### **Product Labeling**

Model: ISLC4100-7P-T (7-pin) **RF Module:** Trilliant compatible

**Date:** 17-10-2019

- Total four labels to apply (MAC ID, SLC ID, FCC&IC ID and Product model/Electrical rating)
- All label material Brady 'B-489' or B-483' to print with Brady's recommended ribbon only.
- MAC ID & SLC ID label with QR code minimum size 7.5mm.

#### 1. OSDI Sr Number

- Label size 40mmx12mm. Refer below example image for label and label application location.








#### 2. SLC ID label application

- Label size 40mmx12mm. Refer below example image for label and label application location.



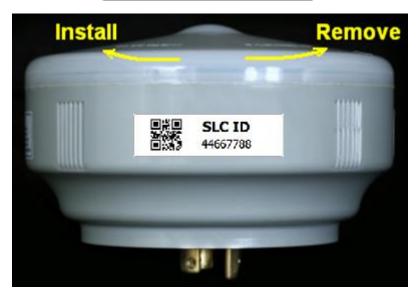

#### 3. FCC&IC ID label application

- Label size 44mmx14.5mm. Refer below example image for label and label application location.

FCC ID: 2ALSZ-CL4100TH
IC: 22787-CL4100TH
This device complies with Part 15 of the FCC Rules.
Operation is subject to the following two conditions:
(1) this device may not cause harmful interference, and
(2) this device must accept any interference received, including interference that may cause undesired operation.



#### 4. Product Model no. / Electrical rating label application

- Label size 40mmx17mm. Refer below example image for label and label application location.

# Photocontroller iSLC4100-7P-T

120-277V AC, 50/60Hz 1560VA Ballast, 960W Tungsten Temp: -40°C to +70°C, FID8 04/17

PN: iSLC4100-7P-T-TRL-A-G-IO-CATC-20

## 40mm X 17mm

