

# TEST REPORT



**DT&C Co., Ltd.**

42, Yurim-ro, 154beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea 17042  
Tel : 031-321-2664, Fax : 031-321-1664

1. Report No : DREFCC1706-0147(1)
2. Customer
  - Name : i3-Technologeies N.V.
  - Address : Nijverheidslaan 60 Deerlijk Belgium 8540
3. Use of Report : Grant of Certification
4. Product Name / Model Name : i3SYNC Touch Transmitter / i3SYNC Touch TX
5. Test Method Used : ANSI C63.4:2014  
FCC Part 15 Subpart B  
(Class B personal computers and peripherals)
6. Date of Test : 2017-05-10
7. Testing Environment : Temperature 21 °C , Humidity 40 % R.H.
8. Test Result : Refer to the attached Test Result

Affirmation	Tested by	Technical Manager
	Name : JinYoung Hwang (Signature)	Name : KyoungHwan Bae (Signature)

The test results presented in this test report are limited only to the sample supplied by applicant and the use of this test report is inhibited other than its purpose.

This test report shall not be reproduced except in full, without the written approval of DT&C Co., Ltd.

2018. 07. 12.

**DT&C Co., Ltd.**

If this report is required to confirmation of authenticity, please contact to [report@dtnc.net](mailto:report@dtnc.net)

## CONTENTS

<b>1. General Remarks</b> .....	3
<b>2. Test Laboratory</b> .....	3
<b>3. General Information of EUT</b> .....	4
<b>4. Test Summary</b> .....	5
4.1 Applied standards and test results .....	5
4.2 Test environment and conditions.....	5
<b>5. Test Set-up and operation mode</b> .....	6
5.1 Principle of Configuration Selection .....	6
5.2 Test Operation Mode.....	6
5.3 Support Equipment Used.....	6
<b>6. Test Results : Emission</b> .....	7
6.1 Conducted Disturbance .....	7
6.2 Radiated Disturbance .....	10
<b>Appendix 1</b> .....	20
<b>List of Test and Measurement Instruments</b> .....	20
<b>Appendix 2</b> .....	22
<b>Report Revision History</b> .....	22

## 1. General Remarks

This report contains the result of tests performed by:

**DT&C Co., Ltd.**

Address : 42, Yurim-ro, 154beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea 17042

<http://www.dtnc.net>

Tel: +82-31-321-2664 Fax: +82-31-321-1664

## 2. Test Laboratory

DT&C Co., Ltd. has been accredited / filed / authorized by the agencies listed in the following table;

Certificate	Nation	Agency	Code	Remark
Accreditation	Korea	KOLAS	393	ISO/IEC 17025
	South Africa	SABS	0006	ISO/IEC 17025
Site Filing	USA	FCC	KR0034 101842 678747, 596748, 804488, 165783	Accredited  2.948 Listed
	Canada	IC	5740A-3 5740A-4	Registered
	Japan	VCCI	C-1427 R-1364, R-3385, R-4076, R-4180, T-1442, G-10338, G-754, G-10815	Registered
Certification	Korea	KC	KR0034	Designation
	Germany	TUV	CARAT 17 11 89112 005	ISO/IEC 17025

Quality control in the testing laboratory is implemented as per ISO/IEC 17025 which is the "General requirements for the competent of calibration and testing laboratory".

### 3. General Information of EUT

Kind of Equipment	i3SYNC Touch Transmitter
Model Name	i3SYNC Touch TX
Add Model Name	None
Serial No.	None
Type of Sample Tested	Pre-Production
Rating Power Supply	DC 5 V
Supplied Power for Test	AC 120 V, 60 Hz
FCC ID	2ALTTSY-X300TX
Applicant	i3-Technologeies N.V. Nijverheidslaan 60 Deerlijk Belgium 8540
Manufacturer	RNware Co., Ltd. (Bon-dong), #202, ICT Park Bldg, 205, Songhyeon-ro, Dalseo-gu, Daegu, Korea.

#### Related Submittal(s) / Grant(s)

Original submittal only.

## 4. Test Summary

### 4.1 Applied standards and test results

Test Items	Applied Standards	Results
Conducted Disturbance	ANSI C63.4:2014	C
Radiated Disturbance	ANSI C63.4:2014	C
C=Comply   N/C=Not Comply   N/T=Not Tested   N/A=Not Applicable		

The data in this test report are traceable to the national or international standards.

### 4.2 Test environment and conditions

Test Items	Test date (YYYY-MM-DD)	Temp (°C)	Humidity (% R.H.)
Conducted Disturbance	2017-05-10	21	40
Radiated Disturbance	2017-05-10	21	40

## 5. Test Set-up and operation mode

### 5.1 Principle of Configuration Selection

**Emission** : The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

### 5.2 Test Operation Mode

- After the connecting the EUT with ANYSYNC TOUCH TX and WIFI, it outputs the image of the Note PC to the Monitor.

### 5.3 Support Equipment Used

Unit	Model No.	Serial No.	Manufacturer	CABLE			Backshell	FCC ID
				Connect type	Length (m)	shield		
Adapter	N/A	N/A	RF Tech	POWER	1.0	Non-shield	Plastic	-
ANYSYNC TOUCH Dongle	AT-1000U	N/A	RNware Co., Ltd.	POWER	-	-	Plastic	-
Monitor	P2417Hb	CN-0jjRX2-74261-674-07YL-A00	DELL	POWER HDMI	1.2 2.0	Non-shield Shield	Plastic Plastic	-
Note PC	HSTNN-Q95C	5CD6256M2B	HP	POWER LAN	1.2 3.0	Non-shield Non-shield	Plastic Plastic	-
Mouse	MODGUO	SA0902009883	HP	USB	1.1	Shield	Plastic	-
ANYSYNC TOUCH PLUS RX	AT-E1000P	N/A	RNware Co., Ltd.	POWER HDMI	1.2 2.0	Non-shield Shield	Plastic Plastic	-

#### NOTE

- See "APPENDIX 2 Photographs" for actual system test setup

## 6. Test Results : Emission

### 6.1 Conducted Disturbance

#### 6.1.1 Measurement Procedure

In the range of 0.15 MHz to 30 MHz, the conducted disturbance was measured and set-up was made accordance with **ANSI C63.4**.

If the EUT is table top equipment, it was placed on a wooden table with a height of 0.8 m above the reference ground plane and 0.4 m from the conducting wall of the shielded room.

Also if the EUT is floor-standing equipment, it was placed on a non-conducted support with a height up to 0.15 m above the reference ground plane.

Connect the EUT's power source lines to the appropriate power mains / peripherals through the LISN. All the other peripherals are connected to the 2<sup>nd</sup> LISN, if any.

Unused measuring port of the LISN was resistively terminated by 50 ohm terminator.

The measuring port of the LISN for EUT was connected to spectrum analyzer.

Using conducted emission test software, the emissions were scanned with peak detector mode.

After scanning over the frequency range, suspected emissions were selected to perform final measurement. When performing final measurement, the receiver was used which has Quasi-Peak detector and Average detector.

By varying the configuration of the test sample and the cable routing it was attempted to maximize the emission.

For further description of the configuration refer to the picture of the test set-up.

#### 6.1.2 Limit for Conducted Disturbance

(1) Conducted disturbance at mains ports.

Frequency range (MHz)	Limits dB(μV)			
	Quasi-peak		Average	
	Class A	Class B	Class A	Class B
0.15 to 0.50	79	66 to 56	66	56 to 46
0.50 to 5	73	56	60	46
5 to 30		60		50

Note 1 The lower limit shall apply at the transition frequencies.  
 Note 2 The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

Note) 1. Emission Level = Reading Value + Correction Factor.

2. Correction Factor = Cable Loss + Insertion Loss of LISN + PULSE LIMITER

3. Margin = Limit - Emission level

**Test Result**



**Results of Conducted Emission**

DT&C  
Date : 2017-05-10

Order No. : DTNC1705-03423  
 Power Supply : 120 V 60 Hz  
 Temp/Humi/Atm : 21 °C 40 % R.H. 101.2 kPa  
 Test Condition :

Memo :

LIMIT : CISPR22\_B QP  
 CISPR22\_B AV

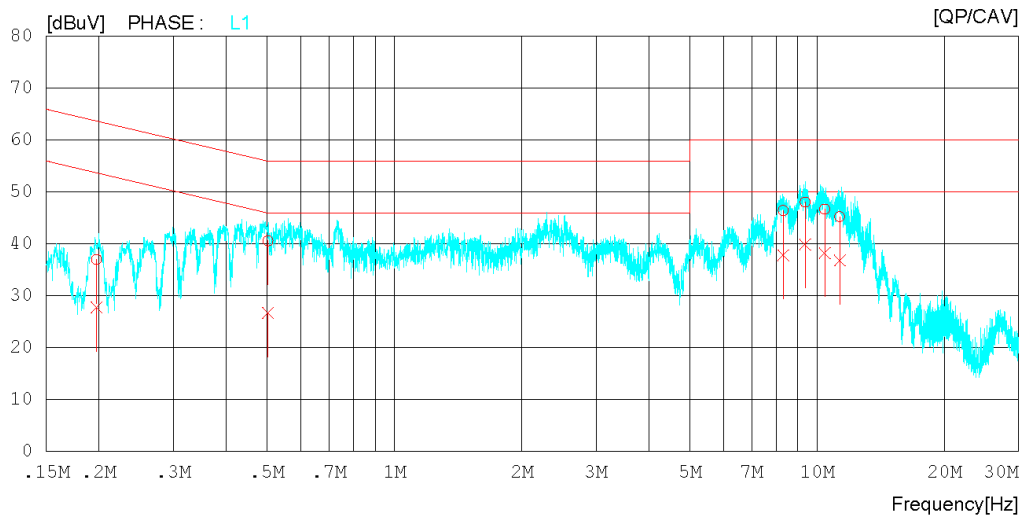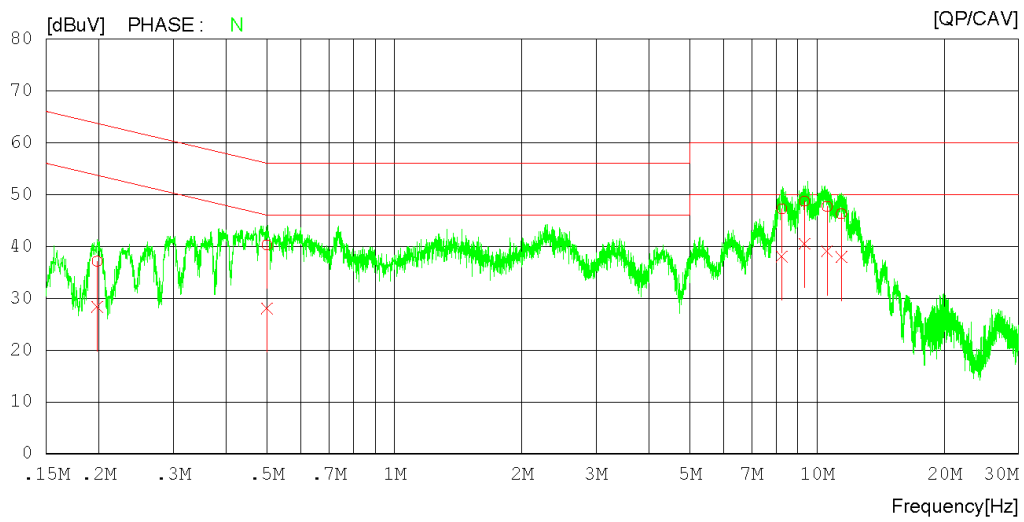



## Results of Conducted Emission

DT&C  
Date : 2017-05-10

Order No. : DTNC1705-03423  
 Power Supply : 120 V 60 Hz  
 Temp/Humi/Atm : 21 °C 40 % R.H. 101.2 kPa  
 Test Condition :

Memo :

LIMIT : CISPR22\_B QP  
 CISPR22\_B AV

NO	FREQ [MHz]	READING		C. FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	CAV [dBuV]		QP [dBuV]	CAV [dBuV]	QP [dBuV]	CAV [dBuV]			
1	0.19789	27.02	18.21	10.07	37.09	28.28	63.70	53.70	26.61	25.42	N
2	0.49935	30.19	17.93	10.09	40.28	28.02	56.01	46.01	15.73	17.99	N
3	8.25495	36.90	27.67	10.32	47.22	37.99	60.00	50.00	12.78	12.01	N
4	9.34077	38.30	30.11	10.37	48.67	40.48	60.00	50.00	11.33	9.52	N
5	10.56036	37.25	28.61	10.41	47.66	39.02	60.00	50.00	12.34	10.98	N
6	11.41592	35.82	27.46	10.45	46.27	37.91	60.00	50.00	13.73	12.09	N
7	0.19737	26.93	17.64	10.08	37.01	27.72	63.72	53.72	26.71	26.00	L1
8	0.50197	30.52	16.60	10.10	40.62	26.70	56.00	46.00	15.38	19.30	L1
9	8.31689	36.14	27.48	10.33	46.47	37.81	60.00	50.00	13.53	12.19	L1
10	9.37434	37.71	29.53	10.38	48.09	39.91	60.00	50.00	11.91	10.09	L1
11	10.42548	36.29	27.86	10.42	46.71	38.28	60.00	50.00	13.29	11.72	L1
12	11.31462	34.80	26.35	10.46	45.26	36.81	60.00	50.00	14.74	13.19	L1

## 6.2 Radiated Disturbance

### 6.2.1 Measurement Procedure

The radiated disturbance was measured and set-up was made accordance with **ANSI C63.4**.

If the EUT is tabletop equipment, it was placed on a wooden table with a height of 0.8 m above the reference ground plane and 3 m or 10 m away from the interference receiving antenna in the **3 m semi-anechoic chamber**.

Also if the EUT is floor-standing equipment, it was placed on a non-conducted support with a height up to 0.15 m above the reference ground plane.

Rotate the EUT from (0 - 360)° and position the receiving antenna at heights from (1 - 4) m above the reference ground plane continuously to determine associated with higher emission levels and record them.

The measurement was made in both the vertical and horizontal polarization, and the maximum value is presented in the report.

For below 1 GHz frequency range, Quasi-Peak detector with 120 kHz RBW was used.

Also Peak and Average detector with 1 MHz RBW were used for above 1 GHz frequency range.

For further description of the configuration refer to the picture of the test set-up.

## 6.2.2 Limit for Radiated Disturbance

- The test frequency range of Radiated Disturbance measurements are listed below.

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 108	1 000
108 – 500	2 000
500 – 1 000	5 000
Above 1 000	5 <sup>th</sup> harmonic of the highest frequency or 40 GHz, whichever is lower

### (1) Limit for Radiated Emission below 1 000MHz

Frequency range (MHz)	Class A Equipment (10 m distance)	Class B Equipment (3 m distance)
	Quasi-peak (dB $\mu$ V/m)	Quasi-peak (dB $\mu$ V/m)
30 to 88	39.1	40
88 to 216	43.5	43.5
216 to 960	46.4	46
960 to 1 000	49.5	54

Note 1 The lower limit shall apply at the transition frequency.

Note 2 Additional provisions may be required for cases where interference occurs.

Note 3 According to 15.109(g), as an alternative to the radiated emission limit shown above, digital devices may be shown to comply with the standards(CISPR), Pub. 22 shown as below.

Frequency range (MHz)	Class A Equipment (10 m distance)	Class B Equipment (10 m distance)
	Quasi-peak (dB $\mu$ V/m)	Quasi-peak (dB $\mu$ V/m)
30 to 230	40	30
230 to 1 000	47	37

### (2) Limits for Radiated Emission above 1 000MHz at a measuring distance of 3 m

Frequency (GHz)	Class A Equipment		Class B Equipment	
	Peak (dB $\mu$ V/m)	Average (dB $\mu$ V/m)	Peak (dB $\mu$ V/m)	Average (dB $\mu$ V/m)
1 to 40	80	60	74	54

Note) 1. Emission Level = Reading Value + loss - gain + Ant Factor

2. Margin = Limit - Emission level

3. loss = Cable loss, gain = Amp gain, Ant Factor = Antenna Factor

Test Result



< 30 MHz ~ 1 GHz >

RADIATED EMISSION

Date 2017-05-10

Order No. DTNC1705-03423  
Power Supply AC 120 V 60 Hz  
Temp/Humi 21 'C 40 % R.H.  
Test Condition

LIMIT : CLASS B  
MARGIN: 3 dB

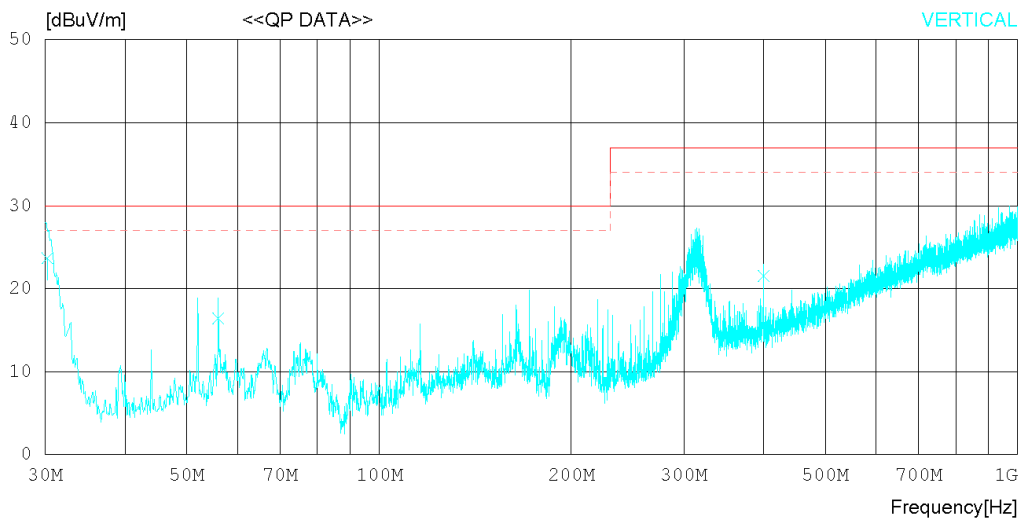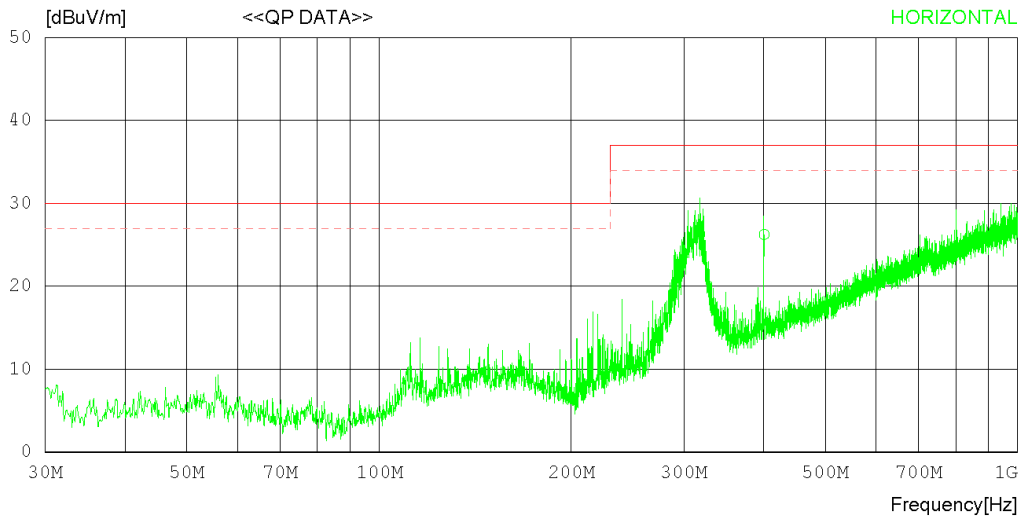

## RADIATED EMISSION

Date 2017-05-10

Order No.	DTNC1705-03423
Power Supply	AC 120 V 60 Hz
Temp/Humi	21 °C 40 % R.H.
Test Condition	

LIMIT : CLASS B  
MARGIN: 3 dB

No.	FREQ [MHz]	READING QP [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	318.082	37.20	14.00	4.83	29.77	26.26	37.00	10.74	400	118
2	400.852	34.50	15.94	5.48	29.68	26.24	37.00	10.76	400	249
----- Vertical -----										
3	30.243	42.10	10.89	1.35	30.64	23.70	30.00	6.30	100	1
4	55.948	33.50	11.55	1.89	30.55	16.39	30.00	13.61	100	1
5	314.203	35.60	13.91	4.80	29.78	24.53	37.00	12.47	100	280
6	400.045	29.80	15.92	5.47	29.68	21.51	37.00	15.49	100	159



< (1 ~ 18) GHz \_ Peak >

### RADIATED EMISSION

Date 2017-05-10

Order No. DTNC1705-03423  
Power Supply AC120 V 60 Hz  
Temp/Humi 21 'C 40 % R.H.  
Test Condition

LIMIT : FCC\_CLASS B\_PK\_1-18G  
FCC\_CLASS B\_AV\_1-18G

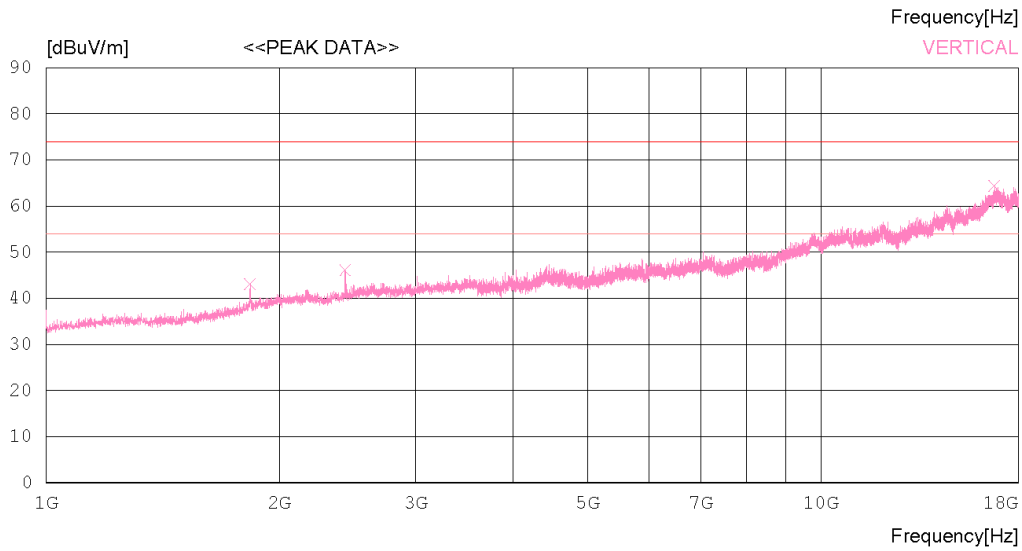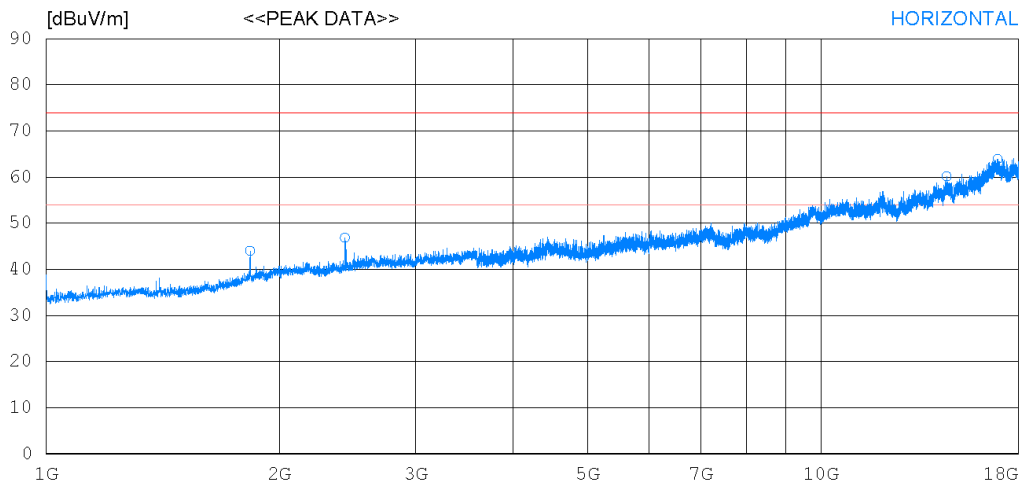

## RADIATED EMISSION

Date 2017-05-10

Order No. DTNC1705-03423  
 Power Supply AC120 V 60 Hz  
 Temp/Humi 21 °C 40 % R.H.  
 Test Condition

LIMIT : FCC\_CLASS B\_PK\_1-18G  
 FCC\_CLASS B\_AV\_1-18G

No.	FREQ [MHz]	READING PEAK [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	1832.500	49.60	30.49	2.90	38.97	44.02	74.0	29.98	100	358
2	2432.500	50.20	31.80	3.43	38.55	46.88	74.0	27.12	100	358
3	14530.500	45.40	39.30	11.16	35.69	60.17	74.0	13.83	100	358
4	16902.750	46.40	41.80	11.10	35.37	63.93	74.0	10.07	100	68
----- Vertical -----										
5	1832.500	48.70	30.49	2.90	38.97	43.12	74.0	30.88	100	1
6	2430.625	49.40	31.79	3.43	38.55	46.07	74.0	27.93	100	1
7	16749.750	47.00	41.65	11.25	35.60	64.30	74.0	9.7	100	334



< (1 ~ 18) GHz \_ Average >

### RADIATED EMISSION

Date 2017-05-10

Order No. DTNC1705-03423  
Power Supply AC120 V 60 Hz  
Temp/Humi 21 'C 40 % R.H.  
Test Condition

LIMIT : FCC Part15 Subpart.B Class B (3m) - 18G(Avg)  
FCC Part15 Subpart.B Class B (3m) - 18G(Peak)

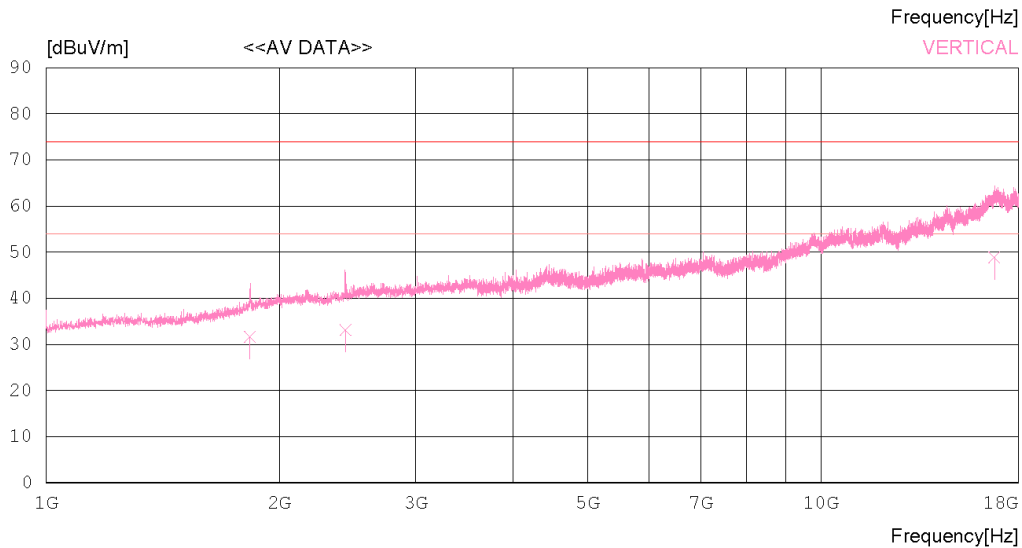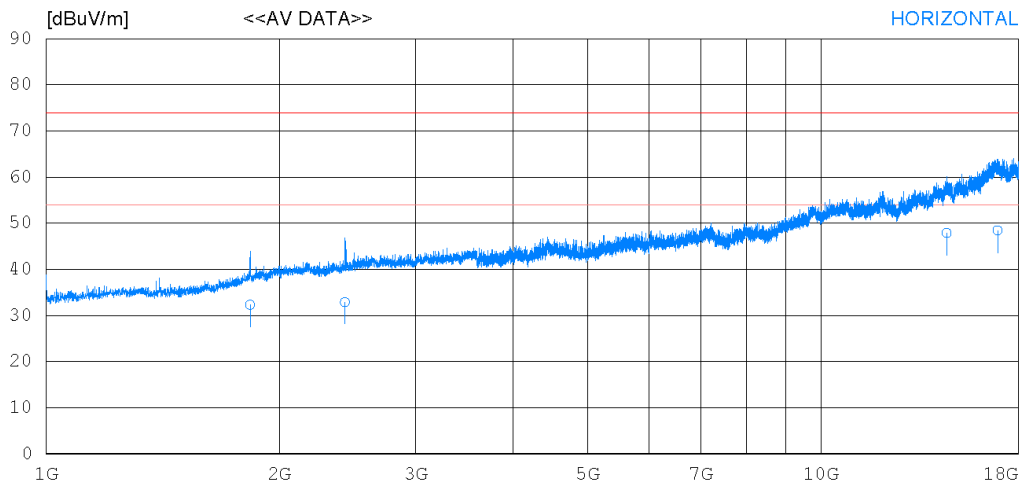



## RADIATED EMISSION

Date 2017-05-10

Order No. DTNC1705-03423  
 Power Supply AC120 V 60 Hz  
 Temp/Humi 21 °C 40 % R.H.  
 Test Condition

LIMIT : FCC Part15 Subpart.B Class B (3m) - 18G(Avg)  
 FCC Part15 Subpart.B Class B (3m) - 18G(Peak)

No.	FREQ [MHz]	READING CAV [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	1833.251	37.80	30.50	2.90	38.97	32.23	54.00	21.77	100	351
2	2431.338	36.20	31.79	3.43	38.55	32.87	54.00	21.13	100	0
3	14532.670	33.10	39.30	11.16	35.69	47.87	54.00	6.13	100	323
4	16900.110	30.90	41.80	11.10	35.38	48.42	54.00	5.58	100	119
----- Vertical -----										
5	1831.238	37.20	30.48	2.90	38.97	31.61	54.00	22.39	100	0
6	2432.853	36.40	31.80	3.43	38.55	33.08	54.00	20.92	100	0
7	16748.910	31.50	41.65	11.25	35.60	48.80	54.00	5.20	100	64

< (18 ~ 40) GHz \_ Peak >

## RADIATED EMISSION

Date 2017-05-10

Order No. DTNC1705-03423  
 Power Supply AC120 V 60 Hz  
 Temp/Humi 21 'C 40 % R.H.  
 Test Condition

Memo

LIMIT : FCC Part15\_18-40G\_PK  
 FCC Part15\_18-40G\_AV

No.	FREQ [MHz]	READING PEAK [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	33880.000	35.20	42.44	8.53	47.98	38.19	74.0	35.81	100	1
----- Vertical -----										
2	27029.000	36.90	40.65	6.75	44.54	39.76	74.0	34.24	100	341

< (18 ~ 40) GHz \_ Average >

## RADIATED EMISSION

Date 2017-05-10

Order No. DTNC1705-03423  
 Power Supply AC120 V 60 Hz21  
 Temp/Humi 21 'C 40 % R.H.  
 Test Condition

Memo

LIMIT : FCC Part15\_18-40G\_AV  
 FCC Part15\_18-40G\_PK

No.	FREQ [MHz]	READING CAV [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	33880.000	26.50	42.44	8.53	47.98	29.49	54.00	24.51	100	93
----- Vertical -----										
2	27028.810	28.70	40.65	6.75	44.54	31.56	54.00	22.44	100	323

## List of Test and Measurement Instruments

To facilitate inclusion on each page of the test equipment used for related tests, each item of test equipment is identified by the Test Laboratory.

### 1. Conducted Disturbance

	Name of Instrument	Model No.	Manufacturer	Serial No.	Cal. Date	Next Cal. Date
<input checked="" type="checkbox"/>	MEASUREMENT SOFTWARE	EMI-C VER. 2.00.0143	TSJ	N/A	N/A	N/A
<input checked="" type="checkbox"/>	EMI TEST RECEIVER	ESR	ROHDE & SCHWARZ	101767	2017.01.03	2018.01.03
<input checked="" type="checkbox"/>	LISN	NNLK 8129	SCHWARZBECK	8129-272	2016.08.03	2017.08.03
<input checked="" type="checkbox"/>	LISN	NNLK8121	SCHWARZBECK	NNLK8121-580	2016.08.03	2017.08.03
<input checked="" type="checkbox"/>	PULSE LIMITER	ESH3-Z2	ROHDE & SCHWARZ	101334	2017.01.03	2018.01.03
<input checked="" type="checkbox"/>	TERMINATION	CT-01	TME	N/A	2017.01.03	2018.01.03

### 2. Radiated Disturbance

	Name of Instrument	Model No.	Manufacturer	Serial No.	Cal. Date	Next Cal. Date
<input checked="" type="checkbox"/>	MEASUREMENT SOFTWARE	EMI-R VER. 2.00.0121	TSJ	N/A	N/A	N/A
<input checked="" type="checkbox"/>	EMI TEST RECEIVER	ESR7	ROHDE & SCHWARZ	101061	2017.02.16	2018.02.16
<input checked="" type="checkbox"/>	TRILOG BROADBAND TEST-ANTENNA	VULB9160	SCHWARZBECK	9160-3362	2016.08.05	2018.08.05
<input checked="" type="checkbox"/>	LOW NOISE PRE AMPLIFIER	MLA-010K01-B01-27	TSJ	1844538	2017.03.06	2018.03.06
<input checked="" type="checkbox"/>	PREAMPLIFIER	8449B	AGILENT TECHNOLOGIES	3008A01590	2017.02.20	2018.02.20
<input checked="" type="checkbox"/>	EMI TEST RECEIVER	ESU	ROHDE & SCHWARZ	100469	2016.07.18	2017.07.18
<input checked="" type="checkbox"/>	HORN ANTENNA	3117	ETS-LINDGREN	00152145	2016.02.26	2018.02.26
<input checked="" type="checkbox"/>	LOW NOISE PRE AMPLIFIER	MLA-1840-J02-40	TSJ	13184	2016.10.18	2017.10.18
<input checked="" type="checkbox"/>	HORN ANTENNA	SAS-574	A.H. SYSTEMS,INC.	155	2015.09.03	2017.09.03

**Appendix 2**
**Report Revision History**

Revision Date	Description	Revised By	Revision Reviewed By
2018-07-12	- This report was reissued due to changes in the use of report. (FCC Declaration of Conformity Marking → FCC Certification of Conformity Marking)  - Changed Product's name (Wireless Video Transmission Device → i3SYNC Touch Transmitter)  - Changed Model name (i3SYNC Touch 3.0 TX → i3SYNC Touch TX)  - Deleted Added Add Model Name	JinYoung Hwang	KyoungHwan Bae