

# FCC & IC REPORT

**Applicant:** Solaborate LLC

**Address of Applicant:** 8300 Utica Ave #283, Rancho Cucamonga, CA 91730, California, USA

## Equipment Under Test (EUT)

**Product Name:** HELLO Remote

**Model No.:** HELLORemote2

**FCC ID:** 2ALUI-REM2

**IC ID:** 24458-REM2

FCC CFR Title 47 Part 15 Subpart C Section 15.247

**Applicable standards:** RSS-Gen Issue 5, April 2018  
RSS-247 Issue 2, February 2017

**Date of sample receipt:** 13 Nov., 2018

**Date of Test:** 13 Nov., to 16 Nov., 2018

**Date of report issued:** 19 Nov., 2018

**Test Result:** PASS \*

\* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Bruce Zhang  
Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the CCIS product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

## 2 Version

Version No.	Date	Description
00	19 Nov., 2018	Original

**Tested by:**

Zora Lee

**Date:**

19 Nov., 2018

*Test Engineer*

**Reviewed by:**

Wimer Zhang

**Date:**

19 Nov., 2018

*Project Engineer*

### 3 Contents

	Page
1 COVER PAGE.....	1
2 VERSION.....	2
3 CONTENTS.....	3
4 TEST SUMMARY.....	4
5 GENERAL INFORMATION.....	5
5.1 CLIENT INFORMATION.....	5
5.2 GENERAL DESCRIPTION OF E.U.T.....	5
5.3 TEST ENVIRONMENT AND TEST MODE .....	6
5.4 DESCRIPTION OF SUPPORT UNITS.....	6
5.5 MEASUREMENT UNCERTAINTY.....	6
5.6 LABORATORY FACILITY.....	6
5.7 LABORATORY LOCATION .....	6
5.8 TEST INSTRUMENTS LIST.....	7
6 TEST RESULTS AND MEASUREMENT DATA.....	8
6.1 ANTENNA REQUIREMENT:.....	8
6.2 CONDUCTED OUTPUT POWER .....	9
6.3 OCCUPY BANDWIDTH .....	11
6.4 POWER SPECTRAL DENSITY .....	13
6.5 BAND EDGE .....	15
6.5.1 Conducted Emission Method.....	15
6.5.2 Radiated Emission Method.....	17
6.6 SPURIOUS EMISSION.....	22
6.6.1 Conducted Emission Method.....	22
6.6.2 Radiated Emission Method.....	24
7 TEST SETUP PHOTO .....	29
8 EUT CONSTRUCTIONAL DETAILS .....	30

## 4 Test Summary

Test Items	Section		Result
	FCC	IC	
Antenna Requirement	15.203/15.247 (c)	/	Pass
AC Power Line Conducted Emission	15.207	RSS-GEN Section 8.8	N/A
Conducted Peak Output Power	15.247 (b)(3)	RSS-247 Section 5.4 (d)	Pass
6dB Emission Bandwidth 99% Occupied Bandwidth	15.247 (a)(2)	RSS-247 Section 5.2 (a)	Pass
Power Spectral Density	15.247 (e)	RSS-247 Section 5.2 (b)	Pass
Band Edge	15.247(d)	RSS-GEN Section 8.10 RSS-247 Section 5.5	Pass
Conducted and Radiated Spurious Emission	15.205/15.209	RSS-GEN Section 6.13 RSS-247 Section 5.5	Pass
<i>Pass: The EUT complies with the essential requirements in the standard.</i>			

## 5 General Information

### 5.1 Client Information

Applicant:	Solaborate LLC
Address:	8300 Utica Ave #283, Rancho Cucamonga, CA 91730, California, USA
Manufacturer	Shenzhen Yitong Weiye Technology Co. Ltd.
Address:	3 units, 6 floors, Shajingsha, Bao'an District, Shenzhen, China

### 5.2 General Description of E.U.T.

Product Name:	HELLO Remote
Model No.:	HELLORemote2
Operation Frequency:	2404-2480 MHz
Channel numbers:	65
Modulation technology:	DSSS
Antenna Type:	PCB Antenna
Antenna gain:	-3.0 dBi
Power supply:	Two "AAA" Battery, DC 3V
Test Sample Condition:	The applicant provided engineering samples for staying in continuously transmitting for testing.

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2404	18	2424	35	2444	52	2467
2	2405	19	2425	36	2445	53	2468
3	2406	20	2426	37	2446	54	2469
4	2407	21	2427	38	2450	55	2470
5	2408	22	2428	39	2451	56	2471
6	2409	23	2429	40	2452	57	2472
7	2410	24	2430	41	2453	58	2473
8	2411	25	2434	42	2454	59	2474
9	2412	26	2435	43	2455	60	2475
10	2413	27	2436	44	2456	61	2476
11	2414	28	2437	45	2457	62	2477
12	2418	29	2438	46	2458	63	2478
13	2419	30	2439	47	2459	64	2479
14	2420	31	2440	48	2460	65	2480
15	2421	32	2441	49	2461		
16	2422	33	2442	50	2462		
17	2423	34	2443	51	2466		

Note:  
In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test. Channel No. 1, 31 & 65 were selected as Lowest, Middle and Highest channel.

### 5.3 Test environment and test mode

Operating Environment:	
Temperature:	24.0 °C
Humidity:	54 % RH
Atmospheric Pressure:	1010 mbar
Test mode:	
Transmitting mode	Keep the EUT in continuous transmitting with modulation
The sample was placed 0.8m (below 1GHz)/1.5m (above 1GHz) above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages. Duty cycle setting during the transmission is 100% with maximum power setting for all modulations.	

### 5.4 Description of Support Units

The EUT has been tested as an independent unit.

### 5.5 Measurement Uncertainty

Parameters	Expanded Uncertainty
Conducted Emission (9kHz ~ 30MHz)	±2.22 dB (k=2)
Radiated Emission (9kHz ~ 30MHz)	±2.76 dB (k=2)
Radiated Emission (30MHz ~ 1000MHz)	±4.28 dB (k=2)
Radiated Emission (1GHz ~ 18GHz)	±5.72 dB (k=2)
Radiated Emission (18GHz ~ 40GHz)	±2.88 dB (k=2)

### 5.6 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC - Registration No.: 727551**

Shenzhen Zhongjian Nanfang Testing Co., Ltd. has been accredited as a testing laboratory by FCC (Federal Communications Commission). The Registration No. is 727551.

- **IC - Registration No.: 10106A-1**

The 3m Semi-anechoic chamber of Shenzhen Zhongjian Nanfang Testing Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1.

- **CNAS - Registration No.: CNAS L6048**

Shenzhen Zhongjian Nanfang Testing Co., Ltd. is accredited to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L6048.

- **A2LA - Registration No.: 4346.01**

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 General requirements for the competence of testing and calibration laboratories. The test scope can be found as below link: <https://portal.a2la.org/scopepdf/4346-01.pdf>

### 5.7 Laboratory Location

Shenzhen Zhongjian Nanfang Testing Co., Ltd.

Address: No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,  
Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755-23118282, Fax: +86-755-23116366

Email: info@ccis-cb.com, Website: http://www.ccis-cb.com

## 5.8 Test Instruments list

Radiated Emission:					
Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
3m SAC	SAEMC	9m*6m*6m	966	07-22-2017	07-21-2020
Loop Antenna	SCHWARZBECK	FMZB1519B	00044	03-16-2018	03-15-2019
BiConiLog Antenna	SCHWARZBECK	VULB9163	497	03-16-2018	03-15-2019
Horn Antenna	SCHWARZBECK	BBHA9120D	916	03-16-2018	03-15-2019
Horn Antenna	SCHWARZBECK	BBHA9120D	1805	06-22-2017	06-21-2020
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170582	11-21-2017	11-20-2018
EMI Test Software	AUDIX	E3	Version: 6.110919b		
Pre-amplifier	HP	8447D	2944A09358	03-07-2018	03-06-2019
Pre-amplifier	CD	PAP-1G18	11804	03-07-2018	03-06-2019
Spectrum analyzer	Rohde & Schwarz	FSP30	101454	03-07-2018	03-06-2019
Spectrum analyzer	Rohde & Schwarz	FSP40	100363	11-21-2017	11-20-2018
EMI Test Receiver	Rohde & Schwarz	ESRP7	101070	03-07-2018	03-06-2019
Cable	ZDECL	Z108-NJ-NJ-81	1608458	03-07-2018	03-06-2019
Cable	MICRO-COAX	MFR64639	K10742-5	03-07-2018	03-06-2019
Cable	SUHNER	SUCOFLEX100	58193/4PE	03-07-2018	03-06-2019
RF Switch Unit	MWRFTEST	MW200	N/A	N/A	N/A
Test Software	MWRFTEST	MTS8200	Version: 2.0.0.0		


Conducted Emission:					
Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
EMI Test Receiver	Rohde & Schwarz	ESCI	101189	03-07-2018	03-06-2019
Pulse Limiter	SCHWARZBECK	OSRAM 2306	9731	03-07-2018	03-06-2019
LISN	CHASE	MN2050D	1447	03-19-2018	03-18-2019
LISN	Rohde & Schwarz	ESH3-Z5	8438621/010	07-21-2018	07-20-2019
Cable	HP	10503A	N/A	03-07-2018	03-06-2019
EMI Test Software	AUDIX	E3	Version: 6.110919b		

## 6 Test results and Measurement Data

### 6.1 Antenna requirement:

<b>Standard requirement:</b>	FCC Part 15 C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	15.247(c) (1)(i) requirement: (i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.
<b>E.U.T Antenna:</b>	The antenna is an Internal antenna which cannot replace by end-user, the best-case gain of the antenna is -3.0 dBi.


## 6.2 Conducted Output Power

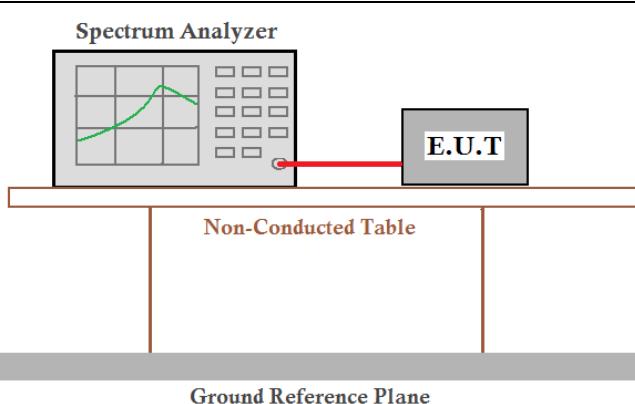Test Requirement:	FCC Part 15 C Section 15.247 (b)(3) RSS-247 section 5.4(d)
Test Method:	ANSI C63.10:2013 and KDB 558074
Limit:	30dBm
Test setup:	<p style="text-align: center;"><b>Spectrum Analyzer</b></p>  <p style="text-align: center;">Non-Conducted Table</p> <p style="text-align: center;">Ground Reference Plane</p>
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed


### Measurement Data:

Test CH	Maximum Conducted Output Power (dBm)	Limit(dBm)	Result
Lowest	-15.68	30.00	Pass
Middle	-15.33		
Highest	-15.67		

Test plot as follows:

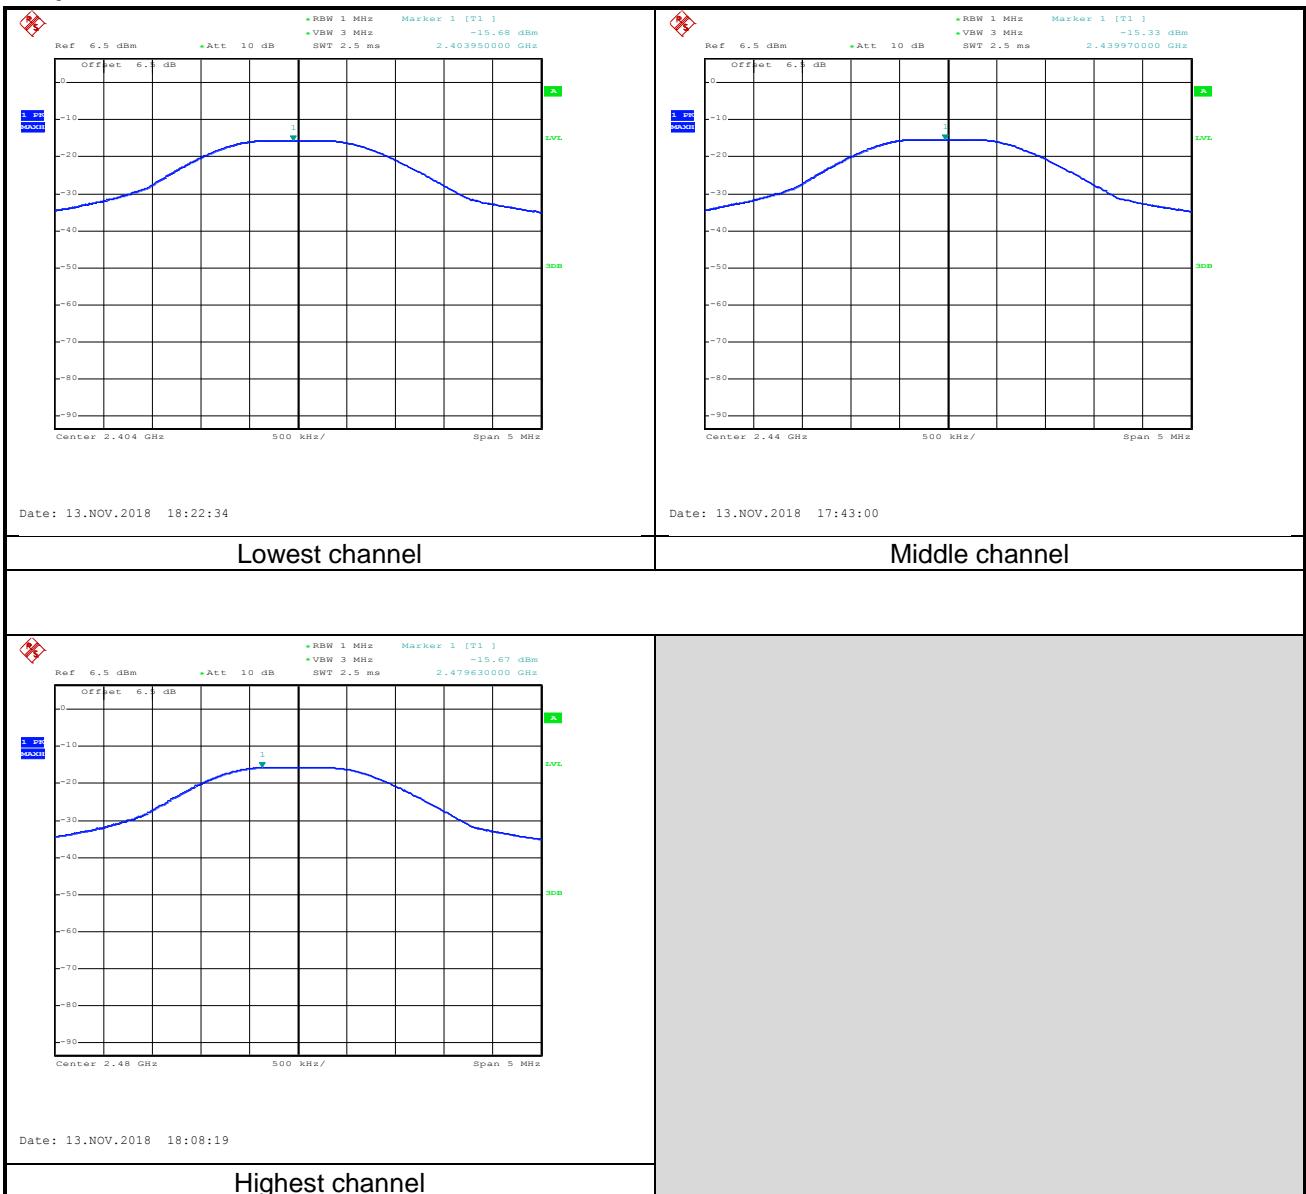


### 6.3 Occupy Bandwidth

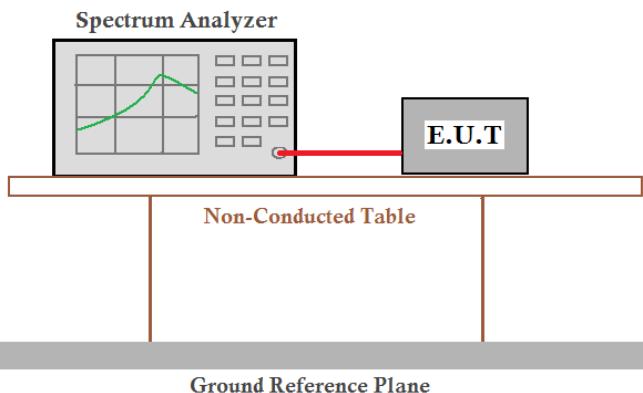Test Requirement:	FCC Part 15 C Section 15.247 (a)(2) RSS-247 section 5.2(a)
Test Method:	ANSI C63.10:2013 and KDB 558074
Limit:	>500kHz
Test setup:	<p style="text-align: center;">    <b>Spectrum Analyzer</b>  <b>E.U.T</b>  <b>Non-Conducted Table</b>  <b>Ground Reference Plane</b> </p>
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed


#### Measurement Data:

Test CH	6dB Emission Bandwidth (MHz)	Limit(kHz)	Result
Lowest	0.786	>500	Pass
Middle	0.804		
Highest	0.798		
Test CH	99% Occupy Bandwidth (MHz)	Limit(kHz)	Result
Lowest	1.074	N/A	N/A
Middle	1.074		
Highest	1.080		

Test plot as follows:

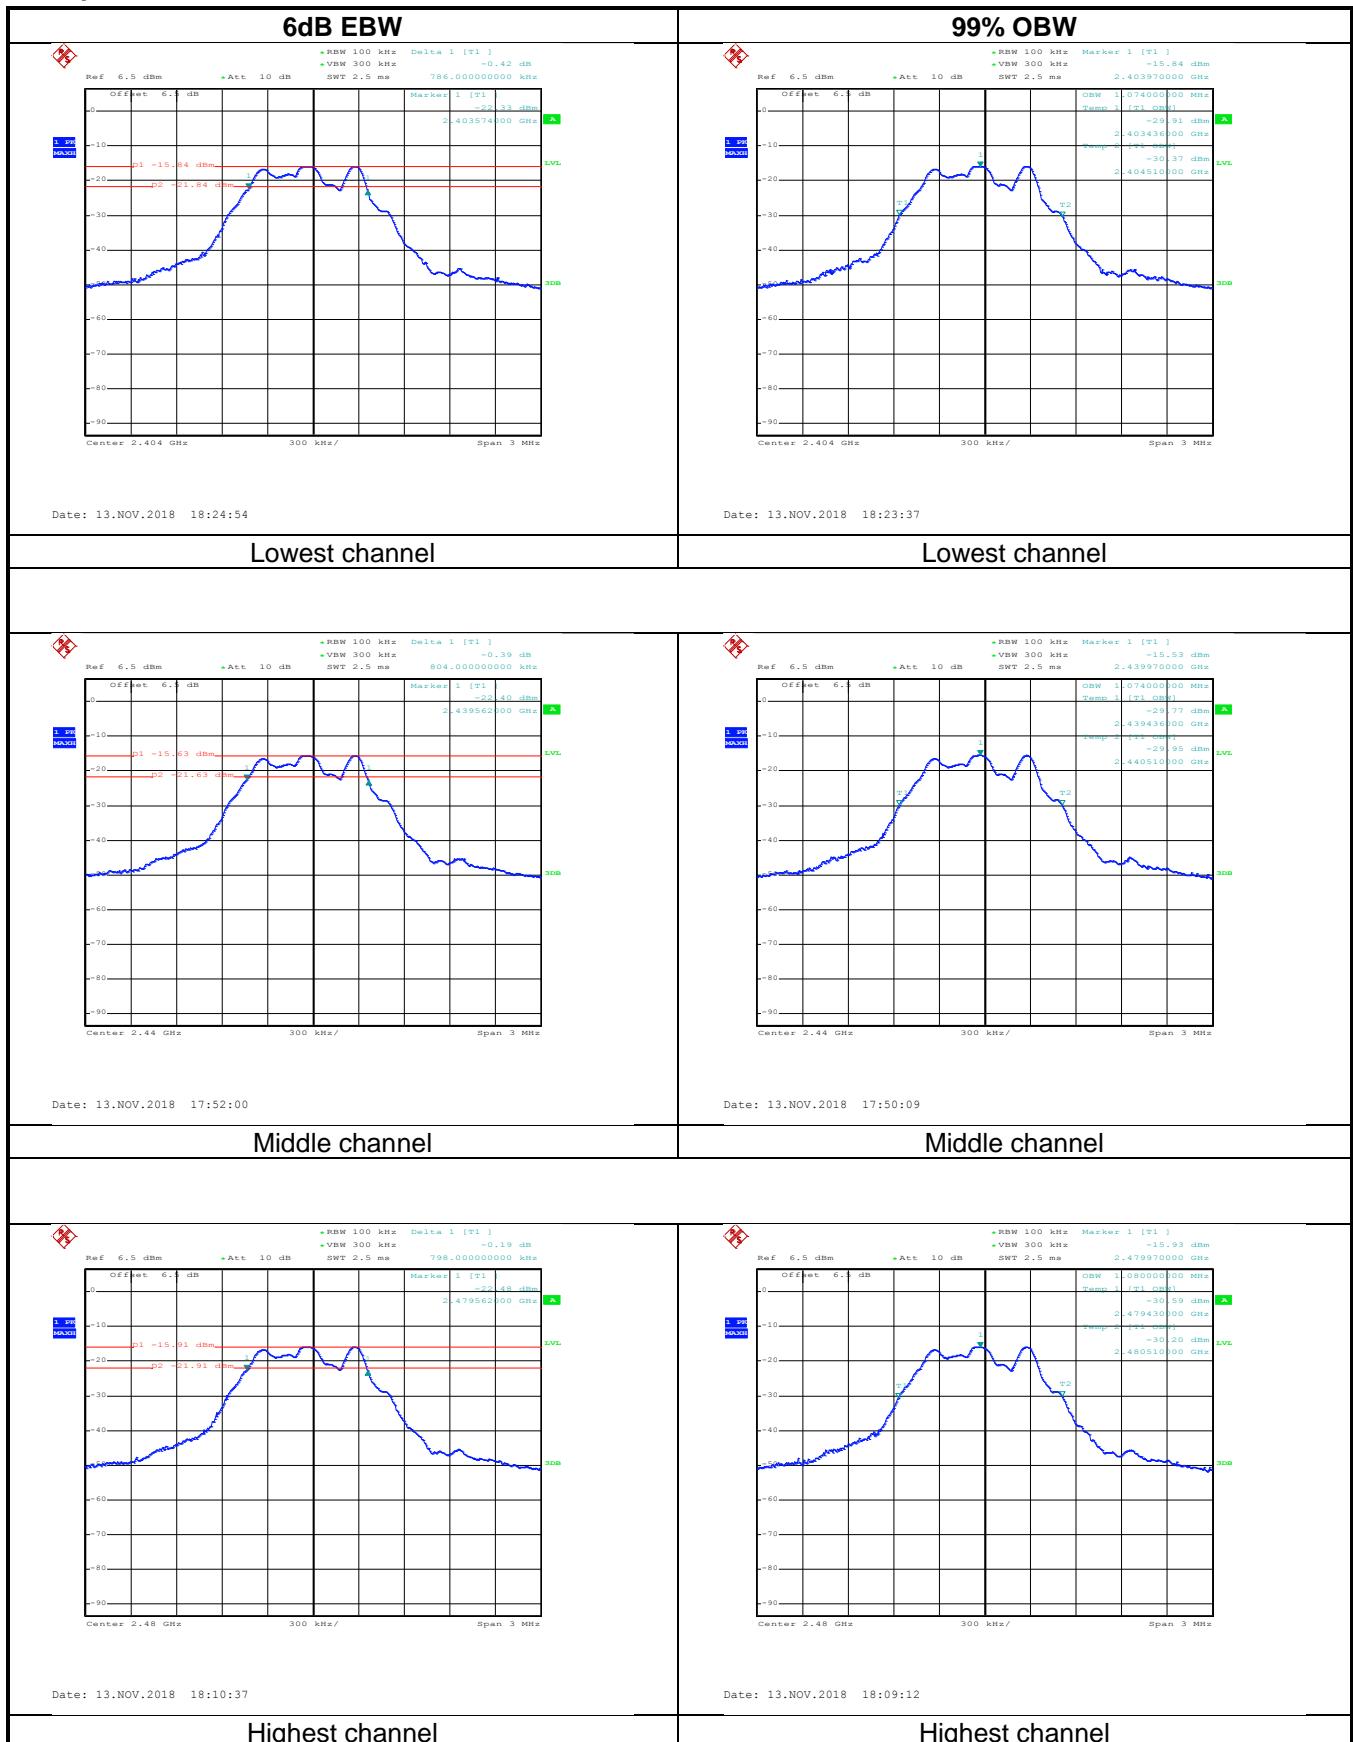


## 6.4 Power Spectral Density

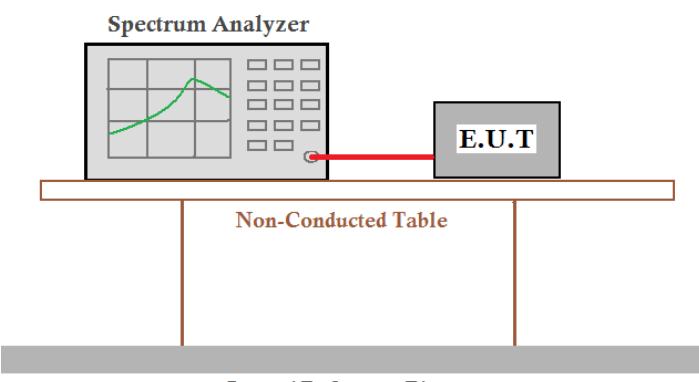Test Requirement:	FCC Part 15 C Section 15.247 (e) RSS-247 section 5.2(b)
Test Method:	ANSI C63.10:2013 and KDB 558074
Limit:	8 dBm
Test setup:	 <p>The diagram illustrates a non-conducted test setup. A Spectrum Analyzer is connected to an E.U.T (Equipment Under Test) via a coaxial cable. The E.U.T is placed on a Non-Conducted Table. The entire assembly sits on a Ground Reference Plane.</p>
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

### Measurement Data:


Test CH	Power Spectral Density (dBm)	Limit(dBm)	Result
Lowest	-15.84	8.00	Pass
Middle	-15.61		
Highest	-15.91		

Test plots as follow:

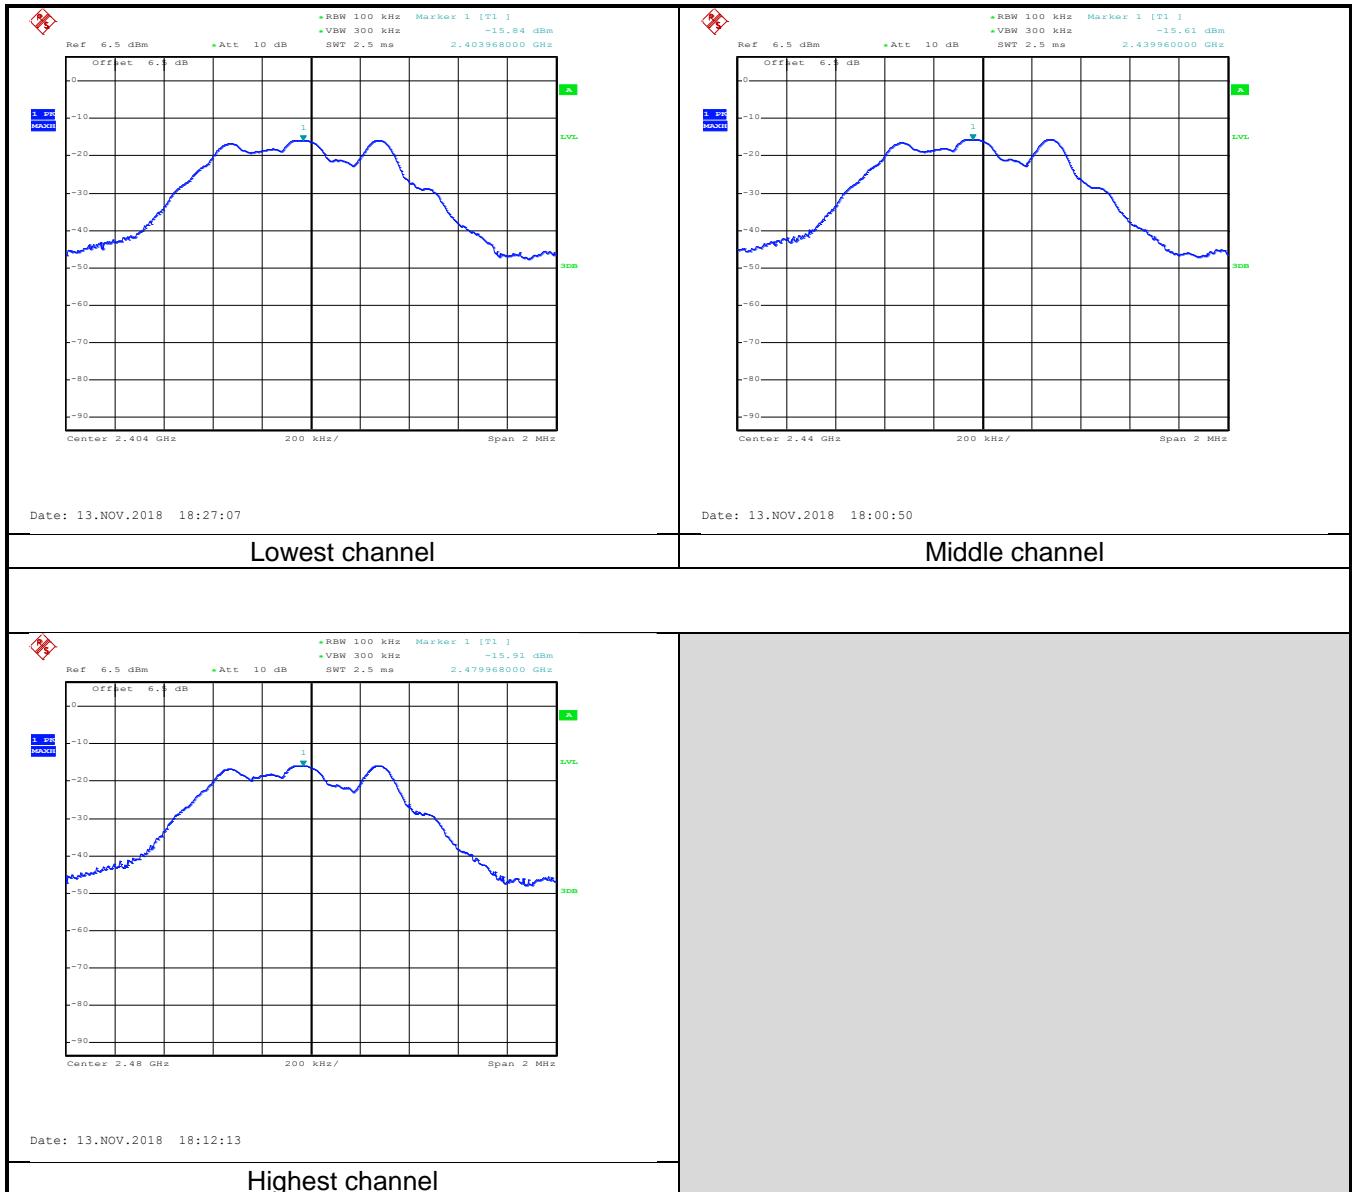


## 6.5 Band Edge

### 6.5.1 Conducted Emission Method

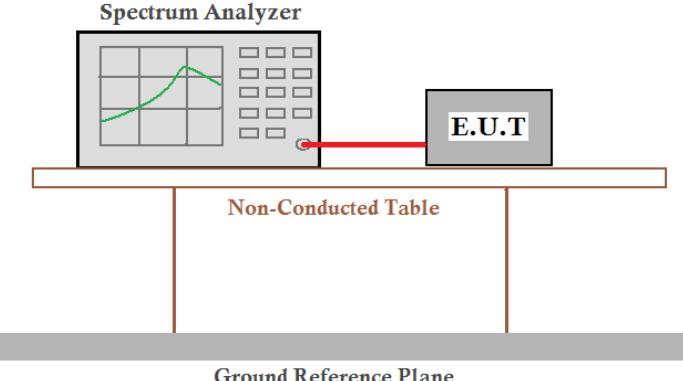Test Requirement:	FCC Part 15 C Section 15.247 (d) RSS-247 section 5.5
Test Method:	ANSI C63.10:2013 and KDB558074
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed


Test plots as follow:

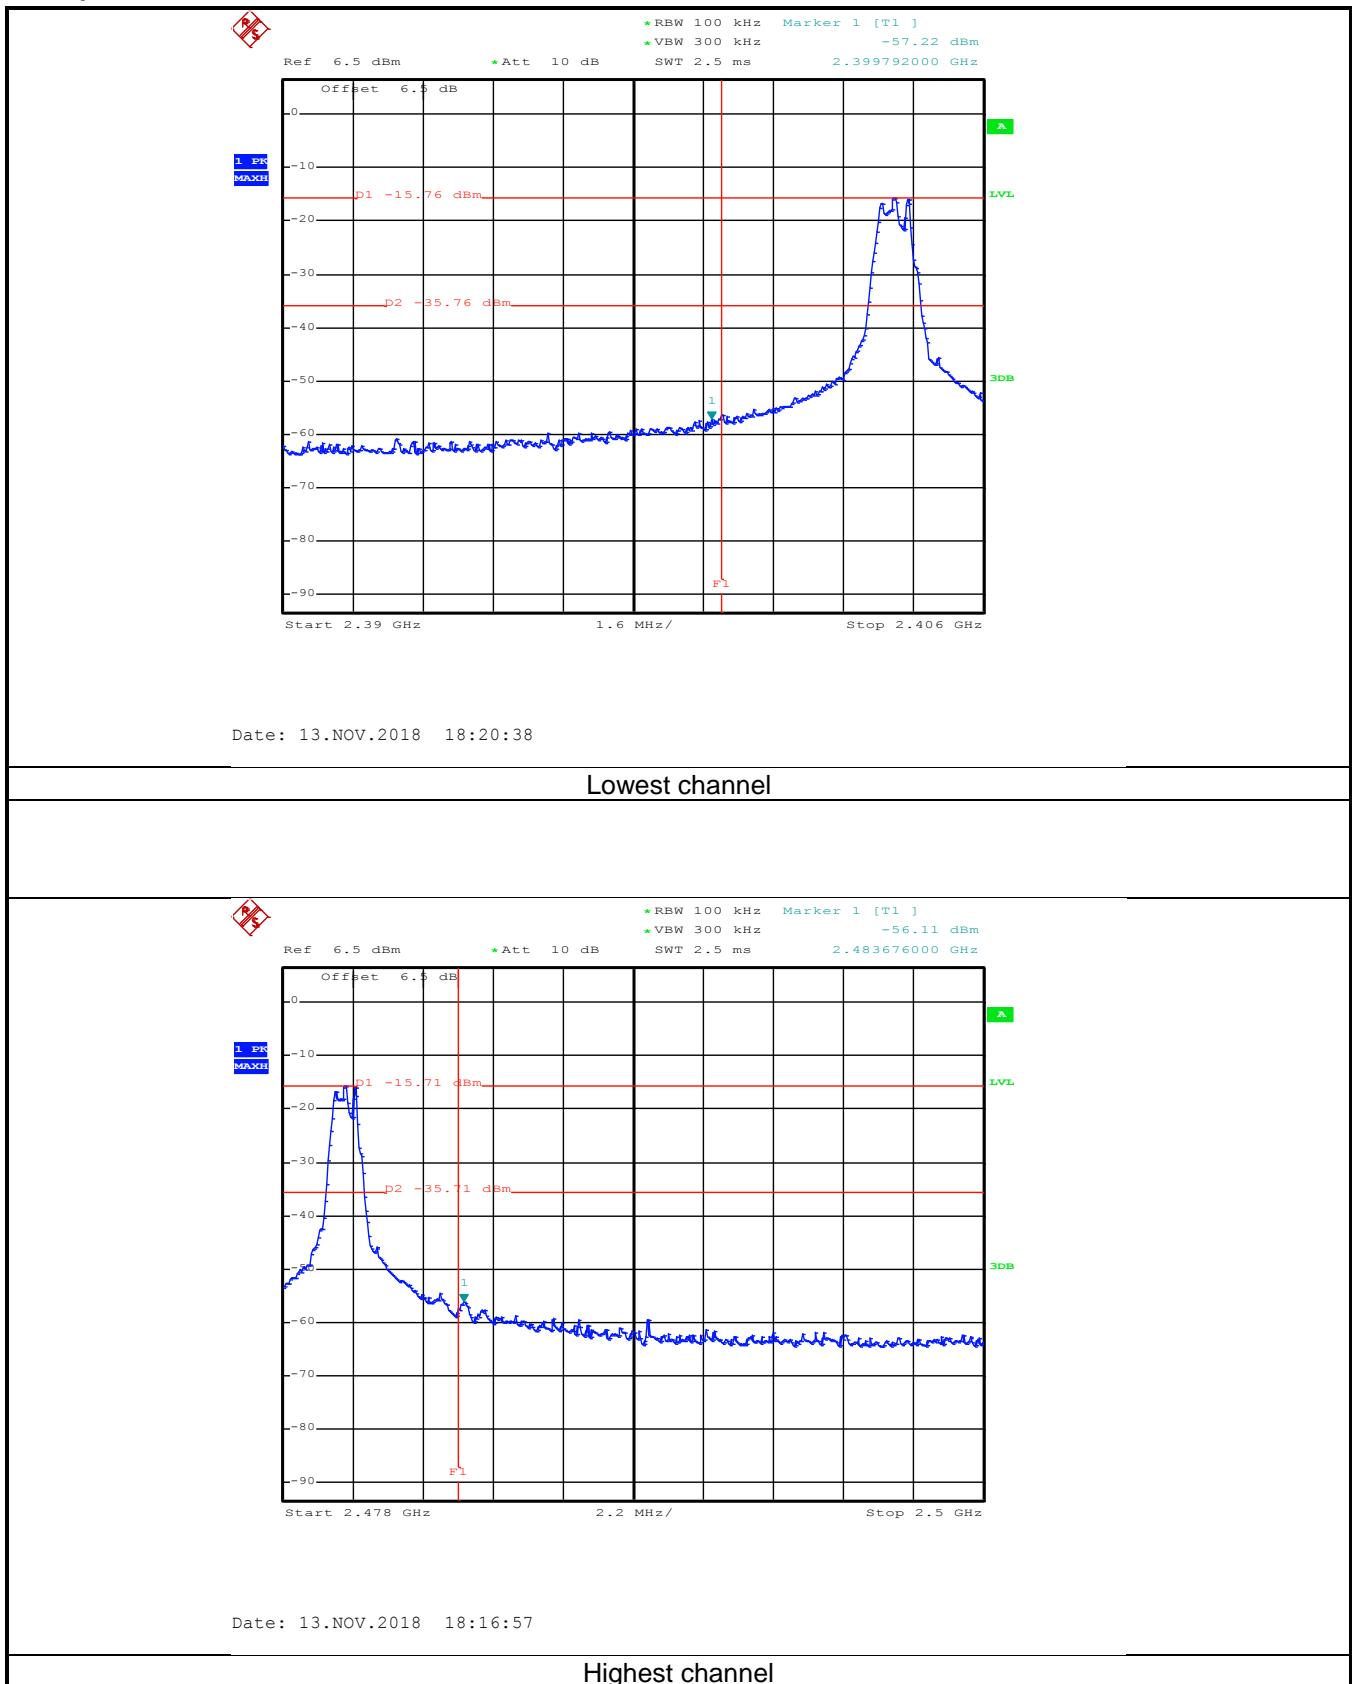

### 6.5.2 Radiated Emission Method

Test Requirement:	FCC Part 15 C Section 15.209 and 15.205 RSS-GEN section 8.10										
Test Method:	ANSI C63.10: 2013 and KDB 558074										
Test Frequency Range:	2.3GHz to 2.5GHz										
Test Distance:	3m										
Receiver setup:	Frequency	Detector	RBW	VBW	Remark						
	Above 1GHz	Peak	1MHz	3MHz	Peak Value						
Limit:	Frequency	Limit (dBuV/m @3m)		Remark							
	Above 1GHz	54.00		Average Value							
Test Procedure:		<ol style="list-style-type: none"> <li>The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</li> </ol>									
Test setup:	<p>The diagram illustrates the test setup for radiated emission. An Equipment Under Test (EUT) is positioned on a turntable 1.5m above a ground reference plane. A horn antenna is mounted on an antenna tower 3m away from the EUT. The test receiver, pre-amplifier, and controller are connected to the horn antenna.</p>										
Test Instruments:	Refer to section 5.8 for details										
Test mode:	Refer to section 5.3 for details										
Test results:	Passed										

<b>Product Name:</b>	HELLO Remote	<b>Product Model:</b>	HELLORemote2
<b>Test By:</b>	Zora	<b>Test mode:</b>	Tx mode
<b>Test Channel:</b>	Lowest channel	<b>Polarization:</b>	Vertical
<b>Test Voltage:</b>	AC 120V/60Hz	<b>Environment:</b>	Temp: 24°C Huni: 57%

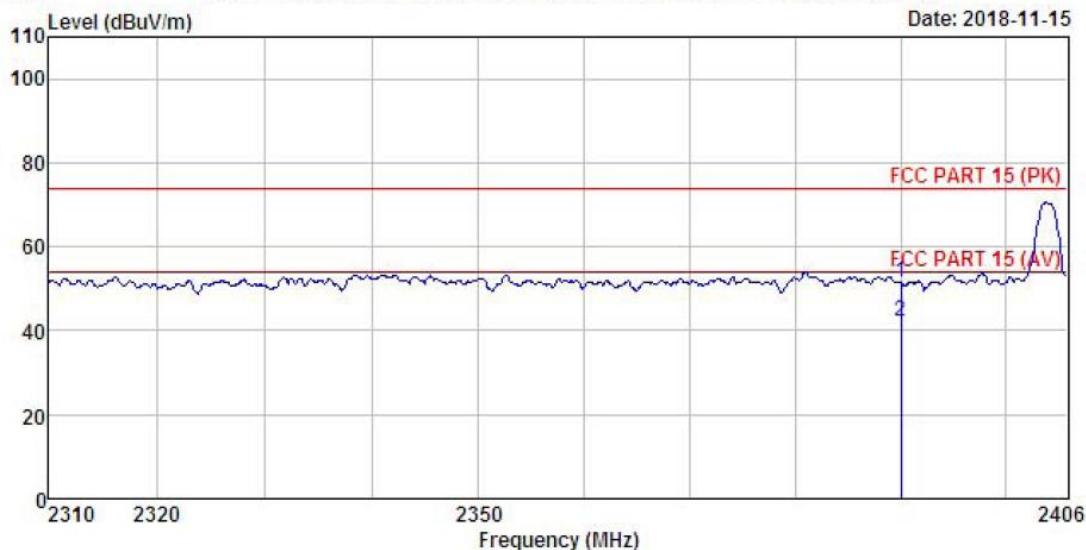


REMARK :		ReadAntenna	Cable	Preamp	Limit	Over	Over
Freq	Level Factor	Loss Factor	Level	Line	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 2390.000	19.46	27.37	4.69	0.00	51.52	74.00	-22.48 Peak
2 2390.000	10.07	27.37	4.69	0.00	42.13	74.00	-31.87 Peak

**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

<b>Product Name:</b>	HELLO Remote	<b>Product Model:</b>	HELLORemote2
<b>Test By:</b>	Zora	<b>Test mode:</b>	Tx mode
<b>Test Channel:</b>	Lowest channel	<b>Polarization:</b>	Horizontal
<b>Test Voltage:</b>	AC 120V/60Hz	<b>Environment:</b>	Temp: 24°C Huni: 57%

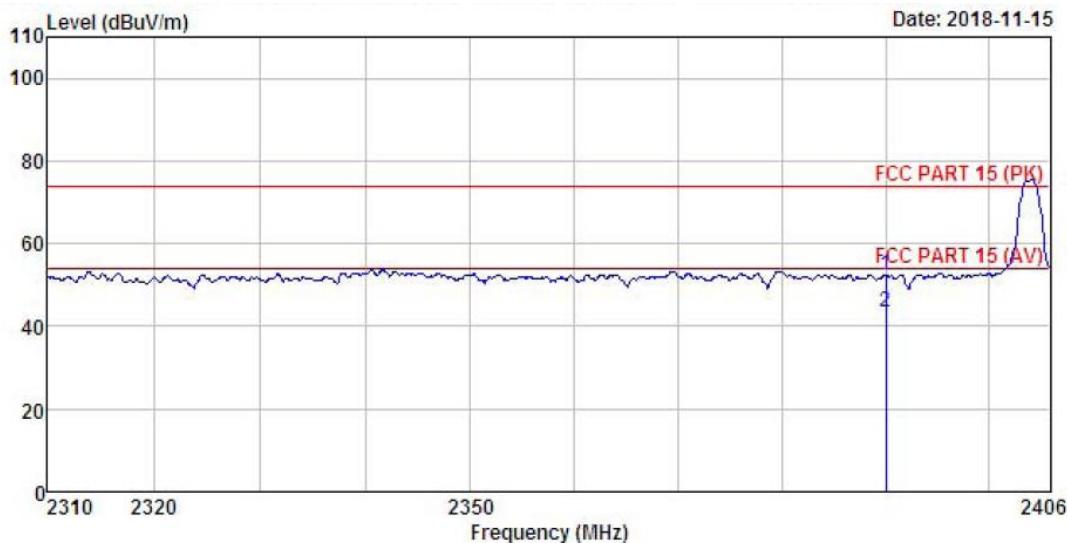


REMARK :		ReadAntenna	Cable	Preamp	Limit	Over	Over
Freq		Level Factor	Loss Factor	Level	Line	Line	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m
1	2390.000	20.25	27.37	4.69	0.00	52.31	74.00 -21.69 Peak
2	2390.000	11.22	27.37	4.69	0.00	43.28	54.00 -10.72 Average

## Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

<b>Product Name:</b>	HELLO Remote	<b>Product Model:</b>	HELLORemote2
<b>Test By:</b>	Zora	<b>Test mode:</b>	Tx mode
<b>Test Channel:</b>	Highest channel	<b>Polarization:</b>	Vertical
<b>Test Voltage:</b>	AC 120V/60Hz	<b>Environment:</b>	Temp: 24°C Huni: 57%

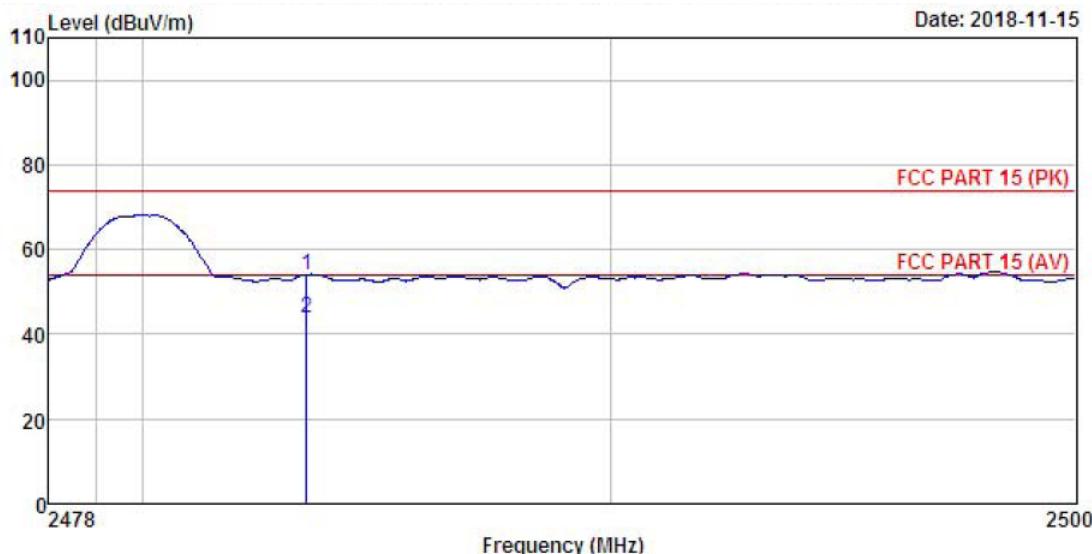


REMARK :		ReadAntenna	Cable	Preamp	Limit	Over	
Freq		Level Factor	Loss Factor	Level	Line	Line	Remark
	MHz	dBuV	dB/m	dB	dBuV/m	dBuV/m	dB
1	2483.500	21.75	27.57	4.81	0.00	54.13	74.00 -19.87 Peak
2	2483.500	11.45	27.57	4.81	0.00	43.83	54.00 -10.17 Average

**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

<b>Product Name:</b>	HELLO Remote	<b>Product Model:</b>	HELLORemote2
<b>Test By:</b>	Zora	<b>Test mode:</b>	Tx mode
<b>Test Channel:</b>	Highest channel	<b>Polarization:</b>	Horizontal
<b>Test Voltage:</b>	AC 120V/60Hz	<b>Environment:</b>	Temp: 24°C Huni: 57%

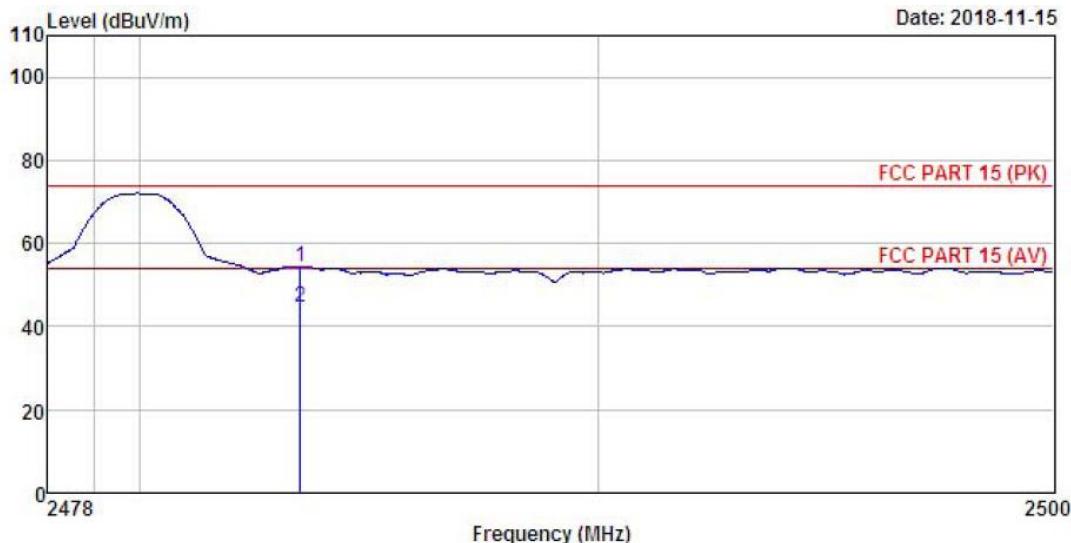


REMARK :		ReadAntenna	Cable	Preamp	Limit	Over	
Freq	Level Factor	Loss Factor	Level	Line	Line	Limit	Remark
-----	-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	2483.500	22.17	27.57	4.81	0.00	54.55	74.00 -19.45 Peak
2	2483.500	12.36	27.57	4.81	0.00	44.74	54.00 -9.26 Average

## Remark:


1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

## 6.6 Spurious Emission

### 6.6.1 Conducted Emission Method

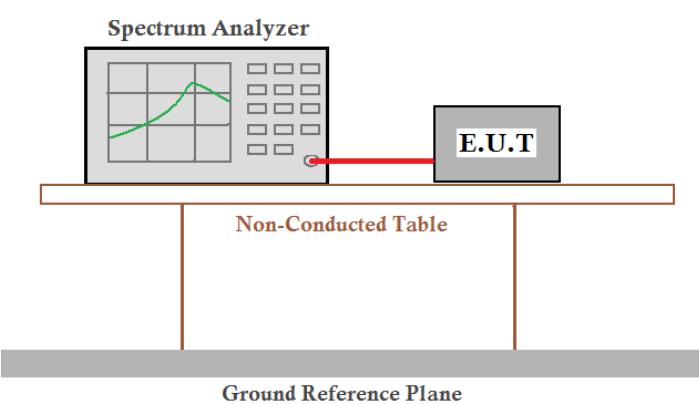
Test Requirement:	FCC Part 15 C Section 15.247 (d) RSS-247 section 5.5
Test Method:	ANSI C63.10:2013 and KDB 558074
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	 <p>The diagram illustrates the test setup for conducted emission testing. A Spectrum Analyzer is connected to the E.U.T (Equipment Under Test) via a cable. The entire assembly sits on a Non-Conducted Table, which is placed above a Ground Reference Plane.</p>
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

Test plot as follows:

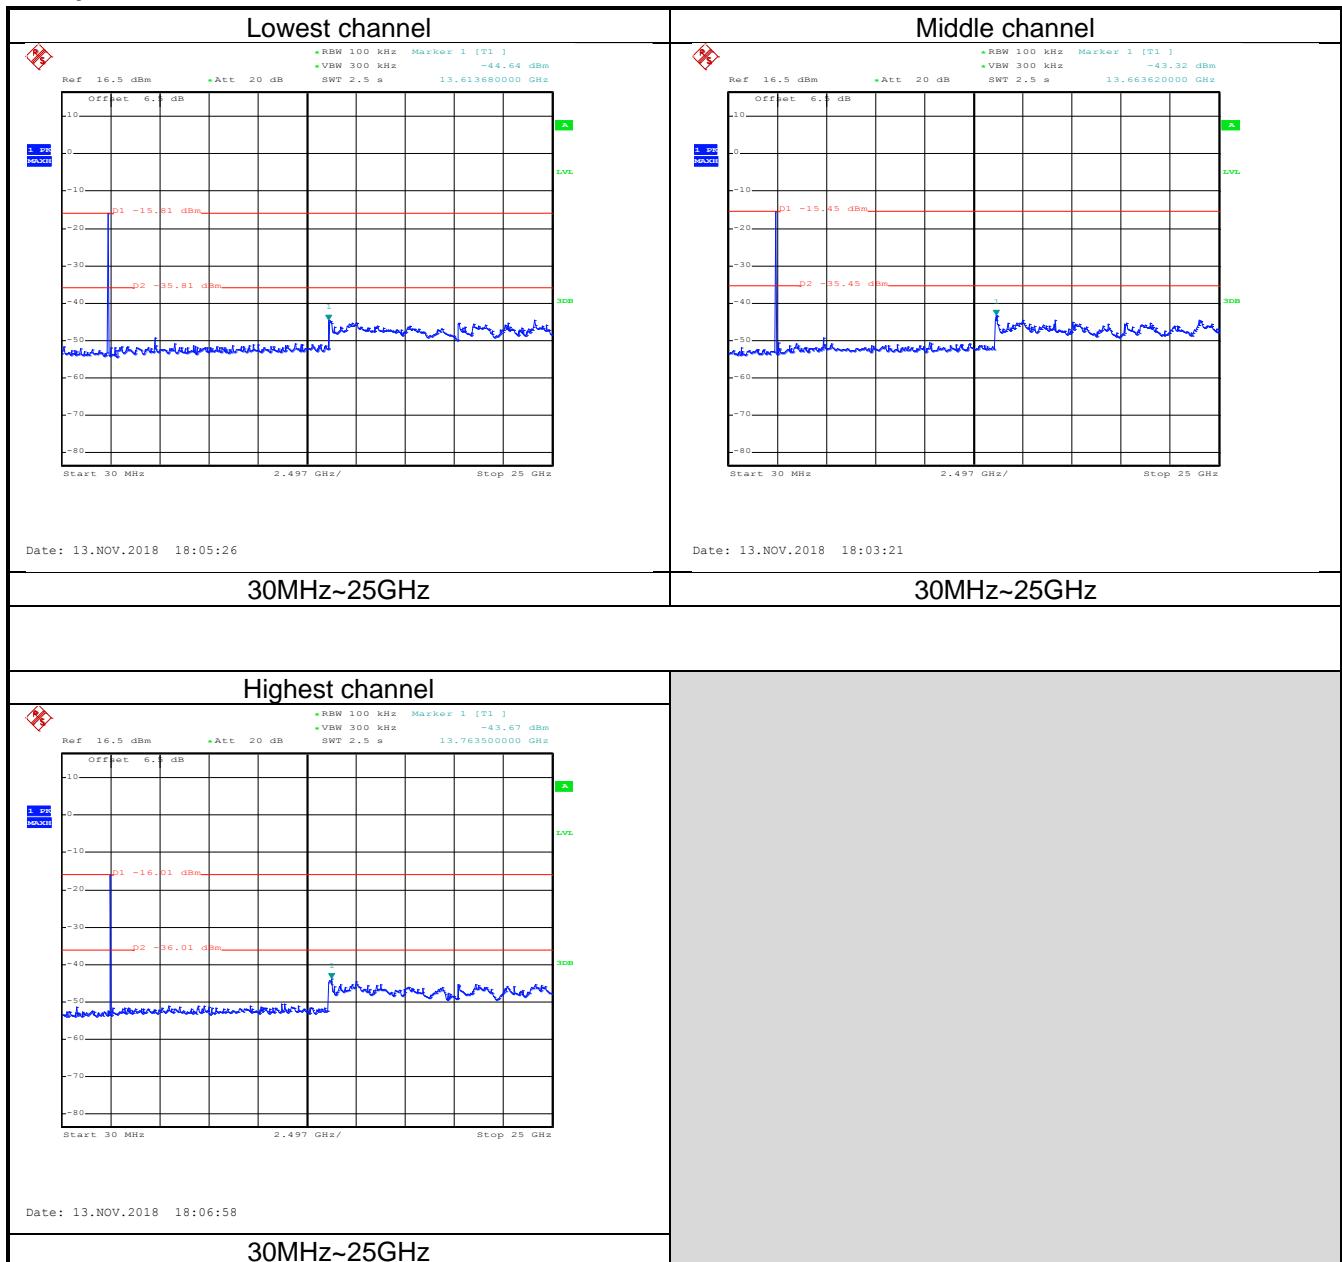


### 6.6.2 Radiated Emission Method

Test Requirement:	FCC Part 15 C Section 15.209 and 15.205 RSS-Gen section 6.13								
Test Method:	ANSI C63.10:2013								
Test Frequency Range:	9kHz to 25GHz								
Test Distance:	3m								
Receiver setup:	Frequency	Detector	RBW	VBW	Remark				
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value				
	Above 1GHz	Peak	1MHz	3MHz	Peak Value				
		RMS	1MHz	3MHz	Average Value				
Limit:	Frequency	Limit (dBuV/m @3m)		Remark					
	30MHz-88MHz	40.0		Quasi-peak Value					
	88MHz-216MHz	43.5		Quasi-peak Value					
	216MHz-960MHz	46.0		Quasi-peak Value					
	960MHz-1GHz	54.0		Quasi-peak Value					
	Above 1GHz	54.0		Average Value					
		74.0		Peak Value					
Test Procedure:	<ol style="list-style-type: none"> <li>The EUT was placed on the top of a rotating table 0.8m(below 1GHz)/1.5m(above 1GHz) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</li> </ol>								
Test setup:	Below 1GHz								

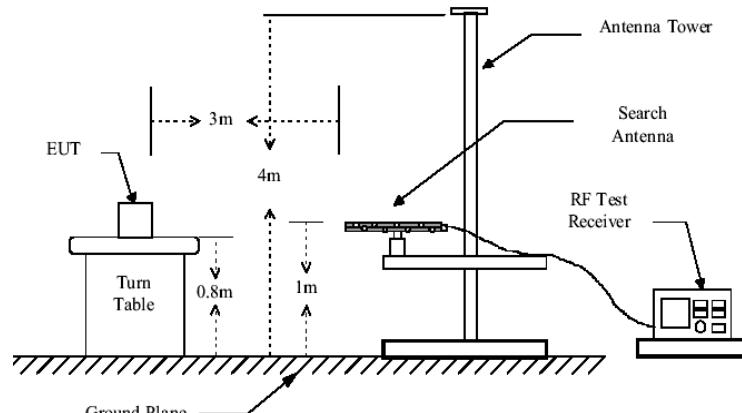


Above 1GHz

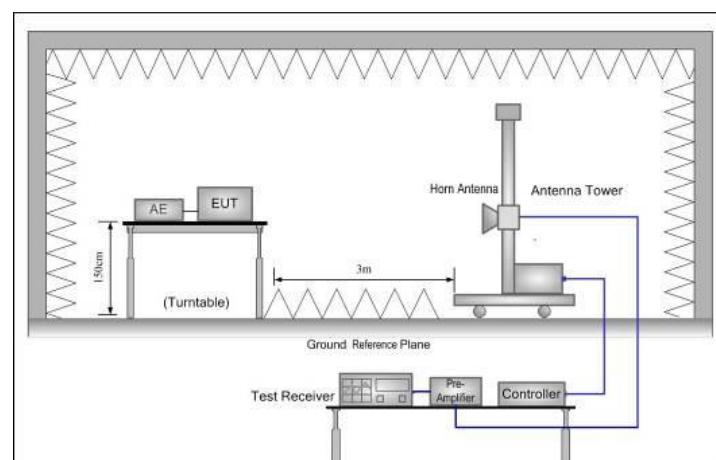

Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed
Remark:	<ul style="list-style-type: none"> <li>1. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis is the worst case.</li> <li>2. 9 kHz to 30MHz is too low, so only shows the data of above 30MHz in this report.</li> </ul>

**Measurement Data (worst case):****Below 1GHz:**

<b>Product Name:</b>	HELLO Remote	<b>Product Model:</b>	HELLORemote2
<b>Test By:</b>	Zora	<b>Test mode:</b>	Tx mode
<b>Test Frequency:</b>	30 MHz ~ 1 GHz	<b>Polarization:</b>	Vertical
<b>Test Voltage:</b>	AC 120V/60Hz	<b>Environment:</b>	Temp: 24°C Huni: 57%

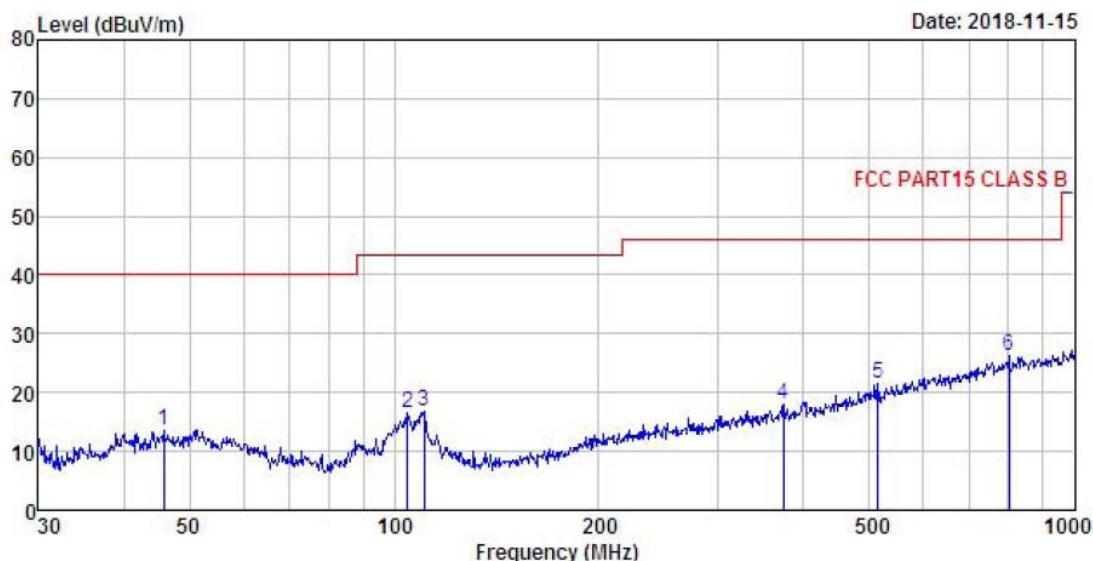
**REMARK :**

Freq	Read	Antenna	Cable	Preamp	Limit	Line	Over	Remark
	Level	Factor	Loss	Factor				
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	45.855	28.41	13.77	1.29	29.85	13.62	40.00	-26.38 QP
2	104.536	32.05	11.98	1.99	29.50	16.52	43.50	-26.98 QP
3	110.569	32.03	12.18	2.05	29.45	16.81	43.50	-26.69 QP
4	373.311	28.60	15.03	3.09	28.66	18.06	46.00	-27.94 QP
5	513.633	29.08	17.64	3.69	28.99	21.42	46.00	-24.58 QP
6	801.786	29.03	21.01	4.34	28.19	26.19	46.00	-19.81 QP

**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

<b>Product Name:</b>	HELLO Remote	<b>Product Model:</b>	HELLORemote2
<b>Test By:</b>	Zora	<b>Test mode:</b>	Tx mode
<b>Test Frequency:</b>	30 MHz ~ 1 GHz	<b>Polarization:</b>	Horizontal
<b>Test Voltage:</b>	AC 120V/60Hz	<b>Environment:</b>	Temp: 24°C Huni: 57%

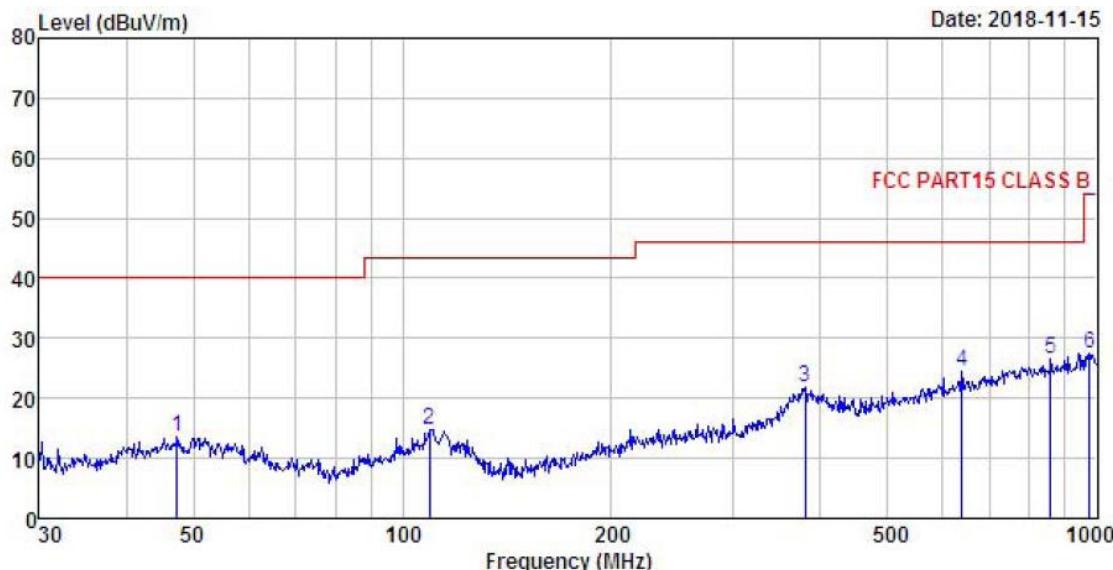

REMARK :		ReadAntenna	Cable	Preamp	Limit	Over	Over	
Freq		Level Factor	Loss Factor	Level	Line	Line	Remark	
MHz	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	47.326	28.21	13.89	1.27	29.84	13.53	40.00	-26.47 QP
2	109.412	30.06	12.27	2.04	29.46	14.91	43.50	-28.59 QP
3	379.914	32.16	15.15	3.09	28.69	21.71	46.00	-24.29 QP
4	638.369	29.89	19.66	3.88	28.81	24.62	46.00	-21.38 QP
5	857.025	29.09	21.44	4.12	27.99	26.66	46.00	-19.34 QP
6	975.753	27.98	22.61	4.34	27.57	27.36	54.00	-26.64 QP

**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

## Above 1GHz

Test channel: Lowest channel								
Detector: Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4808.00	47.51	30.85	6.80	41.81	43.35	74.00	-30.65	Vertical
4808.00	46.35	30.85	6.80	41.81	42.19	74.00	-31.81	Horizontal
Detector: Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4808.00	36.86	30.85	6.80	41.81	32.70	54.00	-21.30	Vertical
4808.00	36.11	30.85	6.80	41.81	31.95	54.00	-22.05	Horizontal
Test channel: Middle channel								
Detector: Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4880.00	47.85	31.20	6.86	41.84	44.07	74.00	-29.93	Vertical
4880.00	47.62	31.20	6.86	41.84	43.84	74.00	-30.16	Horizontal
Detector: Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4880.00	36.69	31.20	6.86	41.84	32.91	54.00	-21.09	Vertical
4880.00	36.58	31.20	6.86	41.84	32.80	54.00	-21.20	Horizontal
Test channel: Highest channel								
Detector: Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4960.00	47.15	31.63	6.91	41.87	43.82	74.00	-30.18	Vertical
4960.00	46.23	31.63	6.91	41.87	42.90	74.00	-31.10	Horizontal
Detector: Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4960.00	36.08	31.63	6.91	41.87	32.75	54.00	-21.25	Vertical
4960.00	35.75	31.63	6.91	41.87	32.42	54.00	-21.58	Horizontal
<i>Remark:</i>								
1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.								
2. The emission levels of other frequencies are very lower than the limit and not show in test report.								