



TESTING LABORATORY  
CERTIFICATE#4323.01



## FCC PART 15.247

### TEST REPORT

For

## Shanghai MOONS' Automation Control Co., Ltd.

No.168 Mingjia Rd, Minhang district, Shanghai China 201107

**FCC ID: 2ALUV-MSDK63XX**

<b>Report Type:</b> Original Report	<b>Product Type:</b> HV Wireless Node Controller with NEMA interface
<b>Test Engineer:</b> Max Min	<i>Max Min</i>
<b>Report Number:</b> RKSB190307002-00A	
<b>Report Date:</b> 2019-03-21	
<b>Reviewed By:</b> Oscar Ye RF Leader	<i>Oscar Ye</i>
<b>Prepared By:</b> Bay Area Compliance Laboratories Corp. (Kunshan) No.248 Chenghu Road, Kunshan, Jiangsu province, China Tel: +86-0512-86175000 Fax: +86-0512-88934268 <a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a>	

**Note:** This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

**TABLE OF CONTENTS**

**GENERAL INFORMATION.....4**

    PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....4

    OBJECTIVE .....4

    RELATED SUBMITTAL(S)/GRANT(S).....4

    TEST METHODOLOGY .....4

    MEASUREMENT UNCERTAINTY.....5

    TEST FACILITY .....5

**SYSTEM TEST CONFIGURATION.....6**

    DESCRIPTION OF TEST CONFIGURATION .....6

    EQUIPMENT MODIFICATIONS .....6

    EUT EXERCISE SOFTWARE .....6

    SUPPORT EQUIPMENT LIST AND DETAILS .....8

    EXTERNAL I/O CABLE.....9

    BLOCK DIAGRAM OF TEST SETUP .....9

**SUMMARY OF TEST RESULTS .....11**

**TEST EQUIPMENT LIST .....12**

**FCC §1.1310& §2.1091 –MAXIMUM PERMISSIBLE EXPOSURE (MPE).....13**

**FCC §15.203 - ANTENNA REQUIREMENT.....14**

    APPLICABLE STANDARD .....14

    ANTENNA CONNECTOR CONSTRUCTION .....14

**FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS .....15**

    APPLICABLE STANDARD .....15

    EUT SETUP .....15

    EMI TEST RECEIVER SETUP.....15

    TEST PROCEDURE .....15

    CORRECTED FACTOR & MARGIN CALCULATION .....16

    TEST RESULTS SUMMARY .....16

    TEST DATA .....16

**FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....21**

    APPLICABLE STANDARD .....21

    EUT SETUP .....21

    EMI TEST RECEIVER SETUP.....22

    TEST PROCEDURE .....22

    CORRECTED AMPLITUDE & MARGIN CALCULATION .....22

    TEST RESULTS SUMMARY .....22

    TEST DATA .....23

**FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH.....31**

    APPLICABLE STANDARD .....31

    TEST PROCEDURE .....31

    TEST DATA .....31

**FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER.....34**

    APPLICABLE STANDARD .....34

---

TEST PROCEDURE .....	34
TEST DATA .....	34
<b>FCC §15.247(d) – BAND EDGE.....</b>	<b>37</b>
APPLICABLE STANDARD .....	37
TEST PROCEDURE .....	37
TEST DATA .....	37
<b>FCC §15.247(e) - POWER SPECTRAL DENSITY .....</b>	<b>39</b>
APPLICABLE STANDARD .....	39
TEST PROCEDURE .....	39
TEST DATA .....	39

## GENERAL INFORMATION

### Product Description for Equipment under Test (EUT)

Applicant	Shanghai MOONS' Automation Control Co., Ltd.
Tested Model	MSDK6349
Product Type	HV Wireless Node Controller with NEMA interface
Dimension	83mm(L) × 83mm(W) × 111mm(H)
Power Supply	AC 100-480V

*\*All measurement and test data in this report was gathered from production sample serial number: 20190307002. (Assigned by the BACL. The EUT supplied by the applicant was received on 2019-03-07.*

### Objective

This report is prepared on behalf of Shanghai MOONS' Automation Control Co., Ltd. in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

### Related Submittal(s)/Grant(s)

No related submittal/grant.

### Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices and FCC 558074 D01 15.247 Meas Guidance v05r01.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Kunshan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

**Measurement Uncertainty**

Item		Uncertainty
AC Power Lines Conducted Emissions		3.19 dB
RF conducted test with spectrum		0.9dB
RF Output Power with Power meter		0.5dB
Radiated emission	30MHz~1GHz	6.11dB
	1GHz~6GHz	4.45dB
	6GHz~18GHz	5.23dB
	18GHz~40GHz	5.65dB
Occupied Bandwidth		0.5kHz
Temperature		1.0°C
Humidity		6%

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

**Test Facility**

The test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road, Kunshan, Jiangsu province, China.

Bay Area Compliance Laboratories Corp. (Kunshan) Lab is accredited to ISO/IEC 17025 by A2LA (Lab code: 4323.01) and the FCC designation No. CN1185 under the FCC KDB 974614 D01 and CAB identifier CN0004 under the ISED requirement. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2014.

**SYSTEM TEST CONFIGURATION**

**Description of Test Configuration**

Channel list:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
11	2405	19	2445
12	2410	20	2450
13	2415	21	2455
14	2420	22	2460
15	2425	23	2465
16	2430	24	2470
17	2435	25	2475
18	2440	/	/

EUT was tested with Channel 11, 18 and 25.

**Equipment Modifications**

No modification was made to the EUT tested.

**EUT Exercise Software**


RF test tool: SecureCRT

The worst case was performed as below:


Channel	Power Level
Channel 11	1
Channel 18	1
Channel 25	1

Duty Cycle:


Channel 11: 2405MHz

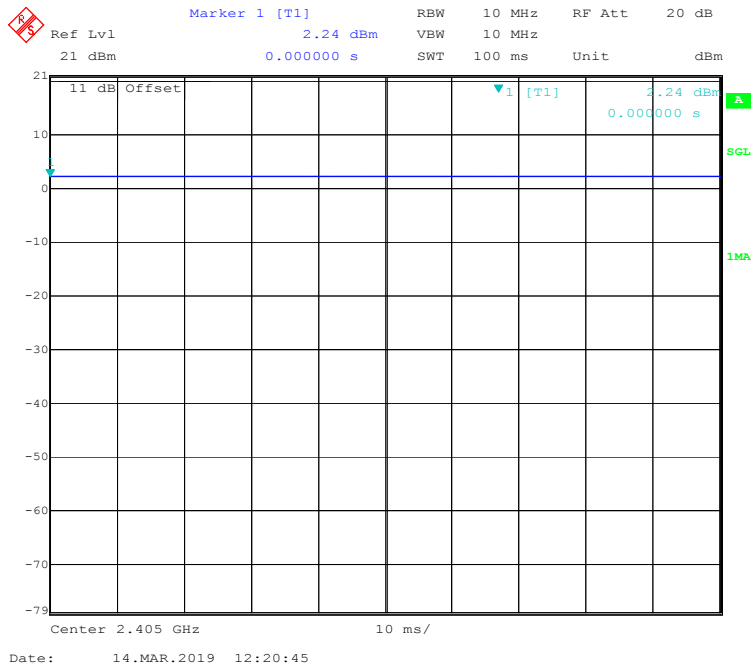

Channel 18: 2440MHz

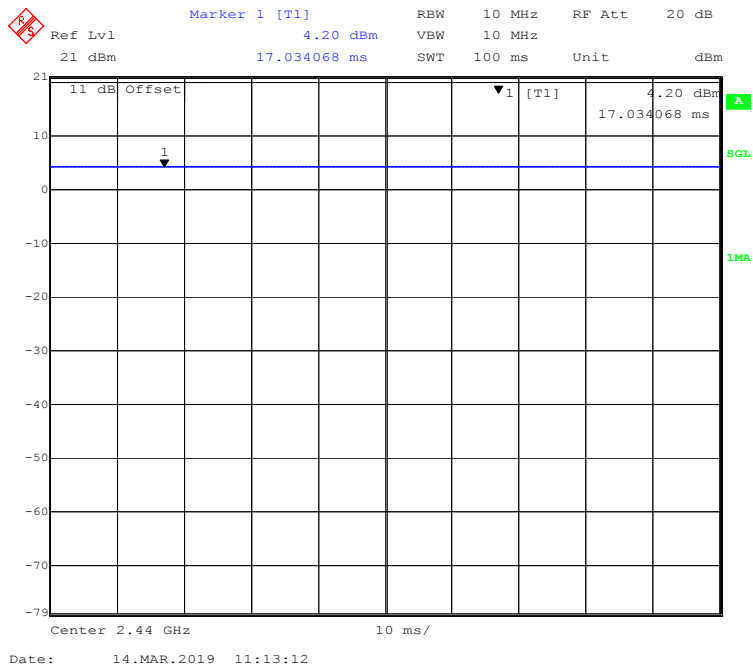

**Channel 25: 2475MHz**

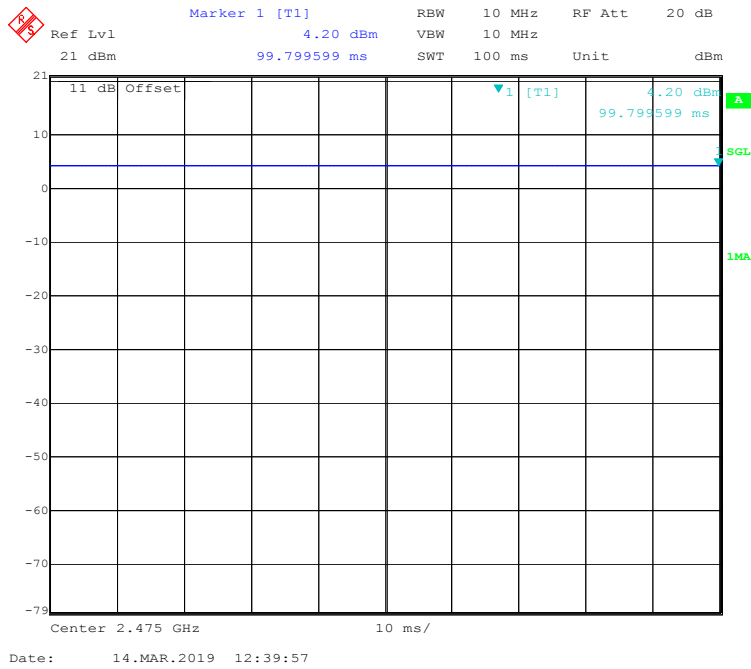

Channel	Duty Cycle	T(us)	1/T(kHz)	10log(1/x)
Channel 11	100%	/	/	0
Channel 18	100%	/	/	0
Channel 25	100%	/	/	0

Note: "x" means the Duty Cycle.

**Support Equipment List and Details**

Manufacturer	Description	Model	Serial Number
DELL	Notebook	GX620	D65874152
DELL	Adapter	LA65NS0-00	DF263
MOONS'	Debug Board	MSSL200	/
OPPLE	Lamp Bulb	90W	/
/	Lamp Holder	/	/




**External I/O Cable**


Cable Description	Length (m)	From Port	To
Data Cable	0.5	EUT	Debug Board
USB Cable	1.0	Debug Board	Notebook
Power Cable	1.0	EUT	LISN
Power Cable	0.3	EUT	Lamp Holder

**Block Diagram of Test Setup**


For Conducted Emissions:

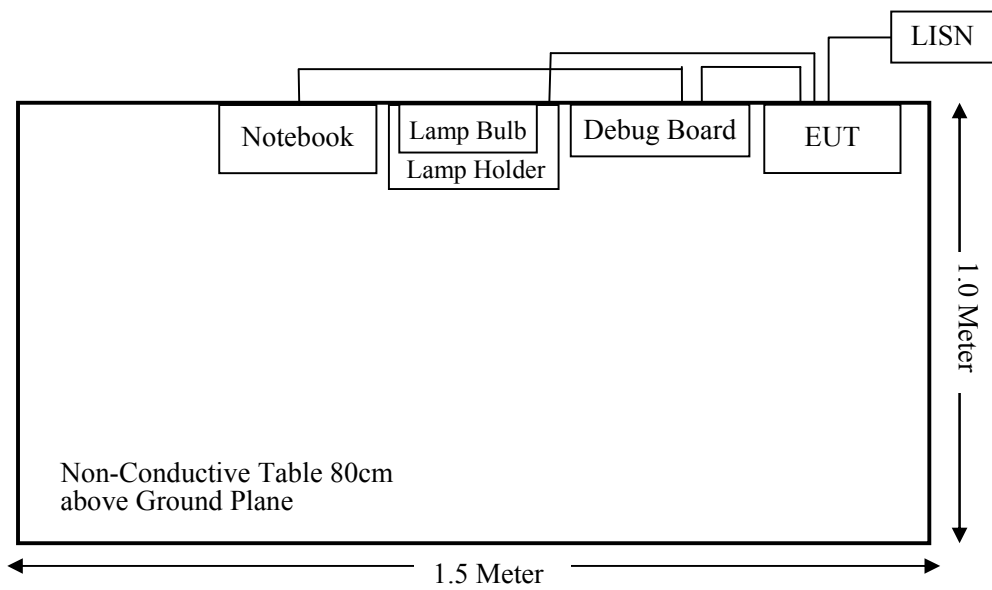

For Radiated Emissions (Below 1GHz):

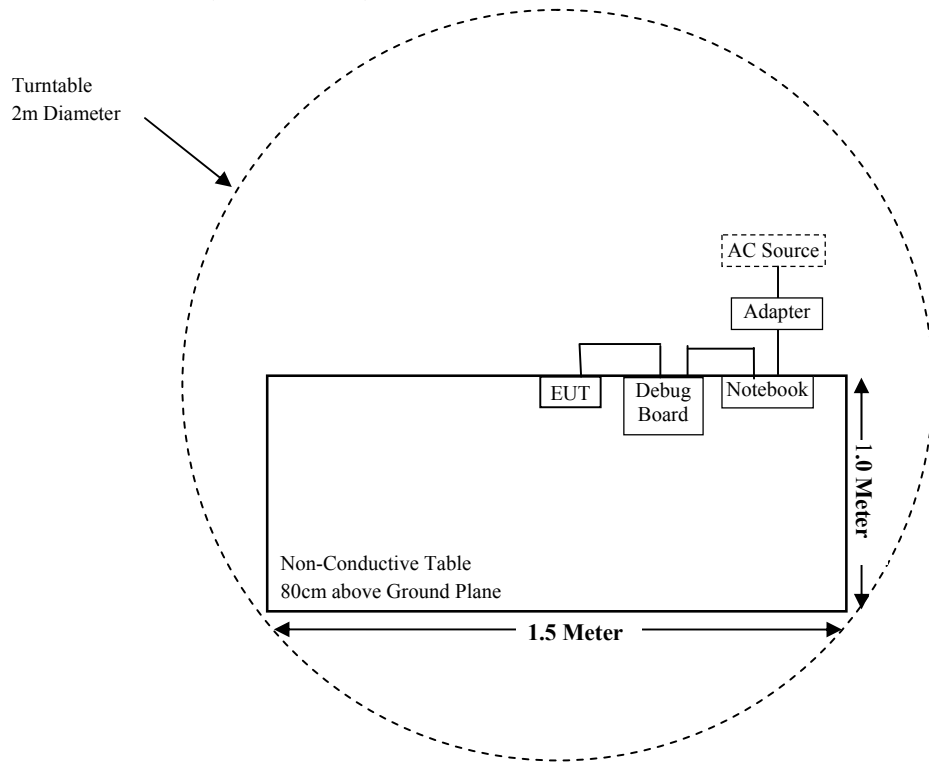

For Radiated Emissions(Above 1GHz):

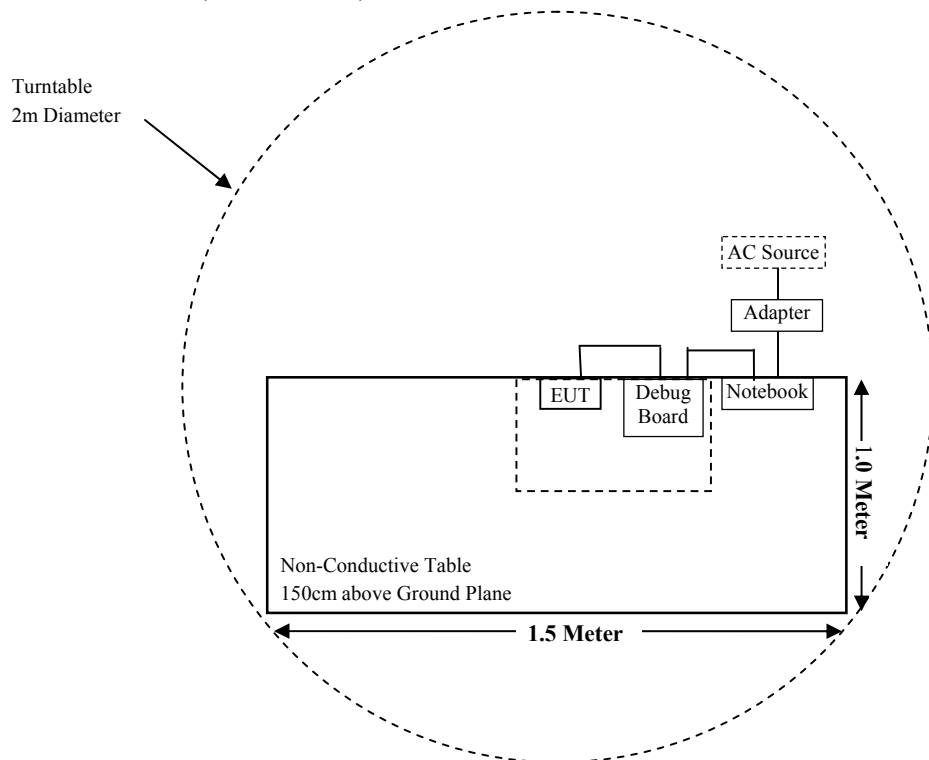

**SUMMARY OF TEST RESULTS**

<b>FCC Rules</b>	<b>Description of Test</b>	<b>Result</b>
§1.1310 & §2.1091	Maximum Permissible Exposure (MPE)	Compliant
§15.203	Antenna Requirement	Compliant
§15.207 (a)	AC Line Conducted Emissions	Compliant
§15.247(d)	Spurious Emissions at Antenna Port	Compliant
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliant
§15.247 (a)(2)	6 dB Emission Bandwidth	Compliant
§15.247(b)(3)	Maximum Conducted Output Power	Compliant
§15.247(d)	Band Edge	Compliant
§15.247(e)	Power Spectral Density	Compliant

**TEST EQUIPMENT LIST**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
<b>Radiated Emission Test (Chamber 1#)</b>					
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2018-11-30	2019-11-29
Sunol Sciences	Broadband Antenna	JB3	A090413-1	2016-12-26	2019-12-25
Sonoma Instrument	Pre-amplifier	310N	171205	2018-08-14	2019-08-13
Rohde & Schwarz	Auto test Software	EMC32	100361	/	/
MICRO-COAX	Coaxial Cable	Cable-8	008	2018-08-15	2019-08-14
MICRO-COAX	Coaxial Cable	Cable-9	009	2018-08-15	2019-08-14
MICRO-COAX	Coaxial Cable	Cable-10	010	2018-08-15	2019-08-14
<b>Radiated Emission Test (Chamber 2#)</b>					
Rohde & Schwarz	EMI Test Receiver	ESU40	100207	2018-08-27	2019-08-26
ETS-LINDGREN	Horn Antenna	3115	9207-3900	2017-07-15	2020-07-14
ETS-LINDGREN	Horn Antenna	3116	00084159	2016-12-12	2019-12-11
A.H.Systems, inc	Amplifier	2641-1	466	2018-09-11	2019-09-10
EM Electronics Corporation	Amplifier	EM18G40G	060726	2018-03-22	2019-03-21
MICRO-TRONICS	Band Reject Filter	BRM50702	G024	2018-08-05	2019-08-04
Narda	Attenuator/10dB	10dB	/	2018-08-15	2019-08-14
Rohde & Schwarz	Auto test Software	EMC32	100361	/	/
MICRO-COAX	Coaxial Cable	Cable-6	006	2018-08-15	2019-08-14
MICRO-COAX	Coaxial Cable	Cable-11	011	2018-08-15	2019-08-14
MICRO-COAX	Coaxial Cable	Cable-12	012	2018-08-15	2019-08-14
MICRO-COAX	Coaxial Cable	Cable-13	013	2018-08-15	2019-08-14
<b>RF Conducted Test</b>					
Rohde & Schwarz	Signal Analyzer	FSIQ26	836131/009	2018-11-30	2019-11-29
Narda	Attenuator	10dB	010	2018-08-15	2019-08-14
MOONS'	RF Cable	/	/	Each Time	/
<b>Conducted Emission Test</b>					
Rohde & Schwarz	EMI Test Receiver	ESCS30	834115/007	2018-11-30	2019-11-29
Rohde & Schwarz	LISN	ENV216	3560655016	2018-11-30	2019-11-29
BACL	Auto test Software	BACL-EMC	CE001	/	/
Narda	Attenuator/6dB	10690812-2	26850-6	2019-01-10	2020-01-09
MICRO-COAX	Coaxial Cable	Cable-15	015	2018-08-15	2019-08-14

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

**FCC §1.1310& §2.1091 –MAXIMUM PERMISSIBLE EXPOSURE (MPE)**

**Applicable Standard**

According to subpart §2.1091 and subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission’s guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

<b>(B) Limits for General Population/Uncontrolled Exposure</b>				
<b>Frequency Range (MHz)</b>	<b>Electric Field Strength (V/m)</b>	<b>Magnetic Field Strength (A/m)</b>	<b>Power Density (mW/cm<sup>2</sup>)</b>	<b>Averaging Time (minutes)</b>
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f <sup>2</sup> )	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

f = frequency in MHz; \* = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

Calculated Formulary:

Predication of MPE limit at a given distance

$S = PG/4\pi R^2$  = power density (in appropriate units, e.g. mW/cm<sup>2</sup>);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

**Calculated Data:**

<b>Frequency Range (MHz)</b>	<b>Antenna Gain</b>		<b>Tune-up Conducted Power</b>		<b>Evaluation Distance (cm)</b>	<b>Power Density (mW/cm<sup>2</sup>)</b>	<b>MPE Limit (mW/cm<sup>2</sup>)</b>
	<b>(dBi)</b>	<b>(numeric)</b>	<b>(dBm)</b>	<b>(mW)</b>			
2405~2475	2.00	1.58	5.00	3.16	20	0.0010	1.0

**Note:** The tune-up power was declared by the manufacturer.

**Result:** The device meet FCC MPE at 20 cm distance.

---

## **FCC §15.203 - ANTENNA REQUIREMENT**

---

### **Applicable Standard**

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
  - b. Antenna must use a unique type of connector to attach to the EUT.
- Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### **Antenna Connector Construction**

The EUT has a monopole antenna for 2.4G and the antenna gain is 2.0dBi, which was permanently attached, fulfill the requirement of this section. Please refer to the EUT photos.


**Result:** Compliant.

## FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

### Applicable Standard

FCC §15.207(a)

### EUT Setup

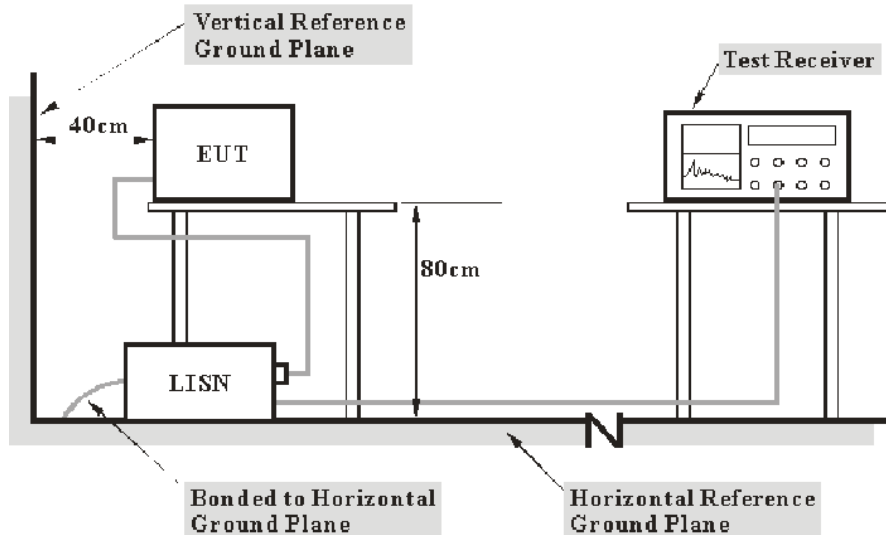

- Note: 1. Support units were connected to second LISN.  
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

### EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

### Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

### Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Corrected Factor (dB)} = \text{LISN VDF (dB)} + \text{Cable Loss (dB)} + \text{Transient Limiter Attenuation (dB)}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin (dB)} = \text{Limit (dB}\mu\text{V)} - \text{Corrected Amplitude (dB}\mu\text{V)}$$

### Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207.

### Test Data

#### Environmental Conditions


<b>Temperature:</b>	24.1 °C
<b>Relative Humidity:</b>	50 %
<b>ATM Pressure:</b>	101.2kPa

*The testing was performed by Max Min on 2019-03-08.*

*EUT operation mode: Transmitting in channel 25. (Worst case)*




AC 120V/60 Hz, Line

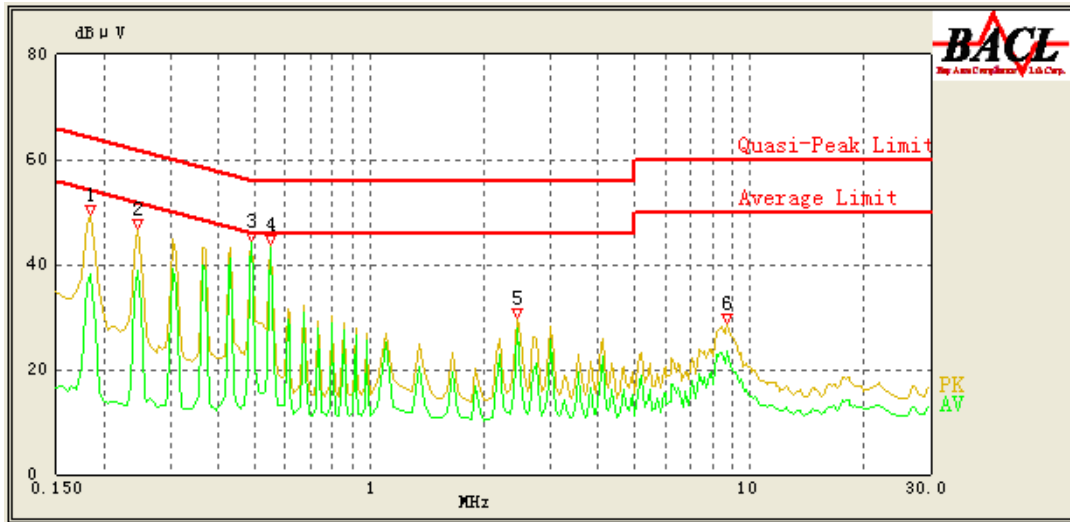

Frequency (MHz)	Corrected Amplitude (dBμV)	Detector (PK/AV/QP)	Bandwidth (kHz)	Line	Corrected Factor (dB)	Limit (dBμV)	Margin (dB)	Comment
0.185	49.66	QP	9.000	L1	16.02	64.26	14.60	Compliance
0.185	38.32	AV	9.000	L1	16.02	54.26	15.94	Compliance
0.245	46.87	QP	9.000	L1	16.02	61.92	15.05	Compliance
0.245	38.97	AV	9.000	L1	16.02	51.92	12.95	Compliance
0.490	44.53	QP	9.000	L1	16.08	56.17	11.64	Compliance
0.490	44.10	AV	9.000	L1	16.08	46.17	2.07	Compliance
0.550	43.96	QP	9.000	L1	16.05	56.00	12.04	Compliance
0.550	43.31	AV	9.000	L1	16.05	46.00	2.69	Compliance
2.450	29.98	QP	9.000	L1	15.85	56.00	26.02	Compliance
2.450	27.86	AV	9.000	L1	15.85	46.00	18.14	Compliance
8.700	28.79	QP	9.000	L1	16.03	60.00	31.21	Compliance
8.700	23.52	AV	9.000	L1	16.03	50.00	26.48	Compliance

AC 120V/60 Hz, Neutral

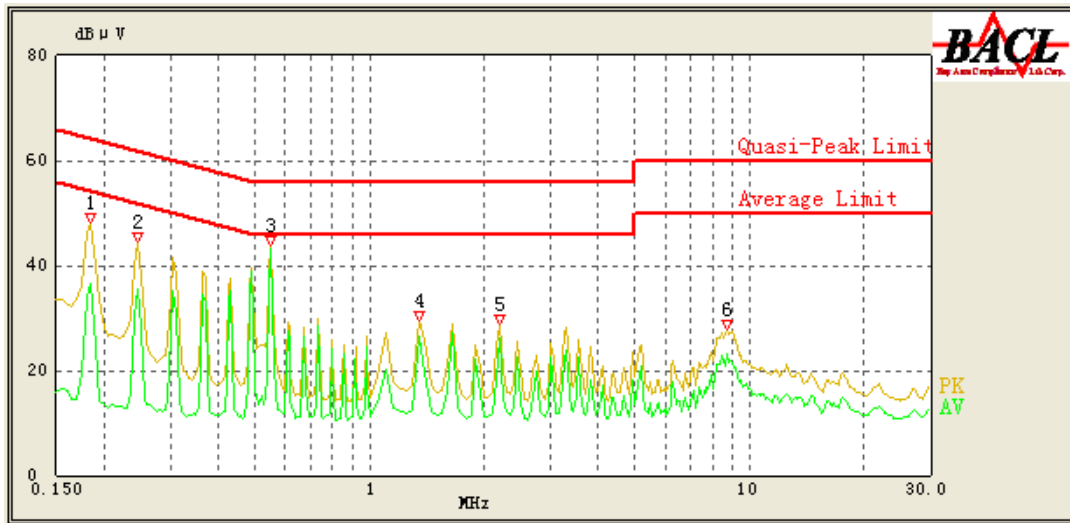


Frequency (MHz)	Corrected Amplitude (dBμV)	Detector (PK/AV/QP)	Bandwidth (kHz)	Line	Corrected Factor (dB)	Limit (dBμV)	Margin (dB)	Comment
0.185	48.01	QP	9.000	N	16.05	64.26	16.25	Compliance
0.185	36.66	AV	9.000	N	16.05	54.26	17.60	Compliance
0.245	44.45	QP	9.000	N	16.06	61.92	17.47	Compliance
0.245	35.37	AV	9.000	N	16.06	51.92	16.55	Compliance
0.550	43.88	QP	9.000	N	16.08	56.00	12.12	Compliance
0.550	43.03	AV	9.000	N	16.08	46.00	2.97	Compliance
1.350	29.64	QP	9.000	N	15.93	56.00	26.36	Compliance
1.350	26.38	AV	9.000	N	15.93	46.00	19.62	Compliance
2.200	28.80	QP	9.000	N	15.91	56.00	27.20	Compliance
2.200	26.04	AV	9.000	N	15.91	46.00	19.96	Compliance
8.750	28.00	QP	9.000	N	15.96	60.00	32.00	Compliance
8.750	23.16	AV	9.000	N	15.96	50.00	26.84	Compliance

Note:


- 1) Corrected Factor (dB) = LISN VDF (dB) + Cable Loss (dB) + Transient Limiter Attenuation (dB)
- 2) Margin (dB) = Limit (dBμV) - Corrected Amplitude (dBμV)

AC 277V/60 Hz, Line

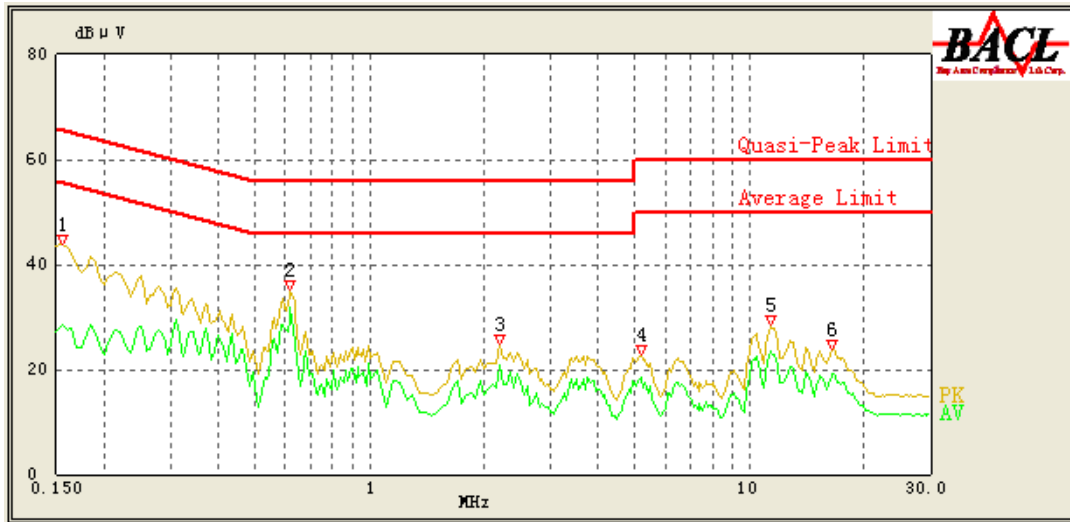

Frequency (MHz)	Corrected Amplitude (dBμV)	Detector (PK/AV/QP)	Bandwidth (kHz)	Line	Corrected Factor (dB)	Limit (dBμV)	Margin (dB)	Comment
0.155	43.95	QP	9.000	L1	16.06	65.73	21.78	Compliance
0.155	28.66	AV	9.000	L1	16.06	55.73	27.07	Compliance
0.620	35.33	QP	9.000	L1	16.04	56.00	20.67	Compliance
0.620	31.79	AV	9.000	L1	16.04	46.00	14.21	Compliance
2.200	24.76	QP	9.000	L1	15.91	56.00	31.24	Compliance
2.200	20.96	AV	9.000	L1	15.91	46.00	25.04	Compliance
5.200	22.75	QP	9.000	L1	15.88	60.00	37.25	Compliance
5.200	18.61	AV	9.000	L1	15.88	50.00	31.39	Compliance
11.350	28.60	QP	9.000	L1	16.00	60.00	31.40	Compliance
11.350	23.58	AV	9.000	L1	16.00	50.00	26.42	Compliance
16.550	23.73	QP	9.000	L1	16.06	60.00	36.27	Compliance
16.550	19.05	AV	9.000	L1	16.06	50.00	30.95	Compliance

AC 277V/60 Hz, Neutral

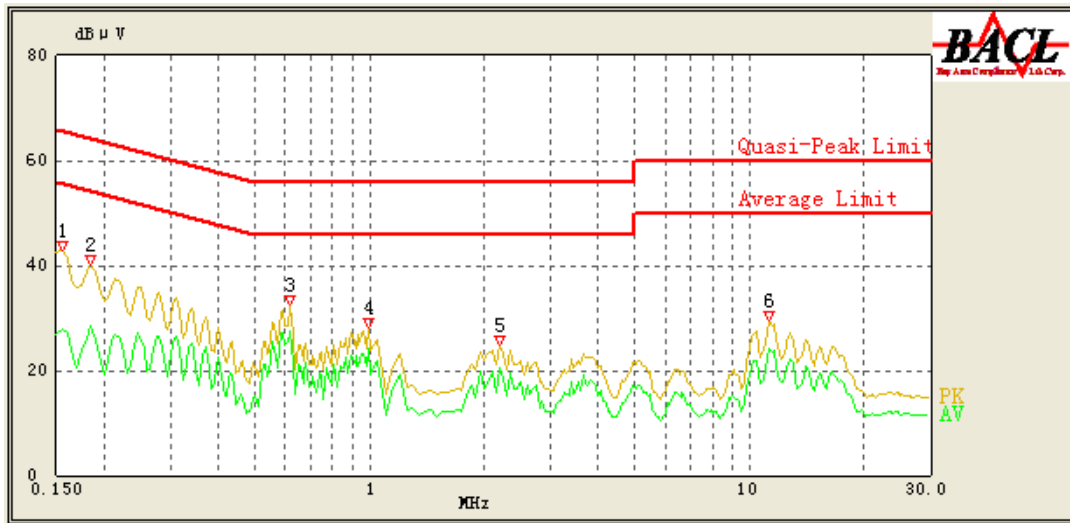

Frequency (MHz)	Corrected Amplitude (dBμV)	Detector (PK/AV/QP)	Bandwidth (kHz)	Line	Corrected Factor (dB)	Limit (dBμV)	Margin (dB)	Comment
0.155	42.79	QP	9.000	N	16.06	65.73	22.94	Compliance
0.155	27.91	AV	9.000	N	16.06	55.73	27.82	Compliance
0.185	40.17	QP	9.000	N	16.05	64.26	24.09	Compliance
0.185	28.38	AV	9.000	N	16.05	54.26	25.88	Compliance
0.620	32.47	QP	9.000	N	16.04	56.00	23.53	Compliance
0.620	27.40	AV	9.000	N	16.04	46.00	18.60	Compliance
0.990	28.28	QP	9.000	N	15.94	56.00	27.72	Compliance
0.990	24.30	AV	9.000	N	15.94	46.00	21.70	Compliance
2.200	24.98	QP	9.000	N	15.91	56.00	31.02	Compliance
2.200	20.34	AV	9.000	N	15.91	46.00	25.66	Compliance
11.300	29.34	QP	9.000	N	16.00	60.00	30.66	Compliance
11.300	24.02	AV	9.000	N	16.00	50.00	25.98	Compliance

**Note:**

- 1) Corrected Factor (dB) = LISN VDF (dB) + Cable Loss (dB) + Transient Limiter Attenuation (dB)
- 2) Margin (dB) = Limit (dBμV) - Corrected Amplitude (dBμV)


## FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

### Applicable Standard


FCC §15.247 (d); §15.209; §15.205;

### EUT Setup

Below 1 GHz:

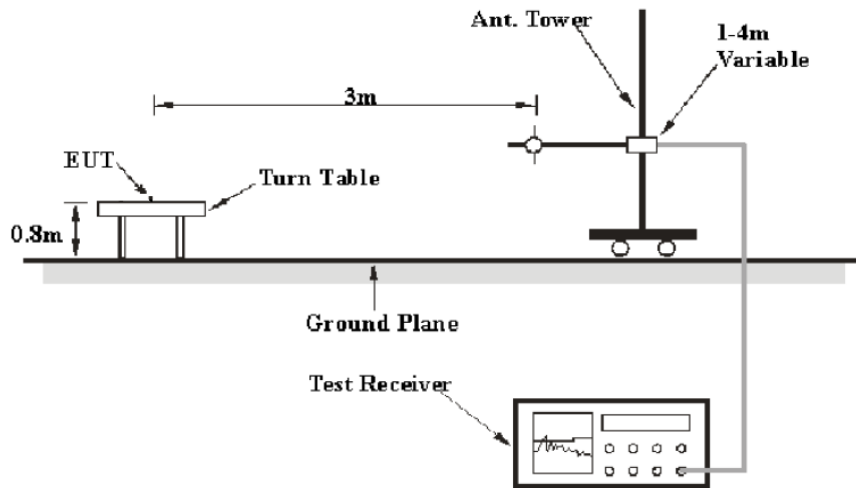

Above 1GHz:

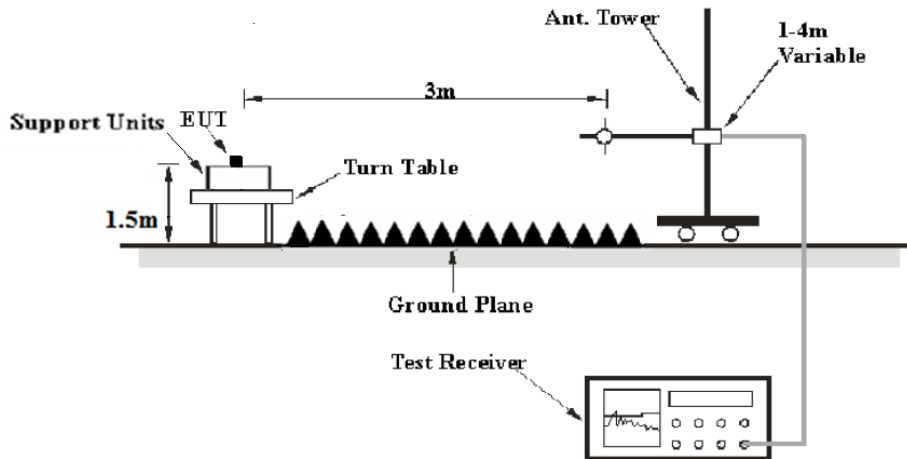

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

## EMI Test Receiver Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver setup was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1GHz	1MHz	3 MHz	/	PK
	1MHz	3 MHz	/	Ave.

## Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection mode for frequencies above 1 GHz.

## Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude (dB}\mu\text{V/m)} = \text{Meter Reading (dB}\mu\text{V)} + \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} - \text{Amplifier Gain (dB)}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin (dB)} = \text{Limit (dB}\mu\text{V/m)} - \text{Corrected Amplitude (dB}\mu\text{V/m)}$$

## Test Results Summary

According to the recorded data in following table, the EUT is compliant with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247.

**Test Data**

**Environmental Conditions**

<b>Temperature:</b>	22.1-24.3 °C
<b>Relative Humidity:</b>	48-52 %
<b>ATM Pressure:</b>	100.6-101.4kPa


The testing was performed by Max Min from 2019-03-14 to 2019-03-20.

EUT operation mode: Transmitting

**Spurious Emission Test:**

**30MHz-1GHz**

(Pre-scan with channel 11, channel 18, channel 25 of operation in the X,Y and Z axes of orientation, the worst case channel 25 of operation in Y-axis of orientation was recorded)

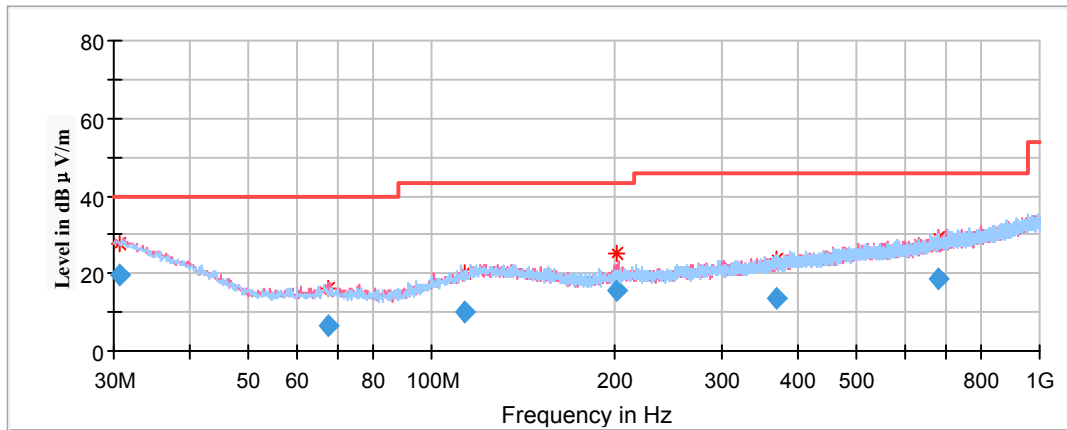

Frequency (MHz)	Corrected Amplitude	Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	QuasiPeak (dBμV/m)	Height (cm)	Polar (H/V)				
30.641300	19.77	101.0	V	358.0	-4.4	40.00	20.23
67.760900	6.68	199.0	V	108.0	-17.4	40.00	33.32
113.059100	10.00	199.0	H	81.0	-12.5	43.50	33.50
202.159450	15.49	101.0	V	230.0	-12.3	43.50	28.01
368.743000	13.44	199.0	H	50.0	-8.8	46.00	32.56
680.408250	18.58	101.0	V	27.0	-3.6	46.00	27.42

**1GHz-18GHz**


(Pre-scan in the X,Y and Z axes of orientation, the worst case **Y-axis of orientation** was recorded.)

Note:

1. This test was performed with the 2.4 - 2.5GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) - Amplifier Factor (dB)  
 Corrected Amplitude (dBµV/m) = Corrected Factor (dB/m) + Reading (dBµV)  
 Margin (dB) = Limit (dBµV/m) - Corrected Amplitude (dBµV/m)

**Low Channel: 2405MHz**

Full Spectrum

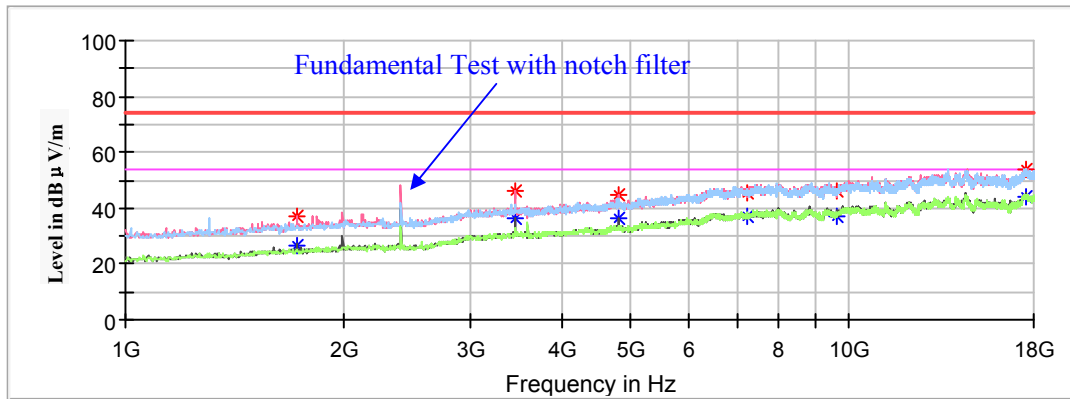


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV/m)	Average (dBµV/m)	Height (cm)	Polar (H/V)				
1724.200000	---	26.39	200.0	V	248.0	-9.2	54.00	27.61
1724.200000	37.39	---	200.0	V	248.0	-9.2	74.00	36.61
3454.800000	---	36.63	200.0	V	236.0	-3.6	54.00	17.37
3454.800000	46.05	---	200.0	V	236.0	-3.6	74.00	27.95
4810.000000	---	36.07	150.0	V	6.0	-0.5	54.00	17.93
4810.000000	44.75	---	150.0	V	6.0	-0.5	74.00	29.25
7215.000000	---	37.21	200.0	V	188.0	5.7	54.00	16.79
7215.000000	45.63	---	200.0	V	188.0	5.7	74.00	28.37
9622.400000	---	37.28	100.0	H	141.0	7.8	54.00	16.72
9622.400000	46.28	---	100.0	H	141.0	7.8	74.00	27.72
17527.400000	---	44.34	150.0	V	189.0	14.2	54.00	9.66
17527.400000	54.17	---	150.0	V	189.0	14.2	74.00	19.83



**Middle Channel: 2440MHz**


Full Spectrum

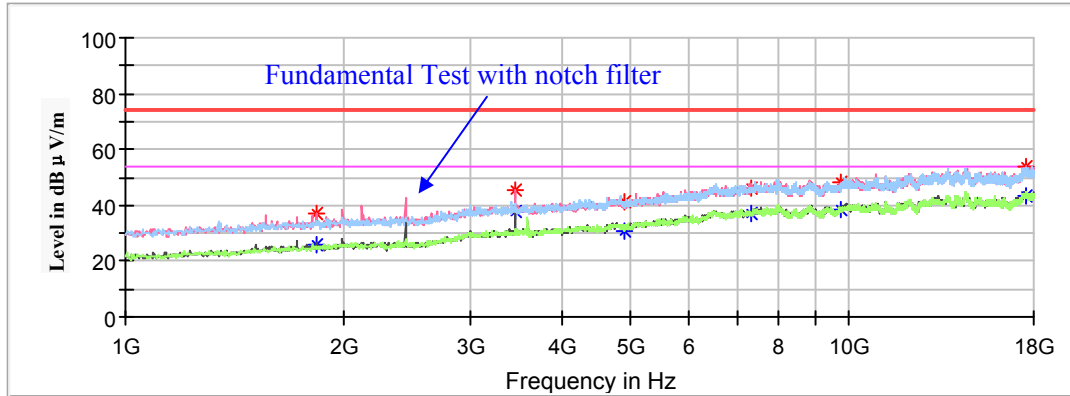

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1836.400000	---	25.62	150.0	V	0.0	-8.8	54.00	28.38
1836.400000	37.33	---	150.0	V	0.0	-8.8	74.00	36.67
3454.800000	---	37.61	200.0	V	246.0	-3.6	54.00	16.39
3454.800000	45.64	---	200.0	V	246.0	-3.6	74.00	28.36
4880.000000	---	31.01	150.0	H	193.0	-0.4	54.00	22.99
4880.000000	41.05	---	150.0	H	193.0	-0.4	74.00	32.95
7320.000000	---	37.29	200.0	H	149.0	5.9	54.00	16.71
7320.000000	46.28	---	200.0	H	149.0	5.9	74.00	27.72
9768.600000	---	38.41	150.0	V	108.0	8.0	54.00	15.59
9768.600000	47.95	---	150.0	V	108.0	8.0	74.00	26.05
17513.800000	---	43.38	150.0	V	306.0	14.3	54.00	10.62
17513.800000	53.90	---	150.0	V	306.0	14.3	74.00	20.10

**High Channel: 2475MHz**

Full Spectrum

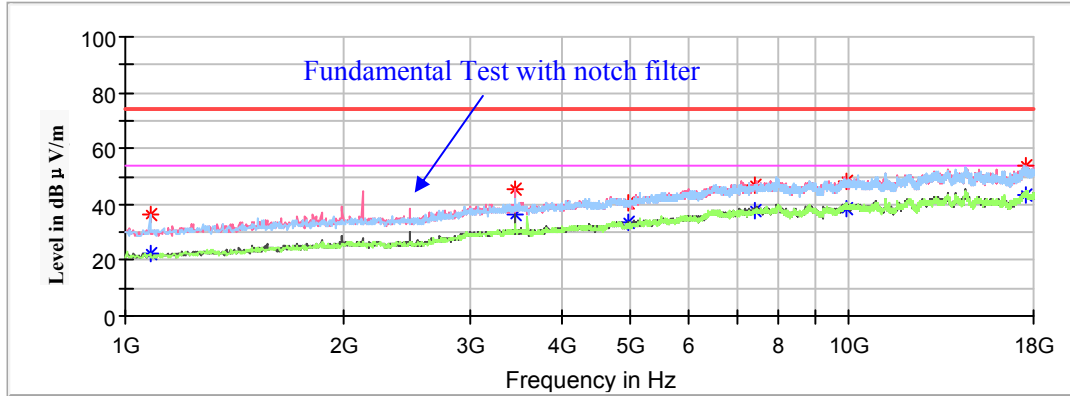


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1081.600000	---	22.21	150.0	H	187.0	-12.2	54.00	31.79
1081.600000	36.07	---	150.0	H	187.0	-12.2	74.00	37.93
3454.800000	---	36.43	200.0	V	248.0	-3.6	54.00	17.57
3454.800000	45.62	---	200.0	V	248.0	-3.6	74.00	28.38
4950.000000	---	33.38	150.0	H	284.0	-0.3	54.00	20.62
4950.000000	40.79	---	150.0	H	284.0	-0.3	74.00	33.21
7425.000000	---	37.90	150.0	H	50.0	6.0	54.00	16.10
7425.000000	46.59	---	150.0	H	50.0	6.0	74.00	27.41
9901.200000	---	38.77	200.0	V	36.0	8.1	54.00	15.23
9901.200000	48.29	---	200.0	V	36.0	8.1	74.00	25.71
17554.600000	---	43.52	200.0	V	163.0	14.2	54.00	10.48
17554.600000	53.98	---	200.0	V	163.0	14.2	74.00	20.02

**18GHz - 25GHz**


(Pre-scan with low, middle and high channels of operation in the X,Y and Z axes of orientation, the worst case channel 25 of operation in Y-axis of orientation was recorded)

**Horizontal**

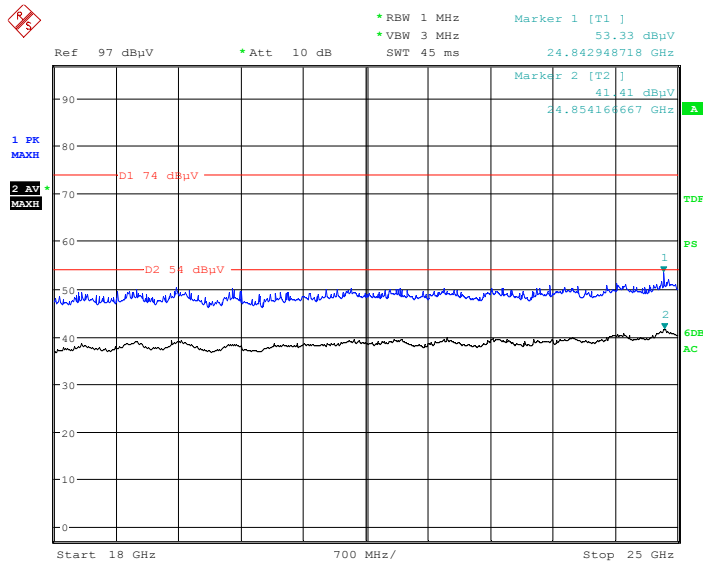

Date: 20.MAR.2019 14:38:52

**Vertical**

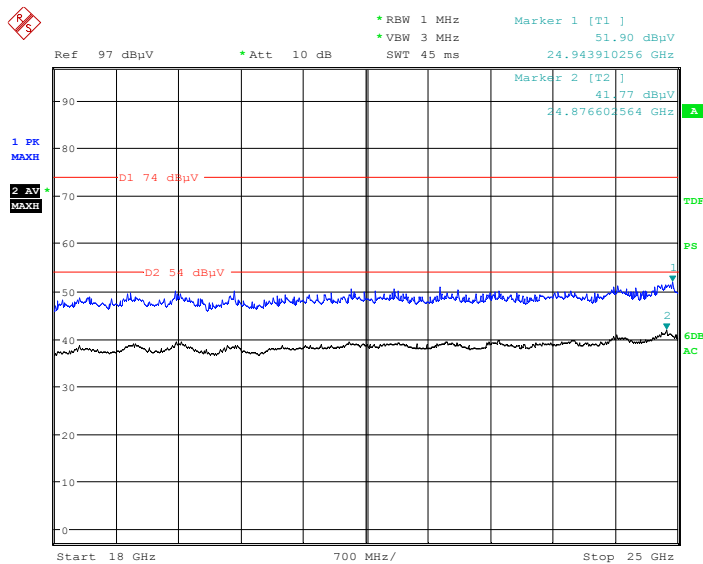

Date: 20.MAR.2019 15:09:46

**Fundamental Test & Restricted Bands Emissions Test:**

*(Pre-scan in the X, Y and Z axes of orientation, the worst case Y-axis of orientation was recorded.)*

Note:

1. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) - Amplifier Factor (dB)


Corrected Amplitude (dBµV/m) = Corrected Factor (dB/m) + Reading (dBµV)

Margin (dB) = Limit (dBµV/m) - Corrected Amplitude (dBµV/m)


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV/m)	Average (dBµV/m)	Height (cm)	Polar (H/V)				
<b>Low Channel: 2405MHz</b>								
2405.000000	102.04	---	200.0	V	63.0	12.8	/	/
2405.000000	---	99.62	200.0	V	63.0	12.8	/	/
2405.000000	93.71	---	150.0	H	29.0	12.8	/	/
2405.000000	---	91.27	150.0	H	29.0	12.8	/	/
2390.000000	---	48.74	100.0	V	17.0	12.7	54.00	5.26
2390.000000	58.23	---	100.0	V	17.0	12.7	74.00	15.77
<b>Middle Channel: 2440MHz</b>								
2440.000000	103.11	---	200.0	V	247.0	6.1	/	/
2440.000000	---	100.75	200.0	V	247.0	6.1	/	/
2440.000000	94.69	---	150.0	H	27.0	6.1	/	/
2440.000000	---	92.27	150.0	H	27.0	6.1	/	/
<b>High Channel: 2475MHz</b>								
2475.000000	105.88	---	150.0	V	324.0	13.0	/	/
2475.000000	---	103.30	150.0	V	324.0	13.0	/	/
2475.000000	97.56	---	250.0	H	2.0	13.0	/	/
2475.000000	---	95.08	250.0	H	2.0	13.0	/	/
2483.500000	57.51	---	100.0	V	64.0	13.1	74.00	16.49
2483.500000	---	47.94	100.0	V	64.0	13.1	54.00	6.06

### Conducted Spurious Emissions at Antenna Port


#### Channel 11: 2405MHz

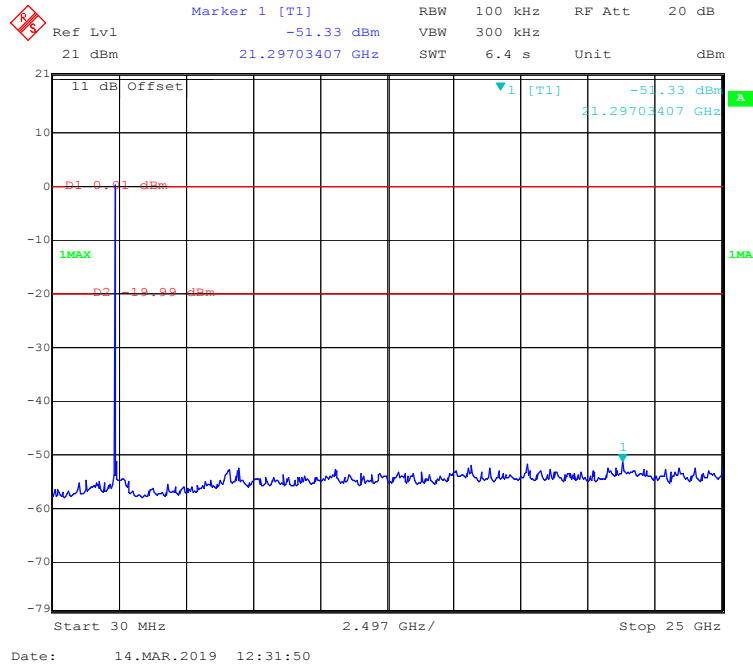

#### Channel 18: 2440MHz

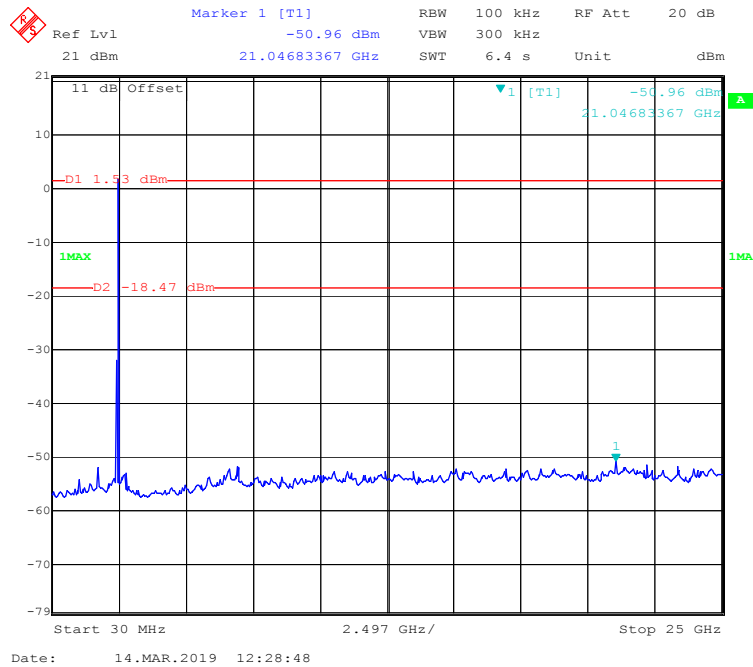

Channel 25: 2475MHz

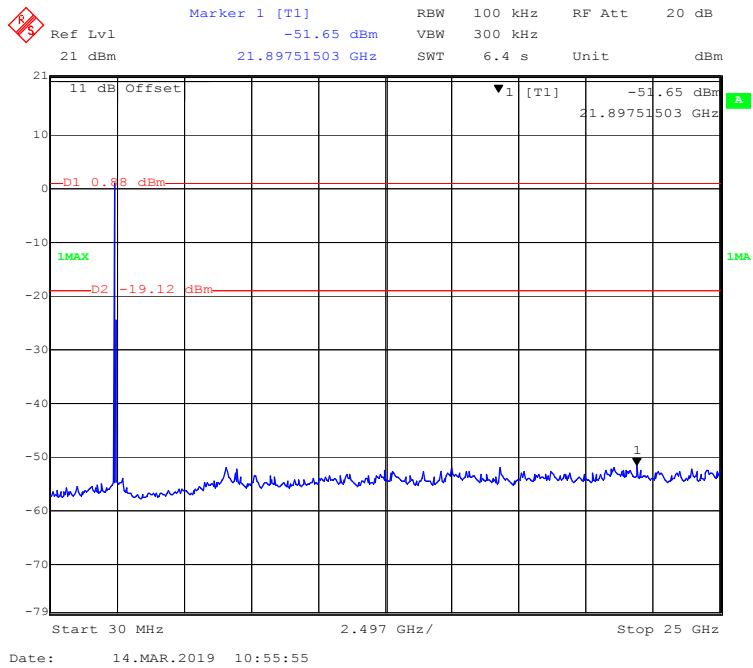

**FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH**


**Applicable Standard**

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

**Test Procedure**

According to ANSI C63.10-2013 sub-clause 11.8.1

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) ≥ 3 x RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



**Test Data**

**Environmental Conditions**

<b>Temperature:</b>	24 °C
<b>Relative Humidity:</b>	51 %
<b>ATM Pressure:</b>	101.3 kPa


*The testing was performed by Max Min on 2019-03-14.*

**Test Result:** Pass.


*EUT operation mode: Transmitting*

Channel	Frequency (MHz)	6 dB Emission Bandwidth (MHz)	Limit (MHz)
Channel 11	2405	1.527	≥0.5
Channel 18	2440	1.551	≥0.5
Channel 25	2475	1.611	≥0.5

**Channel 11: 2405MHz**

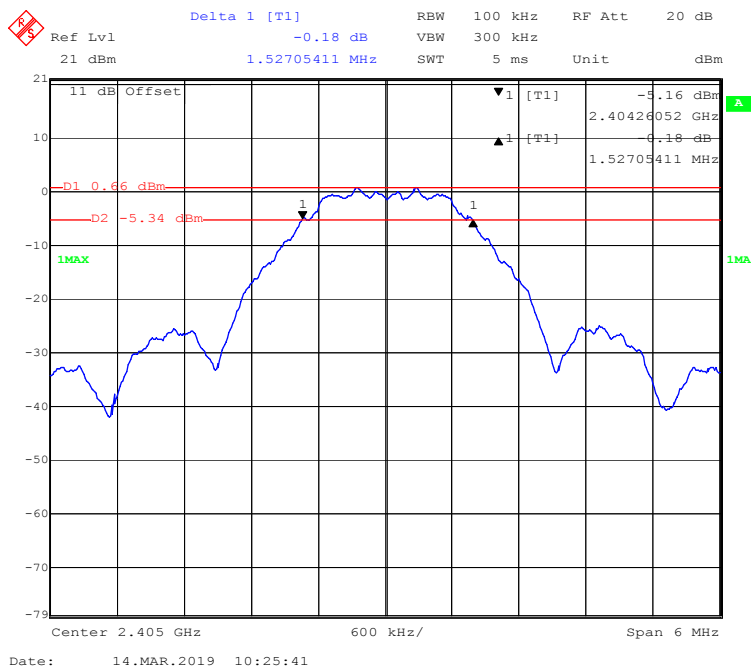


**Channel 18: 2440MHz**

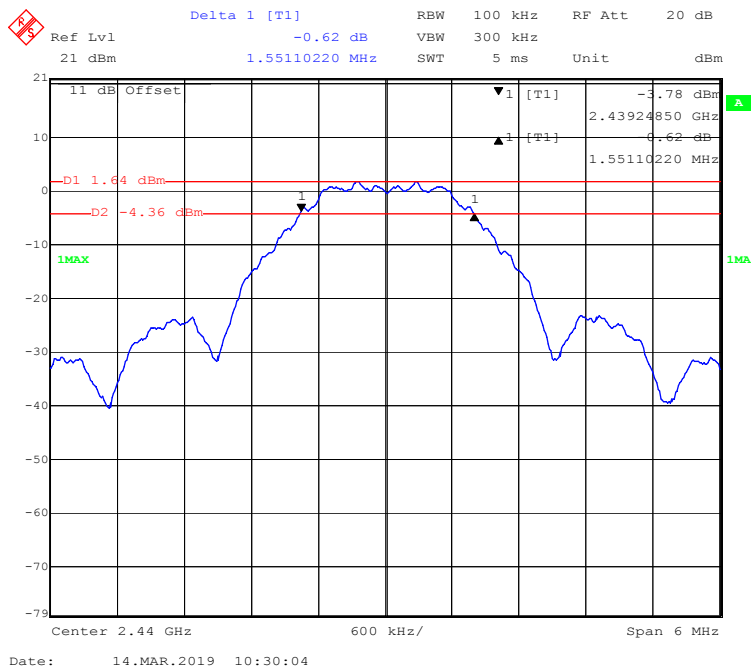



### Channel 25: 2475MHz

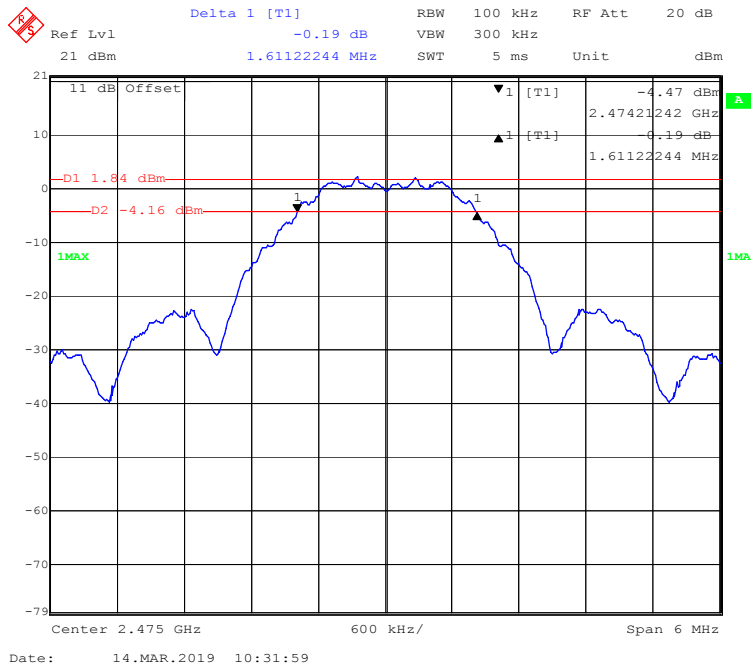

## FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER

### Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

### Test Procedure

According to ANSI C63.10-2013 sub-clause 11.9.1.3

1. Set the RBW  $\geq$  DTS bandwidth.
2. Set VBW  $\geq 3 \times$  RBW.
3. Set span  $\geq 3 \times$  RBW
4. Sweep time = auto couple.
5. Detector = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use peak marker function to determine the peak amplitude level.



### Test Data

#### Environmental Conditions


<b>Temperature:</b>	23.8°C
<b>Relative Humidity:</b>	54 %
<b>ATM Pressure:</b>	101.2 kPa

The testing was performed by Max Min on 2019-03-14.


EUT operation mode: Transmitting

Channel	Frequency (MHz)	Max Conducted Peak Output Power (dBm)	Limit (dBm)	Result
Channel 11	2405	2.98	30	Pass
Channel 18	2440	4.20	30	Pass
Channel 25	2475	4.83	30	Pass


**Channel 11: 2405MHz**

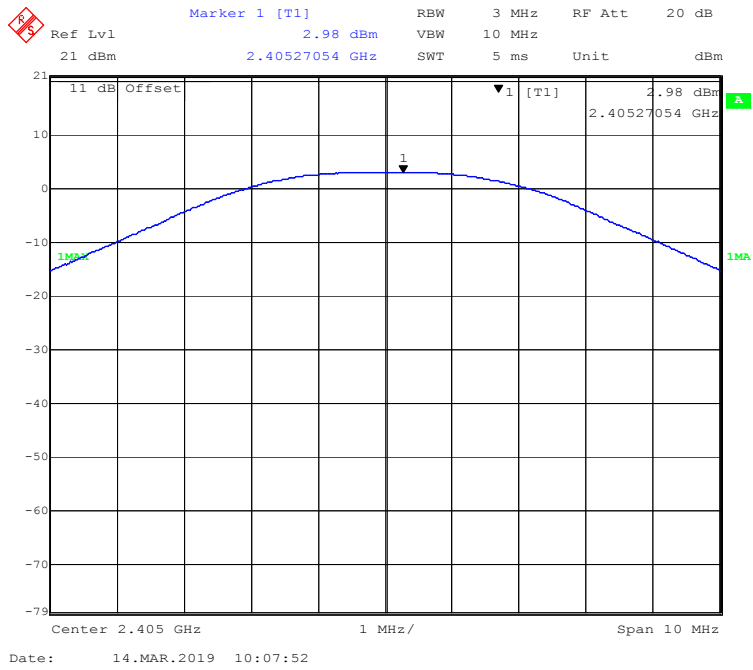

**Channel 18: 2440MHz**

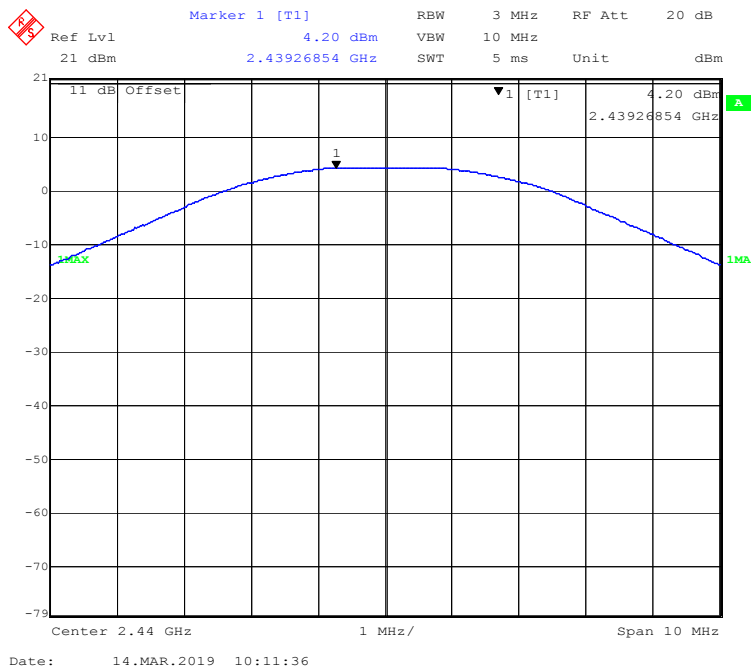

Channel 25: 2475MHz

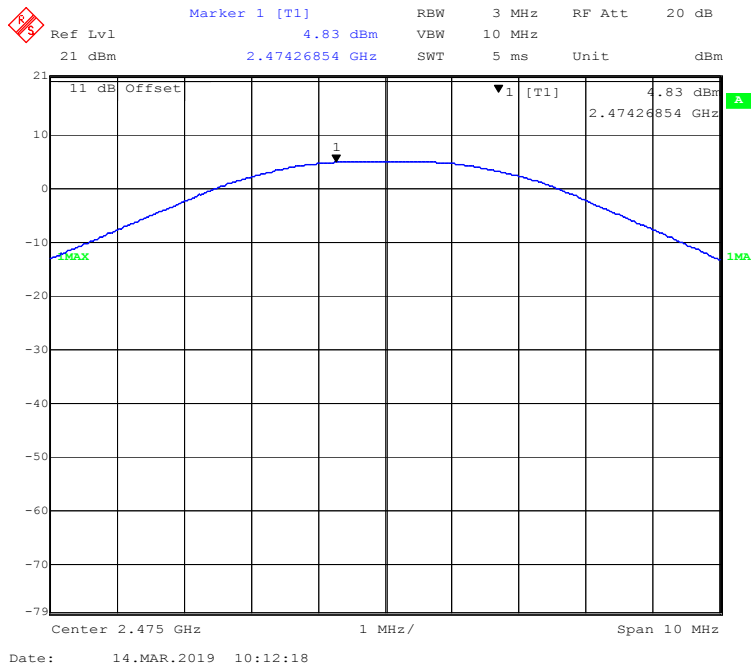

## **FCC §15.247(d) – BAND EDGE**

### **Applicable Standard**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### **Test Procedure**

According to ANSI C63.10-2013 sub-clause 6.10.

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

### **Test Data**

#### **Environmental Conditions**


<b>Temperature:</b>	24.3 °C
<b>Relative Humidity:</b>	50 %
<b>ATM Pressure:</b>	101.3 kPa

*The testing was performed by Max Min on 2019-03-14.*


*EUT operation mode: Transmitting*

**Test Result:** *Compliance*

**Left Side**

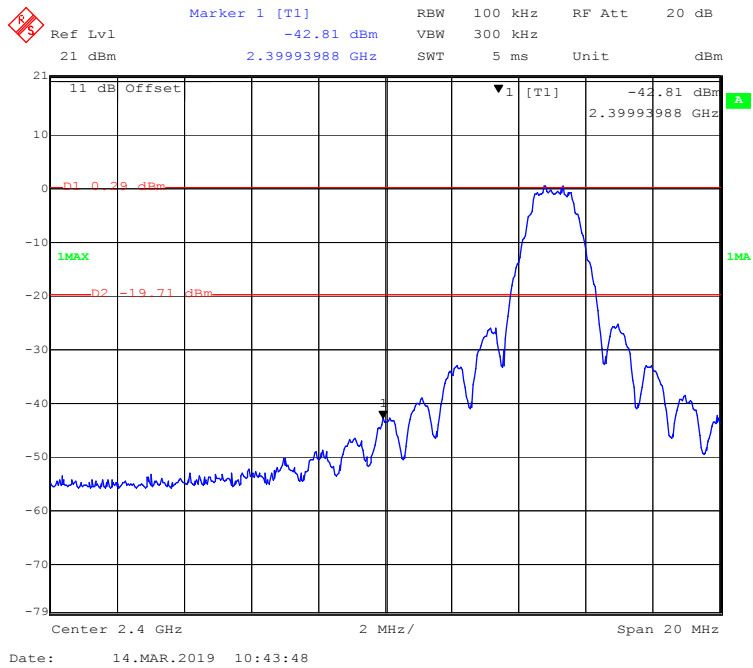

**Right Side**

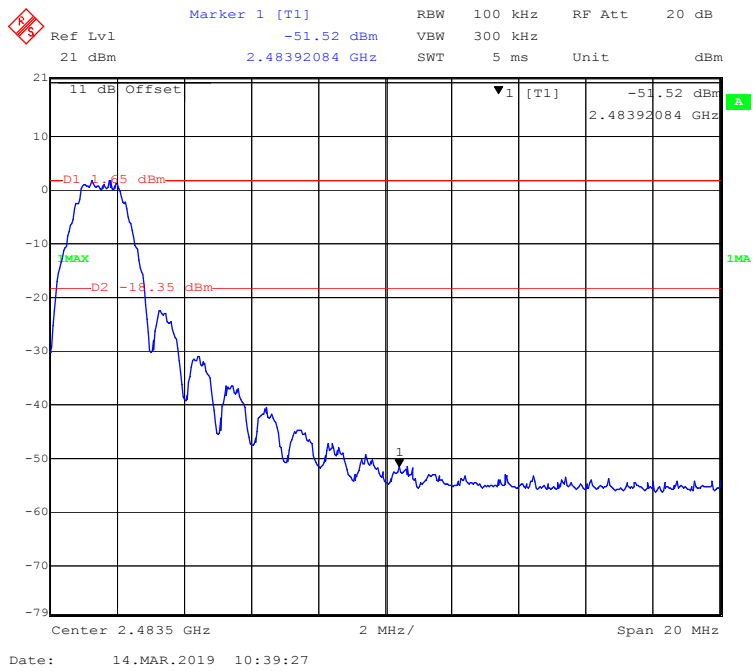

## **FCC §15.247(e) - POWER SPECTRAL DENSITY**

### **Applicable Standard**

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

### **Test Procedure**

According to ANSI C63.10-2013 sub-clause 11.10.2

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set the RBW to:  $3\text{kHz} \leq \text{RBW} \leq 100\text{ kHz}$ .
3. Set the VBW  $\geq 3 \times \text{RBW}$ .
4. Set the span to 1.5 times the DTS bandwidth.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

### **Test Data**

#### **Environmental Conditions**

<b>Temperature:</b>	24.1 °C
<b>Relative Humidity:</b>	50%
<b>ATM Pressure:</b>	101.3 kPa


*The testing was performed by Max Min on 2019-03-14.*

*EUT operation mode: Transmitting*


**Test Result:** Pass

<b>Channel</b>	<b>Frequency (MHz)</b>	<b>PSD (dBm/3kHz)</b>	<b>Limit (dBm/3kHz)</b>
Channel 11	2405	-8.82	$\leq 8$
Channel 18	2440	-8.10	$\leq 8$
Channel 25	2475	-7.65	$\leq 8$

### Channel 11: 2405MHz

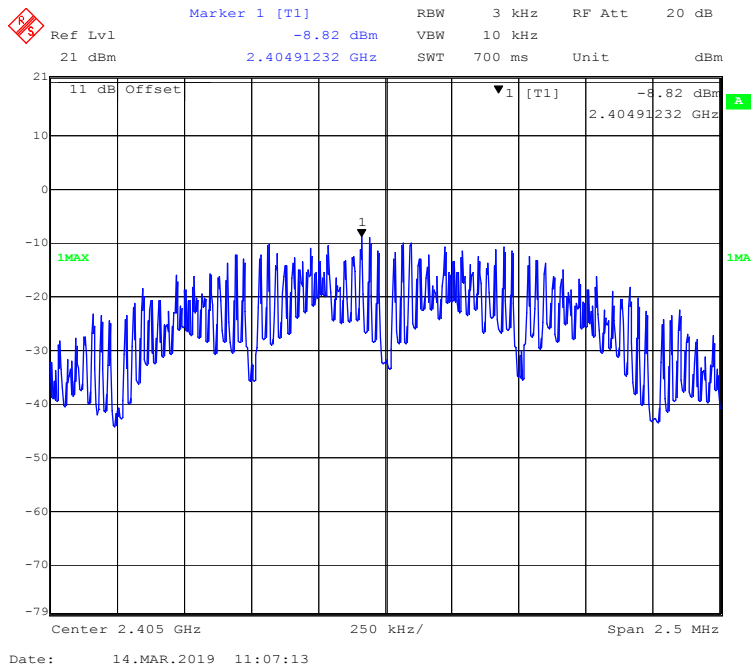


### Channel 18: 2440MHz

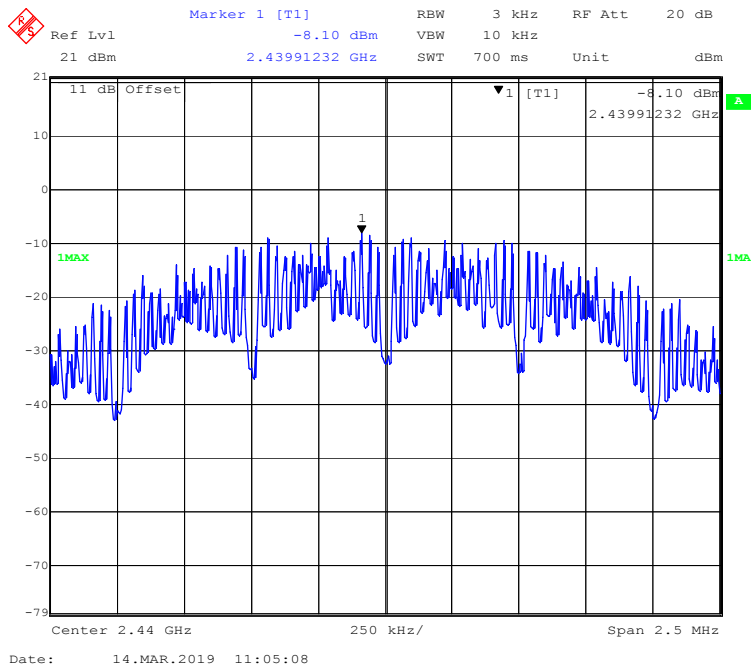



**Channel 25: 2475MHz**

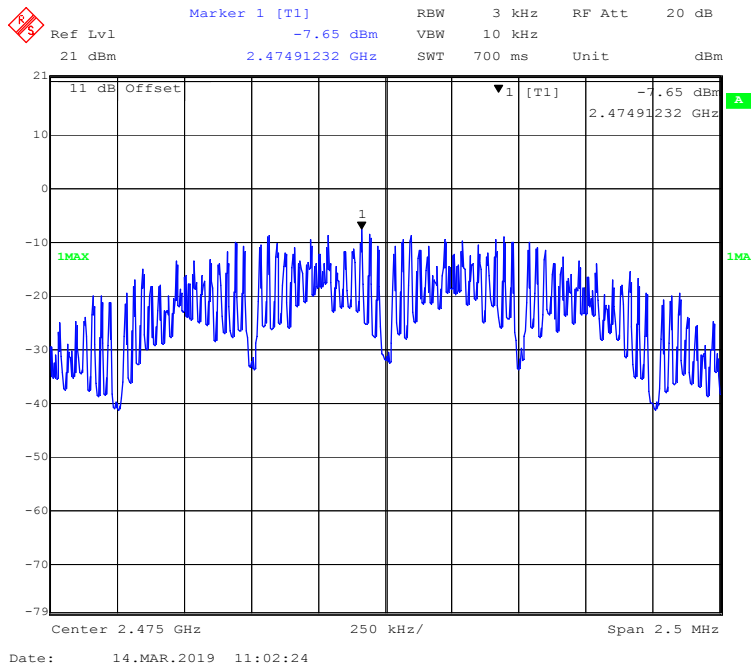

\*\*\*\*\* END OF REPORT \*\*\*\*\*