



REPORT No. : KH18110035W03

TEST REPORT

MANUFACTURER : Xiamen Four-Faith Communication Technology Co., Ltd.
PRODUCT NAME : F8L10GW LoRa Gateway
MODEL NAME : F8L10GW
BRAND NAME : Four-Faith
FCC ID : 2ALUW-F8L10GW
STANDARD(S) : 47 CFR Part 15 Subpart C
TEST DATE : 2018-11-18 to 2018-11-19
ISSUE DATE : 2018-11-20

Tested by: Lion Xiao
Lion Xiao(Project engineer)
Approved by: Anne Liu
Anne Liu (Supervisor)

NOTE: 1.The report is invalid when there is no the approver signature and the special stamp for test report. 2.The test report shall not be reproduced except in full without prior written permission of the company. 3.The report copy is invalid when there is no the special stamp for test repor. 4.The altered report is invalid. 5.The entrust test is responsibility for the received sample only



DIRECTORY

- 1. Technical Information 3
- 1.1. Applicant and Manufacturer Information..... 3
- 1.2. Equipment Under Test (EUT) Description..... 3
- 1.3. The channel number and frequency of EUT 4
- 1.4. Test Standards and Results 4
- 1.5. Environmental Conditions 5
- 2. 47 CFR Part 15C Requirements..... 6
- 2.1. Antenna requirement..... 6
- 2.2. Bandwidth..... 7
- 2.3. Conducted Emission 10
- 2.4. Fundamental&Bandedge 14
- 2.5. Radiated Emission and field strength of harmonics 22
- Annex A Test Uncertainty 38
- Annex B Testing Laboratory Information..... 39

Change History		
Issue	Date	Reason for change
1.0	2018-11-20	First edition



1. Technical Information

Note: Provide by applicant.

1.1. Applicant and Manufacturer Information

Applicant:	Xiamen Four-Faith Communication Technology Co., Ltd.
Applicant Address:	11th Floor, A-06 Area, No.370, Chengyi Street, Jimei, Xiamen, Fujian, China.
Manufacturer:	Xiamen Four-Faith Communication Technology Co., Ltd.
Manufacturer Address:	11th Floor, A-06 Area, No.370, Chengyi Street, Jimei, Xiamen, Fujian, China.

1.2. Equipment Under Test (EUT) Description

Product Name:	F8L10GW LoRa Gateway
Serial No:	(N/A, marked #1 by test site)
Hardware Version:	V1.3
Software Version:	20180927
Operating Frequency Range:	903MHz – 927MHz
Modulation	FSK
Channel Number:	25
Install Antenna Type:	Omni-Directional FRP Antenna
Install Antenna Gain:	2 dBi

Note 1: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.



1.3. The channel number and frequency of EUT

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	903	14	916
2	904	15	917
3	905	16	918
4	906	17	919
5	907	18	920
6	908	19	921
7	909	20	922
8	910	21	923
9	911	22	924
10	912	23	925
11	913	24	926
12	914	25	927
13	915	/	/

Note: EUT was tested with Channel 1, 13, 25.

1.4. Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C for the EUT FCC ID Certification:

No	Identity	Document Title
1	47 CFR Part 15 (10-1-15 Edition)	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Test Date	Test Engineer	Result
1	15.203	Antenna Requirement	N/A	N/A	PASS
2	15.215	Bandwidth	Nov 19, 2018	Scott Chen	PASS
3	15.207	Conducted Emission	Nov 18, 2018	Jinxin Huang	PASS
4	15.249	Field strength & Bandedge	Nov 18, 2018	Jinxin Huang	PASS
5	15.209, 15.249	Radiated Emission and field strength of harmonics	Nov 18, 2018	Jinxin Huang	PASS

Note 1: The tests were performed according to the method of measurements prescribed in ANSIC63.10-2013.



1.5. Environmental Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15 - 35
Relative Humidity (%):	30 -60
Atmospheric Pressure (kPa):	86-106



2. 47 CFR Part 15C Requirements

2.1. Antenna requirement

2.1.1. Applicable Standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

2.1.2. Result: Compliant

The EUT has a permanently and irreplaceable attached antenna connector. The antenna is N type Omni-Directional FRP antenna and max gain is 2dBi. Please refer to the EUT external photos.


2.2. Bandwidth

2.2.1. Requirement

Refer to FCC 15.215

2.2.2. Test Description

A. Test Set:

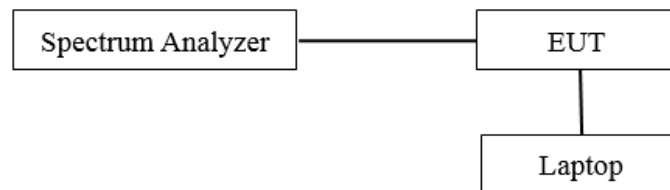

The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. In order to make an accurate measurement, set the span greater than RBW.

B. Equipments List:

Please reference ANNEX B(4).


2.2.3. Test Result

A. Test Verdict:

Channel	Frequency (MHz)	20 dB Bandwidth (kHz)	Result
1	903	135.4	PASS
13	915	139.2	PASS
25	927	138.7	PASS




B. Test Plots:

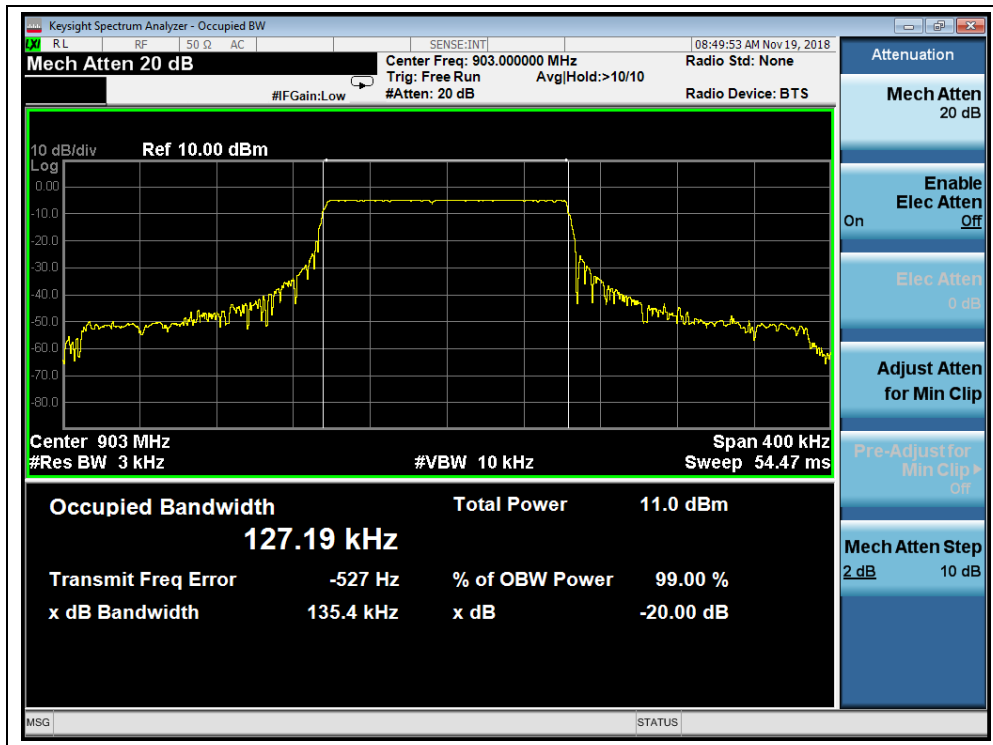

(Channel 1, 903MHz)



(Channel 13, 915 MHz)

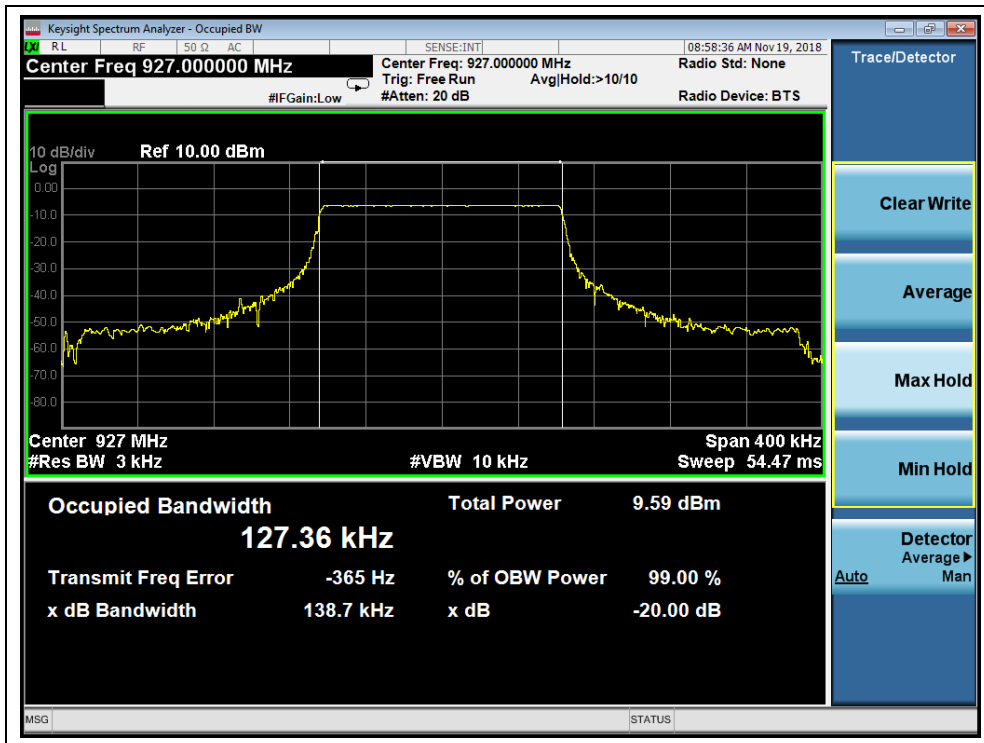

(Channel 25, 927 MHz)

2.3. Conducted Emission

2.3.1. Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).


Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

NOTE:

- (a) The lower limit shall apply at the band edges.
- (b) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

2.3.2. Test Description

A. Test Setup:

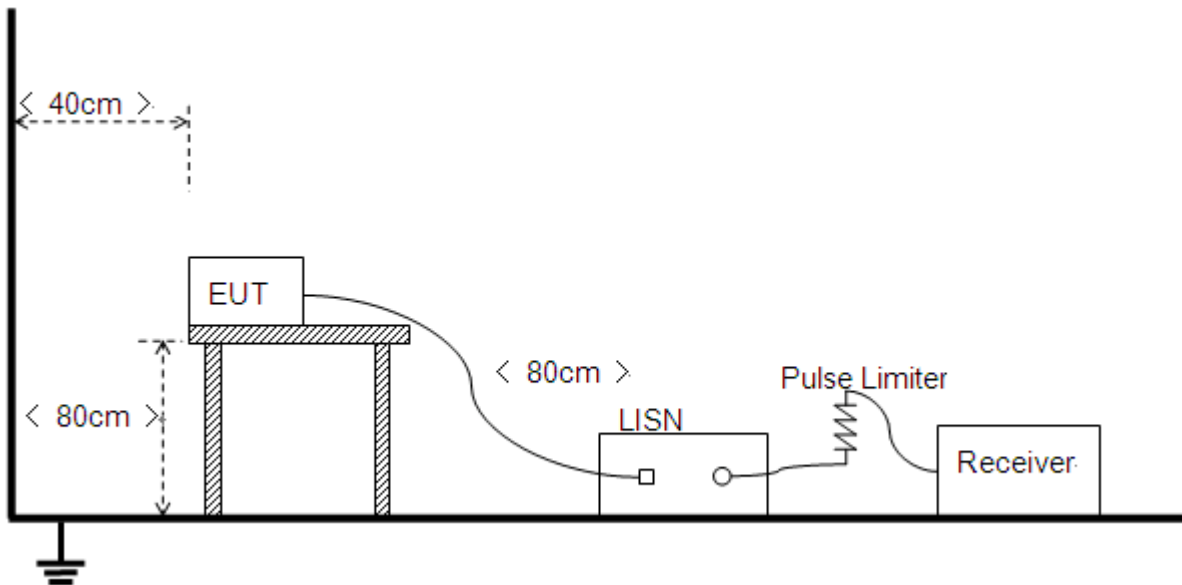

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10: 2013.



B. Equipments List:

Please reference ANNEX B(4).

2.3.3. Test Result


The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

Test Setup:EUT+Lora Link

Note: The test voltage is AC 120V/60Hz




Tset Plots

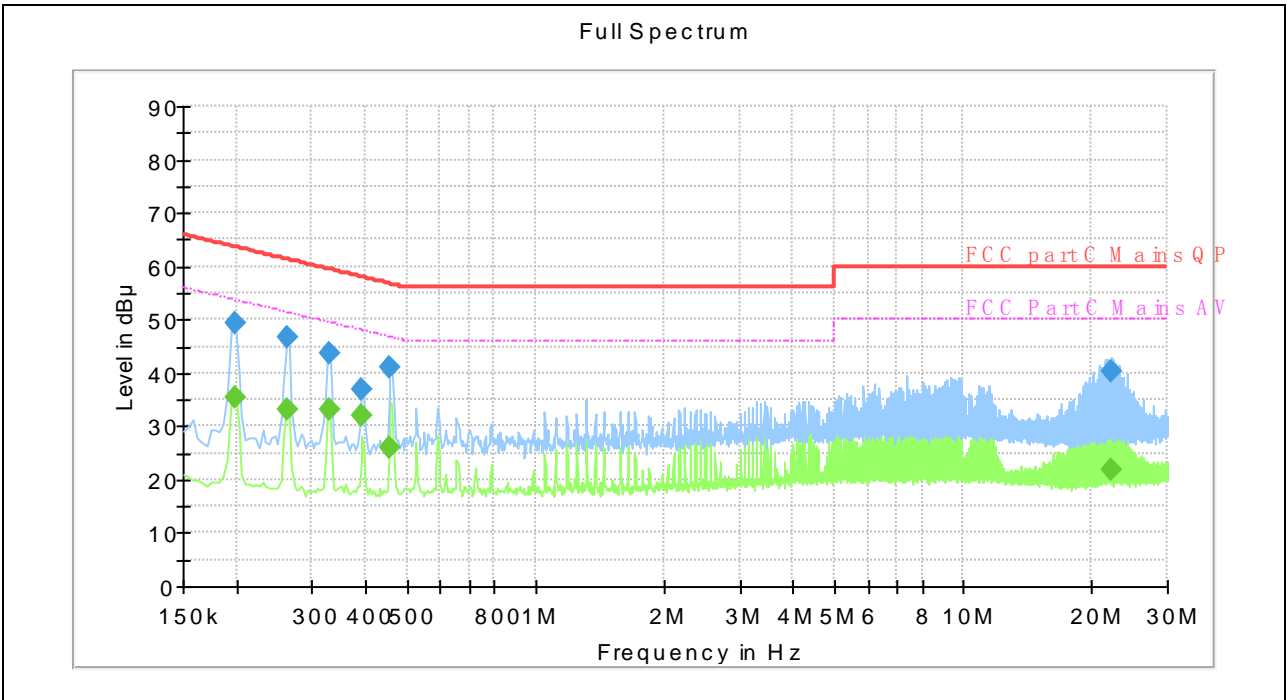

(Plot A: L Phase)

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB)
0.198000	---	35.52	53.69	18.17	L1	10.2
0.198000	49.38	---	63.69	14.32	L1	10.2
0.262000	---	33.30	51.37	18.06	L1	10.2
0.262000	46.58	---	61.37	14.78	L1	10.2
0.330000	---	33.07	49.45	16.38	L1	10.2
0.330000	43.61	---	59.45	15.84	L1	10.2
0.394000	36.90	---	57.98	21.08	L1	10.2
0.394000	---	31.84	47.98	16.14	L1	10.2
0.458000	40.92	---	56.73	15.80	L1	10.2
0.458000	---	25.80	46.73	20.93	L1	10.2
22.258000	40.14	---	60.00	19.86	L1	10.7
22.262000	---	22.02	50.00	27.98	L1	10.7

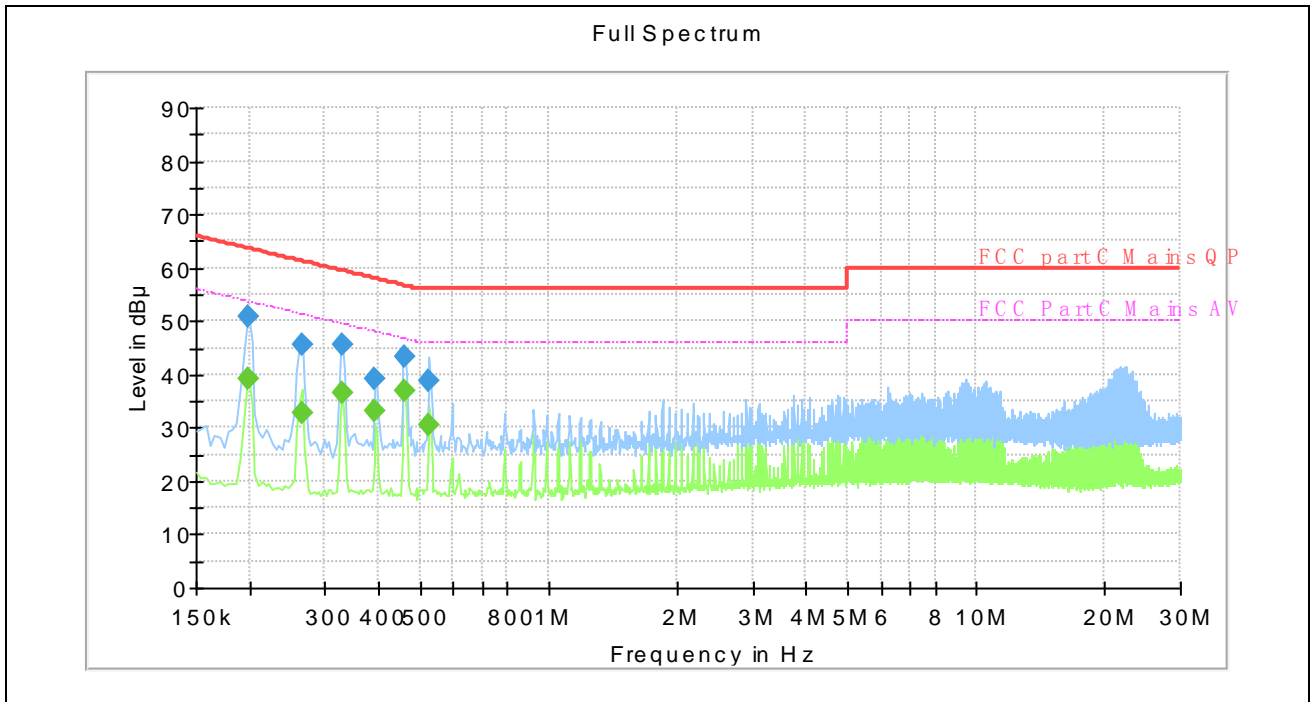

(Plot B: N Phase)

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
0.198000	---	39.13	53.69	14.56	N	10.2
0.198000	50.75	---	63.69	12.94	N	10.2
0.266000	---	32.70	51.24	18.54	N	10.2
0.266000	45.49	---	61.24	15.75	N	10.2
0.330000	---	36.44	49.45	13.01	N	10.2
0.330000	45.66	---	59.45	13.79	N	10.2
0.394000	39.33	---	57.98	18.65	N	10.2
0.394000	---	33.26	47.98	14.72	N	10.2
0.462000	43.12	---	56.66	13.53	N	10.2
0.462000	---	36.81	46.66	9.85	N	10.2
0.526000	---	30.57	46.00	15.43	N	10.2
0.526000	38.74	---	56.00	17.26	N	10.2

2.4. Fundamental&Bandedge


2.4.1. Requirement

According to FCC section 15.249(a), except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)
902-928 MHz	50	500
2400-2483.5 MHz	50	500
5725-5875 MHz	50	500
24.0-24.25 GHz	250	2500

2.4.2. Test Description

A. Test Setup:

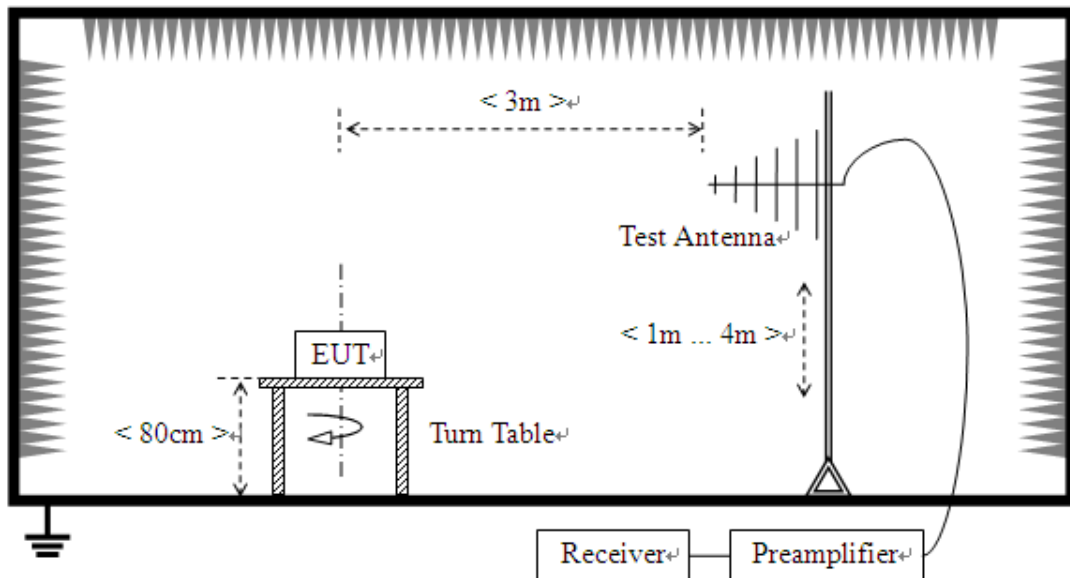

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.



B. Equipments List:

Please reference ANNEX B(4).

2.4.3. Test Procedure

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m


During the test, the total correction Factor A_T and A_{Factor} were built in test software.

Note: All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report

2.4.4. Test Result


Channel	Frequency (MHz)	Detector	Limit (dB μ V/m)	Antenna	Verdict
1	903	QuasiPeak	94	Horizontal	Pass
1	903	QuasiPeak	94	Vertical	Pass
13	915	QuasiPeak	94	Horizontal	Pass
13	915	QuasiPeak	94	Vertical	Pass
25	927	QuasiPeak	94	Horizontal	Pass
25	927	QuasiPeak	94	Vertical	Pass

Plots for Channel=1:

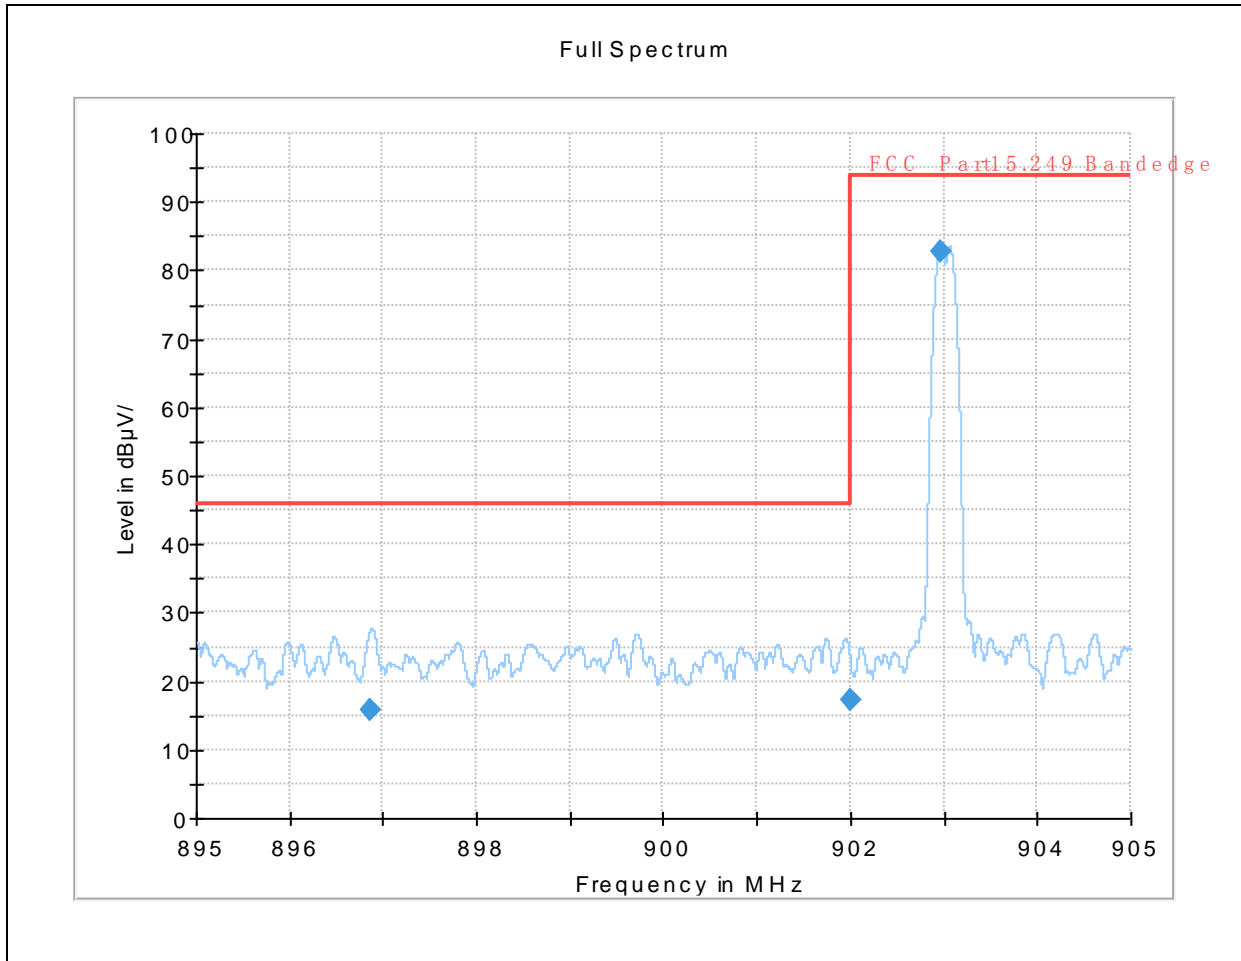

(Channel 1, 903MHz, Antenna Horizontal)


Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Pol	Corr. (dB/m)
896.866667	15.88	46.00	30.12	H	28.0
901.999445	17.29	46.00	28.71	H	28.1
902.965000	82.75	94.00	11.25	H	28.1

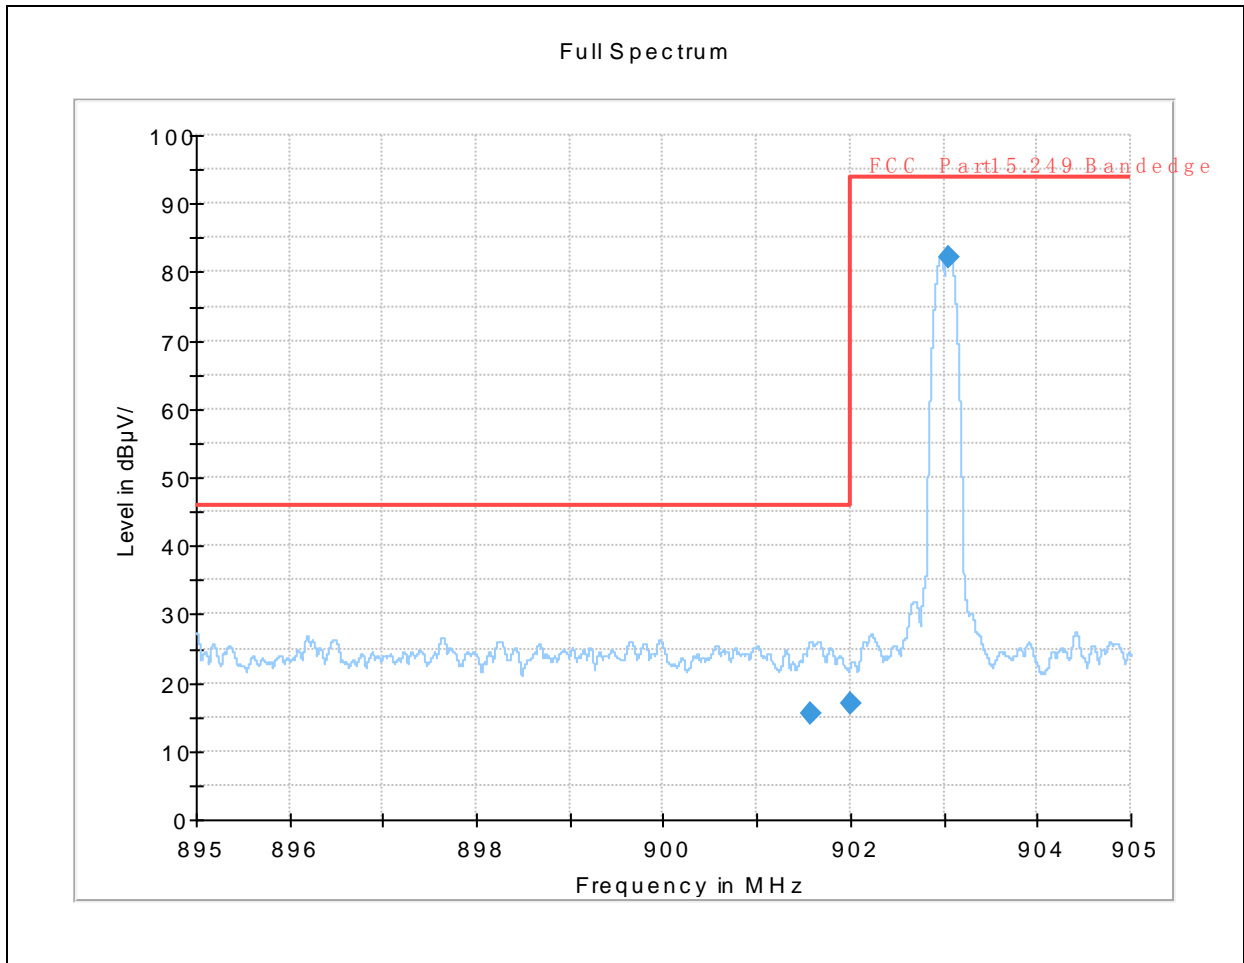

(Channel 1, 903MHz, Antenna Vertical)


Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Pol	Corr. (dB/m)
901.565000	15.60	46.00	30.40	V	28.1
902.000556	16.96	94.00	77.04	V	28.1
903.051111	82.28	94.00	11.72	V	28.1

Plots for Channel=13:

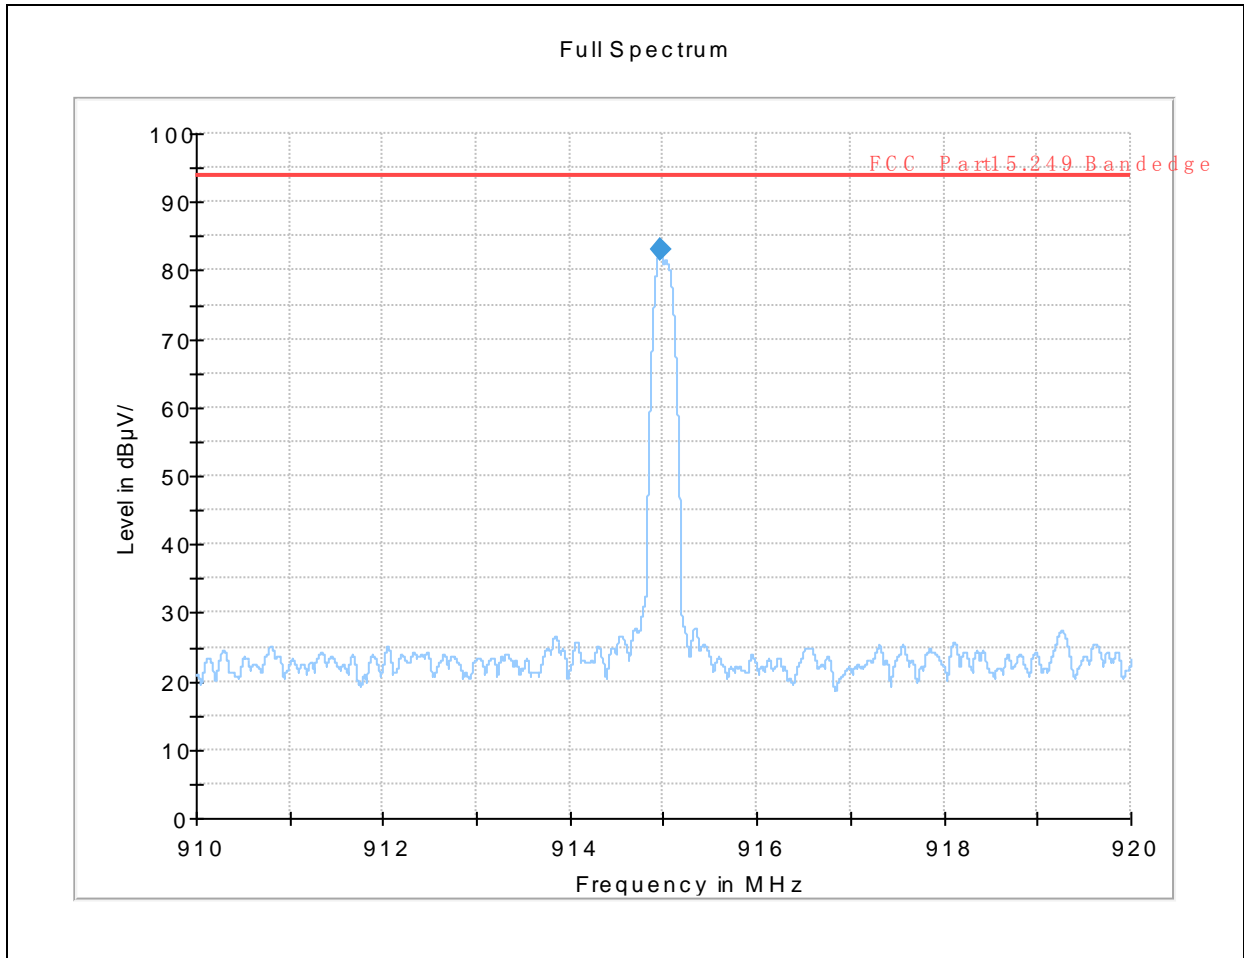

(Channel 13, 915MHz, Antenna Horizontal)


Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Pol	Corr. (dB/m)
914.962778	83.02	94.00	10.98	H	28.0

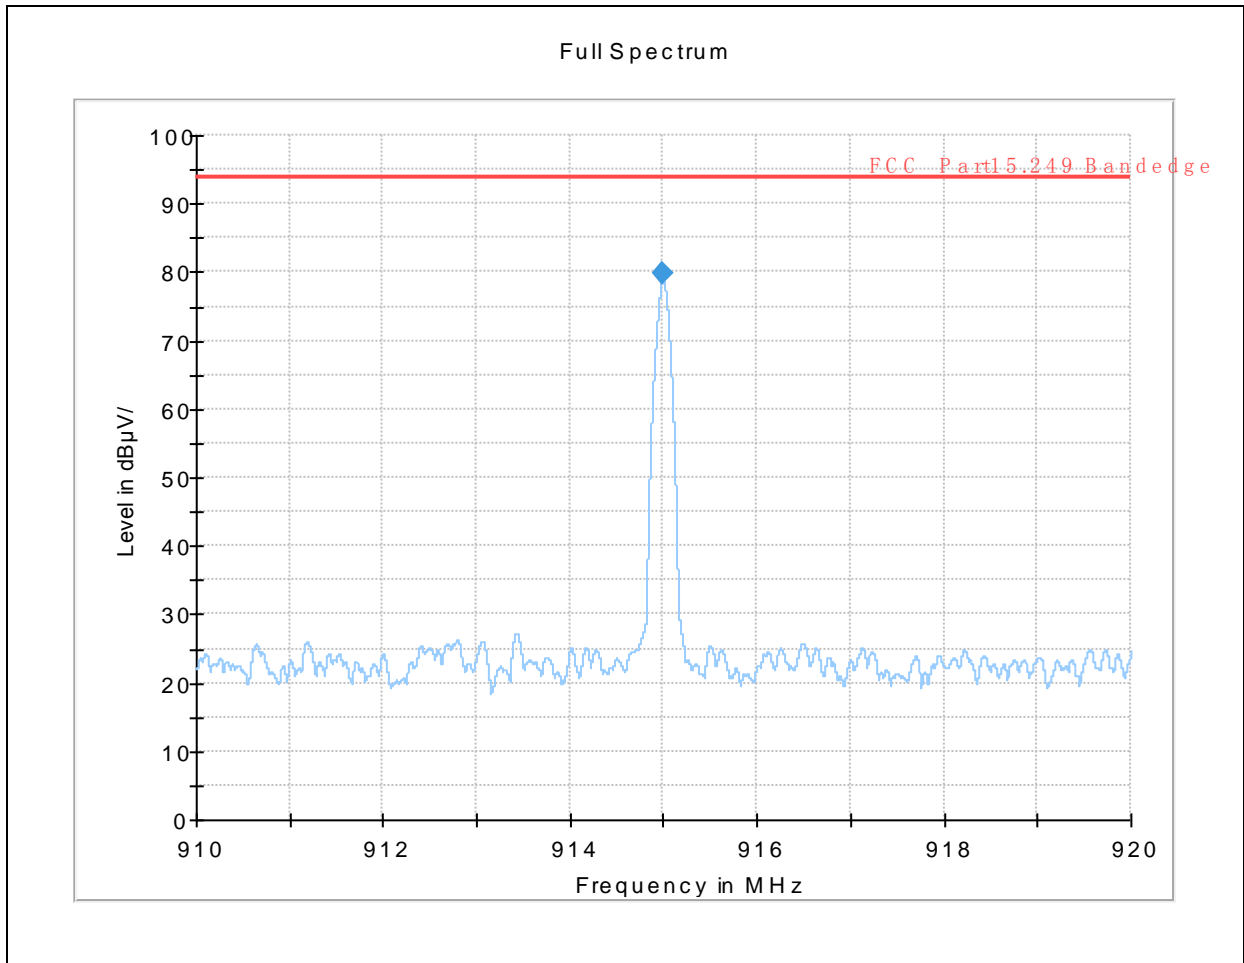

(Channel 13, 915MHz, Antenna Vertical)


Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Pol	Corr. (dB/m)
914.993333	79.83	94.00	14.17	V	28.0

Plots for Channel=25:

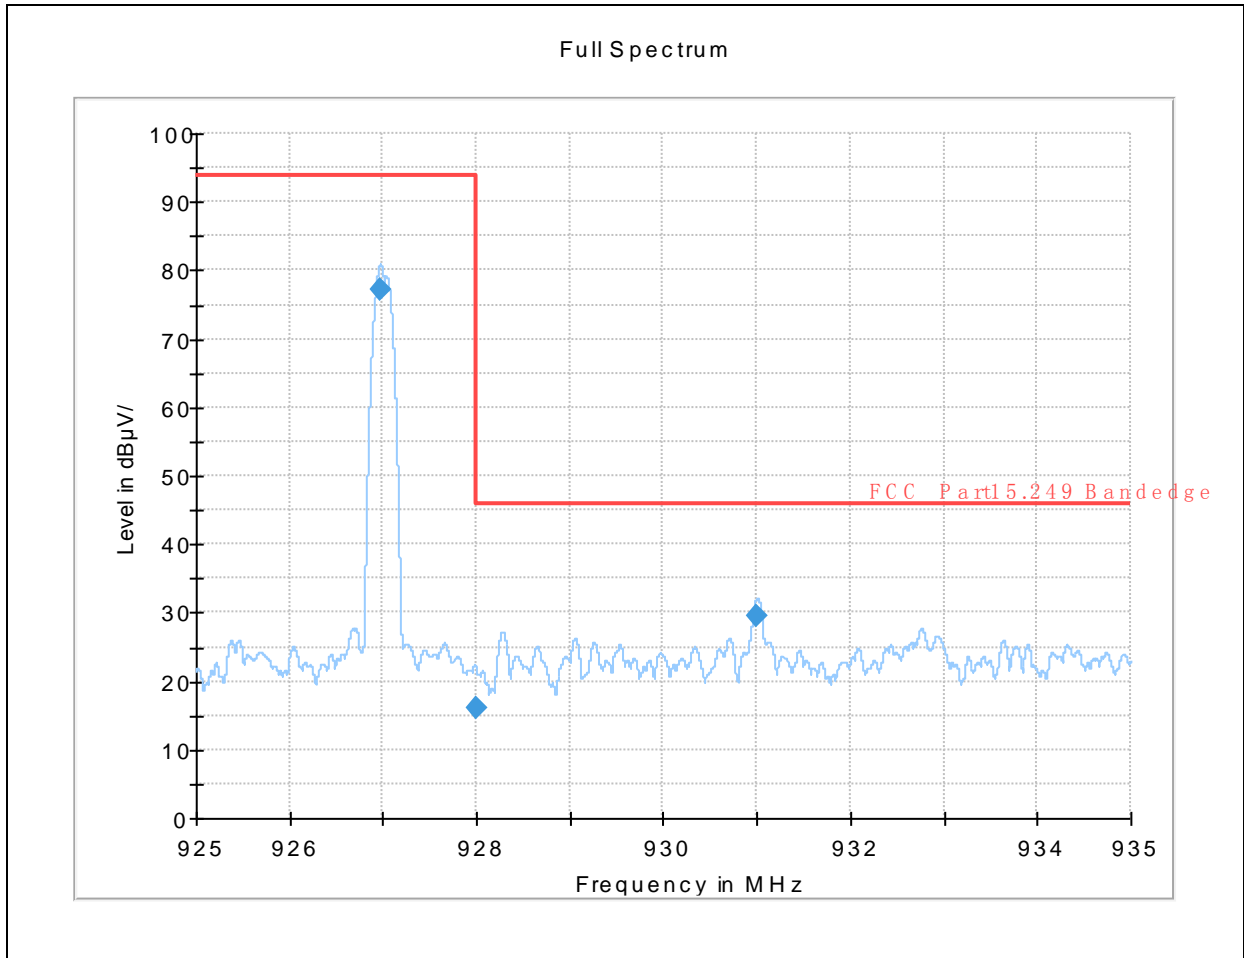

(Channel 25, 927MHz, Antenna Horizontal)

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Pol	Corr. (dB/m)
926.969445	77.20	94.00	16.80	H	28.0
928.001111	15.99	46.00	30.01	H	28.0
930.986667	29.64	46.00	16.36	H	28.1

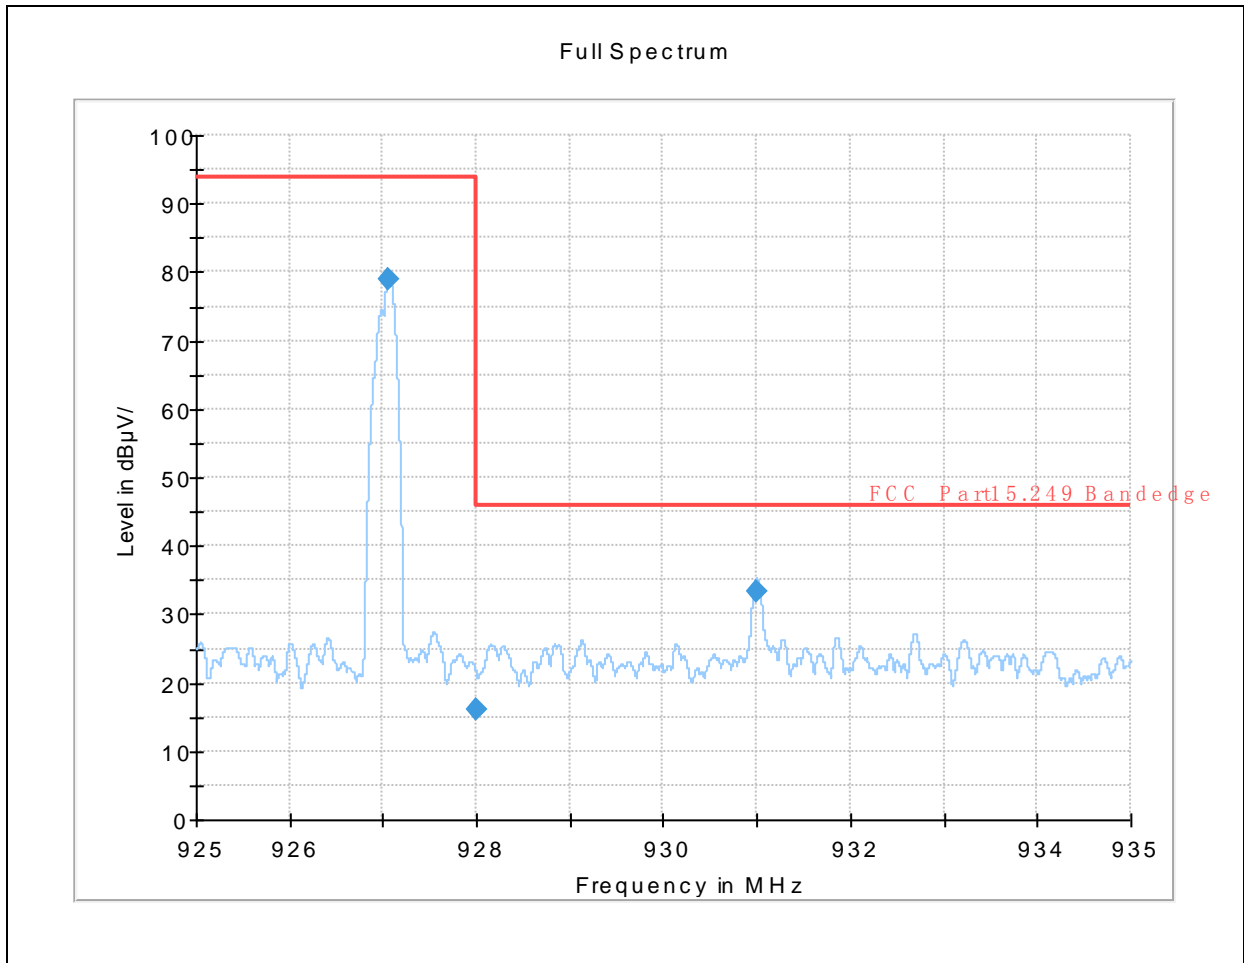

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Pol	Corr. (dB/m)
927.060000	78.98	94.00	15.02	V	28.0
928.000000	16.14	46.00	29.86	V	28.0
930.986667	33.39	46.00	12.61	V	28.1

2.5. Radiated Emission and field strength of harmonics

2.5.1. Requirement

According to section 15.249(a), the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)
902-928 MHz	50	500
2400-2483.5 MHz	50	500
5725-5875 MHz	50	500
24.0-24.25 GHz	250	2500

According to section 15.249(d), Emission Radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50dB below the level of the fundamental or to the general radiated emission limits in Section 15.209:

Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Measurement Distance (m)	Field Strength Limitation at 3m Measurement Distance	
			($\mu\text{V}/\text{m}$)	(dBuV/m)
0.009 - 0.490	2400/F(kHz)	300	10000* 2400/F(KHz)	20log 2400/F(KHz) + 80
0.490 - 1.705	24000/F(kHz)	30	100* 2400/F(KHz)	20log 2400/F(KHz) + 40
1.705 - 30.0	30	30	100*30	20log 30 + 40
30 - 88	100	3	100	20log 100
88 - 216	150	3	150	20log 150
216 - 960	200	3	200	20log 200
Above 960	500	3	500	20log 500

According to section 15.249(e), for frequencies above 1000MHz, the above field strength limits are based on average limits. The peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20dB under any condition of modulation.

Note:


- 1) The tighter limit shall apply at the boundary between two frequency range.
- 2) Limitation expressed in dBuV/m is calculated by $20\log$ Emission Level($\mu\text{V}/\text{m}$).
- 3) If measurement is made at 3m distance, then F.S Limitation at 3m distance is adjusted by using the formula of $Ld1 = Ld2 * (d2/d1)^2$.

Example: F.S Limit at 30m distance is $30\mu\text{V}/\text{m}$, then F.S Limitation at 3m distance is adjusted as $Ld1 = L1 = 30\mu\text{V}/\text{m} * (10)^2 = 100 * 30\mu\text{V}/\text{m}$


2.5.2. Test Description

A. Test Setup:


- 1) For radiated emissions from 9kHz to 30MHz

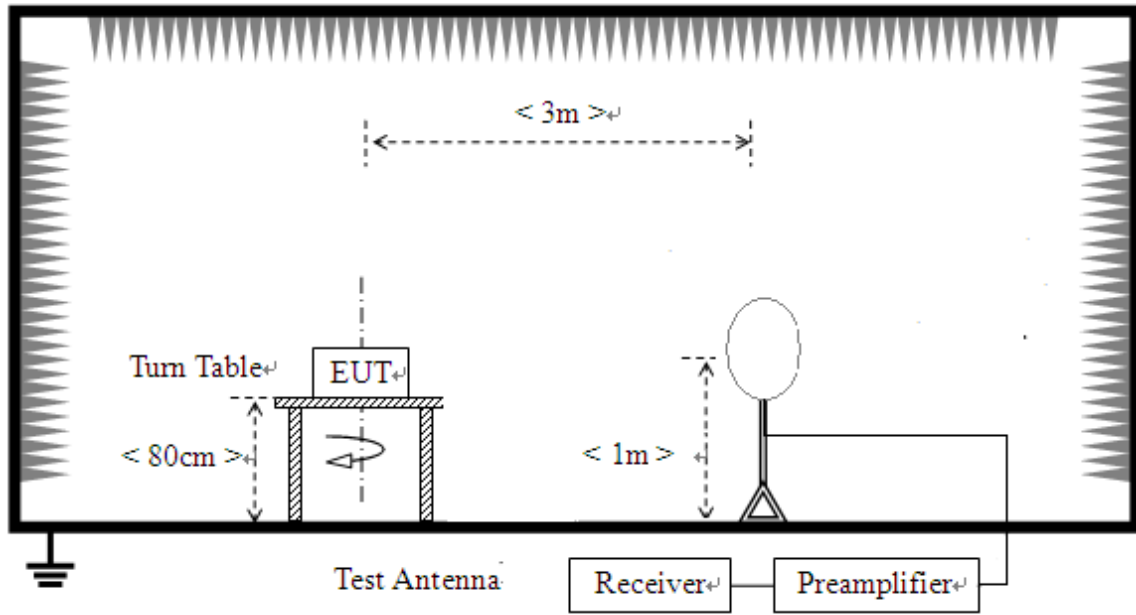

- 2) For radiated emissions from 30MHz to 1GHz

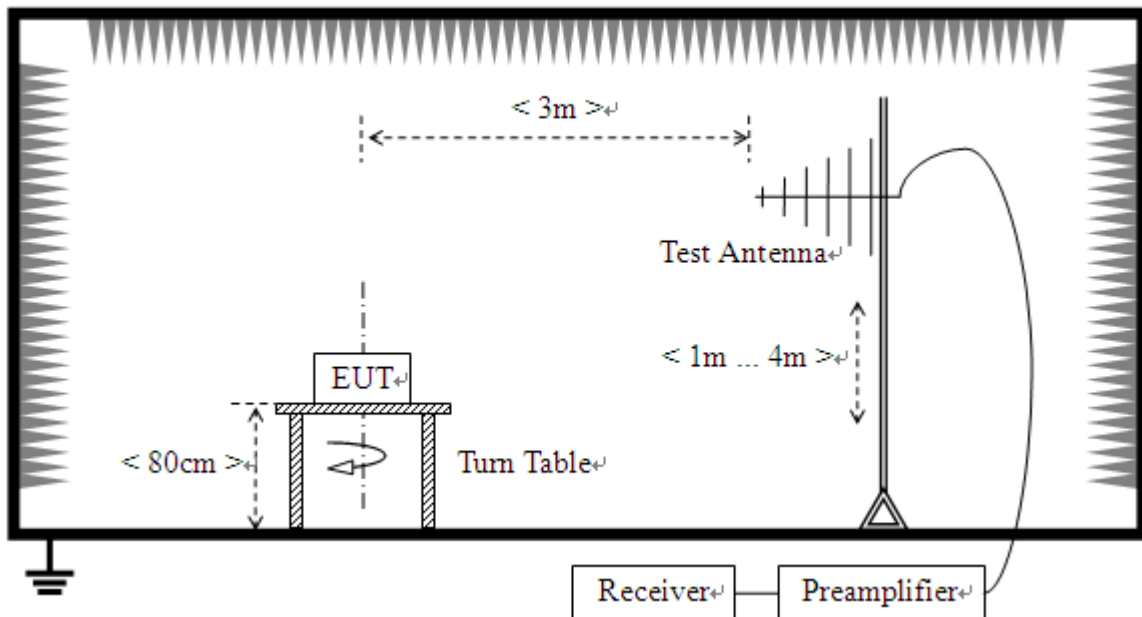

3) For radiated emissions above 1GHz

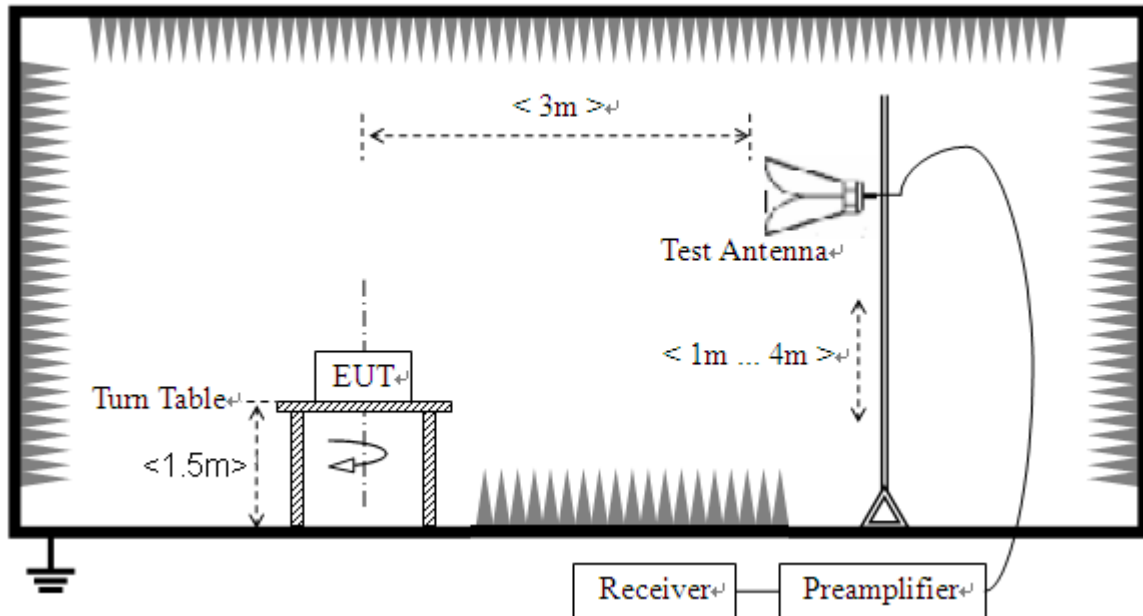

The RF absorbing material used on the reference ground plane and on the turntable have a maximum height (thickness) of 30 cm (12 in) and have a minimum-rated attenuation of 20 dB at all frequencies from 1 GHz to 18 GHz. Test site have a minimum area of the ground plane covered with RF absorbing material as specified in Figure 6 of ANSI C63.4: 2014.

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4dB according to the standards: ANSI C63.10:2013. For radiated emissions below or equal to 1GHz, The EUT was set-up on insulator 80cm above the Ground Plane, For radiated emissions above 1GHz, The EUT was set-up on insulator 150cm above the Ground Plane. The set-up and test methods were according to ANSI C63.10:2013.

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

- (a) In the frequency range of 9 kHz to 30MHz, magnetic field is measured with Loop Test Antenna. The Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.
- (b) In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Place the test antenna at 3m away from area of the EUT, while keeping the test antenna aimed at the source of emissions at each frequency of significant



emissions, with polarization oriented for maximum response. The test antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final test antenna elevation shall be that which maximizes the emissions. The test antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane. The emission levels at both horizontal and vertical polarizations should be tested.

B. Equipments List:

Please reference ANNEX B(4).

2.5.3. Test Result Test Procedure

According to ANSI C63.10, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak limit, it is unnecessary to perform a quasi-peak measurement.

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain


A_{Factor} : Antenna Factor at 3m

During the test, the total correction Factor A_T and A_{Factor} were built in test software.

Note: All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.


The low frequency, which started from 9kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

2.5.4. Test Result

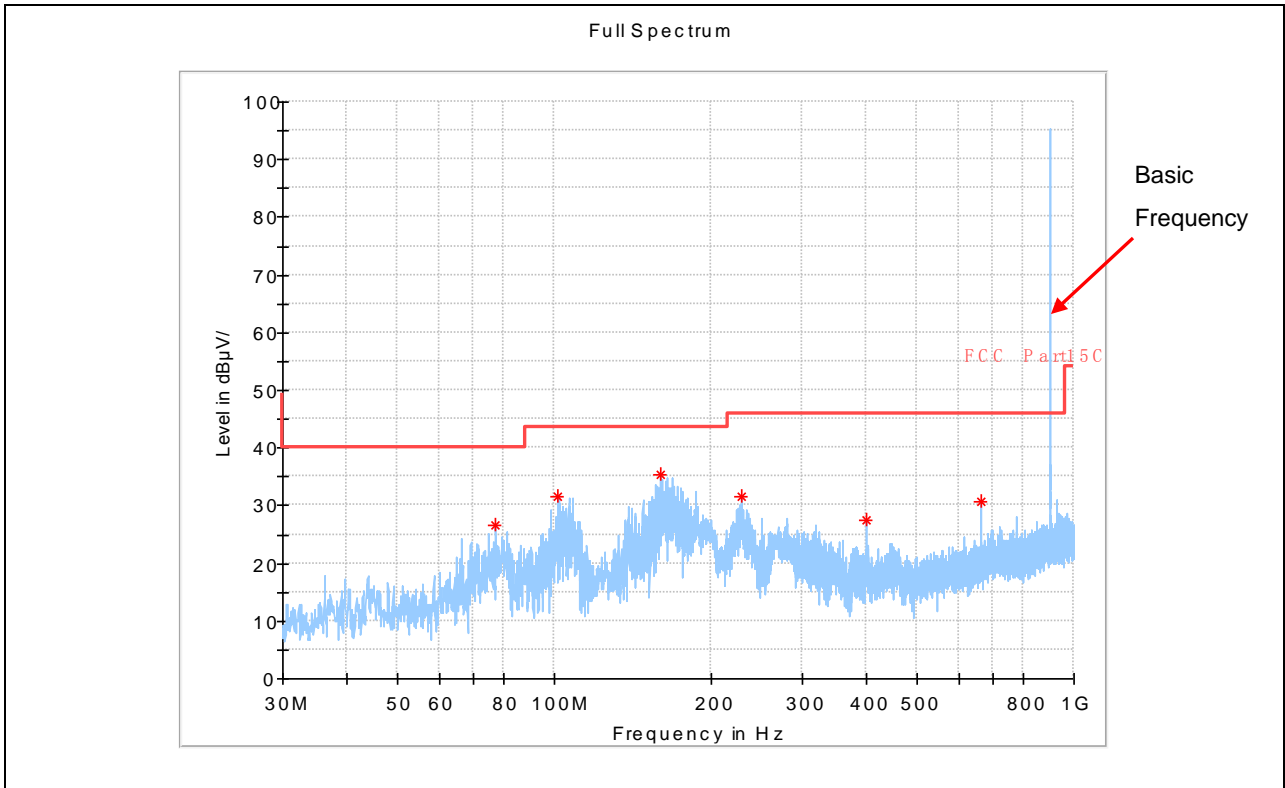


(Channel 1, 903MHz, 30MHz to 1GHz, Antenna Horizontal)

Frequency (MHz)	MaxPeak (dBµV/m)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Pol	Corr. (dB/m)
77.152778	26.62	---	40.00	13.38	H	9.5
101.833889	31.47	---	43.50	12.03	H	14.8
160.303333	35.48	---	43.50	8.02	H	12.1
229.604444	31.58	---	46.00	14.42	H	14.4
398.977222	27.50	---	46.00	18.50	H	19.6
664.972778	30.70	---	46.00	15.30	H	24.3

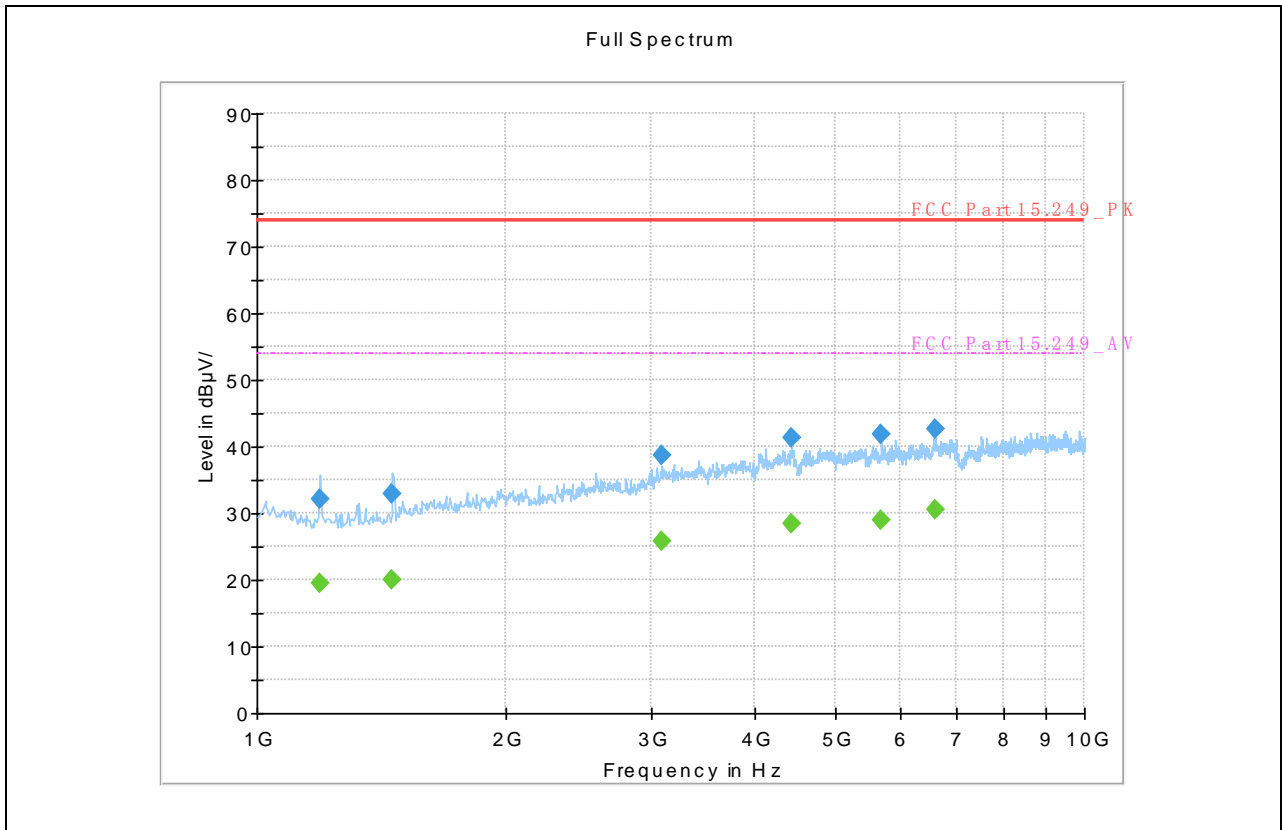


(Channel 1, 903MHz, 1GHz to 10GHz, Antenna Horizontal)

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Pol	Corr. (dB/m)
1193.500000	---	19.47	54.00	34.53	H	-17.8
1193.500000	32.13	---	74.00	41.87	H	-17.8
1459.000000	---	19.91	54.00	34.09	H	-16.6
1459.000000	32.95	---	74.00	41.05	H	-16.6
3088.000000	38.70	---	74.00	35.30	H	-8.7
3088.000000	---	25.76	54.00	28.24	H	-8.7
4433.500000	---	28.45	54.00	25.55	H	-5.0
4433.500000	41.21	---	74.00	32.79	H	-5.0
5689.000000	---	28.88	54.00	25.12	H	-3.6
5689.000000	41.78	---	74.00	32.22	H	-3.6
6607.000000	42.68	---	74.00	31.32	H	-2.0
6607.000000	---	30.49	54.00	23.51	H	-2.0

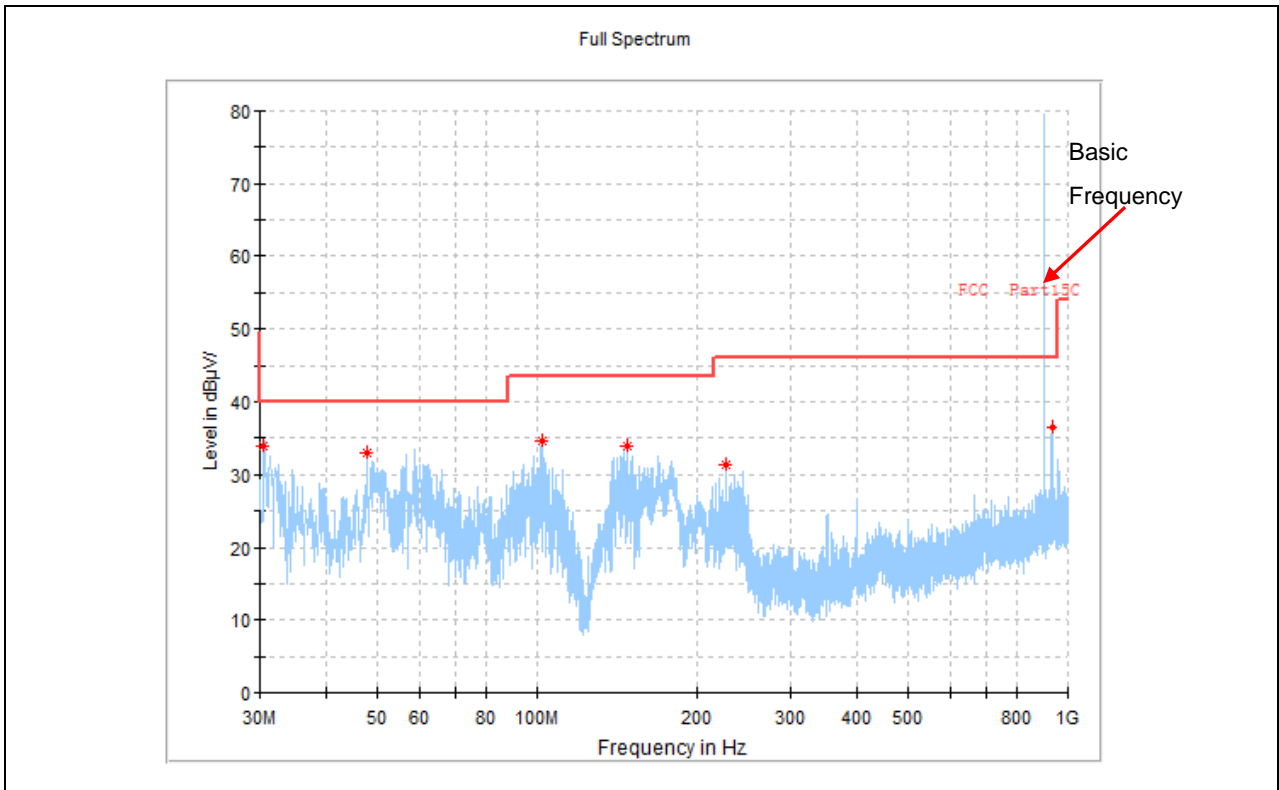

(Channel 1, 903MHz_30MHz to 1GHz, Antenna Vertical)


Frequency (MHz)	MaxPeak (dBµV/m)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Pol	Corr. (dB/m)
30.538889	33.98	---	40.00	6.02	V	12.9
47.783333	32.96	---	40.00	7.04	V	15.5
101.833889	34.66	---	43.50	8.84	V	14.8
148.070556	34.02	---	43.50	9.48	V	11.1
226.856111	31.39	---	46.00	14.61	V	14.1
930.538889	35.98	---	46.00	10.02	V	24.2

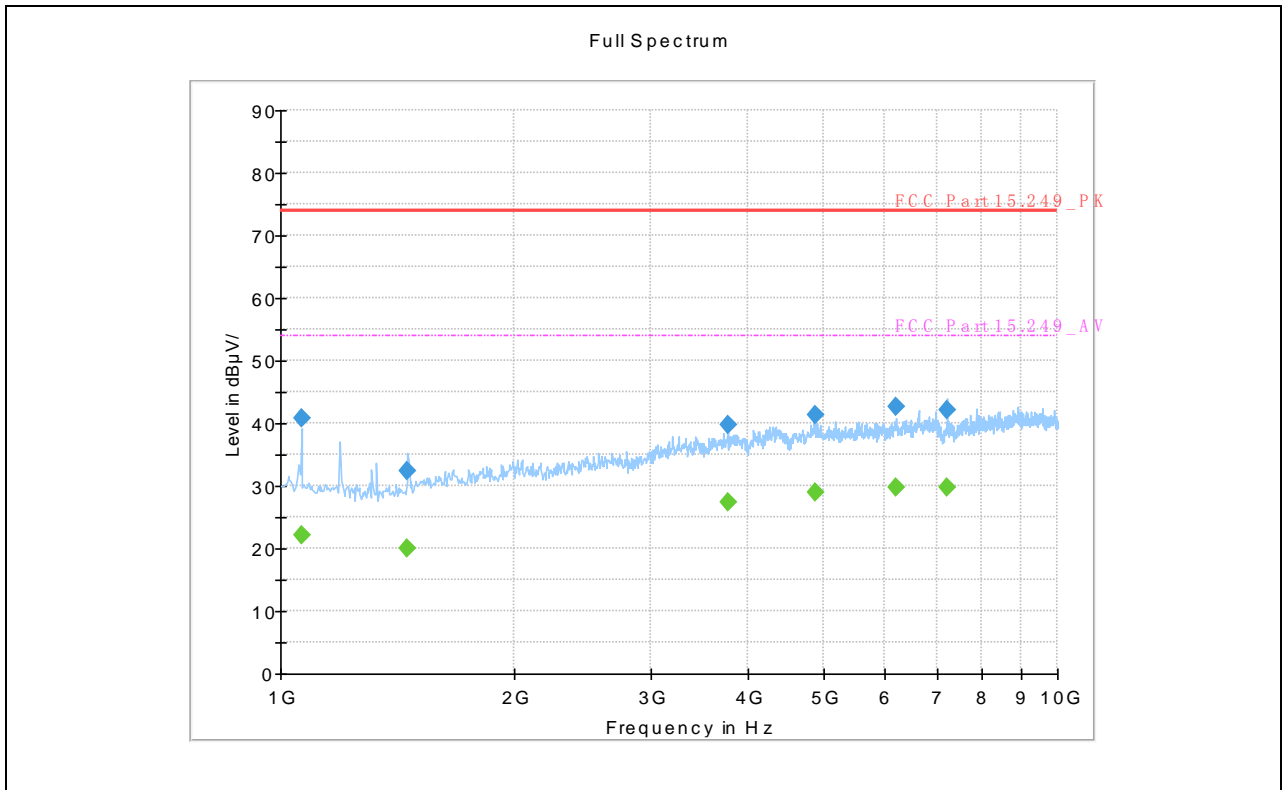

(Channel 1, 903MHz, 1GHz to 10GHz, Antenna Vertical)


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Pol	Corr. (dB/m)
1063.000000	40.70	---	74.00	33.30	V	-16.6
1063.000000	---	22.10	54.00	31.90	V	-16.6
1459.000000	---	20.04	54.00	33.96	V	-16.6
1459.000000	32.30	---	74.00	41.70	V	-16.6
3763.000000	39.67	---	74.00	34.33	V	-6.2
3763.000000	---	27.33	54.00	26.67	V	-6.2
4870.000000	41.36	---	74.00	32.64	V	-4.1
4870.000000	---	29.05	54.00	24.95	V	-4.1
6202.000000	---	29.70	54.00	24.30	V	-2.8
6202.000000	42.59	---	74.00	31.41	V	-2.8
7223.500000	42.08	---	74.00	31.92	V	-1.5
7223.500000	---	29.77	54.00	24.23	V	-1.5

Plots for Channel=13:

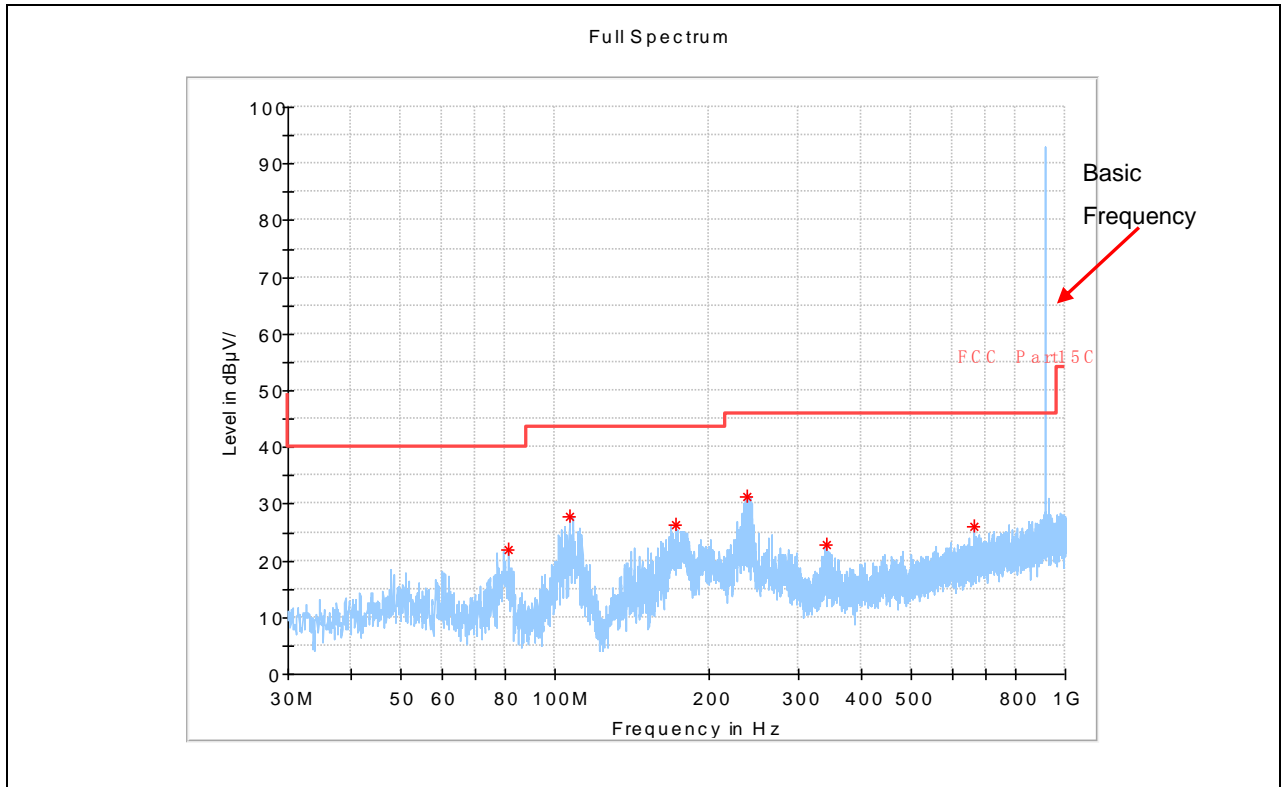


Channel 13, 915MHz, 30MHz to 1GHz, Antenna Horizontal)

Frequency (MHz)	MaxPeak (dBµV/m)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Pol	Corr. (dB/m)
81.194444	21.86	---	40.00	18.14	H	10.3
106.630000	27.82	---	43.50	15.68	H	14.4
172.805556	26.41	---	43.50	17.09	H	11.9
237.795556	31.29	---	46.00	14.71	H	14.9
340.346111	22.75	---	46.00	23.25	H	18.2
664.972778	26.05	---	46.00	19.95	H	24.3

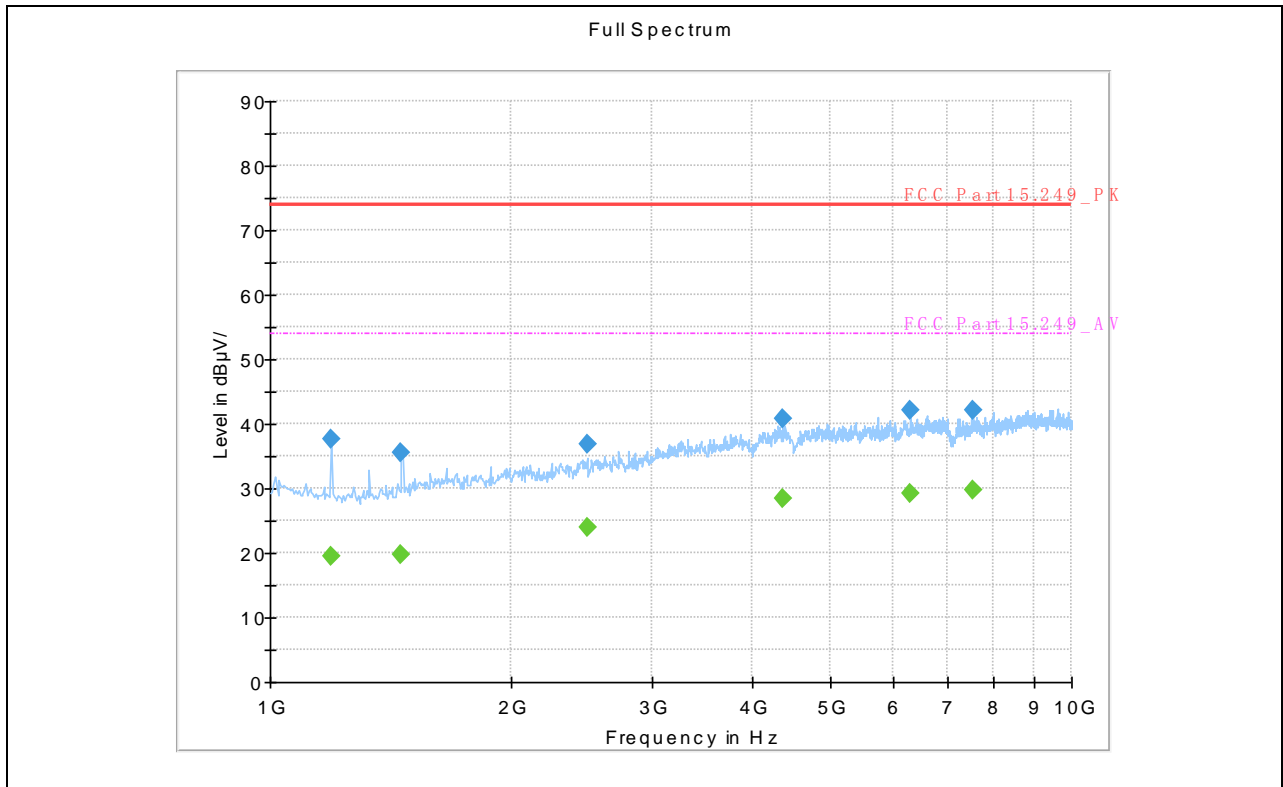


(Channel 13, 915MHz, 1GHz to 10GHz, Antenna Horizontal)

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Pol	Corr. (dB/m)
1193.500000	37.74	---	74.00	36.26	H	-17.8
1193.500000	---	19.38	54.00	34.62	H	-17.8
1459.000000	35.55	---	74.00	38.45	H	-16.6
1459.000000	---	19.84	54.00	34.16	H	-16.6
2485.000000	36.87	---	74.00	37.13	H	-11.2
2485.000000	---	23.95	54.00	30.05	H	-11.2
4366.000000	---	28.42	54.00	25.58	H	-4.3
4366.000000	40.79	---	74.00	33.21	H	-4.3
6292.000000	---	29.18	54.00	24.82	H	-2.9
6292.000000	42.18	---	74.00	31.82	H	-2.9
7543.000000	42.05	---	74.00	31.95	H	-0.9
7543.000000	---	29.75	54.00	24.25	H	-0.9

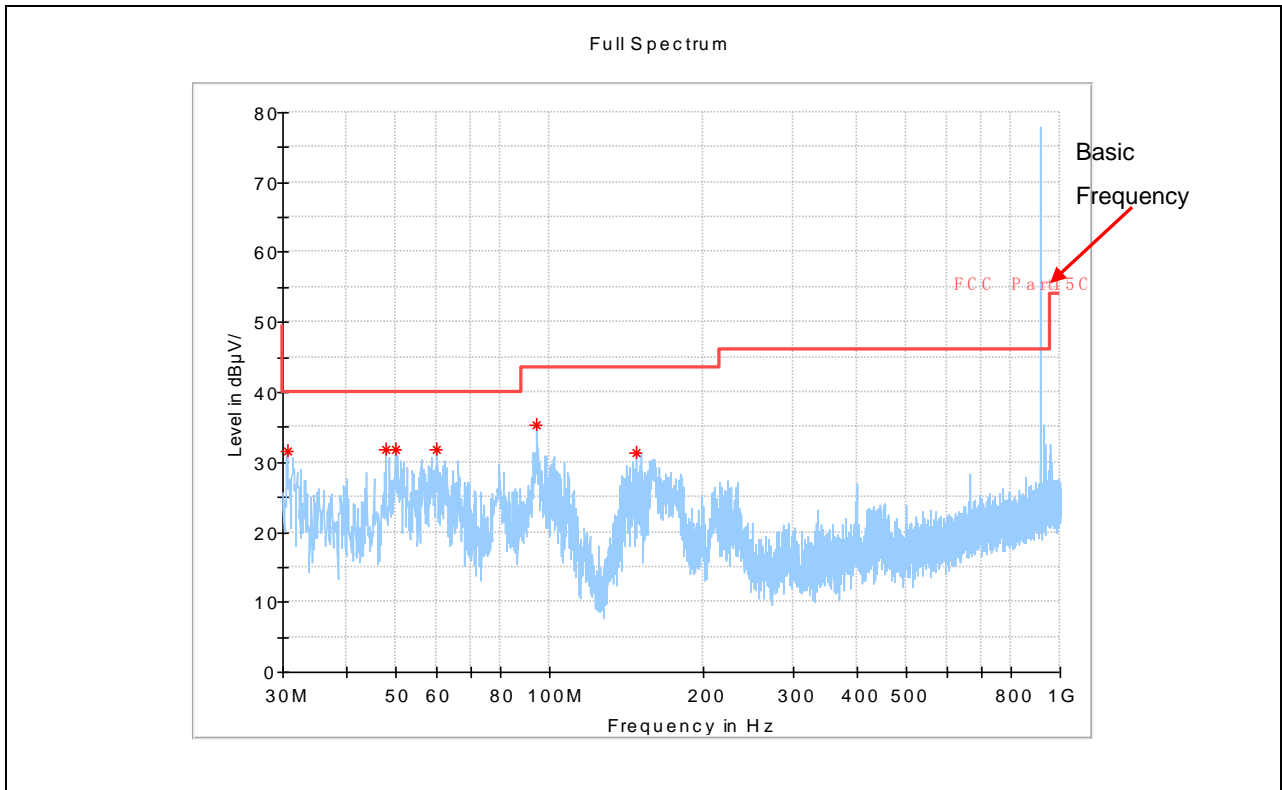

(Channel 13, 915MHz_30MHz to 1GHz, Antenna Vertical)


Frequency (MHz)	MaxPeak (dBµV/m)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Pol	Corr. (dB/m)
30.592778	31.68	---	40.00	8.32	V	12.8
47.783333	31.85	---	40.00	8.15	V	15.5
49.831111	31.83	---	40.00	8.17	V	16.1
60.177778	31.76	---	40.00	8.24	V	14.7
94.343333	35.35	---	43.50	8.15	V	12.9
148.070556	31.29	---	43.50	12.21	V	11.1

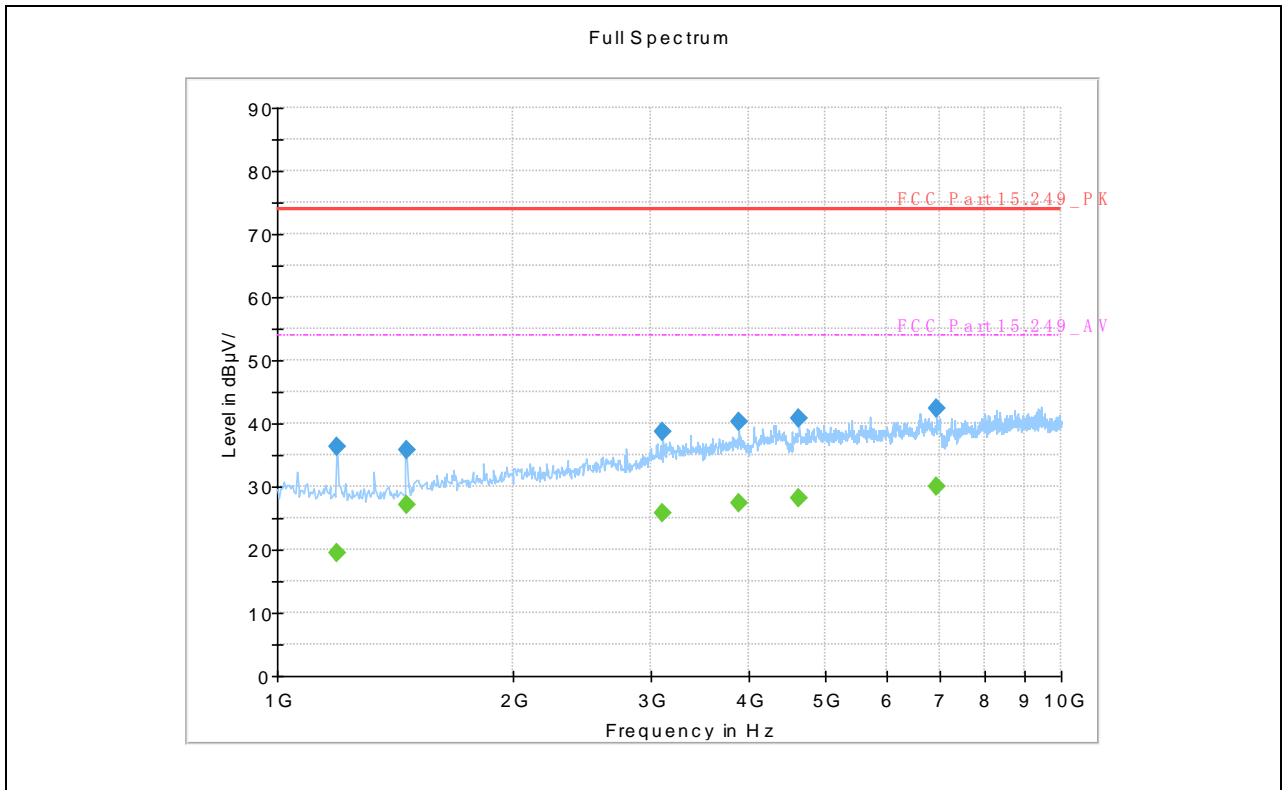

(Channel 13, 915MHz, 1GHz to 10GHz, Antenna Vertical)


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Pol	Corr. (dB/m)
1193.500000	36.26	---	74.00	37.74	V	-17.8
1193.500000	---	19.47	54.00	34.53	V	-17.8
1463.500000	35.79	---	74.00	38.21	V	-16.4
1463.500000	---	27.04	54.00	26.96	V	-16.4
3106.000000	38.57	---	74.00	35.43	V	-8.7
3106.000000	---	25.81	54.00	28.19	V	-8.7
3875.500000	40.19	---	74.00	33.81	V	-5.9
3875.500000	---	27.46	54.00	26.55	V	-5.9
4636.000000	40.70	---	74.00	33.30	V	-4.5
4636.000000	---	28.03	54.00	25.97	V	-4.5
6931.000000	42.39	---	74.00	31.61	V	-2.1
6931.000000	---	30.09	54.00	23.92	V	-2.1

Plots for Channel=25:

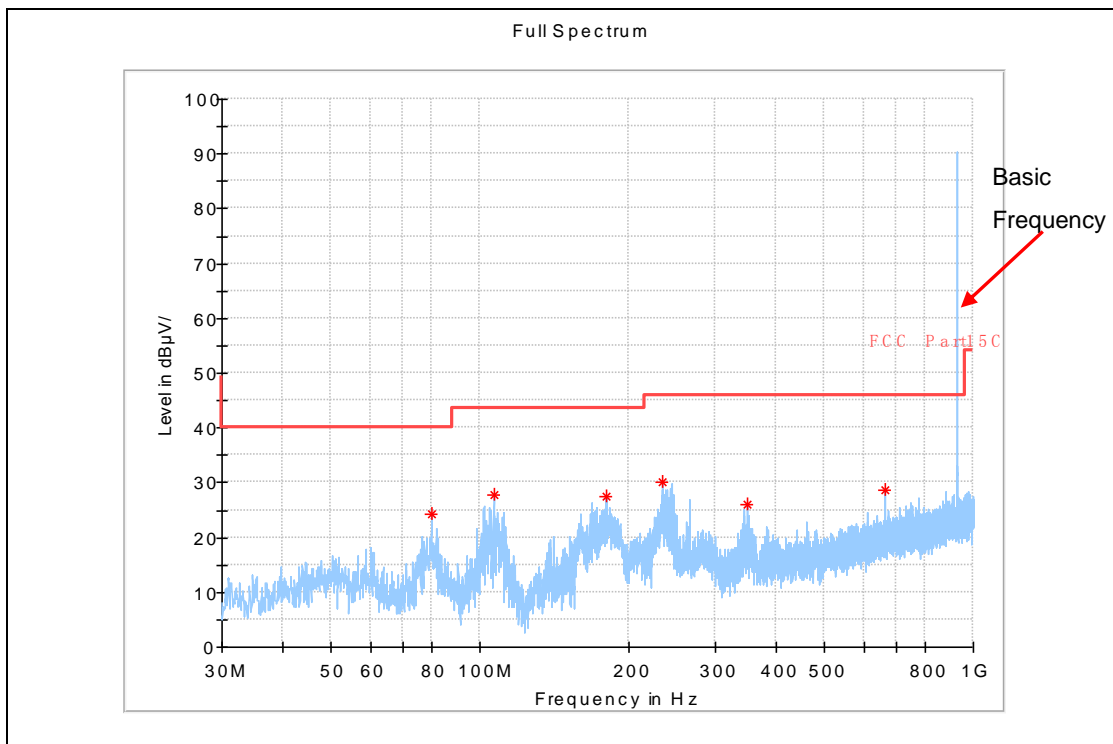


(Channel 25, 927MHz, 30MHz to 1GHz, Antenna Horizontal)

Frequency (MHz)	MaxPeak (dBµV/m)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Pol	Corr. (dB/m)
79.739444	24.27	---	40.00	15.73	H	10.8
106.630000	27.84	---	43.50	15.66	H	14.4
180.888889	27.54	---	43.50	15.96	H	12.7
234.993333	30.23	---	46.00	15.77	H	14.6
348.483333	25.93	---	46.00	20.07	H	17.9
665.026667	28.72	---	46.00	17.28	H	24.3

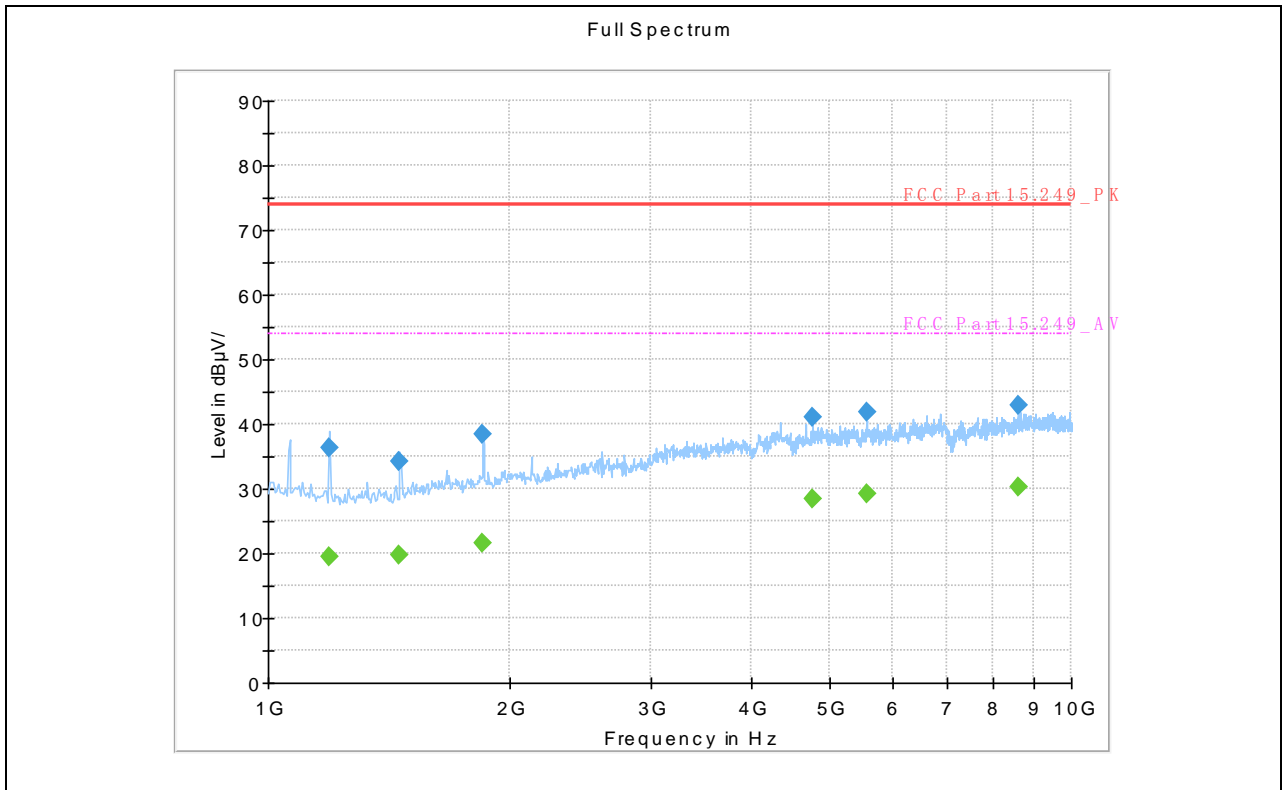


(Channel 25, 927MHz, 1GHz to 10GHz, Antenna Horizontal)

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Pol	Corr. (dB/m)
1193.500000	36.38	---	74.00	37.62	H	-17.8
1193.500000	---	19.41	54.00	34.59	H	-17.8
1459.000000	34.28	---	74.00	39.72	H	-16.6
1459.000000	---	19.86	54.00	34.14	H	-16.6
1850.500000	38.35	---	74.00	35.65	H	-14.2
1850.500000	---	21.71	54.00	32.29	H	-14.2
4766.500000	---	28.45	54.00	25.55	H	-4.3
4766.500000	41.11	---	74.00	32.89	H	-4.3
5558.500000	41.97	---	74.00	32.03	H	-3.1
5558.500000	---	29.28	54.00	24.72	H	-3.1
8578.000000	---	30.36	54.00	23.64	H	0.1
8578.000000	42.99	---	74.00	31.01	H	0.1

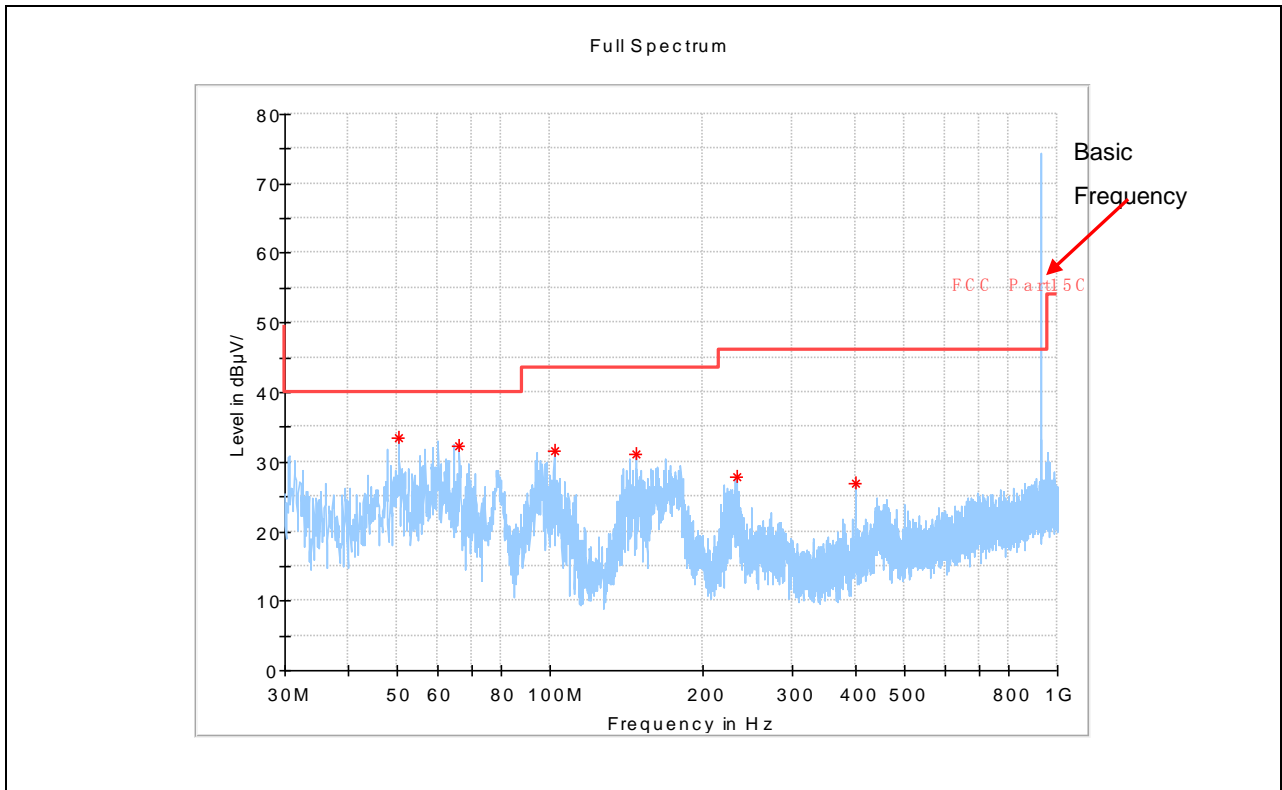

(Channel 25, 927MHz_30MHz to 1GHz, Antenna Vertical)

Frequency (MHz)	MaxPeak (dBµV/m)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Bandwidth (kHz)	Pol	Corr. (dB/m)
50.423889	33.44	---	40.00	6.56	---	V	16.1
66.267222	32.38	---	40.00	7.63	---	V	13.0
101.833889	31.50	---	43.50	12.00	---	V	14.8
148.070556	31.19	---	43.50	12.31	---	V	11.1
233.753889	27.77	---	46.00	18.23	---	V	14.5
398.977222	26.83	---	46.00	19.17	---	V	19.6

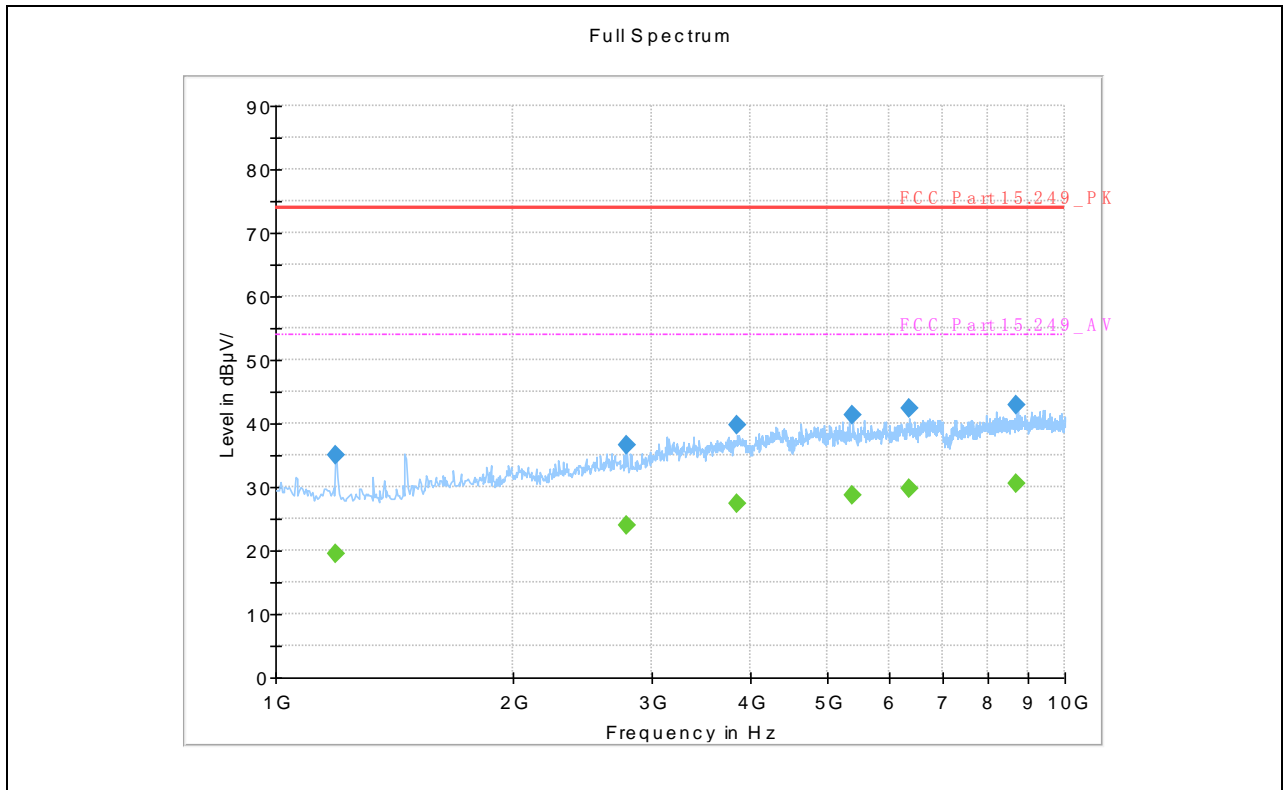

(Channel 25, 927MHz, 1GHz to 10GHz, Antenna Vertical)

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Pol	Corr. (dB/m)
1193.500000	---	19.47	54.00	34.53	V	-17.8
1193.500000	34.93	---	74.00	39.07	V	-17.8
2782.000000	36.68	---	74.00	37.32	V	-11.2
2782.000000	---	23.86	54.00	30.14	V	-11.2
3853.000000	39.87	---	74.00	34.13	V	-6.1
3853.000000	---	27.45	54.00	26.55	V	-6.1
5392.000000	---	28.79	54.00	25.21	V	-3.7
5392.000000	41.44	---	74.00	32.56	V	-3.7
6346.000000	42.30	---	74.00	31.70	V	-2.4
6346.000000	---	29.82	54.00	24.18	V	-2.4
8690.500000	43.02	---	74.00	30.98	V	0.0
8690.500000	---	30.65	54.00	23.35	V	0.0



Annex A Test Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for test performed on the EUT as specified in CISPR 16-1-2:

Test items	Uncertainty
Bandwidth	±5%
Radiated Emission	±2.95dB

This uncertainty represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$



Annex B Testing Laboratory Information

1. Identification of the Responsible Testing Laboratory

Company Name:	Kehu-Morlab Test Laboratory
Address:	Unit 101, No.1732 Gangzhong Road, Xiamen Area, Pilot Free Trade Zone (Fujian), P.R. China
Responsible Test Lab Manager:	Mr. Di Dehai
Telephone:	+86-592-5612050
Facsimile:	+86-592-5612095

2. Identification of the Responsible Testing Location

Name:	Kehu-Morlab Test Laboratory
Address:	Unit 101, No.1732 Gangzhong Road, Xiamen Area, Pilot Free Trade Zone (Fujian), P.R. China

3. Facilities and Accreditations

All measurement facilities used to collect the measurement data are located at Unit 101, No.1732 Gangzhong Road, Xiamen Area, Pilot Free Trade Zone (Fujian), P.R. China.

The test site is constructed in conformance with the requirements of ANSI C63.10-2013 and CISPR Publication 22; the FCC designation number is CN1249.

4. Test Equipments Utilized

4.1 Conducted Test Equipments

No.	Equipment Name	Serial No.	Model No.	Manufacturer	Cal.Date	Cal.Due Date
1	MXA Signal Analyzer	MY53421845	N9020A	Keysight	2017.11.30	2018.11.29
2	Coaxial cable	RF02	N/A	Morlab	N/A	N/A
3	SMA connector	RF03	N/A	Xingbo	N/A	N/A

4.2 Auxiliary Test Equipment

No.	Equipment Name	Serial No.	Model No.	Manufacturer	Cal.Date	Cal. Due Date
1	Laptop	N/A	ThinkPad T470	Lenovo Group	N/A	N/A



4.3 Conducted Emission Test Equipments

No	Equipment Name	Serial No.	Model No.	Manufacturer	Cal.Date	Cal.Due Date
1	EMI Receiver	102174	ESR3	ESR3	2017.11.27	2018.11.26
2	LISN	101338	ENV432	ENV432	2017.11.27	2018.11.26
3	Pulse Limiter (10dB)	317	VTSD 9561 F	VTSD 9561 F	2017.11.27	2018.11.26
4	Coaxial cable(BNC) (30MHz-3GHz)	EMC01	N/A	Morlab	N/A	N/A

4.4 List of Software Used

No	Model	Version Number	Producer	Test Item
1	EMC32	V10.00.00	Rode&Schwarz	RE
2	EMC32	V10.20.01	Rode&Schwarz	CE

4.5 Radiated Test Equipments

RSE Test System						
No.	Equipment Name	Serial No.	Model No.	Manufacturer	Cal. Date	Cal.Due Date
1	Anechoic Chamber	N/A	9m*6m*6m	ETS-Lindgren	2017.11.27	2018.11.26
2	Signal Analyzer	101294	FSV40	R&S	2017.12.01	2018.11.30
3	Active Ring Antenna	FMZB 1513 #269	FMZB 1513	Schwarzbeck	2017.11.26	2018.11.25
4	Linear Log Periodic Broad Band Antenna	949	VULB 9163	Schwarzbeck	2017.12.03	2018.12.02
5	Ultra-Wideband Horn Antenna	102615	HF907	R&S	2017.12.03	2018.12.02
6	RF Switch and Control Platform	N/A	RSC	CDSI	N/A	N/A
7	Coaxial cable (N male) (9kHz -3GHz)	EMC02	N/A	Morlab	N/A	N/A
8	Coaxial cable (N male) (9kHz -3GHz)	EMC03	N/A	Morlab	N/A	N/A
9	Coaxial cable (N male) (1GHz-26.5GHz)	EMC04	N/A	Morlab	N/A	N/A



10	Coaxial cable (N male) (1GHz-26.5GHz)	EMC05	N/A	Morlab	N/A	N/A
11	Pre-amplifier (1GHz-18GHz)	8810011	PAP-1G18	CDSI	2017.11.27	2018.11.26
12	High Pass Filter	EMC13	HFP-1.0/18 G-60	CDSI	N/A	N/A

————— END OF REPORT —————