

<b>Prüfbericht-Nr.:</b> <i>Test report no.:</i>	<b>CN21M71Y 001</b>	<b>Auftrags-Nr.:</b> <i>Order no.:</i>	168335060	<b>Seite 1 von 25</b> <i>Page 1 of 25</i>	
<b>Kunden-Referenz-Nr.:</b> <i>Client reference no.:</i>	<b>N/A</b>	<b>Auftragsdatum:</b> <i>Order date:</i>	2021-09-13		
<b>Auftraggeber:</b> <i>Client:</i>	<b>Cosonic Intelligent Technologies Co., Ltd.</b> Room 506, No.1 Building, No.6, South Industrial Road, Songshan Lake National High-tech Industrial Development Zone, Dongguan City, Guangdong Province, P.R. China.				
<b>Prüfgegenstand:</b> <i>Test item:</i>	Earbuds X				
<b>Bezeichnung / Typ-Nr.:</b> <i>Identification / Type no.:</i>	ALD-00				
<b>Auftrags-Inhalt:</b> <i>Order content:</i>	Test Report				
<b>Prüfgrundlage:</b> <i>Test specification:</i>	CFR47 FCC Part 15: Subpart C Section 15.247 CFR47 FCC Part 15: Subpart C Section 15.209				
<b>Wareneingangsdatum:</b> <i>Date of sample receipt:</i>	2021-09-17	Refer to Photo Documentation			
<b>Prüfmuster-Nr.:</b> <i>Test sample no.:</i>	A003127783-002~003				
<b>Prüfzeitraum:</b> <i>Testing period:</i>	2021-09-20 to 2021-10-15				
<b>Ort der Prüfung:</b> <i>Place of testing:</i>	TÜV Rheinland (Shenzhen) Co., Ltd.				
<b>Prüflaboratorium:</b> <i>Testing laboratory:</i>	TÜV Rheinland (Shenzhen) Co., Ltd.				
<b>Prüfergebnis*:</b> <i>Test result*:</i>	Pass				
<b>geprüft von:</b> <i>tested by:</i>	X <u>Hardy Suo</u>	<b>genehmigt von:</b> <i>authorized by:</i>	X <u>Lin Lin</u>		
<b>Datum:</b> <i>Date:</i>	2021-10-20	<b>Ausstellungsdatum:</b> <i>Issue date:</i>	2021-10-20		
<b>Stellung / Position:</b>	Sachverständige(r)/Expert	<b>Stellung / Position:</b>	Sachverständige(r)/Expert		
<b>Sonstiges / Other:</b>	FCC ID: 2ALVK-ALD00				
<b>Zustand des Prüfgegenstandes bei Anlieferung:</b> <i>Condition of the test item at delivery:</i>	Prüfmuster vollständig und unbeschädigt <i>Test item complete and undamaged</i>				
* Legende:	1 = sehr gut P(ass) = entspricht o.g. Prüfgrundlage(n)	2 = gut F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	3 = befriedigend 3 = satisfactory	4 = ausreichend 4 = sufficient	5 = mangelhaft N/A = nicht anwendbar N/T = nicht getestet 5 = poor N/A = not applicable N/T = not tested
* Legend:	1 = very good P(ass) = passed a.m. test specification(s)	2 = good F(ail) = failed a.m. test specification(s)	3 = satisfactory	4 = sufficient	5 = poor N/A = not applicable N/T = not tested
<b>Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens.</b> <i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>					

v05

## Test Summary

**5.1.1 ANTENNA REQUIREMENT***RESULT: Pass***5.1.2 MAXIMUM PEAK CONDUCTED OUTPUT POWER***RESULT: Pass***5.1.3 CONDUCTED POWER SPECTRAL DENSITY***RESULT: Pass***5.1.4 6dB BANDWIDTH***RESULT: Pass***5.1.5 99% BANDWIDTH***RESULT: Pass***5.1.6 20dB BANDWIDTH***RESULT: Pass***5.1.7 CARRIER FREQUENCY SEPARATION***RESULT: Pass***5.1.8 NUMBER OF HOPPING FREQUENCY***RESULT: Pass***5.1.9 TIME OF OCCUPANCY***RESULT: Pass***5.1.10 CONDUCTED SPURIOUS EMISSIONS MEASURED IN 100 KHz BANDWIDTH***RESULT: Pass***5.1.11 RADIATED SPURIOUS EMISSION***RESULT: Pass*

## Contents

<b>1</b>	<b>GENERAL REMARKS .....</b>	<b>4</b>
<b>1.1</b>	<b>COMPLEMENTARY MATERIALS .....</b>	<b>4</b>
<b>2</b>	<b>TEST SITES.....</b>	<b>5</b>
<b>2.1</b>	<b>TEST FACILITIES.....</b>	<b>5</b>
<b>2.2</b>	<b>LIST OF TEST AND MEASUREMENT INSTRUMENTS .....</b>	<b>5</b>
<b>2.3</b>	<b>TRACEABILITY.....</b>	<b>6</b>
<b>2.4</b>	<b>CALIBRATION.....</b>	<b>6</b>
<b>2.5</b>	<b>MEASUREMENT UNCERTAINTY .....</b>	<b>6</b>
<b>2.6</b>	<b>LOCATION OF ORIGINAL DATA .....</b>	<b>6</b>
<b>2.7</b>	<b>STATUS OF FACILITY USED FOR TESTING.....</b>	<b>6</b>
<b>3</b>	<b>GENERAL PRODUCT INFORMATION.....</b>	<b>7</b>
<b>3.1</b>	<b>PRODUCT FUNCTION AND INTENDED USE.....</b>	<b>7</b>
<b>3.2</b>	<b>RATINGS AND SYSTEM DETAILS .....</b>	<b>7</b>
<b>3.3</b>	<b>INDEPENDENT OPERATION MODES .....</b>	<b>9</b>
<b>3.4</b>	<b>NOISE GENERATING AND NOISE SUPPRESSING PARTS.....</b>	<b>9</b>
<b>3.5</b>	<b>SUBMITTED DOCUMENTS.....</b>	<b>10</b>
<b>4</b>	<b>TEST SET-UP AND OPERATION MODES .....</b>	<b>11</b>
<b>4.1</b>	<b>PRINCIPLE OF CONFIGURATION SELECTION.....</b>	<b>11</b>
<b>4.2</b>	<b>TEST OPERATION AND TEST SOFTWARE.....</b>	<b>11</b>
<b>4.3</b>	<b>SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT.....</b>	<b>11</b>
<b>4.4</b>	<b>COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE.....</b>	<b>11</b>
<b>4.5</b>	<b>TEST SETUP DIAGRAM .....</b>	<b>12</b>
<b>5</b>	<b>TEST RESULTS.....</b>	<b>14</b>
<b>5.1</b>	<b>TRANSMITTER REQUIREMENT &amp; TEST SUITES.....</b>	<b>14</b>
<b>5.1.1</b>	<i>Antenna Requirement.....</i>	<i>14</i>
<b>5.1.2</b>	<i>Maximum Peak Conducted Output Power.....</i>	<i>15</i>
<b>5.1.3</b>	<i>Conducted Power Spectral Density.....</i>	<i>16</i>
<b>5.1.4</b>	<i>6dB Bandwidth.....</i>	<i>17</i>
<b>5.1.5</b>	<i>99% Bandwidth .....</i>	<i>18</i>
<b>5.1.6</b>	<i>20dB Bandwidth.....</i>	<i>19</i>
<b>5.1.7</b>	<i>Carrier Frequency Separation.....</i>	<i>20</i>
<b>5.1.8</b>	<i>Number of Hopping Frequency.....</i>	<i>21</i>
<b>5.1.9</b>	<i>Time of Occupancy .....</i>	<i>22</i>
<b>5.1.10</b>	<i>Conducted Spurious Emissions Measured in 100 kHz Bandwidth.....</i>	<i>23</i>
<b>5.1.11</b>	<i>Radiated Spurious Emission.....</i>	<i>24</i>
<b>6</b>	<b>PHOTOGRAPHS OF THE TEST SET-UP.....</b>	<b>25</b>
<b>7</b>	<b>LIST OF TABLES .....</b>	<b>25</b>

# 1 General Remarks

## 1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix A: Photographs of the Test Set-up

Appendix B: Test Results of Bluetooth (BDR & EDR)

Appendix C: Test Results of Bluetooth Low Energy

## 2 Test Sites

### 2.1 Test Facilities

**TÜV Rheinland (Shenzhen) Co., Ltd.**

362 Huanguan Road Middle Longhua District, Shenzhen 518110 People's Republic of China

FCC Registration No.: 694916

ISED wireless device testing laboratory: 25069

### 2.2 List of Test and Measurement Instruments

**Table 1: List of Test and Measurement Equipment**

<b>Radio Spectrum Testing (TS8997)</b>				
<b>Equipment</b>	<b>Manufacturer</b>	<b>Model</b>	<b>Serial No.</b>	<b>Cal. until</b>
Signal Analyzer	R&S	FSV 40	101441	2022-08-09
OSP	R&S	OSP 150	101017	2021-12-10
Control PC	DELL	OptiPlex 7050	FTJZ9P2	N/A
Test Software	R&S	WMS32 (V11.00.00)	N/A	N/A
Power Meter	R&S	NRP2	107105	2021-12-10
Wideband Power Sensor	R&S	NRP-Z81	105677	2022-08-09
Shielding Room 8#	Albatross	SR8	APC17151-SR8	2024-06-22
<b>Unwanted Emission Testing (TS9975)</b>				
<b>Equipment</b>	<b>Manufacturer</b>	<b>Model</b>	<b>Serial No.</b>	<b>Cal. until</b>
EMI Test Receiver	R&S	ESR 7	102021	2022-08-10
Signal Analyzer	R&S	FSV 40	101439	2022-08-09
System Controller Interface	R&S	SCI-100	S10010038	N/A
Filterbank	R&S	Wlan	100759	2022-08-09
OSP	R&S	OSP 120	102040	N/A
Pre-amplifier	R&S	SCU08F1	08320031	2022-08-09
Amplifier	R&S	SCU-18F	180070	2022-08-09
Amplifier	R&S	SCU40A	100475	2022-08-09
Trilog Broadband Antenna (30 MHz - 7 GHz)	Schwarzbeck	VULB 9162	193	2022-08-08
Double-Ridged Antenna (1 -18 GHz)	ETS-LINDGREN	3117	00218717	2022-08-08
Wideband Ridged Horn Antenna (18-40 GHz)	Steatite	QMS-00880	19067	2022-08-08
Active Loop Antenna	Schwarzbeck	FMZB 1513	302	2022-09-13
Test software	R&S	EMC32 (V10.60.10)	N/A	N/A
Control PC	Dell	OptiPlex 7050	36NV9P2	N/A
3m Semi-Anechoic Chamber	Albatross	SAC-3m	APC17151-SAC	2024-06-22

## 2.3 Traceability

All measurement equipment calibrations are traceable to NIM (National Institute of Metrology) or where calibration is performed in other countries, to equivalent nationally recognized standards organizations.

## 2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

## 2.5 Measurement Uncertainty

The estimated combined standard uncertainty for radiated emissions and conducted emissions measurements as below table.

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-7}$
RF Power (conducted)	$\pm 2.5$ dB
Radiated Emission of Transmitter, valid up to 26.5 GHz	$\pm 6$ dB
Radiated Emission of Receiver, valid up to 26.5 GHz	$\pm 6$ dB
Temperature	$\pm 1$ °C
Humidity	$\pm 5$ %
Voltage (DC)	$\pm 1$ %
Voltage (AC, <10kHz)	$\pm 2$ %

## 2.6 Location of Original Data

The original copies of all test data taken during actual testing were attached at Appendix A & B & C of this report and delivered to the applicant. A copy has been retained in the TÜV Rheinland (Shenzhen) Co., Ltd. file for certification follow-up purposes.

## 2.7 Status of Facility Used for Testing

The TÜV Rheinland (Shenzhen) Co., Ltd. Test facility located at 362 Huanguan Road Middle Longhua District, Shenzhen 518110 People's Republic of China is listed on the US Federal Communications Commission list of facilities approved to perform measurements.

### 3 General Product Information

#### 3.1 Product Function and Intended Use

The EUTs are Bluetooth Earbuds, which consist of a Charging case, a left earbud and a right earbud, both left and right earbuds support Bluetooth technology. Both left and right earbuds are identical in function, circuit design and critical Components employed, hence full test was conducted on the Left earbuds only.

The charging case has two alternative battery.

Earbuds Battery		
Manufacturer	Model	Rating
EVE ENERGY CO LTD	ICB1045 E4H	3.7V, 40mAh, 0.148Wh
Charging case battery		
Manufacturer	Model	Rating
Ganzhou Novel Battery Technology Co., Ltd.	702334	3.7V, 500mAh, 1.85Wh
Dongguan Golden CEL Battery Co., Ltd.	1054	3.7V, 500mAh, 1.85Wh

For details refer to the User Manual, Technical Description and Circuit Diagram.

#### 3.2 Ratings and System Details

**Table 2: Technical Specification of EUT**

General Information of EUT	Value
Kind of Equipment:	Earbuds X
Type Designation:	ALD-00
FCC ID:	2ALVK-ALD00
Operating Voltage:	For left & right earbuds: DC 3.7V, 40mAh via built-in button cell or DC 5V, 100mA charged through the charging case  For Charging case: DC 3.7V, 500mAh via built-in Li-ion Polymer rechargeable battery or DC 5V, 1A via Type C interface
Testing Voltage:	Fully charged battery
Technical Specification of Bluetooth (BDR & EDR)	
Operating Frequency:	2402MHz – 2480 MHz
Bluetooth Core Version:	5.2
Channel Number:	79 channels
Channel Separation:	1MHz
Type of Modulation:	GFSK, $\pi/4$ DQPSK, 8DPSK
Antenna Type:	Integral Antenna
Antenna Gain:	-4.2 dBi
Technical Specification of Bluetooth (Bluetooth Low Energy)	

Operating Frequency:	2402MHz – 2480 MHz
Bluetooth Core Version:	5.2
Type of Modulation:	GFSK
Channel Number:	40 channels
Data Rate:	1 Mbps
Channel Separation:	2 MHz
Antenna Type:	Integral Antenna
Antenna Gain:	-4.2 dBi

**Table 3: RF Channel and Frequency of Classical Bluetooth**

RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)
0	2402.00	20	2422.00	40	2442.00	60	2462.00
1	2403.00	21	2423.00	41	2443.00	61	2463.00
2	2404.00	22	2424.00	42	2444.00	62	2464.00
3	2405.00	23	2425.00	43	2445.00	63	2465.00
4	2406.00	24	2426.00	44	2446.00	64	2466.00
5	2407.00	25	2427.00	45	2447.00	65	2467.00
6	2408.00	26	2428.00	46	2448.00	66	2468.00
7	2409.00	27	2429.00	47	2449.00	67	2469.00
8	2410.00	28	2430.00	48	2450.00	68	2470.00
9	2411.00	29	2431.00	49	2451.00	69	2471.00
10	2412.00	30	2432.00	50	2452.00	70	2472.00
11	2413.00	31	2433.00	51	2453.00	71	2473.00
12	2414.00	32	2434.00	52	2454.00	72	2474.00
13	2415.00	33	2435.00	53	2455.00	73	2475.00
14	2416.00	34	2436.00	54	2456.00	74	2476.00
15	2417.00	35	2437.00	55	2457.00	75	2477.00
16	2418.00	36	2438.00	56	2458.00	76	2478.00
17	2419.00	37	2439.00	57	2459.00	77	2479.00
18	2420.00	38	2440.00	58	2460.00	78	<b>2480.00</b>
19	2421.00	39	<b>2441.00</b>	59	2461.00		

Test frequencies are lowest channel: 2402 MHz, middle channel: 2441 MHz and highest channel: 2480 MHz for General 2.4GHz



**Table 4: RF Channel and Frequency of Bluetooth Low Energy**

RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)
<b>0</b>	<b>2402</b>	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	<b>19</b>	<b>2440</b>	29	2460	<b>39</b>	<b>2480</b>

Test frequencies are lowest channel: 2402 MHz, middle channel: 2440 MHz and highest channel: 2480 MHz for BLE

### 3.3 Independent Operation Modes

The basic operation modes are:

- A. On, Bluetooth transmitting mode (BR & EDR mode)
  - 1) Low Channel
  - 2) Middle Channel
  - 3) High Channel
- B. On, Bluetooth transmitting mode (BLE)
  - 1) Low Channel
  - 2) Middle Channel
  - 3) High Channel
- C. On, Transmitting on Hopping channel
- D. On, Bluetooth Connection Mode
- E. Off

### 3.4 Noise Generating and Noise Suppressing Parts

Refer to Circuit Diagram for further details.

### 3.5 Submitted Documents

- Application Form
- Rating Label
- User Manual
- Block Diagram

## 4 Test Set-up and Operation Modes

### 4.1 Principle of Configuration Selection

**Radio Spectrum:** The equipment under test (EUT) was configured at its highest power output in order to measure its highest possible radiation and conducted level. The test modes were adapted accordingly in reference to the instructions for use.

**Emission:** The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

### 4.2 Test Operation and Test Software

Test operation refers to test setup in chapter 5. All tests were performed according to the procedures in ANSI C63.10: 2013.

According to clause 3.1, all tests were performed on model ALD-00 in this report.

### 4.3 Special Accessories and Auxiliary Equipment

Table 5: Auxiliary Equipment Used during Test

Description	Manufacturer	Model	S/N
Laptop	Lenovo	T480	PF-16A6N8

### 4.4 Countermeasures to Achieve EMC Compliance

The test sample which has been tested contained the noise suppression parts as described in the Technical Construction File (TCF).

No additional measures were employed to achieve compliance.

## 4.5 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test (Below 1GHz)

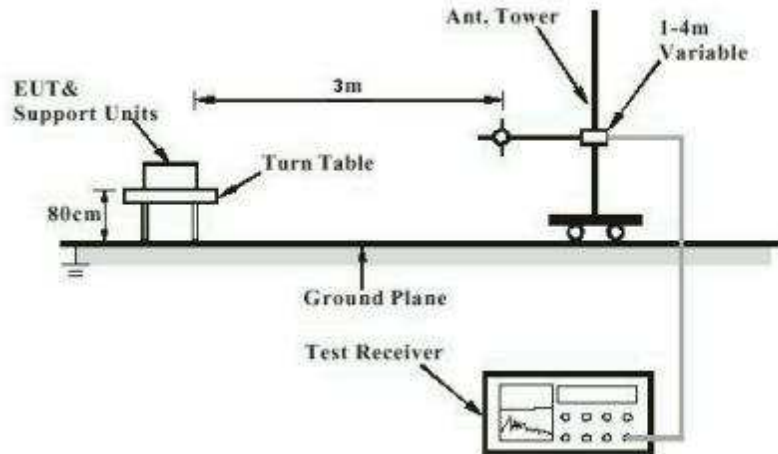
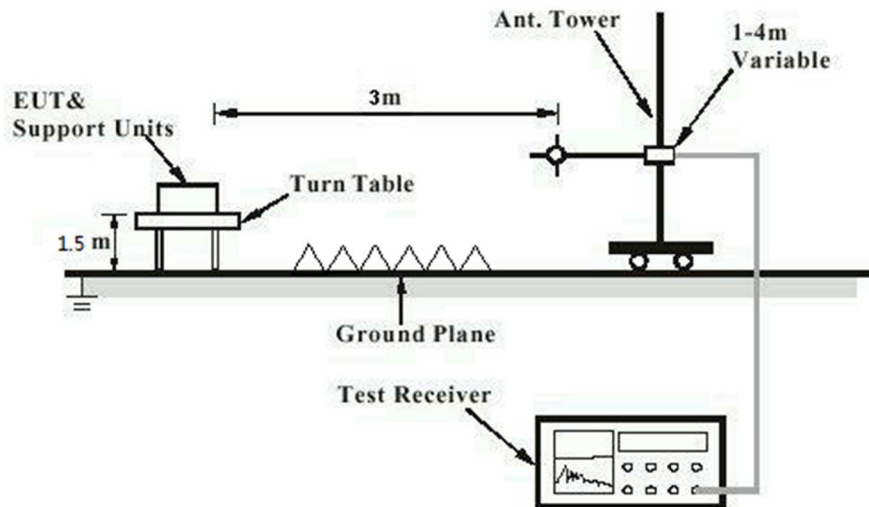
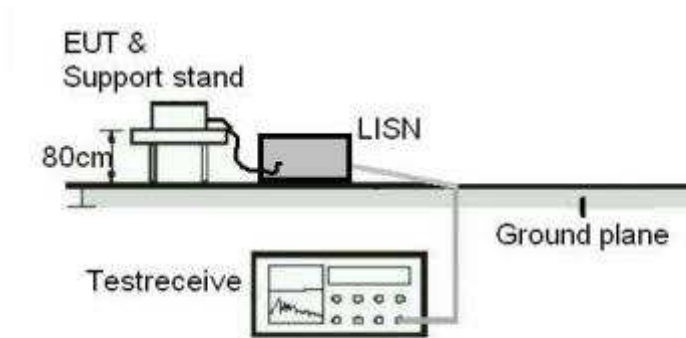
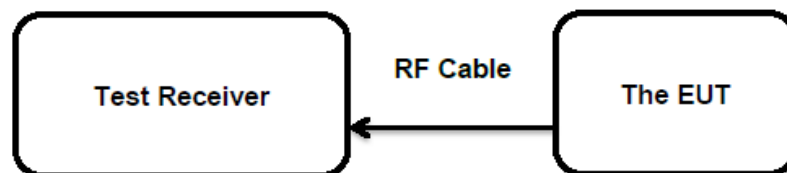


Diagram of Measurement Configuration for Radiation Test (Above 1GHz)



**Diagram of Measurement Configuration for Mains Conduction Measurement**

**Diagram of Measurement Configuration for Conducted Transmitter Measurement**


## 5 Test Results

### 5.1 Transmitter Requirement & Test Suites

#### 5.1.1 Antenna Requirement

**RESULT:**

**Pass**

**Test Specification**

Test standard : FCC Part 15.247(b)(4) and Part 15.203

According to the manufacturer declared, the EUT has an Integral antenna, the directional gain of antenna is -4.2 dBi, and the antenna connector is designed with permanent attachment and no consideration of replacement.

Therefore the EUT is considered sufficient to comply with the provision.

Refer to EUT Photo for further details.

## 5.1.2 Maximum Peak Conducted Output Power

**RESULT:**
**Pass**
**Test Specification**

Test standard	:	FCC Part 15.247(b)(1)&(3)
Basic standard	:	ANSI C63.10: 2013
Limits	:	FHSS < 0.125 Watts, DSSS < 1.0 Watts
Kind of test site	:	Shielded Room

**Test Setup**

Date of testing	:	2021-10-15
Input voltage	:	Fully charged battery
Operation mode	:	A, B
Test channel	:	Low / Middle / High
Ambient temperature	:	23.5 °C
Relative humidity	:	52 %
Atmospheric pressure	:	101 kPa

**Table 6: Test Result of Maximum Peak Conducted Output Power, BR & EDR**

Test Mode	Test Channel (MHz)	Measured Peak Power		Limit (W)
		(dBm)	(W)	
GFSK (BDR)	2402.0	7.70	0.0059	< 0.125
	2441.0	7.90	0.0062	
	2480.0	7.60	0.0058	
<b>Maximum Measured Value</b>		7.90	0.0062	

Test Mode	Test Channel (MHz)	Measured Peak Power		Limit (W)
		(dBm)	(W)	
8DPSK (EDR)	2402.0	7.30	0.0054	< 0.125
	2441.0	7.40	0.0055	
	2480.0	7.20	0.0052	
<b>Maximum Measured Value</b>		7.40	0.0055	

**Table 7: Test Result of Maximum Peak Conducted Output Power, Bluetooth LE**

Test Mode	Test Channel (MHz)	Measured Peak Power		Limit (W)
		(dBm)	(W)	
BLE	2402	7.80	0.0060	< 1.0
	2440	7.90	0.0062	
	2480	7.70	0.0059	
<b>Max. Measured Value</b>		7.90	0.0062	

Note:

- 1) The cable loss is taken into account in results.
- 2) Antenna gain(G): -4.2 dBi

### 5.1.3 Conducted Power Spectral Density

**RESULT:****Pass****Test Specification**

Test standard	:	FCC Part 15.247(e)
Basic standard	:	ANSI C63.10: 2013
Limits	:	< 8 dBm / 3kHz
Kind of test site	:	Shielded Room

**Test Setup**

Date of testing	:	Refer to test result
Input voltage	:	Fully charged battery
Operation mode	:	B
Test channel	:	Low / Middle / High
Ambient temperature	:	23.5 °C
Relative humidity	:	52 %
Atmospheric pressure	:	101 kPa

For the measurement records, refer to the appendix C.



### 5.1.4 6dB Bandwidth

**RESULT:****Pass****Test Specification**

Test standard	:	FCC Part 15.247(a)(2)
Basic standard	:	ANSI C63.10: 2013
Limits	:	> 500 KHz
Kind of test site	:	Shielded Room

**Test Setup**

Date of testing	:	2021-10-15
Input voltage	:	Fully charged battery
Operation mode	:	B
Test channel	:	Low / Middle / High
Ambient temperature	:	23.5 °C
Relative humidity	:	52 %
Atmospheric pressure	:	101 kPa

For the measurement records, refer to the appendix C.

Prüfbericht - Nr.: CN21M71Y 001  
Test Report No.:Seite 18 von 25  
Page 18 of 25

### 5.1.5 99% Bandwidth

**RESULT:****Pass****Test Specification**

Test standard : FCC Part 15.247(a)  
Basic standard : ANSI C63.10: 2013  
Kind of test site : Shielded Room

**Test Setup**

Date of testing : 2021-10-15  
Input voltage : Fully charged battery  
Operation mode : A, B  
Test channel : Low / Middle / High  
Ambient temperature : 23.5 °C  
Relative humidity : 52 %  
Atmospheric pressure : 101 kPa

For the measurement records, refer to the appendix B & C.

Prüfbericht - Nr.: CN21M71Y 001  
Test Report No.:Seite 19 von 25  
Page 19 of 25

### 5.1.6 20dB Bandwidth

**RESULT:****Pass****Test Specification**

Test standard : FCC Part 15.247(a)(1)  
Basic standard : ANSI C63.10: 2013  
Kind of test site : Shielded Room

**Test Setup**

Date of testing : 2021-10-15  
Input voltage : Fully charged battery  
Operation mode : A  
Test channel : Low / Middle / High  
Ambient temperature : 23.5 °C  
Relative humidity : 52 %  
Atmospheric pressure : 101 kPa

For the measurement records, refer to the appendix B.

## 5.1.7 Carrier Frequency Separation

**RESULT:****Pass****Test Specification**

Test standard	:	FCC Part 15.247(a)(1)
Basic standard	:	ANSI C63.10: 2013
Limits	:	≥ 25kHz or 2/3 of 20dB bandwidth, whichever is greater
Kind of test site	:	Shielded Room

**Test Setup**

Date of testing	:	2021-10-15
Input voltage	:	Fully charged battery
Operation mode	:	C
Test channel	:	Low / Middle / High
Ambient temperature	:	23.5 °C
Relative humidity	:	52 %
Atmospheric pressure	:	101 kPa

For the measurement records, refer to the appendix B.

Prüfbericht - Nr.: CN21M71Y 001  
Test Report No.:Seite 21 von 25  
Page 21 of 25

### 5.1.8 Number of Hopping Frequency

**RESULT:****Pass****Test Specification**

Test standard : FCC part 15.247(a)(1)(iii)  
Basic standard : ANSI C63.10: 2013  
Limits :  $\geq 15$  non-overlapping channels  
Kind of test site : Shielded Room

**Test Setup**

Date of testing : 2021-10-15  
Input voltage : Fully charged battery  
Operation mode : C  
Ambient temperature : 23.5 °C  
Relative humidity : 52 %  
Atmospheric pressure : 101 kPa

For the measurement records, refer to the appendix B.

## 5.1.9 Time of Occupancy

**RESULT:****Pass****Test Specification**

Test standard	:	FCC part 15.247(a)(1)(iii)
Basic standard	:	ANSI C63.10: 2013
Limits	:	< 0.4s
Kind of test site	:	Shielded Room

**Test Setup**

Date of testing	:	2021-10-15
Input voltage	:	Fully charged battery
Operation mode	:	C
Test channel	:	Low / Middle / High
Ambient temperature	:	23.5 °C
Relative humidity	:	52 %
Atmospheric pressure	:	101 kPa

For the measurement records, refer to the appendix B.

Prüfbericht - Nr.: CN21M71Y 001  
Test Report No.:Seite 23 von 25  
Page 23 of 25

### 5.1.10 Conducted Spurious Emissions Measured in 100 kHz Bandwidth

RESULT:

Pass

**Test Specification**

Test standard	: FCC Part 15.247(d)
Basic standard	: ANSI C63.10: 2013
Limits	: 20dB (below that in the 100kHz bandwidth within the band that contains the highest level of the desired power); In addition, radiated emissions which fall in the restricted bands, must also comply with the radiated emission limits specified in 15.209(a)
Kind of test site	: Shielded Room

**Test Setup**

Date of testing	: Refer to test result
Input voltage	: Fully charged battery
Operation mode	: A, B
Test channel	: Low / Middle / High
Ambient temperature	: 23.5 °C
Relative humidity	: 52 %
Atmospheric pressure	: 101 kPa

Test results of 100kHz Bandwidth of Frequency Band Edge by Conducted method refer to test plots, and compliance is achieved as well.

For the measurement records, refer to the appendix B & C.

## 5.1.11 Radiated Spurious Emission

**RESULT:****Pass****Test Specification**

Test standard	:	FCC Part 15.247(d) & FCC Part 15.205
Basic standard	:	ANSI C63.10: 2013
Limits	:	Refer to 15.209(a) of FCC part 15.247(d)
Kind of test site	:	3m Semi-anechoic Chamber

**Test Setup**

Date of testing	:	2021-09-29 to 2021-09-30
Input voltage	:	Fully charged battery
Operation mode	:	A, B
Test channel	:	Low / Middle / High
Ambient temperature	:	Refer to test result
Relative humidity	:	Refer to test result
Atmospheric pressure	:	101 kPa

**Remark:**

Testing was carried out within frequency range 9kHz to the tenth harmonics. Only the worst case spurious emissions configuration of the each mode were reported.

For the measurement records, refer to the appendix B & C.



## 6 Photographs of the Test Set-Up

For photographs of the test set-up, refer to the appendix A.

## 7 List of Tables

Table 1: List of Test and Measurement Equipment.....	5
Table 2: Technical Specification of EUT .....	7
Table 3: RF Channel and Frequency of Classical Bluetooth .....	8
Table 4: RF Channel and Frequency of Bluetooth Low Energy.....	9
Table 5: Auxiliary Equipment Used during Test .....	11
Table 6: Test Result of Maximum Peak Conducted Output Power, BR & EDR .....	15
Table 7: Test Result of Maximum Peak Conducted Output Power, Bluetooth LE.....	15