

RF TEST REPORT

FCC / ISED

APPLICANT

Owl Labs Inc.

MODEL NAME

MTW405

FCC ID

2ALXJ-MTW405

ISED ID

22676-MTW405

REPORT NUMBER

HA240429-OWL-001-R13

TEST REPORT

Date of Issue

June 5, 2024

Test Site

Hyundai C-Tech, Inc. dba HCT America, Inc.
1726 Ringwood Ave, San Jose, CA 95131, USA

Applicant	Owl Labs Inc.
Applicant Address	33-1/2 Union Square Somerville, MA 02143 U.S.A.
FCC ID	2ALXJ-MTW405
ISED ID	22676-MTW405
Model Name	MTW405
EUT Type	360-Degree Video Conferencing Platform
Modulation Type	OFDMA
FCC Classification	Unlicensed National Information Infrastructure (NII)
FCC Rule Part(s)	Part 15.407
ISED Rule Part(s)	RSS-247 Issue 3 (August 2023) RSS-Gen Issue 5 Amd 2 (February 2021)
Test Procedure	ANSI C63.10-2013, KDB 789033 D02 v02r01, KDB 662911 D01

The device bearing the trade name and model specified above, has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures required. The results of testing in this report apply only to the product which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Hyundai C-Tech, Inc. dba HCT America, Inc. certifies that no party to application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C 862

Tested By

John Park

Test Engineer

Reviewed By

Yongsoo Park

Technical Manager

REVISION HISTORY

The revision history for this document is shown in table.

TEST REPORT NO.	DATE	DESCRIPTION
HA240429-OWL-001-R13	June 5, 2024	Initial Issue

TABLE OF CONTENTS

1. GENERAL INFORMATION	4
2. METHODOLOGY	7
3. INSTRUMENT CALIBRATION	7
4. FACILITIES AND ACCREDITATIONS	8
5. ANTENNA REQUIREMENTS	9
6. MEASUREMENT UNCERTAINTY	10
7. DESCRIPTION OF TESTS	11
8. SUMMARY OF TEST RESULTS	24
9. TEST RESULT	28
9.1 DUTY CYCLE	28
9.2 6 dB BANDWIDTH / 26 dB BANDWIDTH / 99% BANDWIDTH	29
9.3 OUTPUT POWER	35
9.4 POWER SPECTRAL DENSITY	37
9.5 RADIATED SPURIOUS EMISSIONS	42
9.6 RADIATED RESTRICTED BAND EDGES	49
9.7 RECEIVER SPURIOUS EMISSIONS	55
10. LIST OF TEST EQUIPMENT	58
APPENDIX A. TEST SETUP PHOTOS	59
APPENDIX B. PHOTOGRAPHS OF EUT	60

1. GENERAL INFORMATION

EUT DESCRIPTION

Model	MTW405
Product Name	Meeting Owl 4+
Serial Number	Conducted : M4FC1324001C Radiated :M4FV13240003
Power Supply	20 V d.c. (USB type C - External adaptor)
RF Specification	WIFI 2.4 GHz : 802.11b/g/ n(HT20, HT40)/ ac(VHT20, VHT40)/ ax(HE20, HE40) WIFI 5 GHz : 802.11a/n(HT20/40)/ ac(VHT20/40/80)/ ax(HE20, HE40, HE80) Bluetooth 5.0 LE (1M / BR / EDR)
Transmitter Chain	WIFI 2.4 GHz / 5 GHz : 2x2 MIMO Bluetooth LE / Bluetooth BR/EDR : SISO
Operating Environment	Indoor
Operating Temperature	5 °C ~ +30 °C

RF SPECIFICATION SUBJECT TO THE REPORT

RF Specification	IEEE 802.11ax (HE20, HE40, HE80)	
Transmitter Chain	2 x 2 MIMO	
Frequency Range	U-NII 3	20 MHz BW : 5745 MHz – 5825 MHz 40 MHz BW : 5755 MHz – 5795 MHz 80 MHz BW : 5775 MHz
Max. RF Output Power	23.02 dBm (0.200 W)	
Modulation Type	OFDMA	
Antenna Specification ¹⁾	ANT1	Antenna Type : PCB Antenna Antenna Model : CU23001-1 Antenna Brand: antenova Peak Gain : 3.8 dBi
	ANT2	Antenna Type : PCB Antenna Antenna Model : CU23002-1 Antenna Brand: antenova Peak Gain : 3.2 dBi
Firmware Version ²⁾	6.4.21.22	
Hardware Version ²⁾	OWL-900-00027 Rev 5	
Date(s) of Tests	May 12, 2024 ~ June 5, 2024	

Note :

1. Antenna information is based on the document provided.
2. Firmware and Hardware Version are as received by the client.

ANTENNA CONFIGURATION

The device employs 2x2 MIMO technologies with possible configurations below.

Frequency	Configuration	SDM	Beamforming	CDD
		ANT1 + ANT2	ANT1 + ANT2	ANT1 + ANT2
2.4 GHz	802.11b	-	-	O
	802.11g	-	-	O
	802.11n	O	-	O
	802.11ac	O	O	O
	802.11ax	O	O	O
5 GHz	802.11a	-	-	O
	802.11n	O	-	O
	802.11ac	O	O	O
	802.11ax	O	O	O

The equipment under test supports Cyclic Diversity mode.

CDD mode was picked as worst case for testing even though the device support both CDD and SDM, Beamforming.

ANTENNA DIRECTIONAL GAIN

Antenna Type	Type	RF Technology	Frequency	Gain (Ant 1)	Gain (Ant 2)
PCB	Dipole	802.11b/g/n	2.4 GHz	2.90 dBi	2.90 dBi
PCB	Dipole	802.11a/n/ac	5 GHz	3.80 dBi	3.20 dBi

Directional Gain (2.4 GHz : Uncorrelated) = $10 \log[(10^{(2.90/10)} + 10^{(2.90/10)}) / 2] = 2.90 \text{ dBi}$

Directional Gain (5 GHz : Uncorrelated) = $10 \log[(10^{(3.80/10)} + 10^{(3.20/10)}) / 2] = 3.51 \text{ dBi}$

Directional Gain (2.4 GHz : Correlated) = $10 \log[(10^{(2.90/20)} + 10^{(2.90/20)})^2 / 2] = 5.91 \text{ dBi}$

Directional Gain (5 GHz : Correlated) = $10 \log[(10^{(3.80/20)} + 10^{(3.20/20)})^2 / 2] = 6.52 \text{ dBi}$

Beamforming Directional Gain (2.4 GHz) = $2.90 \text{ dBi} + 10 \log(2) = 5.91 \text{ dBi}$

Beamforming Directional Gain (5 GHz) = $3.51 \text{ dBi} + 10 \log(2) = 6.52 \text{ dBi}$

OPERATING FREQUENCY CHANNELS

Band	Frequency (MHz)	Channel	802.11a	802.11n HT20	802.11ac VHT20	802.11ax HE20
U-NII 3	5745	149	O	O	O	O
	5765	153	O	O	O	O
	5785	157	O	O	O	O
	5805	161	O	O	O	O
	5825	165	O	O	O	O

Band	Frequency (MHz)	Channel	802.11n HT40	802.11ac VHT40	802.11ax HE40
U-NII 3	5755	151	O	O	O
	5795	159	O	O	O

Band	Frequency (MHz)	Channel	802.11ac VHT80	802.11ax HE80
U-NII 3	5775	155	O	O

SUMMARY OF TARGET POWER TABLE

U-NII 2 Band		Target Power / Chain
Mode	Tone	
802.11ax HE20	SU	20 dBm $\pm$ 2 dB
	242T	20 dBm $\pm$ 2 dB
	106T	17 dBm $\pm$ 2 dB
	52T	14 dBm $\pm$ 2 dB
	26T	11 dBm $\pm$ 2 dB
802.11ax HE40	SU	20 dBm $\pm$ 2 dB
	484T	20 dBm $\pm$ 2 dB
	242T	20 dBm $\pm$ 2 dB
	106T	17 dBm $\pm$ 2 dB
	52T	14 dBm $\pm$ 2 dB
	26T	11 dBm $\pm$ 2 dB
802.11ax HE80	Full	20 dBm $\pm$ 2 dB
	996T	20 dBm $\pm$ 2 dB
	484T	20 dBm $\pm$ 2 dB
	242T	20 dBm $\pm$ 2 dB
	106T	17 dBm $\pm$ 2 dB
	52T	14 dBm $\pm$ 2 dB
	26T	11 dBm $\pm$ 2 dB

2. METHODOLOGY

The measurement procedure described in FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01 dated December 14, 2017 entitled "Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (UNII) Devices Part15, Subpart E" and ANSI C63.10 (Version : 2013) 'the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices' were used in the measurement.

EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.407 under the FCC Rules Part 15 Subpart E. / the RSS-GEN issue 5 and 2, RSS-247 issue 3.

GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1GHz. Above 1GHz with 1.5m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. Also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emission, the relative positions of this hand-held transmitter (EUT) were rotated through three orthogonal axes according to the requirements in Section 8 of ANSI C63.10. (Version: 2013)

DESCRIPTION OF TEST MODES

The EUT has been tested at 5 GHz WLAN test mode. Qualcomm Radio Control Tool was used to control the channels, power level setting at continuous TX and normal RX mode.

3. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment's, which is traceable to recognized national standards. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

4. FACILITIES AND ACCREDITATIONS

FACILITIES

The SAC (Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at 1726 Ringwood Avenue, San Jose, California 95131, USA.

The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22.

CABID : 25729



EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5. ANTENNA REQUIREMENTS

According to FCC 47 CFR §15.203:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- (1) The antenna of this E.U.T is permanently attached and there is no provision for connection to an external antenna.
- (2) The E.U.T Complies with the requirement of §15.203

According to RSS-Gen Issue 5 Amd 2 (Section 6.8) :

The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).

When measurements at the antenna port are used to determine the RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna's manufacturer.

The test report shall state the RF power, output power setting and spurious emission measurements with each antenna type that is used with the transmitter being tested.

6. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.


All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty
Output Power, Conducted	± 0.54 dB
Frequency Tolerance	± 16.78 kHz
Occupied Bandwidth	± 120.66 kHz
Unwanted Emissions, Conducted	± 0.54 dB
Radiated Emissions (below 1 GHz)	± 5.70 dB
Radiated Emissions (Above 1 GHz)	± 5.25 dB

7. DESCRIPTION OF TESTS

7.1. DUTY CYCLE

TEST SETUP

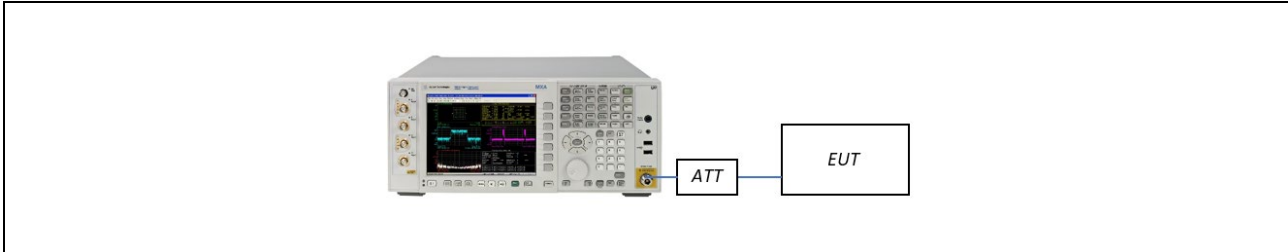

TEST PROCEDURE

The transmitter output is connected to the Spectrum Analyzer.

Measurement is performed in accordance with the section B.2 in KDB 789033 D02 v02r01.

The largest available value of RBW is 8 MHz and VBW is 50 MHz.

The zero-span method of measuring duty cycle shall not be used if $T \leq 6.25$ microseconds. ($50/6.25 = 8$)

The zero-span method was used because all measured T data are > 6.25 microseconds and both RBW and VBW are $> 50/T$.

- RBW = 8 MHz (the largest available value)
- VBW = 8 MHz ($\geq$ RBW)
- SPAN = 0 Hz
- Detector = Peak
- Number of points in sweep > 100
- Trace mode = Clear write
- Measure T_{total} and T_{on}
- Calculate Duty Cycle = T_{on} / T_{total} and Duty Cycle Factor = $10 * \log(1/\text{Duty Cycle})$


7.2. 6 dB BANDWIDTH / 26 dB BANDWIDTH / 99 % OCCUPIED BANDWIDTH

LIMIT

Emission bandwidth was measured to define the minimum frequency range which the spectrum is integrated for maximum conducted output power measurement.

Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

TEST SETUP

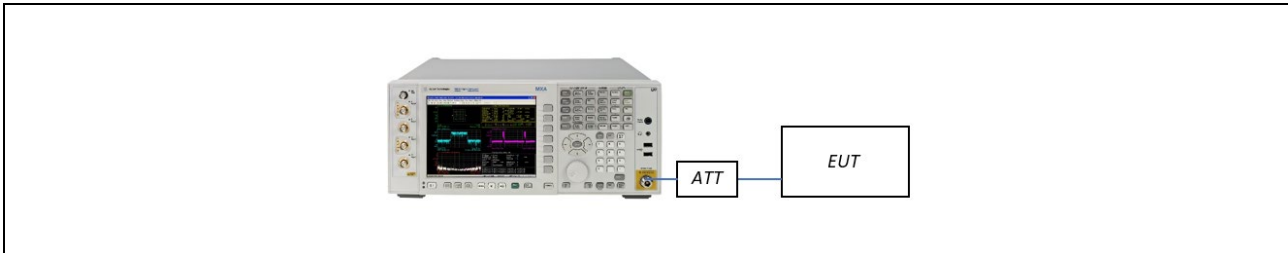

TEST PROCEDURE (26 dB Bandwidth)

Testing was performed according to the section C.1 in KDB 789033 D02 v02r01.
The transmitter output is connected to the spectrum analyzer.

- RBW = Approximately 1 % of the emission bandwidth
- VBW > RBW
- Detector = Peak
- Trace mode = max hold
- Sweep = auto couple
- Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1 %.

TEST PROCEDURE (6 dB Bandwidth)

Testing was performed according to the procedure C.1 in KDB 789033 D02 v02r01.
The transmitter output is connected to the Spectrum Analyzer.

- RBW = 100 kHz
- VBW $\geq 3 \times$ RBW
- Detector = Peak
- Trace mode = Max hold
- Allow the trace to stabilize
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

TEST PROCEDURE (99% Bandwidth)

Testing was performed according to the section D in KDB 789033 D02 v02r01.
The transmitter output is connected to the spectrum analyzer.

- RBW = 1% ~ 5% of the occupied bandwidth
- VBW $\cong$ 3 x RBW
- Detector = Peak
- Trace mode = max hold
- Sweep = auto couple
- Allow the trace to stabilize

Note:

1. The bandwidth measurement function from the spectrum analyzer is used to measure X dB bandwidth.
2. 26 dB bandwidth is used to determine the conducted power limits.


7.3. OUTPUT POWER

LIMIT

Band	47 CFR §15.407(a)(3)(i)	RSS-247, 6.2.4.2
U-NII 3	$\leq 1 \text{ W (= 30dBm)}$	$\leq 1 \text{ W (= 30dBm)}$

If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST SETUP

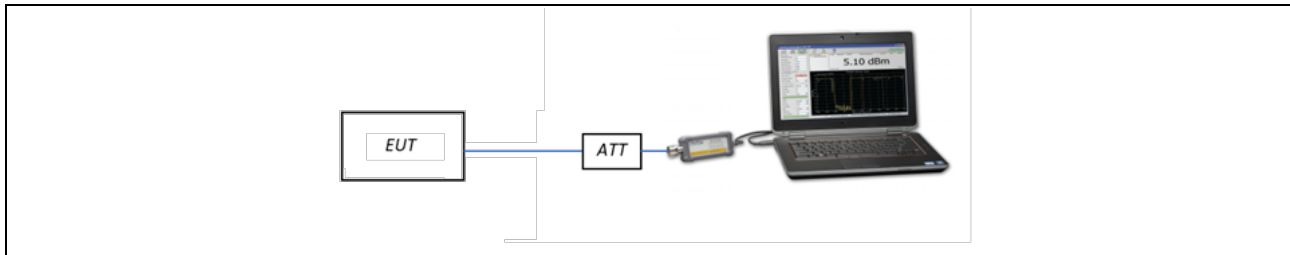

TEST PROCEDURE (Power Meter)

Refer to the section E.3 in KDB 789033 D02 v02r01

The transmitter output is connected to the Average Power Meter

- Measure the duty cycle.
- Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.

Add $10\log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times


7.4. POWER SPECTRAL DENSITY

LIMIT

Band	47 CFR §15.407(a)(3)(i)	RSS-247, 6.2.4.2
U-NII 3	$\leq 30 \text{ dBm/500 kHz}$	$\leq 30 \text{ dBm/500 kHz}$

If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST SETUP

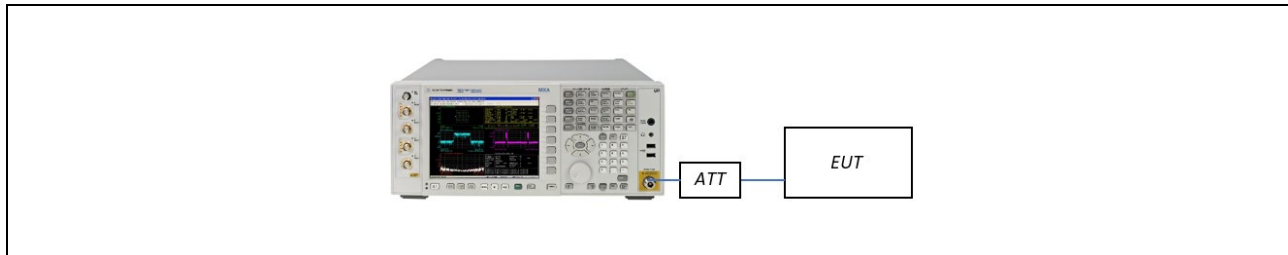

TEST PROCEDURE

Refer to the section F in KDB 789033 D02 v02r01.

- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- RBW = 510 kHz
- VBW $\geq 3 \text{ MHz}$
- Number of points in sweep $\geq 2 \times \text{span/RBW}$.
- Sweep time = auto.
- Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- Do not use sweep triggering. Allow the sweep to “free run”.
- Trace average at least 100 traces in power averaging (RMS) mode
- Use the peak search function on the spectrum analyzer to find the peak of the spectrum.
- If Method SA-2 was used, add $10 \log(1/x)$, where x is the duty cycle, to the peak of the spectrum.

Sample Calculation

Total PSD (Average) = Reading Value + ATT loss + Cable loss + Duty Cycle Factor


7.5. FREQUENCY STABILITY

LIMIT

§15.407(g) / RSS-Gen, 8.8

Fundamental emissions of the radio devices should be kept within at least the central 80% of its permitted operating frequency band to minimize the possibility of out of band operation.

TEST SETUP

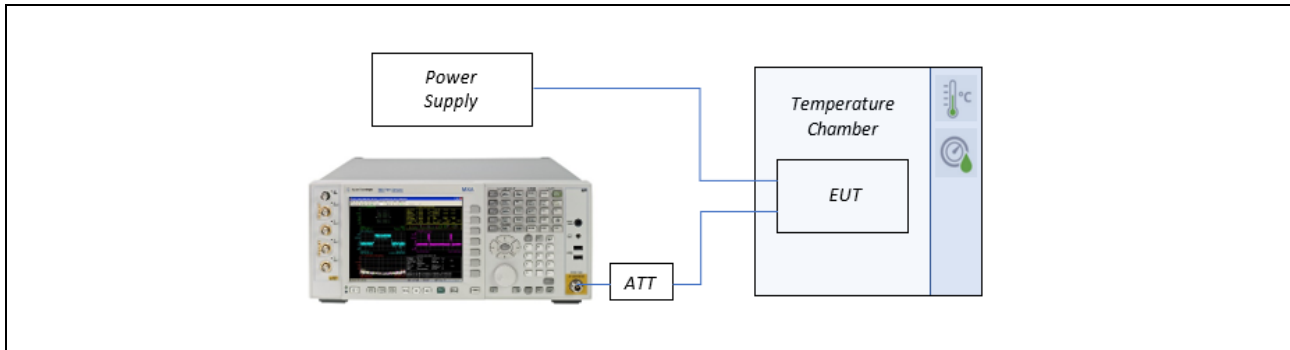

TEST PROCEDURE

- The EUT was placed inside an environmental chamber as the temperature in the chamber was varied between - 30 °C and 50 °C.
- The temperature was incremented by 10 °C intervals and the unit was allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded.
- The primary supply voltage is varied from 85% to 115% of the nominal value for non-hand carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.
- While maintaining a constant temperature inside the environmental chamber, turn the EUT ON and record the operating frequency at startup, and at 2 minutes, 5 minutes, and 10 minutes after the EUT is energized. Four measurements in total are made.

7.6. UNDESIRABLE EMISSION

LIMIT

Frequency Band	47 CFR § 15.407(b)(4) / RSS-247, 6.2.4.3
U-NII 3	In accordance with 47 CFR § 15.407(b)(4) / RSS-247, 6.2.4.3 All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

RADIATION EMISSION LIMIT

FCC : 47 CFR § 15.209		
Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

ISED : RSS-GEN Section 8.9		
Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
0.009 – 0.490	6.37/F(kHz)	300
0.490 – 1.705	63.7/F(kHz)	30
1.705 – 30	0.08	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

RECEIVER RADIATED EMISSION LIMIT

ISED : RSS-GEN Section 7.3		
Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3


RESTRICTED BANDS OF OPERATION

FCC : 47 CFR § 15.205(a)				
Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (MHz)
0.090 - 0.110	12.29 - 12.293	149.9 - 150.05	1660.0 - 1710.0	8025 - 8500
0.495 - 0.505	12.51975 - 12.52025	156.52475 - 156.52525	1718.8 - 1722.2	9000 - 9200
2.1735 - 2.1905	12.57675 - 12.57725	156.7 - 156.9	2200.0 - 2300.0	9300 - 9500
4.125 - 4.128	13.36 - 13.41	162.0125 - 167.17	2310.0 - 2390.0	10600 - 12700
4.17725 - 4.17775	16.42 - 16.423	167.72 - 173.2	2483.5 - 2500.0	13250 - 13400
4.20725 - 4.20775	16.69475 - 16.69525	240.0 - 285.0	2690.0 - 2900.0	14470 - 14500
6.215 - 6.218	16.80425 - 16.80475	322.0 - 335.4	3260.0 - 3267.0	15350 - 16200
6.26775 - 6.26825	25.5 - 25.67	399.9 - 410.0	3332.0 - 3339.0	17700 - 21400
6.31175 - 6.31225	37.5 - 38.25	608.0 - 614.0	3345.8 - 3358.0	22010 - 23120
8.291 - 8.294	73 - 74.6	960.0 - 1240.0	3600.0 - 4400.0	23600 - 24000
8.362 - 8.366	74.8 - 75.2	1300.0 - 1427.0	4500.0 - 5150.0	31200 - 31800
8.37625 - 8.38675	108 - 121.94	1435.0 - 1626.5	5350.0 - 5460.0	36430 - 36500
8.41425 - 8.41475	123 - 138	1645.5 - 1646.5	7250.0 - 7750.0	Above 38600


ISED : RSS-GEN Section 8.10				
Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (MHz)
0.090 - 0.110	8.37625 - 8.38675	108 - 138	1660 - 1710	8025 - 8500
0.495 - 0.505	8.41425 - 8.41475	149.9 - 150.05	1718.8 - 1722.2	9000 - 9200
2.1735 - 2.1905	12.29 - 12.293	156.52475 - 156.52525	2200 - 2300	9300 - 9500
3.020 - 3.026	12.51975 - 12.52025	156.7 - 156.9	2310 - 2390	10600 - 12700
4.125 - 4.128	12.57675 - 12.57725	162.0125 - 167.17	2483.5 - 2500	13250 - 13400
4.17725 - 4.17775	13.36 - 13.41	167.72 - 173.2	2655 - 2900	14470 - 14500
4.20725 - 4.20775	16.42 - 16.423	240 - 285	3260 - 3267	15350 - 16200
5.677 - 5.683	16.69475 - 16.69525	322 - 335.4	3332 - 3339	17700 - 21400
6.215 - 6.218	16.80425 - 16.80475	399.9 - 410	3345.8 - 3358	22010 - 23120
6.26775 - 6.26825	25.5 - 25.67	608 - 614	3500 - 4400	23600 - 24000
6.31175 - 6.31225	37.5 - 38.25	960 - 1427	4500 - 5150	31200 - 31800
8.291 - 8.294	73 - 74.6	1435 - 1626.5	5350 - 5460	36430 - 36500
8.362 - 8.366	74.8 - 75.2	1645.5 - 1646.5	7250 - 7750	Above 38600

TEST SETUP


Below 30 MHz

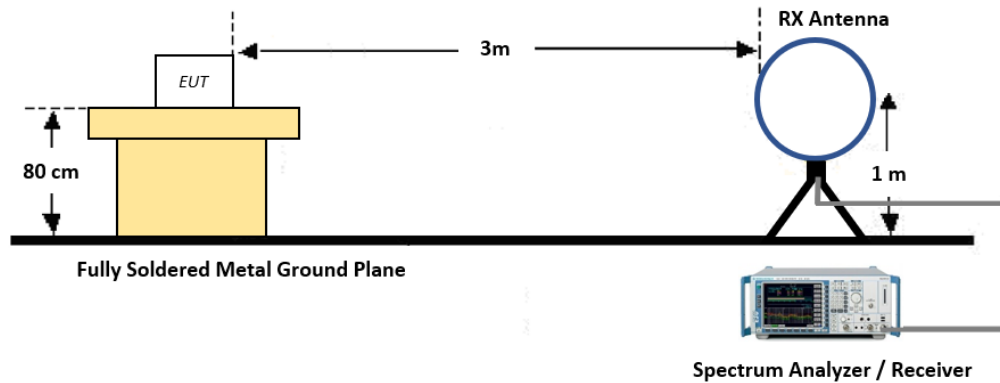

30 MHz - 1 GHz

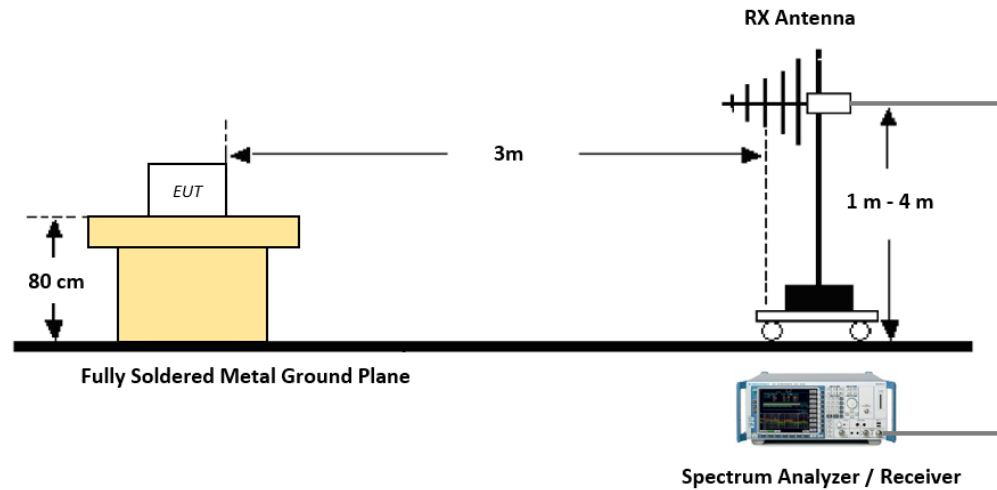

Above 1 GHz

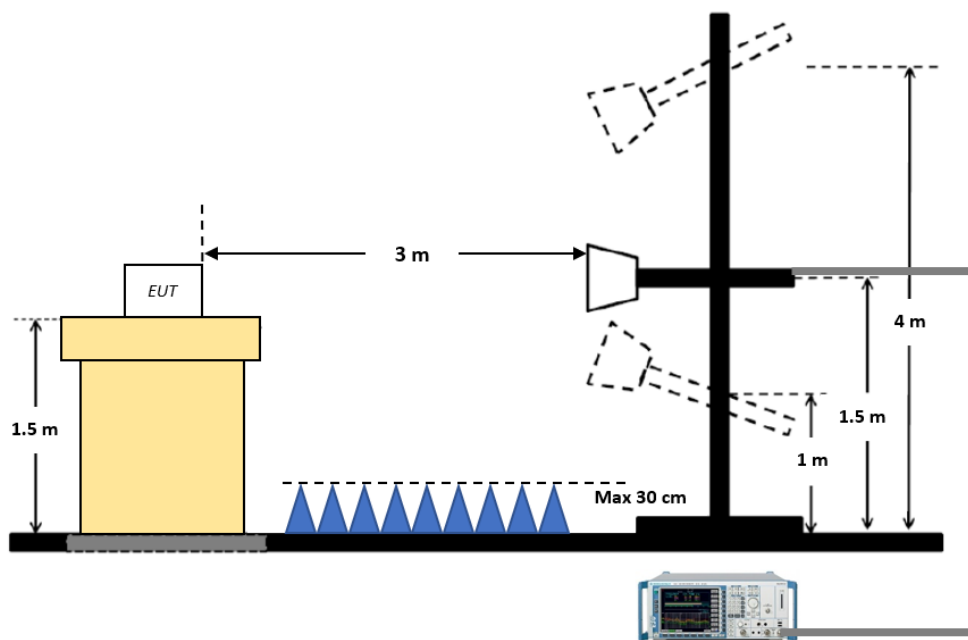

TEST PROCEDURE OF RADIATED SPURIOUS EMISSION (BELOW 30 MHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3m from the EUT
3. The EUT is placed on a turntable, which is 0.8m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Distance Correction Factor (0.009 MHz – 0.490 MHz) = $40 \cdot \log(3 \text{ m}/300 \text{ m}) = -80 \text{ dB}$
Measurement Distance: 3 m
7. Distance Correction Factor (0.490 MHz – 30 MHz) = $40 \cdot \log(3 \text{ m}/30 \text{ m}) = -40 \text{ dB}$
Measurement Distance: 3 m
8. Spectrum Setting
 - Frequency Range = 9 kHz ~ 30 MHz
 - Detector = Peak
 - Trace = Max hold
 - RBW = 9 kHz
 - VBW $\geq 3 \cdot \text{RBW}$
9. Total = Reading Value + Antenna Factor (A.F) + Cable Loss (C.L)
10. There is a comparison data both open-field test site and alternative test site – semi-Anechoic chamber according to 414788 D01. And the results are properly calibrated.

TEST PROCEDURE OF RADIATED SPURIOUS EMISSION (30 MHz – 1 GHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8 m above ground plane.
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
4. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
5. Spectrum Setting
 - (1) Measurement Type (Peak):
 - Measured Frequency Range: 30 MHz – 1 GHz
 - Detector = Peak
 - Trace = Max hold
 - RBW = 100 kHz
 - VBW $\geq 3 \cdot \text{RBW}$
 - (2) Measurement Type(Quasi-peak):
 - Measured Frequency Range: 30 MHz – 1 GHz
 - Detector = Quasi-Peak
 - RBW = 120 kHz
6. Total = Reading Value + Antenna Factor (A.F) + Cable Loss (C.L)

TEST PROCEDURE OF RADIATED SPURIOUS EMISSION (ABOVE 1 GHz)

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.
8. Spectrum Setting

(1) Measurement Type(Peak, G.5 in KDB 789033 v02r01):

- RBW = 1 MHz
- VBW $\geq$ 3 MHz
- Detector = Peak
- Sweep Time = auto
- Trace mode = Max hold
- Allow sweeps to continue until the trace stabilizes.
- Note that if the transmission is not continuous, the time required for the trace to stabilize will increase by a factor of approximately $1/x$, where x is the duty cycle.

(2) Measurement Type(Average, G.6.d in KDB 789033 v02r01):

- RBW = 1 MHz
- VBW(Duty cycle $\geq$ 98 percent) = VBW $\leq$ RBW/100(i.e., 10 kHz) but not less than 10 Hz.
- VBW(Duty cycle is < 98 percent) = VBW $\geq$ $1/T$, where T is the minimum transmission duration.
- The analyzer is set to linear detector mode.
- Detector = Peak.
- Sweep time = auto.
- Trace mode = Max hold.
- Allow max hold to run for at least 50 traces if the transmitted signal is continuous or has at least 98 percent duty cycle. For lower duty cycles, increase the minimum number of traces by a factor of $1/x$, where x is the duty cycle.

9. Measurement value only up to 6 maximum emissions noted or would be lesser if no specific emissions from the EUT are recorded (i.e.: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor
10. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency (or 40 GHz whichever comes first)
11. Sample Calculation

(1) Total (Peak) = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G)

(2) Total (Average, Duty $\geq$ 98%) = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G)

(3) Total (Average, Duty < 98%) = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Duty Cycle Factor

TEST PROCEDURE OF RADIATED RESTRICTED BAND EDGE

1. Radiated test is performed with hopping off (if there is any)
2. The EUT is placed on a turntable, which is 1.5 m above ground plane.
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
4. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
5. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.
8. Spectrum Setting

(1) Measurement Type(Peak, G.5 in KDB 789033 v02r01):

- RBW = 1 MHz
- VBW $\geq$ 3 MHz
- Detector = Peak
- Sweep Time = auto
- Trace mode = Max hold
- Allow sweeps to continue until the trace stabilizes.
- Note that if the transmission is not continuous, the time required for the trace to stabilize will increase by a factor of approximately $1/x$, where x is the duty cycle.

(2) Measurement Type(Average, G.6.d in KDB 789033 v02r01):

- RBW = 1 MHz
- VBW(Duty cycle $\geq$ 98 percent) = VBW $\leq$ RBW/100(i.e., 10 kHz) but not less than 10 Hz.
- VBW(Duty cycle is < 98 percent) = VBW $\geq$ $1/T$, where T is the minimum transmission duration.
- The analyzer is set to linear detector mode.
- Detector = Peak.
- Sweep time = auto.
- Trace mode = Max hold.
- Allow max hold to run for at least 50 traces if the transmitted signal is continuous or has at least 98 percent duty cycle. For lower duty cycles, increase the minimum number of traces by a factor of $1/x$, where x is the duty cycle.

9. Sample Calculation

(1) Total (Peak) = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L)

(2) Total (Average, Duty $\geq$ 98%) = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G)

(3) Total (Average, Duty < 98%) = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Duty Cycle Factor

7.7. AC POWER LINE CONDUCTED EMISSIONS

LIMIT

47 CFR § 15.207 / RSS-GEN Section 8.8

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

*Decreases with the logarithm of the frequency.

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

TEST SETUP

See test photographs attached in Annex A for the actual connections between EUT and support equipment.

TEST PROCEDURE

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors : Quasi Peak and Average Detector.

According to FCC KDB 174176 D01 Line Conducted FAQ v01r01 :

Devices Operating Above 30 MHz

For a device with a permanent or detachable antenna operating above 30 MHz, measurements must be performed with the antenna connected as specified in clause 6.2 of ANSI C63.10-2013.

Devices Operating Below 30 MHz

For a device with a permanent or detachable antenna operating at or below 30 MHz, the FCC will accept measurements performed with a suitable dummy load in lieu of the antenna under the following conditions:

- (1) Perform the AC power-line conducted tests with the antenna connected to determine compliance with Section 15.207 limits outside the transmitter's fundamental emission band;
- (2) Retest with a dummy load in lieu of the antenna to determine compliance with Section 15.207 limits within the transmitter's fundamental emission band. For a detachable antenna, remove the antenna and connect a suitable dummy load to the antenna connector. For a permanent antenna, remove the antenna and terminate the RF output with a dummy load or network which simulates the antenna in the fundamental frequency band. All measurements must be performed as specified in clause 6.2 of ANSI C63.10-2013.

Sample Calculation

Quasi-peak(Final Result) = Reading Value + Correction Factor

8. SUMMARY OF TEST RESULTS

Test Description	FCC Part Section(s)	ISED Part Section(s)	Test Limit	Test Condition	Test Result
26 dB Bandwidth	§15.407	-	N/A (For power measurement)	Conducted	-
6 dB Bandwidth	§15.407(e)	RSS-247, 6.2.4.2	≥ 500 kHz		PASS
Occupied bandwidth	-	RSS-Gen, 6.7	N/A		
Maximum Conducted Output Power	§15.407(a)(3)(i)	RSS-247, 6.2.4.2	≤ 1 W		PASS
Power Spectral Density	§15.407(a)(3)(i)	RSS-247, 6.2.4.2	≤ 30 dBm/500 kHz		PASS
Frequency Stability	§15.407(g) §2.1055	RSS-Gen, 8.11	Maintained within the band		PASS ⁽¹⁾
AC Power line Conducted Emissions	§15.207 §15.407(b)(9)	RSS-Gen, 8.8	cf. Section 7.7		PASS ⁽¹⁾
Undesirable Emissions	§15.407(b)(4)	RSS-247, 6.2.4.3	cf. Section 7.6	Radiated	PASS
Radiated Spurious Emissions	§15.209 §15.407(b)(9)	RSS-Gen, 8.9	cf. Section 7.6		PASS
Radiated Restricted Band Edge	§15.407(b)(7) §15.205(a)	RSS-Gen, 8.10	cf. Section 7.6		PASS
Receiver Spurious Emissions	-	RSS-Gen, 7.3	cf. Section 7.6		PASS

Note :

1. Evaluated on original certification.

WORST CASE CONFIGURATION

1. EUT Axis

- All X, Y, and Z positions for horizontal / vertical antenna polarization were investigated to find the worst-case position.
- X position was selected for the final evaluation.

2. Operations with all the data rates available were investigated for each different channel BW mode. Lowest data rate was selected as the worst case.

3. Radiated test was performed at the worst case 2 x TX CDD mode

- The target power of SISO mode per chain is the same as the target power of MIMO mode per chain.

4. Worst-case test mode

- All the RU tone for each bandwidth were investigated, and the modes below were reported as the worst-case conditions.

U-NII 2 Band		Tone	RU Offset
Test	Mode		
All Conducted Tests	802.11ax HE20	SU	-
		106T	53, 54
		52T	37, 38, 40
		26T	0, 4, 8
	802.11ax HE40	SU	-
		242T	61, 62
		106T	53, 54, 56
	802.11ax HE80	SU	-
Radiated Emission Tests	802.11ax HE20	SU	-
		26T	0, 4, 8
	802.11ax HE40	SU	-
		242T	61, 62
	802.11ax HE80	SU	-
		484T	65, 66
		242T	61, 64


WORST CASE DATA RATE

Mode	Worst Case Data Rate
802.11ax HE20	MCS0
802.11ax HE40	MCS0
802.11ax HE80	MCS0

CHANNEL UNDER TEST

Mode (U-NII 3)	Low Channel (MHz)	Mid Channel (MHz)	High Channel (MHz)
802.11ax HE20	5745	5785	5825
802.11ax HE40	5745	5785	5825
	5755	-	5795
802.11ax HE80	5745	5785	5825
	5755	-	5795
	5775		

TEST CONFIGURATION

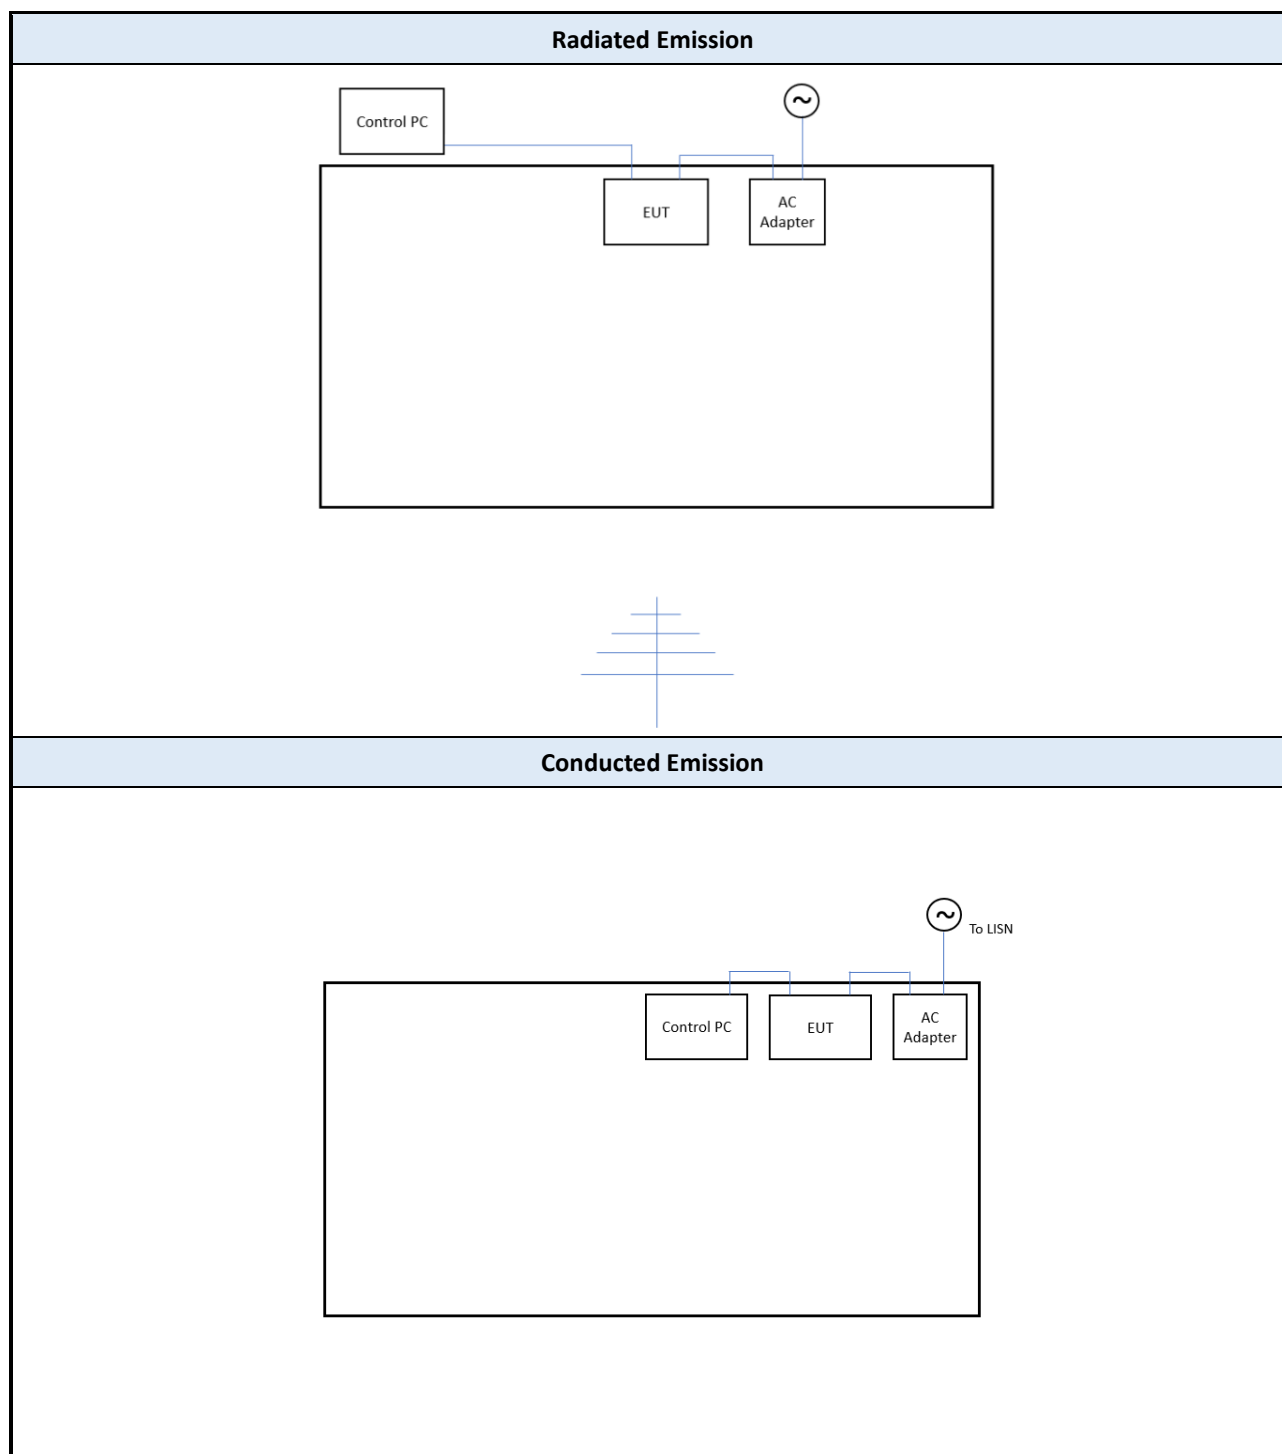

LIST OF SUPPORT EQUIPMENT

Equipment Type	Model No.	Serial No.	Manufacturer	Qty	Note
Power Supply	PA-1650-58	165058LT33803287PEA01	LITEON	1	Input : 100-240 V a.c., 50-60 Hz, 1.6 A Output : 20 V d.c., 3.25 A
Laptop	14-dq1038wrn	5CD04524LL	HP	1	For EUT control

9. TEST RESULT

9.1 DUTY CYCLE


Duty cycle is 100 % continuous.

9.2 6 dB BANDWIDTH / 26 dB BANDWIDTH / 99% BANDWIDTH

U-NII 3 Band				99% Bandwidth (MHz)		26 dB Bandwidth (MHz)	
Mode / Tone	Frequency (MHz)	Channel	Offset	Chain 0	Chain 1	Chain 0	Chain 1
802.11ax HE20 / SU	5745	149	-	18.975	18.929	31.479	20.539
	5785	157	-	19.104	18.931	31.803	24.244
	5825	165	-	19.282	18.992	36.592	25.091
802.11ax HE20 / 106T	5745	149	53	18.008	17.892	20.728	19.454
			54	14.770	17.310	17.577	18.730
	5785	157	53	10.691	13.562	22.661	16.803
			54	17.812	17.011	21.044	21.089
	5825	165	53	13.549	11.188	22.378	20.750
			54	18.191	18.140	20.292	21.555
802.11ax HE20 / 52T	5745	149	37	18.290	16.106	19.966	17.251
			38	14.546	14.150	17.702	15.351
			40	18.087	17.081	19.889	18.249
	5785	157	37	12.158	17.829	13.558	18.857
			38	14.246	16.768	18.792	18.304
			40	14.872	18.289	19.529	19.560
	5825	165	37	11.078	15.686	14.004	17.006
			38	15.565	7.582	16.338	12.863
			40	17.735	17.578	19.017	18.788
802.11ax HE20 / 26T	5745	149	0	11.517	17.408	12.481	18.571
			4	13.902	16.197	15.952	16.916
			8	17.934	15.980	19.175	16.982
	5785	157	0	15.507	17.292	16.511	18.279
			4	10.225	13.989	14.667	15.404
			8	15.069	16.039	19.827	17.358
	5825	165	0	18.381	9.872	19.548	11.836
			4	13.265	16.700	17.816	17.662
			8	17.782	17.385	19.784	18.143
802.11ax HE40 / SU	5755	151	-	38.034	37.863	67.828	40.854
	5795	159	-	38.525	37.787	77.789	44.462
802.11ax HE40 / 242T	5755	151	61	35.751	37.086	57.076	44.349
			62	35.854	37.560	64.042	49.818
	5795	159	61	38.790	35.665	64.139	49.262
			62	30.780	36.927	70.089	61.680
802.11ax HE40 / 106T	5755	151	53	37.465	35.492	39.931	37.774
			54	36.272	33.074	38.185	34.993
			56	35.522	35.852	43.899	38.724
	5795	159	53	30.500	22.554	41.187	25.113
			54	21.237	35.486	28.009	37.205
			56	19.669	37.611	27.250	39.754
802.11ax HE80 / SU	5775	155	-	78.165	77.414	136.051	86.309

U-NII 3 Band				6 dB Bandwidth (MHz)		
Mode / Tone	Frequency (MHz)	Channel	Offset	Chain 0	Chain 1	Limit
802.11ax HE20 / SU	5745	149	-	18.557	17.818	≥ 0.5
	5785	157	-	18.905	17.507	≥ 0.5
	5825	165	-	18.486	16.369	≥ 0.5
802.11ax HE20 / 106T	5745	149	53	16.072	13.374	≥ 0.5
			54	13.575	16.062	≥ 0.5
	5785	157	53	18.085	13.316	≥ 0.5
			54	12.397	15.919	≥ 0.5
	5825	165	53	18.105	18.060	≥ 0.5
			54	11.099	17.127	≥ 0.5
802.11ax HE20 / 52T	5745	149	37	13.352	13.286	≥ 0.5
			38	12.505	11.620	≥ 0.5
			40	17.061	17.111	≥ 0.5
	5785	157	37	15.788	8.276	≥ 0.5
			38	11.674	9.085	≥ 0.5
			40	14.574	13.274	≥ 0.5
	5825	165	37	17.069	12.116	≥ 0.5
			38	8.806	11.638	≥ 0.5
			40	15.721	13.268	≥ 0.5
802.11ax HE20 / 26T	5745	149	0	12.481	18.571	≥ 0.5
			4	2.599	6.348	≥ 0.5
			8	2.080	14.515	≥ 0.5
	5785	157	0	2.028	2.042	≥ 0.5
			4	2.632	2.641	≥ 0.5
			8	2.067	2.094	≥ 0.5
	5825	165	0	4.523	2.048	≥ 0.5
			4	2.627	2.664	≥ 0.5
			8	2.038	15.828	≥ 0.5
802.11ax HE40 / SU	5755	151	-	37.290	37.476	≥ 0.5
	5795	159	-	38.058	36.141	≥ 0.5
802.11ax HE40 / 242T	5755	151	61	18.953	32.934	≥ 0.5
			62	36.619	34.269	≥ 0.5
	5795	159	61	27.710	36.708	≥ 0.5
			62	35.437	30.470	≥ 0.5
802.11ax HE40 / 106T	5755	151	53	32.725	25.297	≥ 0.5
			54	20.156	23.800	≥ 0.5
			56	36.594	31.535	≥ 0.5
	5795	159	53	31.516	34.083	≥ 0.5
			54	18.861	12.386	≥ 0.5
			56	36.533	26.596	≥ 0.5
802.11ax HE80 / SU	5775	155	-	74.046	75.979	≥ 0.5


TEST PLOTS

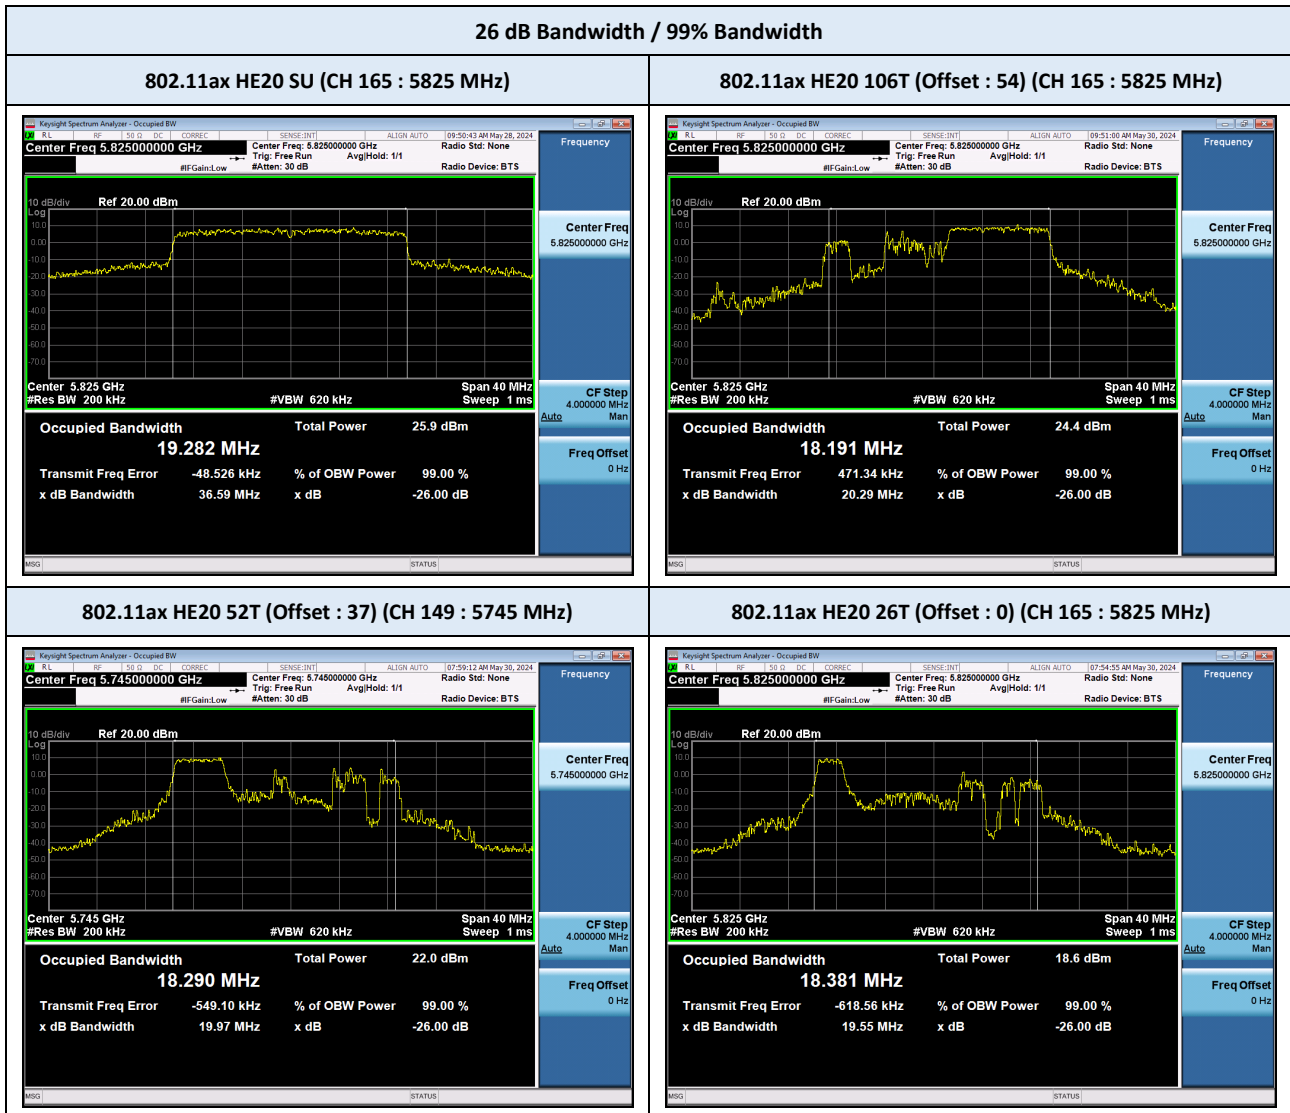

Note :

The worst plots are reported for each tone and bandwidth


TEST PLOTS

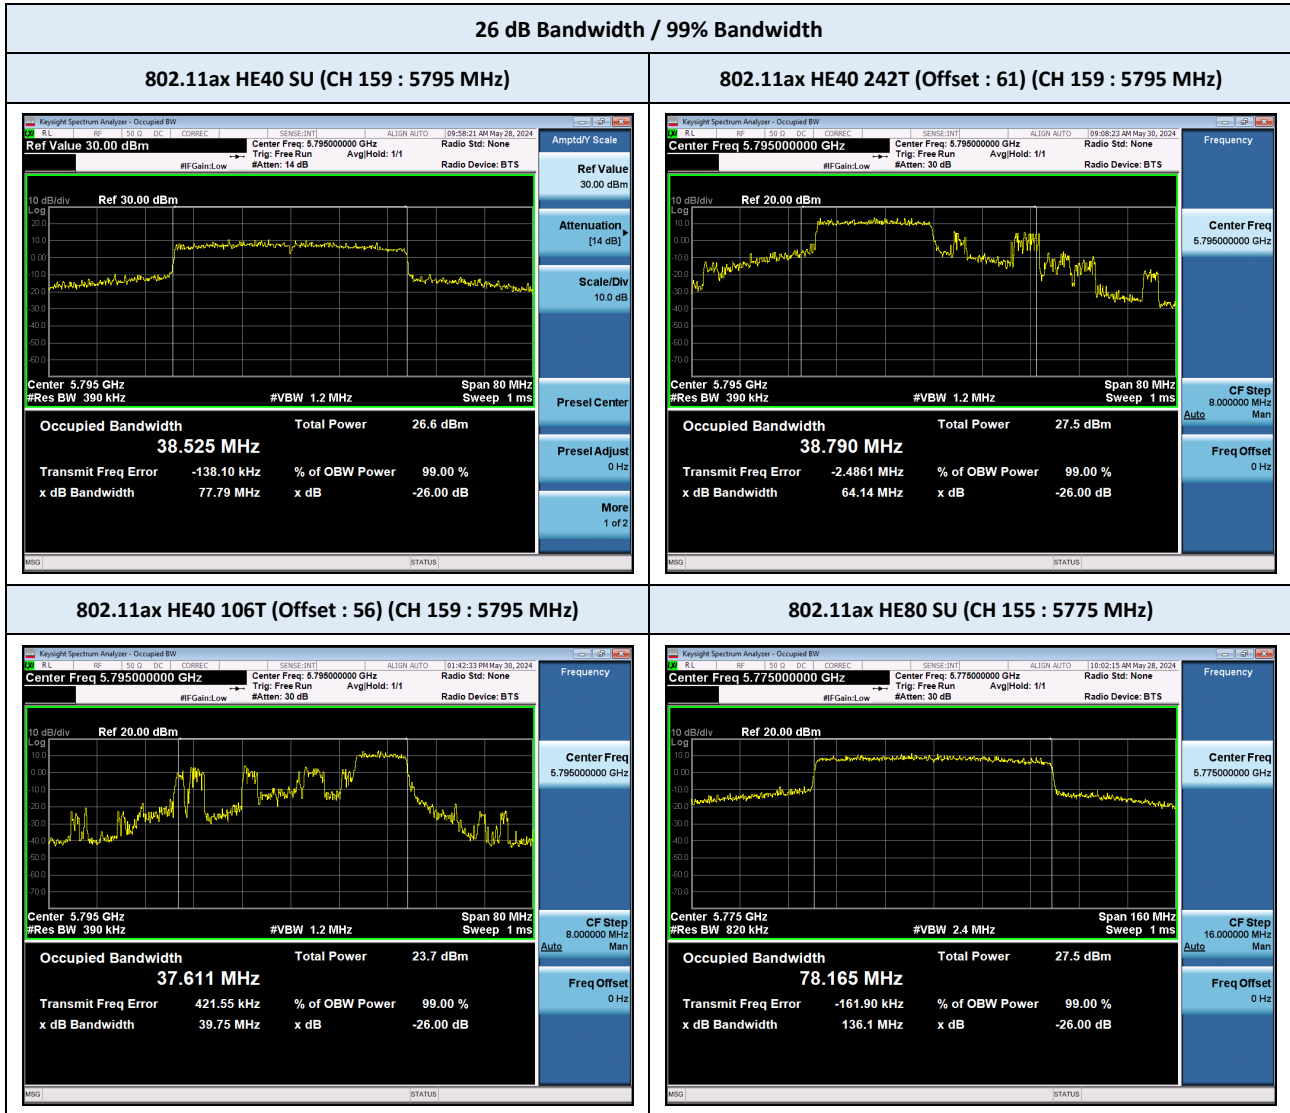

Note :

The worst plots are reported for each tone and bandwidth


TEST PLOTS

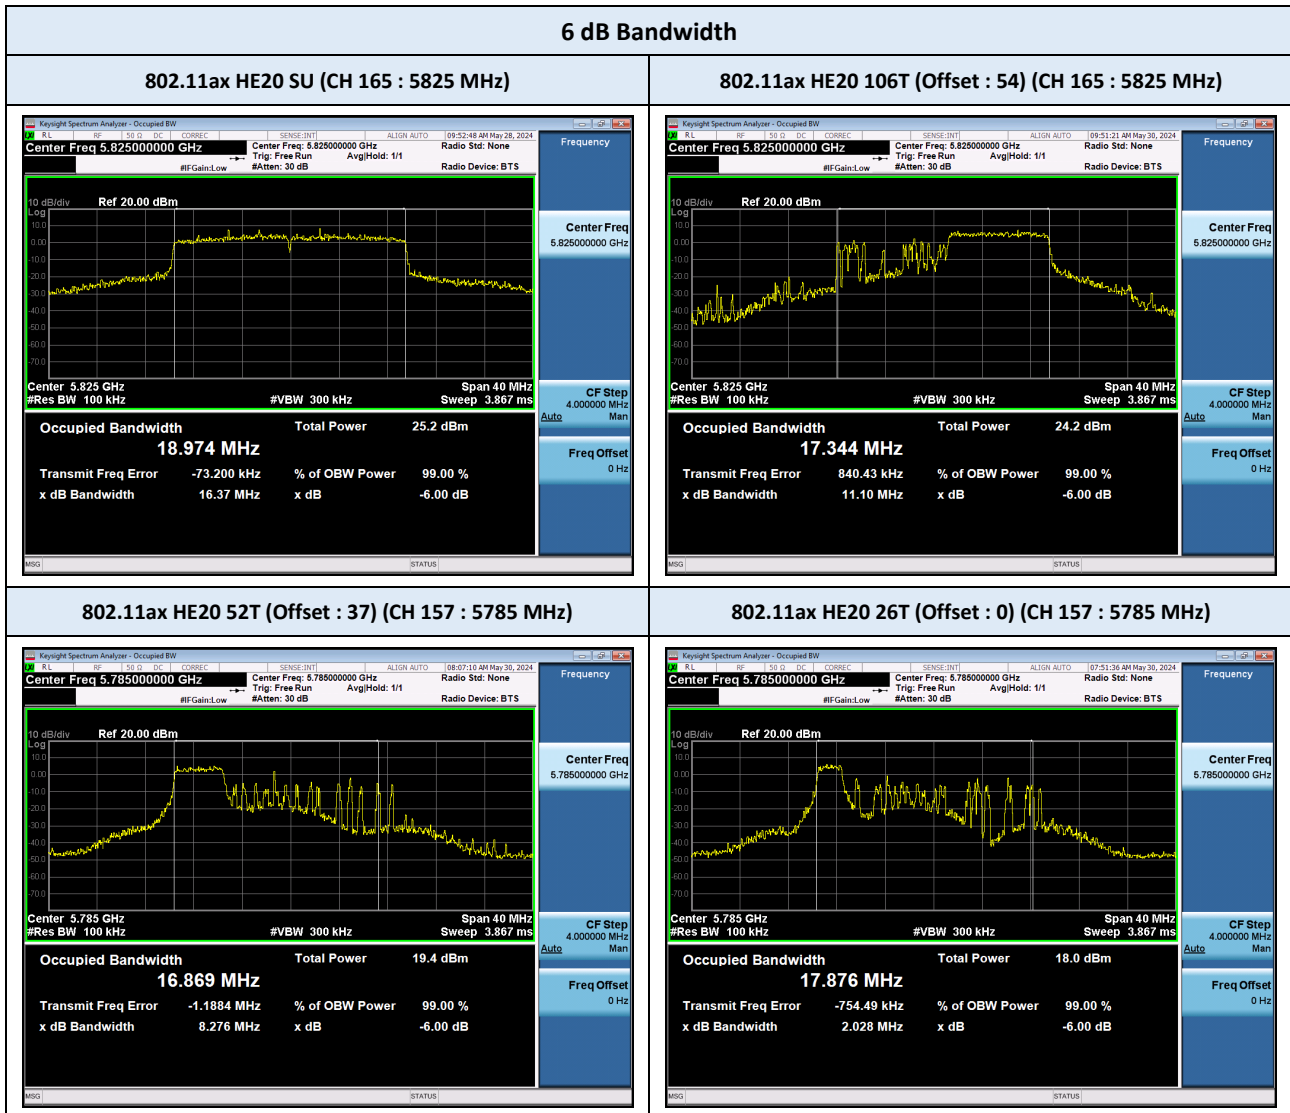

Note :

The worst plots are reported for each tone and bandwidth

TEST PLOTS

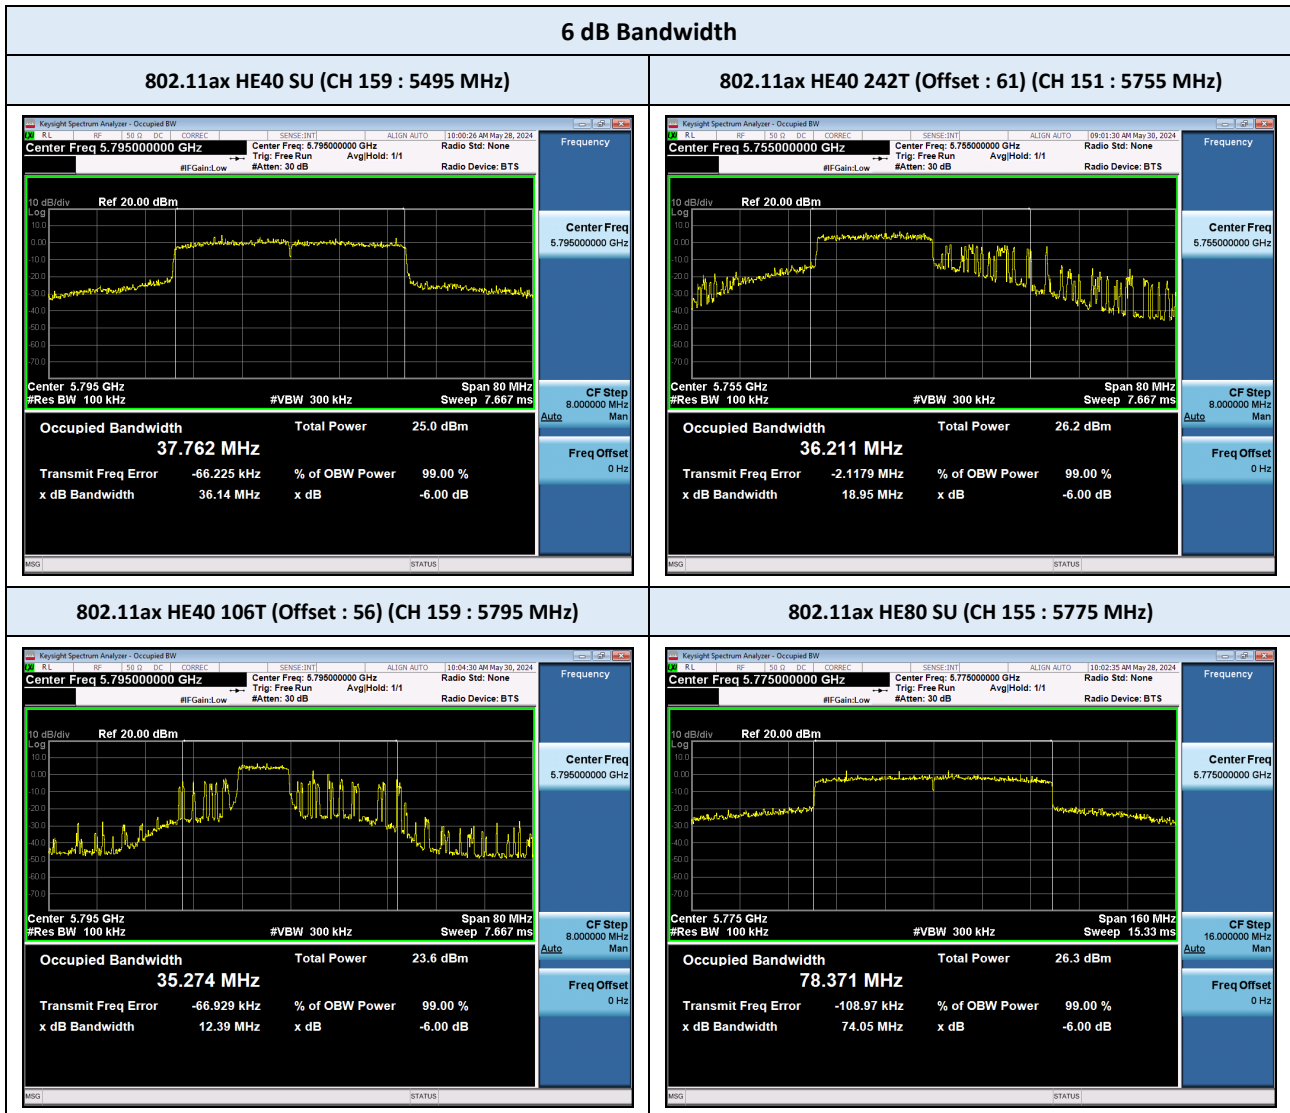

Note :

The worst plots are reported for each tone and bandwidth

9.3 OUTPUT POWER

U-NII 3 Band				Test Result				Limit (dBm)
Mode / Tone	Frequency (MHz)	Channel	Offset	Measured Power (dBm)		Duty Factor (dB)	Total Power (dBm)	
				Chain 0	Chain 1		All Chain	
802.11ax HE20 / SU	5745	149	-	19.60	19.13	-	22.38	29.48
	5785	157	-	19.42	18.70	-	22.08	29.48
	5825	165	-	19.31	18.51	-	21.94	29.48
802.11ax HE20 / 106T	5745	149	53	17.64	17.09	-	20.38	29.48
			54	17.27	16.69	-	20.00	29.48
	5785	157	53	17.56	16.79	-	20.20	29.48
			54	17.21	16.24	-	19.76	29.48
	5825	165	53	17.30	16.48	-	19.92	29.48
			54	17.37	16.81	-	20.10	29.48
802.11ax HE20 / 52T	5745	149	37	14.77	14.18	-	17.50	29.48
			38	14.69	14.09	-	17.41	29.48
			40	14.31	13.60	-	16.98	29.48
	5785	157	37	14.73	13.86	-	17.33	29.48
			38	14.68	13.80	-	17.27	29.48
			40	14.34	13.29	-	16.86	29.48
	5825	165	37	14.55	13.36	-	17.00	29.48
			38	14.66	13.65	-	17.20	29.48
			40	14.84	13.90	-	17.40	29.48
802.11ax HE20 / 26T	5745	149	0	11.61	11.13	-	14.38	29.48
			4	11.54	10.93	-	14.25	29.48
			8	11.44	10.59	-	14.05	29.48
	5785	157	0	11.76	10.89	-	14.36	29.48
			4	11.60	10.76	-	14.21	29.48
			8	11.32	10.29	-	13.85	29.48
	5825	165	0	11.48	10.17	-	13.88	29.48
			4	11.66	10.67	-	14.21	29.48
			8	11.94	10.83	-	14.43	29.48

Note(s) :

1. The limit is reduced as follows considering beamforming gain.
Conducted Power limit = 30 dBm – (6.52 dBi – 6 dBi) = 29.48 dBm
2. Duty factor is not applied since the duty cycle is 100 %.

U-NII 3 Band				Test Result				Limit (dBm)
Mode / Tone	Frequency (MHz)	Channel	Offset	Measured Power (dBm)		Duty Factor (dB)	Total Power (dBm)	
				Chain 0	Chain 1		All Chain	
802.11ax HE40 / SU	5755	151	-	20.00	19.44	-	22.74	29.48
	5795	159	-	19.88	18.75	-	22.36	29.48
802.11ax HE40 / 242T	5755	151	61	20.29	19.72	-	23.02	29.48
			62	19.91	19.65	-	22.79	29.48
	5795	159	61	20.24	19.27	-	22.79	29.48
			62	19.73	18.69	-	22.25	29.48
802.11ax HE40 / 106T	5755	151	53	18.13	17.51	-	20.84	29.48
			54	18.35	17.67	-	21.03	29.48
			56	17.53	17.26	-	20.41	29.48
	5795	159	53	18.19	17.30	-	20.78	29.48
			54	18.24	17.27	-	20.79	29.48
			56	17.29	16.29	-	19.83	29.48
802.11ax HE80 / SU	5775	155	-	19.91	19.09	-	22.53	29.48

Note(s) :

1. The limit is reduced as follows considering beamforming gain.
Conducted Power limit = 30 dBm – (6.52 dBi – 6 dBi) = 29.48 dBm
2. Duty factor is not applied since the duty cycle is 100 %.

9.4 POWER SPECTRAL DENSITY

U-NII 3 Band				Test Result				Limit (dBm/500kHz)
Mode / Tone	Frequency (MHz)	Channel	Offset	Measured PSD (dBm/500kHz)		Duty Factor (dB)	Total PSD (dBm/500kHz)	
				Chain 0	Chain 1		All Chain	
802.11ax HE20 /SU	5745	149	-	5.63	5.48	-	8.57	29.48
	5785	157	-	5.36	5.19	-	8.29	29.48
	5825	165	-	5.25	4.62	-	7.96	29.48
802.11ax HE20 / 106T	5745	149	53	6.61	6.00	-	9.33	29.48
			54	6.16	5.73	-	8.96	29.48
	5785	157	53	6.69	5.78	-	9.27	29.48
			54	6.41	5.21	-	8.86	29.48
	5825	165	53	6.40	5.40	-	8.94	29.48
			54	6.48	5.94	-	9.22	29.48
802.11ax HE20 / 52T	5745	149	37	6.77	6.21	-	9.51	29.48
			38	6.58	5.89	-	9.26	29.48
			40	6.51	5.81	-	9.18	29.48
	5785	157	37	6.74	5.65	-	9.24	29.48
			38	6.62	5.66	-	9.17	29.48
			40	6.27	5.33	-	8.84	29.48
	5825	165	37	6.63	5.44	-	9.08	29.48
			38	6.81	5.36	-	9.16	29.48
			40	7.22	5.97	-	9.65	29.48
802.11ax HE20 / 26T	5745	149	0	6.86	6.24	-	9.57	29.48
			4	6.19	5.34	-	8.79	29.48
			8	6.58	5.49	-	9.08	29.48
	5785	157	0	6.80	5.79	-	9.33	29.48
			4	6.30	5.29	-	8.84	29.48
			8	6.38	5.35	-	8.90	29.48
	5825	165	0	6.36	5.26	-	8.85	29.48
			4	6.44	5.13	-	8.85	29.48
			8	6.74	5.93	-	9.36	29.48

Note :


1. Conducted PSD limit = 30 dBm/500kHz – (6.52 dBi – 6 dBi) = 29.48 dBm/500kHz
2. Duty factor is not applied since the duty cycle is 100 %.

U-NII 3 Band				Test Result				Limit (dBm/500kHz)
Mode / Tone	Frequency (MHz)	Channel	Offset	Measured PSD (dBm/500kHz)		Duty Factor (dB)	Total PSD (dBm/500kHz)	
				Chain 0	Chain 1		All Chain	
802.11ax HE40 /SU	5755	151	-	3.13	2.81	-	5.98	29.48
	5795	159	-	3.04	1.98	-	5.55	29.48
802.11ax HE40 / 242T	5755	151	61	5.85	5.12	-	8.51	29.48
			62	5.75	5.19	-	8.49	29.48
	5795	159	61	5.50	4.77	-	8.16	29.48
			62	5.25	4.38	-	7.85	29.48
802.11ax HE40 / 106T	5755	151	53	7.13	6.33	-	9.76	29.48
			54	7.41	6.60	-	10.04	29.48
			56	6.36	6.26	-	9.32	29.48
	5795	159	53	7.25	6.32	-	9.82	29.48
			54	7.24	6.11	-	9.72	29.48
			56	6.27	5.24	-	8.80	29.48
802.11ax HE80 /SU	5775	155	-	-0.03	-0.53	-	2.74	29.48

Note :

1. Conducted PSD limit = 30 dBm/500kHz – (6.52 dBi – 6 dBi) = 29.48 dBm/500kHz
2. Duty factor is not applied since the duty cycle is 100 %.


TEST PLOTS

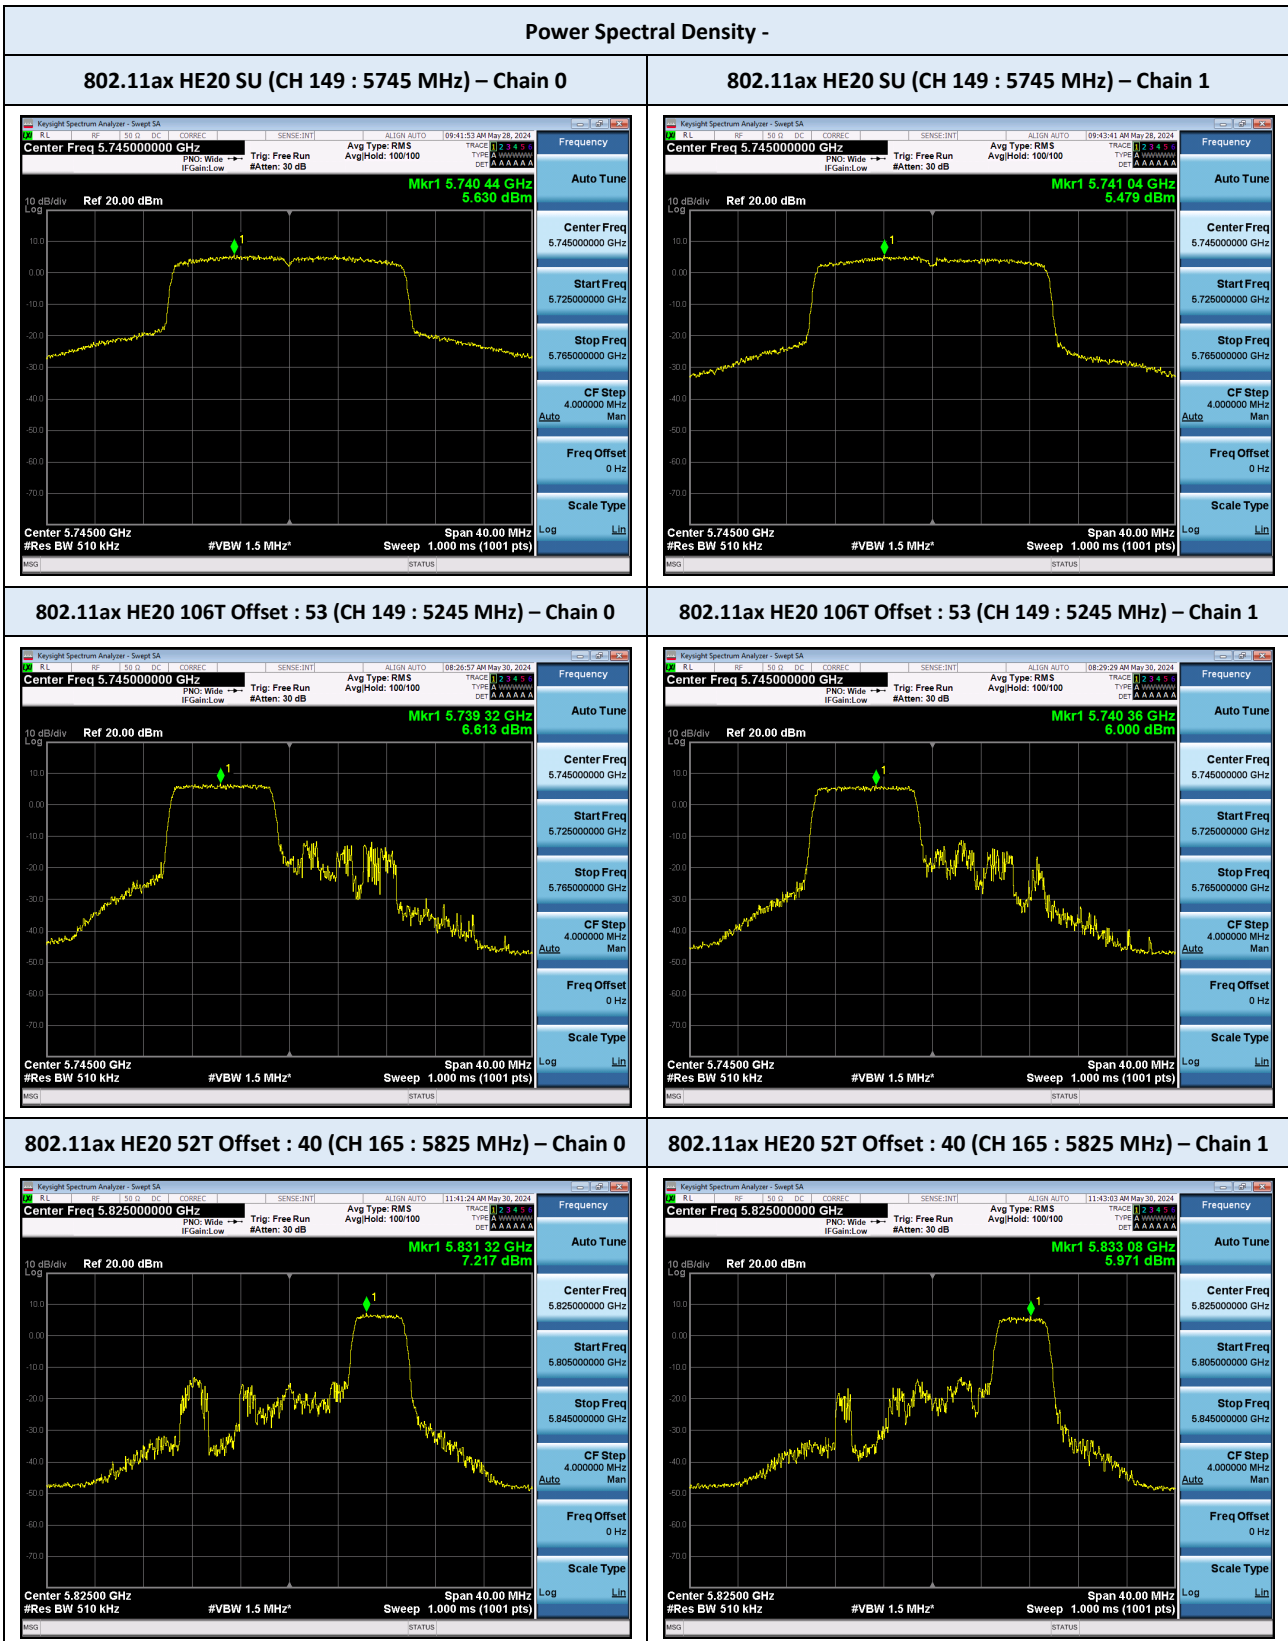

Note :

The worst plots are reported for each tone and bandwidth


TEST PLOTS

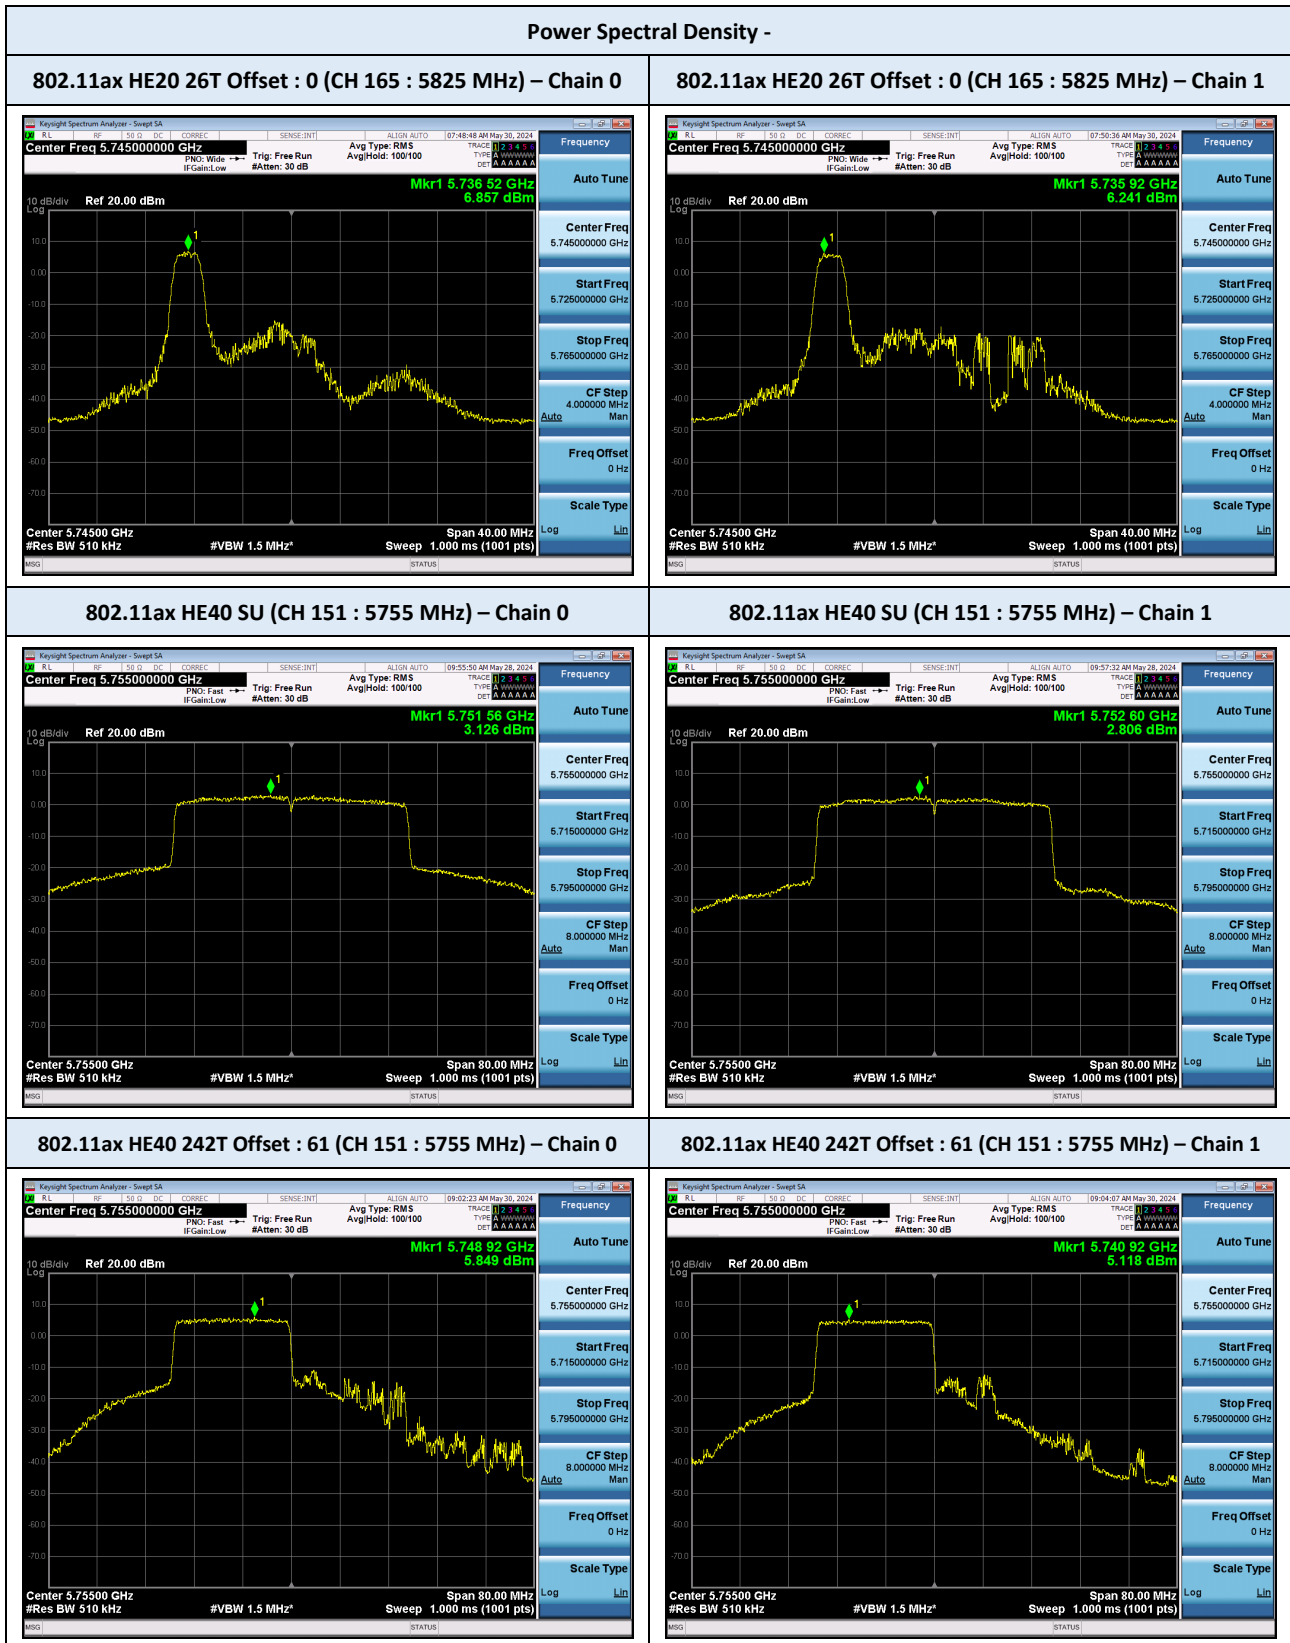

Note :

The worst plots are reported for each tone and bandwidth

TEST PLOTS

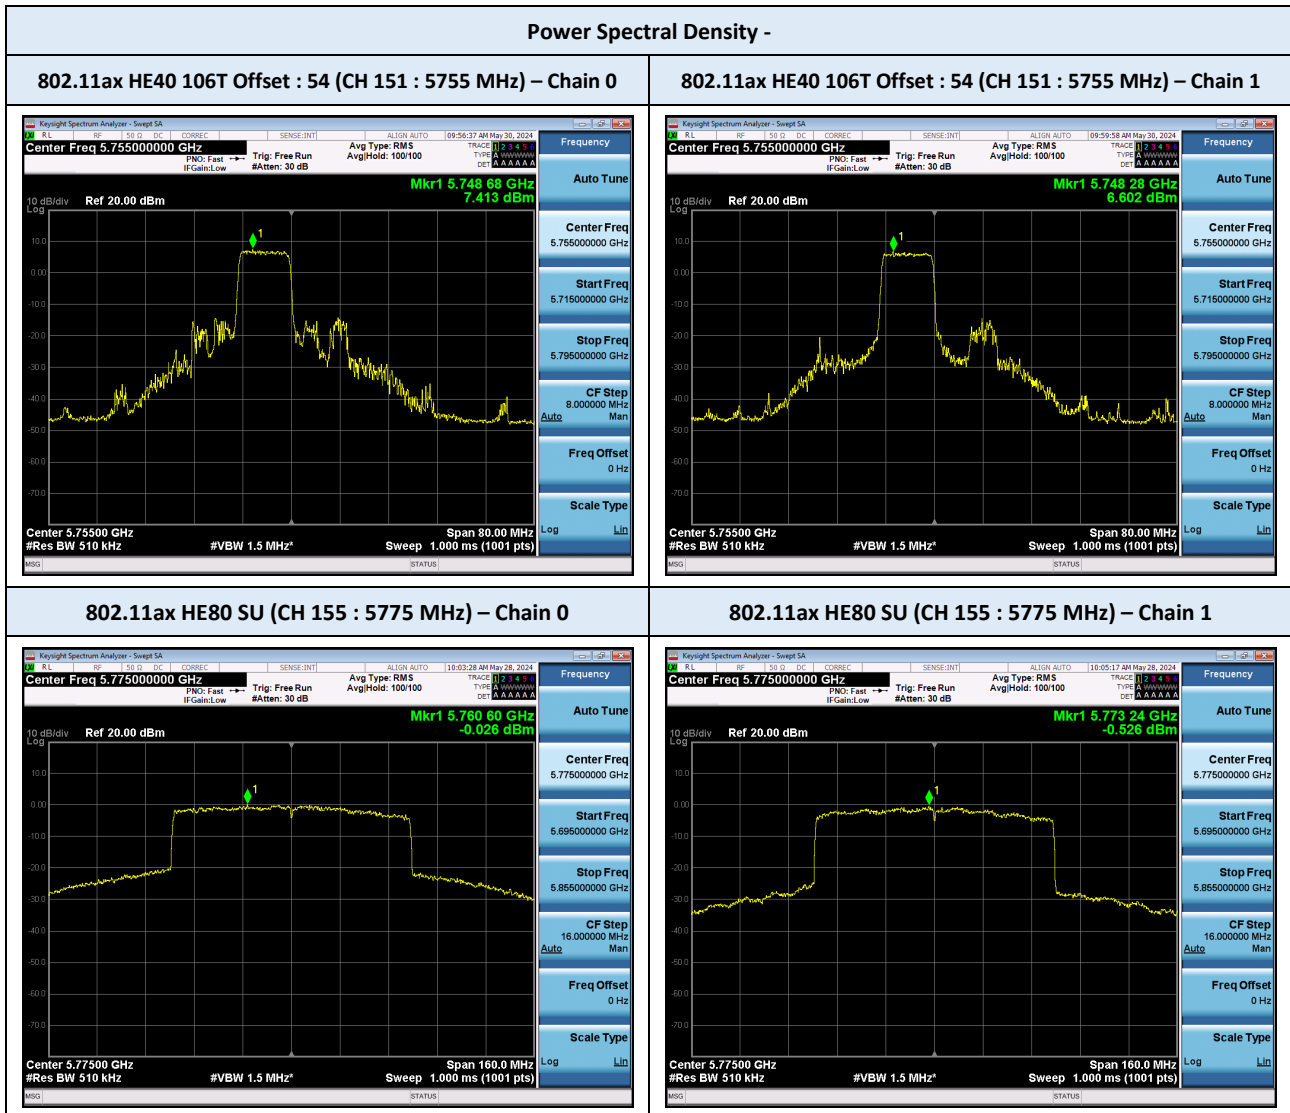

Note :

The worst plots are reported for each tone and bandwidth

9.5 RADIATED SPURIOUS EMISSIONS

Frequency Range : Below 1 GHz

Test Mode 802.11ax HE20 (SU) : TX mode
 Operating Frequency 5745 MHz (CH 149)

Frequency (MHz)	Polarization	Reading (dBuV)	Corr. ¹⁾ (dB)	Total (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement Type
No major peaks found							

Test Mode 802.11ax HE20 (SU) : TX mode
 Operating Frequency 5785 MHz (CH 153)

Frequency (MHz)	Polarization	Reading (dBuV)	Corr. ¹⁾ (dB)	Total (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement Type
No major peaks found							

Test Mode 802.11ax HE20 (SU) : TX mode
 Operating Frequency 5825 MHz (CH 165)

Frequency (MHz)	Polarization	Reading (dBuV)	Corr. ¹⁾ (dB)	Total (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement Type
No major peaks found							

Note(s) :

1. Correction Factor: Antenna Factor + Cable loss + Preamplifier Gain

Frequency Range : Above 1 GHz

Test Mode 802.11ax HE20 (SU) : TX mode

Operating Frequency 5745 MHz (CH 149)

Frequency (MHz)	Polarization	Reading (dBuV)	Corr. ¹⁾ (dB)	Total (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement Type
No major peaks found							

Test Mode 802.11ax HE20 (SU) : TX mode

Operating Frequency 5785 MHz (CH 153)

Frequency (MHz)	Polarization	Reading (dBuV)	Corr. ¹⁾ (dB)	Total (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement Type
No major peaks found							

Test Mode 802.11ax HE20 (SU) : TX mode

Operating Frequency 5825 MHz (CH 165)

Frequency (MHz)	Polarization	Reading (dBuV)	Corr. ¹⁾ (dB)	Total (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement Type
No major peaks found							

Test Mode 802.11ax HE20 (26T Offset : 8) : TX mode

Operating Frequency 5745 MHz (CH 149)

Frequency (MHz)	Polarization	Reading (dBuV)	Corr. ¹⁾ (dB)	Total (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement Type
No major peaks found							

Test Mode 802.11ax HE20 (26T Offset : 8) : TX mode

Operating Frequency 5785 MHz (CH 153)

Frequency (MHz)	Polarization	Reading (dBuV)	Corr. ¹⁾ (dB)	Total (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement Type
No major peaks found							

Test Mode 802.11ax HE20 (26T Offset : 8) : TX mode

Operating Frequency 5825 MHz (CH 165)


Frequency (MHz)	Polarization	Reading (dBuV)	Corr. ¹⁾ (dB)	Total (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement Type
No major peaks found							

Note(s) :


1. Correction Factor: Antenna Factor + Cable loss + Preamplifier Gain
2. AV Level = Measured Power(dBm) + Correction Factor(dB) + Duty Cycle Factor(dB).

■ TEST PLOTS

Radiated Spurious Emission 9 kHz – 30 MHz (Antenna Position 90°) : 802.11ax HE20 (SU) (CH 149)

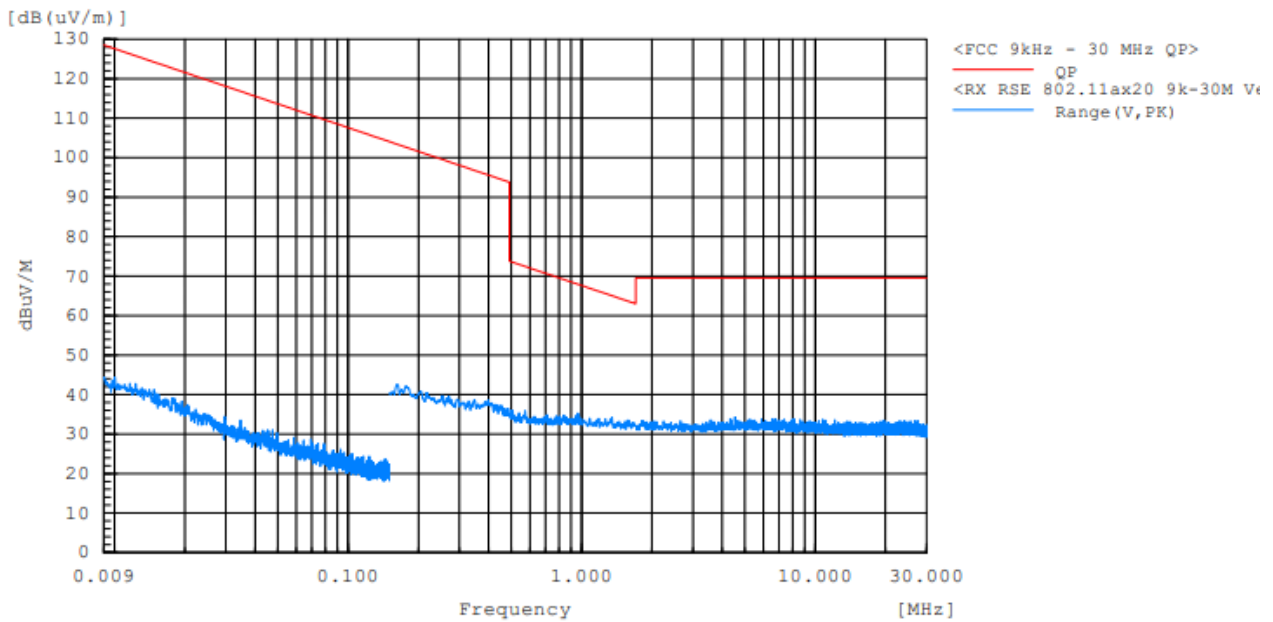

Radiated Spurious Emission 9 kHz – 30 MHz (Antenna Position 180°) : 802.11ax HE20 (SU) (CH 149)

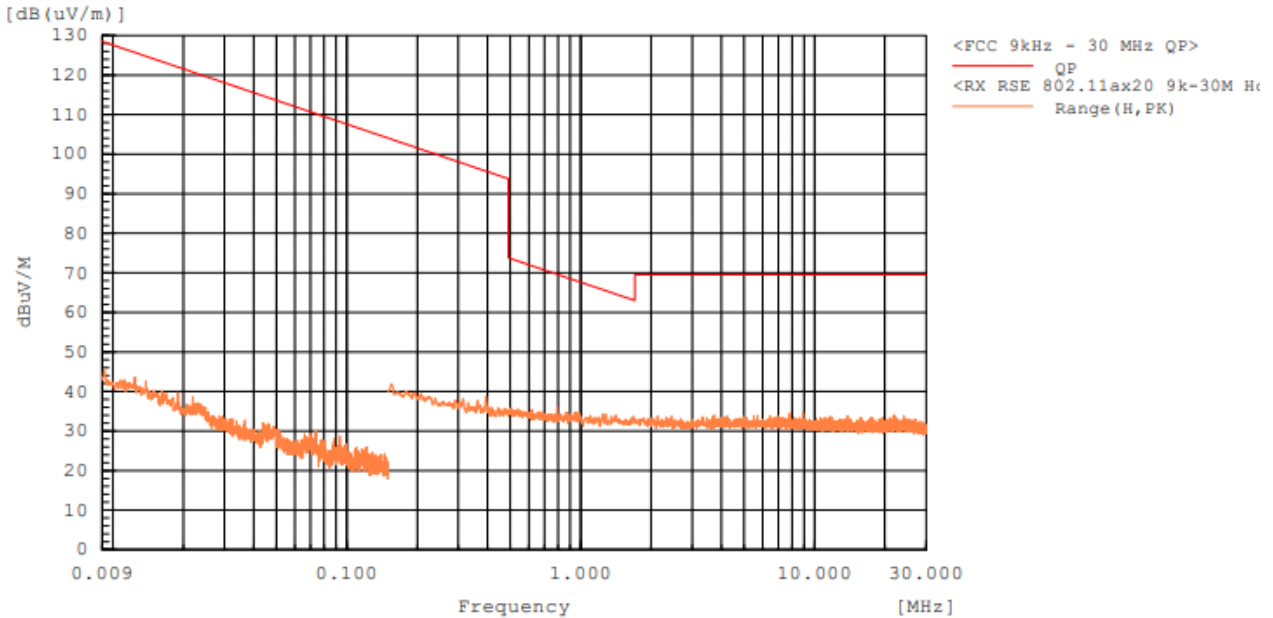


Note:


1. There were no major peaks and representative plots are included in this report
2. The plots include all used factor values for cables, antenna, preamplifier, etc.

■ TEST PLOTS (Continued)

Radiated Spurious Emission 9 kHz – 30 MHz (Antenna Position Bent over) : 802.11ax HE20 (SU) (CH 149)

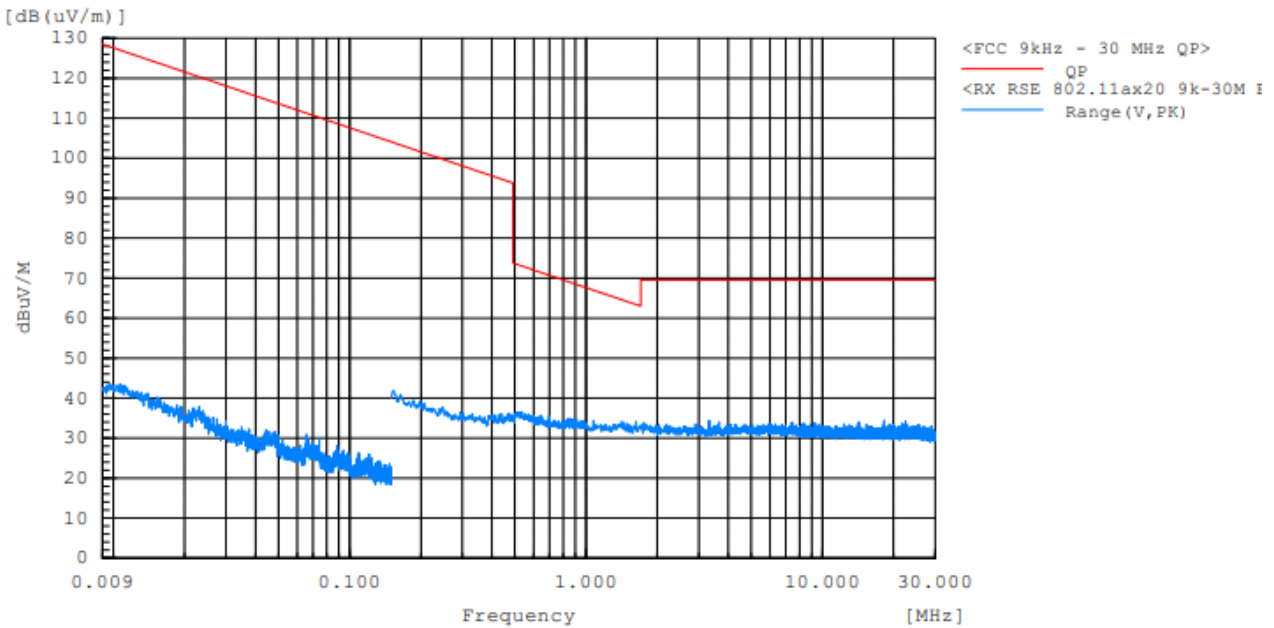

Radiated Spurious Emission 30 MHz – 1 GHz : 802.11ax HE20 (SU) (CH 149)

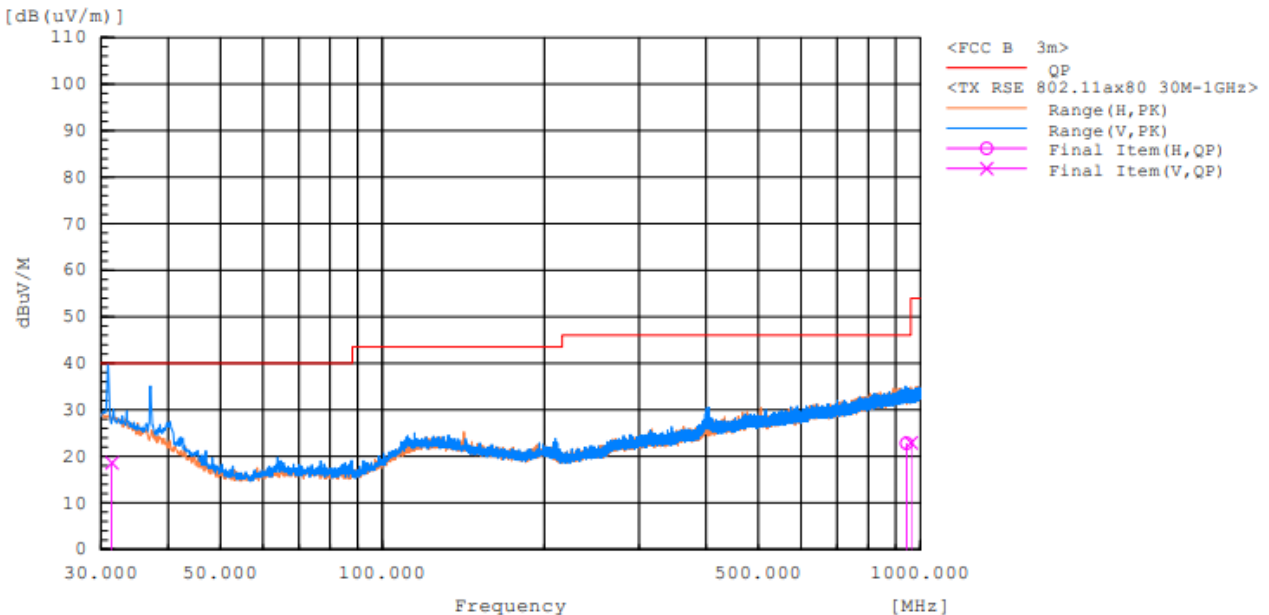


Note:


1. There were no major peaks and representative plots are included in this report
2. The plots include all used factor values for cables, antenna, preamplifier, etc.

■ TEST PLOTS (Continued)

Radiated Spurious Emission 1 GHz - 7 GHz : 802.11ax HE20 (SU) (CH 149)

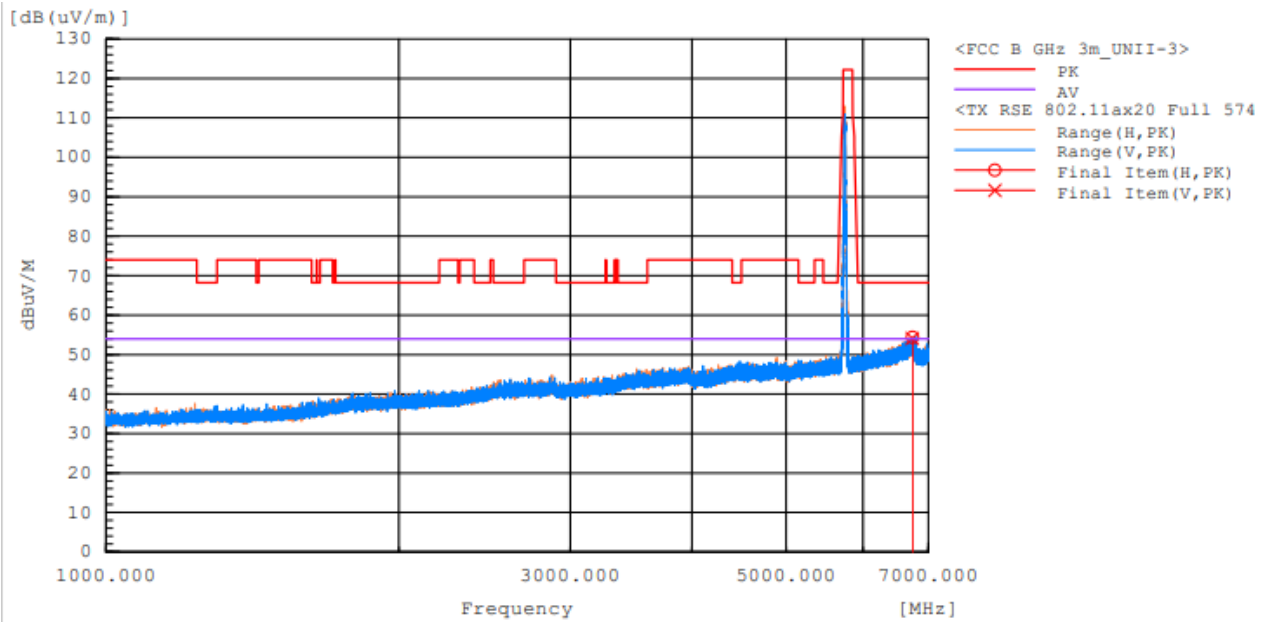

Radiated Spurious Emission 7 GHz - 18 GHz : 802.11ax HE20 (SU) (CH 149)

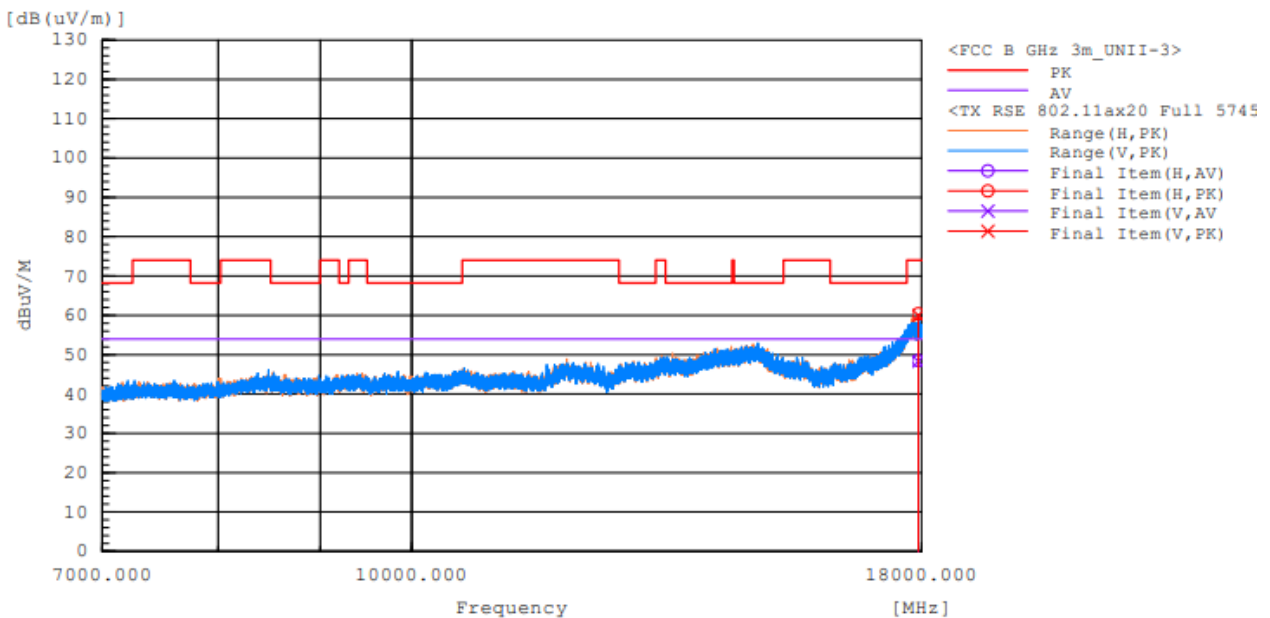


Note:


1. There were no major peaks and representative plots are included in this report
2. The plots include all used factor values for cables, antenna, preamplifier, etc.

■ TEST PLOTS (Continued)

Radiated Spurious Emission 1 GHz - 7 GHz : 802.11ax HE20 (26T Offset : 8) (CH 165)

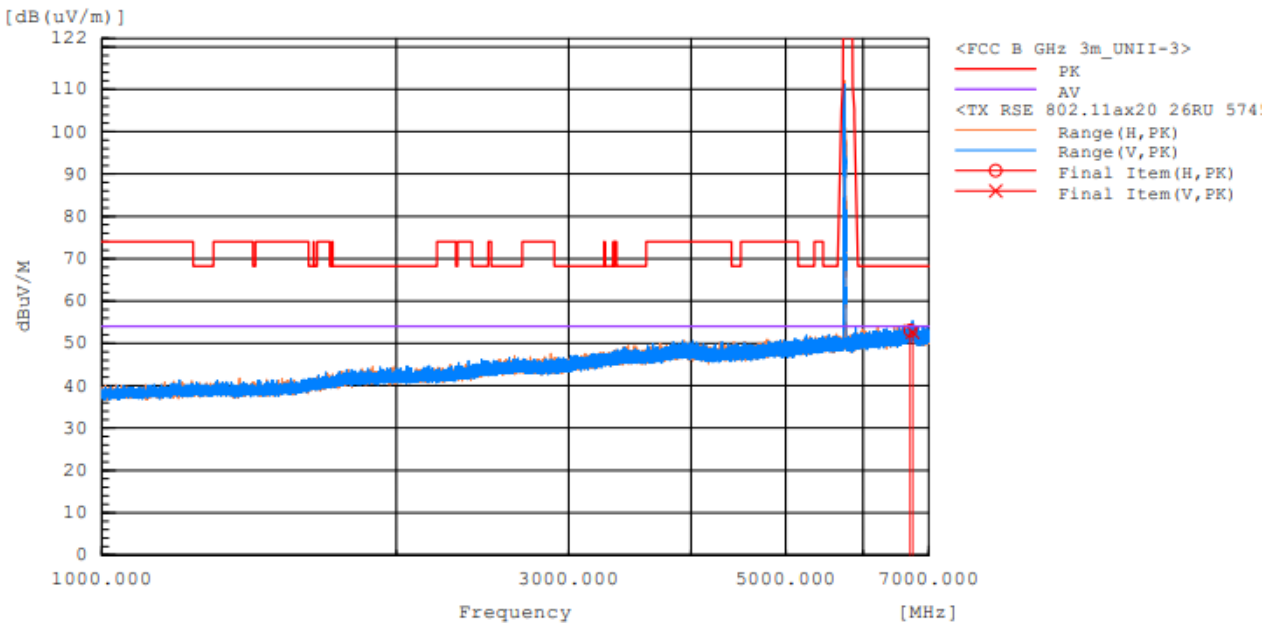


Radiated Spurious Emission 7 GHz - 18 GHz : 802.11ax HE20 (26T Offset : 8) (CH 165)

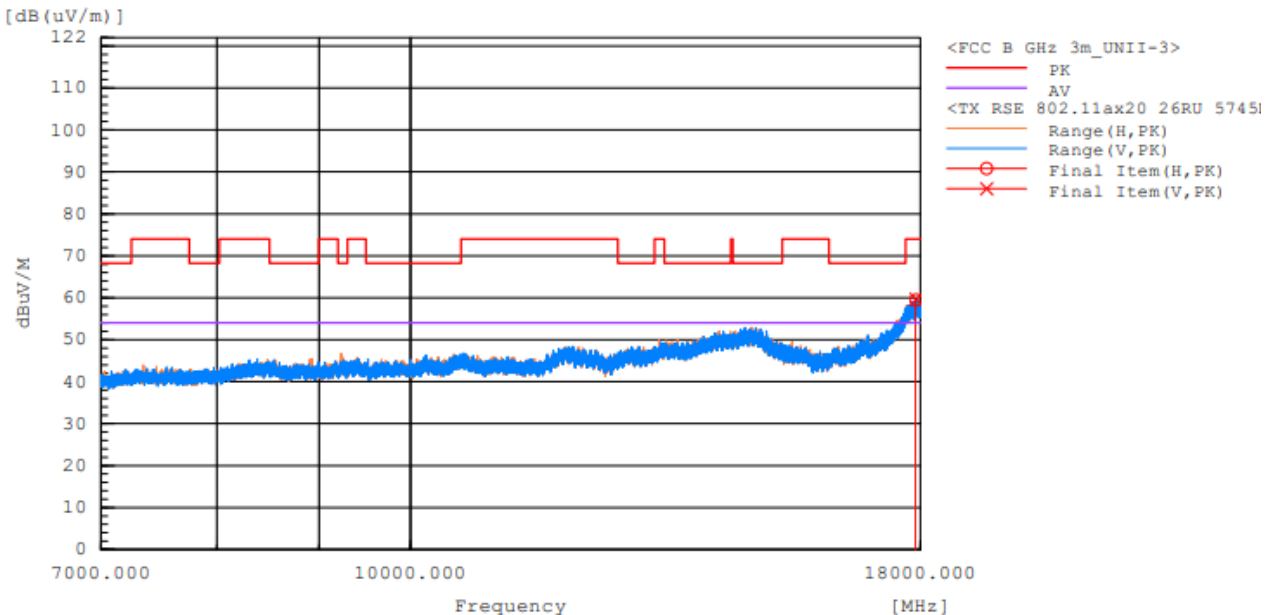

Note:

1. There were no major peaks and representative plots are included in this report
2. The plots include all used factor values for cables, antenna, preamplifier, etc.

■ TEST PLOTS (Continued)

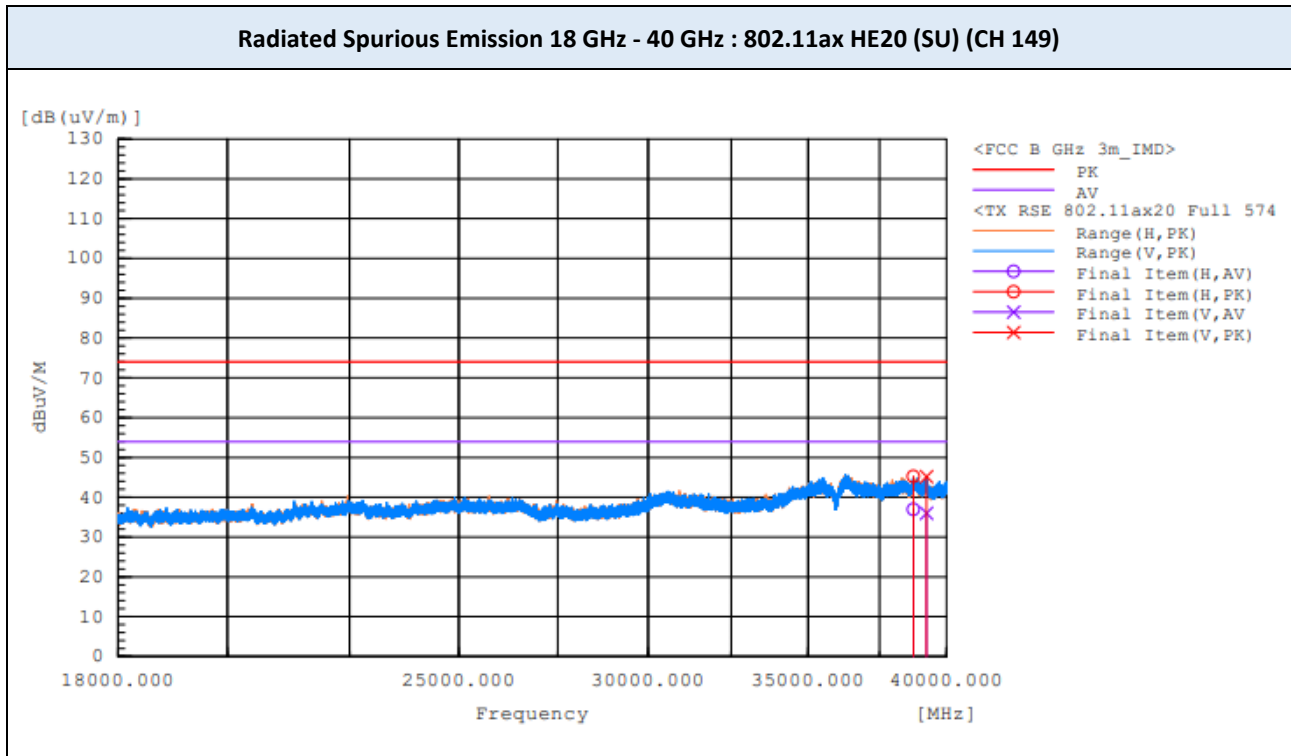

Note:

1. There were no major peaks and representative plots are included in this report
2. The plots include all used factor values for cables, antenna, preamplifier, etc.

9.6 RADIATED RESTRICTED BAND EDGES

Test Mode 802.11ax HE20 (SU) : TX mode
Operating Frequency 5745 MHz (CH 149)

Frequency (MHz)	Polarization	Reading (dBuV)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
		PK	Corr. ¹⁾	PK	PK	PK
5617.499	H	45.3	12.2	57.5	68.2	10.7
5626.841	V	45.4	12.2	57.6	68.2	10.6


Test Mode 802.11ax HE20 (SU) : TX mode
Operating Frequency 5825 MHz (CH 165)

Frequency (MHz)	Polarization	Reading (dBuV)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
		PK	Corr. ¹⁾	PK	PK	PK
5925.275	V	44.3	13.0	57.3	68.2	10.9
5933.539	H	44.6	13.0	57.6	68.2	10.6

Notes:

1. Correction Factor: Antenna Factor + Cable loss

TEST PLOTS

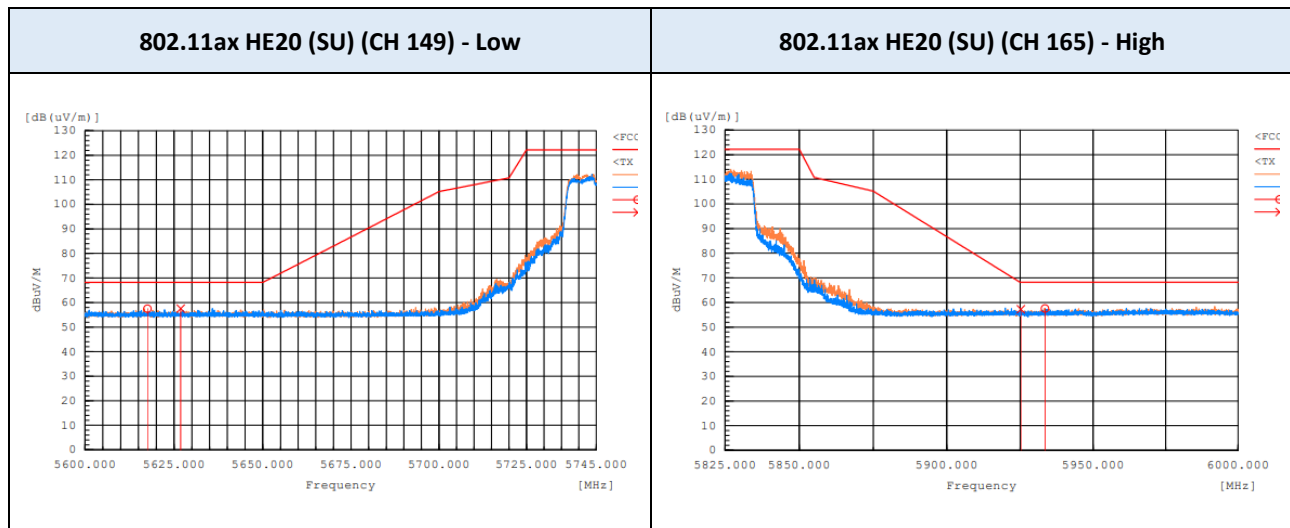

Test Mode 802.11ax HE40 (SU) : TX mode
 Operating Frequency 5755 MHz (CH 151)

Frequency (MHz)	Polarization	Reading (dBuV)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
		PK	Corr. ¹⁾	PK	PK	PK
5622.382	H	45.3	12.2	57.5	68.2	10.7
5627.063	V	45.0	12.2	57.2	68.2	11.0


Test Mode 802.11ax HE40 (SU) : TX mode
 Operating Frequency 5795 MHz (CH 159)

Frequency (MHz)	Polarization	Reading (dBuV)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
		PK	Corr. ¹⁾	PK	PK	PK
5928.660	H	44.2	13.0	57.2	68.2	11.0
5931.940	V	44.4	13.0	57.4	68.2	10.8

Notes:

1. Correction Factor: Antenna Factor + Cable loss

TEST PLOTS

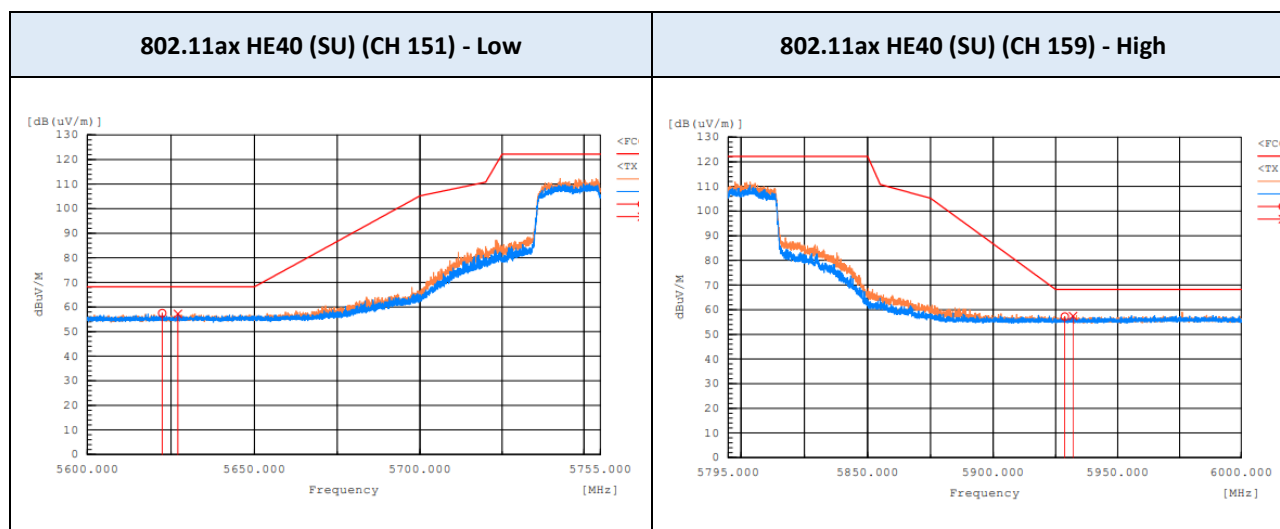

Test Mode 802.11ax HE40 (242T Offset : 61) : TX mode
 Operating Frequency 5755 MHz (CH 151)

Frequency (MHz)	Polarization	Reading (dBuV)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
		PK	Corr. ¹⁾	PK	PK	PK
5648.922	H	49.3	9.2	58.5	68.2	9.7
5649.247	V	45.6	9.2	54.8	68.2	13.4


Test Mode 802.11ax HE40 (242T Offset : 62) : TX mode
 Operating Frequency 5795 MHz (CH 159)

Frequency (MHz)	Polarization	Reading (dBuV)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
		PK	Corr. ¹⁾	PK	PK	PK
5930.888	H	44.6	10.0	54.6	68.2	13.6
5987.189	V	42.8	10.3	53.1	68.2	15.1

Notes:

1. Correction Factor: Antenna Factor + Cable loss

TEST PLOTS

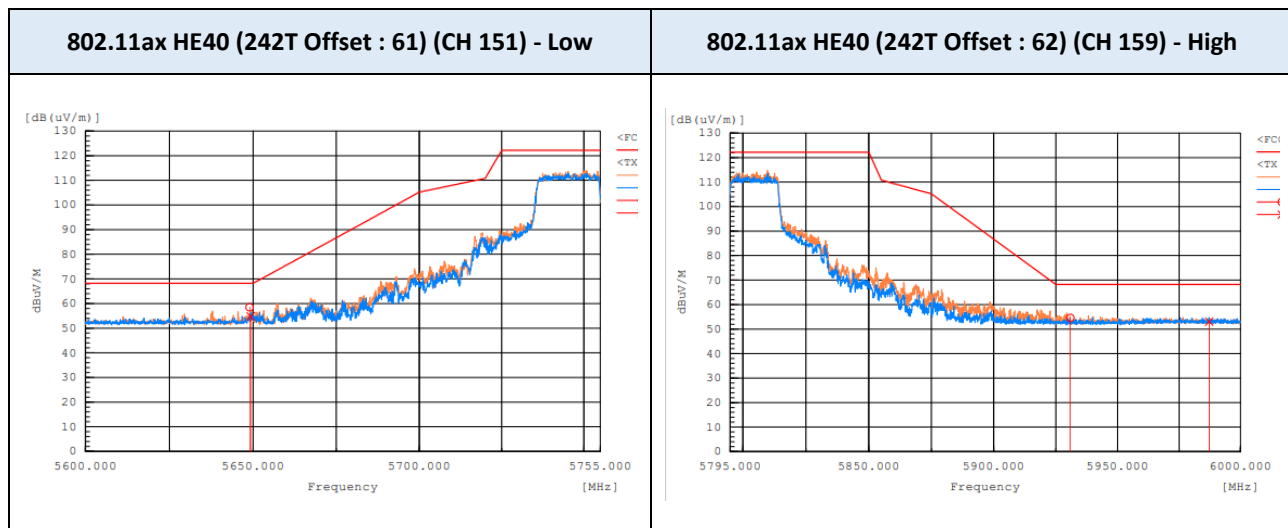


Test Mode 802.11ax HE80 (SU) : TX mode
 Operating Frequency 5775 MHz (CH 155)

Frequency (MHz)	Polarization	Reading (dBuV)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
		PK	Corr. ¹⁾	PK	PK	PK
5644.638	V	47.2	12.2	59.4	68.2	8.8
5646.436	H	49.5	12.2	61.7	68.2	6.5
5925.908	V	46.0	13.0	59.0	68.2	9.2
5934.506	H	48.3	13.0	61.3	68.2	6.9

Notes:

1. Correction Factor: Antenna Factor + Cable loss

TEST PLOTS

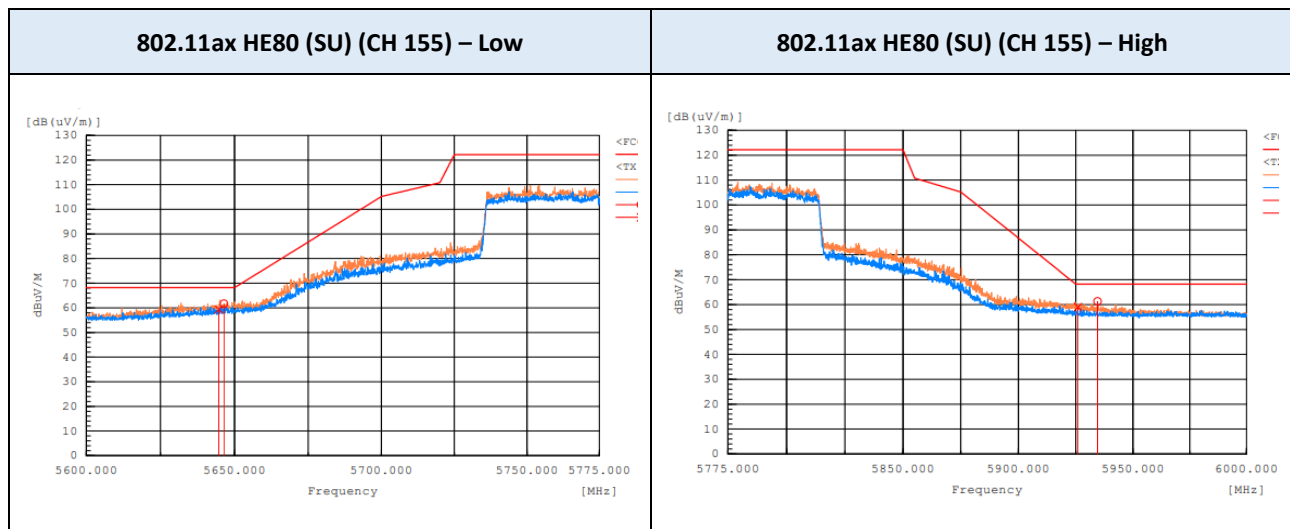

Test Mode 802.11ax HE80 (484T Offset : 65): TX mode
Operating Frequency 5775 MHz (CH 155)

Frequency (MHz)	Polarization	Reading (dBuV)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
		PK	Corr. ¹⁾	PK	PK	PK
5649.764	V	52.6	9.2	61.8	68.2	6.4
5649.958	H	56.4	9.2	65.6	68.2	2.6


Test Mode 802.11ax HE80 (484T Offset : 66): TX mode
Operating Frequency 5775 MHz (CH 155)

Frequency (MHz)	Polarization	Reading (dBuV)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
		PK	Corr. ¹⁾	PK	PK	PK
5649.992	H	56.6	9.2	65.8	68.2	2.4
5649.997	V	53.2	9.2	62.4	68.2	5.8

Notes:

1. Correction Factor: Antenna Factor + Cable loss

TEST PLOTS

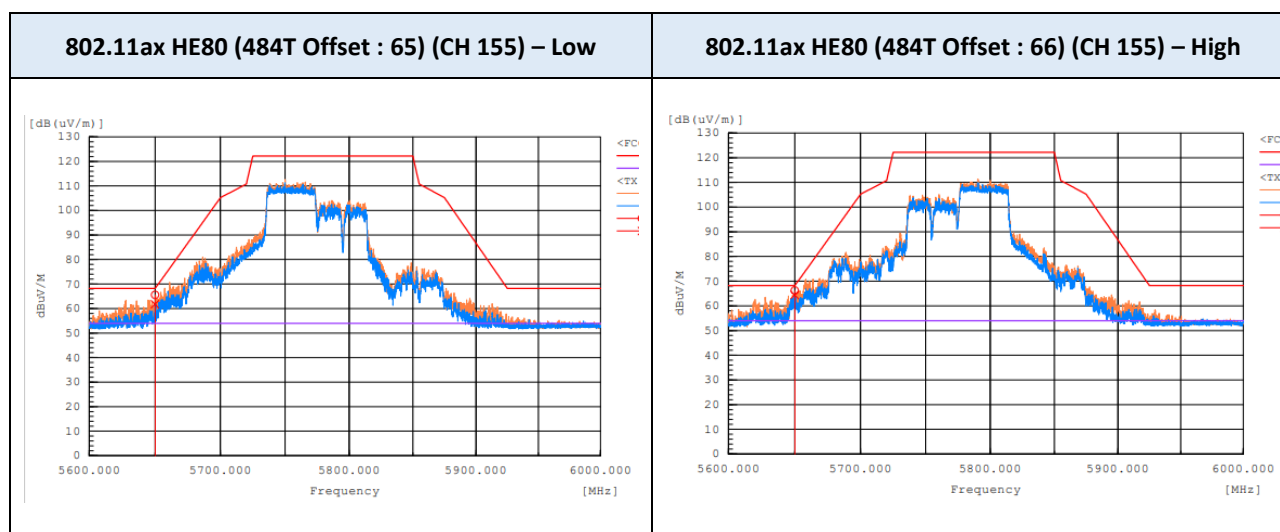

Test Mode 802.11ax HE80 (242T Offset : 61): TX mode
Operating Frequency 5775 MHz (CH 155)

Frequency (MHz)	Polarization	Reading (dBuV)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
		PK	Corr. ¹⁾	PK	PK	PK
5648.893	V	53.6	9.2	62.8	68.2	5.4
5649.824	H	56.6	9.2	65.8	68.2	2.4


Test Mode 802.11ax HE80 (484T Offset : 64): TX mode
Operating Frequency 5775 MHz (CH 155)

Frequency (MHz)	Polarization	Reading (dBuV)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
		PK	Corr. ¹⁾	PK	PK	PK
5649.992	H	56.6	9.2	65.8	68.2	2.4
5649.997	V	53.2	9.2	62.4	68.2	5.8

Notes:

1. Correction Factor: Antenna Factor + Cable loss

TEST PLOTS

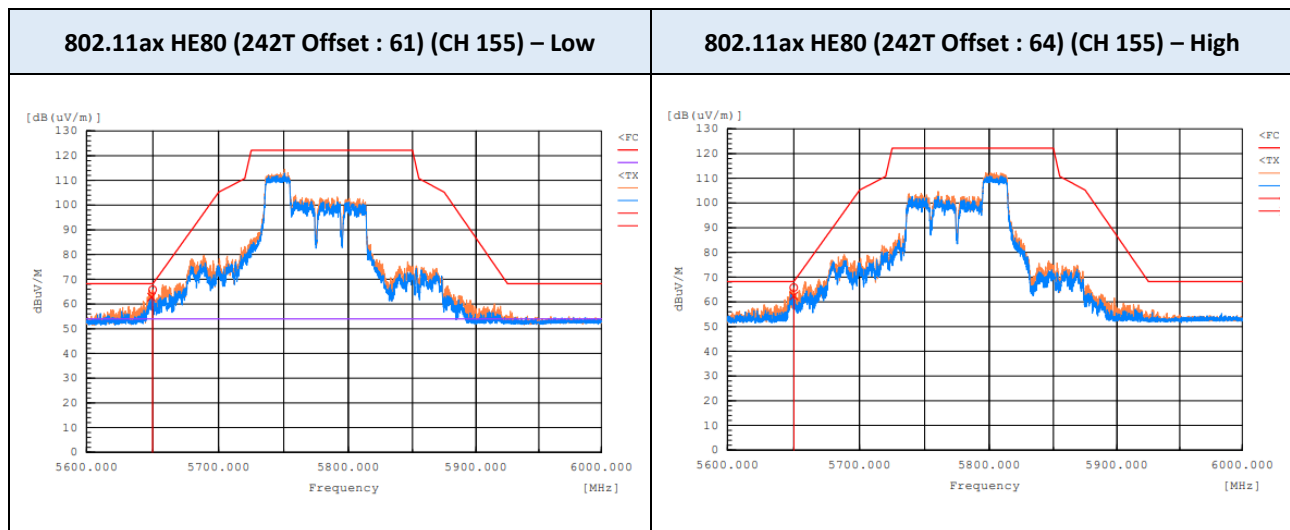

9.7 RECEIVER SPURIOUS EMISSIONS

Frequency Range : Below 1 GHz

Test Mode 802.11ax HE20 (SU) : RX mode
 Operating Frequency 5745 MHz (CH 149)

Frequency (MHz)	Polarization	Reading (dBuV)	Corr. ¹⁾ (dB)	Total (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement Type
No major peaks found							

Frequency Range : Above 1 GHz

Test Mode 802.11ax HE20 (SU) : RX mode
 Operating Frequency 5745 MHz (CH 149)


Frequency (MHz)	Polarization	Reading (dBuV)	Corr. ¹⁾ (dB)	Total (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement Type
No major peaks found							

Note:


1. Correction Factor: Antenna Factor + Cable loss + Preamplifier

■ TEST PLOTS

Radiated Receiver Spurious Emission 30 MHz - 1 GHz : 802.11ax HE20 (SU) (CH 149)

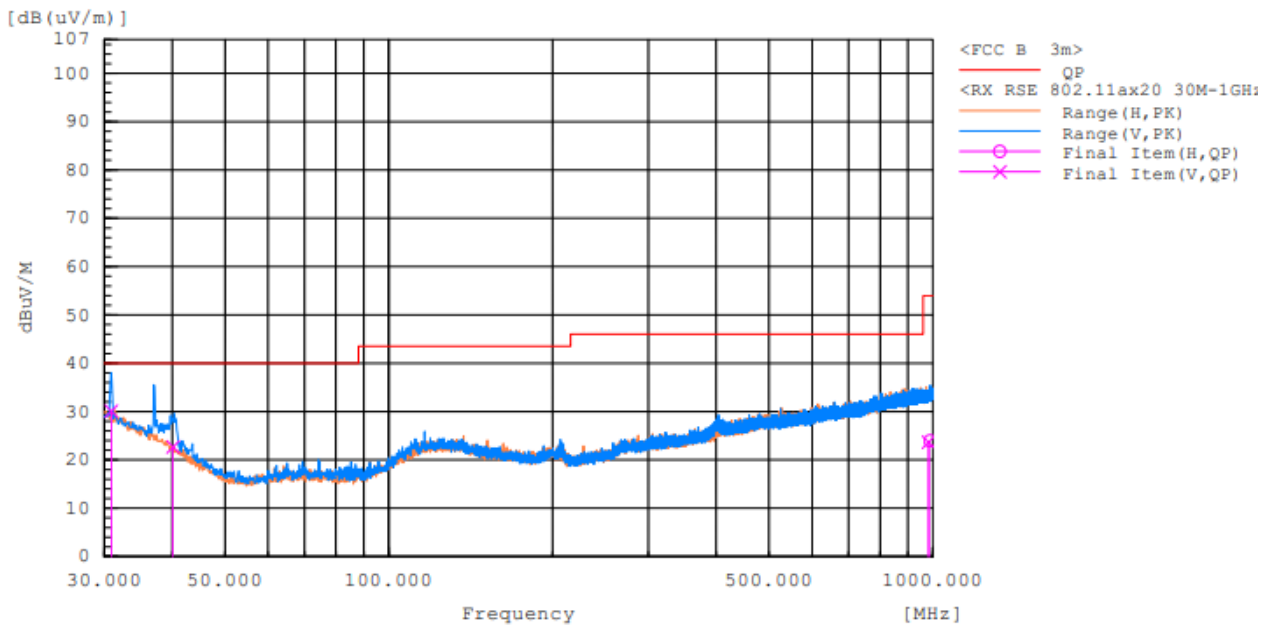


Radiated Receiver Spurious Emission 1 GHz - 18 GHz : 802.11ax HE20 (SU) (CH 149)

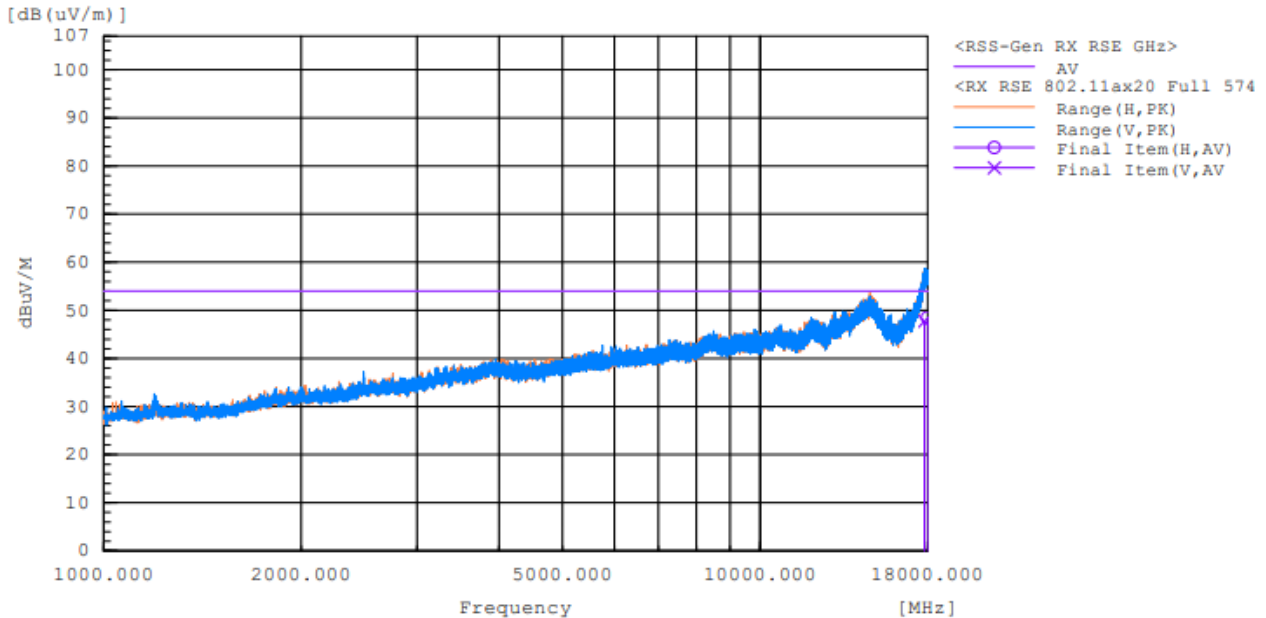

Note:

1. There were no major peaks and representative plots are included in this report
2. The plots include all used factor values for cables, antenna, preamplifier, etc.

TEST PLOTS

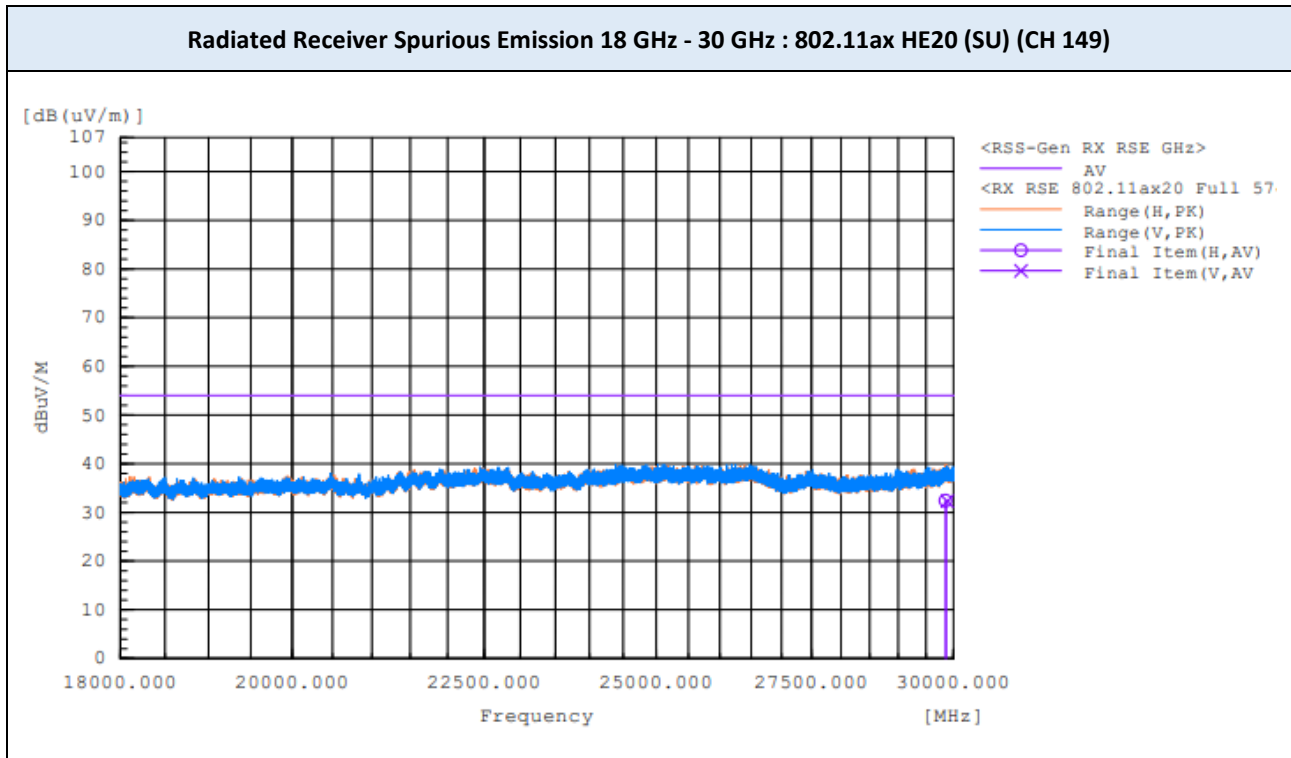

Note:

1. There were no major peaks and representative plots are included in this report
2. The plots include all used factor values for cables, antenna, preamplifier, etc.

10. LIST OF TEST EQUIPMENT

No.	Instrument	Model No.	Calibration Due (mm/dd/yy)	Manufacture	Serial No.
☒	Signal Analyzer (20 Hz ~ 40.0 GHz)	ESU40	12/01/2024	Rohde & Schwarz	100529
☒	Signal Analyzer (1 Hz ~ 40.0 GHz)	ESW44	10/24/2024	Rohde & Schwarz	102015
☒	Signal Analyzer (3 Hz ~ 50 GHz)	N9030A	06/30/2024	Keysight	MY53311083
☐	Attenuator (20 dB, DC ~ 26.5 GHz)	8493C 20 dB	02/16/2025	KEYSIGHT	89401
☒	Attenuator (10 dB, DC ~ 26.5 GHz)	8493C 10 dB	09/05/2024	KEYSIGHT	89576
☒	Open Switch with Power Sensor	OSP150	04/01/2025	Rohde & Schwarz	100872
☒	Loop Antenna (0.009 ~ 30 MHz)	HLA 6121	09/12/2025	TESEQ	43964
☒	BI-LOG Antenna (30 MHz ~ 6 GHz)	JB6	03/06/2025	Sunol	A060916
☒	LNA (30 MHz ~ 1GHz)	PAM-103	05/03/2025	Com-Power	18020254
☒	Horn Antenna (1 GHz ~ 18 GHz)	DRH-118	01/03/2025	Sunol	A061616
☒	LNA (1 GHz ~ 18 GHz)	PAM-118A	03/13/2025	Com-Power	18040074
☒	Horn Antenna (18 GHz ~ 40 GHz)	DRH-1840	01/20/2025	Sunol	17121
☒	LNA (18 GHz ~ 40 GHz)	CBL18405045-01	01/05/2025	CERNEX, Inc.	27973
☒	High Pass Filter	WHKX8-6090- 7000-18000-40SS	11/20/2024	Wainwright	23
☒	EMI Test Receiver	ESR3	12/14/2024	Rohde & Schwarz	102363
☒	LISN	ENV216	10/23/2024	Rohde & Schwarz	101550
☒	Temperature & Humidity Chamber	SH-641	08/01/2024	ESPEC	92002929
☒	DC Power Supply	E3632A	06/12/2024	Agilent	MY40028636

Note(s) :

- Equipment listed above that calibrated during the testing period was set for test after the calibration.
- Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

APPENDIX A. TEST SETUP PHOTOS

The setup photos are provided as a separate document.

APPENDIX B. PHOTOGRAPHS OF EUT

B.1. EXTERNAL PHOTOS

The external photos are provided as a separate document.

B.2. INTERNAL PHOTOS

The internal photos are provided as a separate document.

END OF TEST REPORT