



Shenzhen Huaxia Testing Technology Co., Ltd

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua District, Shenzhen, China

Telephone: +86-755-26648640
Fax: +86-755-26648637
Website: www.cqa-cert.com

Report Template Version: V03
Report Template Revision Date: Mar.1st, 2017

Test Report

Report No.: CQASZ20210500703E-01

Applicant: Shenzhen heng shang pin technology co. , LTD

Address of Applicant: 4004 Hao Wuhedadao Bantianjiedao Longgangqu, Shenzhen

Equipment Under Test (EUT):

Product: Bluetooth Headset

Model No.: HSP-B6, HSP-B6-PRO, HSP-B6-Plus, HSP-B8, HSP-B8-PRO, HSP-B8-Plus, HSP-B10, HSP-B10-PRO, HSP-B10-Plus

Test Model No.: HSP-B6

Brand Name: HonShoop

FCC ID: 2ALXX-B6

Standards: 47 CFR Part 15, Subpart C

Date of Receipt: 2021-4-20

Date of Test: 2021-4-20 to 2021-5-14

Date of Issue: 2021-5-25

Test Result : PASS*

lewis zhou

Tested By: _____
(Lewis Zhou)

Jwh Li

Reviewed By: _____
(Jun Li)

Sheek . Luo

Approved By: _____
(Sheek Luo)



* In the configuration tested, the EUT complied with the standards specified above.

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of CQA, this report can't be reproduced except in full.



Shenzhen Huaxia Testing Technology Co., Ltd

Report No.:CQASZ20210500703E-01

2 Version

Revision History Of Report

Report No.	Version	Description	Issue Date
CQASZ20210500703E-01	Rev.01	Initial report	2021-5-25

3 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203/15.247 (c)	ANSI C63.10 (2013)	PASS
AC Power Line Conducted Emission	47 CFR Part 15, Subpart C Section 15.207	ANSI C63.10 (2013)	PASS
Conducted Peak Output Power	47 CFR Part 15, Subpart C Section 15.247 (b)(1)	ANSI C63.10 (2013)	PASS
20dB Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2013)	PASS
Carrier Frequencies Separation	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2013)	PASS
Hopping Channel Number	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2013)	PASS
Dwell Time	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2013)	PASS
Pseudorandom Frequency Hopping Sequence	47 CFR Part 15, Subpart C Section 15.247(b)(4)&TCB Exclusion List (7 July 2002)	ANSI C63.10 (2013)	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 (2013)	PASS
RF Conducted Spurious Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 (2013)	PASS
Radiated Spurious emissions	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 (2013)	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 (2013)	PASS

Note: When the EUT charging, BT will not work.

4 Contents

	Page
1 COVER PAGE.....	1
2 VERSION.....	2
3 TEST SUMMARY.....	3
4 CONTENTS.....	4
5 GENERAL INFORMATION.....	5
5.1 CLIENT INFORMATION.....	5
5.2 GENERAL DESCRIPTION OF EUT.....	5
5.3 ADDITIONAL INSTRUCTIONS.....	7
5.4 TEST ENVIRONMENT.....	8
5.5 DESCRIPTION OF SUPPORT UNITS.....	8
5.6 STATEMENT OF THE MEASUREMENT UNCERTAINTY.....	9
5.7 TEST LOCATION.....	10
5.8 TEST FACILITY.....	10
5.9 ABNORMALITIES FROM STANDARD CONDITIONS.....	10
5.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER.....	10
5.11 EQUIPMENT LIST.....	11
6 TEST RESULTS AND MEASUREMENT DATA.....	12
6.1 ANTENNA REQUIREMENT.....	12
6.2 CONDUCTED EMISSIONS.....	13
6.3 CONDUCTED PEAK OUTPUT POWER.....	17
6.4 20dB OCCUPY BANDWIDTH.....	24
6.5 CARRIER FREQUENCIES SEPARATION.....	30
6.6 HOPPING CHANNEL NUMBER.....	37
6.7 DWELL TIME.....	40
6.8 BAND EDGE FOR RF CONDUCTED EMISSIONS.....	56
6.9 RF ANTENNA CONDUCTED SPURIOUS EMISSIONS.....	64
6.10 PSEUDORANDOM FREQUENCY HOPPING SEQUENCE.....	83
6.11 RADIATED SPURIOUS EMISSION & RESTRICTED BANDS.....	84
6.11.1 Radiated Emission below 1GHz.....	86
6.11.2 Transmitter Emission above 1GHz.....	88
7 PHOTOGRAPHS - EUT TEST SETUP.....	91
7.1 CONDUCTED EMISSION.....	91
7.2 RADIATED EMISSION.....	92
8 PHOTOGRAPHS - EUT CONSTRUCTIONAL DETAILS.....	94

5 General Information

5.1 Client Information

Applicant:	Shenzhen heng shang pin technology co. , LTD
Address of Applicant:	4004 Hao Wuhedadao Bantianjiedao Longgangqu, Shenzhen
Manufacturer:	Shenzhen heng shang pin technology co. , LTD
Address of Manufacturer:	4004 Hao Wuhedadao Bantianjiedao Longgangqu, Shenzhen
Factory:	Shenzhen Zhongchuan Precision Mould Co., LTD
Address of Factory:	(South Face) First Floor, Building#1, cl Distrist, Luoshan Industrial Zone, Shanxia Community, Pinghu Town, Longgang distrist, Shenzhen, China

5.2 General Description of EUT

Product Name:	Bluetooth Headset
Model No.:	HSP-B6, HSP-B6-PRO, HSP-B6-Plus, HSP-B8, HSP-B8-PRO, HSP-B8-Plus, HSP-B10, HSP-B10-PRO. HSP-B10-Plus
Test Model No.:	HSP-B6
Trade Mark:	HonShoop
Hardware Version:	V1.3
Software Version:	V1.6
Operation Frequency:	2402MHz~2480MHz
Bluetooth Version:	V5.0
Modulation Technique:	Frequency Hopping Spread Spectrum(FHSS)
Modulation Type:	GFSK, π/4DQPSK, 8DPSK
Transfer Rate:	1Mbps/2Mbps/3Mbps
Number of Channel:	79
Hopping Channel Type:	Adaptive Frequency Hopping systems
Product Type:	<input type="checkbox"/> Mobile <input checked="" type="checkbox"/> Portable <input type="checkbox"/> Fix Location
Antenna Type:	Chip antenna
Antenna Gain:	1.72dBi
Power Supply:	Li-ion battery: DC 3.7V, 60mAh, Charge by DC 5.0V

Note:

Model No.:HSP-B6, HSP-B6-PRO, HSP-B6-Plus, HSP-B8, HSP-B8-PRO, HSP-B8-Plus, HSP-B10, HSP-B10-PRO. HSP-B10-Plus

Only the model HSP-B6 was tested, since the electrical circuit design, layout, components used and internal wiring were identical for the above models, with difference being color of appearance and model name.

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	21	2422MHz	41	2442MHz	61	2462MHz
2	2403MHz	22	2423MHz	42	2443MHz	62	2463MHz
3	2404MHz	23	2424MHz	43	2444MHz	63	2464MHz
4	2405MHz	24	2425MHz	44	2445MHz	64	2465MHz
5	2406MHz	25	2426MHz	45	2446MHz	65	2466MHz
6	2407MHz	26	2427MHz	46	2447MHz	66	2467MHz
7	2408MHz	27	2428MHz	47	2448MHz	67	2468MHz
8	2409MHz	28	2429MHz	48	2449MHz	68	2469MHz
9	2410MHz	29	2430MHz	49	2450MHz	69	2470MHz
10	2411MHz	30	2431MHz	50	2451MHz	70	2471MHz
11	2412MHz	31	2432MHz	51	2452MHz	71	2472MHz
12	2413MHz	32	2433MHz	52	2453MHz	72	2473MHz
13	2414MHz	33	2434MHz	53	2454MHz	73	2474MHz
14	2415MHz	34	2435MHz	54	2455MHz	74	2475MHz
15	2416MHz	35	2436MHz	55	2456MHz	75	2476MHz
16	2417MHz	36	2437MHz	56	2457MHz	76	2477MHz
17	2418MHz	37	2438MHz	57	2458MHz	77	2478MHz
18	2419MHz	38	2439MHz	58	2459MHz	78	2479MHz
19	2420MHz	39	2440MHz	59	2460MHz	79	2480MHz
20	2421MHz	40	2441MHz	60	2461MHz		

Note:

In RSS-Gen, regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The Lowest channel	2402MHz
The Middle channel	2441MHz
The Highest channel	2480MHz

5.3 Additional Instructions

EUT Test Software Settings:		
Mode:	<input checked="" type="checkbox"/> Special software is used. <input type="checkbox"/> Through engineering command into the engineering mode. engineering command: *###3646633#**	
EUT Power level:	Class2 (Power level is built-in set parameters and cannot be changed and selected)	
Use test software to set the lowest frequency, the middle frequency and the highest frequency keep transmitting of the EUT.		
Mode	Channel	Frequency(MHz)
DH1/DH3/DH5	CH0	2402
	CH39	2441
	CH78	2480
2DH1/2DH3/2DH5	CH0	2402
	CH39	2441
	CH78	2480
3DH1/3DH3/3DH5	CH0	2402
	CH39	2441
	CH78	2480

5.4 Test Environment

Operating Environment:	
Radiated Emissions:	
Temperature:	25.5 °C
Humidity:	53 % RH
Atmospheric Pressure:	1009mbar
Temperature:	25.5 °C
Humidity:	53 % RH
Atmospheric Pressure:	1009mbar
Radio conducted item test (RF Conducted test room):	
Temperature:	26.4 °C
Humidity:	56 % RH
Atmospheric Pressure:	1009mbar
Test mode:	
Transmitting mode:	Use test software (RF test) to set the lowest frequency, the middle frequency and the highest frequency keep transmitting of the EUT.

5.5 Description of Support Units

The EUT has been tested with associated equipment below.

Description	Manufacturer	Model No.	Remark	FCC certification
Phone	APPLE	iphone5c	CQA	FCC

5.6 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate.

The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities.

The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the **Shenzhen Huaxia Testing Technology Co., Ltd.** quality system acc. to DIN EN ISO/IEC 17025.

Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CQA laboratory is reported:

No.	Item	Uncertainty	Notes
1	Radiated Emission (Below 1GHz)	±5.12dB	(1)
2	Radiated Emission (Above 1GHz)	±4.60dB	(1)
3	Conducted Disturbance (0.15~30MHz)	±3.34dB	(1)
4	Radio Frequency	3×10^{-8}	(1)
5	Duty cycle	0.6 %.	(1)
6	Occupied Bandwidth	1.1%	(1)
7	RF conducted power	0.86dB	(1)
8	RF power density	0.74	(1)
9	Conducted Spurious emissions	0.86dB	(1)
10	Temperature test	0.8°C	(1)
11	Humidity test	2.0%	(1)
12	Supply voltages	0.5 %.	(1)
13	time	0.6 %.	(1)
14	Frequency Error	5.5 Hz	(1)

(1)This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

5.7 Test Location

Shenzhen Huaxia Testing Technology Co., Ltd,

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua District, Shenzhen, China

5.8 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

IC Registration No.: 22984-1

The 3m Semi-anechoic chamber of Shenzhen Huaxia Testing Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing

The test facility is recognized, certified, or accredited by the following organizations:

• **FCC Registration No.: 522263**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.:522263

• **A2LA (Certificate No. 4742.01)**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 4742.01.

5.9 Abnormalities from Standard Conditions

None.

5.10 Other Information Requested by the Customer

None.

5.11 Equipment List


Test Equipment	Manufacturer	Model No.	Instrument No.	Calibration Date	Calibration Due Date
EMI Test Receiver	R&S	ESR7	CQA-005	2020/9/26	2021/9/25
Spectrum analyzer	R&S	FSU26	CQA-038	2020/10/28	2021/10/27
Preamplifier	MITEQ	AFS4-00010300-18-10P-4	CQA-035	2020/9/26	2021/9/25
Preamplifier	MITEQ	AMF-6D-02001800-29-20P	CQA-036	2020/11/2	2021/11/1
Loop antenna	Schwarzbeck	FMZB1516	CQA-087	2019/10/28	2021/10/27
Bilog Antenna	R&S	HL562	CQA-011	2019/9/26	2021/9/25
Horn Antenna	R&S	HF906	CQA-012	2019/9/26	2021/9/25
Horn Antenna	Schwarzbeck	BBHA 9170	CQA-088	2019/9/26	2021/9/25
Coaxial Cable (Above 1GHz)	CQA	N/A	C019	2020/9/26	2021/9/25
Coaxial Cable (Below 1GHz)	CQA	N/A	C020	2020/9/26	2021/9/25
Antenna Connector	CQA	RFC-01	CQA-080	2020/9/26	2021/9/25
RF cable(9KHz~40GHz)	CQA	RF-01	CQA-079	2020/9/26	2021/9/25
Power divider	MIDWEST	PWD-2533-02-SMA-79	CQA-067	2020/9/26	2021/9/25
EMI Test Receiver	R&S	ESPI3	CQA-013	2020/9/26	2021/9/25
LISN	R&S	ENV216	CQA-003	2020/11/5	2021/11/4
Coaxial cable	CQA	N/A	CQA-C009	2020/9/26	2021/9/25

Note:


The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

6 Test Results and Measurement Data

6.1 Antenna Requirement

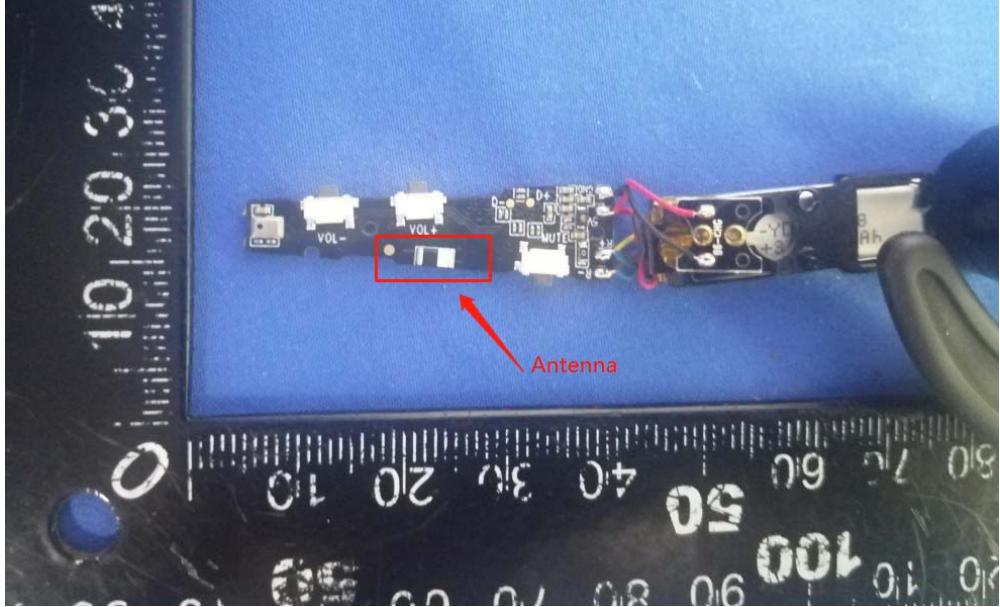Standard Requirement:	47 CFR Part 15C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
EUT Antenna:  The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 1.72dBi.	

6.2 Conducted Emissions

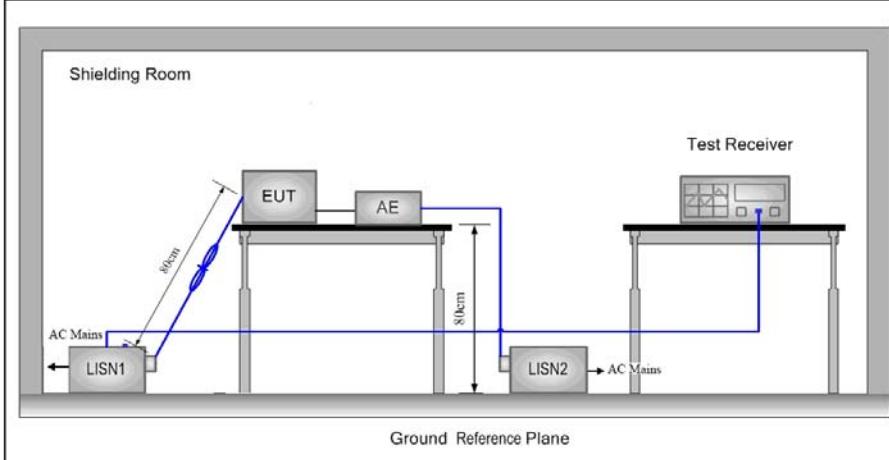
Test Requirement:	47 CFR Part 15C Section 15.207																
Test Method:	ANSI C63.10: 2013																
Test Frequency Range:	150kHz to 30MHz																
Limit:	<table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th><th colspan="2">Limit (dBuV)</th></tr> <tr> <th>Quasi-peak</th><th>Average</th></tr> </thead> <tbody> <tr> <td>0.15-0.5</td><td>66 to 56*</td><td>56 to 46*</td></tr> <tr> <td>0.5-5</td><td>56</td><td>46</td></tr> <tr> <td>5-30</td><td>60</td><td>50</td></tr> </tbody> </table>			Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)																
	Quasi-peak	Average															
0.15-0.5	66 to 56*	56 to 46*															
0.5-5	56	46															
5-30	60	50															
	<small>* Decreases with the logarithm of the frequency.</small>																
Test Procedure:	<ol style="list-style-type: none"> 1) The mains terminal disturbance voltage test was conducted in a shielded room. 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded. 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane. 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement. 																
Test Setup:																	



Exploratory Test Mode:	Non-hopping transmitting mode with all kind of modulation and all kind of data type Transmitting mode.
Final Test Mode:	Through Pre-scan, find the DH5 of data type and GFSK modulation is the worst case. Transmitting mode Only the worst case is recorded in the report.
Test Voltage:	AC 120V/60Hz
Test Results:	Pass

Measurement Data

Live line:

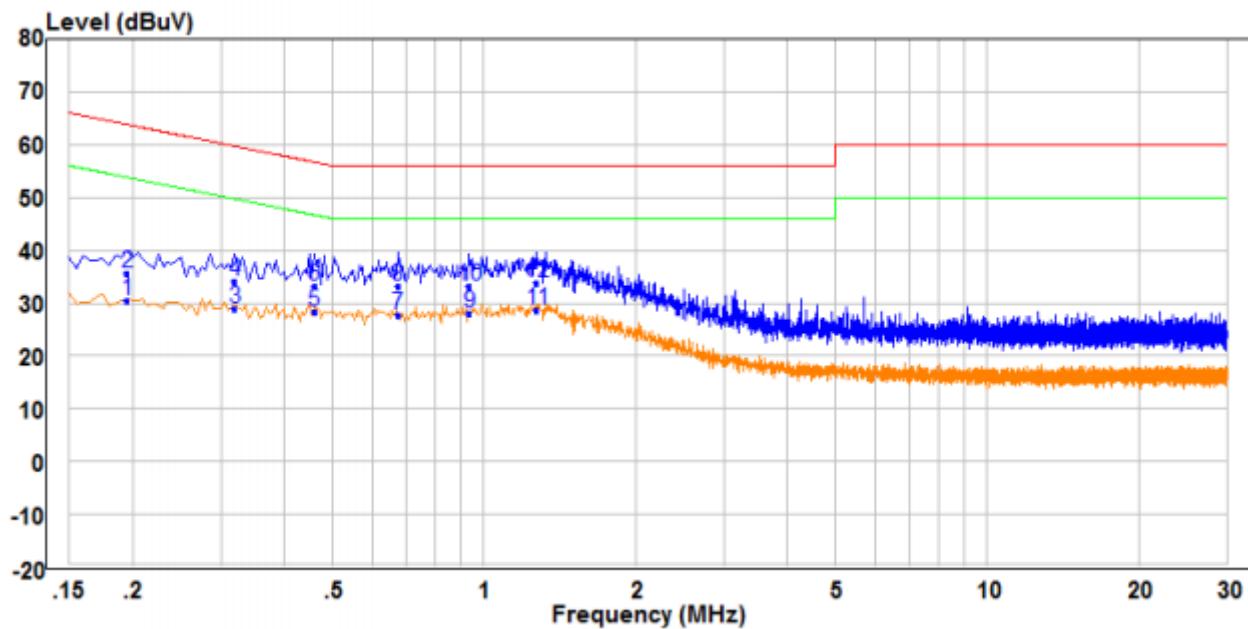


Freq	Read			Limit Line	Over Limit	Remark	Pol/Phase
	MHz	Level	Factor				
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.195	20.94	9.49	30.43	53.82	-23.39	Average Line
2	0.195	26.03	9.49	35.52	63.82	-28.30	QP Line
3	0.320	19.38	9.49	28.87	49.71	-20.84	Average Line
4	0.320	24.55	9.49	34.04	59.71	-25.67	QP Line
5	0.460	18.69	9.52	28.21	46.69	-18.48	Average Line
6	0.460	23.63	9.52	33.15	56.69	-23.54	QP Line
7	0.675	17.93	9.83	27.76	46.00	-18.24	Average Line
8	0.675	23.43	9.83	33.26	56.00	-22.74	QP Line
9	0.935	18.38	9.60	27.98	46.00	-18.02	Average Line
10	0.935	23.59	9.60	33.19	56.00	-22.81	QP Line
11	PP	1.275	19.07	9.52	28.59	46.00	-17.41 Average Line
12	QP	1.275	24.22	9.52	33.74	56.00	-22.26 QP Line

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

Neutral line:

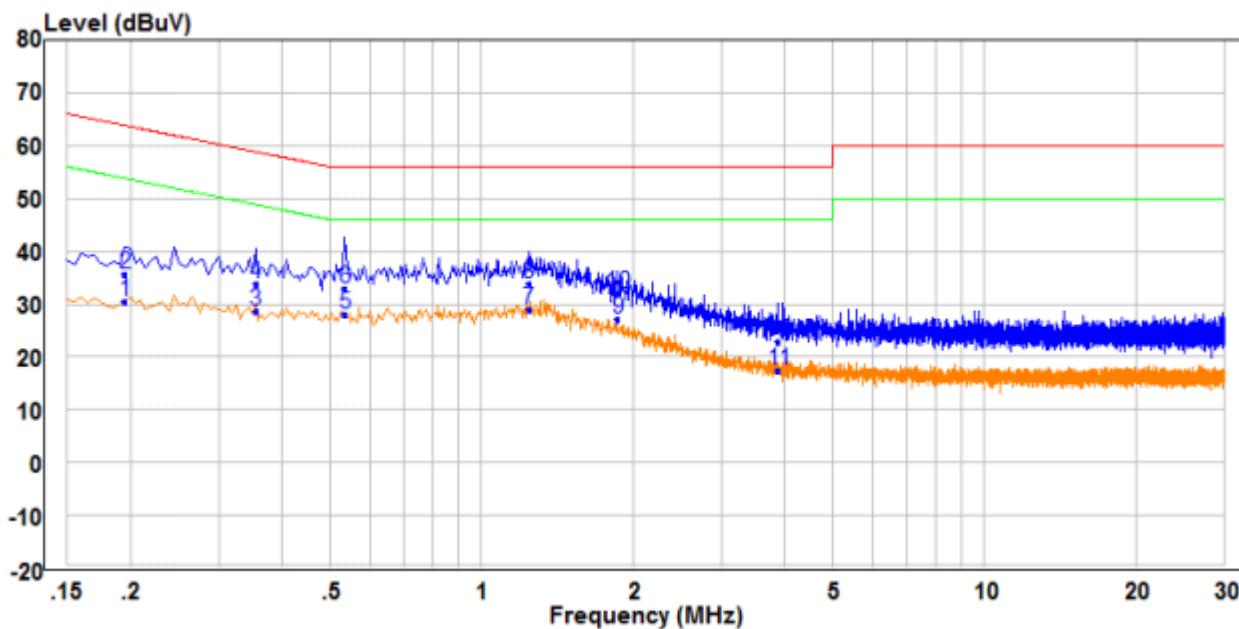


Freq	Read			Limit Line	Over Limit	Remark	Pol/Phase
	Freq	Level	Factor				
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.195	20.94	9.48	30.42	53.82	-23.40	Average
2	0.195	26.21	9.48	35.69	63.82	-28.13	QP
3	0.355	18.98	9.52	28.50	48.84	-20.34	Average
4	0.355	24.15	9.52	33.67	58.84	-25.17	QP
5	0.535	18.31	9.64	27.95	46.00	-18.05	Average
6	0.535	23.38	9.64	33.02	56.00	-22.98	QP
7	PP	1.240	9.71	28.93	46.00	-17.07	Average
8	QP	1.240	24.00	9.71	33.71	56.00	-22.29
9		17.31	9.71	27.02	46.00	-18.98	Average
10		1.870	9.71	32.00	56.00	-24.00	QP
11		3.895	9.77	17.39	46.00	-28.61	Average
12		3.895	9.77	22.78	56.00	-33.22	QP

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

6.3 Conducted Peak Output Power

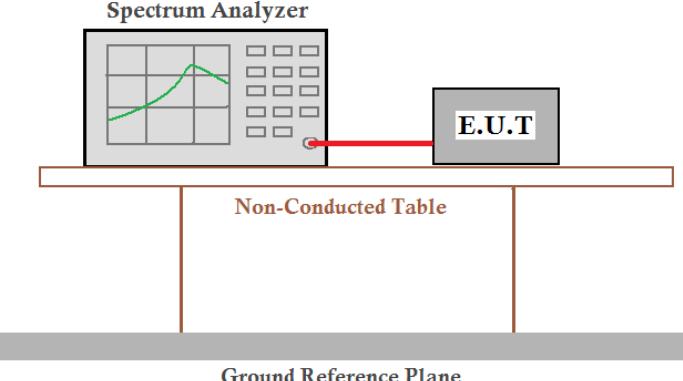Test Requirement:	47 CFR Part 15C Section 15.247 (b)(1)
Test Method:	ANSI C63.10:2013
Test Setup:	<p style="text-align: center;">Spectrum Analyzer</p>  <p style="text-align: center;">Non-Conducted Table</p> <p style="text-align: center;">Ground Reference Plane</p> <p><i>Remark: Offset=Cable loss+ attenuation factor.</i></p>
Exploratory Test Mode:	Non-hopping transmitting with all kind of modulation and all kind of data type
Final Test Mode:	Through Pre-scan, find the DH5 of data type is the worst case of GFSK modulation type, 2-DH5 of data type is the worst case of π/4DQPSK modulation type, 3-DH5 of data type is the worst case of 8DPSK modulation type.
Test Results:	Pass




Measurement Data


GFSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	-0.610	21.00	Pass
Middle	-0.060	21.00	Pass
Highest	-0.290	21.00	Pass


$\pi/4$ DQPSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	1.220	21.00	Pass
Middle	1.840	21.00	Pass
Highest	1.570	21.00	Pass


8DPSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	-0.580	21.00	Pass
Middle	2.350	21.00	Pass
Highest	-0.500	21.00	Pass

Test plot as follows:

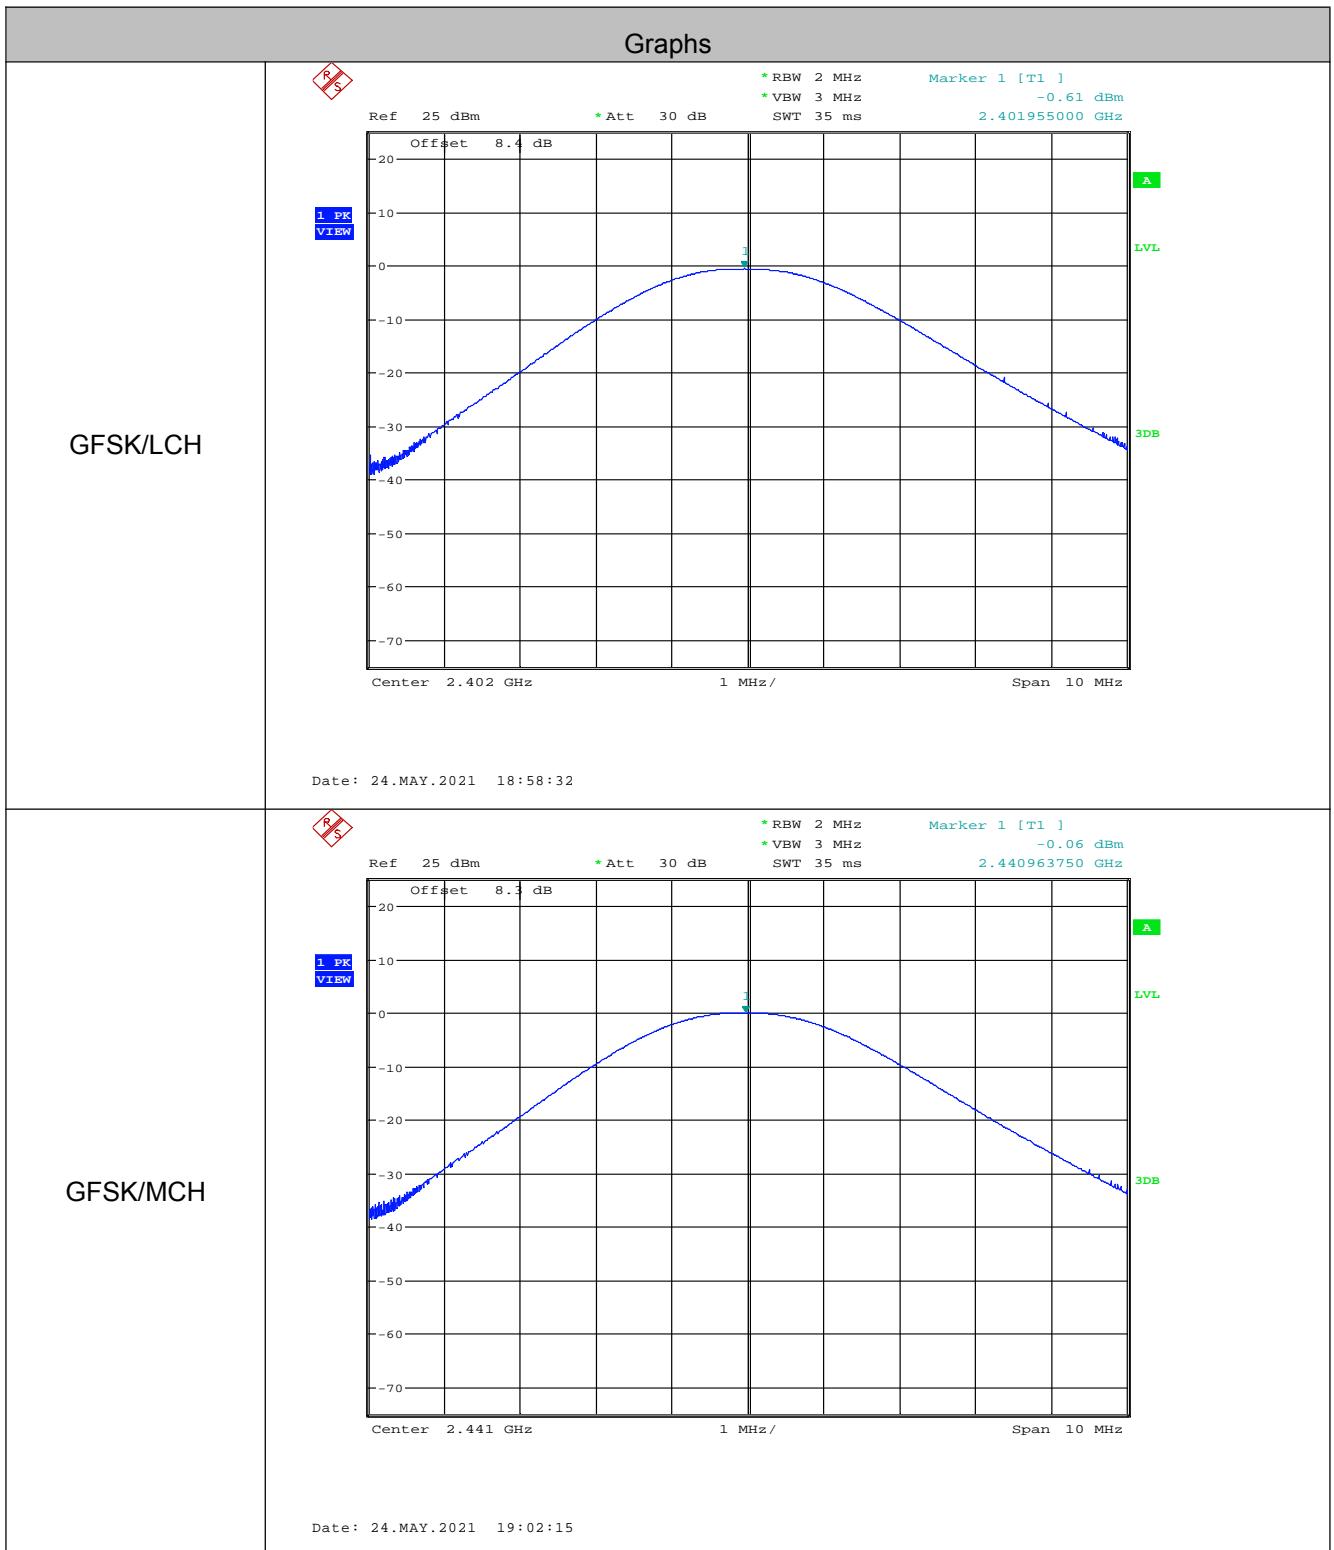

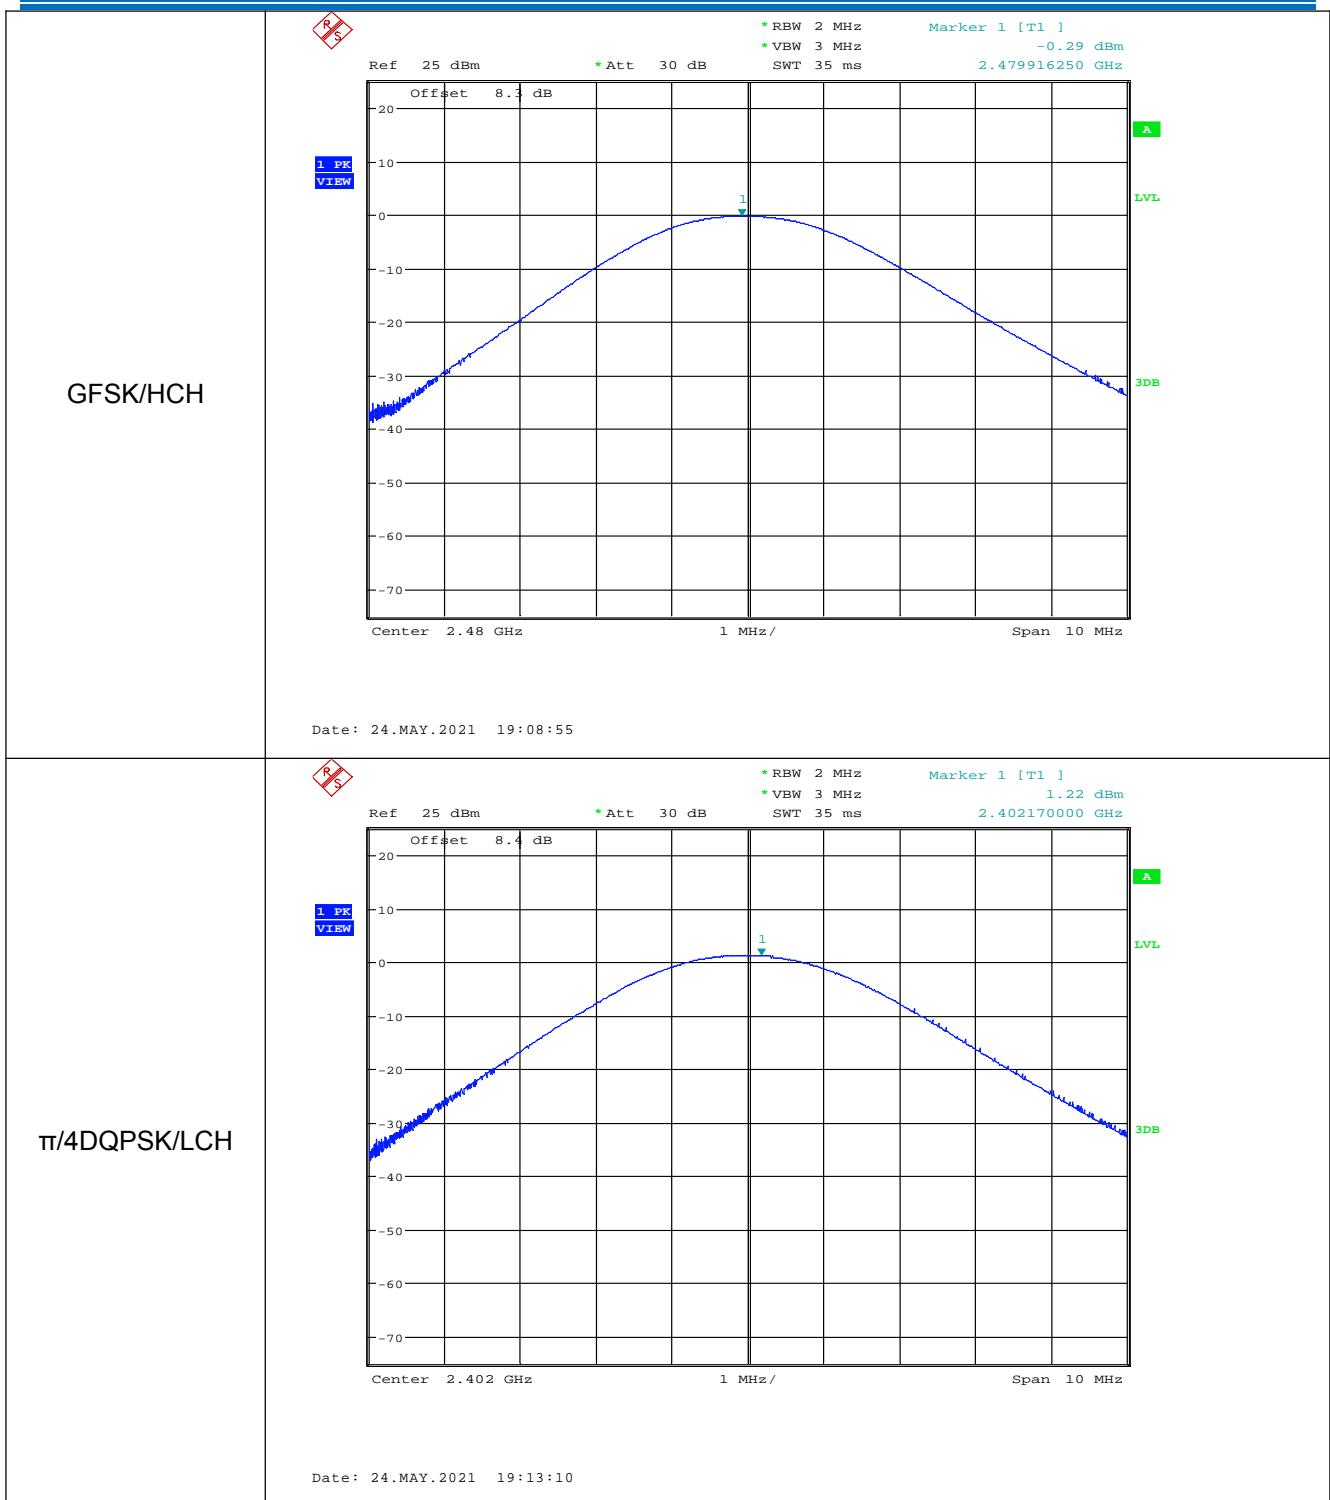


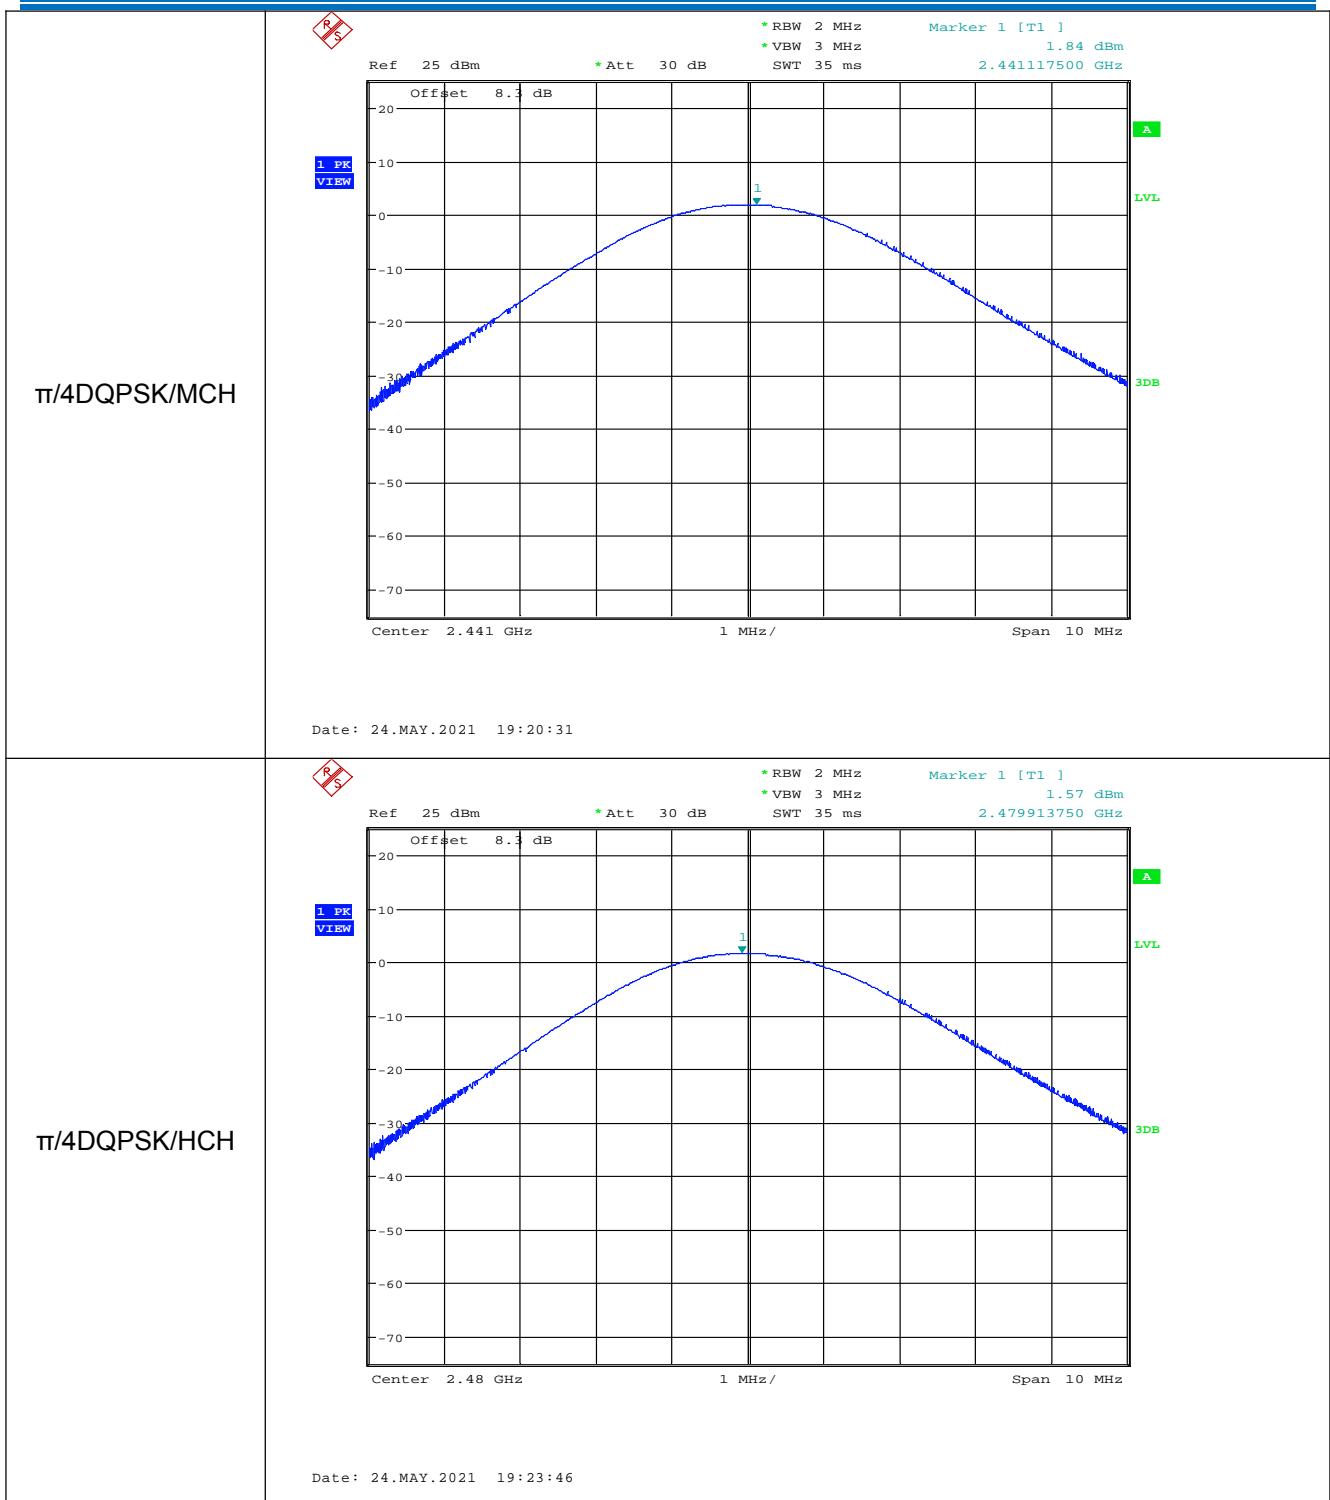

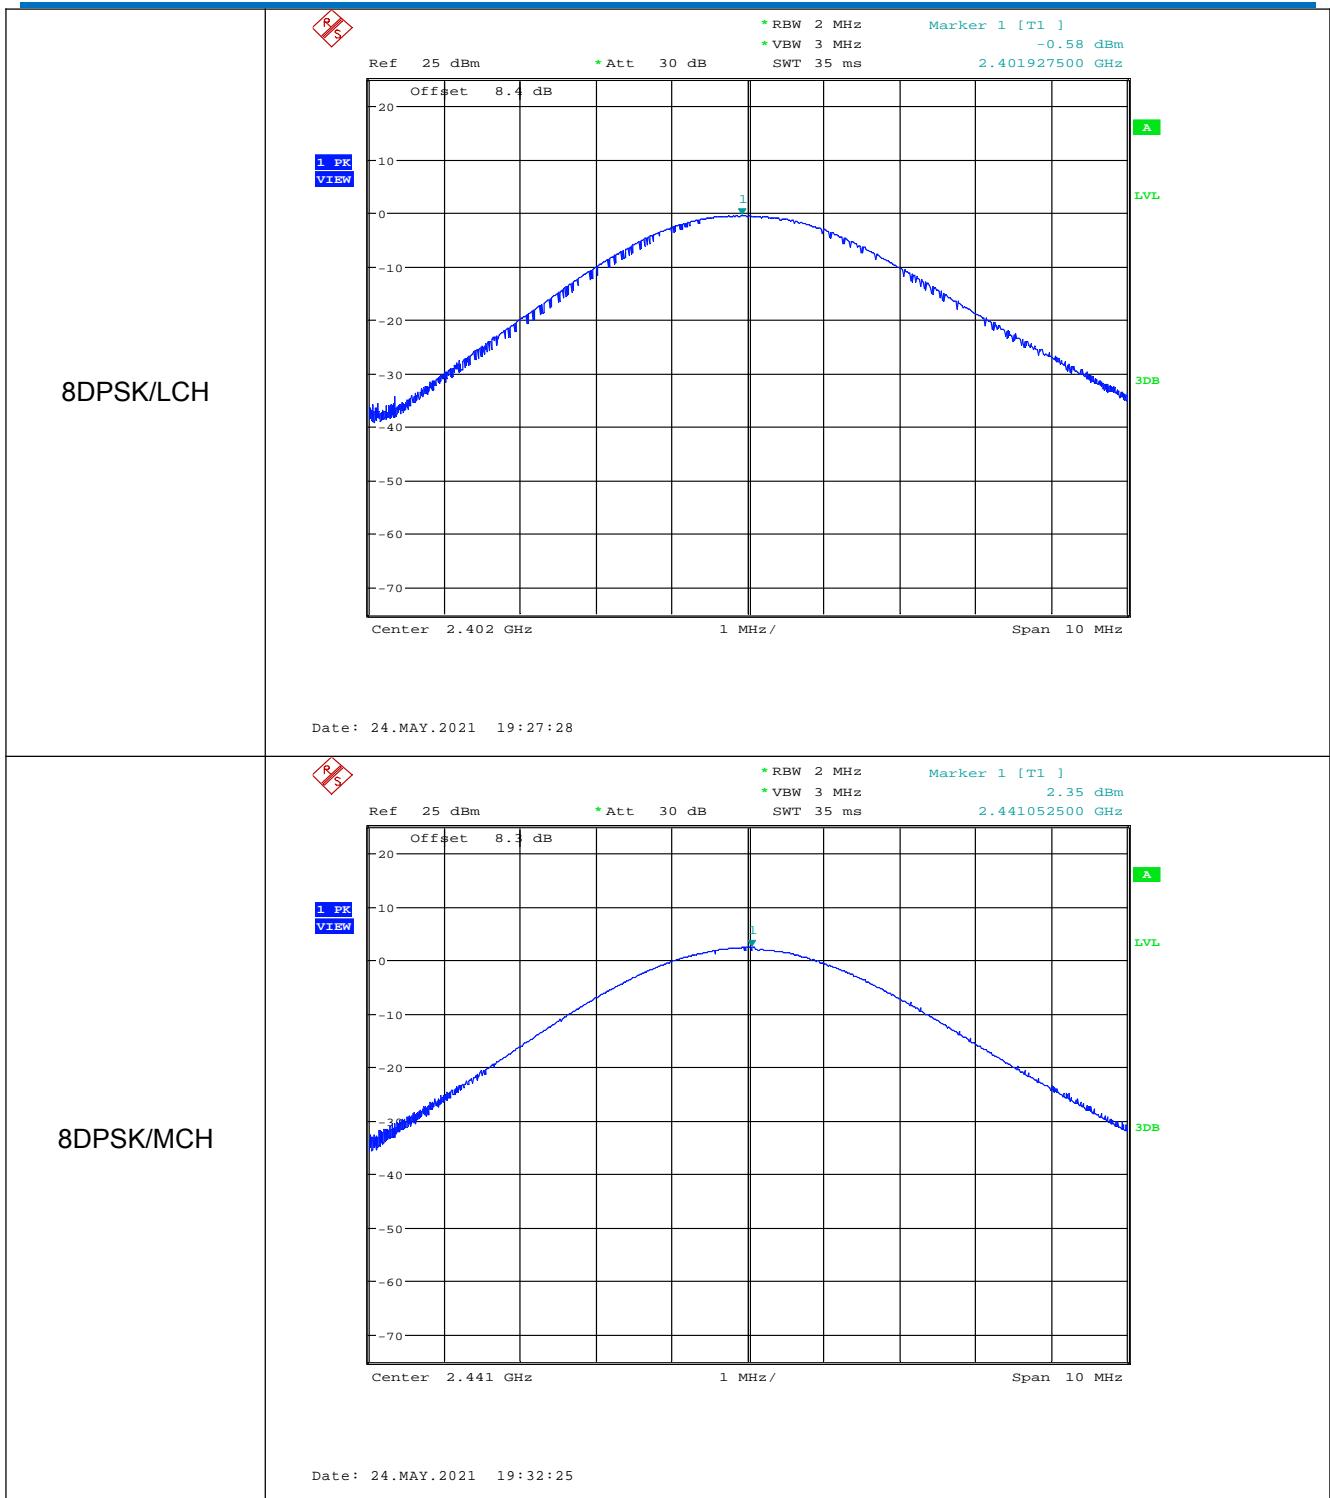




6.4 20dB Occupy Bandwidth

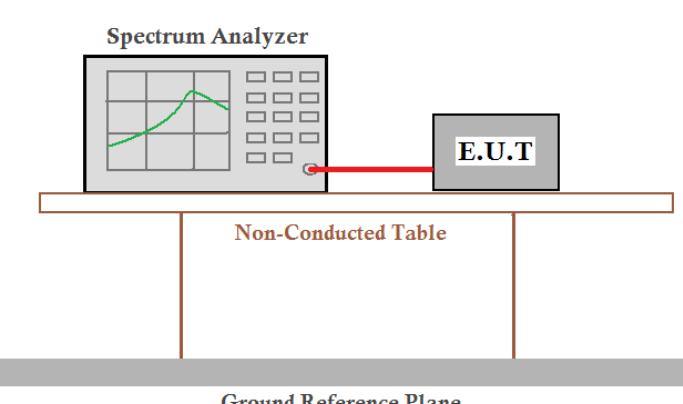
Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013
Test Setup:	<p style="text-align: center;">  Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane </p> <p><i>Remark: Offset=Cable loss+ attenuation factor.</i></p>
Limit:	
Exploratory Test Mode:	
Final Test Mode:	Through Pre-scan, find the DH5 of data type is the worst case of GFSK modulation type, 2-DH5 of data type is the worst case of $\pi/4$ DQPSK modulation type, 3-DH5 of data type is the worst case of 8DPSK modulation type.
Test Results:	Pass


Measurement Data


Test channel	20dB Occupy Bandwidth (kHz)		
	GFSK	$\pi/4$ DQPSK	8DPSK
Lowest	0.956	1.348	1.336
Middle	0.960	1.348	1.338
Highest	0.956	1.346	1.340


Test plot as follows:

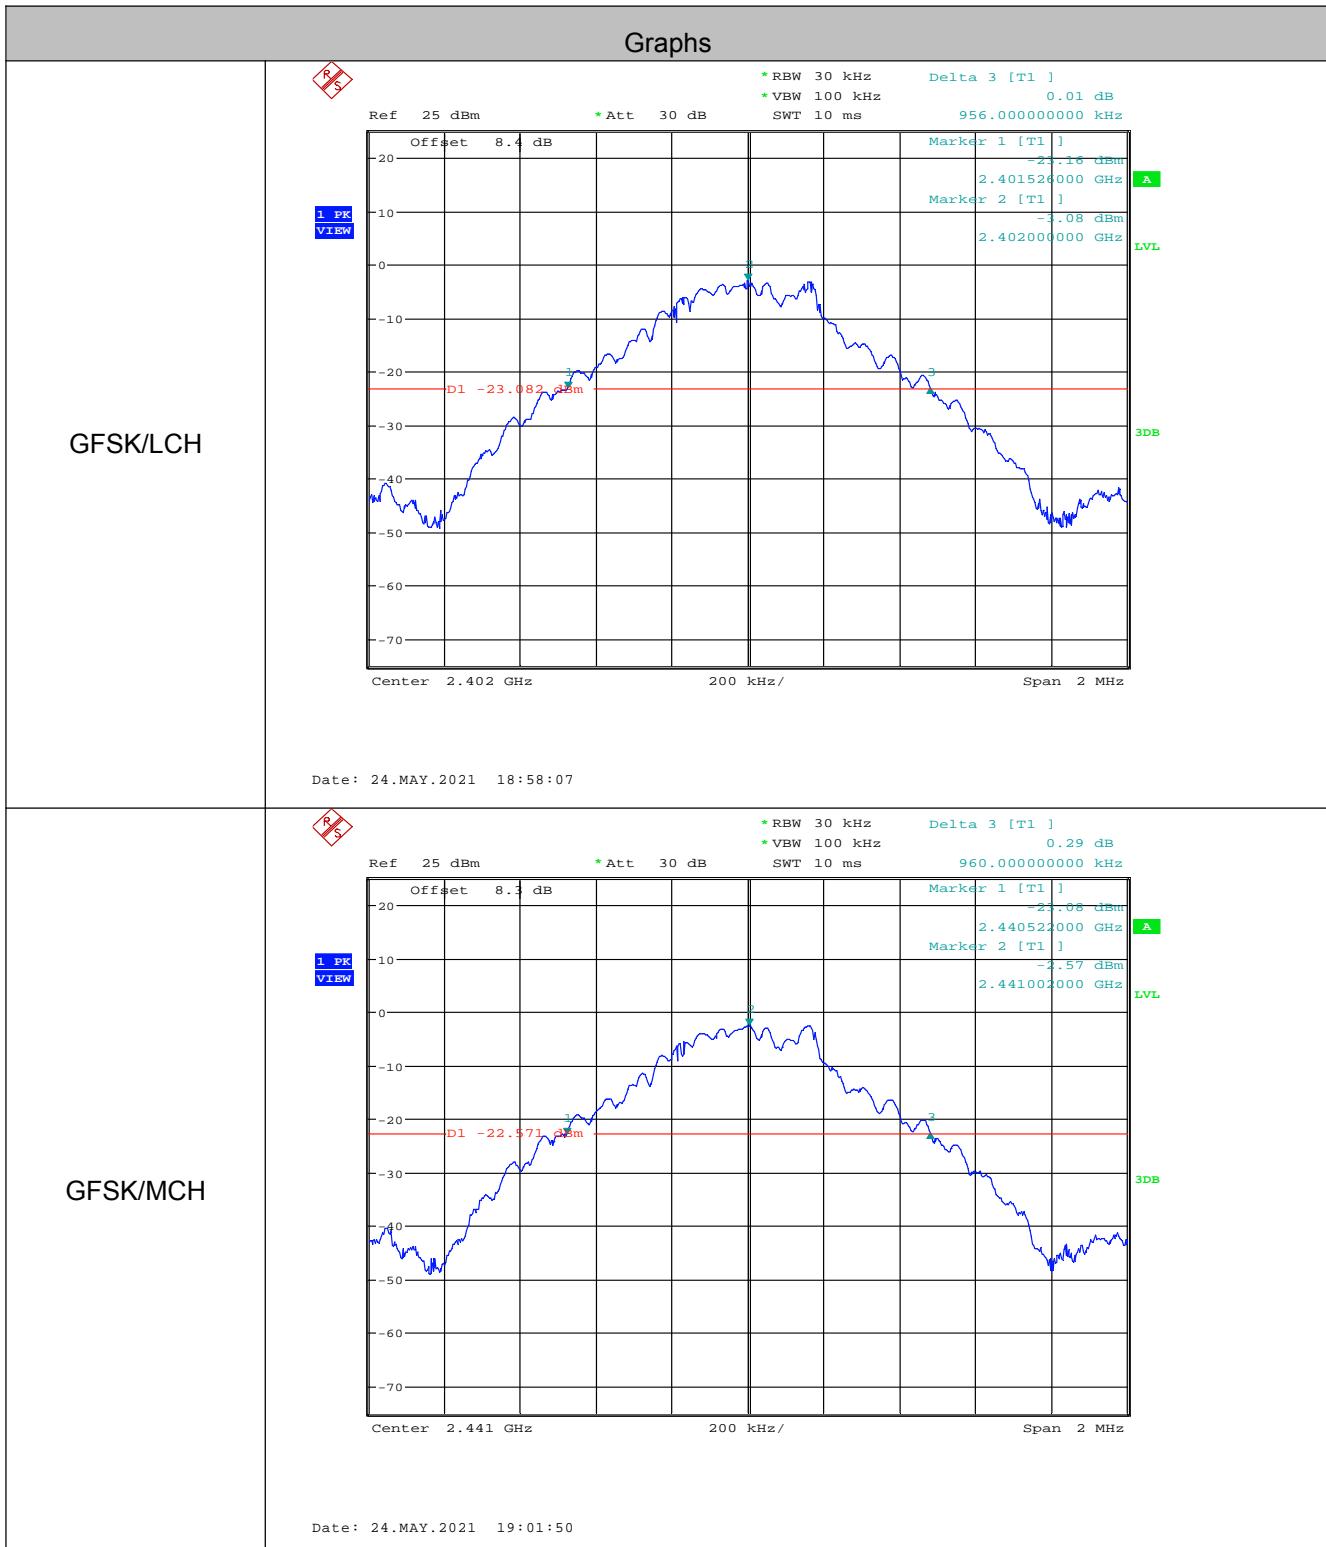

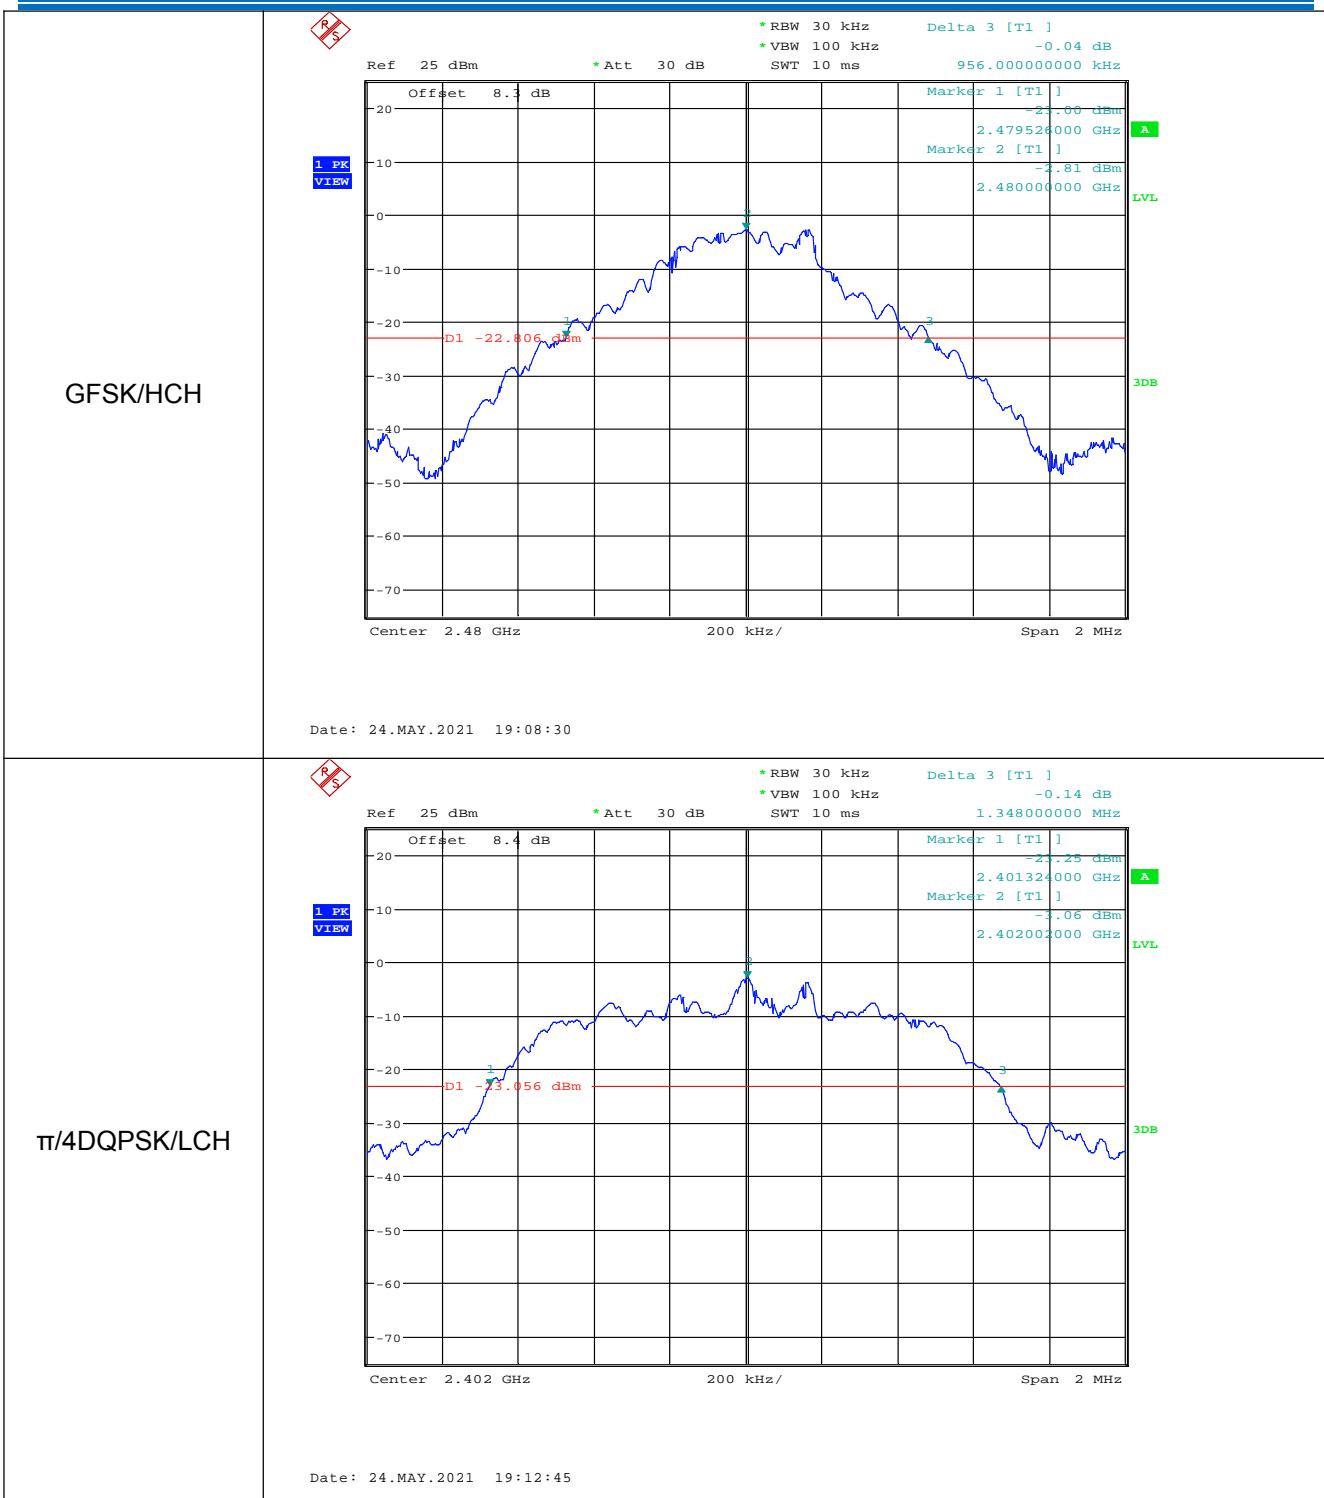


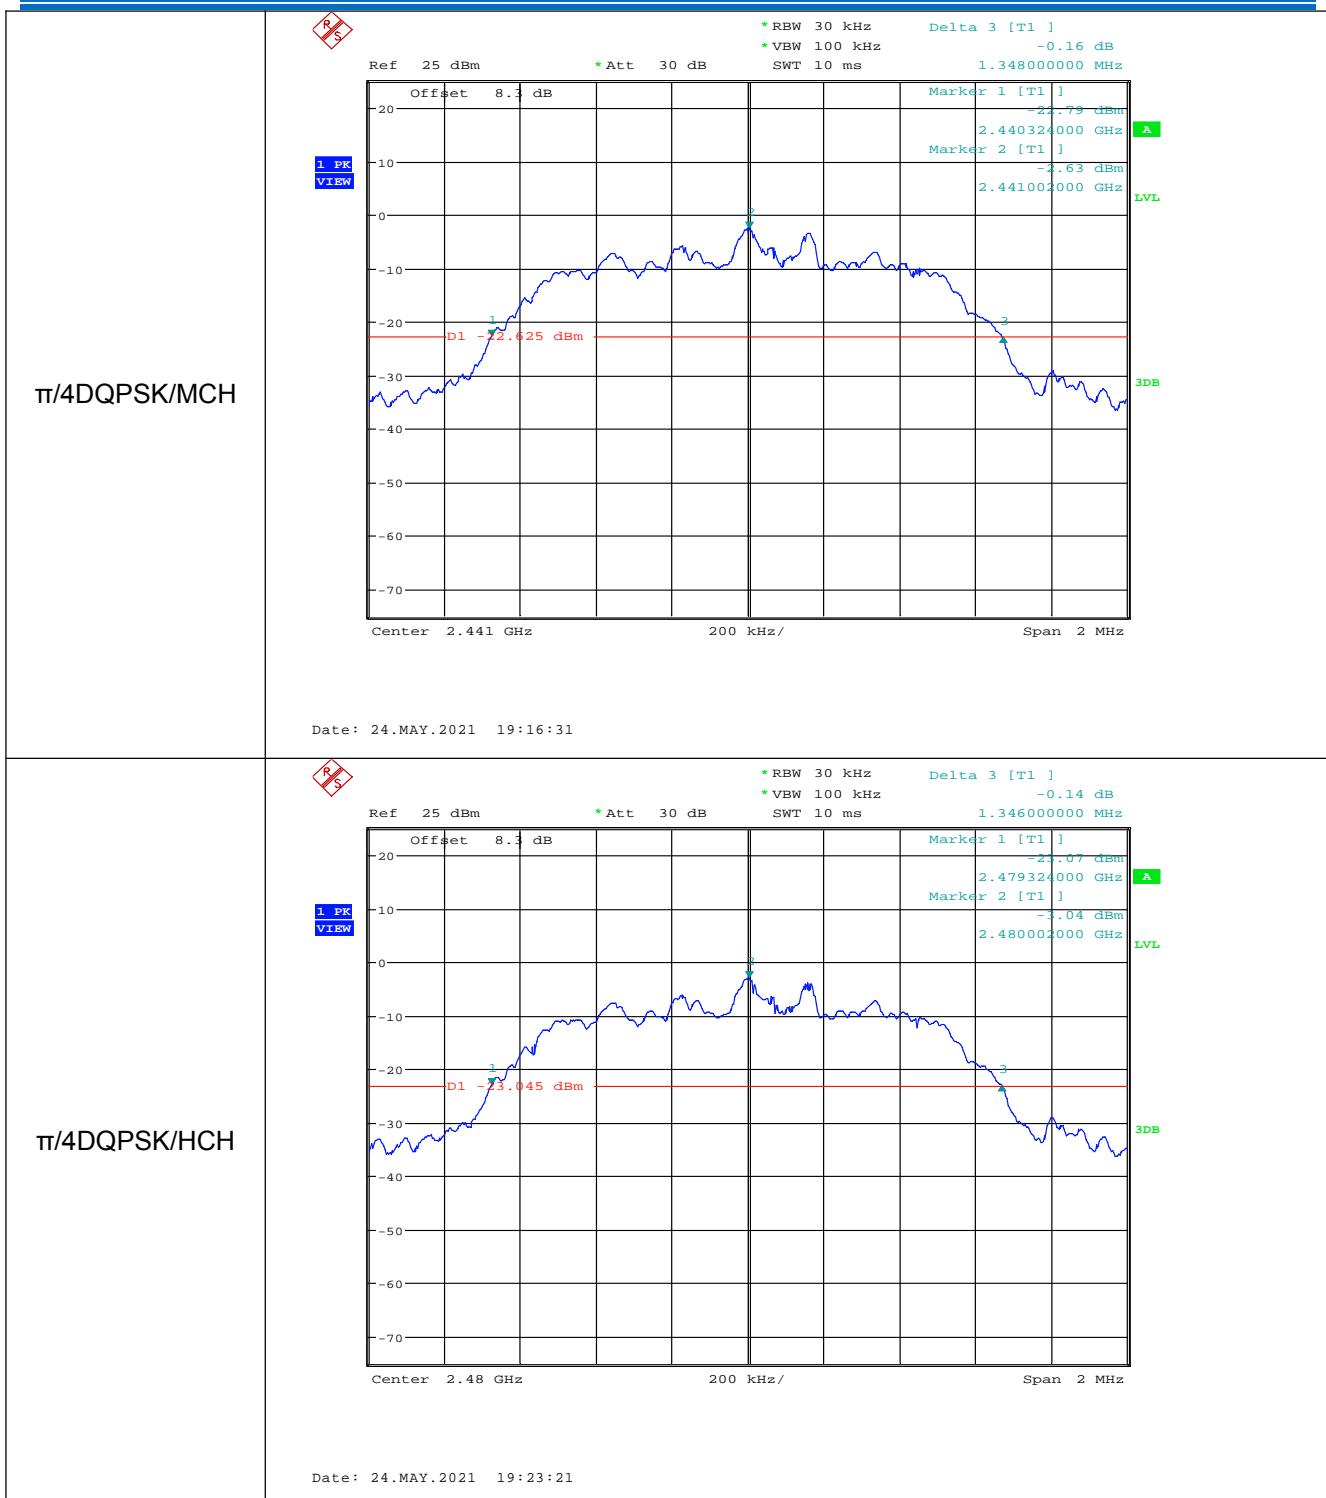

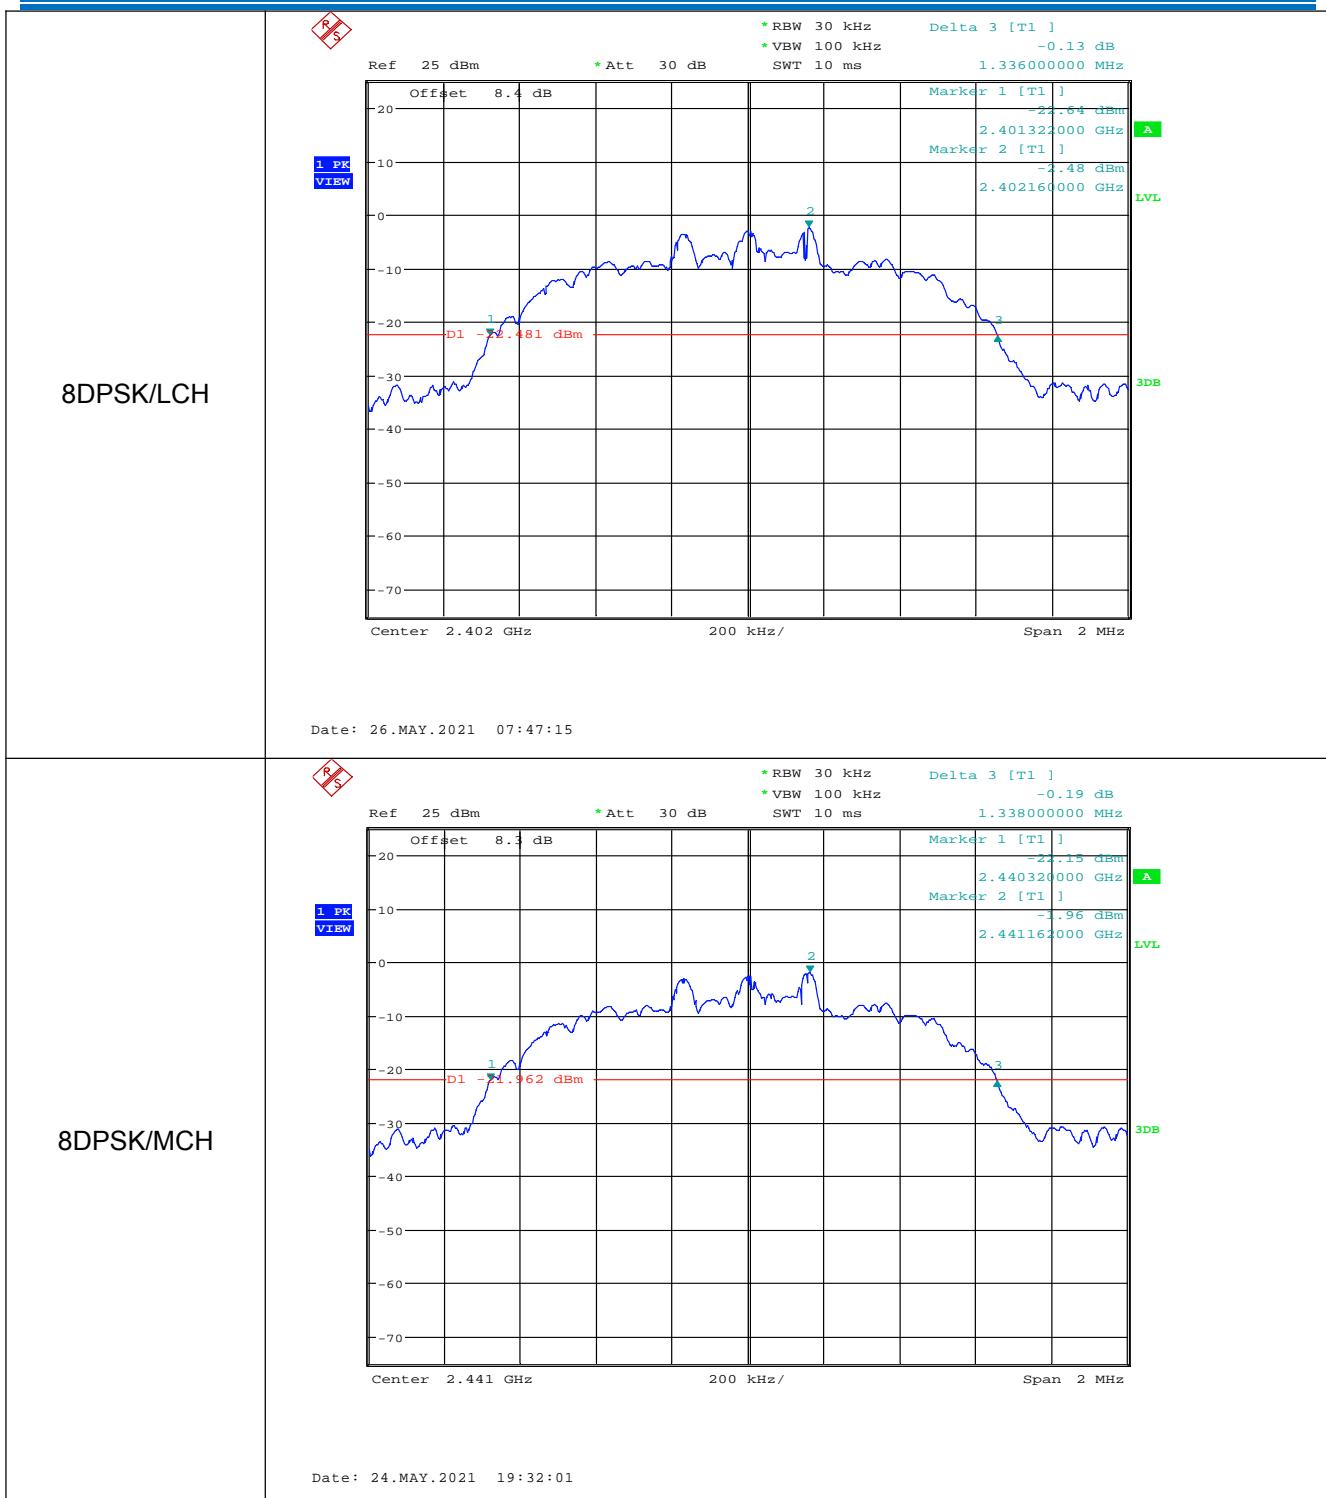

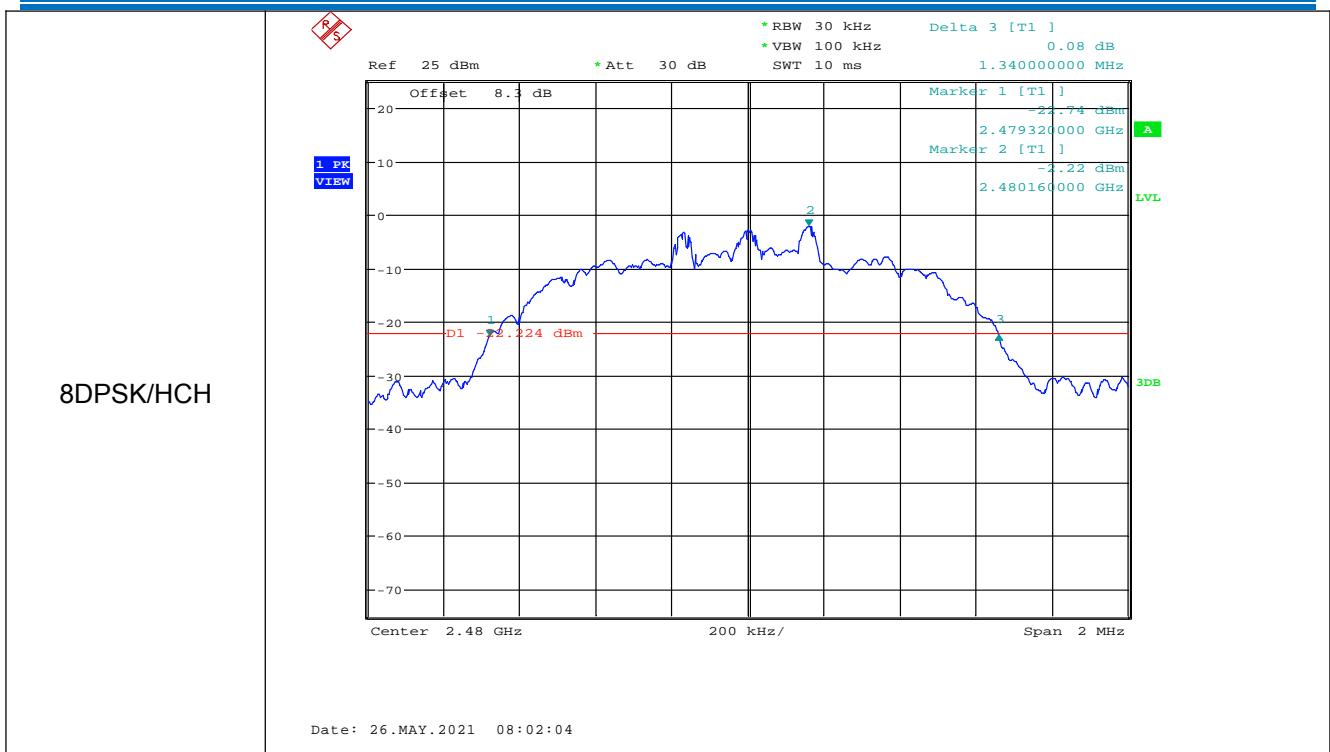


6.5 Carrier Frequencies Separation

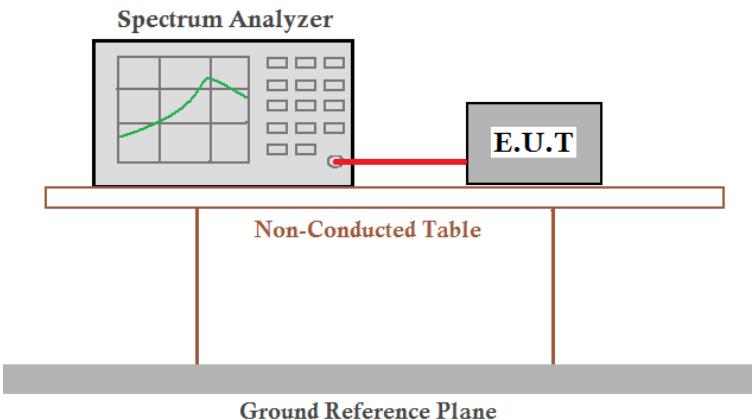
Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013
Test Setup:	<p style="text-align: center;">Spectrum Analyzer</p>  <p style="text-align: center;">Non-Conducted Table</p> <p style="text-align: center;">Ground Reference Plane</p>
<i>Remark: Offset=Cable loss+ attenuation factor.</i>	
Exploratory Test Mode:	Hopping transmitting with all kind of modulation and all kind of data type
Final Test Mode:	Through Pre-scan, find the DH5 of data type is the worst case of GFSK modulation type, 2-DH5 of data type is the worst case of π/4DQPSK modulation type, 3-DH5 of data type is the worst case of 8DPSK modulation type.
Limit:	0.025MHz or 2/3 of the 20dB bandwidth (whichever is greater)
Test Results:	Pass


GFSK mode			
Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result
Lowest	1.010	≥0.640	Pass
Middle	1.000	≥0.640	Pass
Highest	1.000	≥0.640	Pass
$\pi/4$ DQPSK mode			
Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result
Lowest	1.005	≥0.899	Pass
Middle	1.000	≥0.899	Pass
Highest	1.000	≥0.899	Pass
8DPSK mode			
Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result
Lowest	1.163	≥0.894	Pass
Middle	1.000	≥0.894	Pass
Highest	1.005	≥0.894	Pass


Mode	20dB bandwidth (kHz) (worse case)	Limit (kHz) (Carrier Frequencies Separation)
GFSK	0.960	0.640
$\pi/4$ DQPSK	1.348	0.899
8DPSK	1.340	0.894


Test plot as follows:

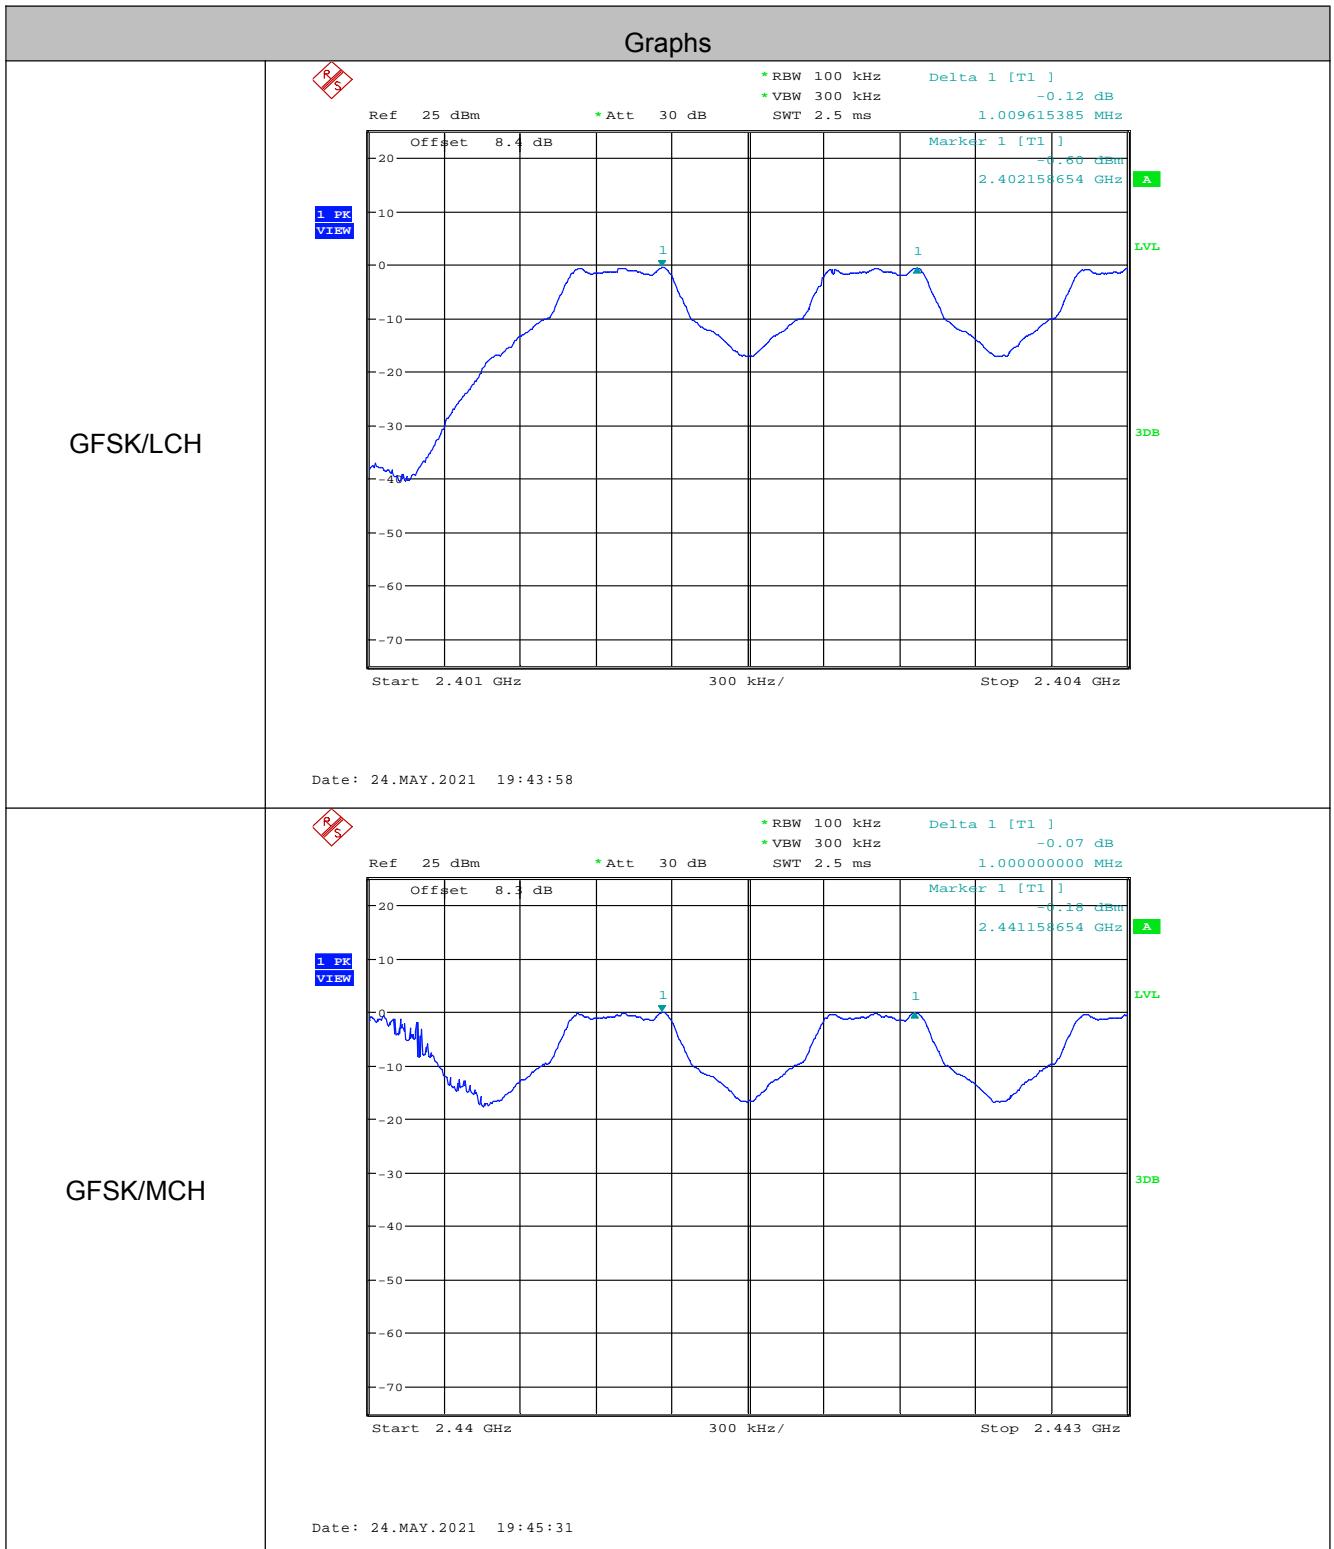

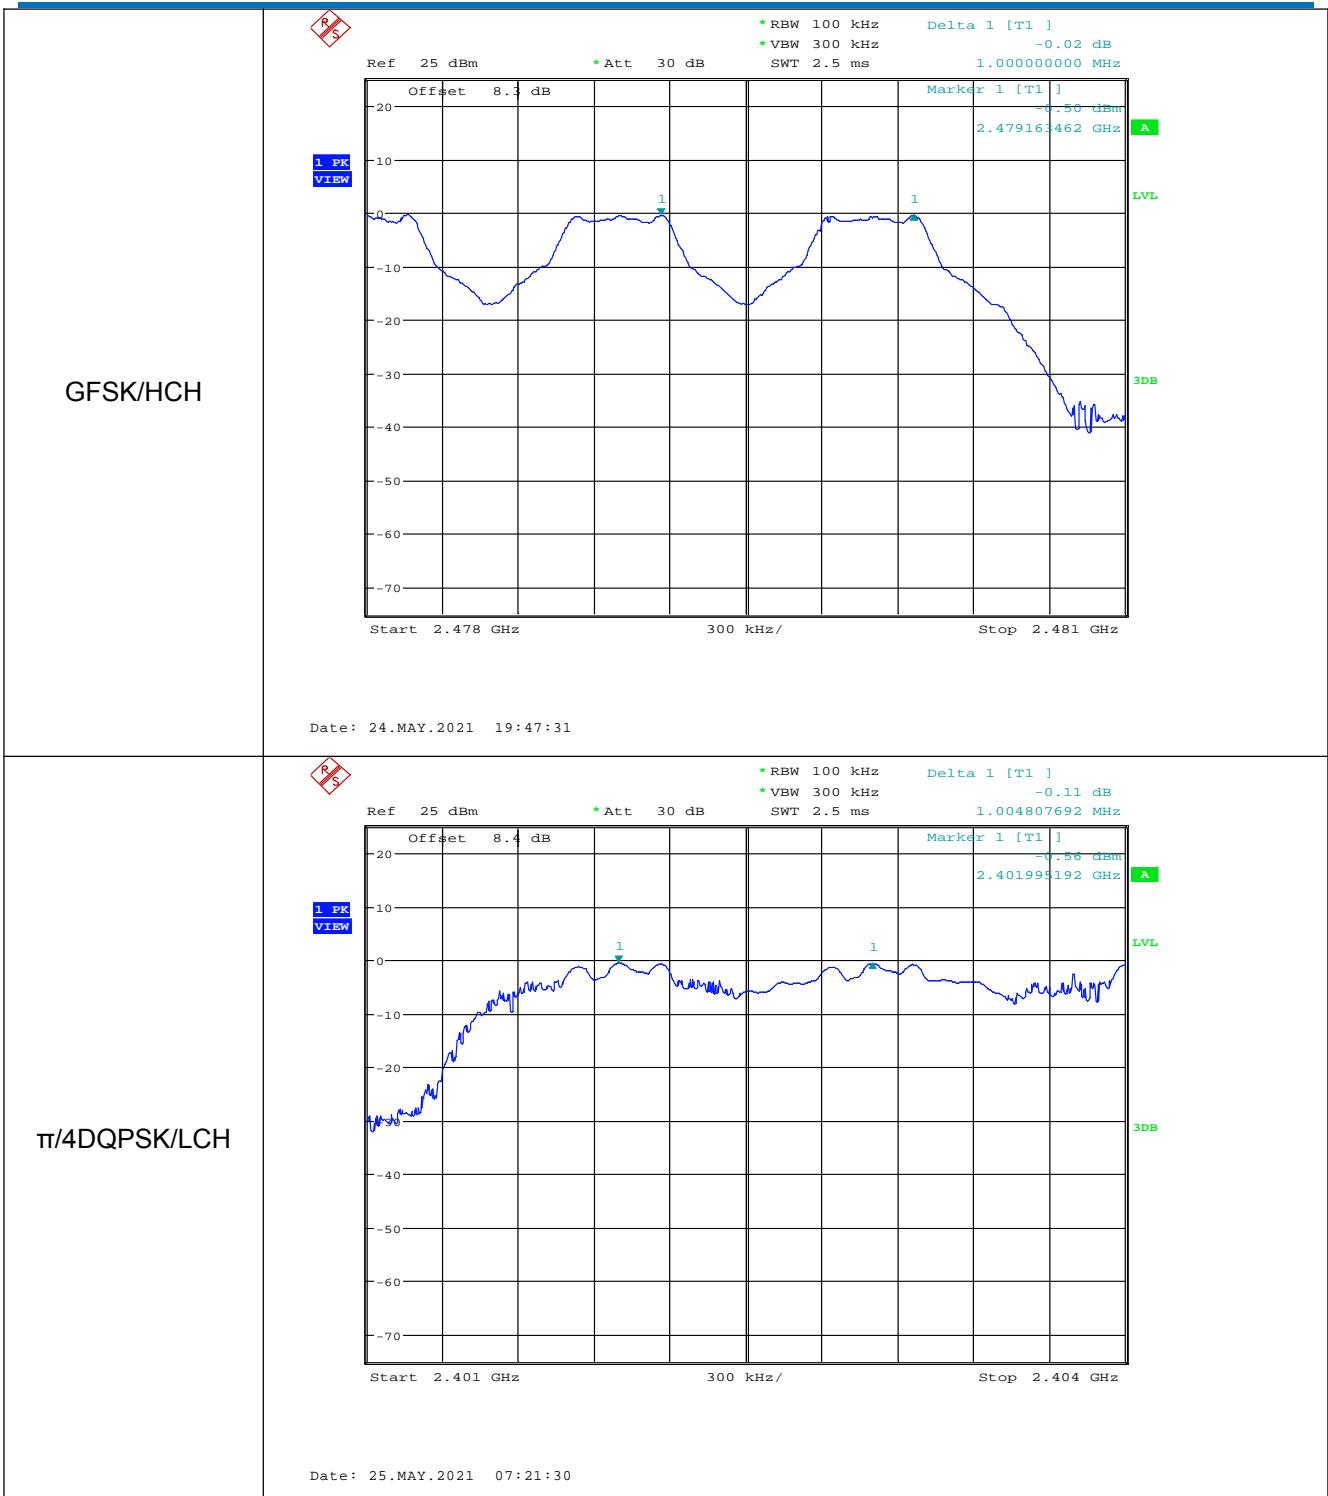


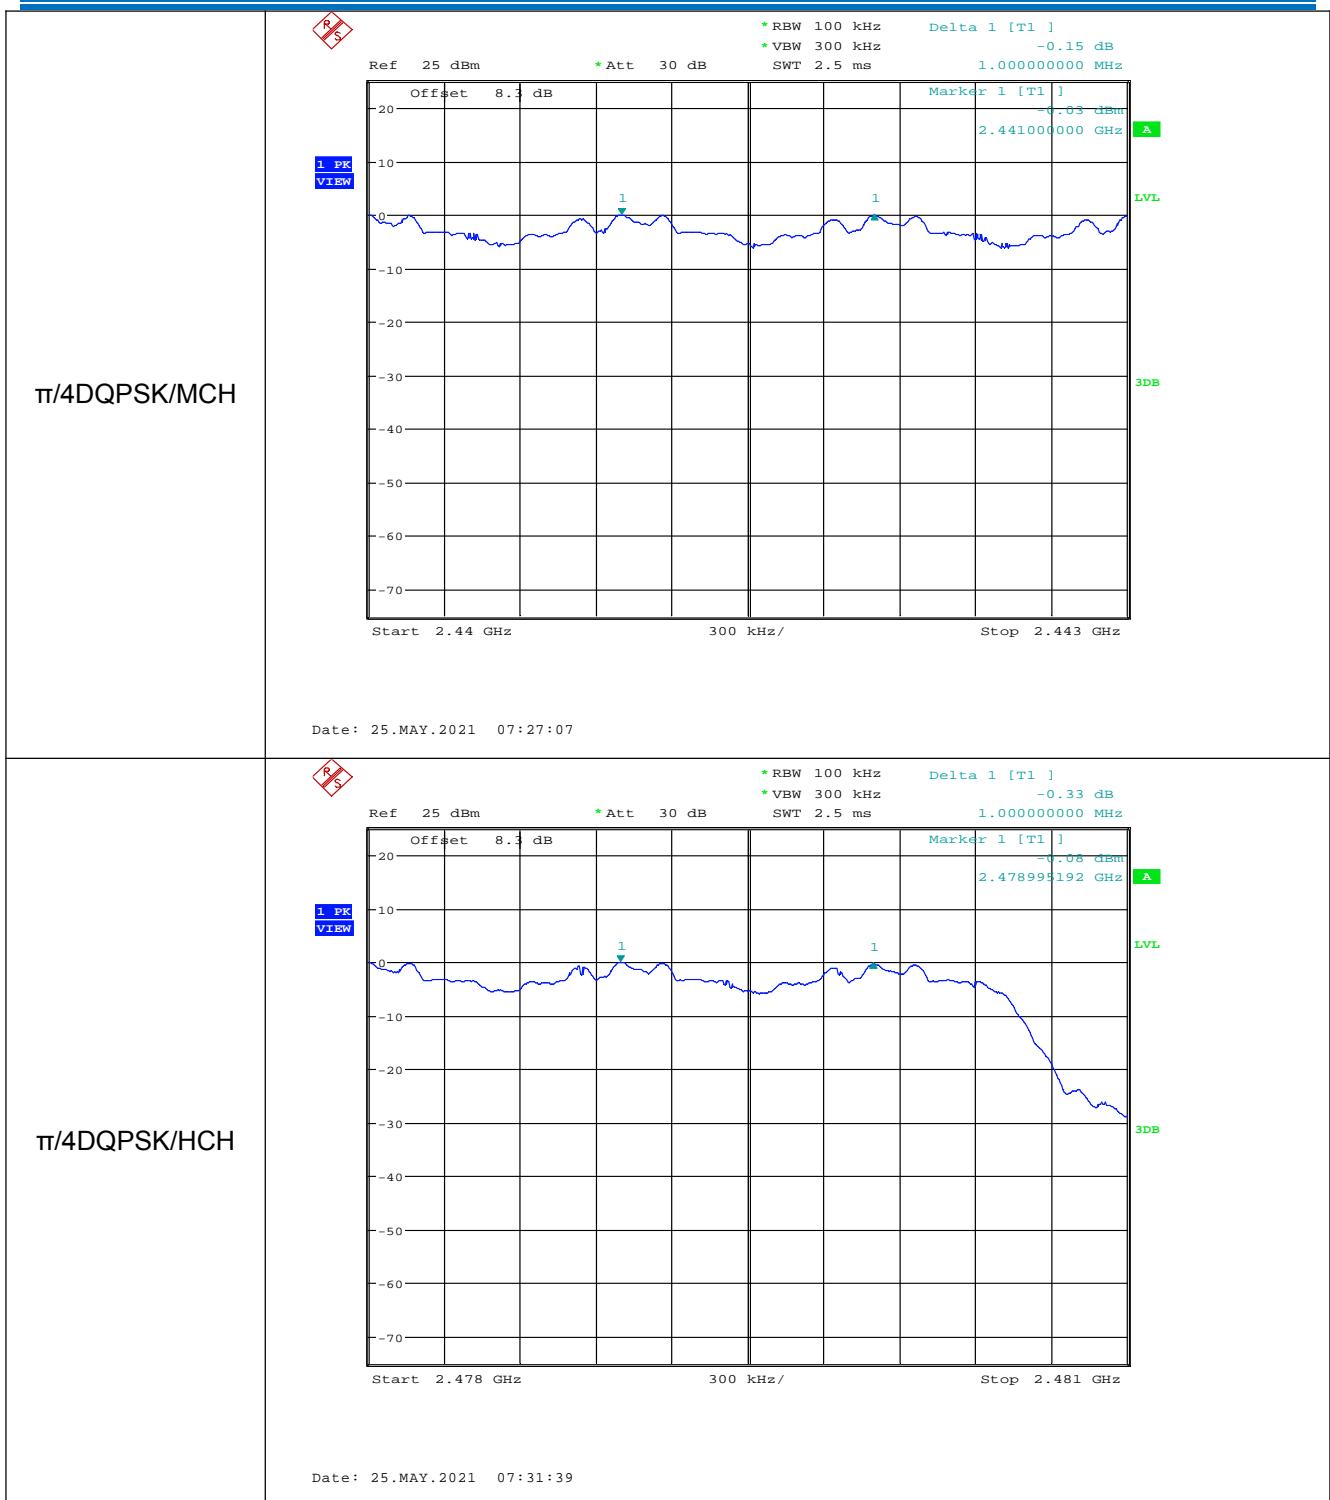

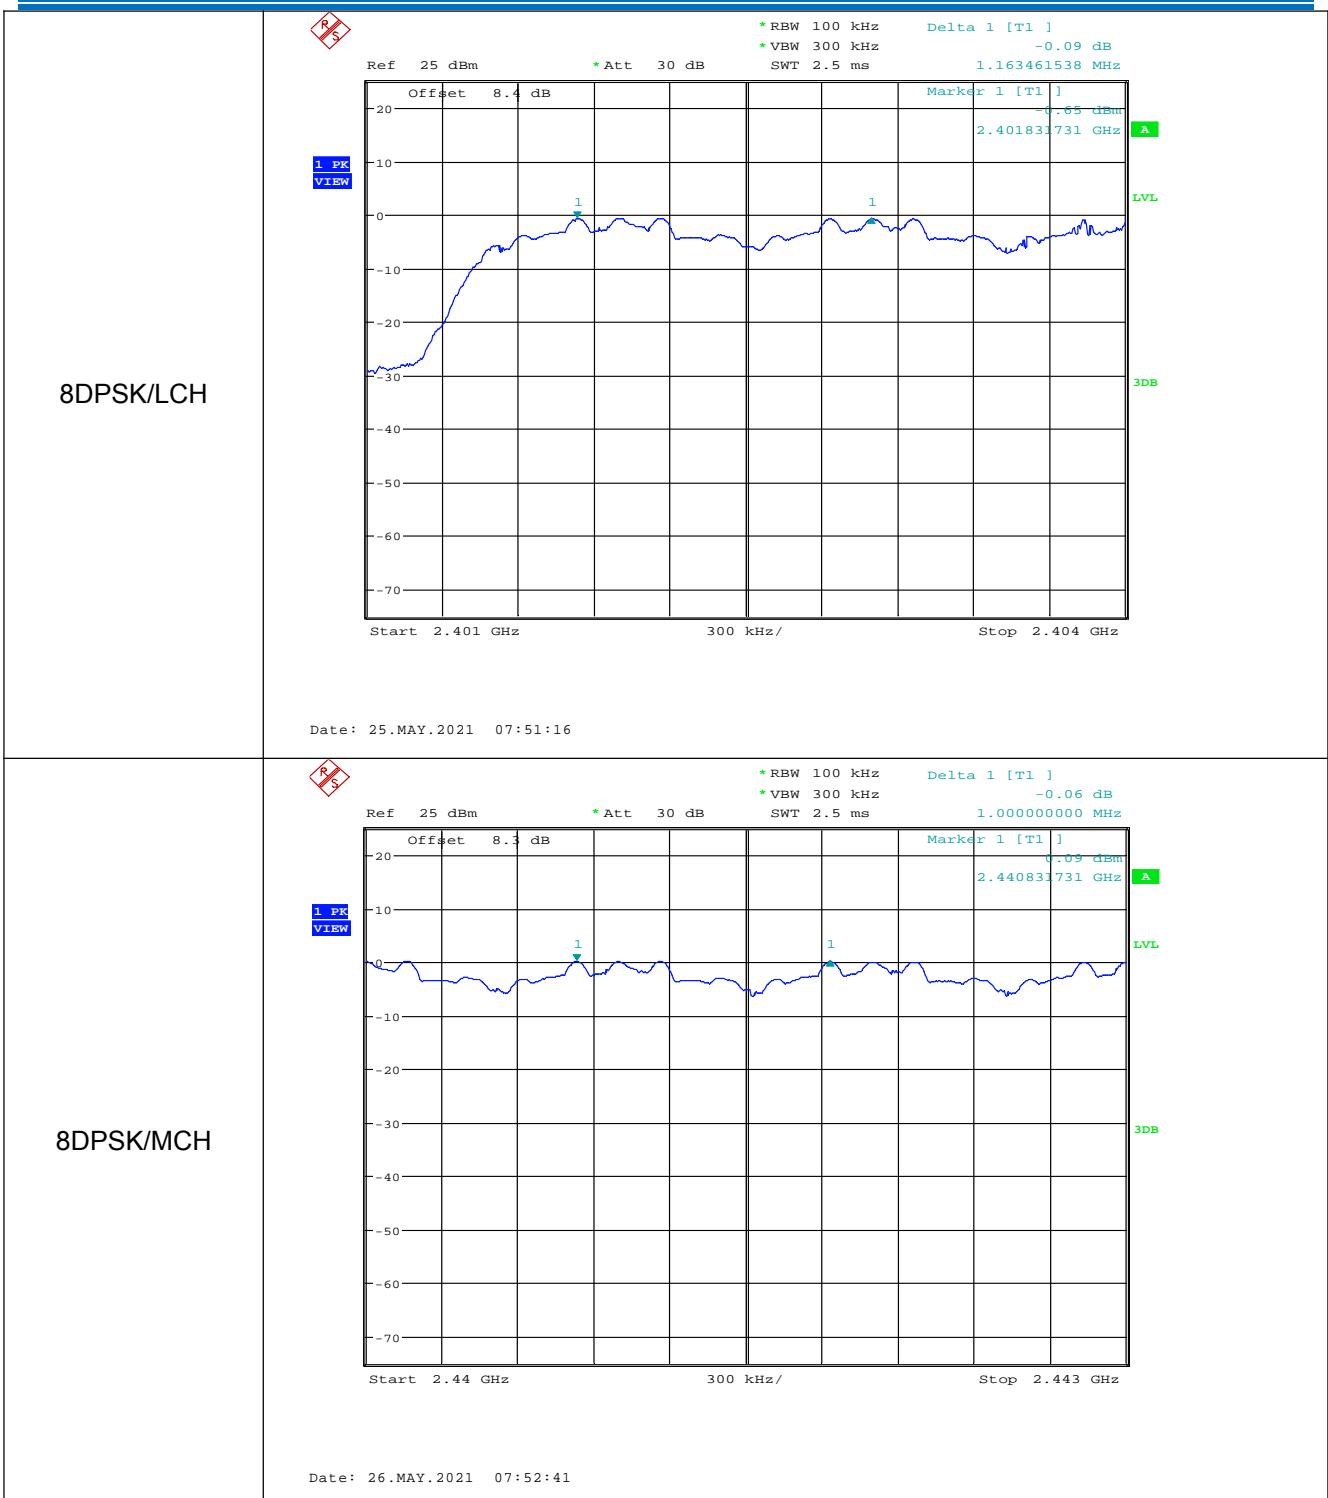

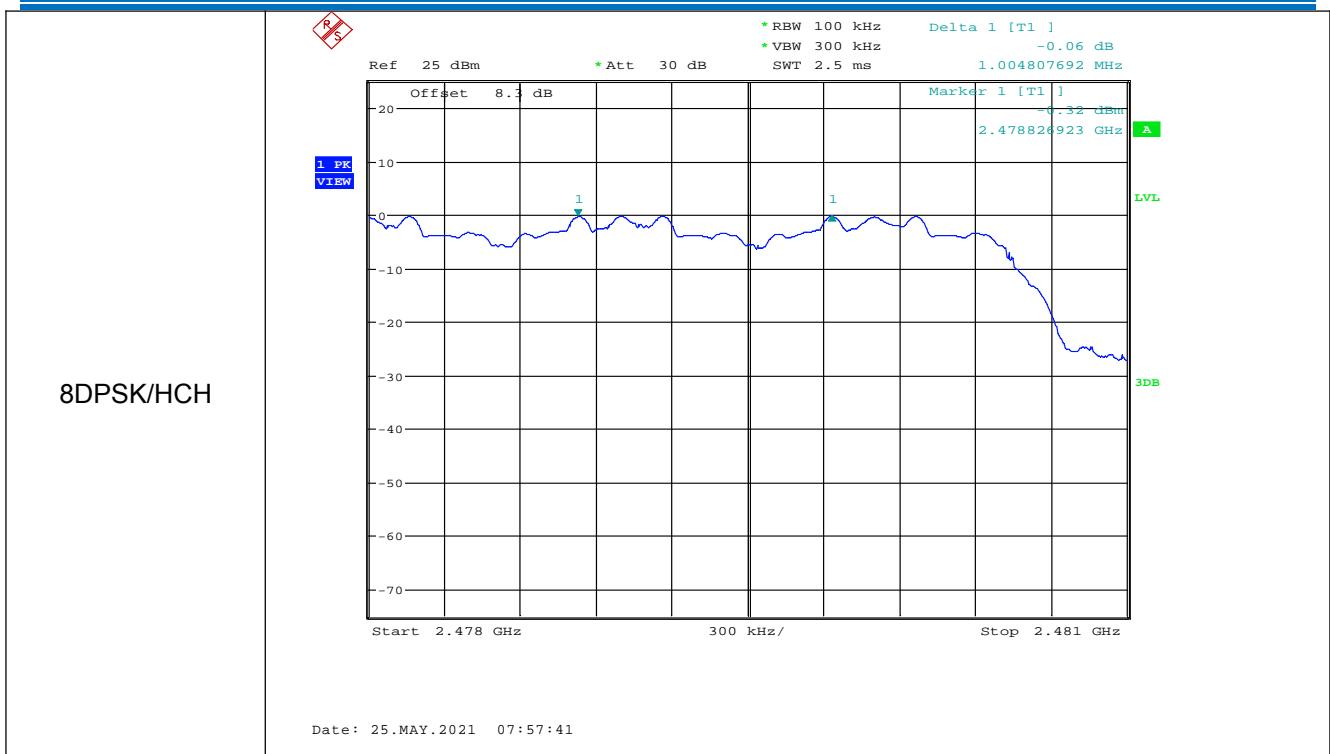


6.6 Hopping Channel Number

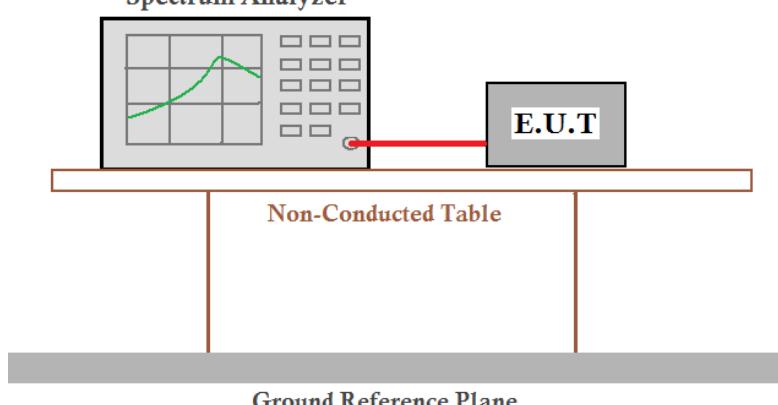
Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013
Test Setup:	<p style="text-align: center;"> Spectrum Analyzer  E.U.T Non-Conducted Table Ground Reference Plane </p> <p><i>Remark: Offset=Cable loss+ attenuation factor.</i></p>
Limit:	
At least 15 channels	
Test Mode:	
Hopping transmitting with all kind of modulation.	
Test Results:	
Pass	

Measurement Data


Test mode	Hopping channel numbers	Limit	Results
GFSK	79	15	Pass
$\pi/4$ DQPSK	79	15	Pass
8DPSK	79	15	Pass

Test plot as follows:

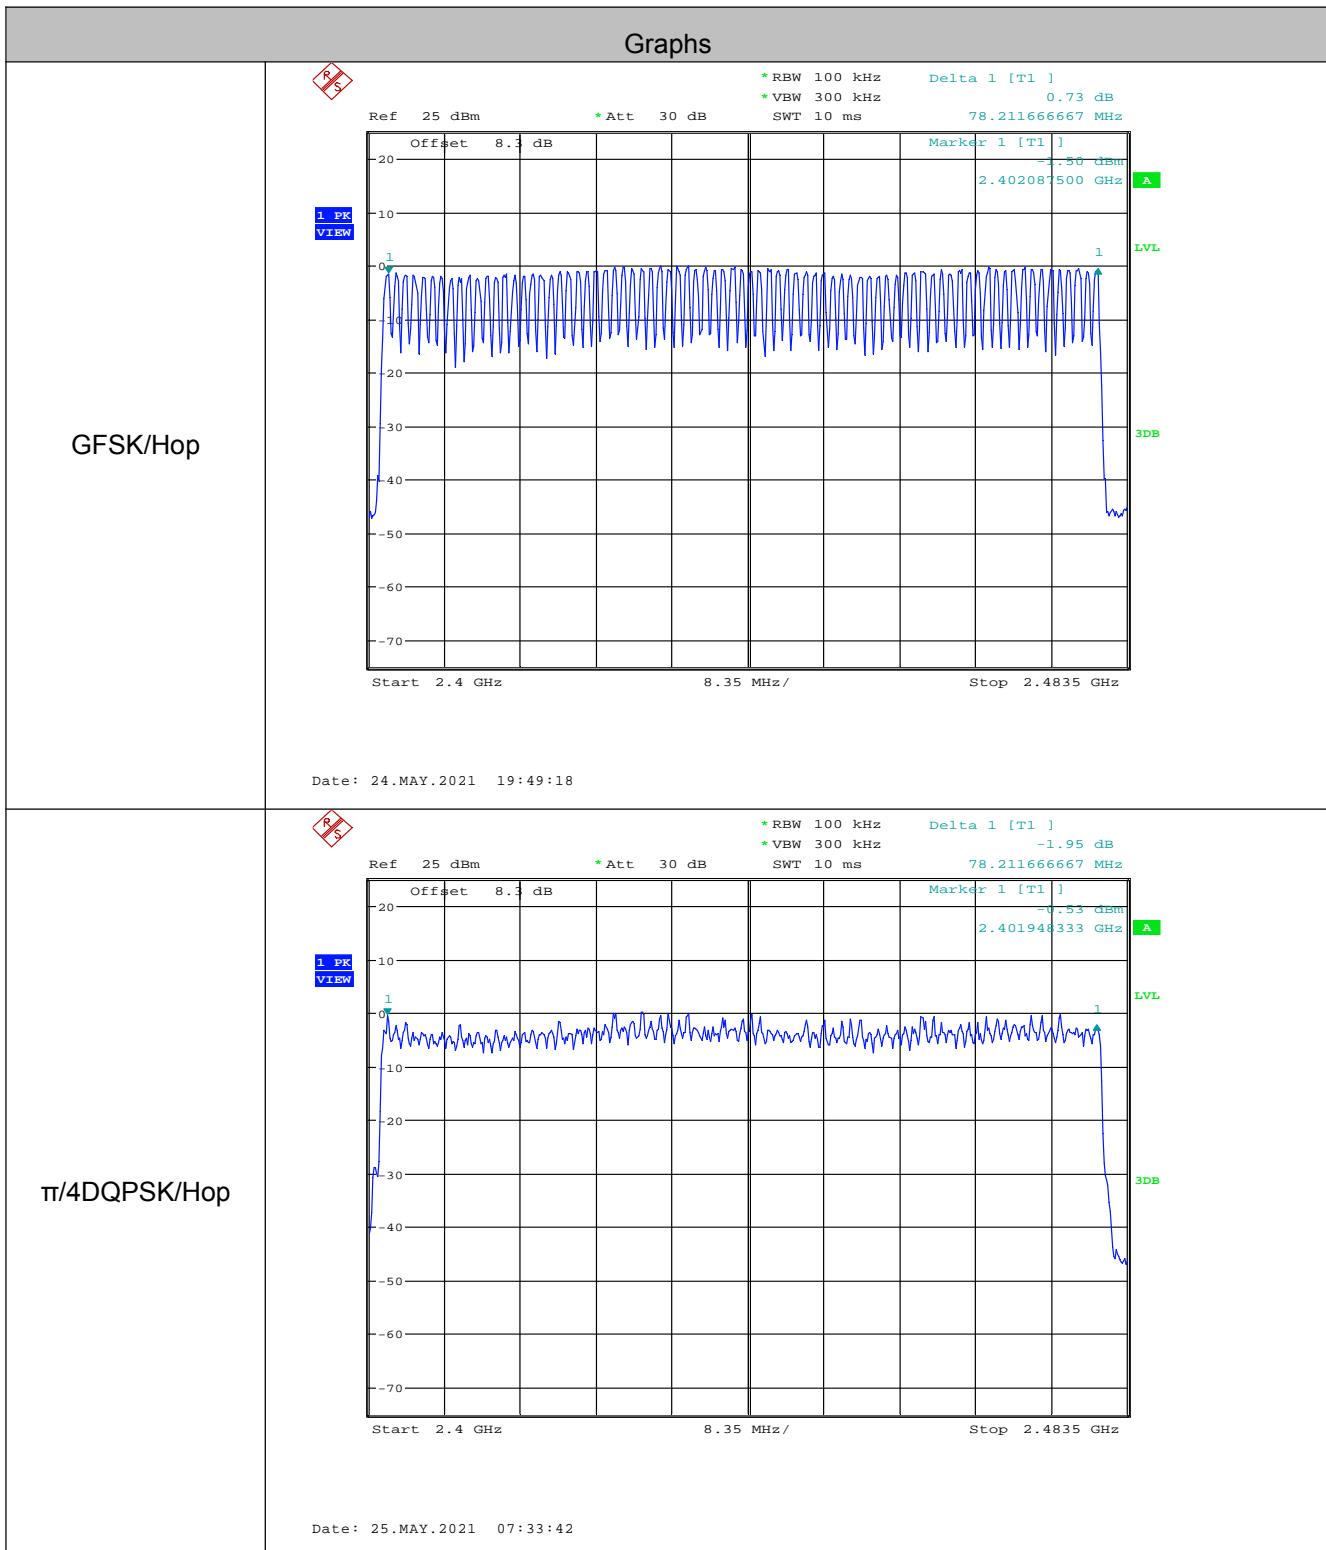

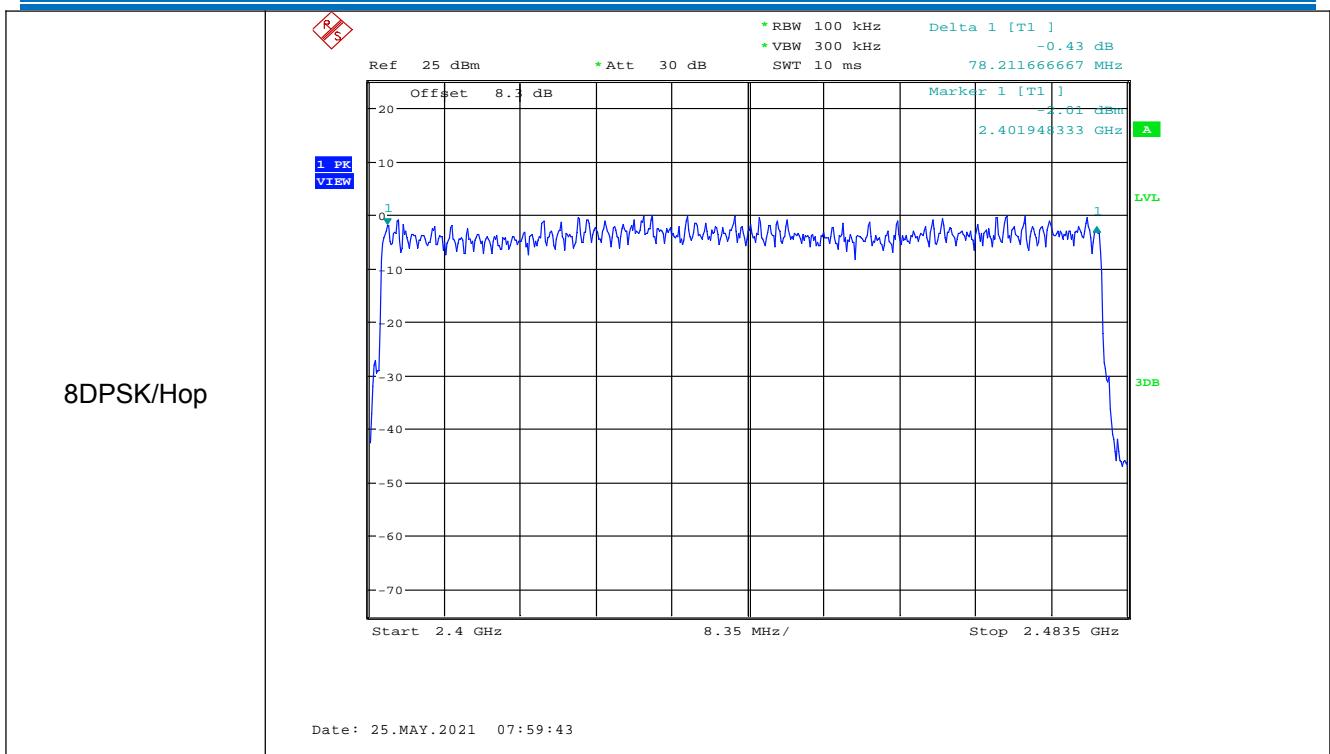

6.7 Dwell Time

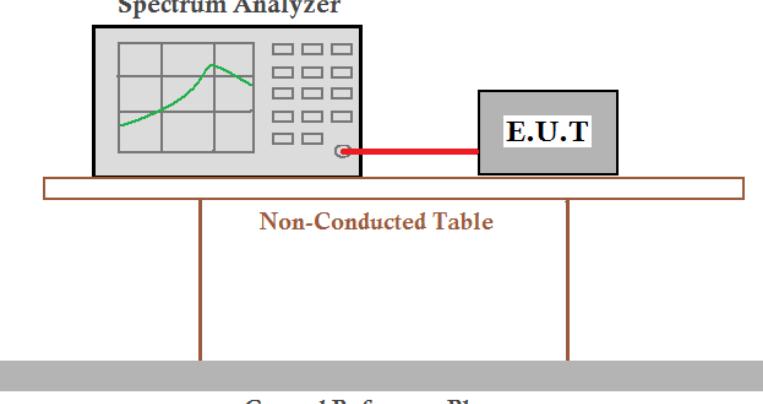Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013
Test Setup:	<p style="text-align: center;">Spectrum Analyzer</p>  <p style="text-align: center;">Non-Conducted Table</p> <p style="text-align: center;">Ground Reference Plane</p>
<i>Remark: Offset=Cable loss+ attenuation factor.</i>	
Limit:	≤0.4 Second
Test Mode:	Hopping transmitting with all kind of modulation and all kind of data type.
Test Results:	Pass

Measurement Data

Mode	Packet	Channel	Burst Width [ms/hop/ch]	Dwell Time[s]	Limit (second)
GFSK	DH1	LCH	0.39	0.125	≤0.4
GFSK	DH1	MCH	0.39	0.125	≤0.4
GFSK	DH1	HCH	0.39	0.125	≤0.4
π/4DQPSK	2DH1	LCH	0.39	0.125	≤0.4
π/4DQPSK	2DH1	MCH	0.39	0.125	≤0.4
π/4DQPSK	2DH1	HCH	0.39	0.125	≤0.4
8DPSK	3DH1	LCH	0.29	0.093	≤0.4
8DPSK	3DH1	MCH	0.29	0.093	≤0.4
8DPSK	3DH1	HCH	0.29	0.093	≤0.4
GFSK	DH3	LCH	1.64	0.262	≤0.4
GFSK	DH3	MCH	1.64	0.262	≤0.4
GFSK	DH3	HCH	1.64	0.262	≤0.4
π/4DQPSK	2DH3	LCH	1.65	0.264	≤0.4
π/4DQPSK	2DH3	MCH	1.65	0.264	≤0.4
π/4DQPSK	2DH3	HCH	1.65	0.264	≤0.4
8DPSK	3DH3	LCH	1.65	0.264	≤0.4
8DPSK	3DH3	MCH	1.65	0.264	≤0.4
8DPSK	3DH3	HCH	1.65	0.264	≤0.4
GFSK	DH5	LCH	2.89	0.308	≤0.4
GFSK	DH5	MCH	2.89	0.308	≤0.4
GFSK	DH5	HCH	2.89	0.308	≤0.4
π/4DQPSK	2DH5	LCH	2.9	0.309	≤0.4
π/4DQPSK	2DH5	MCH	2.9	0.309	≤0.4
π/4DQPSK	2DH5	HCH	2.89	0.308	≤0.4
8DPSK	3DH5	LCH	2.9	0.309	≤0.4
8DPSK	3DH5	MCH	2.9	0.309	≤0.4
8DPSK	3DH5	HCH	2.9	0.309	≤0.4

Remark:


The test period: T= 0.4 Second/Channel × 79 Channel = 31.6 s


DH5/2DH5/3DH5 Dwell time = Burst Width(ms)*(1600/(2*79))*31.6


DH3/2DH3/3DH3 Dwell time = Burst Width (ms)*(1600/(4*79))*31.6


DH5/2DH5/3DH5 Dwell time = Burst Width (ms)*(1600/(6*79))*31.6


Test plot as follows:

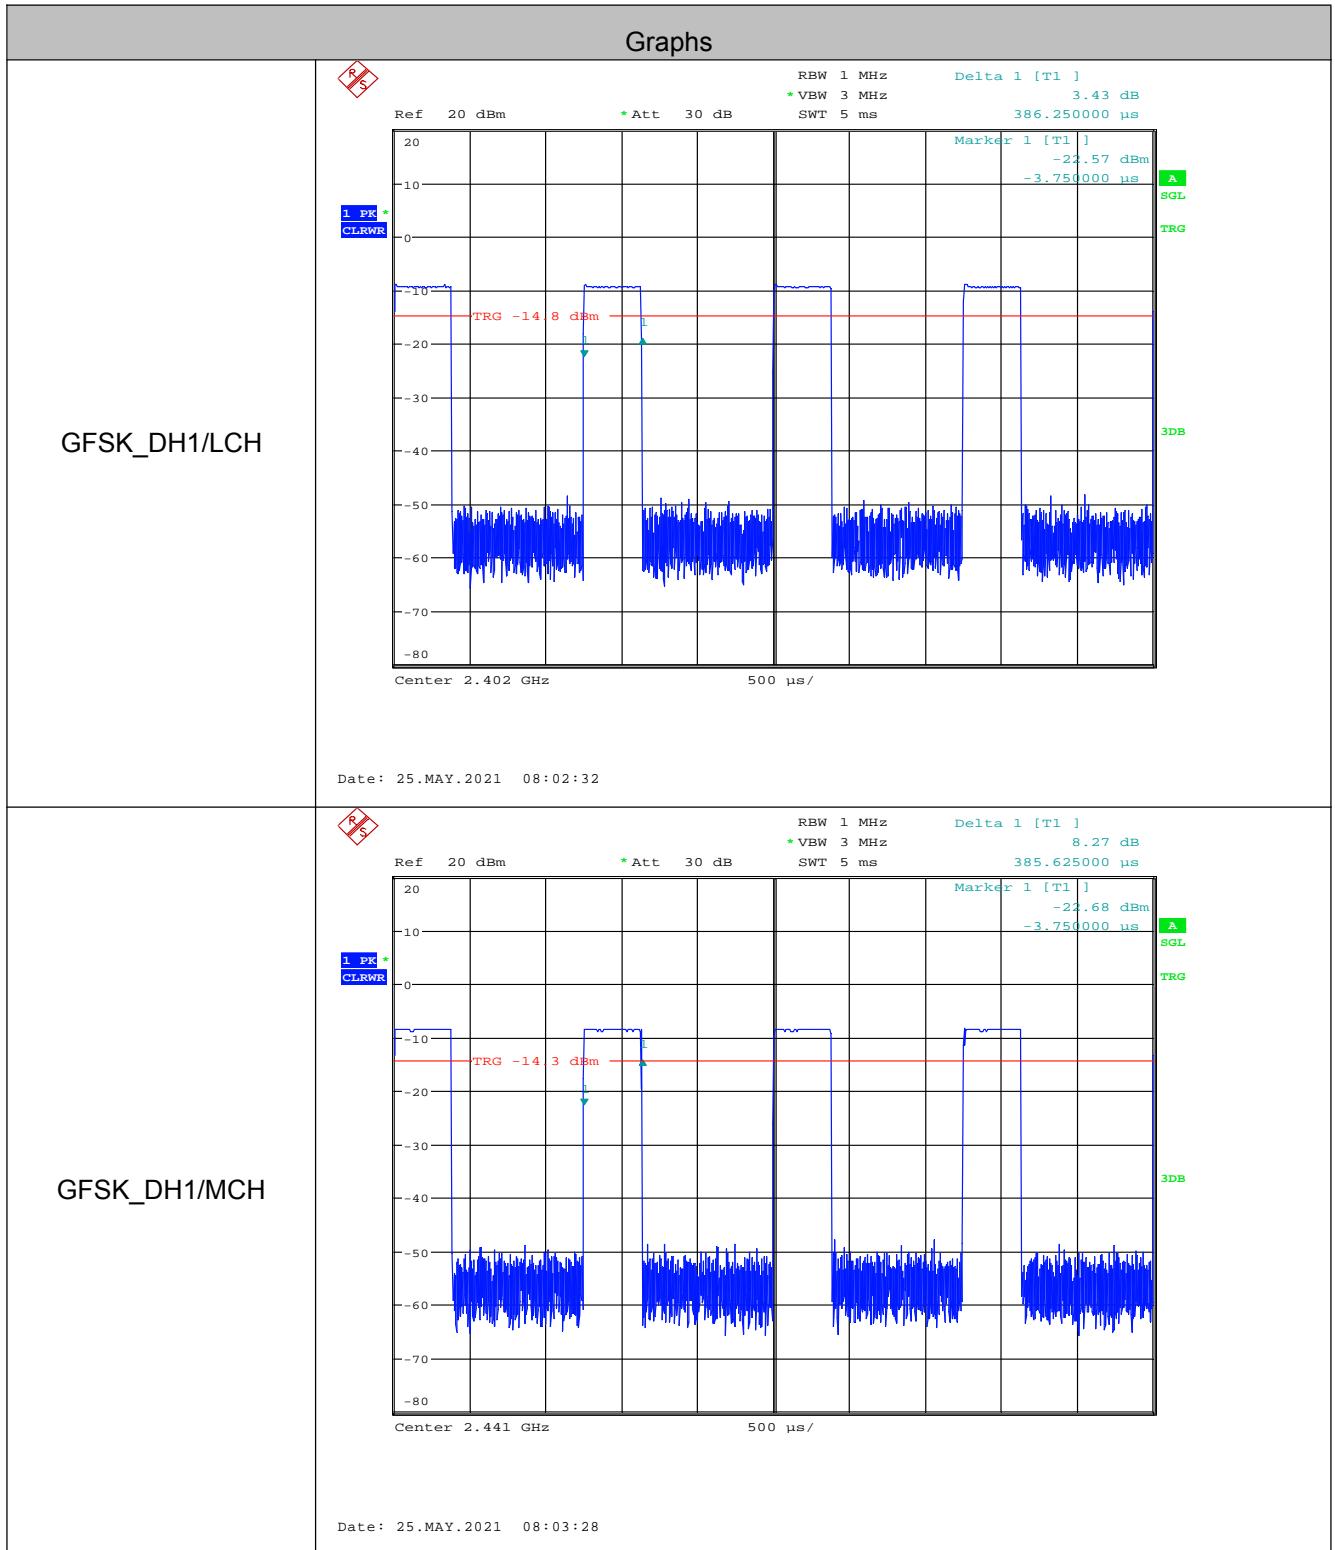


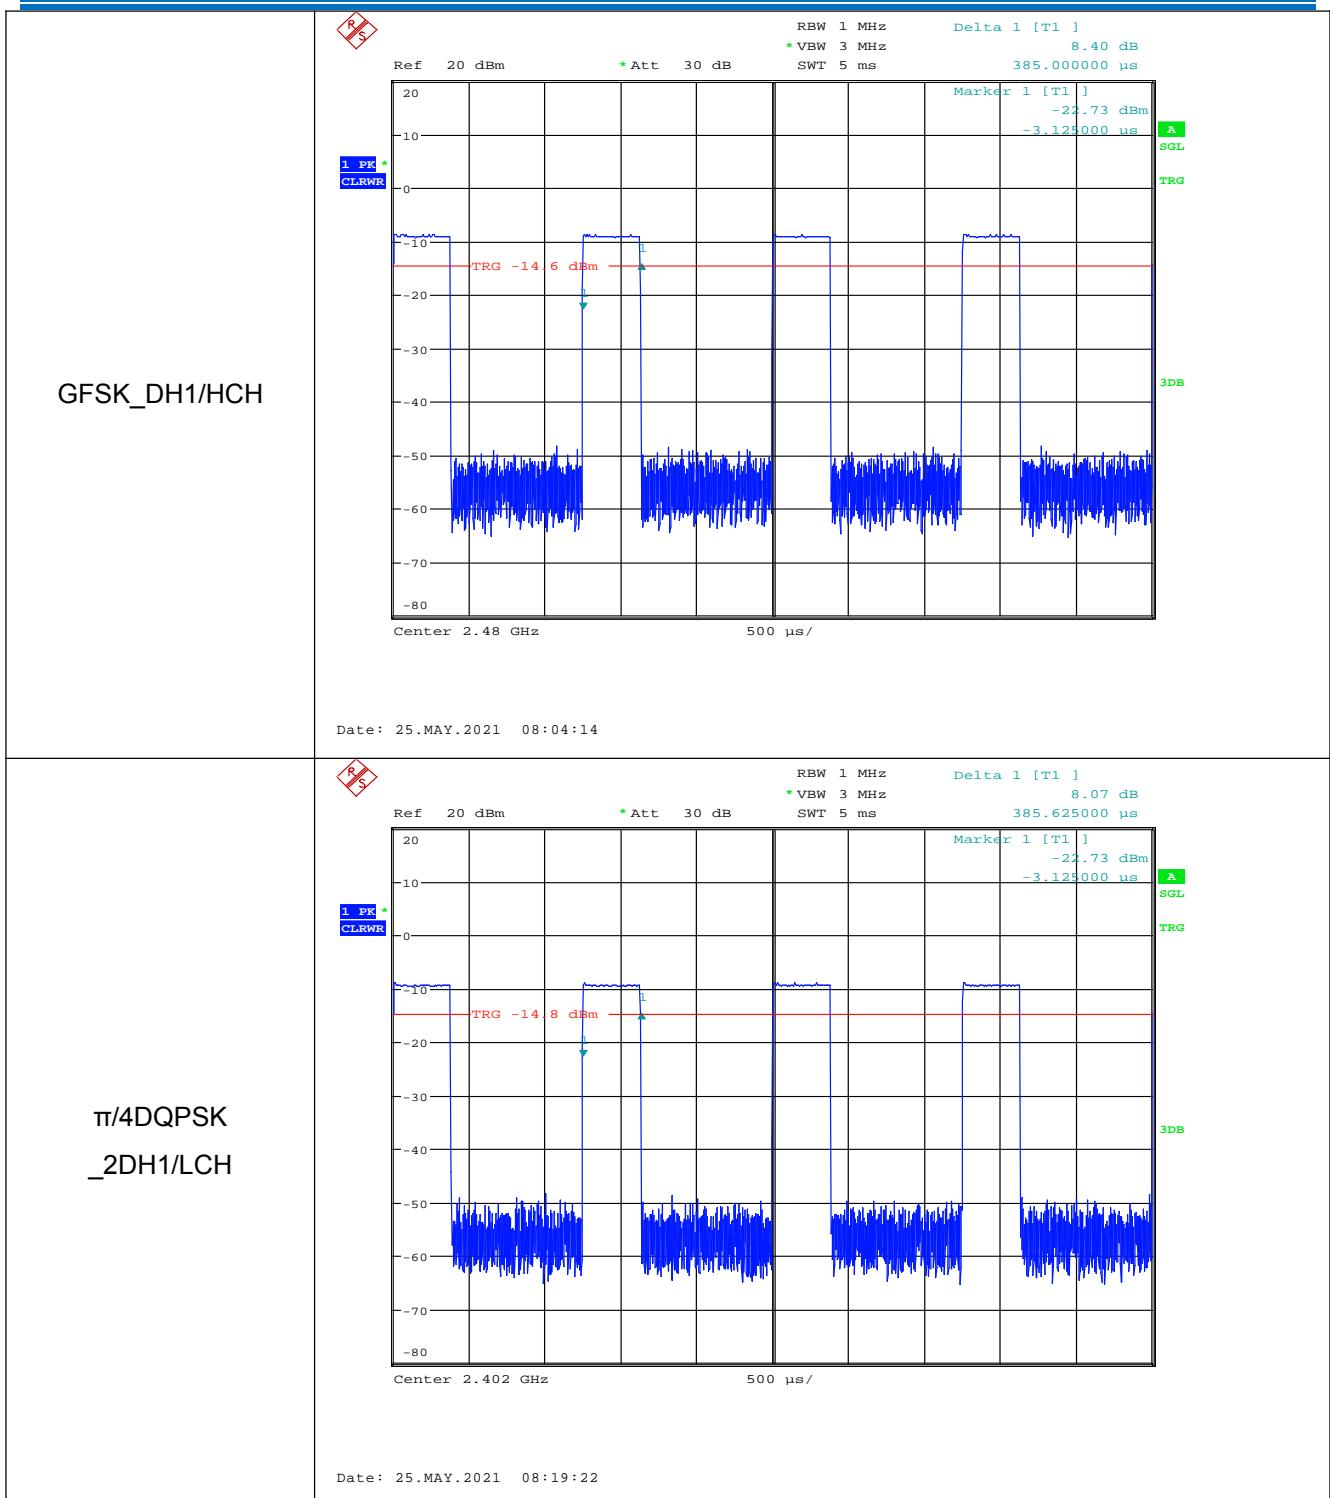


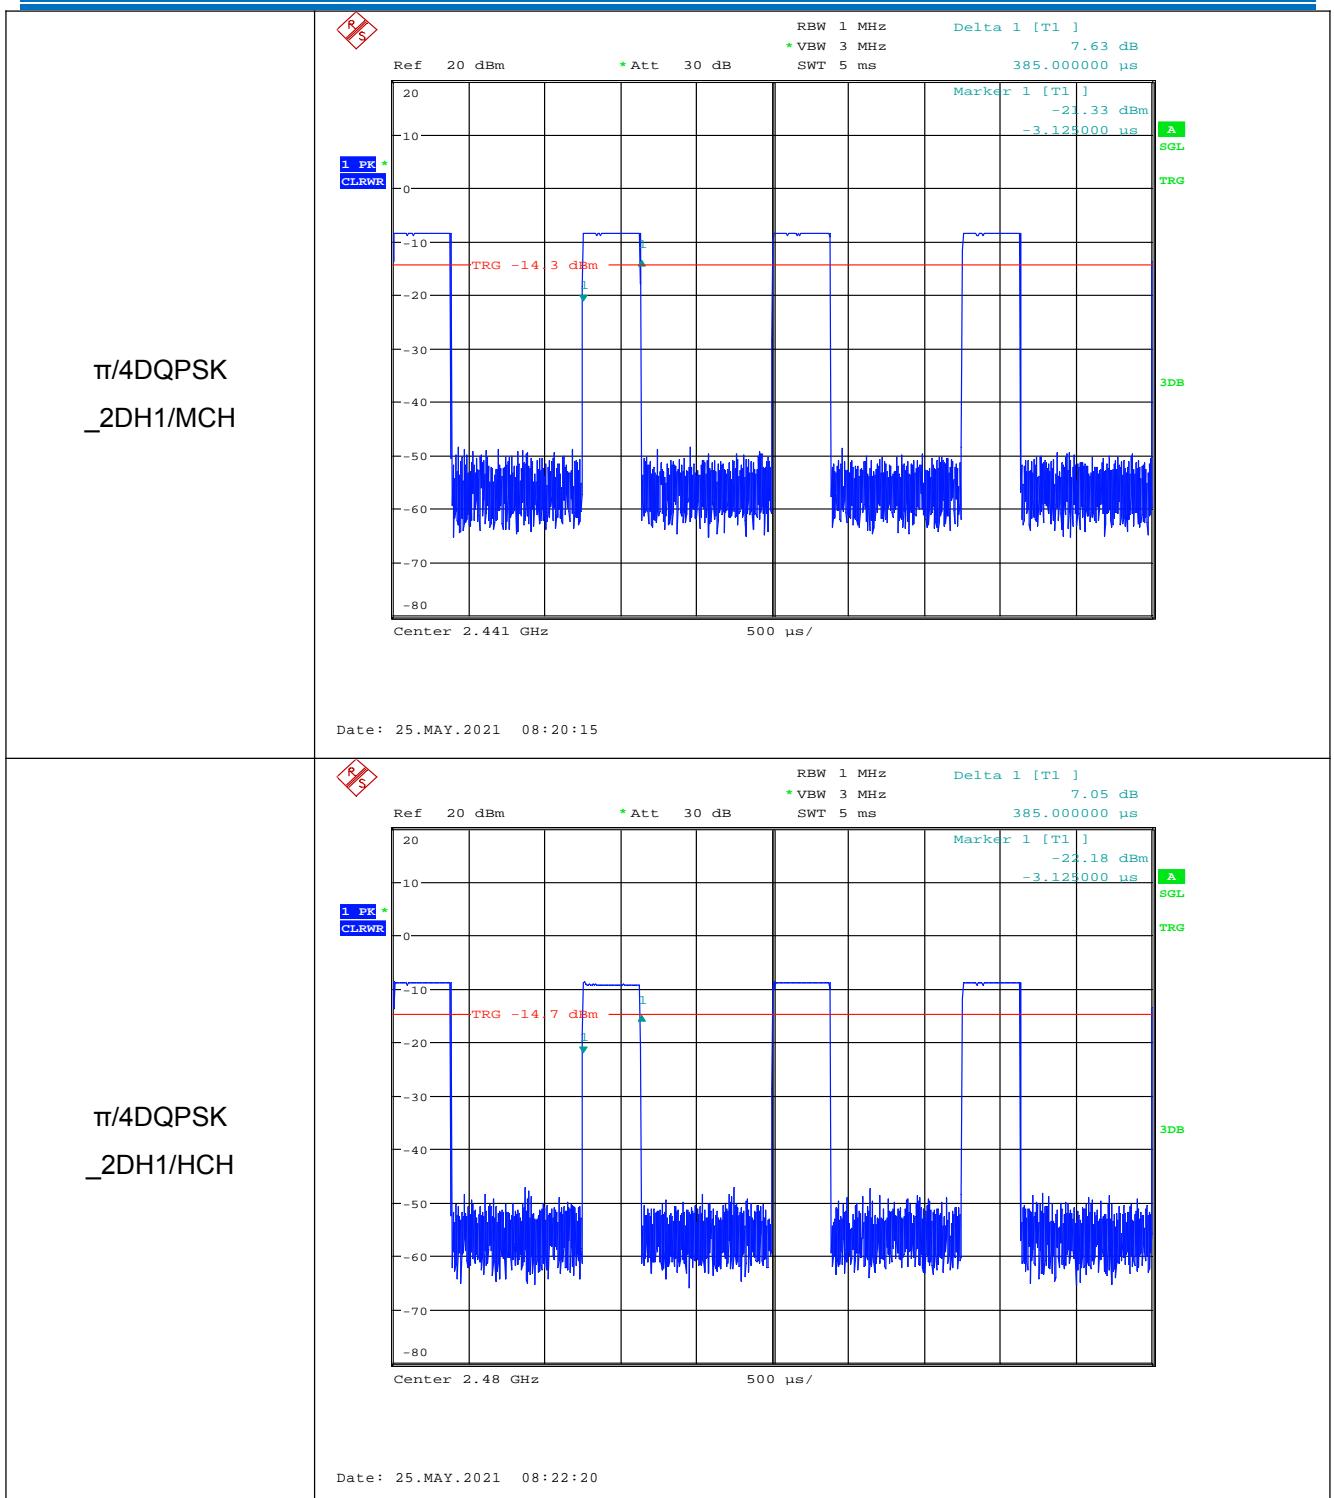


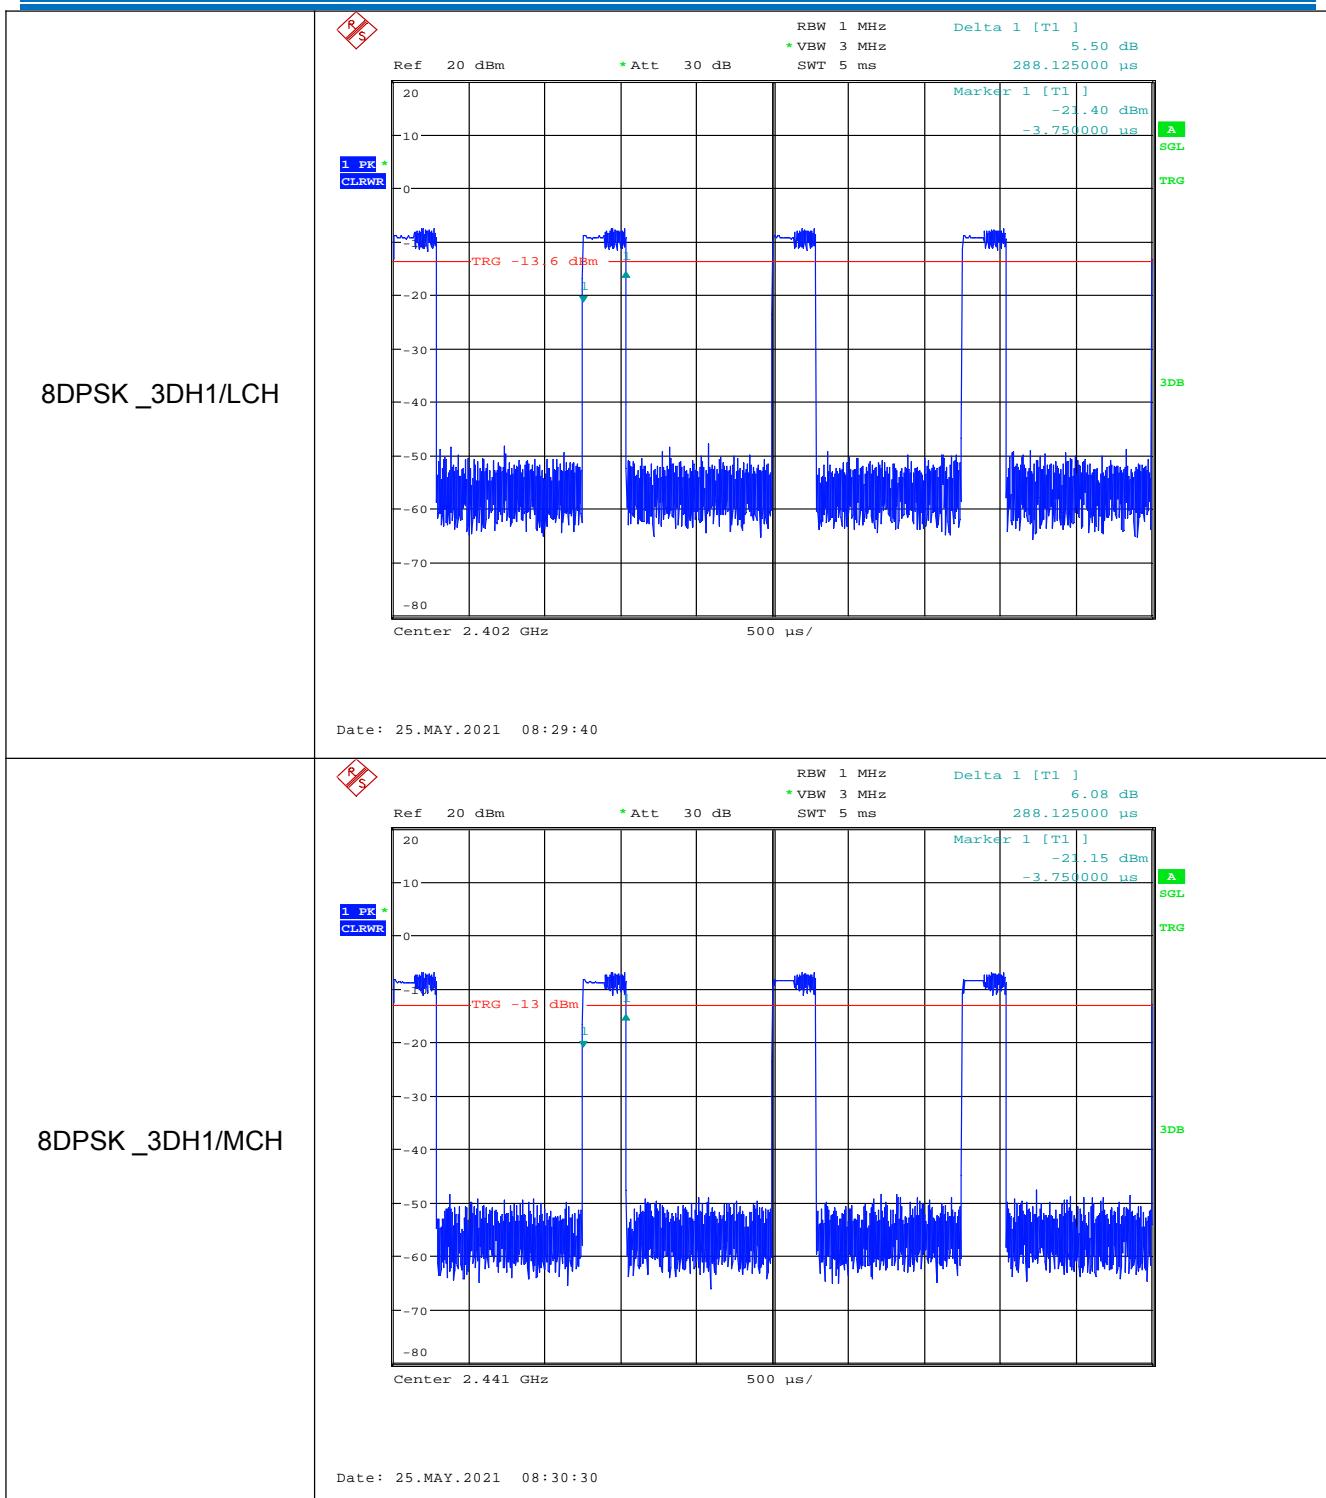


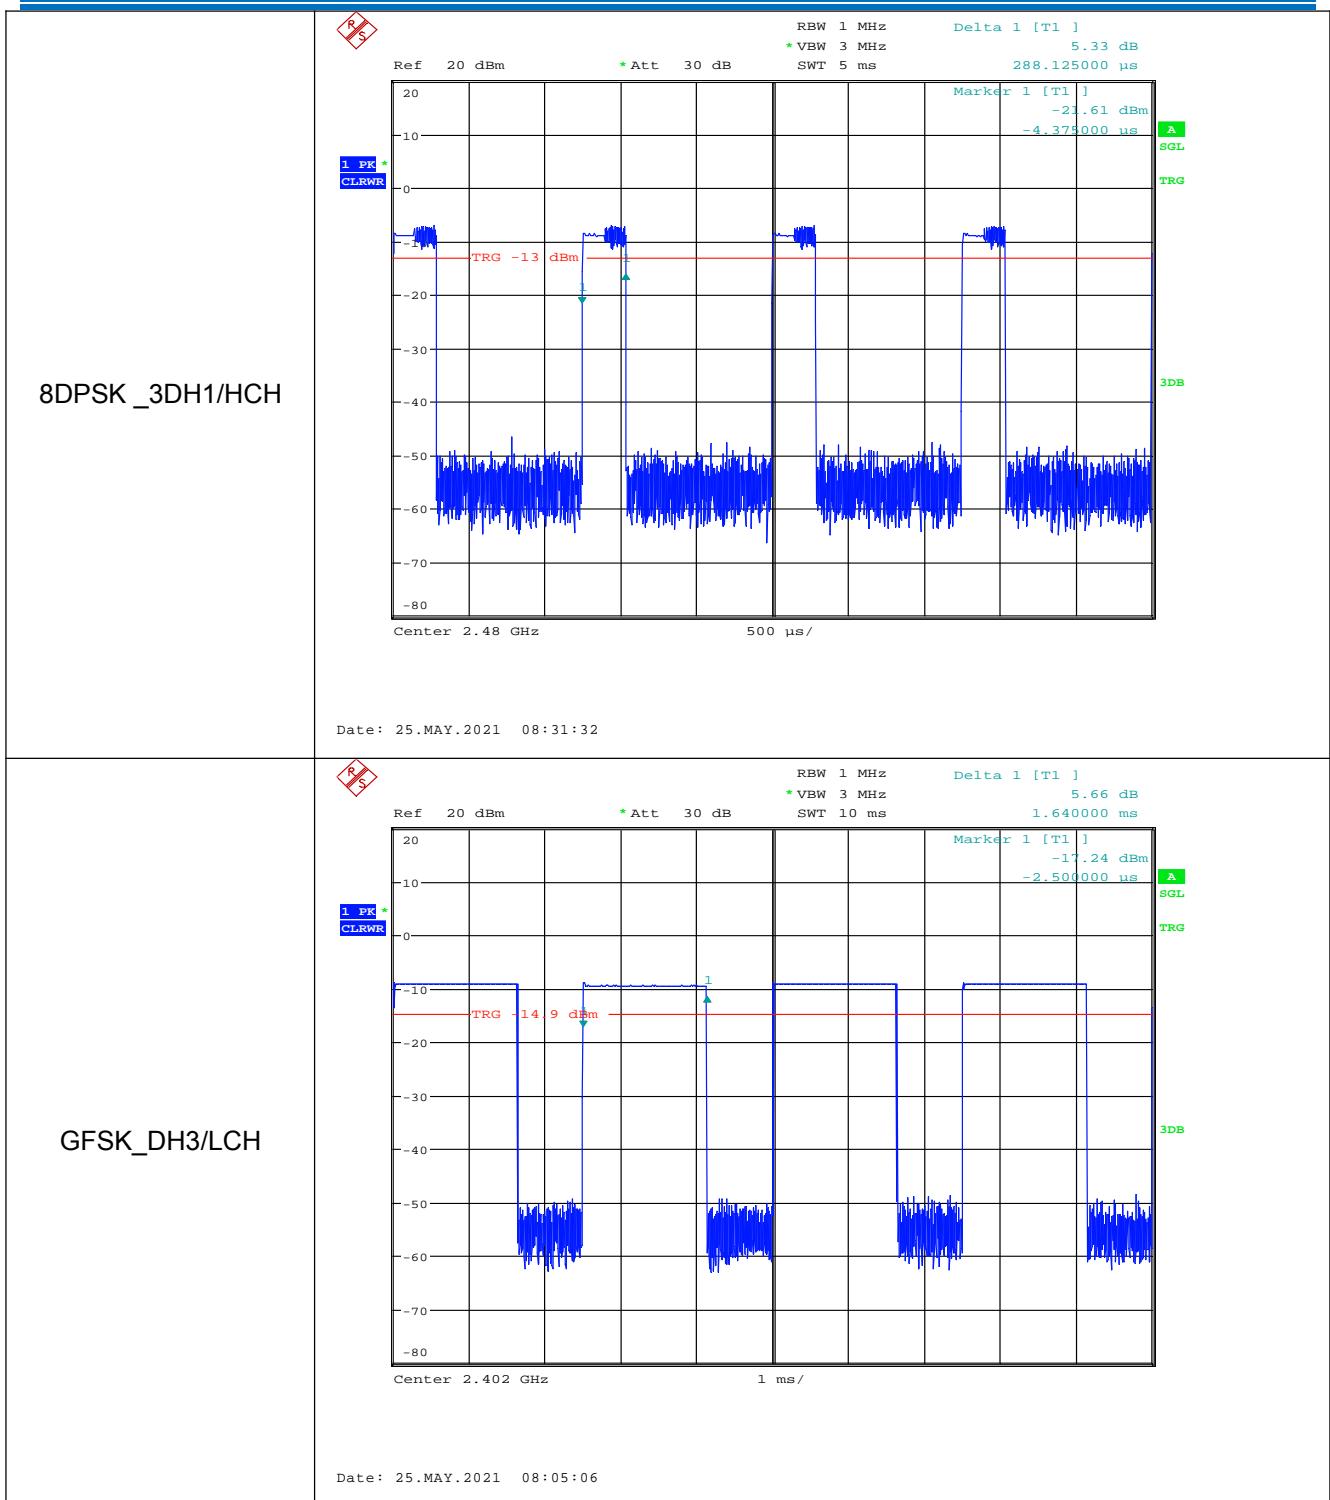


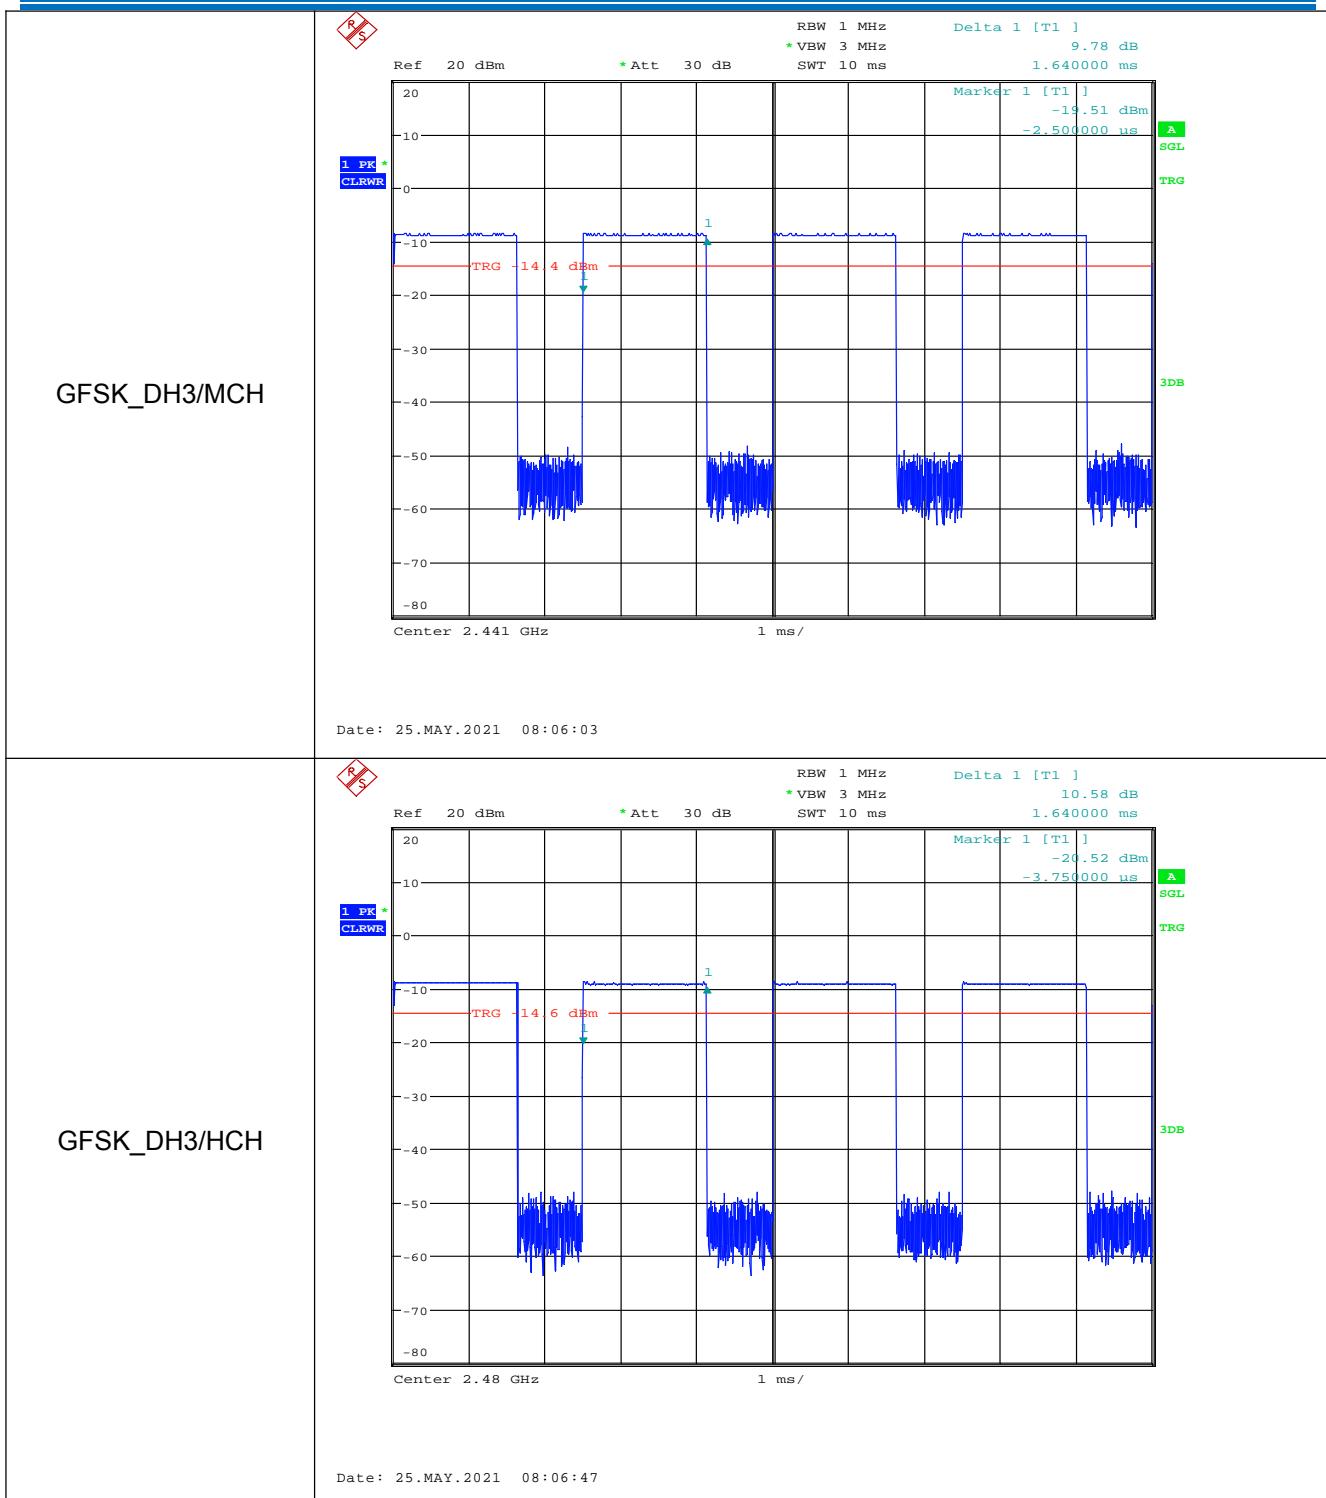


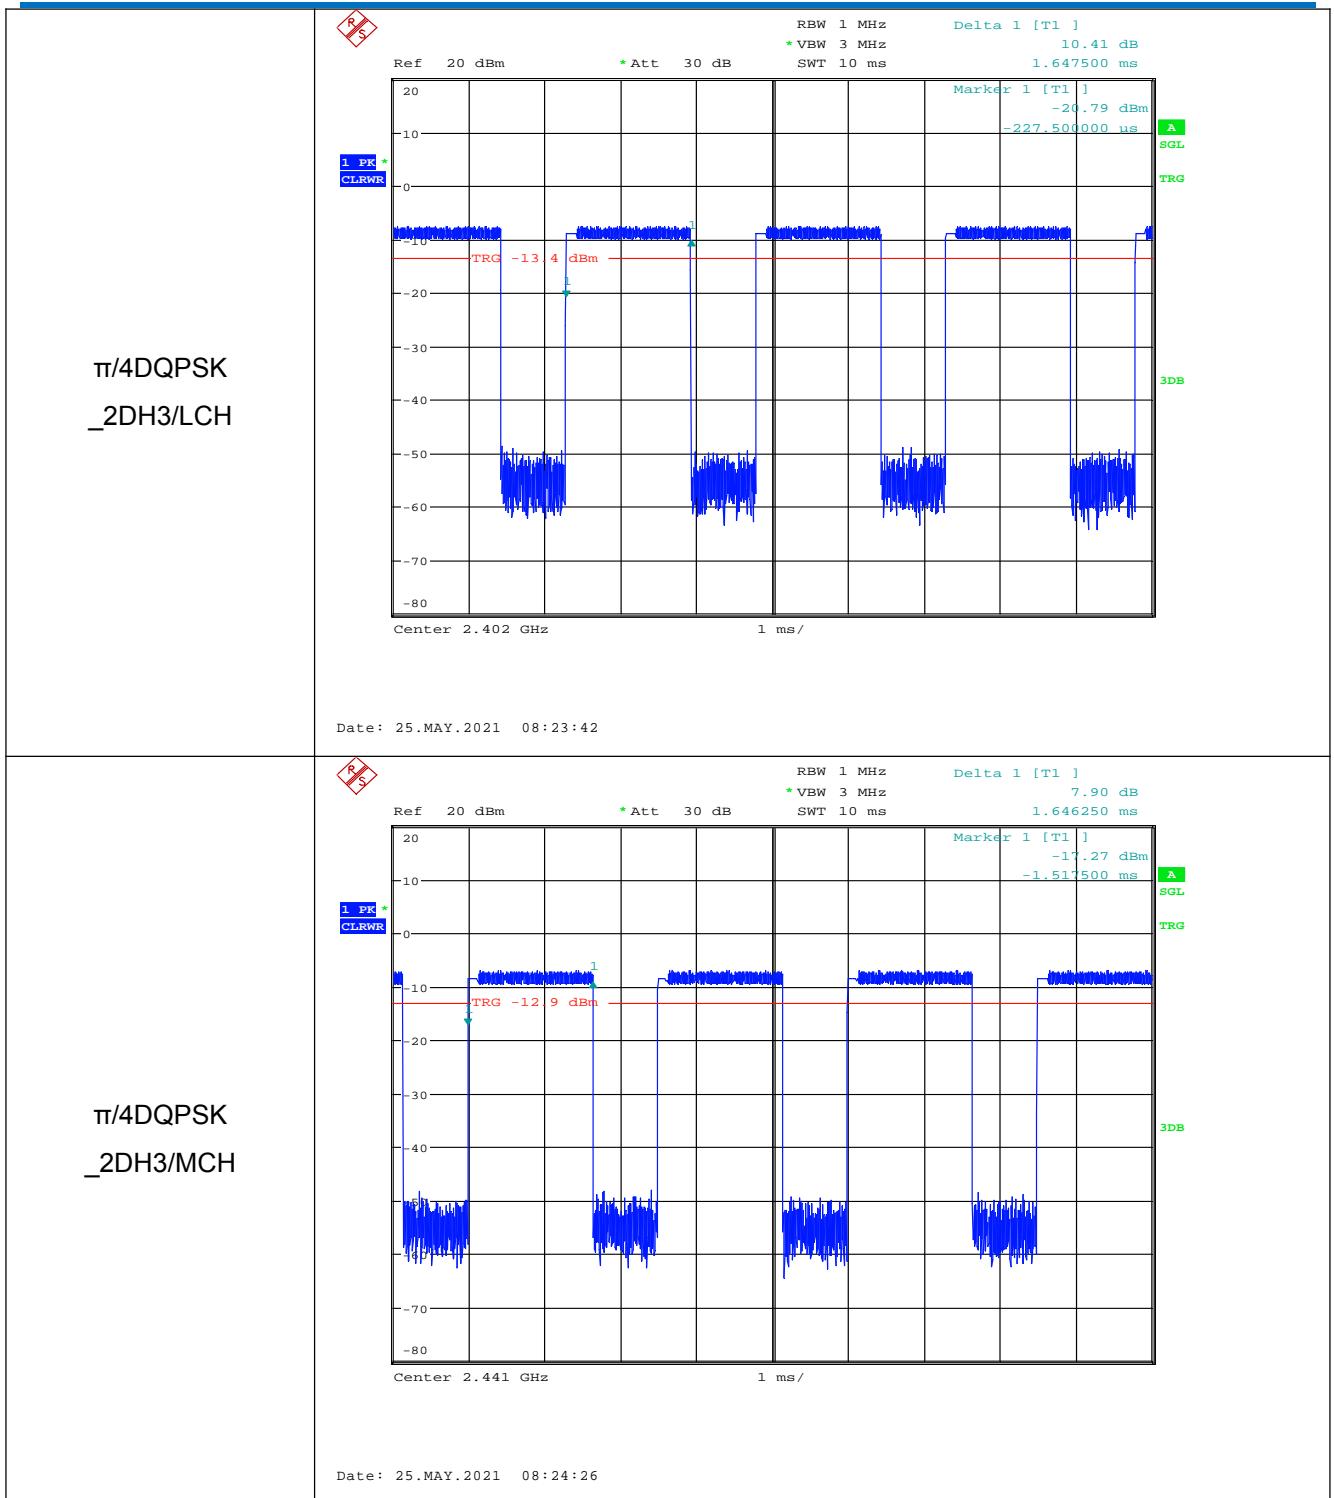


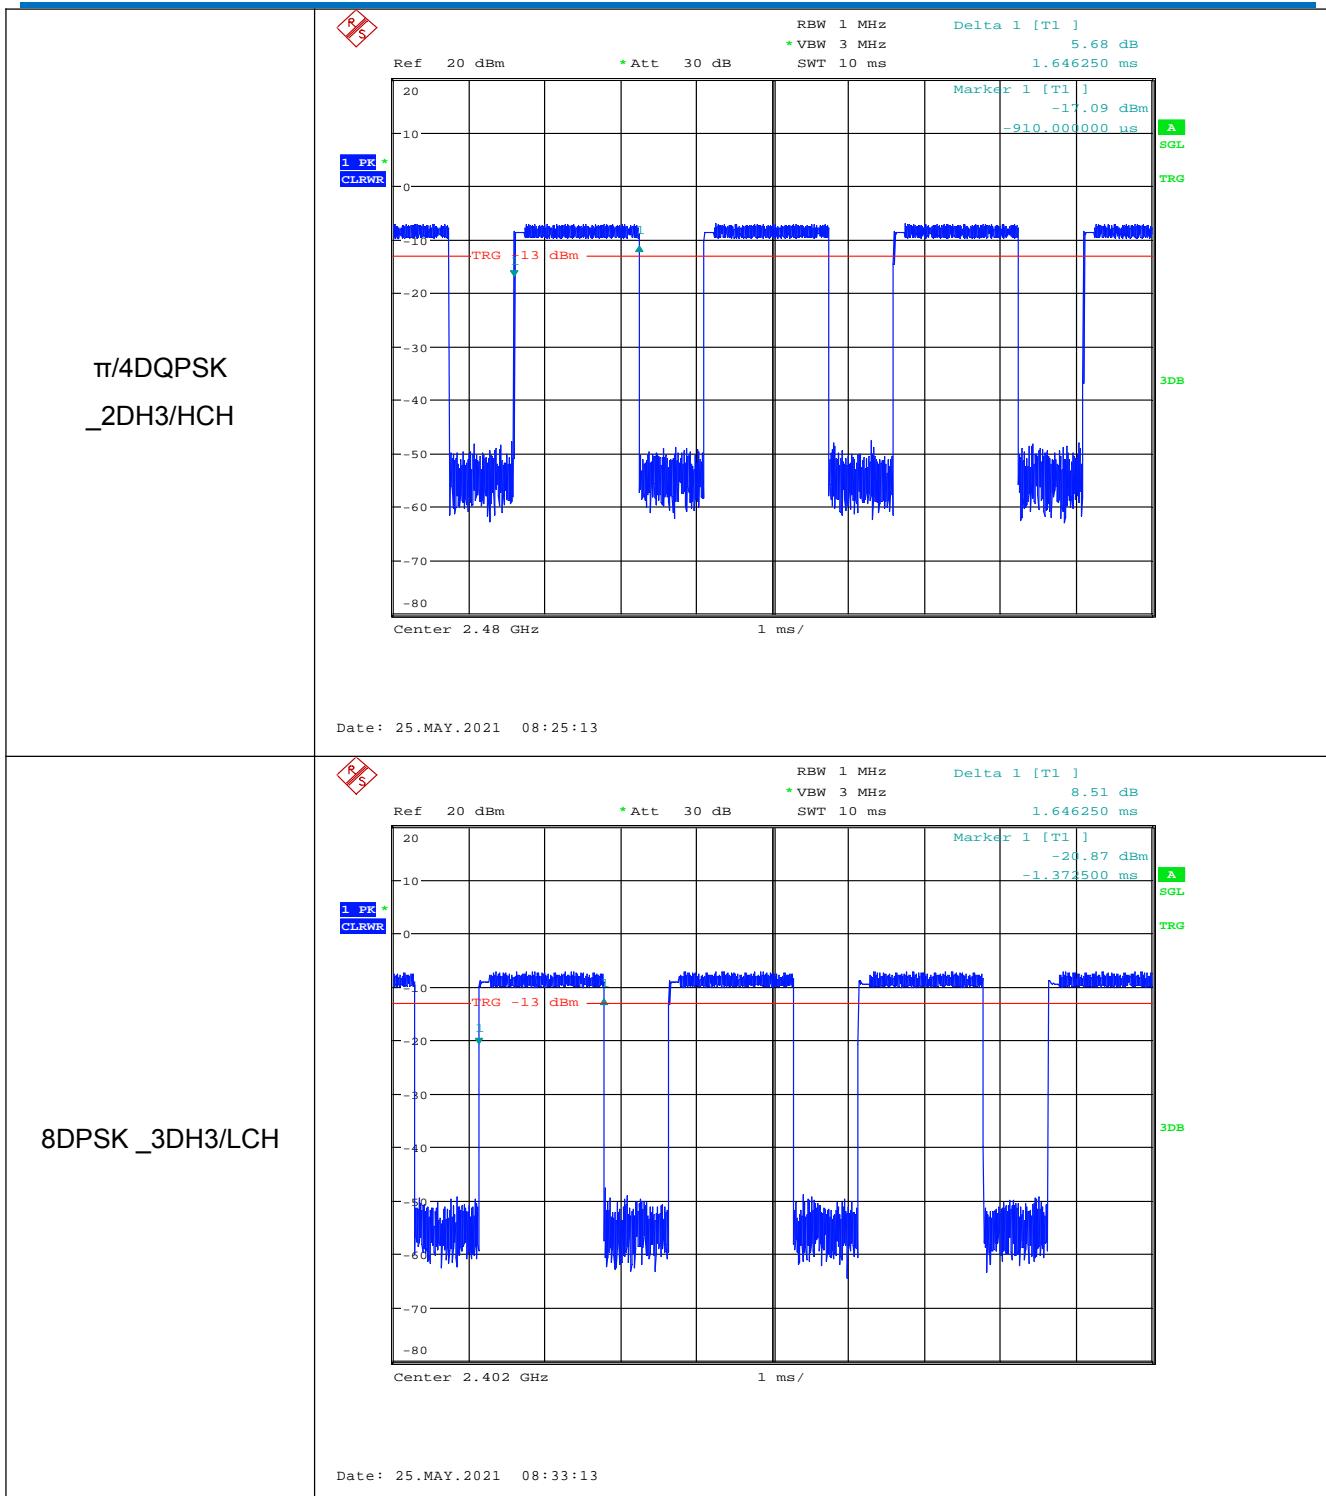

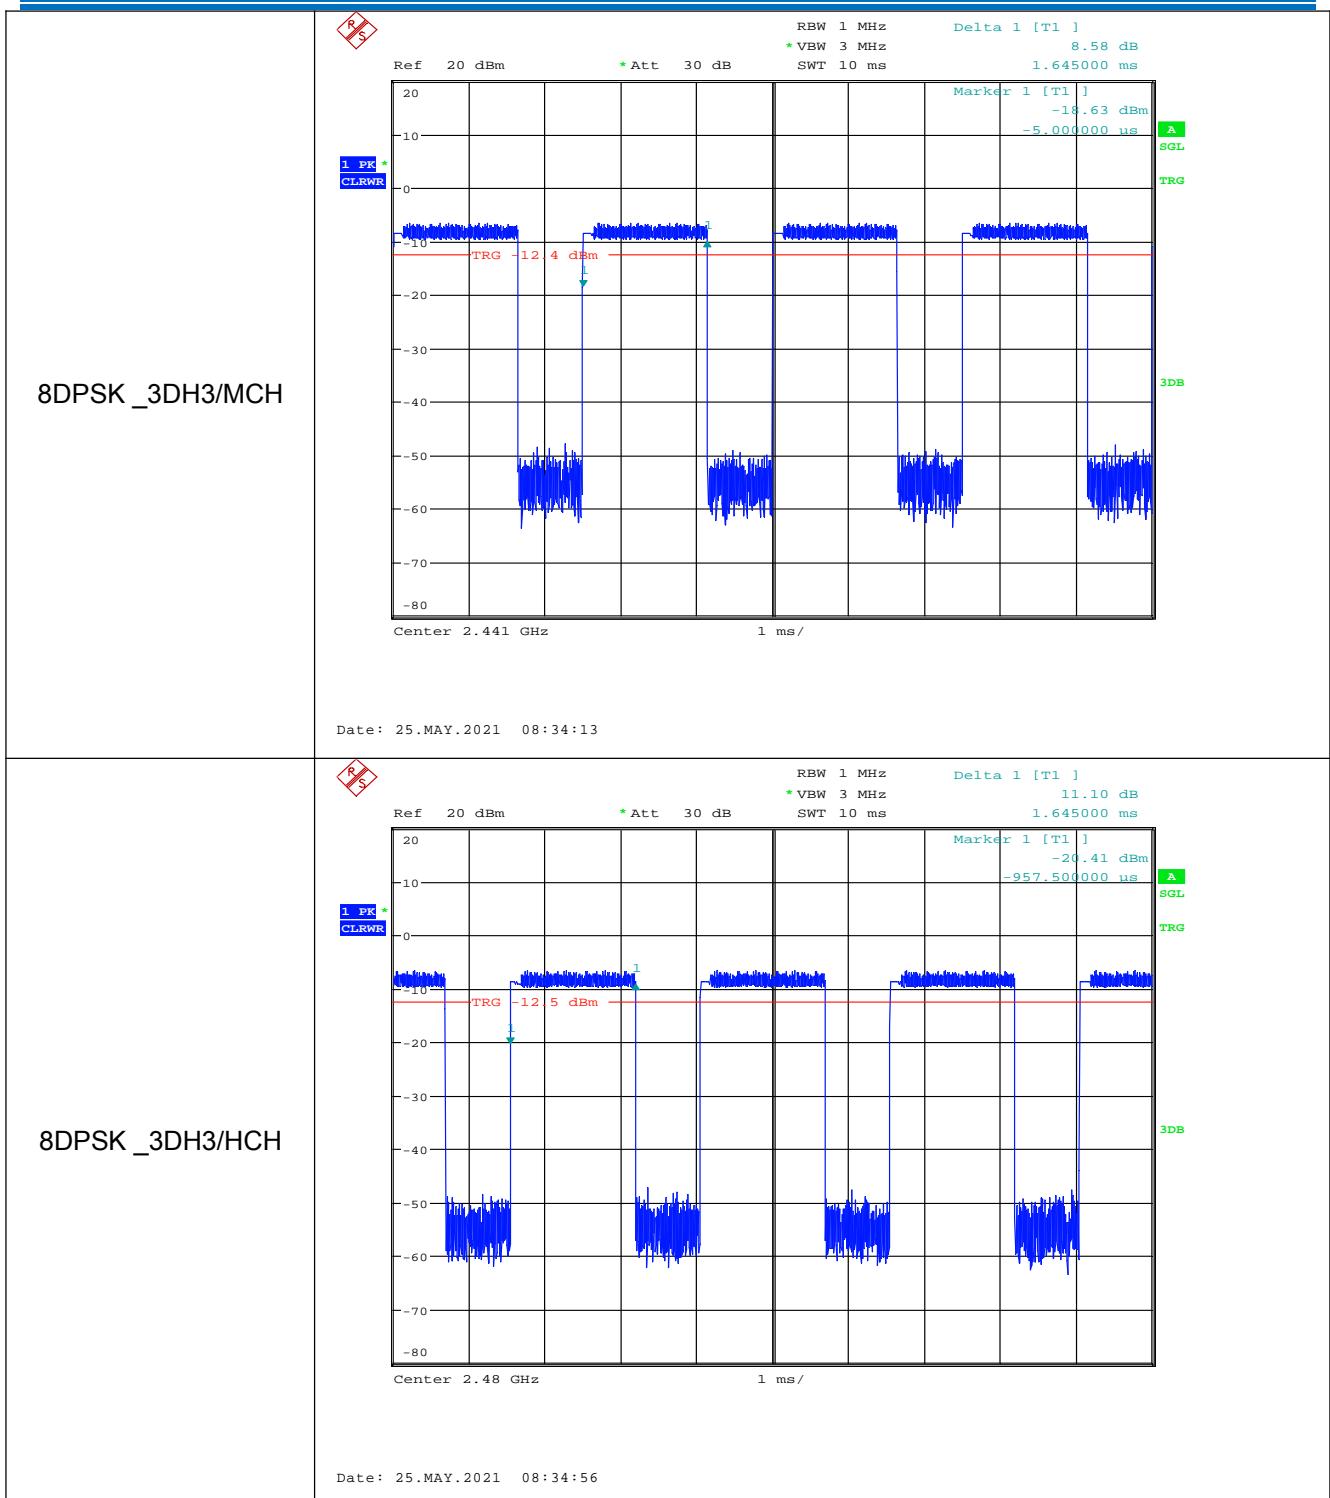


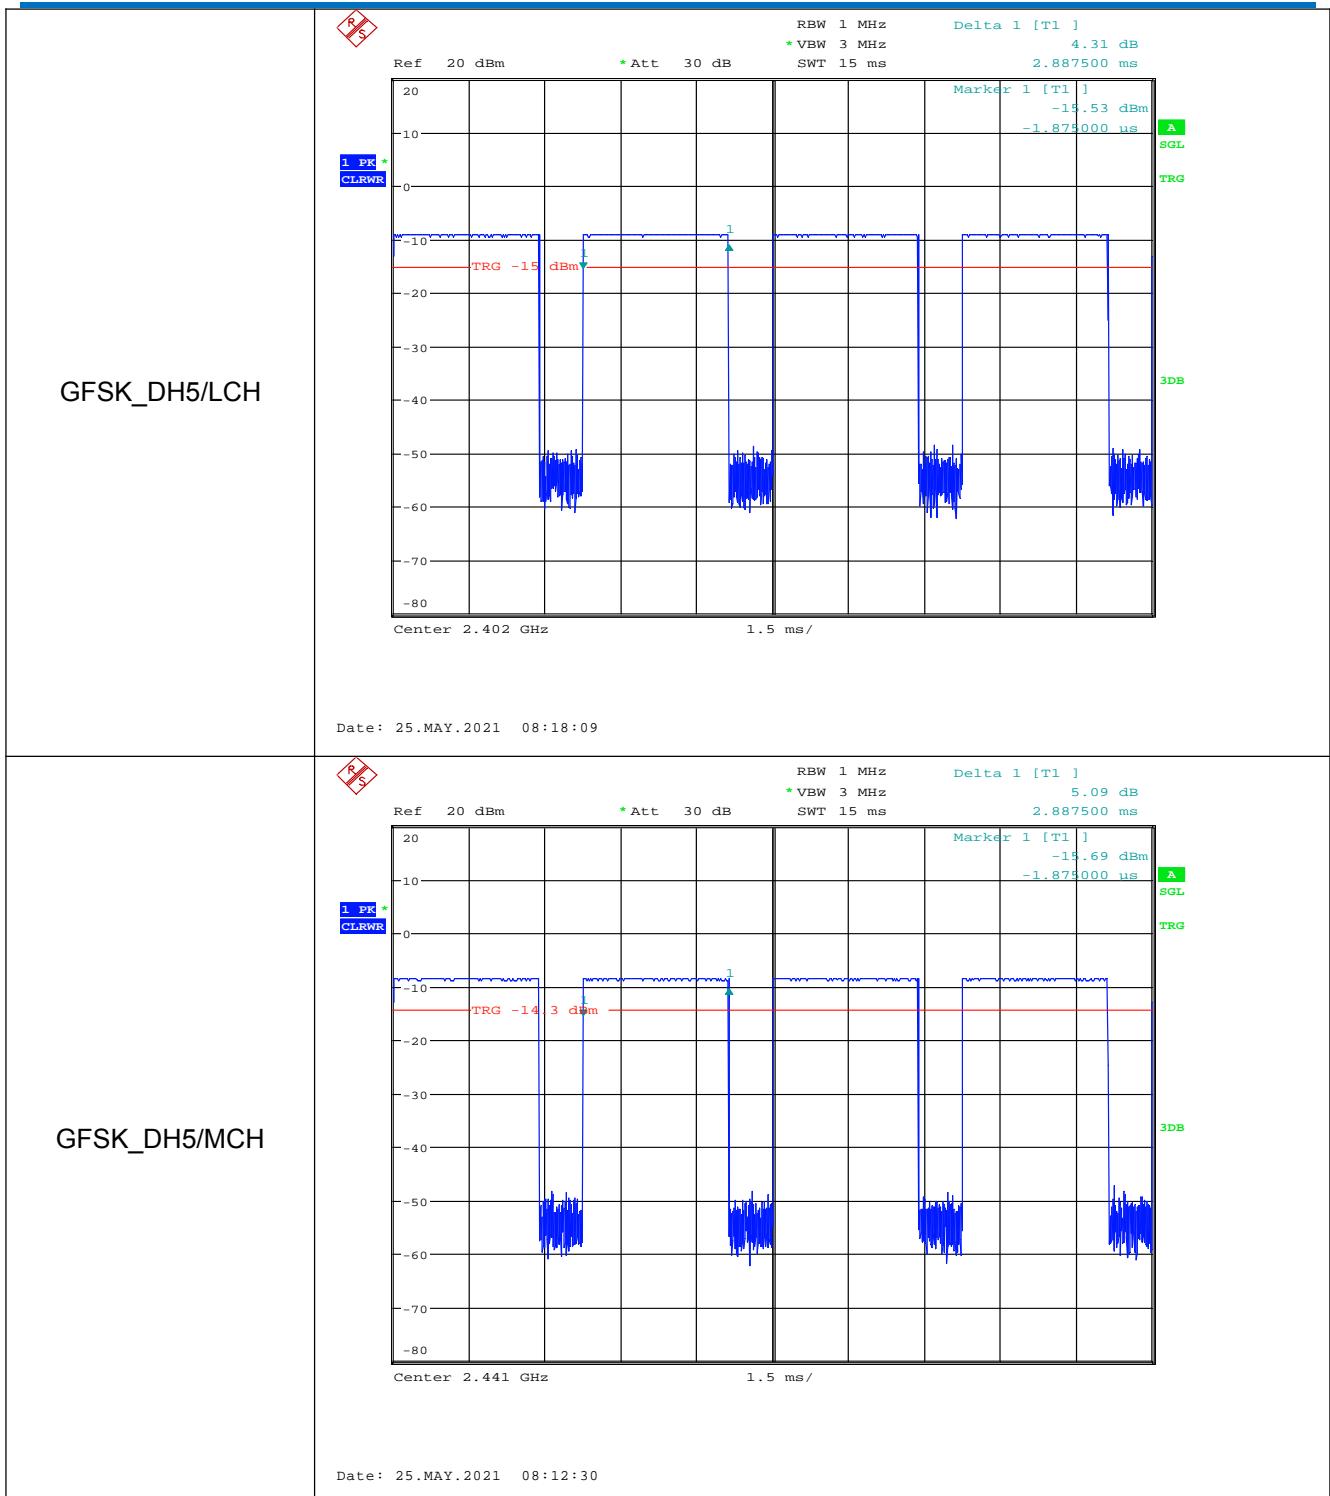

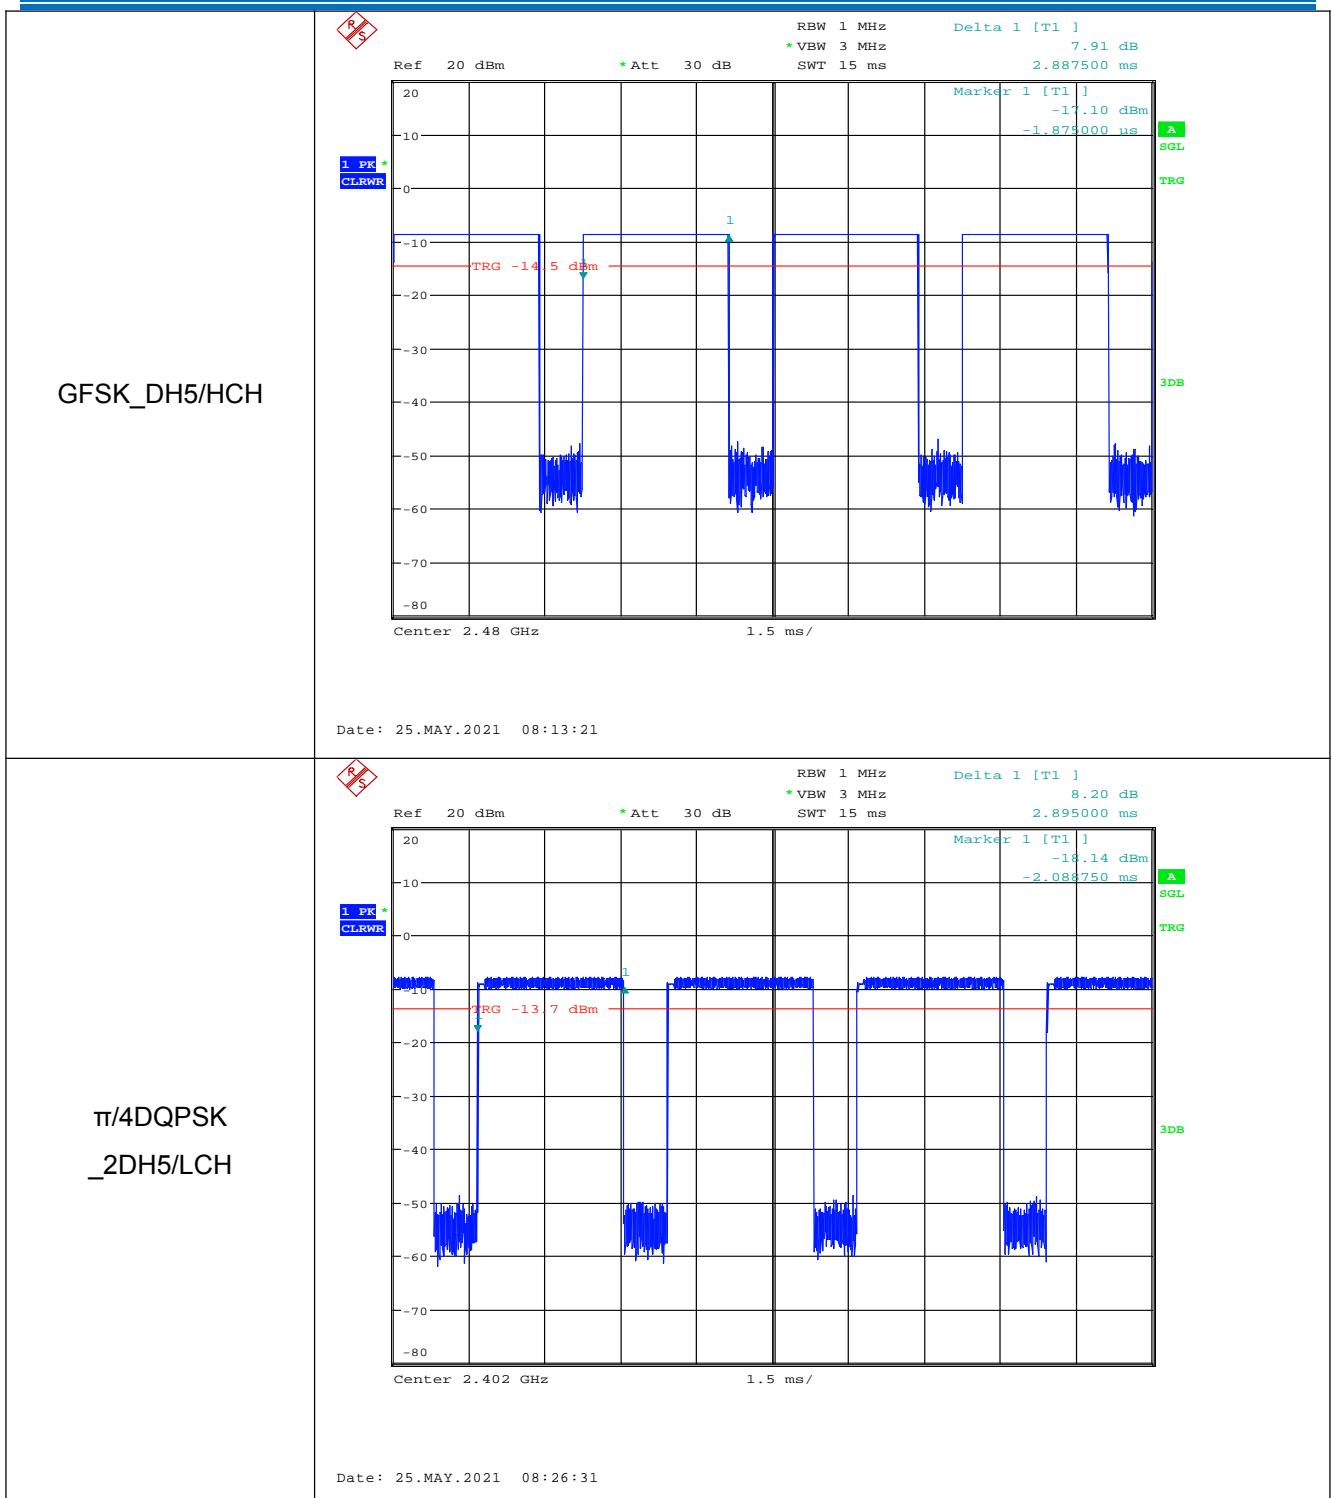


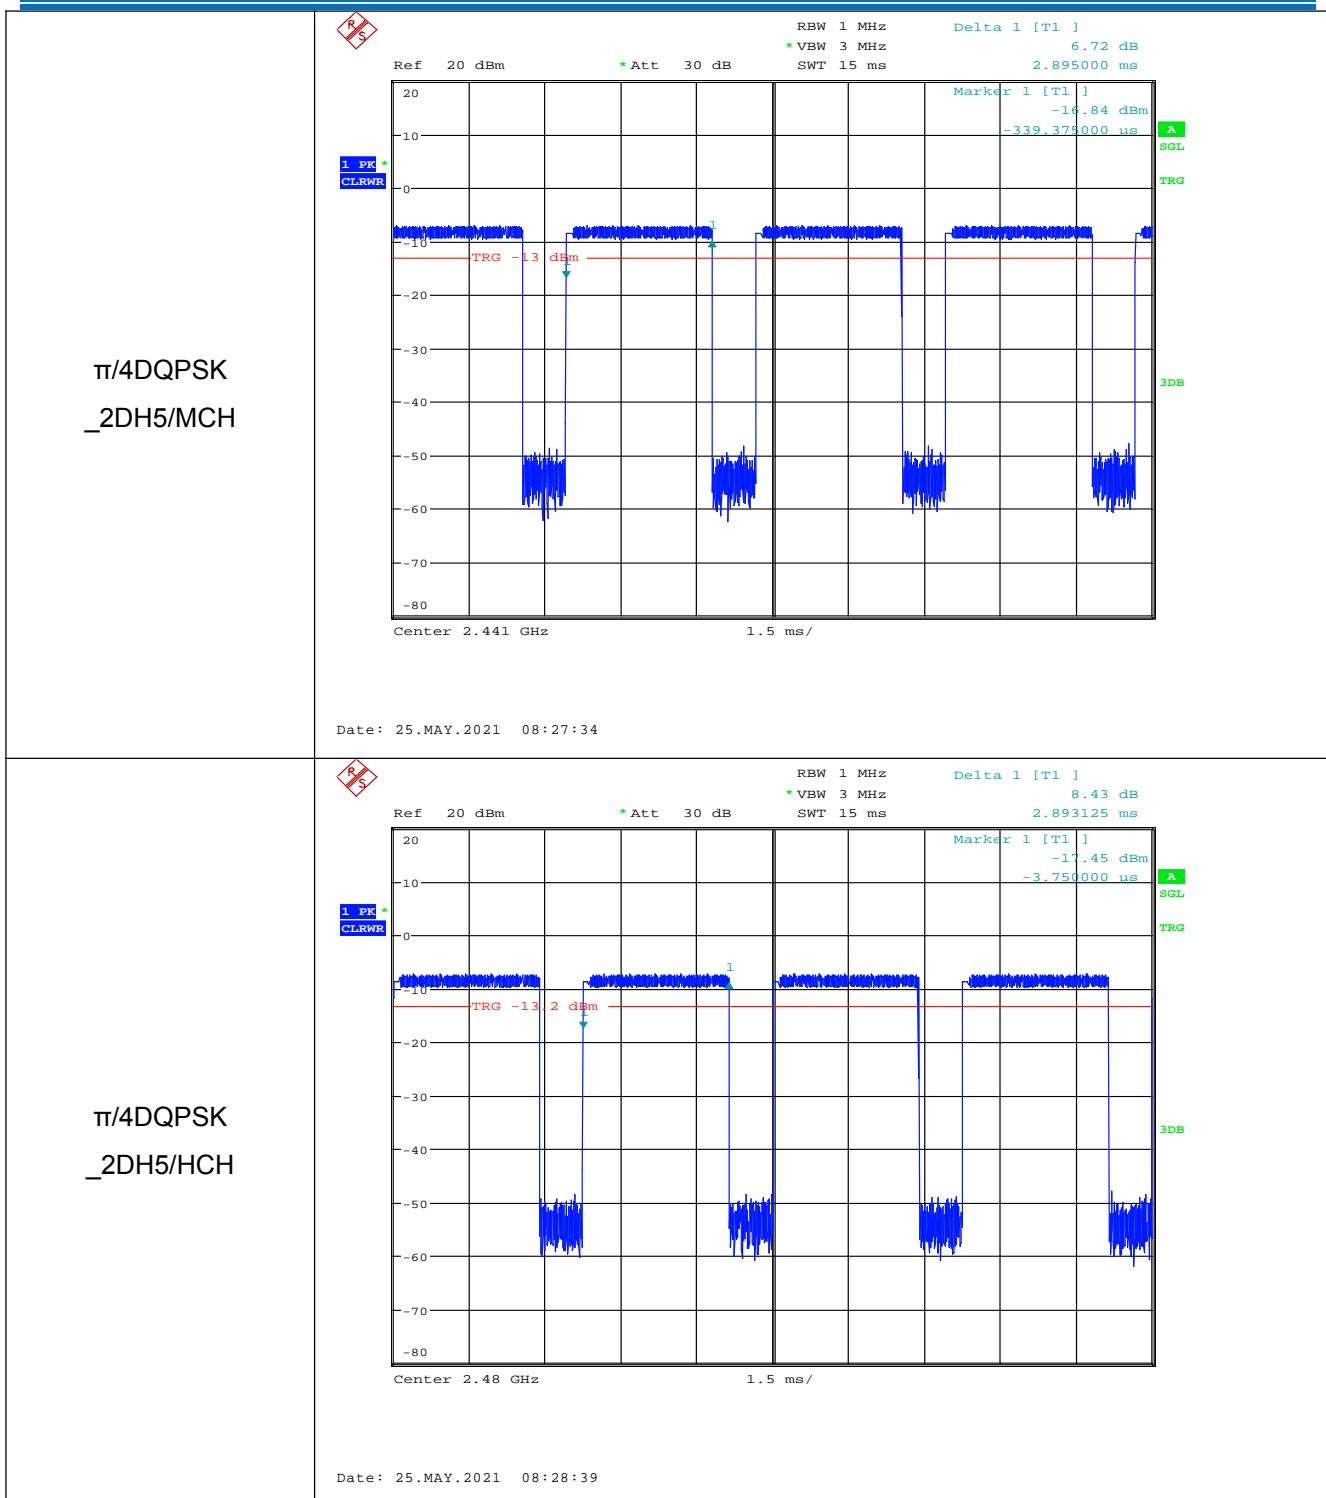



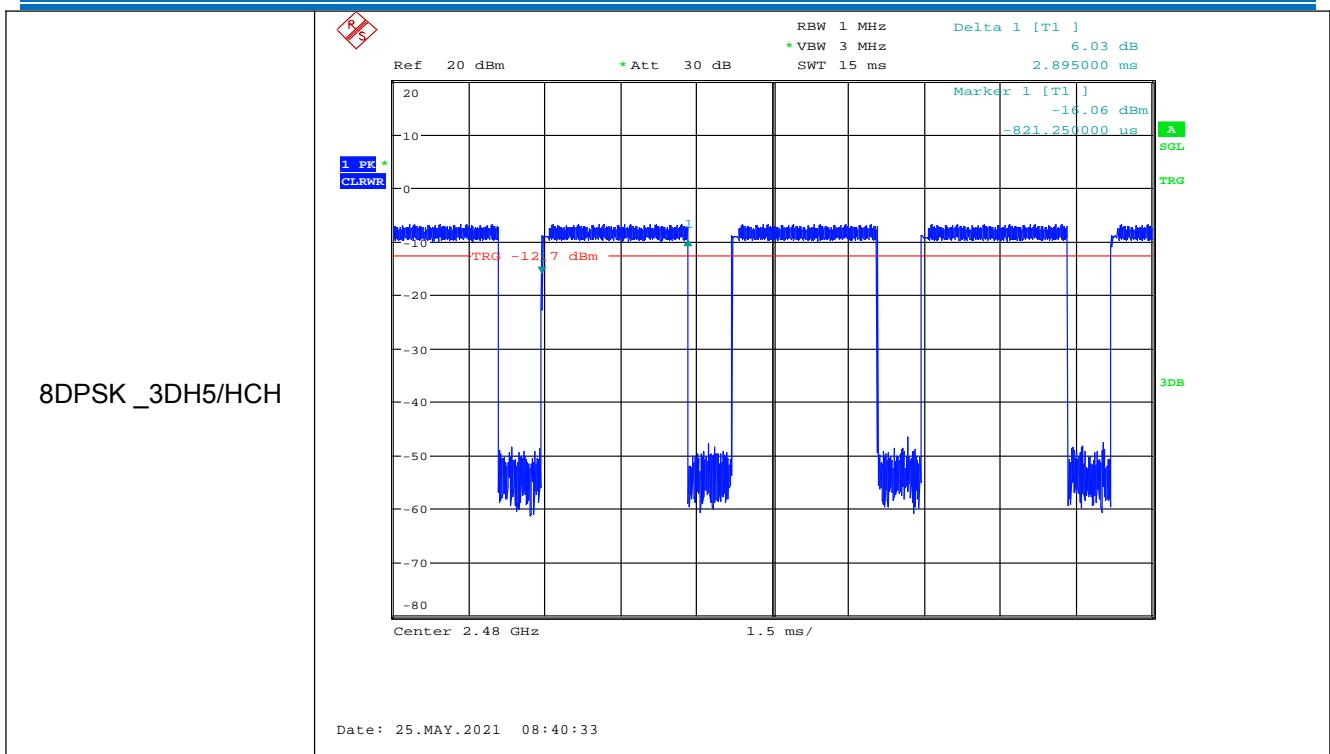


6.8 Band Edge for RF Conducted Emissions

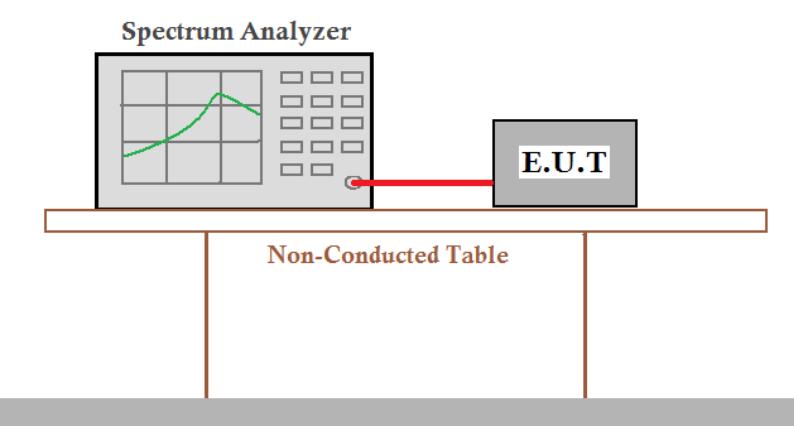
Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10:2013
Test Setup:	<p style="text-align: center;">Spectrum Analyzer</p>  <p style="text-align: center;">Non-Conducted Table</p> <p style="text-align: center;">Ground Reference Plane</p>
<i>Remark: Offset=cable loss+ attenuation factor.</i>	
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Exploratory Test Mode:	Hopping and Non-hopping transmitting with all kind of modulation and all kind of data type
Final Test Mode:	Through Pre-scan, find the DH5 of data type is the worst case of GFSK modulation type, 2-DH5 of data type is the worst case of π/4DQPSK modulation type, 3-DH5 of data type is the worst case of 8DPSK modulation type.
Test Results:	Pass





Mode	Test Channel	Frequency [MHz]	Frequency Hopping	Emission Level [dBm]	Limit [dBm]	Result
GFSK	LCH	2400	Off	-49.160	-21.15	PASS
			On	-46.630	-19.78	PASS
GFSK	HCH	2483.5	Off	-48.310	-20.36	PASS
			On	-46.190	-20.36	PASS
$\pi/4$ DQPSK	LCH	2400	Off	-44.610	-20.58	PASS
			On	-44.320	-19.78	PASS
$\pi/4$ DQPSK	HCH	2483.5	Off	-48.670	-20.56	PASS
			On	-45.570	-20.38	PASS
8DPSK	LCH	2400	Off	-47.980	-20.57	PASS
			On	-43.490	-19.9	PASS
8DPSK	HCH	2483.5	Off	-48.970	-20.54	PASS
			On	-45.210	-20.21	PASS


Test plot as follows:

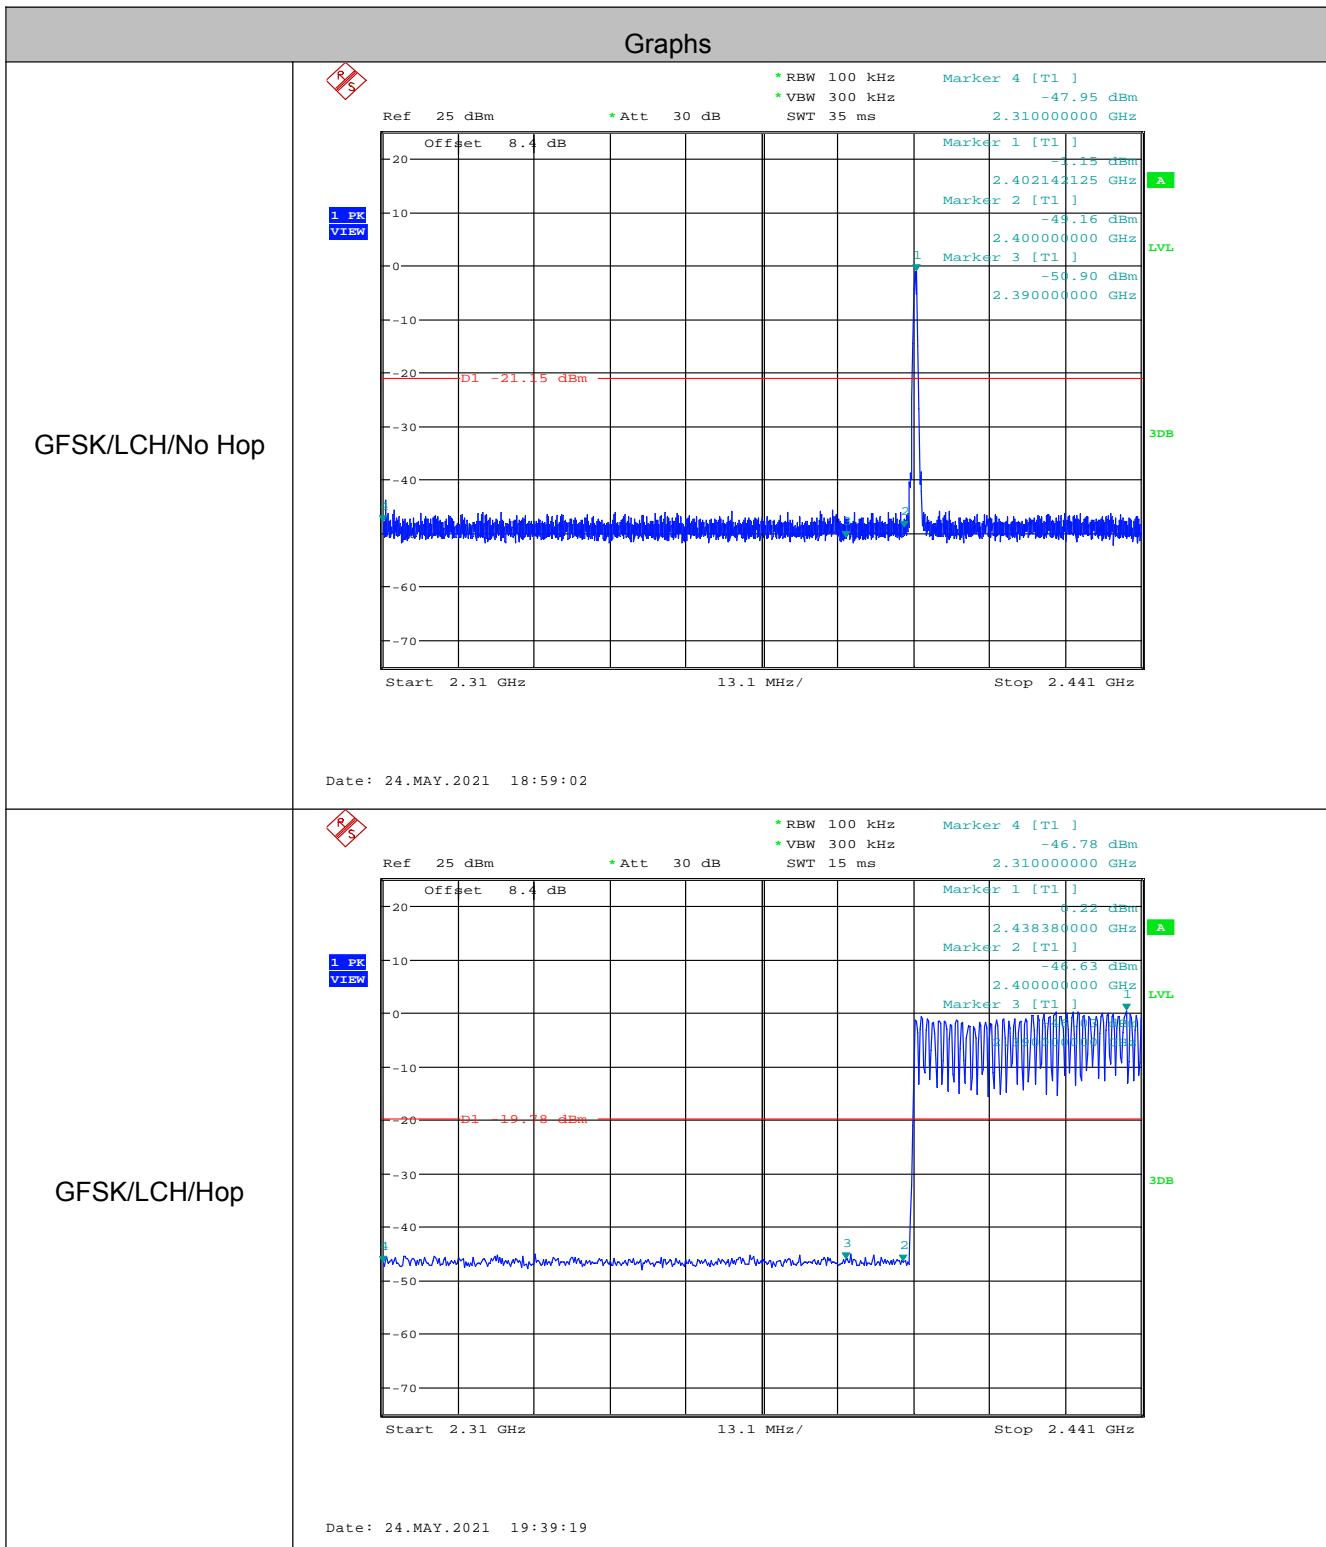


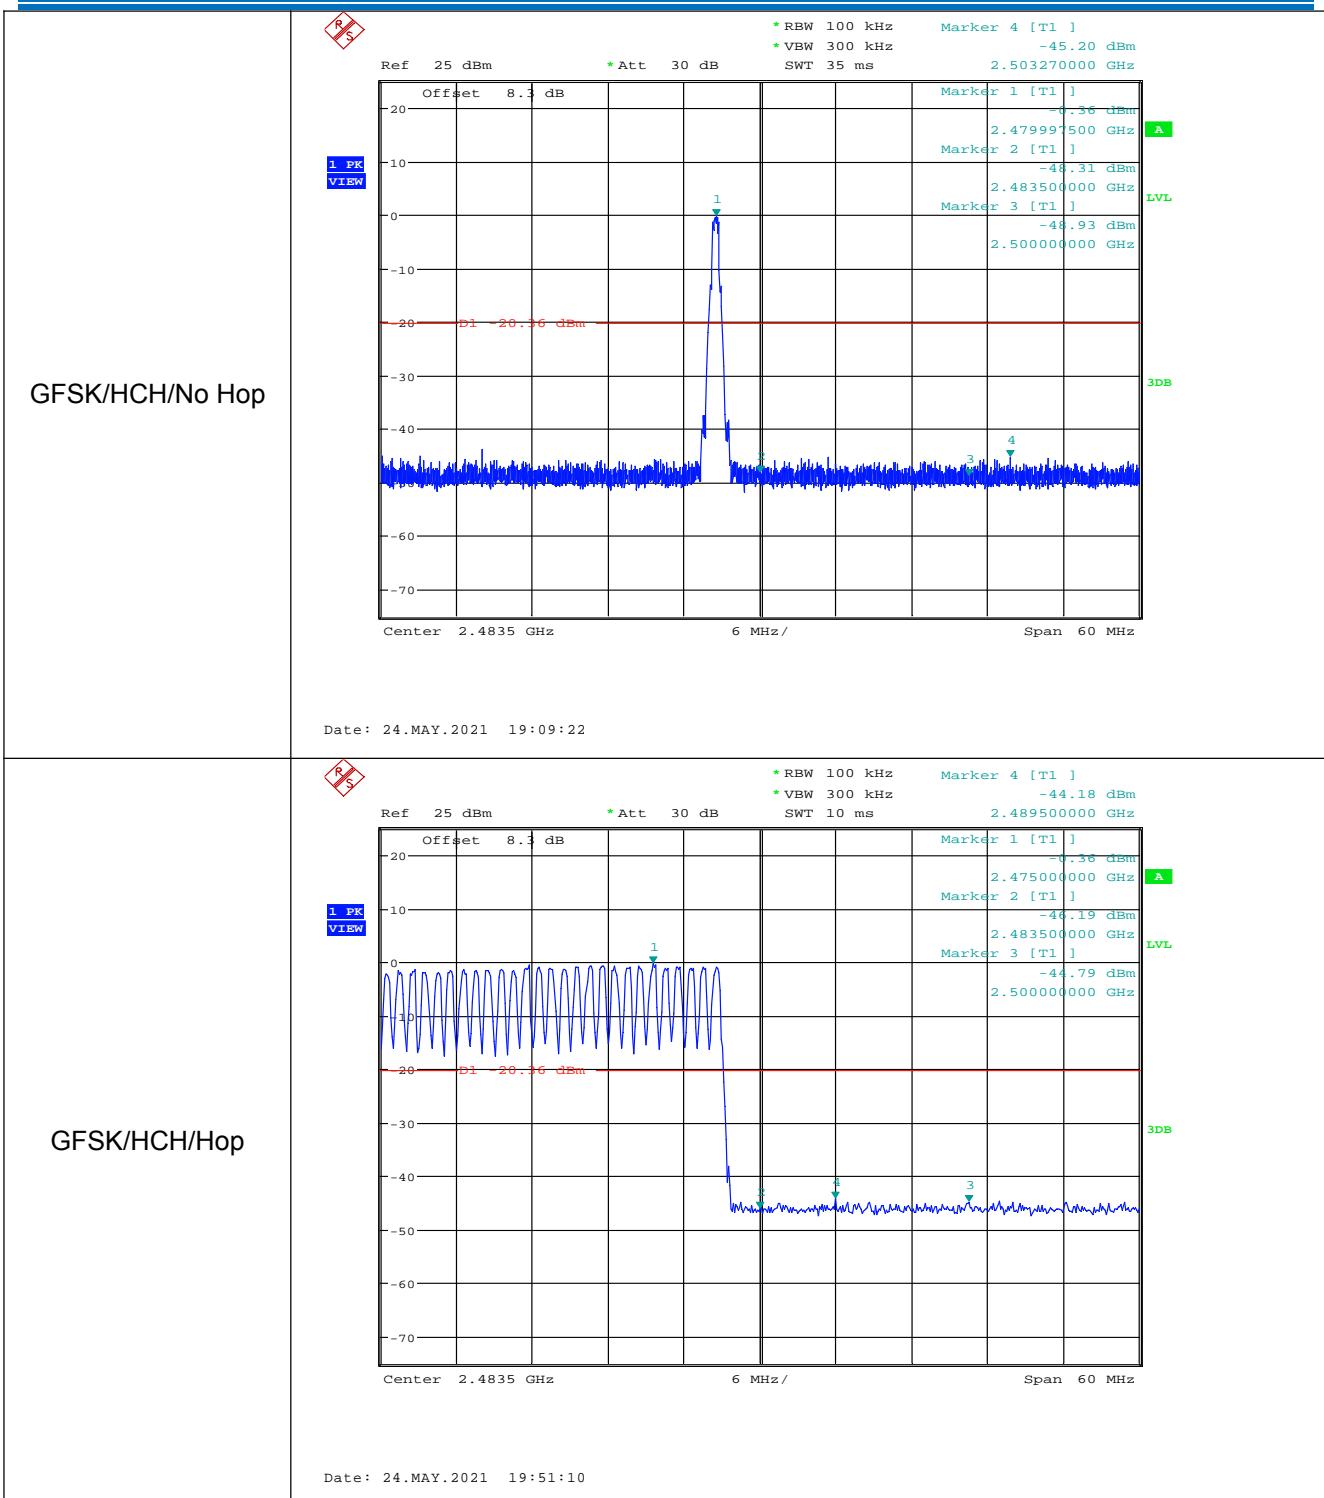

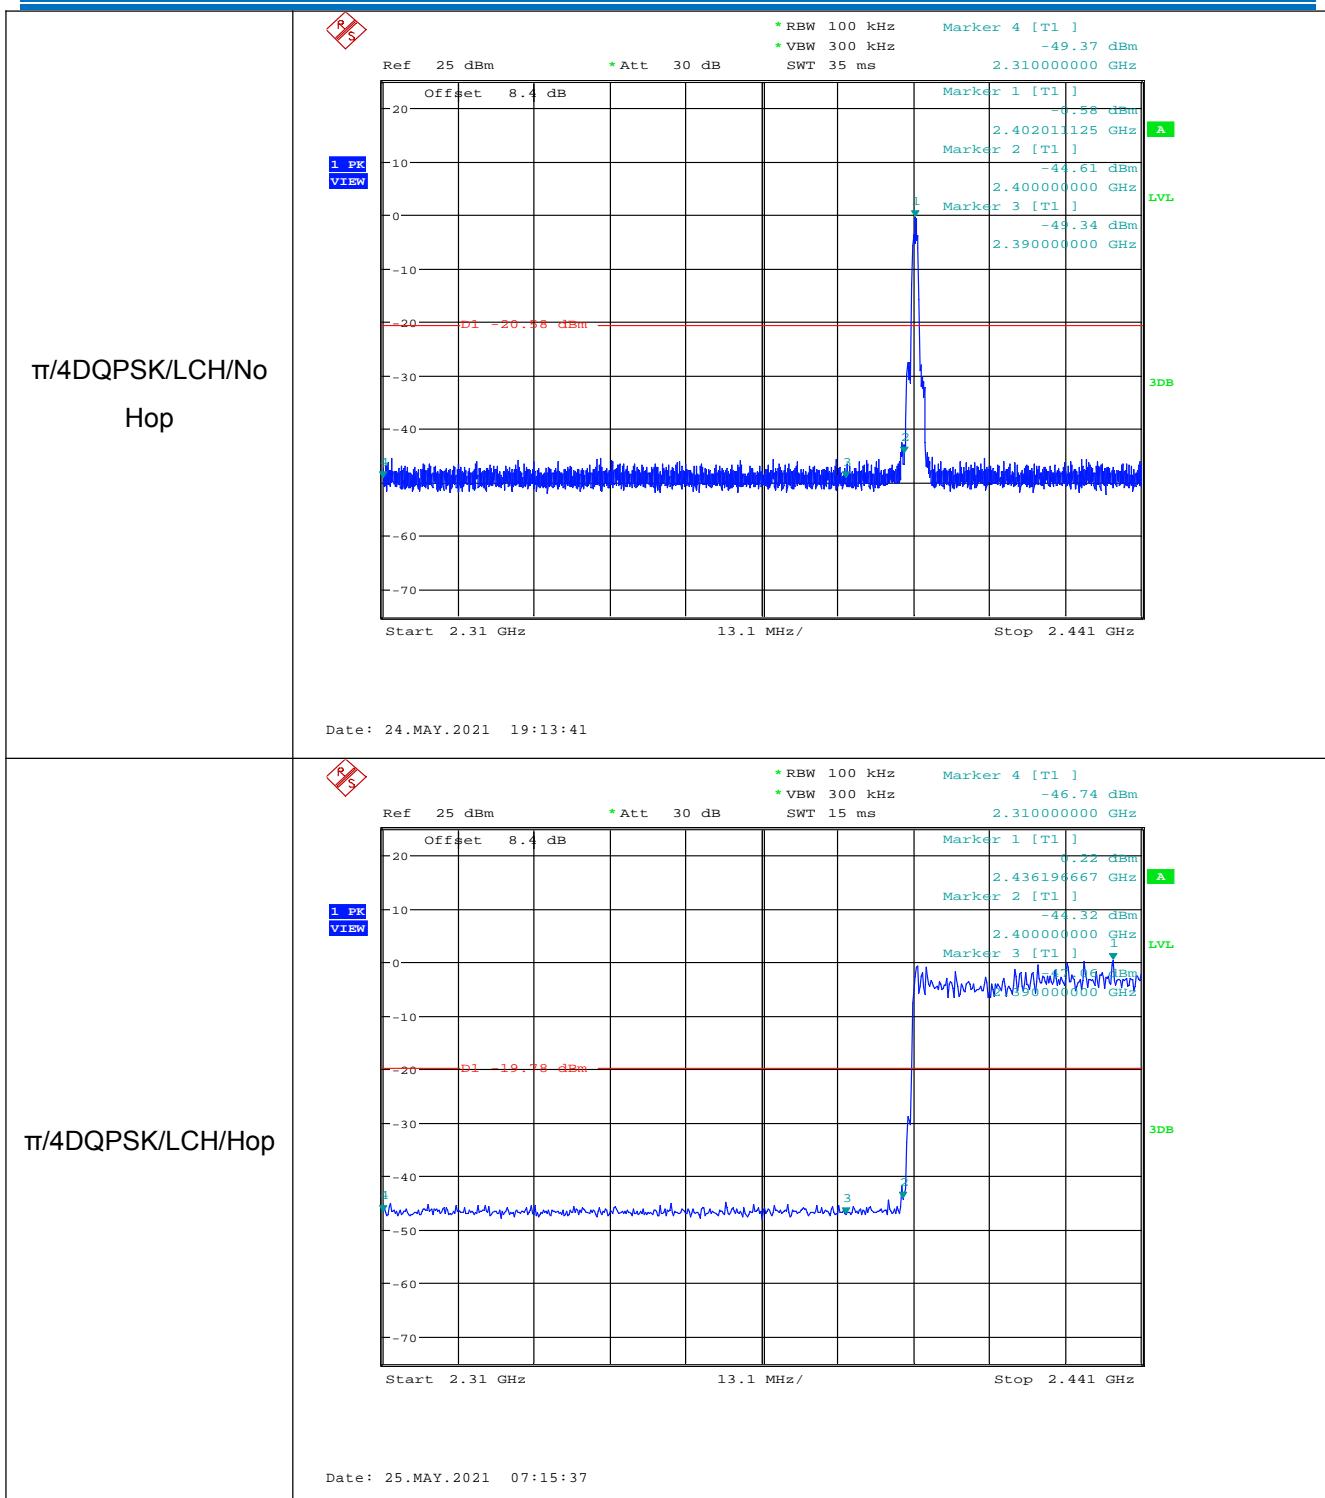


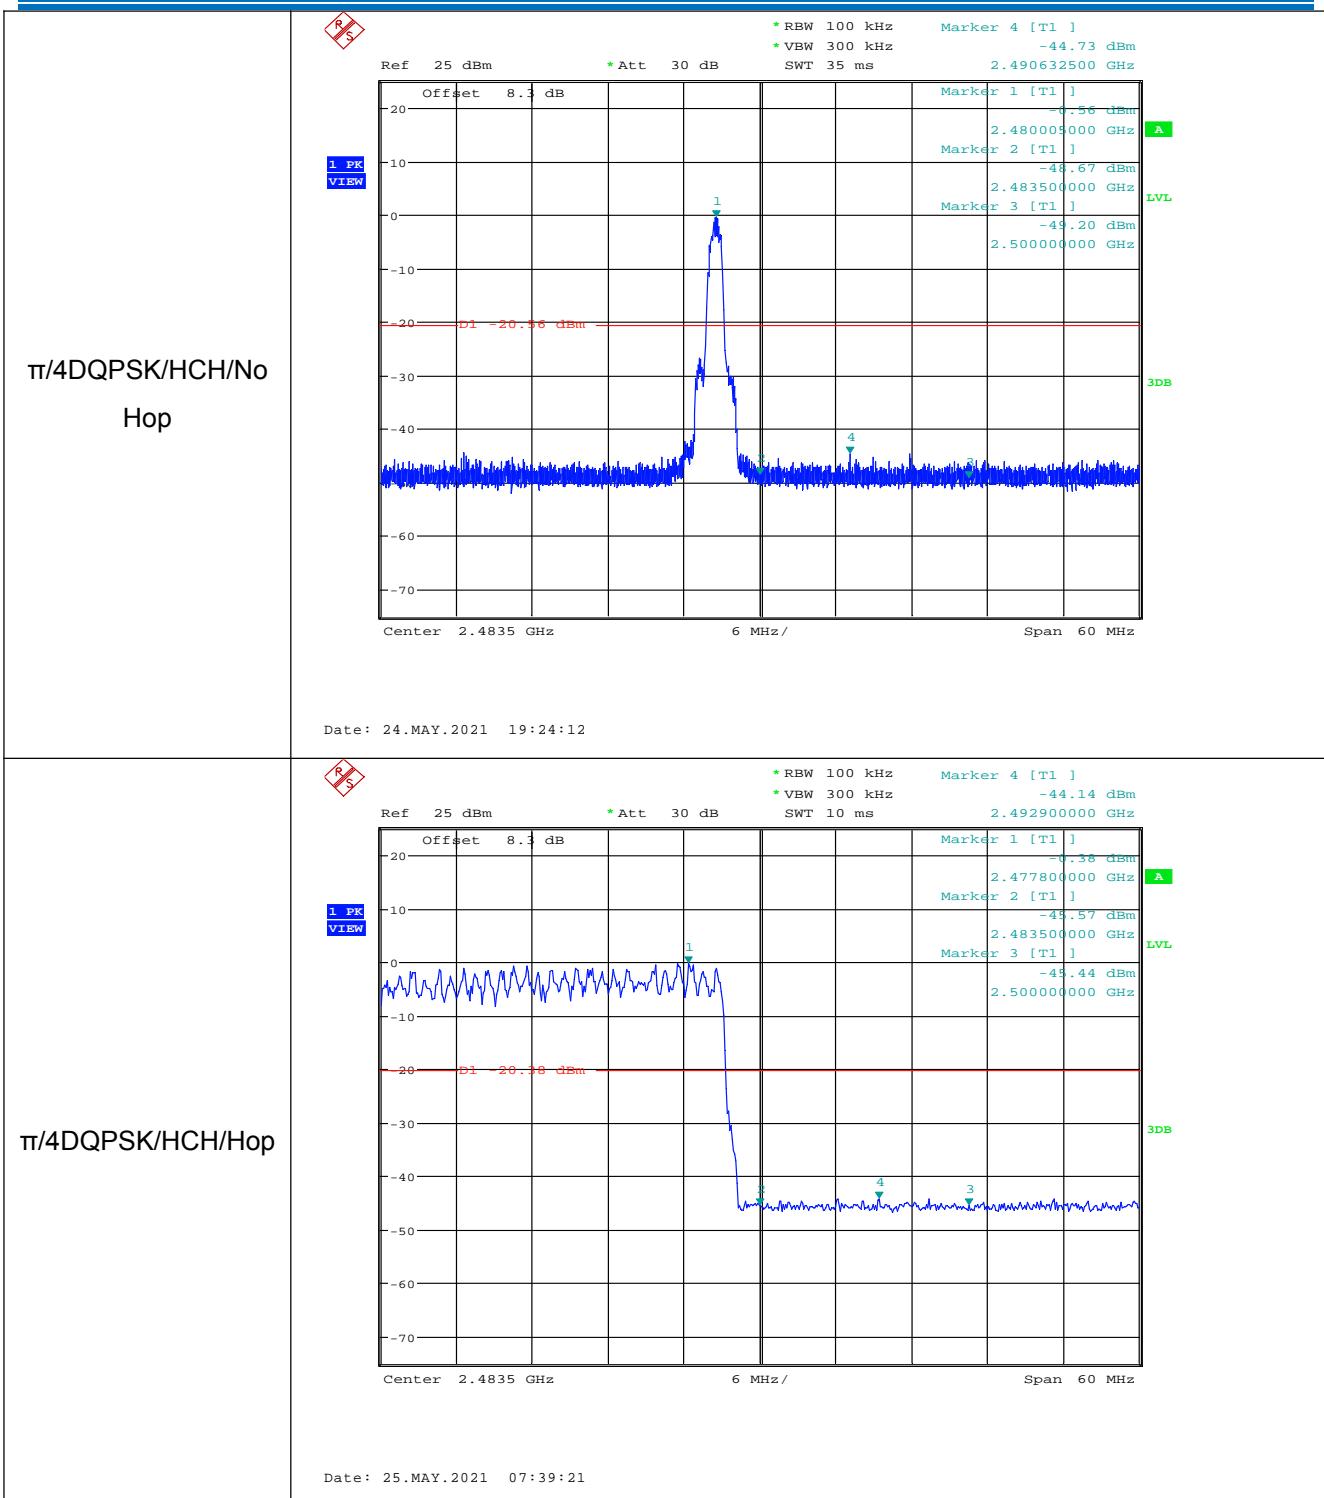


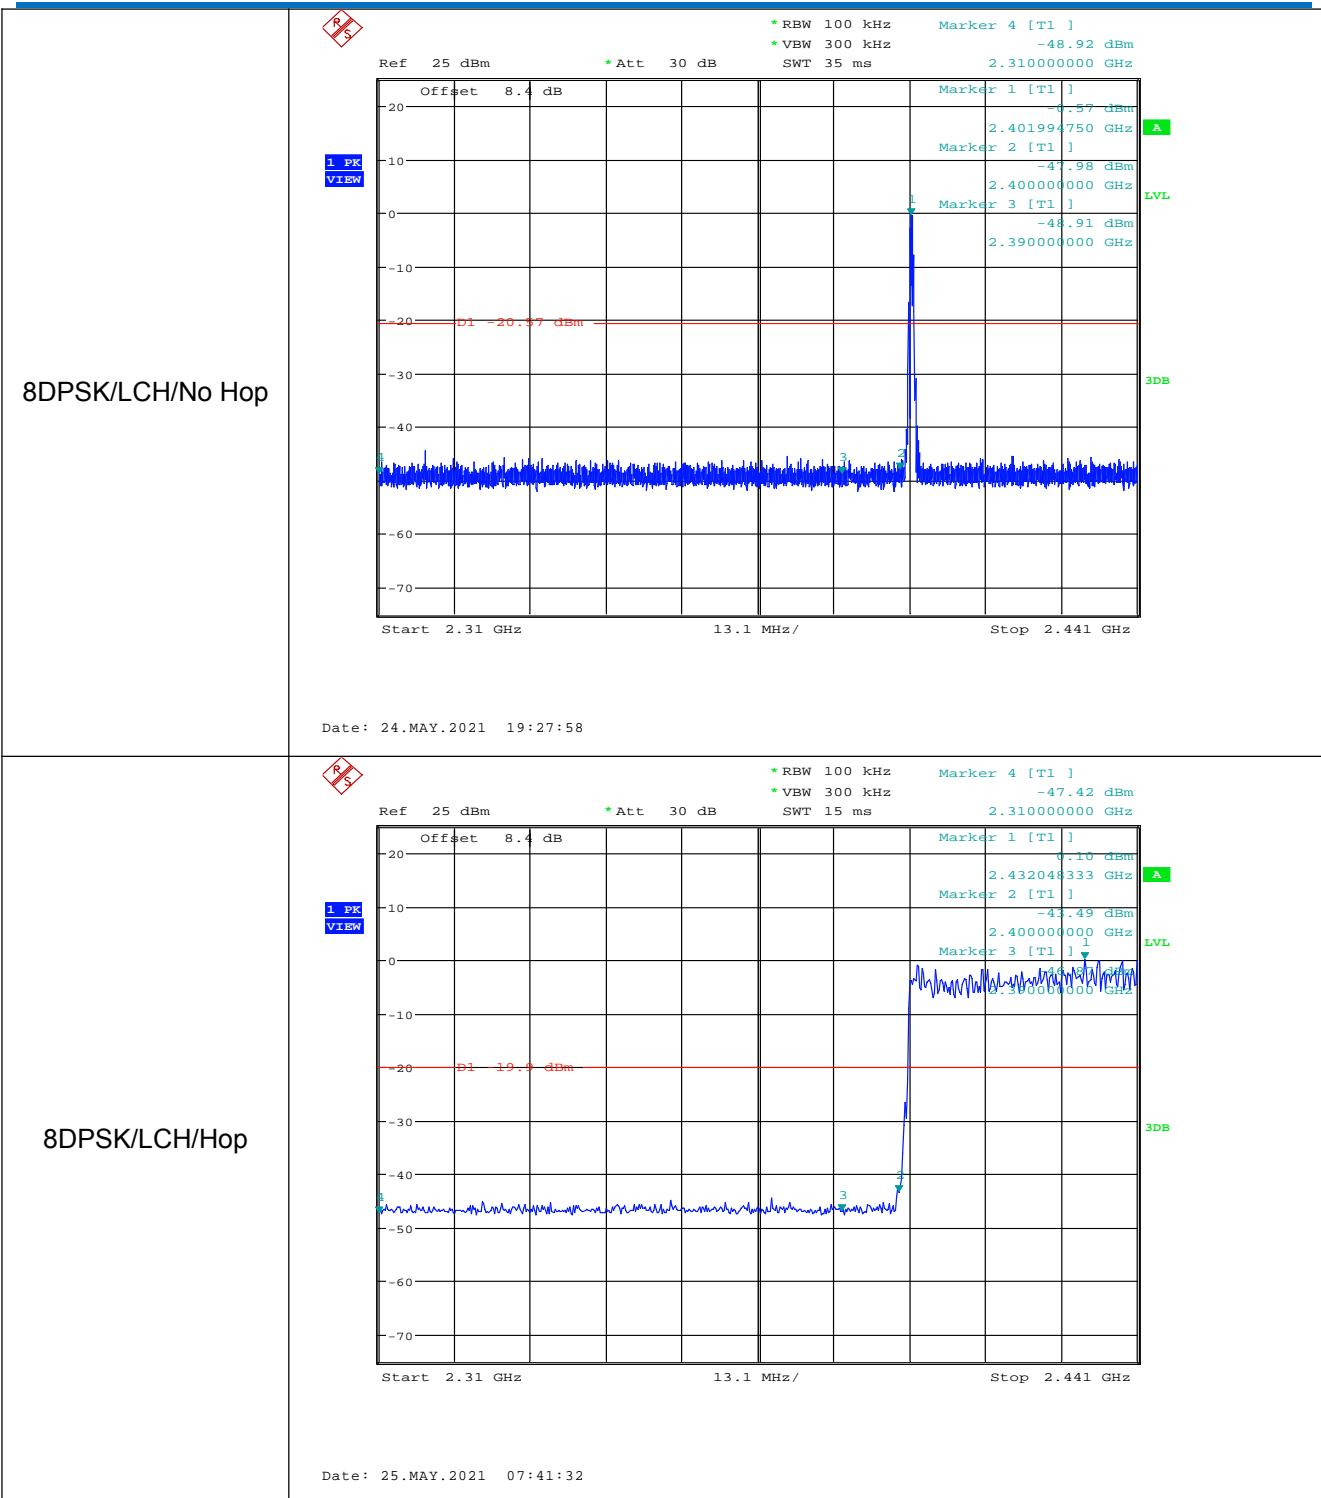


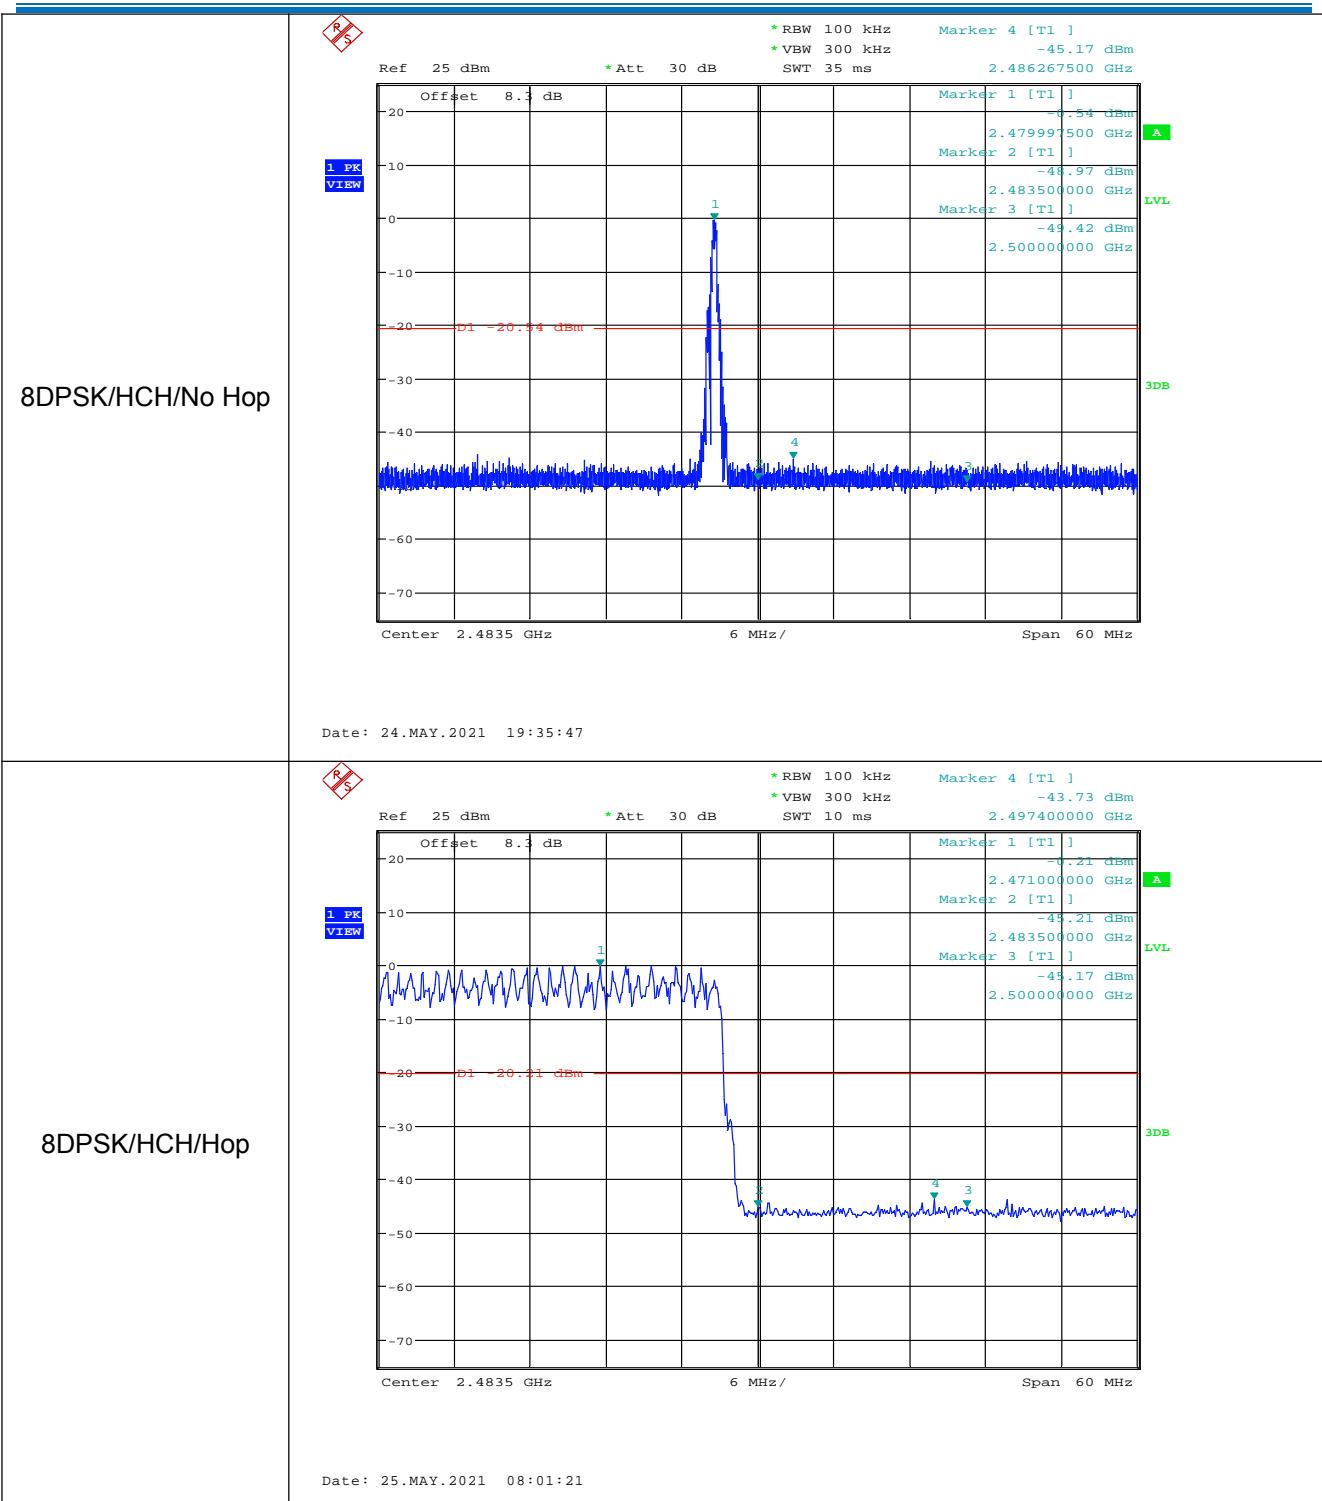



6.9 RF Antenna Conducted Spurious Emissions

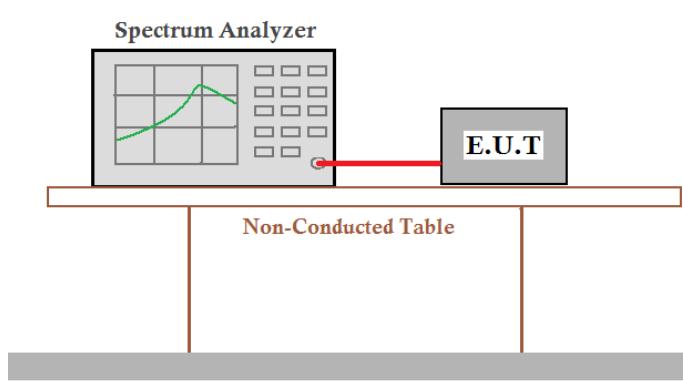
Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10:2013
Test Setup:	<p style="text-align: center;">Spectrum Analyzer</p>  <p style="text-align: center;">Non-Conducted Table</p> <p style="text-align: center;">Ground Reference Plane</p>
<i>Remark: Offset=cable loss+ attenuation factor.</i>	
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Exploratory Test Mode:	Non-hopping transmitting with all kind of modulation and all kind of data type
Final Test Mode:	Through Pre-scan, find the DH5 of data type is the worst case of GFSK modulation type, 2-DH5 of data type is the worst case of $\pi/4$ DQPSK modulation type, 3-DH5 of data type is the worst case of 8DPSK modulation type.
Test Results:	Pass

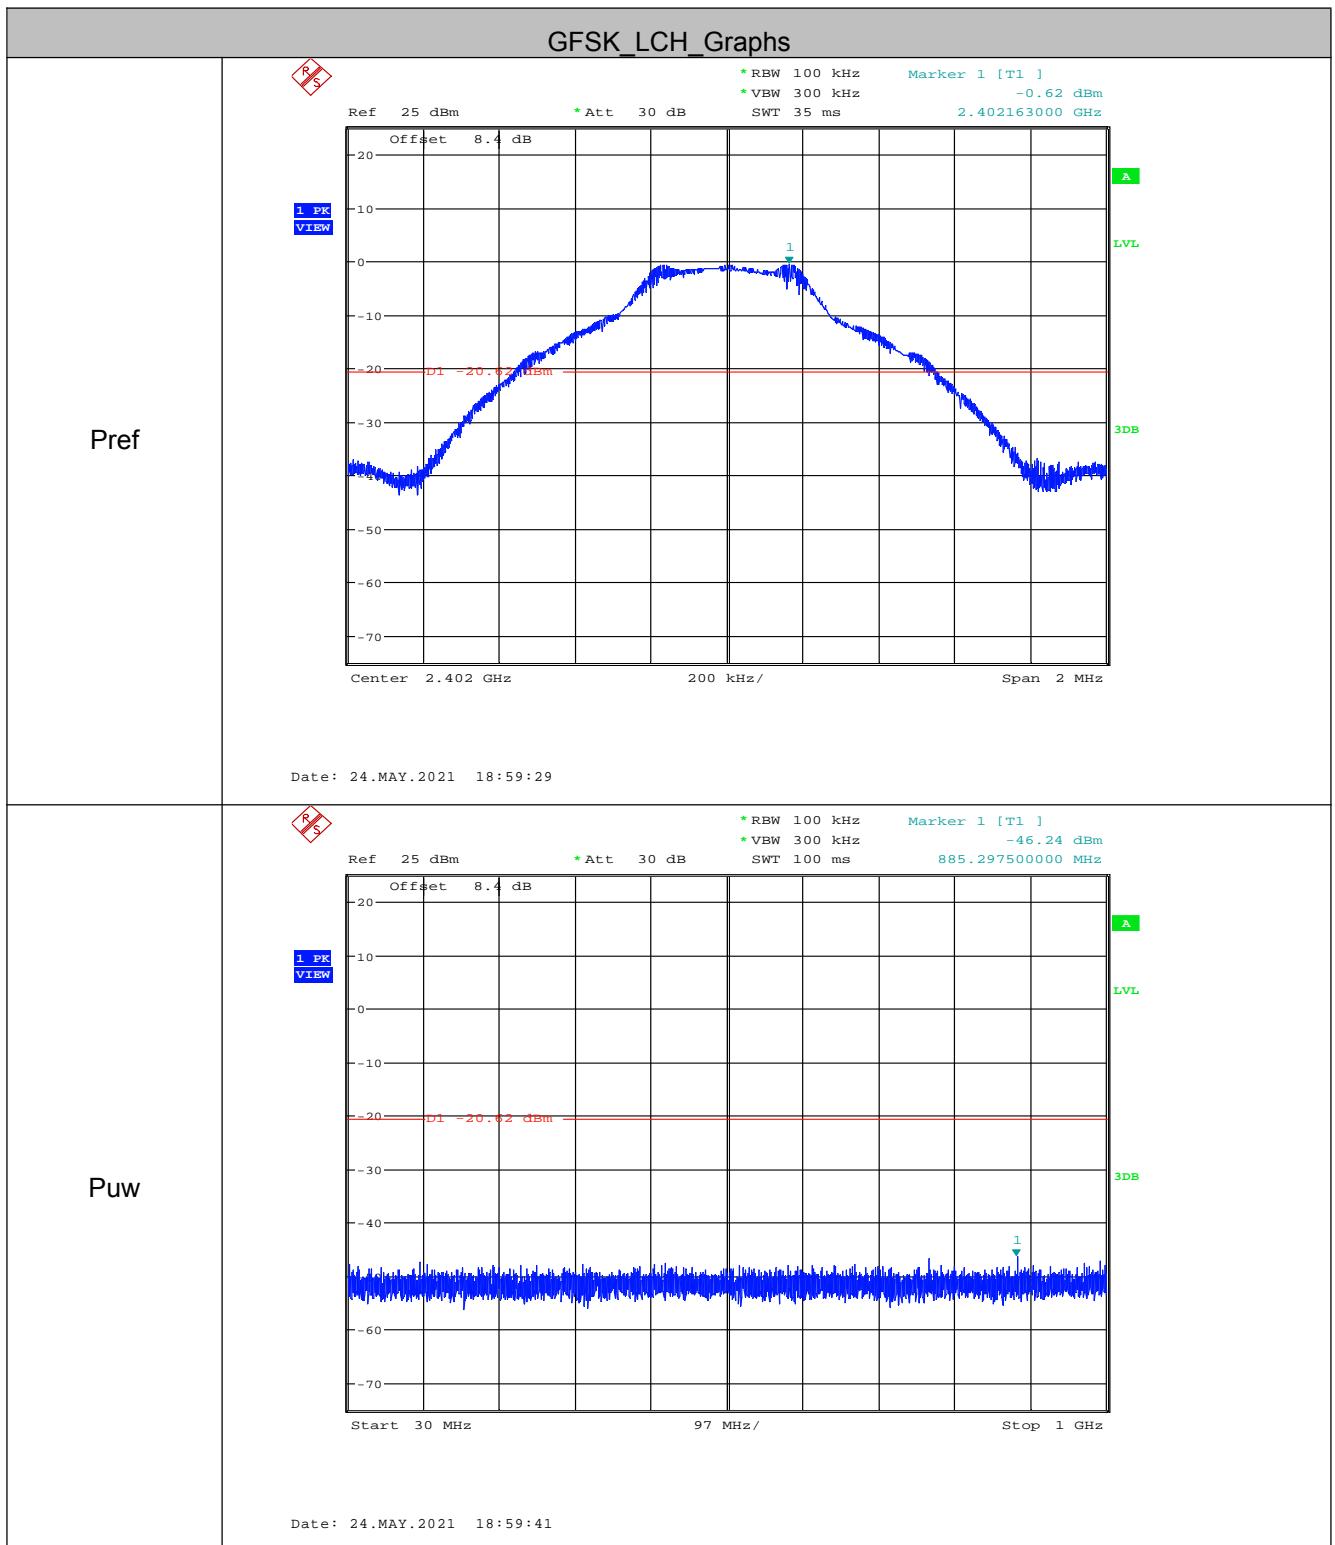


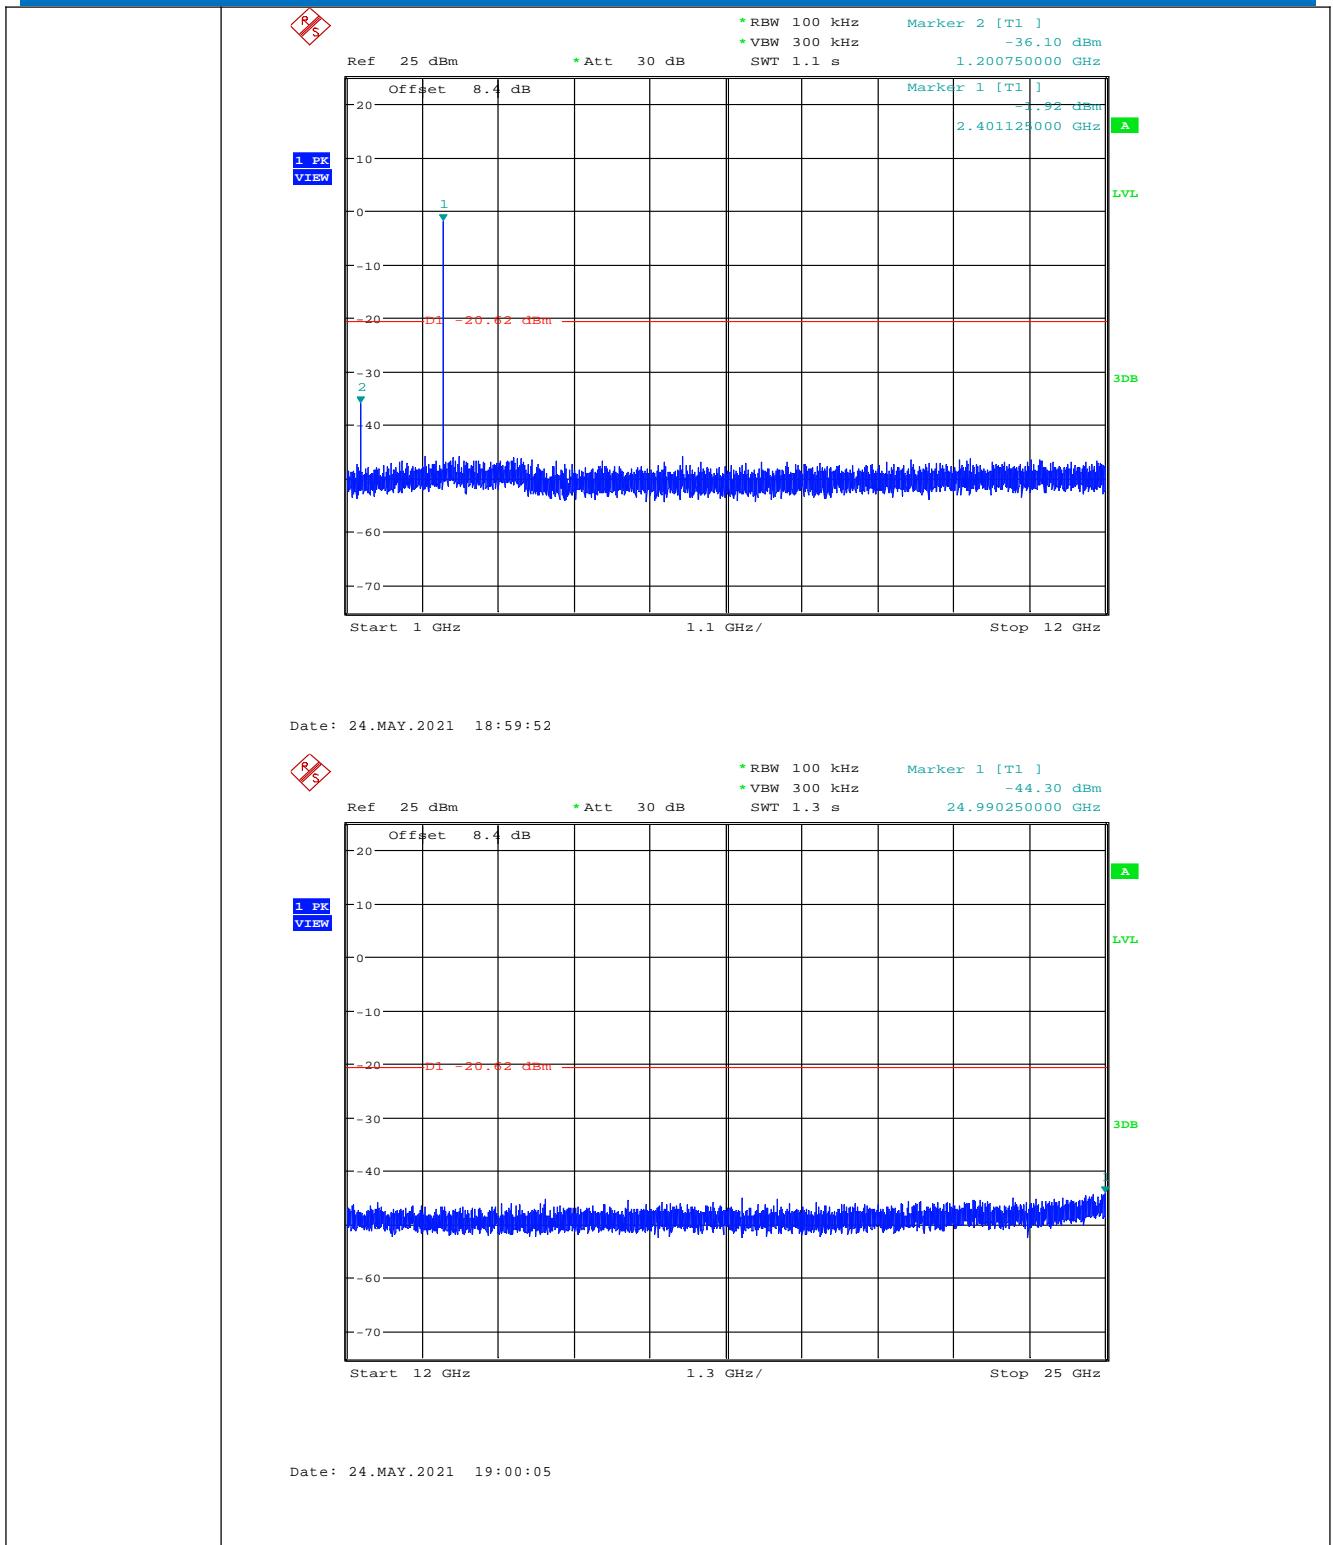
GFSK_MCH_Graphs

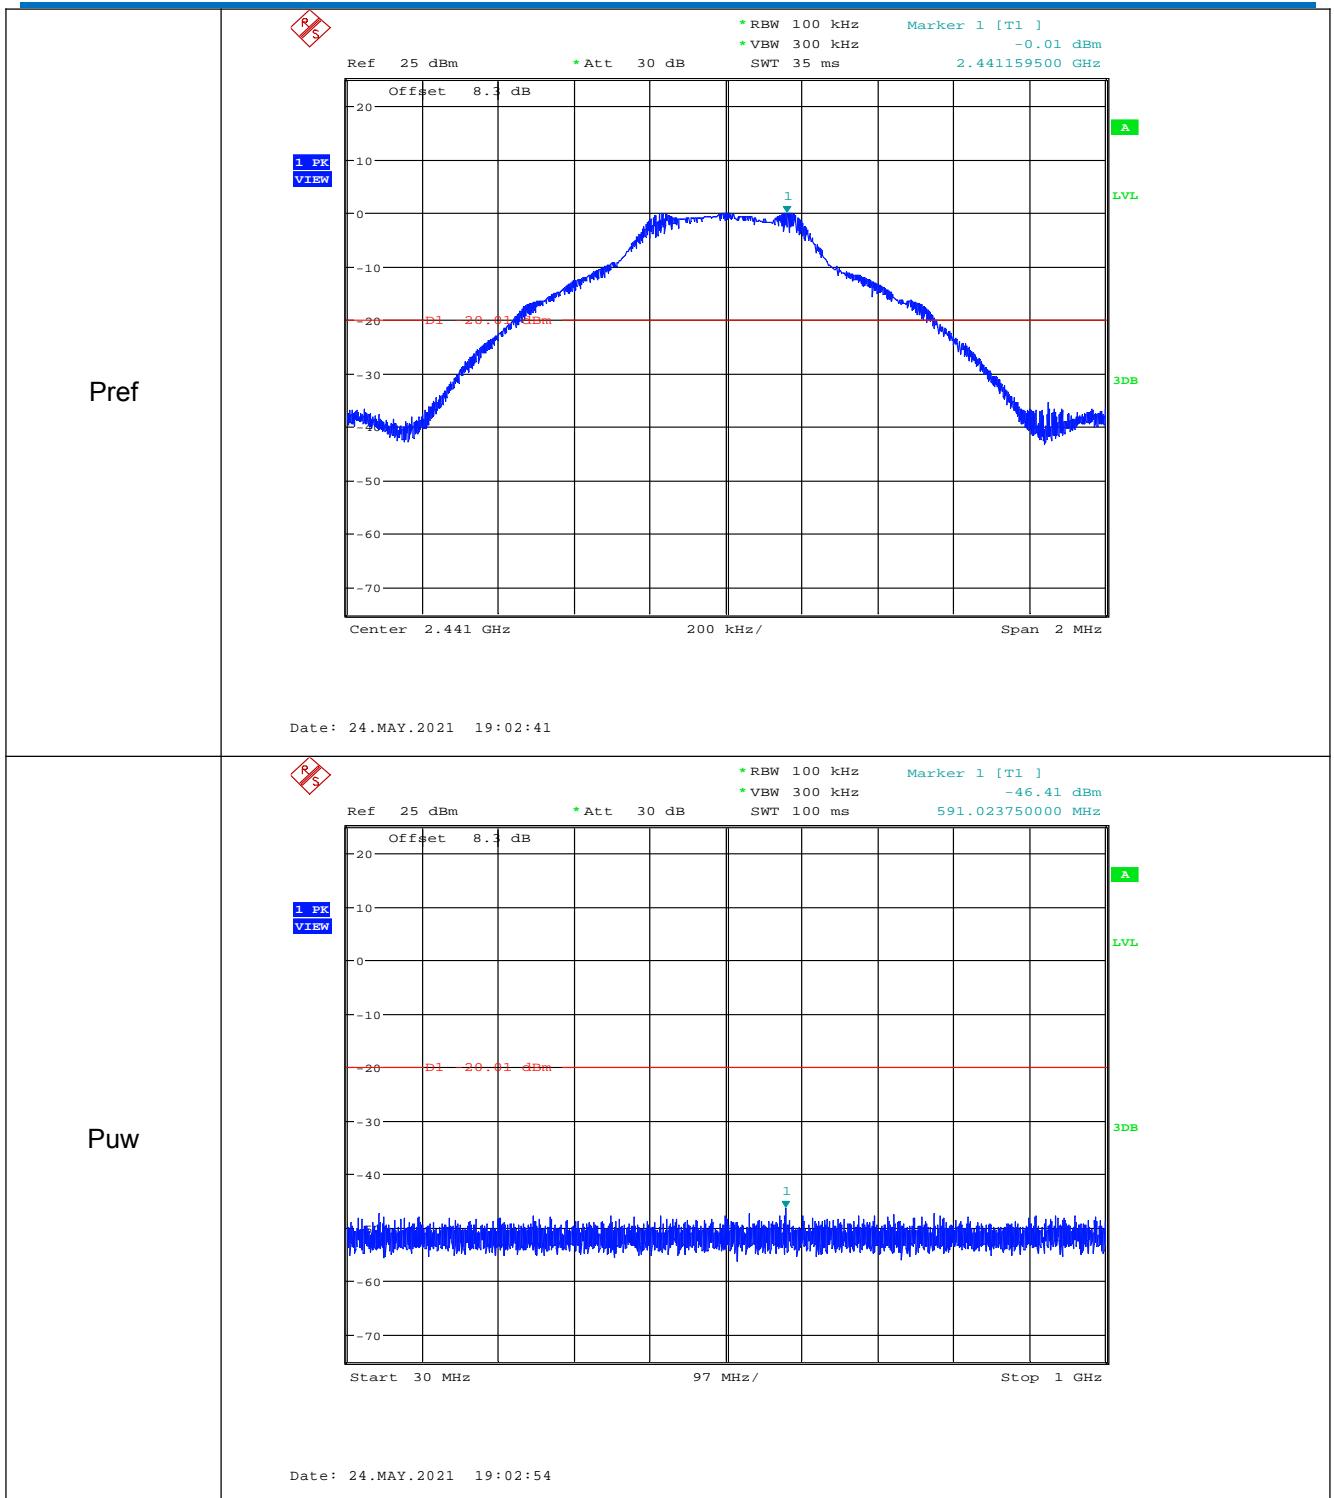


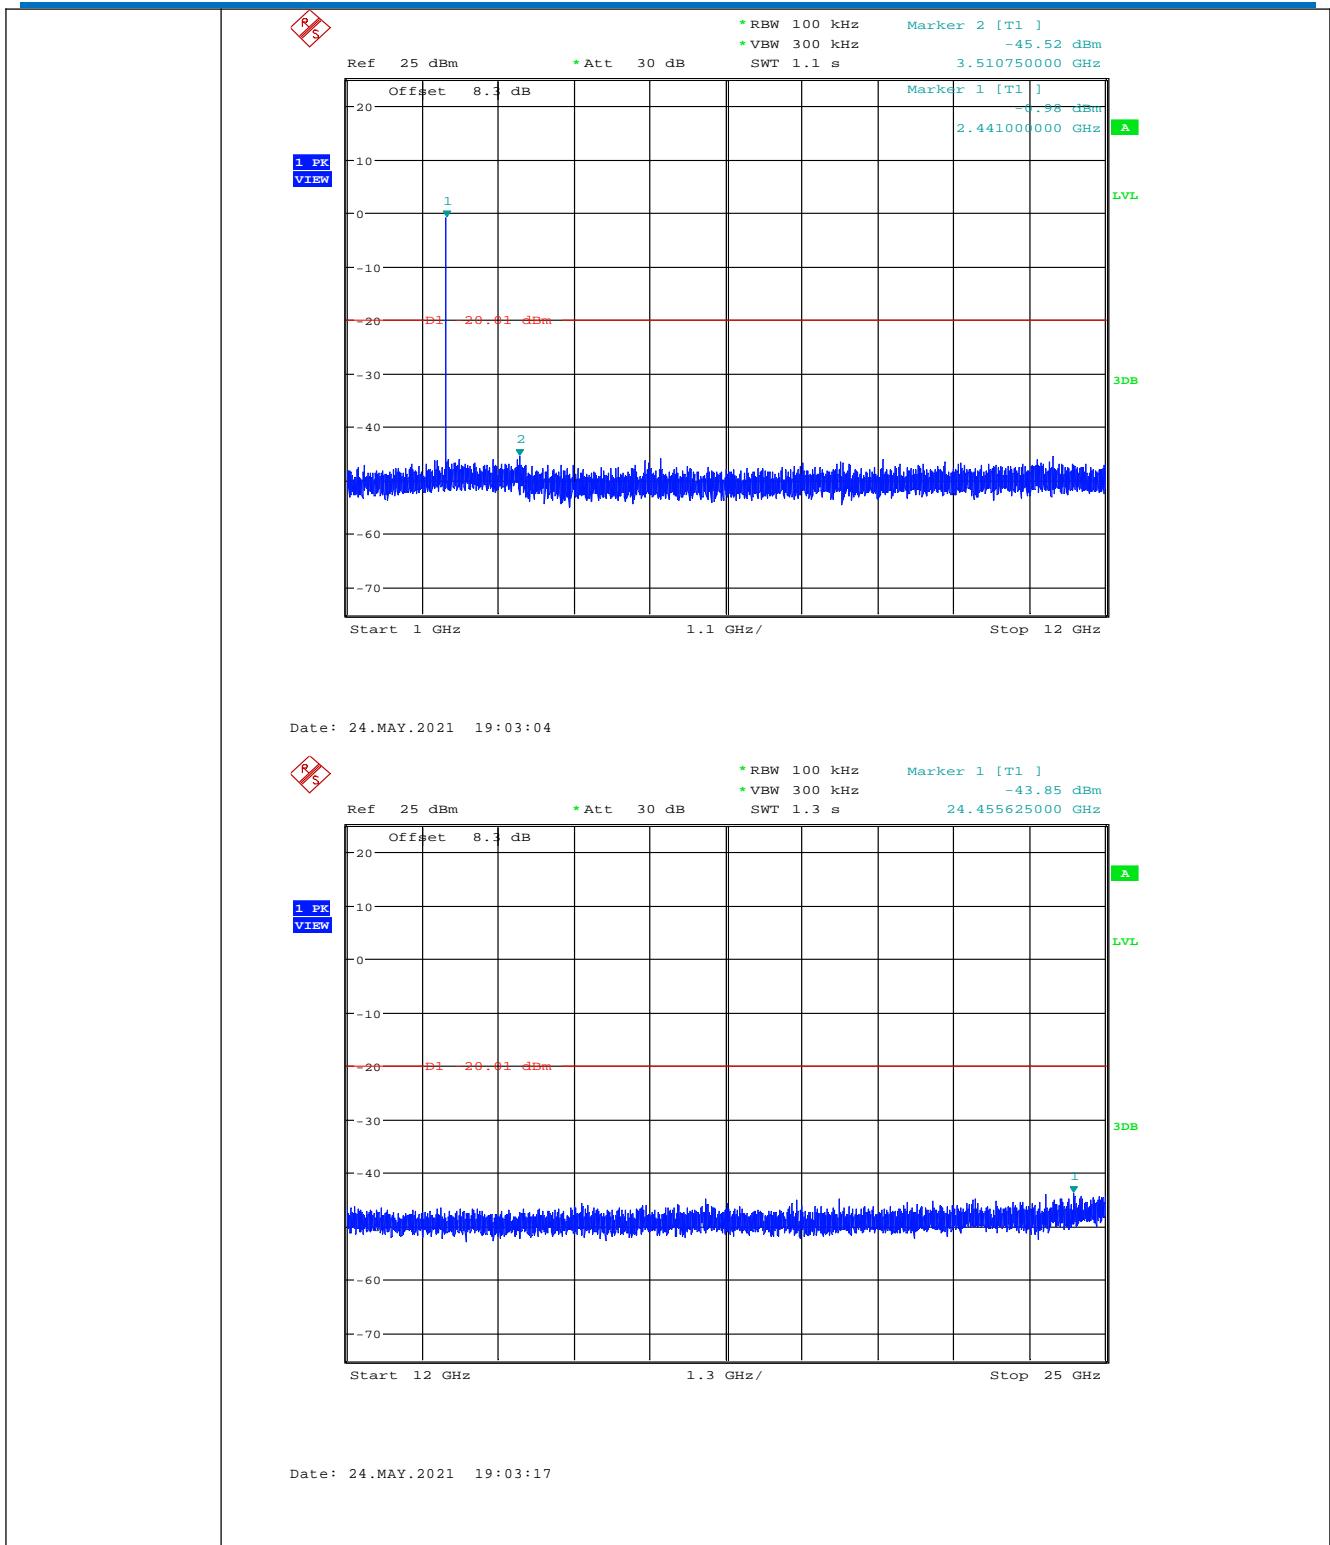

GFSK_HCH_Graphs

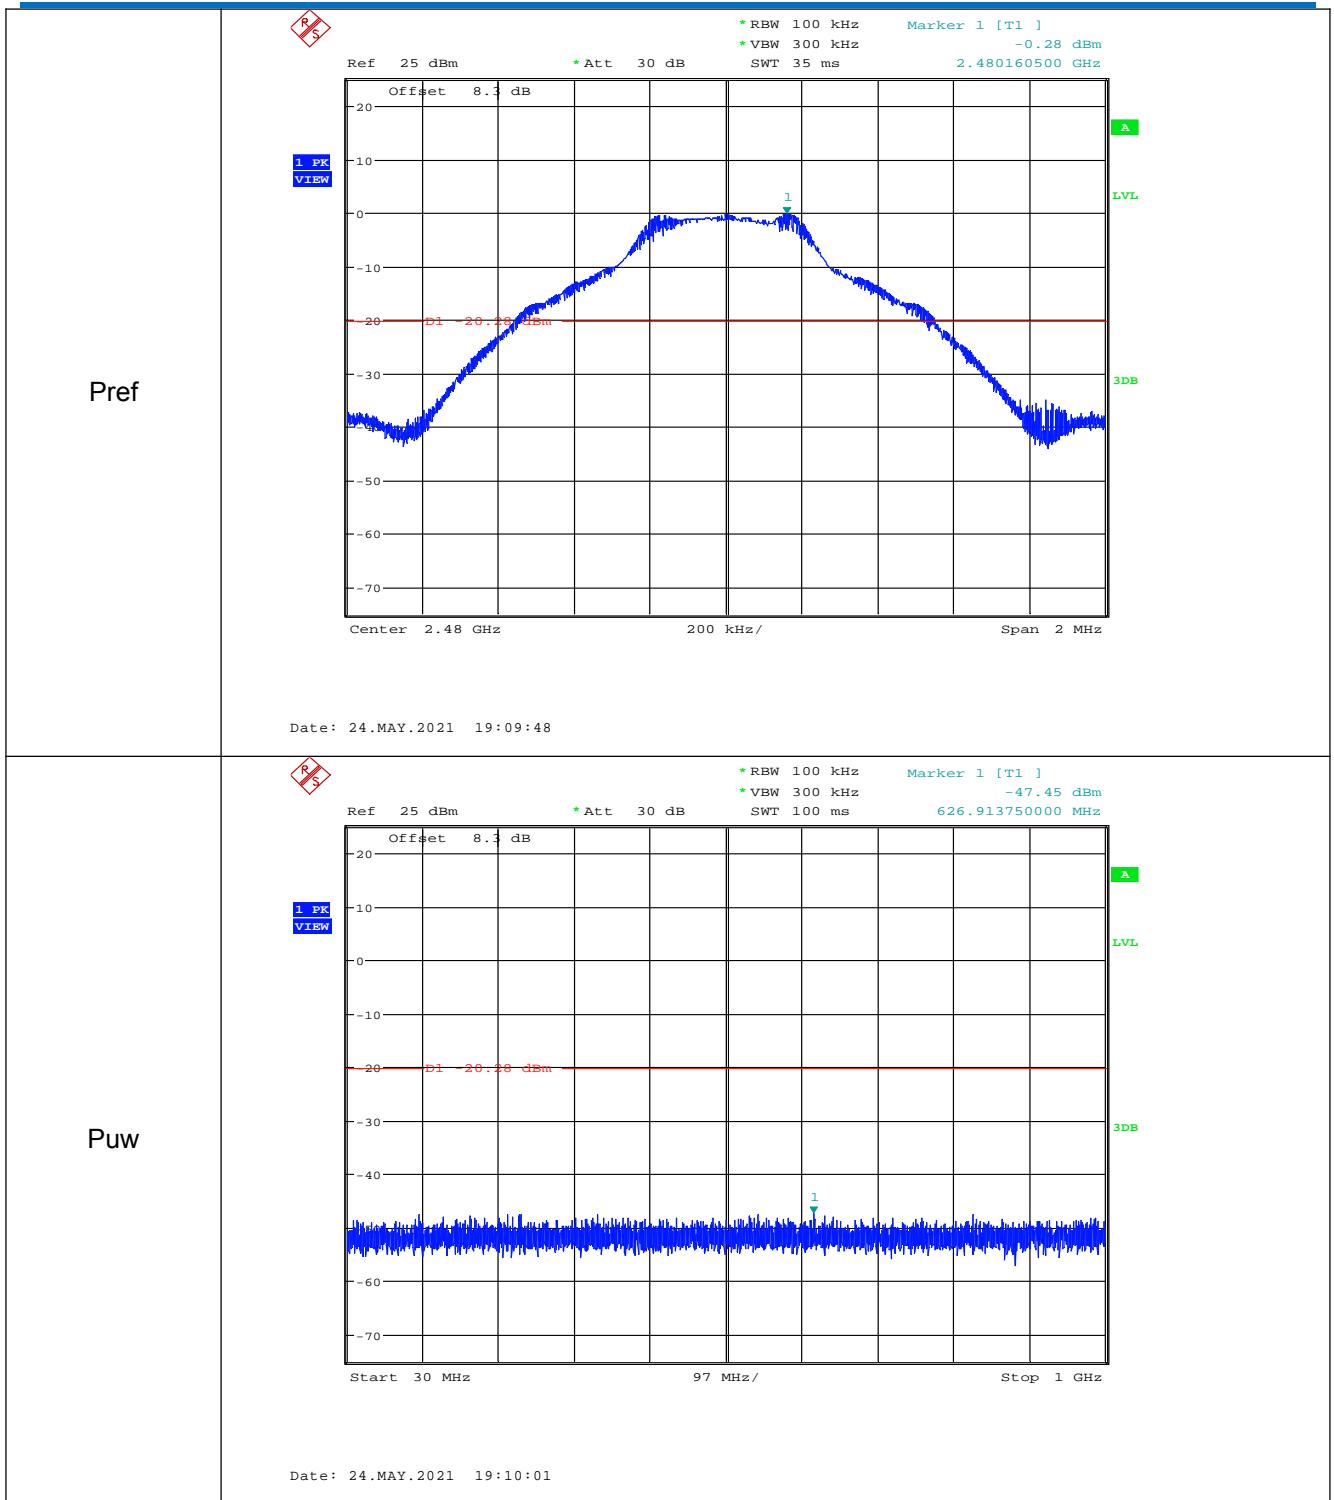


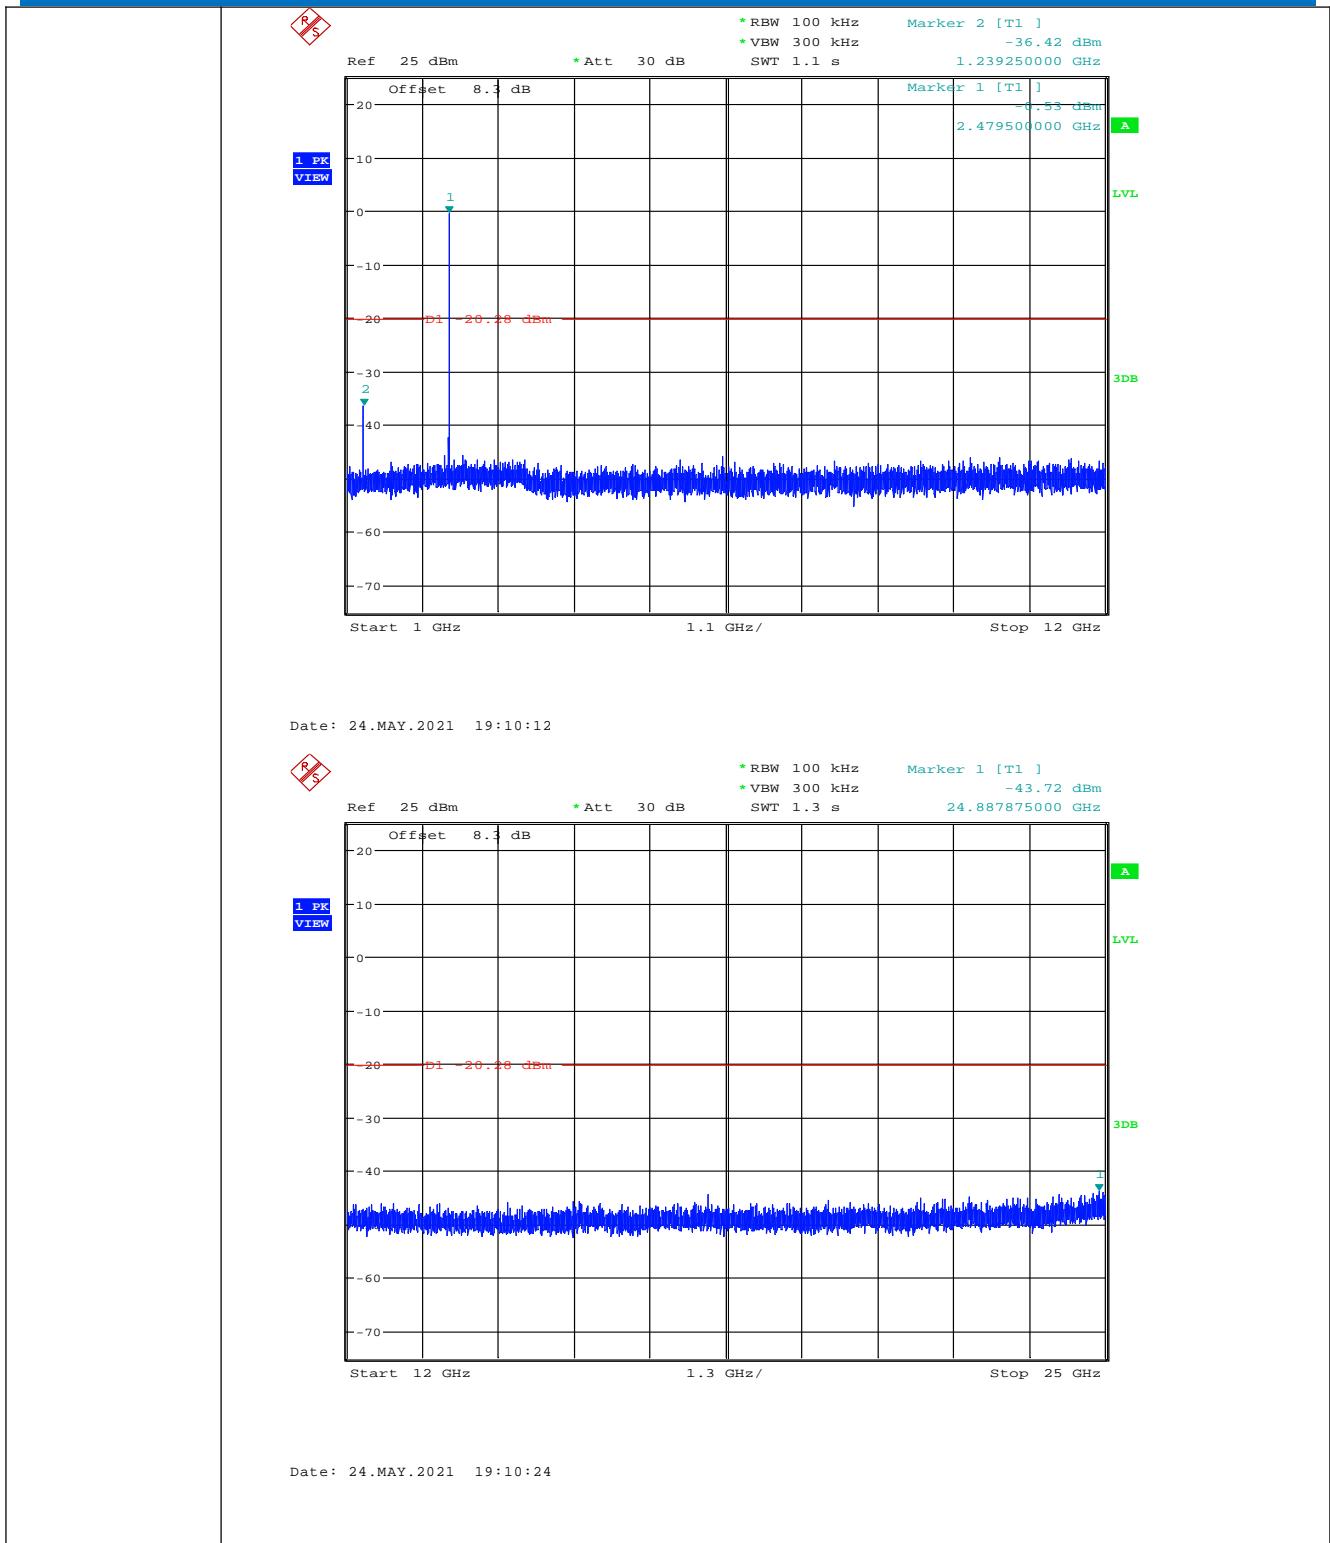



π/4DQPSK_LCH_Graphs

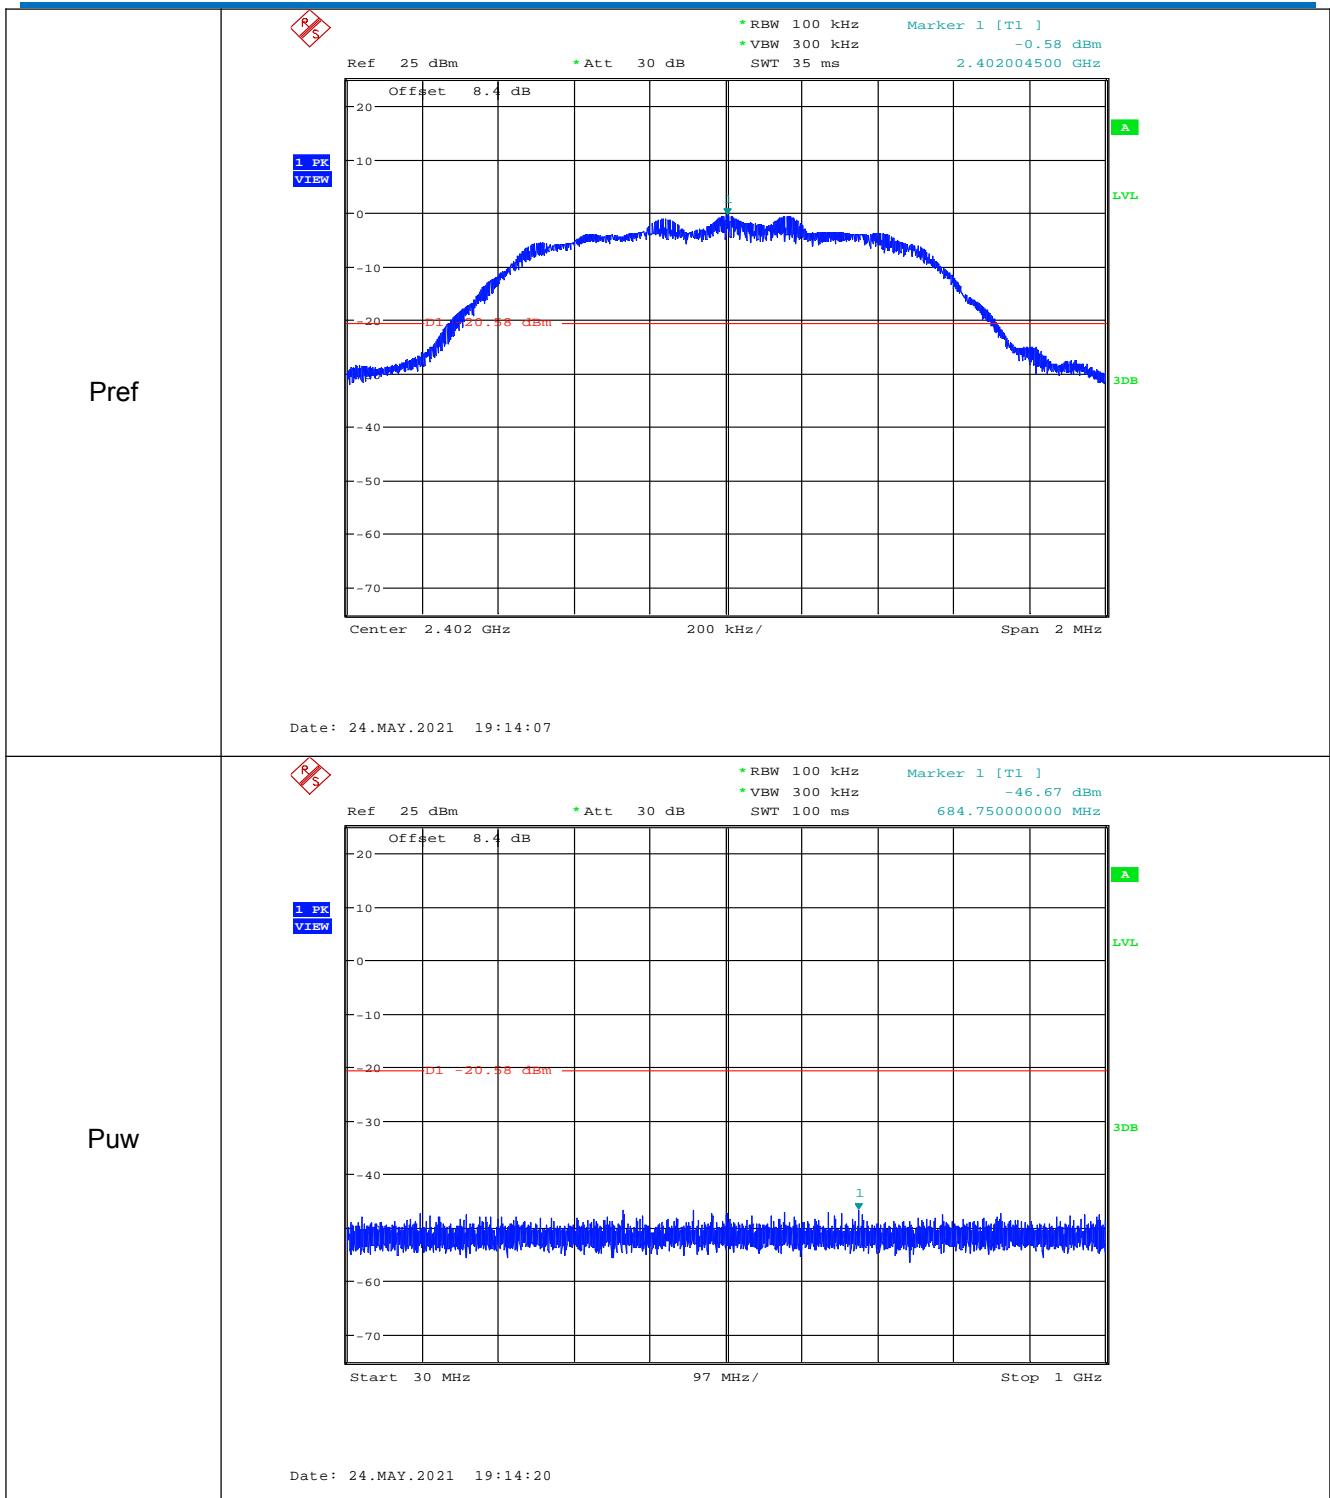


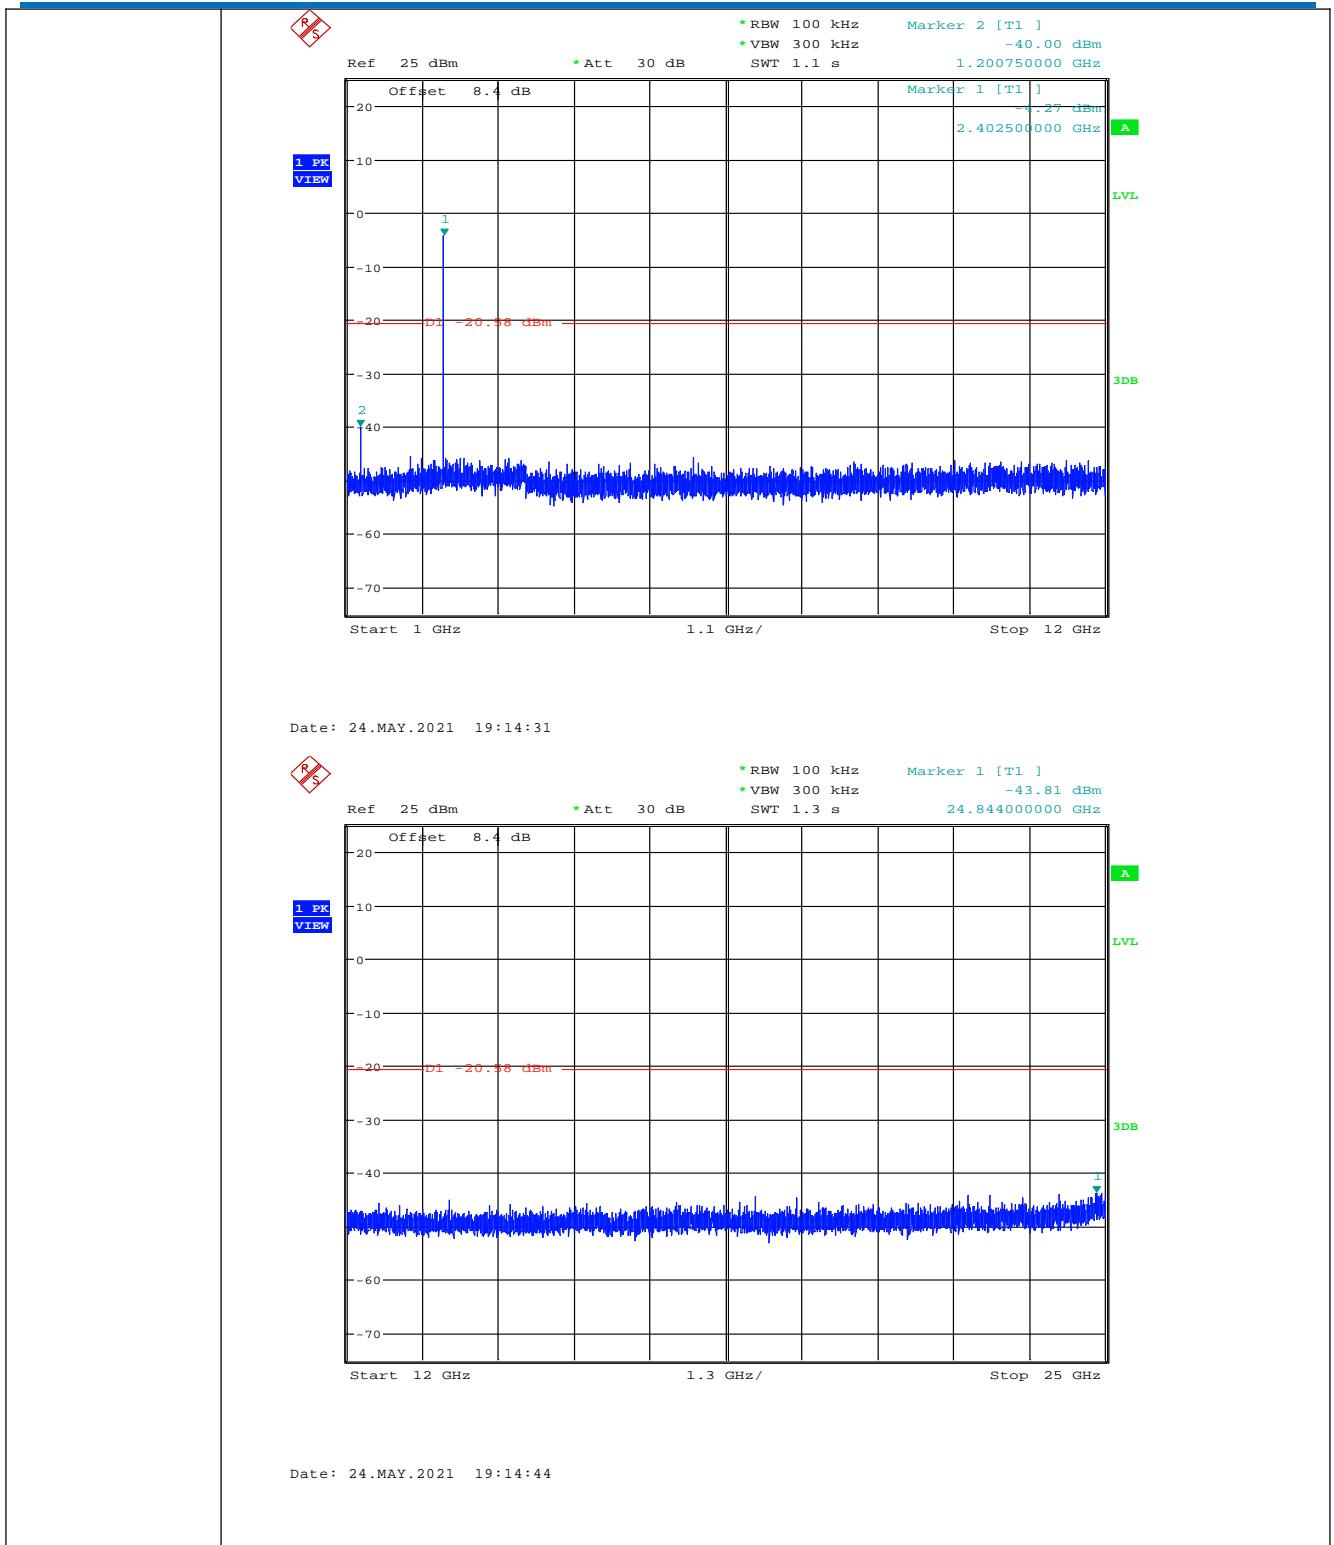
π/4DQPSK_MCH_Graphs

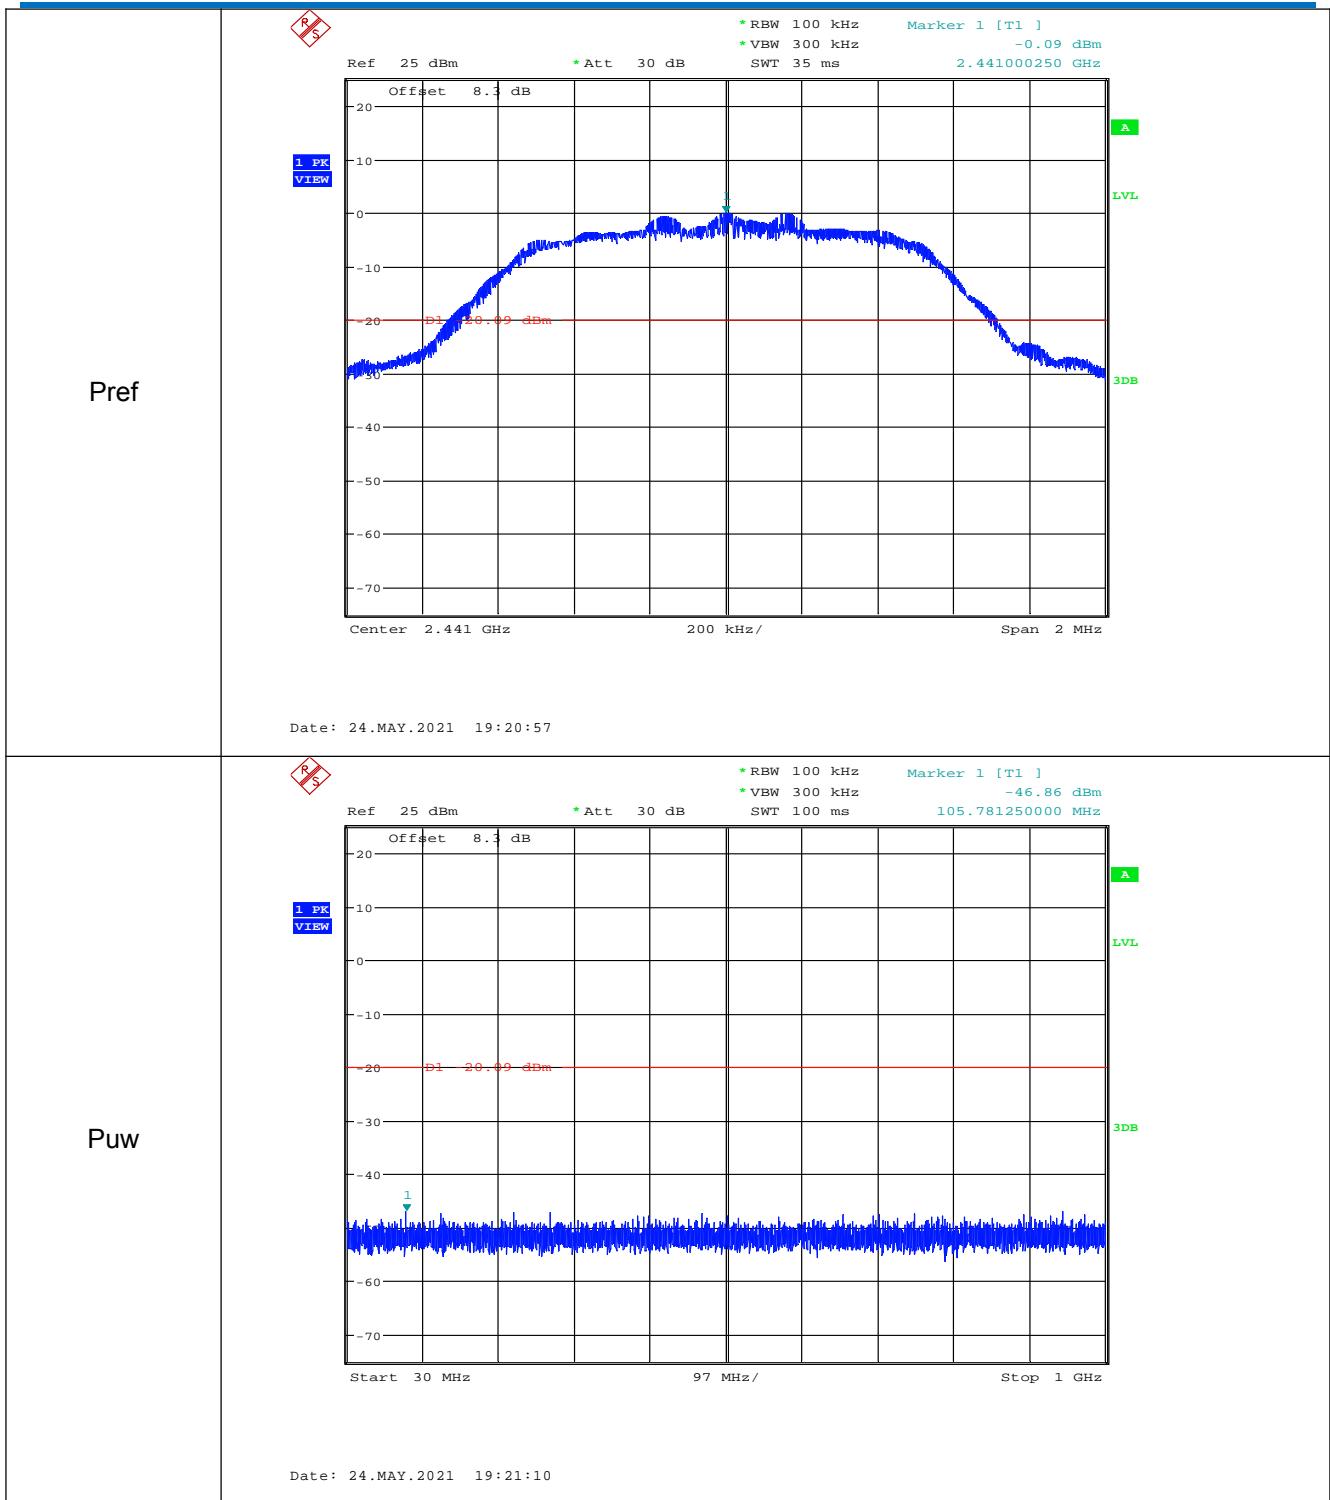


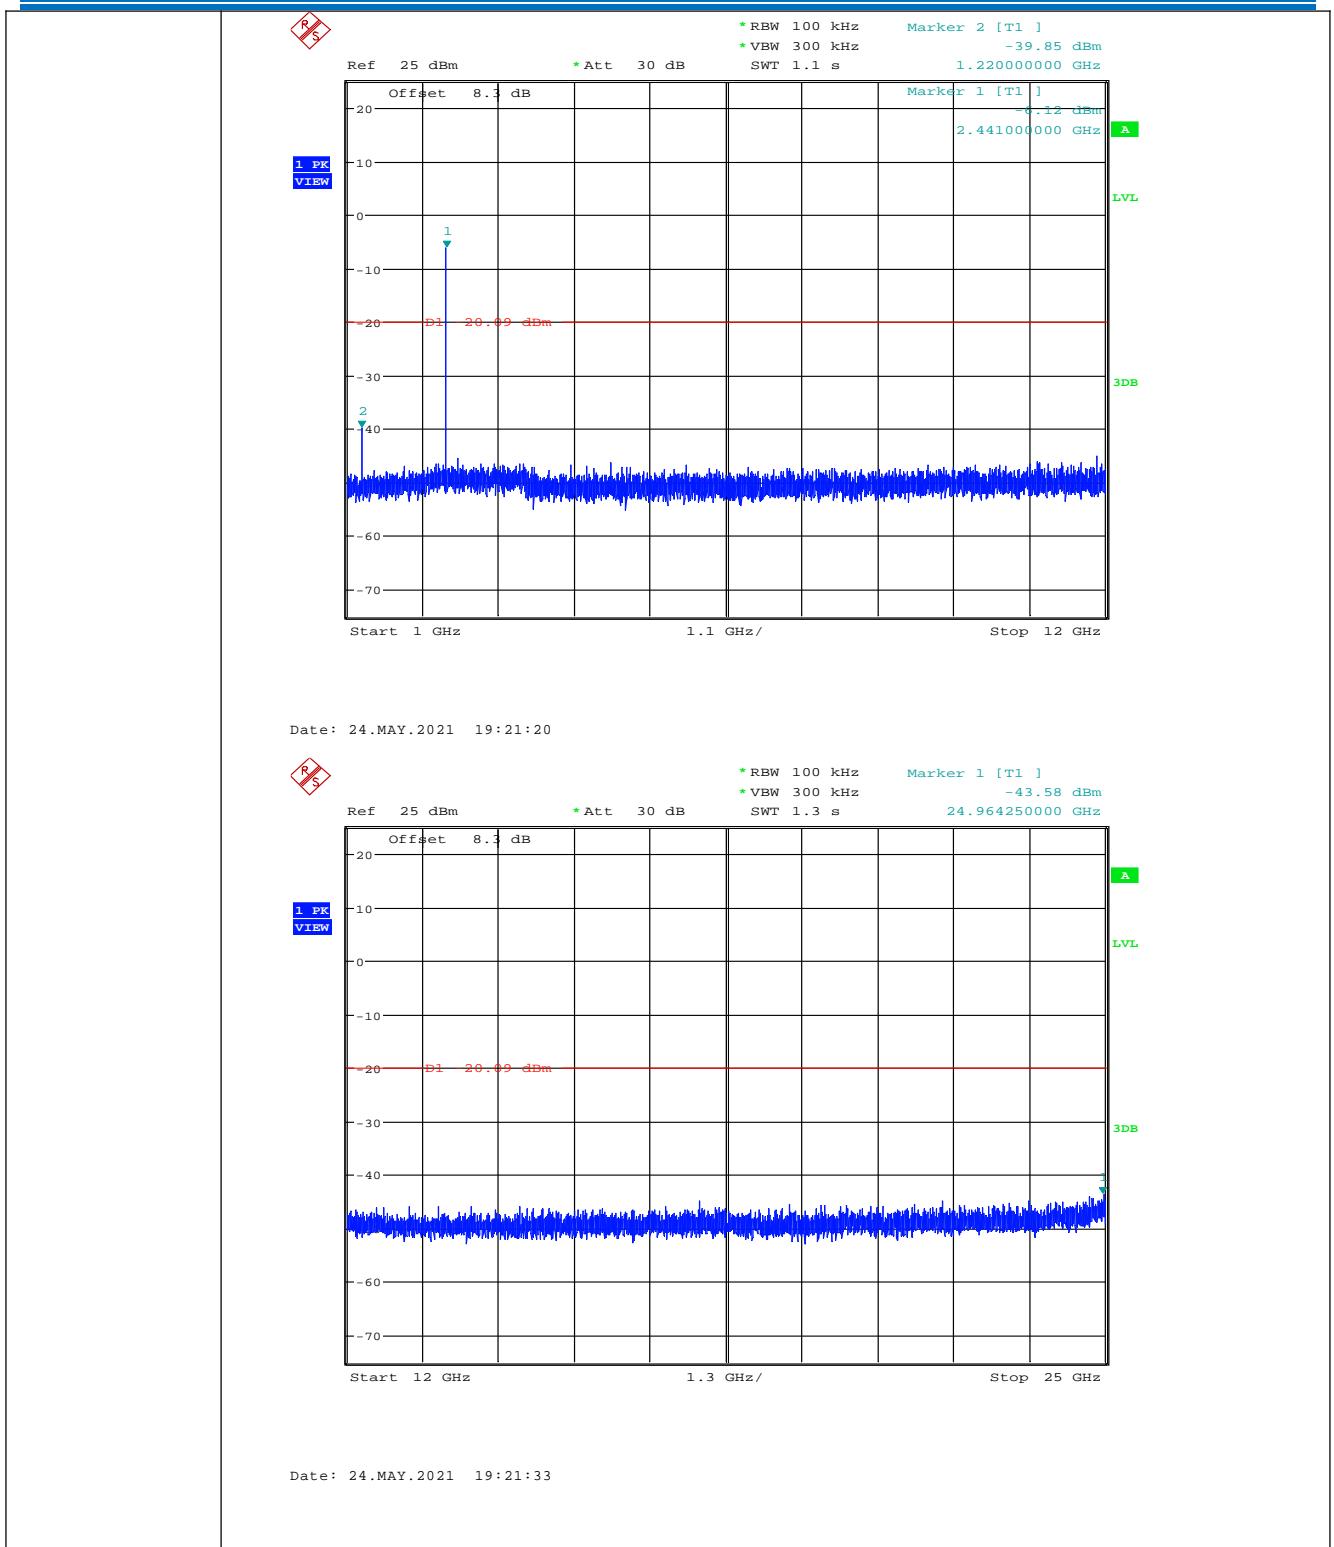

π/4DQPSK_HCH_Graphs

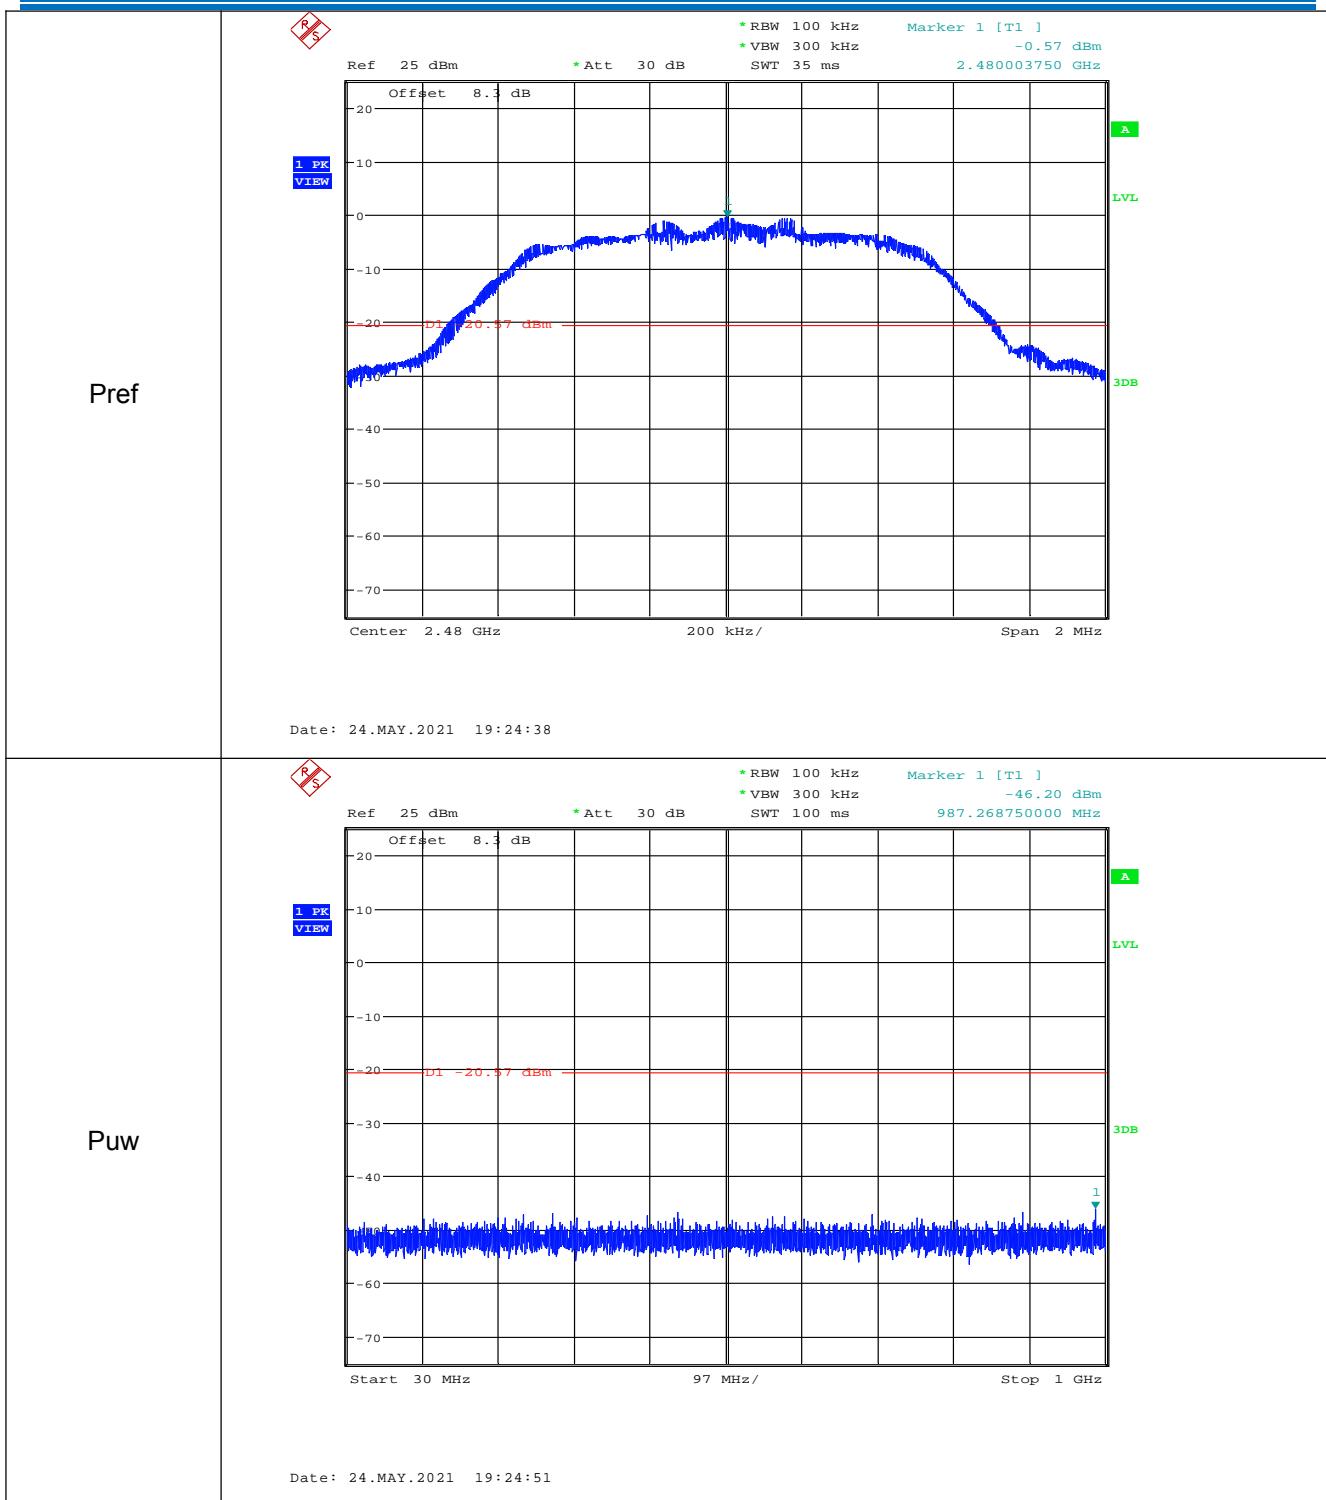


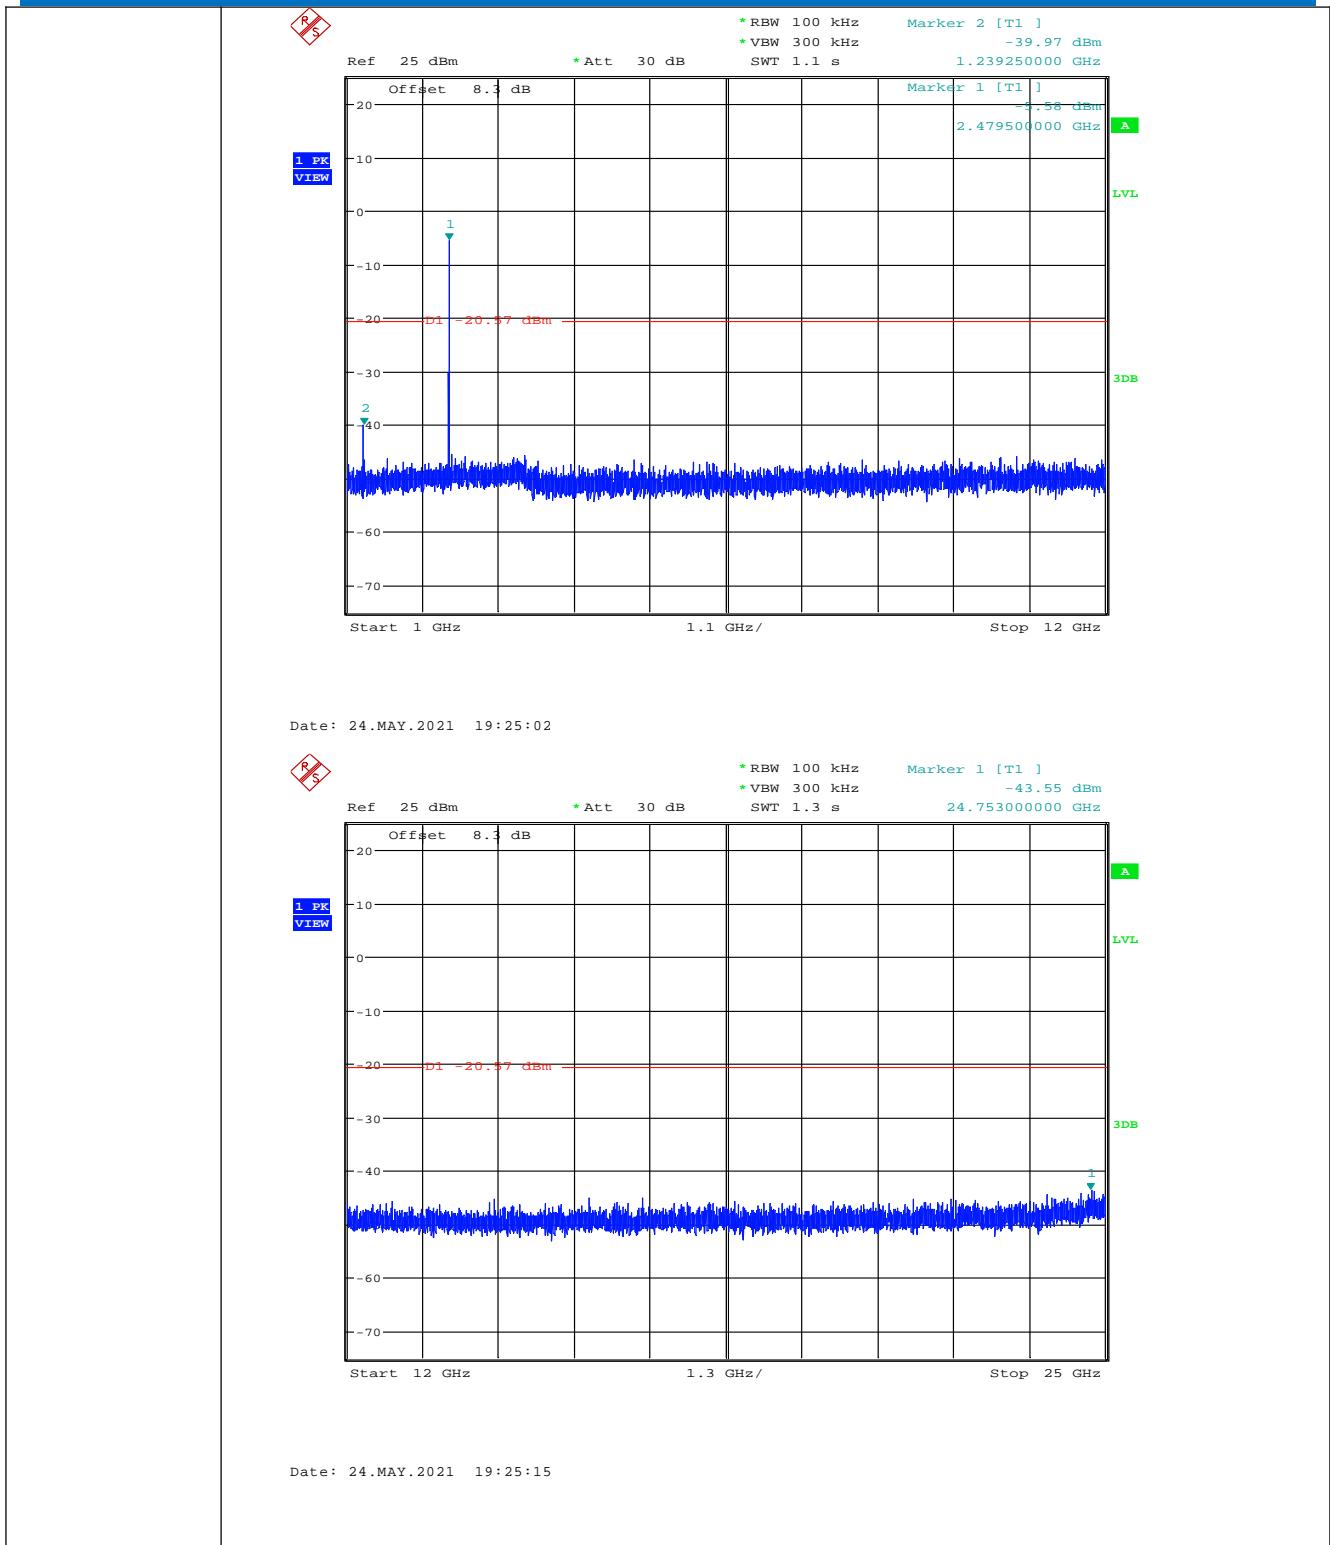



8DPSK_LCH_Graphs

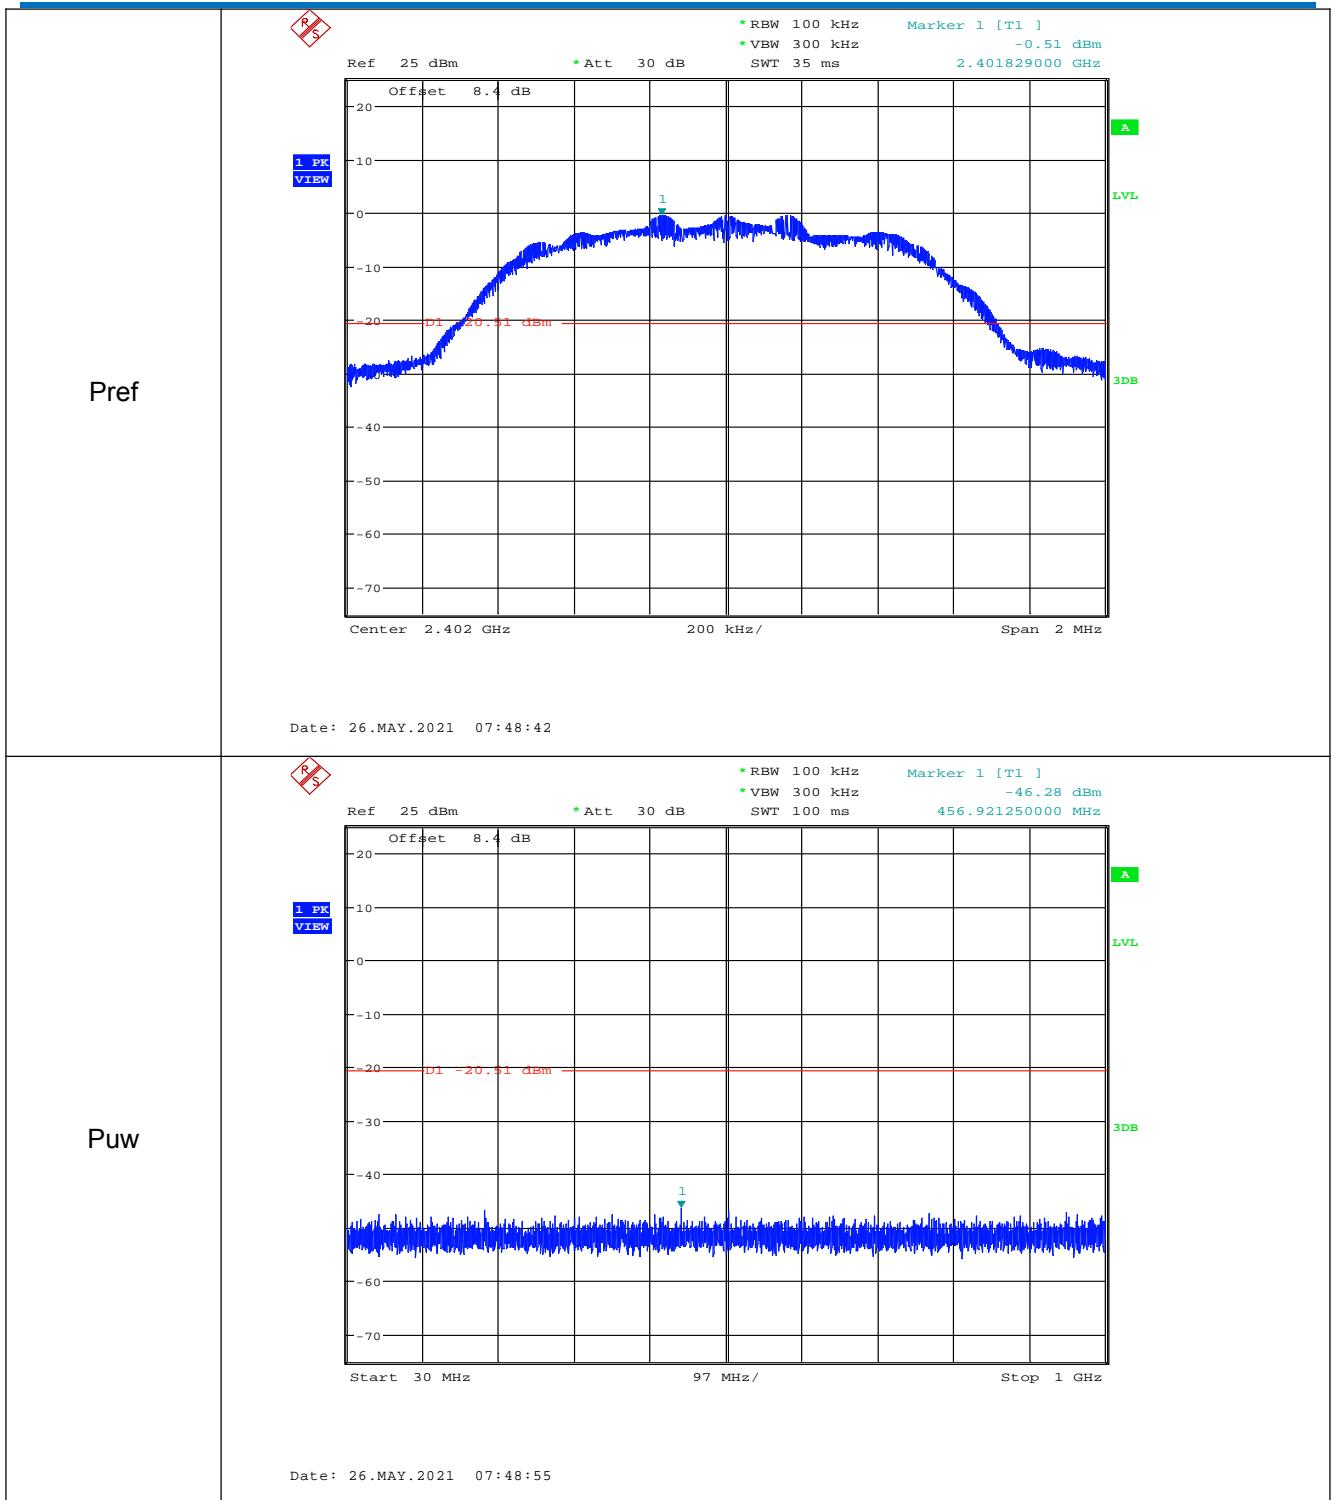


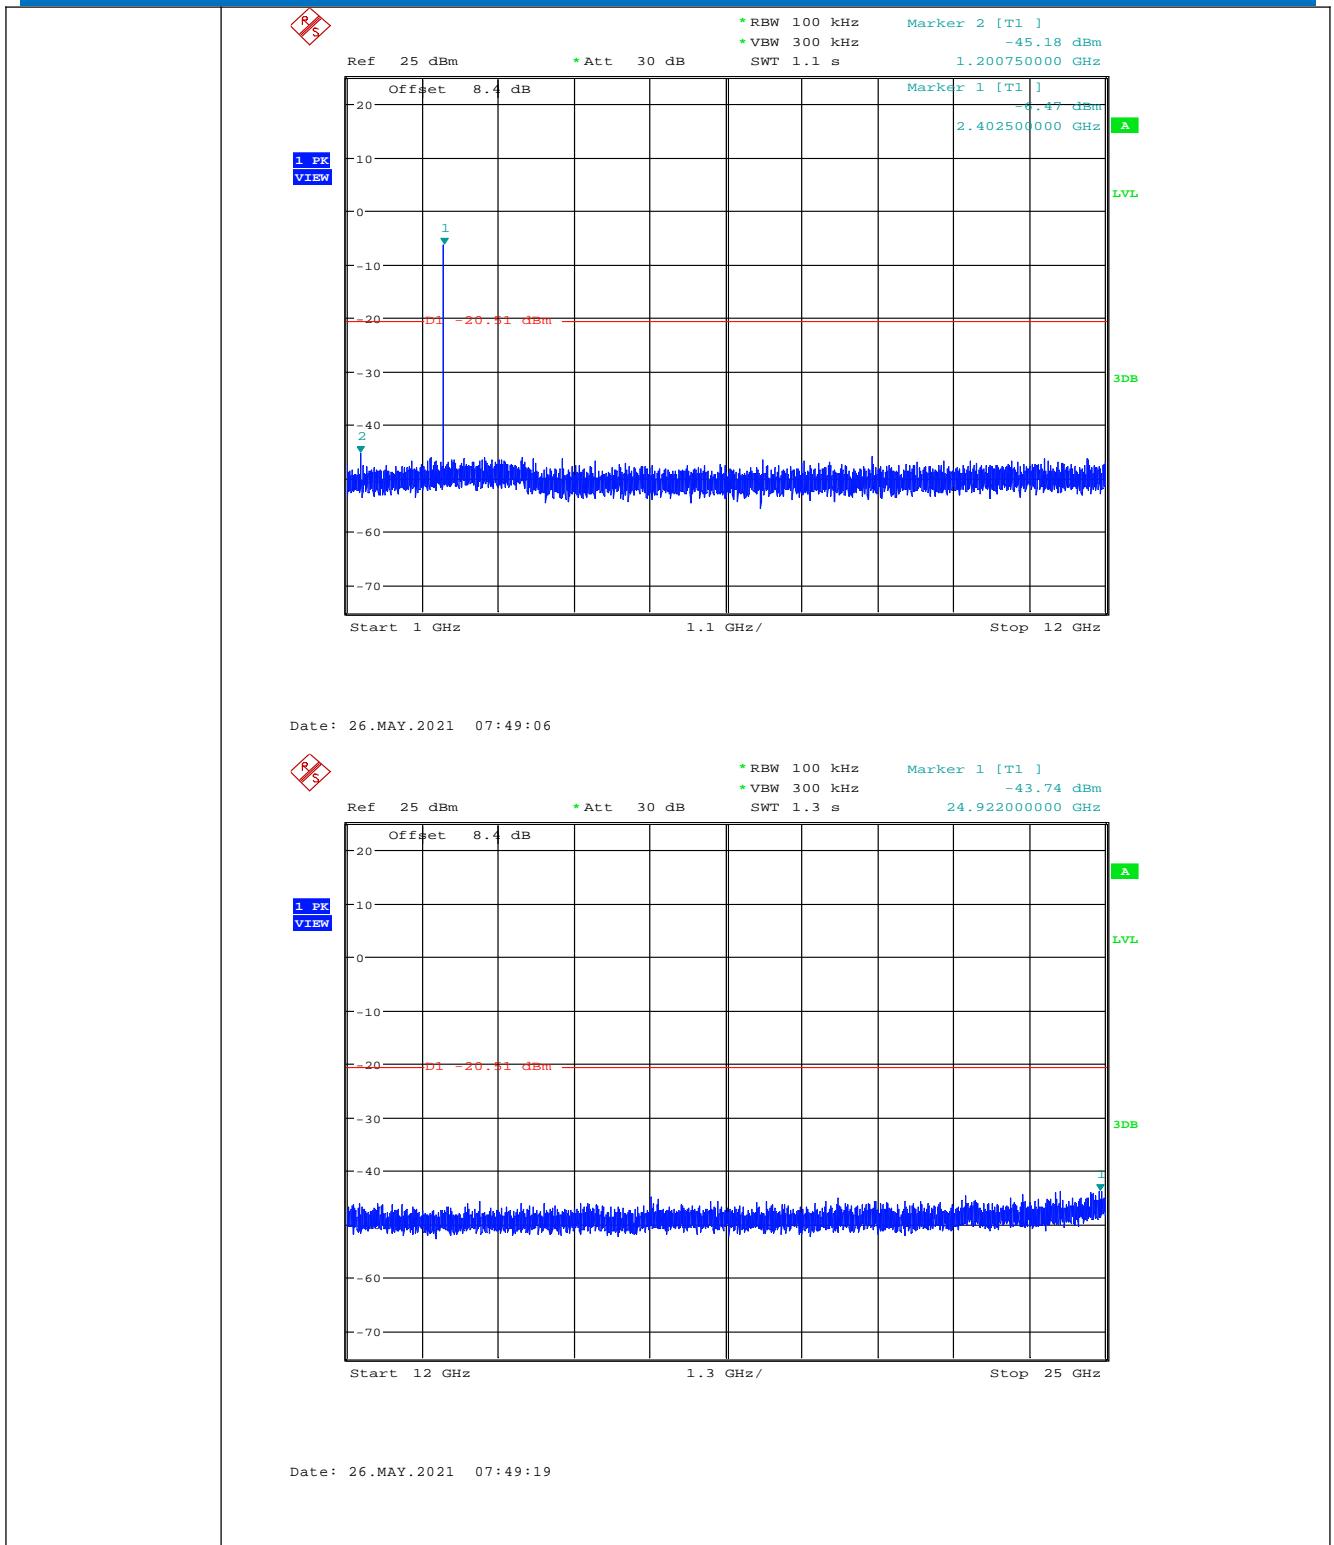
8DPSK_MCH_Graphs

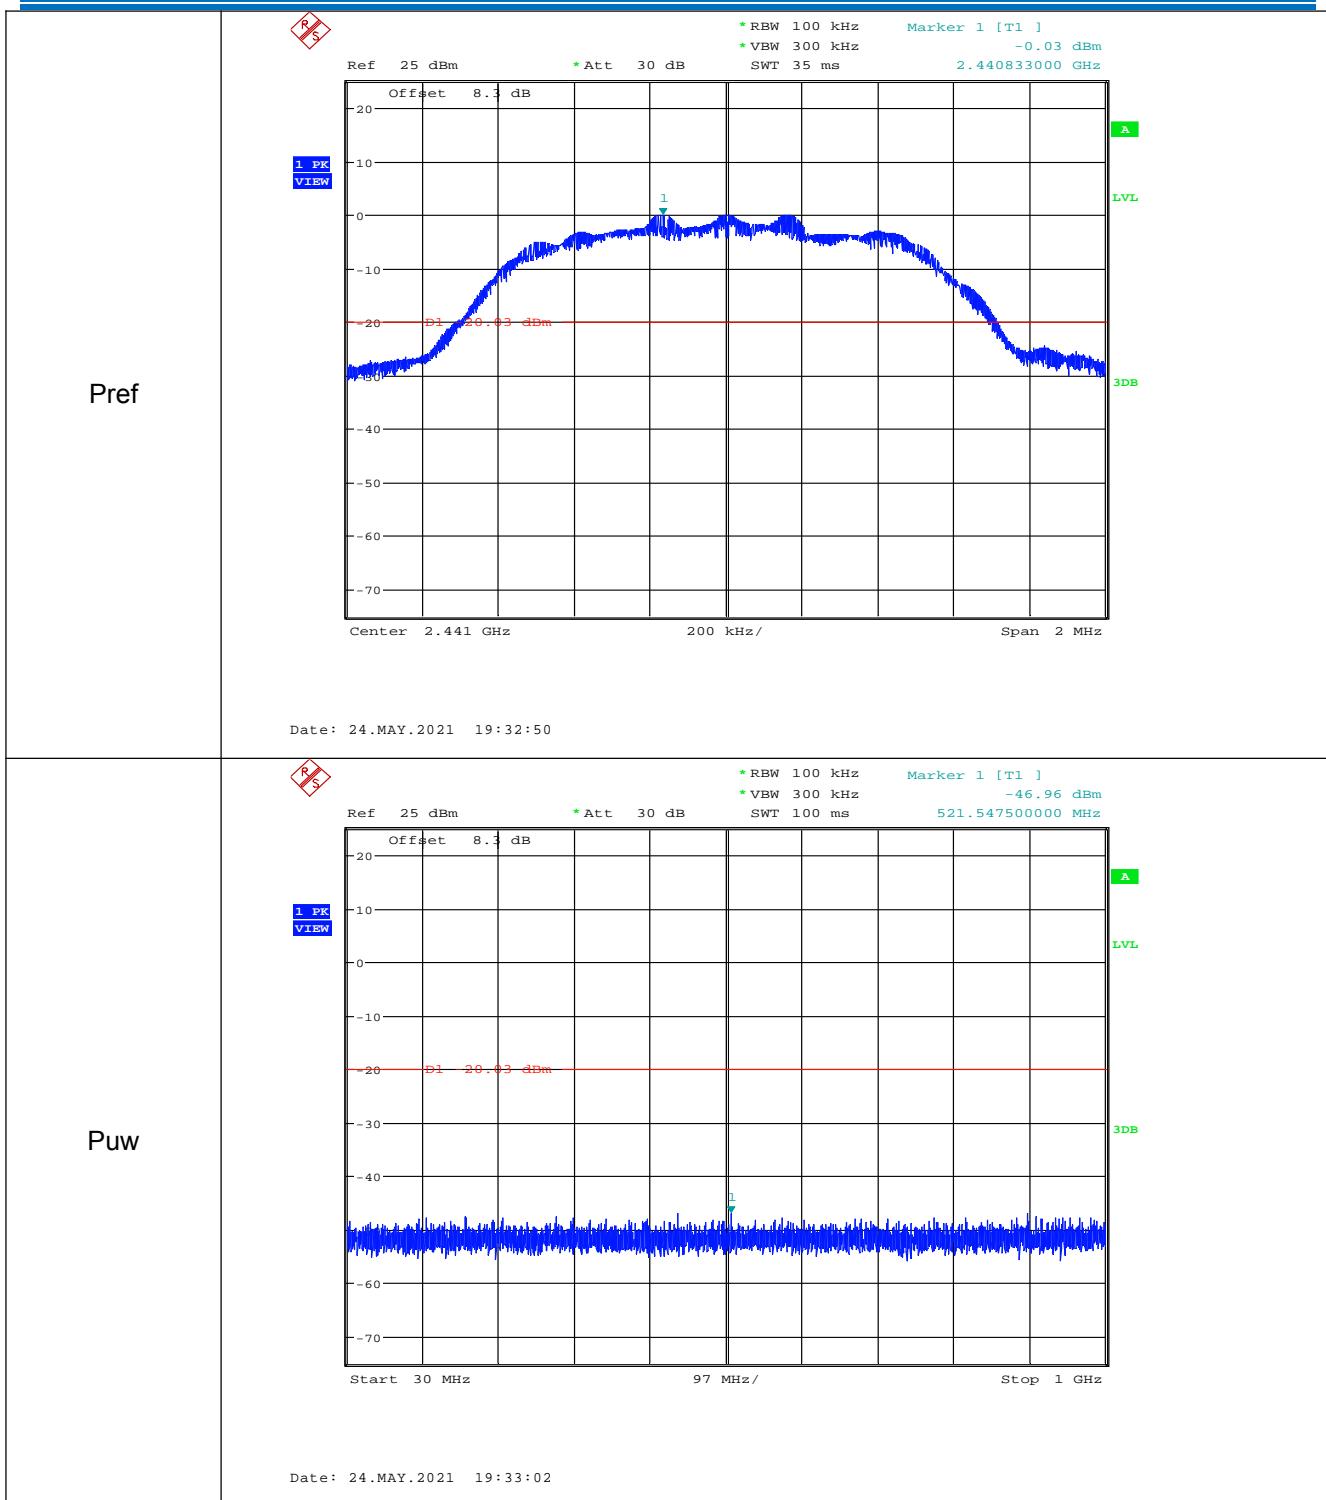

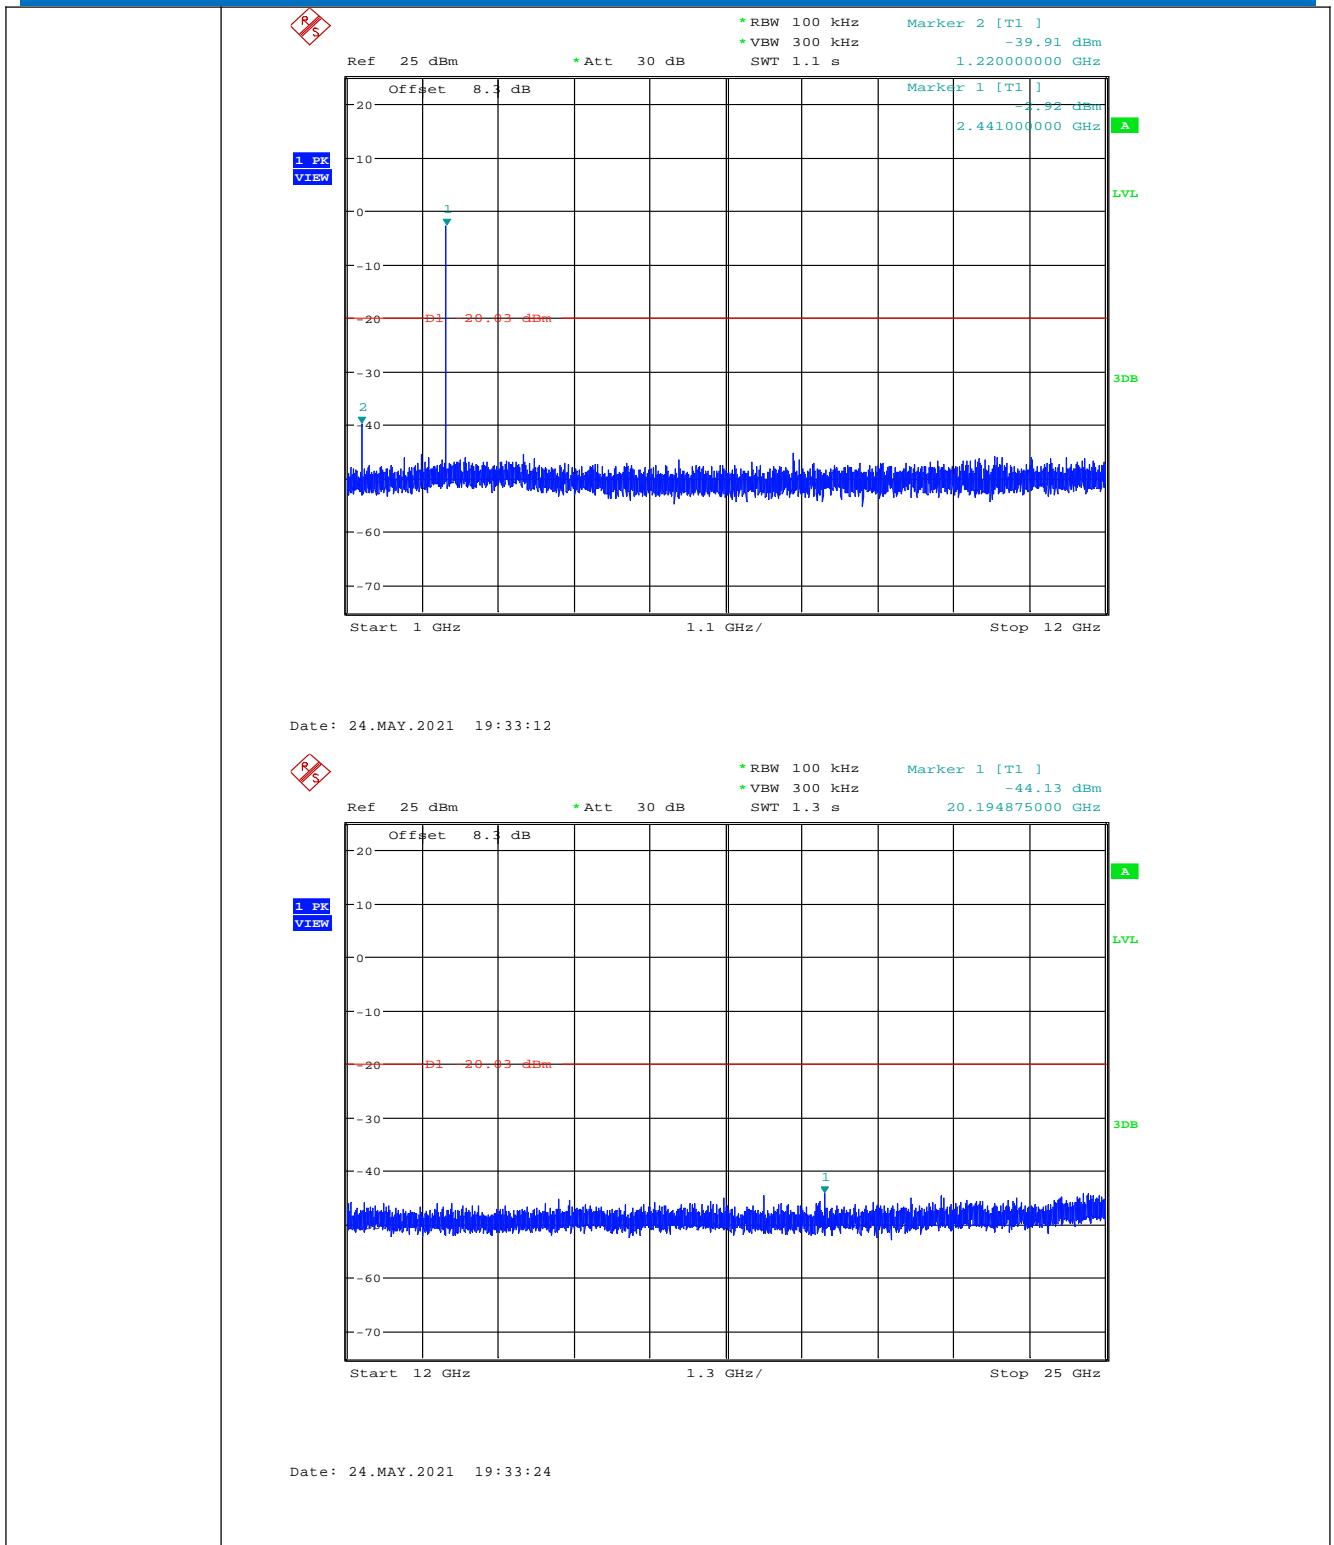
8DPSK_HCH_Graphs

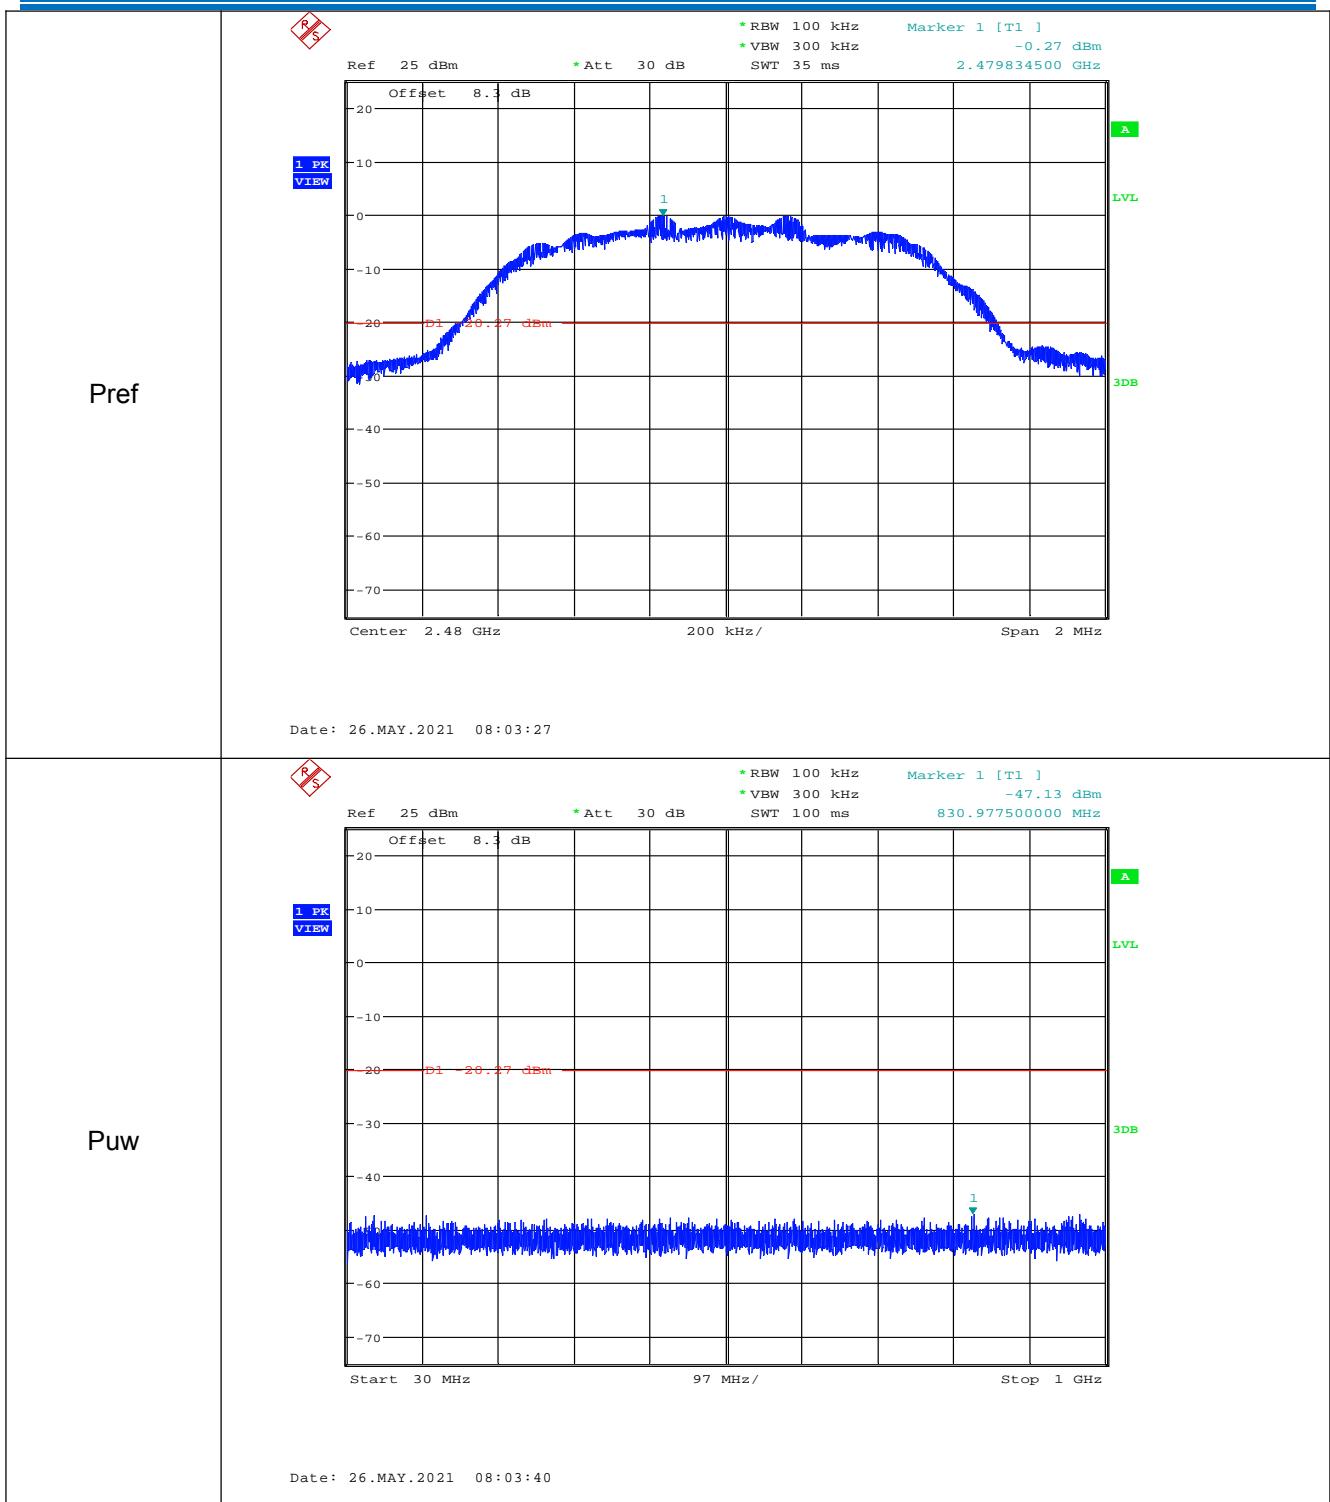

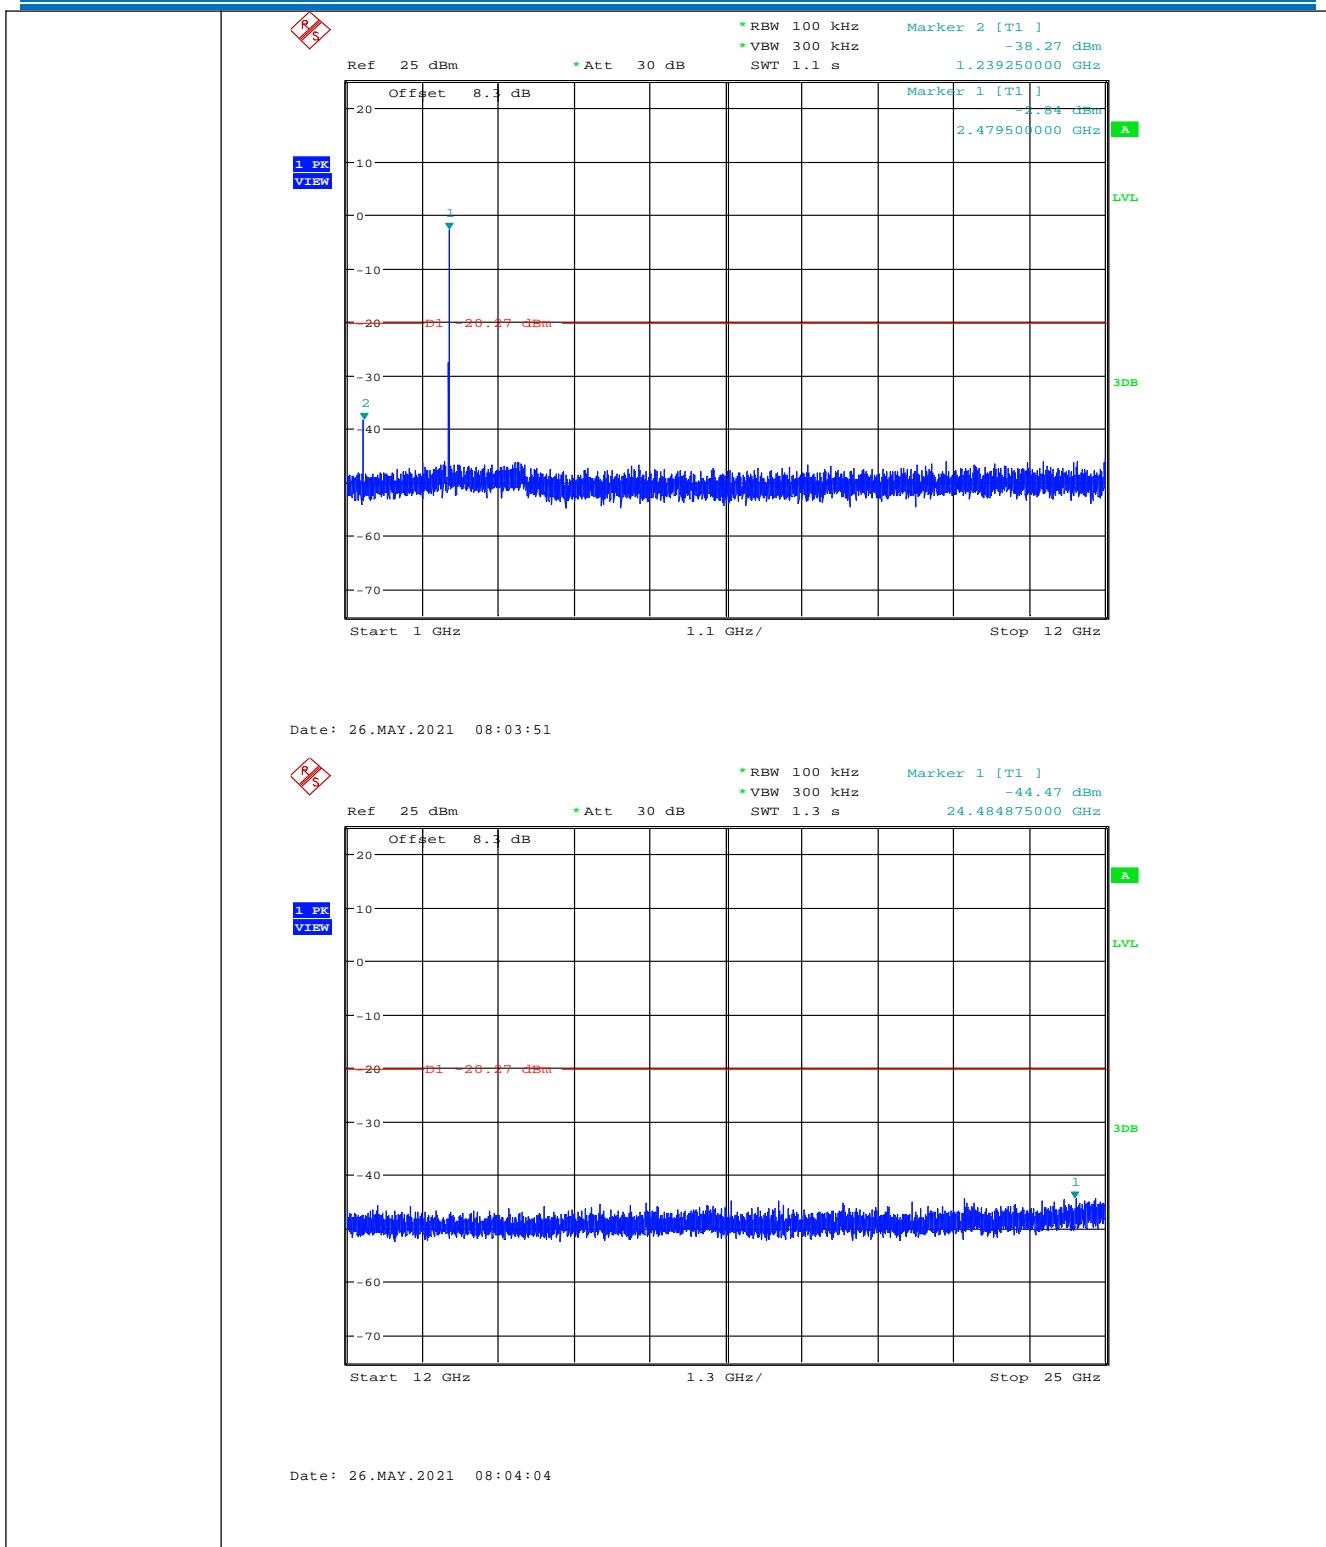
Remark:

Pre test 9kHz to 25GHz, find the highest point when testing, so only the worst data were shown in the test report. Per FCC Part 15.33 (a) and 15.31 (o) ,The amplitude of spurious emissions from intentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

6.10 Pseudorandom Frequency Hopping Sequence


Test Requirement: 47 CFR Part 15C Section 15.247 (a)(1), (h) requirement:

FHSs shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the -20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, FHSs operating in the band 2400-2483.5 MHz may have hopping channel carrier frequencies that are separated by 25 kHz or two thirds of the -20 dB bandwidth of the hopping channel, whichever is greater, provided that the systems operate with an output power no greater than 0.125 W. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

EUT Pseudorandom Frequency Hopping Sequence


The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONEs; i.e. the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence: $2^9 - 1 = 511$ bits
- Longest sequence of zeros: 8 (non-inverted signal)

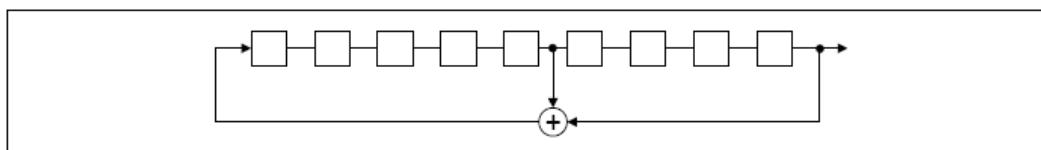

Linear Feedback Shift Register for Generation of the PRBS sequence

An example of Pseudorandom Frequency Hopping Sequence as follow:

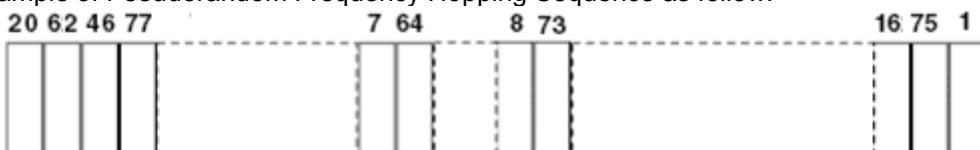

Each frequency used equally on the average by each transmitter.

The system receivers have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

The device does not have the ability to be coordinated with other FHSS systems in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitters.

6.11 Radiated Spurious Emission & Restricted bands

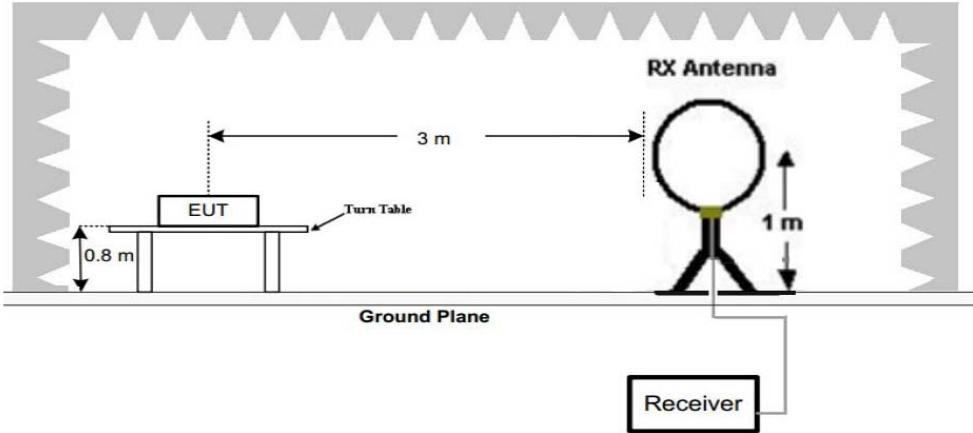
Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205				
Test Method:	ANSI C63.10: 2013				
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.015MHz	Quasi-peak	200Hz	1kHz	Quasi-peak
	0.015MHz-30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	120 kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	Quasi-peak	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	Quasi-peak	30
	1.705MHz-30MHz	30	-	Quasi-peak	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
			74.0	Peak	3
Test Setup:	 <p>The diagram illustrates the test setup for radiated spurious emission testing. An Electronic Under Test (EUT) is placed on a turntable at a height of 0.8 m from the ground plane. The distance between the EUT and the RX Antenna is 3 m. The RX Antenna is positioned at a height of 1 m above the ground plane. A receiver is connected to the RX Antenna to measure the signal.</p>				

Figure 1. Below 30MHz

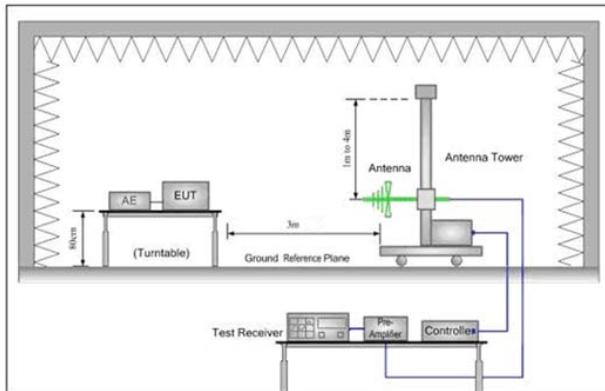


Figure 2. 30MHz to 1GHz


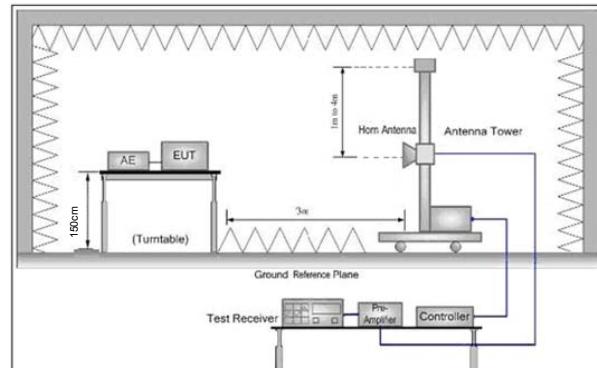


Figure 3. Above 1 GHz

Test Procedure:	<ol style="list-style-type: none"> For below 1GHz test, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. For above 1GHz test, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to height 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. Test the EUT in the lowest channel (2402MHz), the middle channel (2441MHz), the Highest channel (2480MHz) The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case. Repeat above procedures until all frequencies measured was complete.
Exploratory Test Mode:	Non-hopping transmitting mode with all kind of modulation and all kind of data type Transmitting mode.
Final Test Mode:	Through Pre-scan, find the DH5 of data type is the worst case. For below 1GHz part, through pre-scan, the worst case is the lowest channel. Only the worst case is recorded in the report.
Test Results:	Pass

6.11.1 Radiated Emission below 1GHz

30MHz~1GHz		
Test mode:	Transmitting	Vertical

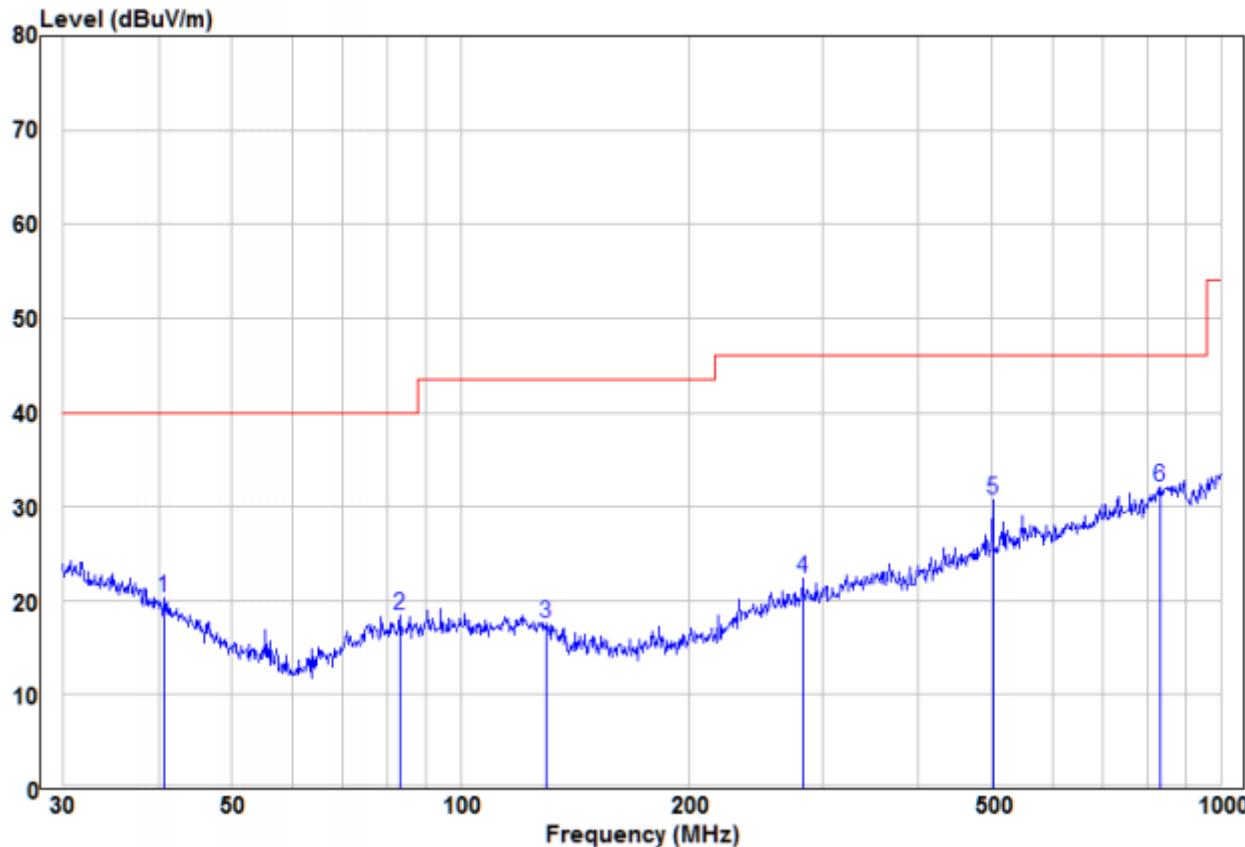

Freq	Read		Limit	Over	Remark	Pol/Phase
	MHz	dB _B V	dB/m	dB _B U/m	dBuV/m	dB
1	40.70	7.82	12.47	20.29	40.00	-19.71 Peak VERTICAL
2	83.23	8.54	9.86	18.40	40.00	-21.60 Peak VERTICAL
3	129.47	7.32	10.34	17.66	43.50	-25.84 Peak VERTICAL
4	281.99	9.14	13.13	22.27	46.00	-23.73 Peak VERTICAL
5	501.18	12.45	18.29	30.74	46.00	-15.26 Peak VERTICAL
6 pp	833.32	8.05	23.97	32.02	46.00	-13.98 Peak VERTICAL

Remark:


The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Factor= Antenna Factor + Cable Factor – Preamplifier Factor,

Level = Read Level + Factor,

Over Limit=Level-Limit Line.

Test mode:	Transmitting	Horizontal
------------	--------------	------------

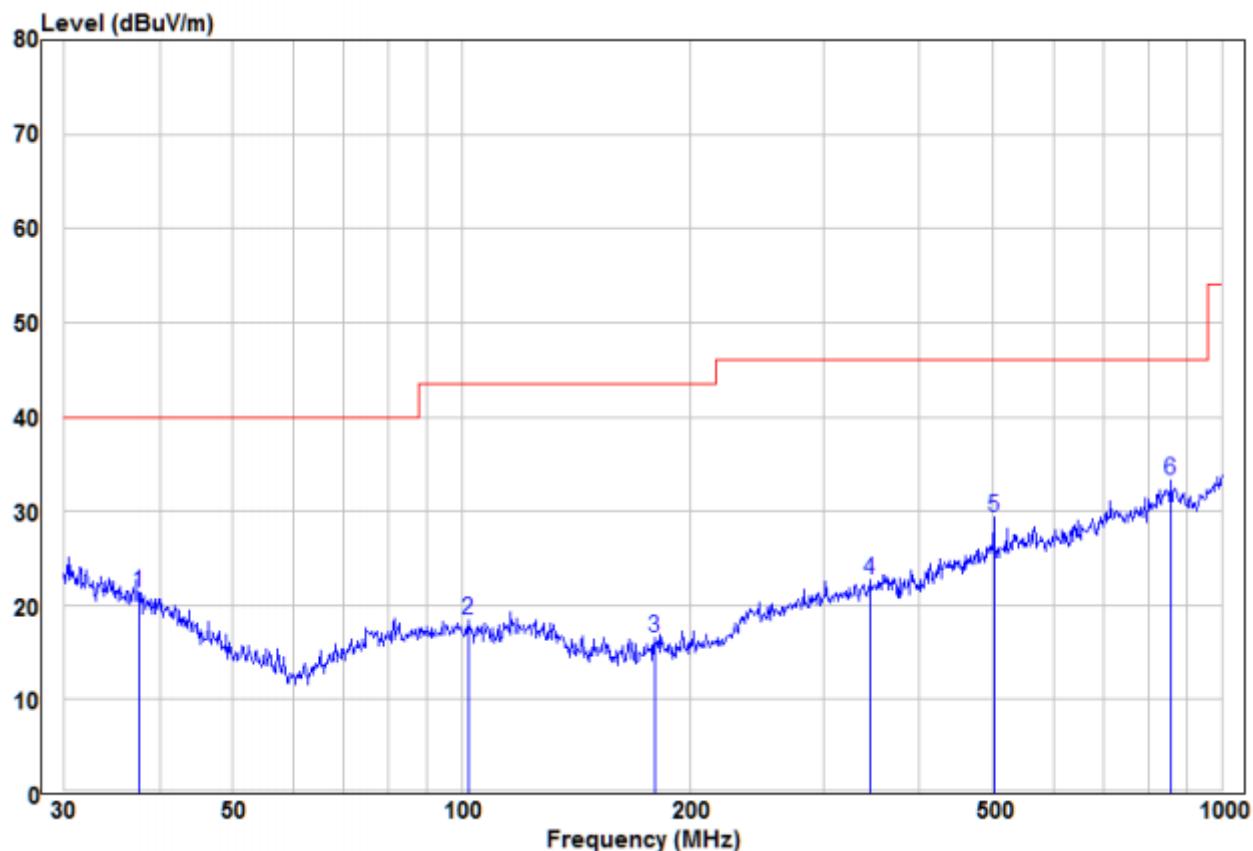

Freq	Read		Limit	Over	Remark	Pol/Phase	
	Freq	Level	Factor	Level	Line	Limit	
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	37.68	7.66	13.64	21.30	40.00	-18.70	Peak HORIZONTAL
2	102.00	7.85	10.55	18.40	43.50	-25.10	Peak HORIZONTAL
3	179.39	8.21	8.30	16.51	43.50	-26.99	Peak HORIZONTAL
4	345.60	7.85	14.84	22.69	46.00	-23.31	Peak HORIZONTAL
5	501.18	10.97	18.29	29.26	46.00	-16.74	Peak HORIZONTAL
6 pp	857.02	9.33	24.02	33.35	46.00	-12.65	Peak HORIZONTAL

Remark:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Factor= Antenna Factor + Cable Factor – Preamplifier Factor,

Level = Read Level + Factor,

Over Limit=Level-Limit Line.

6.11.2 Transmitter Emission above 1GHz

Worse case mode:		GFSK(DH5)		Test channel:		Lowest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)		H/V
2390	53.87	-9.2	44.67	74	-29.33	53.87	H
2400	53.92	-9.39	44.53	74	-29.47	53.92	H
4804	52.13	-4.33	47.8	74	-26.2	52.13	H
7206	51.66	1.01	52.67	74	-21.33	51.66	H
2390	52.74	-9.2	43.54	74	-30.46	52.74	V
2400	53.66	-9.39	44.27	74	-29.73	53.66	V
4804	52.03	-4.33	47.7	74	-26.3	52.03	V
7206	51.22	1.01	52.23	74	-21.77	51.22	V

Worse case mode:		GFSK(DH5)		Test channel:		Middle	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)		H/V
4882	52.07	-4.11	47.96	74	-26.04	peak	H
7323	50.37	1.51	51.88	74	-22.12	peak	H
4882	51.82	-4.11	47.71	74	-26.29	peak	V
7323	49.66	1.51	51.17	74	-22.83	peak	V

Worse case mode:		GFSK(DH5)		Test channel:		Highest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)		H/V
2483.5	52.19	-9.29	42.9	74	-31.1	Peak	H
4960	51.26	-4.04	47.22	74	-26.78	Peak	H
7440	49.22	1.57	50.79	74	-23.21	Peak	H
2483.5	52.84	-9.29	43.55	74	-30.45	Peak	V
4960	51.44	-4.04	47.4	74	-26.6	Peak	V
7440	49.62	1.57	51.19	74	-22.81	Peak	V



Worse case mode:		$\pi/4$ DQPSK(2DH5)		Test channel:		Lowest	
Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Over (dB)	Detector Type	Ant. Pol.
							H/V
2390	52.77	-9.2	43.57	74	52.77	Peak	H
2400	52.46	-9.39	43.07	74	52.46	Peak	H
4804	52.17	-4.33	47.84	74	52.17	Peak	H
7206	50.04	1.01	51.05	74	50.04	Peak	H
2390	52.91	-9.2	43.71	74	52.91	Peak	V
2400	52.61	-9.39	43.22	74	52.61	Peak	V
4804	51.44	-4.33	47.11	74	51.44	Peak	V
7206	51.06	1.01	52.07	74	51.06	Peak	V

Worse case mode:		$\pi/4$ DQPSK(2DH5)		Test channel:		Middle	
Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Over (dB)	Detector Type	Ant. Pol.
							H/V
4882	50.08	-4.11	45.97	74	-28.03	peak	H
7323	49.68	1.51	51.19	74	-22.81	peak	H
4882	50.44	-4.11	46.33	74	-27.67	peak	V
7323	48.97	1.51	50.48	74	-23.52	peak	V

Worse case mode:		$\pi/4$ DQPSK(2DH5)		Test channel:		Highest	
Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Over (dB)	Detector Type	Ant. Pol.
							H/V
2483.5	51.99	-9.29	42.7	74	-31.3	Peak	H
4960	50.63	-4.04	46.59	74	-27.41	Peak	H
7440	48.56	1.57	50.13	74	-23.87	Peak	H
2483.5	51.84	-9.29	42.55	74	-31.45	Peak	V
4960	50.44	-4.04	46.4	74	-27.6	Peak	V
7440	48.67	1.57	50.24	74	-23.76	Peak	V



Worse case mode:		8DPSK(3DH5)		Test channel:		Lowest	
Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits	Over	Detector Type	Ant. Pol.
				(dB μ V/m)	(dB)		H/V
2390	53.07	-9.2	43.87	74	-30.13	Peak	H
2400	52.67	-9.39	43.28	74	-30.72	Peak	H
4804	52.03	-4.33	47.7	74	-26.3	Peak	H
7206	49.88	1.01	50.89	74	-23.11	Peak	H
2390	52.01	-9.2	42.81	74	-31.19	Peak	V
2400	51.24	-9.39	41.85	74	-32.15	Peak	V
4804	50.88	-4.33	46.55	74	-27.45	Peak	V
7206	49.68	1.01	50.69	74	-23.31	Peak	V

Worse case mode:		8DPSK(3DH5)		Test channel:		Middle	
Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits	Over	Detector Type	Ant. Pol.
				(dB μ V/m)	(dB)		H/V
4882	51.26	-4.11	47.15	74	-26.85	peak	H
7323	49.37	1.51	50.88	74	-23.12	peak	H
4882	50.99	-4.11	46.88	74	-27.12	peak	V
7323	49.67	1.51	51.18	74	-22.82	peak	V


Worse case mode:		8DPSK(3DH5)		Test channel:		Highest	
Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits	Over	Detector Type	Ant. Pol.
				(dB μ V/m)	(dB)		H/V
2483.5	52.64	-9.29	43.35	74	-30.65	Peak	H
4960	50.12	-4.04	46.08	74	-27.92	Peak	H
7440	49.67	1.57	51.24	74	-22.76	Peak	H
2483.5	52.61	-9.29	43.32	74	-30.68	Peak	V
4960	51.23	-4.04	47.19	74	-26.81	Peak	V
7440	49.07	1.57	50.64	74	-23.36	Peak	V

Remark:

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor
- 2) Scan from 9kHz to 25GHz, the disturbance above 10GHz and below 30MHz was very low. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.

7 Photographs - EUT Test Setup

7.1 Conducted Emission

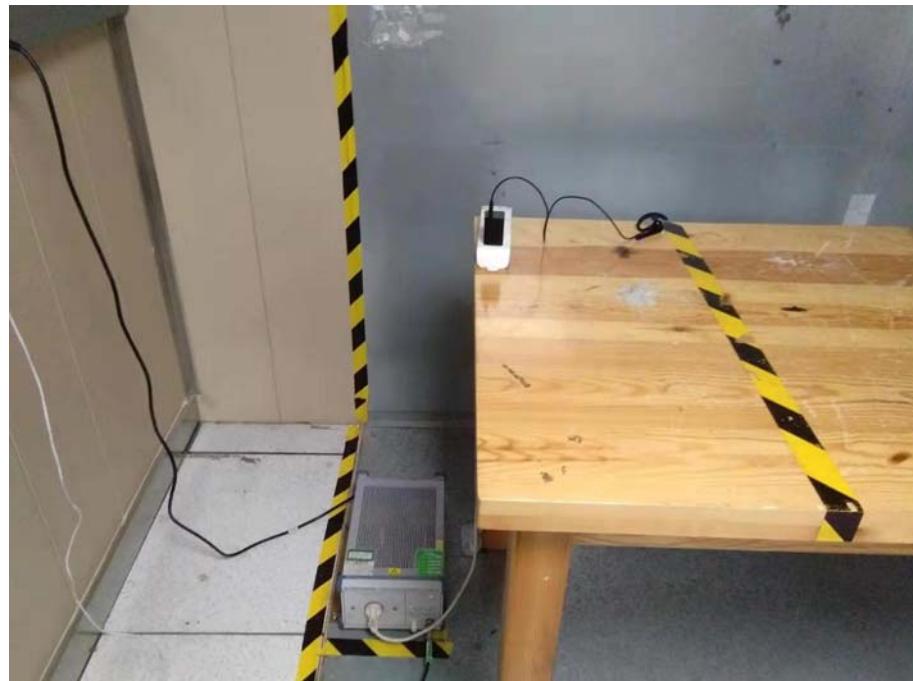


7.2 Radiated Emission

9KHz~30MHz:



30MHz~1GHz:

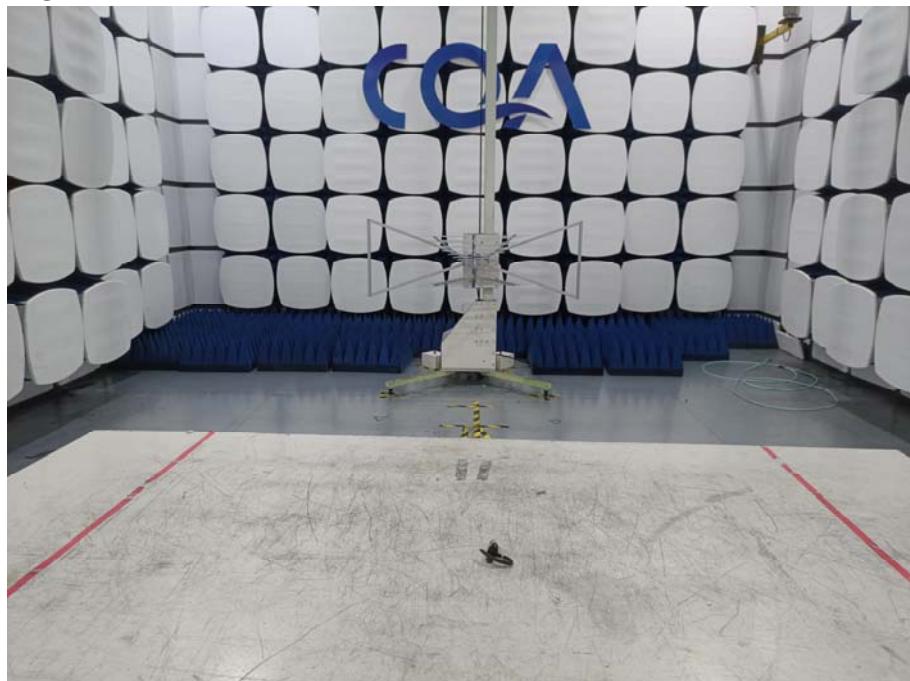

Above 1GHz:





8 Photographs - EUT Constructional Details







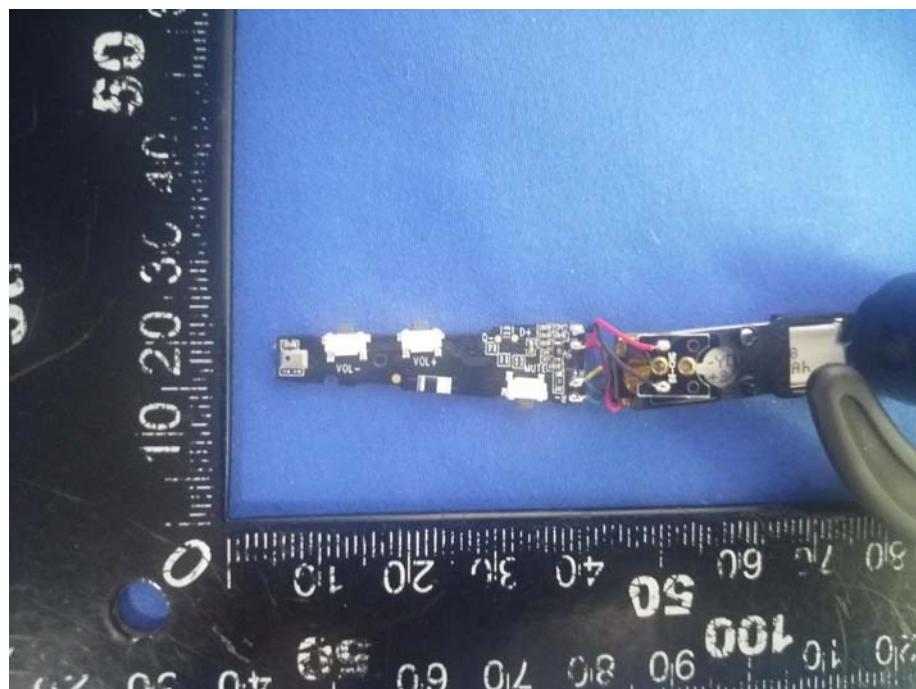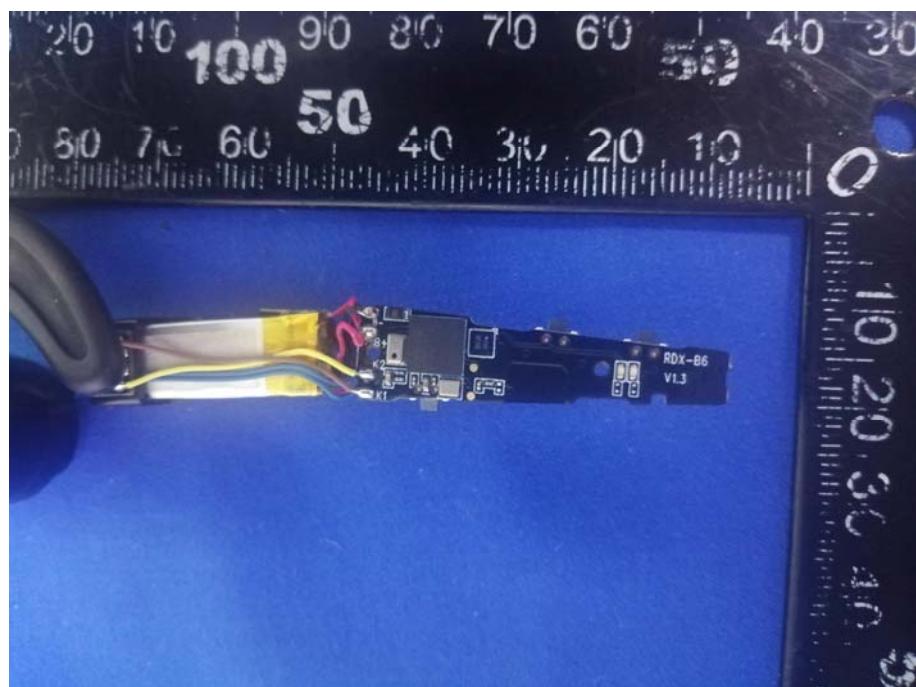

The End