



FCC PART 15.407

TEST REPORT

For

Shenzhen HighGreat Innovation Technology Development Co., Ltd.

NO.6 Yuanlingzai Park, Henggang Town, Longgang District, Shenzhen City, Guangdong
Province, China

FCC ID: 2ALYRHG-C02B

Report Type: Original Report	Product Type: REMOTE CONTROLLER
Report Number: RSZ171214001-00B	
Report Date: 2018-04-13	
Reviewed By: Rocky Kang RF Engineer	<i>Rocky Kang</i>
Prepared By: Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn	

Note: This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA* or any agency of the Federal Government. * This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “*”

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY.....	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	6
DUTY CYCLE	7
EQUIPMENT MODIFICATIONS	8
SUPPORT EQUIPMENT LIST AND DETAILS	8
EXTERNAL I/O CABLE.....	9
BLOCK DIAGRAM OF TEST SETUP	9
SUMMARY OF TEST RESULTS	10
TEST EQUIPMENT LIST	11
FCC§15.407 (i), §1.1307 (b) (1) & §2.1093 – RF EXPOSURE	13
APPLICABLE STANDARD	13
FCC §15.203 – ANTENNA REQUIREMENT	14
APPLICABLE STANDARD	14
ANTENNA CONNECTOR CONSTRUCTION	14
FCC §15.407 (b) (6) §15.207 (a) – CONDUCTED EMISSION.....	15
APPLICABLE STANDARD	15
EUT SETUP	15
EMI TEST RECEIVER SETUP.....	15
TEST PROCEDURE	15
TEST RESULTS SUMMARY	16
TEST DATA	16
§15.205 & §15.209 & §15.407(B) (4),(6),(7) – UNDESIRABLE EMISSION	19
APPLICABLE STANDARD	19
EUT SETUP	19
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	20
TEST PROCEDURE	20
CORRECTED AMPLITUDE & MARGIN CALCULATION	20
TEST RESULTS SUMMARY	20
TEST DATA	21
§15.407(b)(4) –Out Of Band Emission	29
APPLICABLE STANDARD	29
TEST PROCEDURE	29
TEST DATA	29

FCC §15.407(e) –6dB EMISSION BANDWIDTH.....34
APPLICABLE STANDARD 34
TEST PROCEDURE 34
TEST DATA 34

FCC §15.407(a) (3)– CONDUCTED TRANSMITTER OUTPUT POWER48
APPLICABLE STANDARD 48
TEST PROCEDURE 48
TEST DATA 48

FCC §15.407(a) (3) - POWER SPECTRAL DENSITY.....50
APPLICABLE STANDARD 50
TEST PROCEDURE 50
TEST DATA 51

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *Shenzhen HighGreat Innovation Technology Development Co., Ltd.*'s product, model number: *HG-C02B(FCC ID:2ALYRHG-C02B)* in this report was a *REMOTE CONTROLLER*, which was measured approximately: 157 mm (L) ×97 mm (W) ×40 mm (H) , rated with input voltage: DC 3.8 V from battery .

**All measurement and test data in this report was gathered from production sample serial number: 1702755. (Assigned by BACL, shenzhen).The EUT supplied by the applicant was received on 2017-12-14.*

Objective

This type approval report is prepared on behalf of *Shenzhen HighGreat Innovation Technology Development Co., Ltd.* in accordance with Part 2-Subpart J, Part 15-Subparts A and E of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart E, section 15.203, 15.205, 15.207, 15.209 and 15.407 rules.

Related Submittal(s)/Grant(s)

FCC Part 15B JAB Submittal with the remote control unit of a system with FCC ID: 2ALYRHG-C02B.

Submittal with the plane control unit of a system with FCC ID: 2ALYRHG-Z01B.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

And KDB 789033 D02 General UNII Test Procedures New Rules v02r01

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Parameter	uncertainty
Occupied Channel Bandwidth	±5%
RF Output Power with Power meter	±0.5dB
RF conducted test with spectrum	±1.5dB
AC Power Lines Conducted Emissions	±1.95dB
All emissions, radiated	±4.88dB
Temperature	-30~60 °C
Humidity	±6%
Supply voltages	±0.4%

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 342867, the FCC Designation No. : CN1221.

The test site has been registered with ISED Canada under ISED Canada Registration Number 3062B.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in an engineering mode, which was provided by manufacturer.

The device support 802.11a/n20 modes.

For 5725-5850MHz Band, 5 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	161	5805
153	5765	165	5825
157	5785		

Channel 149, 157 and 165 were chosed for testing.

EUT Exercise Software


“ARTGUI” software was used for wifi testing.

The ANT 0 (or left ANT) & ANT 1 (or Right ANT) were tested with the worst case was performed as below:

Mode	Data rate	Power level		
		Low channel	Middle channel	High channel
802.11a	6M	34	34	34
802.11n20	MCS0	30	30	30


Duty cycle

802.11a Mode

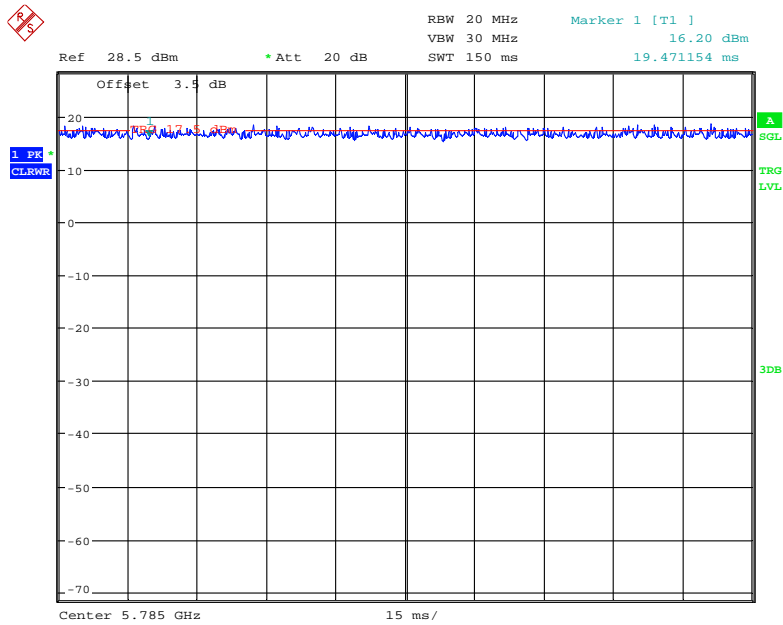

Date: 2.MAR.2018 09:19:05

802.11n20 mode

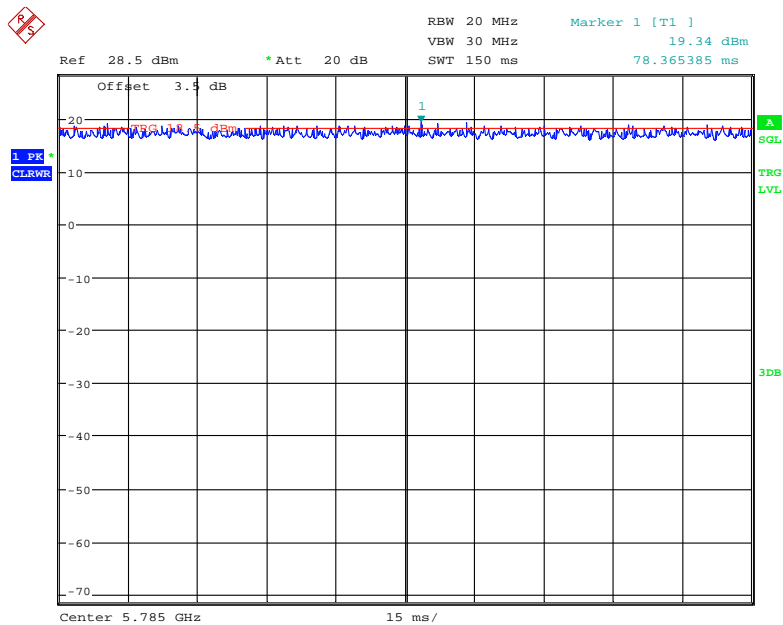

Date: 2.MAR.2018 09:22:01

Band	Duty Cycle (%)	T(ms)	1/T(kHz)	VBW Setting	10log(1/ Duty Cycle)
802.11a	100	-	-	10Hz	-
802.11n20	100	-	-	10Hz	-

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
SKY DEVICES	Adaptor	/	/

External I/O Cable

Cable Description	Length (m)	From Port	To
Un-Shielding Detachable USB Cable	1.0	EUT	Adapter

Block Diagram of Test Setup

For conduct emission:

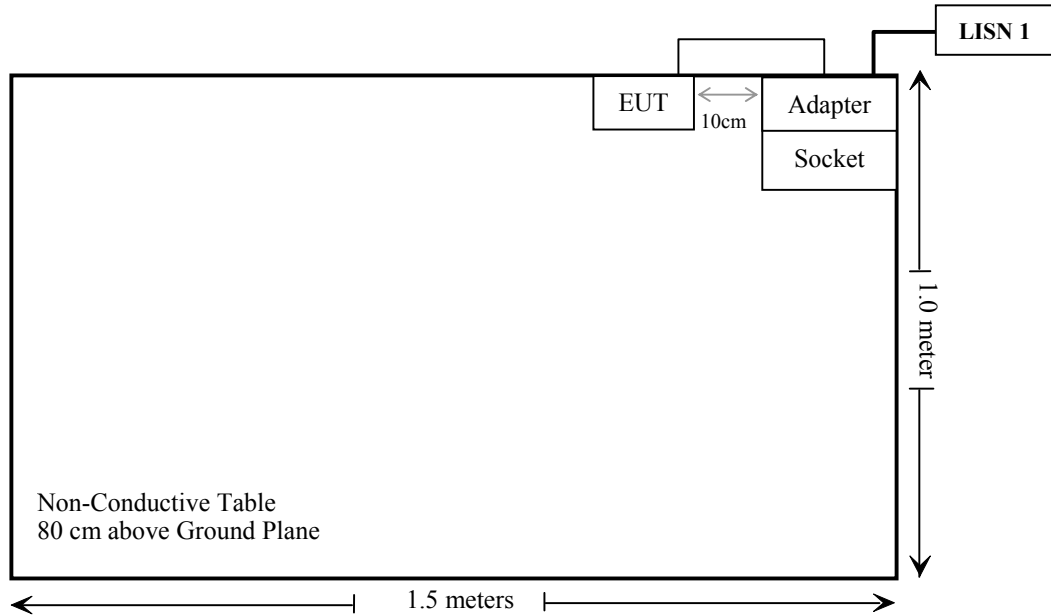

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.407, §1.1307 (b) (1)& §2.1093	RF Exposure	Compliance
§15.203	Antenna Requirement	Compliance
§15.407(b)(6)& §15.207(a)	Conducted Emissions	Compliance
§15.205& §15.209 &§15.407(b) (4),(6),(7)	Undesirable Emission& Restricted Bands	Compliance
§15.407(b) (4)	Out Of Band Emission	Compliance
§15.407(e)	6dB Bandwidth	Compliance
§15.407(a) (3)	Conducted Transmitter Output Power	Compliance
§15.407 (a) (3)	Power Spectral Density	Compliance

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emissions Test					
Rohde & Schwarz	EMI Test Receiver	ESCS30	100176	2017-08-04	2018-08-04
Rohde & Schwarz	LISN	ENV216	3560.6650.12-101613-Yb	2017-12-07	2018-12-07
Rohde & Schwarz	Transient Limiter	ESH3Z2	DE25985	2017-11-19	2018-05-21
Rohde & Schwarz	CE Test software	EMC 32	V8.53.0	NCR	NCR
N/A	Conducted Emission Cable	N/A	UF A210B-1-0720-504504	2017-11-12	2018-05-12
Radiated Emission Test					
Sunol Sciences	Horn Antenna	DRH-118	A052604	2017-12-29	2020-12-28
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2017-04-24	2018-04-24
Sunol Sciences	Bi-log Antenna	JB1	A040904-2	2017-12-17	2020-12-16
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2017-02-14	2018-02-14
HP	Amplifier	HP8447E	1937A01046	2017-11-19	2018-05-21
Agilent	Spectrum Analyzer	8564E	3943A01781	2018-1-4	2019-1-4
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2017-12-07	2018-12-07
Ducommun technologies	RF Cable	UFA210A-1-4724-30050U	MFR64369 223410-001	2017-11-19	2018-05-21
Ducommun technologies	RF Cable	104PEA	218124002	2017-11-19	2018-05-21
Ducommun technologies	RF Cable	RG-214	1	2017-11-19	2018-05-21
Ducommun technologies	RF Cable	RG-214	2	2017-11-22	2018-05-22
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-04	2017-12-29	2020-12-28
Ducommun Technologies	Horn Antenna	ARH-2823-02	1007726-04	2017-12-29	2020-12-28
Ducommun Technologies	Pre-amplifier	ALN-22093530-01	991373-01	2017-08-03	2018-08-03

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
RF Conducted Test					
Rohde & Schwarz	SPECTRUM ANALYZER	FSU26	200120	2017-12-05	2018-12-05
Long Wei	DC Power Supply	TPR-6420D	398363	NCR	NCR
Agilent	Power Meter	N1912A	MY5000492	2017-11-18	2018-11-17
Agilent	Power Sensor	N1921A	MY54210024	2017-11-18	2018-11-17
Ducommun technologies	RF Cable	RG-214	3	2017-11-22	2018-05-22
WEINSCHL	10dB Attenuator	5324	AU 3842	2017-11-22	2018-05-23

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC§15.407 (i), §1.1307 (b) (1) & §2.1093 – RF EXPOSURE

Applicable Standard

According to FCC §2.1093 and §1.1307(b) (1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB 447498 D01 General RF Exposure Guidance

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

1. $f(\text{GHz})$ is the RF channel transmit frequency in GHz.
2. Power and distance are rounded to the nearest mW and mm before calculation.
3. The result is rounded to one decimal place for comparison.
4. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test Exclusion.

Measurement Result

For worst case:

Mode	Frequency (MHz)	Max Tune-up Conducted Power (dBm)	Max Tune-up Conducted Power (mW)	Calculated Distance (mm)	Calculated value	Threshold (10-g SAR)	SAR Test Exclusion
WIFI	5825	8.0	6.31	5	3.05	7.5	Yes

Result: No Standalone SAR test is required

FCC §15.203 – ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.407 (a), if the transmitting antennas of directional gain greater than 6dBi are used, the transmit power and power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

This product has two external wifi antennas which were permanently attached with maximum gain 2.0 dBi, fulfill the requirement of this section, and please refer to the EUT photo.


Result: Compliance.

FCC §15.407 (b) (6) §15.207 (a) – CONDUCTED EMISSION

Applicable Standard

FCC §15.207, §15.407(b) (6)

EUT Setup

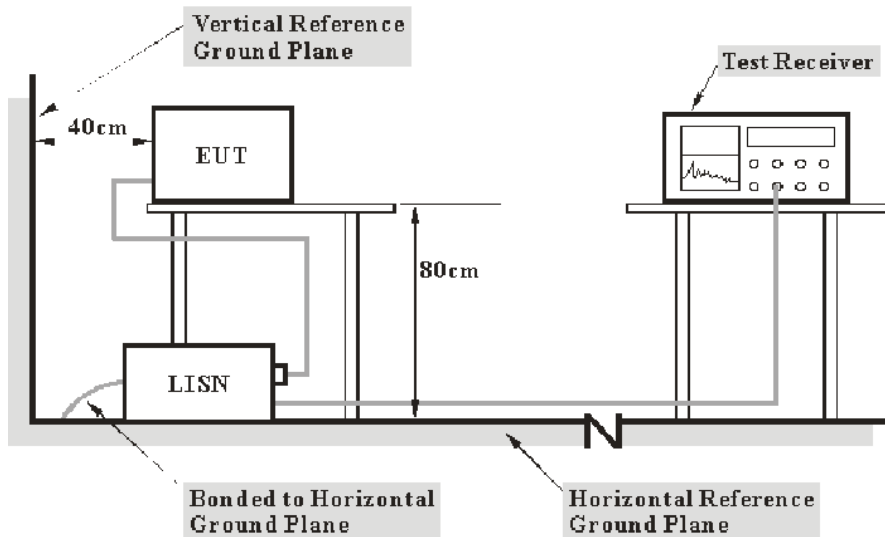

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207.

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level complies with the limit if

$$L_m + U_{(L_m)} \leq L_{lim} + U_{cispr}$$

In BAACL, $U_{(L_m)}$ is less than U_{cispr} , if L_m is less than L_{lim} , it implies that the EUT complies with the limit.

Test Data


Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa

The testing was performed by Nancy Wang on 2018-03-13.


EUT operation mode: Transmitting

AC 120V/60 Hz, Line:

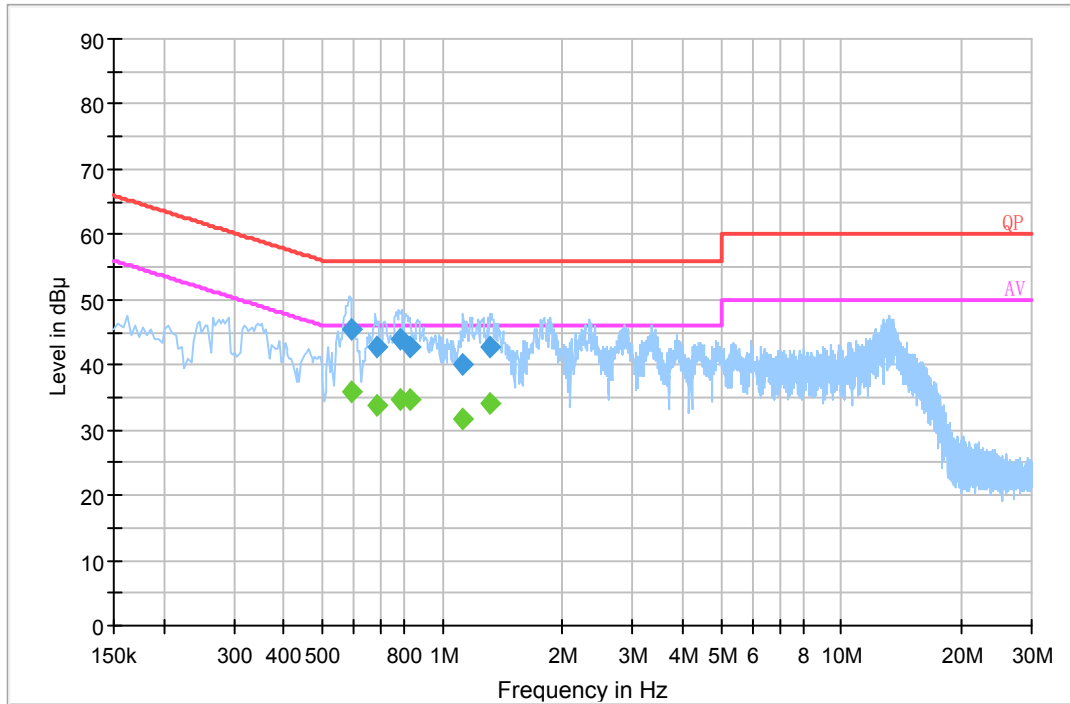

Frequency (MHz)	Corrected Amplitude (dBµV)	Correction Factor (dB)	Limit (dBµV)	Margin (dB)	Detector (PK/Ave./QP)
0.590730	45.6	20.1	56.0	10.4	QP
0.687830	42.7	20.0	56.0	13.3	QP
0.786150	43.8	20.0	56.0	12.2	QP
0.830270	42.8	20.0	56.0	13.2	QP
1.129110	40.0	20.1	56.0	16.0	QP
1.318230	42.6	20.1	56.0	13.4	QP
0.590730	36.0	20.1	46.0	10.0	Ave.
0.687830	33.7	20.0	46.0	12.3	Ave.
0.786150	34.8	20.0	46.0	11.2	Ave.
0.830270	34.8	20.0	46.0	11.2	Ave.
1.129110	31.7	20.1	46.0	14.3	Ave.
1.318230	34.2	20.1	46.0	11.8	Ave.

AC120V, 60 Hz, Neutral:

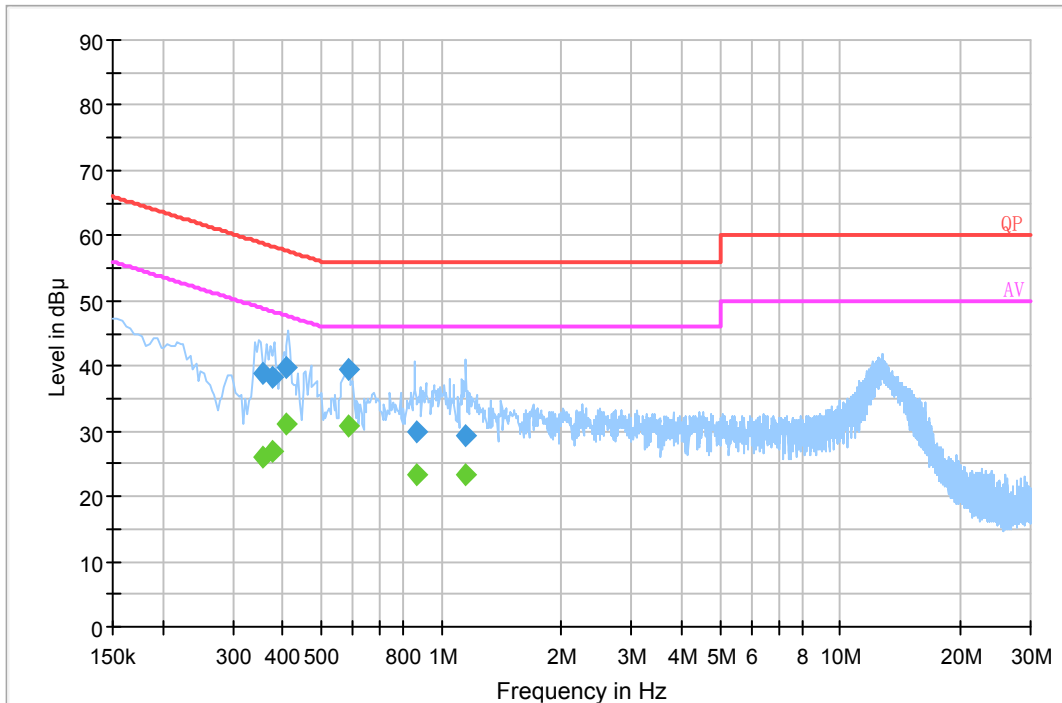

Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/Ave./QP)
0.355250	38.8	20.2	58.8	20.0	QP
0.376270	38.2	20.2	58.4	20.2	QP
0.407790	39.9	20.2	57.7	17.8	QP
0.582610	39.5	20.1	56.0	16.5	QP
0.869130	29.9	20.1	56.0	26.1	QP
1.148750	29.2	20.1	56.0	26.8	QP
0.355250	26.0	20.2	48.8	22.8	Ave.
0.376270	26.8	20.2	48.4	21.6	Ave.
0.407790	31.1	20.2	47.7	16.6	Ave.
0.582610	30.9	20.1	46.0	15.1	Ave.
0.869130	23.4	20.1	46.0	22.6	Ave.
1.148750	23.3	20.1	46.0	22.7	Ave.

Note:

- 1) Correction Factor = LISN VDF (Voltage Division Factor) + Cable Loss + Transient Limiter Attenuation
- 2) Corrected Amplitude = Reading + Correction Factor
- 3) Margin = Limit - Corrected Amplitude

§15.205 & §15.209 & §15.407(B) (4),(6),(7) – UNDESIRABLE EMISSION

Applicable Standard

FCC §15.407 (b) (4), (6), (7); §15.209; §15.205;

(b) Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:


(4) For transmitters operating in the 5.725-5.85 GHz band:

- (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.


Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209.

EUT Setup

Below 1 GHz:

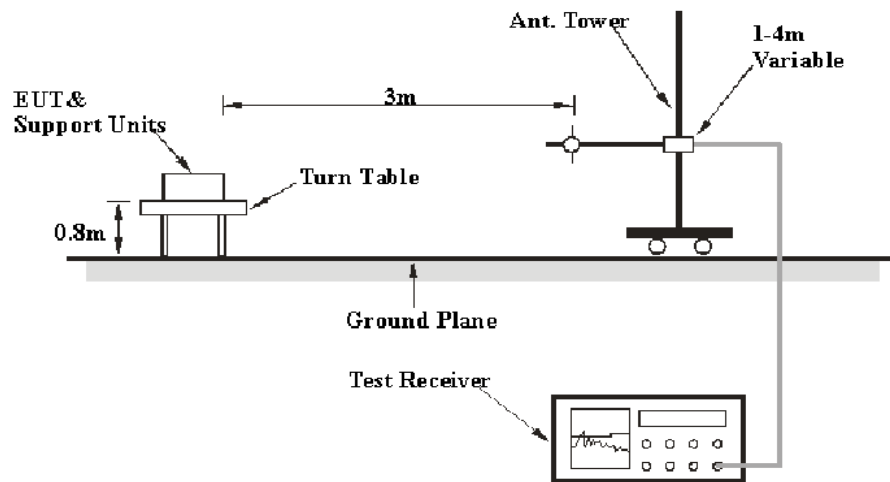

Above 1 GHz:

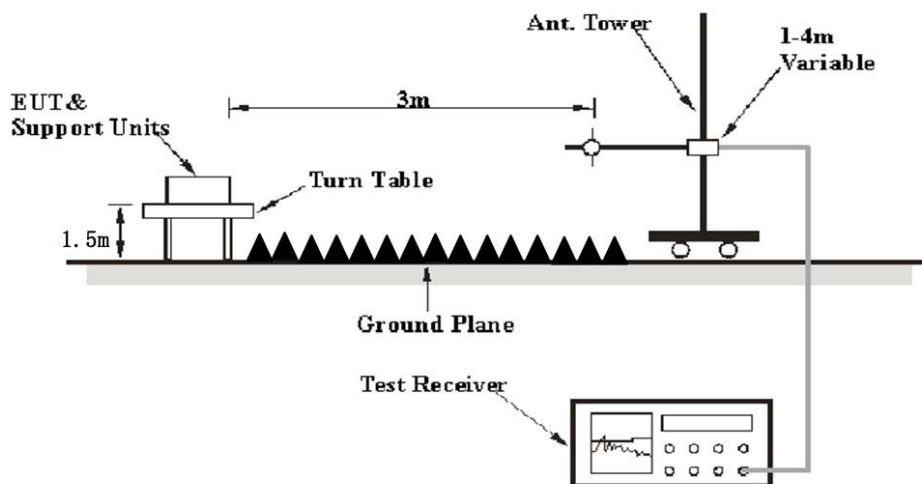

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC 15.209 and FCC 15.407 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 40 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1 MHz	3 MHz	/	PK
	1MHz	10 Hz ^{Note 1}	/	Ave.
	1MHz	> 1/T ^{Note 2}	/	Ave.

Note 1: when duty cycle is no less than 98%

Note 2: when duty cycle is less than 98%

Test Procedure

Radiated Spurious Emission

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all the installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1GHz, peak and Average detection modes for frequencies above 1GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level is in compliance with the limit if

$$L_m + U_{(L_m)} \leq L_{\text{lim}} + U_{\text{cispr}}$$

In BAEL, $U_{(L_m)}$ is less than U_{cispr} , if L_m is less than L_{lim} , it implies that the EUT complies with the limit.

Test Data


Environmental Conditions

Temperature:	21~25 °C
Relative Humidity:	52~56 %
ATM Pressure:	100.0~101.0 kPa

The testing was performed by Nancy Wang from 2018-01-10 to 2018-4-13.

EUT operation mode: Transmitting with two antennas simultaneously

30 MHz~1 GHz: (Worst case is 5825MHz in 802.11n20 mode)

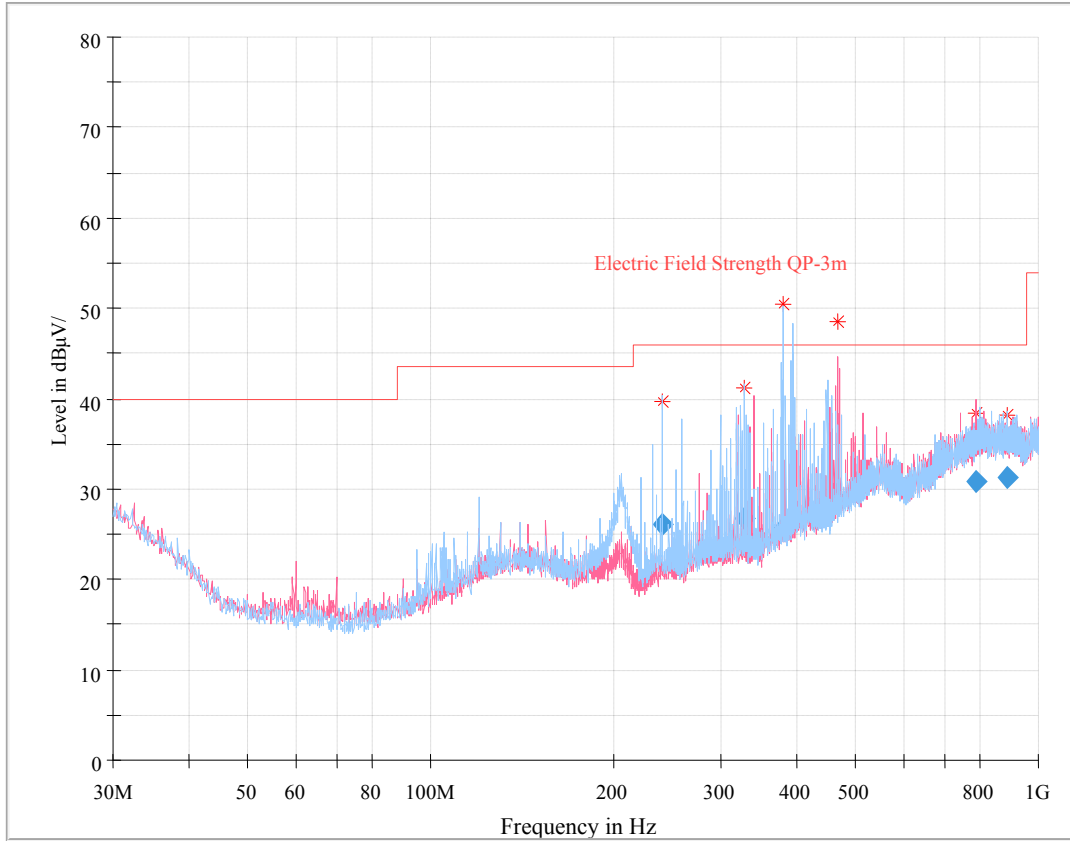

Frequency (MHz)	Corrected Amplitude (dBµV/m)	Antenna height (cm)	Antenna Polarity	Turntable position (degree)	Correction Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
240.352125	26.19	131.0	H	249.0	-4.6	46.00	19.81
328.591250	26.70	110.0	H	100.0	-2.7	46.00	19.30
380.445875	25.76	107.0	H	225.0	-0.9	46.00	20.24
467.327375	28.72	108.0	V	17.0	1.2	46.00	17.28
789.333625	30.77	104.0	V	268.0	8.7	46.00	15.23
891.875375	31.30	345.0	H	27.0	9.6	46.00	14.70

1000 MHz ~ 40 GHz:

802.11a mode:

Frequency (MHz)	Measurement		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBµV/m)	FCC Part 15.407/205/209	
	Reading (dBµV)	(PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBµV/m)	Margin (dB)
5745 MHz									
5745.00	55.63	PK	155	2.2	H	42.15	97.78	/	/
5745.00	43.20	Ave.	155	2.2	H	42.15	85.35	/	/
5745.00	50.29	PK	316	2.3	V	42.15	92.44	/	/
5745.00	38.22	Ave.	316	2.3	V	42.15	80.37	/	/
5715.88	29.21	PK	157	1.9	H	42.15	71.36	109.65	38.29
5721.99	28.73	PK	157	1.9	H	42.15	70.88	115.34	44.46
5694.11	28.12	PK	156	1.4	H	42.15	70.27	100.84	30.57
11490.00	40.94	PK	77	1.7	H	17.08	58.02	74	15.98
11490.00	26.49	Ave.	77	1.7	H	17.08	43.57	54	10.43
5785 MHz									
5785.00	52.23	PK	273	1.9	H	42.08	94.31	/	/
5785.00	40.04	Ave.	273	1.9	H	42.08	82.12	/	/
5785.00	48.33	PK	276	1.0	V	42.08	90.41	/	/
5785.00	27.94	Ave.	276	1.0	V	42.08	70.02	/	/
11570.00	40.39	PK	349	2.4	H	17.61	58.00	74	16.00
11570.00	26.84	Ave.	349	2.4	H	17.61	44.45	54	9.55
5825 MHz									
5825.00	50.15	PK	72	2.1	H	42.08	92.23	/	/
5825.00	37.81	Ave.	72	2.1	H	42.08	79.89	/	/
5825.00	48.34	PK	317	1.8	V	42.08	90.42	/	/
5825.00	36.09	Ave.	317	1.8	V	42.08	78.17	/	/
5850.69	29.28	PK	294	1.8	H	42.55	71.83	120.63	48.80
5855.41	28.95	PK	294	1.8	H	42.55	71.50	110.69	39.19
5890.11	27.69	PK	292	1.9	H	42.55	70.24	94.02	23.78
11650.00	41.76	PK	105	1.5	H	17.61	59.37	74	14.63
11650.00	26.89	Ave.	105	1.5	H	17.61	44.50	54	9.50

802.11n20 mode:

Frequency (MHz)	Measurement		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBµV/m)	FCC Part 15.407/205/209	
	Reading (dBµV)	(PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBµV/m)	Margin (dB)
5745 MHz									
5745.00	50.93	PK	250	2.1	H	42.15	93.08	/	/
5745.00	38.69	Ave.	250	2.1	H	42.15	80.84	/	/
5745.00	48.34	PK	290	1.9	V	42.15	90.49	/	/
5745.00	36.25	Ave.	290	1.9	V	42.15	78.40	/	/
5703.55	29.28	PK	78	1.8	H	42.15	71.43	106.19	34.76
5723.15	27.62	PK	184	2.3	H	42.15	69.77	117.98	48.21
5694.33	28.11	PK	184	2.3	H	42.15	70.26	101	30.74
11490.00	40.36	PK	162	1.6	H	17.08	57.44	74	16.56
11490.00	26.34	Ave.	162	1.6	H	17.08	43.42	54	10.58
5785 MHz									
5785.00	50.69	PK	296	1.3	H	42.08	92.77	/	/
5785.00	38.31	Ave.	296	1.3	H	42.08	80.39	/	/
5785.00	48.26	PK	25	1.7	V	42.08	90.34	/	/
5785.00	36.09	Ave.	25	1.7	V	42.08	78.17	/	/
11570.00	41.08	PK	277	2.2	H	17.61	58.69	74	15.31
11570.00	26.75	Ave.	277	2.2	H	17.61	44.36	54	9.64
5825 MHz									
5825.00	51.85	PK	217	1.8	H	42.08	93.93	/	/
5825.00	39.85	Ave.	217	1.8	H	42.08	81.93	/	/
5825.00	49.11	PK	199	1.3	V	42.08	91.19	/	/
5825.00	36.84	Ave.	199	1.3	V	42.08	78.92	/	/
5864.62	28.06	PK	41	2.0	H	42.55	70.61	108.16	37.55
5869.33	27.56	PK	233	2.5	H	42.55	70.11	106.79	36.68
5897.28	27.06	PK	233	2.5	H	42.55	69.61	88.71	19.10
11650.00	41.62	PK	350	2.1	H	17.61	59.23	74	14.77
11650.00	27.40	Ave.	350	2.1	H	17.61	45.01	54	8.99

Note:

Corrected Amplitude = Corrected Factor + Reading



Corrected Factor=Antenna factor (RX) + Cable Loss – Amplifier Factor

Margin = Limit- Corr. Amplitude


Spurious emissions more than 20 dB below the limit were not reported.

802.11n20 mode


Pre-scan for 1~18 GHz, H

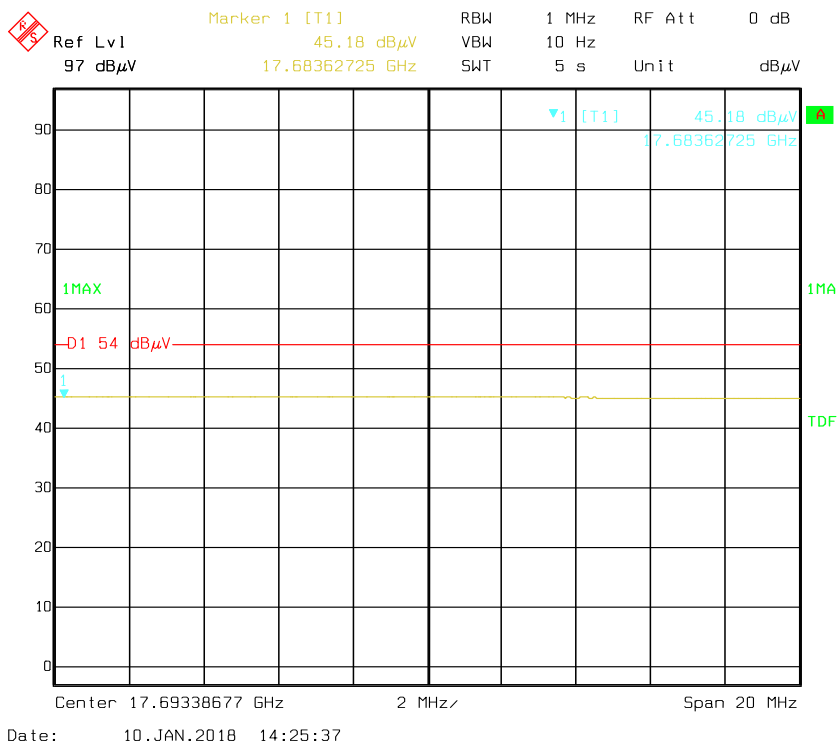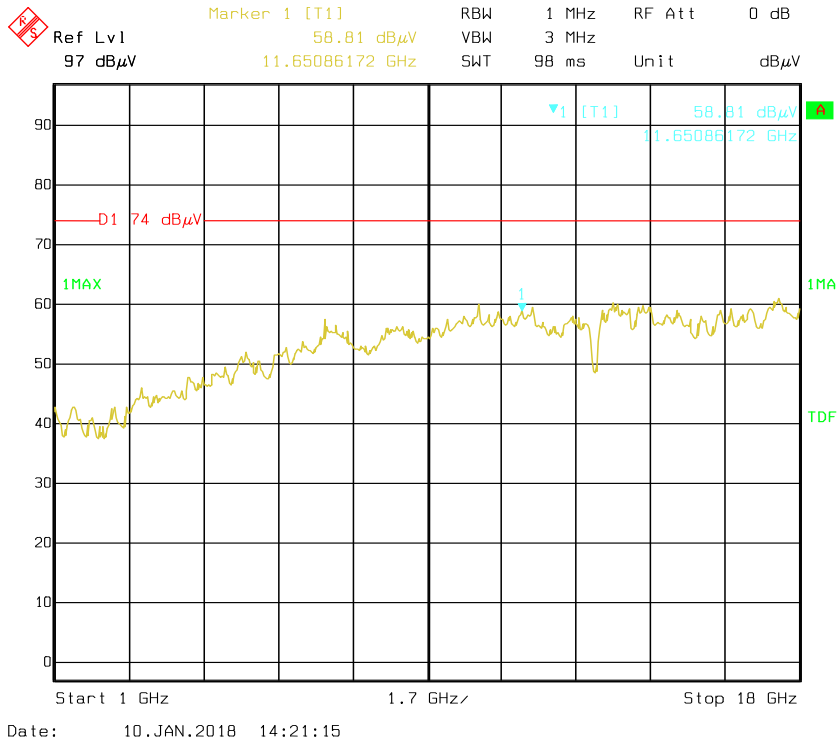


Pre-scan for Above 18 GHz H

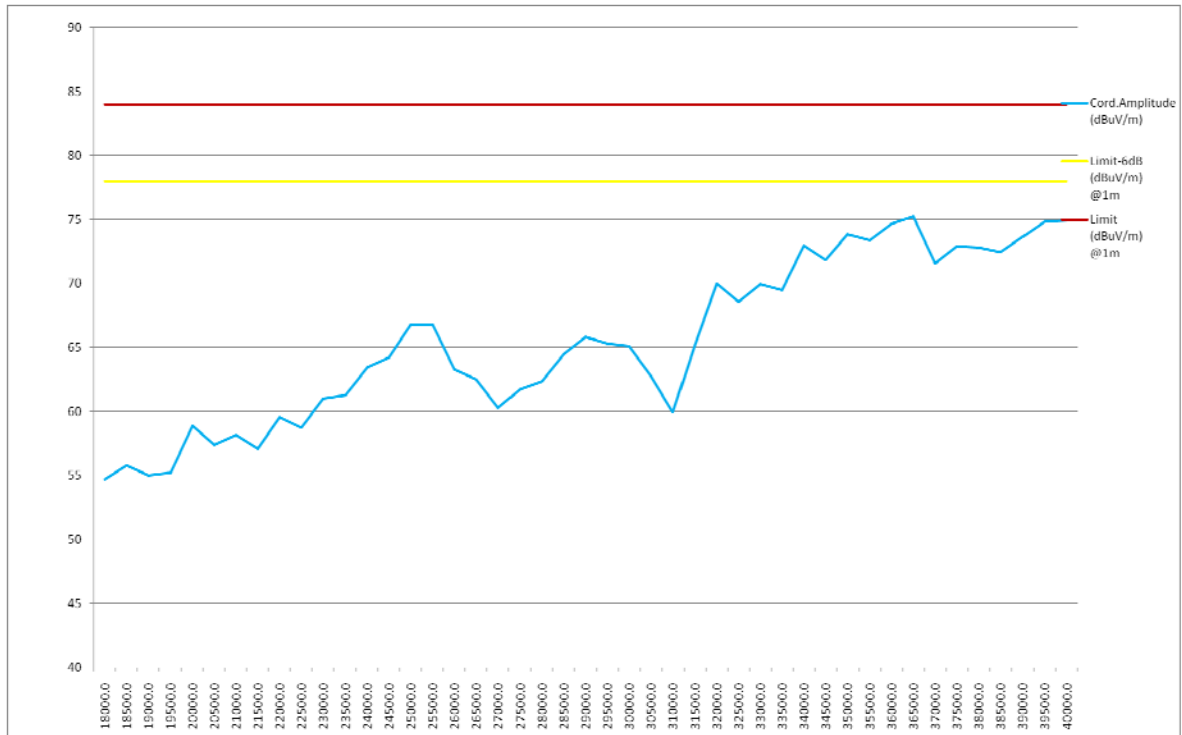


Scan average value at 1m

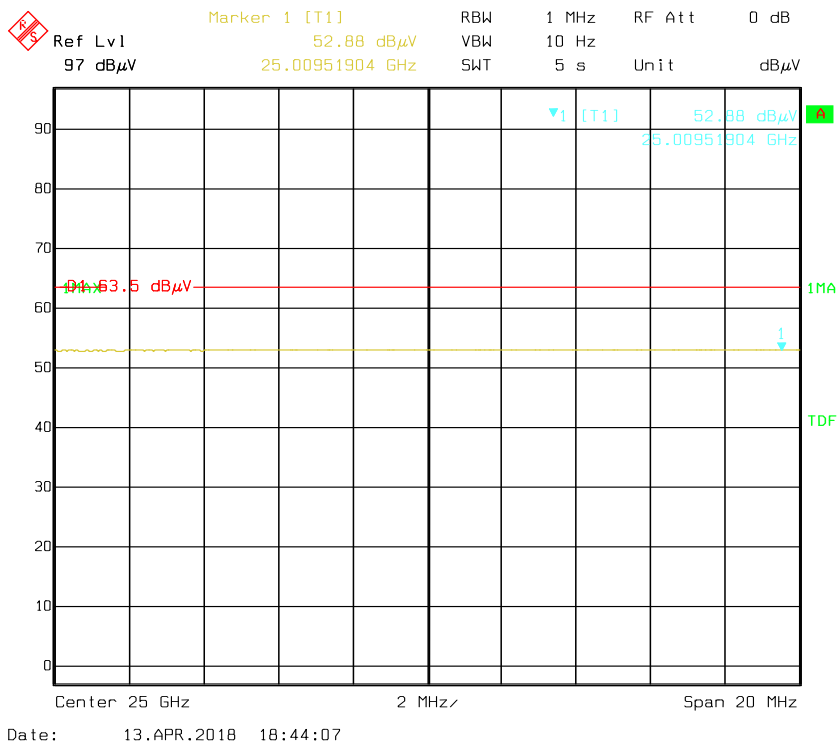

Pre-scan for Above 18 GHz V

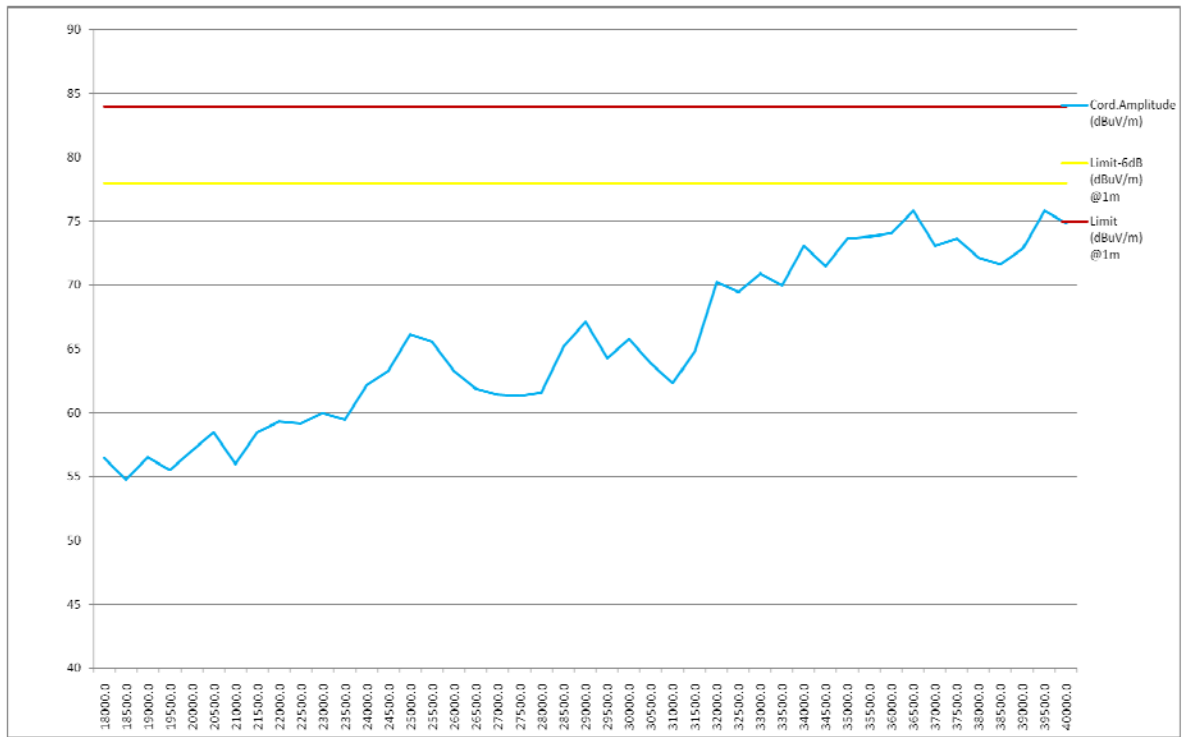

Scan average value at 1m

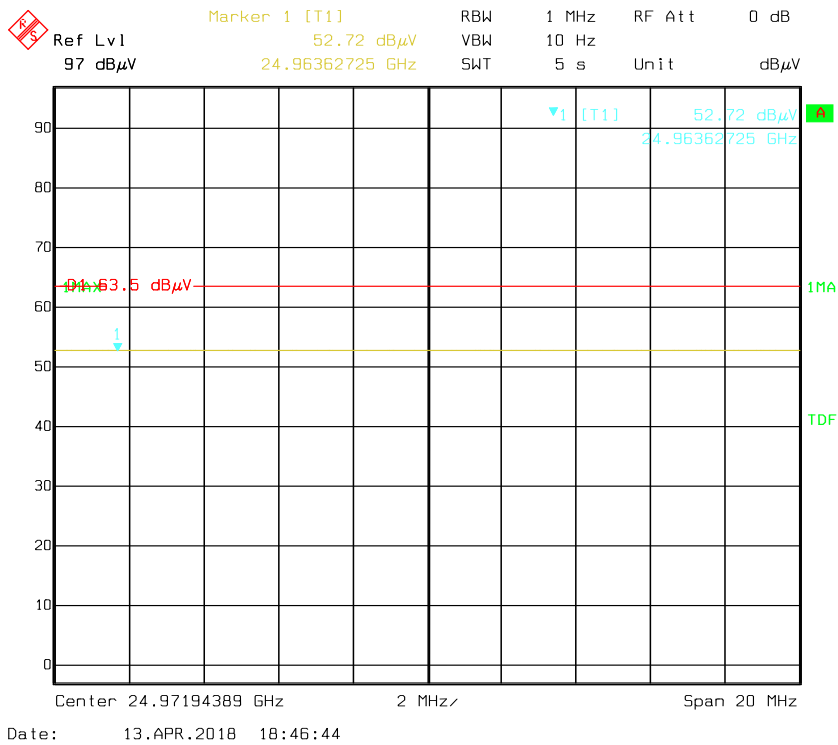

§15.407(b)(4) –Out Of Band Emission


Applicable Standard

FCC §15.407 (b) (4);

For transmitters operating in the 5.725–5.825 GHz band: All emissions shall be limited to a level of –27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. The Resolution bandwidth is set to 1MHz, The Video bandwidth is set to ≥ 1MHz, report the peak value out of the oprating band.
3. Repeat above procedures until all frequencies measured were complete.



Test Data

Environmental Conditions

Temperature:	24 °C
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa


The testing was performed by Nancy Wang on 2018-01-24.

EUT operation mode: Transmitting

Note: The antenna gain had been offset in the plots, the limit is EIRP.


Antenna 0:

802.11a mode, Band Edge, Left Side

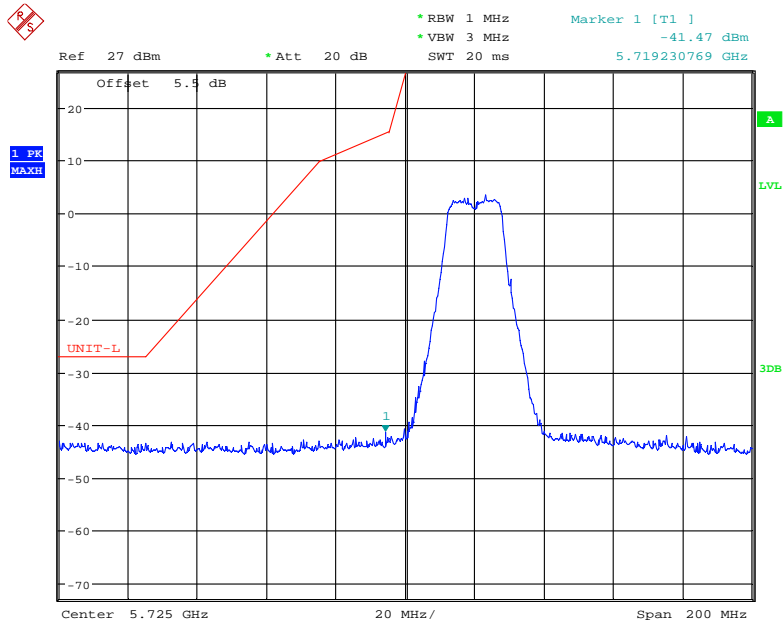


Date: 24.JAN.2018 16:52:25

802.11a mode, Band Edge, Right Side

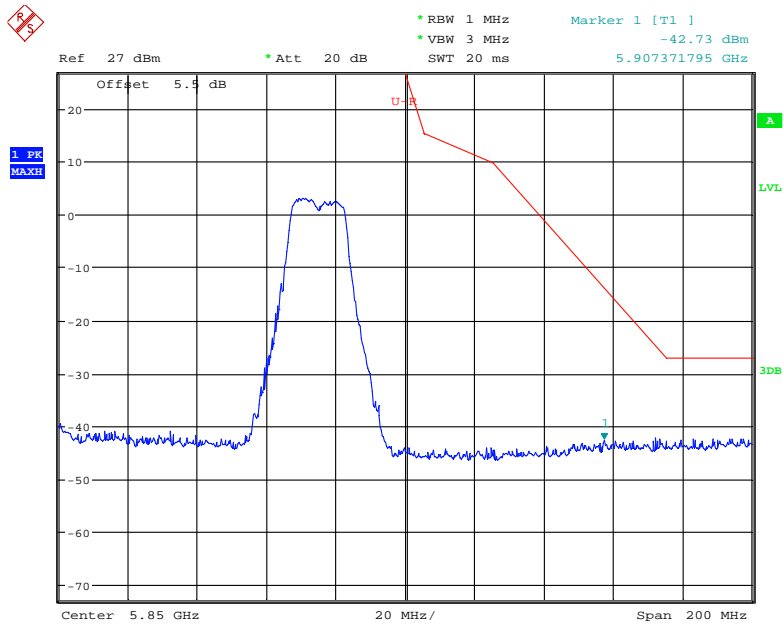


Date: 24.JAN.2018 16:50:26

802.11n20 mode, Band Edge, Left Side

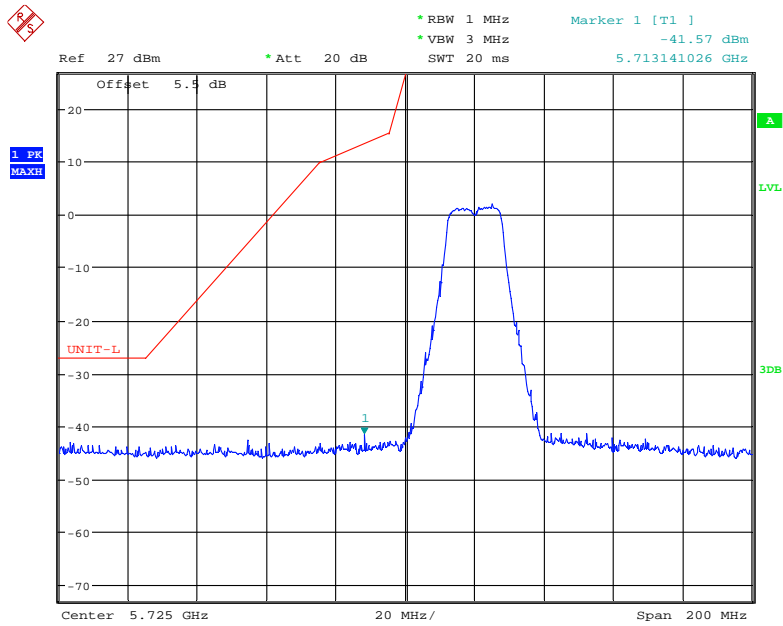

Date: 24.JAN.2018 16:53:02


802.11n20 mode, Band Edge, Right Side

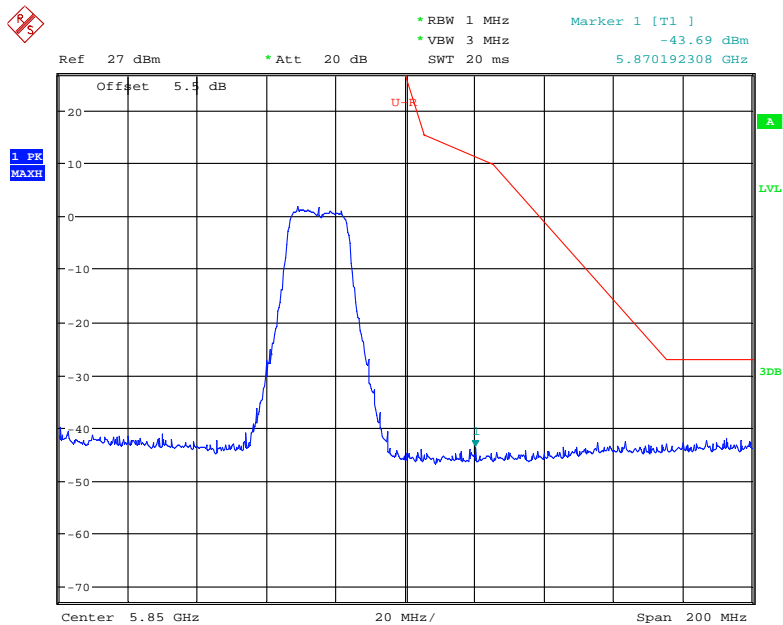

Date: 24.JAN.2018 16:49:01


Antenna 1:

802.11a mode, Band Edge, Left Side

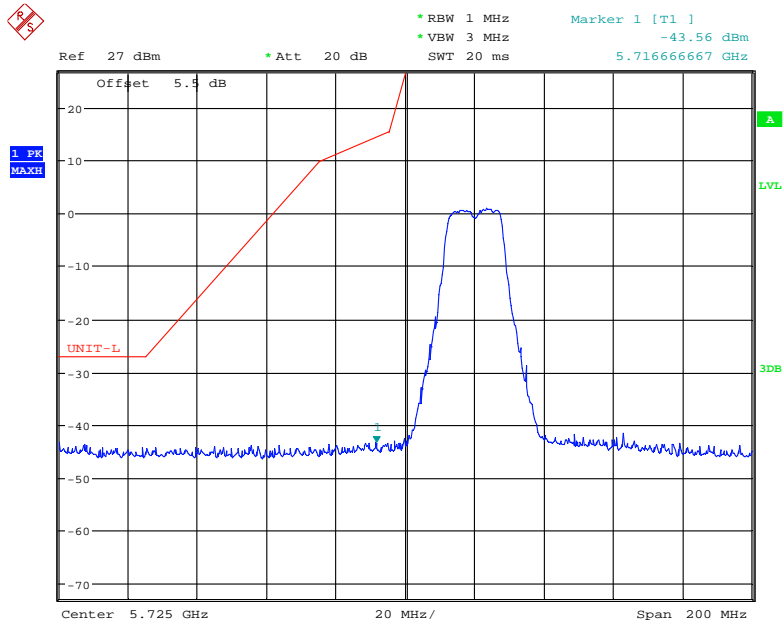


Date: 24.JAN.2018 16:55:19

802.11a mode, Band Edge, Right Side

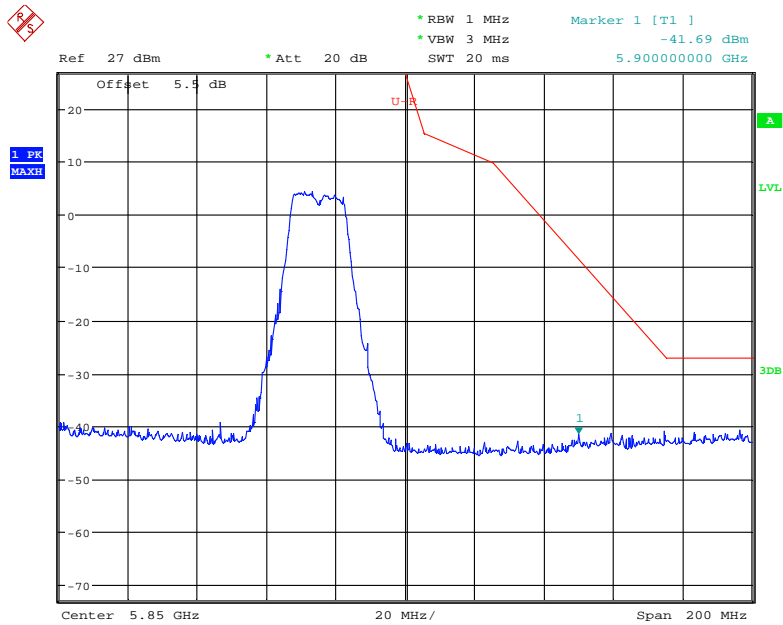


Date: 24.JAN.2018 17:01:59

802.11n20 mode, Band Edge, Left Side

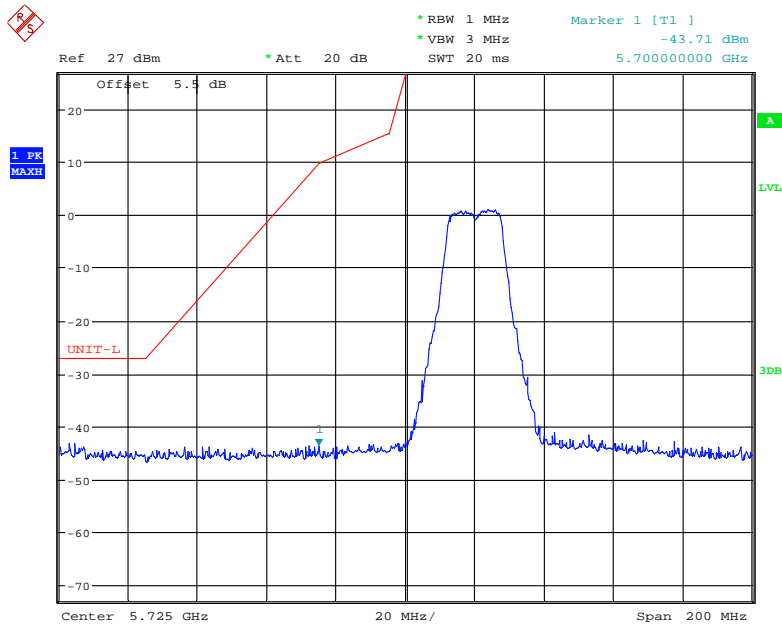

Date: 24.JAN.2018 16:54:27

802.11n20 mode, Band Edge, Right Side

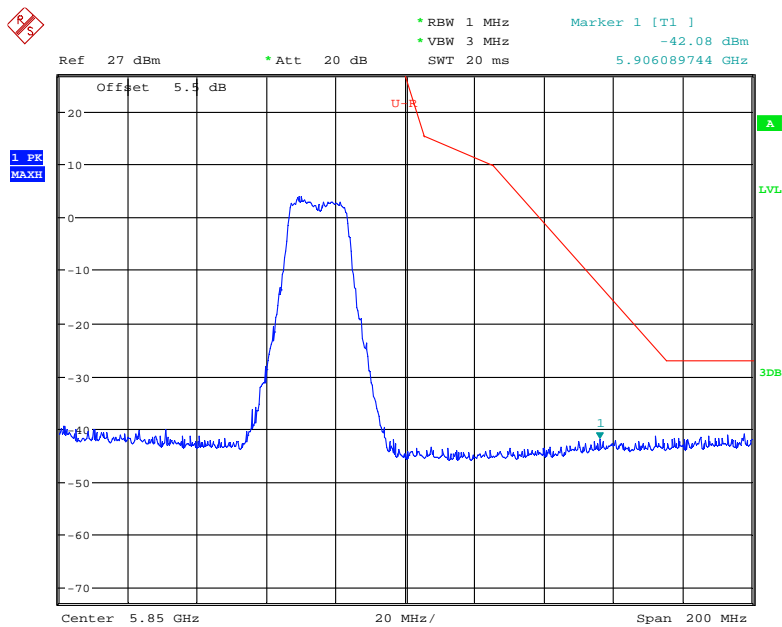

Date: 24.JAN.2018 17:05:00

Note: According the testing data, all the emissions was below the limit 3dB, so the two antennas transmit simultaneously result was pass.

FCC §15.407(e) –6dB EMISSION BANDWIDTH

Applicable Standard


Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

Test Procedure

1. Minimum Emission Bandwidth for the band 5.725-5.85 GHz

Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.725-5.85 GHz. The following procedure shall be used for measuring this bandwidth:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



Test Data

Environmental Conditions

Temperature:	21~24 °C
Relative Humidity:	49~50 %
ATM Pressure:	100~101.0 kPa

The testing was performed by Nancy Wang from 2018-01-24 to 2018-01-29.

EUT operation mode: Transmitting


Test Result: Pass; please refer to the following tables and plots.

5725 MHz – 5850 MHz:

Frequency (MHz)	Antenna Port	6dB Bandwidth (MHz)	99% bandwidth (MHz)
802.11a			
5745	0	16.603	16.923
	1	16.635	17.051
5785	0	16.603	17.051
	1	16.587	16.987
5825	0	16.603	16.987
	1	15.587	16.923
802.11n20			
5745	0	17.821	18.077
	1	17.788	17.949
5785	0	17.885	17.949
	1	17.837	18.013
5825	0	17.821	18.013
	1	17.837	17.949


Antenna 0:

802.11a mode, 6dB Emission Bandwidth, 5745 MHz

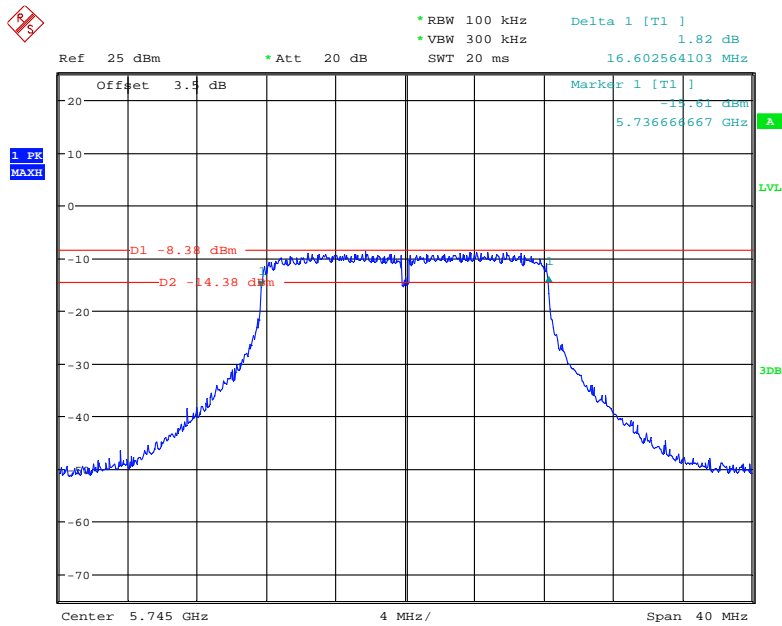


Date: 24.JAN.2018 16:16:20

802.11a mode, 6dB Emission Bandwidth, 5785 MHz

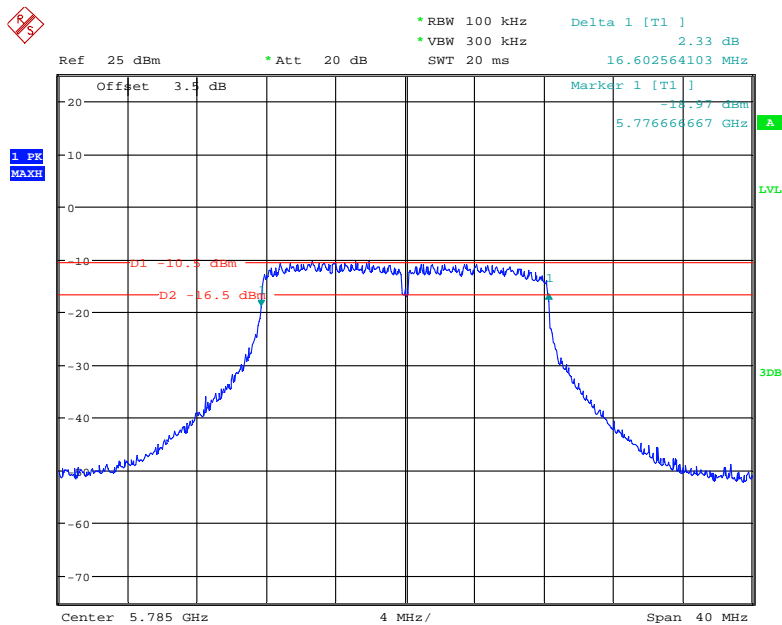


Date: 24.JAN.2018 16:19:16

802.11a mode, 6dB Emission Bandwidth, 5825 MHz

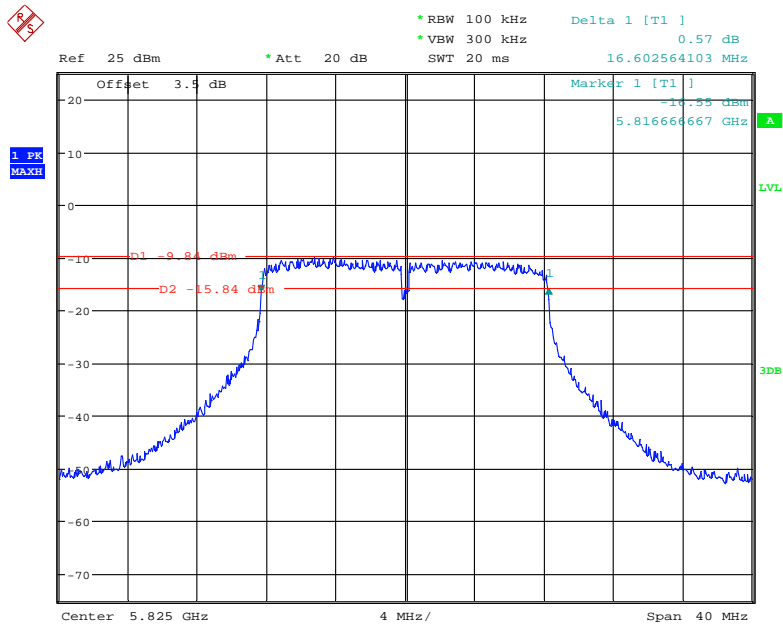


Date: 24.JAN.2018 16:21:44

802.11n20 mode, 6dB Emission Bandwidth, 5745 MHz

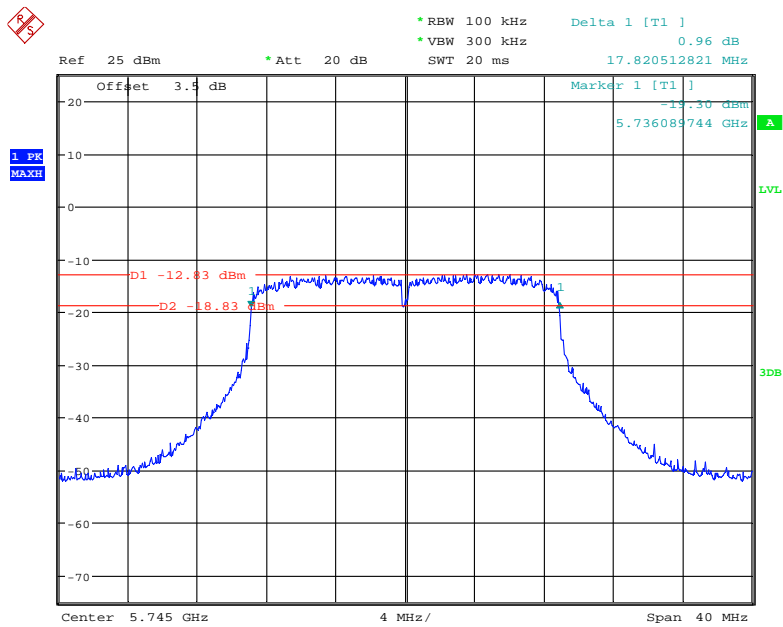


Date: 24.JAN.2018 16:29:41

802.11n20 mode, 6dB Emission Bandwidth, 5785 MHz

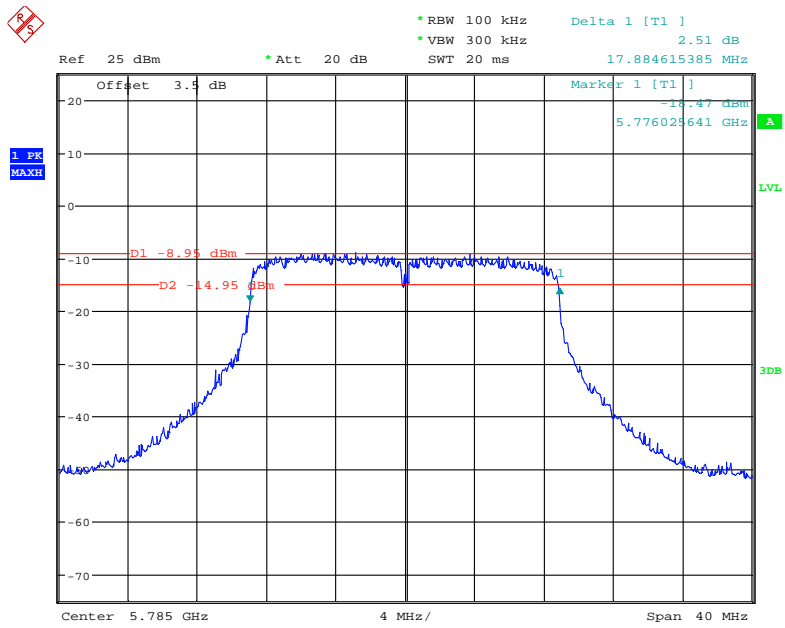


Date: 24.JAN.2018 16:26:24

802.11n20 mode, 6dB Emission Bandwidth, 5825 MHz

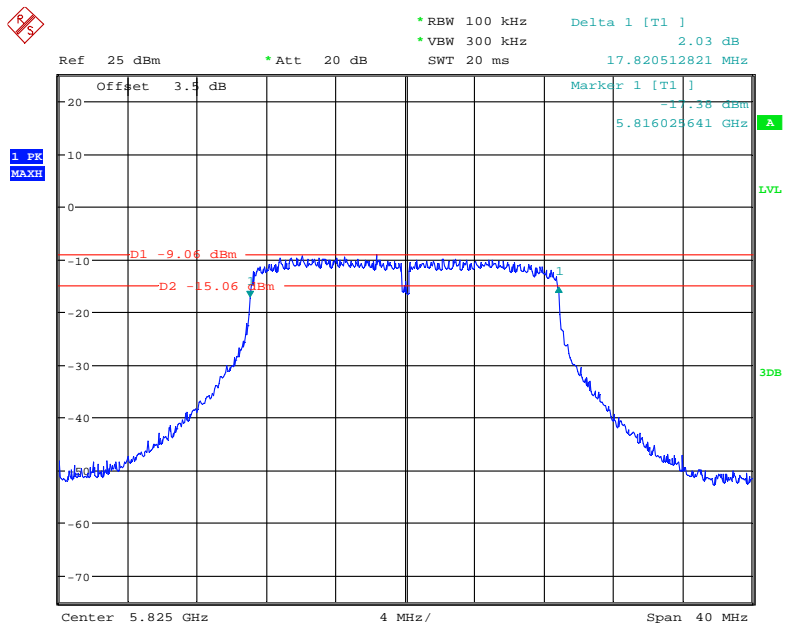


Date: 24.JAN.2018 16:24:18

802.11a mode, 99% Occupied Bandwidth, 5745 MHz

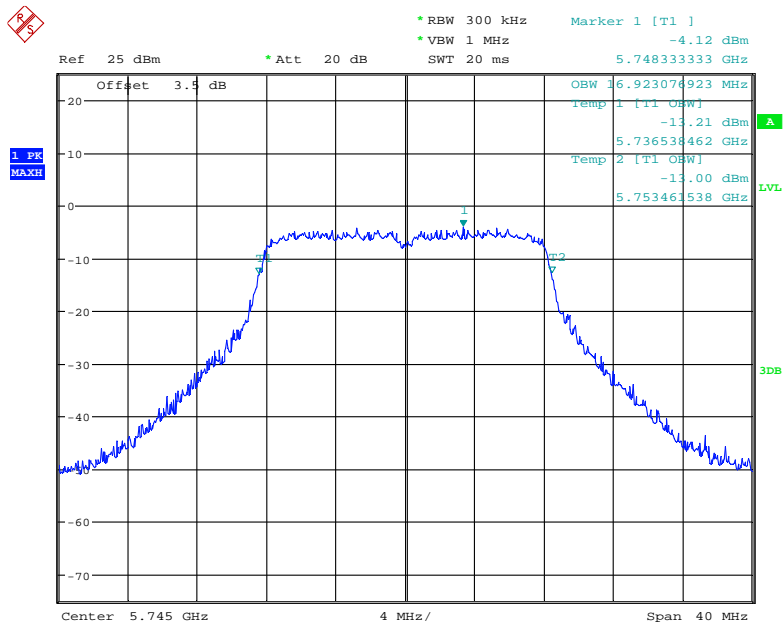


Date: 24.JAN.2018 16:35:18

802.11a mode, 99% Occupied Bandwidth, 5785 MHz

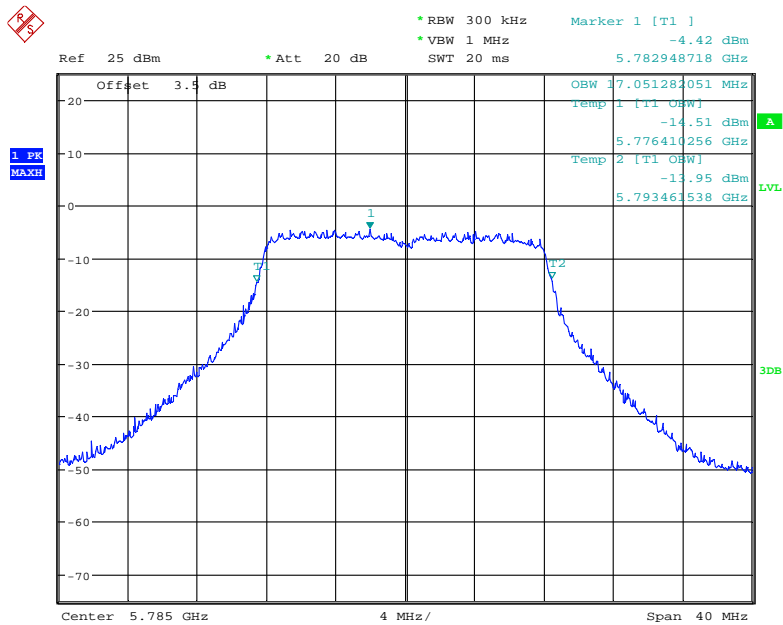


Date: 24.JAN.2018 16:36:06

802.11a mode, 99% Occupied Bandwidth, 5825 MHz

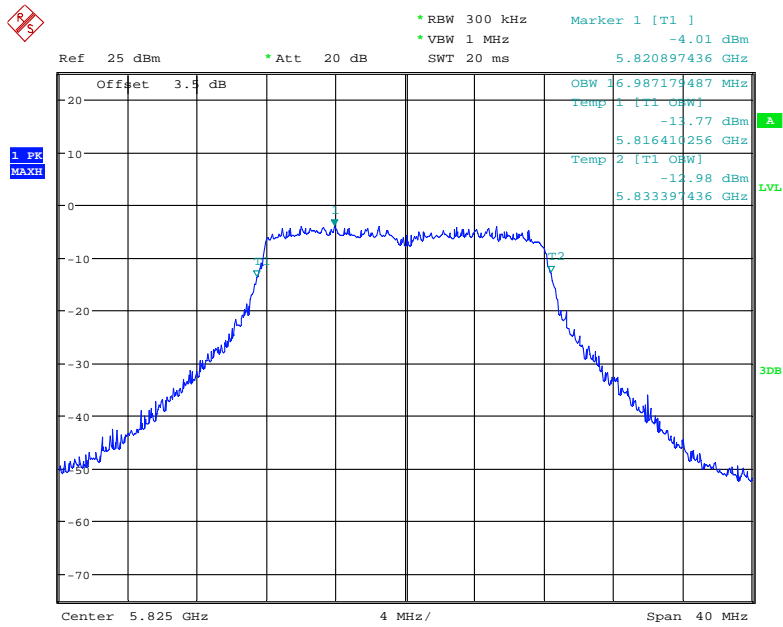


Date: 24.JAN.2018 16:37:56

802.11n20 mode, 99% Occupied Bandwidth, 5745 MHz

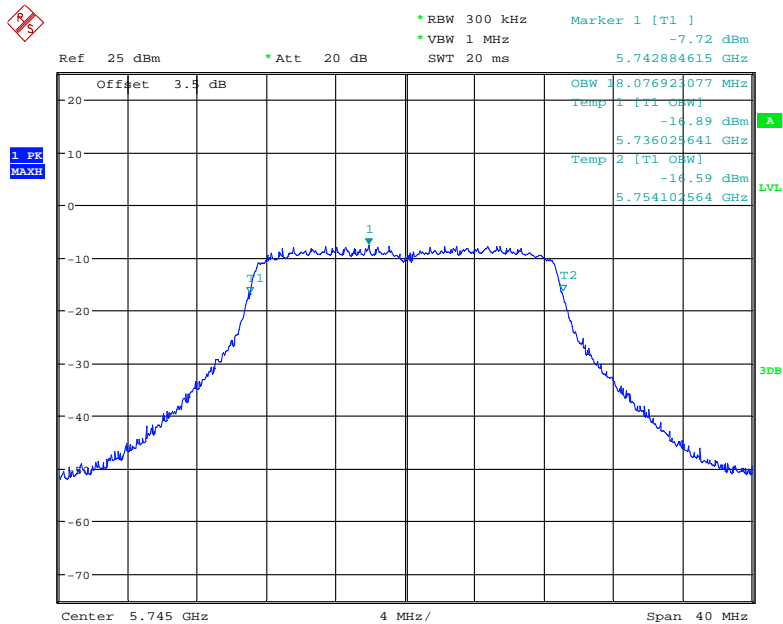


Date: 24.JAN.2018 16:30:53

802.11n20 mode, 99% Occupied Bandwidth, 5785 MHz

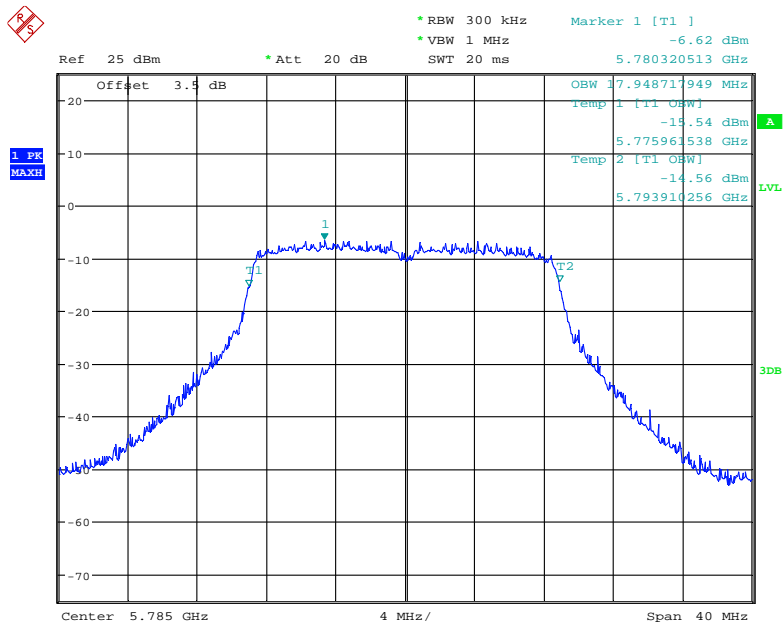

Date: 24.JAN.2018 16:32:19


802.11n20 mode, 99% Occupied Bandwidth, 5825 MHz

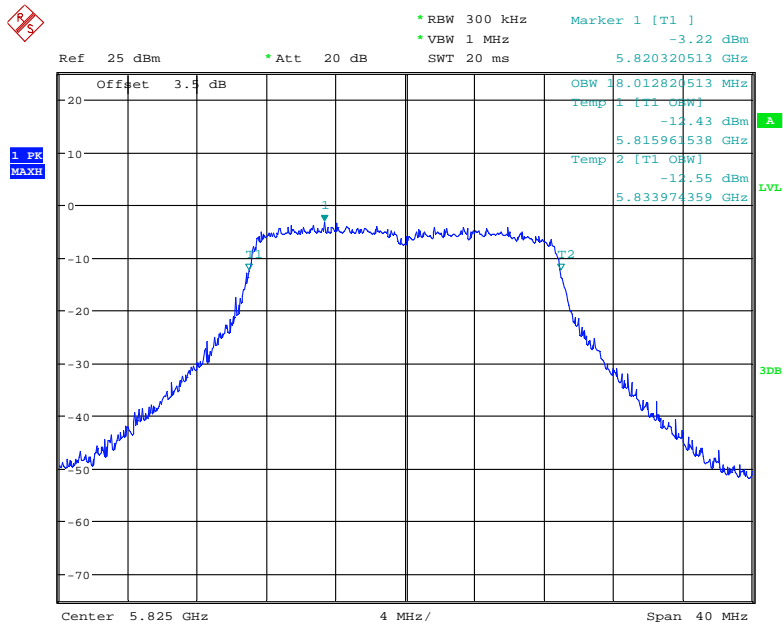

Date: 24.JAN.2018 16:33:54


Antenna 1:

802.11a mode, 6dB Emission Bandwidth, 5745 MHz

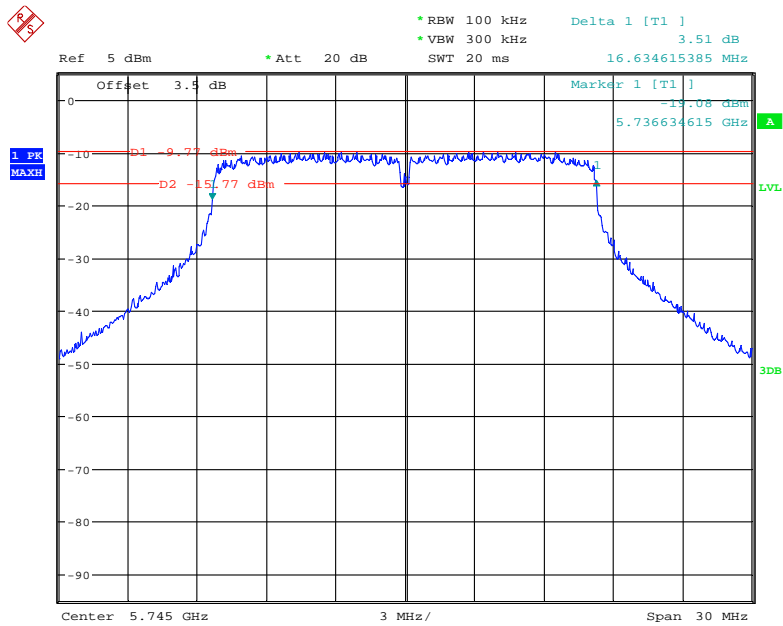


Date: 29.JAN.2018 09:04:45

802.11a mode, 6dB Emission Bandwidth, 5785 MHz

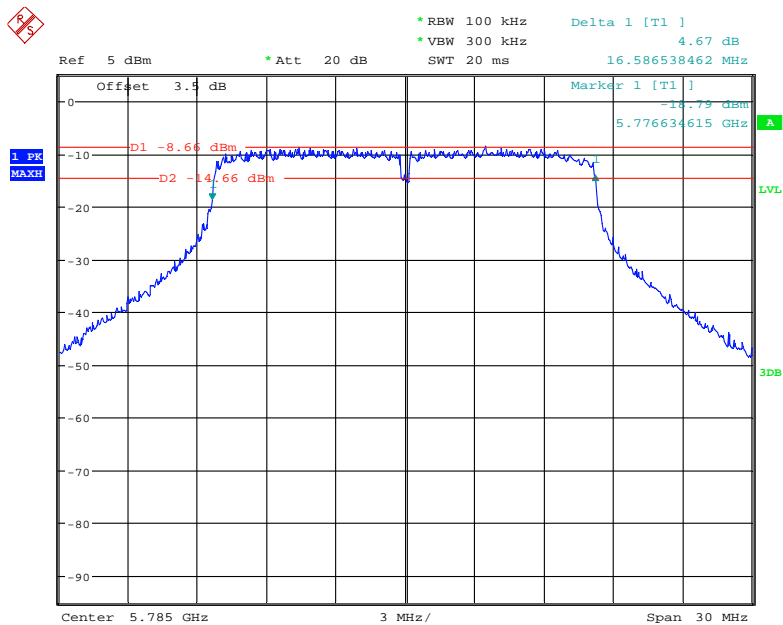


Date: 29.JAN.2018 09:07:26

802.11a mode, 6dB Emission Bandwidth, 5825 MHz

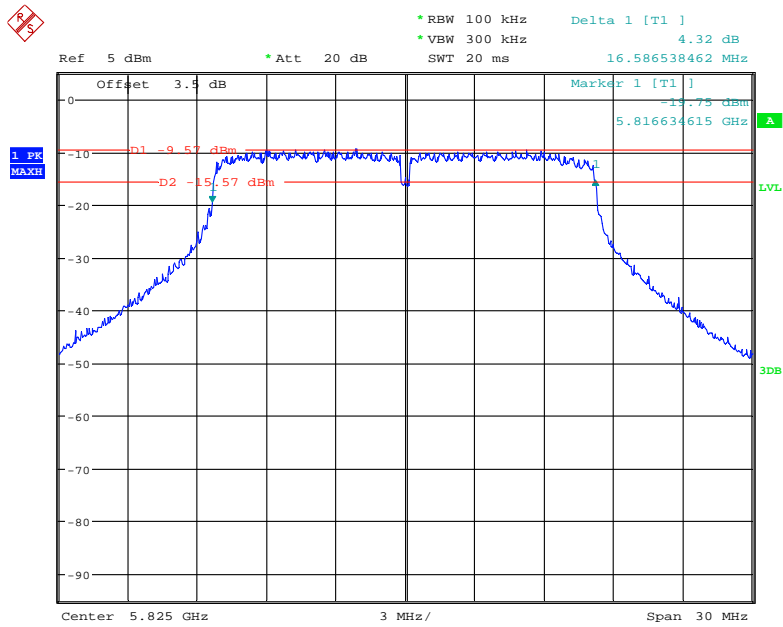


Date: 29.JAN.2018 09:11:47

802.11n20 mode, 6dB Emission Bandwidth, 5745 MHz

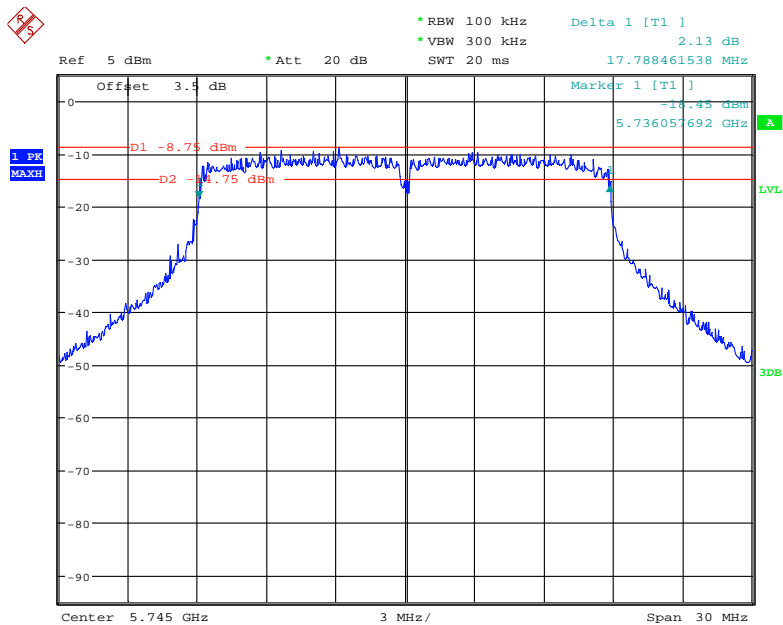


Date: 29.JAN.2018 09:17:00

802.11n20 mode, 6dB Emission Bandwidth, 5785 MHz

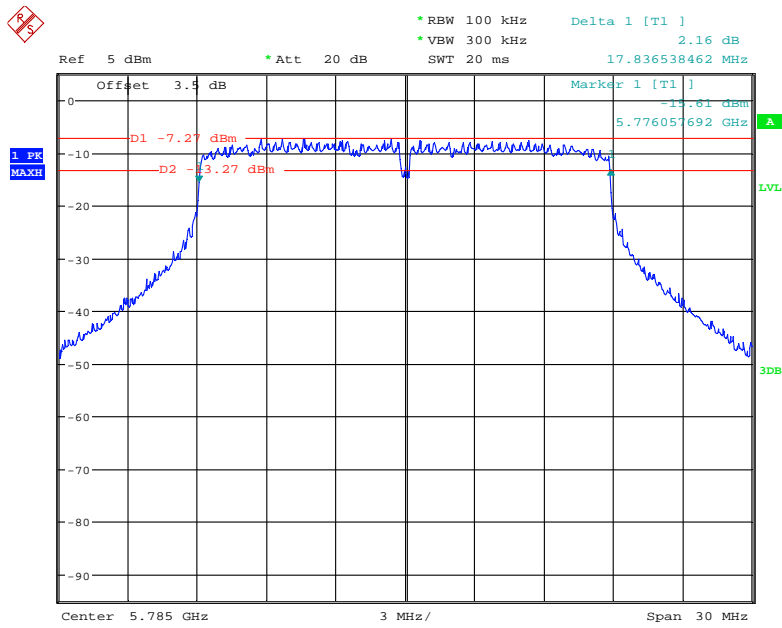


Date: 29.JAN.2018 09:18:34

802.11n20 mode, 6dB Emission Bandwidth, 5825 MHz

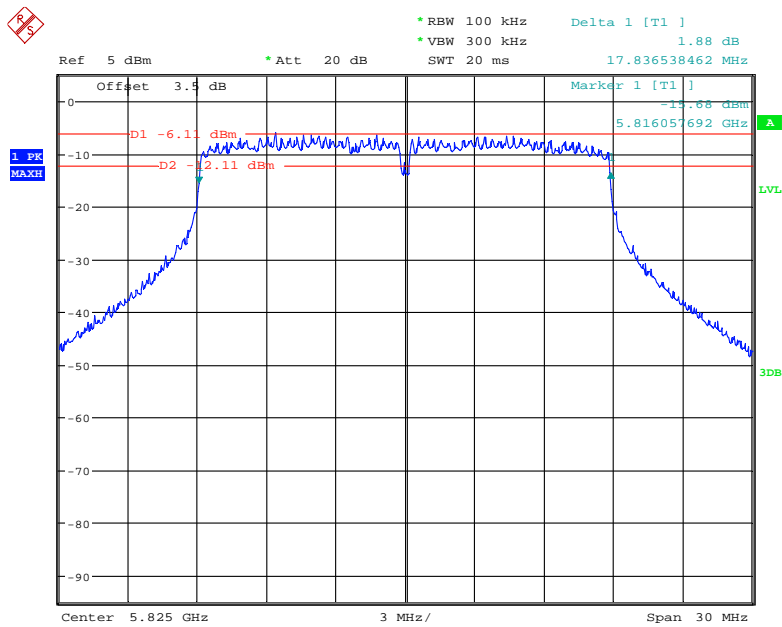


Date: 29.JAN.2018 09:21:47

802.11a mode, 99% Occupied Bandwidth, 5745 MHz

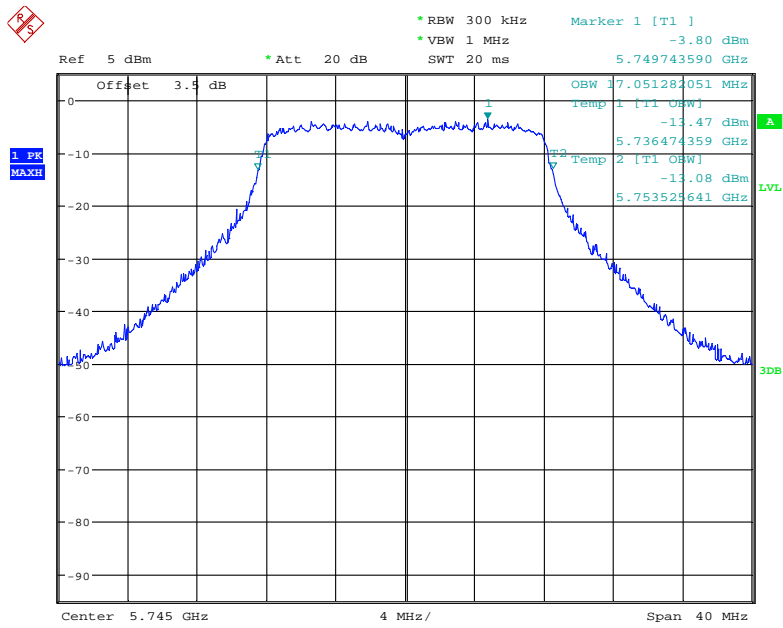


Date: 29.JAN.2018 09:25:12

802.11a mode, 99% Occupied Bandwidth, 5785 MHz

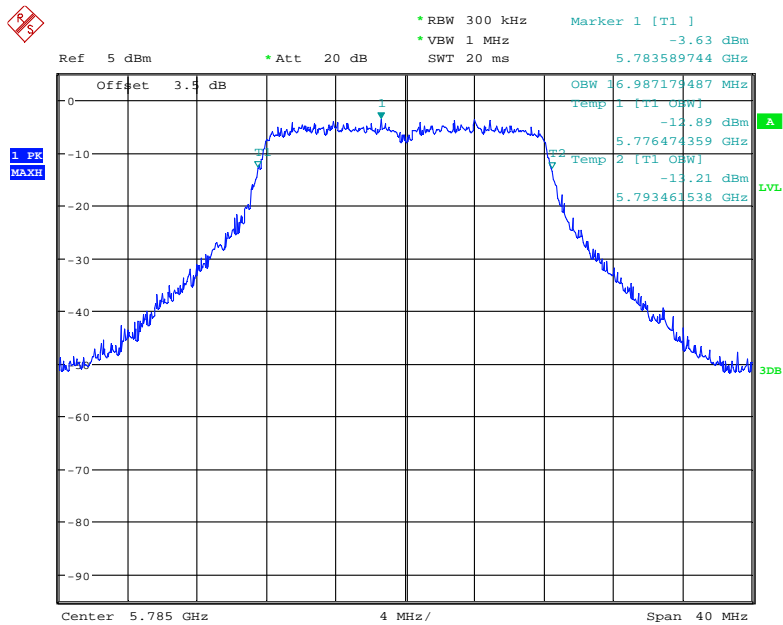


Date: 29.JAN.2018 09:27:23

802.11a mode, 99% Occupied Bandwidth, 5825 MHz

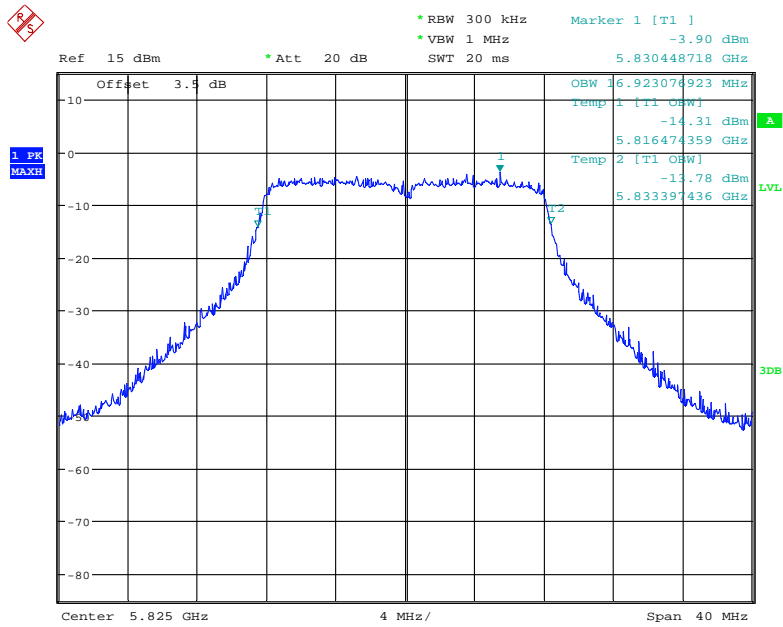


Date: 29.JAN.2018 09:30:38

802.11n20 mode, 99% Occupied Bandwidth, 5745 MHz

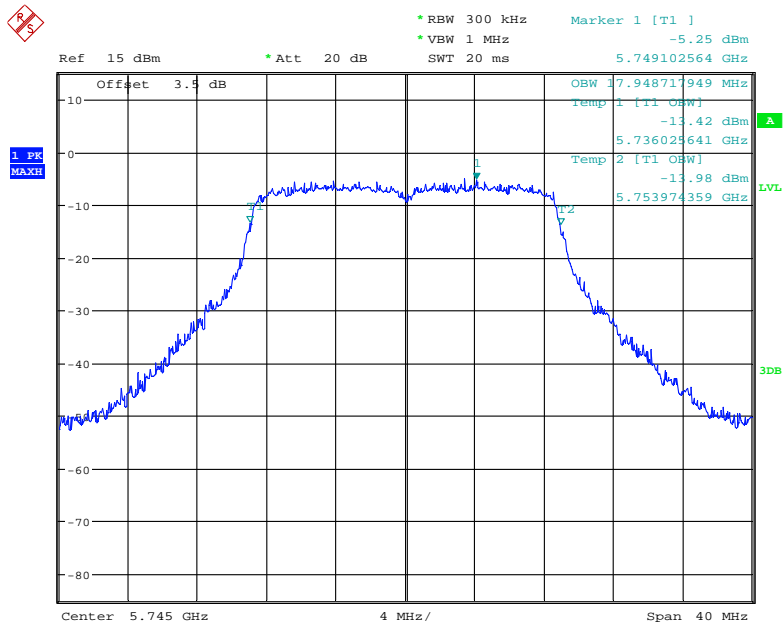


Date: 29.JAN.2018 09:32:05

802.11n20 mode, 99% Occupied Bandwidth, 5785 MHz

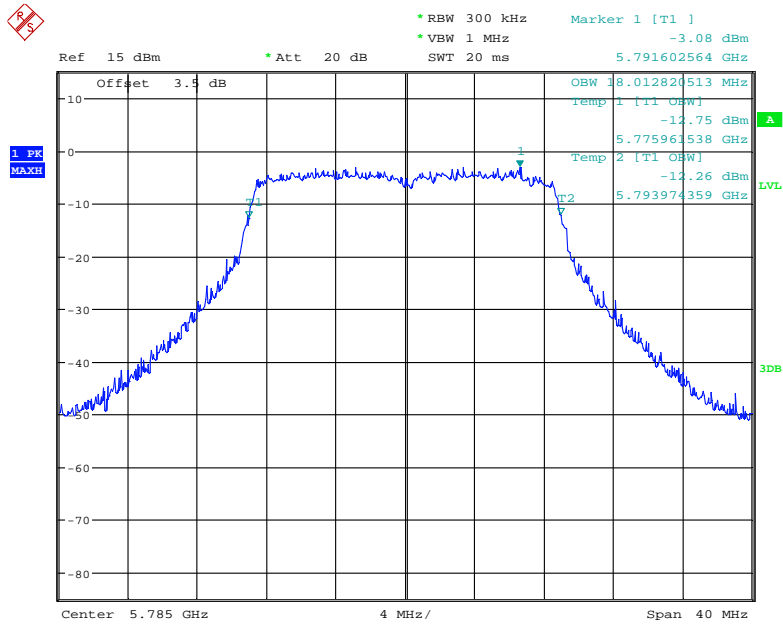

Date: 29.JAN.2018 09:33:16

802.11n20 mode, 99% Occupied Bandwidth, 5825 MHz

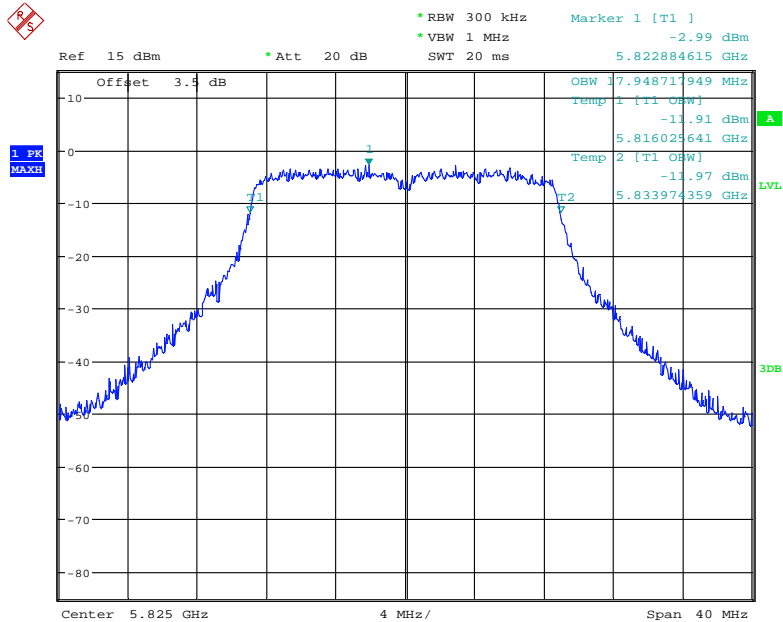

Date: 29.JAN.2018 09:35:34


FCC §15.407(a) (3)– CONDUCTED TRANSMITTER OUTPUT POWER

Applicable Standard

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

Test Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.



Test Data

Environmental Conditions

Temperature:	23 °C
Relative Humidity:	54 %
ATM Pressure:	101.0 kPa

The testing was performed by Nancy Wang on 2018-01-24.

EUT operation mode: Transmitting

Test Result: Pass

Please refer to the following tables.

Frequency (MHz)	Antenna Port	Average Output Power (dBm)	Total Output Power (dBm)	Limit (dBm)
802.11a				
5745	0	4.26	7.09	30
	1	3.89		
5785	0	4.31	7.67	
	1	4.99		
5825	0	4.04	7.22	
	1	4.38		
802.11n20				
5745	0	4.26	7.23	30
	1	3.79		
5785	0	4.04	7.25	
	1	4.45		
5825	0	4.01	7.56	
	1	4.71		

Note: This Device Emploies Cyclic Delay Diversity.
 When determining reductions in conducted power limits, array gain is calculated as follows: As to this device, $N_{ANT} \leq 4$, Array Gain = 0 dB.
 Total directional gain (dBi) = gain of individual transmit antennas (dBi) + 0 (dB) = 2dBi.

FCC §15.407(a) (3) - POWER SPECTRAL DENSITY

Applicable Standard

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

Test Procedure

For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 kHz bandwidth, the following adjustments to the procedures apply:

- a) Set $RBW \geq 1/T$, where T is defined in section II.B.1.a).
- b) Set $VBW \geq 3 RBW$.
- c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10 \log(500 \text{ kHz}/RBW)$ to the measured result, whereas $RBW (< 500 \text{ kHz})$ is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10 \log(1\text{MHz}/RBW)$ to the measured result, whereas $RBW (< 1 \text{ MHz})$ is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Test Data

Environmental Conditions

Temperature:	21~24 °C
Relative Humidity:	49~50 %
ATM Pressure:	100~101.0 kPa

The testing was performed by Nancy Wang from 2018-01-24 to 2018-01-29.

EUT operation mode: Transmitting

Test Result: Pass

Please refer to the following tables and plots.

5725 MHz – 5850 MHz:

Frequency (MHz)	Antenna Port	Power Spectral Density (dBm/500kHz)	Total Power Spectral Density (dBm/500kHz)	Limit (dBm/500kHz)
802.11a				
5745	0	-10.52	-5.63	30
	1	-7.34		
5785	0	-8.02	-4.22	
	1	-6.56		
5825	0	-10.26	-5.71	
	1	-7.59		
802.11n20				
5745	0	-12.45	-8.47	30
	1	-10.69		
5785	0	-8.33	-4.83	
	1	-7.40		
5825	0	-8.77	-4.26	
	1	-6.15		


Note: This Device Emploies Cyclic Delay Diversity.

When determining reductions in conducted power limits, array gain is calculated as follows: Array gain = 10 log (NANT), where NANT is the number of transmit antennas.

Total directional gain (dBi) = gain of individual transmit antennas (dBi) +Array gain (dBi)
 =2dBi+3dBi=5dBi.


Antenna 0:

802.11a mode, Power Spectral Density, 5745 MHz

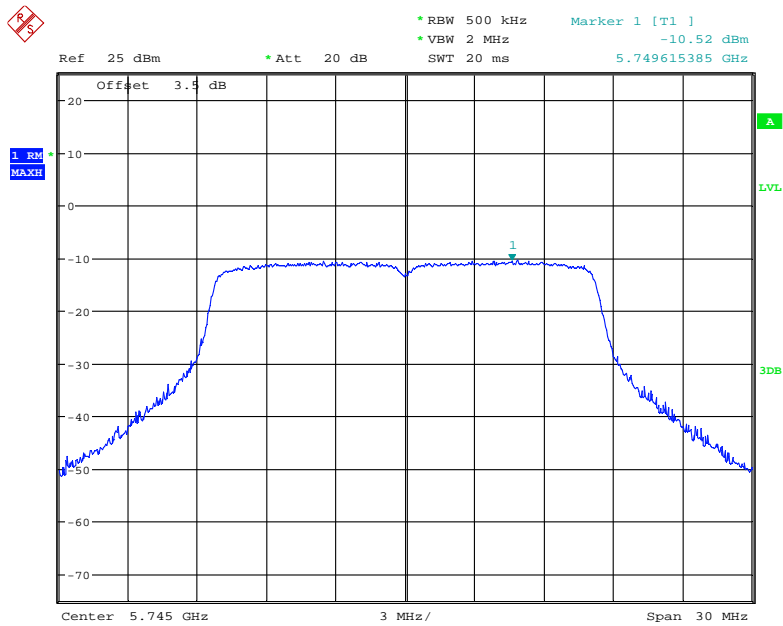


Date: 24.JAN.2018 16:41:59

802.11a mode, Power Spectral Density, 5785 MHz

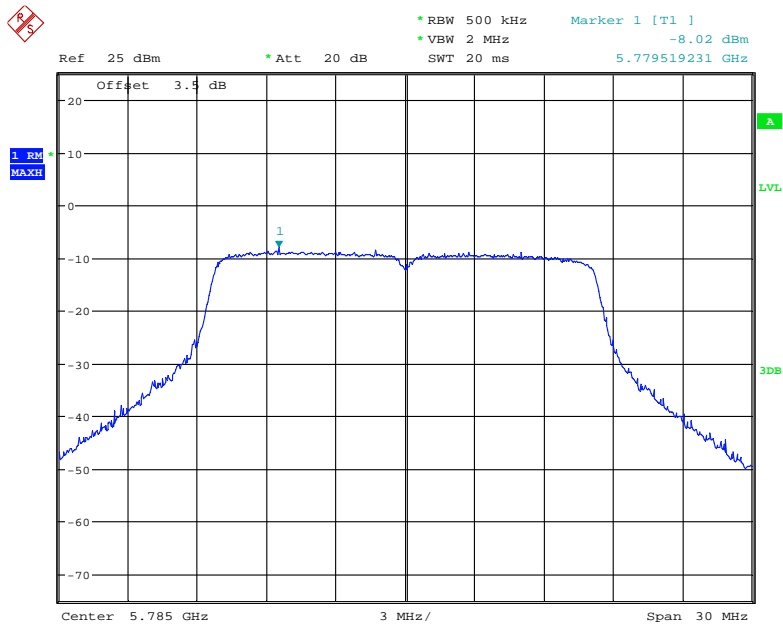


Date: 24.JAN.2018 16:41:17

802.11a mode, Power Spectral Density, 5825 MHz

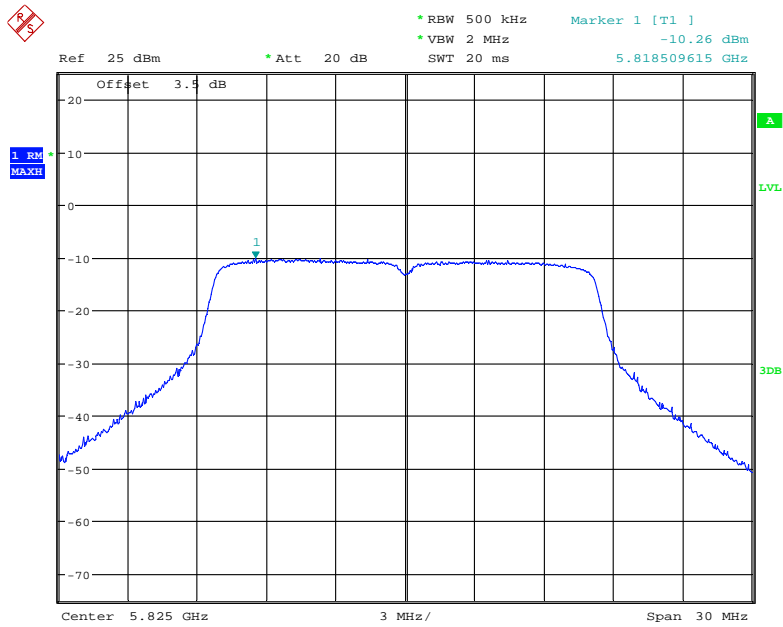


Date: 24.JAN.2018 16:39:33

802.11n20 mode, Power Spectral Density, 5745 MHz

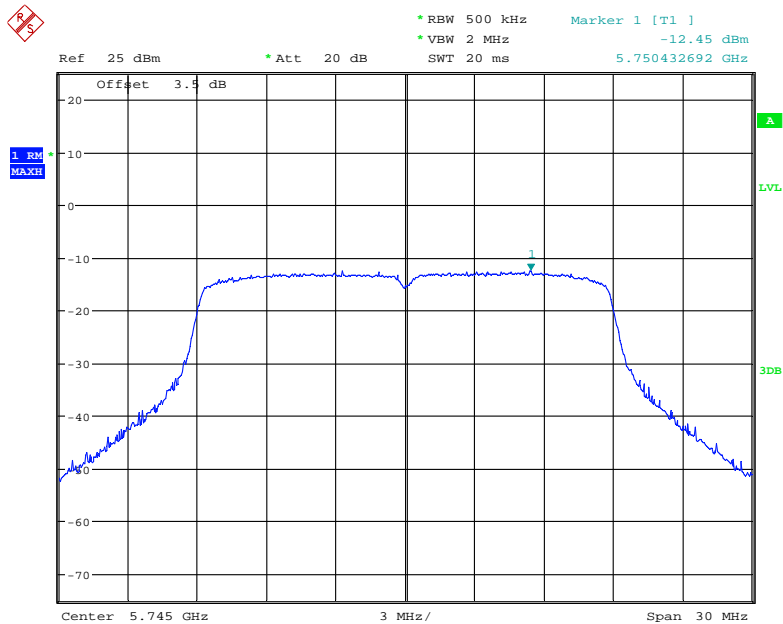


Date: 24.JAN.2018 16:42:33

802.11n20 mode, Power Spectral Density, 5785 MHz

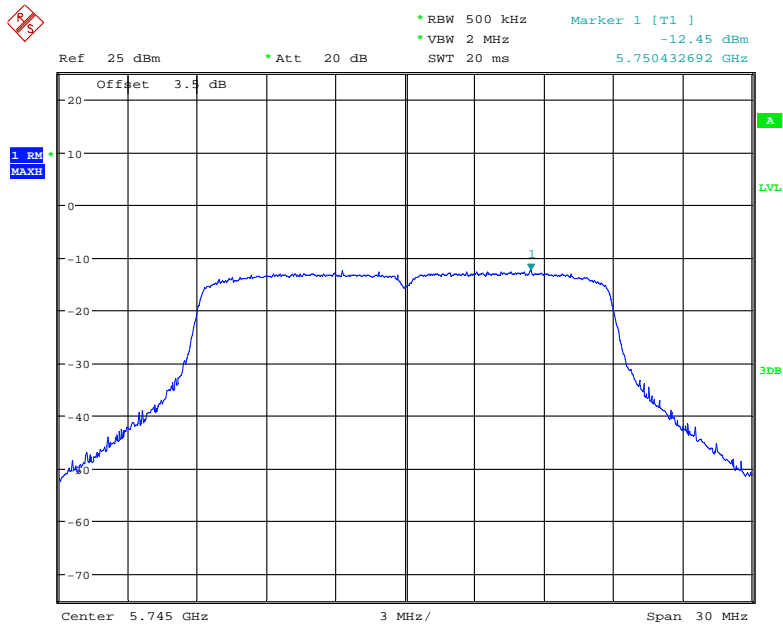

Date: 24.JAN.2018 16:42:33


802.11n20 mode, Power Spectral Density, 5825 MHz

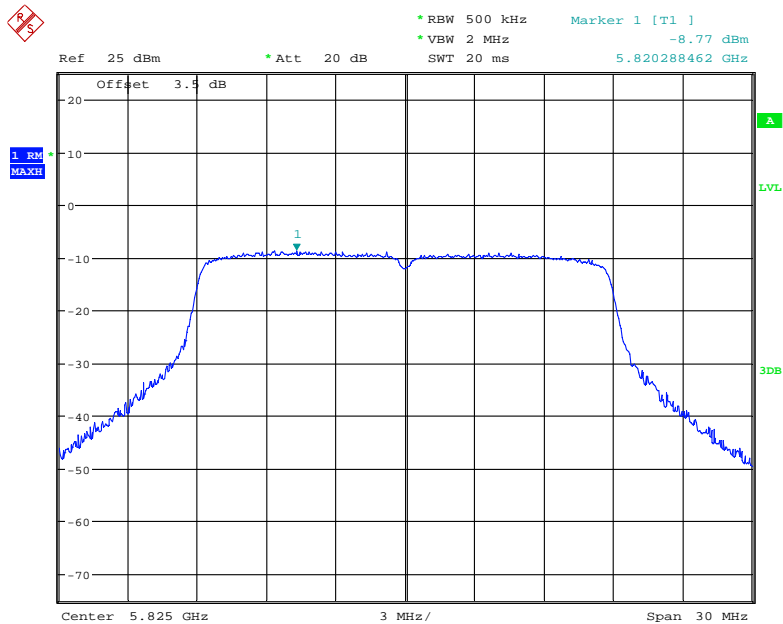

Date: 24.JAN.2018 16:46:02


Antenna 1:

802.11a mode, Power Spectral Density, 5745 MHz

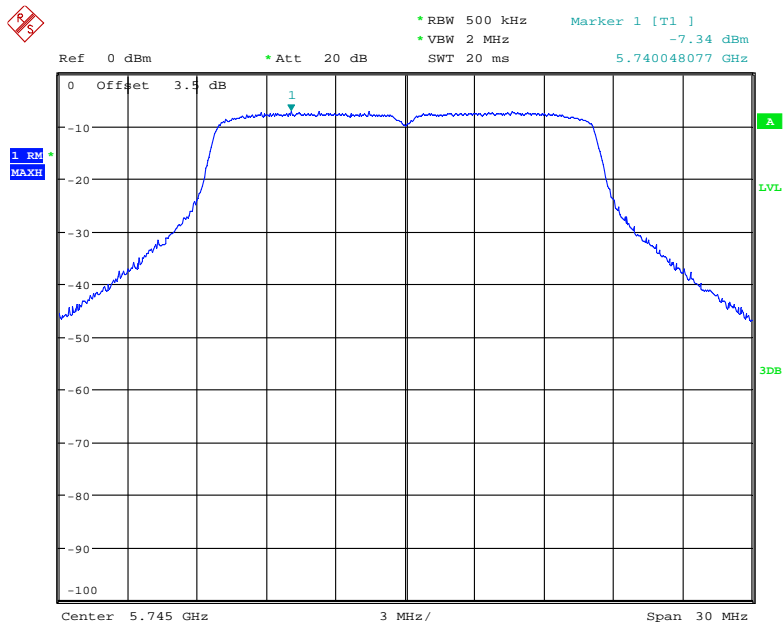


Date: 29.JAN.2018 08:53:18

802.11a mode, Power Spectral Density, 5785 MHz

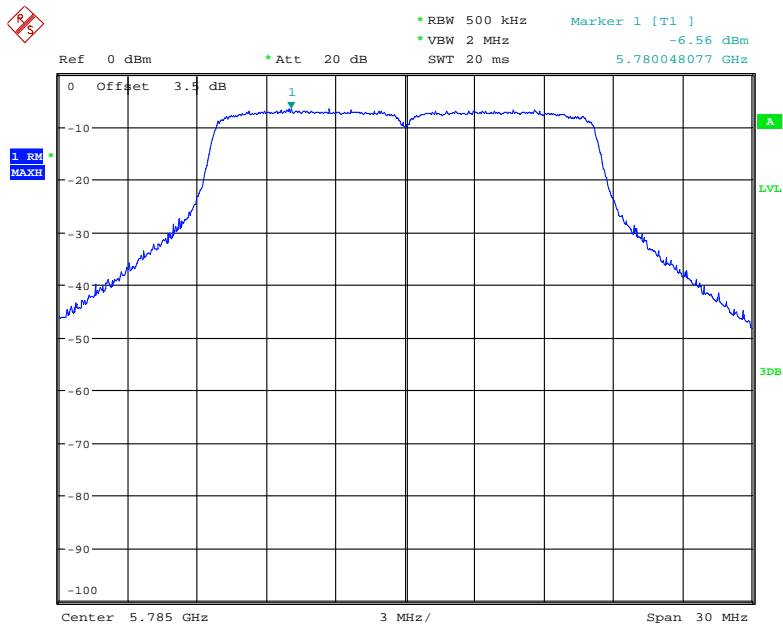


Date: 29.JAN.2018 08:56:09

802.11a mode, Power Spectral Density, 5825 MHz

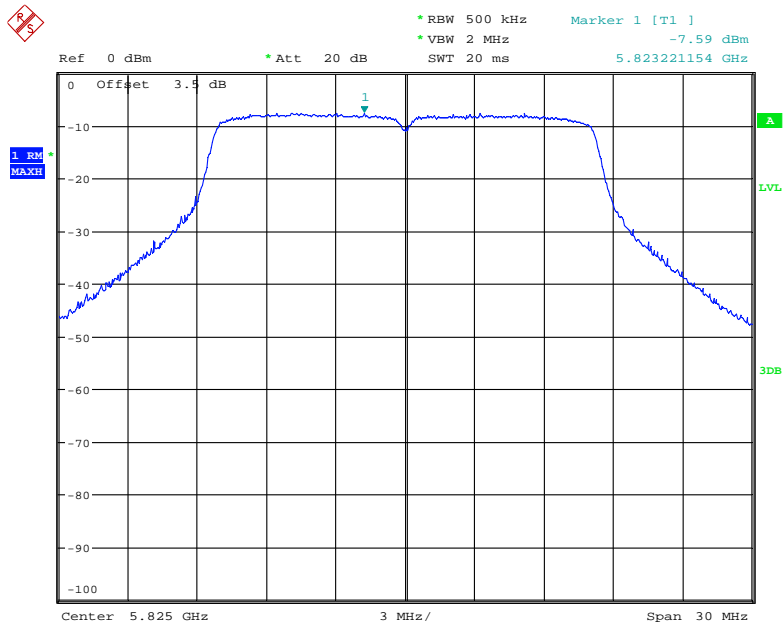


Date: 29.JAN.2018 08:58:16

802.11n20 mode, Power Spectral Density, 5745 MHz

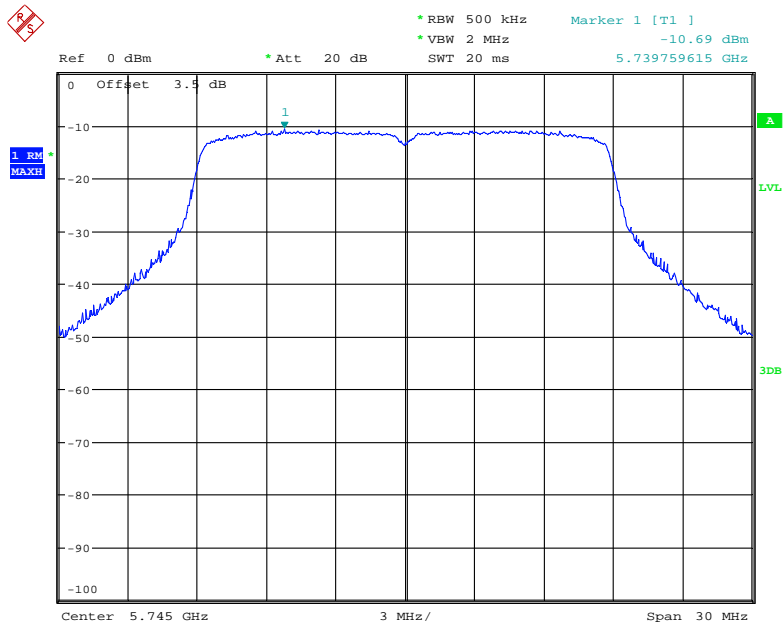


Date: 29.JAN.2018 08:59:13

802.11n20 mode, Power Spectral Density, 5785 MHz

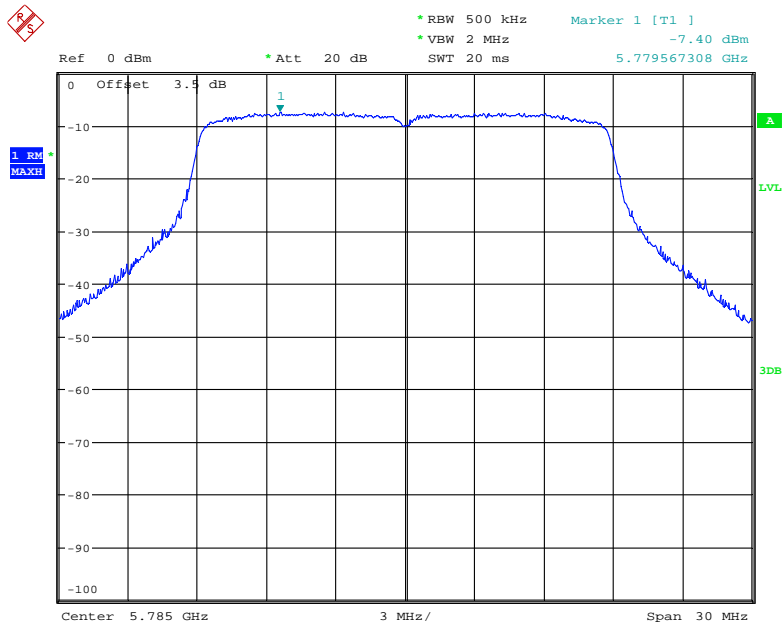

Date: 29.JAN.2018 09:00:46

802.11n20 mode, Power Spectral Density, 5825 MHz

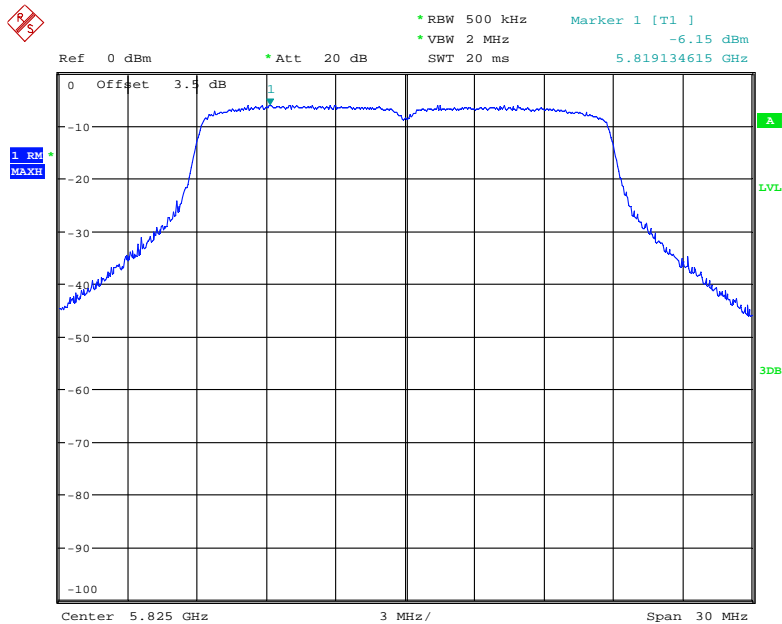

Date: 29.JAN.2018 09:01:41

***** END OF REPORT *****