



TEST REPORT

Test Report No. : UL-RPT-RP-13642680-416-FCC

Applicant : SECO S.p.A.
Model No. : E020AV20-FY
FCC ID : Contains FCC ID: 2ALZBLBE616
Technology : WLAN 5 GHz (802.11 a, n)
Test Standard(s) : FCC Parts 15.207, 15.209(a) & 15.407

For details of applied tests refer to test result summary

1. This test report shall not be reproduced in full or partial, without the written approval of UL International Germany GmbH.
2. The results in this report apply only to the sample tested.
3. The test results in this report are traceable to the national or international standards.
4. Test Report Version 1.0
5. Result of the tested sample: **PASS**

Prepared by: Sercan, Usta
Title: Laboratory Engineer
Date: 02 November 2021

Approved by: Rachid, Acharkaoui
Title: Operations Manager
Date: 17 November 2022



Deutsche
Akkreditierungsstelle
D-PL-19381-02-00

This laboratory is accredited by DAkkS.
The tests reported herein have been performed in
accordance with its' terms of accreditation.

This page has been left intentionally blank.

Table of Contents

1. Customer Information	4
1.1. Applicant Information	4
1.2. Manufacturer Information	4
2. Summary of Testing	5
2.1. General Information	5
Applied Standards	5
Location	5
Date information	5
2.2. Summary of Test Results	6
2.3. Methods and Procedures	7
2.4. Deviations from the Test Specification	7
3. Equipment Under Test (EUT)	8
3.1. Identification of Equipment Under Test (EUT)	8
3.2. Description of EUT	8
3.3. Modifications Incorporated in the EUT	8
3.4. Additional Information Related to Testing	9
3.5. Support Equipment	10
A. Support Equipment (In-house)	10
B. Support Equipment (Manufacturer supplied)	10
4. Operation and Monitoring of the EUT during Testing	11
4.1. Operating Modes / Worst Case Identification	11
4.2. Configuration and Peripherals	12
4.3. Used Power Settings	13
5. Measurements, Examinations and Derived Results	14
5.1. General Comments	14
5.2. Test Results	15
5.2.1. Transmitter AC Conducted Spurious Emissions	15
5.2.2. Transmitter Duty Cycle	21
Transmitter Out of Band Radiated Emissions	23
5.2.3. Transmitter Out of Band Radiated Emissions (5.15-5.25 GHz band operation)	23
5.2.4. Transmitter Out of Band Radiated Emissions (5.25-5.35 GHz band operation)	35
5.2.5. Transmitter Out of Band Radiated Emissions (5.47-5.725 GHz band operation)	45
Transmitter Band Edge Radiated Emissions	55
5.2.6. Transmitter Band Edge Radiated Emissions(5.15-5.25 GHz band operation)	55
5.2.7. Transmitter Band Edge Radiated Emissions (5.25-5.35 GHz band operation)	60
5.2.8. Transmitter Band Edge Radiated Emissions (5.47-5.725 GHz band operation)	65
6. Measurement Uncertainty	70
7. Used equipment	71
8. Report Revision History	72

1. Customer Information

1.1. Applicant Information

Company Name:	SECO S.p.A.
Company Address:	Via Achille Grandi 20, 52100 Arezzo AR, Italy
Company Phone No.:	+39057526979
Company E-Mail:	customerquality@seco.com
Contact Person:	Giacomo Nucci
Contact E-Mail Address:	giacomo.nucci@seco.com
Contact Phone No.:	+39 0575 26979

1.2. Manufacturer Information

Company Name:	SECO S.p.A.
Company Address:	Via Achille Grandi 20, 52100 Arezzo AR, Italy
Company Phone No.:	+39057526979
Company E-Mail:	customerquality@seco.com
Contact Person:	Alessandro Pali
Contact E-Mail Address:	alessandro.pali@seco.com
Contact Phone No.:	+39 0575 26979

2. Summary of Testing

2.1. General Information

Applied Standards

Specification Reference:	47CFR15.407 and 47CFR15.403
Specification Title:	Code of Federal Regulations Volume 47 (Telecommunications): Part 15 Subpart E (Unlicensed National Information Infrastructure Devices) – Sections 15.403 and 15.407
Specification Reference:	47CFR15.207 and 47CFR15.209
Specification Title:	Code of Federal Regulations Volume 47 (Telecommunications): Part 15 Subpart C (Intentional Radiators) - Sections 15.207 and 15.209

Location

Location of Testing:	UL International Germany GmbH Hedelfinger Str. 61 70327 Stuttgart Germany
Test Firm Registration:	399704

Date information

Order Date:	17 December 2020
EUT arrived:	18 February 2021 to 10 March 2021
Test Dates:	19 April 2021 to 10 May 2021
EUT returned:	-/-

2.2. Summary of Test Results

Clause	Measurement	Complied	Did not comply	Not performed	Not applicable
Part 15.207	Transmitter AC Conducted Emissions	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Part 15.403(i)	Transmitter 26 dB Emission Bandwidth	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Part 15.407(e)	Transmitter Minimum 6 dB Bandwidth (5.725-5.85 GHz band)	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Part 15.35(c)	Transmitter Duty Cycle ⁽¹⁾	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Part 15.407(a)(1)(iv)	Transmitter Maximum Conducted Output Power (5.15-5.25 GHz band)	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Part 15.407(a)(2)	Transmitter Maximum Conducted Output Power (5.25-5.35 GHz & 5.47-5.725 GHz bands)	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Part 15.407(a)(3)	Transmitter Maximum Conducted Output Power (5.725-5.85 GHz band)	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Part 15.407(a)(1)(iv)	Transmitter Peak Power Spectral Density (5.15-5.25 GHz band)	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Part 15.407(a)(2)	Transmitter Peak Power Spectral Density (5.25-5.35 GHz & 5.47-5.725 GHz bands)	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Part 15.407(a)(3)	Transmitter Peak Power Spectral Density (5.725-5.85 GHz band)	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Part 15.407(b)/15.209(a)	Transmitter Out of Band Radiated Emissions	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Part 15.407(b)/15.209(a)	Transmitter Band Edge Radiated Emissions ⁽¹⁾	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Part 15.407(g)	Transmitter Frequency Stability (Temperature & Voltage Variation)	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Part 15.407(h)(1)	Transmitter Power Control	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>

Note(s):

1. The measurement was performed to assist in the calculation of the average measurements.

2.3. Methods and Procedures

Reference:	ANSI C63.10-2013
Title:	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
Reference:	FCC KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 December 14, 2017
Title:	Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices – Part 15, Subpart E
Reference:	KDB 174176 D01 Line Conducted FAQ v01r01 June 3, 2015
Title:	AC Power-Line Conducted Emissions Frequently Asked Questions

2.4. Deviations from the Test Specification

For the measurements contained within this test report, there were no deviations from, additions to, or exclusions from the test specification identified above.

3. Equipment Under Test (EUT)

3.1. Identification of Equipment Under Test (EUT)

Brand Name:	Technogym
Model Name or Number:	/MyWellness Kiosk
Model Number:	E020AV20-FY
Test Sample Serial Number:	E020AV2020400117
Hardware Version Number:	E020AV20-FY
Firmware Version Number:	D09_D33_FCC_cert_key_20210414
FCC ID:	Contains FCC ID: 2ALZBLBE616

3.2. Description of EUT

The equipment under test was the MyWellness Kiosk which is a digital workstation that helps trainers in class management and improves the customer experience as digital coaching features.

It is provided by a control panel (touchscreen display): the customer can obtain class information, check personal goals, track their biometric data.

This equipment under test contains a pre-certified radio module which supports WLAN 2,4 GHz 802.11 b, g, n, WLAN 5 GHz a, n modes, Bluetooth and Bluetooth Low Energy operations.

3.3. Modifications Incorporated in the EUT

No modifications were applied to the EUT during testing.

3.4. Additional Information Related to Testing

Technology Tested:	WLAN (IEEE 802.11a) / U-NII – 1 / 2A / 2C				
Type of Unit:	Transceiver				
Modulation:	BPSK, QPSK, 16QAM & 64QAM				
Data rates:	802.11a	6 Mbps	(Note2)		
Power Supply Requirement(s):	Nominal	100-240 VAC			
Declared Antenna Gain:	4.8 dBi				
Antenna Type:	PCB Antenna				
Antenna Details:	Type: Unbalanced dipole PCB antenna Part / Model No.: 616SE_400_IPX4 Manufacturer: Dynaflex				
Maximum Average Output Power:	20 MHz	14.82 dBm (Note 1)			
Channel Spacing:	20 MHz				
Transmit Frequency Band:	5150 MHz to 5250 MHz [U-NII-1]				
Transmit Channels Tested:	Channel ID	Channel Number	Channel Frequency (MHz)		
	Bottom	36	5180		
	Bottom +1 / Middle	40	5200		
	Top	48	5240		
Transmit Frequency Band:	5250 MHz to 5350 MHz [U-NII-2A]				
Transmit Channels Tested (Note 2):	Channel ID	Channel Number	Channel Frequency (MHz)		
	Bottom	52	5260		
	Top-1	60	5300		
	Top	64	5320		
Transmit Frequency Band:	5470 MHz to 5725 MHz [U-NII-2C]				
Transmit Channels Tested (Note 2):	Channel ID	Channel Number	Channel Frequency (MHz)		
	Bottom	100	5500		
	Bottom +1	104	5520		
	Middle	116	5580		
	Top-1	136	5680		
	Top	140	5700		
	(Note 1) Value taken from test report, serial number 1802WSU008-U4, for pre-certified radio module FCC ID: VPYLBEE5HY1MW				
(Note 2) Regarding KDB 996369 D04 Module Integration Guide v02: "b) Perform testing on unwanted (spurious) radiated emissions on the worst-case modulation and channel per frequency range as shown in original filing. So only worst case mode tested.					

3.5. Support Equipment

The following support equipment was used to exercise the EUT during testing:

A. Support Equipment (In-house)

Item	Description	Brand Name	Model Name or Number	Serial Number
1	USB Pen Drive	N/A	N/A	N/A

B. Support Equipment (Manufacturer supplied)

Item	Description	Brand Name	Model Name or Number	Serial Number
1	External Speaker	ZAFFIRO	N/A	N/A
2	External Microphone with Cable(5m)	ELKON	DM800	N/A
3	External LCD Screen	Asus	LCD Monitor	EBLMTF261423
4	HDMI Cable (2m)	N/A	N/A	N/A
5	LAN Cable (2m)	N/A	N/A	N/A
6	2 x AC Power Cable (2.4m)	N/A	N/A	N/A
7	Audio able (1.8m)	N/A	N/A	N/A
8	Micro USB Cable (2m)	N/A	N/A	N/A

4. Operation and Monitoring of the EUT during Testing

4.1. Operating Modes / Worst Case Identification

The EUT was tested in the following operating mode(s):

Transmitter / Modulated Carrier Continuous Transmissions Mode WLAN 5 GHz, Worst Cases*:

- 802.11a 6 Mbps: I UNII-1 Bottom Channel I Power Level 16
- 802.11a 6 Mbps: I UNII-1 Bottom +1 / Middle Channel I Power Level 30
- 802.11a 6 Mbps: I UNII-1 Top Channel I Power Level 30
- 802.11a 6 Mbps: I UNII-2A Bottom Channel I Power Level 30
- 802.11a 6 Mbps: I UNII-2A Top-1 Channel I Power Level 30
- 802.11a 6 Mbps: I UNII-2A Top Channel I Power Level 16
- 802.11a 6 Mbps: I UNII-2C Bottom Channel I Power Level 18
- 802.11a 6 Mbps: I UNII-2C Bottom +1 Channel I Power Level 30
- 802.11a 6 Mbps: I UNII-2C Middle Channel I Power Level 30
- 802.11a 6 Mbps: I UNII-2C Top-1 Channel I Power Level 30
- 802.11a 6 Mbps: I UNII-2C Top Channel I Power Level 16

** Worst case data rate taken from test report, serial number 1802WSU008-U4, for pre-certified radio module FCC ID: VPYLBEE5HY1MW

4.2. Configuration and Peripherals

The EUT was tested in the following configuration(s):

- The applicant supplied a document containing the setup instructions “Quick guide - Radio Test _ WiFi&BT _ Kiosk with Murata.pdf”

EUT Power Supply:

- The EUT was powered by 120 V / 60 Hz AC supply.

Test Mode Activation:

- “The test modes were activated using touch screen. Touch screen was used to enable continuous transmission and to select the test channels as required.
- EUT were configured to transmit test modes continuously with power level 16 for bottom, 30 for Middle and Top Channel.
- As the EUT was transmitting continuously with a Duty Cycle of 97.74 %, a Duty Cycle Correction Factor of 0.10 dB was added to all average measurements.

AC Conducted Line Measurements:

- The EUT was connected to 120 VAC /60 Hz & 240 VAC/60 Hz single phase supply via a LISN.
- In accordance with ANSI 63.10 Section 6.3 “A typical arrangement for floor-standing equipment is shown in Figure 6, with LISNs located above the ground plane was used for AC Conducted emission measurements. The antenna of the EUT was located at a height of 1.5 m above the floor, and the intentional radiator circuitry was located within the system at a height of at least 0.8 m above the floor.

Radiated Measurements:

- The EUT connected with all accessories.
- The radiated samples with integrated on PCB antenna were used for radiated spurious emission measurements.
- As per applicant’s declaration, EUT must be placed in standing position for its’ intended application therefore this report includes relevant results.
- In accordance with ANSI 63.10 Section 6.3 “A typical arrangement for floor-standing equipment is shown in Figure 6, except that the LISNs located above the ground plane was used for radiated measurements. The antenna of the EUT was located at a height of 1.5 m above the floor, and the intentional radiator circuitry was located within the system at a height of at least 0.8 m above the floor.
- Radiated measurements below 30 MHz were performed with the EUT positioned on the turn table and rotating 360 degrees while the loop antenna height was set to 150 cm.
- Radiated measurements above 30 MHz were performed with the EUT positioned on the turn table and rotating 360 degrees while the antenna height varies from 1 to 4 m over the measurement frequency range.
- R&S® EMC32 V10.60.10 Software was used for the Radiated spurious emission measurements.

4.3. Used Power Settings

The EUT was configured with following GUI Power Settings (PWL) & test channels

Tested Channels & Power Levels				
5150 MHz to 5250 MHz [U-NII-1 Band]				
Nominal Channel Bandwidth	20 MHz			
Test Channel	36	40	44	48
a-mode: 6 Mbit	16	30	30	30
5250 MHz to MHz [U-NII-2A Band]				
Nominal Channel Bandwidth	20 MHz			
Test Channel	52	60	64	
a-mode: 6 Mbit	30	30	16	
5470 MHz to 5725 MHz [U-NII-2C Band]				
Nominal Channel Bandwidth	20 MHz			
Test Channel	100	104	116	136
a-mode: 6 Mbit	18	30	30	16

5. Measurements, Examinations and Derived Results

5.1. General Comments

Measurement uncertainties are evaluated in accordance with current best practice. Our reported expanded uncertainties are based on standard uncertainties, which are multiplied by an appropriate coverage factor to provide a statistical confidence level of approximately 95%. Please refer to Section 6 *Measurement Uncertainty* for details.

In accordance with DAkkS requirements all the measurement equipment is on a calibration schedule. All equipment was within the calibration period on the date of testing.

5.2. Test Results

5.2.1. Transmitter AC Conducted Spurious Emissions

Test Summary:

Test Engineer:	Bernd Woerl	Test Date:	22 April 2021
Test Sample Serial Number:	E020AV2020400117(Radiated Test Sample)		
Test Site Identification	SR 7/8		

FCC Reference:	Part 15.207
Test Method Used:	ANSI C63.10 Section 6.2 / FCC KDB 174176 and notes below

Environmental Conditions:

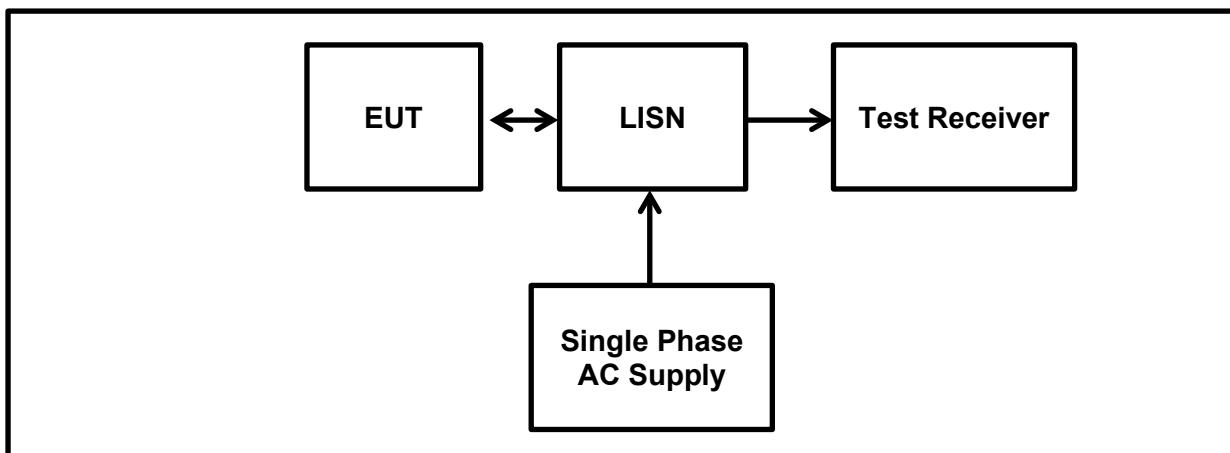
Temperature (°C):	20
Relative Humidity (%):	33

Settings of the Instrument

Detector	Quasi Peak/ Average Peak
-----------------	--------------------------

Note(s):

1. Measurements were performed in shielded room (SR7/ 8 Asset Number 1603671). The EUT was placed at a height of 10 cm above the reference ground plane and in a distance of 40 cm from the vertical ground plane at the edge of the table.
2. Measurement software used: Toyo EMI Software; CE measurement software EP5/CE Ver 4.0.1.
3. The EUT was powered via 120 VAC 60 Hz or 240 V AC / 60 Hz single phase supply via a LISN.
4. In accordance with FCC KDB 174176 Q4, tests were performed with a 240 VAC 60 Hz single phase supply as this was within the voltage range marked on the 100-240 VAC~50/60 Hz power supply.
5. The EUT was configured on middle channel with the power setting of 30.
6. All other emissions shown on the pre-scan plot were investigated. Only the highest 6 emissions have been reported in the tables below in accordance with ANSI C63.10 section 6.2.5.
7. The final measured value, for the given emission, in the table below incorporates the cable loss. Calculation: Level = test receiver reading + path loss (cable attenuation + correction LISN).

Transmitter AC Conducted Spurious Emissions (continued)**Test setup:**

Transmitter AC Conducted Spurious Emissions (continued)**Results: 802.11a / 20 MHz / PWR30 / Middle Channel / 6 Mbps****Results: 120 VAC 60 Hz / Live / Quasi Peak**

Frequency (MHz)	Line	Level (dB μ V)	Limit (dB μ V)	Margin (dB)	Result
0.1851	Live	43.2	64.3	21.1	Complied
0.1994	Live	43.7	63.6	19.9	Complied
0.2428	Live	42.4	62.0	19.6	Complied
0.2444	Live	42.2	61.9	19.7	Complied
20.4500	Live	47.0	60.0	13.0	Complied
21.1730	Live	45.1	60.0	14.9	Complied

Results: 120 VAC 60 Hz / Live / Average

Frequency (MHz)	Line	Level (dB μ V)	Limit (dB μ V)	Margin (dB)	Result
0.1851	Live	26.1	54.3	28.2	Complied
0.1994	Live	29.5	53.6	24.1	Complied
0.2428	Live	25.1	52.0	26.9	Complied
0.2444	Live	25.8	51.9	26.1	Complied
20.4500	Live	42.6	50.0	7.4	Complied
21.1730	Live	41.9	50.0	8.1	Complied

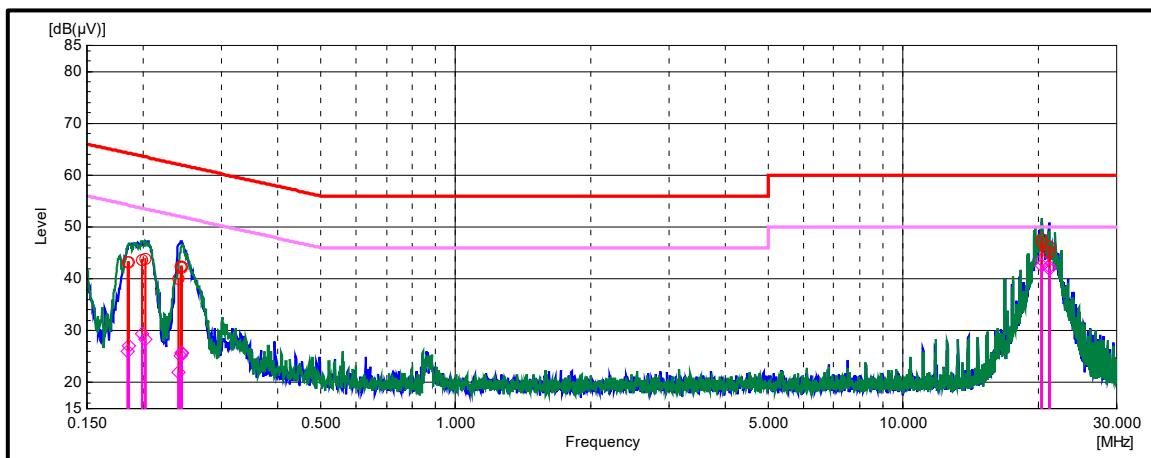
Results: 120 VAC 60 Hz / Neutral / Quasi Peak

Frequency (MHz)	Line	Level (dB μ V)	Limit (dB μ V)	Margin (dB)	Result
0.1864	Neutral	43.2	64.2	21.0	Complied
0.2031	Neutral	43.9	63.5	19.6	Complied
0.2399	Neutral	39.9	62.1	22.2	Complied
0.2440	Neutral	42.3	62.0	19.7	Complied
20.4498	Neutral	47.6	60.0	12.4	Complied
21.1686	Neutral	46.1	60.0	13.9	Complied

Transmitter AC Conducted Spurious Emissions (continued)**Results: 802.11a / 20 MHz / PWR30 / Middle Channel / 6 Mbps****Results: 120 VAC 60 Hz / Neutral / Average**

Frequency (MHz)	Line	Level (dB μ V)	Limit (dB μ V)	Margin (dB)	Result
0.1864	Neutral	27.2	54.2	27.0	Complied
0.2031	Neutral	28.4	53.5	25.1	Complied
0.2399	Neutral	22.0	52.1	30.1	Complied
0.2440	Neutral	25.6	52.0	26.4	Complied
20.4498	Neutral	43.6	50.0	6.4	Complied
21.1686	Neutral	42.4	50.0	7.6	Complied

Result: Pass

Plot: 120 VAC 60 Hz / Live and Neutral Line

Note: These plots are pre-scans and for indication purposes only. For final measurements, see accompanying tables.

Transmitter AC Conducted Spurious Emissions (continued)**Results: 802.11a / 20 MHz / PWR30 / Middle Channel / 6 Mbps****Results: 240 VAC 60 Hz / Live / Quasi Peak**

Frequency (MHz)	Line	Level (dB μ V)	Limit (dB μ V)	Margin (dB)	Result
0.1850	Live	45.3	64.3	19.0	Complied
0.2007	Live	45.5	63.6	18.1	Complied
0.2474	Live	41.7	61.8	20.1	Complied
19.7872	Live	47.0	60.0	13.0	Complied
20.4304	Live	45.8	60.0	14.2	Complied
21.2276	Live	46.3	60.0	13.7	Complied

Results: 240 VAC 60 Hz / Live / Average

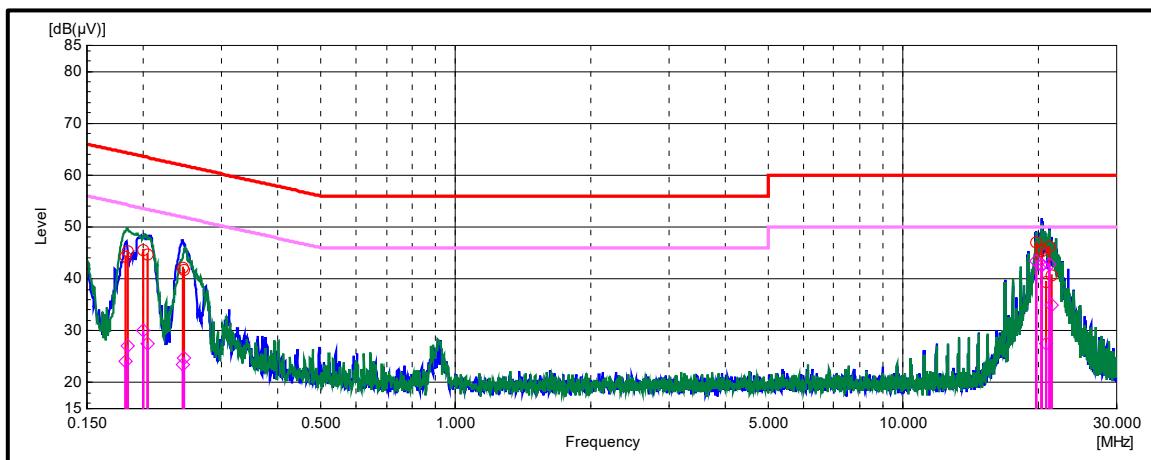
Frequency (MHz)	Line	Level (dB μ V)	Limit (dB μ V)	Margin (dB)	Result
0.1850	Live	27.0	54.3	27.3	Complied
0.2007	Live	30.0	53.6	23.6	Complied
0.2474	Live	24.7	51.8	27.1	Complied
19.7872	Live	43.4	50.0	6.6	Complied
20.4304	Live	42.5	50.0	7.5	Complied
21.2276	Live	42.8	50.0	7.2	Complied

Results: 240 VAC 60 Hz / Neutral / Quasi Peak

Frequency (MHz)	Line	Level (dB μ V)	Limit (dB μ V)	Margin (dB)	Result
0.1826	Neutral	44.2	64.4	20.2	Complied
0.2053	Neutral	44.8	63.4	18.6	Complied
0.2454	Neutral	42.1	61.9	19.8	Complied
20.4308	Neutral	45.3	60.0	14.7	Complied
20.8278	Neutral	39.5	60.0	20.5	Complied
21.5038	Neutral	40.6	60.0	19.4	Complied

Transmitter AC Conducted Spurious Emissions (continued)**Results: 802.11a / 20 MHz / PWR30 / Middle Channel / 6 Mbps****Results: 240 VAC 60 Hz / Neutral / Average**

Frequency (MHz)	Line	Level (dB μ V)	Limit (dB μ V)	Margin (dB)	Result
0.1826	Neutral	24.1	54.4	30.3	Complied
0.2053	Neutral	27.5	53.4	25.9	Complied
0.2454	Neutral	23.4	51.9	28.5	Complied
20.4308	Neutral	42.7	50.0	7.3	Complied
20.8278	Neutral	27.5	50.0	22.5	Complied
21.5038	Neutral	35.0	50.0	15.0	Complied

Result: Pass**Plot: 240 VAC 60 Hz / Live and Neutral Line**

Note: These plots are pre-scans and for indication purposes only. For final measurements, see accompanying tables.

5.2.2. Transmitter Duty Cycle

Test Summary:

Test Engineer:	Sercan Usta	Test Date:	19 April 2021
Test Sample Serial Number:	E020AV2020400117(Radiated Test Sample)		
Test Site Identification	SR 1/2		

FCC Reference:	Part 15.35(c)
Test Method Used:	FCC KDB 789033 D02 Section II.B.2.b)

Environmental Conditions:

Temperature (°C):	29
Relative Humidity (%):	47

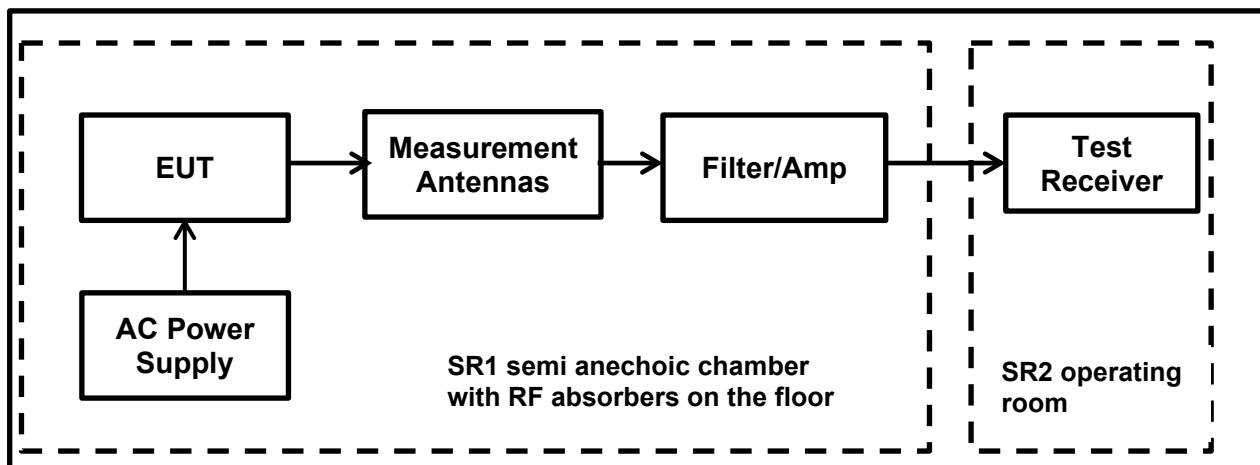
Notes:

1. The transmitter duty cycle was measured using a spectrum analyser in the time domain and calculated by using the following calculation:

Duty Cycle (%) = 100 X [On Time (Ton)] / [Period(Ton+ ToFF) or 100ms whichever is the lesser]

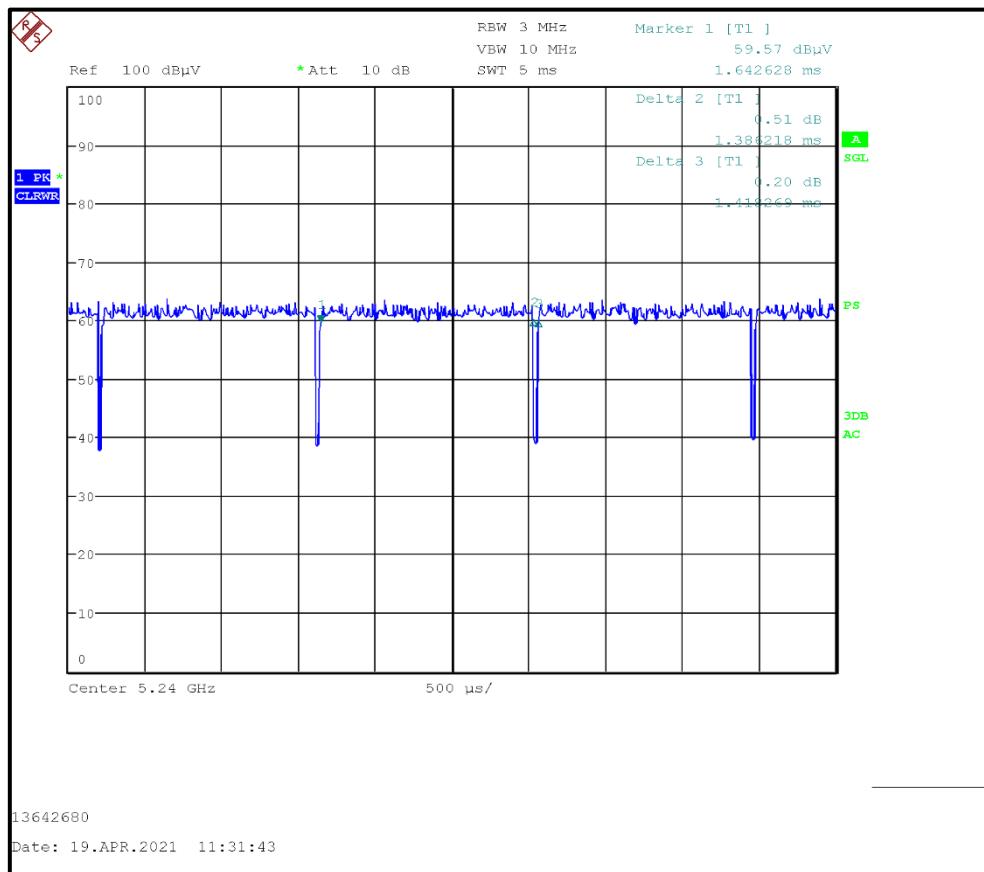
Duty Cycle Correction Factor= 10 log 1 / [On Time (Ton)] / [Period(Ton+ ToFF) or 100ms whichever is the lesser]

Test Setup:



Transmitter Duty Cycle (continued)**Results: UNII-1 / 802.11a / 20 MHz / PWR30 / Top Channel / 6 Mbps**

Pulse On Time (T_{ON}) (ms)	Pulse Period ($T_{ON} + T_{OFF}$) (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)
1.386	1.418	97.74	0.10

**Result: Pass**

Transmitter Out of Band Radiated Emissions

5.2.3. Transmitter Out of Band Radiated Emissions (5.15-5.25 GHz band operation)

Test Summary:

Test Engineer:	Sercan Usta	Test Date:	26 April 2021
Test Sample Serial Number:	E020AV2020400117(Radiated Test Sample)		
Test Site Identification	SR 1/2		

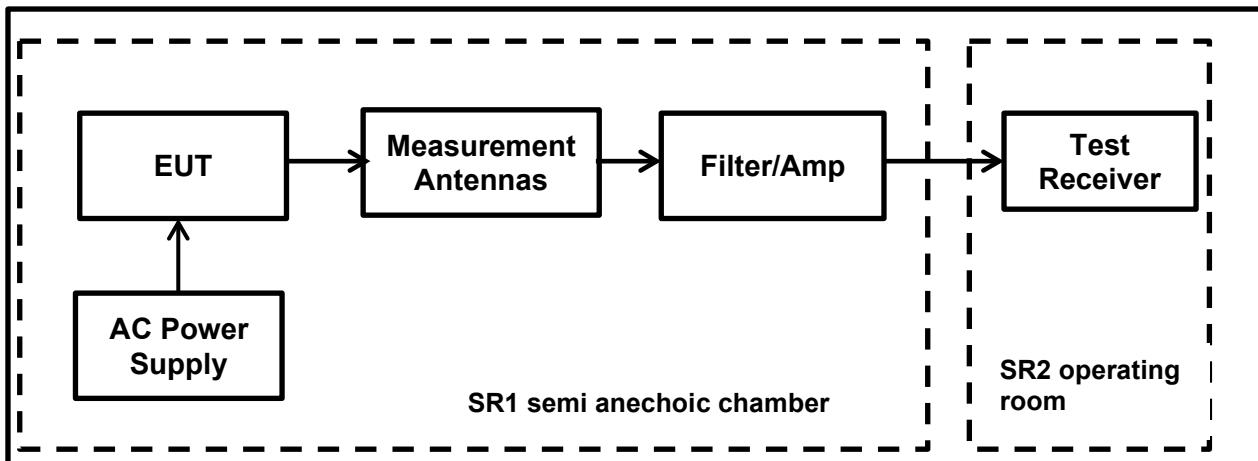
FCC Reference:	Parts 15.407(b)(1),(9) & 15.209(a)
Test Method Used:	FCC KDB 789033 II .G.1, II .G.2, II .G.3 & II .G.4. & ANSI C63.10 Sections 6.3 and 6.4
Frequency Range:	9 kHz to 30 MHz

Environmental Conditions:

Temperature (°C):	21.7
Relative Humidity (%):	47.2

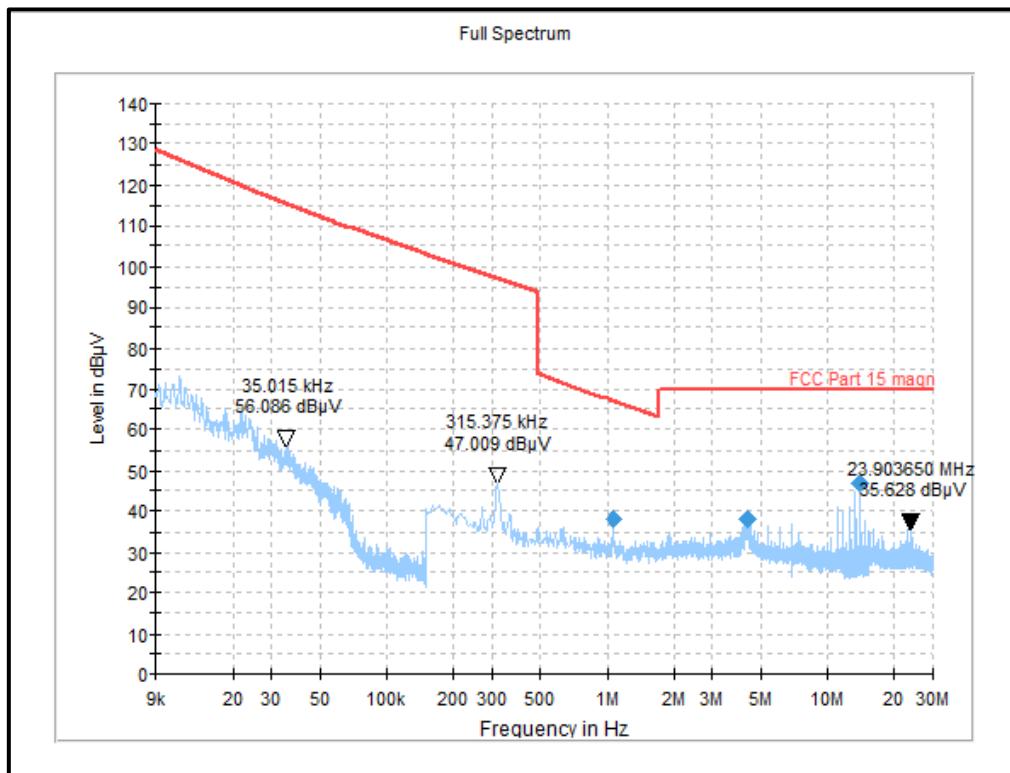
Note(s):

1. In accordance with FCC KDB 414788 D01 Radiated Test Site & ANSI C63.10 clause 5.2 an alternative test site that can demonstrate equivalence to a open area test site may be used. Therefore, the measurement was performed in a Semi Anechoic Chamber. (The OATS / SAC comparison data is available upon request).
2. The limits are specified at a test distances of 30 and 300 metres. However, as specified in FCC Section 15.31 (f)(2) & ANSI C63.10 clause 6.4.3, measurements may be performed at a closer distance and the measured level extrapolated to the specified measurement distance using the method described in clauses 6.4.4, specifically sub-clause 6.4.4.1 which specifies that the measured level shall be extrapolated to the specified distance by conservatively presuming that the field strength decays at 40 dB/decade.
3. Therefore, the limit values are extrapolated to a measurement distance of 3 m.
 - 9 kHz- 490 kHz: limits extrapolated from 300 m to 3 m by adding 80 dB at 40 dB/decade.
 - 490 kHz-1705 kHz: limits extrapolated from 30 m to 3 m by adding 40 dB /decade.
4. Pre-scans with the EUT transmitting were measured according to FCC Part 15.407(b)(1) which states for transmitters operating in the band 5.15 to 5.25 GHz: all emissions outside of the band 5.15-5.35 GHz band shall not exceed -27 dBm/MHz. Part(b)(7) states the provisions of 15.205 apply, e.g. restricted bands of operation.
5. The preliminary scans showed similar emission levels below 30 MHz, for each channel of operation. Therefore, final radiated emissions measurements were performed with the EUT set to the middle channel only.
6. The final measured value, for the given emission in the field strength result tables, incorporates the calibrated antenna factor and cable loss. All other emissions shown on the pre-scan plots were found to be below the measurement system noise floor or ambient, therefore the highest peak noise floor reading of the measuring receiver was recorded in the table below.
7. Measurements below 1 GHz were performed in a semi-anechoic chamber (Asset Number K0001) at a distance of 3 metres. The EUT was a floor standing equipment which 120 cm height. EUT was placed in the centre of the chamber turntable on 30 cm non-conductive material The EUT was a floor standing equipment which 120 cm height. EUT was placed in the centre of the chamber turntable on 30 cm non-conductive material. The measurement loop antenna height was 150 cm.

Transmitter Out of Band Radiated Emissions (5.15-5.25 GHz band operation) (continued)**Test Setup:**

Transmitter Out of Band Radiated Emissions (5.15-5.25 GHz band operation) (continued)**Results: UNII-1 / 802.11a / 20 MHz / PWR 30 / Middle Channel / 6 Mbps**

Frequency (MHz)	Antenna Polarization	Peak Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
1.07	Vertical	38.23	66.82	28.59	Complied
4.34	Vertical	38.10	70.00	31.90	Complied
13.91	Vertical	46.67	70.00	23.33	Complied

Plot: 9 kHz – 30 MHz: UNII-1 / 802.11a / 20 MHz / PWR 30 / Middle Channel / 6 Mbps**Result: Pass**

Transmitter Out of Band Radiated Emissions (5.15-5.25 GHz band operation) (continued)**Test Summary:**

Test Engineer:	Sercan Usta	Test Date:	26 April 2021
Test Sample Serial Number:	E020AV2020400117(Radiated Test Sample)		
Test Site Identification	SR 1/2		

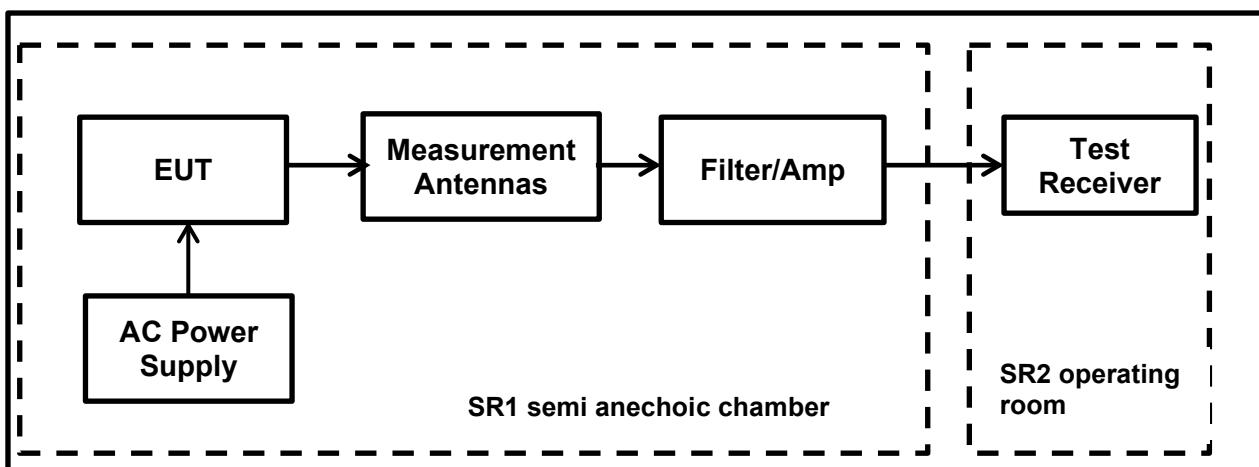
FCC Reference:	Parts 15.407(b)(1),(9) & 15.209(a)
Test Method Used:	FCC KDB 789033 II .G.1, II .G.2, II .G.3 & II .G.4 & ANSI C63.10 Sections 6.3 and 6.5
Frequency Range:	30 MHz to 1000 MHz

Environmental Conditions:

Temperature (°C):	21.7
Relative Humidity (%):	47.2

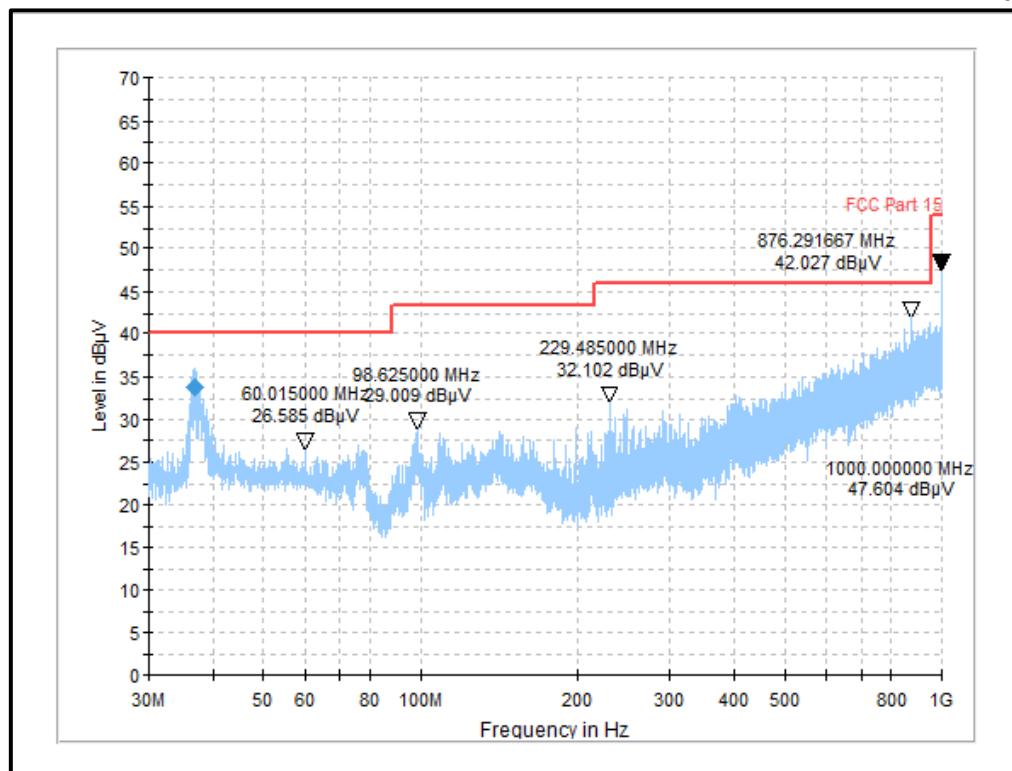
Note(s):

1. The preliminary scans showed similar emission levels below 1 GHz, for each channel of operation. Therefore, final radiated emissions measurements were performed with the EUT set to the middle channel only.
2. The final measured value, for the given emission in the field strength result tables, incorporates the calibrated antenna factor and cable loss.
3. All other emissions shown on the pre-scan plots were found to be below the measurement system noise floor or ambient, therefore the highest peak noise floor reading of the measuring receiver was recorded in the table below.
4. Pre-scans with the EUT transmitting were measured according to FCC Part 15.407(b)(1) which states for transmitters operating in the band 5.15 to 5.25 GHz: all emissions outside of the band 5.15-5.35 GHz band shall not exceed -27 dBm/MHz. Part(b)(7) states the provisions of 15.205 apply, e.g. restricted bands of operation.
5. Measurements below 1 GHz were performed in a semi-anechoic chamber (Asset Number K0001) at a distance of 3 metres. The EUT was a floor standing equipment which 120 cm height. EUT was placed in the centre of the chamber turntable on 30 cm non-conductive material. Maximum emission levels were determined by height searching the measurement antenna over the range 1 m to 4 m.

Transmitter Out of Band Radiated Emissions (continued)**Test Setup:**

Transmitter Out of Band Radiated Emissions (5.15-5.25 GHz band operation) (continued)**Results: UNII-1 / 802.11a / 20 MHz / PWR30 / Middle Channel / 6 Mbps**

Frequency (MHz)	Antenna Polarization	Peak Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
36.98	Vertical	33.73	40.00	6.27	Complied

Plot: 30 MHz – 1GHz: UNII-1 / 802.11a / 20 MHz / PWR 30 / Middle Channel / 6 Mbps**Result: Pass**

Transmitter Out of Band Radiated Emissions (5.15-5.25 GHz band operation) (continued)**Test Summary:**

Test Engineer:	Sercan Usta	Test Date:	21 & 26 April 2021
Test Sample Serial Number:	E020AV2020400117(Radiated Test Sample)		
Test Site Identification	SR 1/2		

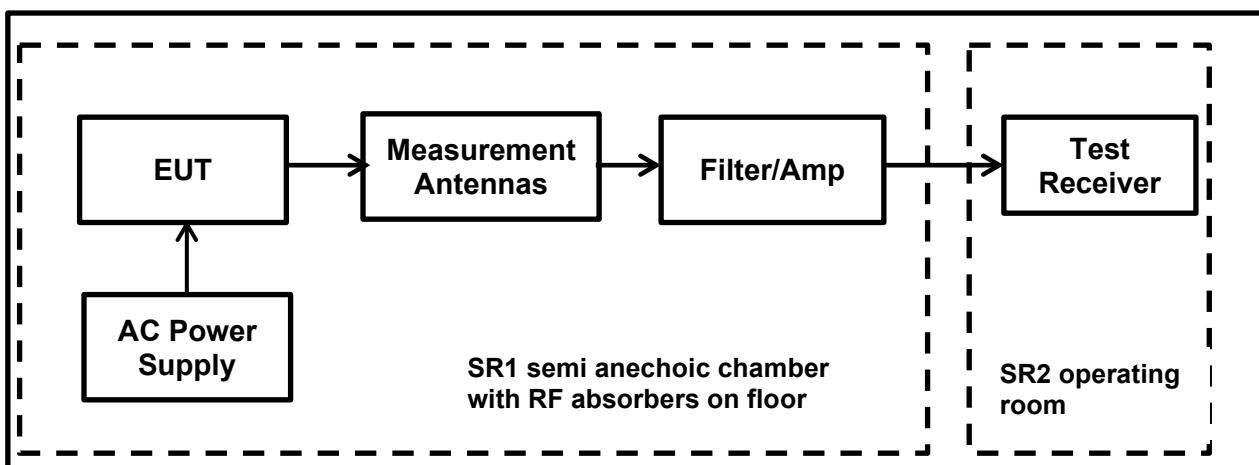
FCC Reference:	Parts 15.407(b)(1),(8) & 15.209(a)
Test Method Used:	FCC KDB 789033 II .G.1, II .G.2, II .G.3, II .G.5 &, II .G.6 ANSI C63.10:2013 Sections 6.3 and 6.6
Frequency Range:	1 GHz to 40 GHz

Environmental Conditions:

Temperature (°C):	21.7
Relative Humidity (%):	47.2

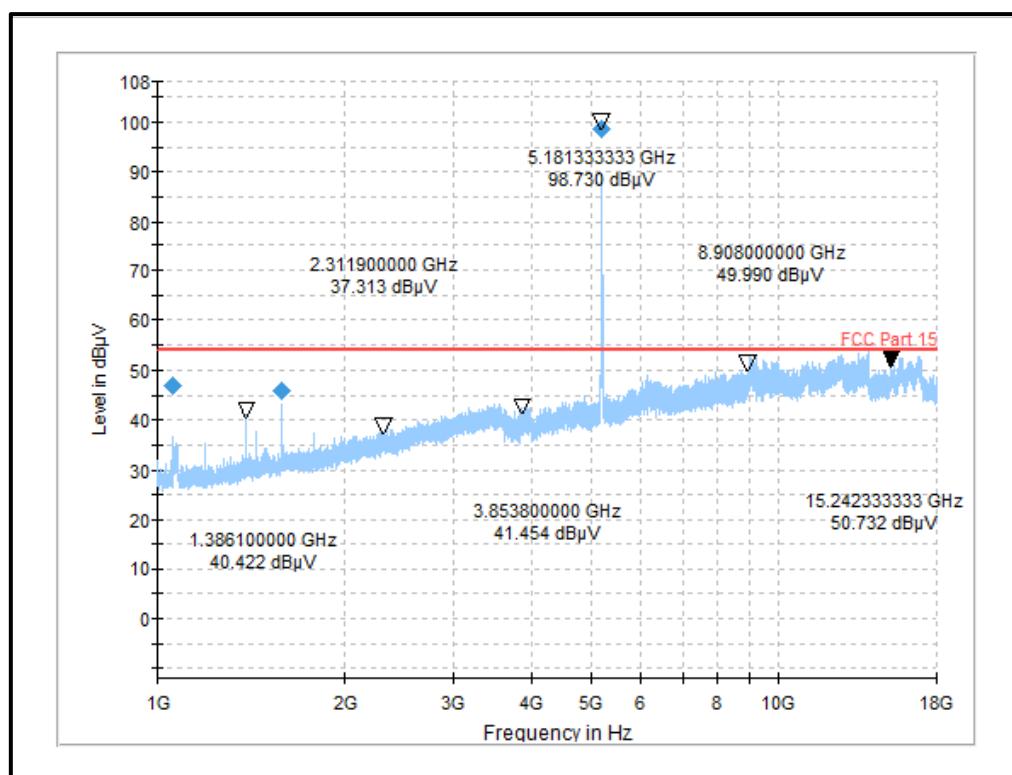
Note(s):

1. The emissions shown at frequencies approximately 5.15-5.25 GHz on the 1 GHz to 18 GHz plots are the EUT fundamental for the tested channel.
2. Pre-scans with the EUT transmitting were measured according to FCC Part 15.407(b)(1) which states for transmitters operating in the band 5.15 to 5.25 GHz: all emissions outside of the band 5.15-5.35 GHz band shall not exceed -27 dBm/MHz. Part(b)(7) states the provisions of 15.205 apply, e.g. restricted bands of operation.
3. The final measured value, for the given emission in the field strength result tables, incorporates the calibrated antenna factor and cable loss.
4. All other emissions shown on the pre-scan plots were found to be below the measurement system noise floor or ambient, therefore the highest peak noise floor reading of the measuring receiver was recorded in the table below.
5. Pre-scans above 1 GHz were performed in a fully anechoic chamber (Asset Number K0002) at a distance of 3 metres. The EUT was placed at a height of 1.5 metres above the test chamber floor in the centre of the chamber turntable. All measurement antennas were placed at a fixed height of 1.5 metres above the test chamber floor, in line with the EUT. Final measurements above 1 GHz were performed in a semi-anechoic chamber (Asset Number K0001) at a distance of 3 metres. The EUT was placed at a height of 1.5 m above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.
6. For unwanted emissions measured with Peak detector there are two limit possibilities:
 - According to FCC 15.209
 - peak limit (above 1 GHz) is 74 dB μ V/m (restricted band limit)
 - average limit (above 1 GHz) is 54 dB μ V/m (restricted band limit)
 - According to FCC 15.407(b)(1) peak limit is 68.2 dB μ V/m (non-restricted band limit)
7. Therefore, unwanted emissions in restricted as well non restricted bands, measured with Peak detector & lowest average limit (above 1 GHz) is 54 dB μ V/m (restricted band limit) has been applied.
8. * In accordance with KDB 789033 Section II.G.1.c) If all peak measurements satisfy the average limit, then average measurements are not required.

Transmitter Out of Band Radiated Emissions Test setup**Test Setup:**

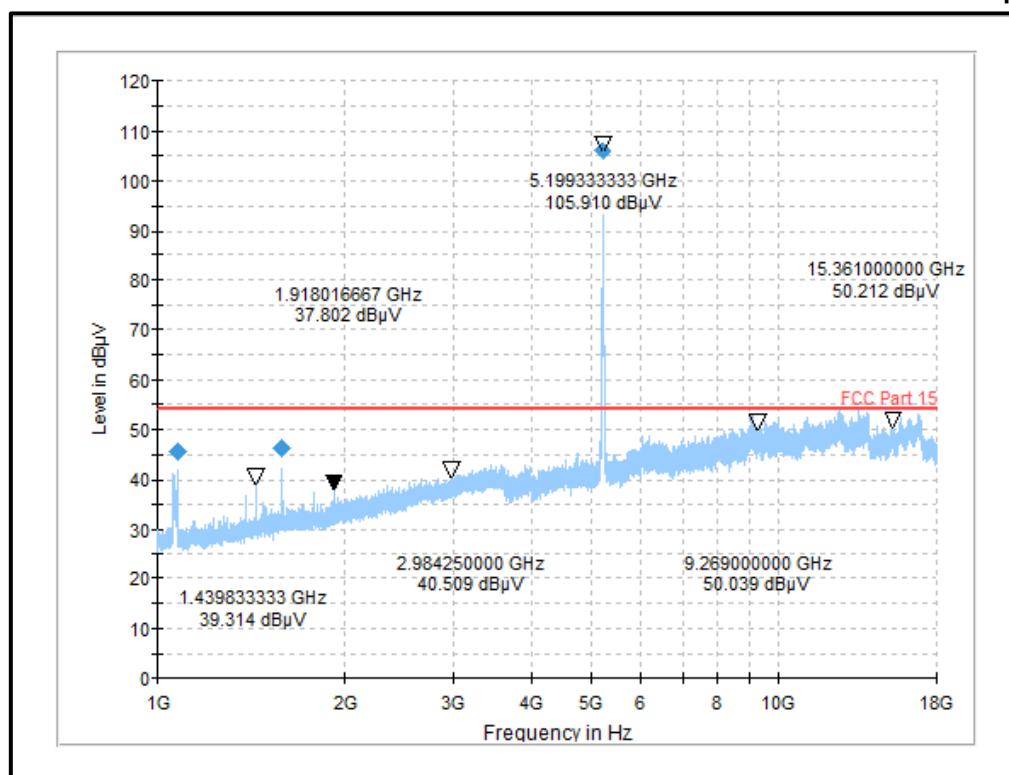
Transmitter Out of Band Radiated Emissions (5.15-5.25 GHz band operation) (continued)**Results: UNII-1 / 802.11a / 20 MHz / PWR16 / Bottom Channel / 6 Mbps**

Frequency (MHz)	Antenna Polarization	Peak Level (dB μ V/m)	Limit* (dB μ V/m)	Margin (dB)	Result
1057.20	Vertical	46.97	54.00	7.03	Complied
1583.92	Vertical	46.04	54.00	7.96	Complied

Plot: 1 GHz – 18 GHz: UNII-1 / 802.11a / 20 MHz / PWR 16 / Bottom Channel / 6 Mbps**Result: Pass**

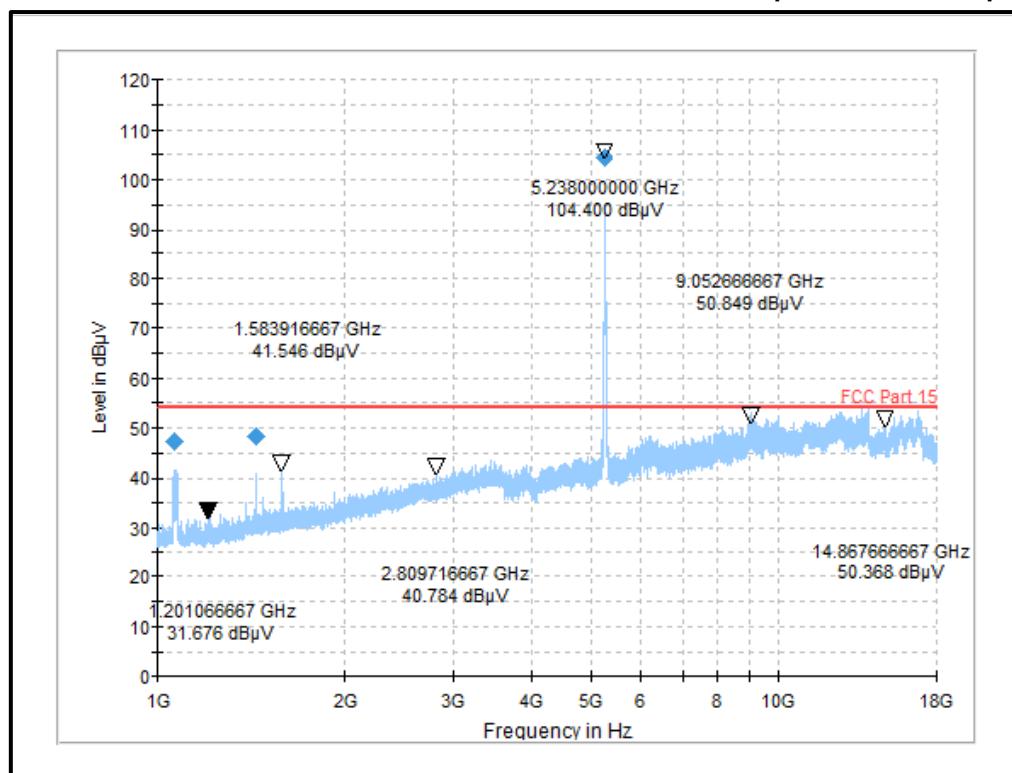
Transmitter Out of Band Radiated Emissions (5.15-5.25 GHz band operation) (continued)**Results: UNII-1 / 802.11a / 20 MHz / PWR30 / Middle Channel / 6 Mbps**

Frequency (MHz)	Antenna Polarization	Peak Level (dB μ V/m)	Limit* (dB μ V/m)	Margin (dB)	Result
1078.65	Vertical	45.55	54.00	8.45	Complied
1583.92	Vertical	46.14	54.00	7.86	Complied

Plot: 1 GHz – 18 GHz: UNII-1 / 802.11a / 20 MHz / PWR30 / Middle Channel / 6 Mbps**Result: Pass**

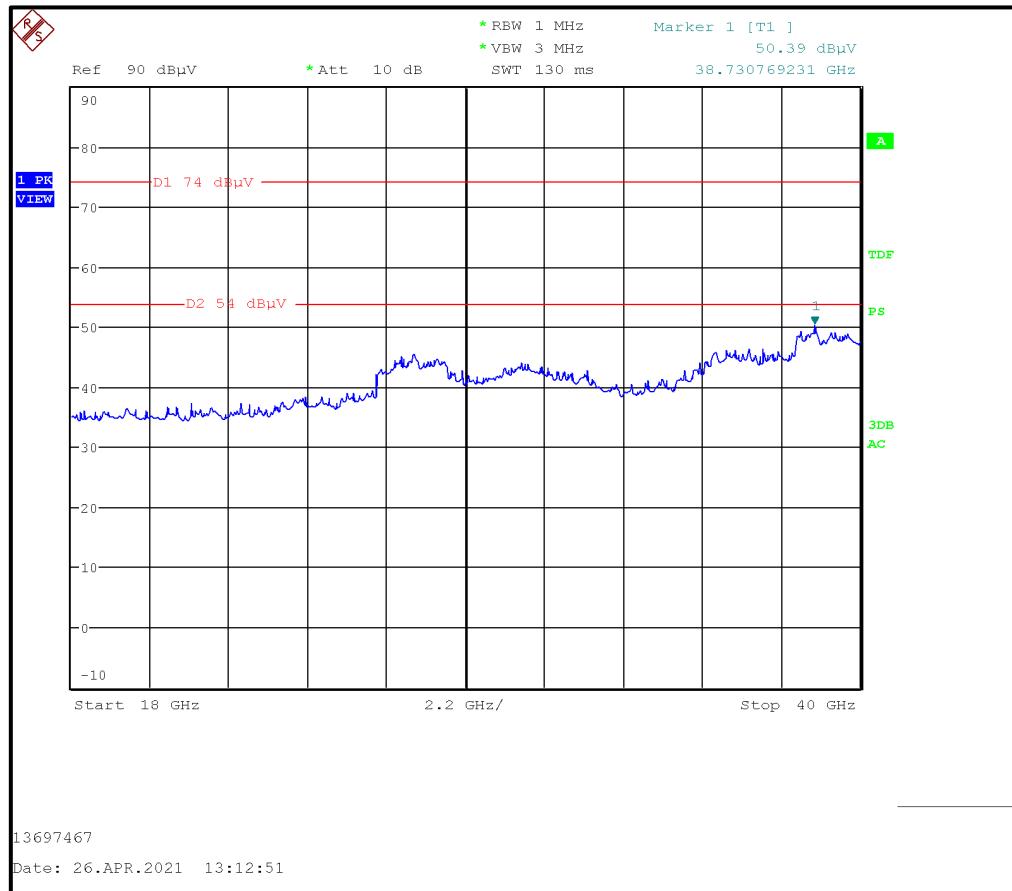
Transmitter Out of Band Radiated Emissions (5.15-5.25 GHz band operation) (continued)**Results: UNII-1 / 802.11a / 20 MHz / PWR30 / Top Channel / 6 Mbps**

Frequency (MHz)	Antenna Polarization	Peak Level (dB μ V/m)	Limit* (dB μ V/m)	Margin (dB)	Result
1066.95	Vertical	47.28	54.00	6.72	Complied
1440.92	Vertical	48.35	54.00	5.65	Complied

Plot: 1 GHz – 18 GHz: UNII-1 / 802.11a / 20 MHz / PWR30 / Top Channel / 6 Mbps**Result: Pass**

Transmitter Out of Band Radiated Emissions (5.15-5.25 GHz band operation) (continued)**Results: UNII-1 / 802.11a / 20 MHz / PWR30 / Middle Channel / 6 Mbps**

Frequency (MHz)	Antenna Polarization	Peak Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
All emissions were below the level of the measurement system noise floor.					

Plot: 18 GHz – 40 GHz : UNII-1 / 802.11a / 20 MHz / PWR30 / Middle Channel / 6 Mbps**Result: Pass**

5.2.4. Transmitter Out of Band Radiated Emissions (5.25-5.35 GHz band operation)**Test Summary:**

Test Engineer:	Sercan Usta	Test Date:	10 May 2021
Test Sample Serial Number:	E020AV2020400117(Radiated Test Sample)		
Test Site Identification	SR 1/2		

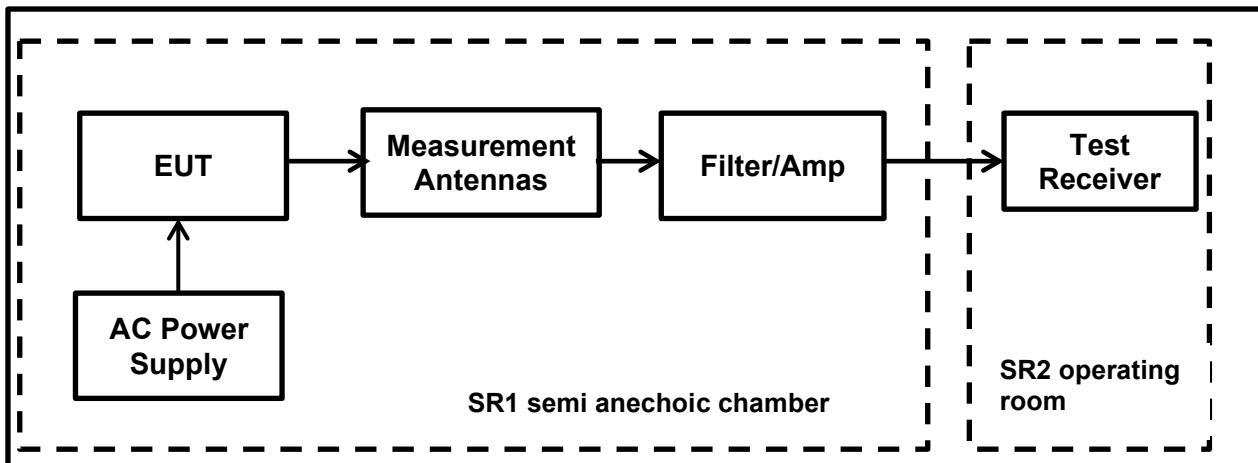
FCC Reference:	Parts 15.407(b)(2),(9) & 15.209(a)
Test Method Used:	FCC KDB 789033 II .G.1, II .G.2, II .G.3 & II .G.4. & ANSI C63.10 Sections 6.3 and 6.4
Frequency Range:	9 kHz to 30 MHz

Environmental Conditions:

Temperature (°C):	23.2
Relative Humidity (%):	48

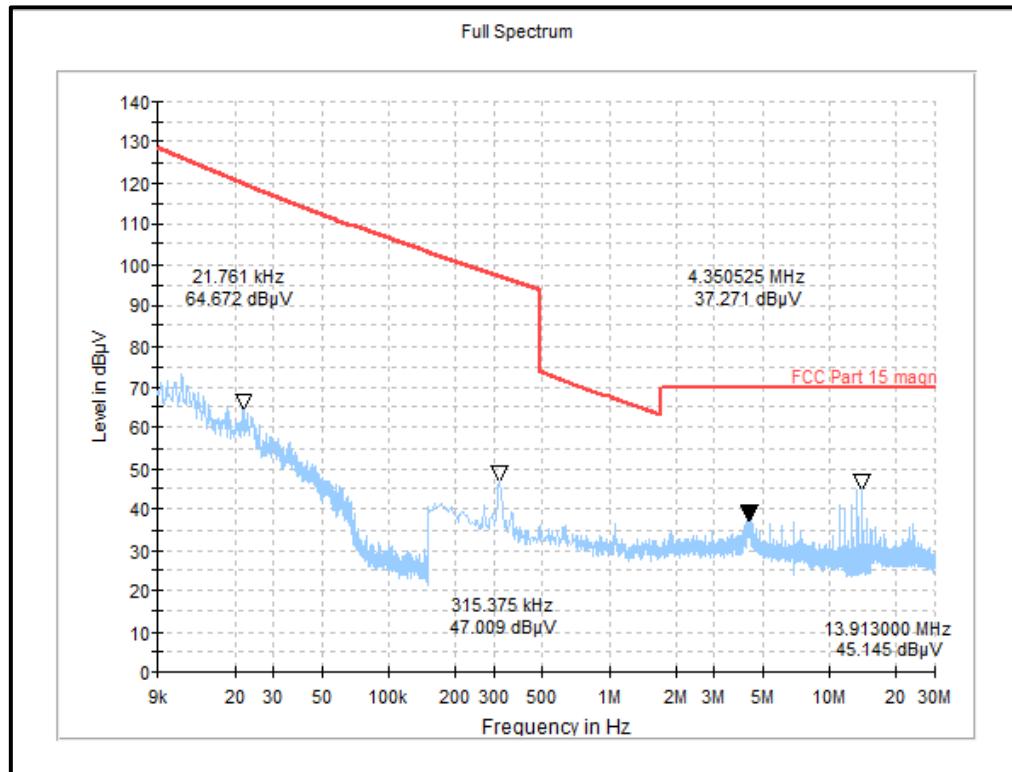
Note(s):

1. In accordance with FCC KDB 414788 D01 Radiated Test Site & ANSI C63.10 clause 5.2 an alternative test site that can demonstrate equivalence to a open area test site may be used. Therefore, the measurement was performed in a Semi Anechoic Chamber. (The OATS / SAC comparison data is available upon request).
2. The limits are specified at a test distances of 30 and 300 metres. However, as specified in FCC Section 15.31 (f)(2) & ANSI C63.10 clause 6.4.3, measurements may be performed at a closer distance and the measured level extrapolated to the specified measurement distance using the method described in clauses 6.4.4, specifically sub-clause 6.4.4.1 which specifies that the measured level shall be extrapolated to the specified distance by conservatively presuming that the field strength decays at 40 dB/decade.
3. Therefore, the limit values are extrapolated to a measurement distance of 3 m.
 - 9 kHz- 490 kHz: limits extrapolated from 300 m to 3 m by adding 80 dB at 40 dB/decade.
 - 490 kHz-1705 kHz: limits extrapolated from 30 m to 3 m by adding 40 dB /decade.
4. Pre-scans with the EUT transmitting were measured according to FCC Part 15.407(b)(2) which states for transmitters operating in the band 5.25 to 5.35 GHz: all emissions outside of the band 5.15-5.35 GHz band shall not exceed -27 dBm/MHz. Part(b)(7) states the provisions of 15.205 apply, e.g. restricted bands of operation.
5. The preliminary scans showed similar emission levels below 30 MHz, for each channel of operation. Therefore, final radiated emissions measurements were performed with the EUT set to the bottom channel only.
6. All emissions shown on the pre-scan plots were found to be below the measurement system noise floor or ambient.
7. Measurements below 1 GHz were performed in a semi-anechoic chamber (Asset Number K0001) at a distance of 3 metres. The EUT was a floor standing equipment which 120 cm height. EUT was placed in the centre of the chamber turntable on 30 cm non-conductive material The EUT was a floor standing equipment which 120 cm height. EUT was placed in the centre of the chamber turntable on 30 cm non-conductive material. The measurement loop antenna height was 150 cm.

Transmitter Out of Band Radiated Emissions (5.25-5.35 GHz band operation) (continued)**Test Setup:**

Transmitter Out of Band Radiated Emissions (5.25-5.35 GHz band operation) (continued)**Results: UNII-2A / 802.11a / 20 MHz / 6 Mbps / PWR 30 / Bottom Channel**

Frequency (MHz)	Antenna Polarization	Peak Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
No spurious emissions were found					

Plot: 9 kHz – 30 MHz: UNII-2A / 802.11a / 20 MHz / 6 Mbps / PWR 30 / Bottom Channel

Note: This plot is a pre-scan and for indication purposes only. For final measurements, see accompanying table.

Result: Pass

Transmitter Out of Band Radiated Emissions (5.25-5.35 GHz band operation) (continued)**Test Summary:**

Test Engineer:	Sercan Usta	Test Date:	10 May 2021
Test Sample Serial Number:	E020AV2020400117(Radiated Test Sample)		
Test Site Identification	SR 1/2		

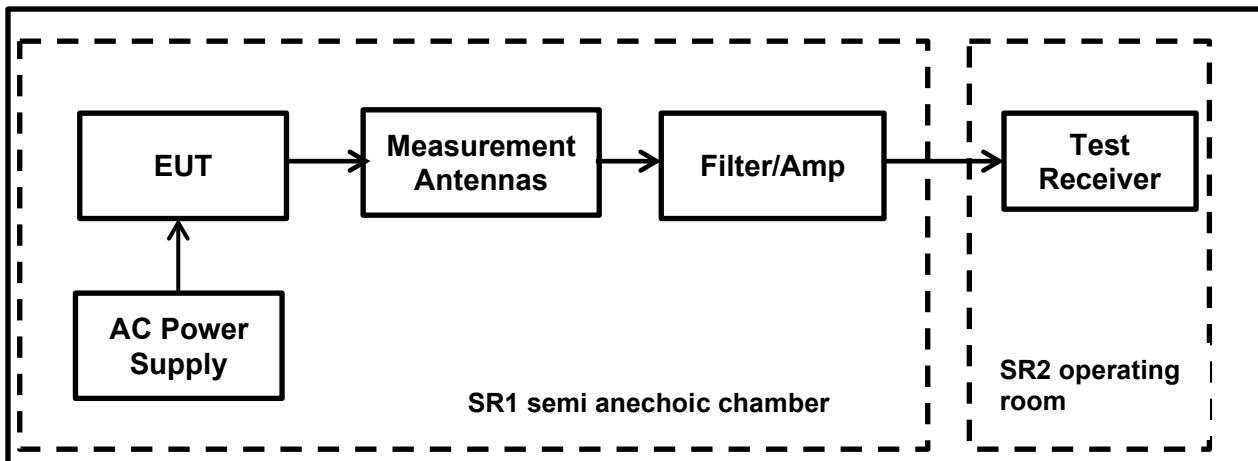
FCC Reference:	Parts 15.407(b)(2),(9) & 15.209(a)
Test Method Used:	FCC KDB 789033 II .G.1, II .G.2, II .G.3 & II .G.4 & ANSI C63.10 Sections 6.3 and 6.5
Frequency Range:	30 MHz to 1 GHz

Environmental Conditions:

Temperature (°C):	23.2
Relative Humidity (%):	48

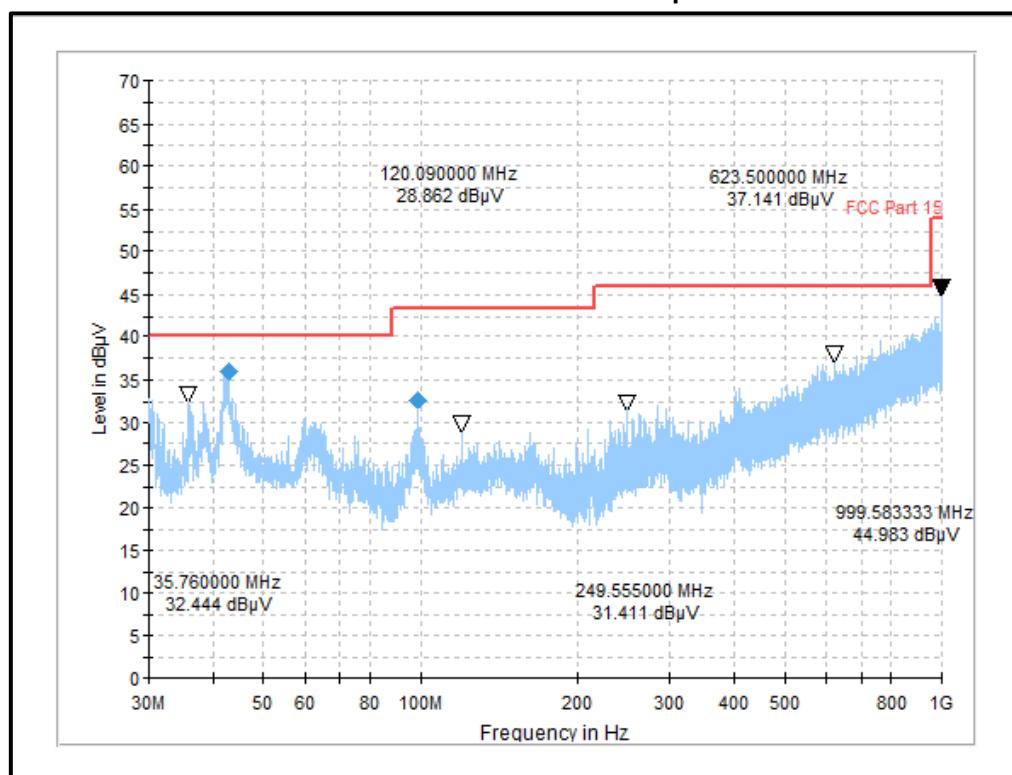
Note(s):

1. The preliminary scans showed similar emission levels below 1 GHz, for each channel of operation. Therefore, final radiated emissions measurements were performed with the EUT set to the middle channel only.
2. The final measured value, for the given emission in the field strength result tables, incorporates the calibrated antenna factor and cable loss.
3. All other emissions shown on the pre-scan plots were found to be below the measurement system noise floor or ambient, therefore the highest peak noise floor reading of the measuring receiver was recorded in the table below.
4. Pre-scans with the EUT transmitting were measured according to FCC Part 15.407(b)(2) which states for transmitters operating in the band 5.15 to 5.25 GHz: all emissions outside of the band 5.15-5.35 GHz band shall not exceed -27 dBm/MHz. Part(b)(7) states the provisions of 15.205 apply, e.g. restricted bands of operation.
5. Measurements below 1 GHz were performed in a semi-anechoic chamber (Asset Number K0001) at a distance of 3 metres. The EUT was a floor standing equipment which 120 cm height. EUT was placed in the centre of the chamber turntable on 30 cm non-conductive material. Maximum emission levels were determined by height searching the measurement antenna over the range 1 m to 4 m.

Transmitter Out of Band Radiated Emissions (5.25-5.35 GHz band operation) (continued)**Test Setup:**

Transmitter Out of Band Radiated Emissions (5.25-5.35 GHz band operation) (continued)**Results: UNII-2A / 802.11a / 20 MHz / 6 Mbps / PWR 30 / Bottom Channel**

Frequency (MHz)	Antenna Polarization	Peak Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
42.74	Vertical	35.99	40.00	4.01	Complied
98.54	Vertical	32.60	43.50	10.90	Complied

Plot: 30 MHz – 1 GHz: UNII-2A / 802.11a / 20 MHz / 6 Mbps / PWR 30 / Bottom Channel

Note: This plot is a pre-scan and for indication purposes only. For final measurements, see accompanying table.

Result: Pass

Transmitter Out of Band Radiated Emissions (5.25-5.35 GHz band operation) (continued)**Test Summary:**

Test Engineer:	Sercan Usta	Test Dates:	10 May 2021
Test Sample Serial Number:	E020AV2020400117(Radiated Test Sample)		
Test Site Identification	SR 1/2		

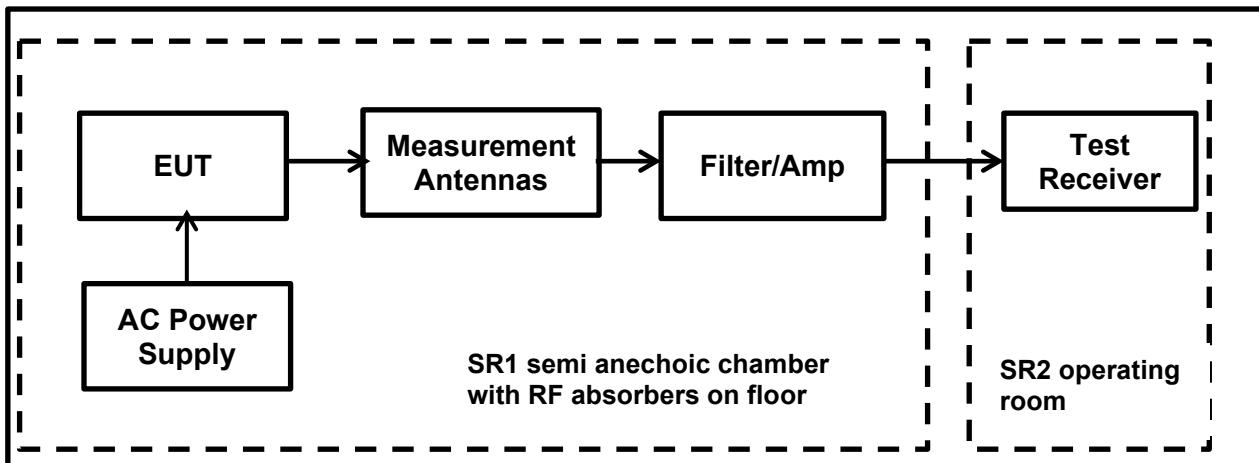
FCC Reference:	Parts 15.407(b)(2),(8) & 15.209(a)
Test Method Used:	FCC KDB 789033 II .G.1, II .G.2, II .G.3, II .G.5 &, II .G.6 ANSI C63.10:2013 Sections 6.3 and 6.6
Frequency Range:	1 GHz to 40 GHz

Environmental Conditions:

Temperature (°C):	23.2
Relative Humidity (%):	48

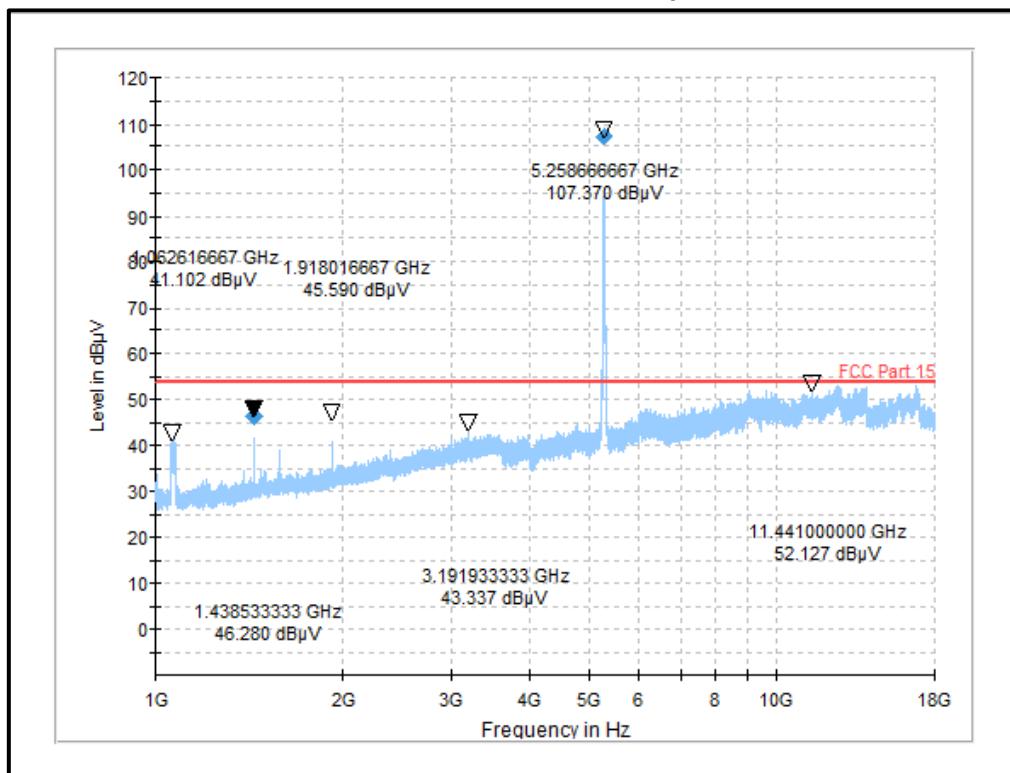
Note(s):

1. The emissions shown at frequencies approximately 5.25-5.35 GHz on the 1 GHz to 18 GHz plots are the EUT fundamental for the tested channel.
2. The preliminary scans showed similar emission levels above 1 GHz, for each channel of operation. Therefore, final radiated emissions measurements were performed with the EUT set to the bottom channel only.
3. Pre-scans with the EUT transmitting were measured according to FCC Part 15.407(b)(2) which states for transmitters operating in the band 5.25 to 5.35 GHz: all emissions outside of the band 5.15-5.35 GHz band shall not exceed -27 dBm/MHz. Part(b)(7) states the provisions of 15.205 apply, e.g. restricted bands of operation.
4. The final measured value, for the given emission in the field strength result tables, incorporates the calibrated antenna factor and cable loss.
5. All other emissions shown on the pre-scan plots were found to be below the measurement system noise floor or ambient, therefore the highest peak noise floor reading of the measuring receiver was recorded in the table below.
6. Pre-scans above 1 GHz were performed in a fully anechoic chamber (Asset Number K0002) at a distance of 3 metres. The EUT was placed at a height of 1.5 metres above the test chamber floor in the centre of the chamber turntable. All measurement antennas were placed at a fixed height of 1.5 metres above the test chamber floor, in line with the EUT. Final measurements above 1 GHz were performed in a semi-anechoic chamber (Asset Number K0001) at a distance of 3 metres. The EUT was placed at a height of 1.5 m above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.
7. For unwanted emissions measured with Peak detector there are two limit possibilities:
 - According to FCC 15.209
 - peak limit (above 1 GHz) is 74 dB μ V/m (restricted band limit)
 - average limit (above 1 GHz) is 54 dB μ V/m (restricted band limit)
 - According to FCC 15.407(b)(2) peak limit is 68.2 dB μ V/m (non-restricted band limit)
8. Therefore, unwanted emissions in restricted as well non restricted bands, measured with Peak detector & lowest average limit (above 1 GHz) is 54 dB μ V/m (restricted band limit) has been applied.
9. * In accordance with KDB 789033 Section II.G.1.c) If all peak measurements satisfy the average limit, then average measurements are not required.

Transmitter Out of Band Radiated Emissions (5.25-5.35 GHz band operation) (continued)**Test Setup:**

Transmitter Out of Band Radiated Emissions (5.25-5.35 GHz band operation) (continued)**Results: UNII-2A / 802.11a / 20 MHz / 6 Mbps / PWR 30 / Bottom Channel**

Frequency (MHz)	Antenna Polarization	Peak Level (dB μ V/m)	Limit* (dB μ V/m)	Margin (dB)	Result
1438.53	Vertical	46.28	54.00	7.72	Complied

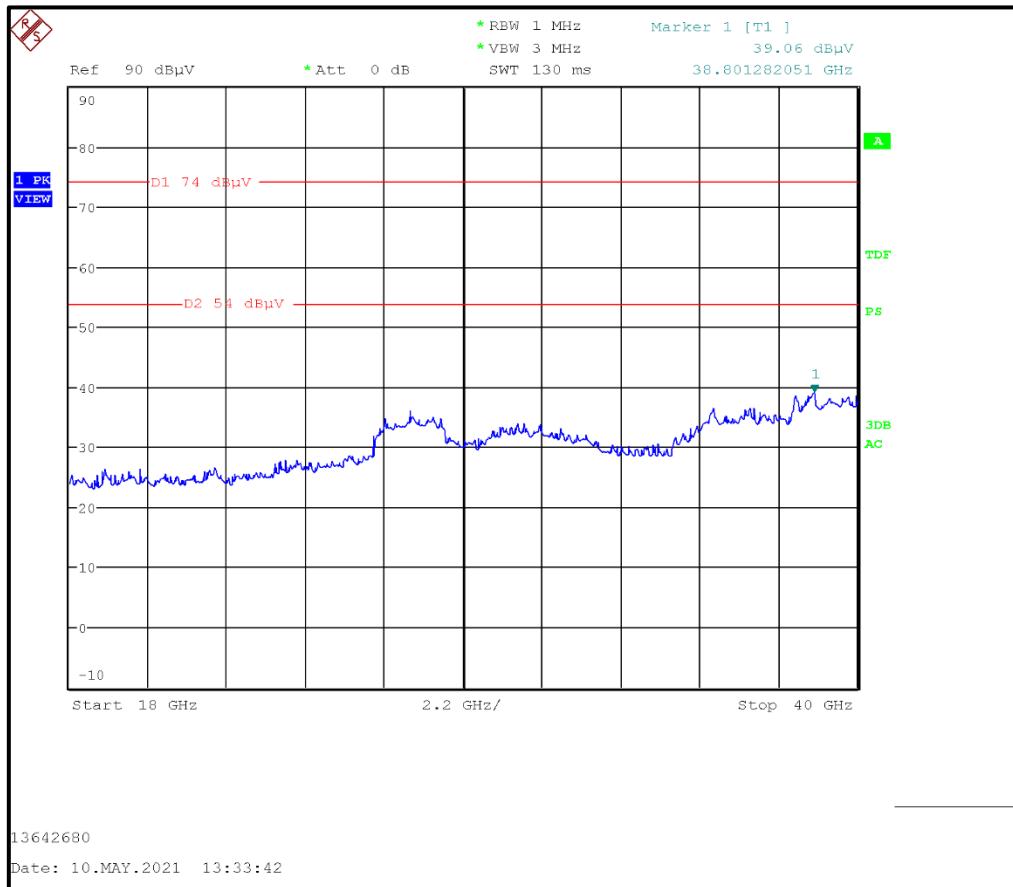
Plot: 1 GHz – 18 GHz: UNII-2A / 802.11a / 20 MHz / 6 Mbps / PWR 30 / Bottom Channel

Note: This plot is a pre-scan and for indication purposes only. For final measurements, see accompanying table.

Result: Pass

Transmitter Out of Band Radiated Emissions (5.25-5.35 GHz band operation) (continued)**Results: UNII-2A / 802.11a / 20 MHz / 6 Mbps / PWR 30 / Bottom Channel**

Frequency (MHz)	Antenna Polarization	Peak Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
No spurious emissions were found					

Plot: 18 GHz – 40 GHz: UNII-2A / 802.11a / 20 MHz / 6 Mbps / PWR 30 / Bottom Channel

Note: This plot is a pre-scan and for indication purposes only. For final measurements, see accompanying table.

Result: Pass

5.2.5. Transmitter Out of Band Radiated Emissions (5.47-5.725 GHz band operation)**Test Summary:**

Test Engineer:	Sercan Usta	Test Date:	10 May 2021
Test Sample Serial Number:	E020AV2020400117(Radiated Test Sample)		
Test Site Identification	SR 1/2		

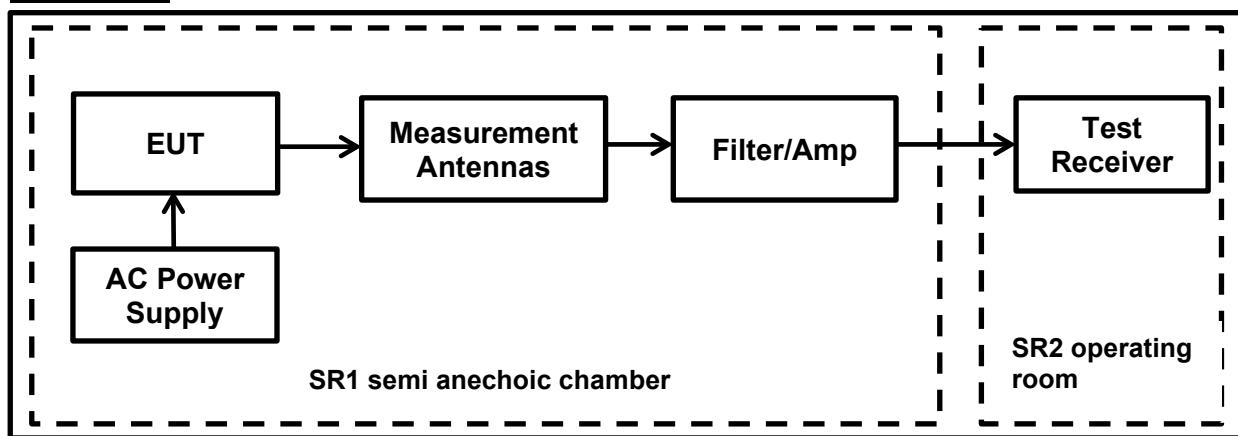
FCC Reference:	Parts 15.407(b)(3),(9) & 15.209(a)
Test Method Used:	FCC KDB 789033 II .G.1, II .G.2, II .G.3 & II .G.4. & ANSI C63.10 Sections 6.3 and 6.4
Frequency Range:	9 kHz to 30 MHz

Environmental Conditions:

Temperature (°C):	23.2
Relative Humidity (%):	48

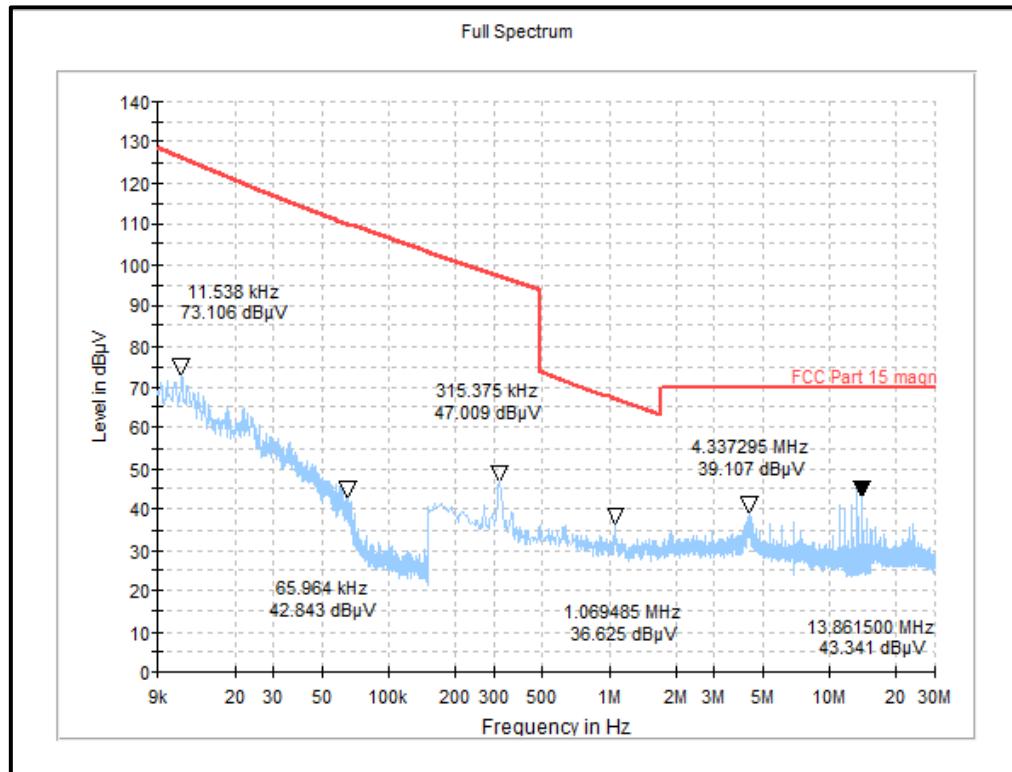
Note(s):

1. In accordance with FCC KDB 414788 D01 Radiated Test Site & ANSI C63.10 clause 5.2 an alternative test site that can demonstrate equivalence to a open area test site may be used. Therefore, the measurement was performed in a Semi Anechoic Chamber. (The OATS / SAC comparison data is available upon request).
2. The limits are specified at a test distances of 30 and 300 metres. However, as specified in FCC Section 15.31 (f)(2) & ANSI C63.10 clause 6.4.3, measurements may be performed at a closer distance and the measured level extrapolated to the specified measurement distance using the method described in clauses 6.4.4, specifically sub-clause 6.4.4.1 which specifies that the measured level shall be extrapolated to the specified distance by conservatively presuming that the field strength decays at 40 dB/decade.
3. Therefore, the limit values are extrapolated to a measurement distance of 3 m.
 - 9 kHz- 490 kHz: limits extrapolated from 300 m to 3 m by adding 80 dB at 40 dB/decade.
 - 490 kHz-1705 kHz: limits extrapolated from 30 m to 3 m by adding 40 dB /decade.
4. Pre-scans with the EUT transmitting were measured according to FCC Part 15.407(b)(3) which states for transmitters operating in the band 5.47 to 5.725 GHz: all emissions outside of the band 5.47-5.725 GHz band shall not exceed -27 dBm/MHz. Part(b)(7) states the provisions of 15.205 apply, e.g. restricted bands of operation.
5. The preliminary scans showed similar emission levels below 30 MHz, for each channel of operation. Therefore, final radiated emissions measurements were performed with the EUT set to the middle channel only.
6. The final measured value, for the given emission in the field strength result tables, incorporates the calibrated antenna factor and cable loss. All other emissions shown on the pre-scan plots were found to be below the measurement system noise floor or ambient, therefore the highest peak noise floor reading of the measuring receiver was recorded in the table below.
7. Measurements below 1 GHz were performed in a semi-anechoic chamber (Asset Number K0001) at a distance of 3 metres. The EUT was a floor standing equipment which 120 cm height. EUT was placed in the centre of the chamber turntable on 30 cm non-conductive material The EUT was a floor standing equipment which 120 cm height. EUT was placed in the centre of the chamber turntable on 30 cm non-conductive material. The measurement loop antenna height was 150 cm.

Transmitter Out of Band Radiated Emissions (5.47-5.725 GHz band operation) (continued)**Test Setup:**

Transmitter Out of Band Radiated Emissions (5.47-5.725 GHz band operation) (continued)**Results: UNII-2C / 802.11a / 20 MHz / 6 Mbps / PWR 30 / Middle Channel**

Frequency (MHz)	Antenna Polarization	Peak Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
No spurious emissions were found					

Plot: 9 kHz – 30 MHz: UNII-2C / 802.11a / 20 MHz / 6 Mbps / PWR 30 / Middle Channel

Note: This plot is a pre-scan and for indication purposes only. For final measurements, see accompanying table.

Result: Pass

Transmitter Out of Band Radiated Emissions (5.47-5.725 GHz band operation) (continued)**Test Summary:**

Test Engineer:	Sercan Usta	Test Date:	10 May 2021
Test Sample Serial Number:	E020AV2020400117(Radiated Test Sample)		
Test Site Identification	SR 1/2		

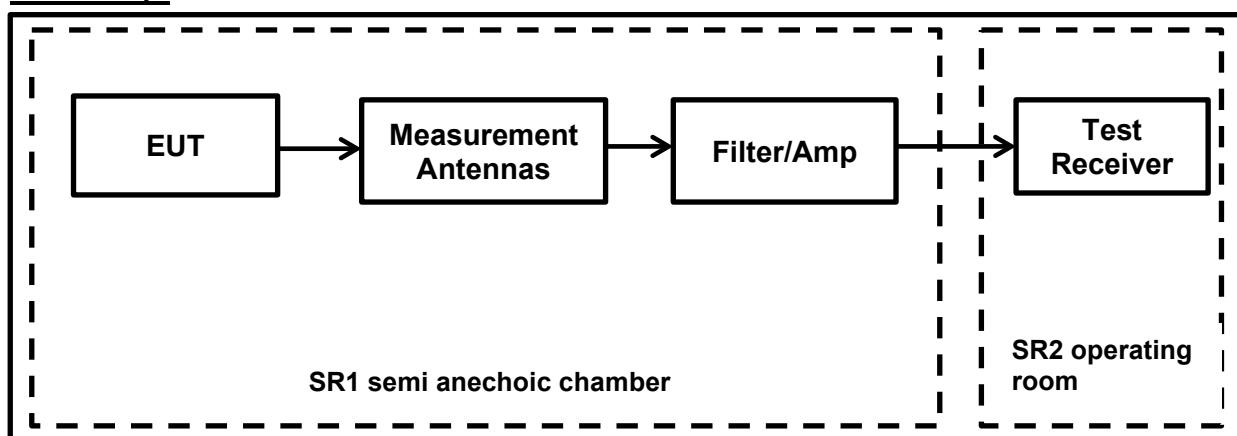
FCC Reference:	Parts 15.407(b)(3),(9) & 15.209(a)
Test Method Used:	FCC KDB 789033 II .G.1, II .G.2, II .G.3 & II .G.4 & ANSI C63.10 Sections 6.3 and 6.5
Frequency Range:	30 MHz to 1 GHz

Environmental Conditions:

Temperature (°C):	23.2
Relative Humidity (%):	48

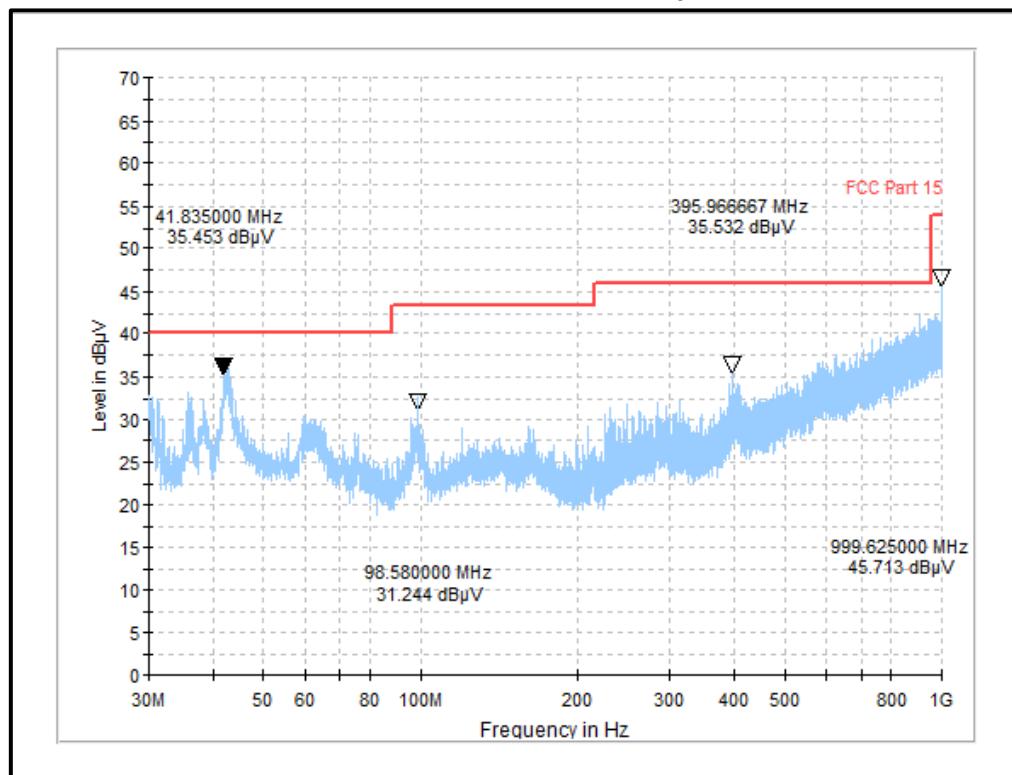
Note(s):

1. The preliminary scans showed similar emission levels below 1 GHz, for each channel of operation. Therefore, final radiated emissions measurements were performed with the EUT set to the middle channel only.
2. All emissions shown on the pre-scan plots were found to be below the measurement system noise floor or ambient.
3. Pre-scans with the EUT transmitting were measured according to FCC Part 15.407(b)(3) which states for transmitters operating in the band 5.47 to 5.725 GHz: all emissions outside of the band 5.47-5.725 GHz band shall not exceed -27 dBm/MHz. Part(b)(7) states the provisions of 15.205 apply, e.g. restricted bands of operation.
4. Measurements below 1 GHz were performed in a semi-anechoic chamber (Asset Number K0001) at a distance of 3 metres. The EUT was a floor standing equipment which 120 cm height. EUT was placed in the centre of the chamber turntable on 30 cm non-conductive material. Maximum emission levels were determined by height searching the measurement antenna over the range 1 m to 4 m.

Transmitter Out of Band Radiated Emissions (5.47-5.725 GHz band operation) (continued)**Test Setup:**

Transmitter Out of Band Radiated Emissions (5.47-5.725 GHz band operation) (continued)**Results: UNII-2C / 802.11a / 20 MHz / 6 Mbps / PWR 30 / Middle Channel**

Frequency (MHz)	Antenna Polarization	Peak Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
No spurious emissions were found					

Plot: 30 MHz – 1 GHz: UNII-2C / 802.11a / 20 MHz / 6 Mbps / PWR 30 / Middle Channel

Note: This plot is a pre-scan and for indication purposes only. For final measurements, see accompanying table.

Result: Pass

Transmitter Out of Band Radiated Emissions (5.47-5.725 GHz band operation) (continued)**Test Summary:**

Test Engineer:	Sercan Usta	Test Dates:	10 May 2021
Test Sample Serial Number:	E020AV2020400117(Radiated Test Sample)		
Test Site Identification	SR 1/2		

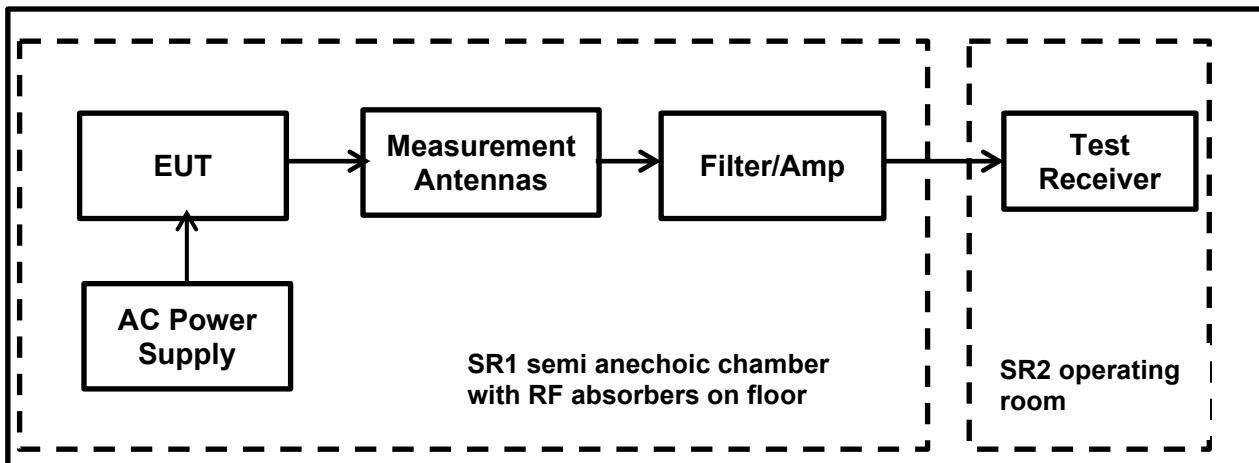
FCC Reference:	Parts 15.407(b)(3),(8) & 15.209(a)
Test Method Used:	FCC KDB 789033 II .G.1, II .G.2, II .G.3, II .G.5 &, II .G.6 ANSI C63.10:2013 Sections 6.3 and 6.6
Frequency Range:	1 GHz to 40 GHz

Environmental Conditions:

Temperature (°C):	23.2
Relative Humidity (%):	48

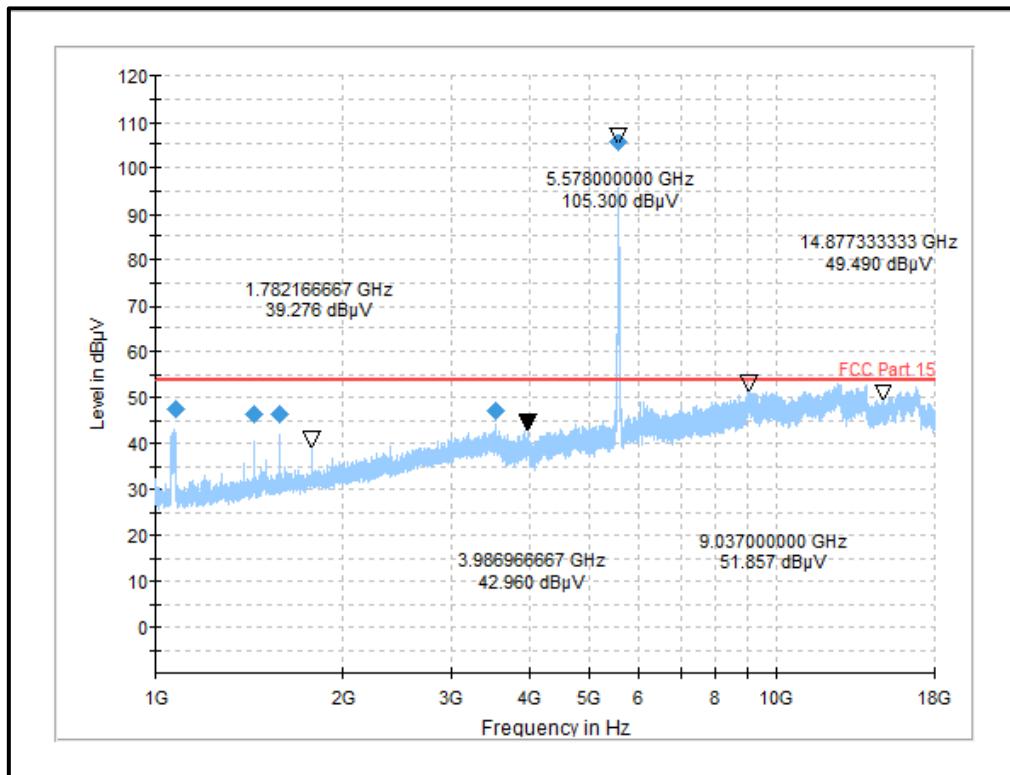
Note(s):

1. The emissions shown at frequencies approximately 5.15-5.25 GHz on the 1 GHz to 18 GHz plots are the EUT fundamental for the tested channel.
2. Pre-scans with the EUT transmitting were measured according to FCC Part 15.407(b)(3) which states for transmitters operating in the band 5.47 to 5.725 GHz: all emissions outside of the band 5.47-5.725 GHz band shall not exceed -27 dBm/MHz. Part(b)(7) states the provisions of 15.205 apply, e.g. restricted bands of operation.
3. The preliminary scans showed similar emission levels above 1 GHz, for each channel of operation. Therefore, final radiated emissions measurements were performed with the EUT set to the middle channel only.
4. The final measured value, for the given emission in the field strength result tables, incorporates the calibrated antenna factor and cable loss.
5. All other emissions shown on the pre-scan plots were found to be below the measurement system noise floor or ambient, therefore the highest peak noise floor reading of the measuring receiver was recorded in the table below.
6. Pre-scans above 1 GHz were performed in a fully anechoic chamber (Asset Number K0002) at a distance of 3 metres. The EUT was placed at a height of 1.5 metres above the test chamber floor in the centre of the chamber turntable. All measurement antennas were placed at a fixed height of 1.5 metres above the test chamber floor, in line with the EUT. Final measurements above 1 GHz were performed in a semi-anechoic chamber (Asset Number K0001) at a distance of 3 metres. The EUT was placed at a height of 1.5 m above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.
7. For unwanted emissions measured with Peak detector there are two limit possibilities:
 - According to FCC 15.209
 - peak limit (above 1 GHz) is 74 dB μ V/m (restricted band limit)
 - average limit (above 1 GHz) is 54 dB μ V/m (restricted band limit)
 - According to FCC 15.407(b)(3) peak limit is 68.2 dB μ V/m (non-restricted band limit)
8. Therefore, unwanted emissions in restricted as well non restricted bands, measured with Peak detector & lowest average limit (above 1 GHz) is 54 dB μ V/m (restricted band limit) has been applied.
9. * In accordance with KDB 789033 Section II.G.1.c) If all peak measurements satisfy the average limit, then average measurements are not required.

Transmitter Out of Band Radiated Emissions (5.47-5.725 GHz band operation) (continued)**Test Setup:**

Transmitter Out of Band Radiated Emissions (5.47-5.725 GHz band operation) (continued)**Results: UNII-2C / 802.11a / 20 MHz / 6 Mbps / PWR 30 / Middle Channel**

Frequency (MHz)	Antenna Polarization	Peak Level (dB μ V/m)	Limit* (dB μ V/m)	Margin (dB)	Result
1074.10	Vertical	47.55	54.00	6.45	Complied
1439.83	Vertical	46.30	54.00	7.70	Complied
1583.92	Vertical	46.30	54.00	7.70	Complied
3528.53	Vertical	47.14	54.00	6.86	Complied

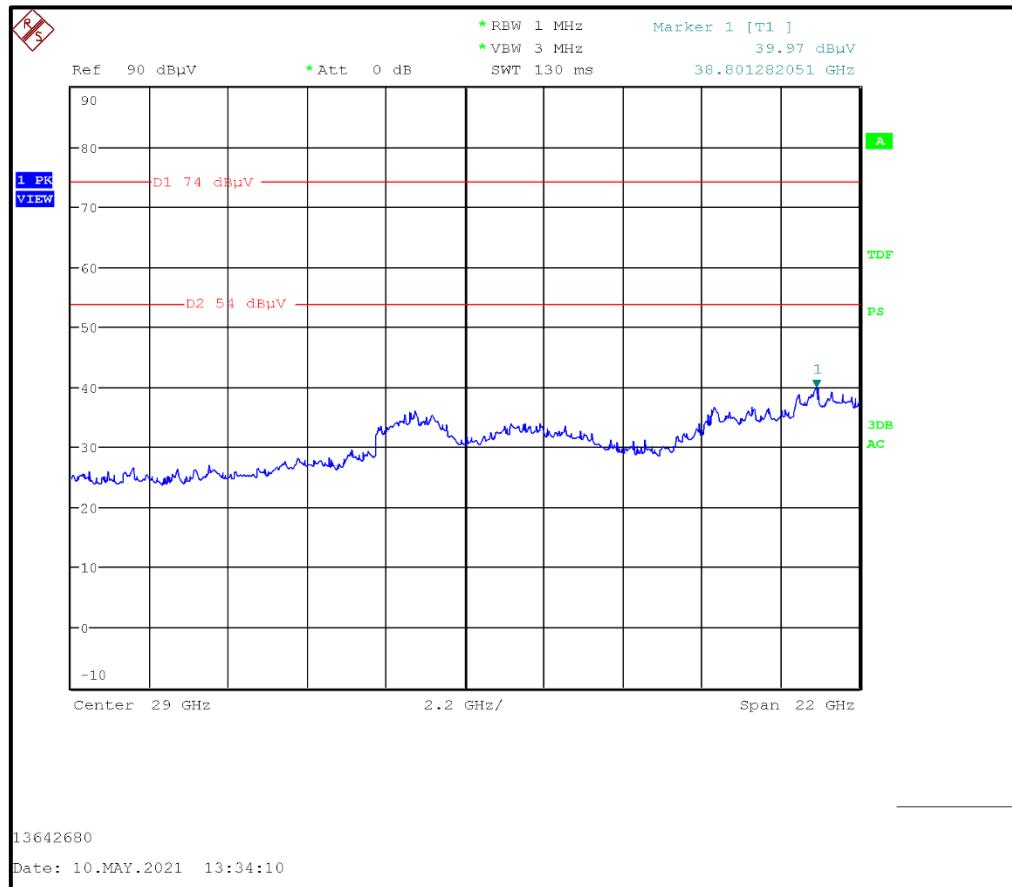
Plot: 1 GHz – 18 GHz: UNII-2C / 802.11a / 20 MHz / 6 Mbps / PWR 30 / Middle Channel

Note: This plot is a pre-scan and for indication purposes only. For final measurements, see accompanying table.

Result: Pass

Transmitter Out of Band Radiated Emissions (5.47-5.725 GHz band operation) (continued)**Results: UNII-2C / 802.11a / 20 MHz / 6 Mbps / PWR 30 / Bottom Channel**

Frequency (MHz)	Antenna Polarization	Peak Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
No spurious emissions were found					

Plot: 18 GHz – 40 GHz: UNII-2C / 802.11a / 20 MHz / 6 Mbps / PWR 30 / Middle Channel

Note: This plot is a pre-scan and for indication purposes only. For final measurements, see accompanying table.

Result: Pass

Transmitter Band Edge Radiated Emissions

5.2.6. Transmitter Band Edge Radiated Emissions(5.15-5.25 GHz band operation)

Test Summary:

Test Engineer:	Sercan Usta	Test Date:	21 April 2021
Test Sample Serial Number:	E020AV2020400117(Radiated Test Sample)		
Test Site Identification	SR 1/2		

FCC Reference:	Parts 15.407(b)(1),(8) & 15.209(a)
Test Method Used:	FCC KDB 789033 II .G.1, II .G.2, II .G.3, II .G.5 &, II .G.6 ANSI C63.10:2013 Sections 6.3 and 6.6

Environmental Conditions:

Temperature (°C):	21.7
Relative Humidity (%):	47.2

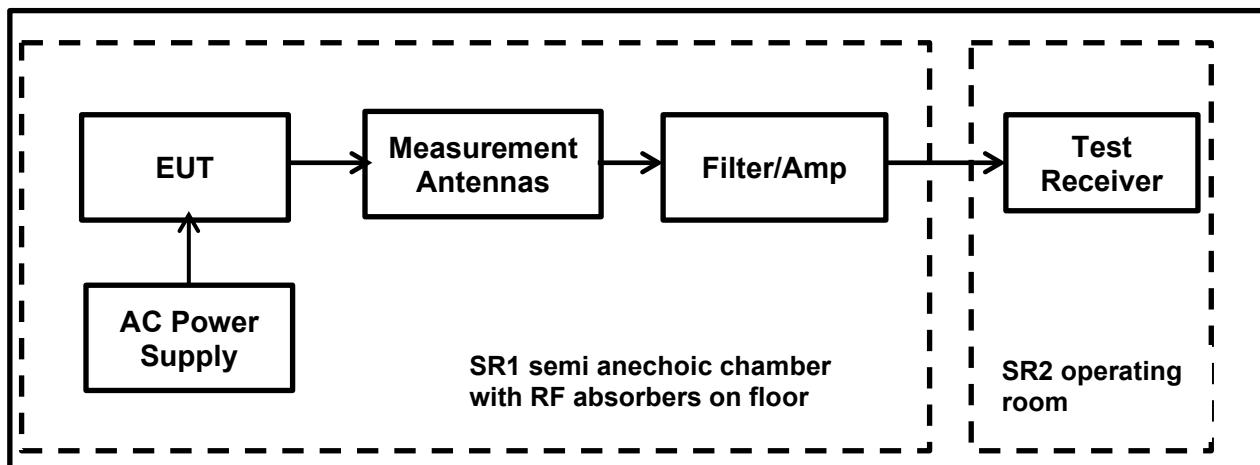
Note(s):

1. According to FCC KDB 789033 D02 Section II.G.5 & II.G.6 Transmitter Band Edge Radiated Emissions were performed.
2. The test receiver was set to RBW: 1 MHZ | VBW: 3 MHz | Sweep time: Auto | Trace mode: max hold | Span: large enough to capture unwanted band edge emissions with trace stabilizations.
3. In accordance with KDB 789033 Section II.D.v), Method AD (vi), the average measurements were performed using an increased number of sweeps A value of 300 was used for all measurements as this number ensured that the requirement Sweep $\geq 2 \times$ Span / RBW is met.
4. Transmitter Band Edge Radiated Emissions were performed in a semi-anechoic chamber SR1/ 2 (Asset Number 1603665) with absorbers on the ground at a distance of 3 meters. The EUT was a floor standing equipment which 120 cm height. EUT was placed in the centre of the chamber turntable on 30 cm non-conductive material The EUT was a floor standing equipment which 120 cm height. EUT was placed in the centre of the chamber turntable on 30 cm non-conductive material. Maximum emission levels were determined by height searching the measurement antenna with tilting function enabled over the range 1 meter to 4 meters above the test chamber floor, in line with the EUT.
5. The maximum emissions around band edges were searched & are indicated with a marker placed on them. For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz. However, there are restricted bands of operation below the lower band edge at 4.5-5.15 GHz and also above the upper band edge at 5.35-5.46 GHz therefore the provisions of FCC Part 15.205 apply.
6. As all radiated band edge measurements have been performed with R.B.W. 1 MHz; the limits in dBm / MHz can be converted to dB μ V/m by adding a conversion factor of 95.2 (in accordance with KDB 789033 G.2.d)(iii)).
7. Field strength measurements using peak and average detectors were performed in the restricted bands below 5.15 GHz and above 5.35 GHz.
8. In accordance with KDB 789033 Section II.G.1.c) If all peak measurements satisfy the average limit, then average measurements are not required.
9. For unwanted emissions measured with Peak detector there are two limit possibilities:
 - According to FCC 15.209 peak limit (above 1 GHz) is 74 dB μ V/m (restricted band limit)
 - According to FCC 15.407(b)(1) peak limit is 68.2 dB μ V/m (non-restricted band limit)
10. Therefore, unwanted emissions in restricted as well non restricted bands, measured with Peak detector lowest limit 68.2 dB μ V/m has been applied.

Transmitter Band Edge Radiated Emissions(5.15-5.25 GHz band operation) (continued)
Note(s) (continued):

11. In accordance with ANSI C63.10 Section 12.7.7.2 Method AD g), for average measurements, data rates where the EUT was transmitting < 98% duty cycle, the duty cycle correction factor calculated in section 5.2.3 was added to the measured result.
12. **Therefore, Duty Cycle Correction factor of 0.10 dB was added to all average measurements, to compute the corrected average values of the emissions that would have been measured had the test been performed at 100% Duty Cycle.

Test Setup:



Transmitter Band Edge Radiated Emissions(5.15-5.25 GHz band operation) (continued)**Results: 802.11a / 20 MHz / 6 Mbps****Results: Lower Band Edge / Peak / Bottom Channel / PWR 16**

Frequency (MHz)	Peak Level (dB μ V/m)	Peak Limit (dB μ V/m)	Margin (dB)	Result
5147.11	62.35	68.20	5.85	Complied
5150.00	60.80	68.20	7.4	Complied

Results: Lower Band Edge / Average / Bottom Channel / PWR 16

Frequency (MHz)	Average Level (dB μ V/m)	Duty Cycle Correction Factor (dB)	Corrected Average Level ** (dB μ V/m)	Average Limit (dB μ V/m)	Margin (dB)	Result
5149.81	48.35	0.10	48.45	54.00	5.55	Complied
5150.00	48.41	0.10	48.51	54.00	5.49	Complied

Results: Upper Band Edge / Peak / Top Channel / PWR 30

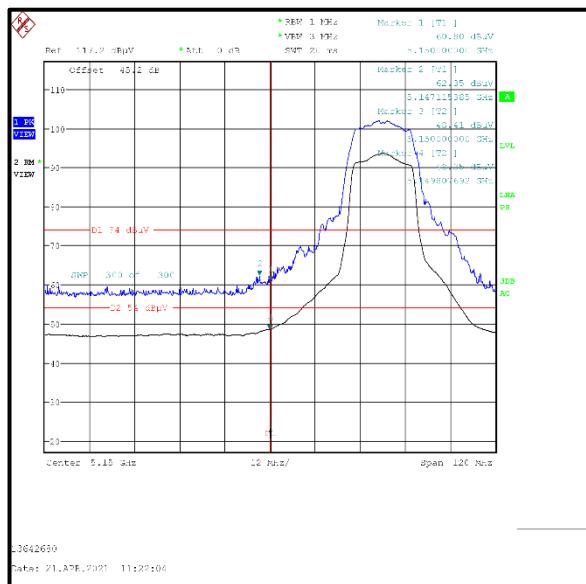
Frequency (MHz)	Peak Level (dB μ V/m)	Peak Limit (dB μ V/m)	Margin (dB)	Result
5350.00	62.81	68.20	5.39	Complied
5407.69	64.33	68.20	3.87	Complied

Results: Upper Band Edge / Average / Top Channel / PWR 30

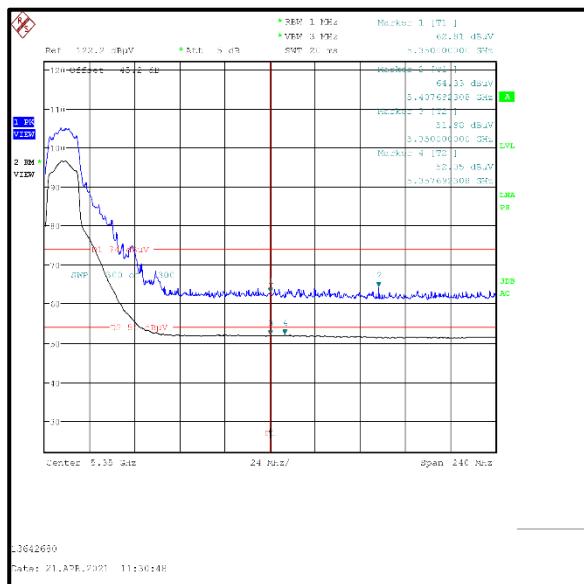
Frequency (MHz)	Average Level (dB μ V/m)	Duty Cycle Correction Factor (dB)	Corrected Average Level ** (dB μ V/m)	Average Limit (dB μ V/m)	Margin (dB)	Result
5350.00	51.98	0.10	52.08	54.00	1.92	Complied
5376.92	52.05	0.10	52.15	54.00	1.85	Complied

Transmitter Band Edge Radiated Emissions(5.15-5.25 GHz band operation) (continued)
Results: 802.11a / 20 MHz / 6 Mbps

Plots:



Lower Band Edge Measurement-Bottom



Upper Band Edge Measurement-Top

Result: Pass

Transmitter Band Edge Radiated Emissions(5.15-5.25 GHz band operation) (continued)**Results: 802.11a / 20 MHz / 6 Mbps****Results: Lower Band Edge / Peak / Bottom +1 Channel / PWR 30**

Frequency (MHz)	Peak Level (dB μ V/m)	Peak Limit (dB μ V/m)	Margin (dB)	Result
5149.23	64.41	68.20	3.79	Complied
5150.00	62.80	68.20	5.40	Complied

Results: Lower Band Edge / Average / Bottom +1 Channel / PWR 30

Frequency (MHz)	Average Level (dB μ V/m)	Duty Cycle Correction Factor (dB)	Corrected Average Level ** (dB μ V/m)	Average Limit (dB μ V/m)	Margin (dB)	Result
5149.81	50.81	0.10	50.91	54.00	3.09	Complied
5150.00	51.00	0.10	51.10	54.00	2.90	Complied

Plots:**Lower Band Edge Measurement- Bottom +1****Result: Pass**

5.2.7. Transmitter Band Edge Radiated Emissions (5.25-5.35 GHz band operation)**Test Summary:**

Test Engineer:	Sercan Usta	Test Date:	10 May 2021
Test Sample Serial Number:	E020AV2020400117(Radiated Test Sample)		
Test Site Identification	SR 1/2		
FCC Reference:	Parts 15.407(b)(2),(8) & 15.209(a)		
Test Method Used:	FCC KDB 789033 II .G.1, II .G.2, II .G.3, II .G.5 &, II .G.6 ANSI C63.10:2013 Sections 6.3 and 6.6		

Environmental Conditions:

Temperature (°C):	23.2
Relative Humidity (%):	48

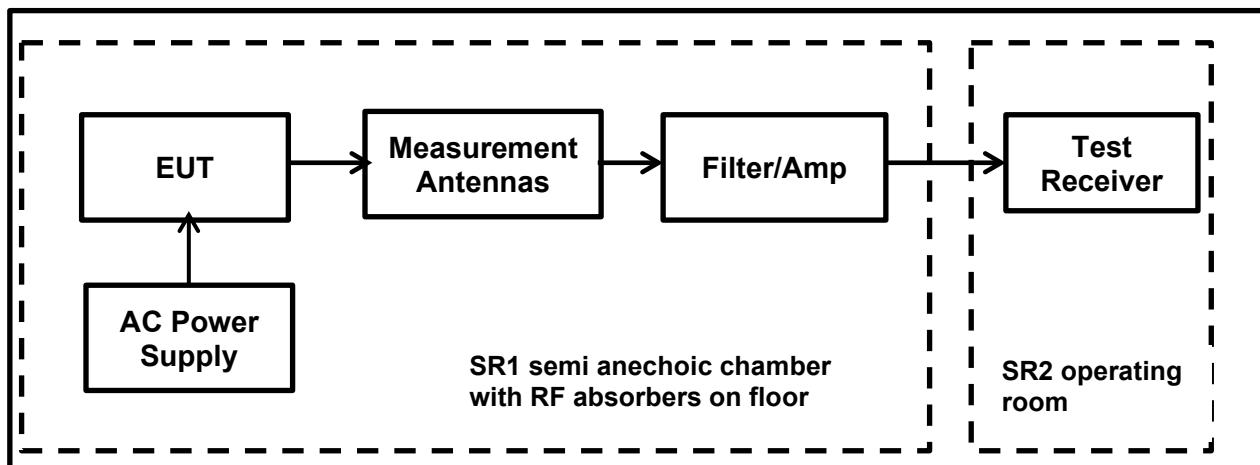
Note(s):

1. According to FCC KDB 789033 D02 Section II.G.5 & II.G.6 Transmitter Band Edge Radiated Emissions were performed.
2. The test receiver was set to RBW: 1 MHZ | VBW: 3 MHz | Sweep time: Auto | Trace mode: max hold | Span: large enough to capture unwanted band edge emissions with trace stabilizations.
3. In accordance with KDB 789033 Section II.D.v), Method AD (vi), the average measurements were performed using an increased number of sweeps A value of 300 was used for all measurements as this number ensured that the requirement Sweep $\geq 2 \times$ Span / RBW is met.
4. Transmitter Band Edge Radiated Emissions were performed in a semi-anechoic chamber SR1/ 2 (Asset Number 1603665) with absorbers on the ground at a distance of 3 meters. The EUT was a floor standing equipment which 120 cm height. EUT was placed in the centre of the chamber turntable on 30 cm non-conductive material The EUT was a floor standing equipment which 120 cm height. EUT was placed in the centre of the chamber turntable on 30 cm non-conductive material. Maximum emission levels were determined by height searching the measurement antenna with tilting function enabled over the range 1 meter to 4 meters above the test chamber floor, in line with the EUT.
5. The maximum emissions around band edges were searched & are indicated with a marker placed on them. For transmitters operating in the 5.25-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz. However, there are restricted bands of operation below the lower band edge at 4.5-5.15 GHz and also above the upper band edge at 5.35-5.46 GHz therefore the provisions of FCC Part 15.205 apply. Tests were performed in these restricted bands of operation with the EUT transmitting on the bottom and top channels within 5.25-5.35 GHz band, the results are included in the transmitter 5.25-5.35 GHz band radiated spurious emissions section of this test report.
6. As all radiated band edge measurements have been performed with R.B.W. 1 MHz; the limits in dBm / MHz can be converted to dB μ V/m by adding a conversion factor of 95.2 (in accordance with KDB 789033 G.2.d)(iii)).
7. Field strength measurements using peak and average detectors were performed in the restricted bands below 5.15 GHz and above 5.35 GHz.
8. In accordance with KDB 789033 Section II.G.1.c) If all peak measurements satisfy the average limit, then average measurements are not required.
9. For unwanted emissions measured with Peak detector there are two limit possibilities:
 - According to FCC 15.209 peak limit (above 1 GHz) is 74 dB μ V/m (restricted band limit)
 - According to FCC 15.407(b)(2) peak limit is 68.2 dB μ V/m (non-restricted band limit)
10. Therefore, unwanted emissions in restricted as well non restricted bands, measured with Peak detector lowest limit 68.2 dB μ V/m has been applied.

Transmitter Band Edge Radiated Emissions(5.25-5.35 GHz band operation) (continued)
Note(s) (continued):

11. In accordance with ANSI C63.10 Section 12.7.7.2 Method AD g), for average measurements, data rates where the EUT was transmitting < 98% duty cycle, the duty cycle correction factor calculated in section 5.2.3 was added to the measured result.
12. **Therefore, Duty Cycle Correction factor of 0.10 dB was added to all average measurements, to compute the corrected average values of the emissions that would have been measured had the test been performed at 100% Duty Cycle.

Test Setup:



Transmitter Band Edge Radiated Emissions (5.25-5.35 GHz band operation) (Continued)**Results: UNII-2A / 802.11a / 20 MHz / 6 Mbps****Results: Lower Band Edge / Peak / Bottom Channel / PWR 30**

Frequency (MHz)	Peak Level (dB μ V/m)	Peak Limit (dB μ V/m)	Margin (dB)	Result
5095.77	63.98	68.20	4.22	Complied
5150.00	62.18	68.20	6.02	Complied

Results: Lower Band Edge / Average / Bottom Channel / PWR 30

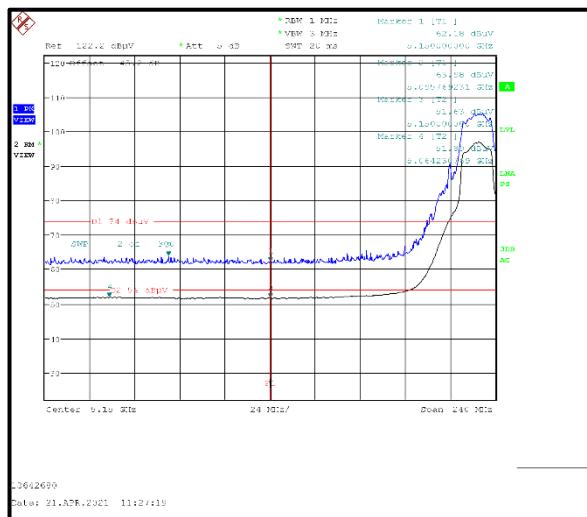
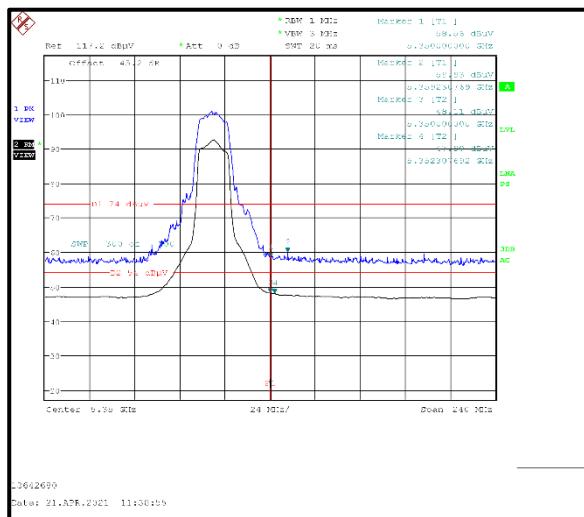
Frequency (MHz)	Average Level (dB μ V/m)	Duty Cycle Correction Factor (dB)	Corrected Average Level ** (dB μ V/m)	Average Limit (dB μ V/m)	Margin (dB)	Result
5064.23	51.89	0.10	51.99	54.00	2.01	Complied
5150.00	51.63	0.10	51.73	54.00	2.27	Complied

Results: Upper Band Edge / Peak / Top Channel / PWR 16

Frequency (MHz)	Peak Level (dB μ V/m)	Peak Limit (dB μ V/m)	Margin (dB)	Result
5350.00	58.56	68.20	9.64	Complied
5359.23	59.93	68.20	8.27	Complied

Results: Upper Band Edge / Average / Top Channel / PWR 16

Frequency (MHz)	Average Level (dB μ V/m)	Duty Cycle Correction Factor (dB)	Corrected Average Level ** (dB μ V/m)	Average Limit (dB μ V/m)	Margin (dB)	Result
5350.00	48.11	0.10	48.21	54.00	5.79	Complied
5352.31	47.90	0.10	48.00	54.00	6.00	Complied

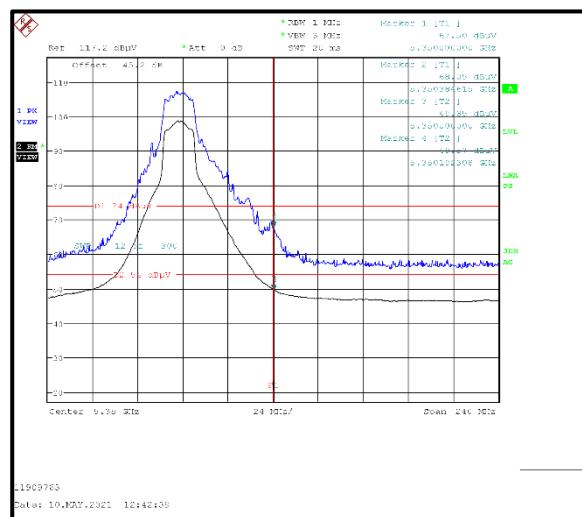
Transmitter Band Edge Radiated Emissions (5.25-5.35 GHz band operation) (Continued)**Results: UNII-2A / 802.11a / 20 MHz / 6 Mbps****Plots:****Lower Band Edge Measurement-Bottom****Upper Band Edge Measurement-Top****Result: Pass**

Transmitter Band Edge Radiated Emissions (5.25-5.35 GHz band operation) (Continued)**Results: UNII-2A / 802.11a / 20 MHz / 6 Mbps****Results: Upper Band Edge / Peak / Top -1 Channel / PWR 30**

Frequency (MHz)	Peak Level (dB μ V/m)	Peak Limit (dB μ V/m)	Margin (dB)	Result
5350.00	65.50	68.20	2.70	Complied
5350.38	66.05	68.20	2.15	Complied

Results: Upper Band Edge / Average / Top -1 Channel / PWR 30

Frequency (MHz)	Average Level (dB μ V/m)	Duty Cycle Correction Factor (dB)	Corrected Average Level ** (dB μ V/m)	Average Limit (dB μ V/m)	Margin (dB)	Result
5350.00	49.85	0.10	49.95	54.00	4.05	Complied
5352.31	49.57	0.10	49.67	54.00	4.33	Complied

Plots:**Upper Band Edge Measurement-Top-1****Result: Pass**

5.2.8. Transmitter Band Edge Radiated Emissions (5.47-5.725 GHz band operation)**Test Summary:**

Test Engineer:	Sercan Usta	Test Date:	10 May 2021
Test Sample Serial Number:	E020AV2020400117(Radiated Test Sample)		
Test Site Identification	SR 1/2		
FCC Reference:	Parts 15.407(b)(3),(8) & 15.209(a)		
Test Method Used:	FCC KDB 789033 II .G.1, II .G.2, II .G.3, II .G.5 &, II .G.6 ANSI C63.10:2013 Sections 6.3 and 6.6.		

Environmental Conditions:

Temperature (°C):	23.2
Relative Humidity (%):	48

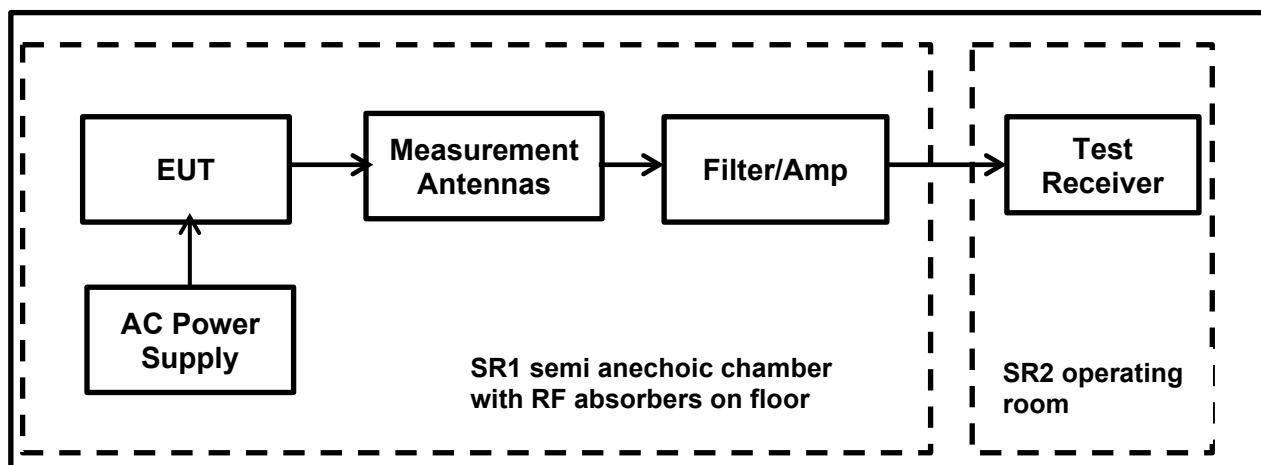
Note(s):

1. According to FCC KDB 789033 D02 Section II.G.5 & II.G.6 Transmitter Band Edge Radiated Emissions were performed.
2. The test receiver was set to RBW: 1 MHZ | VBW: 3 MHz | Sweep time: Auto | Trace mode: max hold | Span: large enough to capture unwanted band edge emissions with trace stabilizations.
3. In accordance with KDB 789033 Section II.D.v), Method AD (vi), the average measurements were performed using an increased number of sweeps A value of 300 was used for all measurements as this number ensured that the requirement Sweep $\geq 2 \times$ Span / RBW is met.
4. Transmitter Band Edge Radiated Emissions were performed in a semi-anechoic chamber SR1/ 2 (Asset Number 1603665) with absorbers on the ground at a distance of 3 meters. The EUT was a floor standing equipment which 120 cm height. EUT was placed in the centre of the chamber turntable on 30 cm non-conductive material The EUT was a floor standing equipment which 120 cm height. EUT was placed in the centre of the chamber turntable on 30 cm non-conductive material. Maximum emission levels were determined by height searching the measurement antenna with tilting function enabled over the range 1 meter to 4 meters above the test chamber floor, in line with the EUT.
5. The maximum emissions around band edges were searched & are indicated with a marker placed on them. For transmitters operating in the 5.47-5.725 GHz band: all emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz. However, there are restricted bands of operation below the lower band edge at 4.5-5.15 GHz and also at 5.35-5.46 GHz therefore the provisions of FCC Part 15.205 apply. Tests were performed in these restricted bands of operation with the EUT transmitting on the bottom and top channels within 5.47-5.725 GHz band, the results are included in the transmitter 5.25-5.35 GHz band radiated spurious emissions section of this test report.
6. As all radiated band edge measurements have been performed with R.B.W. 1 MHz; the limits in dBm / MHz can be converted to dB μ V/m by adding a conversion factor of 95.2 (in accordance with KDB 789033 G.2.d)(iii)).
7. Field strength measurements using peak and average detectors were performed in the restricted bands below 5.47 GHz and above 5.725 GHz.
8. In accordance with KDB 789033 Section II.G.1.c) If all peak measurements satisfy the average limit, then average measurements are not required.
9. For unwanted emissions measured with Peak detector there are two limit possibilities:
 - According to FCC 15.209 peak limit (above 1 GHz) is 74 dB μ V/m (restricted band limit)
 - According to FCC 15.407(b)(3) peak limit is 68.2 dB μ V/m (non-restricted band limit)
10. Therefore, unwanted emissions in restricted as well non restricted bands, measured with Peak detector lowest limit 68.2 dB μ V/m has been applied.

Transmitter Band Edge Radiated Emissions(5.25-5.35 GHz band operation) (continued)
Note(s) (continued):

11. In accordance with ANSI C63.10 Section 12.7.7.2 Method AD g), for average measurements, data rates where the EUT was transmitting < 98% duty cycle, the duty cycle correction factor calculated in section 5.2.3 was added to the measured result.
12. **Therefore, Duty Cycle Correction factor of 0.10 dB was added to all average measurements, to compute the corrected average values of the emissions that would have been measured had the test been performed at 100% Duty Cycle.

Test Setup:



Transmitter Band Edge Radiated Emissions (5.47-5.725 GHz band operation) (Continued)**Results: UNII-2C / 802.11a / 20 MHz / 6 Mbps****Results: Lower Band Edge / Peak / Bottom Channel / PWR 18**

Frequency (MHz)	Peak Level (dB μ V/m)	Peak Limit (dB μ V/m)	Margin (dB)	Result
5468.46	64.21	68.20	3.99	Complied
5470.00	63.08	68.20	5.12	Complied

Results: Lower Band Edge / Average / Bottom Channel / PWR 18

Frequency (MHz)	Average Level (dB μ V/m)	Duty Cycle Correction Factor (dB)	Corrected Average Level ** (dB μ V/m)	Average Limit (dB μ V/m)	Margin (dB)	Result
5469.62	51.22	0.10	51.32	54.00	2.68	Complied
5470.00	51.22	0.10	51.32	54.00	2.68	Complied

Results: Upper Band Edge / Peak / Top Channel / PWR 16

Frequency (MHz)	Peak Level (dB μ V/m)	Peak Limit (dB μ V/m)	Margin (dB)	Result
5725.00	64.25	68.20	3.95	Complied
5726.15	65.05	68.20	3.15	Complied

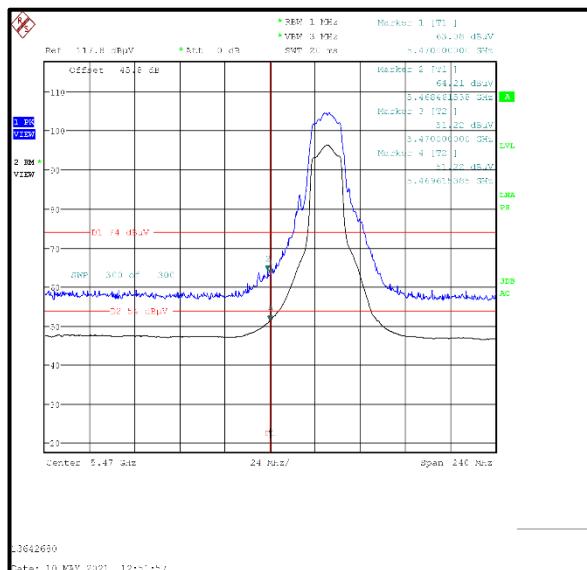
Results: Upper Band Edge / Average / Top Channel / PWR 16

Frequency (MHz)	Average Level (dB μ V/m)	Duty Cycle Correction Factor (dB)	Corrected Average Level ** (dB μ V/m)	Average Limit (dB μ V/m)	Margin (dB)	Result
5725.00	50.99	0.10	51.09	54.00	2.91	Complied
5725.38	51.00	0.10	51.10	54.00	2.90	Complied

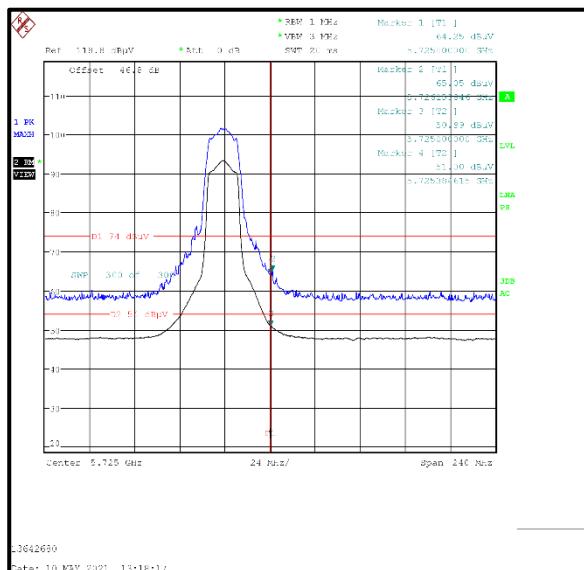
Transmitter Band Edge Radiated Emissions (5.47-5.725 GHz band operation) (Continued)

Results: UNII-2C / 802.11a / 20 MHz / 6 Mbps

Plots:



Lower Band Edge Peak Measurement-Bottom



Upper Band Edge Measurement-Top

Result: Pass

Transmitter Band Edge Radiated Emissions (5.47-5.725 GHz band operation) (Continued)**Results: UNII-2C / 802.11a / 20 MHz / 6 Mbps****Results: Lower Band Edge / Peak / Bottom +1 Channel / PWR 30**

Frequency (MHz)	Peak Level (dB μ V/m)	Peak Limit (dB μ V/m)	Margin (dB)	Result
5468.46	62.73	68.20	5.47	Complied
5470.00	62.42	68.20	5.78	Complied

Results: Lower Band Edge / Average / Bottom +1 Channel / PWR 30

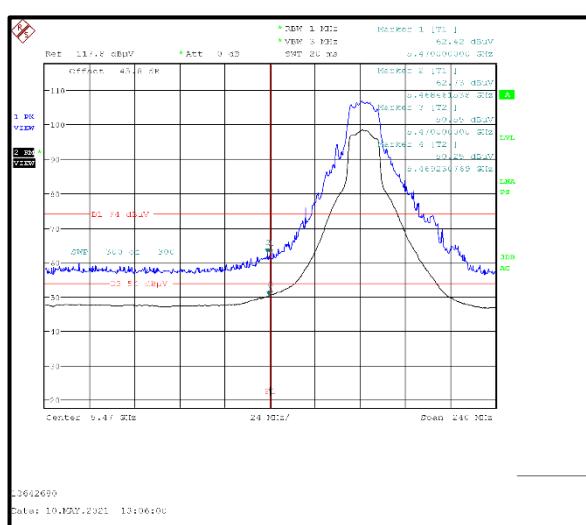
Frequency (MHz)	Average Level (dB μ V/m)	Duty Cycle Correction Factor (dB)	Corrected Average Level ** (dB μ V/m)	Average Limit (dB μ V/m)	Margin (dB)	Result
5469.23	50.25	0.10	50.35	54.00	3.65	Complied
5470.00	50.55	0.10	50.65	54.00	3.35	Complied

Results: Upper Band Edge / Peak / Top -1 Channel / PWR 30

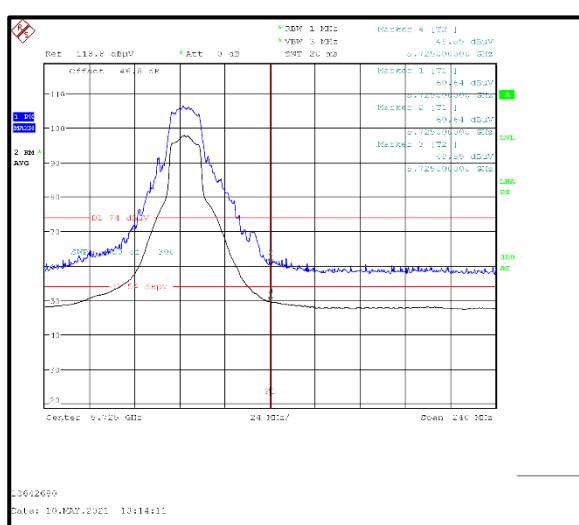
Frequency (MHz)	Peak Level (dB μ V/m)	Peak Limit (dB μ V/m)	Margin (dB)	Result
5725.00	60.64	68.20	7.56	Complied

Results: Upper Band Edge / Average / Top -1 Channel / PWR 30

Frequency (MHz)	Average Level (dB μ V/m)	Duty Cycle Correction Factor (dB)	Corrected Average Level ** (dB μ V/m)	Average Limit (dB μ V/m)	Margin (dB)	Result
5725.00	49.55	0.10	49.65	54.00	4.35	Complied

Plots:

Lower Band Edge Measurement-Bottom +1



Upper Band Edge Measurement-Top -1

Result: Pass

6. Measurement Uncertainty

The expression of uncertainty of a measurement result allows realistic comparison of results with reference values and limits given in specifications and standards.

The uncertainty of the result may need to be taken into account when interpreting the measurement results.

The reported expanded uncertainties below are based on a standard uncertainty multiplied by an appropriate coverage factor such that a confidence level of approximately 95% is maintained. For the purposes of this document "approximately" is interpreted as meaning "effectively" or "for most practical purposes".

Measurement Type	Confidence Level (%)	Calculated Uncertainty
AC Conducted Spurious Emissions	95%	±2.49 dB
Radiated Spurious Emissions	95%	±3.10 dB
Band Edge Radiated Emissions	95%	±3.10 dB
Transmitter Duty Cycle	95%	±3.4%

The methods used to calculate the above uncertainties are in line with those recommended within the various measurement specifications. Where measurement specifications do not include guidelines for the evaluation of measurement uncertainty the published guidance of the appropriate accreditation body is followed.

7. Used equipment

Test site: SR 1/2

ID	Manufacturer	Type	Model	Serial	Calibration Date	Cal. Cycle (months)
1	Rohde & Schwarz	Antenna, Loop	HFH2-Z2	831247/012	10/07/2020	36
423	Bonn Elektronik	Amplifier, Low Noise Pre	BLMA 1840-1A	55929	09/07/2020	12
607	Schwarzbeck	Antenna broadband horn antenna	BBHA 9170	9170-561	15/10/2019	24
460	Deisl	Turntable	DT 4250 S	n/a	n/a	n/a
452	Schwarzbeck	Antenna, Trilog Broadband	VULB 9168	9168-240	02/09/2020	24
496	Rohde & Schwarz	Antenna, Log-Periodic Broadband	HL050	100297	05/08/2020	24
587	Maturo	antenna mast, tilting	TAM 4.0-E	011/7180311	n/a	n/a
588	Maturo	Controller	NCD	029/7180311	n/a	n/a
591	Rohde & Schwarz	Receiver	ESU 40	100244/040	07/07/2020	12
608	Rohde & Schwarz	Switch Matrix	OSP 120	101227	lab verification	n/a
628	Maturo	Antenna mast	CAM 4.0-P	224/19590716	n/a	n/a
629	Maturo	Kippeinrichtung	KE 2.5-R-M	MAT002	n/a	n/a
-/-	Testo	Thermo-Hygrometer	608-H1	01	lab verification	n/a
328	SPS	AC/DC power distribution system	PAS 5000	A2464 00/2 0200	lab verification	n/a
1603665	Siemens Matsushita Components	semi-anechoic chamber SR1/ 2	-/-	B83117-A1421-T161	n/a	n/a

Test site: SR 7/8

ID	Manufacturer	Type	Model	Serial	Calibration Date	Cal. Cycle (months)
23	Rohde & Schwarz	Artificial Mains Network	ESH3-Z5	831767/013	07/07/2020	12
349	Rohde & Schwarz	Receiver, EMI Test	ESIB7	836697/009	07/09/2020	12
-/-	Testo	Thermo-Hygrometer	608-H1	08	lab verification	n/a
327	SPS	AC/DC power distribution system	PAS 5000	A2464 00/1 0200	lab verification	n/a

8. Report Revision History

Version Number	Revision Details		
	Page No(s)	Clause	Details
1.0	72	-	Initial Version

--- END OF REPORT ---