



Band12 LTE DL Right Side Pre AGC

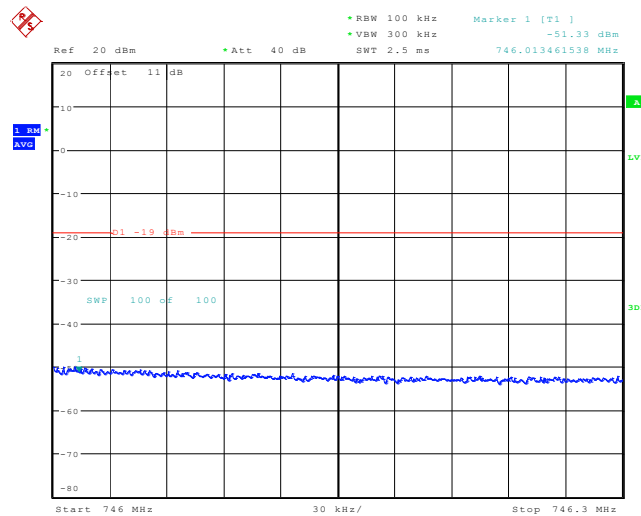

Date: 15.AUG.2020 19:10:54


Band12 LTE DL Right Side Max. Input

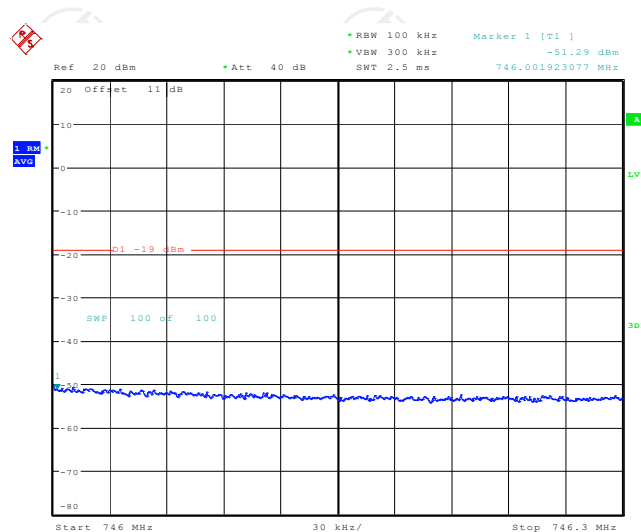

Date: 15.AUG.2020 19:10:26

6.5. Conducted Spurious Emission

6.5.1. Test Specification

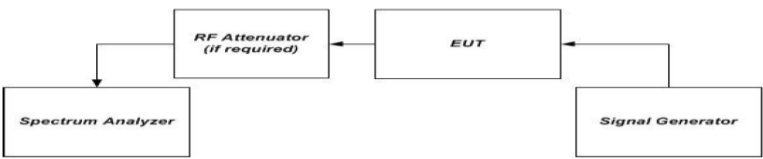Test Requirement:	FCC Part2 Section 1051; FCC Rules Part 27 Subpart C, Section 27.53
Test Method:	KDB 935210 D03 Signal Booster Measurements v04r04
Limit:	-13 dBm
Test Setup:	 <pre> graph LR SG[Signal Generator] --> EUT[EUT] EUT --> RA[RF Attenuator (if required)] RA --> SA[Spectrum Analyzer] </pre>
Test Procedure:	<p>a) Connect the EUT to the test equipment as shown in Set-Up. Begin with the uplink output connected to the spectrum analyzer.</p> <p>b) Configure the signal generator for AWGN with a 99% occupied bandwidth of 4.1 MHz operation with a center frequency corresponding to the center of the CMRS band under test.</p> <p>c) Set the signal generator amplitude to the level determined in the power measurement procedure in Maximum power.</p> <p>d) Turn on the signal generator RF output and measure the spurious emission power levels with an appropriate measurement instrument as follows.</p> <p>e) Set RBW = measurement bandwidth specified in the applicable rule section for the operational frequency band under consideration (see Annex A for relevant cross-references). Note that many of the individual rule sections permit the use of a narrower RBW (typically $\geq 1\%$ of the emission bandwidth) to enhance measurement accuracy, but the result must then be integrated over the specified measurement bandwidth.</p> <p>f) Set VBW = 3 X RBW.</p> <p>g) Select the power averaging (RMS) detector. (See above note regarding the use of a peak detector for preliminary measurements.)</p> <p>h) Sweep time = auto-couple.</p> <p>i) Set the analyzer start frequency to the lowest radio frequency signal generated in the equipment, without going below 9 kHz, and the stop frequency to the lower band/block edge frequency minus 100 kHz or 1 MHz, as specified in the applicable rule part. Note that the number of measurement points in each sweep must be $\geq (2 \times \text{span}/\text{RBW})$ which may require that the measurement range defined by the start and stop frequencies above be subdivided, depending on the available number of measurement points provided by the spectrum analyzer. Trace average at least 10 traces in power averaging (i.e., RMS) mode.</p> <p>j) Use the peak marker function to identify the highest amplitude level over each measured frequency range Record the frequency and amplitude and capture a Test Plots for inclusion in the test report.</p> <p>k) Reset the analyzer start frequency to the upper band/block edge frequency plus 100 kHz or 1 MHz, as specified in the applicable rule part, and the analyzer stop frequency to 10 times the highest frequency of the fundamental emission. Note that the number of measurement points in each sweep must be $\geq (2 \times \text{span}/\text{RBW})$ which may require that the measurement range defined by the start and stop frequencies above be subdivided, depending on the available number of measurement points provided by the</p>

	spectrum analyzer. l) Use the peak marker function to identify the highest amplitude level over each of the measured frequency ranges. Record the frequency and amplitude and capture a Test Plots for inclusion in the test report. m) Repeat steps b) through l) for each supported frequency band of operation.
Test Result:	PASS

6.5.2. Test Instruments


Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
Signal Generator	Agilent	N5182A	MY47070282	Sep. 12, 2019	Sep. 11, 2020
Spectrum Analyzer	Agilent	N9020A	MY49100619	Sep. 12, 2019	Sep. 11, 2020
Attenuator	50FP-006-H3	JFW	907763	Sep. 12, 2019	Sep. 11, 2020

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).


6.5.3. Test data

Test Plots


Band2 Uplink

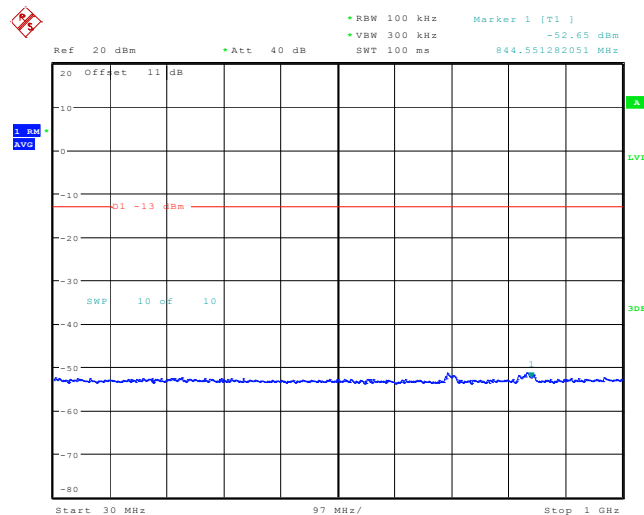

Date: 15.AUG.2020 20:30:00

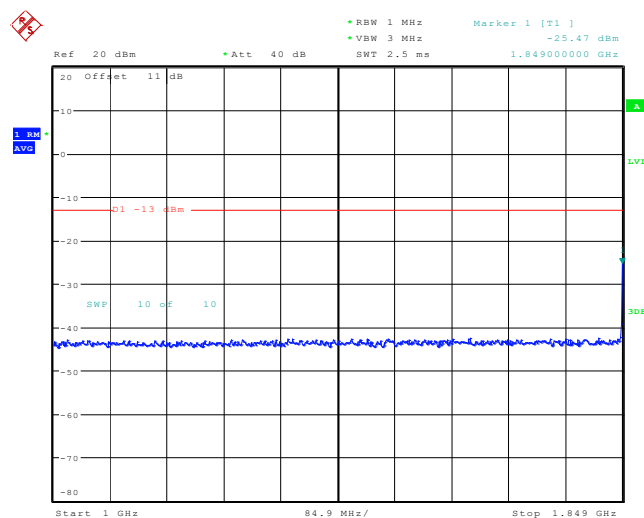


Date: 15.AUG.2020 20:30:29

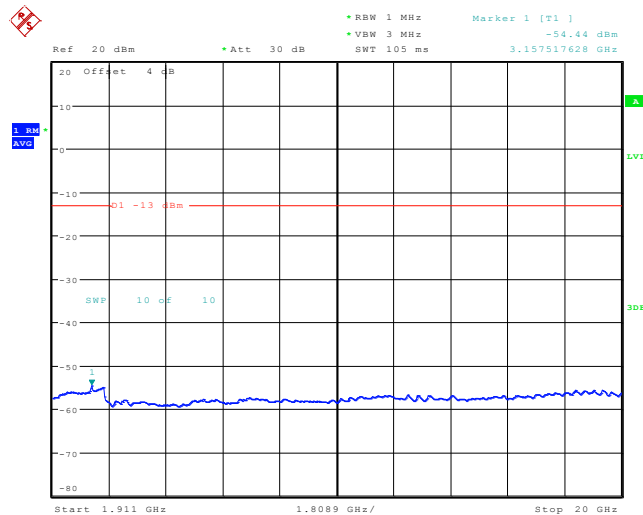


Date: 15.AUG.2020 20:38:41


Band2 Downlink

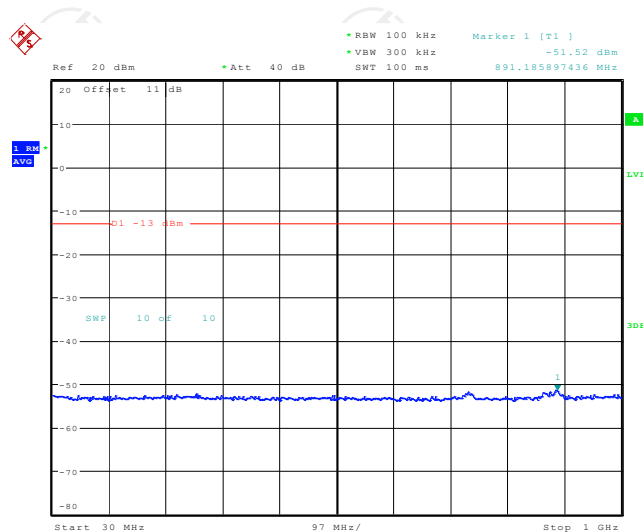

Date: 15.AUG.2020 20:07:21

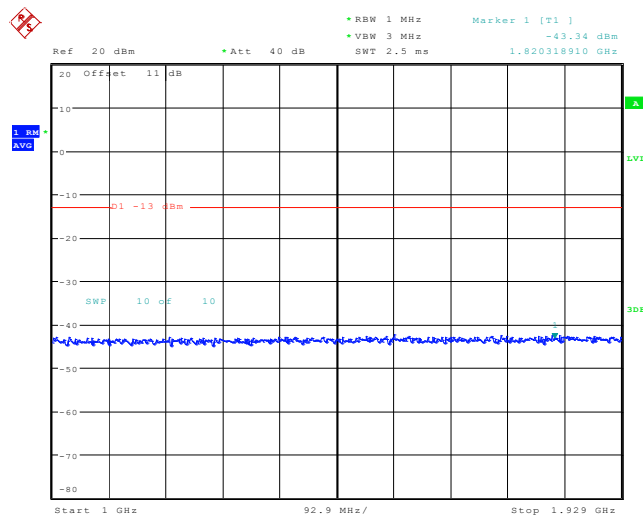



Date: 15.AUG.2020 20:10:50

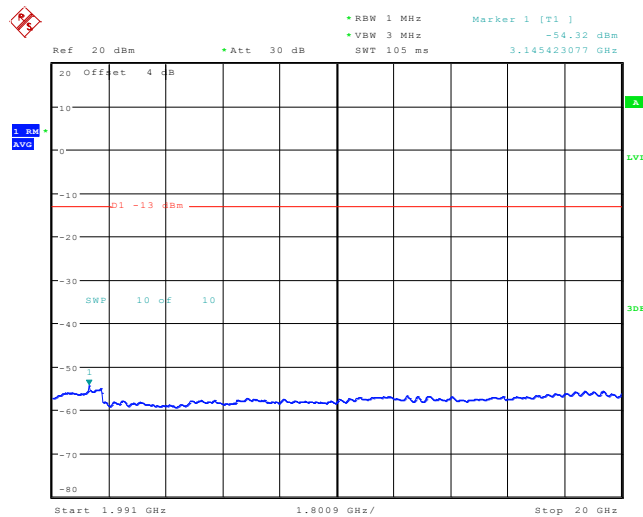


Date: 15.AUG.2020 20:40:13

Test Plots

Band5 Uplink

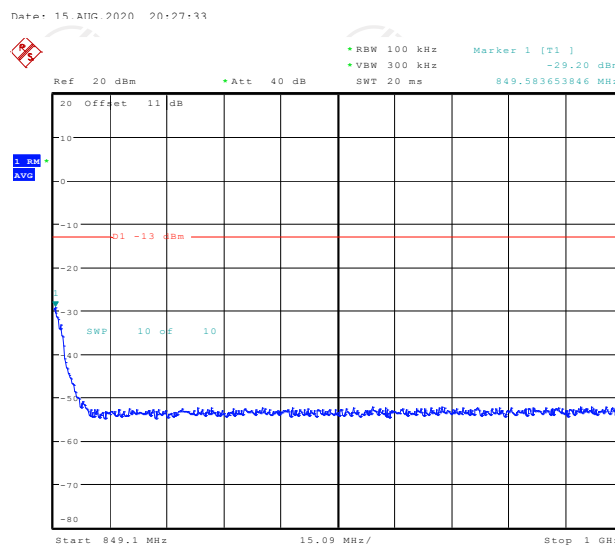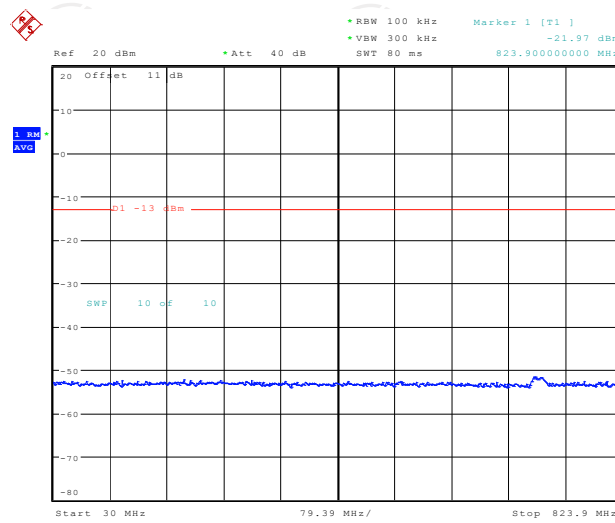


Date: 15.AUG.2020 20:26:56

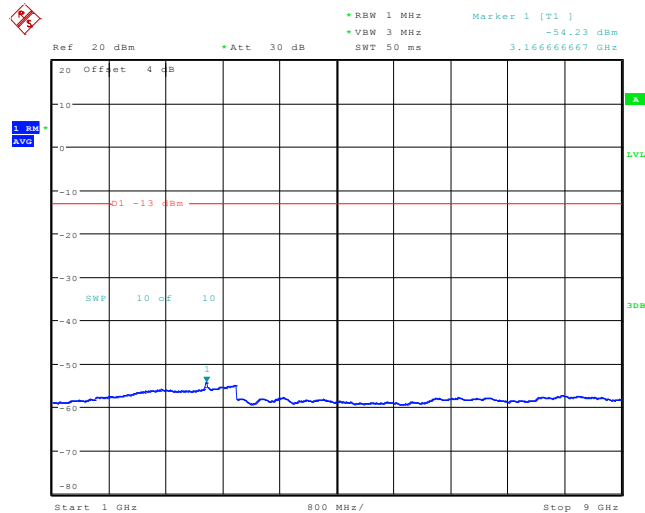


Date: 15.AUG.2020 20:37:13


Band5 Downlink

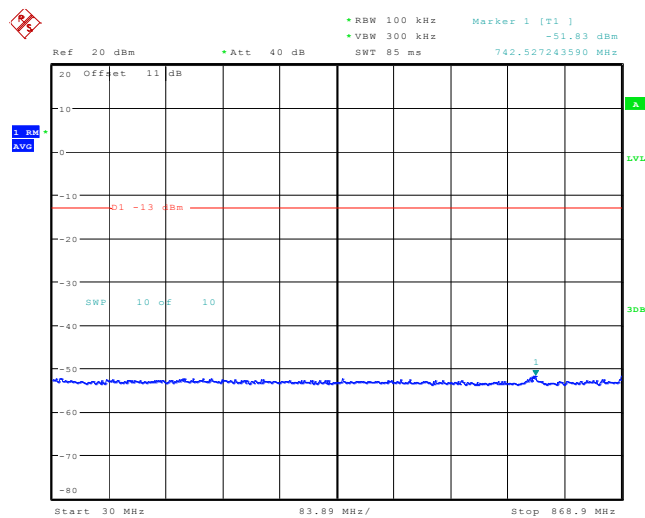

Date: 15.AUG.2020 20:20:32

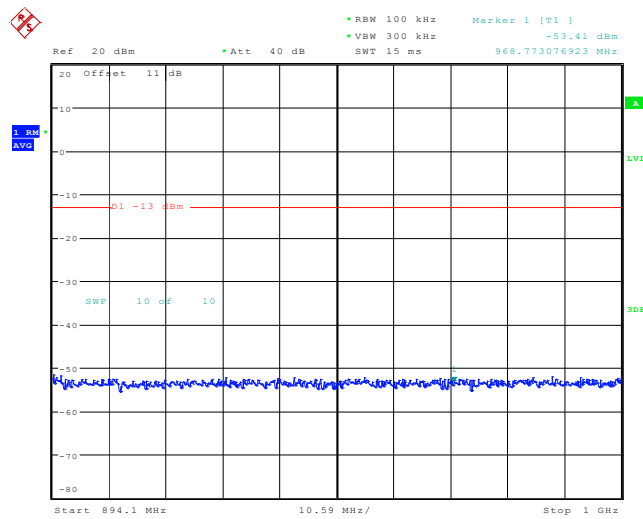


Date: 15.AUG.2020 20:21:18

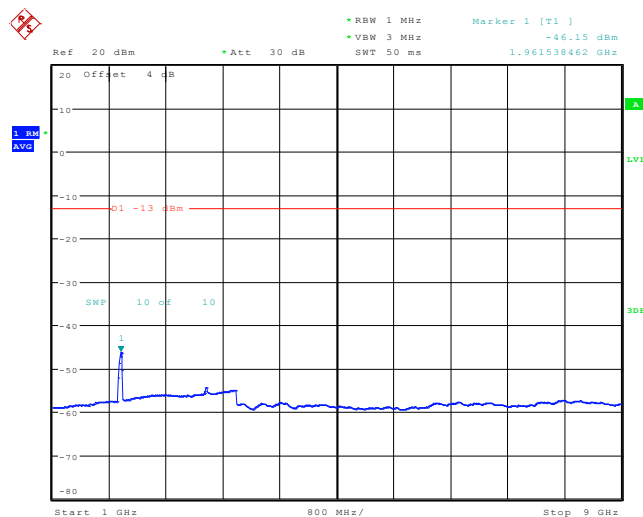


Date: 15.AUG.2020 20:40:53

Test Plots


Band12 Uplink

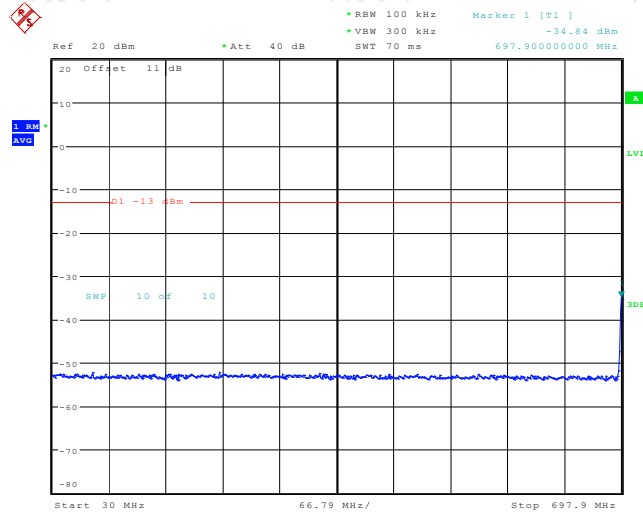

Date: 15.AUG.2020 20:28:19

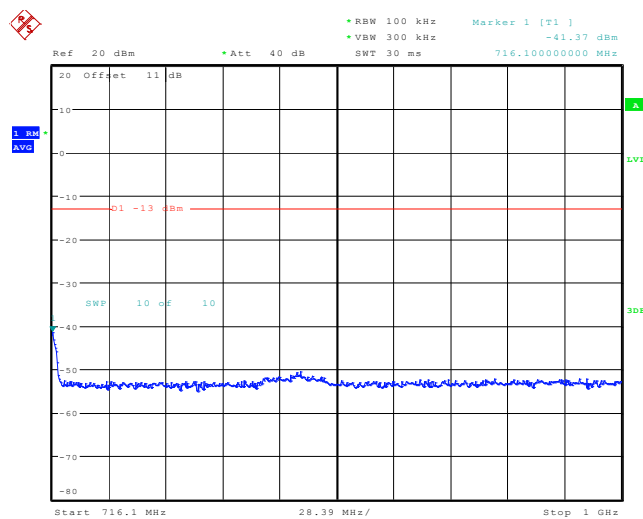


Date: 15.AUG.2020 20:28:48

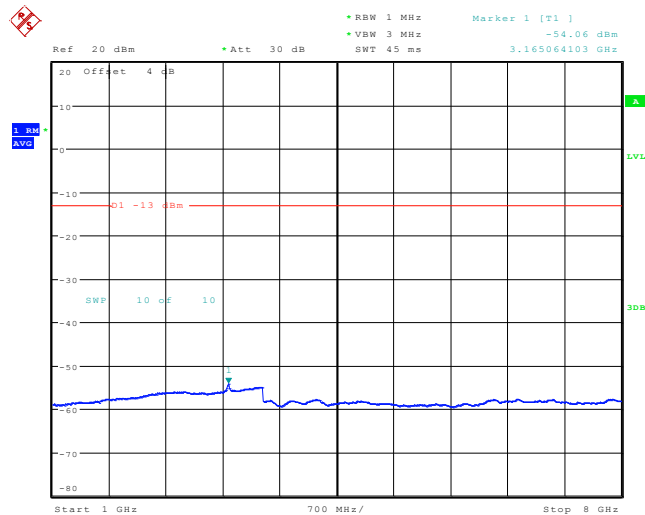


Date: 15.AUG.2020 20:37:54


Band12 Downlink

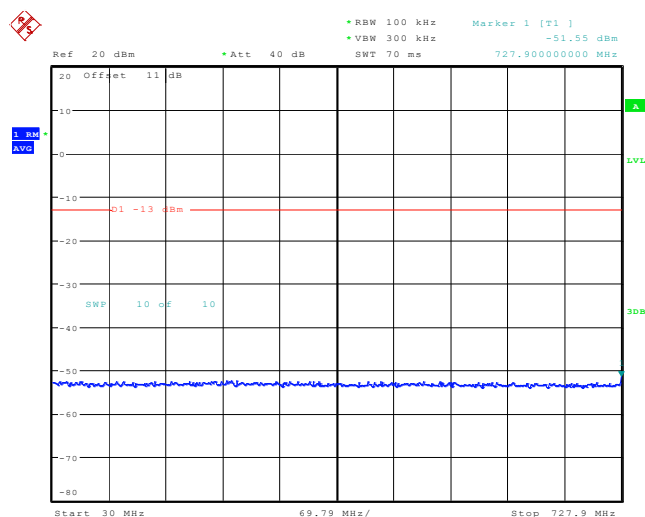

Date: 15.AUG.2020 20:22:56

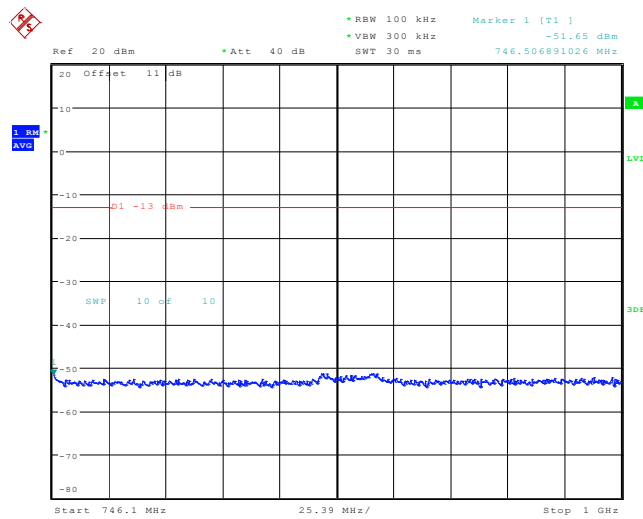



Date: 15.AUG.2020 20:22:17

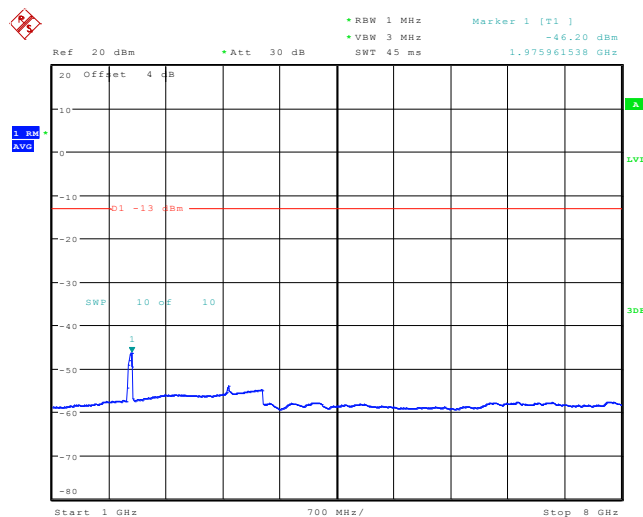

Date: 15.AUG.2020 20:41:20

6.6. Noise Limits

6.6.1. Test Specification

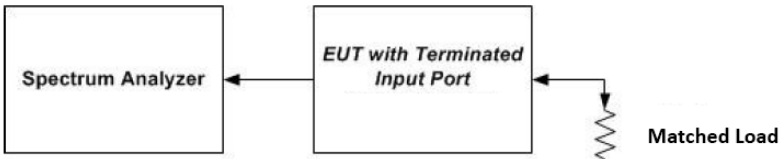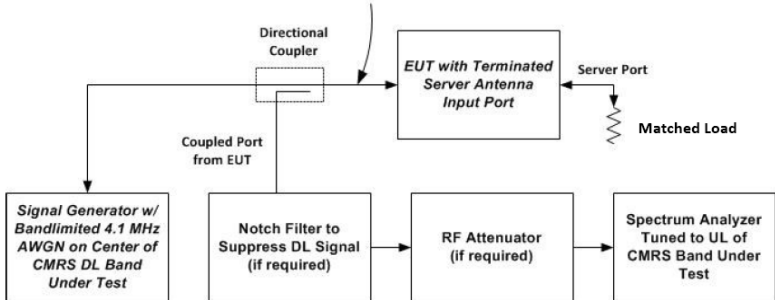Test Requirement:	FCC Part20 Section 20.21(e)(8)(i)(A); 20.21(e)(8)(i)(H)
Test Method:	KDB935210 D03 Signal Booster Measurements v04r04
Limit:	not exceed -103 dBm/MHz —RSSI. not exceed $-102.5 \text{ dBm/MHz} + 20 \log (F)$, where Frequency is the uplink mid-band frequency of the supported spectrum bands in MHz.
Test Setup:	 <p>Figure 3 – Noise limit test setup (also used for 7.8)</p>  <p>Figure 4 – Test setup for uplink noise power measurement in the presence of a downlink signal</p>
Test Procedure:	<ol style="list-style-type: none"> Connect the EUT to the test equipment as shown in Figure 3. Begin with the uplink output (donor) port connected to the spectrum analyzer. When measuring downlink noise, connect the downlink output (server) port to the spectrum analyzer. Set the spectrum analyzer RBW to 1 MHz with the VBW $\geq 3 \cdot$ RBW. Select the power averaging (rms) detector and trace average over at least 100 traces. Set the center frequency of the spectrum analyzer to the center of the CMRS band under test with the span $\geq 2 \cdot$ the CMRS band. Measure the maximum transmitter noise power level. Save the spectrum analyzer Test Plots as necessary for inclusion in the final test report. Repeat 7.7b) to 7.7f) for all operational uplink and downlink bands. Connect the EUT to the test equipment as shown in Figure 4 for uplink noise power measurement in the presence a downlink signal. Affirm the coupled path of the RF coupler is connected to the spectrum analyzer. Configure the signal generator for AWGN operation with a 99% OBW of 4.1 MHz. Set the spectrum analyzer RBW for 1 MHz, VBW $\geq 3 \cdot$ RBW, with a power averaging (rms) detector with at least 100 trace averages. Set the center frequency of the spectrum analyzer to the center of

	<p>the CMRS band under test, with the span ≥ 2 the CMRS band. This shall include all spectrum blocks in the particular CMRS band under test (see Appendix A).</p> <p>l) For uplink noise measurements, set the spectrum analyzer center frequency for the uplink band under test, and tune the signal generator to the center of the paired downlink band.</p> <p>m) Measure the maximum transmitter noise power level while varying the downlink signal generator output level from -90 dBm to -20 dBm, as measured at the input port (i.e., downlink signal level at the booster donor port node of Figure 4), in 1 dB steps inside the RSSI-dependent region, and in 10 dB steps outside the RSSI-dependent region. Report the six values closest to the limit, with at least two points within the RSSI-dependent region of the limit. See Appendix D for noise limits graphs.</p> <p>n) Repeat 7.7.1h) through 7.7.1m) for all operational uplink bands.</p> <p>Variable uplink noise timing</p> <p>Variable uplink noise timing is to be measured as follows, using the test setup shown in Figure 4.</p> <p>a) Set the spectrum analyzer to the uplink frequency to be measured.</p> <p>b) Set the span to 0 Hz, with a sweep time of 10 seconds.</p> <p>c) Set the power level of signal generator to the lowest level of the RSSI-dependent noise [see 7.7.1m)].</p> <p>d) Select MAX HOLD and increase the power level of signal generator by 10 dB for mobile boosters, and 20 dB for fixed boosters.</p> <p>e) Confirm that the uplink noise decreases to the specified level within 1 second for mobile devices, and within 3 seconds for fixed devices.¹²</p> <p>f) Repeat 7.7.2a) to 7.7.2e) for all operational uplink bands.</p> <p>g) Include Test Plotss and summary table in test report.</p>
Test Result:	PASS

6.6.2. Test Instruments

Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
Signal Generator	Agilent	N5182A	MY47070282	Sep. 12, 2019	Sep. 11, 2020
Spectrum Analyzer	Agilent	N9020A	MY49100619	Sep. 12, 2019	Sep. 11, 2020
RF Combiner	SUNVNDN	SUD-CS 0800	16230009	Sep. 12, 2019	Sep. 11, 2020
Attenuator	50FP-006-H3	JFW	907763	Sep. 12, 2019	Sep. 11, 2020

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

6.6.3. Test Data

Max Noise Power			
Frequency Band (MHz)	Measured dBm/MHz	Limit dBm/MHz	Result (dB)
Band2 Uplink	-40.84	-37.02	PASS
Band5 Uplink	-46.93	-44.05	PASS
Band12 Uplink	-46.70	-45.51	PASS
Band2 Downlink	-45.35	-36.65	PASS
Band5 Downlink	-46.79	-43.60	PASS
Band12 Downlink	-48.40	-45.15	PASS

Note: Fixed booster maximum noise power shall not exceed $-102.5 \text{ dBm/MHz} + 20 \log (F)$, where Frequency is the uplink mid-band frequency of the supported spectrum bands in MHz.

Variable Uplink Noise				
Operation Bands	RSSI dBm	Measured dBm/MHz	Limit dBm/MHz	Results
Band2	-60	-45.65	-43.00	PASS
	-58	-47.37	-45.00	PASS
	-55	-49.05	-48.00	PASS
	-53	-51.64	-50.00	PASS
	-50	-53.98	-53.00	PASS
	-48	-55.53	-55.00	PASS
Band5	-60	-51.23	-44.05	PASS
	-56	-52.94	-47.00	PASS
	-50	-55.63	-53.00	PASS
	-45	-61.80	-58.00	PASS
	-40	-66.32	-63.00	PASS
	-38	-67.71	-65.00	PASS
Band12	-60	-49.88	-45.51	PASS
	-50	-57.37	-53.00	PASS
	-48	-57.50	-55.00	PASS
	-45	-60.88	-58.00	PASS
	-43	-62.16	-60.00	PASS
	-40	-64.00	-63.00	PASS


Note: According to the KDB 935210 D03 Signal Booster Measurements v04r04 APPENDIX D, when outside of RSSI Dependent limit (20.21.e.8.1.A.1), fixed booster maximum noise power shall not exceed $-102.5 \text{ dBm/MHz} + 20 \log (F)$. RSSI limit not exceed -103 dBm/MHz -RSSI.

Variable Uplink Noise Timing

Operation Bands	Measured Sec	Limit Sec	Results
Band2	2.001	3	PASS
Band5	1.712	3	PASS
Band12	1.055	3	PASS


Test Plots

Band2

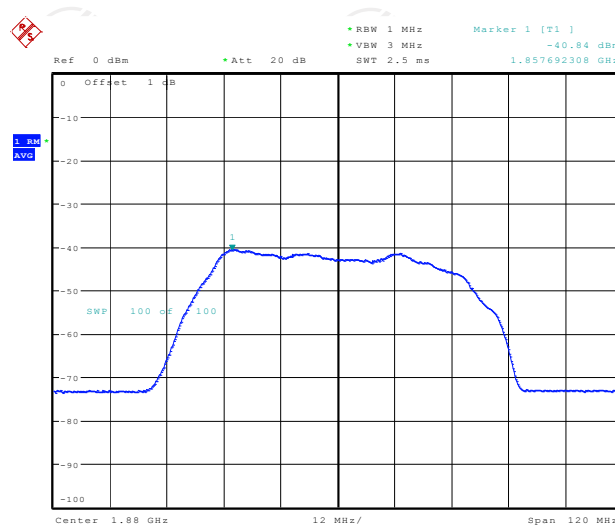

Date: 15 AUG 2020 20:56:49


Uplink Noise

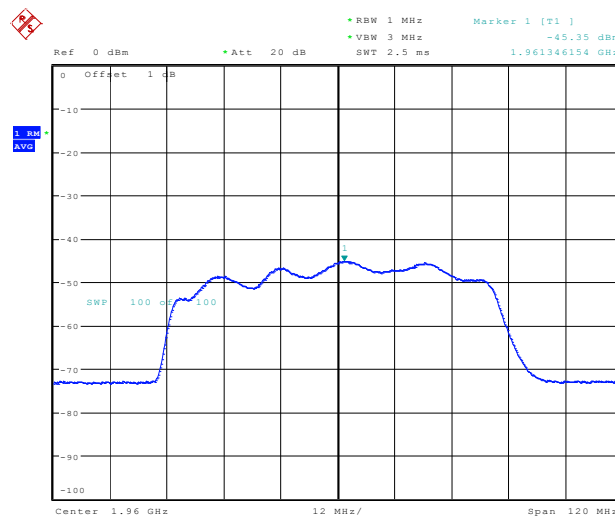

Date: 15 AUG 2020 20:57:45


Downlink Noise

Band5

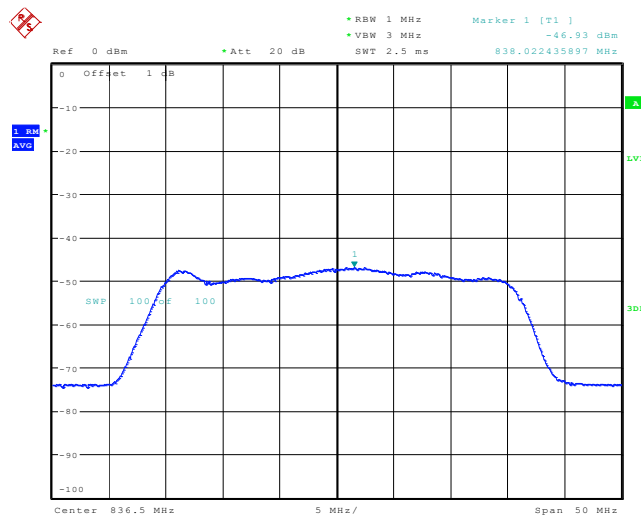

Date: 15.AUG.2020 20:56:26


Uplink Noise

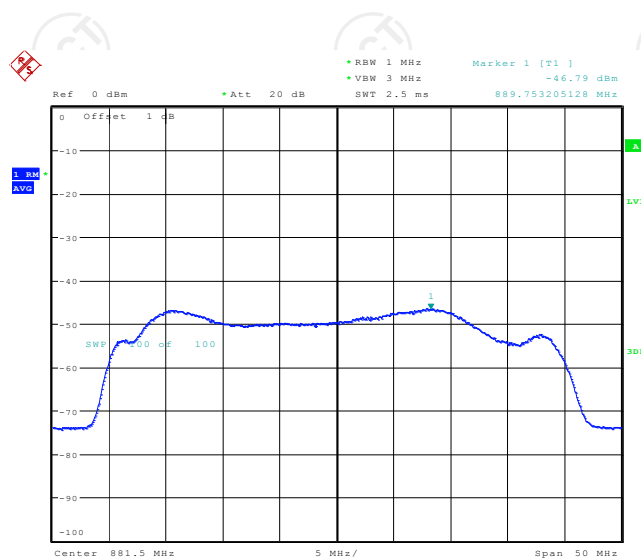

Date: 15.AUG.2020 20:58:13


Downlink Noise

Band12

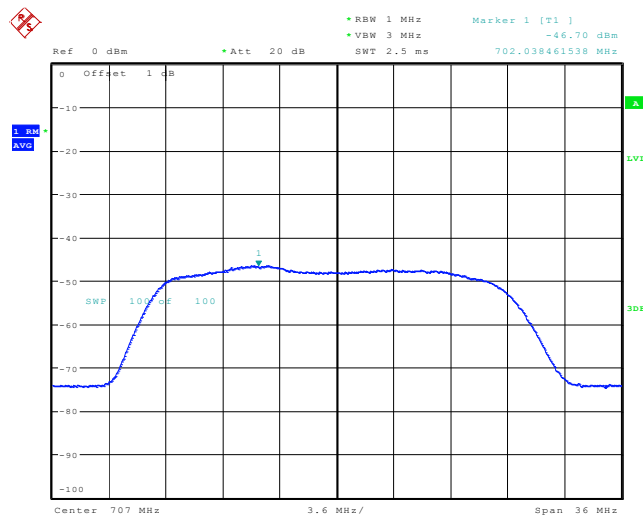

Date: 15.AUG.2020 20:54:41


Uplink Noise

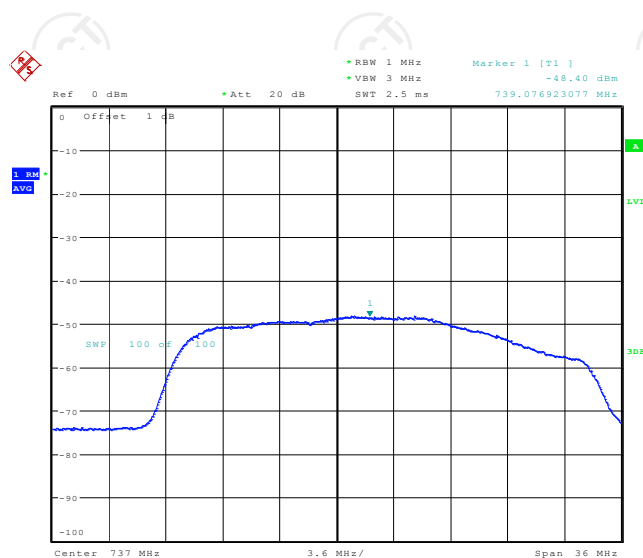

Date: 15.AUG.2020 20:58:33


Downlink Noise

Variable Noise Timing Test Plots

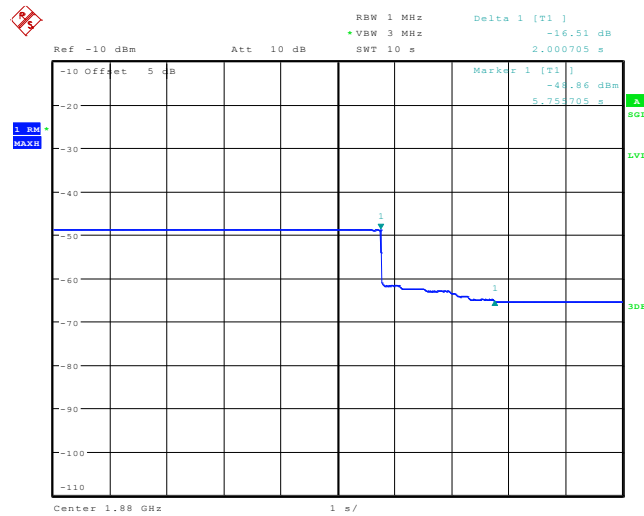


Date: 19.AUG.2020 20:01:19

Band2

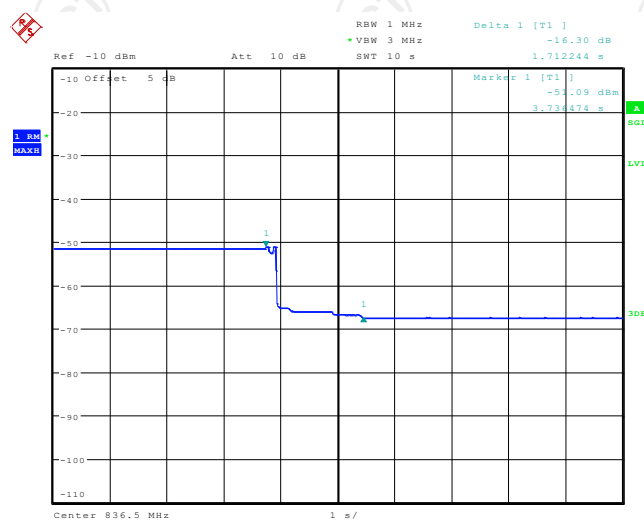

Date: 19.AUG.2020 20:05:05

Band5

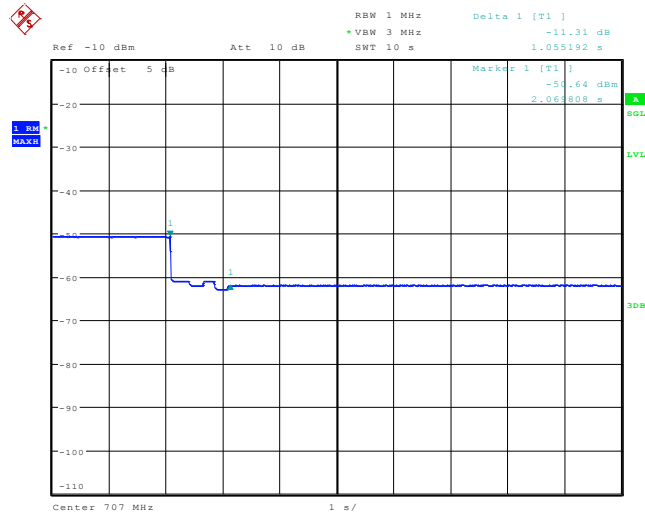


Date: 19 AUG 2020 20:07:16

Band12

6.7. Uplink Inactivity

6.7.1. Test Specification

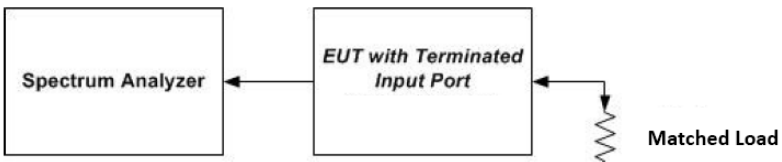Test Requirement:	FCC Part20 Section 20.21(e)(8)(i)(I)
Test Method:	KDB935210 D03 Signal Booster Measurements v04r04
Limit:	20.21(e), When a consumer booster is not serving an active device connection after 5 minutes the uplink noise power shall not exceed -70 dBm/MHz.
Test Setup:	 <p>Figure 3 – Noise limit test setup (also used for 7.8)</p>
Test Procedure:	<ol style="list-style-type: none"> Connect the EUT to the test equipment as shown in Set-Up with the uplink output connected to the spectrum analyzer. Select the RMS power averaging detector. Set the spectrum analyzer RBW for 1 MHz with the VBW $\geq 3X$ RBW. Set the center frequency of the spectrum analyzer to the center of the uplink operational band. Set the span for 0 Hz with a single sweep time for a minimum of 330 seconds. Start to capture a new trace using MAX HOLD. After approximately 15 seconds turn on the EUT power. Once the full spectrum analyzer trace is complete place a MARKER on the leading edge of the pulse and use the DELTA MARKER METHOD to measure the time until the uplink was squelched. Ensure the noise level for the squelched signal is below the uplink inactivity noise power limit, as specified by the rules. Capture the Test Plots for inclusion in the test report. Measure noise using procedures in a) to e). Repeat steps c) to k) for all operational uplink bands.
Test Result:	PASS

6.7.2. Test Instruments


Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
Spectrum Analyzer	Agilent	N9020A	MY49100619	Sep. 12, 2019	Sep. 11, 2020

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

6.7.3. Test Data


Uplink Inactivity			
Operation Bands	Measured (s)	Limit (s)	Result
Band2	268.78	300.0	PASS
Band5	268.22	300.0	PASS
Band12	267.47	300.0	PASS

Test Plots

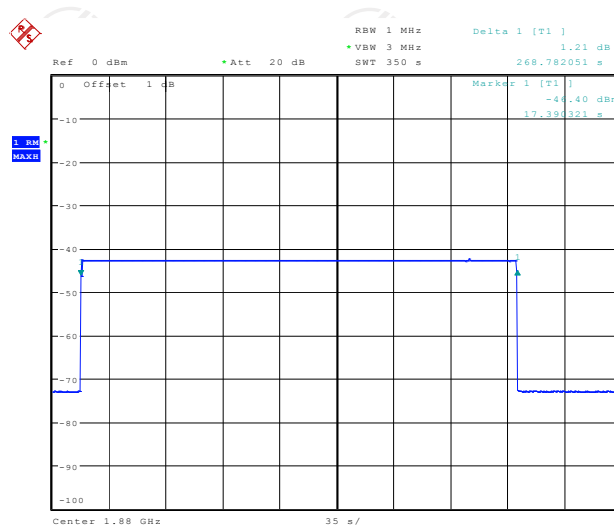


Date: 15.AUG.2020 21:41:57

Band2

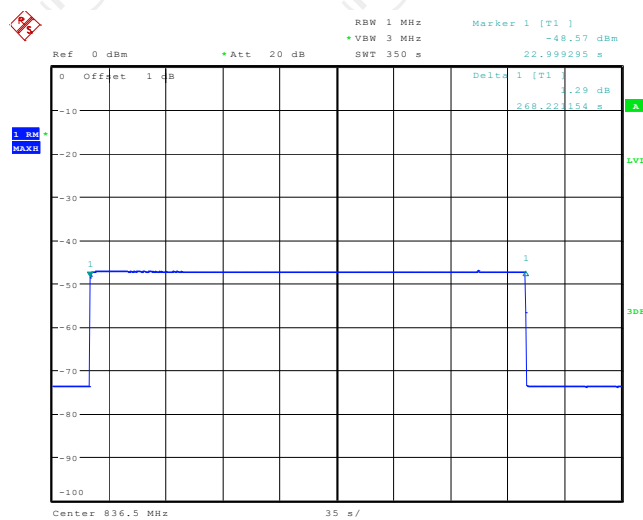

Date: 15.AUG.2020 21:35:18

Band5

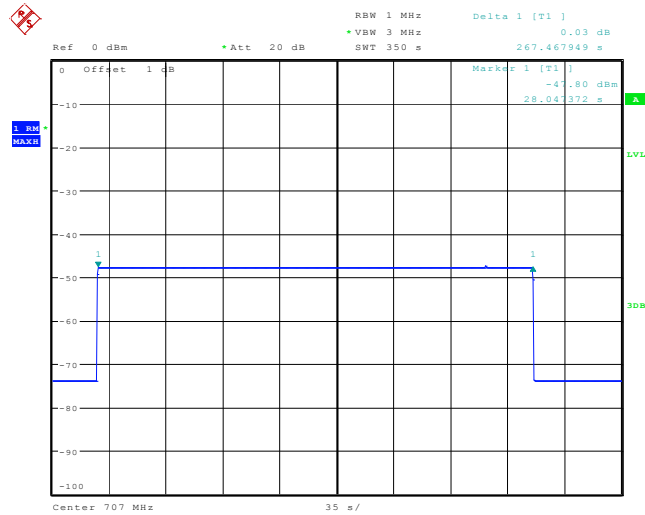


Date: 20. AUG. 2020 16:07:25

Band12

6.8. Variable Booster Gain

6.8.1. Test Specification

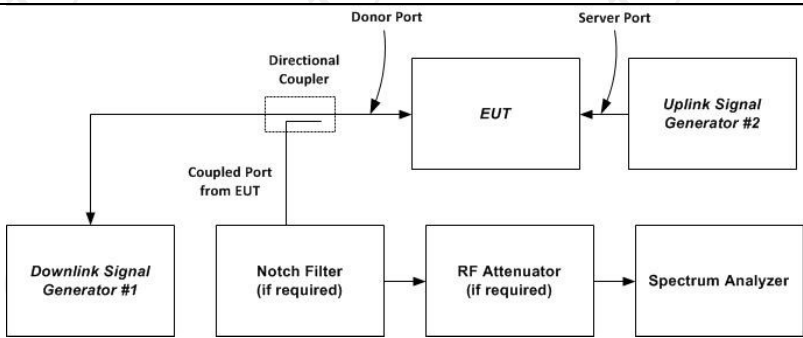Test Requirement:	FCC Part20 Section 120.21(e)(8)(i)(C)(1) FCC Part20 Section 120.21(e)(8)(i)(H)
Test Method:	KDB935210 D03 Signal booster Measurements v04r04
Limit:	-34 dB - RSSI + MSCL
Test Setup:	 <p>Figure 5 – Variable gain instrumentation test setup</p>
Test Procedure:	<p>Variable gain:</p> <ol style="list-style-type: none"> Connect the EUT to the test equipment as shown in Figure 5 with the uplink output (donor) port connected to signal generator #1. Affirm that the coupled path of the RF coupler is connected to the spectrum analyzer. Configure downlink signal generator #1 for AWGN operation with a 99% OBW of 4.1 MHz, tuned to the center of the operational band. Set the power level and frequency of signal generator #2 to a value that is 5 dB below the AGC level determined from 7.2. The signal type is AWGN with a 99% OBW of 4.1 MHz. Set RBW = 100 kHz. Set VBW ≥ 300 kHz. Select the CHANNEL POWER measurement mode. Select the power averaging (rms) detector. Affirm that the number of measurement points per sweep ≥ (2 . span)/RBW. Sweep time = auto couple or as necessary (but no less than auto couple value). Trace average at least 10 traces in power averaging (i.e., rms) mode. Measure the maximum channel power and compute maximum gain when varying the signal generator #1 output to a level from .90 dBm to .20 dBm, as measured at the input port (i.e., downlink signal level at the booster donor port node of Figure 5), in 1 dB steps inside the RSSI-dependent region, and 10 dB steps outside the RSSI-dependent region. Report the six values closest to the limit, including at least two points from within the RSSI-dependent region of operation. See gain limit in charts in Appendix D for uplink gain requirements. Additionally, document that the EUT provides equivalent uplink and downlink gain, and when operating in shutoff mode that the uplink and downlink gain is within the transmit power off mode gain limits. Repeat 7.9.1b) to 7.9.1k) for all operational uplink bands. <p>Variable uplink gain timing: Variable uplink gain timing is to be measured as follows, using the test setup shown in Figure 5.</p>

	<p>a) Set the spectrum analyzer to the uplink frequency to be measured.</p> <p>b) Set the span to 0 Hz with a sweep time of 10 seconds.</p> <p>c) Set the power level of signal generator #1 to the lowest level of the RSSI-dependent gain [see 7.9.1k)].</p> <p>d) Select MAX HOLD and increase the power level of signal generator #1 by 10 dB for mobile boosters, and by 20 dB for fixed indoor boosters. Signal generator #2 remains same, as described in 7.9.1c).</p> <p>e) Confirm that the uplink gain decreases to the specified levels, within 1 second for mobile devices, and within 3 seconds for fixed devices.13</p> <p>f) Repeat 7.9.2a) to 7.9.2e) for all operational uplink bands.</p>
Test Result:	PASS

6.8.2. Test Instruments

Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
Signal Generator	Agilent	E4421B	GB39340839	Jul. 30, 2019	Jul. 29, 2020
Signal Generator	Agilent	N5182A	MY47070282	Sep. 12, 2019	Sep. 11, 2020
Spectrum Analyzer	Agilent	N9020A	MY49100619	Sep. 12, 2019	Sep. 11, 2020
RF Combiner	SUNVNDN	SUD-CS 0800	16230009	Sep. 12, 2019	Sep. 11, 2020
Attenuator	50FP-006-H3	JFW	907763	Sep. 12, 2019	Sep. 11, 2020

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

6.8.3. Test Data

Mobile station coupling loss (MSCL): the minimum coupling loss (in dB) between the wireless device and the input (server) port of the consumer booster. MSCL must be calculated or measured for each band of operation and provided in compliance test reports. MSCL includes the path loss from the wireless device, and the booster's server antenna gain and cable loss. The wireless device is assumed to be an isotropic (0 dBi) antenna reference. Minimum standoff distances from inside wireless devices to the booster's server antenna must be reasonable and specified by the manufacturer in customer provided installation manuals.

MSCL Calculation							
Operation Bands	Frequency (MHz)	Distance (m)	Path loss (dB)	Indoor Antenna Gain(dBi)	Indoor Cable Loss(dB)	Polarity Loss(dB)	MSCL (dB)
Band2	1850	2	43.86	8.5	2.55	3.01	40.92
Band5	824	2	36.84	7	2.29	3.01	35.14
Band12	698	2	35.40	7	2.19	3.01	33.60

Note : Path loss = $20\log f + 20\log d - 27.5$


Polarity loss = $20\log (1/\sin (45\deg)) \text{ dB} = 3.01\text{dB}$

Variable booster gain							
Operation Band	RSSI (dBm)	Input Power (dBm)	Output Power (dBm)	Measured Gain (dB)	MSCL	Limit	Results
Bnad2	-47	-46	-2.11	43.89	40.92	53.92	PASS
	-45	-46	-3.19	42.81	40.92	51.92	PASS
	-43	-46	-6.41	39.59	40.92	49.92	PASS
	-41	-46	-7.86	38.14	40.92	47.92	PASS
	-40	-46	-7.92	38.08	40.92	46.92	PASS
	-38	-46	-10.28	35.72	40.92	44.92	PASS
Band5	-50	-40	7.64	47.64	35.14	51.14	PASS
	-45	-40	1.93	41.93	35.14	46.14	PASS
	-42	-40	-2.54	37.46	35.14	43.14	PASS
	-41	-40	-3.79	36.21	35.14	42.14	PASS
	-40	-40	-3.53	36.47	35.14	41.14	PASS
	-38	-40	-5.05	34.95	35.14	39.14	PASS
Band12	-55	-44	6.07	50.07	33.60	54.60	PASS
	-48	-44	0.83	44.83	33.60	47.60	PASS
	-45	-44	-1.75	42.25	33.60	44.60	PASS
	-43	-44	-4.21	39.79	33.60	42.60	PASS
	-40	-44	-7.21	36.79	33.60	39.60	PASS
	-39	-44	-7.61	36.39	33.60	38.60	PASS

Variable Uplink Gain Timing


Operation Band	Measured Sec	Limit Sec	Result
Band2	2.017	3.0	PASS
Band5	2.161	3.0	PASS
Band12	1.664	3.0	PASS

Variable Uplink Gain Timing Test Plots

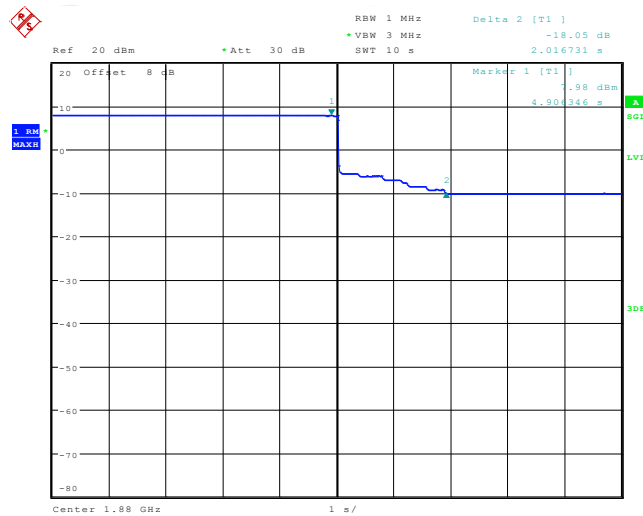


Date: 19 AUG 2020 20:34:12

Band2

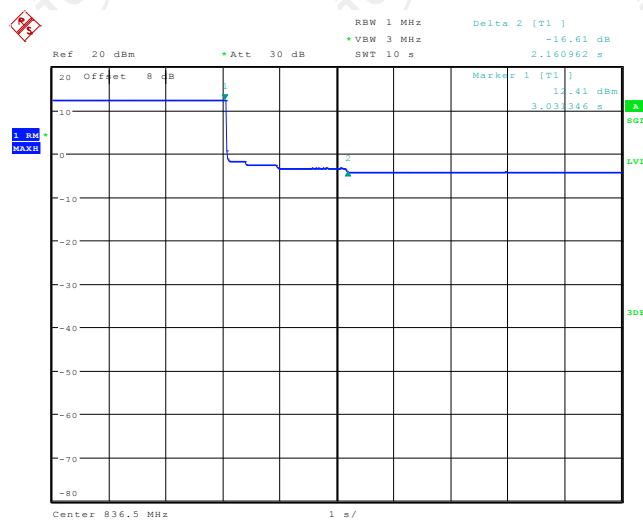

Date: 19 AUG 2020 20:36:59

Band5

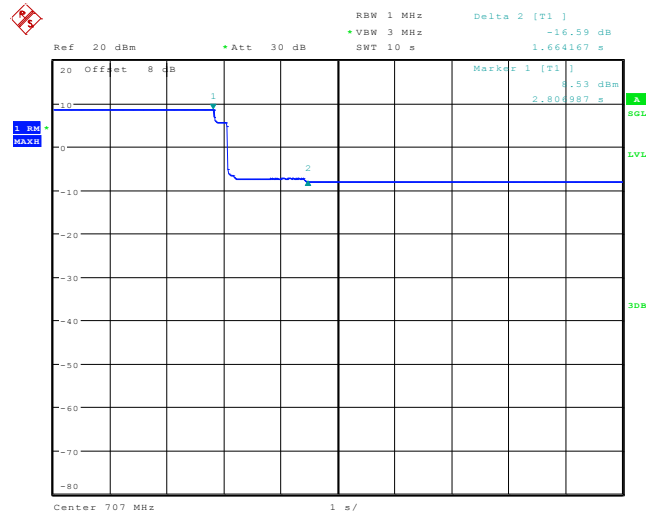


Date: 19 AUG 2020 20:38:22

Band12

6.9. Occupied Bandwidth

6.9.1. Test Specification

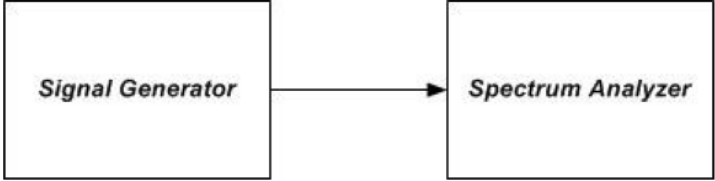Test Requirement:	FCC Part2 Section 2.1049
Test Method:	KDB935210 D03 Signal booster Measurements v04r04
Limit:	N/A
Test setup:	 <p>Figure 6 – Test setup for measuring characteristics of test signals used for subsequent EUT occupied bandwidth testing</p>
Test Procedure:	<ul style="list-style-type: none"> a) Connect the test equipment as shown in Figure 6 to firstly measure the characteristics of the test signals produced by the signal generator. b) Set VBW ≥ 3 RBW. c) Set the center frequency of the spectrum analyzer to the center of the operational band. The span will be adjusted for each modulation type and OBW as necessary for accurately viewing the signals. d) Set the signal generator for power level to match the values obtained from the tests of 7.2. e) Set the signal generator modulation type for GSM with a PRBS pattern and allow the trace on the signal generator to stabilize adjusting the span as necessary. f) Set the spectrum analyzer RBW for 1% to 5% of the EBW. g) Capture the spectrum analyzer trace for inclusion in the test report. h) Repeat 7.10c) to 7.10g) for CDMA and W-CDMA modulation, adjusting the span as necessary. AWGN or LTE may be used in place of W-CDMA, as an option. i) Repeat 7.10c) to 7.10h) for all uplink and downlink operational bands. j) Connect the test equipment as shown in Figure 1, with the uplink output (donor) port connected to the spectrum analyzer, and the server port connected to the signal generator. k) Repeat 7.10c) to 7.10i) with this EUT uplink path test setup. l) Connect the test equipment as shown in Figure 1, with the downlink output (server) port connected to the spectrum analyzer, and the donor port connected to the signal generator. m) Repeat 7.10c) to 7.10i) with this EUT downlink path test setup.
Test results:	PASS

6.9.2. Test Instruments

Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
Signal Generator	Agilent	N5182A	MY47070282	Sep. 12, 2019	Sep. 11, 2020
Spectrum Analyzer	Agilent	N9020A	MY49100619	Sep. 12, 2019	Sep. 11, 2020


Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

6.9.3. Test Data

Operation Band		Signal Type	Input OBW [MHz]	Output OBW [MHz]	Results
Uplink	Band2	GSM	0.245	0.247	PASS
		CDMA	1.240	1.245	PASS
		LTE	4.519	4.535	PASS
	Band5	GSM	0.244	0.245	PASS
		CDMA	1.250	1.245	PASS
		LTE	4.583	4.519	PASS
	Band12	GSM	0.245	0.245	PASS
		CDMA	1.240	1.245	PASS
		LTE	4.535	4.519	PASS
Downlink	Band2	GSM	0.248	0.245	PASS
		CDMA	1.245	1.240	PASS
		LTE	4.551	4.535	PASS
	Band5	GSM	0.248	0.247	PASS
		CDMA	1.245	1.245	PASS
		LTE	4.615	4.535	PASS
	Band12	GSM	0.248	0.245	PASS
		CDMA	1.250	1.240	PASS
		LTE	4.519	4.535	PASS


Test Plots

Band2 GSM UL Input

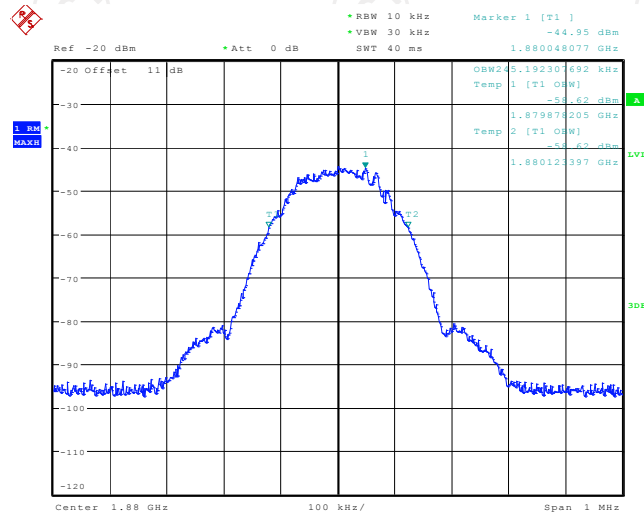


Date: 17.AUG.2020 10:21:32

Band2 GSM UL output

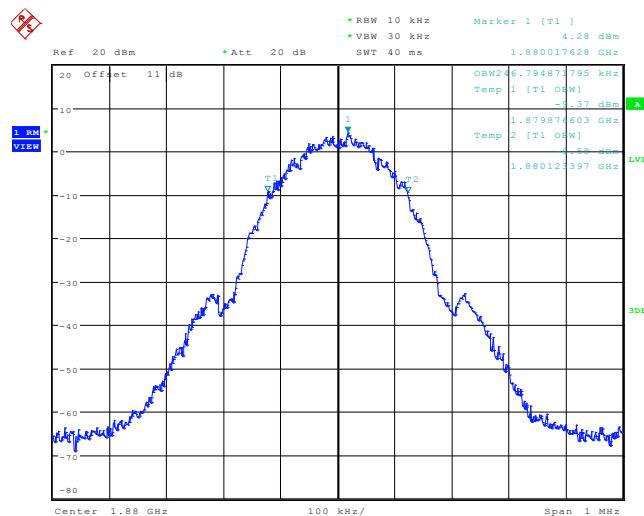


Date: 29.AUG.2020 15:55:26

Band2 GSM DL Input

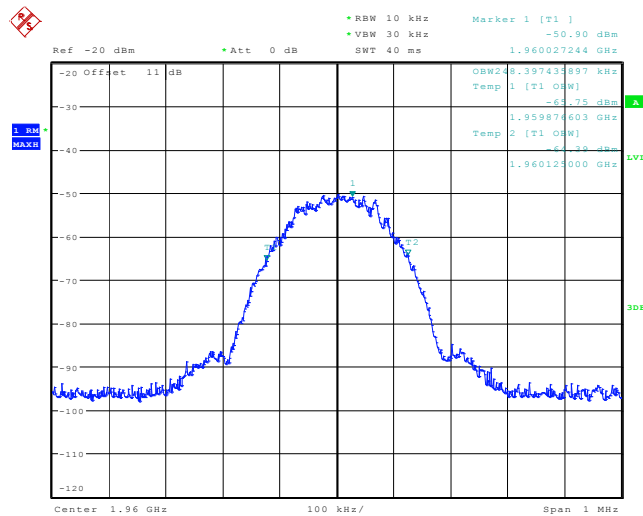


Date: 17.AUG.2020 10:22:21

Band2 GSM DL Output

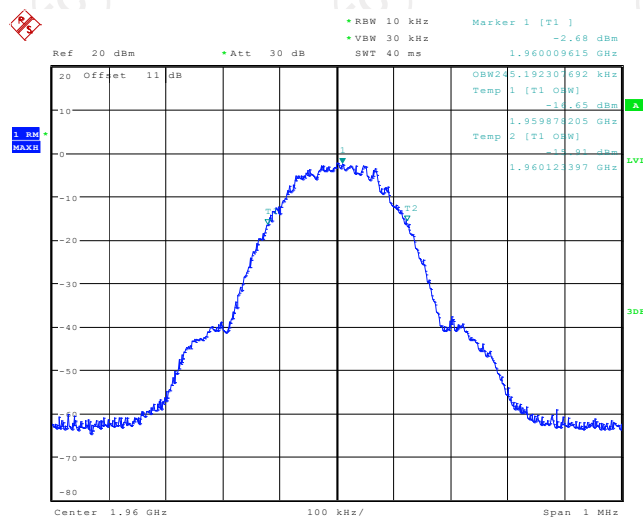


Date: 17.AUG.2020 11:29:34

Band2 CDMA UL Input

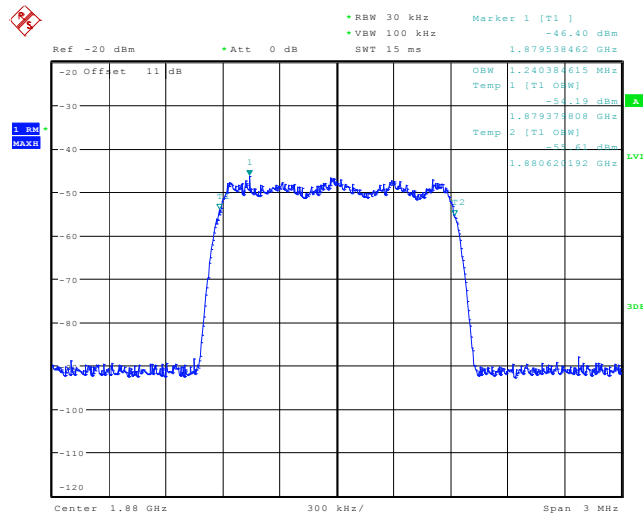


Date: 17.AUG.2020 10:20:44

Band2 CDMA UL output

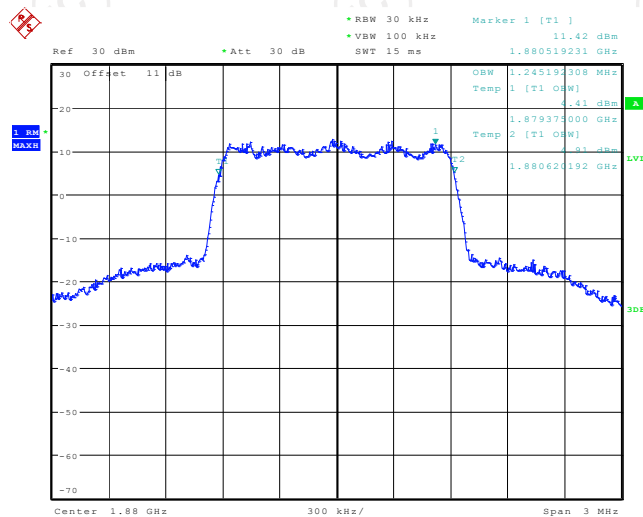


Date: 17.AUG.2020 11:47:30

Band2 CDMA DL Input

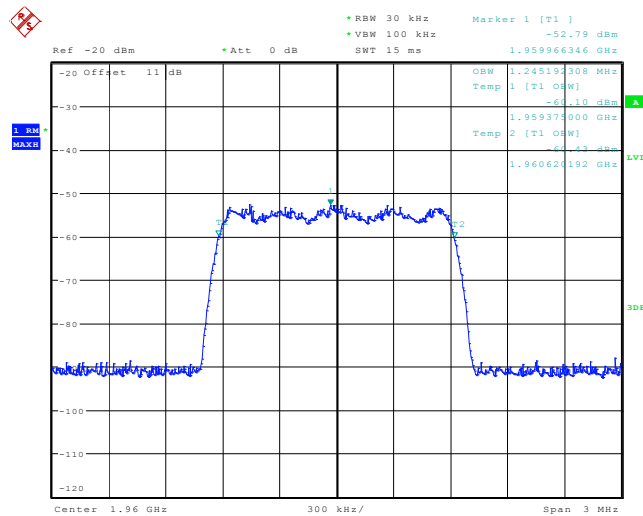


Date: 17.AUG.2020 10:23:07

Band2 CDMA DL Output

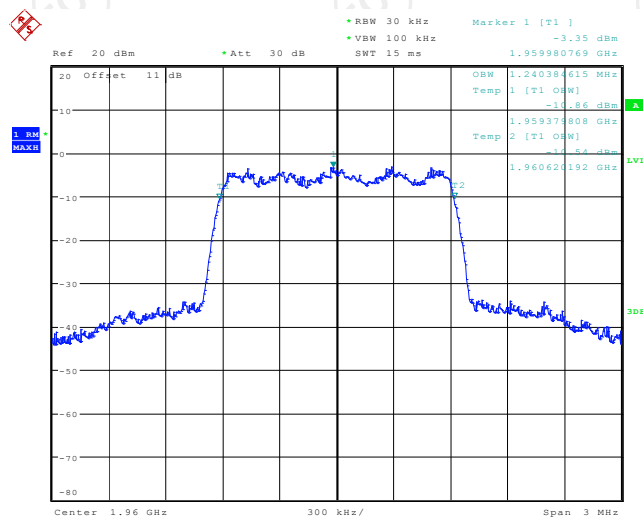


Date: 17.AUG.2020 11:28:38

Band2 LTE UL Input

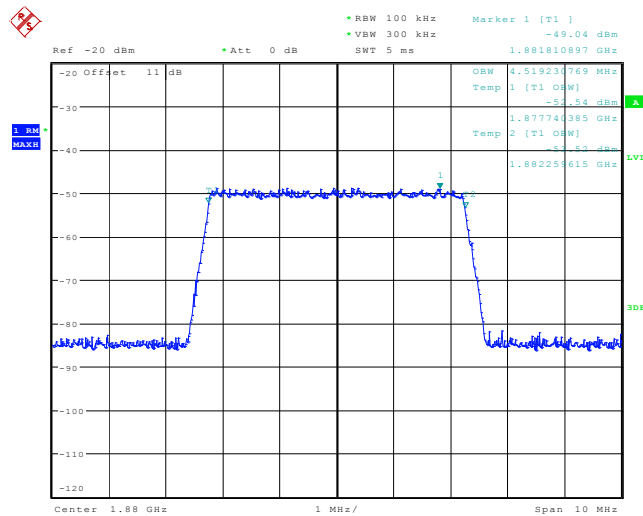


Date: 17.AUG.2020 10:19:46

Band2 LTE UL output

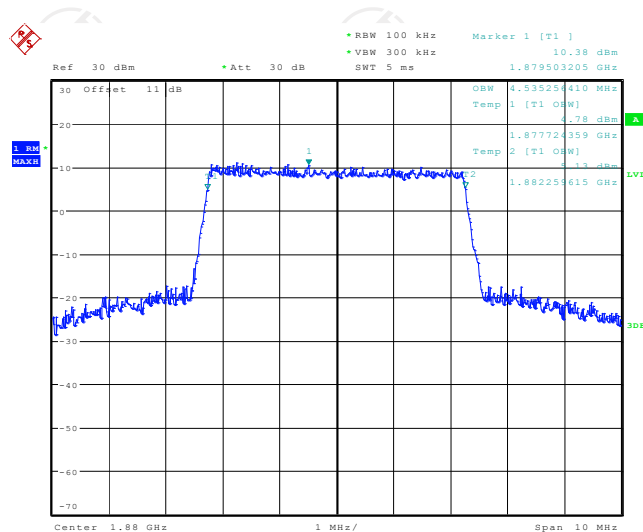


Date: 17.AUG.2020 11:46:04

Band2 LTE DL Input

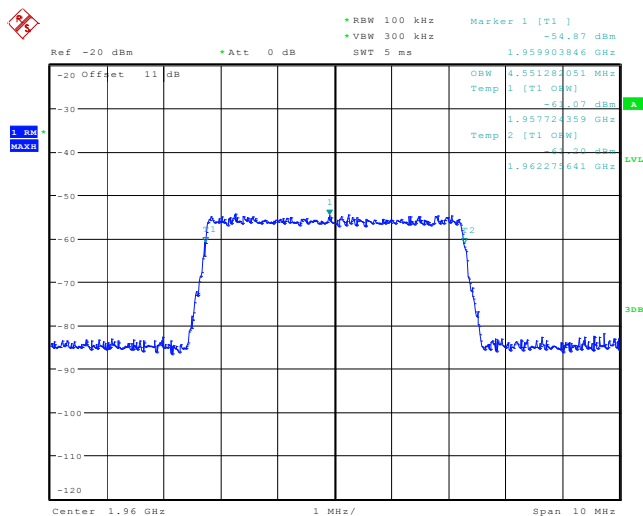


Date: 17.AUG.2020 10:24:11

Band2 LTE DL Output

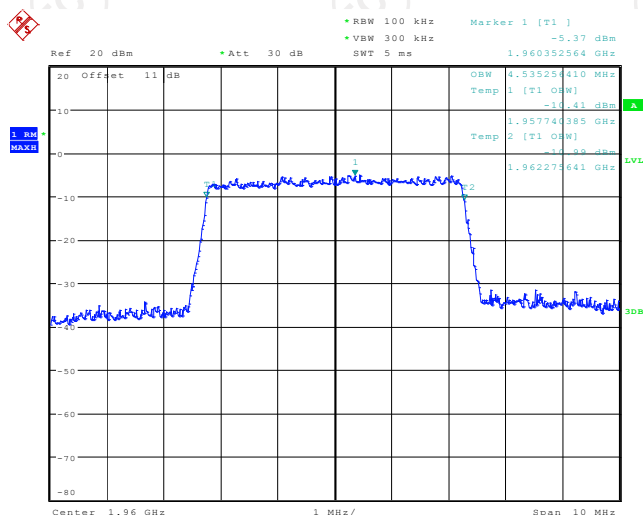


Date: 17.AUG.2020 11:27:04

Band5 GSM UL Input

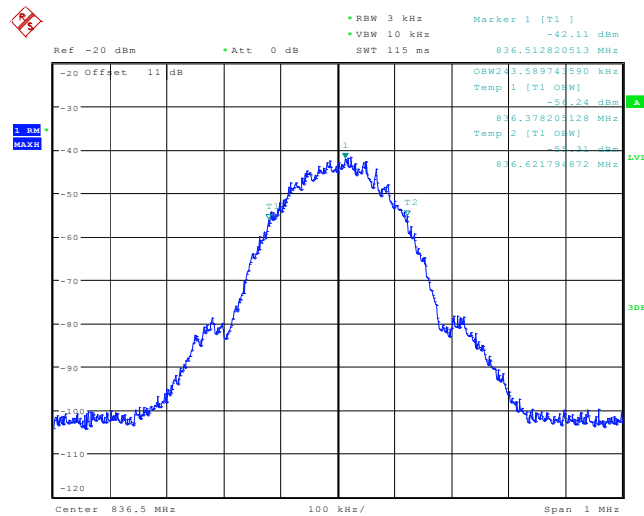


Date: 17.AUG.2020 10:17:27

Band5 GSM UL output

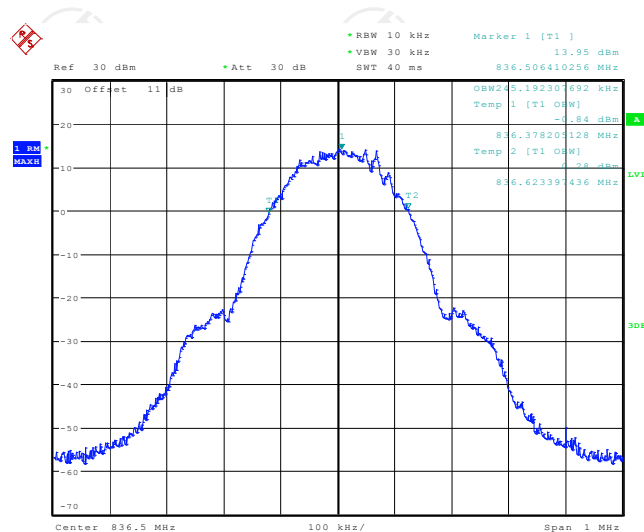


Date: 17.AUG.2020 11:43:27

Band5 GSM DL Input

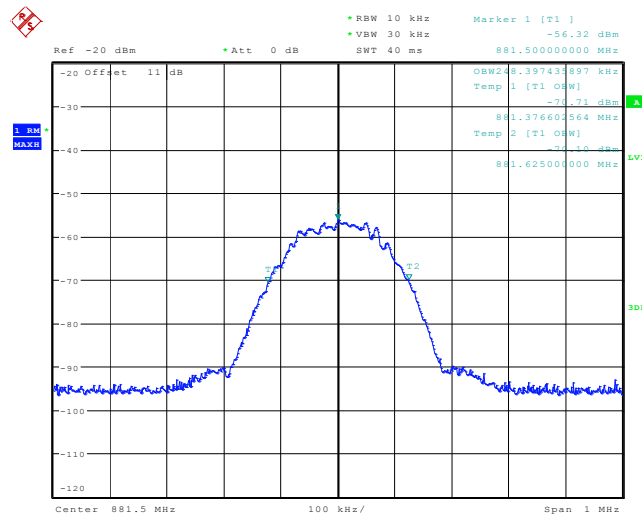


Date: 17.AUG.2020 10:10:09

Band5 GSM DL Output

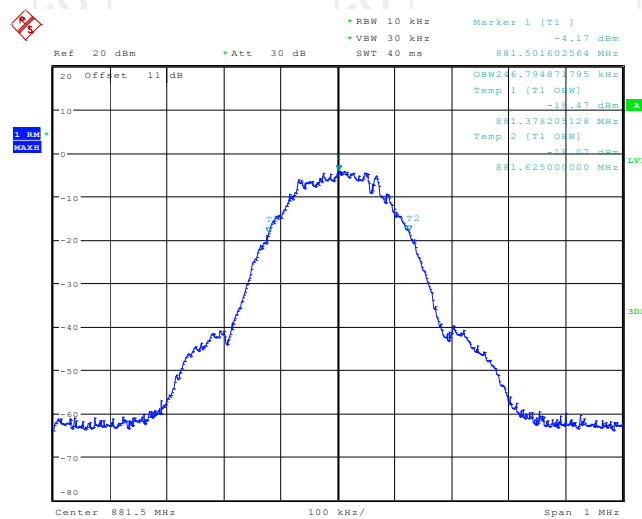


Date: 17.AUG.2020 11:30:49

Band5 CDMA UL Input

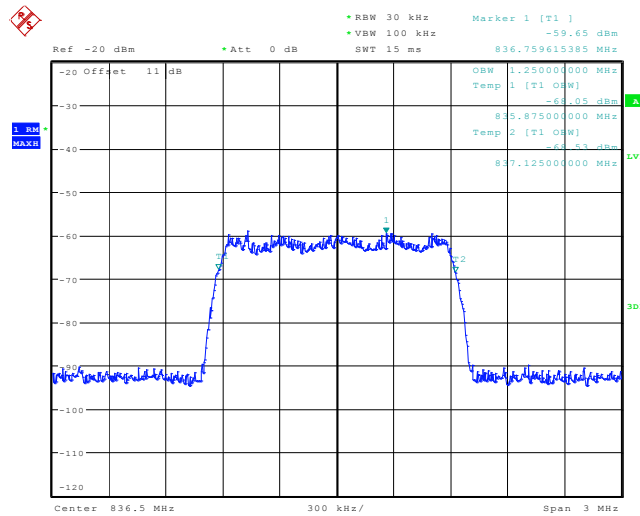


Date: 17.AUG.2020 10:15:00

Band5 CDMA UL output

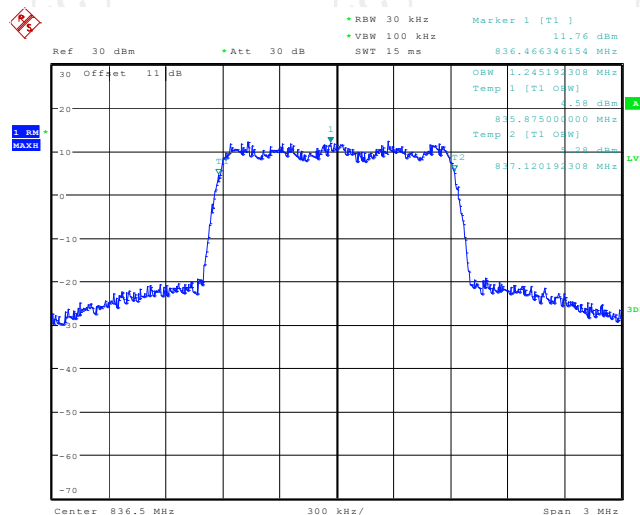


Date: 17.AUG.2020 11:44:18

Band5 CDMA DL Input

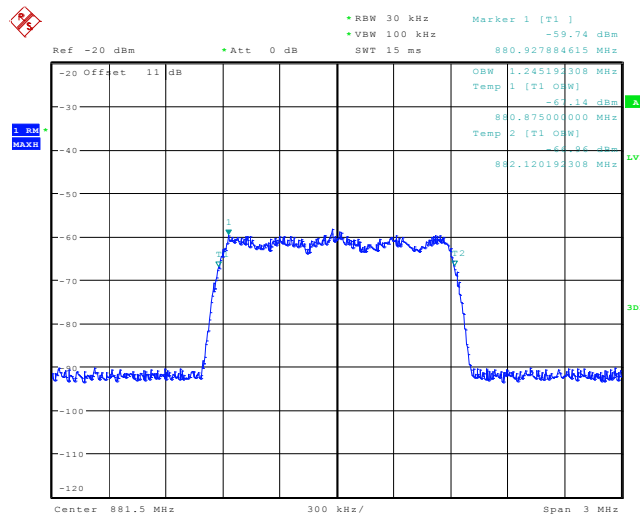


Date: 17.AUG.2020 10:11:07

Band5 CDMA DL Output

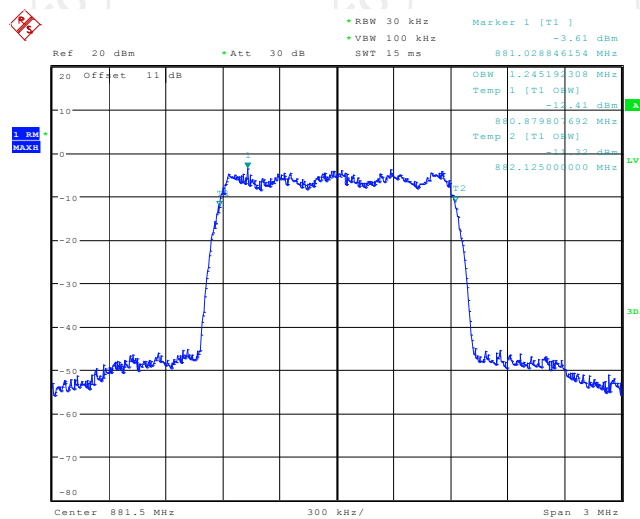


Date: 17.AUG.2020 11:31:54

Band5 LTE UL Input

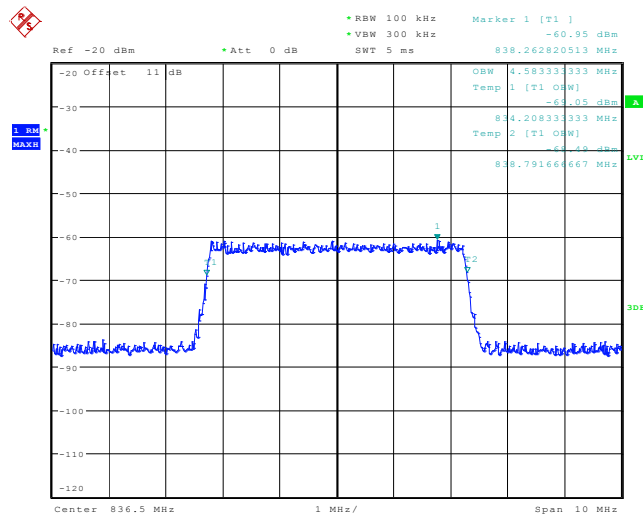


Date: 17.AUG.2020 10:13:24

Band5 LTE UL output

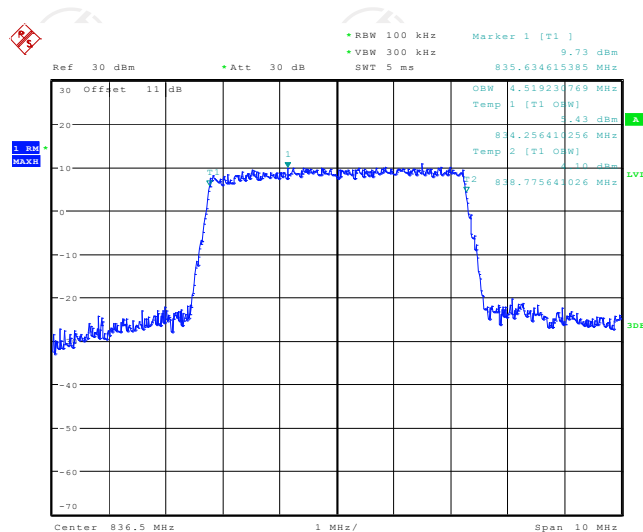


Date: 17.AUG.2020 11:45:10

Band5 LTE DL Input

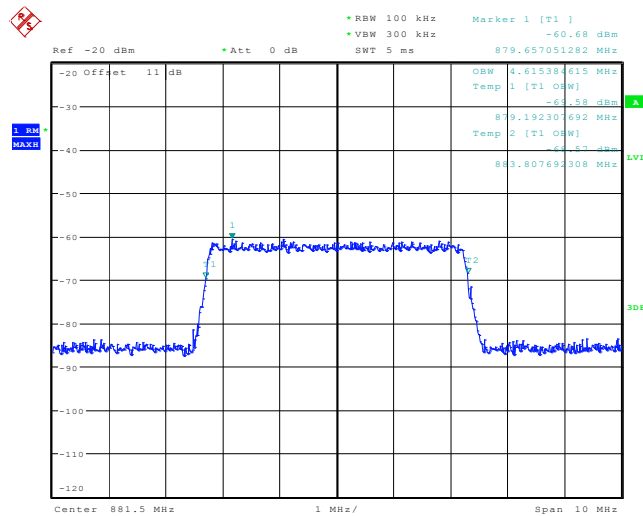


Date: 17.AUG.2020 10:12:01

Band5 LTE DL Output

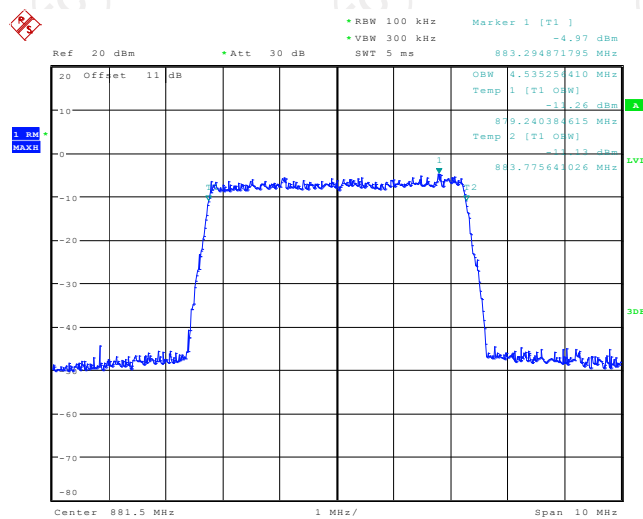


Date: 17.AUG.2020 11:32:50

Band12 GSM UL Input

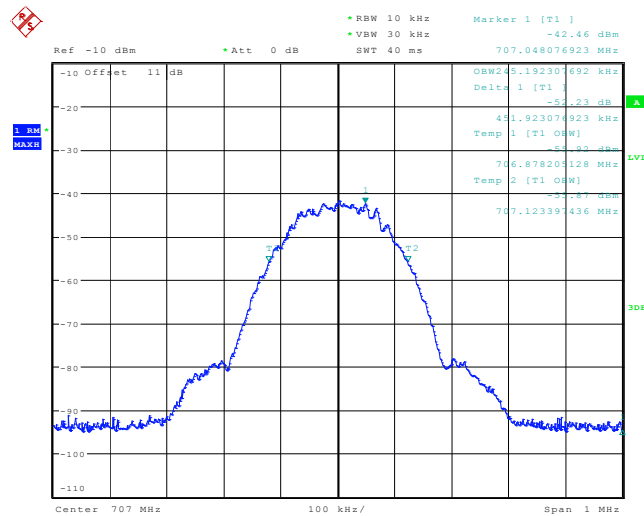


Date: 17.AUG.2020 09:54:02

Band12 GSM UL output

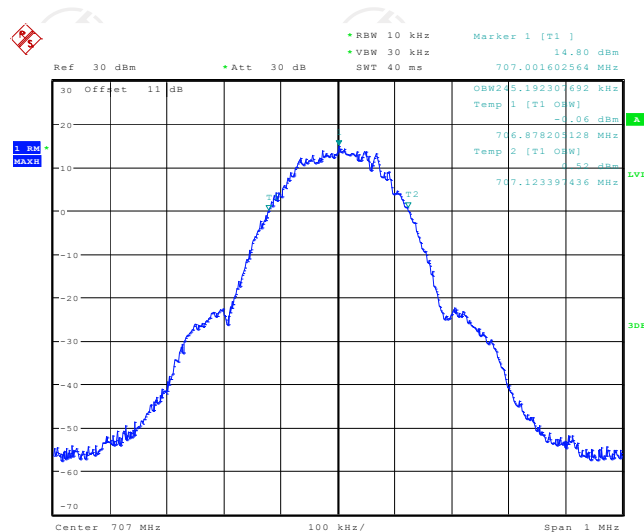


Date: 17.AUG.2020 11:42:35

Band12 GSM DL Input

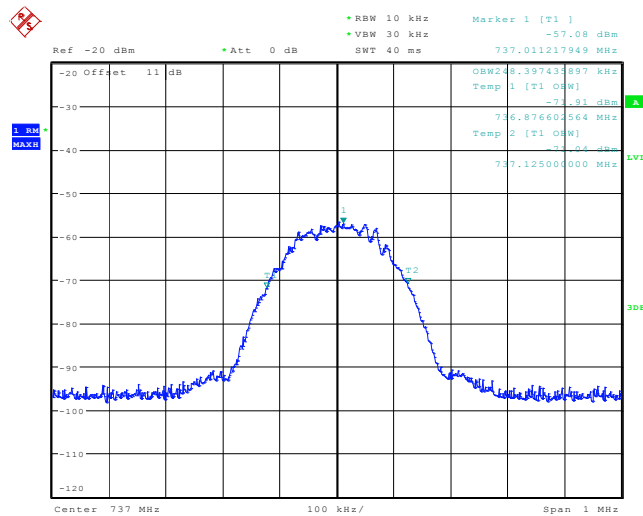


Date: 17.AUG.2020 10:03:37

Band12 GSM DL Output

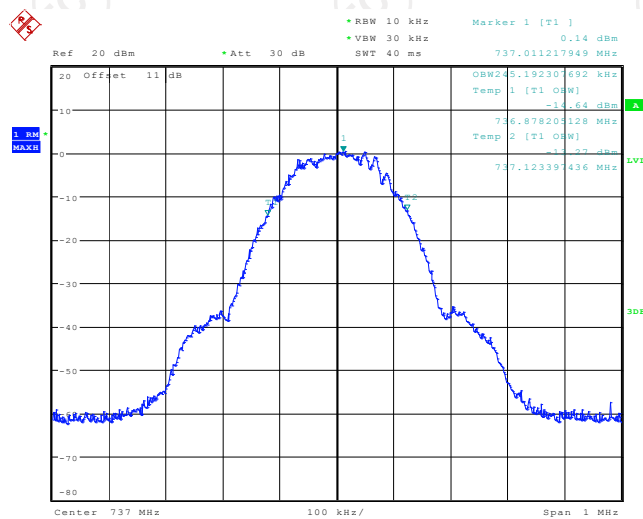


Date: 17.AUG.2020 11:36:10

Band12 CDMA UL Input

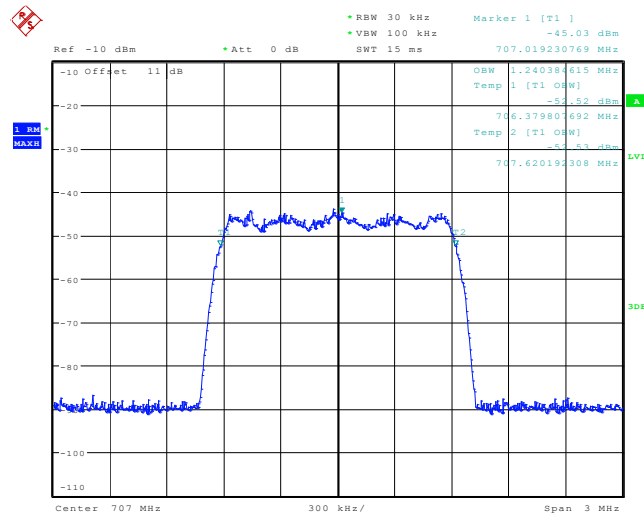


Date: 17.AUG.2020 09:56:02

Band12 CDMA UL output

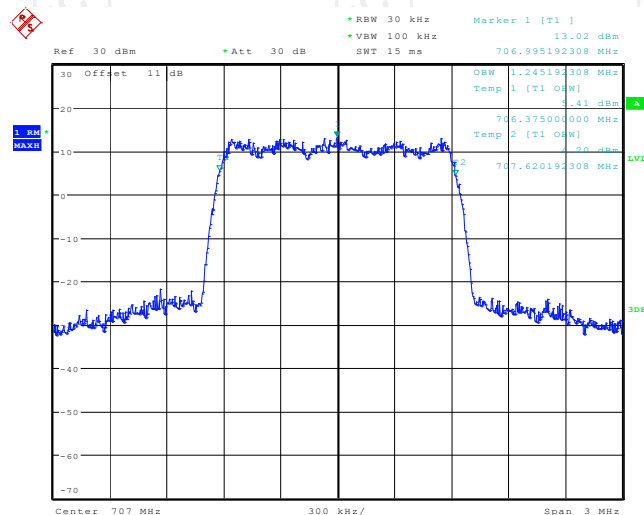


Date: 17.AUG.2020 11:40:47

Band12 CDMA DL Input

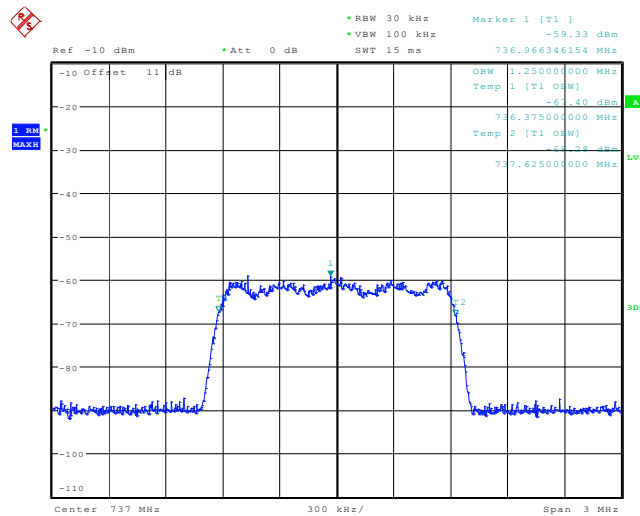


Date: 17.AUG.2020 09:59:57

Band12 CDMA DL Output

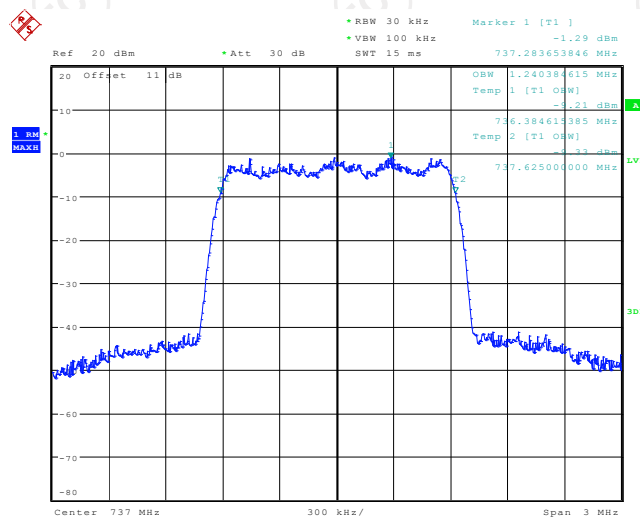


Date: 17.AUG.2020 11:34:58

Band12 LTE UL Input

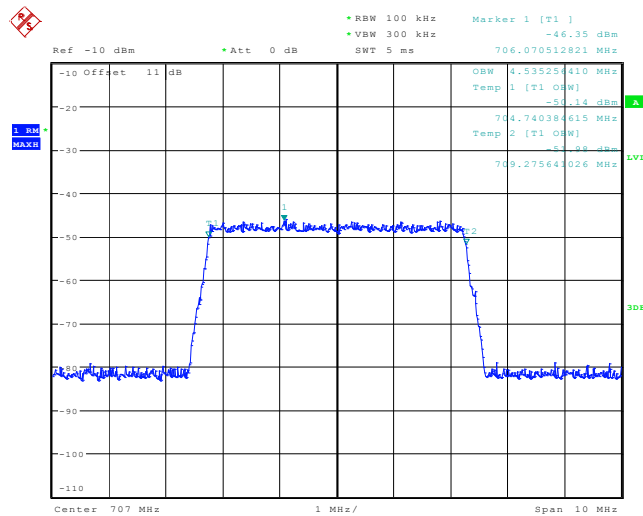


Date: 17.AUG.2020 09:57:13

Band12 LTE UL output

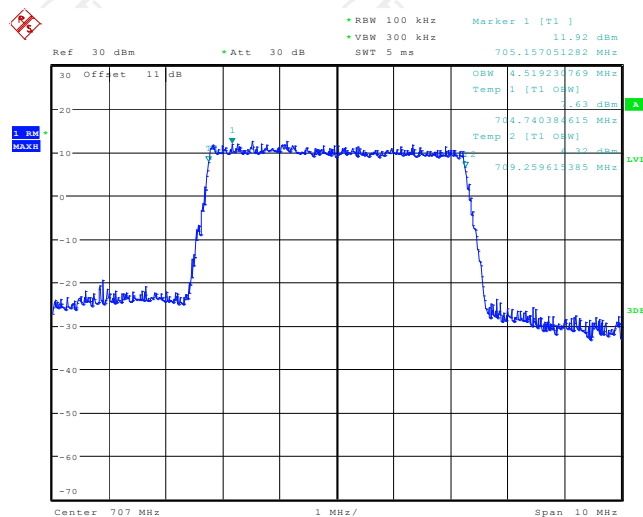


Date: 17.AUG.2020 11:41:49

Band12 LTE DL Input

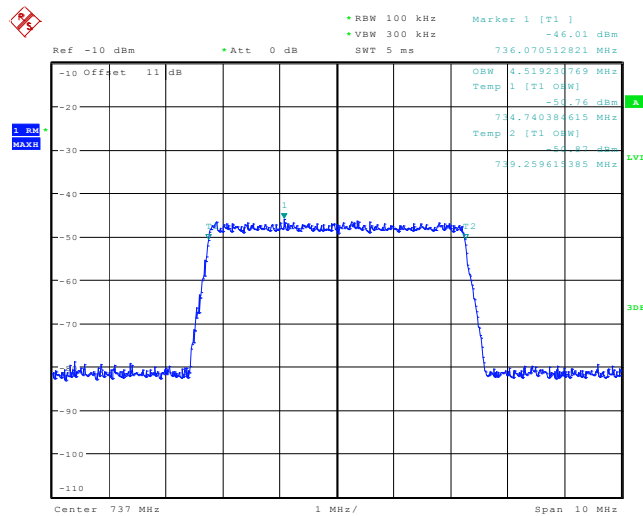

Date: 17.AUG.2020 09:58:03



Band12 LTE DL Output

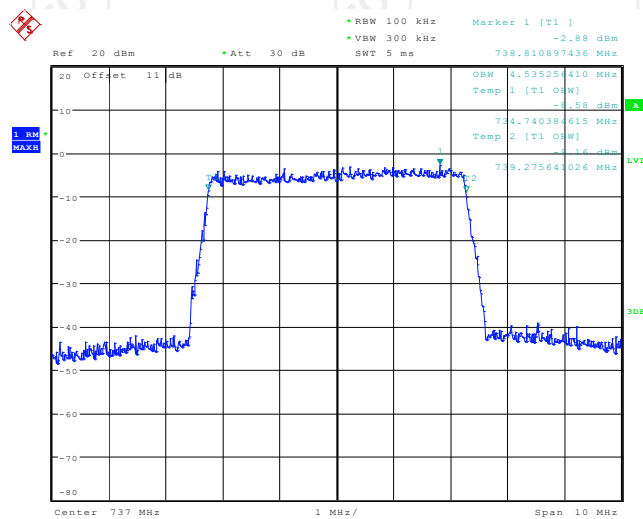

Date: 17.AUG.2020 11:33:53

6.10. Oscillation Detection and Mitigation

6.10.1. Test Specification

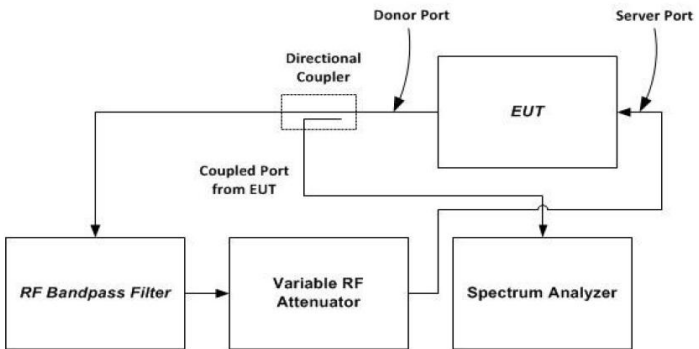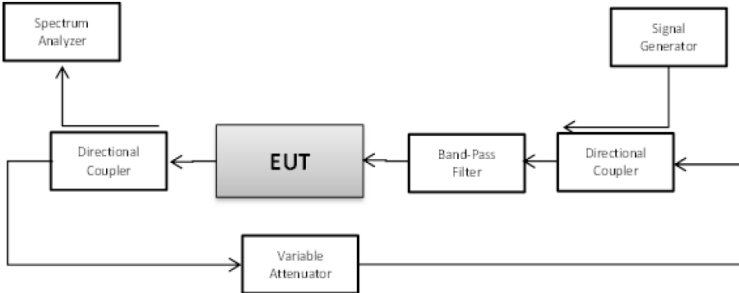Test Requirement:	FCC Part20 Section 20.21(e)(8)(iii)(A)
Test Method:	KDB935210 D03 Signal booster Measurements v04r04
Limit:	Reference to test data bellow
Test setup:	 <p>NOTE—This figure shows the test setup for uplink bands transmission path tests; i.e., signal flow is out from the donor port into the directional coupler. For downlink bands transmission path tests, the feedback signal flow path direction and equipment connections shall be reversed, i.e., signal flow is out from the server port into the directional coupler, and signal flow is into the donor port from the variable RF attenuator.</p> <p>Figure 7 – Oscillation detection (7.11.2) test setup</p>  <p>Figure 8 – Oscillation mitigation/shutdown test setup</p>
Test Procedure:	<p>Oscillation restart tests</p> <ol style="list-style-type: none"> Connect the normal-operating mode EUT to the test equipment as shown in Figure 7 beginning with the spectrum analyzer on the uplink output (donor) port. Confirm that the RF coupled path is connected to the spectrum analyzer. <p>NOTE—The band-pass filter shall provide sufficient out-of-band rejection to prevent oscillations from occurring in bands not under test.</p> <ol style="list-style-type: none"> Spectrum analyzer settings: <ol style="list-style-type: none"> Center frequency at the center of the band under test Span equal or slightly exceeding the width of the band under test Continuous sweep, max-hold RBW\geq1 MHz, VBW > 3xRBW Decrease the variable attenuator until the spectrum analyzer displays a signal within the band under test. Using a marker, identify the approximate center frequency of this signal on the max-hold display, increase the attenuation by 10 dB, then reset the EUT (e.g., cycle ac/dc power). Repeat 7.11.2c) twice to ensure that the center of the signal

- created by the booster remains within 250 kHz of the spectrum analyzer display center frequency. If the frequency of the signal is unstable, confirm that the spectrum analyzer display is centered between the frequency extremes observed. If the signal is wider than 1 MHz, ensure that the spectrum analyzer display is centered on the signal by increasing the RBW. Reset the EUT (e.g., cycle ac/dc power) after each oscillation event, if necessary. Set the spectrum analyzer sweep trigger level to just below the peak amplitude of the displayed EUT oscillation signal.
- e) Set the spectrum analyzer to zero-span, with a sweep time of 5 seconds, and single-sweep with max-hold. The spectrum analyzer sweep trigger level in this and the subsequent steps shall be the level identified in 7.11.2d).
 - f) Decrease the variable attenuator until the spectrum analyzer sweep is triggered, increase the attenuation by 10 dB, then reset the EUT (e.g., cycle ac/dc power).
 - g) Reset the zero-span trigger of the spectrum analyzer, then repeat 7.11.2f) twice to ensure that the spectrum analyzer is reliably triggered, resetting the EUT (e.g., cycle ac/dc power) after each oscillation event if necessary.
 - h) Reset the zero-span sweep trigger of the spectrum analyzer, and reset the EUT (e.g., cycle ac/dc power).
 - i) Force the EUT into oscillation by reducing the attenuation.
 - j) Use the marker function of the spectrum analyzer to measure the time from the onset of oscillation until the EUT turns off, by setting Marker 1 on the leading edge of the oscillation signal and Marker 2 on the trailing edge. The spectrum analyzer sweep time may be adjusted to improve the time resolution of these cursors.
 - k) Capture the spectrum analyzer zero-span trace for inclusion in the test report. Report the power level associated with the oscillation separately if it can't be displayed on the trace.
 - l) Repeat 7.11.2b) to 7.11.2k) for all operational uplink and downlink bands.
 - m) Set the spectrum analyzer zero-span sweep time for longer than 60 seconds, then measure the restart time for each operational uplink and downlink band.
 - n) Replace the normal-operating mode EUT with the EUT that supports an anti-oscillation test mode.
 - o) Set the spectrum analyzer zero-span time for a minimum of 120 seconds, and a single sweep.
 - p) Manually trigger the spectrum analyzer zero-span sweep, and manually force the booster into oscillation as described in 7.11.2i).
 - q) When the sweep is complete, place cursors between the first two oscillation detections, and save the Test Plots for inclusion in the test report. The time between restarts must match the manufacturer's timing for the test mode, and there shall be no more than 5 restarts.
 - r) Repeat 7.11.2m) to 7.11.2q) for all operational uplink and downlink bands.

Test procedure for measuring oscillation mitigation or shutdown

- a) Connect the normal-operating mode EUT to the test equipment as shown in Figure 8.
- b) Set the spectrum analyzer center frequency to the center of band under test, and use the following settings:
 - 1) RBW=30 kHz, VBW $\geq 3 \times$ RBW,
 - 2) power averaging (rms) detector,
 - 3) trace averages ≥ 100 ,
 - 4) span $\geq 120\%$ of operational band under test

	<p>5) number of sweep points $\geq 2 \times \text{Span/RBW}$.</p> <p>c) Configure the signal generator for AWGN operation with a 99% OBW of 4.1 MHz, tuned to the frequency of 2.5 MHz above the lower edge or below the upper edge of the operating band under test. Adjust the RF output level of the signal generator such that the measured power level of the AWGN signal at the output port of the booster is 30 dB less than the maximum power of the booster for the band under test. Affirm that the input signal is not obstructing the measurement of the strongest oscillation peak in the band, and is not included within the span in the measurement.</p> <p>1) Boosters with operating spectrum passbands of 10 MHz or less may use a CW signal source at the band edge rather than AWGN.</p> <p>2) For device passbands greater than 10 MHz, standard CMRS signal sources (i.e., CDMA, W-CDMA, LTE) may be used instead of AWGN at the band edge.</p> <p>d) Set the variable attenuator to a high attenuation setting such that the booster will operate at maximum gain when powered on. Reset the EUT (e.g., cycle ac/dc power). Allow the EUT to complete its boot-up process, to reach full operational gain, and to stabilize its operation.</p> <p>e) Set the variable attenuator such that the insertion loss for the center of the band under test (isolation) between the booster donor port and server port is 5 dB greater than the maximum gain, as recorded in the maximum gain test procedure (see 7.3), for the band under test.</p> <p>f) Verify the EUT shuts down, i.e., to mitigate the oscillations. If the booster does not shut down, measure and verify the peak oscillation level as follows.</p> <p>1) Allow the spectrum analyzer trace to stabilize.</p> <p>2) Place the marker at the highest oscillation level occurring within the span, and record its output level and frequency.</p> <p>3) Set the spectrum analyzer center frequency to the frequency with the highest oscillation signal level, and reduce the span such that the upper and lower adjacent oscillation peaks are within the span.</p> <p>4) Use the Minimum Search Marker function to find the lowest output level that is within the span, and within the operational band under test, and record its output level and frequency.</p> <p>5) Affirm that the peak oscillation level measured in 7.11.3f2), does not exceed by 12.0 dB the minimal output level measured in 7.11.3f4). Record the measurement results of 7.11.3f2) and 7.11.3f4) in tabular format for inclusion in the test report.</p> <p>6) The procedure of 7.11.3f1) to 7.11.3f5) allows the spectrum analyzer trace to stabilize, and verification of shutdown or oscillation level measurement must occur within 300 seconds.</p> <p>g) Decrease the variable attenuator in 1 dB steps, and repeat step 7.11.3f) for each 1 dB step. Continue testing to the level when the insertion loss for the center of band under test (isolation) between the booster donor port and server port is 5 dB lower than the maximum gain (see 7.3).</p> <p>h) Repeat 7.11.3a) to 7.11.3g) for all operational uplink and downlink bands.</p>
Test results:	PASS

6.10.2. Test Instruments

Equipment	Manufacturer	Model	S/N	Calibration Date	Calibration Due
Spectrum Analyzer	Agilent	N9020A	MY49100619	Sep. 12, 2019	Sep. 11, 2020
Attenuation	AF115A-09-34	JFW	907763	Sep. 12, 2019	Sep. 11, 2020
RF Combiner	SUNVNDN	SUD-CS0800	16230009	Sep. 12, 2019	Sep. 11, 2020
AN03468	Band Pass Filter	4CS10-781.5/E12.2-O/O	N/A	Sep. 12, 2019	Sep. 11, 2020
AN03469	Band Pass Filter	4CS10-751.5/E12-O/O	N/A	Sep. 12, 2019	Sep. 11, 2020
AN02475	1 dB step Attenuator	8494B	N/A	Sep. 12, 2019	Sep. 11, 2020
AN03429	10dB step Attenuator	8496B	N/A	Sep. 12, 2019	Sep. 11, 2020
ANC00082	RF Coupler	722-10-1.500V	N/A	Sep. 12, 2019	Sep. 11, 2020

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).


6.10.3. Test Data

Test results of detection time				
Operation Bands		Detection Time (s)	Limit (s)	Result
Uplink	Band2	0.286	0.300	PASS
	Band5	0.288	0.300	PASS
	Band12	0.283	0.300	PASS
Downlink	Band2	0.457	1.000	PASS
	Band5	0.457	1.000	PASS
	Band12	0.401	1.000	PASS

Test results of detection time						
Operation Bands		Restarting Time(s)	Limit (s)	Restarting Counts	Limit	Result
Uplink	Band2	69.81	60	2	5	PASS
	Band5	70.87	60	3	5	PASS
	Band12	69.81	60	2	5	PASS
Downlink	Band2	130.10	60	2	5	PASS
	Band5	69.81	60	3	5	PASS
	Band12	69.81	60	2	5	PASS


Test Test Plotss of detection time

Band2 UL

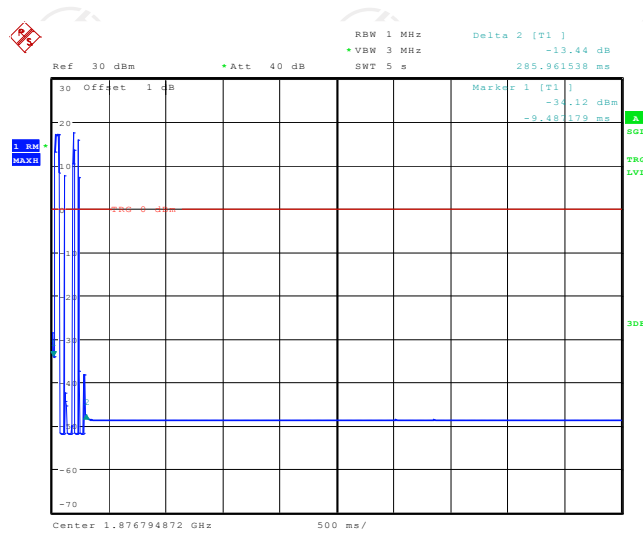


Date: 20.AUG.2020 19:03:48

Band2 DL

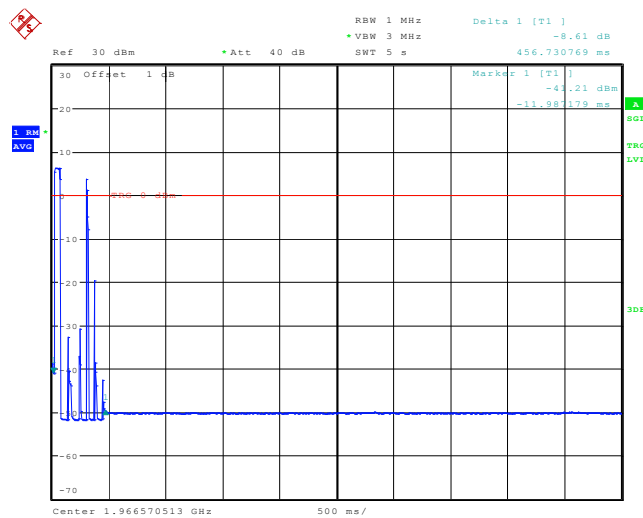


Date: 20.AUG.2020 18:56:47

Band5 UL

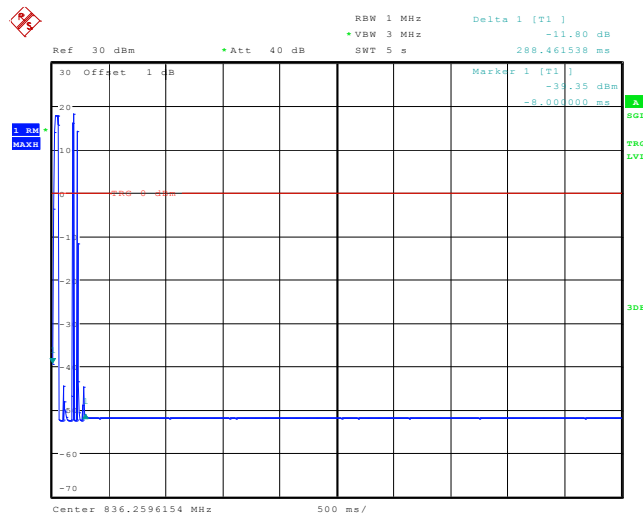


Date: 20.AUG.2020 19:12:14

Band5 DL

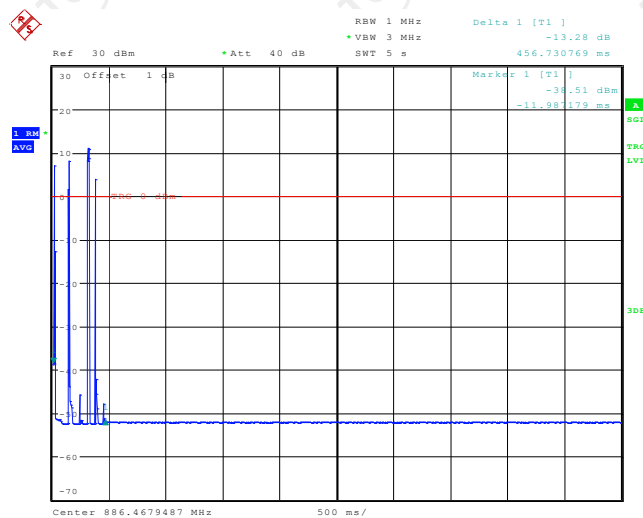


Date: 20.AUG.2020 18:52:30

Band12 UL

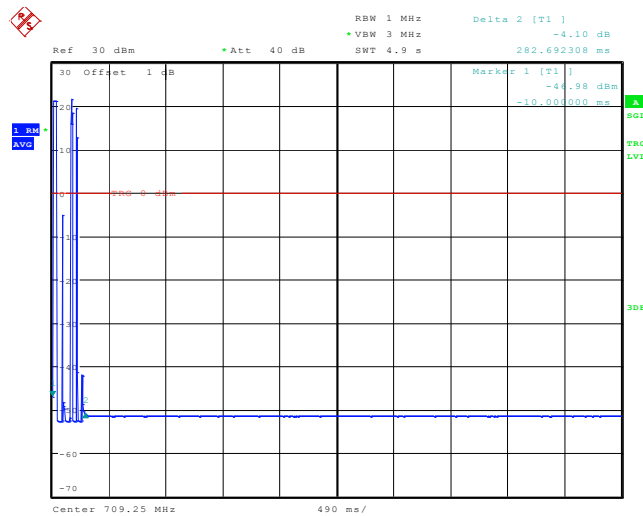

Date: 20.AUG.2020 19:17:56


Band12 DL

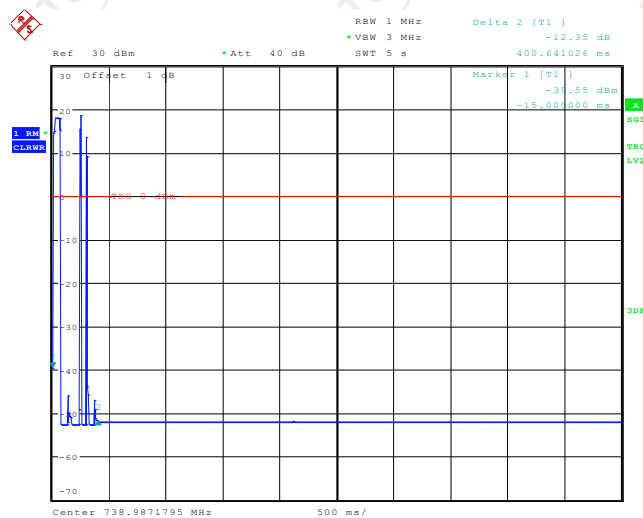

Date: 20.AUG.2020 18:43:40


Test Test Plotss of restarting time

Band2 UL

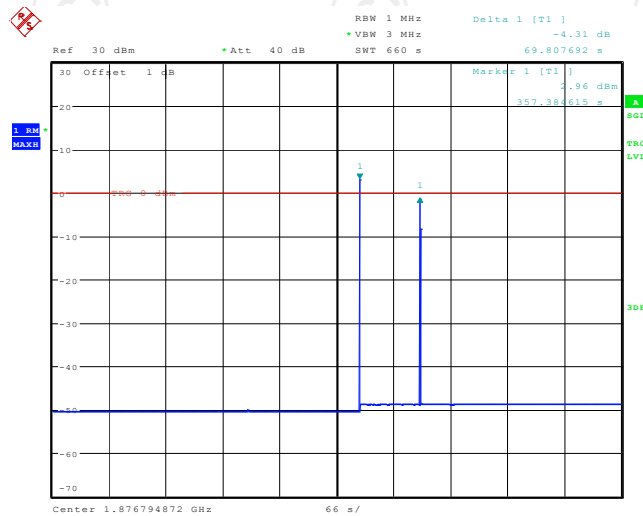


Date: 21.AUG.2020 11:22:35

Band2 DL

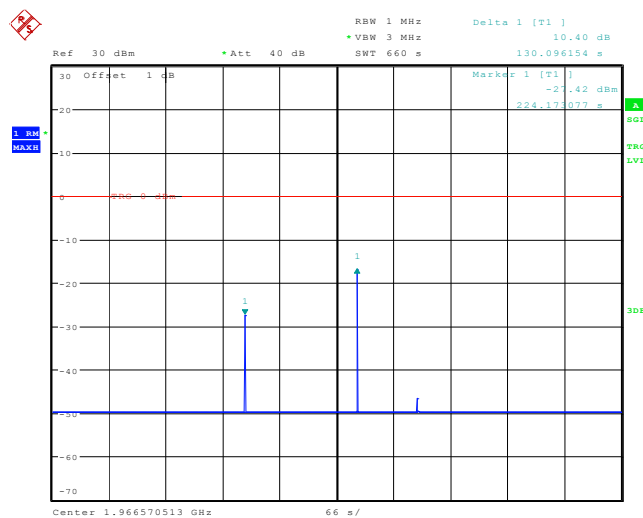


Date: 21.AUG.2020 11:56:34

Band5 UL

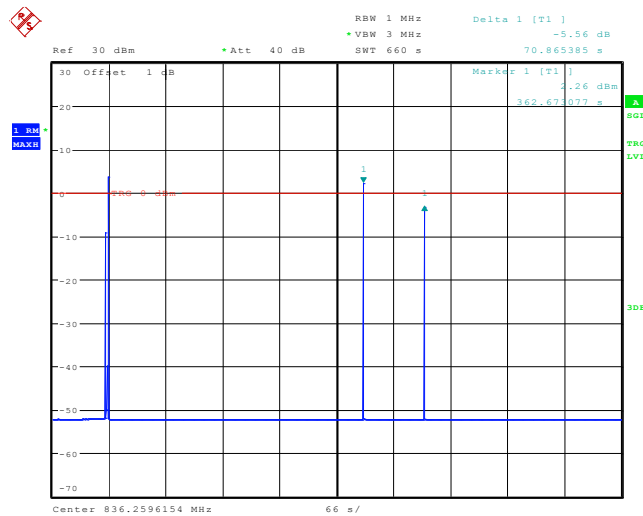


Date: 21.AUG.2020 11:09:18

Band5 DL

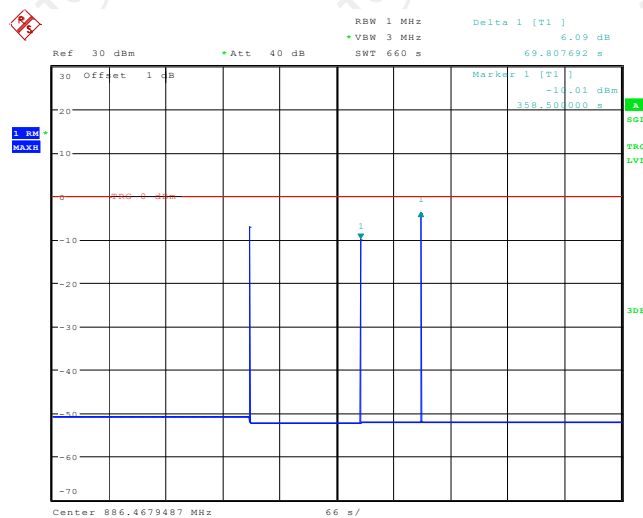


Date: 21.AUG.2020 13:59:22

Band12 UL

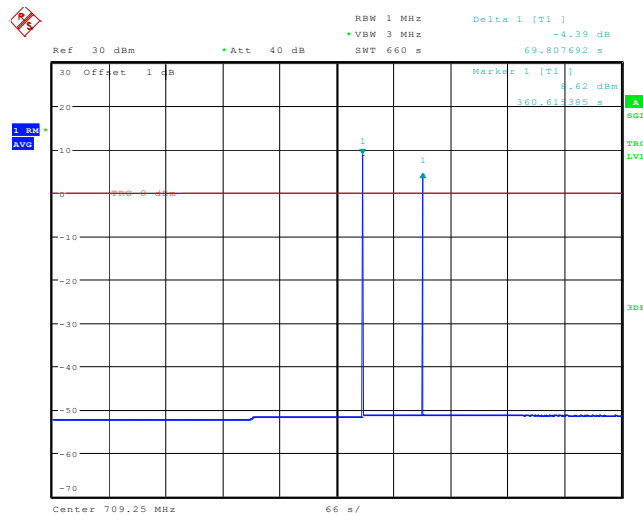

Date: 20.AUG.2020 19:51:32

Band12 DL

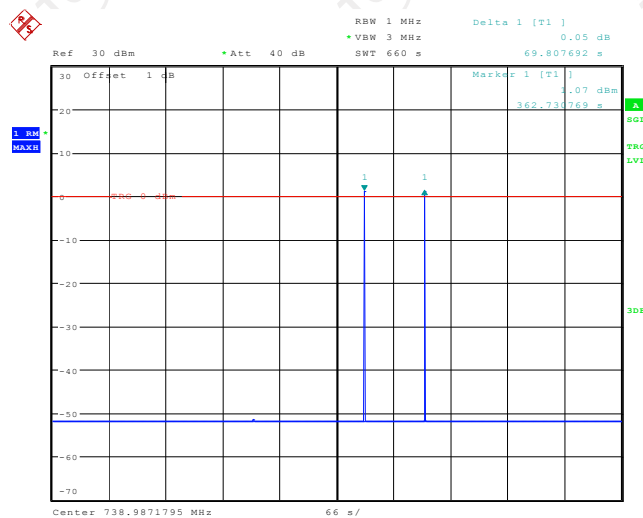

Date: 21.AUG.2020 14:12:07

Test results of Mitigation or Shutdown

Band2	Uplink(1850-1910MHz)								
Signal Type	AWGN								
Isolation	Peak Oscillations		Minimal Level		Delta Value	Limit	Time to Mitigate Oscillation	Mitigation Time Limit	Result
	Freq.	Level	Freq.	Level					
dB	MHz	dBm	MHz	dBm	dB	dB	sec	sec	
+5	1872.69	-41.88	1870	-68.27	26.39	<12	218	300	Pass
+4	1872.69	-40.06	1870	-70.48	30.42	<12	223	300	Pass
+3	EUT Shutdown								

Band2	Downlink(1930-1990MHz)								
Signal Type	AWGN								
Isolation	Peak Oscillations		Minimal Level		Delta Value	Limit	Time to Mitigate Oscillation	Mitigation Time Limit	Result
	Freq.	Level	Freq.	Level					
dB	MHz	dBm	MHz	dBm	dB	dB	sec	sec	
+5	1963.96	-42.33	1960.87	-70.28	27.95	<12	225	300	Pass
+4	1963.96	-41.12	1960.87	-70.73	29.61	<12	218	300	Pass
+3	1963.96	-39.12	1960.87	-71.66	32.54	<12	220	300	Pass
+2	EUT Shutdown								

Band5	Uplink(824-849MHz)								
Signal Type	AWGN								
Isolation	Peak Oscillations		Minimal Level		Delta Value	Limit	Time to Mitigate Oscillation	Mitigation Time Limit	Result
	Freq.	Level	Freq.	Level					
dB	MHz	dBm	MHz	dBm	dB	dB	sec	sec	
+5	836.34	-41.38	832.92	-71.62	30.24	<12	228	300	Pass
+4	EUT Shutdown								


Band5	Downlink(869-894MHz)								
Signal Type	AWGN								
Isolation	Peak Oscillations		Minimal Level		Delta Value	Limit	Time to Mitigate Oscillation	Mitigation Time Limit	Result
	Freq.	Level	Freq.	Level					
dB	MHz	dBm	MHz	dBm	dB	dB	sec	sec	
+5	889.56	-39.55	887.27	-71.05	31.5	<12	227	300	Pass
+4	EUT Shutdown								

Band12	Uplink(698-716MHz)								
Signal Type	AWGN								
Isolation	Peak Oscillations		Minimal Level		Delta Value	Limit	Time to Mitigate Oscillation	Mitigation Time Limit	Result
	Freq.	Level	Freq.	Level					
dB	MHz	dBm	MHz	dBm	dB	dB	sec	sec	
+5	708.91	-59.48	707.11	-70.24	-10.76	<12	218	300	Pass
+4	708.91	-56.74	707.11	-71.82	-15.08	<12	222	300	Pass
+3	EUT Shutdown								

Band12	Downlink(728-746MHz)								
Signal Type	AWGN								
Isolation	Peak Oscillations		Minimal Level		Delta Value	Limit	Time to Mitigate Oscillation	Mitigation Time Limit	Result
	Freq.	Level	Freq.	Level					
dB	MHz	dBm	MHz	dBm	dB	dB	sec	sec	
+5	737.87	-61.44	736.36	-70.84	9.4	<12	231	300	Pass
+4	737.87	-58.26	736.36	-71.47	13.21	<12	225	300	Pass
+3	737.87	-57.31	737.87	-71.10	13.79	<12	230	300	Pass
+2	737.87	-53.24	737.87	-71.63	18.39	<12	228	300	Pass
+1	737.87	-41.1	737.87	-71.17	30.07	<12	225	300	Pass
0	EUT Shutdown								

7. Radiation Spurious Emission

7.1.1. Test Specification

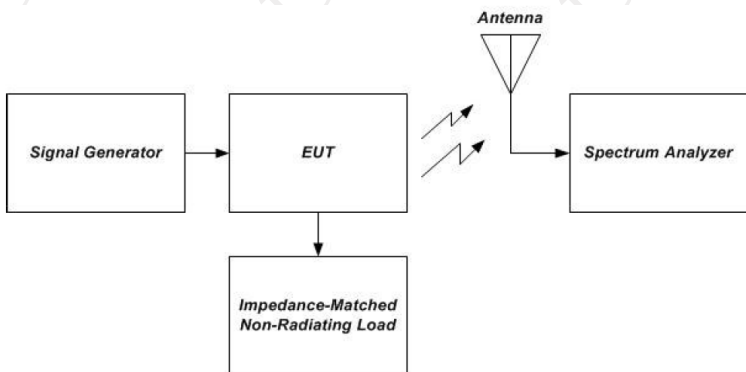Test Requirement:	FCC Part2 Section 2.1053
Test Method:	KDB935210 D03 Signal booster Measurements v04r04
Limit:	-13dBm
Test setup:	 <p>Figure 10 – Radiated spurious emissions test and instrumentation setup</p>
Test Procedure:	<ol style="list-style-type: none"> Place the EUT on an OATS or semi-anechoic chamber turntable 3 m from the receiving antenna. Connect the EUT to the test equipment as shown in Figure 10 beginning with the uplink output (donor) port. Set the signal generator to produce a CW signal with the frequency set to the center of the operational band under test, and the power level set at PIN as determined from measurement results per 7.2. Measure the radiated spurious emissions from the EUT from the lowest to the highest frequencies as specified in § 2.1057. Maximize the radiated emissions by using the procedures described in ANSI C63.4. Capture the peak emissions Test Plotss using a peak detector with Max-Hold for inclusion in the test report. Tabular data is acceptable in lieu of spectrum analyzer Test Plotss. Repeat 7.12c) through 7.12e) for all uplink and downlink operational bands.
Test results:	PASS

7.1.2. Test Instruments

Radiated Emission				
Name	Model No.	Manufacturer	Date of Cal.	Due Date
EMI Test Receiver	ESIB7	R&S	Jul. 28, 2020	Jul. 27, 2021
Spectrum Analyzer	FSQ40	R&S	Sep. 12, 2019	Sep. 11, 2020
Amplifier	8447D	HP	Sep. 09, 2019	Sep. 08, 2020
Amplifier	EM30265	EM Electronics Corporation CO.,LTD	Sep. 09, 2019	Sep. 08, 2020
Broadband Antenna	VULB9163	Schwarzbeck	Sep. 07, 2019	Sep. 06, 2020
Horn Antenna	BBHA 9120D	Schwarzbeck	Sep. 07, 2019	Sep. 06, 2020
Coax cable (9KHz-40GHz)	RE-high-02	TCT	Sep. 09, 2019	Sep. 08, 2020
Coax cable (9KHz-40GHz)	RE-high-04	TCT	Sep. 09, 2019	Sep. 08, 2020
Loop antenna	ZN30900A	ZHINAN	Sep. 12, 2019	Sep. 11, 2020
Signal Generator	N5182A	Agilent	Sep. 12, 2019	Sep. 11, 2020

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

7.1.3. Test data

Frequency [MHz]	Antenna polarity [H/V]	Reading Level	Substitution factor	Measurement Level [dBm]	Limit [dBm]	Margin [dB]
Band2 Uplink						
170.24	H	-40.76	-8.05	-49.40	-13.00	36.4
555.61	V	-54.39	5.91	-46.71		33.71
3517.06	H	-48.36	4.62	-40.57		27.57
3517.06	V	-46.31	6.04	-40.39		27.39
Band2 Downlink						
175.14	H	-43.31	-6.95	-50.26	-13.00	37.26
553.88	V	-55.18	5.97	-49.21		36.21
3920.21	H	-52.26	8.39	-43.87		30.87
3920.21	V	-53.51	9.01	-44.50		31.50


Frequency [MHz]	Antenna polarity [H/V]	Reading Level	Substitution factor	Measurement Level [dBm]	Limit [dBm]	Margin [dB]
Band5 Uplink						
160.54	H	-41.06	-8.84	-49.90	-13.00	36.90
556.30	V	-53.49	5.91	-47.58		34.58
1660.33	H	-41.3	-0.37	-41.67		28.67
1660.33	V	-43.27	1.25	-42.02		29.02
Band5 Downlink						
168.20	H	-42.89	-7.01	-49.84	-13.00	36.84
552.63	V	-53.64	5.28	-48.36		35.36
1750.47	H	-47.18	-0.19	-47.37		34.37
1750.47	V	-45.35	1.38	-43.97		30.97


Frequency [MHz]	Antenna polarity [H/V]	Reading Level	Substitution factor	Measurement Level [dBm]	Limit [dBm]	Margin [dB]
Band12 Uplink						
170.23	H	-41.52	-8.15	-49.67	-13.00	36.67
553.61	V	-55.74	5.83	-49.91		36.91
1400.00	H	-41.85	-0.76	-42.61		29.61
1400.00	V	-43.18	2.76	-40.42		27.42
Band12 Downlink						
173.26	H	-42.06	-6.82	-48.88	-13.00	35.88
555.49	V	-46.35	5.68	-40.67		27.67
1480.36	H	-43.11	-0.72	-43.83		30.83
1480.36	V	-45.27	1.20	-44.07		31.07

Appendix A: Photographs of Test Setup

Product: Cell Phone Signal Booster


Model: AN-CPL70A Plus

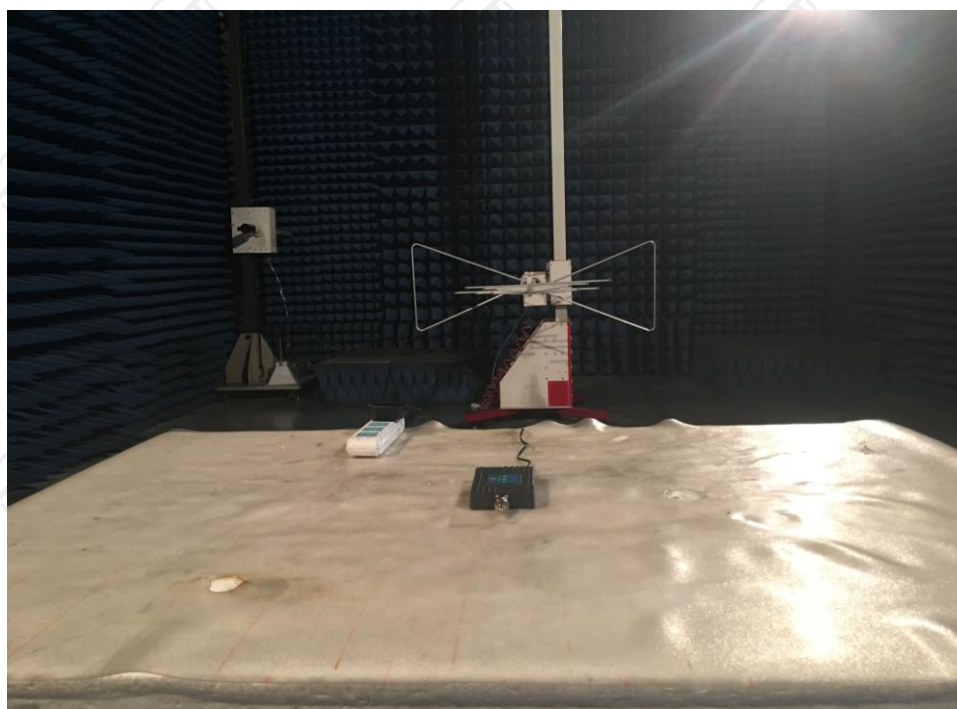


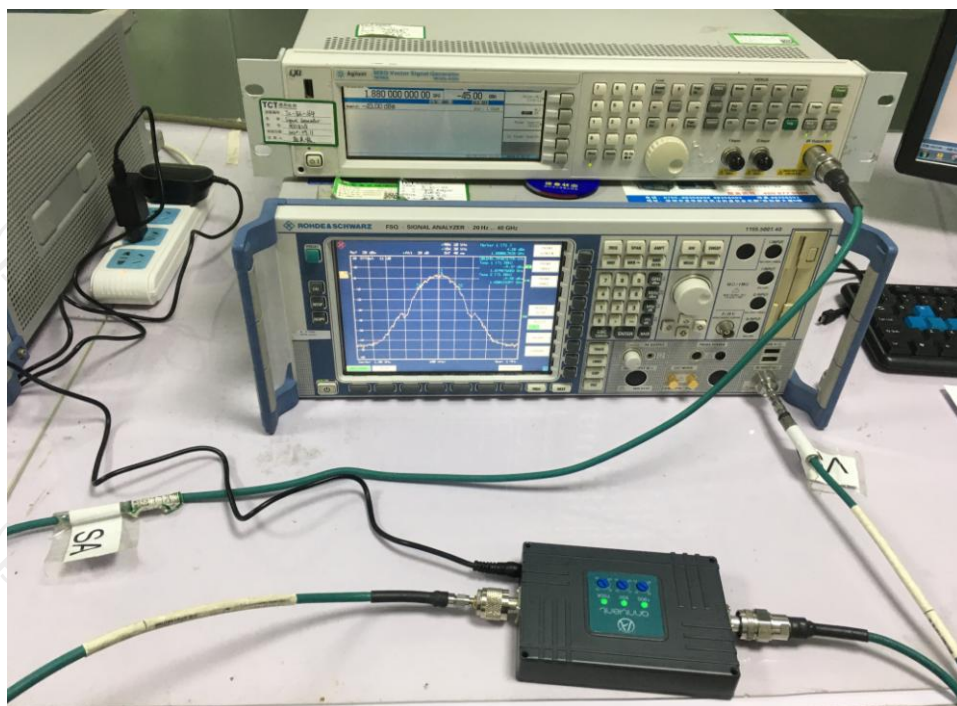


Appendix B: Photographs of EUT
Product: Cell Phone Signal Booster
Model: AN-CPL70A Plus
External Photos






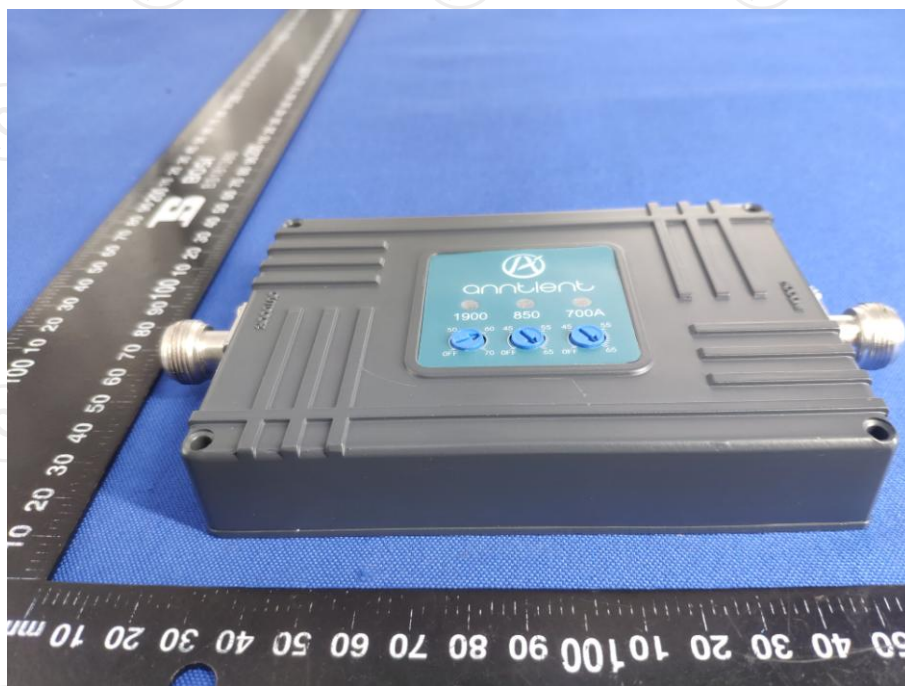



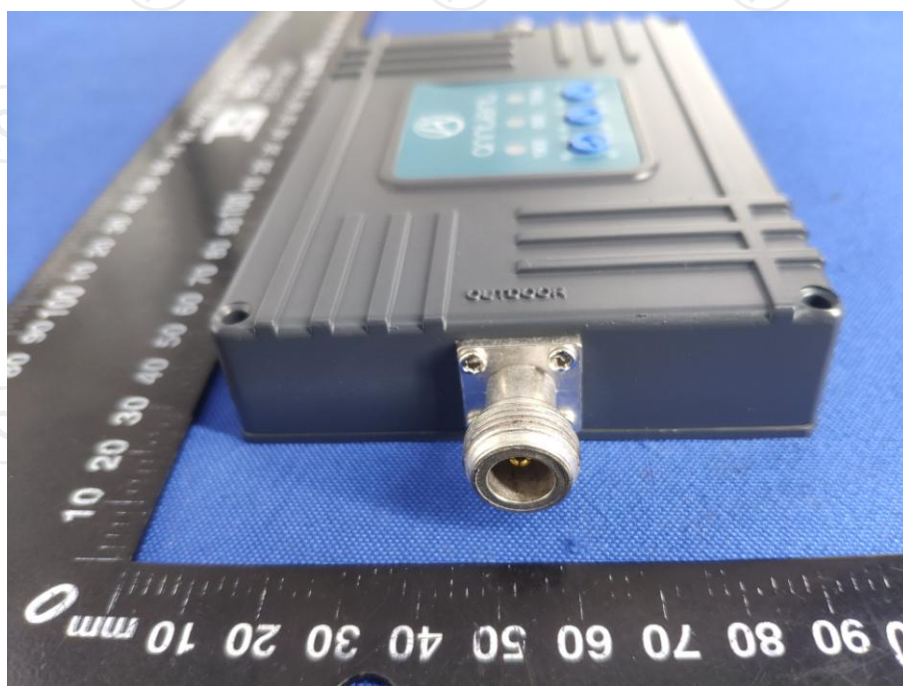


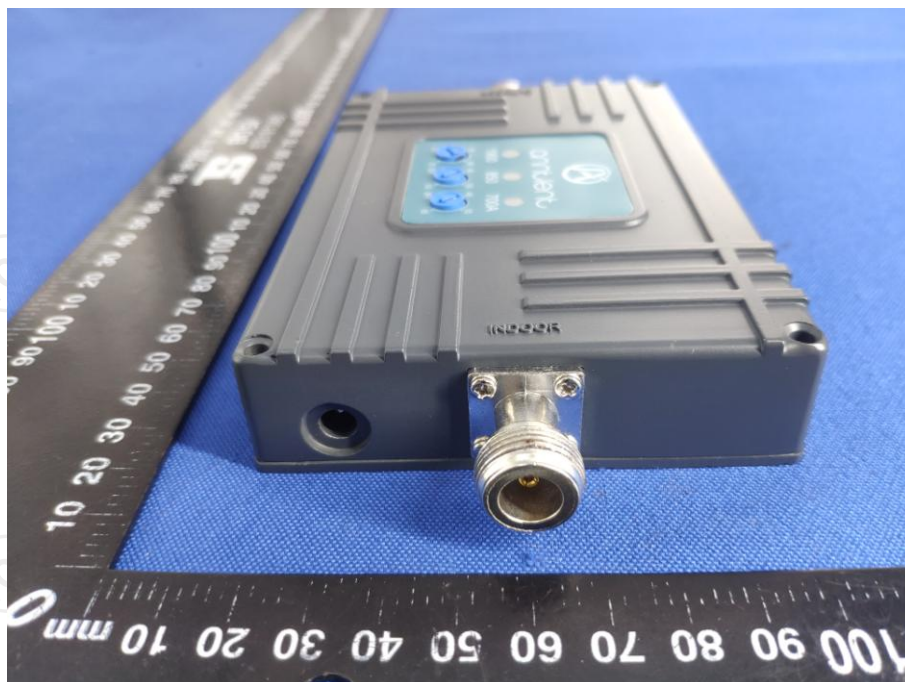


Product: Cell Phone Signal Booster
Model: AN-CPL70A Plus
Internal Photos

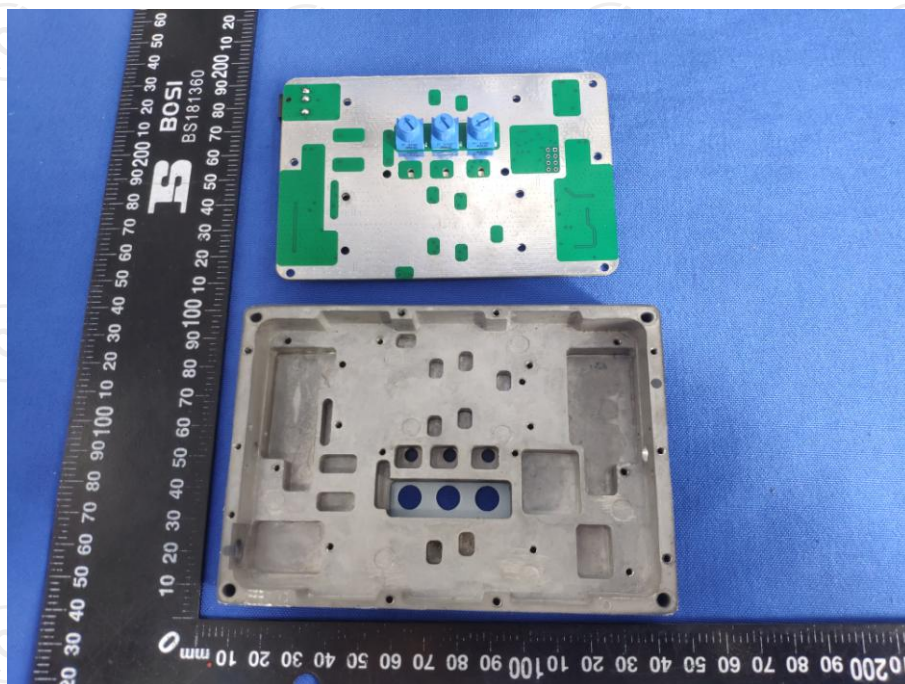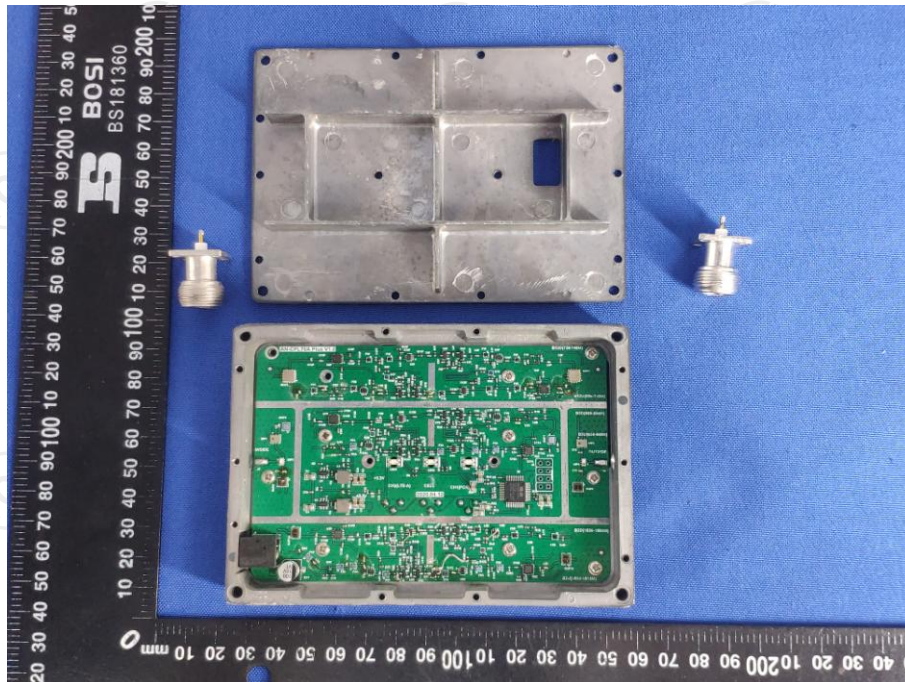

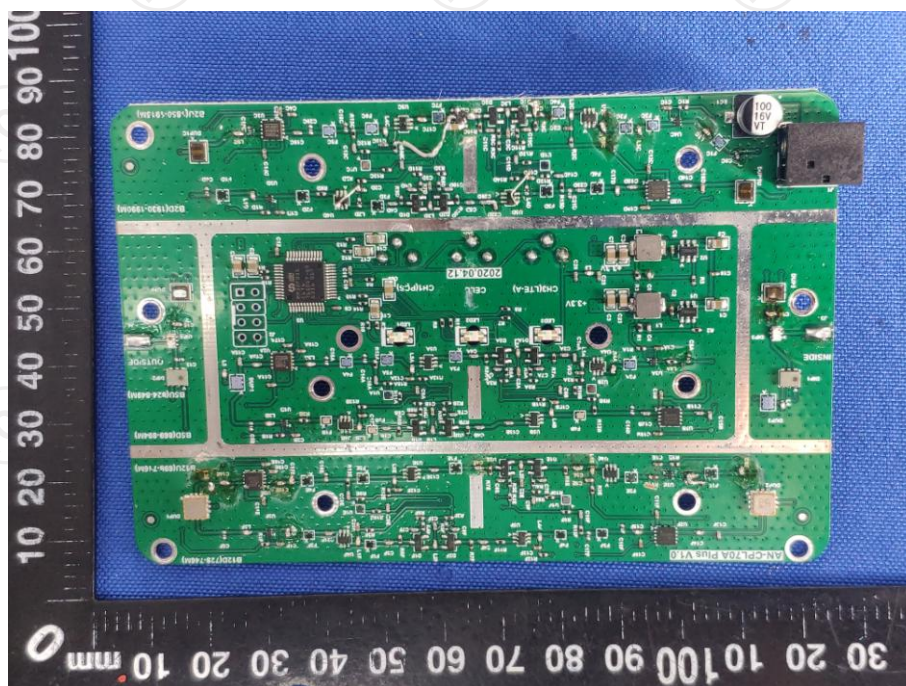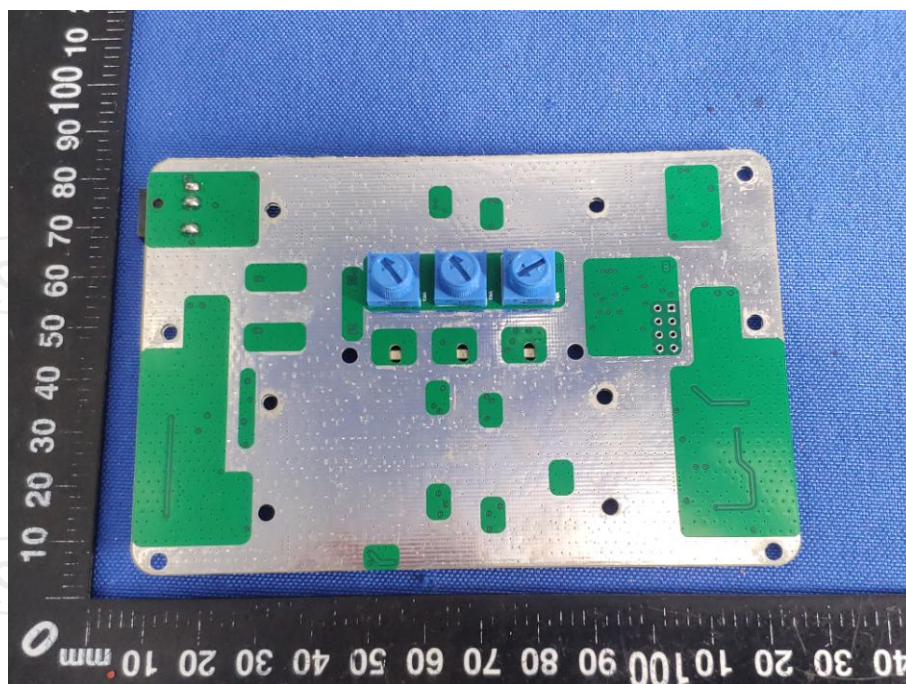

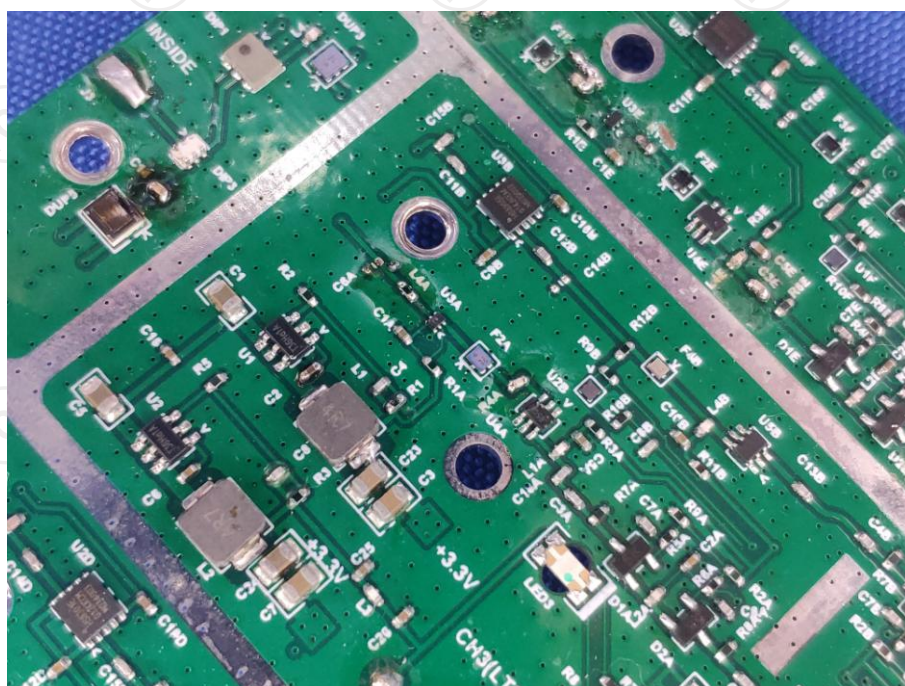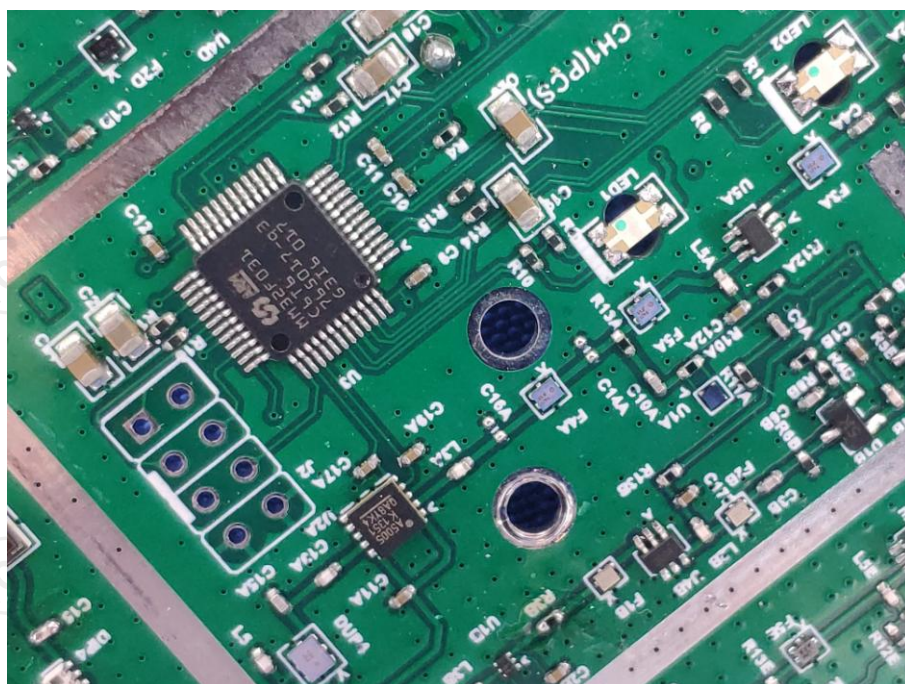

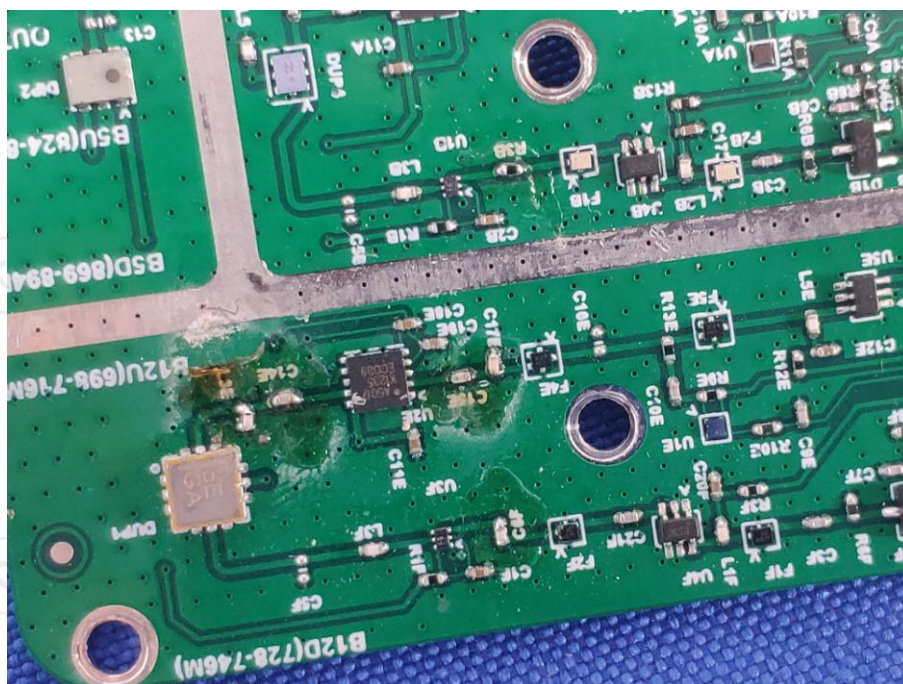

*****END OF REPORT*****