



BUREAU VERITAS

Test Report No.: RF190517W003-2



# FCC TEST REPORT (Part 15, Subpart C)



Applicant:	GREAT TALENT TECHNOLOGY LIMITED
Address:	RM602,T3 Software Park, Hi-Tech Park South, Nanshan, Shenzhen, China

Manufacturer or Supplier:	GREAT TALENT TECHNOLOGY LIMITED
Address:	RM602,T3 Software Park, Hi-Tech Park South, Nanshan, Shenzhen, China
Product:	2803
Brand Name:	F30
Model Name:	F30
FCC ID:	2ALZM-F30
Date of tests:	May. 18, 2019 ~ Jun. 11, 2019

The tests have been carried out according to the requirements of the following standard:

- FCC Part 15, Subpart C, Section 15.247
- ANSI C63.10-2013

**CONCLUSION: The submitted sample was found to COMPLY with the test requirement**

Prepared by Alex Chen Engineer / Mobile Department	Approved by Luke Lu Manager / Mobile Department
 Date: Jun. 14, 2019	 Date: Jun. 14, 2019
<small>This report is governed by, and incorporates by reference, CPS Conditions of Service as posted at the date of issuance of this report at <a href="http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions">http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions</a> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.</small>	



# TABLE OF CONTENTS

**RELEASE CONTROL RECORD ..... 4**

**1 SUMMARY OF TEST RESULTS..... 5**

1.1 MEASUREMENT UNCERTAINTY ..... 5

**2 GENERAL INFORMATION ..... 6**

2.1 GENERAL DESCRIPTION OF EUT ..... 6

2.2 DESCRIPTION OF TEST MODES ..... 8

2.2.1 CONFIGURATION OF SYSTEM UNDER TEST ..... 9

2.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL..... 9

2.3 DUTY CYCLE OF TEST SIGNAL ..... 12

2.4 GENERAL DESCRIPTION OF APPLIED STANDARDS ..... 13

2.5 DESCRIPTION OF SUPPORT UNITS ..... 13

**3 TEST TYPES AND RESULTS..... 14**

3.1 CONDUCTED EMISSION MEASUREMENT ..... 14

3.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT ..... 14

3.1.2 TEST INSTRUMENTS..... 14

3.1.3 TEST PROCEDURES ..... 15

3.1.4 DEVIATION FROM TEST STANDARD ..... 15

3.1.5 TEST SETUP ..... 16

3.1.6 EUT OPERATING CONDITIONS ..... 16

3.1.7 TEST RESULTS ..... 17

3.2 RADIATED EMISSION MEASUREMENT ..... 21

3.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT ..... 21

3.2.2 TEST INSTRUMENTS..... 22

3.2.3 TEST PROCEDURES ..... 23

3.2.4 DEVIATION FROM TEST STANDARD ..... 23

3.2.5 TEST SETUP ..... 24

3.2.6 EUT OPERATING CONDITIONS ..... 25

3.2.7 TEST RESULTS ..... 26

3.3 6 DB BANDWIDTH MEASUREMENT ..... 45

3.3.1 LIMITS OF 6DB BANDWIDTH MEASUREMENT ..... 45

3.3.2 TEST INSTRUMENTS..... 45

3.3.3 TEST PROCEDURE ..... 45

3.3.4 DEVIATION FROM TEST STANDARD ..... 46

3.3.5 TEST SETUP ..... 46



3.3.6	EUT OPERATING CONDITIONS .....	46
3.3.7	TEST RESULTS .....	47
3.4	CONDUCTED OUTPUT POWER.....	52
3.4.1	LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT .....	52
3.4.2	TEST SETUP .....	52
3.4.3	TEST INSTRUMENTS.....	52
3.4.4	TEST PROCEDURES .....	52
3.4.5	DEVIATION FROM TEST STANDARD .....	52
3.4.6	EUT OPERATING CONDITIONS .....	52
3.4.7	TEST RESULTS .....	53
3.4.7.1	MAXIMUM PEAK OUTPUT POWER .....	53
3.4.7.2	AVERAGE OUTPUT POWER (FOR REFERENCE).....	54
3.5	POWER SPECTRAL DENSITY MEASUREMENT .....	56
3.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT .....	56
3.5.2	TEST SETUP .....	56
3.5.3	TEST INSTRUMENTS.....	56
3.5.4	TEST PROCEDURE.....	56
3.5.5	DEVIATION FROM TEST STANDARD .....	56
3.5.6	EUT OPERATING CONDITION .....	56
3.5.7	TEST RESULTS .....	57
3.6	OUT OF BAND EMISSION MEASUREMENT .....	62
3.6.1	LIMITS OF OUT OF BAND EMISSION MEASUREMENT .....	62
3.6.2	TEST SETUP .....	62
3.6.3	TEST INSTRUMENTS.....	62
3.6.4	TEST PROCEDURE.....	62
3.6.5	DEVIATION FROM TEST STANDARD .....	63
3.6.6	EUT OPERATING CONDITION .....	63
3.6.7	TEST RESULTS .....	63
<b>4</b>	<b>PHOTOGRAPHS OF THE TEST CONFIGURATION .....</b>	<b>74</b>
<b>5</b>	<b>APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB .....</b>	<b>75</b>



**BUREAU**  
**VERITAS**

Test Report No.: RF190517W003-2

## RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF190517W003-2	Original release	Jun. 14, 2019



# 1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.247)			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -13.97dB at 0.182000MHz.
15.205 15.209	Radiated Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -1.01dB at 2383.5MHz.
15.247(d)	Out of band Emission Measurement	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted Output power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	No antenna connector is used

## 1.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	UNCERTAINTY
AC Power Conducted emissions	± 2.70dB
All Radiated emissions	±4.48dB
Conducted emissions	±2 dB
Occupied Channel Bandwidth	±21.7KHz
Conducted Output power	±1.03 dB
Power Spectral Density	±0.95 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k = 2.



## 2 GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF EUT

<b>PRODUCT</b>	2803
<b>BRAND NAME</b>	F30
<b>MODEL NAME</b>	F30
<b>NOMINAL VOLTAGE</b>	5.0Vdc (adapter or host equipment) 3.85Vdc (Li-ion, battery)
<b>MODULATION TECHNOLOGY</b>	DSSS, OFDM, DTS
<b>MODULATION TYPE</b>	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM BT-LE(GFSK) for DTS
<b>TRANSMISSION RATE</b>	802.11b: 11/ 5.5/ 2.0 / 1.0 Mbps 802.11g: 54/ 48/ 36 / 24 / 18 / 9/ 6 Mbps 802.11n: up to 135 Mbps BT_LE: 1 Mbps
<b>OPERATING FREQUENCY</b>	2412-2462MHz for 11b/g/n(HT20) 2422-2452MHz for 11n(HT40) 2402-2480MHz for BT-LE(GFSK)
<b>MAX. OUTPUT POWER</b>	WLAN: 169.044mW (Maximum) BT-LE: 1.247mW (Maximum)
<b>ANTENNA TYPE</b>	PIFA Antenna with 1.5dBi gain
<b>HW VERSION</b>	Q2803-V1.0
<b>SW VERSION</b>	F30_V1.1.0
<b>I/O PORTS</b>	Refer to user's manual
<b>CABLE SUPPLIED</b>	USB cable: non-shielded, detachable, 1.0m

**NOTE:**

- For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
- The EUT incorporates a SISO function. Physically, the EUT provides one transmitter and one receiver.

MODULATION MODE	TX/RX FUNCTION
802.11b	1TX /1RX
802.11g	1TX /1RX
802.11n (20MHz)	1TX /1RX
802.11n (40MHz)	1TX /1RX
BT_LE	1TX /1RX



3. The EUT was powered by the following adapter:

<b>ADAPTER</b>	
<b>BRAND:</b>	KFL
<b>MODEL:</b>	TPA-5950070UU
<b>INPUT:</b>	AC 100-240V, 50/60Hz 0.2A
<b>OUTPUT:</b>	DC 5V, 700mA

4. The EUT matched the following USB cable:

<b>USB CABLE</b>	
<b>BRAND:</b>	GuoJun
<b>MODEL:</b>	R0PC1S
<b>SIGNAL LINE:</b>	1.0 METER

5. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.



## 2.2 DESCRIPTION OF TEST MODES

11 channels are provided for 802.11b, 802.11g and 802.11n (HT20):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

7 channels are provided for 802.11n (HT40):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
3	2422MHz	7	2442MHz
4	2427MHz	8	2447MHz
5	2432MHz	9	2452MHz
6	2437MHz		

40 channels are provided for BT-LE (GFSK):

CHANNEL	FREQ. (MHZ)	CHANNEL	FREQ. (MHZ)	CHANNEL	FREQ. (MHZ)	CHANNEL	FREQ. (MHZ)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480





### 2.2.1 CONFIGURATION OF SYSTEM UNDER TEST

Please see section 5 photographs of the test configuration for reference.

### 2.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports. The worst case was found when positioned on Y axis for radiated emission. Following test modes were selected for the final test, and the final worst case is marked in boldface and recorded in the report:

EUT CONFIGURE MODE	APPLICABLE TO				MODE
	RE<1G	RE≥1G	PLC	APCM	
-	√	√	√	√	-

Where **RE<1G**: Radiated Emission below 1GHz      **RE≥1G**: Radiated Emission above 1GHz  
**PLC**: Power Line Conducted Emission      **APCM**: Antenna Port Conducted Measurement

**NOTE**: No need to concern of Conducted Emission due to the EUT is powered by battery.

### RADIATED EMISSION TEST (BELOW 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11n HT20	1 to 11	11	OFDM	BPSK	6.5
BT-LE	0 to 39	0	DTS	GFSK	1



**RADIATED EMISSION TEST (ABOVE 1GHz):**

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	CCK	DBPSK	1.0
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
802.11n HT20	1 to 11	1, 6, 11	OFDM	BPSK	6.5
802.11n HT40	3 to 9	3, 6, 9	OFDM	BPSK	13.5
BT-LE	0 to 39	0,19, 39	DTS	GFSK	1

**POWER LINE CONDUCTED EMISSION TEST:**

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11n HT20	1 to 11	11	OFDM	BPSK	6.5

**BANDEDGE MEASUREMENT:**

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 11	CCK	DBPSK	1.0
802.11g	1 to 11	1, 11	OFDM	BPSK	6.0
802.11n HT20	1 to 11	1, 11	OFDM	BPSK	6.5
802.11n HT40	3 to 9	3, 9	OFDM	BPSK	13.5
BT-LE	0 to 39	0, 39	DTS	GFSK	1



**ANTENNA PORT CONDUCTED MEASUREMENT:**

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	CCK	DBPSK	1.0
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
802.11n HT20	1 to 11	1, 6, 11	OFDM	BPSK	6.5
802.11n HT40	3 to 9	3,6, 9	OFDM	BPSK	13.5
BT-LE	0 to 39	0, 19, 39	DTS	GFSK	1

**TEST CONDITION:**

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	TEST VOLTAGE	TESTED BY
RE<1G	22deg. C, 54%RH	DC 5V from adaptor	Jacky Liu
RE≥1G	22deg. C, 54%RH	DC 5V from adaptor	Jacky Liu
PLC	24deg. C, 55%RH	DC 5V from adaptor	Star Le
APCM	25deg. C, 60%RH	3.85Vdc from battery	Rain Wang



### 2.3 Duty Cycle of Test Signal

#### WIFI 2.4GHZ

802.11b: Duty cycle = 8.096/8.360 = 0.968 < 98%, Duty factor = 10 \* log( 1/0.968) = 0.139

802.11g: Duty cycle = 1.363/1.578 = 0.864 < 98%, Duty factor = 10 \* log( 1/0.864) = 0.636

802.11n (HT20): Duty cycle = 1.275/1.476 = 0.864 < 98%, Duty factor = 10 \* log( 1/0.864) = 0.636

802.11n (HT40): Duty cycle = 0.634/0.845 = 0.750 < 98%, Duty factor = 10 \* log( 1/0.750) = 1.248





## 2.4 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC Part 15, Subpart C, Section 15.247**

**KDB 558074 D01 15.247 Meas Guidance v05r02**

**ANSI C63.10-2013**

Note:

1. All test items have been performed and recorded as per the above standards.
2. The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (Certification). The test report has been issued separately.

## 2.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	DC source	LONG WEI	PS-6403D	010934269	N/A
2	PC	HP	A6608CN	3CR83825X3	N/A
3	Earphone	N/A	N/A	N/A	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	DC Line: Unshielded, Detachable 1.0m
2	AC Line: Unshielded, Detachable 1.5m
3	Earphone Line: Unshielded, Detachable 1.5m



### 3 TEST TYPES AND RESULTS

#### 3.1 CONDUCTED EMISSION MEASUREMENT

##### 3.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dBµV)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

- NOTE:**
- 1.The lower limit shall apply at the transition frequencies.
  2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
  3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

##### 3.1.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESR3	101900	Feb. 26,19	Feb. 25, 20
EMC32 test software	Rohde&Schwarz	EMC32	NA	NA	NA
LISN network	Rohde&Schwarz	ENV216	101922	Feb. 26,19	Feb. 25, 20

**NOTE:**

1. The test was performed in CE shielded room.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.



### 3.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.


**NOTE:** All modes of operation were investigated and the worst-case emissions are reported.

### 3.1.4 DEVIATION FROM TEST STANDARD

No deviation.



### 3.1.5 TEST SETUP

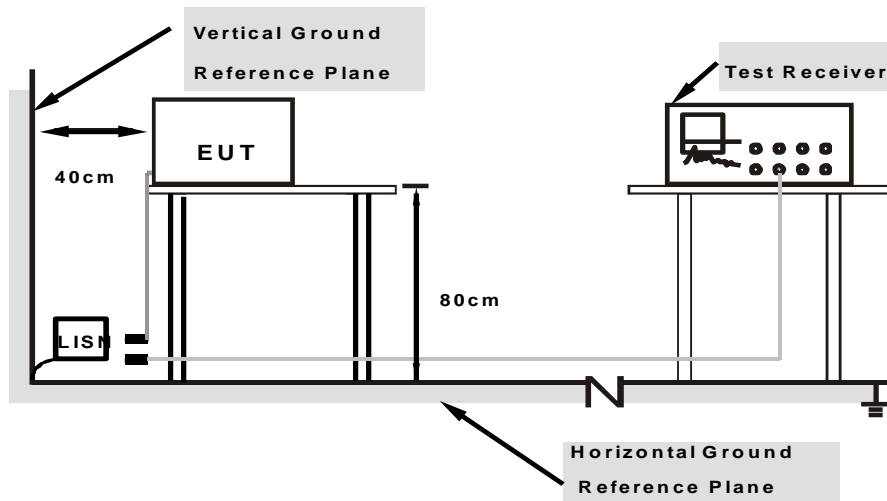

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

### 3.1.6 EUT OPERATING CONDITIONS

- a. Turned on the power and connected of all equipment.
- b. EUT was operated according to the type used was description in manufacturer's specifications or the User's Manual.





### 3.1.7 TEST RESULTS


#### CONDUCTED WORST-CASE DATA:

<b>Frequency Range</b>	150KHz ~ 30MHz	<b>Detector Function &amp; Resolution Bandwidth</b>	Quasi-Peak (QP) / Average (AV), 9 kHz
<b>Input Power</b>	120Vac, 60Hz	<b>Environmental Conditions</b>	25deg. C, 52RH
<b>Tested By</b>	John Wen	<b>TEST DATE</b>	2019/05/26
<b>Test Voltage</b>	DC 5V From Adapter		

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.166000	---	22.29	55.16	-32.87	L	ON	9.9
0.166000	35.03	---	65.16	-30.13	L	ON	9.9
0.468000	---	29.24	46.55	-17.31	L	ON	10.1
0.468000	37.89	---	56.55	18.66	L	ON	10.1
0.852000	---	18.13	46.00	-27.87	L	ON	10.1
0.852000	28.39	---	56.00	-27.61	L	ON	10.1
1.742000	---	21.95	46.00	-24.05	L	ON	10.2
1.742000	28.33	---	56.00	-27.67	L	ON	10.2
2.176000	---	20.36	46.00	-25.64	L	ON	10.2
2.176000	27.22	---	56.00	-28.78	L	ON	10.2
4.962000	---	17.25	46.00	-28.75	L	ON	10.3
4.962000	24.87	---	56.00	-31.13	L	ON	10.3

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

Full Spectrum

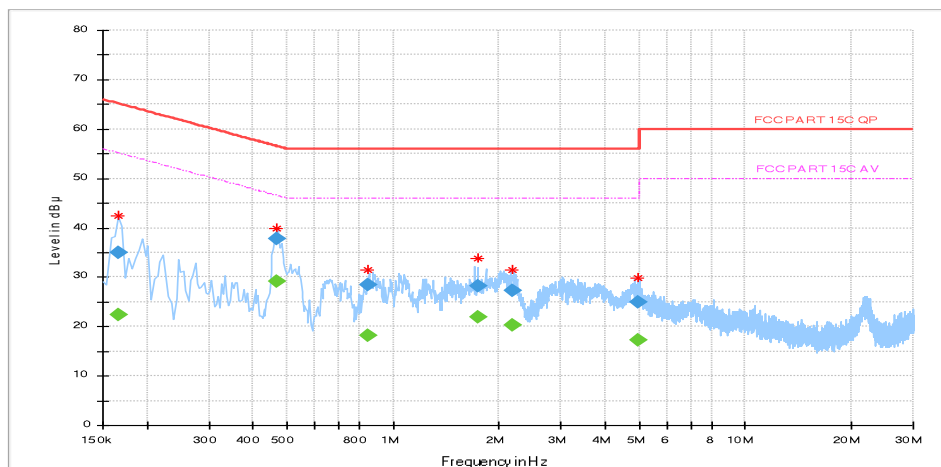




<b>Frequency Range</b>	150KHz ~ 30MHz	<b>Detector Function &amp; Resolution Bandwidth</b>	Quasi-Peak (QP) / Average (AV), 9 kHz
<b>Input Power</b>	120Vac, 60Hz	<b>Environmental Conditions</b>	25deg. C, 52RH
<b>Tested By</b>	John Wen	<b>TEST DATE</b>	2019/05/26
<b>Test Voltage</b>	DC 5V From Adapter		

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.166000	---	24.05	55.16	-31.11	N	ON	9.9
0.166000	38.44	---	65.16	-26.72	N	ON	9.9
0.468000	---	27.24	46.55	-19.31	N	ON	9.9
0.468000	38.32	---	56.55	-18.23	N	ON	9.9
1.044000	---	22.30	46.00	-23.70	N	ON	10.0
1.044000	33.50	---	56.00	-22.50	N	ON	10.0
2.124000	33.26	---	56.00	-22.74	N	ON	10.1
2.124000	---	21.99	46.00	-24.01	N	ON	10.1
2.144000	34.48	---	56.00	-21.52	N	ON	10.1
2.144000	---	23.28	46.00	-22.72	N	ON	10.1
4.874000	---	20.94	46.00	-25.06	N	ON	10.2
4.874000	30.18	---	56.00	-25.82	N	ON	10.2

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

Full Spectrum

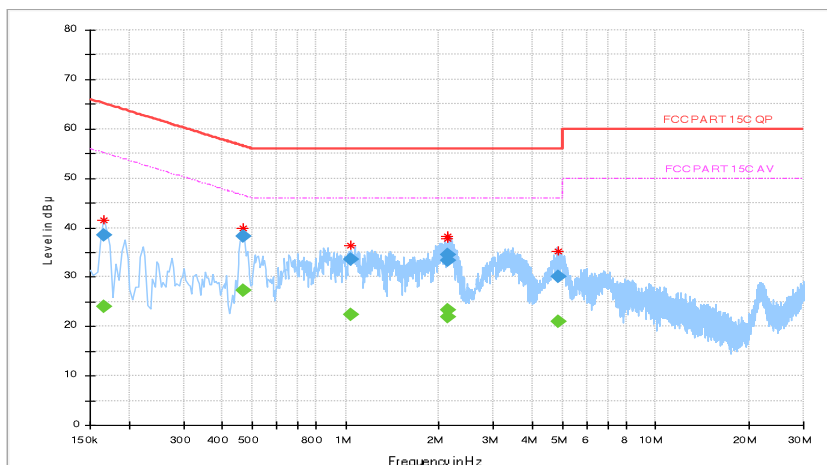




<b>Frequency Range</b>	150KHz ~ 30MHz	<b>Detector Function &amp; Resolution Bandwidth</b>	Quasi-Peak (QP) / Average (AV), 9 kHz
<b>Input Power</b>	120Vac, 60Hz	<b>Environmental Conditions</b>	25deg. C, 52RH
<b>Tested By</b>	John Wen	<b>TEST DATE</b>	2019/05/26
<b>Test Voltage</b>	Data Transmission		

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.154000	---	16.47	55.78	-39.31	L	ON	9.9
0.154000	40.17	---	65.78	-25.61	L	ON	9.9
0.268000	---	24.47	51.18	-26.71	L	ON	9.9
0.268000	36.76	---	61.18	-24.42	L	ON	9.9
0.492000	---	24.79	46.13	-21.35	L	ON	10.1
0.492000	34.25	---	56.13	-21.89	L	ON	10.1
1.700000	---	27.14	46.00	-18.86	L	ON	10.2
1.700000	32.56	---	56.00	-23.44	L	ON	10.2
3.492000	---	24.21	46.00	-21.79	L	ON	10.3
3.492000	35.98	---	56.00	-20.02	L	ON	10.3
4.504000	---	28.74	46.00	-17.26	L	ON	10.3
4.504000	39.59	---	56.00	-16.41	L	ON	10.3

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

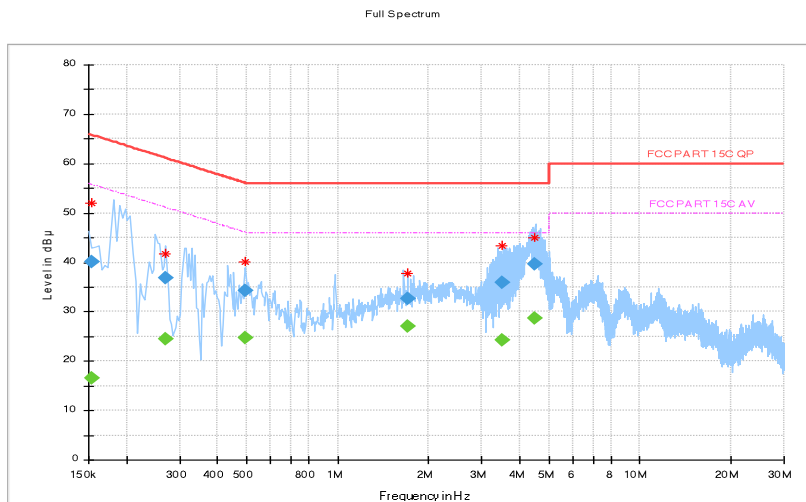




<b>Frequency Range</b>	150KHz ~ 30MHz	<b>Detector Function &amp; Resolution Bandwidth</b>	Quasi-Peak (QP) / Average (AV), 9 kHz
<b>Input Power</b>	120Vac, 60Hz	<b>Environmental Conditions</b>	25deg. C, 52RH
<b>Tested By</b>	John Wen	<b>TEST DATE</b>	2019/05/26
<b>Test Voltage</b>	Data Transmission		

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.182000	---	32.25	54.39	-22.14	N	ON	9.9
<b>0.182000</b>	<b>50.43</b>	---	<b>64.39</b>	<b>-13.97</b>	<b>N</b>	<b>ON</b>	<b>9.9</b>
0.204000	---	33.78	53.45	-19.66	N	ON	9.9
0.204000	48.78	---	63.45	-14.66	N	ON	9.9
0.492000	---	25.91	46.13	-20.22	N	ON	9.9
0.492000	35.96	---	56.13	-20.18	N	ON	9.9
1.700000	---	30.29	46.00	-15.71	N	ON	10.0
1.700000	37.77	---	56.00	-18.23	N	ON	10.0
3.480000	---	22.30	46.00	-23.70	N	ON	10.1
3.480000	35.96	---	56.00	-20.04	N	ON	10.1
4.716000	---	30.47	46.00	-15.53	N	ON	10.2
4.716000	39.92	---	56.00	-16.08	N	ON	10.2

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

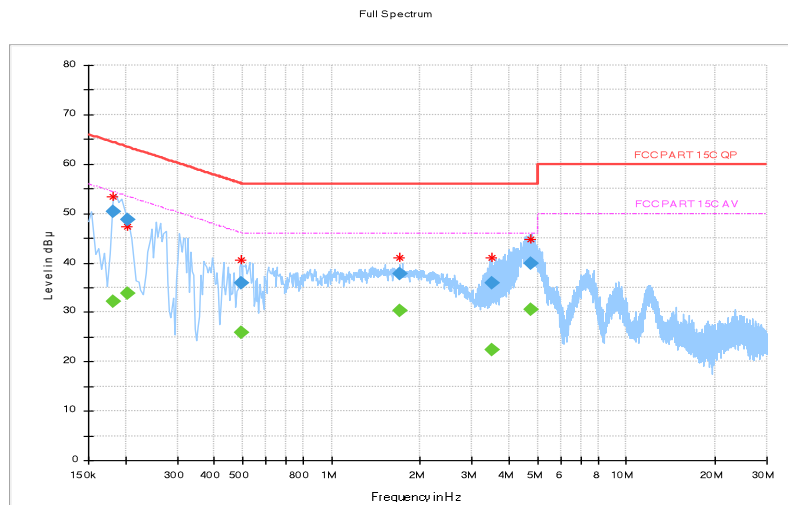



### 3.2 RADIATED EMISSION MEASUREMENT

#### 3.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



### 3.2.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
3m Semi-anechoic Chamber	ETS-LINDGREN	9m*6m*6m	Euroshieldpn-CT0001143-1216	Feb. 26,19	Feb. 25,20
Bilog Antenna	ETS-LINDGREN	3143B	00161965	Feb. 26,19	Feb. 25,20
Horn Antenna	ETS-LINDGREN	3117	00168728	Feb. 26,19	Feb. 25,20
Loop antenna	Daze	ZN30900A	0708	Oct. 23,18	Oct. 22, 19
Horn Antenna (18GHz-40GHz)	N/A	QWH-SL-18-40-K-SG/QMS-00361	15433	Nov. 21, 18	Nov. 20, 19
Test Software	E3	V 9.160323	N/A	N/A	N/A
Test Software	ADT	ADT_Radiated_V7.6.15.9.2	N/A	N/A	N/A
10dB Attenuator	JFW/USA	50HF-010-SMA	1505	Jul. 09,18	Jul. 08,19
MXE EMI Receiver	KEYSIGHT	N9038A-544	MY54450026	Feb. 26,19	Feb. 25,20
Signal Pre-Amplifier	EMSI	EMC 9135	980249	Jul. 09,18	Jul. 08,19
Signal Pre-Amplifier	EMSI	EMC 012645B	980257	Jul. 09,18	Jul. 08,19
Signal Pre-Amplifier	EMSI	EMC 184045B	980259	Jul. 09,18	Jul. 08,19

- NOTE:**
1. The calibration interval of the above test instruments is 12 months or 24 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
  2. The test was performed in 3m Chamber.
  3. The FCC Site Registration No. is 525120; The Designation No. is CN1171.



### 3.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters (for below 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, For battery operated equipment, the equipment tests shall be perform using fresh batteries. The turntable was rotated to maximize the emission level.

#### **Note:**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is  $\geq 1/T$  (Duty cycle < 98%) or 10Hz (Duty cycle > 98%) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.


### 3.2.4 DEVIATION FROM TEST STANDARD

No deviation




### 3.2.5 TEST SETUP

#### < Frequency Range below 30MHz >

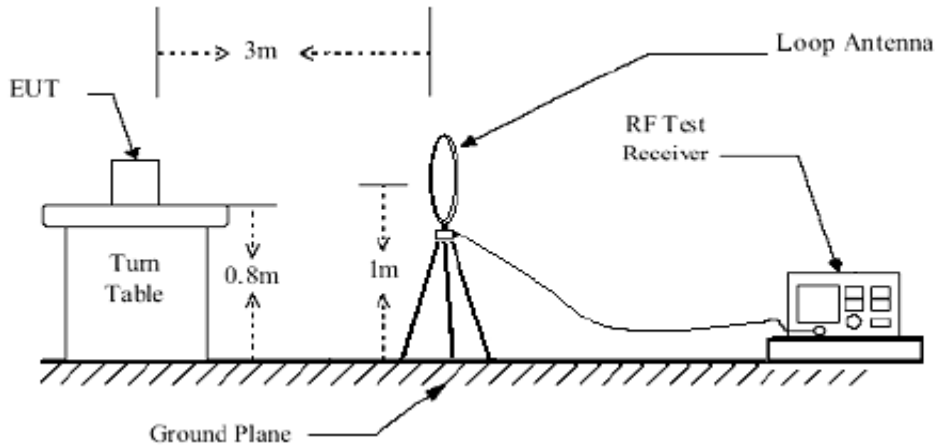


#### < Frequency Range 30MHz~1GHz >

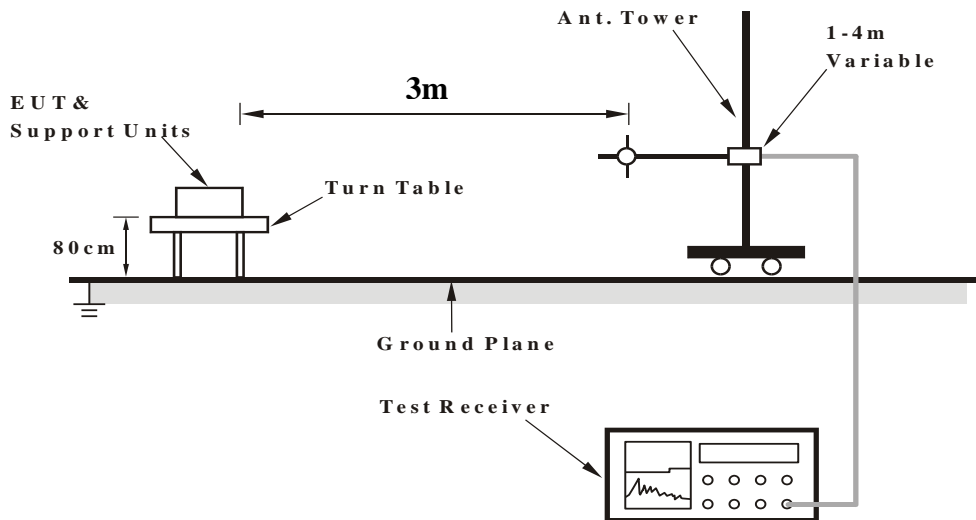





<Frequency Range above 1GHz>

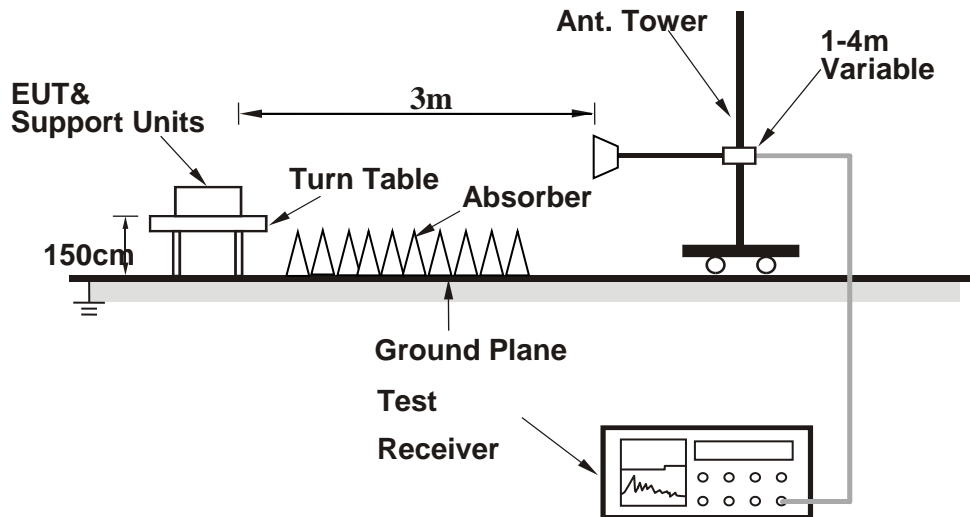

For the actual test configuration, please refer to the attached file (Test Setup Photo).

### 3.2.6 EUT OPERATING CONDITIONS

- Set the EUT under full load condition and placed them on a testing table.
- Set the transmitter part of EUT under transmission condition continuously at specific channel frequency.
- The necessary accessories enable the EUT in full functions.



### 3.2.7 TEST RESULTS

#### BELOW 1GHz WORST-CASE DATA:

**9 KHz – 30 MHz data:** the amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required in the report.


**30 MHz – 1GHz data:**  
**802.11n (20MHz)**

<b>CHANNEL</b>	TX Channel 11	<b>DETECTOR FUNCTION</b>	Quasi-Peak (QP)
<b>FREQUENCY RANGE</b>	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
54.31	16.4	45.68	40	-23.6	7.01	1.03	37.32	100	360	QP
175.66	27.51	52.14	43.5	-15.99	10.34	1.69	36.66	100	360	QP
255.42	23.8	45.28	46	-22.2	13.12	2.06	36.66	100	360	QP
285.64	28.87	49.65	46	-17.13	13.78	2.16	36.72	100	360	QP
342.16	26.24	45.23	46	-19.76	15.41	2.38	36.78	100	360	QP
485.21	26.83	42.55	46	-19.17	18.31	2.94	36.97	100	360	QP

**REMARKS:**

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
 Margin value = Emission level – Limit value.

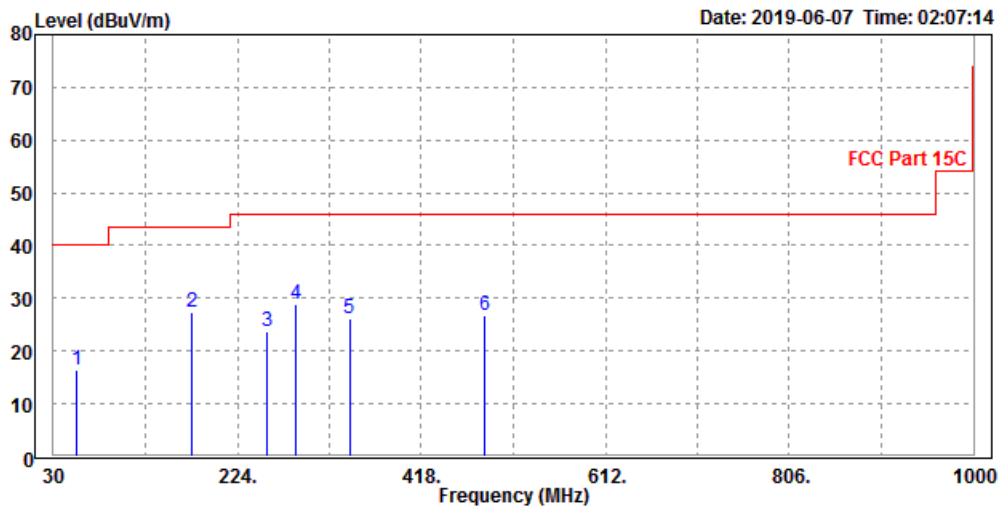




<b>CHANNEL</b>	TX Channel 11	<b>DETECTOR FUNCTION</b>	Quasi-Peak (QP)
<b>FREQUENCY RANGE</b>	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
52.31	25.08	54.12	40	-14.92	7.26	1.02	37.32	100	0	QP
101.23	28.13	54.24	43.5	-15.37	9.73	1.32	37.16	100	0	QP
178.96	27.02	51.56	43.5	-16.48	10.4	1.7	36.64	100	0	QP
310.22	25.17	45.16	46	-20.83	14.52	2.25	36.76	100	0	QP
401.25	34.4	51.29	46	-11.6	17.32	2.62	36.83	100	0	QP
512.34	36.2	51.37	46	-9.8	18.87	3.01	37.05	100	0	QP

**REMARKS:**

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.

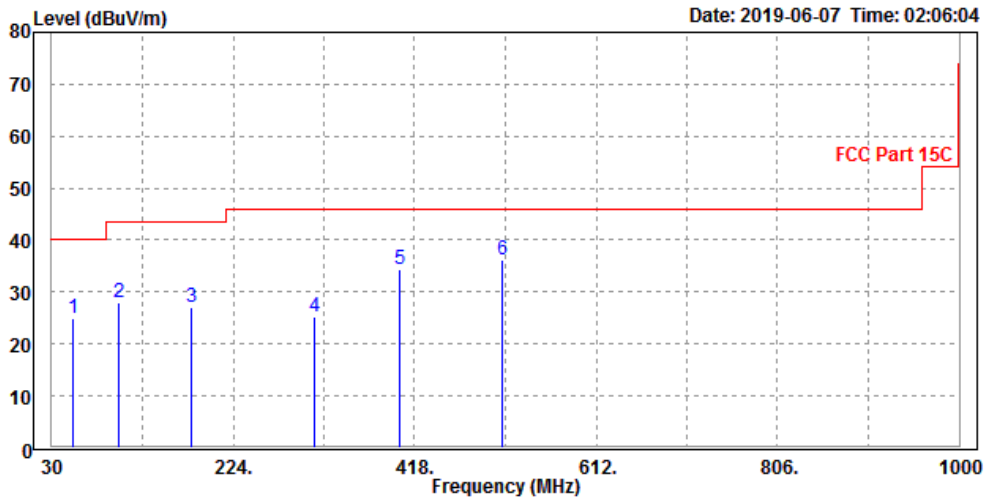



**ABOVE 1GHz WORST-CASE DATA:**

**Note:** For higher frequency, the emission is too low to be detected.

**802.11b**

<b>CHANNEL</b>	TX Channel 1	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	55.21	58.67	74	-18.79	33.1	4.88	41.44	100	185	Peak
2390	50	53.46	54	-4	33.1	4.88	41.44	100	185	Average
2412	104.84	108.25			33.14	4.9	41.45	100	185	Peak
2412	101.61	105.02			33.14	4.9	41.45	100	185	Average
2483.5	50.06	53.27	74	-23.94	33.27	4.98	41.46	100	185	Peak
2483.5	40.05	43.26	54	-13.95	33.27	4.98	41.46	100	185	Average
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	55.32	59.67	74	-18.68	32.21	4.88	41.44	100	215	Peak
2390	50.06	54.41	54	-3.94	32.21	4.88	41.44	100	215	Average
2412	104.89	109.17			32.27	4.9	41.45	100	215	Peak
2412	101.96	106.24			32.27	4.9	41.45	100	215	Average
2483.5	49.65	53.67	74	-24.35	32.46	4.98	41.46	100	215	Peak
2483.5	39.19	43.21	54	-14.81	32.46	4.98	41.46	100	215	Average

**REMARKS:**

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
2. 2412MHz: Fundamental frequency.



<b>CHANNEL</b>	TX Channel 6	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	50.39	53.85	74	-23.61	33.1	4.88	41.44	100	187	Peak
2390	40.3	43.76	54	-13.7	33.1	4.88	41.44	100	187	Average
2437	104.35	107.68			33.19	4.93	41.45	100	187	Peak
2437	100.9	104.23			33.19	4.93	41.45	100	187	Average
2483.5	50.25	53.46	74	-23.75	33.27	4.98	41.46	100	187	Peak
2483.5	40.01	43.22	54	-13.99	33.27	4.98	41.46	100	187	Average
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	49.13	53.48	74	-24.87	32.21	4.88	41.44	100	218	Peak
2390	38.66	43.01	54	-15.34	32.21	4.88	41.44	100	218	Average
2437	104.34	108.52			32.34	4.93	41.45	100	218	Peak
2437	101.16	105.34			32.34	4.93	41.45	100	218	Average
2483.5	49.64	53.66	74	-24.36	32.46	4.98	41.46	100	218	Peak
2483.5	39.21	43.23	54	-14.79	32.46	4.98	41.46	100	218	Average

**REMARKS:**

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
- 2437MHz: Fundamental frequency.



<b>CHANNEL</b>	TX Channel 11	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	48.85	52.31	74	-25.15	33.1	4.88	41.44	100	221	Peak
2390	39.8	43.26	54	-14.2	33.1	4.88	41.44	100	221	Average
2462	105.99	109.25			33.23	4.96	41.45	100	221	Peak
2462	102.38	105.64			33.23	4.96	41.45	100	221	Average
2483.5	55.15	58.36	74	-18.85	33.27	4.98	41.46	100	221	Peak
2483.5	45.43	48.64	54	-8.57	33.27	4.98	41.46	100	221	Average
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	49.08	53.43	74	-24.92	32.21	4.88	41.44	100	221	Peak
2390	38.16	42.51	54	-15.84	32.21	4.88	41.44	100	221	Average
2462	104.79	108.88			32.4	4.96	41.45	100	221	Peak
2462	100.97	105.06			32.4	4.96	41.45	100	221	Average
2483.5	54.02	58.04	74	-19.98	32.46	4.98	41.46	100	221	Peak
2483.5	45.59	49.61	54	-8.41	32.46	4.98	41.46	100	221	Average

**REMARKS:**

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
- 2462MHz: Fundamental frequency.



**802.11g**

<b>CHANNEL</b>	TX Channel 1	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>										
<b>FREQ. (MHz)</b>	<b>EMISSION LEVEL (dBuV/m)</b>	<b>READ LEVEL (dBuV)</b>	<b>LIMIT (dBuV/m)</b>	<b>MARGIN (dB)</b>	<b>ANTENNA FACTOR (dB /m)</b>	<b>CABLE LOSS (dB)</b>	<b>PREAMP FACTOR (dB)</b>	<b>ANTENNA HEIGHT (cm)</b>	<b>TABLE ANGLE (Degree)</b>	<b>REMARK</b>
2390	67.19	70.65	74	-6.81	33.1	4.88	41.44	100	189	Peak
2390	51.89	55.35	54	-2.11	33.1	4.88	41.44	100	189	Average
2412	105.05	108.46			33.14	4.9	41.45	100	189	Peak
2412	93.85	97.26			33.14	4.9	41.45	100	189	Average
2483.5	49.47	52.68	74	-24.53	33.27	4.98	41.46	100	189	Peak
2483.5	38.92	42.13	54	-15.08	33.27	4.98	41.46	100	189	Average
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>										
<b>FREQ. (MHz)</b>	<b>EMISSION LEVEL (dBuV/m)</b>	<b>READ LEVEL (dBuV)</b>	<b>LIMIT (dBuV/m)</b>	<b>MARGIN (dB)</b>	<b>ANTENNA FACTOR (dB /m)</b>	<b>CABLE LOSS (dB)</b>	<b>PREAMP FACTOR (dB)</b>	<b>ANTENNA HEIGHT (cm)</b>	<b>TABLE ANGLE (Degree)</b>	<b>REMARK</b>
2390	67.33	71.68	74	-6.67	32.21	4.88	41.44	100	215	Peak
2390	52.66	57.01	54	-1.34	32.21	4.88	41.44	100	215	Average
2412	104.29	108.57			32.27	4.9	41.45	100	215	Peak
2412	94.04	98.32			32.27	4.9	41.45	100	215	Average
2483.5	48.62	52.64	74	-25.38	32.46	4.98	41.46	100	215	Peak
2483.5	37.84	41.86	54	-16.16	32.46	4.98	41.46	100	215	Average

**REMARKS:**

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
2. 2412MHz: Fundamental frequency.



<b>CHANNEL</b>	TX Channel 6	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	49.02	52.48	74	-24.98	33.1	4.88	41.44	100	191	Peak
2390	38.9	42.36	54	-15.1	33.1	4.88	41.44	100	191	Average
2437	108.36	111.69			33.19	4.93	41.45	100	191	Peak
2437	97.9	101.23			33.19	4.93	41.45	100	191	Average
2483.5	50.44	53.65	74	-23.56	33.27	4.98	41.46	100	191	Peak
2483.5	39.38	42.59	54	-14.62	33.27	4.98	41.46	100	191	Average

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	48.29	52.64	74	-25.71	32.21	4.88	41.44	100	221	Peak
2390	37.8	42.15	54	-16.2	32.21	4.88	41.44	100	221	Average
2437	105.68	109.86			32.34	4.93	41.45	100	221	Peak
2437	95.17	99.35			32.34	4.93	41.45	100	221	Average
2483.5	48.36	52.38	74	-25.64	32.46	4.98	41.46	100	221	Peak
2483.5	37.55	41.57	54	-16.45	32.46	4.98	41.46	100	221	Average

**REMARKS:**

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
2. 2437MHz: Fundamental frequency.





<b>CHANNEL</b>	TX Channel 11	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	50.16	53.62	74	-23.84	33.1	4.88	41.44	100	178	Peak
2390	39.11	42.57	54	-14.89	33.1	4.88	41.44	100	178	Average
2462	103.28	106.54			33.23	4.96	41.45	100	178	Peak
2462	92.99	96.25			33.23	4.96	41.45	100	178	Average
2486.5	68.15	71.34	74	-5.85	33.28	4.99	41.46	100	178	Peak
2486.5	50.92	54.11	54	-3.08	33.28	4.99	41.46	100	178	Average

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	50.01	54.36	74	-23.99	32.21	4.88	41.44	100	216	Peak
2390	40.17	44.52	54	-13.83	32.21	4.88	41.44	100	216	Average
2462	103.23	107.32			32.4	4.96	41.45	100	216	Peak
2462	93.12	97.21			32.4	4.96	41.45	100	216	Average
2483.5	69.43	73.45	74	-4.57	32.46	4.98	41.46	100	216	Peak
2483.5	52.19	56.21	54	-1.81	32.46	4.98	41.46	100	216	Average

**REMARKS:**

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
2. 2462MHz: Fundamental frequency.



**802.11n (20MHz)**

<b>CHANNEL</b>	TX Channel 1	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	67.18	70.64	74	-6.82	33.1	4.88	41.44	100	191	Peak
2390	50.86	54.32	54	-3.14	33.1	4.88	41.44	100	191	Average
2412	100.91	104.32			33.14	4.9	41.45	100	191	Peak
2412	90.96	94.37			33.14	4.9	41.45	100	191	Average
2483.5	50.01	53.22	74	-23.99	33.27	4.98	41.46	100	191	Peak
2483.5	40.06	43.27	54	-13.94	33.27	4.98	41.46	100	191	Average

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	68	72.35	74	-6	32.21	4.88	41.44	100	220	Peak
2390	51.67	56.02	54	-2.33	32.21	4.88	41.44	100	220	Average
2412	101.42	105.7			32.27	4.9	41.45	100	220	Peak
2412	91.51	95.79			32.27	4.9	41.45	100	220	Average
2483.5	49.09	53.11	74	-24.91	32.46	4.98	41.46	100	220	Peak
2483.5	38.87	42.89	54	-15.13	32.46	4.98	41.46	100	220	Average

**REMARKS:**

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
- 2412MHz: Fundamental frequency.



<b>CHANNEL</b>	TX Channel 6	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	49.78	53.24	74	-24.22	33.1	4.88	41.44	100	195	Peak
2390	38.66	42.12	54	-15.34	33.1	4.88	41.44	100	195	Average
2437	104.36	107.69			33.19	4.93	41.45	100	195	Peak
2437	94.12	97.45			33.19	4.93	41.45	100	195	Average
2483.5	49.47	52.68	74	-24.53	33.27	4.98	41.46	100	195	Peak
2483.5	38.36	41.57	54	-15.64	33.27	4.98	41.46	100	195	Average
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	49.07	53.42	74	-24.93	32.21	4.88	41.44	100	215	Peak
2390	38.22	42.57	54	-15.78	32.21	4.88	41.44	100	215	Average
2437	105.07	109.25			32.34	4.93	41.45	100	215	Peak
2437	105.03	109.21			32.34	4.93	41.45	100	215	Average
2483.5	48.65	52.67	74	-25.35	32.46	4.98	41.46	100	215	Peak
2483.5	38.14	42.16	54	-15.86	32.46	4.98	41.46	100	215	Average

**REMARKS:**

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
- 2437MHz: Fundamental frequency.



<b>CHANNEL</b>	TX Channel 11	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	49.8	53.26	74	-24.2	33.1	4.88	41.44	100	195	Peak
2390	38.89	42.35	54	-15.11	33.1	4.88	41.44	100	195	Average
2462	102.08	105.34			33.23	4.96	41.45	100	195	Peak
2462	91.97	95.23			33.23	4.96	41.45	100	195	Average
2483.5	69.11	72.32	74	-4.89	33.27	4.98	41.46	100	195	Peak
2483.5	51.58	54.79	54	-2.42	33.27	4.98	41.46	100	195	Average
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	49.9	54.25	74	-24.1	32.21	4.88	41.44	100	221	Peak
2390	39.01	43.36	54	-14.99	32.21	4.88	41.44	100	221	Average
2462	103.14	107.23			32.4	4.96	41.45	100	221	Peak
2462	92.45	96.54			32.4	4.96	41.45	100	221	Average
2483.5	71.19	75.21	74	-2.81	32.46	4.98	41.46	100	221	Peak
<b>2483.5</b>	<b>52.99</b>	<b>57.01</b>	<b>54</b>	<b>-1.01</b>	<b>32.46</b>	<b>4.98</b>	<b>41.46</b>	<b>100</b>	<b>221</b>	<b>Average</b>

**REMARKS:**

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
2. 2462MHz: Fundamental frequency.

**802.11n (40MHz)**

<b>CHANNEL</b>	TX Channel 3	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>										
<b>FREQ. (MHz)</b>	<b>EMISSION LEVEL (dBuV/m)</b>	<b>READ LEVEL (dBuV)</b>	<b>LIMIT (dBuV/m)</b>	<b>MARGIN (dB)</b>	<b>ANTENNA FACTOR (dB /m)</b>	<b>CABLE LOSS (dB)</b>	<b>PREAMP FACTOR (dB)</b>	<b>ANTENNA HEIGHT (cm)</b>	<b>TABLE ANGLE (Degree)</b>	<b>REMARK</b>
2390	68.12	71.58	74	-5.88	33.1	4.88	41.44	100	196	Peak
2390	51.56	55.02	54	-2.44	33.1	4.88	41.44	100	196	Average
2422	101.87	105.24			33.16	4.92	41.45	100	196	Peak
2422	91.83	95.2			33.16	4.92	41.45	100	196	Average
2483.5	50.21	53.42	74	-23.79	33.27	4.98	41.46	100	196	Peak
2483.5	39.05	42.26	54	-14.95	33.27	4.98	41.46	100	196	Average
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>										
<b>FREQ. (MHz)</b>	<b>EMISSION LEVEL (dBuV/m)</b>	<b>READ LEVEL (dBuV)</b>	<b>LIMIT (dBuV/m)</b>	<b>MARGIN (dB)</b>	<b>ANTENNA FACTOR (dB /m)</b>	<b>CABLE LOSS (dB)</b>	<b>PREAMP FACTOR (dB)</b>	<b>ANTENNA HEIGHT (cm)</b>	<b>TABLE ANGLE (Degree)</b>	<b>REMARK</b>
2390	69.3	73.65	74	-4.7	32.21	4.88	41.44	100	225	Peak
2390	52.88	57.23	54	-1.12	32.21	4.88	41.44	100	225	Average
2422	102.08	106.31			32.3	4.92	41.45	100	225	Peak
2422	92.02	96.25			32.3	4.92	41.45	100	225	Average
2483.5	49.51	53.53	74	-24.49	32.46	4.98	41.46	100	225	Peak
2483.5	39.4	43.42	54	-14.6	32.46	4.98	41.46	100	225	Average

**REMARKS:**

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
2. 2422MHz: Fundamental frequency.



<b>CHANNEL</b>	TX Channel 6	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>										
<b>FREQ. (MHz)</b>	<b>EMISSION LEVEL (dBuV/m)</b>	<b>READ LEVEL (dBuV)</b>	<b>LIMIT (dBuV/m)</b>	<b>MARGIN (dB)</b>	<b>ANTENNA FACTOR (dB /m)</b>	<b>CABLE LOSS (dB)</b>	<b>PREAMP FACTOR (dB)</b>	<b>ANTENNA HEIGHT (cm)</b>	<b>TABLE ANGLE (Degree)</b>	<b>REMARK</b>
2390	49.99	53.45	74	-24.01	33.1	4.88	41.44	100	199	Peak
2390	39.12	42.58	54	-14.88	33.1	4.88	41.44	100	199	Average
2437	106.34	109.67			33.19	4.93	41.45	100	199	Peak
2437	96.02	99.35			33.19	4.93	41.45	100	199	Average
2483.5	49.26	52.47	74	-24.74	33.27	4.98	41.46	100	199	Peak
2483.5	40.01	43.22	54	-13.99	33.27	4.98	41.46	100	199	Average
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>										
<b>FREQ. (MHz)</b>	<b>EMISSION LEVEL (dBuV/m)</b>	<b>READ LEVEL (dBuV)</b>	<b>LIMIT (dBuV/m)</b>	<b>MARGIN (dB)</b>	<b>ANTENNA FACTOR (dB /m)</b>	<b>CABLE LOSS (dB)</b>	<b>PREAMP FACTOR (dB)</b>	<b>ANTENNA HEIGHT (cm)</b>	<b>TABLE ANGLE (Degree)</b>	<b>REMARK</b>
2390	48.81	53.16	74	-25.19	32.21	4.88	41.44	100	215	Peak
2390	38.3	42.65	54	-15.7	32.21	4.88	41.44	100	215	Average
2437	106.24	110.42			32.34	4.93	41.45	100	215	Peak
2437	95.94	100.12			32.34	4.93	41.45	100	215	Average
2483.5	48.4	52.42	74	-25.6	32.46	4.98	41.46	100	215	Peak
2483.5	38.13	42.15	54	-15.87	32.46	4.98	41.46	100	215	Average

**REMARKS:**

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
2. 2437MHz: Fundamental frequency.



<b>CHANNEL</b>	TX Channel 9	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	50.32	53.78	74	-23.68	33.1	4.88	41.44	100	225	Peak
2390	40.06	43.52	54	-13.94	33.1	4.88	41.44	100	225	Average
2452	104.29	107.58			33.21	4.95	41.45	100	225	Peak
2452	91.34	94.63			33.21	4.95	41.45	100	225	Average
2483.5	69.11	72.32	74	-4.89	33.27	4.98	41.46	100	225	Peak
2483.5	51.66	54.87	54	-2.34	33.27	4.98	41.46	100	225	Average
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	49.34	53.69	74	-24.66	32.21	4.88	41.44	100	221	Peak
2390	37.93	42.28	54	-16.07	32.21	4.88	41.44	100	221	Average
2452	101.73	105.85			32.38	4.95	41.45	100	221	Peak
2452	91.54	95.66			32.38	4.95	41.45	100	221	Average
2483.5	67.62	71.64	74	-6.38	32.46	4.98	41.46	100	221	Peak
2483.5	52.77	56.79	54	-1.23	32.46	4.98	41.46	100	221	Average

**REMARKS:**

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
2. 2452MHz: Fundamental frequency.



**BELOW 1GHz WORST-CASE DATA:**

**9 KHz – 30 KHz data:** the amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required in the report.

**30 MHz – 1GHz data:**


**BT-LE (GFSK)**

<b>CHANNEL</b>	TX Channel 0	<b>DETECTOR FUNCTION</b>	Quasi-Peak (QP)
<b>FREQUENCY RANGE</b>	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
45.12	16.48	45.36	40	-23.52	7.49	1.04	37.41	100	0	QP
101.24	22.36	48.57	43.5	-21.14	9.63	1.32	37.16	100	0	QP
187.64	20.94	45.33	43.5	-22.56	10.49	1.73	36.61	100	0	QP
241.56	23.35	45.35	46	-22.65	12.63	2	36.63	100	0	QP
345.26	22.36	41.25	46	-23.64	15.5	2.4	36.79	100	0	QP
425.18	28.6	45.23	46	-17.4	17.53	2.71	36.87	100	0	QP

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

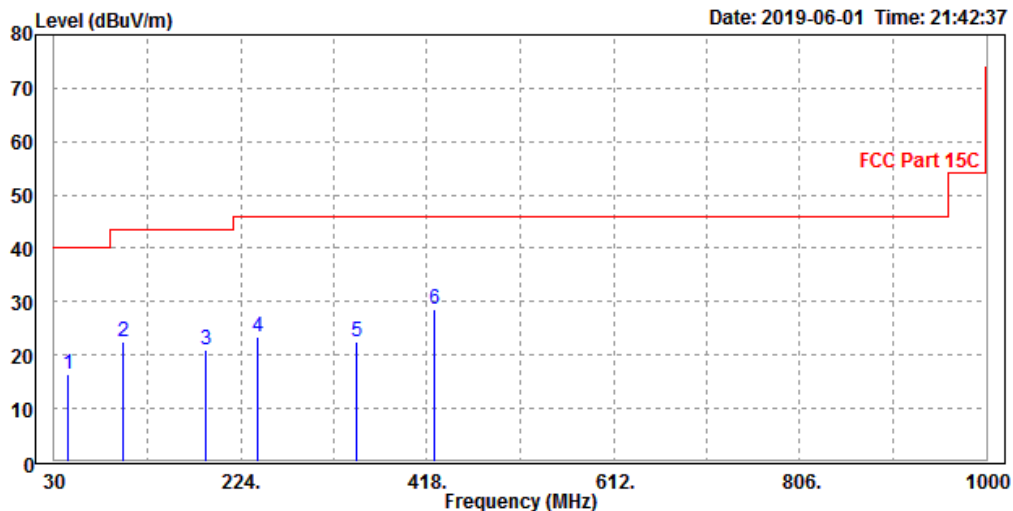






<b>CHANNEL</b>	TX Channel 0	<b>DETECTOR FUNCTION</b>	Quasi-Peak (QP)
<b>FREQUENCY RANGE</b>	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
42.56	30.54	56.44	40	-9.46	10.58	0.98	37.46	100	360	QP
105.36	26.92	53.2	43.5	-16.58	9.51	1.35	37.14	100	360	QP
168.45	19.02	43.63	43.5	-24.48	10.4	1.68	36.69	100	360	QP
289.65	24.72	45.29	46	-21.28	13.99	2.17	36.73	100	360	QP
354.78	22.79	41.25	46	-23.21	15.9	2.43	36.79	100	360	QP
455.21	26.55	42.58	46	-19.45	18.07	2.82	36.92	100	360	QP

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

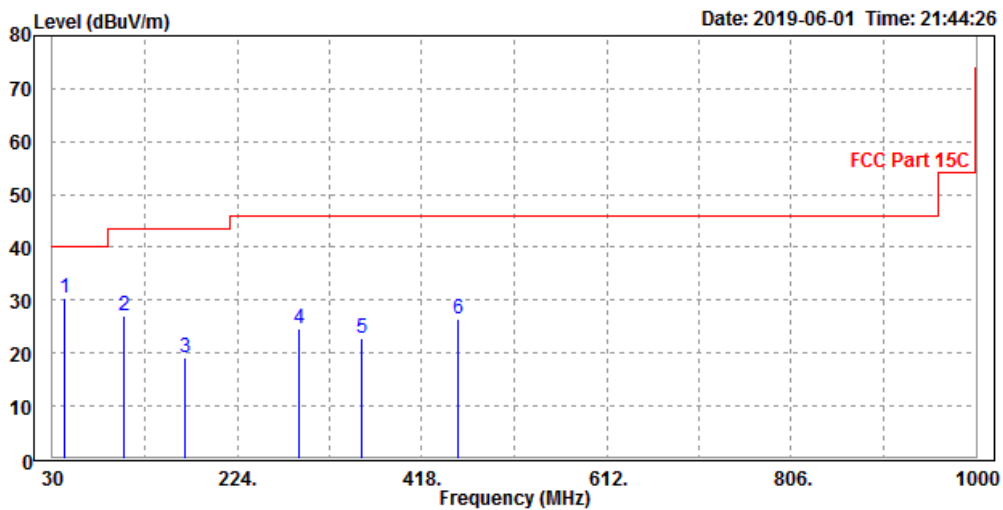



**ABOVE 1GHz TEST DATA:**

**Note:** For higher frequency, the emission is too low to be detected.

**BT-LE (GFSK)**

<b>CHANNEL</b>	TX Channel 0	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	50.95	54.41	74	-23.05	33.1	4.88	41.44	100	290	Peak
<b>2390</b>	<b>40.25</b>	<b>43.71</b>	<b>54</b>	<b>-13.75</b>	<b>33.1</b>	<b>4.88</b>	<b>41.44</b>	<b>100</b>	<b>290</b>	<b>Average</b>
2402	99.78	103.21			33.12	4.89	41.44	100	290	Peak
2402	91.09	94.52			33.12	4.89	41.44	100	290	Average
2483.5	49.26	52.47	74	-24.74	33.27	4.98	41.46	100	290	Peak
2483.5	40.03	43.24	54	-13.97	33.27	4.98	41.46	100	290	Average

<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	49.1	53.45	74	-24.9	32.21	4.88	41.44	100	275	Peak
2390	39.3	43.65	54	-14.7	32.21	4.88	41.44	100	275	Average
2402	100.01	104.31			32.25	4.89	41.44	100	275	Peak
2402	91.31	95.61			32.25	4.89	41.44	100	275	Average
2483.5	49.19	53.21	74	-24.81	32.46	4.98	41.46	100	275	Peak
2483.5	39.56	43.58	54	-14.44	32.46	4.98	41.46	100	275	Average

**REMARKS:**

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
- 2402MHz: Fundamental frequency.



<b>CHANNEL</b>	TX Channel 19	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	49.18	52.64	74	-24.82	33.1	4.88	41.44	100	216	Peak
2390	38.89	42.35	54	-15.11	33.1	4.88	41.44	100	216	Average
2440	99.04	102.36			33.19	4.94	41.45	100	216	Peak
2440	89.89	93.21			33.19	4.94	41.45	100	216	Average
2483.5	50.22	53.43	74	-23.78	33.27	4.98	41.46	100	216	Peak
2483.5	39.48	42.69	54	-14.52	33.27	4.98	41.46	100	216	Average

<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	48.93	53.28	74	-25.07	32.21	4.88	41.44	100	275	Peak
2390	38.21	42.56	54	-15.79	32.21	4.88	41.44	100	275	Average
2440	98.31	102.48			32.34	4.94	41.45	100	275	Peak
2440	89.35	93.52			32.34	4.94	41.45	100	275	Average
2483.5	48.67	52.69	74	-25.33	32.46	4.98	41.46	100	215	Peak
2483.5	37.98	42	54	-16.02	32.46	4.98	41.46	100	215	Average

**REMARKS:**

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
- 2440MHz: Fundamental frequency.



<b>CHANNEL</b>	TX Channel 39	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	49.8	53.26	74	-24.2	33.1	4.88	41.44	100	268	Peak
2390	39.79	43.25	54	-14.21	33.1	4.88	41.44	100	268	Average
2480	99.13	102.35			33.26	4.98	41.46	100	268	Peak
2480	89.31	92.53			33.26	4.98	41.46	100	268	Average
2483.5	49.47	52.68	74	-24.53	33.27	4.98	41.46	100	268	Peak
2483.5	39.95	43.16	54	-14.05	33.27	4.98	41.46	100	268	Average

<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	48.89	53.24	74	-25.11	32.21	4.88	41.44	100	211	Peak
2390	38.34	42.69	54	-15.66	32.21	4.88	41.44	100	211	Average
2480	99.61	103.64			32.45	4.98	41.46	100	211	Peak
2480	58.32	62.35			32.45	4.98	41.46	100	211	Average
2483.5	49.46	53.48	74	-24.54	32.46	4.98	41.46	100	211	Peak
2483.5	39.27	43.29	54	-14.73	32.46	4.98	41.46	100	211	Average

**REMARKS:**

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
2. 2480MHz: Fundamental frequency.



### 3.3 6 dB BANDWIDTH MEASUREMENT

#### 3.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

#### 3.3.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Power Meter	ANRITSU	ML2495A	1506002	Feb. 26,19	Feb. 25,20
EXA Signal Analyzer	KEYSIGHT	N9010A-526	MY54510523	Feb. 26,19	Feb. 25,20
EXA Signal Analyzer	KEYSIGHT	N9010A-544	MY54510332	Feb. 26,19	Feb. 25,20
Power Sensor	ANRITSU	MA2411B	1339352	Feb. 26,19	Feb. 25,20

**NOTE:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
2. The test was performed in RF Oven room.

#### 3.3.3 TEST PROCEDURE


1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW)  $\geq 3$  RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



### 3.3.4 DEVIATION FROM TEST STANDARD

No deviation.

### 3.3.5 TEST SETUP

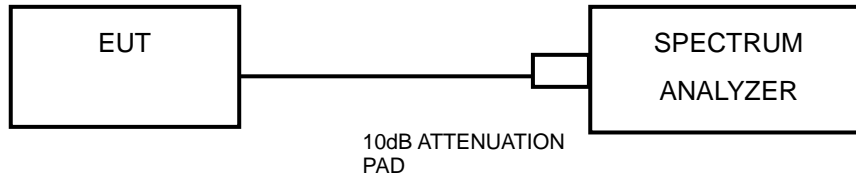

### 3.3.6 EUT OPERATING CONDITIONS


The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



### 3.3.7 TEST RESULTS

#### 802.11b

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	8.58	0.5	PASS
6	2437	8.06	0.5	PASS
11	2462	8.09	0.5	PASS

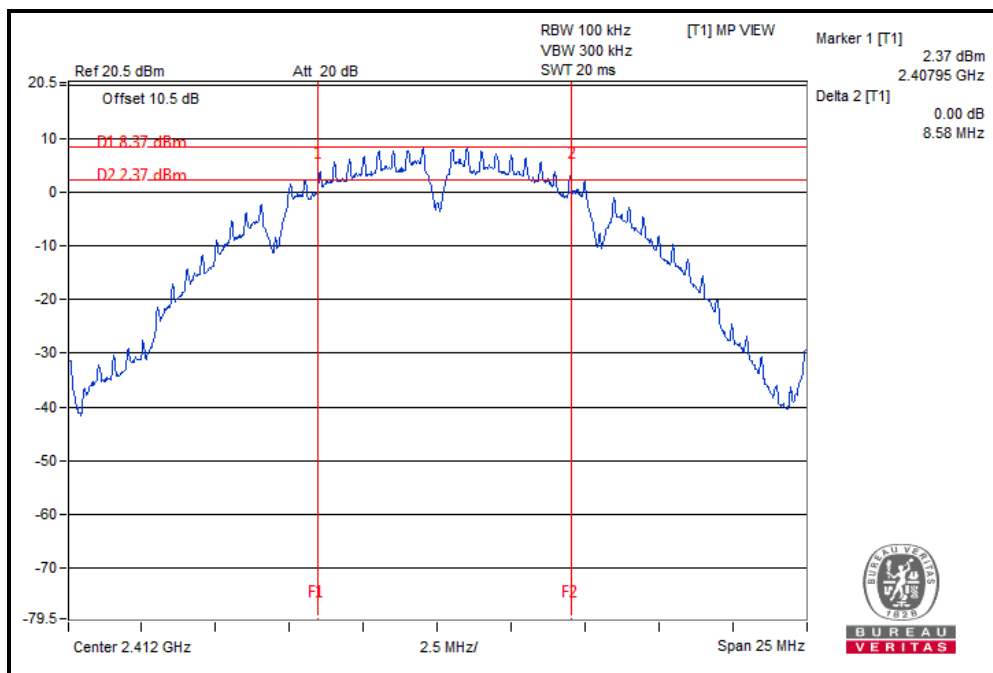




**BUREAU  
VERITAS**

Test Report No.: RF190517W003-2

802.11g

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	16.33	0.5	PASS
6	2437	16.37	0.5	PASS
11	2462	16.36	0.5	PASS

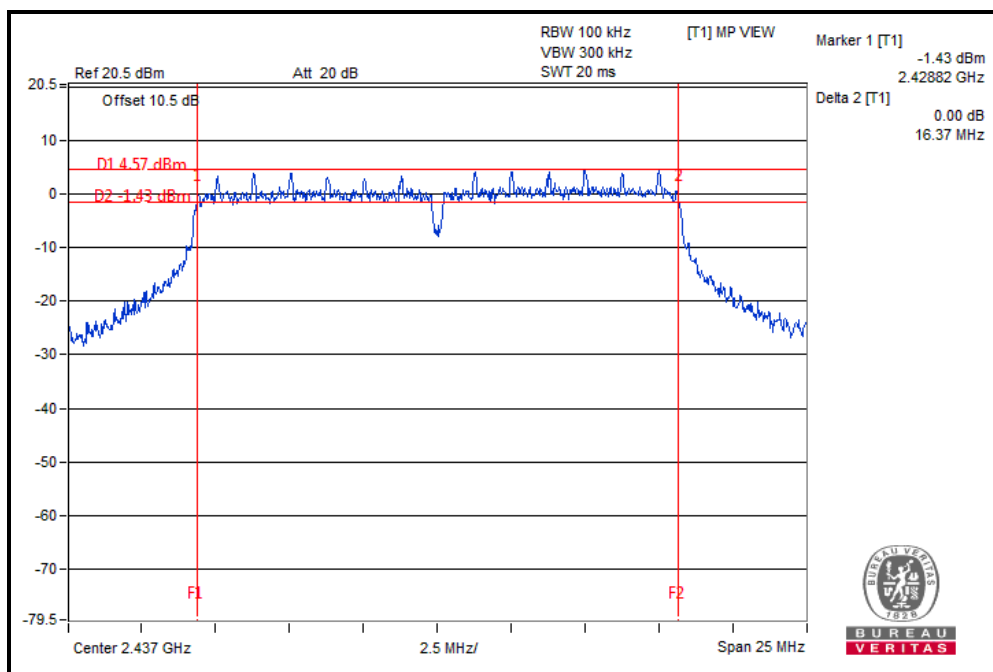






**BUREAU  
VERITAS**

Test Report No.: RF190517W003-2

802.11n (20MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	17.29	0.5	PASS
6	2437	17.56	0.5	PASS
11	2462	17.59	0.5	PASS

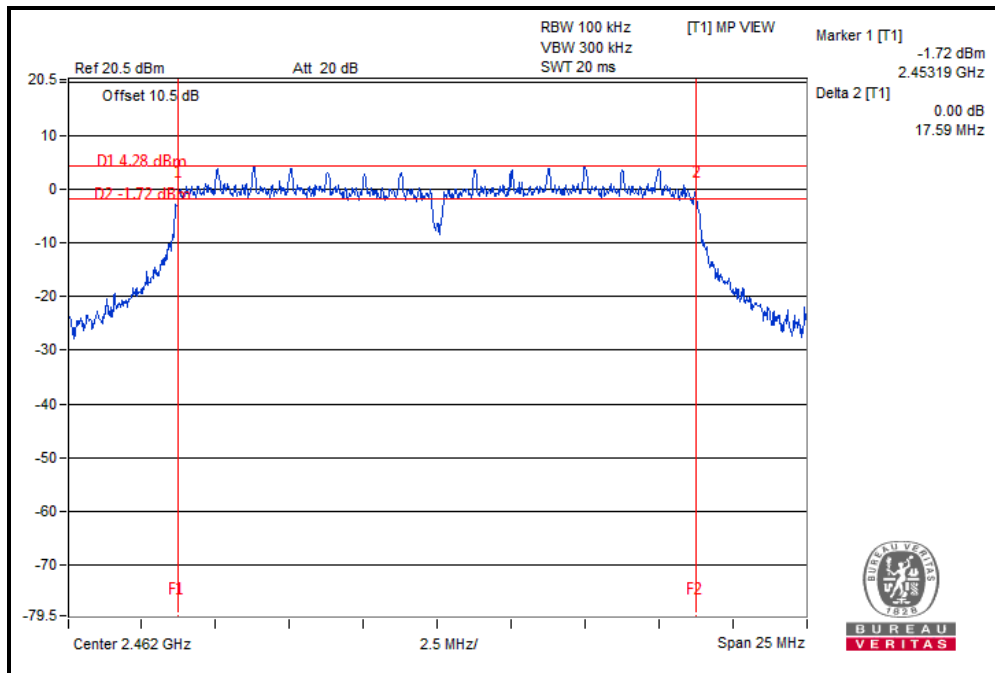




**BUREAU  
VERITAS**

Test Report No.: RF190517W003-2

802.11n (40MHz)


CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
3	2422	35.12	0.5	PASS
6	2437	35.74	0.5	PASS
9	2452	35.14	0.5	PASS

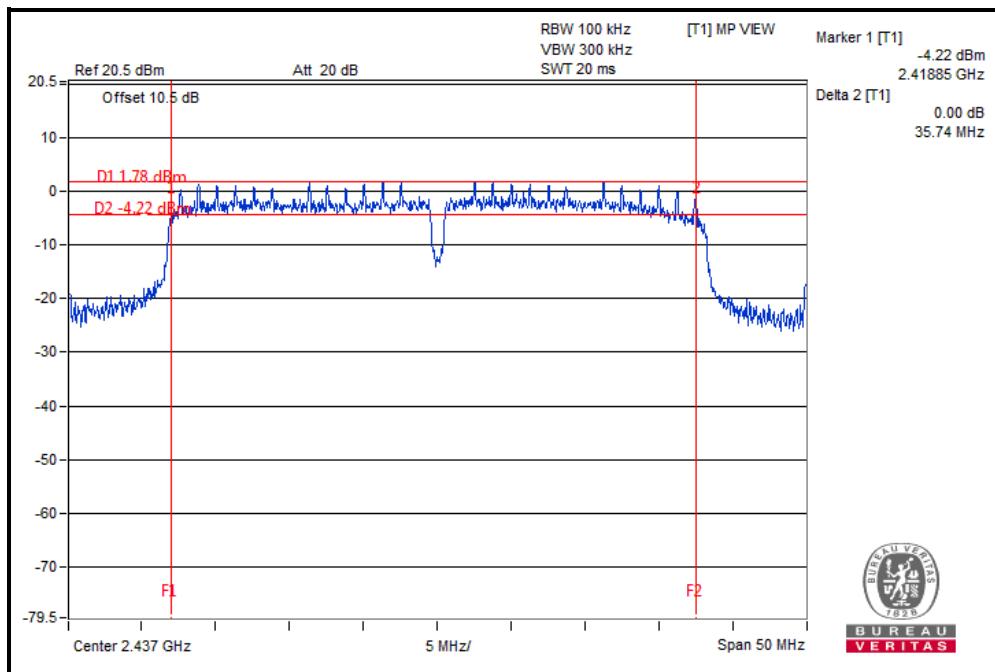



**BT-LE (GFSK)**

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
0	2402	0.69	0.5	PASS
19	2440	0.68	0.5	PASS
39	2480	0.68	0.5	PASS

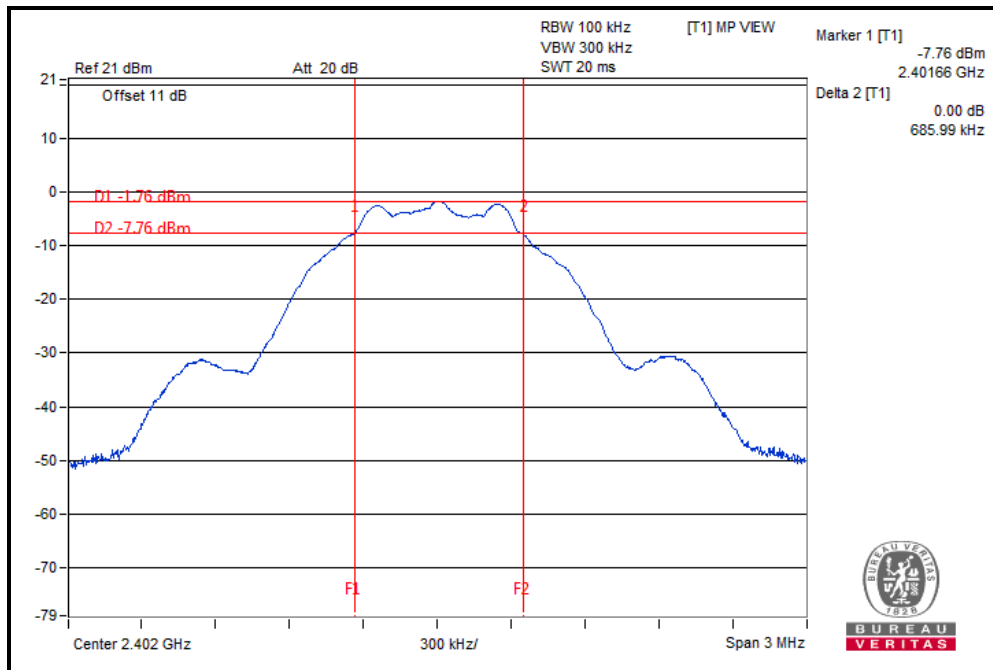




### 3.4 CONDUCTED OUTPUT POWER

#### 3.4.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT

For systems using digital modulation in the 2400–2483.5 MHz band: 1 Watt (30dBm)

#### 3.4.2 TEST SETUP

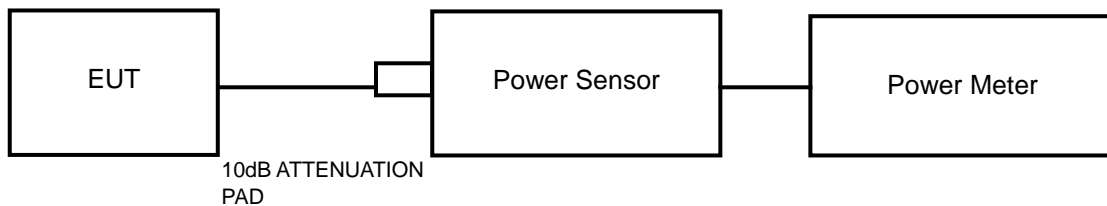

#### 3.4.3 TEST INSTRUMENTS

Refer to section 3.3.2 to get information of above instrument.

#### 3.4.4 TEST PROCEDURES

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.

#### 3.4.5 DEVIATION FROM TEST STANDARD

No deviation.

#### 3.4.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



3.4.7 TEST RESULTS

3.4.7.1 MAXIMUM PEAK OUTPUT POWER

802.11b

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	PEAK POWER LIMIT(W)	PASS/FAIL
1	2412	18.88	77.268	1	PASS
6	2437	19.74	94.189	1	PASS
11	2462	19.62	91.622	1	PASS

802.11g

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	PEAK POWER LIMIT(W)	PASS/FAIL
1	2412	21.07	127.938	1	PASS
6	2437	22.14	163.682	1	PASS
11	2462	22.03	159.588	1	PASS

802.11n (20MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	PEAK POWER LIMIT(W)	PASS/FAIL
1	2412	21.15	130.317	1	PASS
6	2437	22.14	163.682	1	PASS
11	2462	21.79	151.008	1	PASS

802.11n (40MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	PEAK POWER LIMIT(W)	PASS/FAIL
3	2422	21.88	154.170	1	PASS
6	2437	21.93	155.955	1	PASS
9	2452	22.28	<b>169.044</b>	1	PASS



**BT-LE (GFSK)**

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	PEAK POWER LIMIT(W)	PASS/FAIL
0	2402	-2.48	0.565	1	PASS
19	2440	0.96	<b>1.247</b>	1	PASS
39	2480	-0.61	0.869	1	PASS

**3.4.7.2 Average Output Power (FOR REFERENCE)**

The average power sensor was used on the output port of the EUT. A power meter was used to read the response of the power sensor. Record the power level.

**802.11b**

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)	PASS/FAIL
1	2412	16.12	N/A
6	2437	16.41	N/A
11	2462	16.34	N/A

**802.11g**

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)	PASS/FAIL
1	2412	14.12	N/A
6	2437	14.66	N/A
11	2462	14.17	N/A

**802.11n (20MHz)**

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)	PASS/FAIL
1	2412	14.04	N/A
6	2437	14.55	N/A
11	2462	14.25	N/A



**802.11n (40MHz)**

<b>CHANNEL</b>	<b>CHANNEL FREQUENCY (MHz)</b>	<b>AVERAGE POWER (dBm)</b>	<b>PASS/FAIL</b>
3	2422	14.02	N/A
6	2437	14.05	N/A
9	2452	14.22	N/A

**BT-LE (GFSK)**

<b>CHANNEL</b>	<b>CHANNEL FREQUENCY (MHz)</b>	<b>AVERAGE POWER (dBm)</b>	<b>PASS/FAIL</b>
0	2402	-4.88	N/A
19	2440	-1.38	N/A
39	2480	-3.21	N/A




### 3.5 POWER SPECTRAL DENSITY MEASUREMENT

#### 3.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm/3KHz.

#### 3.5.2 TEST SETUP



#### 3.5.3 TEST INSTRUMENTS

Refer to section 3.3.2 to get information of above instrument.

#### 3.5.4 TEST PROCEDURE

1. Set the span to 1.5 times the DTS bandwidth
2. Set the RBW = 3 kHz, VBW  $\geq 3 \times$  RBW, Detector = peak.
3. Sweep time = auto couple, Trace mode = max hold, allow trace to fully stabilize.
4. Use the peak marker function to determine the maximum amplitude level.

#### 3.5.5 DEVIATION FROM TEST STANDARD

No deviation.

#### 3.5.6 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.






### 3.5.7 TEST RESULTS

#### 802.11b

Channel	FREQ. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
1	2412	-7.18	8	PASS
6	2437	-5.62	8	PASS
11	2462	-5.39	8	PASS

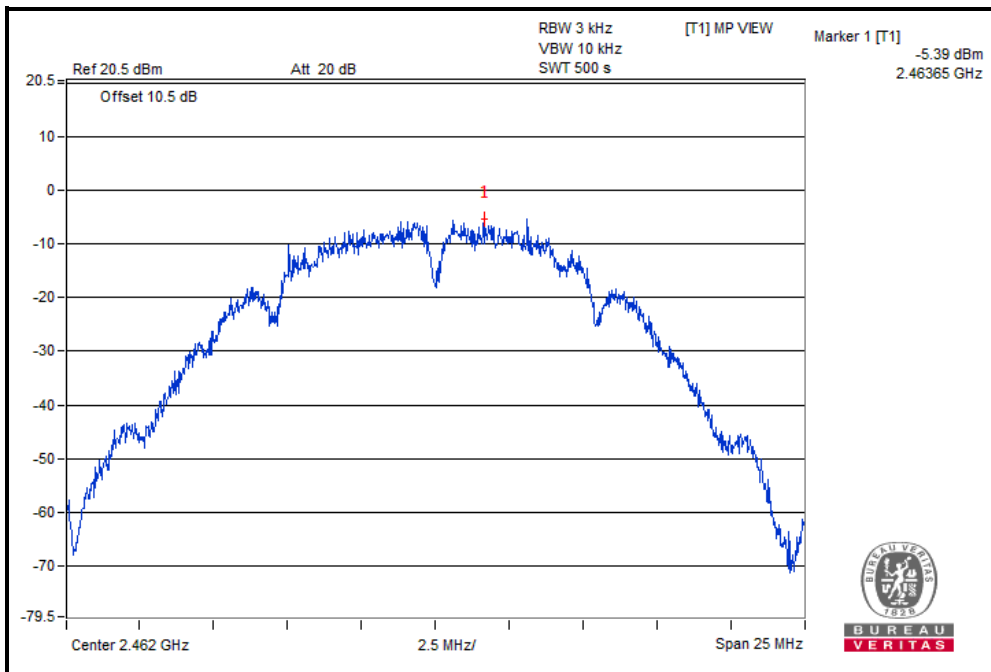




**BUREAU  
VERITAS**

Test Report No.: RF190517W003-2

802.11g

Channel	FREQ. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
1	2412	-9.22	8	PASS
6	2437	-9.79	8	PASS
11	2462	-10.38	8	PASS

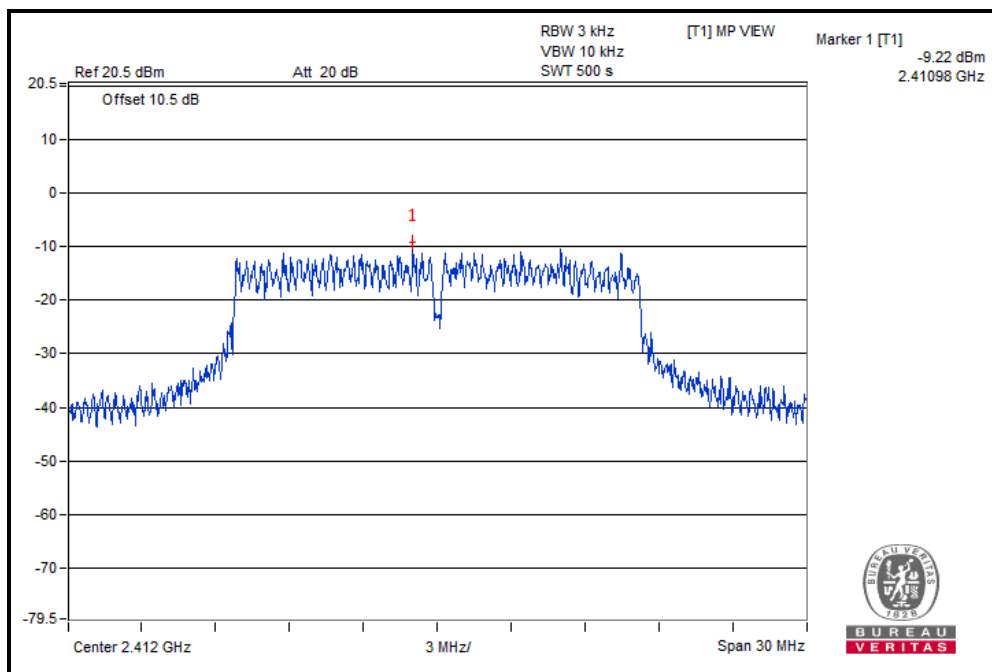




**BUREAU  
VERITAS**

**Test Report No.: RF190517W003-2**

**802.11n (20MHz)**

Channel	FREQ. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
1	2412	-9.72	8	PASS
6	2437	-9.38	8	PASS
11	2462	-10.19	8	PASS

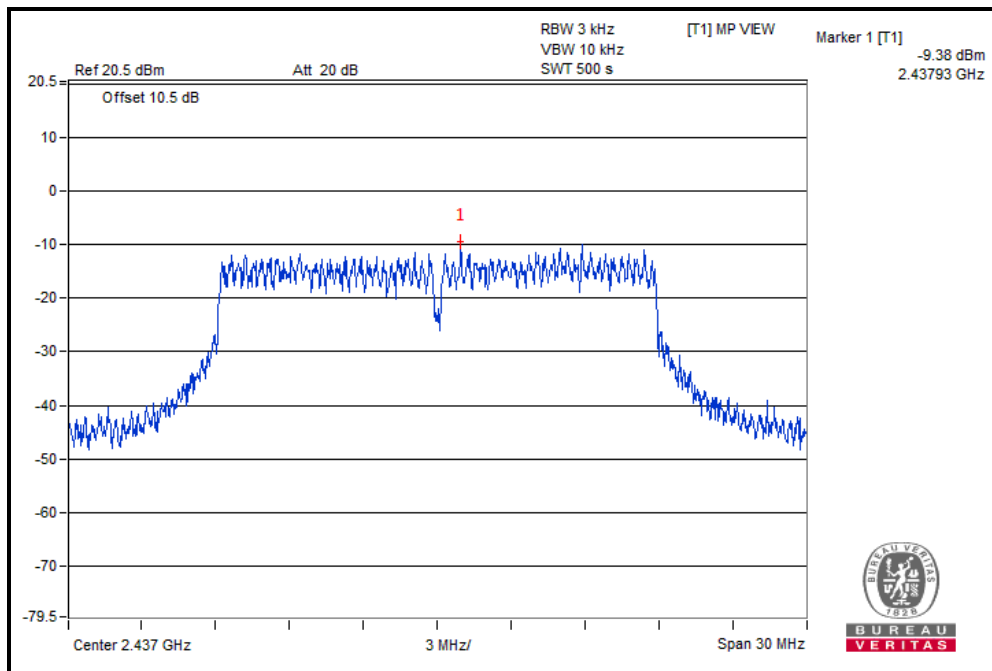




**BUREAU  
VERITAS**

**Test Report No.: RF190517W003-2**

**802.11n (40MHz)**

Channel	FREQ. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
3	2422	-12.49	8	PASS
6	2437	-12.61	8	PASS
9	2452	-10.98	8	PASS

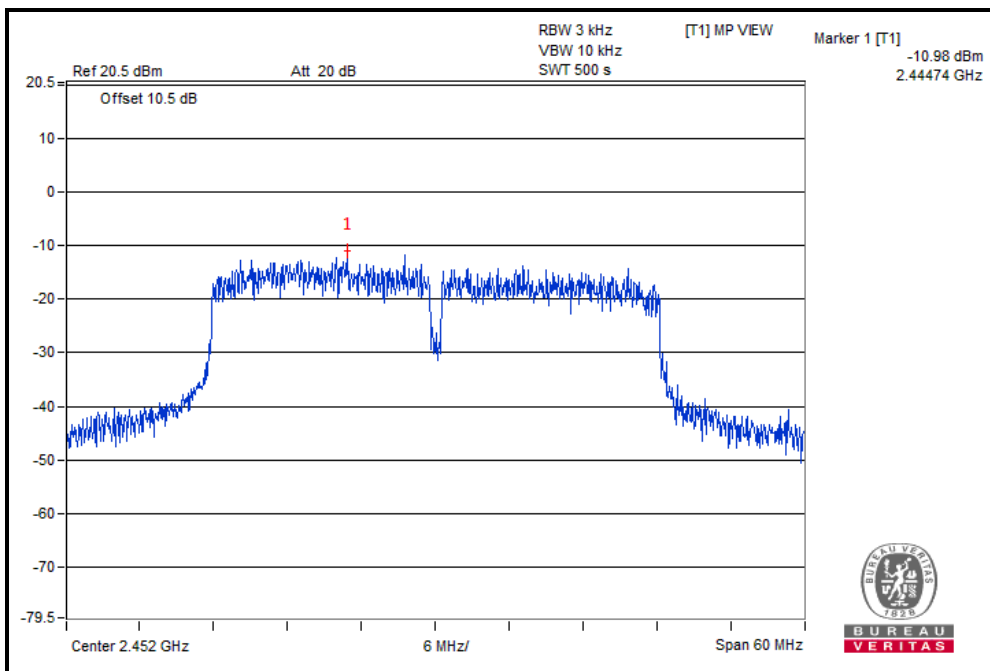




**BUREAU  
VERITAS**

**Test Report No.: RF190517W003-2**

**BT-LE (GFSK)**

Channel	FREQ. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	2402	-15.88	8	PASS
19	2440	-12.10	8	PASS
39	2480	-13.40	8	PASS

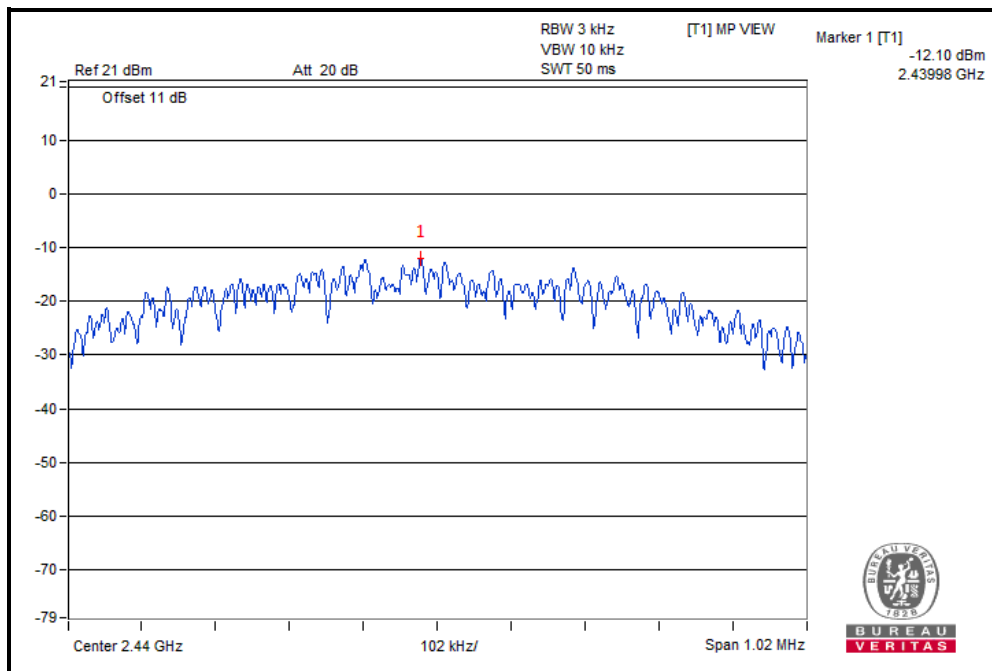




### 3.6 OUT OF BAND EMISSION MEASUREMENT

#### 3.6.1 LIMITS OF OUT OF BAND EMISSION MEASUREMENT

Below  $-20\text{dB}$  of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

#### 3.6.2 TEST SETUP

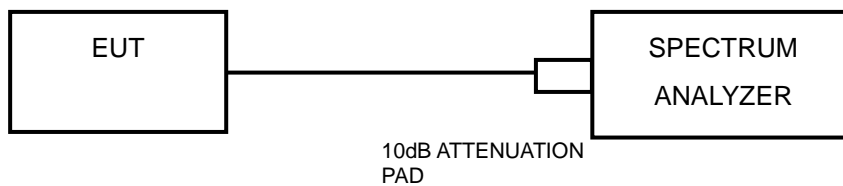

#### 3.6.3 TEST INSTRUMENTS

Refer to section 3.3.2 to get information of above instrument.

#### 3.6.4 TEST PROCEDURE

##### MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW  $\geq$  300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.



## MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW  $\geq$  300 kHz.
3. Set span to encompass the spectrum to be examined
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.

### 3.6.5 DEVIATION FROM TEST STANDARD

No deviation.

### 3.6.6 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

### 3.6.7 TEST RESULTS

The spectrum plots are attached on the following images. D1 line indicates the highest level. D2 line indicates the 20dB offset below D1. It shows compliance to the requirement.




**BUREAU  
VERITAS**


Test Report No.: RF190517W003-2

### 802.11b


#### CH 1

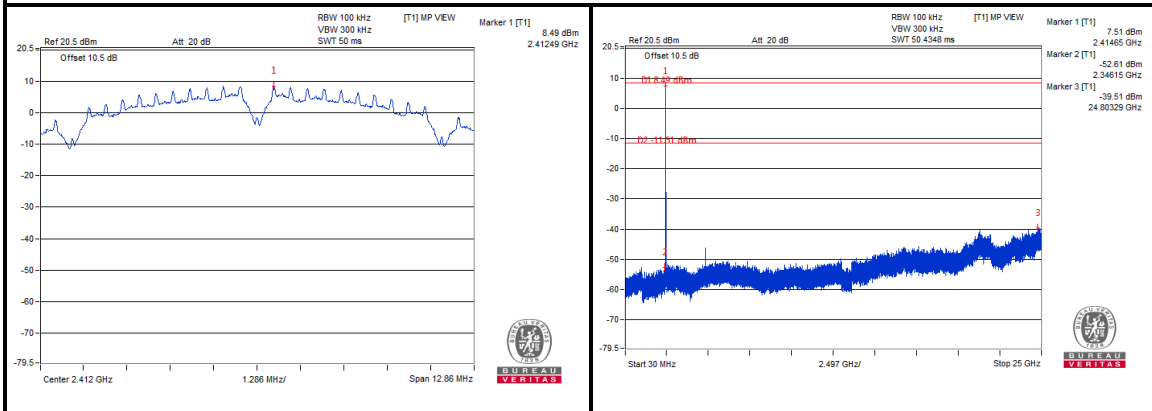

#### CH 6

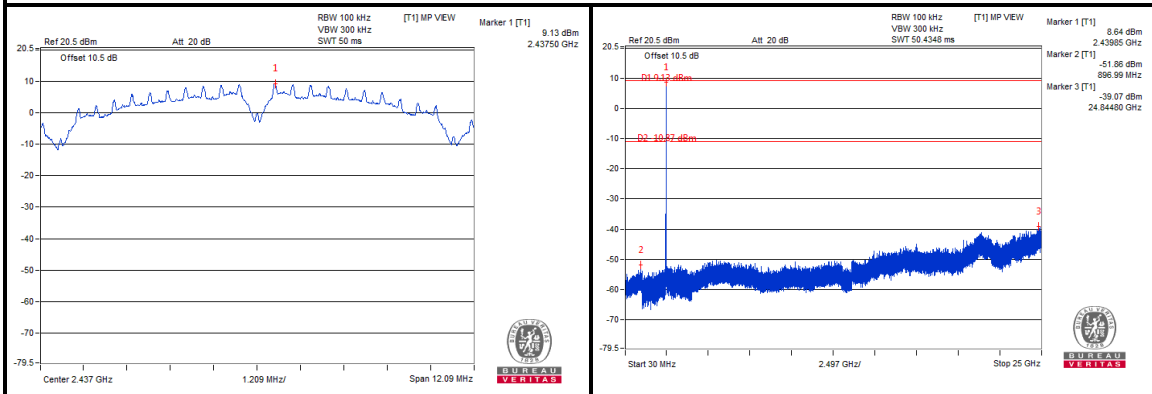

#### CH 11

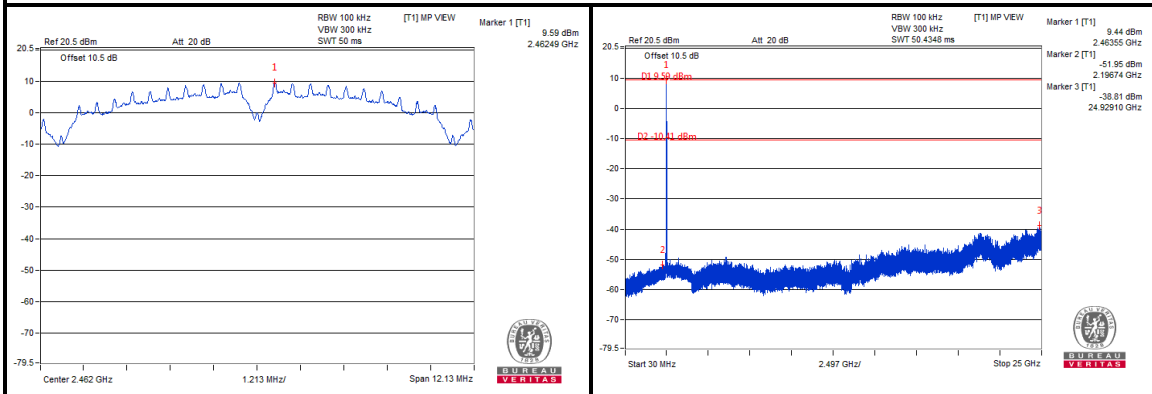







**BUREAU  
VERITAS**

Test Report No.: RF190517W003-2

### CH 1 Band Edge

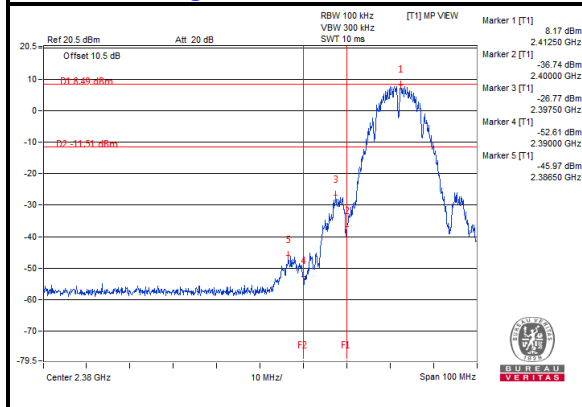

### CH 11 Band Edge

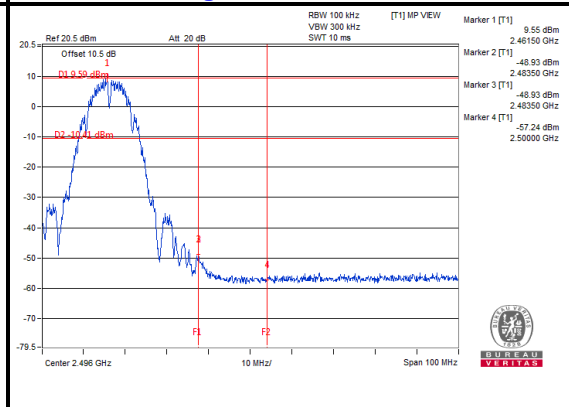




BUREAU VERITAS


Test Report No.: RF190517W003-2

### 802.11g


#### CH 1

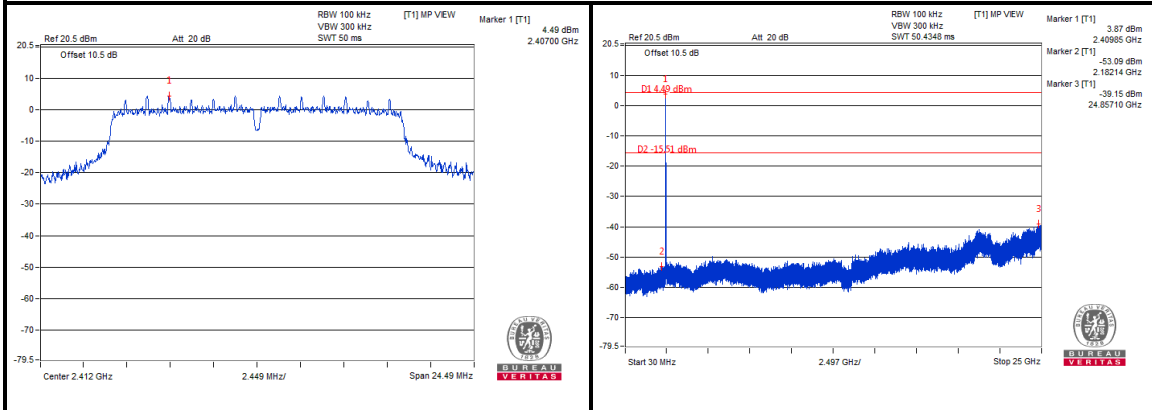

#### CH 6

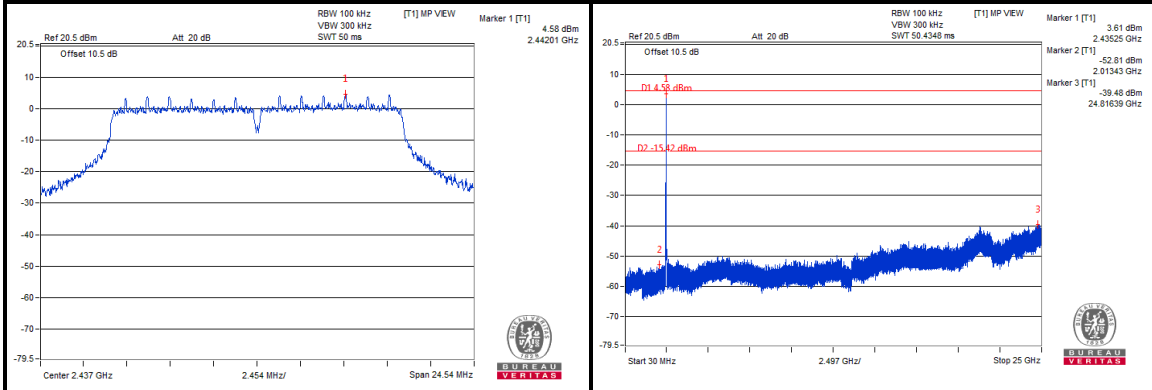

#### CH 11

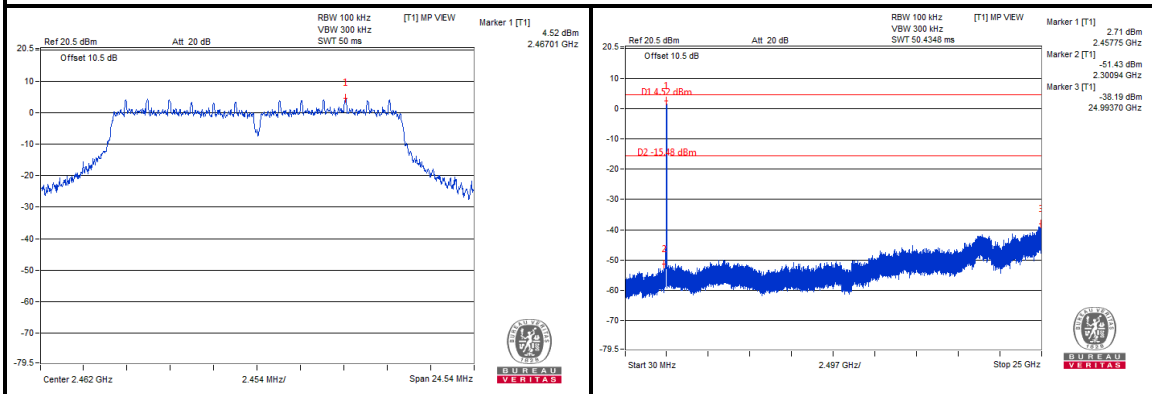





**BUREAU  
VERITAS**

Test Report No.: RF190517W003-2

### CH 1 Band Edge

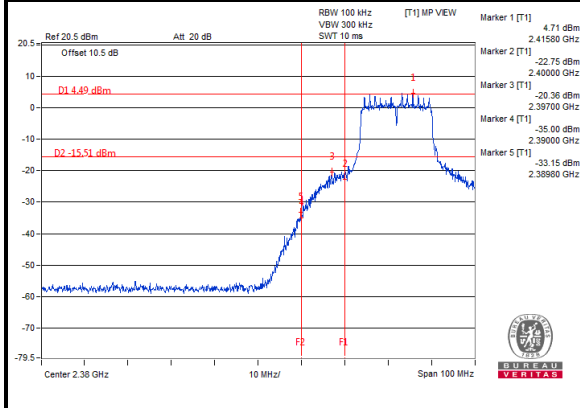

### CH 11 Band Edge

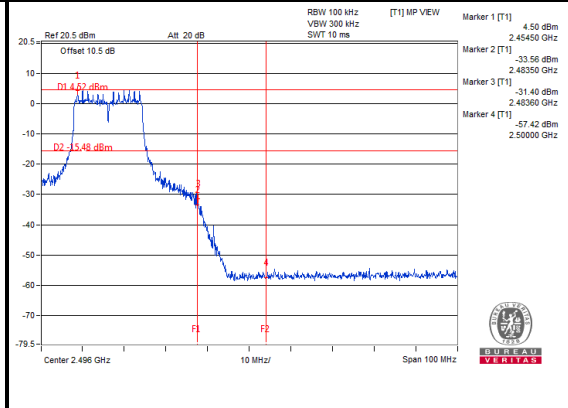





**BUREAU  
VERITAS**



Test Report No.: RF190517W003-2

### 802.11n (20MHz)



#### CH 1

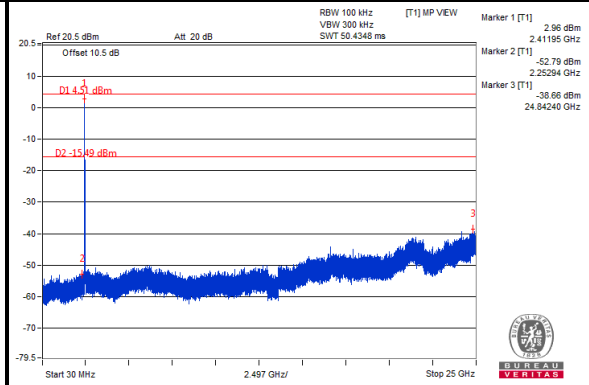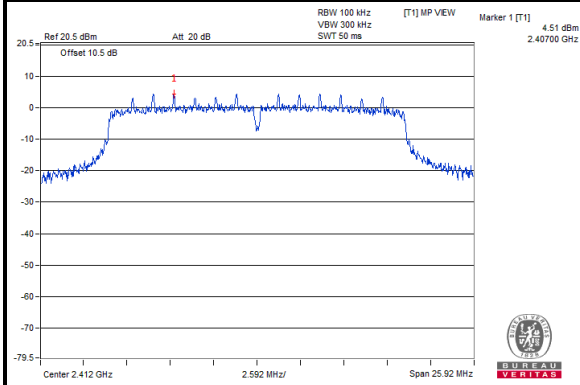

#### CH 6

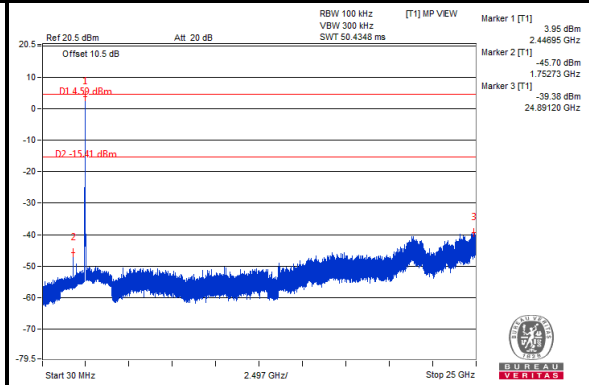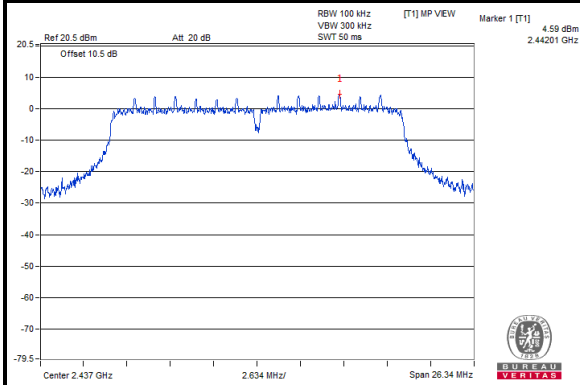

#### CH 11

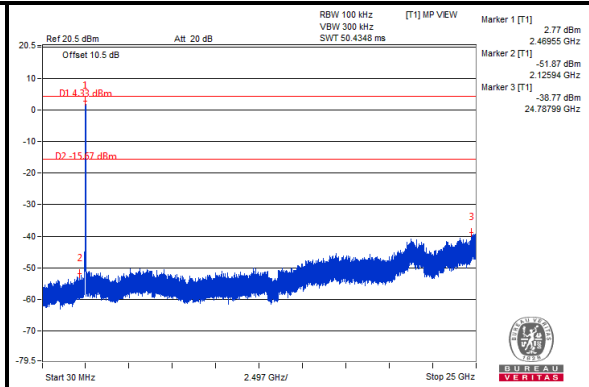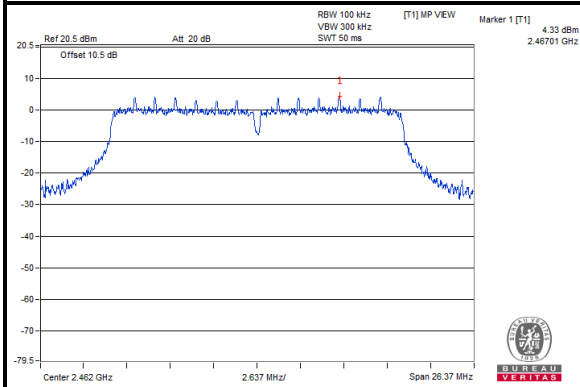





**BUREAU  
VERITAS**

Test Report No.: RF190517W003-2

### CH 1 Band Edge

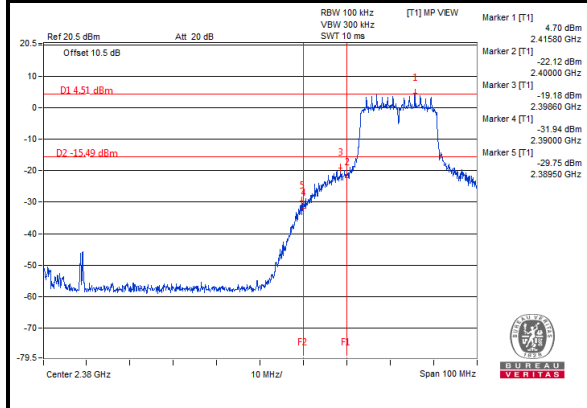

### CH 11 Band Edge

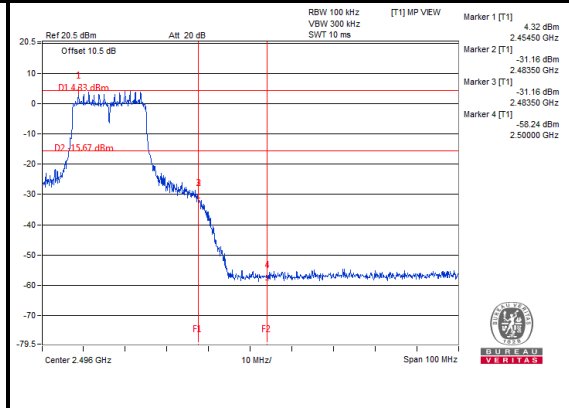





BUREAU VERITAS



Test Report No.: RF190517W003-2

### 802.11n (40MHz)



#### CH 3

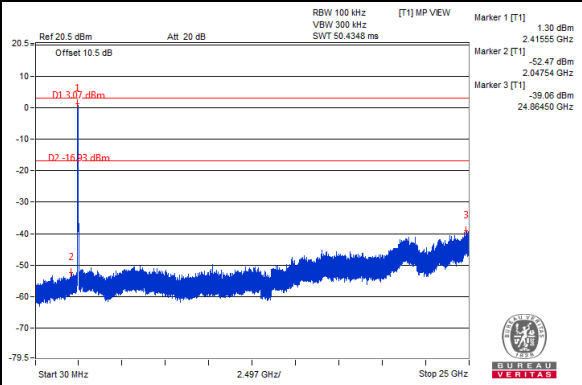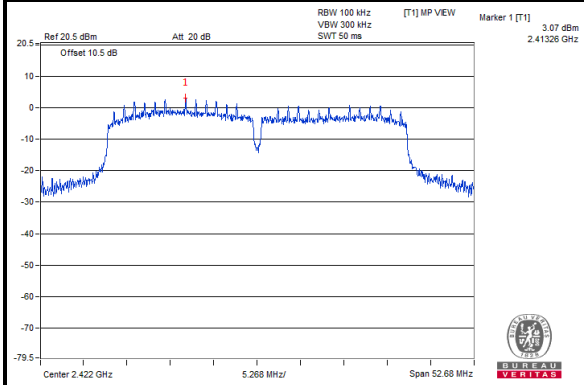

#### CH 6

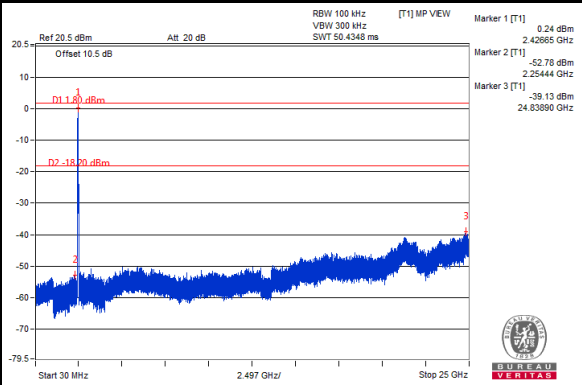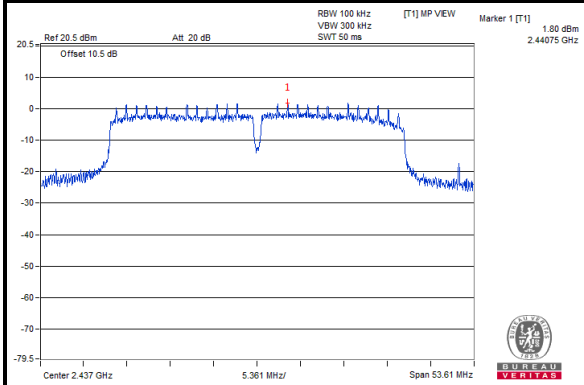


#### CH 9

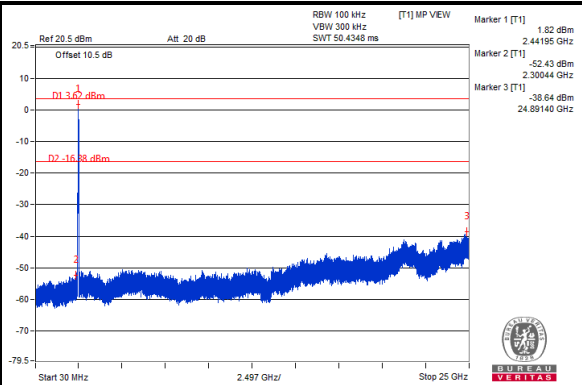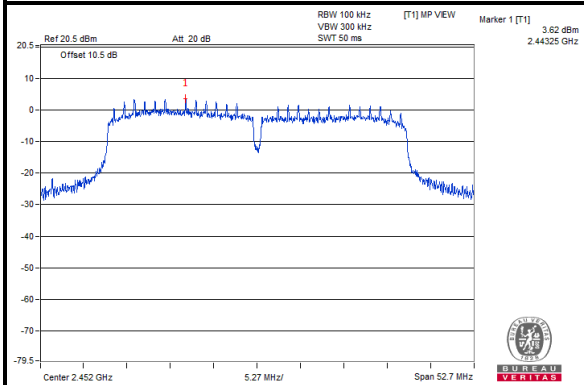



**BUREAU  
VERITAS**

Test Report No.: RF190517W003-2

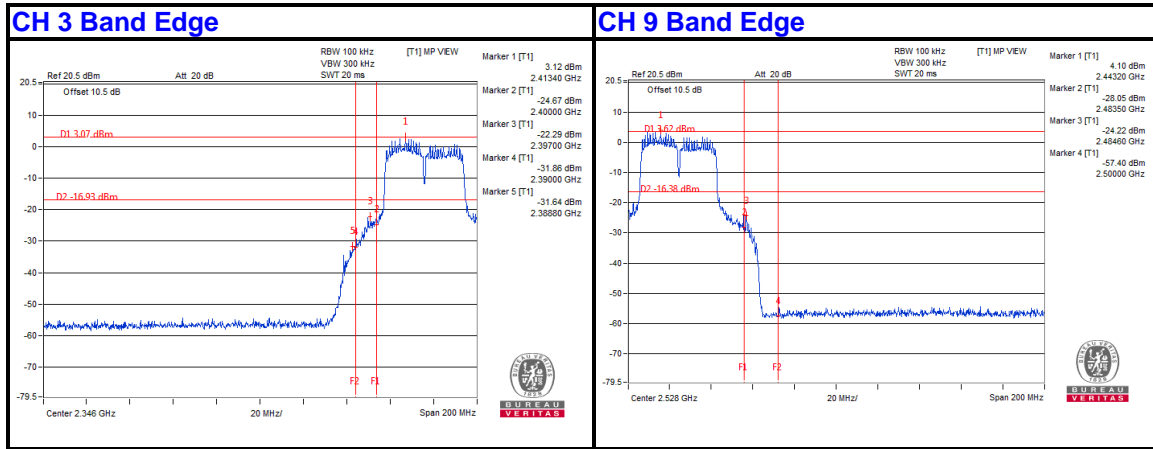

BV 7Layers Communications Technology  
(Shenzhen) Co. Ltd

No.B102, Dazu Chuangxin Mansion, North of Beihuan  
Avenue, North Area, Hi-Tech Industrial Park, Nanshan  
District, Shenzhen, Guangdong, China

Tel: +86 755 8869 6566  
Fax: +86 755 8869 6577  
Email: [customerservice.dq@cn.bureauveritas.com](mailto:customerservice.dq@cn.bureauveritas.com)





BUREAU VERITAS



Test Report No.: RF190517W003-2

### BT-LE (GFSK)



#### CH 0

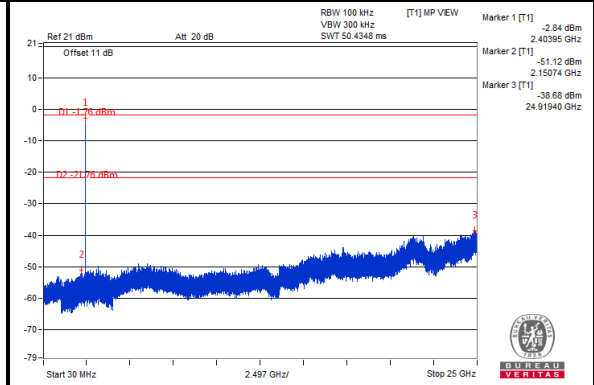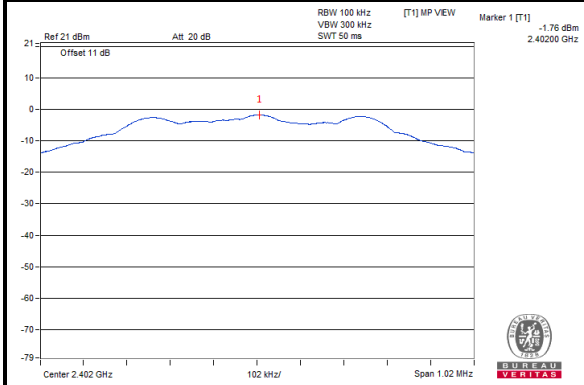

#### CH 19

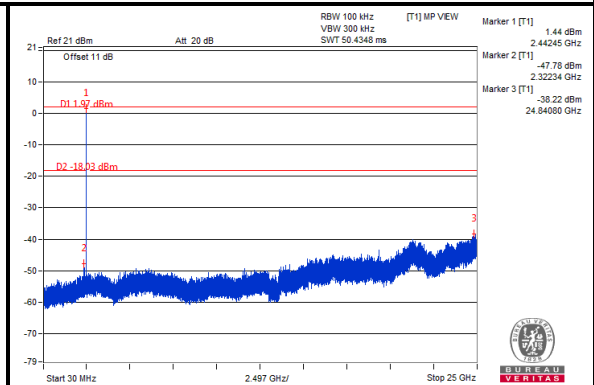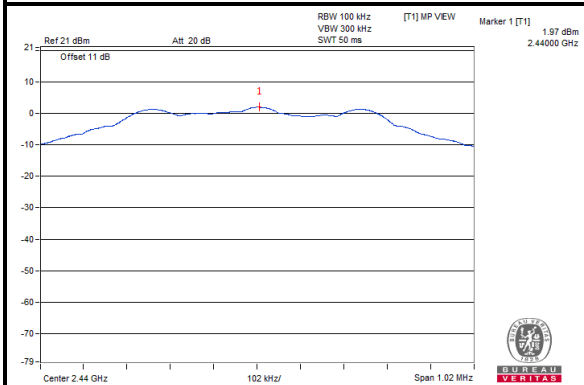

#### CH 39

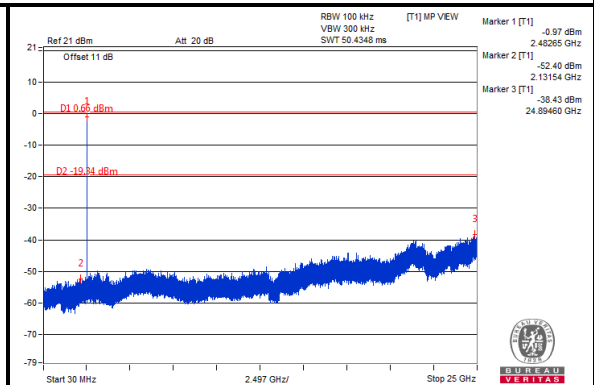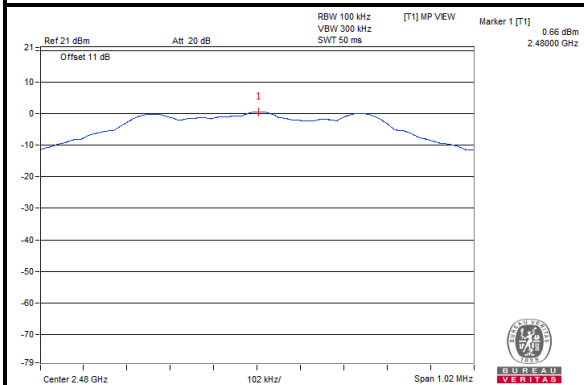






**BUREAU  
VERITAS**

Test Report No.: RF190517W003-2

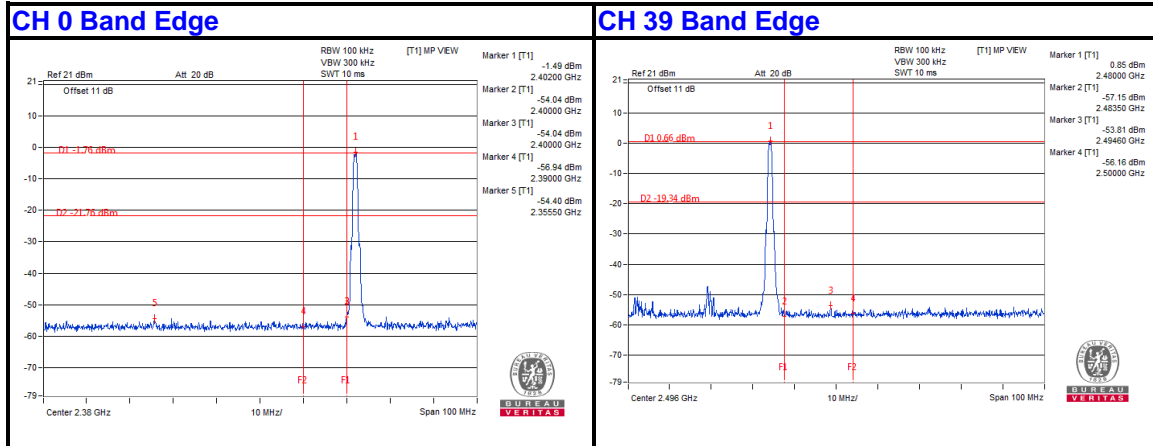

BV 7Layers Communications Technology  
(Shenzhen) Co. Ltd

No.B102, Dazu Chuangxin Mansion, North of Beihuan  
Avenue, North Area, Hi-Tech Industrial Park, Nanshan  
District, Shenzhen, Guangdong, China

Tel: +86 755 8869 6566  
Fax: +86 755 8869 6577  
Email: [customerservice.dq@cn.bureauveritas.com](mailto:customerservice.dq@cn.bureauveritas.com)



## 4 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



**BUREAU** Test Report No.: RF190517W003-2  
**VERITAS**

## 5 APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

**---END---**