

FCC TEST REPORT (PART 24)

Applicant:	GREAT TALENT TECHNOLOGY LIMITED
Address:	RM602,T3 Software Park, Hi-Tech Park South, Nanshan, Shenzhen, China

Manufacturer or Supplier:	GREAT TALENT TECHNOLOGY LIMITED
Address:	RM602,T3 Software Park, Hi-Tech Park South, Nanshan, Shenzhen, China
Product:	2803
Brand Name:	F30
Model Name:	F30
FCC ID:	2ALZM-F30
Date of tests:	May. 18, 2019 ~ Jun. 11, 2019

The tests have been carried out according to the requirements of the following standard:

- FCC PART 24, Subpart E**
 ANSI C63.26-2015
 ANSI/TIA/EIA-603-D
 ANSI/TIA/EIA-603-E


CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Prepared by Alex Chen
Engineer / Mobile Department

Approved by Luke Lu
Manager / Mobile Department



Date: Jun. 17, 2019

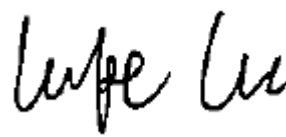

Date: Jun. 17, 2019

This report is governed by, and incorporates by reference, CPS Conditions of Service as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



TABLE OF CONTENTS

RELEASE CONTROL RECORD	4
1 SUMMARY OF TEST RESULTS	5
1.1 MEASUREMENT UNCERTAINTY	5
1.2 TEST SITE AND INSTRUMENTS	6
2 GENERAL INFORMATION	7
2.1 GENERAL DESCRIPTION OF EUT	7
2.2 CONFIGURATION OF SYSTEM UNDER TEST	10
2.3 DESCRIPTION OF SUPPORT UNITS	11
2.4 TEST ITEM AND TEST CONFIGURATION	11
2.5 EUT OPERATING CONDITIONS	16
2.6 GENERAL DESCRIPTION OF APPLIED STANDARDS	16
3 TEST TYPES AND RESULTS	17
3.1 OUTPUT POWER MEASUREMENT	17
3.1.1 LIMITS OF OUTPUT POWER MEASUREMENT	17
3.1.2 TEST PROCEDURES	17
3.1.3 TEST SETUP	18
3.1.4 TEST RESULTS	19
3.2 FREQUENCY STABILITY MEASUREMENT	35
3.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT	35
3.2.2 TEST PROCEDURE	35
3.2.3 TEST SETUP	35
3.2.4 TEST RESULTS	36
3.3 OCCUPIED BANDWIDTH MEASUREMENT	49
3.3.1 TEST PROCEDURES	49
3.3.2 TEST SETUP	49
3.3.3 TEST RESULTS	50
3.4 BAND EDGE MEASUREMENT	63
3.4.1 LIMITS OF BAND EDGE MEASUREMENT	63
3.4.2 TEST SETUP	63
3.4.3 TEST PROCEDURES	64
3.4.4 TEST RESULTS	65
3.5 CONDUCTED SPURIOUS EMISSIONS	90
3.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT	90
3.5.2 TEST PROCEDURE	90
3.5.3 TEST SETUP	90
3.5.4 TEST RESULTS	91
3.6 RADIATED EMISSION MEASUREMENT	104
3.6.1 LIMITS OF RADIATED EMISSION MEASUREMENT	104
3.6.2 TEST PROCEDURES	104
3.6.3 DEVIATION FROM TEST STANDARD	104
3.6.4 TEST SETUP	105
3.6.5 TEST RESULTS	107
3.7 PEAK TO AVERAGE RATIO	147
3.7.1 LIMITS OF PEAK TO AVERAGE RATIO MEASUREMENT	147
3.7.2 TEST SETUP	147
3.7.3 TEST PROCEDURES	147
3.7.4 TEST RESULTS	148



**BUREAU
VERITAS**

Test Report No.: RF190517W003-4

4 INFORMATION ON THE TESTING LABORATORIES.....	157
5 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB.....	158



BUREAU
VERITAS

Test Report No.: RF190517W003-4

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF190517W003-4	Original release	Jun. 17, 2019



1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 24 & Part 2			
STANDARD SECTION	TEST TYPE	RESULT	REMARK
2.1046 24.232	Equivalent Isotropic Radiated Power	PASS	Meet the requirement of limit.
2.1055 24.235	Frequency Stability	PASS	Meet the requirement of limit.
2.1049 24.238(b)	Occupied Bandwidth	PASS	Meet the requirement of limit.
24.232(d)	Peak to average ratio	PASS	Meet the requirement of limit.
24.238(b)	Band Edge Measurements	PASS	Meet the requirement of limit.
2.1051 24.238	Conducted Spurious Emissions	PASS	Meet the requirement of limit.
2.1053 24.238	Radiated Spurious Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -26.42dB at 31.940MHz.

1.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	UNCERTAINTY
Effective Radiated Power	±4.48dB
Frequency Stability	± 39.27Hz
Radiated emissions	±4.48dB
Conducted emissions	±2 dB
Occupied Channel Bandwidth	±21.7KHz
Band Edge Measurements	±4.48dB
Peak to average ratio	±0.76dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



1.2 TEST SITE AND INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
MXE EMI Receiver	KEYSIGHT	N9038A-544	MY54450026	Feb. 26,19	Feb. 25,20
EXA Signal Analyzer	KEYSIGHT	N9010A-526	MY54510322	Feb. 26,19	Feb. 25,20
Bilog Antenna 1	ETS-LINDGREN	3143B	00161964	Feb. 26,19	Feb. 25,20
Bilog Antenna 2	ETS-LINDGREN	3143B	00161965	Feb. 26,19	Feb. 25,20
Horn Antenna 1	ETS-LINDGREN	3117	00168728	Feb. 26,19	Feb. 25,20
Horn Antenna 2	ETS-LINDGREN	3117	00168692	Nov. 30, 18	Nov. 29, 19
Loop antenna	Daze	ZN30900A	0708	Oct. 23,18	Oct. 22, 19
Horn Antenna (18GHz-40GHz)	N/A	QWH-SL-18-40-K-SG/QMS-00361	15433	Nov. 21, 18	Nov. 20, 19
Radio Communication Analyzer	ANRITSU	MT8820C	6201465426	Feb. 26,19	Feb. 25,20
Signal Pre-Amplifier	EMSI	EMC 9135	980249	Jul. 09,18	Jul. 08,19
Signal Pre-Amplifier	EMSI	EMC 012645B	980257	Jul. 09,18	Jul. 08,19
Signal Pre-Amplifier	EMSI	EMC 184045B	980259	Jul. 09,18	Jul. 08,19
3m Semi-anechoic Chamber	ETS-LINDGREN	9m*6m*6m	Euroshieldpn-CT0001143-1216	Feb. 26,19	Feb. 25,20
Test Software	E3	V 9.160323	N/A	N/A	N/A
Test Software	ADT	ADT_Radiated V7.6.15.9.2	N/A	N/A	N/A
10dB Attenuator	JFW/USA	50HF-010-SM A	1505	Jul. 09,18	Jul. 08,19
Power Meter	Anritsu	ML2495A	1506002	Feb. 26,19	Feb. 25,20
Power Sensor	Anritsu	MA2411B	1339352	Feb. 26,19	Feb. 25,20
Humid & Temp Programmable Tester	Juyi	ITH-120-45-CP-AR	IAA1504-001	Jul. 09,18	Jul. 08,19
MXG Analog Microvave Signal Generator	KEYSIGHT	N5183A	MY50143024	Feb. 26,19	Feb. 25,20

- NOTE:**
1. The calibration interval of the above test instruments is 12 months or 24 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
 2. The test was performed in 3m Semi-anechoic Chamber and RF Oven Room.
 3. The horn antenna is used only for the measurement of emission frequency above 1GHz if tested.
 4. The FCC Site Registration No. is 525120; The Designation No. is CN1171.



2 GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

PRODUCT	2803	
BRAND NAME	F30	
MODEL NAME	F30	
POWER SUPPLY	5.0Vdc (adapter or host equipment) 3.85Vdc (Li-ion, battery)	
MODULATION TYPE	CDMA : QPSK LTE : QPSK, 16QAM	
FREQUENCY RANGE	CDMA BC1	1851.25MHz ~1908.75MHz
	LTE Band 2 Channel Bandwidth: 1.4MHz	1850.7MHz ~ 1909.3MHz
	LTE Band 2 Channel Bandwidth: 3MHz	1851.5MHz ~ 1908.5MHz
	LTE Band 2 Channel Bandwidth: 5MHz	1852.5MHz ~ 1907.5MHz
	LTE Band 2 Channel Bandwidth: 10MHz	1855.0MHz ~ 1905.0MHz
	LTE Band 2 Channel Bandwidth: 15MHz	1857.5MHz ~ 1902.5MHz
	LTE Band 2 Channel Bandwidth: 20MHz	1860.0MHz ~ 1900.0MHz
	LTE Band 25 Channel Bandwidth: 1.4MHz	1850.7MHz ~ 1914.3MHz
	LTE Band 25 Channel Bandwidth: 3MHz	1851.5MHz ~ 1913.5MHz
	LTE Band 25 Channel Bandwidth: 5MHz	1852.5MHz ~ 1912.5MHz
	LTE Band 25 Channel Bandwidth: 10MHz	1855MHz ~ 1910MHz
	LTE Band 25 Channel Bandwidth: 15MHz	1857.5MHz ~ 1907.5MHz
	LTE Band 25 Channel Bandwidth: 20MHz	1860MHz ~ 1905MHz
	MAX. EIRP POWER	CDMA BC1
LTE Band 2 Channel Bandwidth: 1.4MHz		54mW
LTE Band 2 Channel Bandwidth: 3MHz		55mW
LTE Band 2 Channel Bandwidth: 5MHz		55mW
LTE Band 2 Channel Bandwidth: 10MHz		55mW



	LTE Band 2 Channel Bandwidth: 15MHz	54mW
	LTE Band 2 Channel Bandwidth: 20MHz	49mW
	LTE Band 25 Channel Bandwidth: 1.4MHz	80mW
	LTE Band 25 Channel Bandwidth: 3MHz	81mW
	LTE Band 25 Channel Bandwidth: 5MHz	80mW
	LTE Band 25 Channel Bandwidth: 10MHz	80mW
	LTE Band 25 Channel Bandwidth: 15MHz	78mW
	LTE Band 25 Channel Bandwidth: 20MHz	70mW
EMISSION DESIGNATOR	CDMA BC1	1M28F9W
	LTE Band 2 Channel Bandwidth: 1.4MHz	QPSK: 1M09G7D
		16QAM: 1M09W7D
	LTE Band 2 Channel Bandwidth: 3MHz	QPSK: 2M68G7D
		16QAM: 2M68W7D
	LTE Band 2 Channel Bandwidth: 5MHz	QPSK: 4M48G7D
		16QAM: 4M47W7D
	LTE Band 2 Channel Bandwidth: 10MHz	QPSK: 8M94G7D
		16QAM: 8M93W7D
	LTE Band 2 Channel Bandwidth: 15MHz	QPSK: 13M4G7D
		16QAM: 13M4W7D
	LTE Band 2 Channel Bandwidth: 20MHz	QPSK: 17M9G7D
		16QAM: 17M9W7D
	LTE Band 25 Channel Bandwidth: 1.4MHz	QPSK: 1M09G7D
		16QAM: 1M09W7D
	LTE Band 25 Channel Bandwidth: 3MHz	QPSK: 2M68G7D
		16QAM: 2M68W7D
	LTE Band 25 Channel Bandwidth: 5MHz	QPSK: 4M47G7D
16QAM: 4M48W7D		
LTE Band 25 Channel Bandwidth: 10MHz	QPSK: 8M95G7D	
	16QAM: 8M92W7D	
LTE Band 25 Channel Bandwidth: 15MHz	QPSK: 13M4G7D	
	16QAM: 13M4W7D	



EMISSION DESIGNATOR	LTE Band 25 Channel Bandwidth: 20MHz	QPSK: 17M9G7D
		16QAM: 17M9W7D
ANTENNA TYPE	PIFA antenna with 0.8dBi gain	
HW VERSION	Q2803-V1.0	
SW VERSION	F30_V1.1.0	
I/O PORTS	Refer to user's manual	
CABLE SUPPLIED	USB cable: non-shielded, detachable, 1.0m	

NOTE:

- For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
- The EUT was powered by the following adapter:

ADAPTER	
BRAND:	KFL
MODEL:	TPA-5950070JU
INPUT:	AC 100-240V, 50/60Hz 0.2A
OUTPUT:	DC 5V, 700mA

- The EUT matched the following USB cable:


USB CABLE	
BRAND:	GuoJun
MODEL:	R0PC1S
SIGNAL LINE:	1.0 METER

- For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.




2.2 CONFIGURATION OF SYSTEM UNDER TEST

FOR RADIATION EMISSION TEST

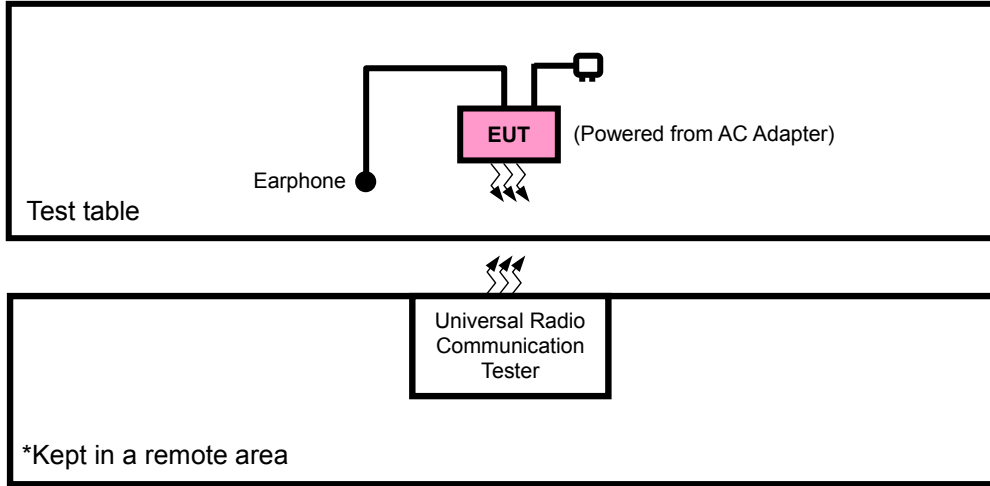

FOR CONDUCTED & E.I.R.P. TEST

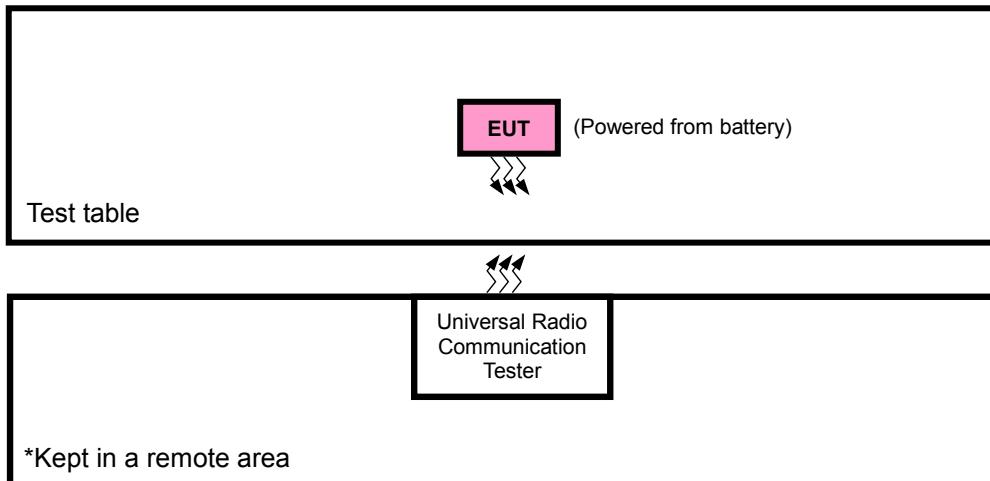



2.3 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	DC source	LONG WEI	PS-6403D	010934269	N/A
2	PC	HP	A6608CN	3CR83825X3	N/A
3	Earphone	N/A	N/A	N/A	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	DC Line: Unshielded, Detachable 1.0m
2	AC Line: Unshielded, Detachable 1.5m
3	Earphone Line: Unshielded, Detachable 1.5m

NOTE:

1. All power cords of the above support units are non shielded (1.8m).

2.4 TEST ITEM AND TEST CONFIGURATION

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports

The worst case in EIRP and radiated emission was found when positioned on X-plane for CDMA/ LTE. Following channel(s) was (were) selected for the final test as listed below:

EUT CONFIGURE MODE	DESCRIPTION
A	EUT + Adapter + USB Cable + Earphone with CDMA or LTE link
B	EUT + Battery with CDMA or LTE link



CDMA BC 1 MODE

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	MODE
B	ERP	25 to 1175	25, 600, 1175	CDMA BC 1
B	FREQUENCY STABILITY	25 to 1175	25, 1175	CDMA BC 1
B	OCCUPIED BANDWIDTH	25 to 1175	25, 600, 1175	CDMA BC 1
B	PEAK TO AVERAGE RATIO	25 to 1175	25, 600, 1175	CDMA BC 1
B	BAND EDGE	25 to 1175	25, 1175	CDMA BC 1
B	CONDCUDED EMISSION	25 to 1175	25, 600, 1175	CDMA BC 1
A	RADIATED EMISSION	25 to 1175	25, 600, 1175	CDMA BC 1

LTE BAND 2

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	CHANNEL BANDWIDTH	MODULATION	MODE
B	EIRP	18607 to 19193	18607, 18900, 19193	1.4MHz	QPSK,16QAM	1 RB / 0 RB Offset
		18615 to 19185	18615, 18900, 19185	3MHz	QPSK,16QAM	1 RB / 0 RB Offset
		18625 to 19175	18625, 18900, 19175	5MHz	QPSK,16QAM	1 RB / 0 RB Offset
		18650 to 19150	18650, 18900, 19150	10MHz	QPSK,16QAM	1 RB / 0 RB Offset
		18675 to 19125	18675, 18900, 19125	15MHz	QPSK,16QAM	1 RB / 0 RB Offset
		18700 to 19100	18700, 18900, 19100	20MHz	QPSK,16QAM	1 RB / 0 RB Offset
B	FREQUENCY STABILITY	18607 to 19193	18607, 19193	1.4MHz	QPSK	1 RB / 0 RB Offset
		18615 to 19185	18615, 19185	3MHz	QPSK	1 RB / 0 RB Offset
		18625 to 19175	18625, 19175	5MHz	QPSK	1 RB / 0 RB Offset
		18650 to 19150	18650, 19150	10MHz	QPSK	1 RB / 0 RB Offset
		18675 to 19125	18675, 19125	15MHz	QPSK	1 RB / 0 RB Offset
		18700 to 19100	18700, 19100	20MHz	QPSK	1 RB / 0 RB Offset
B	OCCUPIED BANDWIDTH	18607 to 19193	18607, 18900, 19193	1.4MHz	QPSK,16QAM	6 RB / 0 RB Offset
		18615 to 19185	18615, 18900, 19185	3MHz	QPSK,16QAM	15 RB / 0 RB Offset
		18625 to 19175	18625, 18900, 19175	5MHz	QPSK,16QAM	25 RB / 0 RB Offset
		18650 to 19150	18650, 18900, 19150	10MHz	QPSK,16QAM	50 RB / 0 RB Offset
		18675 to 19125	18675, 18900, 19125	15MHz	QPSK,16QAM	75 RB / 0 RB Offset
		18700 to 19100	18700, 18900, 19100	20MHz	QPSK,16QAM	100 RB / 0 RB Offset
B	PEAK TO AVERAGE RATIO	18607 to 19193	18607, 18900, 19193	1.4MHz	QPSK,16QAM	1 RB / 0 RB Offset
		18615 to 19185	18615, 18900, 19185	3MHz	QPSK,16QAM	1 RB / 0 RB Offset
		18625 to 19175	18625, 18900, 19175	5MHz	QPSK,16QAM	1 RB / 0 RB Offset
		18650 to 19150	18650, 18900, 19150	10MHz	QPSK,16QAM	1 RB / 0 RB Offset
		18675 to 19125	18675, 18900, 19125	15MHz	QPSK,16QAM	1 RB / 0 RB Offset
		18700 to 19100	18700, 18900, 19100	20MHz	QPSK,16QAM	1 RB / 0 RB Offset



B	BAND EDGE	18607 to 19193	18607	1.4MHz	QPSK,16QAM	1 RB / 0 RB Offset		
			19193	1.4MHz	QPSK,16QAM	6 RB / 0 RB Offset		
		18615 to 19185	18615	3MHz	QPSK,16QAM	1 RB / 0 RB Offset		
			19185	3MHz	QPSK,16QAM	15 RB / 0 RB Offset		
		18625 to 19175	18625	5MHz	QPSK,16QAM	1 RB / 14 RB Offset		
			19175	5MHz	QPSK,16QAM	15 RB / 0 RB Offset		
		18650 to 19150	18650	10MHz	QPSK,16QAM	1 RB / 0 RB Offset		
			19150	10MHz	QPSK,16QAM	25 RB / 0 RB Offset		
		18675 to 19125	18675	15MHz	QPSK,16QAM	1 RB / 24 RB Offset		
			19125	15MHz	QPSK,16QAM	25 RB / 0 RB Offset		
		18700 to 19100	18700	20MHz	QPSK,16QAM	1 RB / 0 RB Offset		
			19100	20MHz	QPSK,16QAM	50 RB / 0 RB Offset		
		B	CONDCUDED EMISSION	18607 to 19193	18607, 18900, 19193	1.4MHz	QPSK	1 RB / 49 RB Offset
				18615 to 19185	18615, 18900, 19185	3MHz	QPSK	50 RB / 0 RB Offset
				18625 to 19175	18625, 18900, 19175	5MHz	QPSK	1 RB / 0 RB Offset
				18650 to 19150	18650, 18900, 19150	10MHz	QPSK	1 RB / 0 RB Offset
18675 to 19125	18675, 18900, 19125			15MHz	QPSK	1 RB / 0 RB Offset		
18700 to 19100	18700, 18900, 19100			20MHz	QPSK	1 RB / 0 RB Offset		
A	RADIATED EMISSION	18607 to 19193	18900	1.4MHz	QPSK	1 RB / 0 RB Offset		
		18615 to 19185	18900	3MHz	QPSK	1 RB / 0 RB Offset		
		18625 to 19175	18625, 18900, 19175	5MHz	QPSK	1 RB / 0 RB Offset		
		18650 to 19150	18900	10MHz	QPSK	1 RB / 0 RB Offset		
		18675 to 19125	18900	15MHz	QPSK	1 RB / 0 RB Offset		
		18700 to 19100	18900	20MHz	QPSK	1 RB / 0 RB Offset		



LTE BAND 25 MODE

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	CHANNEL BANDWIDTH	MODULATION	MODE
B	EIRP	26047 to 26683	26047, 26365, 26683	1.4MHz	QPSK,16QAM	1 RB / 0 RB Offset
		26055 to 26675	26055, 26365, 26675	3MHz	QPSK,16QAM	1 RB / 0 RB Offset
		26065 to 26665	26065, 26365, 26665	5MHz	QPSK,16QAM	1 RB / 0 RB Offset
		26090 to 26640	26090, 26365 26640	10MHz	QPSK,16QAM	1 RB / 0 RB Offset
		26115 to 26615	26115, 26365, 26615	15MHz	QPSK,16QAM	1 RB / 0 RB Offset
		26140 to 26590	26140, 26365, 26590	20MHz	QPSK,16QAM	1 RB / 0 RB Offset
B	FREQUENCY STABILITY	26047 to 26683	26047, 26683	1.4MHz	QPSK	1 RB / 0 RB Offset
		26055 to 26675	26055, 26675	3MHz	QPSK	1 RB / 0 RB Offset
		26065 to 26665	26065, 26665	5MHz	QPSK	1 RB / 0 RB Offset
		26090 to 26640	26090, 26640	10MHz	QPSK	1 RB / 0 RB Offset
		26115 to 26615	26115, 26615	15MHz	QPSK	1 RB / 0 RB Offset
		26140 to 26590	26140, 26590	20MHz	QPSK	1 RB / 0 RB Offset
B	OCCUPIED BANDWIDTH	26047 to 26683	26047, 26365, 26683	1.4MHz	QPSK,16QAM	6 RB / 0 RB Offset
		26055 to 26675	26055, 26365, 26675	3MHz	QPSK,16QAM	15 RB / 0 RB Offset
		26065 to 26665	26065, 26365, 26665	5MHz	QPSK,16QAM	25 RB / 0 RB Offset
		26090 to 26640	26090, 26365 26640	10MHz	QPSK,16QAM	50 RB / 0 RB Offset
		26115 to 26615	26115, 26365, 26615	15MHz	QPSK,16QAM	75 RB / 0 RB Offset
		26140 to 26590	26140, 26365, 26590	20MHz	QPSK,16QAM	100 RB / 0 RB Offset
B	PEAK TO AVERAGE RATIO	26047 to 26683	26047, 26365, 26683	1.4MHz	QPSK,16QAM	1 RB / 0 RB Offset
		26055 to 26675	26055, 26365, 26675	3MHz	QPSK,16QAM	1 RB / 0 RB Offset
		26065 to 26665	26065, 26365, 26665	5MHz	QPSK,16QAM	1 RB / 0 RB Offset
		26090 to 26640	26090, 26365 26640	10MHz	QPSK,16QAM	1 RB / 0 RB Offset
		26115 to 26615	26115, 26365, 26615	15MHz	QPSK,16QAM	1 RB / 0 RB Offset
		26140 to 26590	26140, 26365, 26590	20MHz	QPSK,16QAM	1 RB / 0 RB Offset



B	BAND EDGE	26047 to 26683	26047	1.4MHz	QPSK	1 RB / 0 RB Offset		
			26683	1.4MHz	QPSK	6 RB / 0 RB Offset		
		26055 to 26675	26055	3MHz	QPSK	1 RB / 5 RB Offset		
			26675	3MHz	QPSK	6 RB / 0 RB Offset		
		26065 to 26665	26065	5MHz	QPSK	1 RB / 0 RB Offset		
			26665	5MHz	QPSK	15 RB / 0 RB Offset		
		26090 to 26640	26090	10MHz	QPSK	1 RB / 14 RB Offset		
			26640	10MHz	QPSK	15 RB / 0 RB Offset		
		26115 to 26615	26115	15MHz	QPSK	1 RB / 0 RB Offset		
			26615	15MHz	QPSK	25 RB / 0 RB Offset		
		26140 to 26590	26140	26140	20MHz	QPSK	1 RB / 24 RB Offset	
				26590	20MHz	QPSK	25 RB / 0 RB Offset	
			26090	26090	10MHz	QPSK	1 RB / 0 RB Offset	
				26640	10MHz	QPSK	50 RB / 0 RB Offset	
		B	CONDCUDED EMISSION	26047 to 26683	26047, 26365, 26683	1.4MHz	QPSK	1 RB / 0 RB Offset
				26055 to 26675	26055, 26365, 26675	3MHz	QPSK	1 RB / 0 RB Offset
				26065 to 26665	26065, 26365, 26665	5MHz	QPSK	1 RB / 0 RB Offset
				26090 to 26640	26090, 26365, 26640	10MHz	QPSK	1 RB / 0 RB Offset
26115 to 26615	26115, 26365, 26615			15MHz	QPSK	1 RB / 0 RB Offset		
26140 to 26590	26140, 26365, 26590			20MHz	QPSK	1 RB / 0 RB Offset		
A	RADIATED EMISSION	26047 to 26683	26047, 26365, 26683	1.4MHz	QPSK	1 RB / 0 RB Offset		
		26055 to 26675	26365	3MHz	QPSK	1 RB / 0 RB Offset		
		26065 to 26665	26365	5MHz	QPSK	1 RB / 0 RB Offset		
		26090 to 26640	26365	10MHz	QPSK	1 RB / 0 RB Offset		
		26115 to 26615	26365	15MHz	QPSK	1 RB / 0 RB Offset		
		26140 to 26590	26365	20MHz	QPSK	1 RB / 0 RB Offset		

TEST CONDITION:

TEST ITEM	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
EIRP	25deg. C, 57%RH	3.85Vdc from Battery	Star Le
FREQUENCY STABILITY	23deg. C, 61%RH	DC 3.6V/3.85V/4.3V	Rain Wang
OCCUPIED BANDWIDTH	23deg. C, 61%RH	3.85Vdc from Battery	Rain Wang
PEAK TO AVERAGE RATIO	23deg. C, 61%RH	3.85Vdc from Battery	Rain Wang
BAND EDGE	23deg. C, 61%RH	3.85Vdc from Battery	Rain Wang
CONDCUDED EMISSION	23deg. C, 61%RH	3.85Vdc from Battery	Rain Wang
RADIATED EMISSION	23deg. C, 70%RH	5Vdc from adapter	Star Le



2.5 EUT OPERATING CONDITIONS

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency

2.6 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 2

FCC 47 CFR Part 24

KDB 971168 D01 Power Meas License Digital Systems v03r01

ANSI/TIA/EIA-603-D

ANSI/TIA/EIA-603-E

ANSI C63.26-2015

NOTE: All test items have been performed and recorded as per the above standards.



3 TEST TYPES AND RESULTS

3.1 OUTPUT POWER MEASUREMENT

3.1.1 LIMITS OF OUTPUT POWER MEASUREMENT

Mobile and portable stations are limited to 2 watts EIRP.

3.1.2 TEST PROCEDURES

EIRP MEASUREMENT:

- a. All measurements were done at low, middle and high operational frequency range. RBW and VBW is 5MHz for CDMA mode and 10MHz for LTE mode.
- b. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The “Read Value” is the spectrum reading the maximum power value.
- c. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a tx cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to “Read Value “ of step b. Record the power level of S.G
- d. $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn.}$

CONDUCTED POWER MEASUREMENT:


The EUT was set up for the maximum power with CDMA link data modulation and link up with simulator. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.




3.1.3 TEST SETUP

EIRP / ERP Measurement:

<Radiated Emission below or equal 1 GHz>

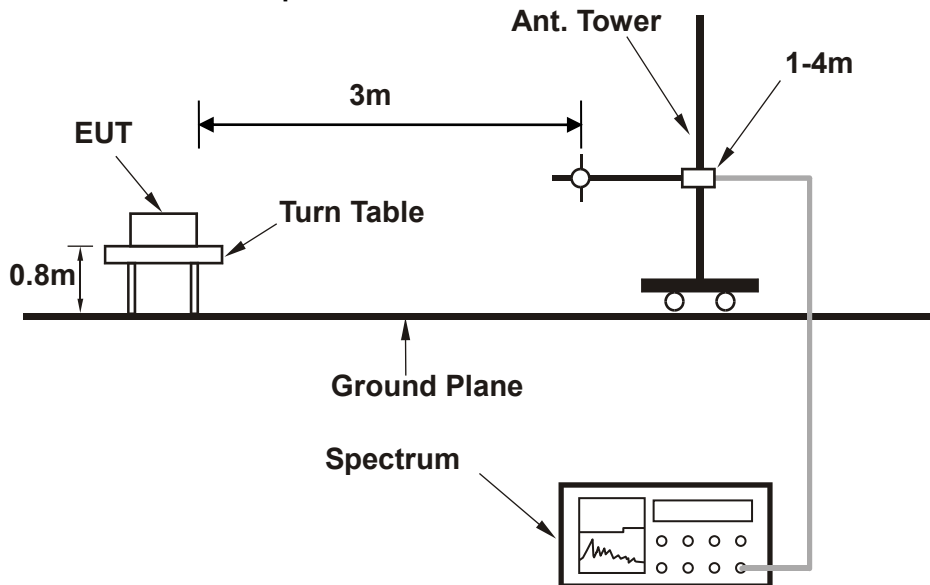


<Radiated Emission above 1 GHz>

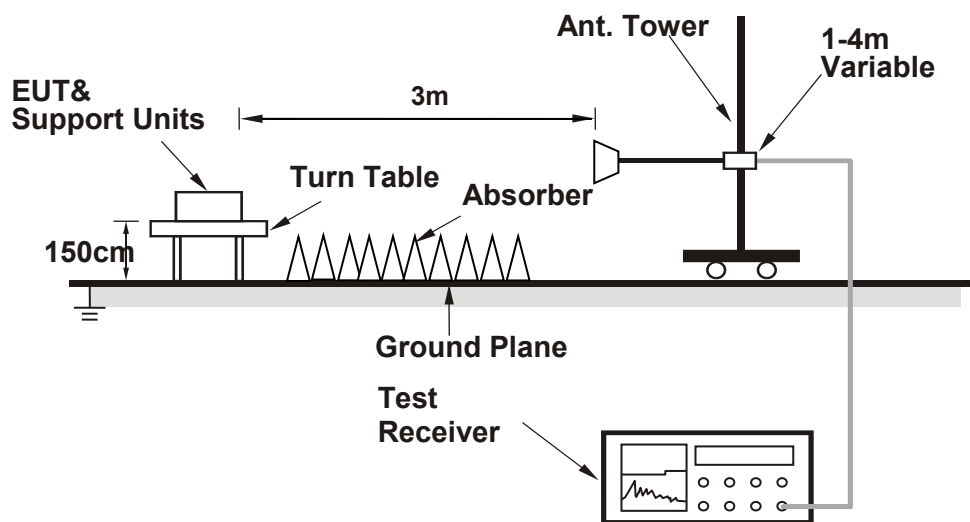

For the actual test configuration, please refer to the attached file (Test Setup Photo).

CONDUCTED POWER MEASUREMENT:

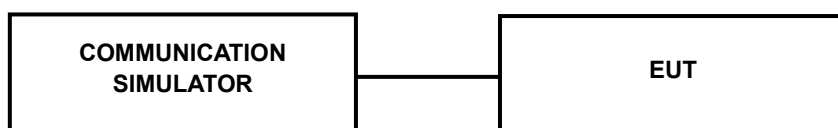



3.1.4 TEST RESULTS

CONDUCTED OUTPUT POWER (dBm)

Band	CDMA2000 BC1		
	25	600	1175
Channel	25	600	1175
Frequency (MHz)	1851.25	1880	1908.75
RC1+SO55	22.30	22.33	22.08
RC3+SO55	22.35	22.38	22.13
RC3+SO32(FCH)	22.38	22.35	22.16
RC3+SO32(SCH)	22.42	22.31	22.20
RTAP 153.6	22.44	22.33	22.22
RETAP 4096	22.39	22.28	22.17



LTE Band 2							
BW	Modulation	RB Size	RB Offset	Low CH 18607	Mid CH 18900	High CH 19193	3GPP MPR (dB)
				Frequency 1850.7 MHz	Frequency 1880 MHz	Frequency 1909.3 MHz	
1.4MHz	QPSK	1	0	22.18	22.15	22.05	0
		1	2	21.92	21.89	21.79	0
		1	5	21.82	21.79	21.69	0
		3	0	22.17	22.14	22.04	0
		3	1	21.91	21.88	21.78	0
		3	3	21.81	21.78	21.68	0
		6	0	20.99	20.96	20.86	1
	16QAM	1	0	20.85	20.82	20.72	1
		1	2	20.91	20.88	20.78	1
		1	5	20.67	20.64	20.54	1
		3	0	20.83	20.80	20.70	1
		3	1	20.89	20.86	20.76	1
		3	3	20.65	20.62	20.52	1
		6	0	20.02	19.99	19.89	2
BW	Modulation	RB Size	RB Offset	Low CH 18615	Mid CH 18900	High CH 19185	3GPP MPR (dB)
				Frequency 1851.5 MHz	Frequency 1880 MHz	Frequency 1908.5 MHz	
3 MHz	QPSK	1	0	22.21	22.18	22.08	0
		1	7	21.95	21.92	21.82	0
		1	14	21.85	21.82	21.72	0
		8	0	21.10	21.07	20.97	1
		8	3	21.06	21.03	20.93	1
		8	7	20.97	20.94	20.84	1
		15	0	21.02	20.99	20.89	1
	16QAM	1	0	20.88	20.85	20.75	1
		1	7	20.94	20.91	20.81	1
		1	14	20.70	20.67	20.57	1
		8	0	20.24	20.21	20.11	2
		8	3	20.17	20.14	20.04	2
		8	7	20.20	20.17	20.07	2
		15	0	20.05	20.02	19.92	2



LTE Band 2							
BW	Modulation	RB Size	RB Offset	Low CH 18625	Mid CH 18900	High CH 19175	3GPP MPR (dB)
				Frequency 1852.5 MHz	Frequency 1880 MHz	Frequency 1907.5 MHz	
5 MHz	QPSK	1	0	22.24	22.21	22.11	0
		1	12	21.98	21.95	21.85	0
		1	24	21.88	21.85	21.75	0
		12	0	21.13	21.10	21.00	1
		12	6	21.09	21.06	20.96	1
		12	13	21.00	20.97	20.87	1
		25	0	21.05	21.02	20.92	1
	16QAM	1	0	20.91	20.88	20.78	1
		1	12	20.97	20.94	20.84	1
		1	24	20.73	20.70	20.60	1
		12	0	20.27	20.24	20.14	2
		12	6	20.20	20.17	20.07	2
		12	13	20.23	20.20	20.10	2
		25	0	20.08	20.05	19.95	2
BW	Modulation	RB Size	RB Offset	Low CH 18650	Mid CH 18900	High CH 19150	3GPP MPR (dB)
				Frequency 1855 MHz	Frequency 1880 MHz	Frequency 1905 MHz	
10 MHz	QPSK	1	0	22.26	22.23	22.13	0
		1	24	22.00	21.97	21.87	0
		1	49	21.90	21.87	21.77	0
		25	0	21.15	21.12	21.02	1
		25	12	21.11	21.08	20.98	1
		25	25	21.02	20.99	20.89	1
		50	0	21.07	21.04	20.94	1
	16QAM	1	0	20.93	20.90	20.80	1
		1	24	20.99	20.96	20.86	1
		1	49	20.75	20.72	20.62	1
		25	0	20.29	20.26	20.16	2
		25	12	20.22	20.19	20.09	2
		25	25	20.25	20.22	20.12	2
		50	0	20.10	20.07	19.97	2



LTE Band 2							
BW	Modulation	RB Size	RB Offset	Low CH 18675	Mid CH 18900	High CH 19125	3GPP MPR (dB)
				Frequency 1857.5 MHz	Frequency 1880 MHz	Frequency 1902.5 MHz	
15 MHz	QPSK	1	0	22.29	22.26	22.16	0
		1	37	22.03	22.00	21.90	0
		1	74	21.93	21.90	21.80	0
		36	0	21.18	21.15	21.05	1
		36	19	21.14	21.11	21.01	1
		36	39	21.05	21.02	20.92	1
		75	0	21.10	21.07	20.97	1
	16QAM	1	0	20.96	20.93	20.83	1
		1	37	21.02	20.99	20.89	1
		1	74	20.78	20.75	20.65	1
		36	0	20.32	20.29	20.19	2
		36	19	20.25	20.22	20.12	2
		36	39	20.28	20.25	20.15	2
		75	0	20.13	20.10	20.00	2
BW	Modulation	RB Size	RB Offset	Low CH 18700	Mid CH 18900	High CH 19100	3GPP MPR (dB)
				Frequency 1860 MHz	Frequency 1880 MHz	Frequency 1900 MHz	
20MHz	QPSK	1	0	22.34	22.31	22.21	0
		1	50	22.08	22.05	21.95	0
		1	99	21.98	21.95	21.85	0
		50	0	21.23	21.20	21.10	1
		50	25	21.19	21.16	21.06	1
		50	50	21.10	21.07	20.97	1
		100	0	21.15	21.12	21.02	1
	16QAM	1	0	21.01	20.98	20.88	1
		1	50	21.07	21.04	20.94	1
		1	99	20.83	20.80	20.70	1
		50	0	20.37	20.34	20.24	2
		50	25	20.30	20.27	20.17	2
		50	50	20.33	20.30	20.20	2
		100	0	20.18	20.15	20.05	2



LTE Band 25							
BW	Modulation	RB Size	RB Offset	Low CH 26047	Mid CH 26365	High CH 26683	3GPP MPR (dB)
				Frequency 1850.7 MHz	Frequency 1882.5 MHz	Frequency 1914.3 MHz	
1.4MHz	QPSK	1	0	22.01	22.03	22.07	0
		1	2	21.78	21.80	21.84	0
		1	5	21.59	21.61	21.65	0
		3	0	21.11	21.13	21.17	1
		3	1	20.96	20.98	21.02	1
		3	3	20.99	21.01	21.05	1
		6	0	20.93	20.95	20.99	1
	16QAM	1	0	21.14	21.16	21.20	1
		1	2	20.78	20.80	20.84	1
		1	5	20.78	20.80	20.84	1
		3	0	20.20	20.22	20.26	2
		3	1	19.98	20.00	20.04	2
		3	3	20.04	20.06	20.10	2
		6	0	20.14	20.16	20.20	2
BW	Modulation	RB Size	RB Offset	Low CH 26055	Mid CH 26365	High CH 26675	3GPP MPR (dB)
				Frequency 1851.5 MHz	Frequency 1882.5 MHz	Frequency 1913.5 MHz	
3MHz	QPSK	1	0	22.03	22.05	22.09	0
		1	7	21.80	21.82	21.86	0
		1	14	21.61	21.63	21.67	0
		8	0	21.13	21.15	21.19	1
		8	3	20.98	21.00	21.04	1
		8	7	21.01	21.03	21.07	1
		15	0	20.95	20.97	21.01	1
	16QAM	1	0	21.16	21.18	21.22	1
		1	7	20.80	20.82	20.86	1
		1	14	20.80	20.82	20.86	1
		8	0	20.22	20.24	20.28	2
		8	3	20.00	20.02	20.06	2
		8	7	20.06	20.08	20.12	2
		15	0	20.16	20.18	20.22	2



LTE Band 25							
BW	Modulation	RB Size	RB Offset	Low CH 26065	Mid CH 26365	High CH 26665	3GPP MPR (dB)
				Frequency 1852.5 MHz	Frequency 1882.5 MHz	Frequency 1912.5 MHz	
5MHz	QPSK	1	0	22.05	22.07	22.11	0
		1	12	21.82	21.84	21.88	0
		1	24	21.63	21.65	21.69	0
		12	0	21.15	21.17	21.21	1
		12	6	21.00	21.02	21.06	1
		12	13	21.03	21.05	21.09	1
		25	0	20.97	20.99	21.03	1
	16QAM	1	0	21.18	21.20	21.24	1
		1	12	20.82	20.84	20.88	1
		1	24	20.82	20.84	20.88	1
		12	0	20.24	20.26	20.30	2
		12	6	20.02	20.04	20.08	2
		12	13	20.08	20.10	20.14	2
		25	0	20.18	20.20	20.24	2
BW	Modulation	RB Size	RB Offset	Low CH 26090	Mid CH 26365	High CH 26640	3GPP MPR (dB)
				Frequency 1855 MHz	Frequency 1882.5 MHz	Frequency 1910 MHz	
10MHz	QPSK	1	0	22.07	22.09	22.13	0
		1	24	21.84	21.86	21.90	0
		1	49	21.65	21.67	21.71	0
		25	0	21.17	21.19	21.23	1
		25	12	21.02	21.04	21.08	1
		25	25	21.05	21.07	21.11	1
		50	0	20.99	21.01	21.05	1
	16QAM	1	0	21.20	21.22	21.26	1
		1	24	20.84	20.86	20.90	1
		1	49	20.84	20.86	20.90	1
		25	0	20.26	20.28	20.32	2
		25	12	20.04	20.06	20.10	2
		25	25	20.10	20.12	20.16	2
		50	0	20.20	20.22	20.26	2



LTE Band 25							
BW	Modulation	RB Size	RB Offset	Low CH 26115	Mid CH 26365	High CH 26615	3GPP MPR (dB)
				Frequency 1857.5 MHz	Frequency 1882.5 MHz	Frequency 1907.5 MHz	
15MHz	QPSK	1	0	22.09	22.11	22.15	0
		1	37	21.86	21.88	21.92	0
		1	74	21.67	21.69	21.73	0
		36	0	21.19	21.21	21.25	1
		36	19	21.04	21.06	21.10	1
		36	39	21.07	21.09	21.13	1
		75	0	21.01	21.03	21.07	1
	16QAM	1	0	21.22	21.24	21.28	1
		1	37	20.86	20.88	20.92	1
		1	74	20.86	20.88	20.92	1
		36	0	20.28	20.30	20.34	2
		36	19	20.06	20.08	20.12	2
		36	39	20.12	20.14	20.18	2
		75	0	20.22	20.24	20.28	2
BW	Modulation	RB Size	RB Offset	Low CH 26140	Mid CH 26365	High CH 26590	3GPP MPR (dB)
				Frequency 1860 MHz	Frequency 1882.5 MHz	Frequency 1905 MHz	
20MHz	QPSK	1	0	22.12	22.14	22.18	1
		1	50	21.89	21.91	21.95	1
		1	99	21.70	21.72	21.76	1
		50	0	21.22	21.24	21.28	50
		50	25	21.07	21.09	21.13	50
		50	50	21.10	21.12	21.16	50
		100	0	21.04	21.06	21.10	100
	16QAM	1	0	21.25	21.27	21.31	1
		1	50	20.89	20.91	20.95	1
		1	99	20.89	20.91	20.95	1
		50	0	20.31	20.33	20.37	50
		50	25	20.09	20.11	20.15	50
		50	50	20.15	20.17	20.21	50
		100	0	20.25	20.27	20.31	100



EIRP POWER (dBm)

CDMA BC 1

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	ERP(dBm)	ERP(mW)	Polarization (H/V)
25	1851.3	-32.18	43.83	11.65	14.62	H
600	1880.0	-32.05	43.57	11.52	14.19	H
1175	1908.8	-32.09	44.57	12.48	17.70	H
25	1851.3	-26.89	46.39	19.50	89.13	V
600	1880.0	-27.02	47.10	20.08	101.81	V
1175	1908.8	-26.06	45.98	19.92	98.08	V

REMARKS: 1. ERP Output Power (dBm) = SPA LVL (dBm) + Correction Factor (dB) -2.15(dB).
2. Correction factor (dB) = Free Space Loss + Antenna Factor + Cable Loss



LTE BAND 2

CHANNEL BANDWIDTH: 1.4MHz QPSK

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	LIMIT (W)
18607	1850.7	-29.21	43.83	14.62	28.97	H	2
18900	1880.0	-30.72	43.57	12.85	19.28	H	2
19193	1908.3	-30.72	44.32	13.60	22.92	H	2
18607	1850.7	-29.06	46.41	17.36	54.40	V	2
18900	1880.0	-29.71	47.07	17.36	54.41	V	2
19193	1908.3	-29.93	45.88	15.95	39.36	V	2

CHANNEL BANDWIDTH: 1.4MHz 16QAM

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	LIMIT (W)
18607	1850.7	-30.08	43.83	13.75	23.71	H	2
18900	1880.0	-31.65	43.57	11.92	15.56	H	2
19193	1908.3	-31.68	44.32	12.64	18.37	H	2
18607	1850.7	-29.93	46.41	16.49	44.52	V	2
18900	1880.0	-30.64	47.07	16.43	43.92	V	2
19193	1908.3	-30.89	45.88	14.99	31.56	V	2

CHANNEL BANDWIDTH: 3MHz QPSK

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	LIMIT (W)
18615	1851.5	-29.19	43.82	14.63	29.03	H	2
18900	1880.0	-30.78	43.57	12.79	19.02	H	2
19185	1908.5	-30.67	44.38	13.71	23.49	H	2
18615	1851.5	-29.04	46.45	17.42	55.16	V	2
18900	1880.0	-29.77	47.07	17.30	53.67	V	2
19185	1908.5	-29.88	45.88	16.00	39.78	V	2



CHANNEL BANDWIDTH: 3MHz 16QAM

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	LIMIT (W)
18615	1851.5	-30.26	43.82	13.56	22.69	H	2
18900	1880.0	-31.67	43.57	11.90	15.49	H	2
19185	1908.5	-31.66	44.38	12.72	18.70	H	2
18615	1851.5	-30.11	46.45	16.35	43.11	V	2
18900	1880.0	-30.66	47.07	16.41	43.72	V	2
19185	1908.5	-30.87	45.88	15.01	31.67	V	2

CHANNEL BANDWIDTH: 5MHz QPSK

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	LIMIT (W)
18625	1852.5	-29.25	43.83	14.57	28.67	H	2
18900	1880.0	-30.73	43.57	12.84	19.24	H	2
19175	1907.5	-30.62	44.19	13.57	22.76	H	2
18625	1852.5	-29.10	46.46	17.37	54.55	V	2
18900	1880.0	-29.72	47.07	17.35	54.29	V	2
19175	1907.5	-29.83	45.89	16.06	40.35	V	2

CHANNEL BANDWIDTH: 5MHz 16QAM

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	LIMIT (W)
18625	1852.5	-30.08	43.83	13.74	23.68	H	2
18900	1880.0	-31.75	43.57	11.82	15.21	H	2
19175	1907.5	-31.72	44.19	12.47	17.66	H	2
18625	1852.5	-29.93	46.46	16.54	45.06	V	2
18900	1880.0	-30.74	47.07	16.33	42.92	V	2
19175	1907.5	-30.93	45.89	14.96	31.32	V	2



CHANNEL BANDWIDTH: 10MHz QPSK

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	LIMIT (W)
18650	1855.0	-29.06	43.86	14.80	30.18	H	2
18900	1880.0	-30.67	43.57	12.90	19.50	H	2
19150	1905.0	-30.49	43.99	13.51	22.42	H	2
18650	1855.0	-28.91	46.28	17.37	54.61	V	2
18900	1880.0	-29.66	47.07	17.41	55.04	V	2
19150	1905.0	-29.70	45.92	16.22	41.87	V	2

CHANNEL BANDWIDTH: 10MHz 16QAM

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	LIMIT (W)
18650	1855.0	-30.21	43.86	13.65	23.16	H	2
18900	1880.0	-31.77	43.57	11.80	15.14	H	2
19150	1905.0	-31.65	43.99	12.35	17.17	H	2
18650	1855.0	-30.06	46.28	16.22	41.91	V	2
18900	1880.0	-30.76	47.07	16.31	42.73	V	2
19150	1905.0	-30.86	45.92	15.06	32.06	V	2

CHANNEL BANDWIDTH: 15MHz QPSK

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	LIMIT (W)
18675	1857.5	-29.07	43.99	14.92	31.03	H	2
18900	1880.0	-30.74	43.57	12.83	19.19	H	2
19125	1902.5	-30.56	43.66	13.10	20.41	H	2
18675	1857.5	-28.92	45.93	17.01	50.26	V	2
18900	1880.0	-29.73	47.07	17.34	54.16	V	2
19125	1902.5	-29.77	46.20	16.43	43.94	V	2



CHANNEL BANDWIDTH: 15MHz 16QAM

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	LIMIT (W)
18675	1857.5	-29.93	43.99	14.06	25.46	H	2
18900	1880.0	-31.61	43.57	11.96	15.71	H	2
19125	1902.5	-31.41	43.66	12.25	16.78	H	2
18675	1857.5	-29.78	45.93	16.15	41.23	V	2
18900	1880.0	-30.60	47.07	16.47	44.33	V	2
19125	1902.5	-30.62	46.20	15.58	36.13	V	2

CHANNEL BANDWIDTH: 20MHz QPSK

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	LIMIT (W)
18700	1860.0	-29.65	43.50	13.85	24.24	H	2
18900	1880.0	-31.19	43.57	12.38	17.30	H	2
19100	1900.0	-31.14	43.62	12.48	17.70	H	2
18700	1860.0	-29.50	45.57	16.08	40.50	V	2
18900	1880.0	-30.18	47.07	16.89	48.83	V	2
19100	1900.0	-30.35	46.26	15.91	38.98	V	2

CHANNEL BANDWIDTH: 20MHz 16QAM

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	LIMIT (W)
18700	1860.0	-30.58	43.50	12.92	19.57	H	2
18900	1880.0	-32.26	43.57	11.31	13.52	H	2
19100	1900.0	-31.97	43.62	11.65	14.62	H	2
18700	1860.0	-30.43	45.57	15.15	32.70	V	2
18900	1880.0	-31.25	47.07	15.82	38.17	V	2
19100	1900.0	-31.18	46.26	15.08	32.20	V	2

REMARKS: 1. EIRP Output Power (dBm) = SPA LVL (dBm) + Correction Factor (dB).

2. Correction factor (dB) = Free Space Loss + Antenna Factor + Cable Loss



LTE BAND 25

CHANNEL BANDWIDTH: 1.4MHz QPSK

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	LIMIT (W)
26047	1850.7	-27.79	43.83	16.04	40.18	H	2
26365	1882.5	-27.21	43.57	16.36	43.27	H	2
26683	1914.3	-28.27	44.40	16.13	41.04	H	2
26047	1850.7	-27.40	46.41	19.01	79.67	V	2
26365	1882.5	-28.15	47.07	18.92	78.04	V	2
26683	1914.3	-27.76	45.99	18.23	66.56	V	2

CHANNEL BANDWIDTH: 1.4MHz 16QAM

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	LIMIT (W)
26047	1850.7	-28.66	43.83	15.17	32.89	H	2
26365	1882.5	-28.14	43.57	15.43	34.93	H	2
26683	1914.3	-29.23	44.40	15.17	32.90	H	2
26047	1850.7	-28.27	46.41	18.14	65.21	V	2
26365	1882.5	-29.08	47.07	17.99	62.99	V	2
26683	1914.3	-28.72	45.99	17.27	53.36	V	2

CHANNEL BANDWIDTH: 3MHz QPSK

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	LIMIT (W)
26055	1851.5	-27.77	43.82	16.05	40.25	H	2
26365	1882.5	-27.27	43.57	16.30	42.68	H	2
26675	1913.5	-28.22	44.38	16.16	41.29	H	2
26055	1851.5	-27.38	46.45	19.07	80.78	V	2
26365	1882.5	-28.21	47.07	18.86	76.97	V	2
26675	1913.5	-27.71	45.95	18.24	66.71	V	2



CHANNEL BANDWIDTH: 3MHz 16QAM

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	LIMIT (W)
26055	1851.5	-28.84	43.82	14.98	31.46	H	2
26365	1882.5	-28.16	43.57	15.41	34.77	H	2
26675	1913.5	-29.21	44.38	15.17	32.87	H	2
26055	1851.5	-28.45	46.45	18.00	63.14	V	2
26365	1882.5	-29.10	47.07	17.97	62.70	V	2
26675	1913.5	-28.70	45.95	17.25	53.11	V	2

CHANNEL BANDWIDTH: 5MHz QPSK

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	LIMIT (W)
26065	1852.5	-27.83	43.83	15.99	39.76	H	2
26365	1882.5	-27.22	43.57	16.35	43.17	H	2
26665	1912.5	-28.17	44.37	16.20	41.71	H	2
26065	1852.5	-27.44	46.46	19.03	79.89	V	2
26365	1882.5	-28.16	47.07	18.91	77.86	V	2
26665	1912.5	-27.66	45.90	18.24	66.71	V	2

CHANNEL BANDWIDTH: 5MHz 16QAM

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	LIMIT (W)
26065	1852.5	-28.66	43.83	15.16	32.84	H	2
26365	1882.5	-28.24	43.57	15.33	34.14	H	2
26665	1912.5	-29.27	44.37	15.10	32.37	H	2
26065	1852.5	-28.27	46.46	18.20	65.99	V	2
26365	1882.5	-29.18	47.07	17.89	61.56	V	2
26665	1912.5	-28.76	45.90	17.14	51.78	V	2



CHANNEL BANDWIDTH: 10MHz QPSK

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	LIMIT (W)
26090	1855.0	-27.64	43.86	16.22	41.85	H	2
26365	1882.5	-27.16	43.57	16.41	43.77	H	2
26640	1910.0	-28.04	44.32	16.28	42.47	H	2
26090	1855.0	-27.25	46.28	19.03	79.98	V	2
26365	1882.5	-28.10	47.07	18.97	78.94	V	2
26640	1910.0	-27.53	45.88	18.36	68.49	V	2

CHANNEL BANDWIDTH: 10MHz 16QAM

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	LIMIT (W)
26090	1855.0	-28.79	43.86	15.07	32.11	H	2
26365	1882.5	-28.26	43.57	15.31	33.98	H	2
26640	1910.0	-29.20	44.32	15.12	32.52	H	2
26090	1855.0	-28.40	46.28	17.88	61.38	V	2
26365	1882.5	-29.20	47.07	17.87	61.28	V	2
26640	1910.0	-28.69	45.88	17.20	52.43	V	2

CHANNEL BANDWIDTH: 15MHz QPSK

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	LIMIT (W)
26115	1857.5	-27.65	43.99	16.34	43.03	H	2
26365	1882.5	-27.23	43.57	16.34	43.07	H	2
26615	1907.5	-28.11	44.19	16.08	40.55	H	2
26115	1857.5	-27.26	45.93	18.67	73.60	V	2
26365	1882.5	-28.17	47.07	18.90	77.68	V	2
26615	1907.5	-27.60	45.89	18.29	67.50	V	2



CHANNEL BANDWIDTH: 15MHz 16QAM

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	LIMIT (W)
26115	1857.5	-28.51	43.99	15.48	35.30	H	2
26365	1882.5	-28.10	43.57	15.47	35.25	H	2
26615	1907.5	-28.96	44.19	15.23	33.34	H	2
26115	1857.5	-28.12	45.93	17.81	60.38	V	2
26365	1882.5	-29.04	47.07	18.03	63.58	V	2
26615	1907.5	-28.45	45.89	17.44	55.50	V	2

CHANNEL BANDWIDTH: 20MHz QPSK

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	LIMIT (W)
26140	1860.0	-28.23	43.50	15.27	33.61	H	2
26365	1882.5	-27.68	43.57	15.89	38.83	H	2
26590	1905.0	-28.69	43.99	15.31	33.93	H	2
26140	1860.0	-27.84	45.57	17.73	59.32	V	2
26365	1882.5	-28.62	47.07	18.45	70.03	V	2
26590	1905.0	-28.18	45.92	17.74	59.48	V	2

CHANNEL BANDWIDTH: 20MHz 16QAM

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	LIMIT (W)
26140	1860.0	-29.16	43.50	14.34	27.13	H	2
26365	1882.5	-28.75	43.57	14.82	30.35	H	2
26590	1905.0	-29.52	43.99	14.48	28.03	H	2
26140	1860.0	-28.77	45.57	16.80	47.89	V	2
26365	1882.5	-29.69	47.07	17.38	54.74	V	2
26590	1905.0	-29.01	45.92	16.91	49.14	V	2

REMARKS: 1. EIRP Output Power (dBm) = SPA LVL (dBm) + Correction Factor (dB).

2. Correction factor (dB) = Free Space Loss + Antenna Factor + Cable Loss



3.2 FREQUENCY STABILITY MEASUREMENT

3.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT


The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

3.2.2 TEST PROCEDURE

- a. Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- b. EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- c. The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the $\pm 0.5^{\circ}\text{C}$ during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

NOTE: The frequency error was recorded frequency error from the communication simulator.

3.2.3 TEST SETUP

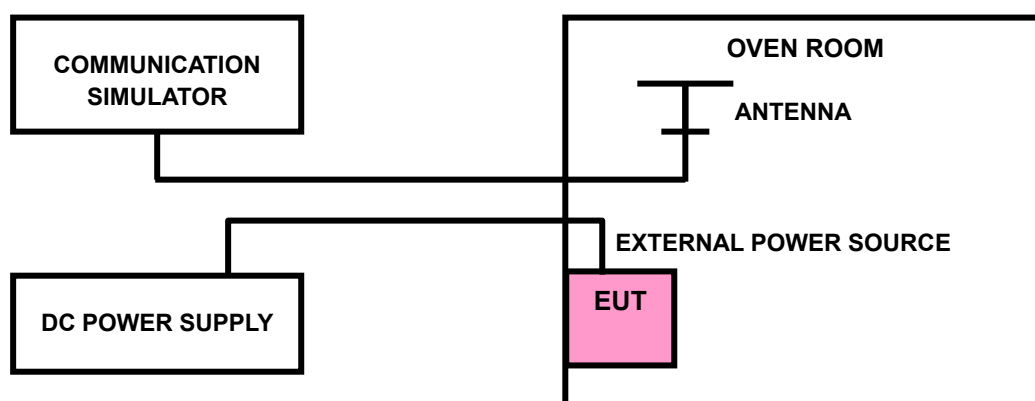



3.2.4 TEST RESULTS

CDMA BC1

FREQUENCY ERROR VS. VOLTAGE

VOLTAGE (Volts)	FREQUENCY ERROR (ppm)		LIMIT (ppm)
	Low Channel	High Channel	
3.85	0.0009	0.0009	2.5
3.6	-0.0010	-0.0011	2.5
4.3	0.0009	0.0010	2.5

NOTE: The applicant defined the normal working voltage of the battery is from 3.6Vdc to 4.3Vdc.

FREQUENCY ERROR vs. TEMPERATURE.

TEMP. (°C)	FREQUENCY ERROR (ppm)		LIMIT (ppm)
	Low Channel	High Channel	
-30	-0.0055	-0.0052	2.5
-20	-0.0052	-0.0048	2.5
-10	-0.0044	-0.0042	2.5
0	-0.0039	-0.0036	2.5
10	-0.0029	-0.0027	2.5
20	-0.0023	-0.0022	2.5
30	-0.0017	-0.0016	2.5
40	-0.0012	-0.0012	2.5
50	-0.0005	-0.0005	2.5



LTE BAND 2

FREQUENCY ERROR VS. VOLTAGE

VOLTAGE (Volts)	1.4MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
3.85	0.0008	0.0009	2.5
3.6	-0.0009	-0.0010	2.5
4.3	0.0007	0.0009	2.5

NOTE: The applicant defined the normal working voltage of the battery is from 3.6Vdc to 4.3Vdc.

FREQUENCY ERROR vs. TEMPERATURE.

TEMP. (°C)	1.4MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
-30	-0.0055	-0.0055	2.5
-20	-0.0050	-0.0046	2.5
-10	-0.0044	-0.0039	2.5
0	-0.0036	-0.0032	2.5
10	-0.0032	-0.0028	2.5
20	-0.0024	-0.0025	2.5
30	-0.0015	-0.0013	2.5
40	-0.0008	-0.0008	2.5
50	-0.0002	-0.0001	2.5



FREQUENCY ERROR VS. VOLTAGE

VOLTAGE (Volts)	3MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
3.85	0.0008	0.0010	2.5
3.6	-0.0010	-0.0010	2.5
4.3	0.0010	0.0009	2.5

NOTE: The applicant defined the normal working voltage of the battery is from 3.6Vdc to 4.3Vdc.

FREQUENCY ERROR vs. TEMPERATURE.

TEMP. (°C)	3MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
-30	-0.0055	-0.0028	2.5
-20	-0.0051	-0.0020	2.5
-10	-0.0041	-0.0013	2.5
0	-0.0036	-0.0027	2.5
10	-0.0027	-0.0020	2.5
20	-0.0022	-0.0013	2.5
30	-0.0018	-0.0014	2.5
40	-0.0010	-0.0008	2.5
50	-0.0003	-0.0002	2.5



FREQUENCY ERROR VS. VOLTAGE

VOLTAGE (Volts)	5MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
3.85	0.0009	0.0011	2.5
3.6	-0.0014	-0.0012	2.5
4.3	0.0010	0.0010	2.5

NOTE: The applicant defined the normal working voltage of the battery is from 3.6Vdc to 4.3Vdc.

FREQUENCY ERROR vs. TEMPERATURE.

TEMP. (°C)	5MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
-30	-0.0052	-0.0050	2.5
-20	-0.0046	-0.0044	2.5
-10	-0.0041	-0.0038	2.5
0	-0.0034	-0.0033	2.5
10	-0.0026	-0.0023	2.5
20	-0.0018	-0.0018	2.5
30	-0.0014	-0.0012	2.5
40	-0.0007	-0.0008	2.5
50	-0.0001	0.0002	2.5



FREQUENCY ERROR VS. VOLTAGE

VOLTAGE (Volts)	10MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
3.85	0.0010	0.0008	2.5
3.6	-0.0012	-0.0009	2.5
4.3	0.0010	0.0008	2.5

NOTE: The applicant defined the normal working voltage of the battery is from 3.6Vdc to 4.3Vdc.

FREQUENCY ERROR vs. TEMPERATURE.

TEMP. (°C)	10MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
-30	-0.0051	-0.0052	2.5
-20	-0.0044	-0.0046	2.5
-10	-0.0039	-0.0040	2.5
0	-0.0034	-0.0034	2.5
10	-0.0028	-0.0025	2.5
20	-0.0021	-0.0019	2.5
30	-0.0015	-0.0013	2.5
40	-0.0010	-0.0008	2.5
50	0.0003	0.0002	2.5



FREQUENCY ERROR VS. VOLTAGE

VOLTAGE (Volts)	15MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
3.85	0.0012	0.0011	2.5
3.6	-0.0011	-0.0012	2.5
4.3	0.0009	0.0010	2.5

NOTE: The applicant defined the normal working voltage of the battery is from 3.6Vdc to 4.3Vdc.

FREQUENCY ERROR vs. TEMPERATURE.

TEMP. (°C)	15MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
-30	-0.0051	-0.0049	2.5
-20	-0.0047	-0.0043	2.5
-10	-0.0039	-0.0036	2.5
0	-0.0030	-0.0028	2.5
10	-0.0024	-0.0025	2.5
20	-0.0019	-0.0013	2.5
30	-0.0011	-0.0010	2.5
40	-0.0007	-0.0003	2.5
50	0.0002	0.0002	2.5



FREQUENCY ERROR VS. VOLTAGE

VOLTAGE (Volts)	20MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
3.85	0.0011	0.0011	2.5
3.6	-0.0012	-0.0011	2.5
4.3	0.0010	0.0012	2.5

NOTE: The applicant defined the normal working voltage of the battery is from 3.6Vdc to 4.3Vdc.

FREQUENCY ERROR vs. TEMPERATURE.

TEMP. (°C)	20MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
-30	-0.0048	-0.0051	2.5
-20	-0.0040	-0.0042	2.5
-10	-0.0037	-0.0051	2.5
0	-0.0030	-0.0042	2.5
10	-0.0023	-0.0036	2.5
20	-0.0018	-0.0029	2.5
30	-0.0010	-0.0023	2.5
40	-0.0004	-0.0013	2.5
50	-0.0002	-0.0009	2.5



LTE BAND 25

FREQUENCY ERROR VS. VOLTAGE

VOLTAGE (Volts)	1.4MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
3.85	0.0008	0.0009	2.5
3.6	-0.0009	-0.0010	2.5
4.3	0.0007	0.0008	2.5

NOTE: The applicant defined the normal working voltage of the battery is from 3.6Vdc to 4.3Vdc.

FREQUENCY ERROR vs. TEMPERATURE.

TEMP. (°C)	1.4MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
-30	-0.0055	-0.0056	2.5
-20	-0.0050	-0.0052	2.5
-10	-0.0044	-0.0046	2.5
0	-0.0036	-0.0042	2.5
10	-0.0028	-0.0030	2.5
20	-0.0024	-0.0023	2.5
30	-0.0018	-0.0019	2.5
40	-0.0010	-0.0009	2.5
50	-0.0003	-0.0003	2.5



FREQUENCY ERROR VS. VOLTAGE

VOLTAGE (Volts)	3MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
3.85	0.0008	0.0010	2.5
3.6	-0.0010	-0.0010	2.5
4.3	0.0010	0.0010	2.5

NOTE: The applicant defined the normal working voltage of the battery is from 3.6Vdc to 4.3Vdc.

FREQUENCY ERROR vs. TEMPERATURE.

TEMP. (°C)	3MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
-30	-0.0056	-0.0055	2.5
-20	-0.0052	-0.0051	2.5
-10	-0.0045	-0.0041	2.5
0	-0.0037	-0.0034	2.5
10	-0.0029	-0.0029	2.5
20	-0.0023	-0.0024	2.5
30	-0.0018	-0.0012	2.5
40	-0.0010	-0.0009	2.5
50	-0.0003	-0.0002	2.5



FREQUENCY ERROR VS. VOLTAGE

VOLTAGE (Volts)	5MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
3.85	0.0010	0.0011	2.5
3.6	-0.0012	-0.0012	2.5
4.3	0.0010	0.0010	2.5

NOTE: The applicant defined the normal working voltage of the battery is from 3.6Vdc to 4.3Vdc.

FREQUENCY ERROR vs. TEMPERATURE.

TEMP. (°C)	5MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
-30	-0.0052	-0.0054	2.5
-20	-0.0046	-0.0049	2.5
-10	-0.0041	-0.0039	2.5
0	-0.0034	-0.0035	2.5
10	-0.0030	-0.0027	2.5
20	-0.0023	-0.0019	2.5
30	-0.0016	-0.0012	2.5
40	-0.0007	-0.0007	2.5
50	-0.0002	0.0002	2.5



FREQUENCY ERROR VS. VOLTAGE

VOLTAGE (Volts)	10MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
3.85	0.0010	0.0008	2.5
3.6	-0.0012	-0.0010	2.5
4.3	0.0010	0.0008	2.5

NOTE: The applicant defined the normal working voltage of the battery is from 3.6Vdc to 4.3Vdc.

FREQUENCY ERROR vs. TEMPERATURE.

TEMP. (°C)	10MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
-30	-0.0051	-0.0051	2.5
-20	-0.0045	-0.0048	2.5
-10	-0.0039	-0.0039	2.5
0	-0.0035	-0.0033	2.5
10	-0.0029	-0.0022	2.5
20	-0.0022	-0.0019	2.5
30	-0.0015	-0.0015	2.5
40	-0.0010	-0.0008	2.5
50	0.0003	0.0002	2.5



FREQUENCY ERROR VS. VOLTAGE

VOLTAGE (Volts)	15MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
3.85	0.0012	0.0012	2.5
3.6	-0.0012	-0.0013	2.5
4.3	0.0010	0.0010	2.5

NOTE: The applicant defined the normal working voltage of the battery is from 3.6Vdc to 4.3Vdc.

FREQUENCY ERROR vs. TEMPERATURE.

TEMP. (°C)	15MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
-30	-0.0051	-0.0048	2.5
-20	-0.0046	-0.0041	2.5
-10	-0.0040	-0.0036	2.5
0	-0.0030	-0.0029	2.5
10	-0.0025	-0.0024	2.5
20	-0.0019	-0.0022	2.5
30	-0.0011	-0.0010	2.5
40	-0.0007	-0.0003	2.5
50	0.0002	0.0003	2.5



FREQUENCY ERROR VS. VOLTAGE

VOLTAGE (Volts)	20MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
3.85	0.0012	0.0011	2.5
3.6	-0.0012	-0.0012	2.5
4.3	0.0010	0.0012	2.5

NOTE: The applicant defined the normal working voltage of the battery is from 3.6Vdc to 4.3Vdc.

FREQUENCY ERROR vs. TEMPERATURE.

TEMP. (°C)	20MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
-30	-0.0048	-0.0052	2.5
-20	-0.0041	-0.0041	2.5
-10	-0.0035	-0.0036	2.5
0	-0.0029	-0.0030	2.5
10	-0.0022	-0.0023	2.5
20	-0.0019	-0.0015	2.5
30	-0.0010	-0.0010	2.5
40	-0.0005	-0.0001	2.5
50	0.0003	0.0003	2.5




3.3 OCCUPIED BANDWIDTH MEASUREMENT

3.3.1 TEST PROCEDURES

The EUT makes a call to the communication simulator. All measurements were done at low, middle and high operational frequency range. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.

3.3.2 TEST SETUP

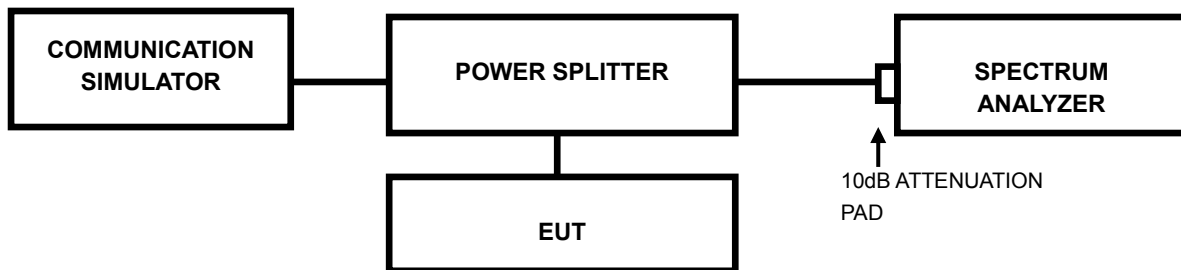




BUREAU VERITAS

Test Report No.: RF190517W003-4

3.3.3 TEST RESULTS

CDMA BC 1



CHANNEL	Frequency (MHz)	99% OCCUPIED Bandwidth (MHz)	CHANNEL	Frequency (MHz)	26dB Bandwidth (MHz)
25	1851.25	1.28	25	1851.25	1.45
600	1880.00	1.28	600	1880.00	1.44
1175	1908.75	1.28	1175	1908.75	1.45

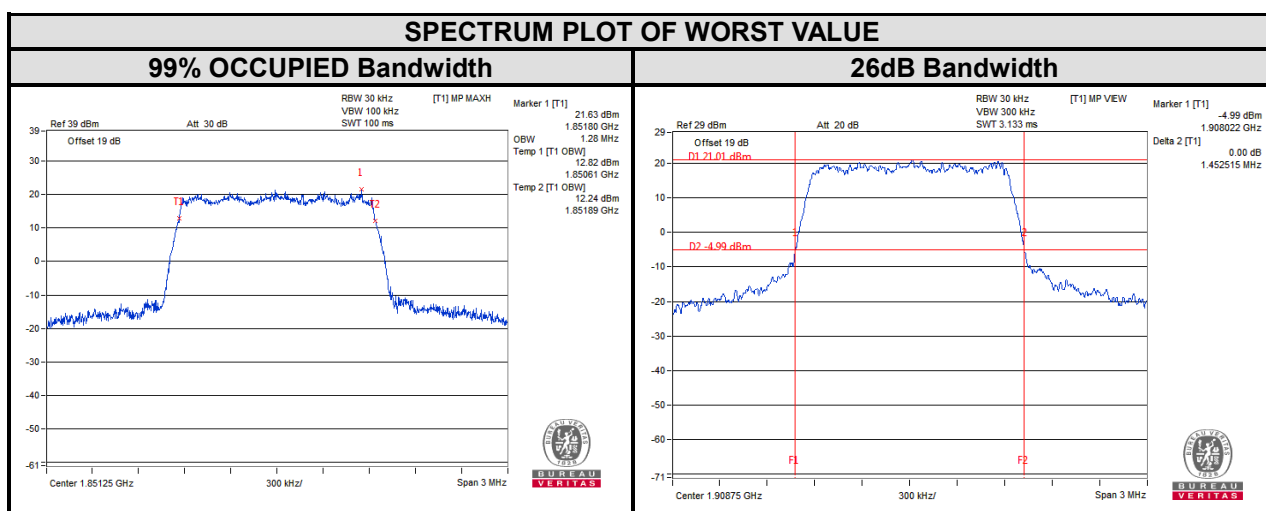





LTE band 2

LTE band 2							
Channel Bandwidth : 1.4MHz							
Channel	Frequency (MHz)	99% Occupied bandwidth (MHz)		Channel	Frequency (MHz)	26dB bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
18607	1850.7	1.08	1.09	18607	1850.7	1.28	1.25
18900	1880	1.09	1.09	18900	1880	1.28	1.26
19193	1909.3	1.09	1.09	19193	1909.3	1.33	1.30

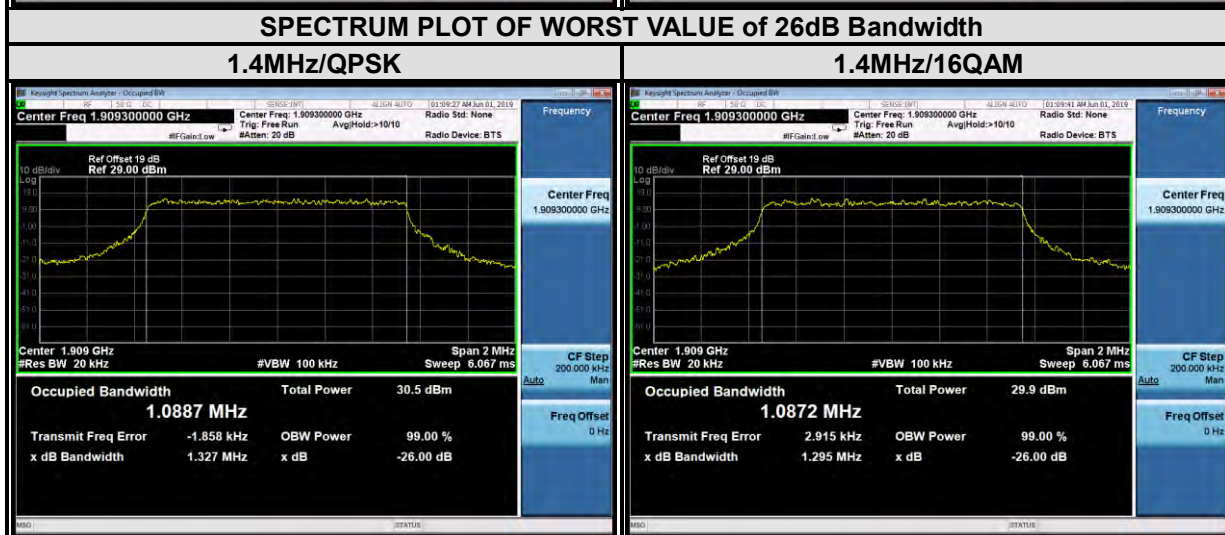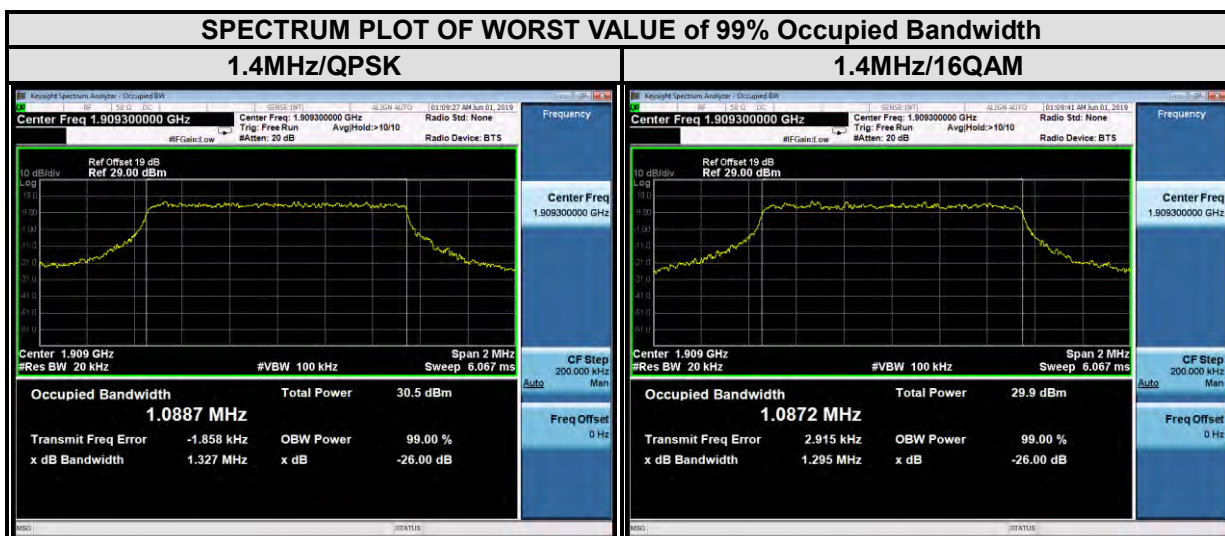



LTE band 2							
Channel Bandwidth : 3MHz							
Channel	Frequency (MHz)	99% Occupied bandwidth (MHz)		Channel	Frequency (MHz)	26dB bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
18615	1851.5	2.68	2.68	18615	1851.5	2.91	2.93
18900	1880	2.68	2.68	18900	1880	2.91	2.93
19185	1908.5	2.68	2.68	19185	1908.5	2.93	2.92

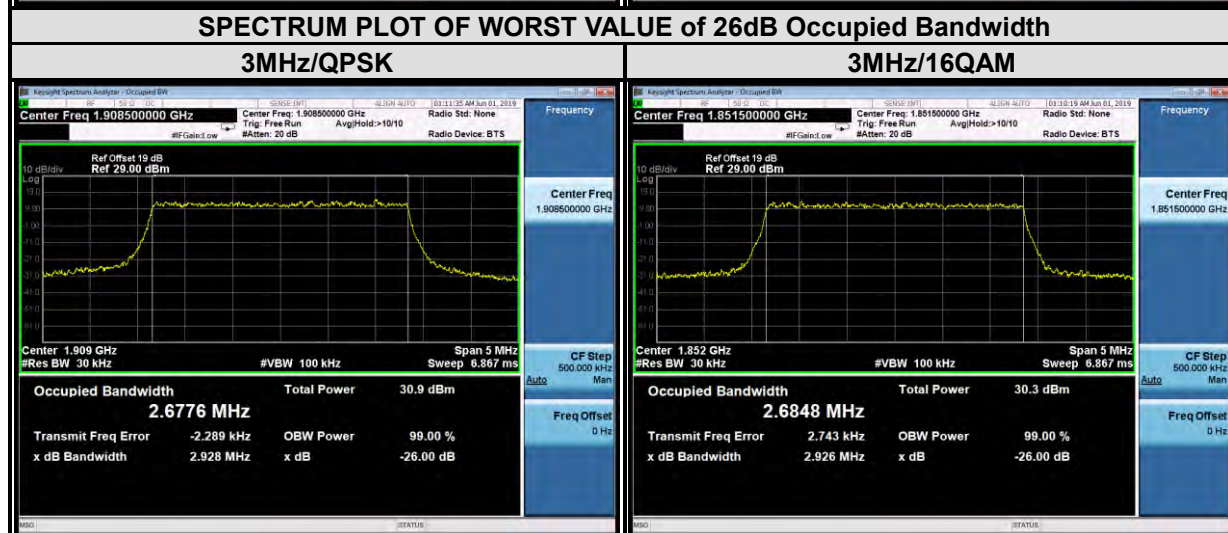
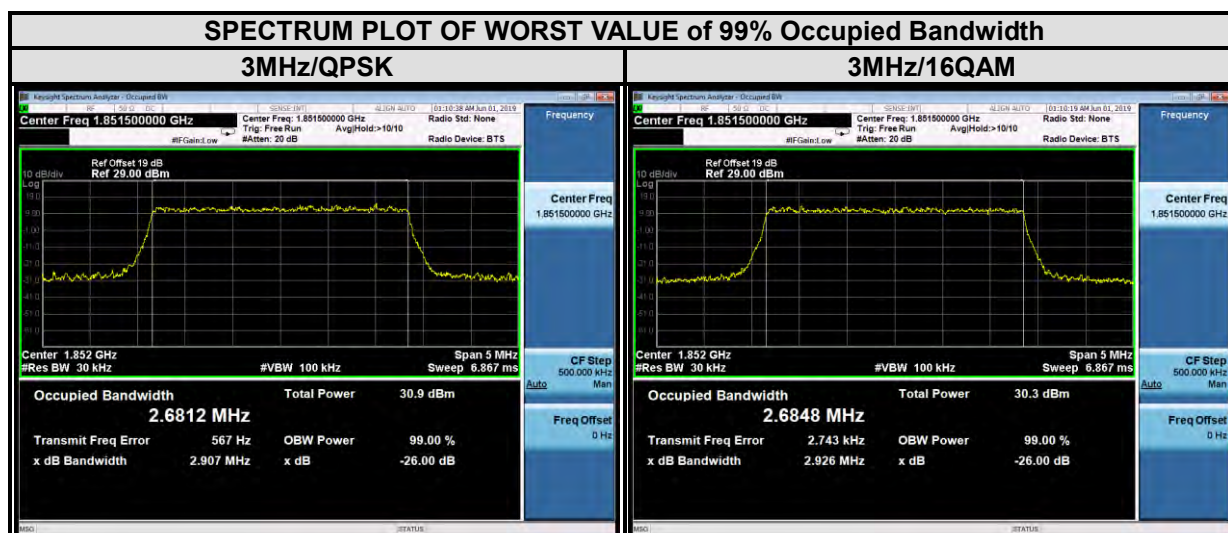




**BUREAU
VERITAS**

Test Report No.: RF190517W003-4

LTE band 2							
Channel Bandwidth : 5 MHz							
Channel	Frequency (MHz)	99% Occupied bandwidth (MHz)		Channel	Frequency (MHz)	26dB bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
18625	1852.5	4.47	4.47	18625	1852.5	4.95	4.92
18900	1880	4.47	4.47	18900	1880	4.90	4.88
19175	1907.5	4.48	4.47	19175	1907.5	4.92	4.92

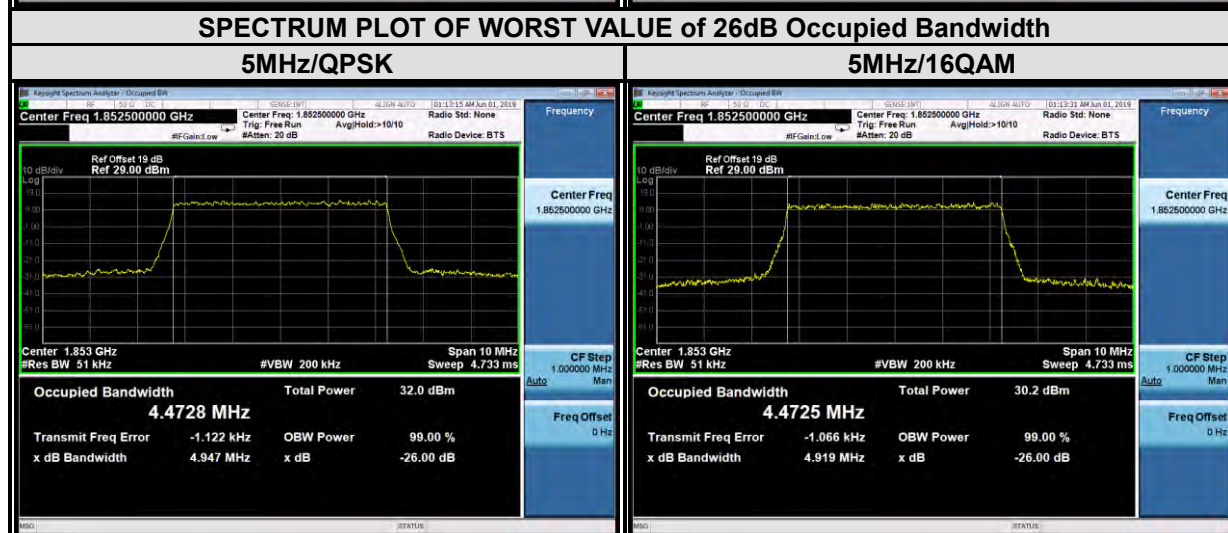
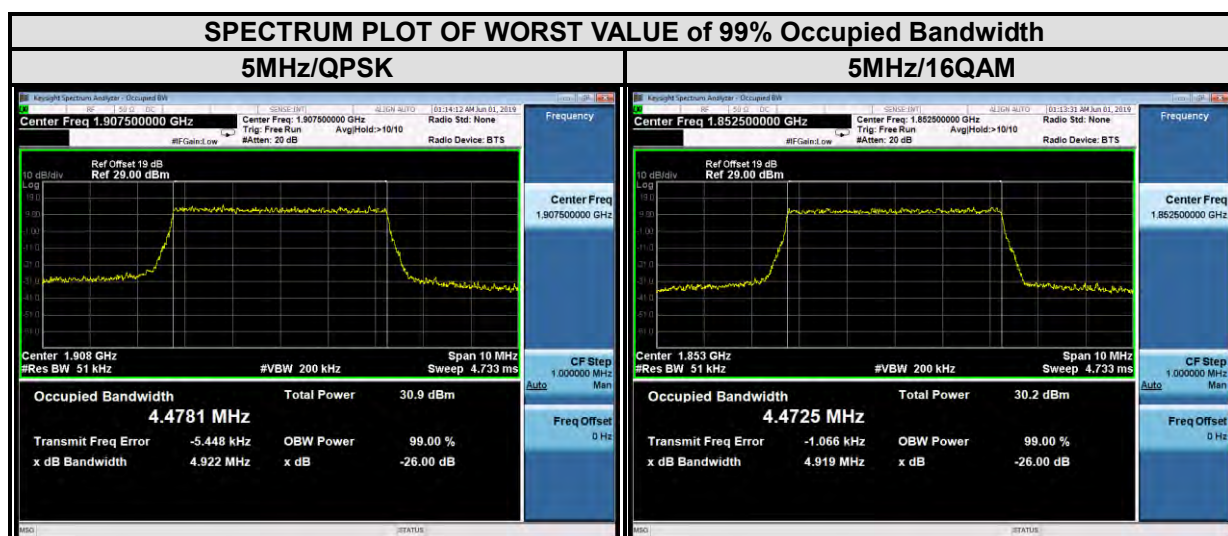




BUREAU VERITAS



Test Report No.: RF190517W003-4

LTE band 2							
Channel Bandwidth : 10 MHz							
Channel	Frequency (MHz)	99% Occupied bandwidth (MHz)		Channel	Frequency (MHz)	26dB bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
18650	1855	8.93	8.91	18650	1855	9.69	9.63
18900	1880	8.92	8.93	18900	1880	9.59	9.57
19150	1905	8.94	8.91	19150	1905	9.60	9.51

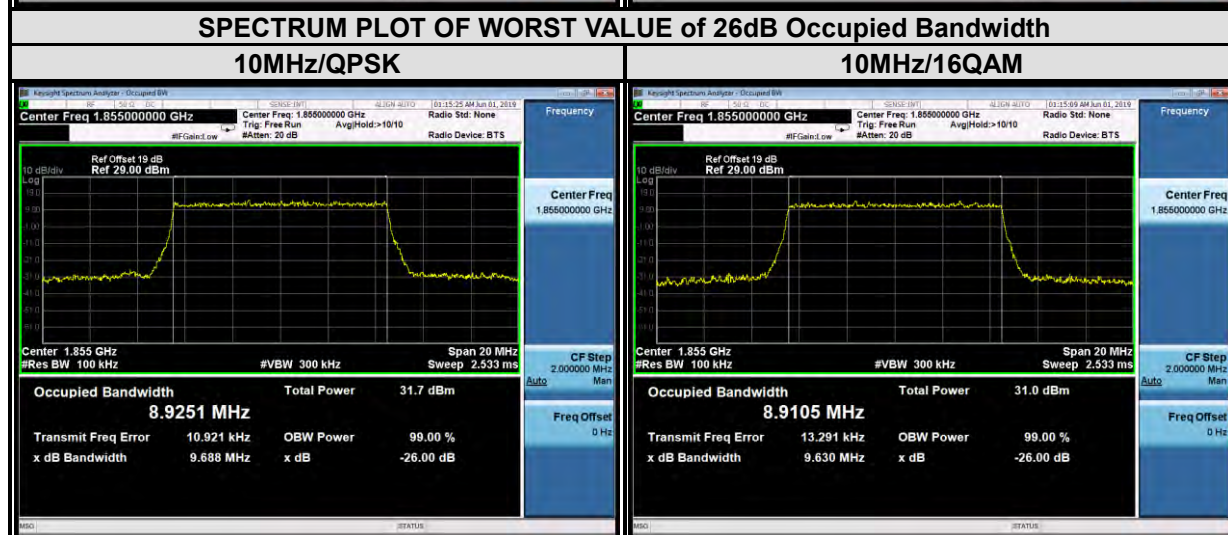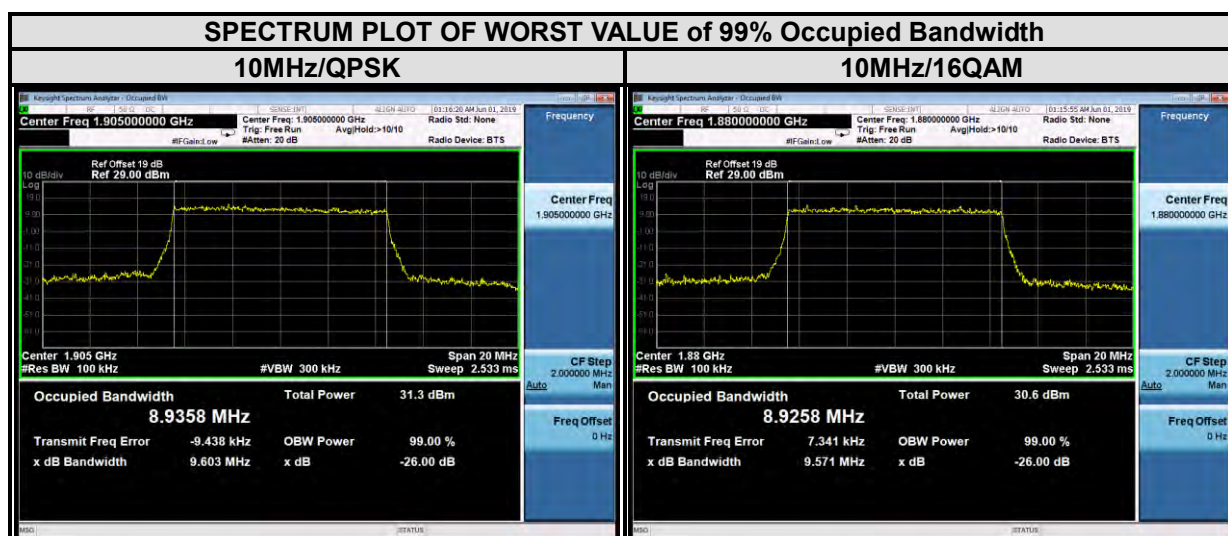





LTE band 2							
Channel Bandwidth : 15 MHz							
Channel	Frequency (MHz)	99% Occupied bandwidth (MHz)		Channel	Frequency (MHz)	26dB bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
18675	1857.5	13.40	13.41	18675	1857.5	14.41	14.50
18900	1880	13.43	13.41	18900	1880	14.38	14.50
19125	1902.5	13.41	13.37	19125	1902.5	14.33	14.28

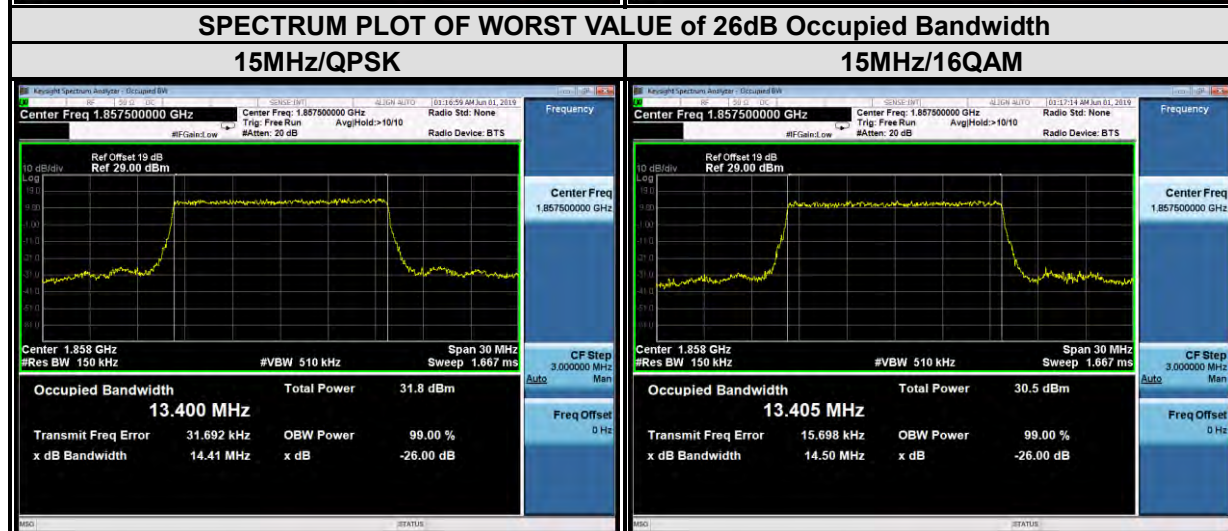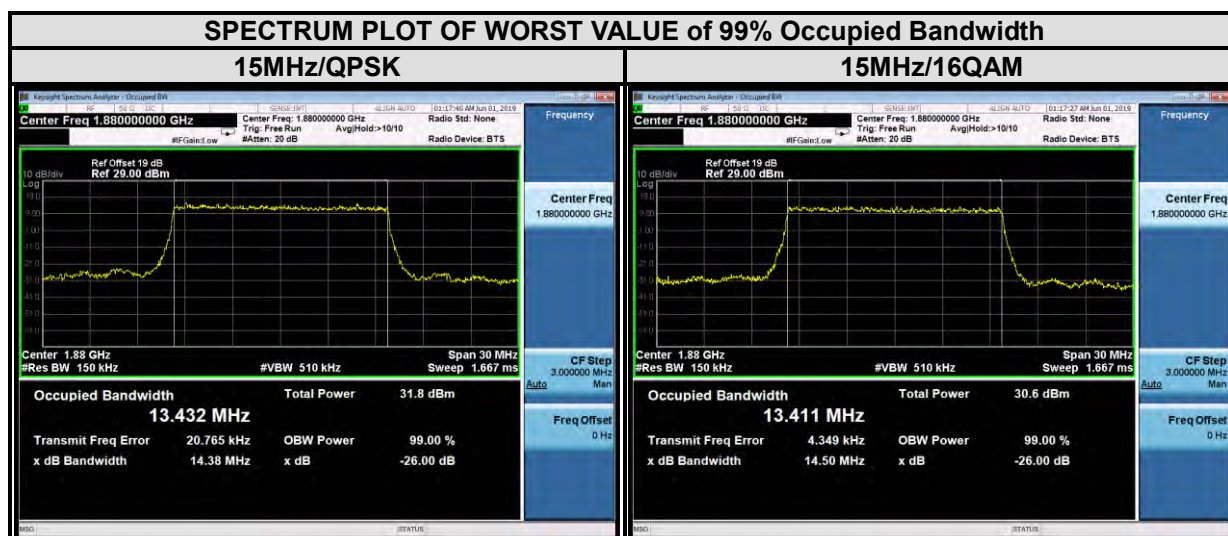



LTE band 2							
Channel Bandwidth : 20 MHz							
Channel	Frequency (MHz)	99% Occupied bandwidth (MHz)		Channel	Frequency (MHz)	26dB bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
18700	1860	17.85	17.86	18700	1860	19.03	19.17
18900	1880	17.87	17.85	18900	1880	19.11	18.99
19100	1900	17.81	17.82	19100	1900	18.87	18.97

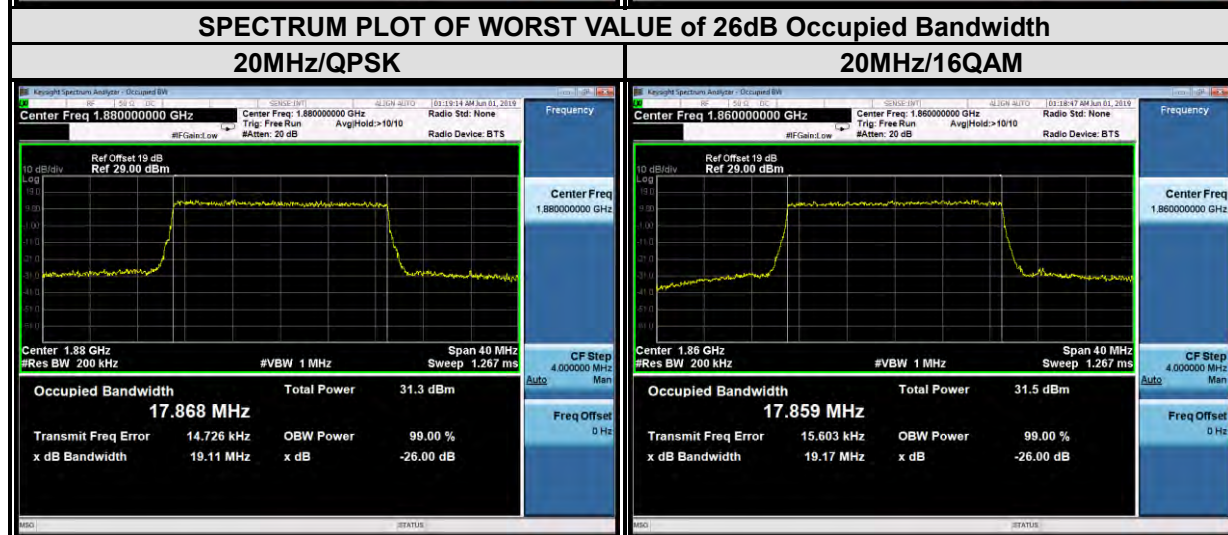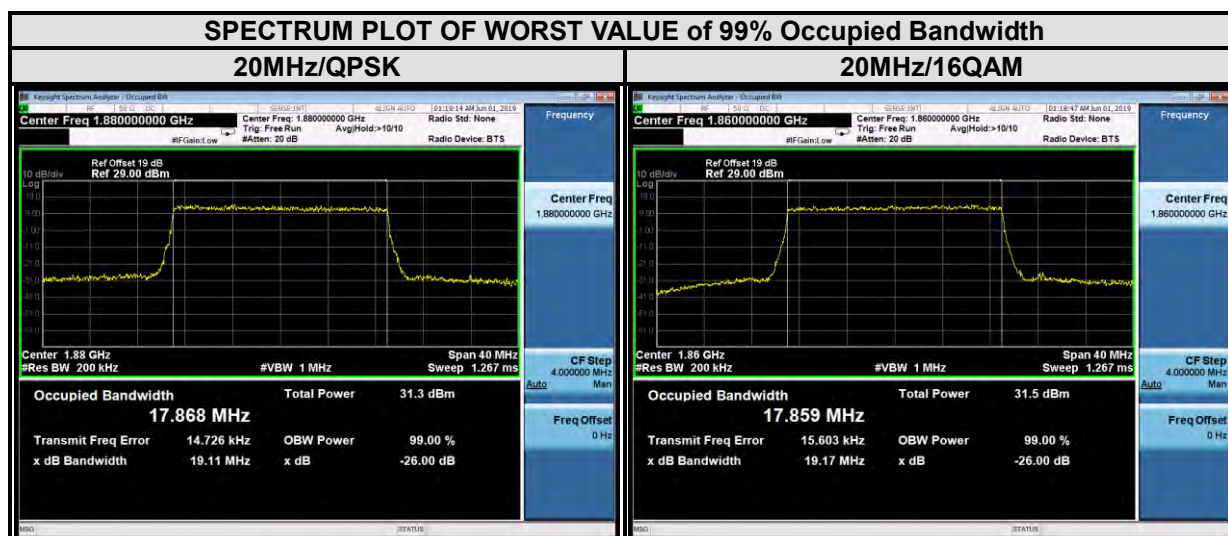





**BUREAU
VERITAS**

Test Report No.: RF190517W003-4



LTE band 25

LTE band 25							
Channel Bandwidth : 1.4 MHz							
Channel	Frequency (MHz)	99% Occupied bandwidth (MHz)		Channel	Frequency (MHz)	26dB bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
26047	1850.7	1.08	1.08	26047	1850.7	1.28	1.27
26365	1882.5	1.09	1.09	26365	1882.5	1.28	1.27
26683	1914.3	1.09	1.09	26683	1914.3	1.31	1.30

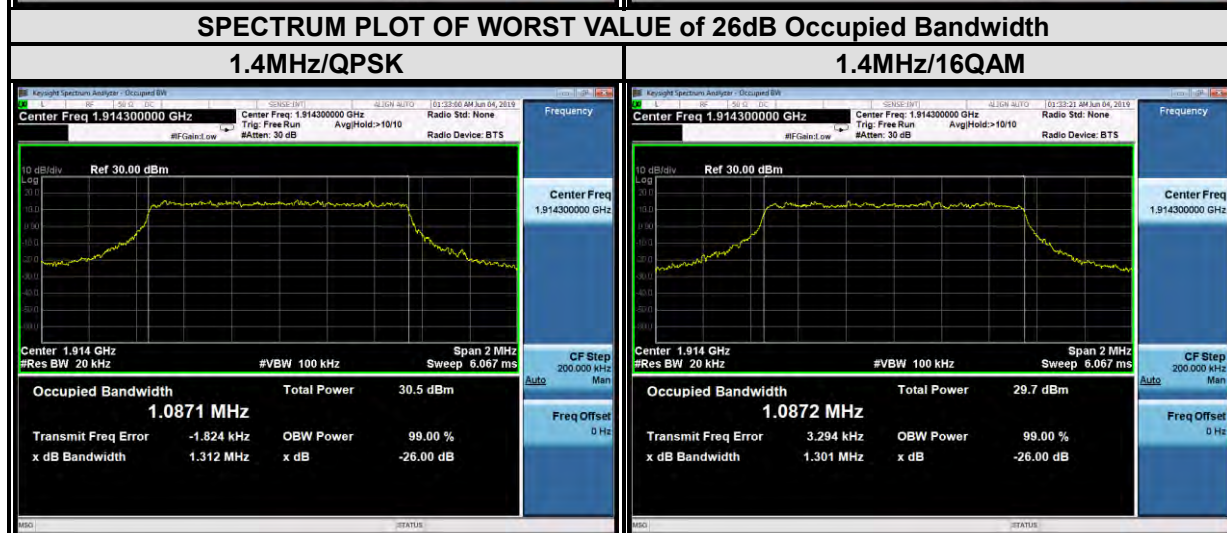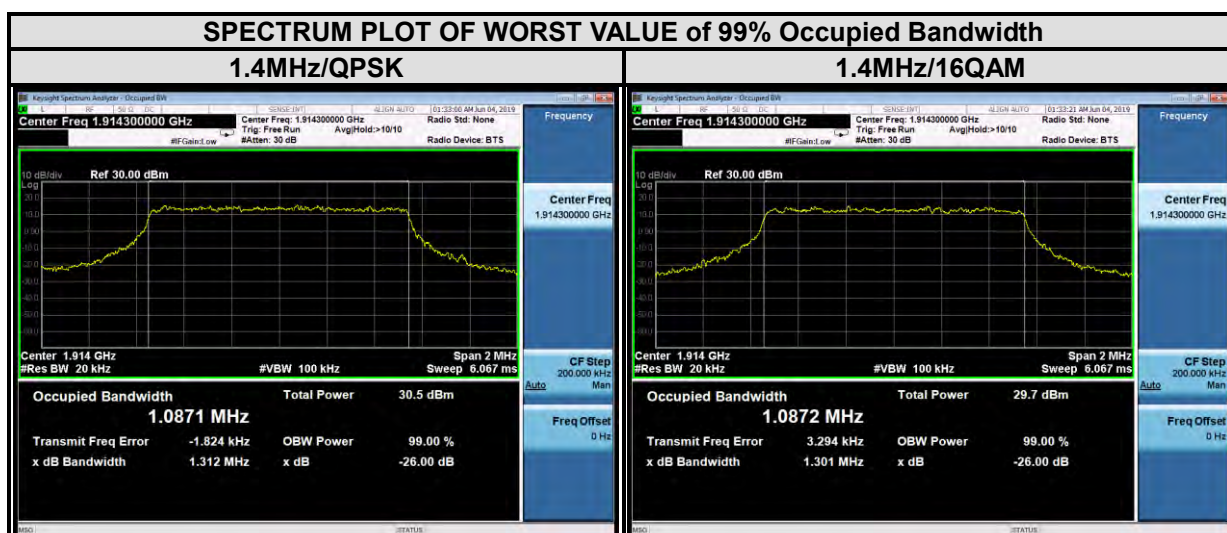




LTE band 25							
Channel Bandwidth : 3 MHz							
Channel	Frequency (MHz)	99% Occupied bandwidth (MHz)		Channel	Frequency (MHz)	26dB bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
26055	1851.5	2.68	2.68	26047	1850.7	2.91	2.93
26365	1882.5	2.68	2.68	26365	1882.5	2.92	2.93
26675	1913.5	2.68	2.68	26683	1914.3	2.92	2.95

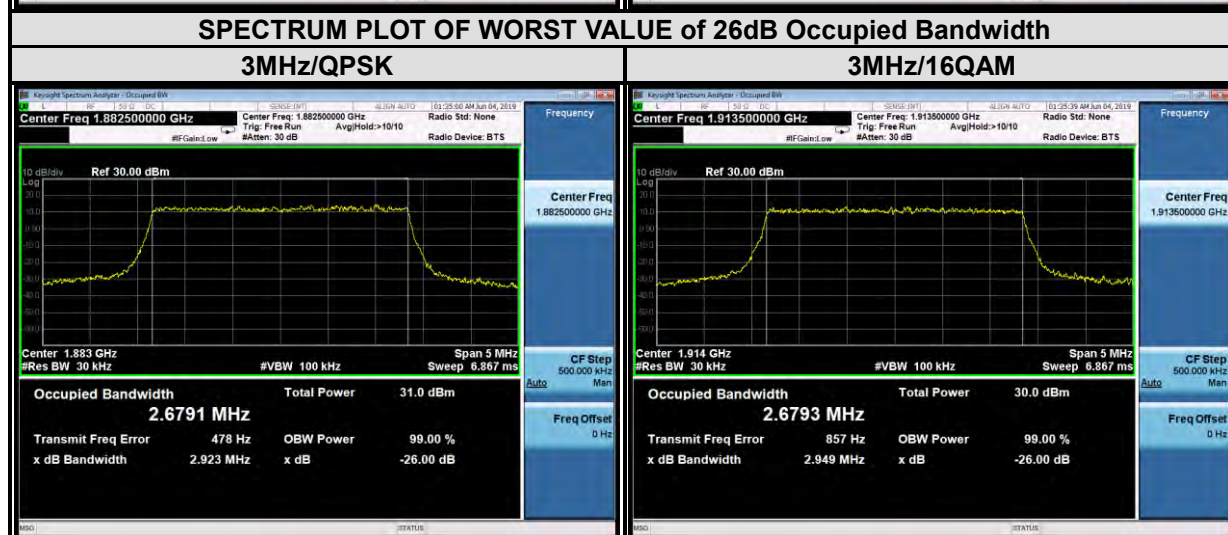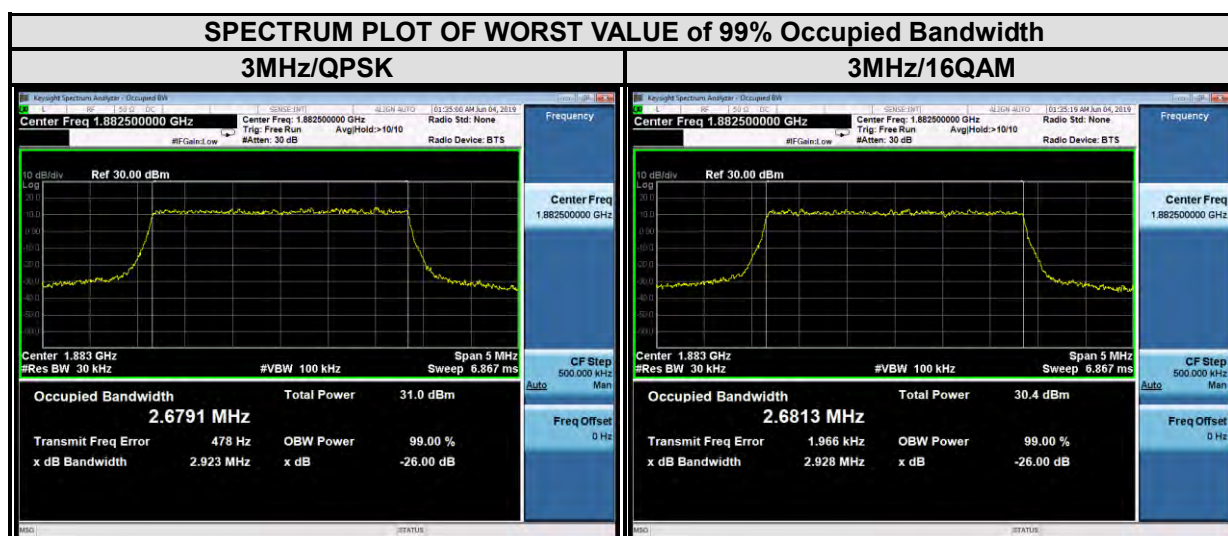




LTE band 25							
Channel Bandwidth : 5 MHz							
Channel	Frequency (MHz)	99% Occupied bandwidth (MHz)		Channel	Frequency (MHz)	26dB bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
26065	1852.5	4.47	4.48	26065	1852.5	4.91	4.93
26365	1882.5	4.47	4.47	26365	1882.5	4.94	4.92
26665	1912.5	4.47	4.47	26665	1912.5	4.94	4.93

SPECTRUM PLOT OF WORST VALUE of 99% Occupied Bandwidth


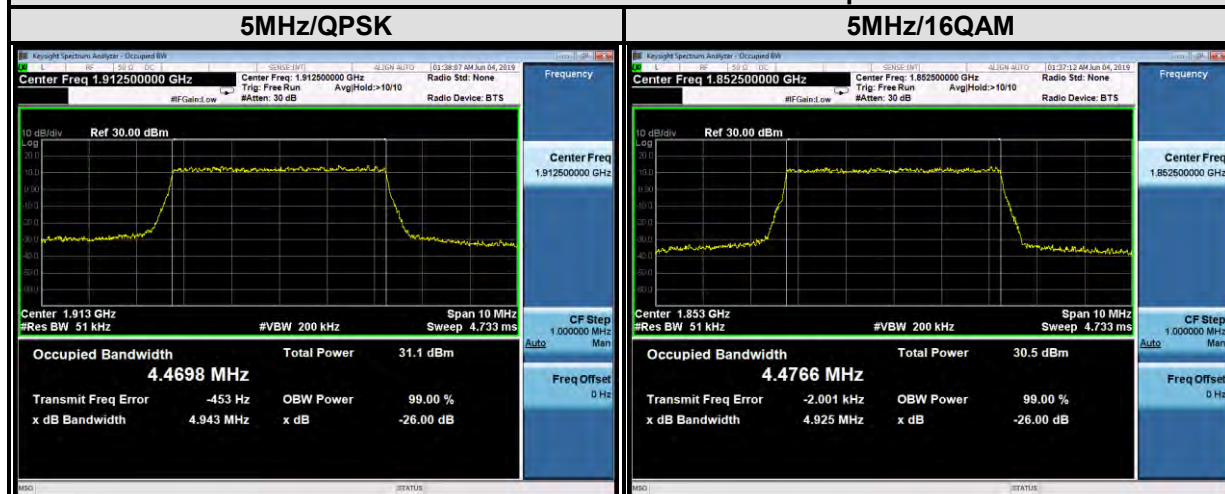


SPECTRUM PLOT OF WORST VALUE of 26dB Occupied Bandwidth

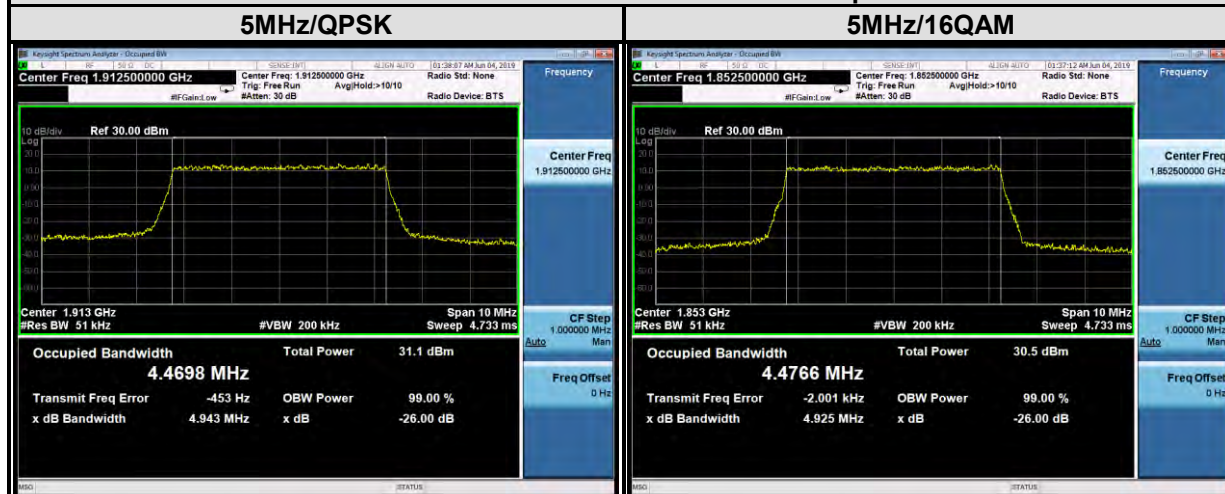




LTE band 25							
Channel Bandwidth : 10 MHz							
Channel	Frequency (MHz)	99% Occupied bandwidth (MHz)		Channel	Frequency (MHz)	26dB bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
26090	1855.0	8.93	8.91	26090	1855.0	9.64	9.59
26365	1882.5	8.94	8.92	26365	1882.5	9.70	9.61
26640	1910.0	8.95	8.92	26640	1910.0	9.71	9.61

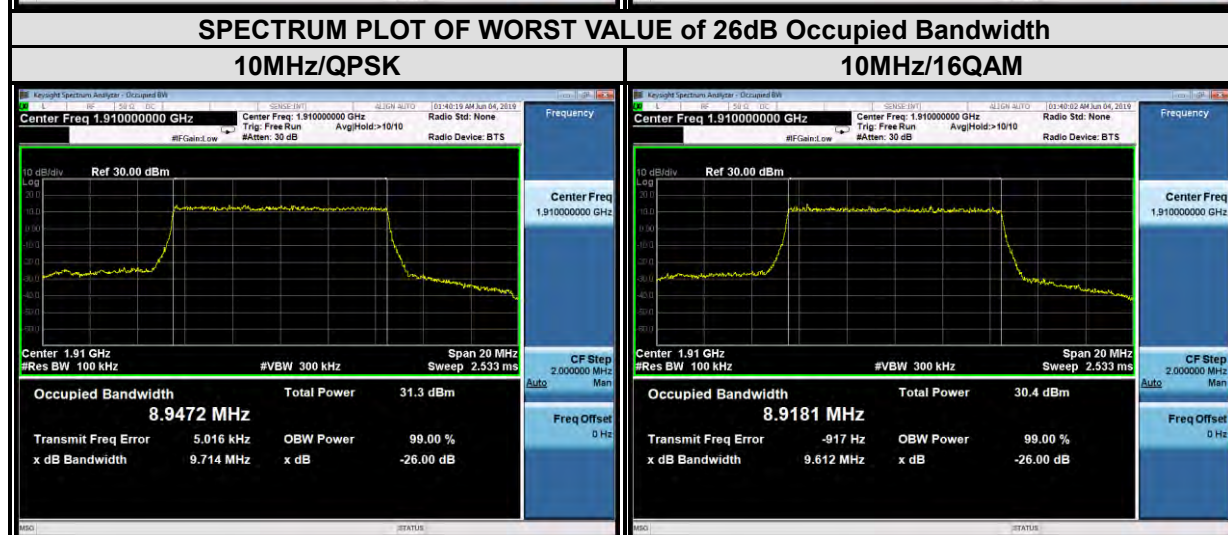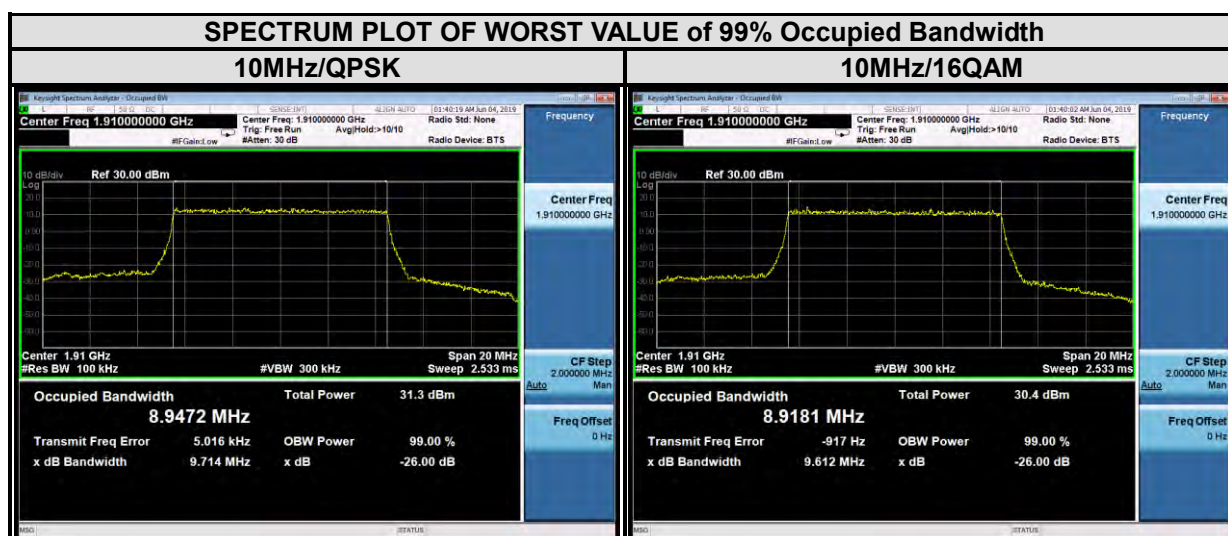




LTE band 25							
Channel Bandwidth : 15 MHz							
Channel	Frequency (MHz)	99% Occupied bandwidth (MHz)		Channel	Frequency (MHz)	26dB bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
26115	1857.5	13.42	13.41	26115	1857.5	14.43	14.49
26365	1882.5	13.45	13.41	26365	1882.5	14.45	14.53
26615	1907.5	13.43	13.42	26615	1907.5	14.42	14.49

SPECTRUM PLOT OF WORST VALUE of 99% Occupied Bandwidth


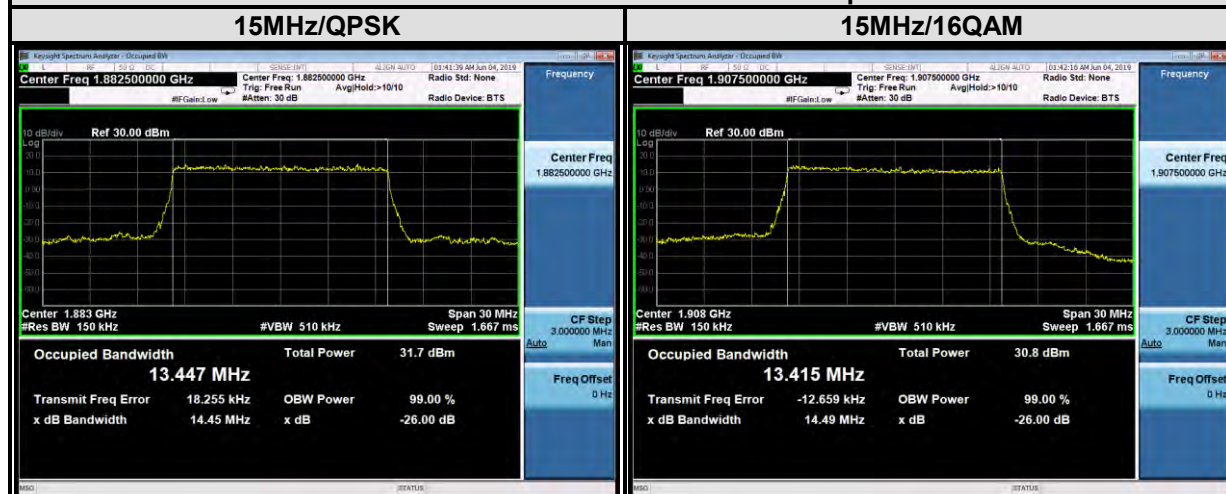


SPECTRUM PLOT OF WORST VALUE of 26dB Occupied Bandwidth

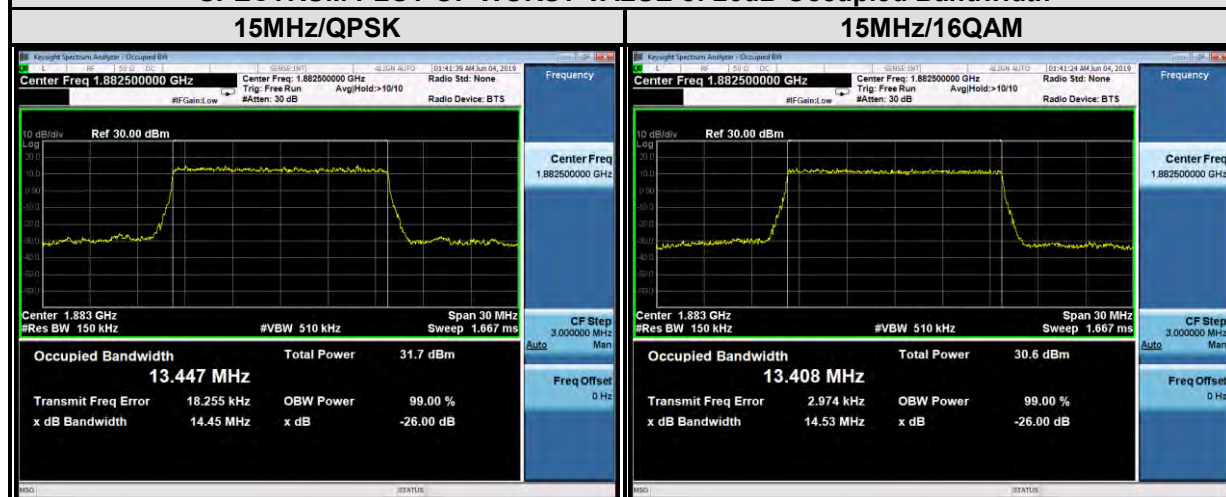



Channel Bandwidth : 20 MHz							
Channel	Frequency (MHz)	99% Occupied bandwidth (MHz)		Channel	Frequency (MHz)	26dB bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
26140	1860	17.86	17.89	26140	1860	18.95	19.03
26365	1882.5	17.85	17.87	26365	1882.5	19.08	19.11
26590	1905	17.85	17.84	26590	1905	19.06	18.99

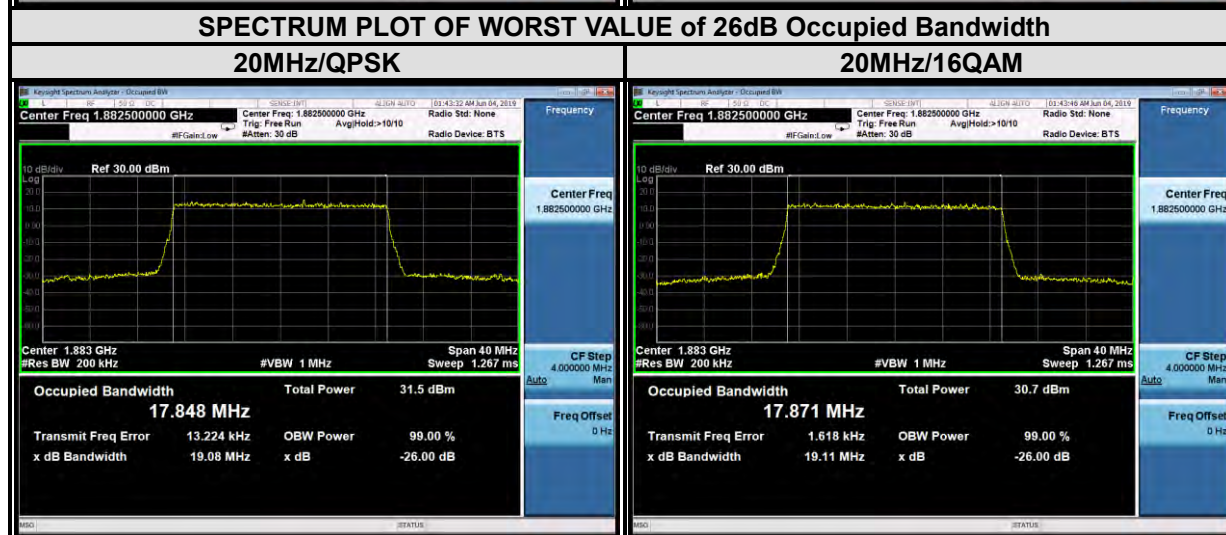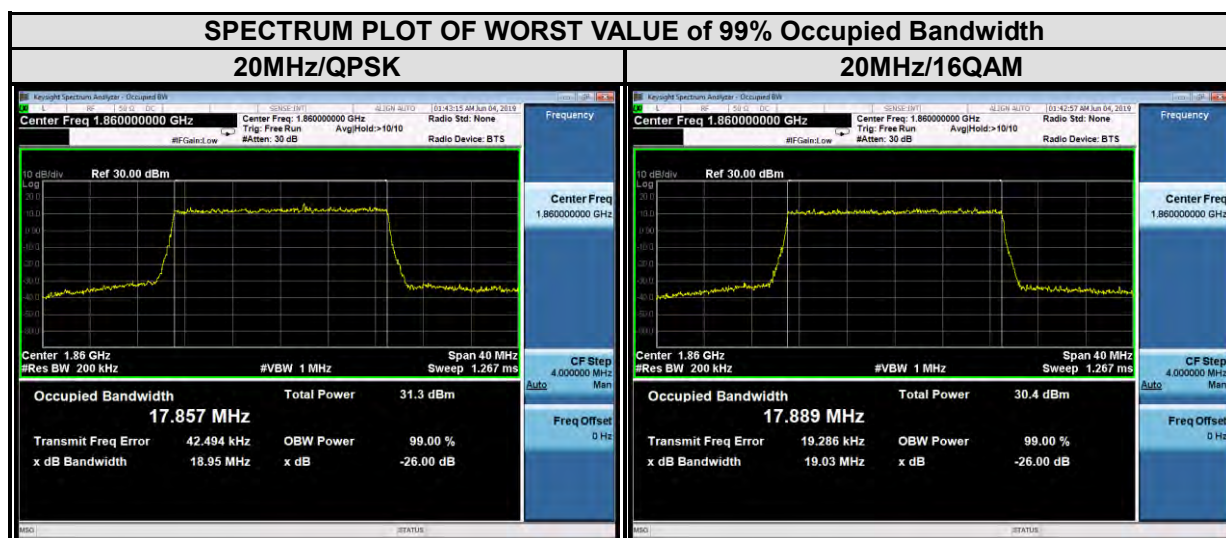




3.4 BAND EDGE MEASUREMENT

3.4.1 LIMITS OF BAND EDGE MEASUREMENT

Power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

3.4.2 TEST SETUP

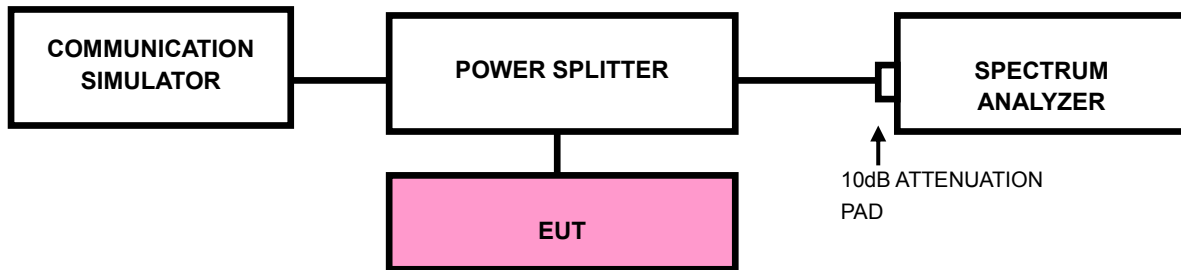



3.4.3 TEST PROCEDURES


- a. All measurements were done at low and high operational frequency range.
- b. The center frequency of spectrum is the band edge frequency and span is 3MHz. RBW of the spectrum is 15kHz and VBW of the spectrum is 15kHz (CDMA)
- c. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RBW of the spectrum is 20kHz and VBW of the spectrum is 100 kHz. (LTE bandwidth 1.4MHz)
- d. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RBW of the spectrum is 30kHz and VBW of the spectrum is 100kHz. (LTE bandwidth 3MHz)
- e. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RBW of the spectrum is 50kHz and VBW of the spectrum is 200kHz. (LTE bandwidth 5MHz)
- f. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RBW of the spectrum is 100kHz and VBW of the spectrum is 300kHz. (LTE bandwidth 10MHz)
- g. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RBW of the spectrum is 200kHz and VBW of the spectrum is 1MHz. (LTE bandwidth 15MHz)
- h. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RBW of the spectrum is 200kHz and VBW of the spectrum is 1MHz. (LTE bandwidth 20MHz)
- i. Record the max trace plot into the test report.



**BUREAU
VERITAS**

Test Report No.: RF190517W003-4

3.4.4. TEST RESULTS

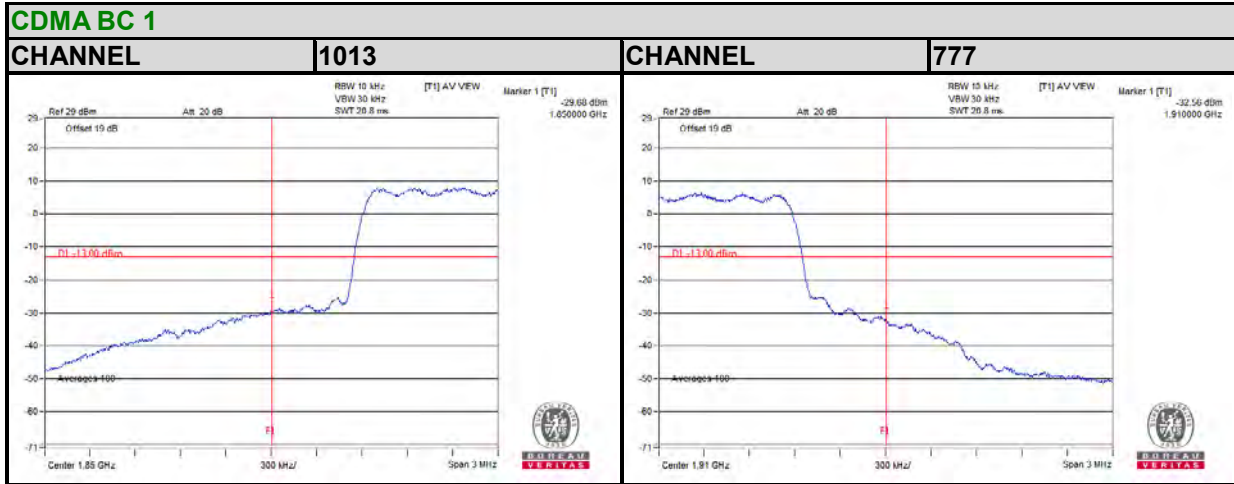





BUREAU VERITAS

Test Report No.: RF190517W003-4

LTE BAND 2


Channel Bandwidth: 1.4MHz QPSK

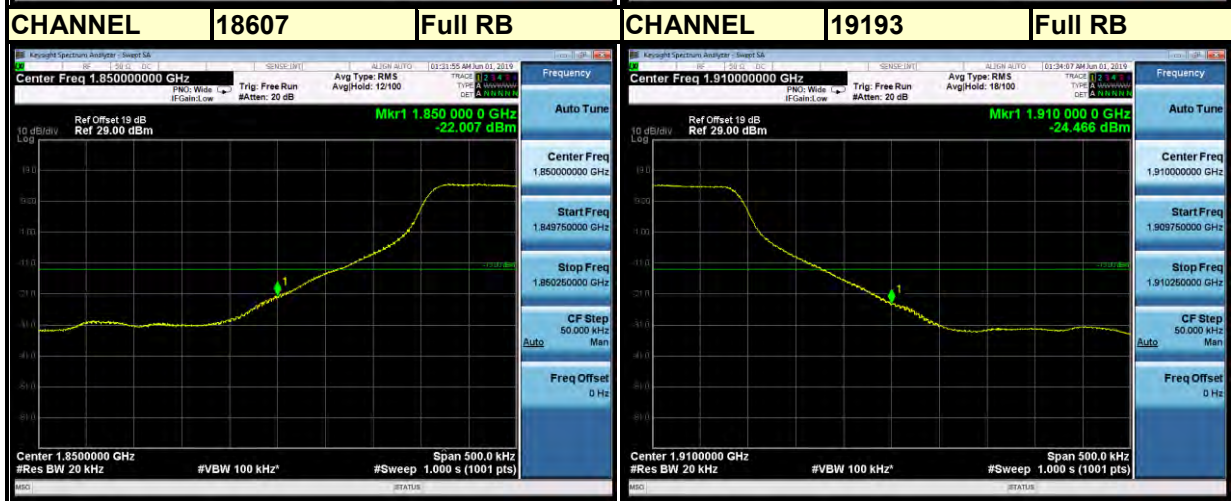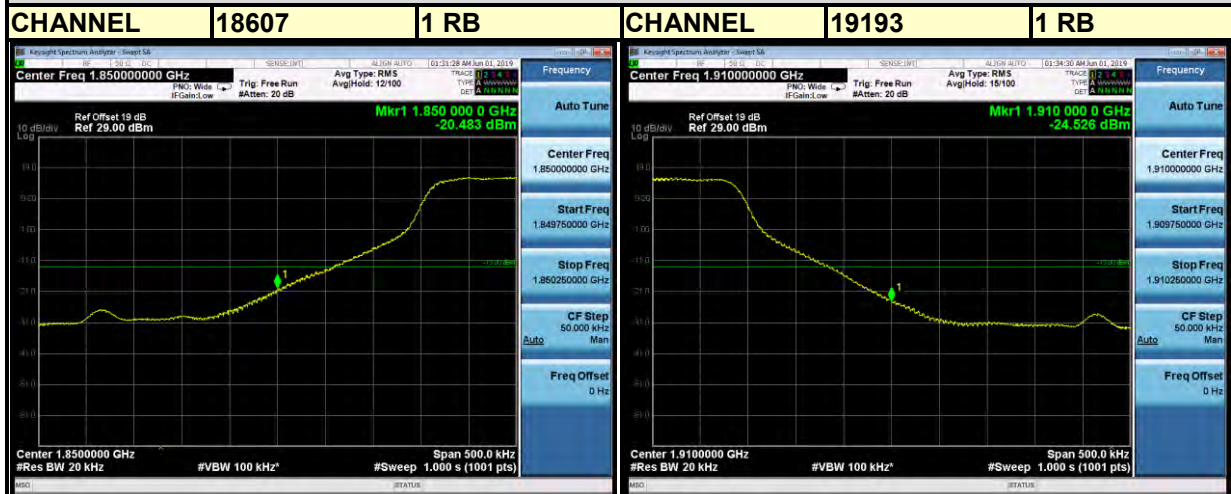



BUREAU VERITAS

Test Report No.: RF190517W003-4

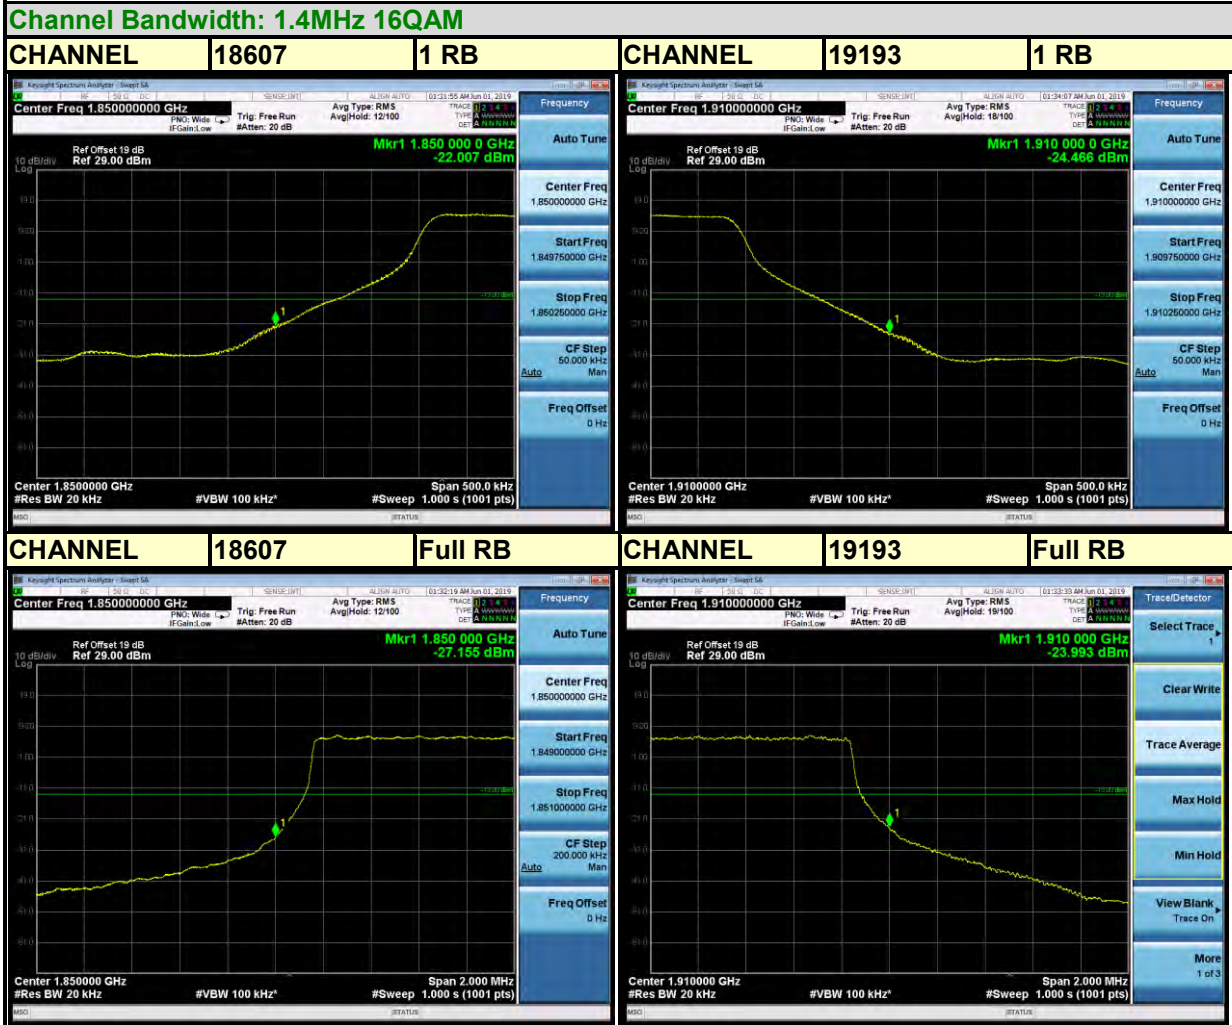





BUREAU VERITAS

Test Report No.: RF190517W003-4


LTE BAND 2

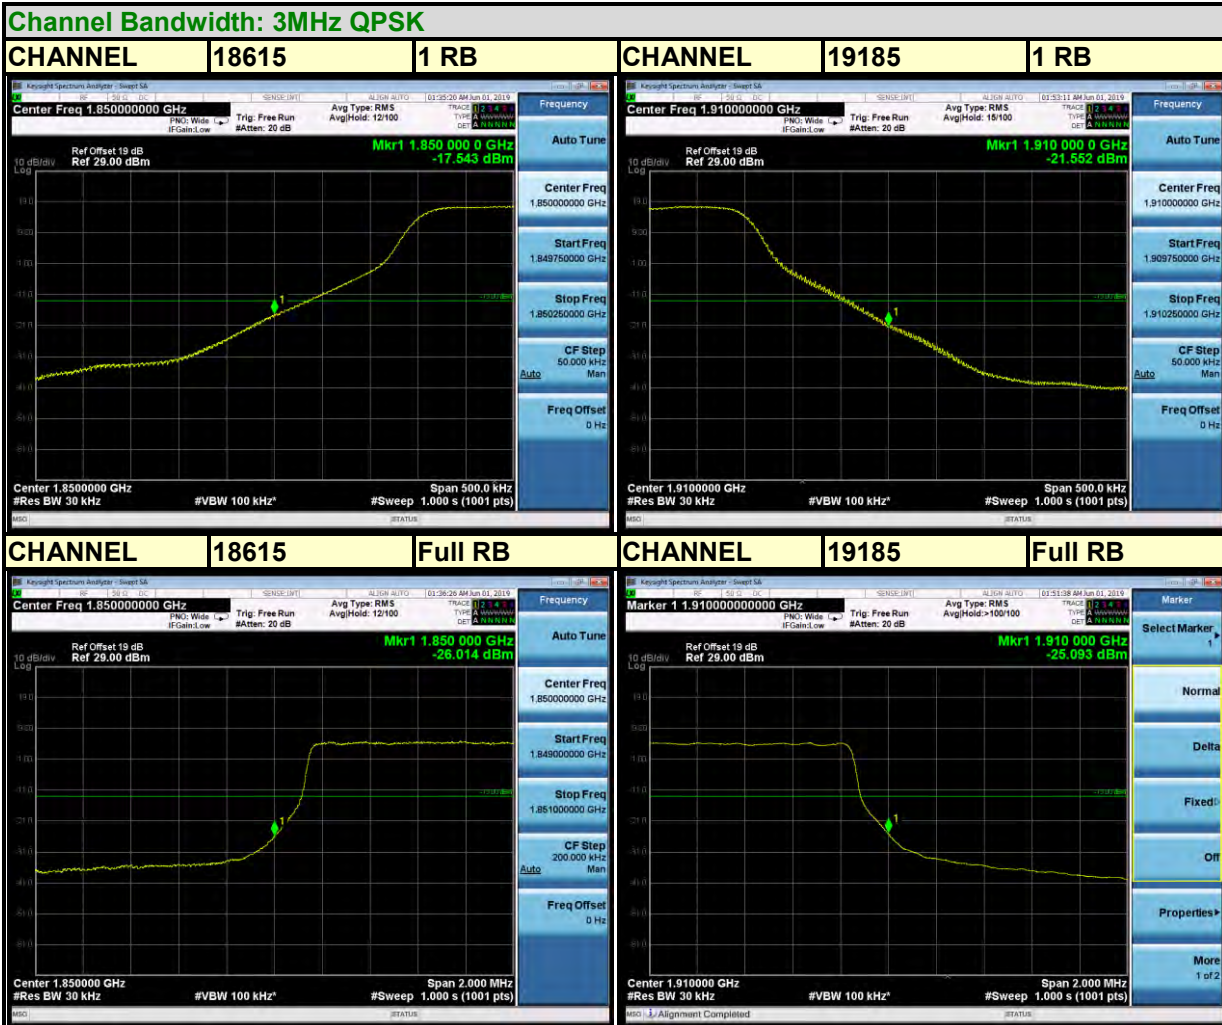

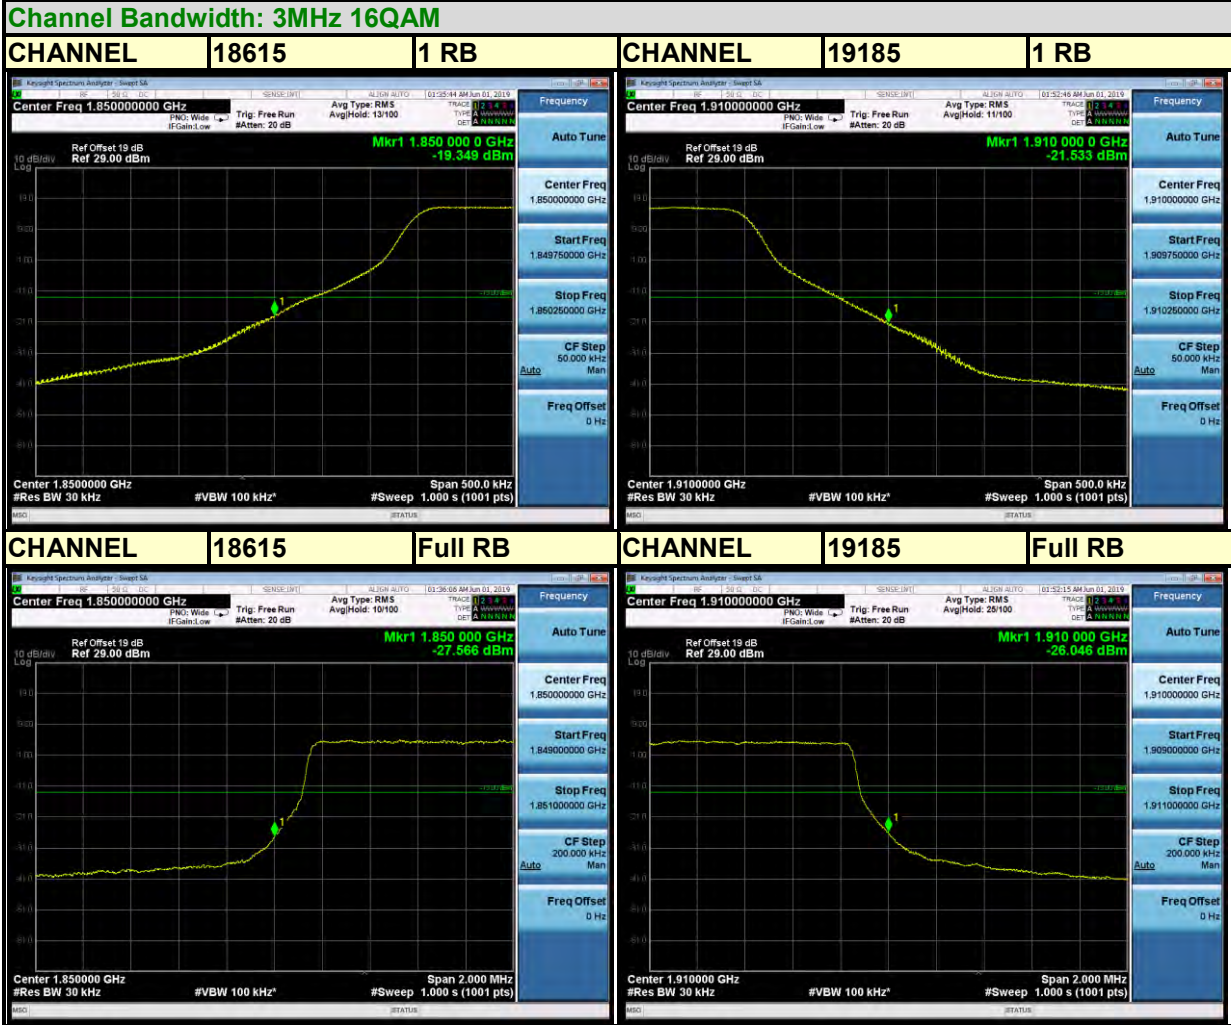




LTE BAND 2

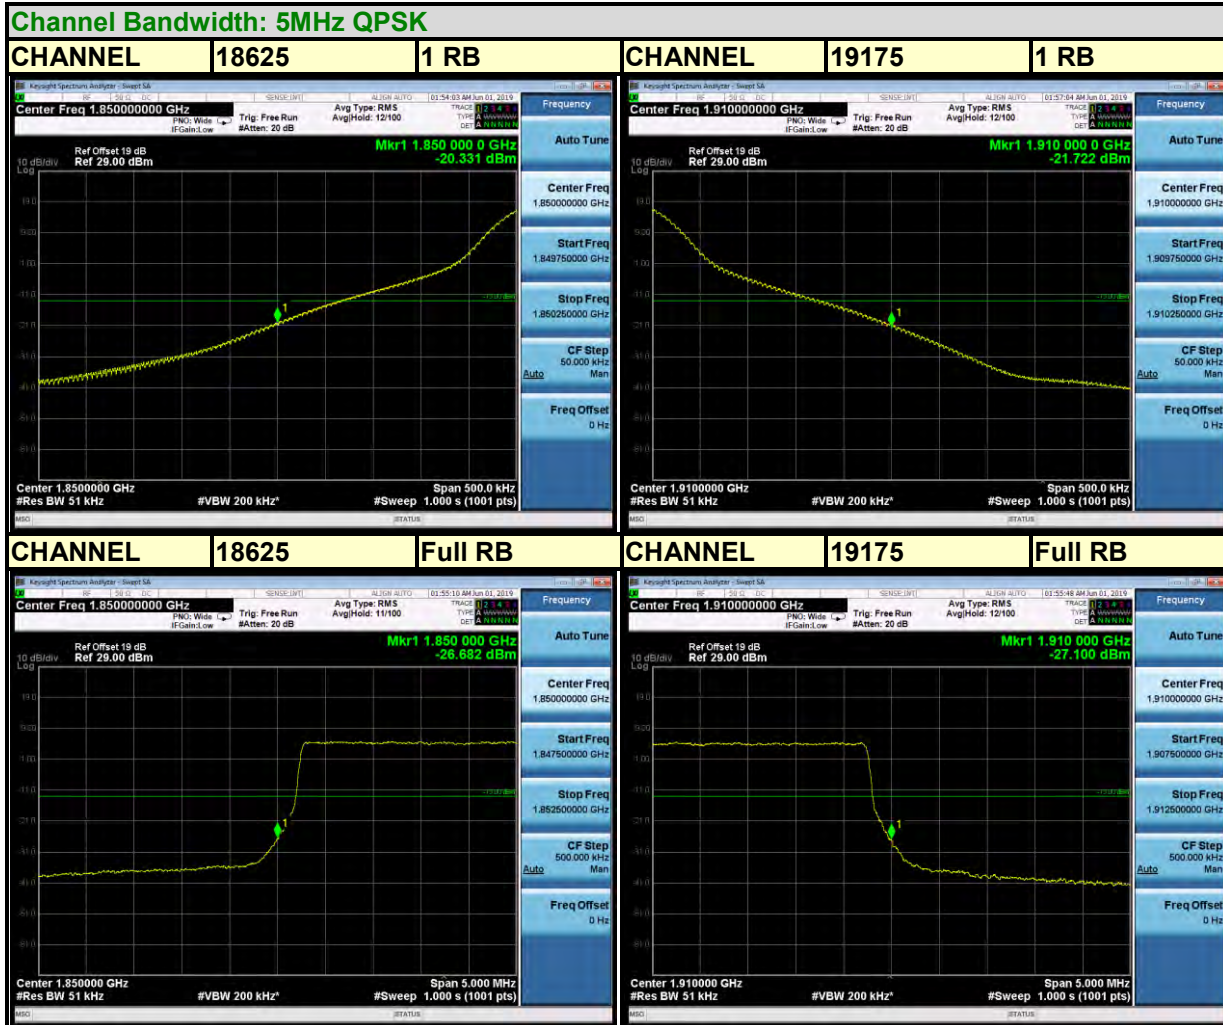



BUREAU VERITAS

Test Report No.: RF190517W003-4

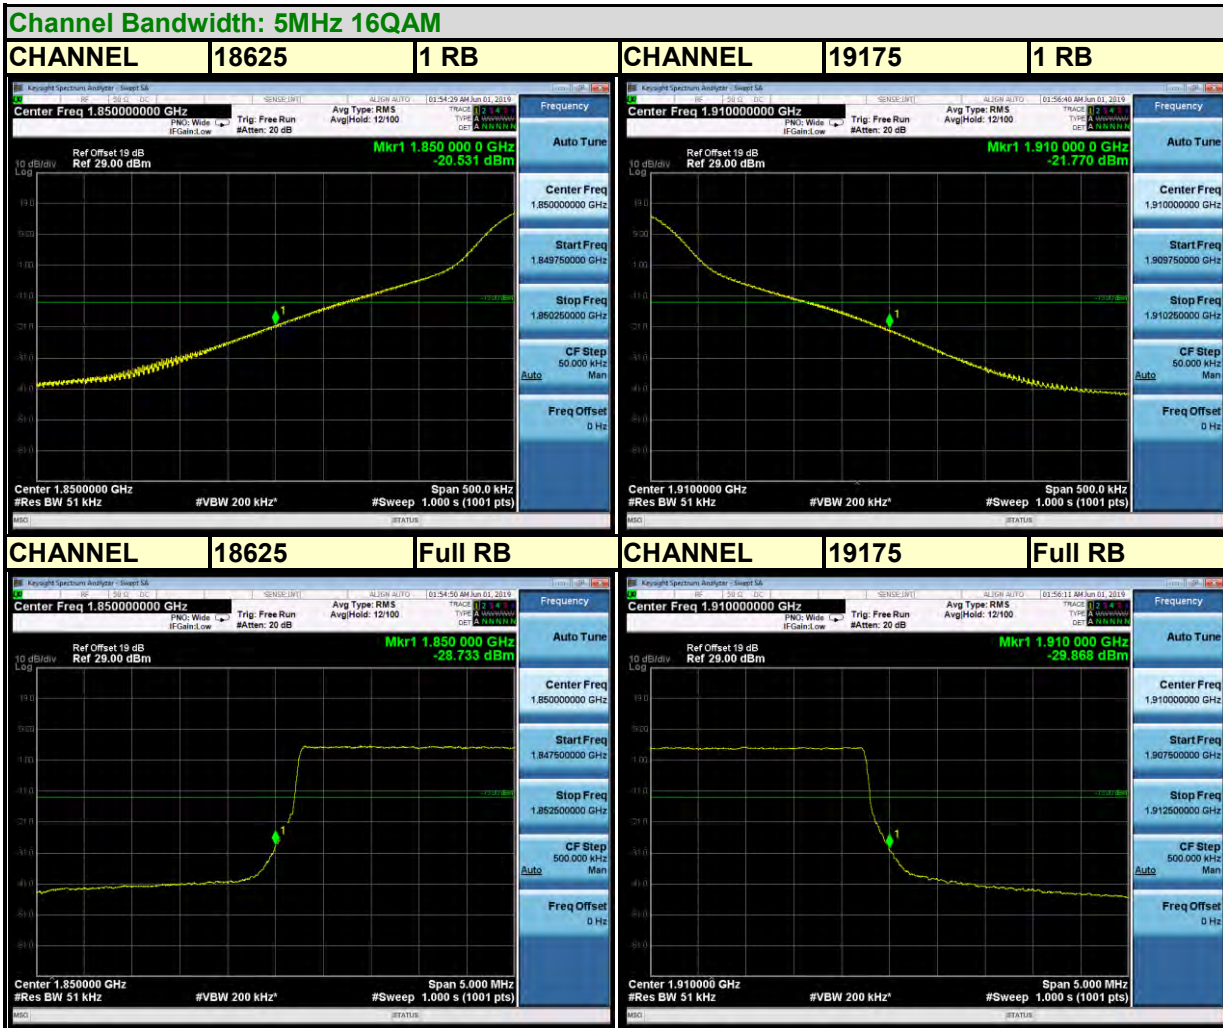




BUREAU VERITAS

Test Report No.: RF190517W003-4

LTE BAND 2

Channel Bandwidth: 10MHz QPSK


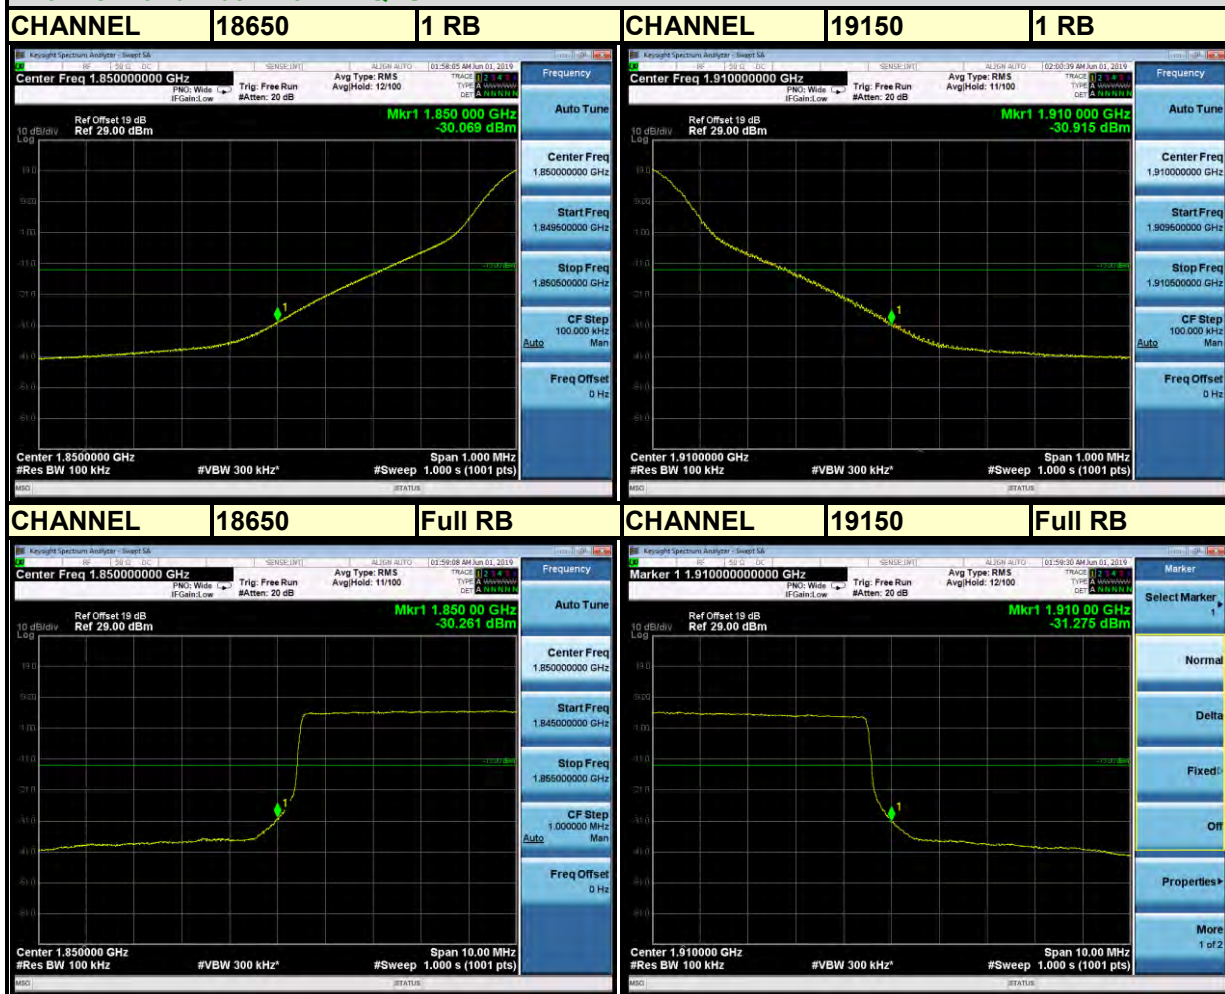




BUREAU VERITAS


Test Report No.: RF190517W003-4

Channel Bandwidth: 10MHz 16QAM

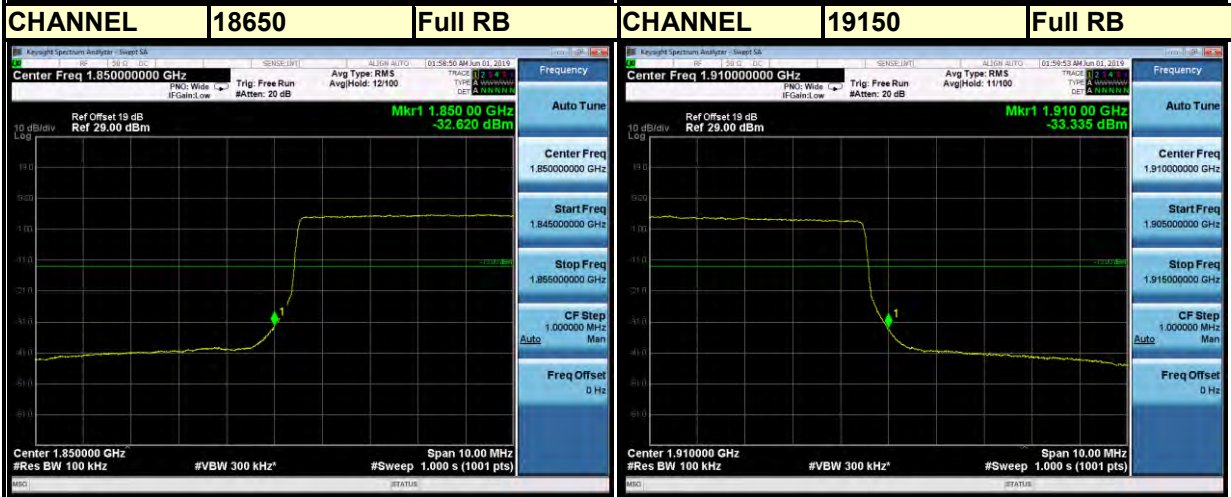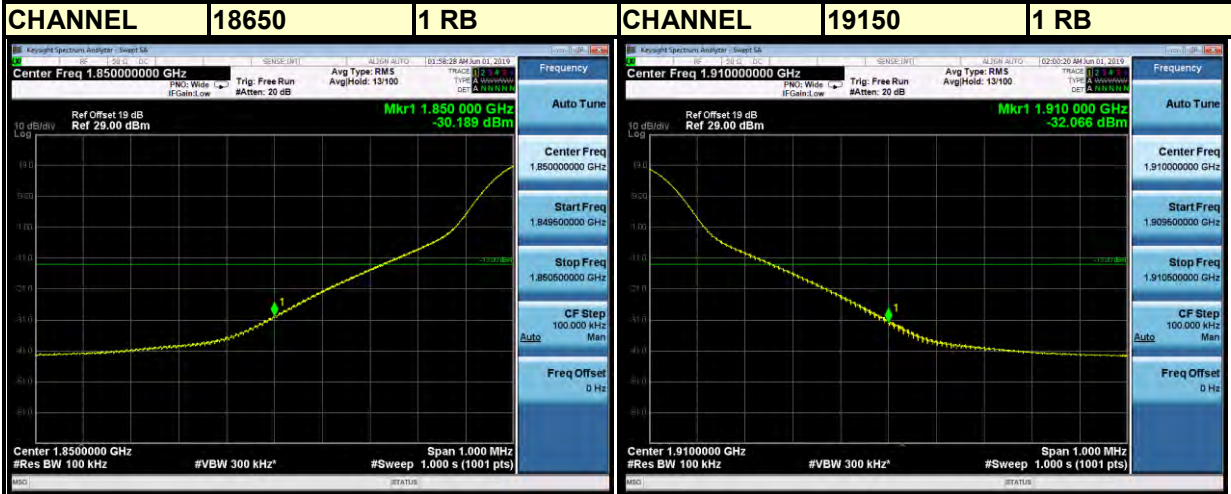




LTE BAND 2

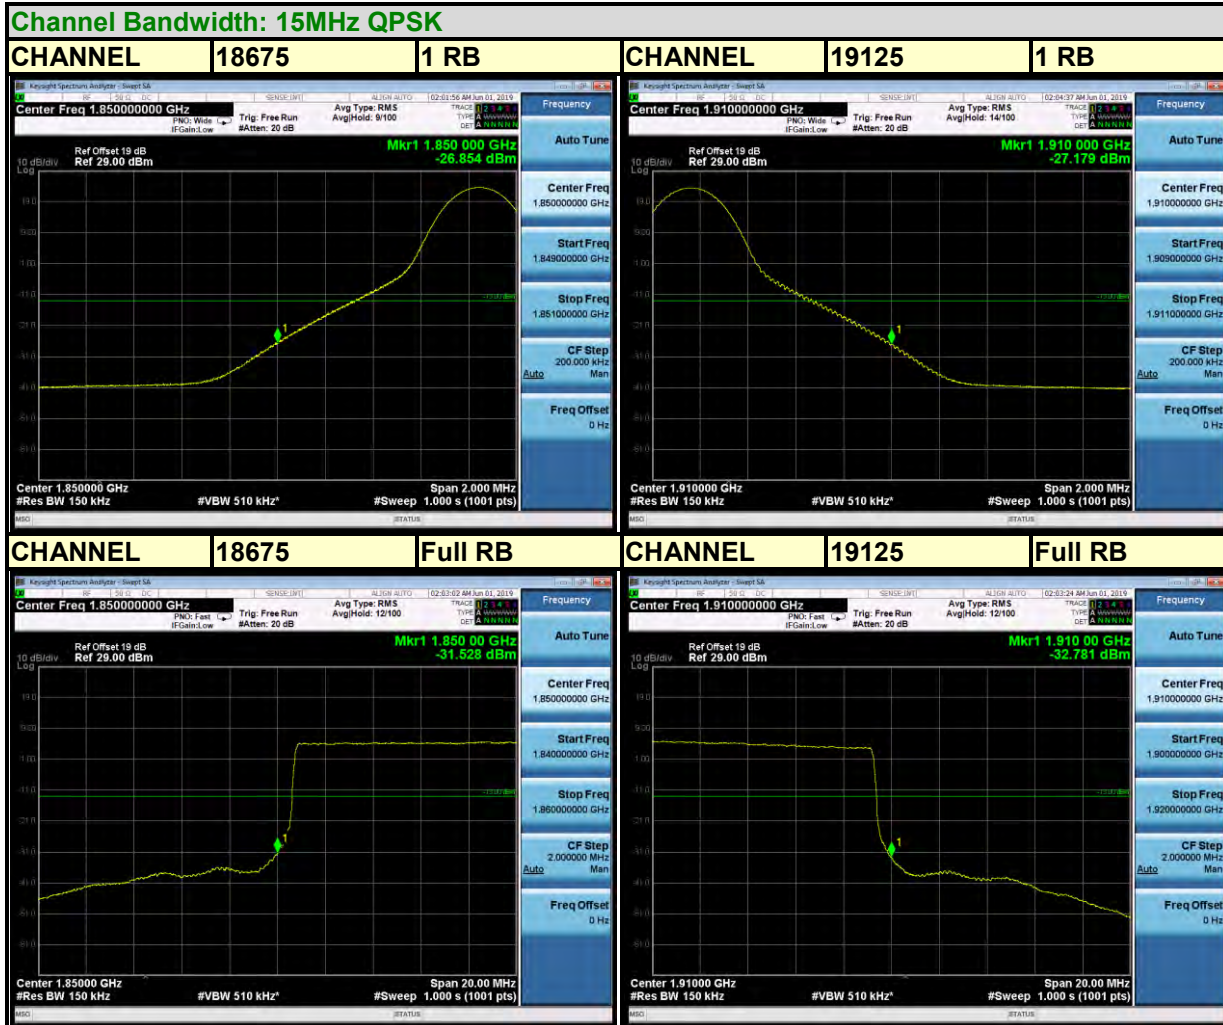




BUREAU VERITAS

Test Report No.: RF190517W003-4

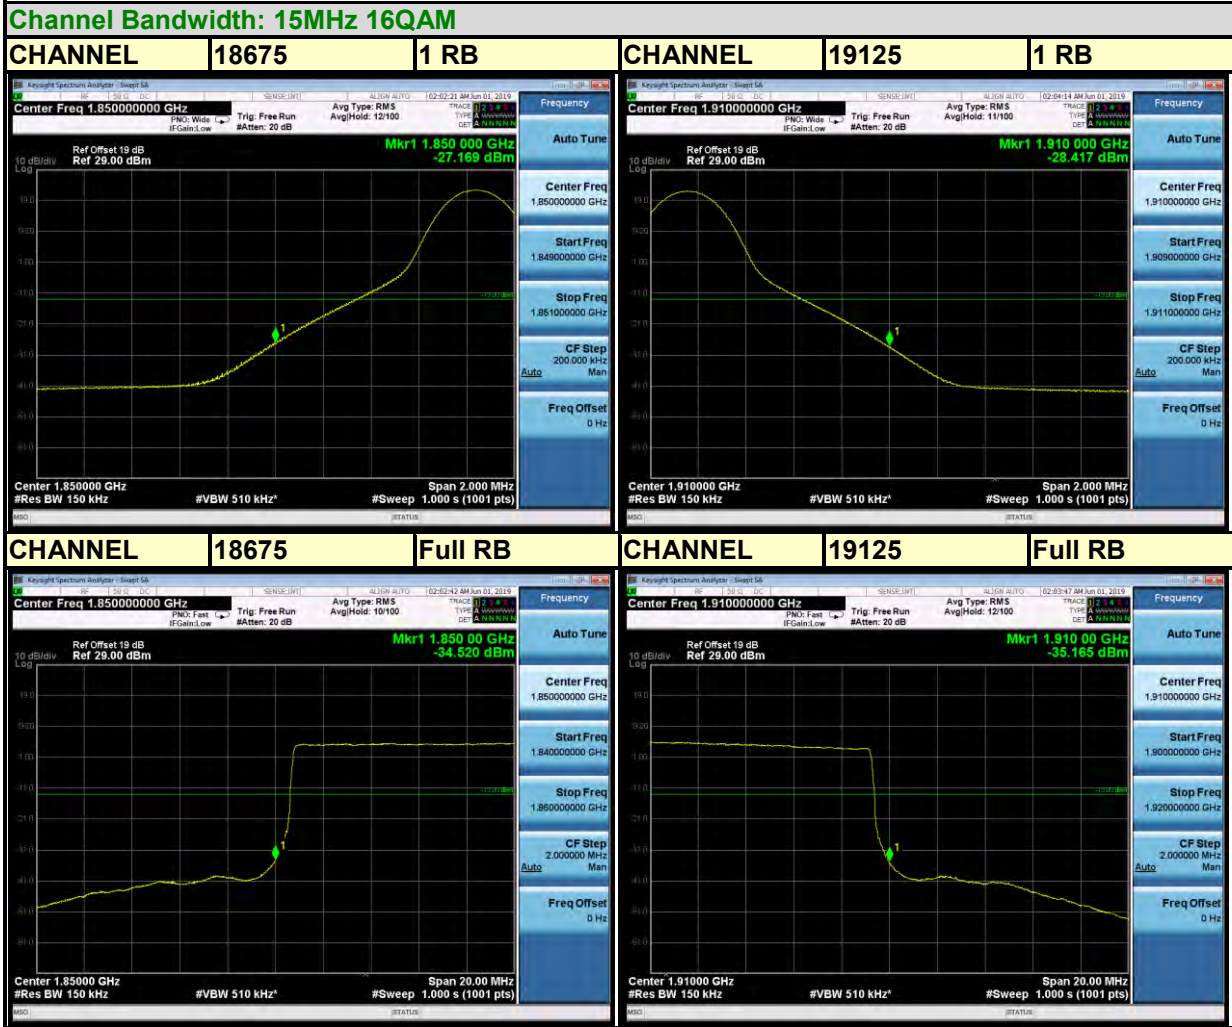



LTE BAND 2


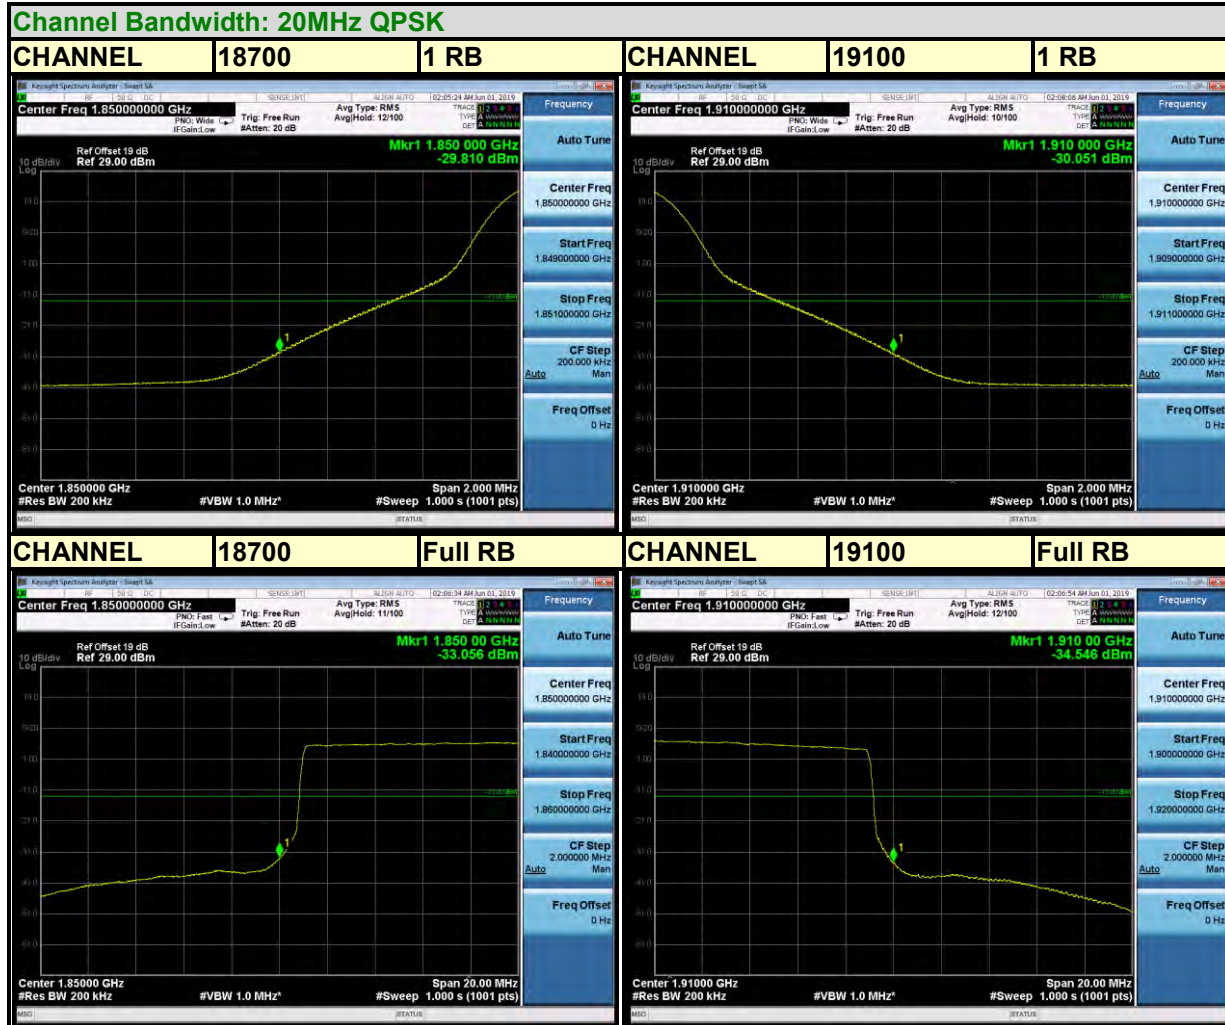




BUREAU VERITAS

Test Report No.: RF190517W003-4



Channel Bandwidth: 20MHz 16QAM

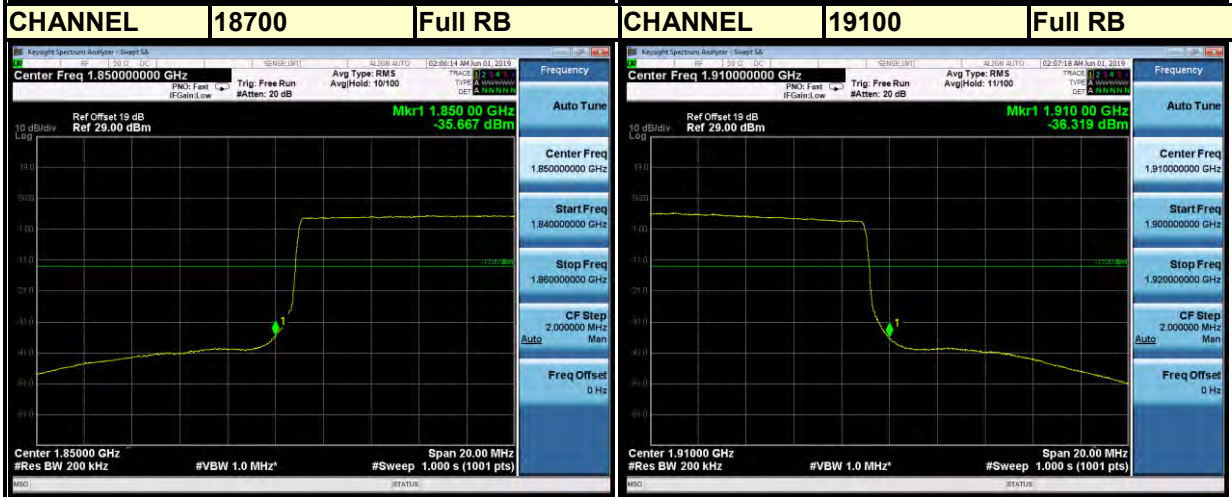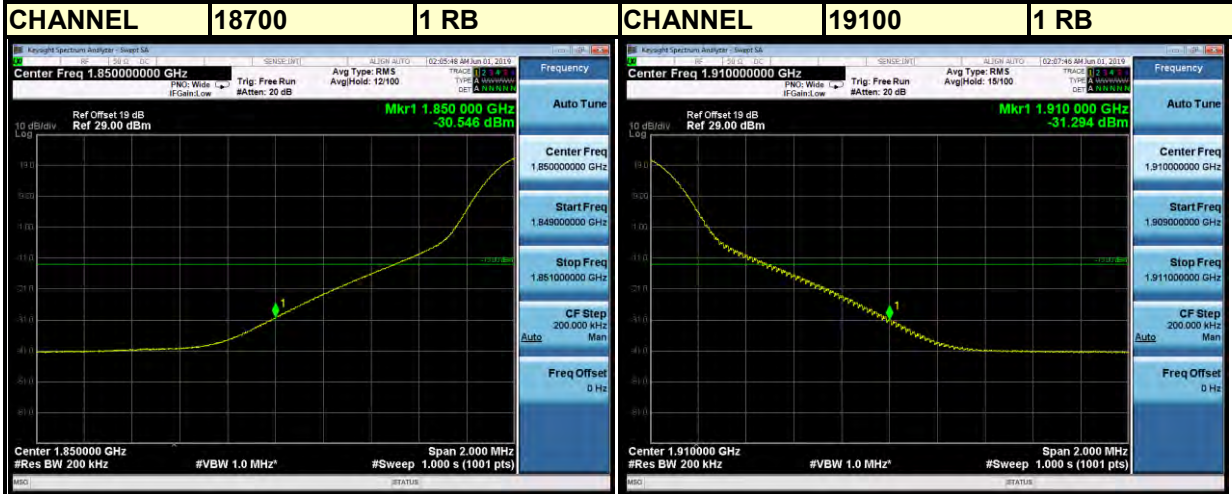



LTE BAND 25


Channel Bandwidth: 1.4MHz QPSK

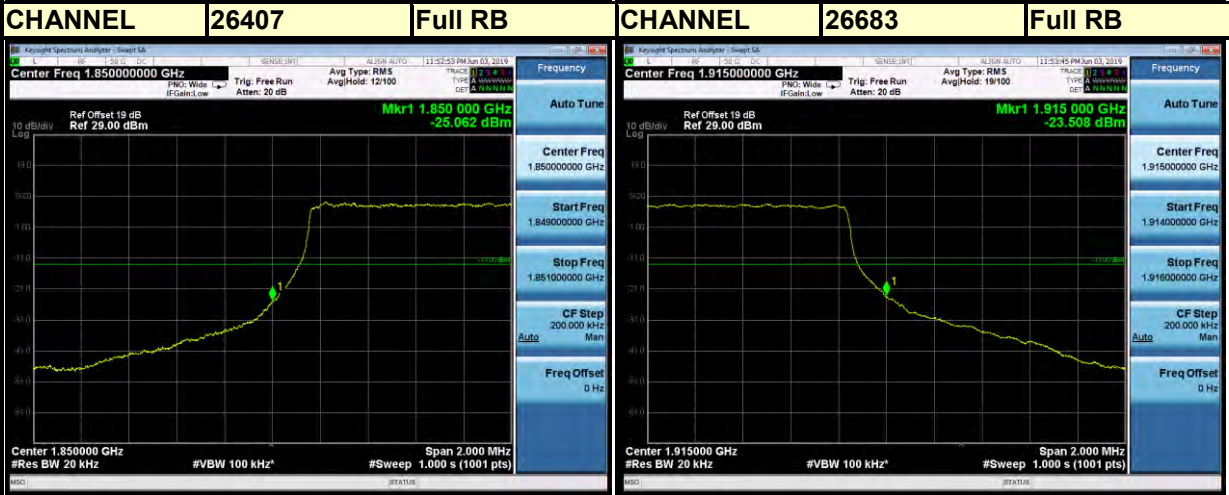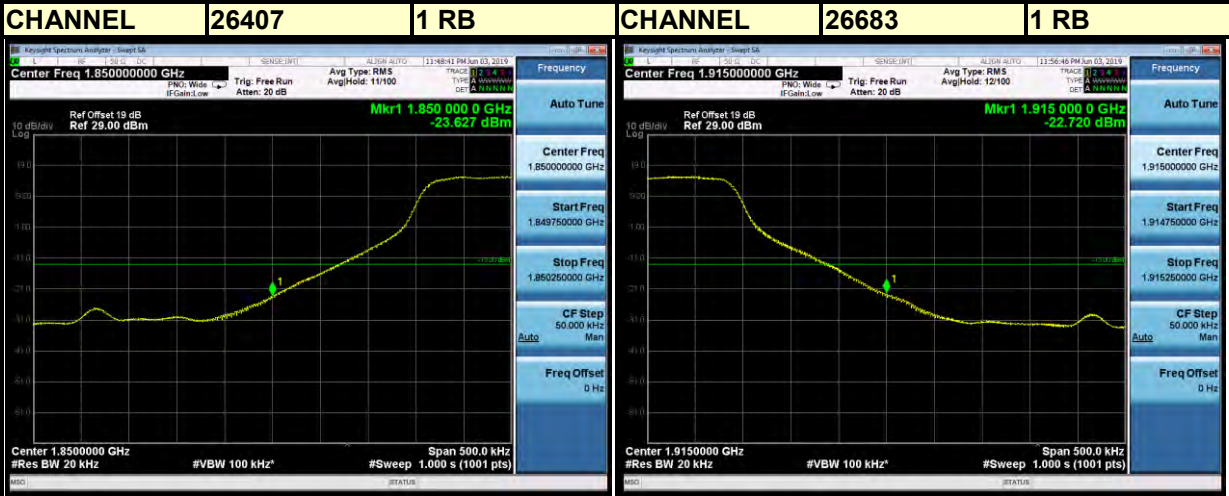



BUREAU VERITAS

Test Report No.: RF190517W003-4

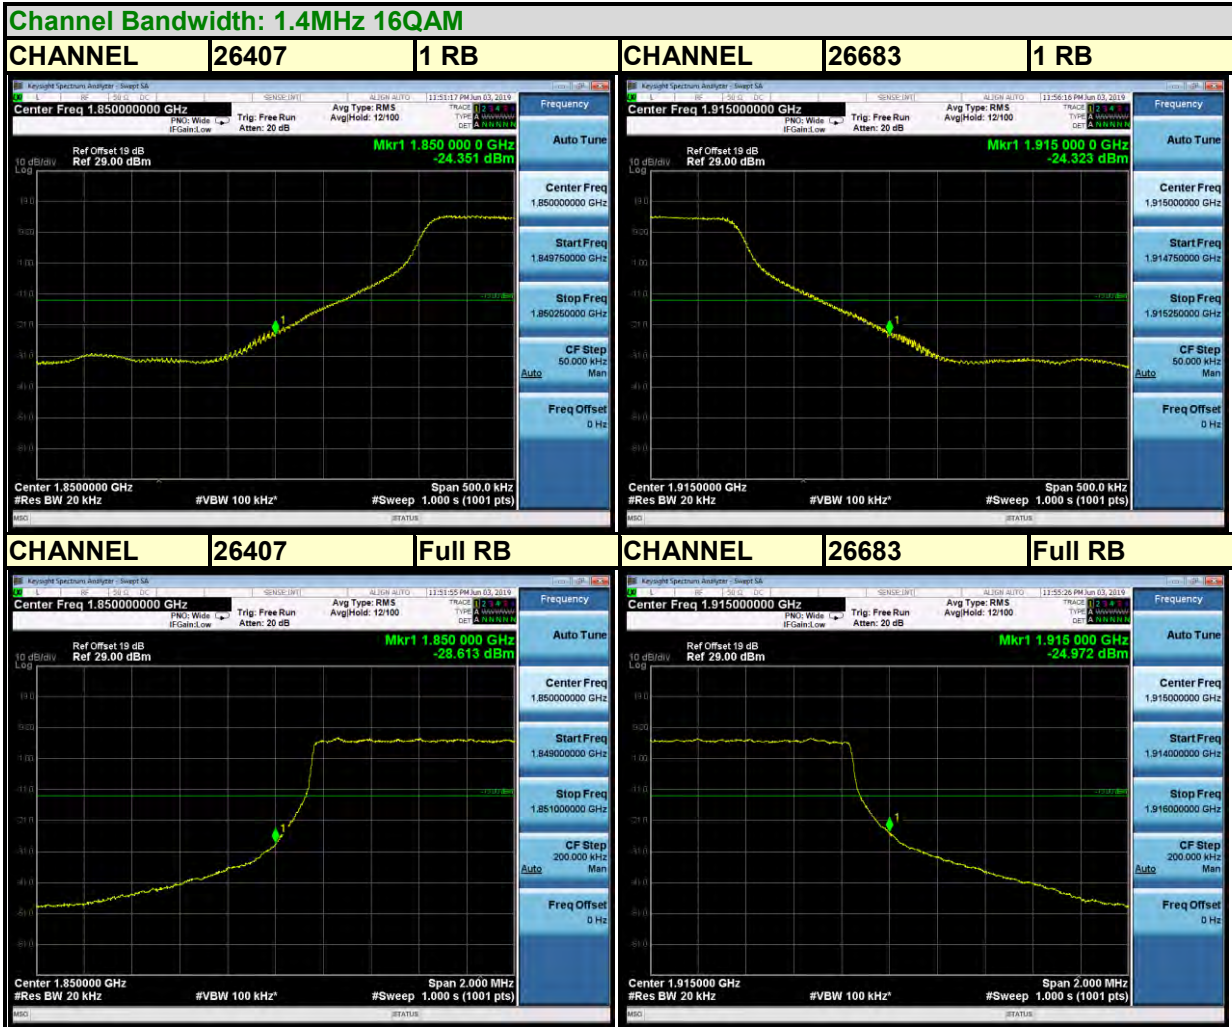




BUREAU VERITAS

Test Report No.: RF190517W003-4

LTE BAND 25

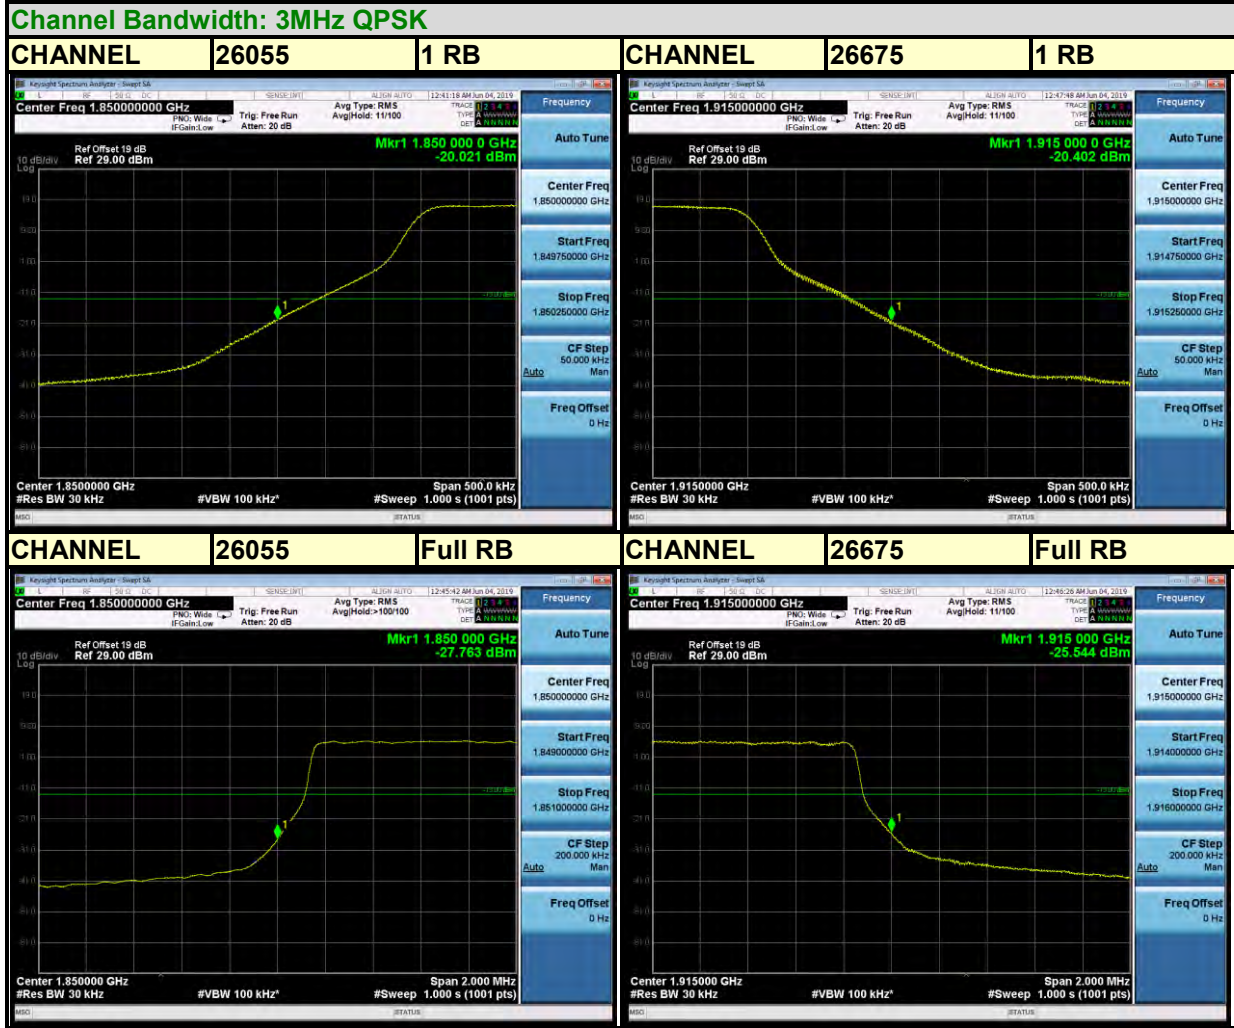




BUREAU VERITAS


Test Report No.: RF190517W003-4

Channel Bandwidth: 3MHz 16QAM

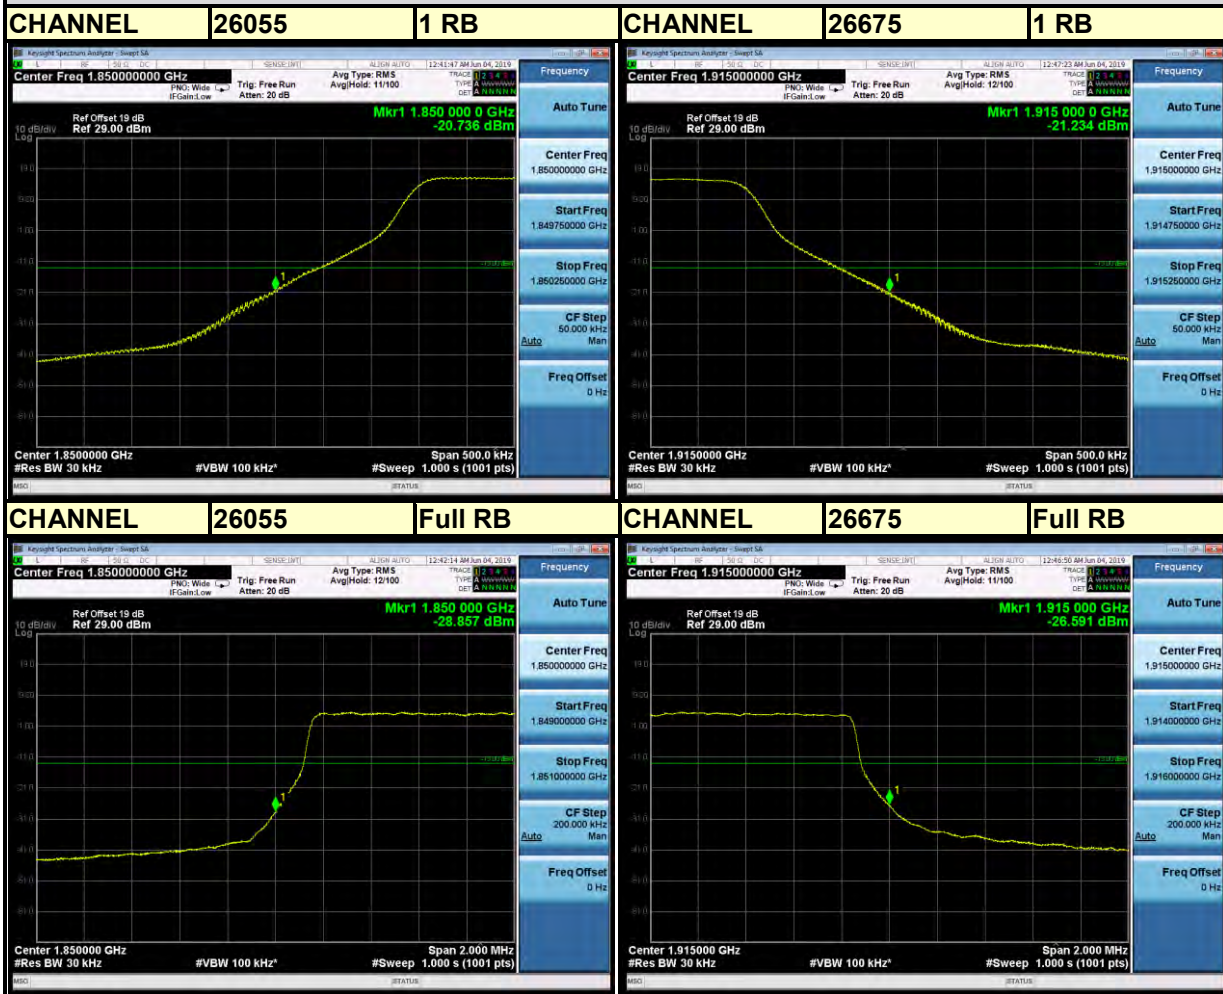



LTE BAND 25


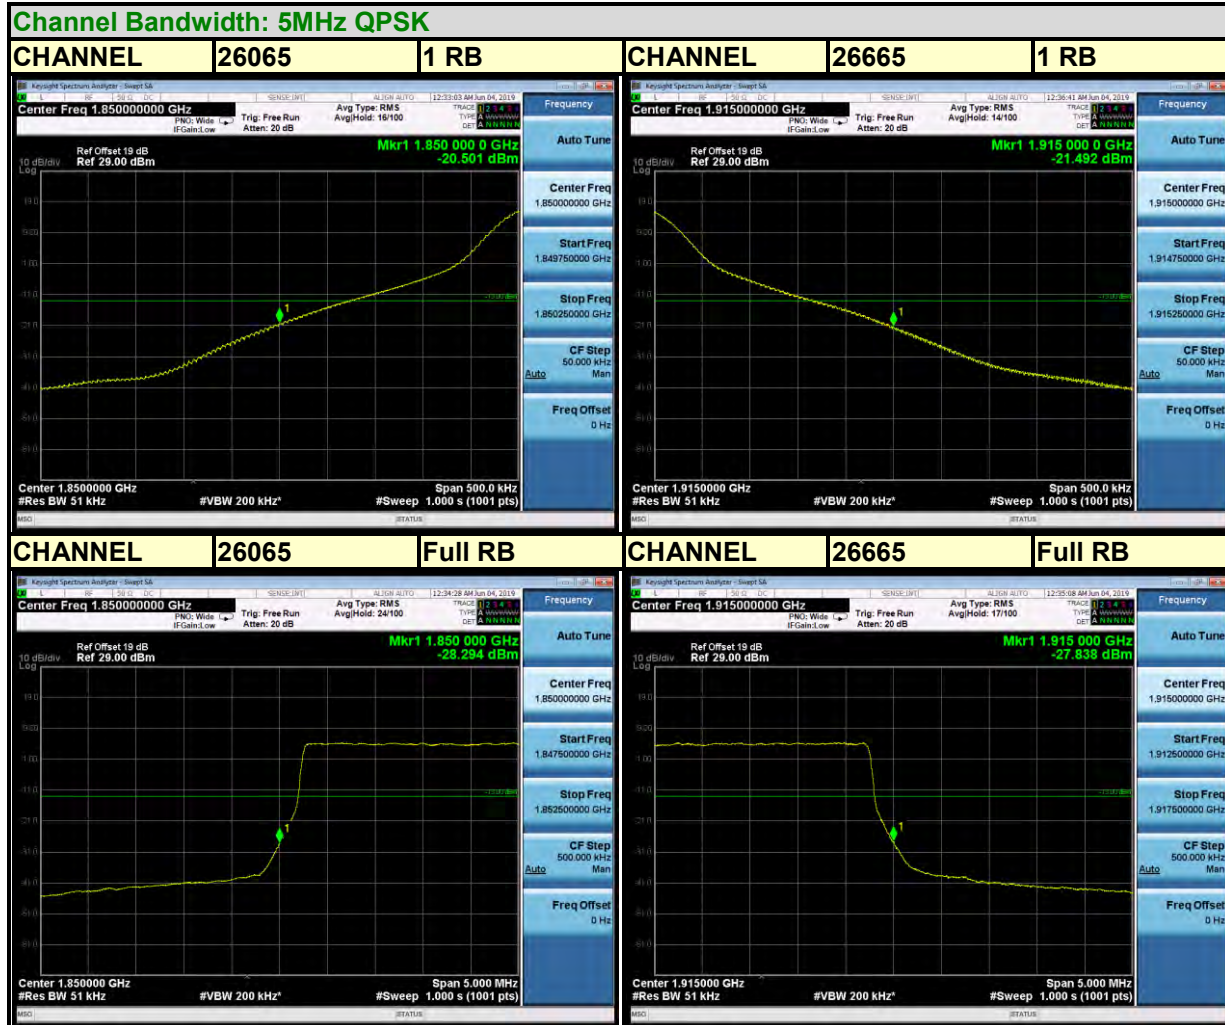




BUREAU VERITAS


Test Report No.: RF190517W003-4

Channel Bandwidth: 5MHz 16QAM

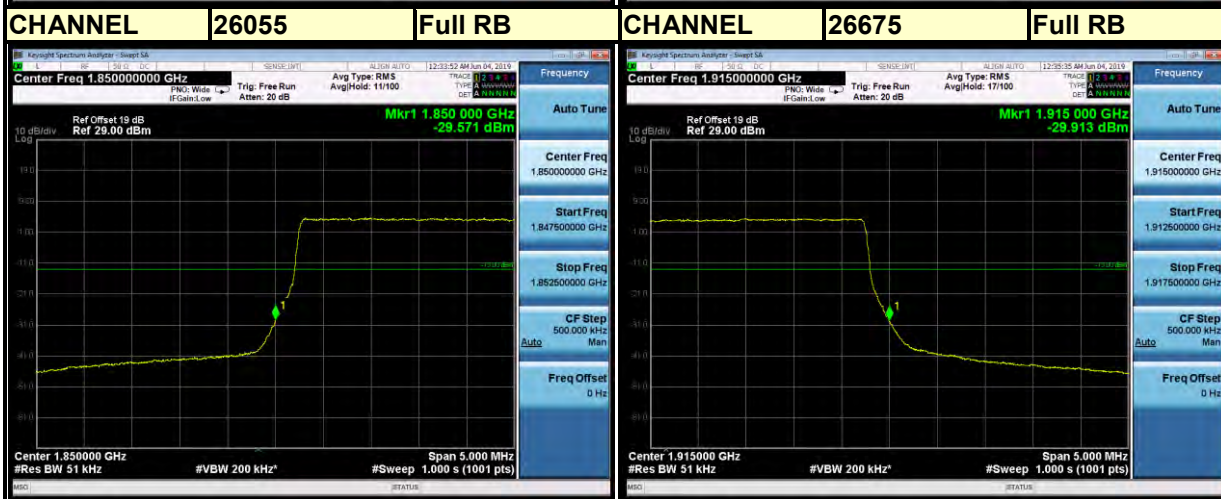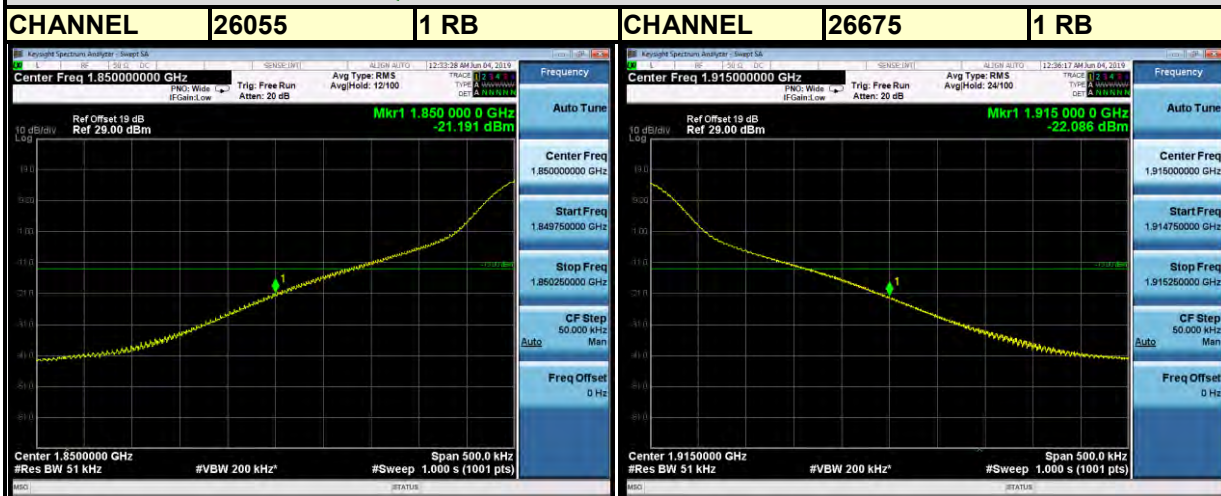




LTE BAND 25

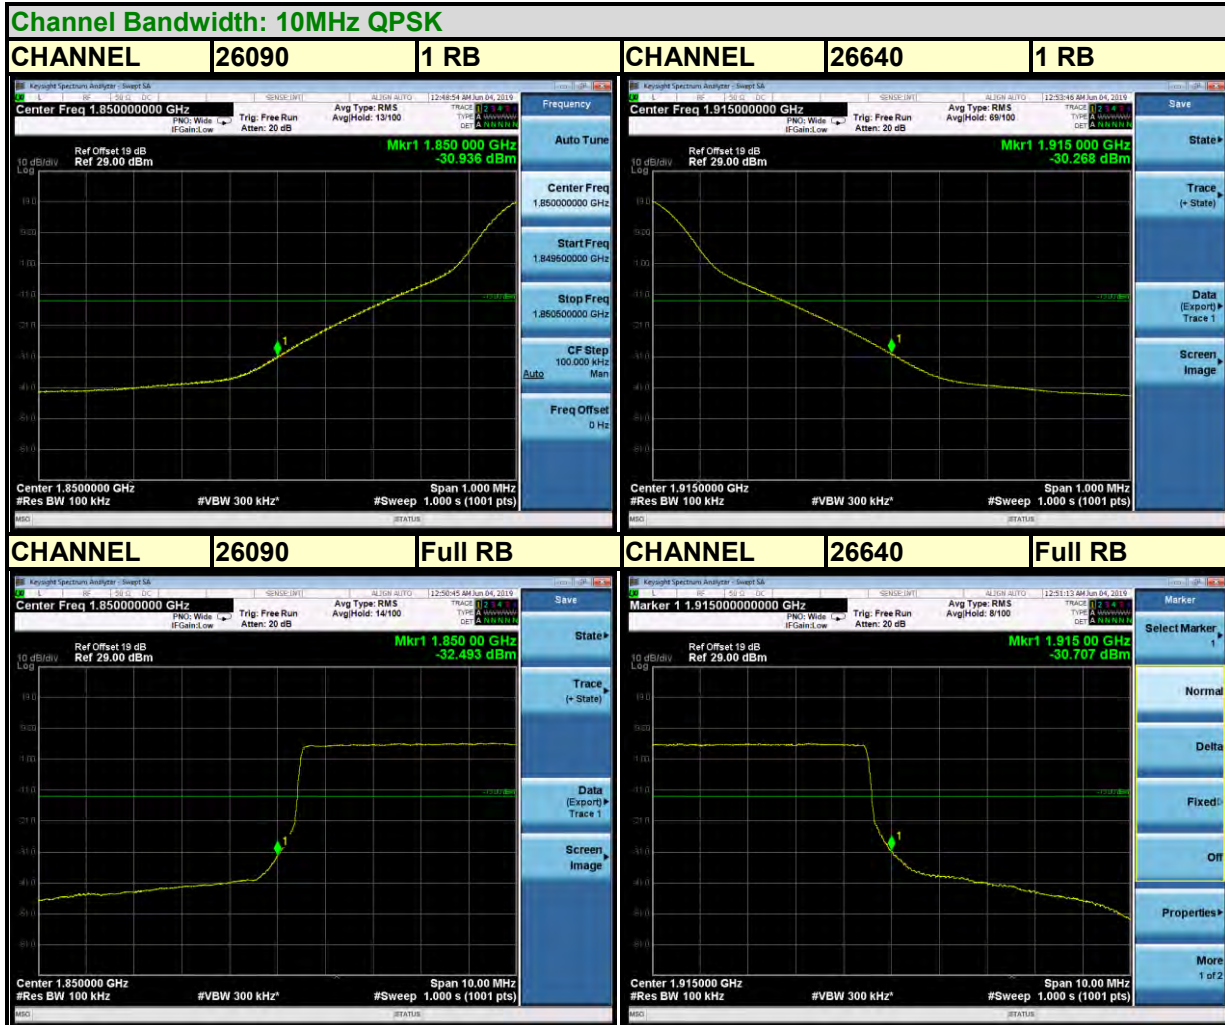




BUREAU VERITAS

Test Report No.: RF190517W003-4

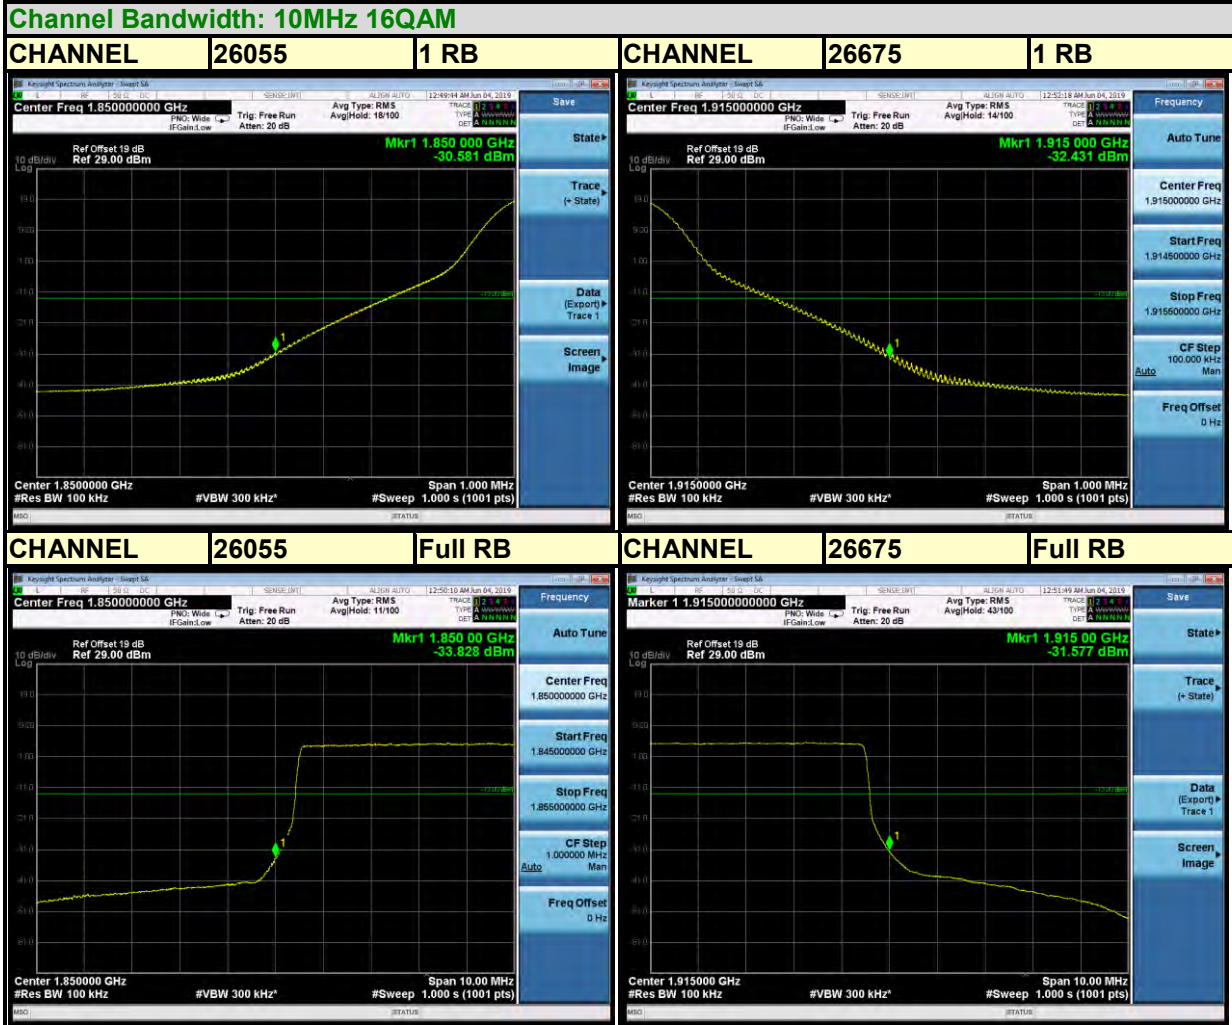




LTE BAND 25

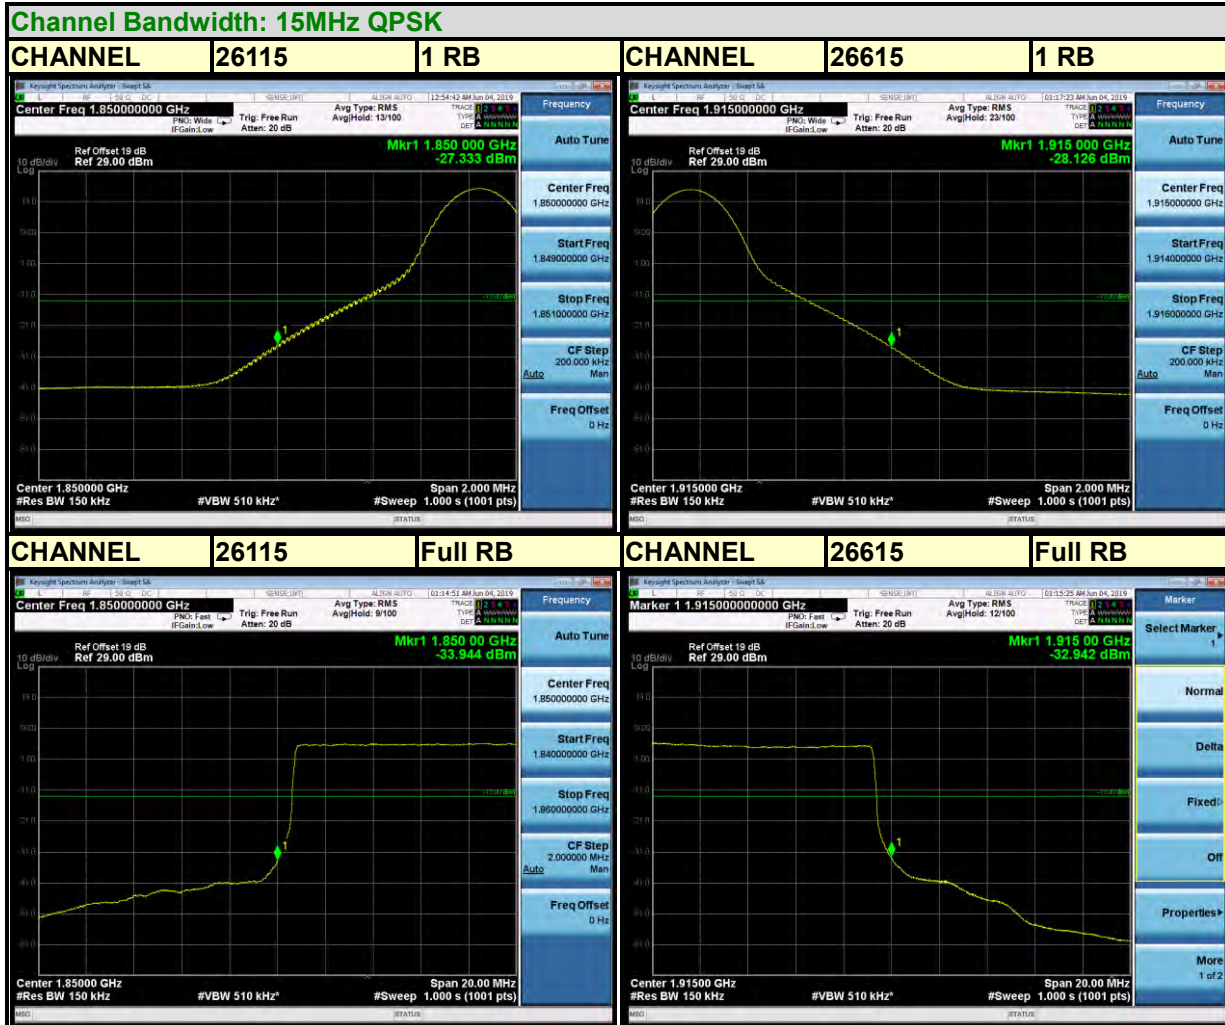




BUREAU VERITAS

Test Report No.: RF190517W003-4

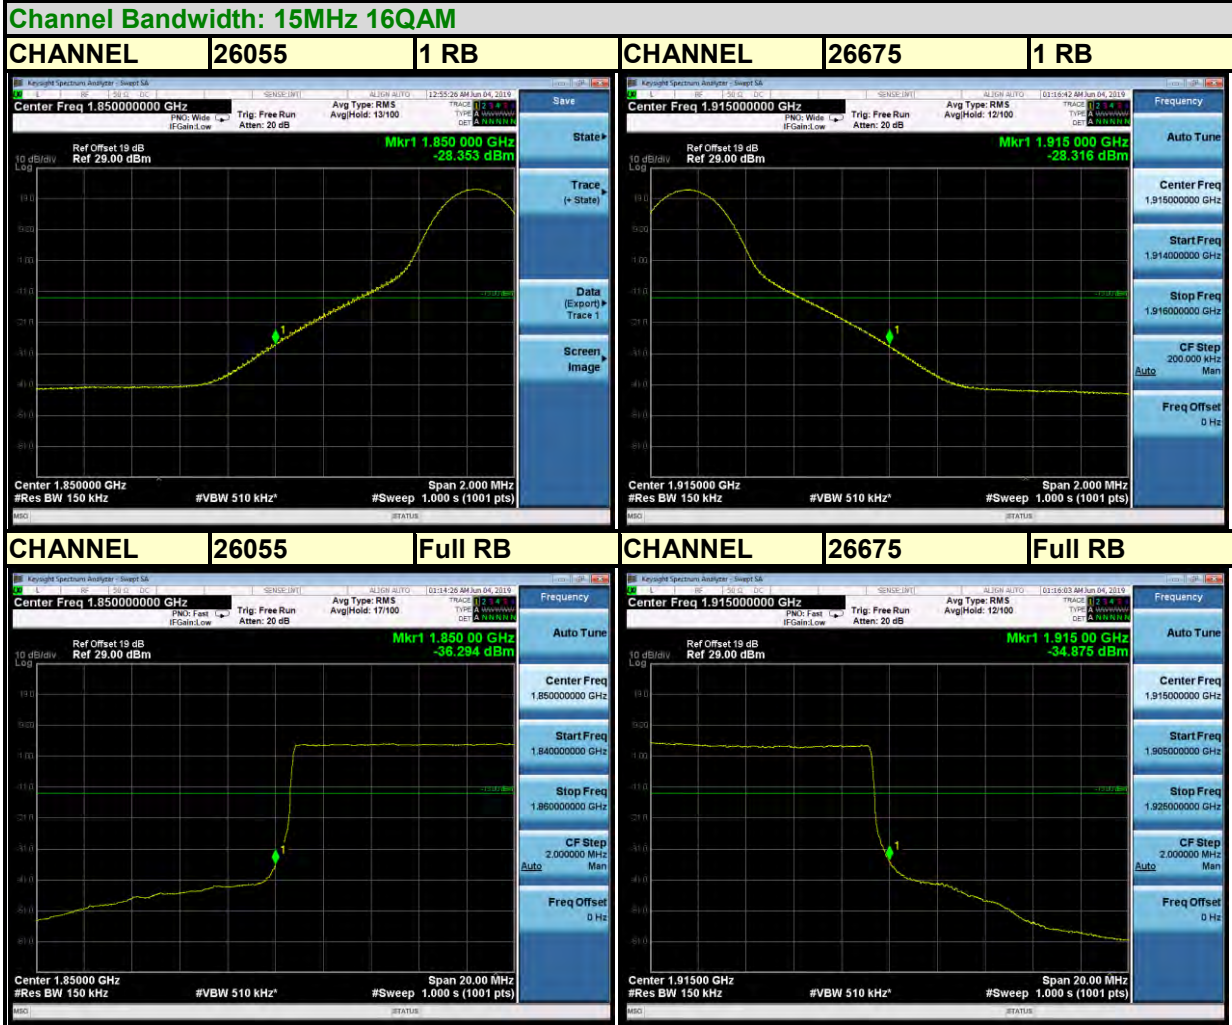




LTE BAND 25

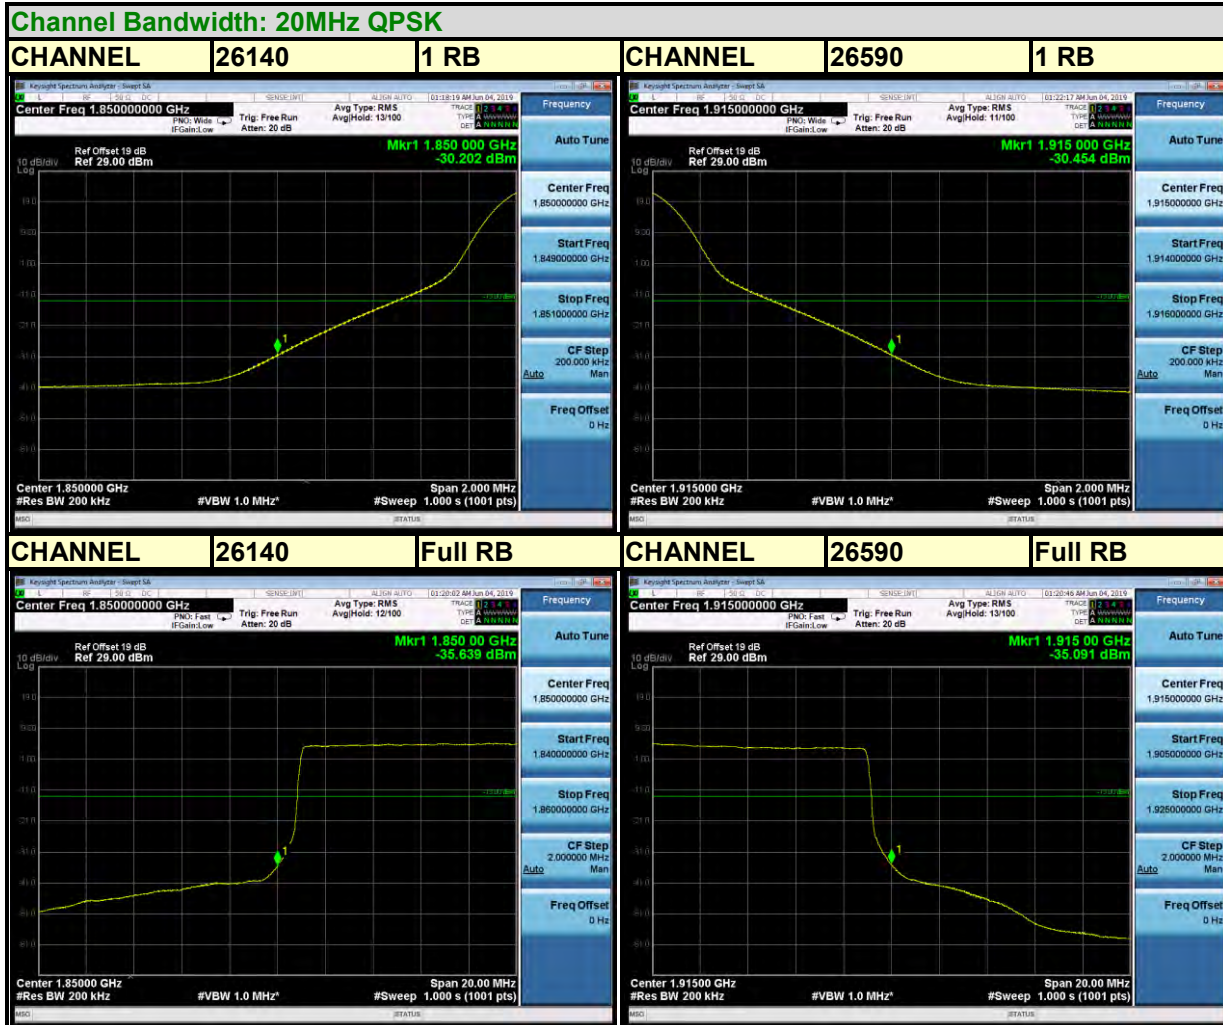



BUREAU VERITAS

Test Report No.: RF190517W003-4

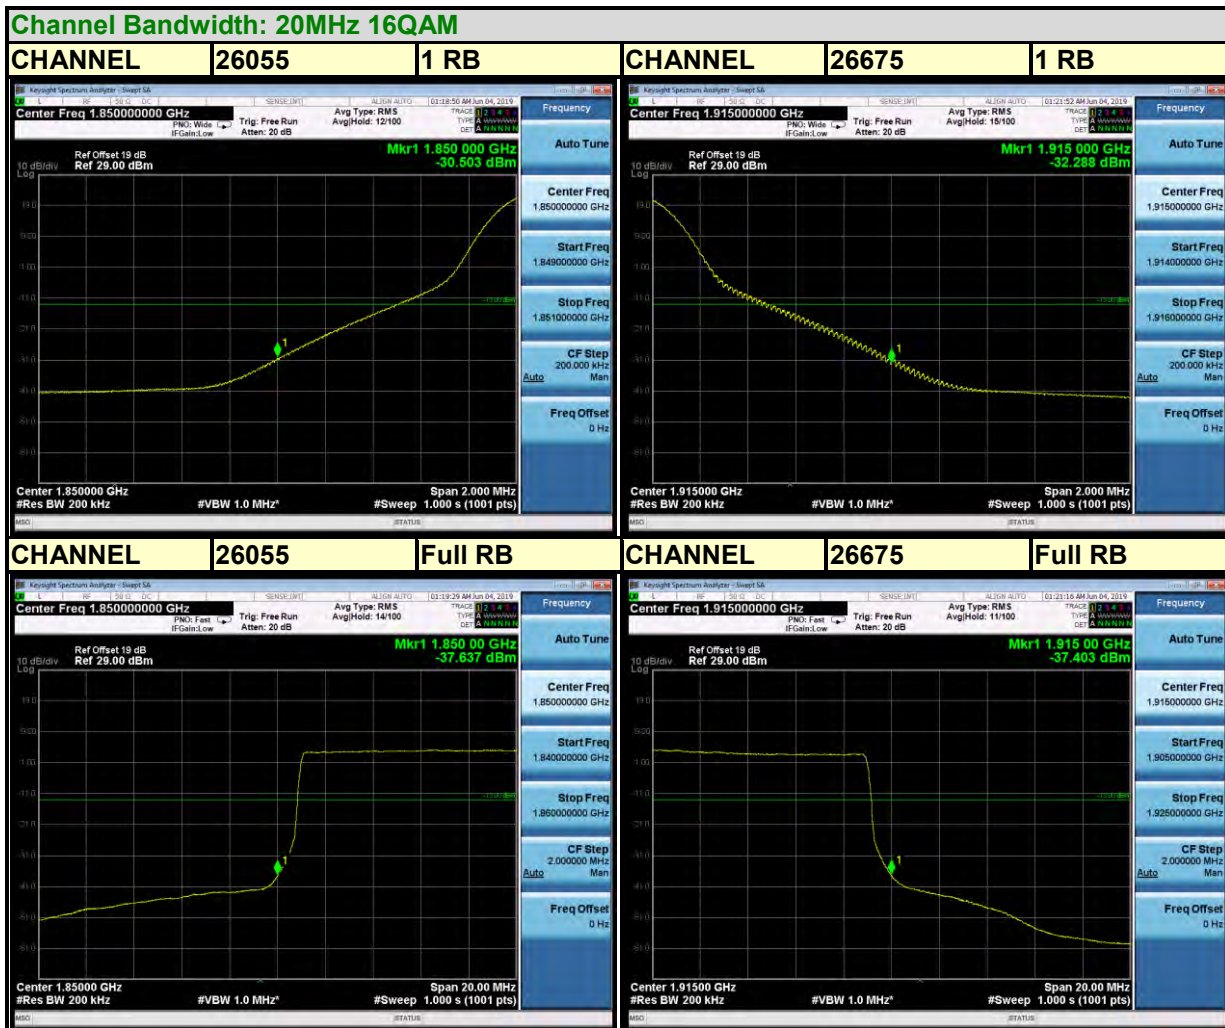



3.5 CONDUCTED SPURIOUS EMISSIONS


3.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm .

3.5.2 TEST PROCEDURE

- a. The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range.
- b. Measuring frequency range is from 9 kHz to 19.1GHz. 10dB attenuation pad is connected with spectrum. RBW=1MHz and VBW=3MHz is used for conducted emission measurement.

3.5.3 TEST SETUP

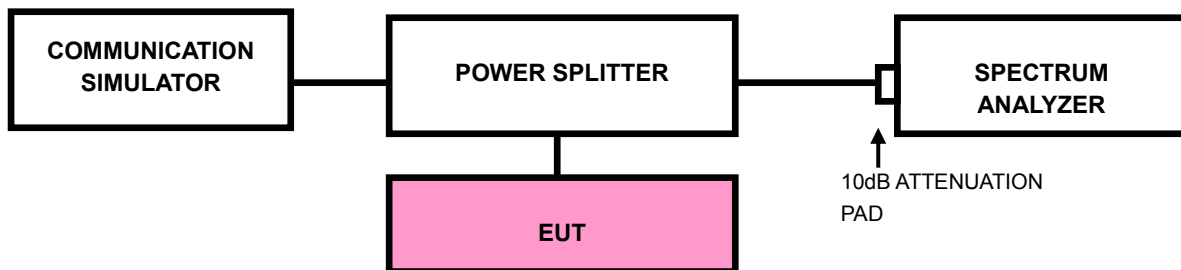



3.5.4 TEST RESULTS






BUREAU VERITAS

Test Report No.: RF190517W003-4


LTE BAND 2

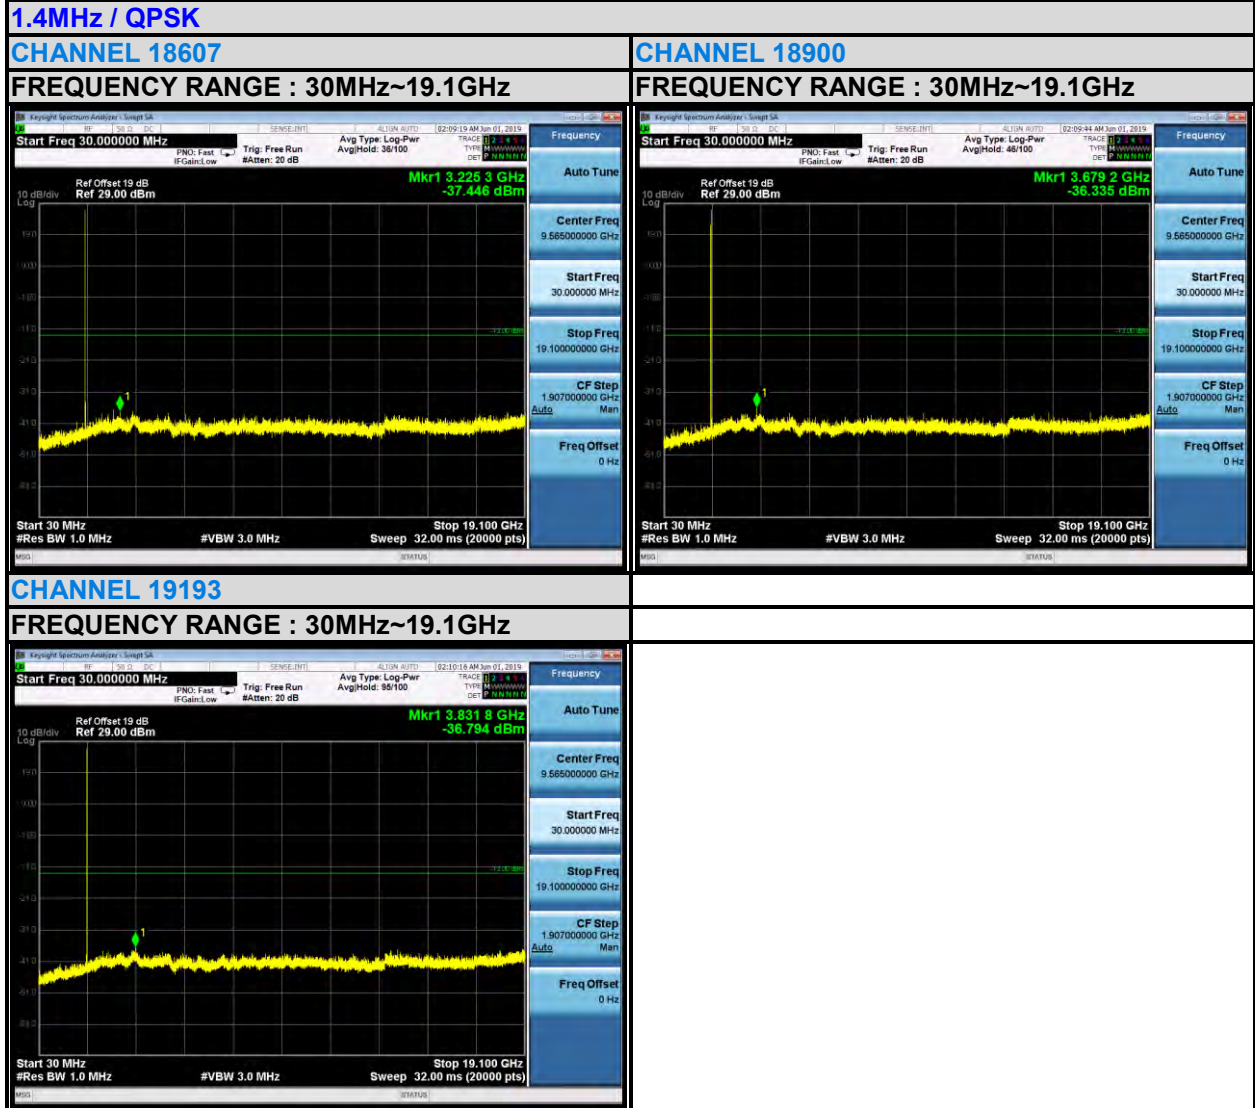



BUREAU VERITAS

Test Report No.: RF190517W003-4

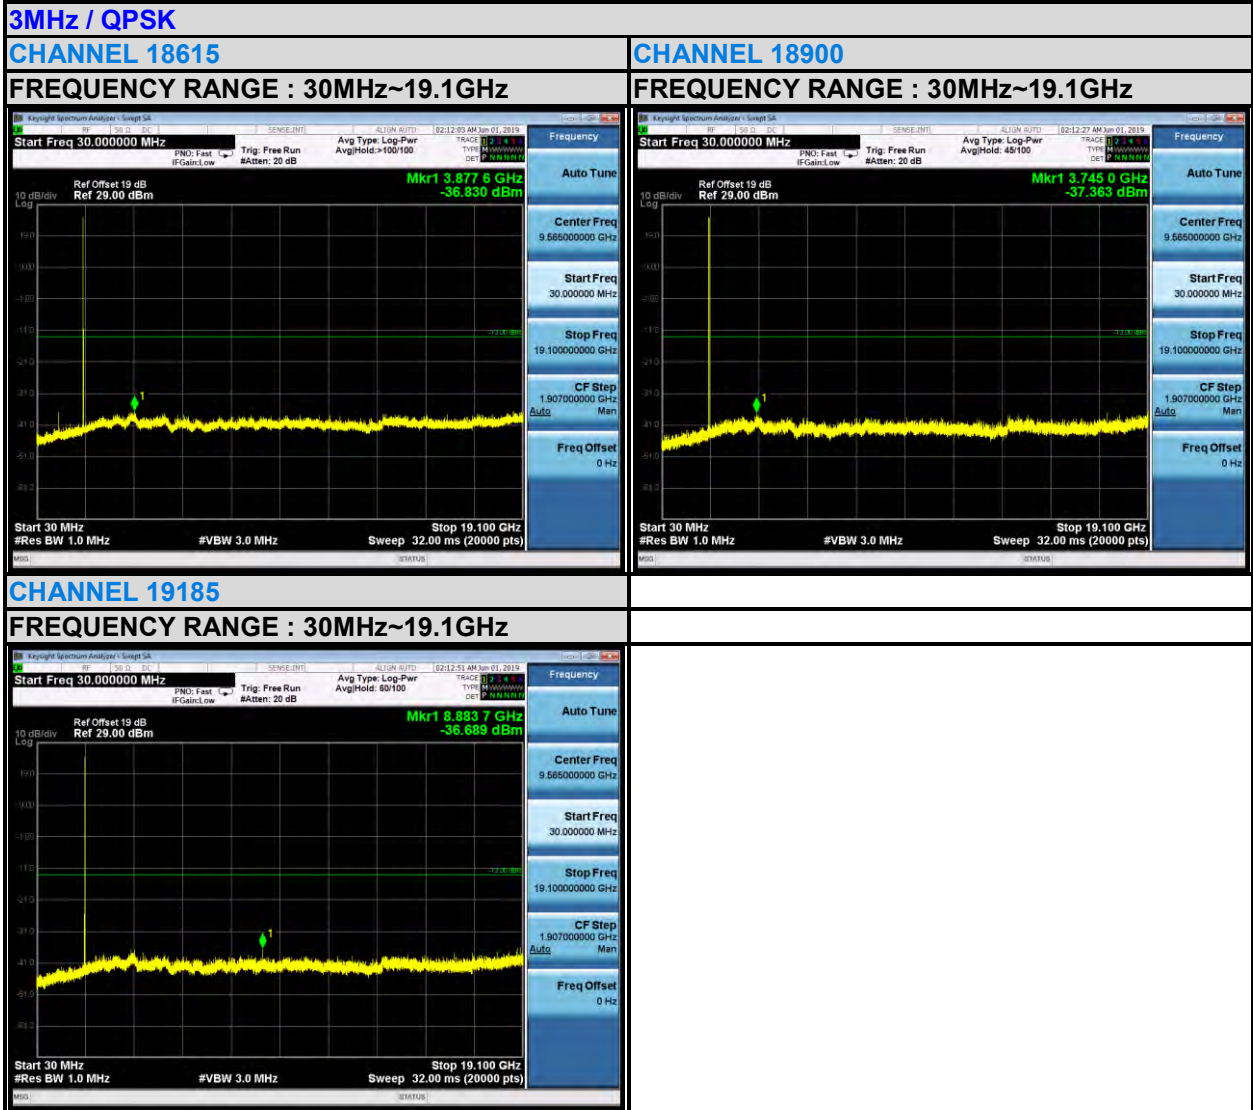




BUREAU VERITAS

Test Report No.: RF190517W003-4

5MHz / QPSK


CHANNEL 18625

FREQUENCY RANGE : 30MHz~19.1GHz

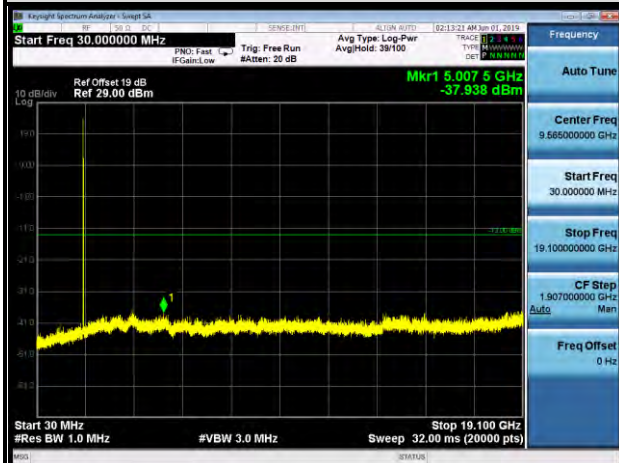


CHANNEL 18900

FREQUENCY RANGE : 30MHz~19.1GHz

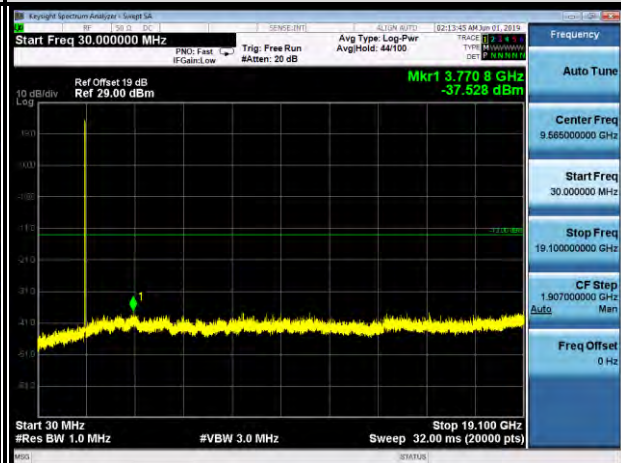

CHANNEL 19175


FREQUENCY RANGE : 30MHz~19.1GHz

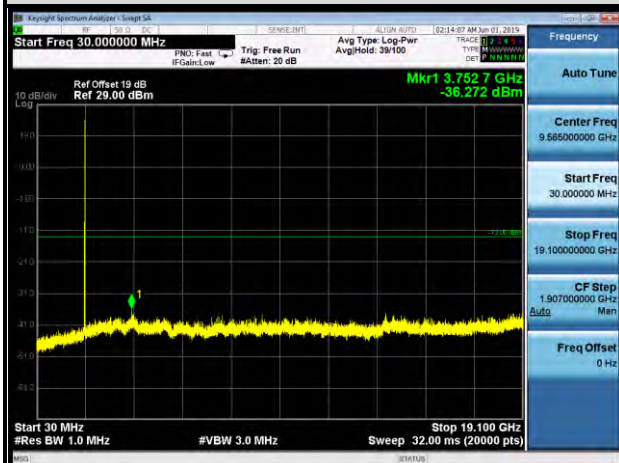



BUREAU VERITAS

Test Report No.: RF190517W003-4

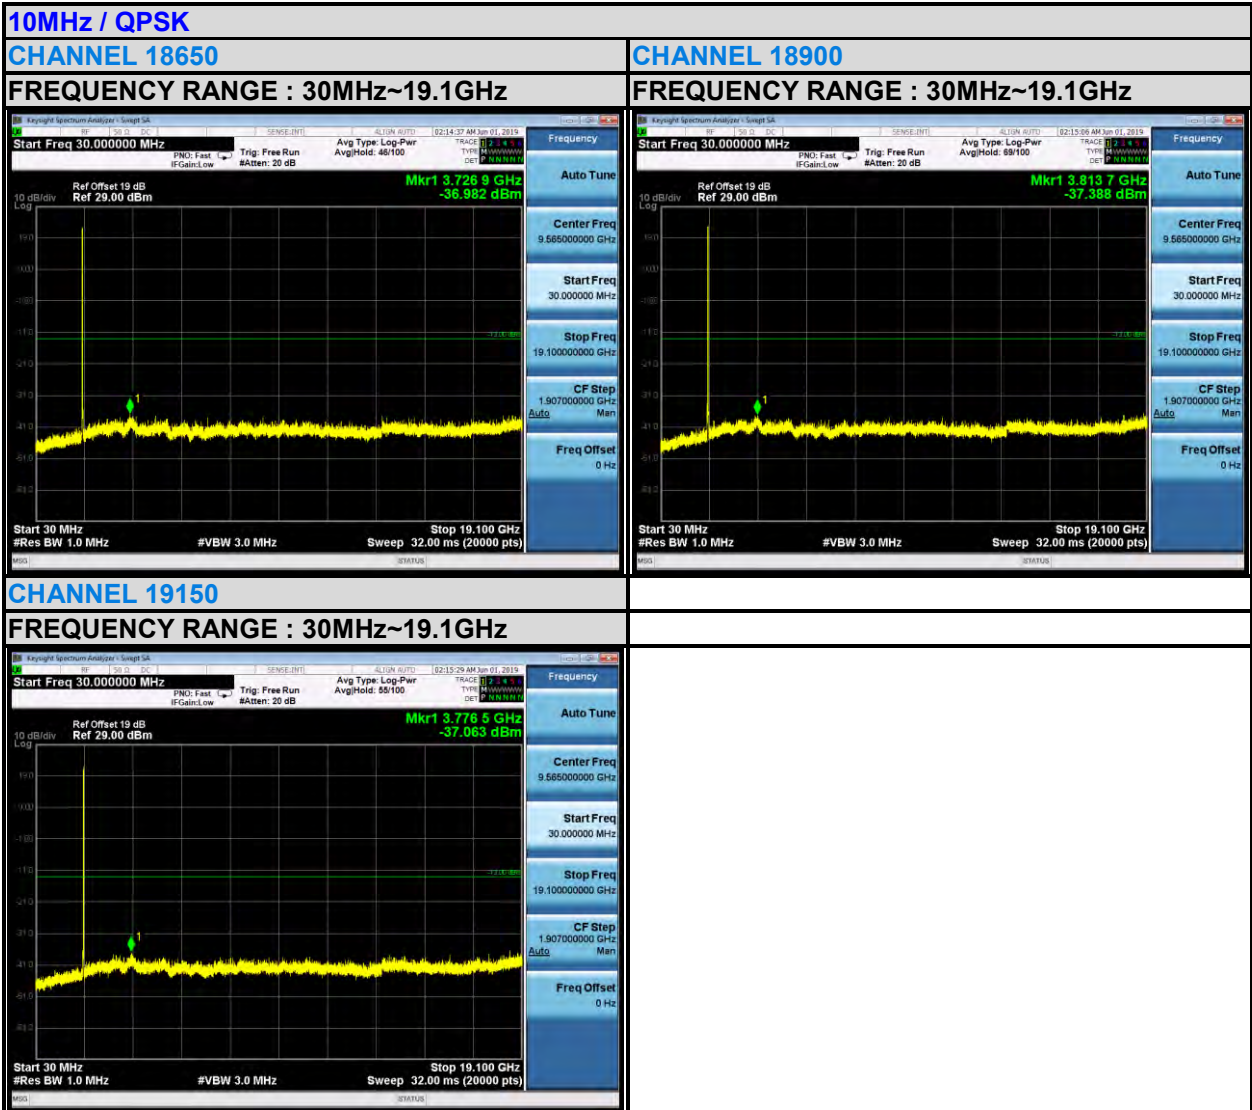



BUREAU VERITAS


Test Report No.: RF190517W003-4





BUREAU VERITAS

Test Report No.: RF190517W003-4

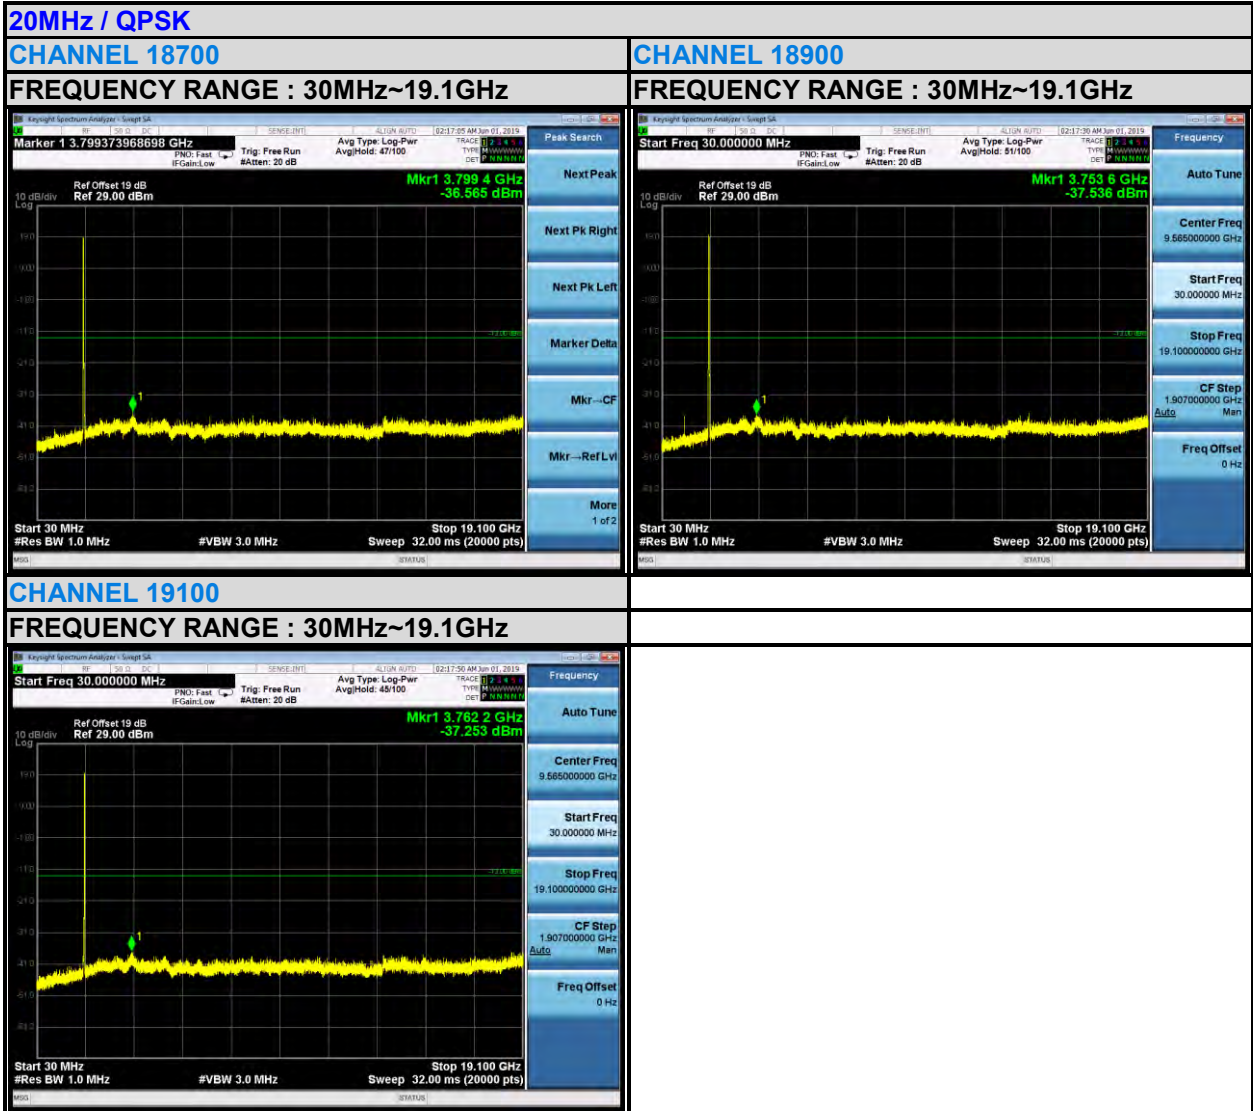




LTE BAND 25

1.4MHz / QPSK

CHANNEL 26047

FREQUENCY RANGE : 30MHz~19.15GHz

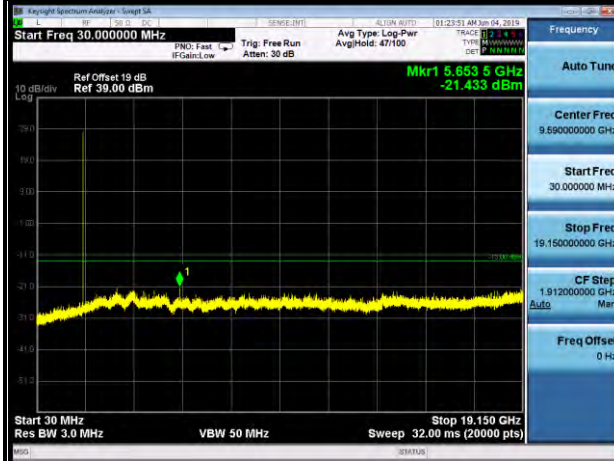


CHANNEL 26365

FREQUENCY RANGE : 30MHz~19.15GHz



CHANNEL 26683


FREQUENCY RANGE : 30MHz~19.15GHz

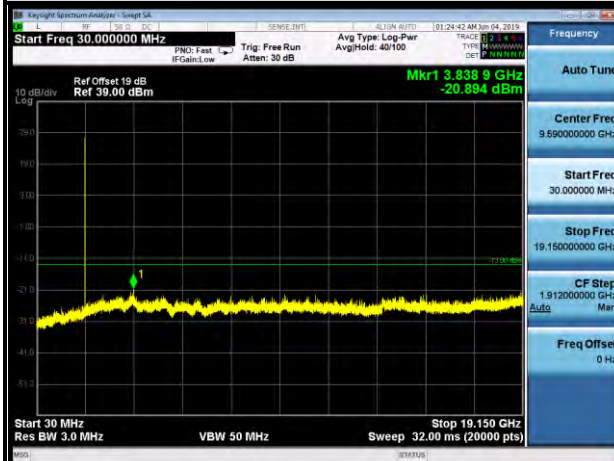



BUREAU VERITAS


Test Report No.: RF190517W003-4

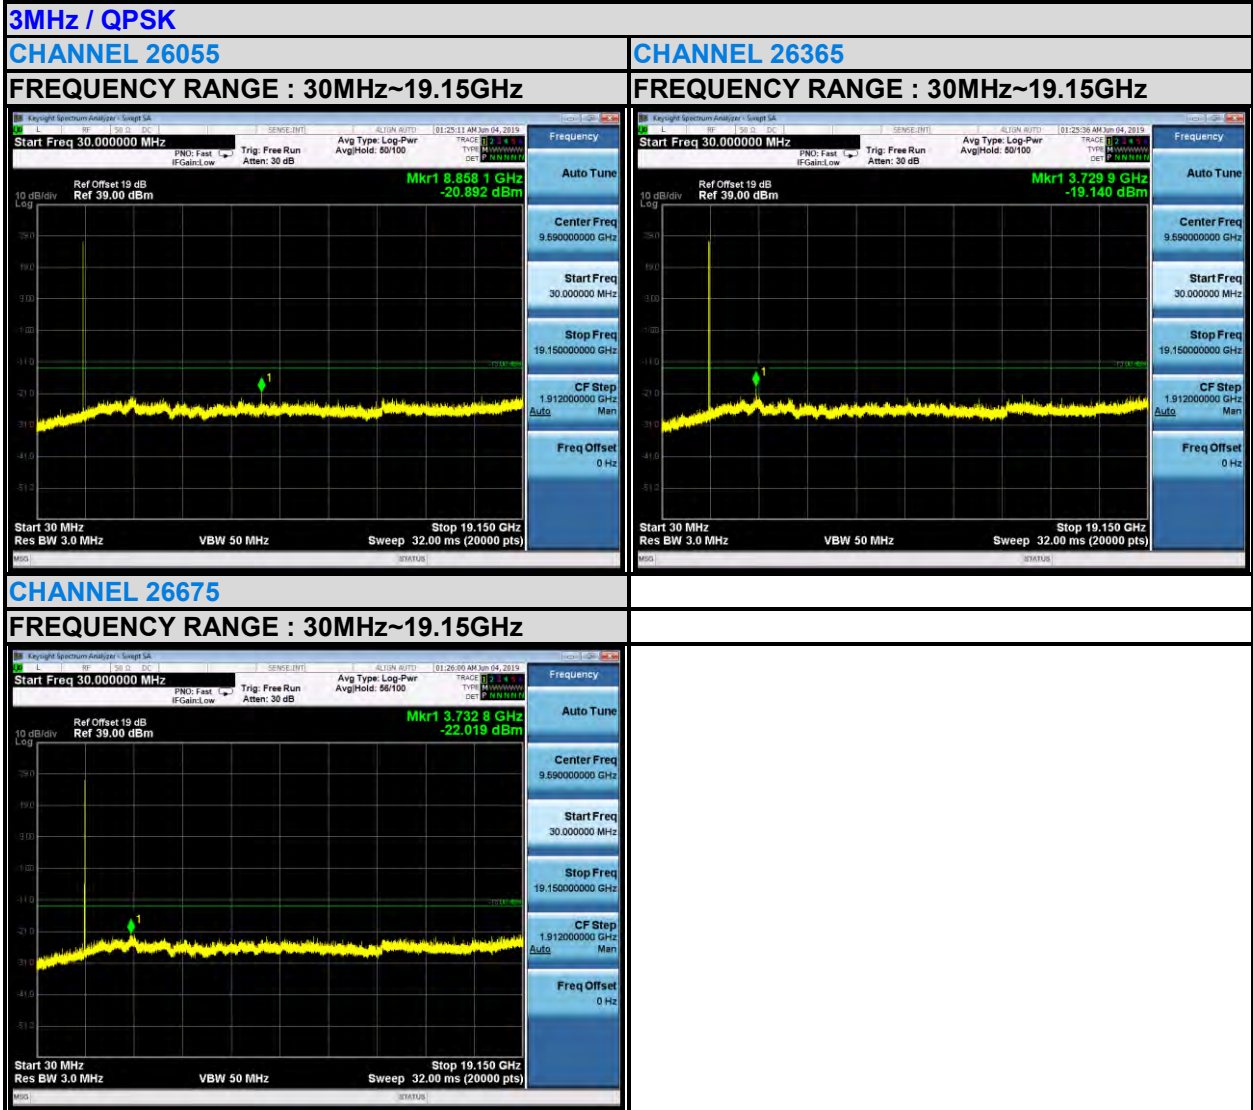



BUREAU VERITAS


Test Report No.: RF190517W003-4

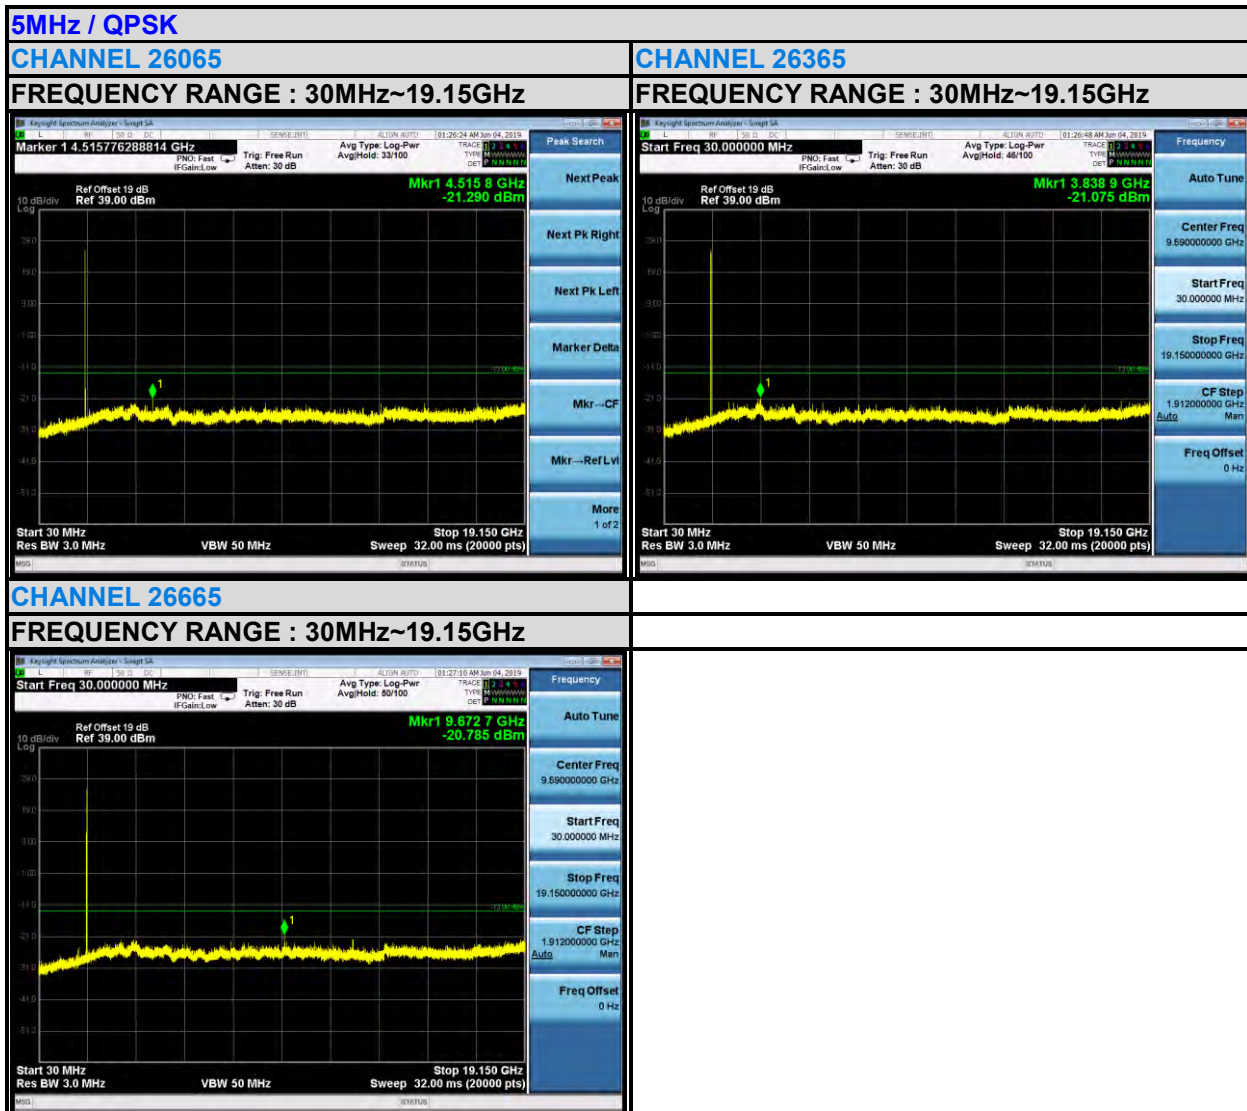



BUREAU VERITAS


Test Report No.: RF190517W003-4

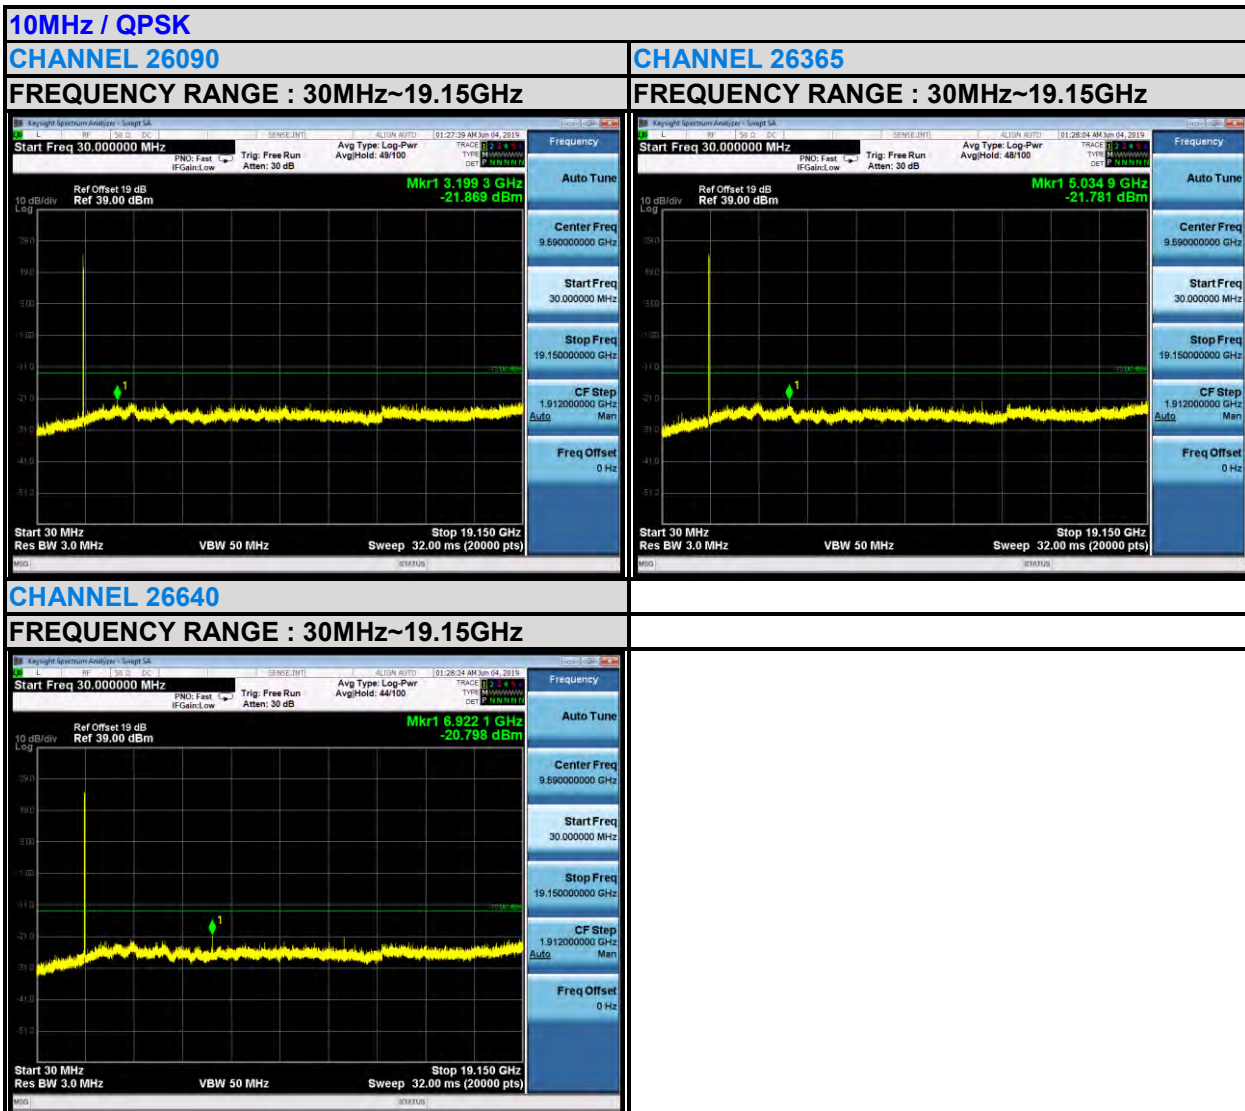



BUREAU VERITAS

Test Report No.: RF190517W003-4

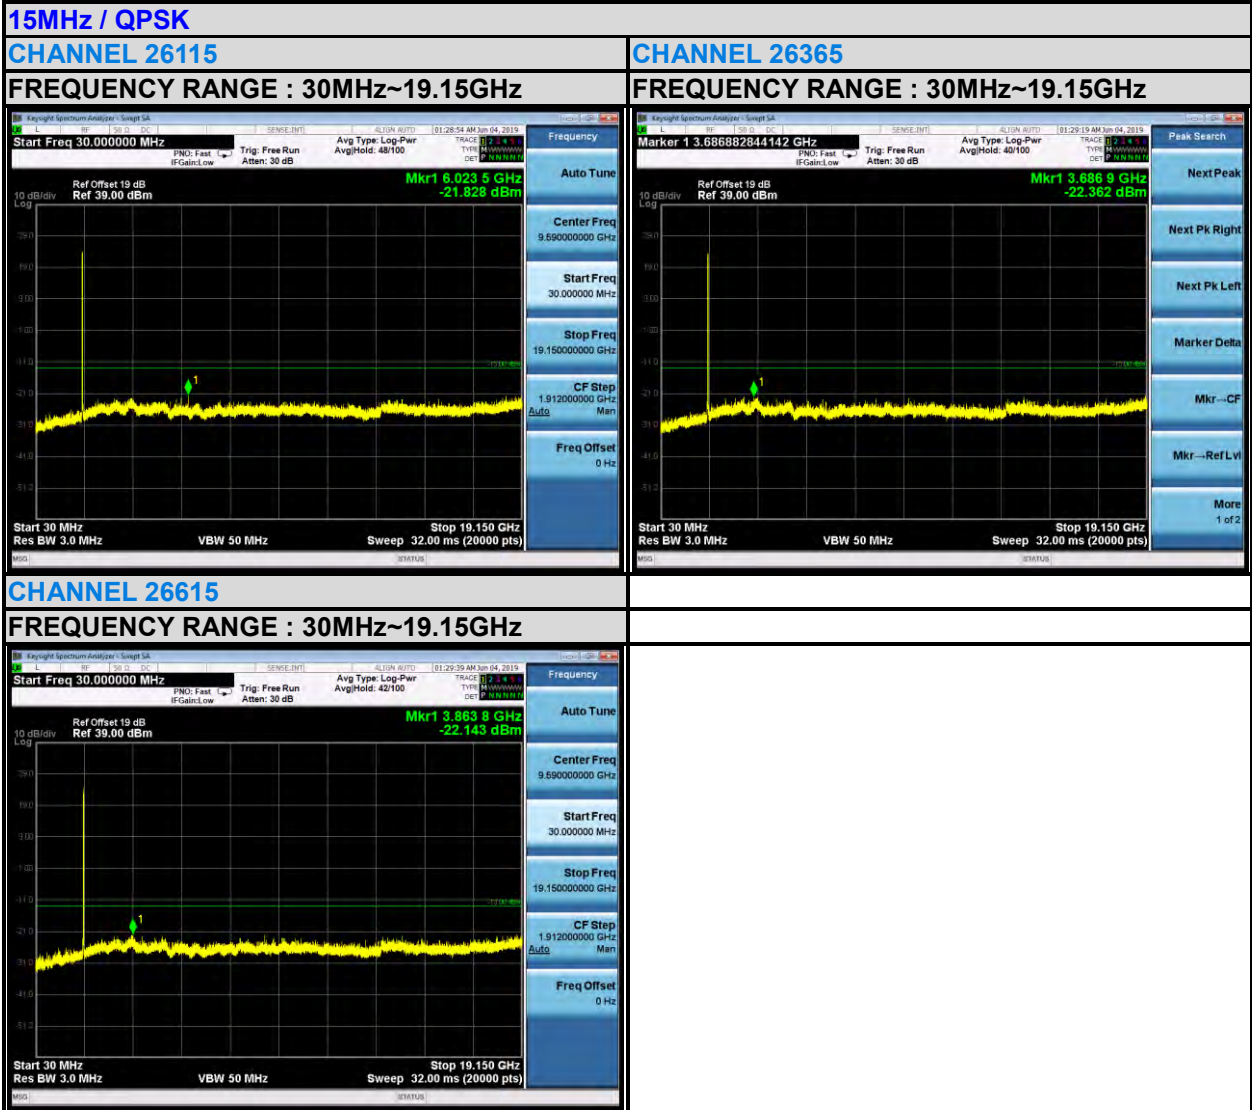



BUREAU VERITAS

Test Report No.: RF190517W003-4

