

# SPECIFICATION

Daxian Communication Technology Limited



*Shenzhen Daxian Technology Co., Ltd.*

## Unimax L13 WIFI-1 antenna

### Product specification book

|                 |              |                      |                                    |
|-----------------|--------------|----------------------|------------------------------------|
| client          | Unimax       | frequency range      | 2400MHz-2500MHz<br>5150MHz-5180MHz |
| project name    | L13          | edition              | V01                                |
| Material number | 3L-13XXX-109 | pigment              | black                              |
| RF design       | Peng.Hu      | architectural design | YeZhi.Bi                           |
| QA Manager      | ZiYin.Hu     | Technical Director   | Lei.Zhang                          |
| date            |              | 2022-11-24           |                                    |

#### Customer confirmation:

Does the assembly meet your requirements:  OK  NG

Shenzhen Topant Technology Co., Ltd .

Buji Town, Longgang District, Shenzhen, China Jihua Road 513, Sh an g shuijing Village (opposite the national defense training base) Dacheng Industrial Park, Building 7.

TEL:0755-28576002

FAX:0755-84276383

Room201, Building8, LongDongRoad3000#, Semiconductor Industry Park, ZhangJiang Hitech Zone, ShangHai

TEL:021-61630552

FAX:755-84276383

## Change the resume

[www.Topant<sup>1</sup>.com.cn](http://www.Topant.com.cn)  
Confidentiality requirements

Shenzhen Daxian Technology Co., Ltd. has the materials provided by the proprietary technology, and these proprietary materials shall be strictly confidential and are not allowed to be disclosed to anyone or the company without the prior written consent of Shenzhen Daxian Technology Co., Ltd.

# index of matrix

|  |    |
|--|----|
| I. Project Description.....  | 4  |
| II. WIFI-1 antenna.....  | 4  |
| 1. Specification: .....  | 4  |
| 1.1Electrical Specification Standard .....                                 | 5  |
| 1.1.1 Electrical performance index .....                                   | 5  |
| 1.2 Structural specification standard.....                                 | 5  |
| 1.2.1 Antenna composition.....   | 5  |
| 2. Test environment.....   | 6  |
| 3. Test.....   | 6  |
| 3.1 Resident Wave (VSWR) test.....   | 6  |
| 3.1.1 Test the connection to the .....                                     | 6  |
| 3.2 Efficiency, power (TRP), sensitivity (TIS) test.....                   | 6  |
| 3.2.1, Test site .....   | 6  |
| 3.2.2. Test instrument .....   | 6  |
| 3.2.3 test data .....  | 6  |
| 4. Conclusion.....   | 7  |
| 5. Annex chart .....   | 7  |
| 5.1Return Loss and VSWR and impedance park diagram parameters Figure ..... | 7  |
| 6、 2D&3DPassive field type diagram.....                                    | 8  |
| 7、 Environmental treatment.....  | 9  |
| III. Project drawing .....   | 10 |

[www.Topant<sup>1</sup>.com.cn](http://www.Topant.com.cn)  
**Confidentiality requirements**

Shenzhen Daxian Technology Co., Ltd. has the materials provided by the proprietary technology, and these proprietary materials shall be strictly confidential and are not allowed to be disclosed to anyone or the company without the prior written consent of Shenzhen Daxian Technology Co., Ltd.


# I project description

|                               |                                  |
|-------------------------------|----------------------------------|
| <b>Customer Name:</b>         | Unimax                           |
| <b>Complete machine type:</b> | MIFI                             |
| <b>Antenna band:</b>          | 2400MHz-2500MHz, 5150MHz-5180MHz |
| <b>Antenna form:</b>          | FPC                              |
| <b>Feeding form:</b>          | welding                          |
| <b>Number of feeders:</b>     | /                                |
| <b>Hardware version:</b>      | /                                |

## II WIFI-1 antenna

### 1 Specifications

This report mainly provides the router antenna L13 Test status of various electrical and structural performance parameters. The following picture shows the antenna picture of the display design.

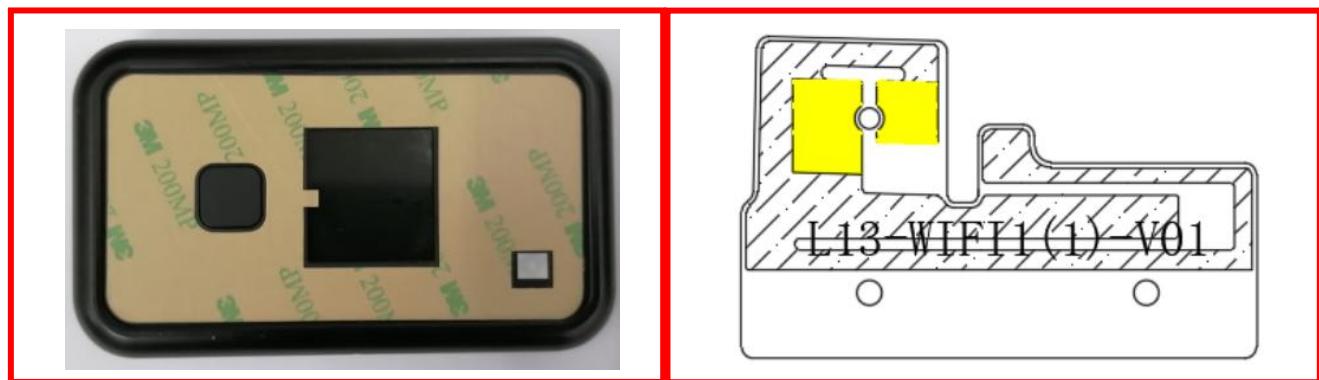

Appearance diagram of the whole machine and the antenna appearance diagram

#### 1.1 Electrical specification standard

The frequency range of the antenna is 2400 ~ 2500 MHz. The following table indicates the electrical performance specifications of the antenna. The antenna is designed and manufactured by a large display.

| Frequency Range | Frequency (MHz) | VSWR |
|-----------------|-----------------|------|
| WIFI-1          | 2400 ~ 2500     | ≤ 2  |
| WIFI-1          | 5150 ~ 5850     | ≤ 2  |

[www.Topant.com.cn](http://www.Topant.com.cn)  
Confidentiality requirements

Shenzhen Daxian Technology Co., Ltd. has the materials provided by the proprietary technology, and these proprietary materials shall be strictly confidential and are not allowed to be disclosed to anyone or the company without the prior written consent of Shenzhen Daxian Technology Co., Ltd.

## 1.2 Antenna composition

The antenna is mainly composed of FPC.

## 2、 The Equipment of Active Test

Satimo 3D Chamber  $6 \times 4 \times 4$ ( m )

Agilent 8960 E 5515c

Network analyzer-R&S ZVL



graph 2

[www.Topant<sup>1</sup>.com.cn](http://www.Topant.com.cn)  
**Confidentiality requirements**

Shenzhen Daxian Technology Co., Ltd. has the materials provided by the proprietary technology, and these proprietary materials shall be strictly confidential and are not allowed to be disclosed to anyone or the company without the prior written consent of Shenzhen Daxian Technology Co., Ltd.

### 3 Test

#### 3.1 Standing Wave (VSWR) test

3.1.1 3. Test connection: The sequential connection of the VSWR test device is: R & S ZVL network analyzer test line test and treatment

#### Measured (attached)

#### 3.2 Gain and efficiency, power (TRP), sensitivity (TIS) testing

##### 3.2.1 Test Site:

Large display microwave dark chamber. The test frequency range was 400MH z- -6GHz, the static area range was 50cm circumference, and the reflectivity was less than-50 dB.

##### 3.2.2 Test instrument:

R & S ZVL Network Analyzer, Agilent8960 E5515C, Standard Speaker Antenna, French SATIMO-SG24SYSTEM System, Printer, etc.

3.2.3 Test data: In the microwave dark room, the test power and sensitivity-related values are shown in the following table:

#### OTA Passive Efficiency & Gain-WIFI-1 antenna:

| Freq (MHz) | Effi (%) | Effi (dB) | Gain (dBi) |
|------------|----------|-----------|------------|
| 2400       | 40.09    | -3.97     | -0.3       |
| 2410       | 39.07    | -4.08     | -0.42      |
| 2420       | 37.08    | -4.31     | -0.56      |
| 2430       | 35.94    | -4.44     | -0.33      |
| 2440       | 35.49    | -4.5      | 0.1        |
| 2450       | 37.32    | -4.28     | 0.63       |
| 2460       | 37.24    | -4.29     | 0.87       |
| 2470       | 37.9     | -4.21     | 1.49       |
| 2480       | 39.39    | -4.05     | 1.51       |
| 2490       | 40.24    | -3.95     | 1.7        |
| 2500       | 40.04    | -3.98     | 1.59       |


| Freq (MHz) | Effi (%) | Effi (dB) | Gain (dBi) |
|------------|----------|-----------|------------|
| 5200       | 56.18    | -2.5      | 2.8        |
| 5210       | 56.42    | -2.49     | 2.86       |
| 5220       | 57.88    | -2.37     | 2.84       |
| 5230       | 54.97    | -2.6      | 2.56       |
| 5240       | 56.58    | -2.47     | 2.6        |
| 5250       | 54.57    | -2.63     | 2.43       |
| 5260       | 56.41    | -2.49     | 2.4        |
| 5270       | 53.56    | -2.71     | 2.03       |
| 5280       | 55.03    | -2.59     | 2.21       |
| 5290       | 54.29    | -2.65     | 2.07       |
| 5300       | 53.93    | -2.68     | 1.88       |
| 5750       | 31.14    | -5.07     | 0.21       |
| 5760       | 30.68    | -5.13     | 0.16       |
| 5770       | 31.45    | -5.02     | 0.15       |
| 5780       | 29.05    | -5.37     | -0.14      |
| 5790       | 30.29    | -5.19     | 0.03       |
| 5800       | 30.23    | -5.2      | 0.06       |

## 4. Conclusion:

This antenna is designed on the basis of customer-provided prototype. Electrical parameters and structural performance have met the technical requirements. Please confirm!

## 5. Attachment chart


### 5.1 Parameters of Return Loss and VSWR and impedance diagram- -WiFi-1 antenna

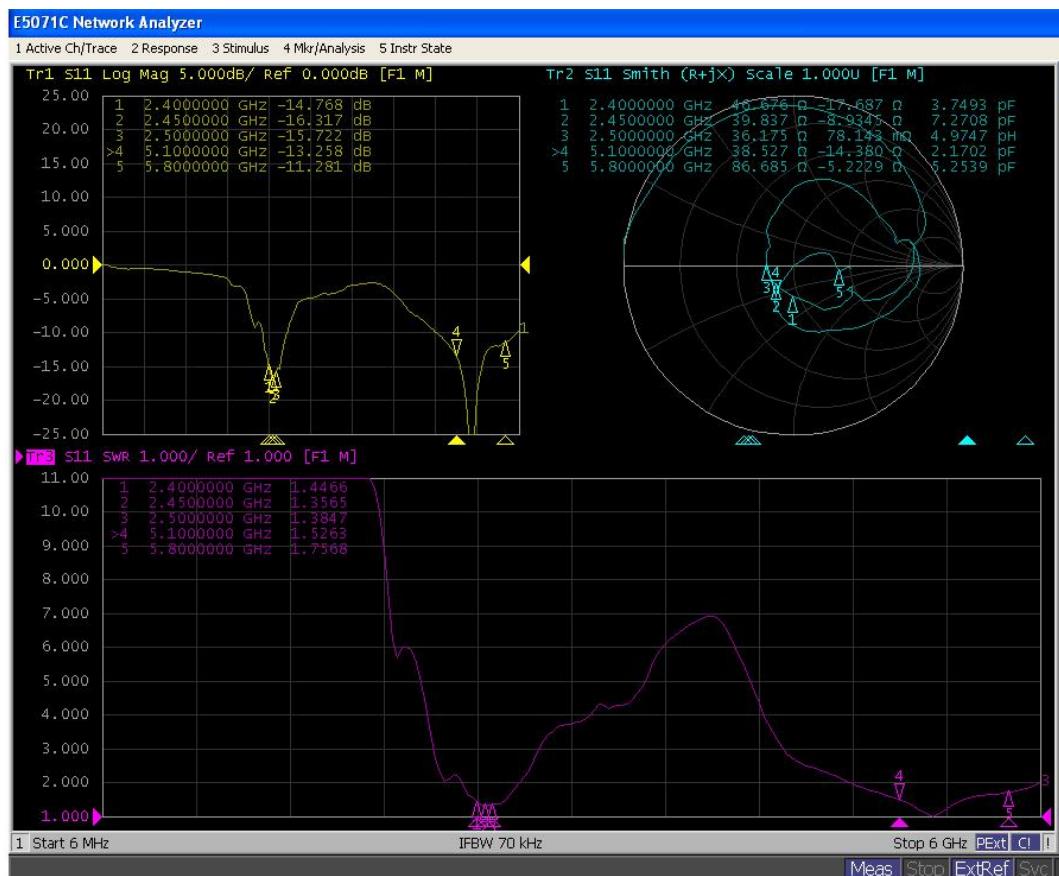


## 6. 2D&3DPassive field type diagram

2.4G



2400.000MHz



2450.000MHz



2490.000MHz




5.8G



5100.000MHz



5500.000MHz



5850.000MHz



[www.Topant.com.cn](http://www.Topant.com.cn)  
Confidentiality requirements

Shenzhen Daxian Technology Co., Ltd. has the materials provided by the proprietary technology, and these proprietary materials shall be strictly confidential and are not allowed to be disclosed to anyone or the company without the prior written consent of Shenzhen Daxian Technology Co., Ltd.

## 7. Environmental treatment





**The width of the conductive cloth must be increased, or it will affect the IF TIS. At present, two conductive sponges are pasted to increase the grounding width.**

导电布的宽度必须加大，否则对中频 TIS 有影响。目前是贴了两条导电海绵增加接地宽度。

The module should be grounded with the main board shield, otherwise it will have a great impact on the low-frequency TIS. Current conductive cloth size: 23mm \* 58mm.  
模块要跟主板屏蔽罩接地，否则对低频 TIS 影响很大。  
目前的导电布尺寸：  
23mm\*58mm.

The coaxial line here interferes with the shell material structure, and the bone position on the shell material needs to be reduced. (The coaxial line here is bent to avoid B48 receiving coaxial line being too close to the antenna).  
此处同轴线与壳料结构干涉，壳料上的骨位需要减掉。（此处同轴线折弯，避免 B48 接收同轴线离天线太近）.

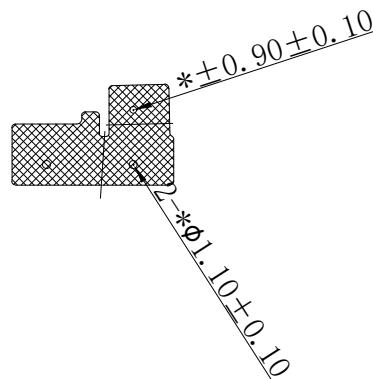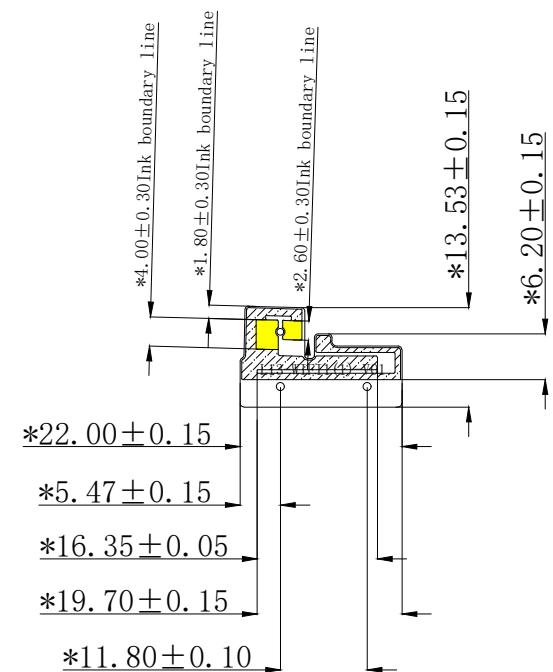

TOP

bottom

Note:

1. "\*" for the key size;
2. FPC Material Science:Electrolytic copper
3. 3m300 series double-sided adhesive tape is pasted on the back of the product
4. No tolerance dimension is marked, and the tolerance of die stamping dimension is  $\pm 0.1$
5. █ Gold plated area. █ Copper foil area. █ Gum:

|   |                        |                                      |       |                   |            |
|---|------------------------|--------------------------------------|-------|-------------------|------------|
| <br>TOPANT |                        | Shenzhen Daxian Technology Co., Ltd. |       |                   |            |
| Model   | L13                    | Product color                        | black | Date              | 2022/11/23 |
| Project Coding  | BL-13XXX-109           | Mold surface treatment               |       | Structural Design | biyezhi    |
| Part Name   | DIV FPC                |                                      |       | RF design         | 胡鹏         |
| Parts coding  | 3L-13XXX-109-1         |                                      |       | Check             | zhoukang   |
| Material  | PI Electrolytic copper |                                      |       | Approve           | zhanglei   |
| Save Path   |                        |                                      |       | current version   | A          |
|   | 4                      |                                      | 5     |                   | 6          |