

Report No.: SUZR/2021/9002607

Rev.: 01 Page: 1 of 25

RF-Emission Test Report

Application No.: ZR/2021/90026

Applicant: Great Talent Technology Limited

Manufacturer: Great Talent Technology Limited

Product Name: smart phone

Model No.(EUT): SP502
Trade Mark: SeNse

FCC ID: 2ALZM-SP502

Standards: ANSI C63.19-2011 CFR 47 FCC Part 20

Date of Receipt: 2022-01-18

Date of Test: 2022-01-26 to 2022-01-27

Date of Issue: 2022-03-07
Test conclusion: PASS *

* In the configuration tested, the EUT detailed in this report complied with the standards specified above.

Authorized Signature:

Panta Sun

Wireless Laboratory Manager



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or faisification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

**REATER STATES AND LIMITED STATES AND LI

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000

中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000



Report No.: SUZR/2021/9002607

Rev.: 01 Page: 2 of 25

REVISION HISTORY

Report Number	Revision	Description	Issue Date
SUZR/2021/9002607	01	Original	2022-03-07



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sas.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sas.com/en/Terms-and-Conditions appx and, for electronic format documents, at http://www.sas.com/en/Terms-and-Conditions for Electronic Document at http://www.sas.com/en/Terms-and-Conditions for Terms-a-Document ex. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues define therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or fallsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-75) 8307 1443,

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suzhou Area, China (Kangsu) Plot Free Trade Zone 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜鹿1号的6号厂房南部 邮编: 215000



Report No.: SUZR/2021/9002607

Rev.: 01 Page: 3 of 25

TEST SUMMARY

Frequency Band	HAC RF Emission Test result*		M-rating
CDMA BC0	E-Field dB(V/m)	28.74	M4
CDMA BC1	E-Field dB(V/m)	23.23	M4
CMDA BC10	E-Field dB(V/m)	29.80	M4
LTE Band 2	E-Field dB(V/m)	/	M4
LTE Band 4	E-Field dB(V/m)	/	M4
LTE Band 5	E-Field dB(V/m)	/	M4
LTE Band 12	E-Field dB(V/m)	/	M4
LTE Band 25	E-Field dB(V/m)	/	M4
LTE Band 26	E-Field dB(V/m)	/	M4
LTE Band 41	E-Field dB(V/m)	25.00	M4
LTE Band 66	E-Field dB(V/m)	/	M4
LTE Band 71	E-Field dB(V/m)	/	M4
WI-FI (2.4GHz)	E-Field dB(V/m)	/	M4
HAC Rate Category	r: M4		

Note:

1) This portable wireless equipment has been shown to be hearing-aid compatible under the above rated category, specified in ANSI/IEEE Std.C63.19-2011 and had been tested in accordance with the specified measurement procedures, Hear-Aid Compatibility is based on the assumption that all production units will be designed electrically identical to the device tested in this report. Test results reported herein relate only to the item(s) tested and are for North American Bands only.

2) *- HAC RF Emission Test for low power exemption according to ANSI C63.19-2011 and HAC RF Emission rating is M4 (Refer to Section 9.3 for details).

Reviewed by

Well Wei

Prepared by

Nature Shen



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.ags.com/en/Terms-and-Conditions.agx; and, for electronic Documents at http://www.ags.com/en/Terms-and-Conditions/Terms-e-Document as public to Terms and Conditions for Telectronic Document as http://www.ags.com/en/Terms-and-Conditions/Terms-e-Document as public to the state of the stat

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suzhou Area, China (Jiangsu) Plot Free Trade Zone
中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜嘉(号的6号厂房南部 邮编: 215000

t (86–512) 62992980



Report No.: SUZR/2021/9002607

Rev.: 01 Page: 4 of 25

CONTENTS

1	Gen	eral Information	5
	1.1	Introduction	5
	1.2	Details of Client	
	1.3	Test Location	
	1.4	Test Facility	6
	1.5	General Description of EUT	
	1.5.1	'	
	1.5.2	, ,	
	1.6	Test Specification	
	1.7	ANSI C63.19-2011 limits	10
2	Calil	bration certificate	10
3	HAC	(T Coil) Measurement System	11
	3.1	Measurement System Diagram for SPEAG Robotic	11
	3.2	E-Field Probe	
	3.3	Test Arch	
	3.4	Phone Holder	
4	Mea	surement uncertainty evaluation	13
5		Emission Measurements Reference and Plane	
6	Syst	em Verification Procedure	
	6.1	System Check	
	6.2	System Check Result	15
7	Mod	ulation Interference Factor	16
8	HAC	Measurement Procedure	18
9	HAC	RF Measurement Results	19
	9.1	Max Tune-up	19
	9.2	Conducted RF Output Power	20
	9.3	Low-power Exemption	
	9.4	HAC RF Emission Test Results	23
1() Equi	ipment list	2 4
11	l Calil	bration certificate	25
12	2 Pho	tographs	25
Α		x A: Detailed System Check Results	
	• •	B: Detailed Test Results	
		C: Calibration certificate	
		D: Photographs	
		∵ 1	_



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or faistification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-75) 8307 1443, or email: CM.Doccheck@sgs.com

South of No. 6 Pfart, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jiangsu) Pilot Fee Trade Zone 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号约6号厂房南部 邮编: 215000



Report No.: SUZR/2021/9002607

Rev.: 01 Page: 5 of 25

1 General Information

1.1 Introduction

The purpose of the Hearing Aid Compatibility is to enable measurements of the near electric fields generated by wireless communication devices in the region controlled for use by a hearing aid in accordance with ANSI-C63.19-2011

The purpose of this standard is to establish categories for hearing aids and for WD (wireless communications devices) that can indicate to health care practitioners and hearing aid users which hearing aids are compatible with which WD, and to provide tests that can be used to assess the electromagnetic characteristics of hearing aids and WD and assign them to these categories. The various parameters required, in order to demonstrate compatibility and accessibility are measured. The design of the standard is such that when a hearing aid and WD achieve one of the categories specified, as measured by the methodology of this standard, the indicated performance is realized.

In order to provide for the usability of a hearing aid with a WD, several factors must be coordinated:

E) Radio frequency (RF) measurements of the near-field electric fields emitted by a WD to categorize these emissions for correlation with the RF immunity of a hearing aid.

Hence, the following are measurements made for the WD: RF E-Field emissions

The measurement plane is parallel to, and 1.5cm in front of, the reference plane.

Applications for certification of equipment operation under part 20, that a manufacturer is seeking to certify as hearing aid compatible, as set forth in §20.19 of that part, shall include a statement indication compliance with the test requirements of §20.19 and indicating the appropriate U-rating for the equipment. The manufacturer of the equipment shall be responsible for maintaining the test results.

1.2 Details of Client

Applicant:	Great Talent Technology Limited
Address:	35F, HBC HuiLong Center Building-II Minzhi Street, Longhua, Shenzhen, P.R. China
Manufacturer:	Great Talent Technology Limited
Address:	35F, HBC HuiLong Center Building-II Minzhi Street, Longhua, Shenzhen, P.R. China

1.3 Test Location

Company:	SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.
Address:	South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone
Post code:	215000
Test Engineer:	Nature Shen, KING-P li



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.appx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-a-Document.appx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extend of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

**Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) \$3071443.

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suzhou Area, China (Jiangsu) Plot Free Trade Zone
中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜嘉(号的6号厂房南部 邮编: 215000

t (86–512) 62992980



Report No.: SUZR/2021/9002607

Rev.: 01 Page: 6 of 25

1.4 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• A2LA (Certificate No. 6336.01)

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 6336.01.

• Innovation, Science and Economic Development Canada

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0120.

IC#: 27594.

• FCC -Designation Number: CN1312

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized as an

accredited testing laboratory. Designation Number: CN1312.

Test Firm Registration Number: 717327





Report No.: SUZR/2021/9002607

Rev.: 01 Page: 7 of 25

1.5 General Description of EUT

Device Type :	portable device				
Exposure Category:	' ·	uncontrolled environment / general population			
Product Name:		smart phone			
Model No.(EUT):	SP502	· ·			
FCC ID:	2ALZM-SP502				
Trade Mark:	SeNse				
Product Phase:	Identical Prototype				
IMEI:	990012679500691				
Hardware Version:	Q6003_V1.0				
Software Version:	SP502_01.01.04				
Antenna Type:	Integrated				
Device Operating Configur	rations:				
Modulation Mode:	CDMA: QPSK; LTE: QPSK,16QAM WIFI: DSSS, OFDM; B	T: GFSK, π/4DQPSK,8DPSK			
Power Class		ntrol "all up"(CDMA Band)			
1 OWEI CIASS	· · ·	ntrol Max Power(LTE Band)			
	Band	Tx (MHz)	Rx (MHz)		
	CDMA BC0	824~845	869~894		
	CDMA BC1	1850~1910	1930~1990		
	CMDA BC10	806~824	851~869		
	LTE Band 2	1850~1910	1930~1990		
	LTE Band 4	1710~1755	2110~2155		
	LTE Band 5	824~849	869-894		
Frequency Bands:	LTE Band 12	699~716	729~746		
requeriey Barias.	LTE Band 25	1850~1915	1930~1995		
	LTE Band 26	814~849	859~894		
	LTE Band 41 (Class 2/3)	2496~2690	2496~2690		
	LTE Band 66	1710~1780	2110~2200		
	LTE Band 71	663~698	617~652		
	Bluetooth	2402~2480	2402~2480		
	Wi-Fi 2.4G	2412~2462	2412~2462		
RF Cable*:	□ Provided by client				
	Model:	BTE-3402			
Dottory Informations	Normal Voltage:	3.8V			
Battery Information:	Rated capacity:				
	Manufacturer:	Manufacturer: Phenix New Energy (Huizhou) Co., Ltd.			
Daniel	•	· · · · · · · · · · · · · · · · · · ·			

Remark:

*Since the above data and/or information is provided by the client relevant results or conclusions of this report are only made for these data and/or information , SGS is not responsible for the authenticity, integrity and results of the data and information and/or the validity of the conclusion.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exceed except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone (86-755) \$3071443.

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jiangsu) Plot Free Trade Zone 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号约6号厂房南部 邮编: 215000

t (86–512) 62992980


www.sgsgroup.com.cn sgs.china@sgs.com



Report No.: SUZR/2021/9002607

Rev.: 01 Page: 8 of 25

1.5.1 DUT Antenna Locations(Back View)

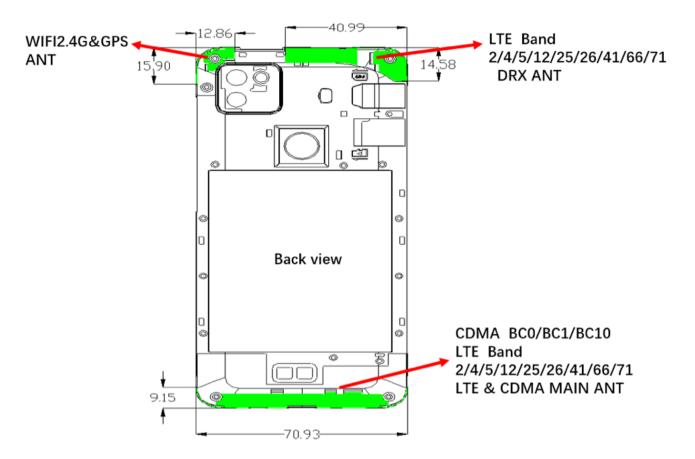



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exceed except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone (86-755) \$3071443.

South of No. 6 Pfart, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jiangsu) Pilot Free Trade Zone 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号约6号厂房南部 邮编: 215000



Report No.: SUZR/2021/9002607

Rev.: 01 Page: 9 of 25

1.5.2 List of air interfaces/frequency bands

Air Interface	Band (MHz)	Туре	ANSI C63.19 Tested	Simultaneous Transmitter	Name of Voice Service	Power Reduction
	CDMA BC0					
CDMA	CDMA BC1	VO	Yes	BT, Wi-Fi	CMRS Voice	NA
	CDMA BC10					
	Band 2					
	Band 4			BT, Wi-Fi	VoLTE	NA
LTE (FDD)	Band 5		Yes			
	Band 12	VD				
	Band 25					
	Band 26					
	Band 66					
	Band 71					
LTE (TDD)	Band 41	VD	Yes	BT, Wi-Fi	VoLTE	NA
Wi-Fi	2450	VD	Yes	WWAN	NA	NA
BT	2450	DT	NA	WWAN	NA	NA

VO: Legacy Cellular Voice Service from Table 7.1 in 7.4.2.1 of ANSI C63.19-2011

DT: Digital Transport (no voice)

VD: IP Voice Service over Digital Transport

For protocols not listed in Table 7.1 of ANSI C63.19-2011 or the ANSI C63.19-2011 VoLTE interpretation,

the average speech level of -20 dBm0 should be used.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exceed except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone (86-755) \$3071443.

South of No. 6 Pfart, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jiangsu) Pilot Free Trade Zone 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号约6号厂房南部 邮编: 215000



Report No.: SUZR/2021/9002607

Rev.: 01

Page: 10 of 25

1.6 Test Specification

Identity	Document Title
CFR 47 FCC Part 20	§20.19 Hearing aid-compatible mobile handsets.
ANSI C63.19-2011	American National Standard for Methods of Measurement of Compatibility between Wireless Communication Devices
KDB 285076 D01	HAC Guidance v05r01

1.7 ANSI C63.19-2011 limits

Emissian Catagorias	E-field emissions dB(V/m)			
Emission Categories	< 960 MHz	> 960 MHz		
Category M1	50-55	40-45		
Category M2	45-50	35-40		
Category M3	40-45	30-45		
Category M4	<40	<30		

Table 2: Telephone near-field categories in linear units

2 Calibration certificate

Temperature	Min. = 18°C, Max. = 25 °C
Relative humidity	Min. = 30%, Max. = 70%

Table 3: The Ambient Conditions



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at https://www.sgs.com/en/Terms-and-Conditions.aspx.and, for electronic format documents as subject to Terms and Conditions for Electronic Document sat http://www.sgs.com/en/Terms-en/Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

**Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) \$307,1443.

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suzhou Area, China (Kangsu) Plot Free Trade Zone 215000中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜鹿1号的6号厂房南部 邮编: 215000



Report No.: SUZR/2021/9002607

Rev.: 01

Page: 11 of 25

3 HAC (T Coil) Measurement System

3.1 Measurement System Diagram for SPEAG Robotic

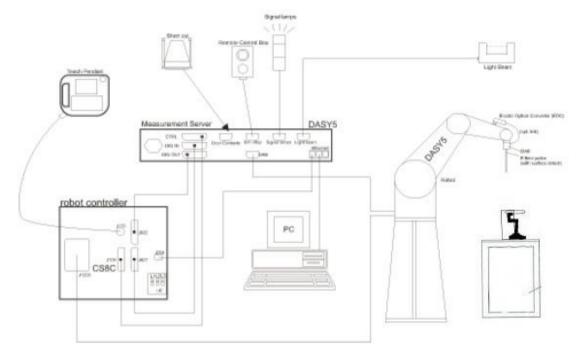


Fig. 1. The SPEAG Robotic Diagram

The DASY5 system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Stabile RX family) with controller, teach pendant and software. An arm extension is for accommodating the data acquisition electronics (DAE).
- An Audio Magnetic probe.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to the DAE and for the analog signal from the optical surface detection. The EOC is connected to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
- A computer operating Windows 7.
- DASY5 software.
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The Test Arch SAM phantom
- The device holder for handheld mobile phones.
- Validation dipole kits allowing to validate the proper functioning of the system.



Inless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed worleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms-en/Cocuments. Usually the terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en/Cocuments.. Its distriction is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is divised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of lient's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a ransaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or pipearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the esuits shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86–512) 62992980 t (86–512) 62992980

sgs.china@sgs.com



Report No.: SUZR/2021/9002607

Rev.: 01 Page: 12 of 25


3.2 E-Field Probe

Construction	One dipole parallel, two dipoles normal to probe axis Built-in shielding against static charges PEEK enclosure material
Calibration	In air from 100 MHz to 6.0 GHz (absolute accuracy ±6.0%, k=2)
Frequency	(extended to 20 MHz for MRI), Linearity: ± 0.2 dB (100 MHz to 6 GHz)
Directivity	± 0.2 dB in air (rotation around probe axis) ± 0.4 dB in air (rotation normal to probe axis)
Dynamic Range	2 V/m to > 1000 V/m; Linearity: ± 0.2 dB
Dimensions	Tip diameter: 8 mm Distance from probe tip to dipole centers: 2.5 mm



3.3 Test Arch

Description	Enables easy and well defined positioning of the phone and validation dipoles as well as simple teaching of the robot.
Dimensions	length: 370 mm width: 370 mm height: 370 mm



3.4 Phone Holder

Description Supports accurate and reliable positioning of any phon Effect on near field <+/- 0.5 dB	ne
---	----





Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx.and.for electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx.Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) \$307.1443.

South of No. 6 Pfart, No. 1, Runsheng Read, Suchou Industrial Park, Suchou Area, China (Jangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86–512) 62992980

www.sgsgroup.com.cn sgs.china@sgs.com



Report No.: SUZR/2021/9002607

Rev.:

Page: 13 of 25

Measurement uncertainty evaluation 4

Uncertainty Component	Uncertainty Value (%)	Probability Distribution	Divisor	ci €	Standard Uncertainty € (%)
Measurement system					
Probe calibration	±5.1	N	1	1	±5.1
Axial isotropy	±4.7	R	$\sqrt{3}$	1	±2.7
Sensor position	±16.5	R	$\sqrt{3}$	1	±9.5
Boundary effect	±2.4	R	$\sqrt{3}$	1	±1.4
Phantom Boundary Effect	±7.2	R	$\sqrt{3}$	1	±4.1
Linearity	±4.7	R	$\sqrt{3}$	1	±2.7
Scaling with PMR calibration	±10.0	R	$\sqrt{3}$	1	±5.8
System Detection limit	±1.0	R	$\sqrt{3}$	1	±0.6
Readout Electronics	±0.3	N	1	1	±0.3
Response time	±0.8	R	$\sqrt{3}$	1	±0.5
Integration time	±2.6	R	$\sqrt{3}$	1	±1.5
RF ambient conditions	±3.0	R	$\sqrt{3}$	1	±1.7
RF reflection	±12.0	R	$\sqrt{3}$	1	±6.9
Probe positioner	±1.2	R	$\sqrt{3}$	1	±0.7
Probe positioning	±4.7	R	$\sqrt{3}$	1	±2.7
Extrapolation and interpolation	±1.0	R	$\sqrt{3}$	1	±0.6
Related to test samples					
Device Positioning Vertical	±4.7	R	$\sqrt{3}$	1	±2.7
Device Positioning Lateral	±1.0	R	$\sqrt{3}$	1	±0.6
Device Holder and Phantom	±2.4	R	$\sqrt{3}$	1	±1.4
Power drift	±5.0	R	$\sqrt{3}$	1	±2.9
Phantom and Setup Related					
Phantom Thickness	±2.4	R	$\sqrt{3}$	1	±1.4
Combined Std. Uncertainty	$u_{c}^{'} = \sqrt{\sum_{i=1}^{21} c_{i}^{2} u_{i}^{2}}$				±16.3
Expanded Std. Uncertainty on Power (K=2)					±32.6
Expanded Std. Uncertainty on Field (K=2)					±16.3

Table 4: Measurement uncertainties for RF



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@gs.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路(号的6号厂房南部 邮编: 215000

t (86-512) 62992980 www.sgsgroup.com.cn sgs.china@sgs.com



Report No.: SUZR/2021/9002607

Rev.: 01 Page: 14 of 25

5 RF Emission Measurements Reference and Plane

Fig.3 illustrate the references and reference plane that shall be used in a typical EUT emissions measurement. The principle of this section is applied to EUT with similar geometry. Please refer to Appendix C for the setup photographs.

- ♦ The area is 5 cm by 5 cm.
- ◆ The area is centered on the audio frequency output transducer of the EUT.
- ♦ The area is in a reference plane, which is defined as the planar area that contains the highest point in the area of the phone that normally rests against the user's ear. It is parallel to the centerline of the receiver area of the phone and is defined by the points of the receiver-end of the EUT handset, which, in normal handset use, rest against the ear.
- The measurement plane is parallel to, and 10 mm in front of, the reference plane.



Fig.3 WD reference and plane for RF emission measurements



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exceed except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone (86-755) \$3071443.

South of No. 6 Pfart, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jiangsu) Pilot Free Trade Zone 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000



Report No.: SUZR/2021/9002607

Rev.: 01 Page: 15 of 25

6 System Verification Procedure

6.1 System Check

Place a dipole antenna meeting the requirements given in ANSI C63.19-2011 in the position normally occupied by the WD. The dipole antenna serves as a known source for an electrical and magnetic output. Position the E-field probe so that the following occurs:

- The probes and their cables are parallel to the coaxial feed of the dipole antenna
- The probe cables and the coaxial feed of the dipole antenna approach the measurement area from opposite directions
- The center point of the probe element(s) are 15 mm from the closest surface of the dipole elements. Scan the length of the dipole with the E-field probe and record the two maximum values found near the dipole ends. Average the two readings and compare the reading to the expected value in the calibration certificate or the expected value in this standard.

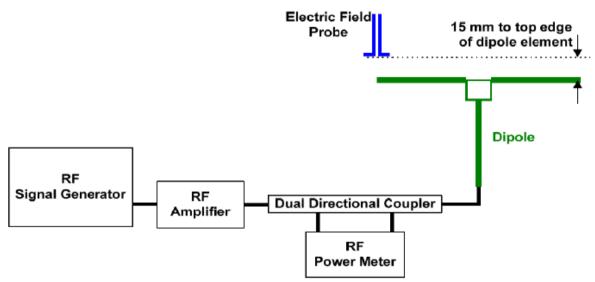


Fig.4 System verification

6.2 System Check Result

Frequency (MHz)	Input Power (mW)	E-Field Value 1 (V/m)	E-Field Value 2 (V/m)	Averaged Measured* Value(V/m)	Target** Value (V/m)	Deviation*** (%)	Limit**** (%)	Test Date
835	100	107.2	101.9	104.55	110.4	-5.30	±18	2022/1/26
1880	100	86.57	81.68	84.13	86.5	-2.75	±18	2022/1/26
2600	100	81.63	81.48	81.56	85.0	-4.05	±18	2022/1/27

Note:

- * Please refer to the appendix A for detailed measurement data and plot.
- ** Target value is provided by SPEAD in the calibration certificate of specific dipoles.
- *** Deviation (%) = 100 * (Measured value minus Target value) divided by Target value.
- **** ANSI C63.19 requires values within ± 18% are acceptable.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.appx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-a-Document.appx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extend of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

**Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) \$3071443.

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86–512) 62992980

sgs.china@sgs.com



Report No.: SUZR/2021/9002607

Rev.: 01 Page: 16 of 25

7 Modulation Interference Factor

The HAC Standard ANSI C63.19-2011 defines a new scaling using the Modulation Interference Factor (MIF). For any specific fixed and repeatable modulated signal, a modulation interference factor (MIF, expressed in dB) may be developed that relates its interference potential to its steady-state rms signal level or average power level. This factor is a function only of the audio-frequency amplitude modulation characteristics of the signal and is the same for field-strength and conducted power measurements. It is important to emphasize that the MIF is valid only for a specific repeatable audio-frequency amplitude modulation characteristic. Any change in modulation characteristic requires determination and application of a new MIF

The Modulation Interference factor (MIF, in dB) is added to the measured average E-field (in dBV/m) and converts it to the RF Audio Interference level (in dBV/m). This level considers the audible amplitude modulation components in the RF E-field. CW fields without amplitude modulation are assumed to not interfere with the hearing aid electronics.

Modulations without time slots and low fluctuations at low frequencies have low MIF values, TDMA modulations with narrow transmission and repetition rates of few 100 Hz have high MIF values and give similar classifications as ANSI C63.19-2011.

ER3D, EF3D and EU2D E-field probes have a bandwidth <10 kHz and can therefore not evaluate the RF envelope in the full audio band. DASY52 is therefore using the indirect measurement method according to ANSI C63.19-2011 which is the primary method. These near field probes read the averaged E-field measurement. Especially for the new high peak-to-average (PAR) signal types, the probes shall be linearized by PMR calibration in order to not overestimate the field reading. Probe Modulation Response (PMR) calibration linearizes the probe response over its dynamic range for specific modulations which are characterized by their UID and result in an uncertainty specified in the probe calibration certificate. The MIF is characteristic for a given waveform envelope and can be used as a constant conversion factor if the probe has been PMR calibrated.

The evaluation method for the MIF is defined in ANSI C63.19-2011 section D.7. An RMS demodulated RF signal is fed to a spectral filter (similar to an A weighting filter) and forwarded to a temporal filter acting as a quasi-peak detector. The averaged output of these filtering is scaled to a 1 kHz 80% AM signal as reference. MIF measurement requires additional instrumentation and is not well suited for evaluation by the end user with reasonable uncertainty.

It may alliteratively be determined through analysis and simulation, because it is constant and characteristic for a communication signal. DASY52 uses well-defined signals for PMR calibration. The MIF of these signals has been determined by simulation and it is automatically applied.

The MIF measurement uncertainty is estimated as follows, declared by HAC equipment provider SPEAG, for modulation frequencies from slotted waveforms with fundamental frequency and at least 2 harmonics within 10 kHz:

1. 0.2 dB for MIF: -7 to +5 dB 2. 0.5 dB for MIF: -13 to +11 dB 3. 1 dB for MIF: > -20 dB

MIF values applied in this test report were provided by the HAC equipment provider of SPEAG, and the worst values for all air interface are listed below to be determine the Low-power Exemption.

SPEAG UID	UID version	Communication system	MIF(dB)
10081	CAB	CDMA2000 (1xRTT, RC3)	-19.71
10295	AAB	CDMA2000 (1xRTT, RC1 SO3, 1/8th Rate 25 fr.)	3.26
10403	AAB	CDMA2000 (1xEV-DO, Rev. 0)	-17.67
10169	CAE	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	-15.63
10170	CAE	LTE-FDD (SC-FDMA,1RB, 20 MHz,16-QAM)	-9.76
10172	CAG	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	-1.62
10173	CAG	LTE-TDD (SC-FDMA,1RB, 20 MHz,16-QAM)	-1.44



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.apx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.apx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

**Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) \$3071443.

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jiangsu) Pilot Fee Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000



Report No.: SUZR/2021/9002607

Rev.: 01

Page: 17 of 25

10061	CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps)	-2.02
10077	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 54 Mbps)	0.12
10427	AAB	IEEE 802.11n (HT Green eld, 150 Mbps, 64-QAM)	-13.44
10069	CAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps)	-3.15
10616	AAB	IEEE 802.11ac WiFi (40MHz, MCS0, 90pc duty cycle)	-5.57



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or faistification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-75) 8307 1443, or email: CM.Doccheck@sgs.com

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suzhou Area, China (Kangsu) Plot Free Trade Zone 215000中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜鹿1号的6号厂房南部 邮编: 215000



Report No.: SUZR/2021/9002607

Rev.: 01

Page: 18 of 25

8 HAC Measurement Procedure

The evaluation was performed with the following procedure:

- a) Confirm the proper operation of the field probe, probe measurement system, and other instrumentation and the positioning system.
- b) Position the WD in its intended test position.
- c) Set the WD to transmit a fixed and repeatable combination of signal power and modulation characteristic that is representative of the worst case (highest interference potential) encountered in normal use. Transiently occurring start-up, changeover, or termination conditions, or other operations likely to occur less than 1% of the time during normal operation, may be excluded from consideration.
- d) The center subgrid shall be centered on the T-Coil mode perpendicular measurement point or the acoustic output, as appropriate. Locate the field probe at the initial test position in the 50 mm by 50 mm grid, which is contained in the measurement plane, refer to illustrated in Figure 3. If the field alignment method is used, align the probe for maximum field reception.
- e) Record the reading at the output of the measurement system.
- f) Scan the entire 50 mm by 50 mm region in equally spaced increments and record the reading at each measurement point. The distance between measurement points shall be sufficient to assure the identification of the maximum reading.
- g) Identify the five contiguous subgrids around the center subgrid whose maximum reading is the lowest of all available choices. This eliminates the three subgrids with the maximum readings. Thus, the six areas to be used to determine the WD's highest emissions are identified.
- h) Identify the maximum reading within the nonexcluded subgrids identified in step g).
- i) Convert the maximum reading identified in step h) to RF audio interference level, in, V/m, by taking the square root of the reading and then dividing it by the measurement system transfer function, established in 5.5.1.1. Convert the result to dB(V/m) by taking the base-10 logarithmand multiplying it by 20. Indirect measurement method
- Replacing step i) of 5.5.1.2, the RF audio interference level in dB(V/m) is obtained by adding the MIF (in dB) to the maximum steady-state rms field-strength reading, in dB(V/m), from step h). Use this result to determine the category rating.
- j) Compare this RF audio interference level with the categories in Clause 8 and record the resulting WD category rating.
- k) For the T-Coil mode M-rating assessment, determine whether the chosen perpendicular measurement point is contained in an included subgrid of the first scan. If so, then a second scan is not necessary. The first scan and resultant category rating may be used for the T-Coil mode M rating.

Otherwise, repeat step a) through step i), with the grid shifted so that it is centered on the perpendicular measurement point. Record the WD category rating.





Report No.: SUZR/2021/9002607

Rev.: 01

Page: 19 of 25

9 HAC RF Measurement Results

9.1 Max Tune-up

	Average Power (dBm)		
	CDM.	25.00	
CDMA	CDM	A BC1	25.00
	CDMA	A BC10	25.00
	Bai	nd 2	23.50
	Bai	nd 4	24.50
	Bai	23.50	
FDD LTE	Ban	23.50	
IDDEIL	Ban	23.50	
	Ban	23.50	
	Ban	24.50	
	Ban	24.50	
	Band 41 PC2	QPSK	25.00
TDD LTE	Dallu 41 FG2	16QAM	24.00
IDDLIE	Band 41 PC3	QPSK	23.00
	Dallu 41 FC3	16QAM	22.00

	Average Power (dBm)	
	802.11b	17.00
2. 4GHz WLAN	802.11g	13.00
Z. 4GHZ WLAIN	802.11n-HT20	13.00
	802.11n-HT40	13.00



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CND.occheck@sgs.com

South of No. 6 Pfart, No. 1, Runsheng Read, Suchou Industrial Park, Suchou Area, China (Jangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000



Report No.: SUZR/2021/9002607

Rev.: 01 Page: 20 of 25

9.2 Conducted RF Output Power

Band		Tune-up				
Channel	Average	Average Conducted Power(dBm)				
Channel	1013	384	777	(dBm)		
RC1 SO55	23.54	23.61	23.42	25.00		
RC3 SO55	23.49	23.69	23.57	25.00		
RC3 SO32 (F+SCH)	23.48	23.59	23.51	25.00		
RC3 SO32 (+SCH)	23.51	23.66	23.49	25.00		

Band		Tune-up				
Channel	Average	Average Conducted Power(dBm)				
Channel	1013	384	777	(dBm)		
RC1 SO55	23.51	23.68	23.47	25.00		
RC3 SO55	23.52	23.77	23.46	25.00		
RC3 SO32 (F+SCH)	23.46	23.71	23.48	25.00		
RC3 SO32 (+SCH)	23.56	23.74	23.54	25.00		

Band		Tune-up				
Channel	Average	Average Conducted Power(dBm)				
Channel	1013	384	777	(dBm)		
RC1 SO55	23.72	23.84	23.77	25.00		
RC3 SO55	23.71	23.95	23.80	25.00		
RC3 SO32 (F+SCH)	23.73	23.93	23.75	25.00		
RC3 SO32 (+SCH)	23.75	23.91	23.72	25.00		



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sas.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sas.com/en/Terms-and-Conditions appx and, for electronic format documents, at http://www.sas.com/en/Terms-and-Conditions for Electronic Document at http://www.sas.com/en/Terms-and-Conditions for Terms-a-Document ex. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues define therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or fallsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-75) 8307 1443,

South of No. 6 Pfart, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jiangsu) Pilot Free Trade Zone 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号约6号厂房南部 邮编: 215000



Report No.: SUZR/2021/9002607

Rev.: 01 Page: 21 of 25

LTE Band 41 class2				Conducted Power(dBm)					
Dondwidth	Madulation	DD oizo	DD offeet	Channel	Channel	Channel	Channel	Channel	Tungun
bandwidth	Modulation	KD SIZE	RD Ollset	39750	40185	40620	41055	41490	Tune up
		1	0	23.41	23.74	24.39	24.16	24.31	25.00
		1	50	23.68	23.81	24.18	24.35	24.29	25.00
		1	99	23.88	23.74	24.08	24.37	24.18	25.00
	QPSK	50	0	22.64	22.78	22.91	23.26	23.47	24.00
		50	25	22.79	22.78	22.85	23.24	23.19	24.00
		50	50	22.74	22.87	22.94	23.35	23.16	24.00
20MHz		100	0	22.75	22.83	22.95	23.25	23.39	24.00
ZUIVITZ		1	0	22.02	22.34	22.46	22.75	22.95	24.00
		1	50	22.48	22.59	22.42	22.91	22.99	24.00
		1	99	22.19	22.28	22.34	22.97	22.69	24.00
	16QAM	50	0	21.61	21.75	21.97	22.19	22.47	23.00
		50	25	21.78	21.84	21.99	22.23	22.32	23.00
		50	50	21.68	21.73	21.93	22.27	22.19	23.00
		100	0	21.71	21.73	21.92	22.29	22.36	23.00

LTE Band 41 class3				Conducted Power(dBm)					
Pandwidth	Modulation	DD cizo	RB	Channel	Channel	Channel	Channel	Channel	Tungun
bandwidth	Modulation	RD SIZE	offset	39750	40185	40620	41055	41490	Tune up
		1	0	21.21	21.32	21.82	21.62	21.72	23.00
		1	50	21.06	21.18	21.63	21.47	21.59	23.00
		1	99	21.31	21.33	21.51	21.29	21.50	23.00
	QPSK	50	0	20.27	20.31	20.41	20.51	20.50	22.00
		50	25	20.26	20.40	20.40	20.49	20.50	22.00
		50	50	20.43	20.38	20.41	20.74	20.37	22.00
20MHz		100	0	20.08	20.24	20.38	20.21	20.34	22.00
ZUIVITZ		1	0	20.32	20.36	20.41	20.35	20.20	22.00
		1	50	20.19	20.31	20.30	20.21	20.02	22.00
		1	99	20.22	20.34	20.38	20.32	20.14	22.00
	16QAM	50	0	19.10	19.22	19.23	19.14	19.39	21.00
		50	25	19.13	19.27	19.24	19.17	19.30	21.00
		50	50	19.16	19.33	19.29	19.21	19.43	21.00
		100	0	19.19	19.25	19.27	19.26	19.43	21.00



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or faistification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-75) 8307 1443, or email: CM.Doccheck@sgs.com

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jiangsu) Plot Free Trade Zone 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号约6号厂房南部 邮编: 215000



Report No.: SUZR/2021/9002607

Rev.: 01

Page: 22 of 25

9.3 Low-power Exemption

According to ANSI C63.19-2011, a RF air interface technology of a device is exempt from testing when its average antenna input power plus its MIF is ≤17 dBm for any of its operation modes.

Air Interface (Ant)		Max Average Antenna Input Power (dBm)	Worst Case MIF (dB)			
CDMA		25.00	3.26	28.26	Yes	
LTE - FDD		24.50	-9.76	14.74	No	
LTE TOD	QPSK	25.00	25.38	50.38	Yes	
LTE - TDD	16QAM	24.00	24.56	48.56	Yes	

Air Interface	Max Average Antenna Input Power (dBm)	Worst Case MIF (dB)	Power + MIF (dB)	C63.19 test required
802.11b	17.00	-2.02	14.98	No
802.11g	13.00	0.12	14.12	No
802.11n-HT40	13.00	-13.44	0.56	No
802.11n-HT20	13.00	-13.44	0.56	No

General Note:

- 1. 16QAM is not necessary due the QPSK is the worst case.
- 2. According to ANSI C63.19 2011-version, for the air interface technology of a device is exempt from testing when its average antenna input power plus its MIF is ≤17 dBm for any of its operating modes.
- 3. HAC RF rating is M4 for the air interface which meets the low power exemption.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.ags.com/en/Terms-and-Conditions.agx; and, for electronic Documents at http://www.ags.com/en/Terms-and-Conditions/Terms-e-Document as public to Terms and Conditions for Telectronic Document as http://www.ags.com/en/Terms-and-Conditions/Terms-e-Document as public to the state of the stat

South of No. 6 Pfart, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jiangsu) Pilot Free Trade Zone 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000



Report No.: SUZR/2021/9002607

Rev.: 01

Page: 23 of 25

9.4 HAC RF Emission Test Results

Band	Test Mode	Channel	Frequenc y (MHz)	MIF (dB)	Audio Interference Level (dBV/m)	Margin to the next Level (dBV/m)	Power Drift (dB)	Category
CDMA BC0	RC1 SO3 1/8th Frame Rate	1013	824.7	3.26	28.74	11.26	-0.02	M4
CDMA BC0	RC1 SO3 1/8th Frame Rate	384	836.52	3.26	28.41	11.59	-0.08	M4
CDMA BC0	RC1 SO3 1/8th Frame Rate	777	848.31	3.26	27.38	12.62	0.00	M4
CDMA BC1	RC1 SO3 1/8th Frame Rate	25	1851.25	3.26	23.23	6.77	-0.03	M4
CDMA BC1	RC1 SO3 1/8th Frame Rate	600	1880	3.26	22.38	7.62	-0.02	M4
CDMA BC1	RC1 SO3 1/8th Frame Rate	1175	1908.75	3.26	19.03	10.97	-0.06	M4
CDMA BC10	RC1 SO3 1/8th Frame Rate	476	817.9	3.26	29.80	10.20	0.05	M4
CDMA BC10	RC1 SO3 1/8th Frame Rate	580	820.5	3.26	29.65	10.35	0.05	M4
CDMA BC10	RC1 SO3 1/8th Frame Rate	684	823.1	3.26	29.64	10.36	-0.06	M4
LTE Band 41 PC3	20M QPSK 1RB_0	39750	2506	-1.62	25.00	5.00	-0.13	M4
LTE Band 41 PC3	20M QPSK 1RB_0	40185	2549.5	-1.62	24.36	5.64	0.12	M4
LTE Band 41 PC3	20M QPSK 1RB_0	40620	2593	-1.62	22.85	7.15	-0.07	M4
LTE Band 41 PC3	20M QPSK 1RB_0	41055	2636.5	-1.62	23.16	6.84	0.06	M4
LTE Band 41 PC3	20M QPSK 1RB_0	41490	2680	-1.62	23.37	6.63	-0.09	M4
LTE Band 41 PC2	20M QPSK 1RB_0	39750	2506	-1.62	24.18	5.82	0.04	M4
LTE Band 41 PC2	20M QPSK 1RB_0	40185	2549.5	-1.62	24.29	5.71	0.04	M4
LTE Band 41 PC2	20M QPSK 1RB_0	40620	2593	-1.62	22.91	7.09	0.08	M4
LTE Band 41 PC2	20M QPSK 1RB_0	41055	2636.5	-1.62	23.58	6.42	0.11	M4
LTE Band 41 PC2	20M QPSK 1RB_0	41490	2680	-1.62	23.72	6.28	0.06	M4

Remark:

1. The detail RF Emission results please refer to appendix B.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.ags.com/en/Terms-and-Conditions.agx; and, for electronic Documents at http://www.ags.com/en/Terms-and-Conditions/Terms-e-Document as public to Terms and Conditions for Telectronic Document as http://www.ags.com/en/Terms-and-Conditions/Terms-e-Document as public to the state of the stat

South of No. 6 Pfart, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jiangsu) Pilot Free Trade Zone 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号约6号厂房南部 邮编: 215000



Report No.: SUZR/2021/9002607

Rev.: 01 Page: 24 of 25

10 Equipment list

	Equipment	Manufacturer	Model	Serial Number	Calibration Date	Due date of calibration
\boxtimes	Software	SPEAG	DASY52 52.10.4	NA	NCR	NCR
\boxtimes	DAE	SPEAG	DAE4	1428	2021-04-09	2022-04-08
\boxtimes	E-Field Probe	SPEAG	EF3DV3	4051	2021-05-28	2022-05-27
	Validation Kits	SPEAG	CD835V3	1052	2021-05-27	2022-05-26
\boxtimes	Validation Kits	SPEAG	CD1880V3	1044	2021-05-27	2022-05-26
\boxtimes	Validation Kits	SPEAG	CD2600V3	1021	2021-05-27	2022-05-26
\boxtimes	Test Arch SD HAC	SPEAG	NA	NA	NCR	NCR
	Universal Radio	R&S	CMW500	169633	2021-02-20	2022-02-19
	Communication Tester	nmunication Tester			2022-02-14	2023-02-13
	Signal Congretor	Dec	SMB100A	182393	2021-02-20	2022-02-19
	Signal Generator	R&S			2022-02-15	2023-02-14
	Preamplifier	Qiji	YX28980933	202104001	NCR	NCR
\boxtimes	Power Meter	Aglient	E4419B	6843318103	2021-06-08	2022-06-07
\boxtimes	Power Sensor	Aglient	E9301A	MY41496508	2021-09-09	2022-09-08
\boxtimes	Power Sensor	Aglient	E9301H	MY41495605	2021-06-08	2022-06-07
\boxtimes	Coaxial low pass filter	Mini-Circuits	VLF-2500(+)	NA	NCR	NCR
\boxtimes	Coaxial low pass filter	Microlab Fxr	LA-F13	NA	NCR	NCR
\boxtimes	DC POWER SUPPLY	SAKO	SK1730SL5A	NA	NCR	NCR
\boxtimes	Humidity and Temperature Indicator	MingGao	MingGao	NA	2021-06-16	2022-06-15

Note:

1. All the equipments are within the valid period when the tests are performed.

2. NCR: "No-Calibration Required".



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exceed except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone (86-755) \$3071443.

South of No. 6 Pfart, No. 1, Runsheng Read, Suchou Industrial Park, Suchou Area, China (Jangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86–512) 62992980 v

www.sgsgroup.com.cn sgs.china@sgs.com



Report No.: SUZR/2021/9002607

Rev.: 01

Page: 25 of 25

11 Calibration certificate

Please see the Appendix C

12 Photographs

Please see the Appendix D

Appendix A: Detailed System Check Results

Appendix B: Detailed Test Results

Appendix C: Calibration certificate

Appendix D: Photographs

---END---

