

Appendix A

Detailed System Check Results

- | |
|--------------------------------------|
| 1. System Check Results |
| 2. System Performance Check 835 MHz |
| 3. System Performance Check 1880 MHz |
| 4. System Performance Check 2600 MHz |

Test Laboratory: SGS-SAR Lab

HAC-E-Dipole CD835V3**DUT: CD835V3; Type: CD835V3; Serial: 1052**

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: Air; Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Phantom section: RF Section

DASY 5 Configuration:

- Probe: EF3DV3 - SN4051; ConvF(1, 1, 1); Calibrated: 2021-05-28
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1428; Calibrated: 2021-04-09
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Dipole E-Field measurement/E Scan - measurement distance from the probe sensor center to CD835 = 15mm/Hearing Aid Compatibility Test at 15mm distance (41x361x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 110.0 V/m; Power Drift = -0.12 dB

PMR not calibrated. PMF = 1.000 is applied.

E-field emissions = 101.9 V/m

Average value of Total=(107.2+101.9)/2=104.55V/m

PMF scaled E-field


Grid 1 M4 102.4 V/m	Grid 2 M4 107.2 V/m	Grid 3 M4 106.4 V/m
Grid 4 M4 55.88 V/m	Grid 5 M4 58.04 V/m	Grid 6 M4 58.00 V/m
Grid 7 M4 97.38 V/m	Grid 8 M4 101.9 V/m	Grid 9 M4 101.6 V/m

Cursor:

Total = 107.2 V/m

E Category: M4

Location: -1.5, -73, 8.7 mm

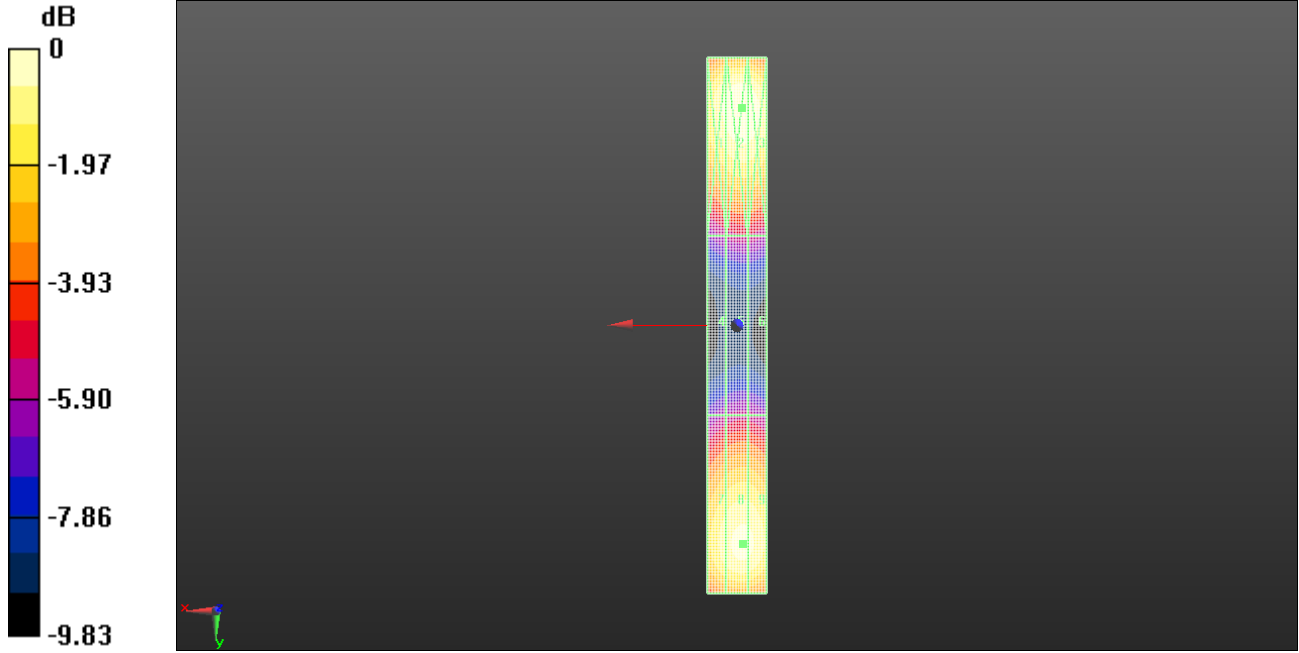

0 dB = 107.2 V/m = 40.60 dBV/m

Test Laboratory: SGS-SAR Lab

HAC-E-Dipole CD1880V3**DUT: CD1880V3; Type: CD1880V3; Serial: 1044**

Communication System: UID 0, CW; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: Air; Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Phantom section: RF Section

DASY 5 Configuration:

- Probe: EF3DV3 - SN4051; ConvF(1, 1, 1); Calibrated: 2021-05-28
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1428; Calibrated: 2021-04-09
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Dipole E-Field measurement/E Scan - measurement distance from the probe sensor center to CD1880 =15mm/Hearing Aid Compatibility Test at 15mm distance (41x181x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 130.0 V/m; Power Drift = -0.09 dB

PMR not calibrated. PMF = 1.000 is applied.

E-field emissions = 81.68 V/m

Average value of Total=(86.57+81.68)/2=84.125V/m

PMF scaled E-field


Grid 1 M3 83.52 V/m	Grid 2 M3 86.57 V/m	Grid 3 M3 85.90 V/m
Grid 4 M4 60.32 V/m	Grid 5 M4 61.77 V/m	Grid 6 M4 61.76 V/m
Grid 7 M3 78.15 V/m	Grid 8 M3 81.68 V/m	Grid 9 M3 81.38 V/m

Cursor:

Total = 86.57 V/m

E Category: M3

Location: -1, -33.5, 8.7 mm

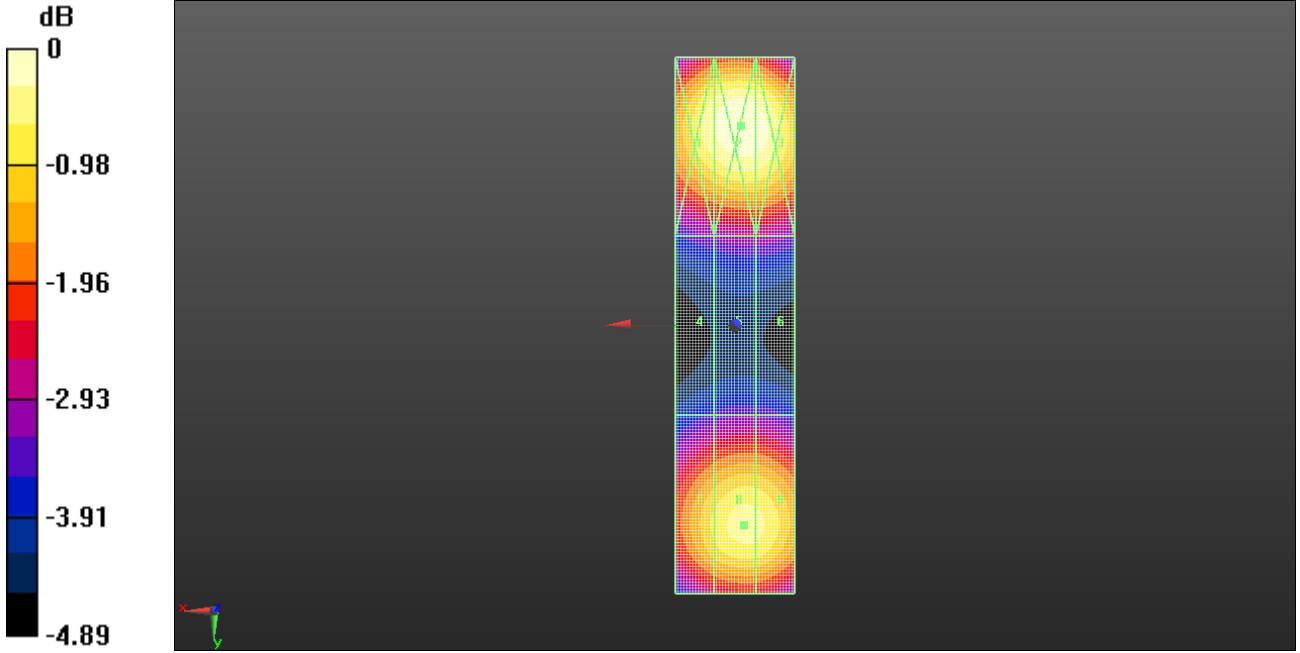

0 dB = 86.57 V/m = 38.75 dBV/m

Test Laboratory: SGS-SAR Lab

HAC-E-Dipole CD2600V3**DUT: CD2600V3; Type: CD2600V3; Serial: 1021**

Communication System: UID 0, CW (0); Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: Air; Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Phantom section: RF Section

DASY 5 Configuration:

- Probe: EF3DV3 - SN4051; ConvF(1, 1, 1); Calibrated: 2021-05-28
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1428; Calibrated: 2021-04-09
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Dipole E-Field measurement/E Scan - measurement distance from the probe sensor center to CD2600 =15mm/Hearing Aid Compatibility Test at 15mm distance (41x181x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 63.85 V/m; Power Drift = -0.01 dB

PMR not calibrated. PMF = 1.000 is applied.

E-field emissions = 81.48 V/m

Average value of Total=(81.63+81.48)/2=81.555V/m

PMF scaled E-field

Grid 1 M3 78.76 V/m	Grid 2 M3 81.63 V/m	Grid 3 M3 81.24 V/m
Grid 4 M3 73.86 V/m	Grid 5 M3 76.22 V/m	Grid 6 M3 76.16 V/m
Grid 7 M3 78.42 V/m	Grid 8 M3 81.48 V/m	Grid 9 M3 80.90 V/m

Cursor:

Total = 81.63 V/m

E Category: M3

Location: -1.5, -22, 8.7 mm

