



Report No.: SUZR/2021/A002407

Rev.: 01

Page: 1 of 1

# Appendix B

## Detailed Test Results

|                                  |
|----------------------------------|
| 1. LTE                           |
| LTE Band 41 for E-Field Emission |

Test Laboratory: SGS-SAR Lab

**Q6005 HAC-RF-LTE Band 41 PC2 20M QPSK 1RB0 39750CH****DUT: Q6005; Type: Mobinet Phone; Serial: 990019130002357**

Communication System: UID 10172 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 2506 MHz; Duty Cycle: 1:8.33681

Medium: Air; Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Phantom section: RF Section

DASY 5 Configuration:

- Probe: EF3DV3 - SN4051; ConvF(1, 1, 1); Calibrated: 2021-05-28
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1374; Calibrated: 2021-11-05
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Device E-Field measurement/E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1):** Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 15.33 V/m; Power Drift = 0.04dB

Applied MIF = -1.62 dB

RF audio interference level = 24.72 dBV/m

**Emission category: M4**

MIF scaled E-field


|  |  |  |
|--|--|--|
| <b>Grid 1 M4</b><br><b>26.57 dBV/m</b> | <b>Grid 2 M4</b><br><b>27.73 dBV/m</b> | <b>Grid 3 M4</b><br><b>27.03 dBV/m</b> |
| <b>Grid 4 M4</b><br><b>22.2 dBV/m</b>  | <b>Grid 5 M4</b><br><b>24.72 dBV/m</b> | <b>Grid 6 M4</b><br><b>24.6 dBV/m</b>  |
| <b>Grid 7 M4</b><br><b>22.34 dBV/m</b> | <b>Grid 8 M4</b><br><b>22.7 dBV/m</b>  | <b>Grid 9 M4</b><br><b>21.93 dBV/m</b> |


**Cursor:**

Total = 27.73 dBV/m

E Category: M4

Location: -0.5, -25, 7.7 mm

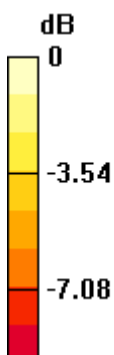

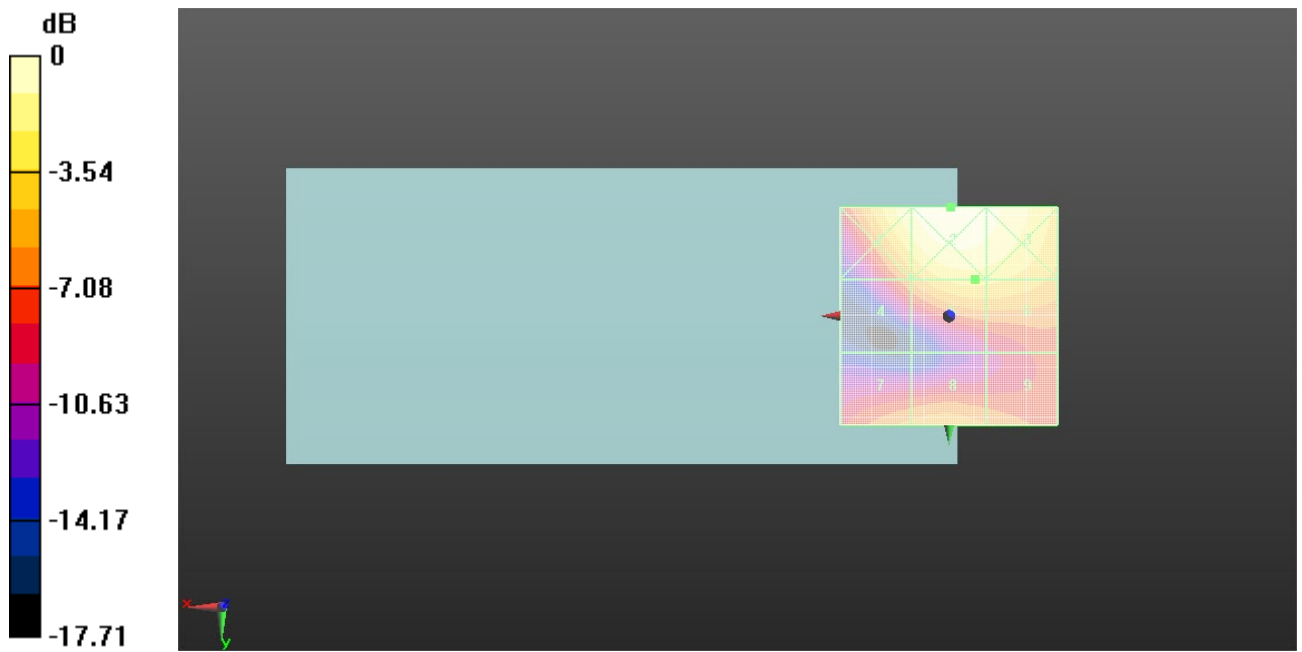

Test Laboratory: SGS-SAR Lab

**Q6005 HAC-RF-LTE Band 41 PC2 20M QPSK 1RB50 40185CH****DUT: Q6005; Type: Mobinet Phone; Serial: 990019130002357**

Communication System: UID 10172 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 2549.5 MHz; Duty Cycle: 1:8.33681

Medium: Air; Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Phantom section: RF Section

DASY 5 Configuration:

- Probe: EF3DV3 - SN4051; ConvF(1, 1, 1); Calibrated: 2021-05-28
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1374; Calibrated: 2021-11-05
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Device E-Field measurement/E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1):** Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 22.94 V/m; Power Drift = -0.03 dB

Applied MIF = -1.62 dB

RF audio interference level = 25.53 dBV/m

**Emission category: M4**

MIF scaled E-field


|  |  |  |
|--|--|--|
| <b>Grid 1 M4</b><br><b>26.41 dBV/m</b> | <b>Grid 2 M4</b><br><b>27.36 dBV/m</b> | <b>Grid 3 M4</b><br><b>26.63 dBV/m</b> |
| <b>Grid 4 M4</b><br><b>22.82 dBV/m</b> | <b>Grid 5 M4</b><br><b>25.53 dBV/m</b> | <b>Grid 6 M4</b><br><b>25.45 dBV/m</b> |
| <b>Grid 7 M4</b><br><b>21.39 dBV/m</b> | <b>Grid 8 M4</b><br><b>19.77 dBV/m</b> | <b>Grid 9 M4</b><br><b>20.65 dBV/m</b> |


**Cursor:**

Total = 27.36 dBV/m

E Category: M4

Location: 0.5, -25, 7.7 mm

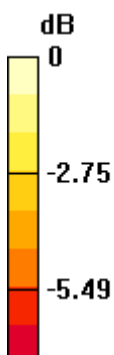

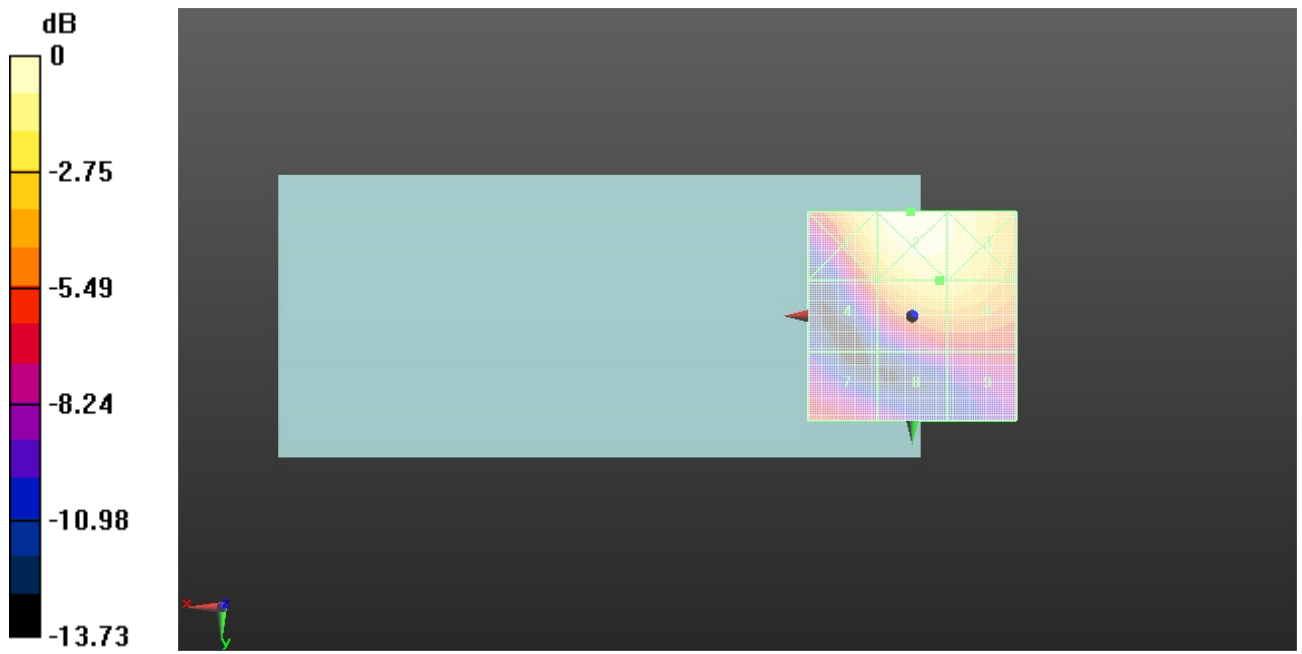

0 dB = 23.32 V/m = 27.35 dBV/m

Test Laboratory: SGS-SAR Lab

**Q6005 HAC-RF-LTE Band 41 PC2 20M QPSK 1RB0 40620CH****DUT: Q6005; Type: Mobinet Phone; Serial: 990019130002357**

Communication System: UID 10172 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 2593 MHz; Duty Cycle: 1:8.33681

Medium: Air; Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Phantom section: RF Section

DASY 5 Configuration:

- Probe: EF3DV3 - SN4051; ConvF(1, 1, 1); Calibrated: 2021-05-28
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1374; Calibrated: 2021-11-05
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Device E-Field measurement/E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1):** Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 26.75 V/m; Power Drift = 0.02 dB

Applied MIF = -1.62 dB

RF audio interference level = 26.59 dBV/m

**Emission category: M4**

MIF scaled E-field


|  |  |  |
|--|--|--|
| <b>Grid 1 M4</b><br><b>27.19 dBV/m</b> | <b>Grid 2 M4</b><br><b>28.52 dBV/m</b> | <b>Grid 3 M4</b><br><b>27.68 dBV/m</b> |
| <b>Grid 4 M4</b><br><b>24.07 dBV/m</b> | <b>Grid 5 M4</b><br><b>26.59 dBV/m</b> | <b>Grid 6 M4</b><br><b>26.29 dBV/m</b> |
| <b>Grid 7 M4</b><br><b>21.85 dBV/m</b> | <b>Grid 8 M4</b><br><b>21.76 dBV/m</b> | <b>Grid 9 M4</b><br><b>21.78 dBV/m</b> |



**Cursor:**

Total = 28.52 dBV/m

E Category: M4

Location: -0.5, -25, 7.7 mm

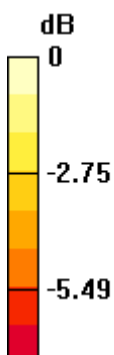

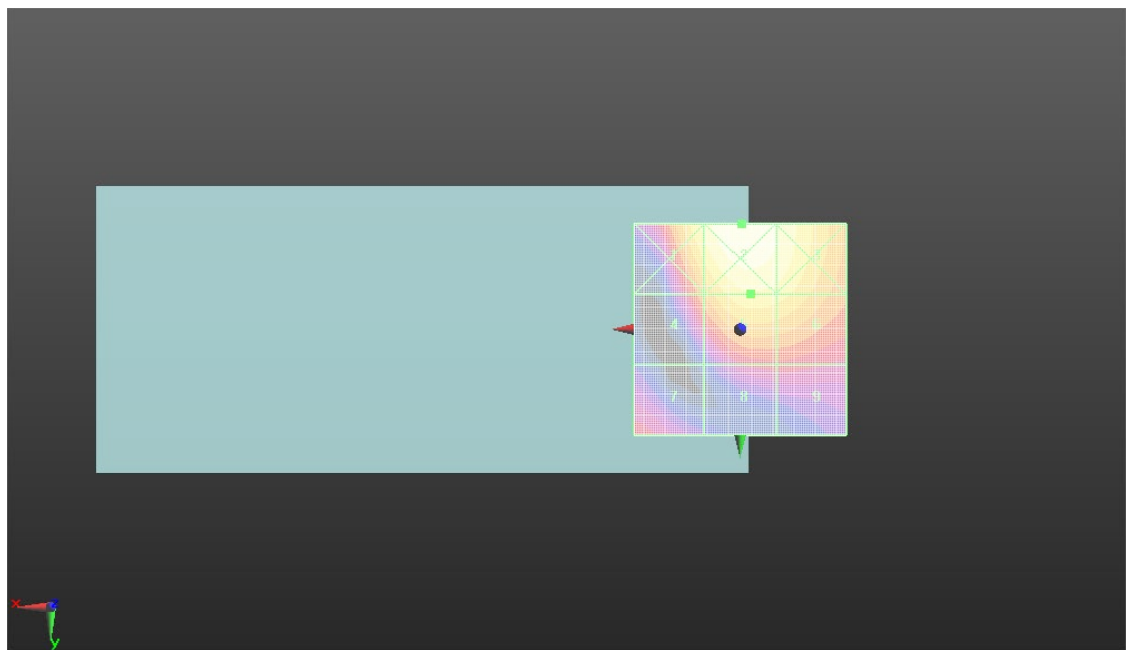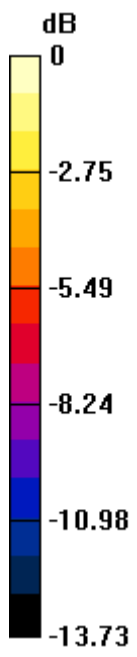

0 dB = 26.68 V/m = 28.52 dBV/m

Test Laboratory: SGS-SAR Lab

**Q6005 HAC-RF-LTE Band 41 PC2 20M QPSK 1RB99 41055CH****DUT: Q6005; Type: Mobinet Phone; Serial: 990019130002357**

Communication System: UID 10172 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 2636.5 MHz; Duty Cycle: 1:8.33681

Medium: Air; Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Phantom section: RF Section

DASY 5 Configuration:

- Probe: EF3DV3 - SN4051; ConvF(1, 1, 1); Calibrated: 2021-05-28
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1374; Calibrated: 2021-11-05
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Device E-Field measurement/E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1):** Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 34.99 V/m; Power Drift = -0.02 dB

Applied MIF = -1.62 dB

RF audio interference level = 28.09 dBV/m

**Emission category: M4**

MIF scaled E-field


|  |  |  |
|--|--|--|
| Grid 1 <b>M4</b><br><b>25.67 dBV/m</b> | Grid 2 <b>M4</b><br><b>28.51 dBV/m</b> | Grid 3 <b>M4</b><br><b>28.37 dBV/m</b> |
| Grid 4 <b>M4</b><br><b>24.23 dBV/m</b> | Grid 5 <b>M4</b><br><b>28.09 dBV/m</b> | Grid 6 <b>M4</b><br><b>27.96 dBV/m</b> |
| Grid 7 <b>M4</b><br><b>22.23 dBV/m</b> | Grid 8 <b>M4</b><br><b>25.49 dBV/m</b> | Grid 9 <b>M4</b><br><b>25.46 dBV/m</b> |

**Cursor:**


Total = 28.51 dBV/m

E Category: M4

Location: -5.5, -19, 7.7 mm

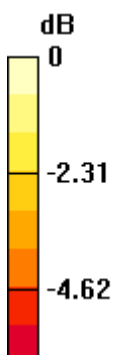



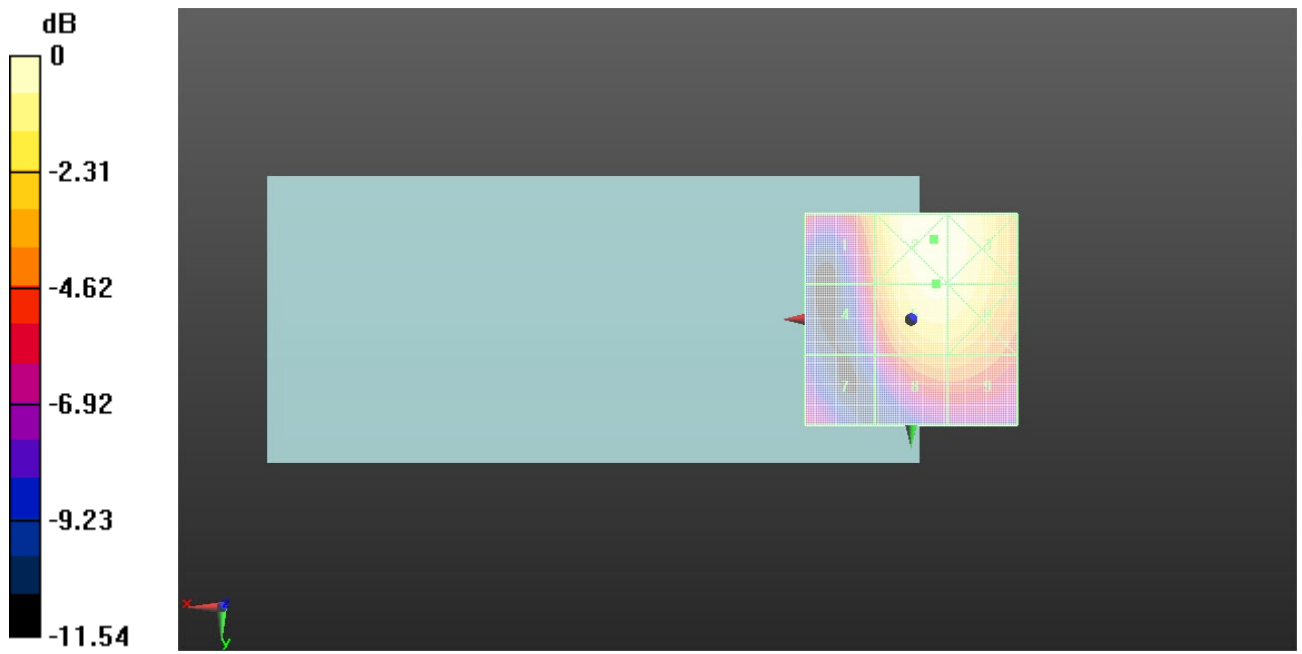

**Q6005 HAC-RF-LTE Band 41 PC2 20M QPSK 1RB99 41490CH****DUT: Q6005; Type: Mobinet Phone; Serial: 990019130002357**

Communication System: UID 10172 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 2680 MHz; Duty Cycle: 1:8.33681

Medium: Air; Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Phantom section: RF Section

DASY 5 Configuration:

- Probe: EF3DV3 - SN4051; ConvF(1, 1, 1); Calibrated: 2021-05-28
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1374; Calibrated: 2021-11-05
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Device E-Field measurement/E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1):** Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 35.33 V/m; Power Drift = -0.04 dB

Applied MIF = -1.62 dB

RF audio interference level = 28.23 dBV/m

**Emission category: M4**

MIF scaled E-field


|  |  |  |
|--|--|--|
| Grid 1 <b>M4</b><br><b>26.08 dBV/m</b> | Grid 2 <b>M4</b><br><b>28.53 dBV/m</b> | Grid 3 <b>M4</b><br><b>28.42 dBV/m</b> |
| Grid 4 <b>M4</b><br><b>24.07 dBV/m</b> | Grid 5 <b>M4</b><br><b>28.22 dBV/m</b> | Grid 6 <b>M4</b><br><b>28.09 dBV/m</b> |
| Grid 7 <b>M4</b><br><b>23.17 dBV/m</b> | Grid 8 <b>M4</b><br><b>25.93 dBV/m</b> | Grid 9 <b>M4</b><br><b>25.88 dBV/m</b> |


**Cursor:**

Total = 28.53 dBV/m

E Category: M4

Location: -6, -19, 7.7 mm

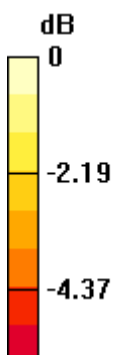

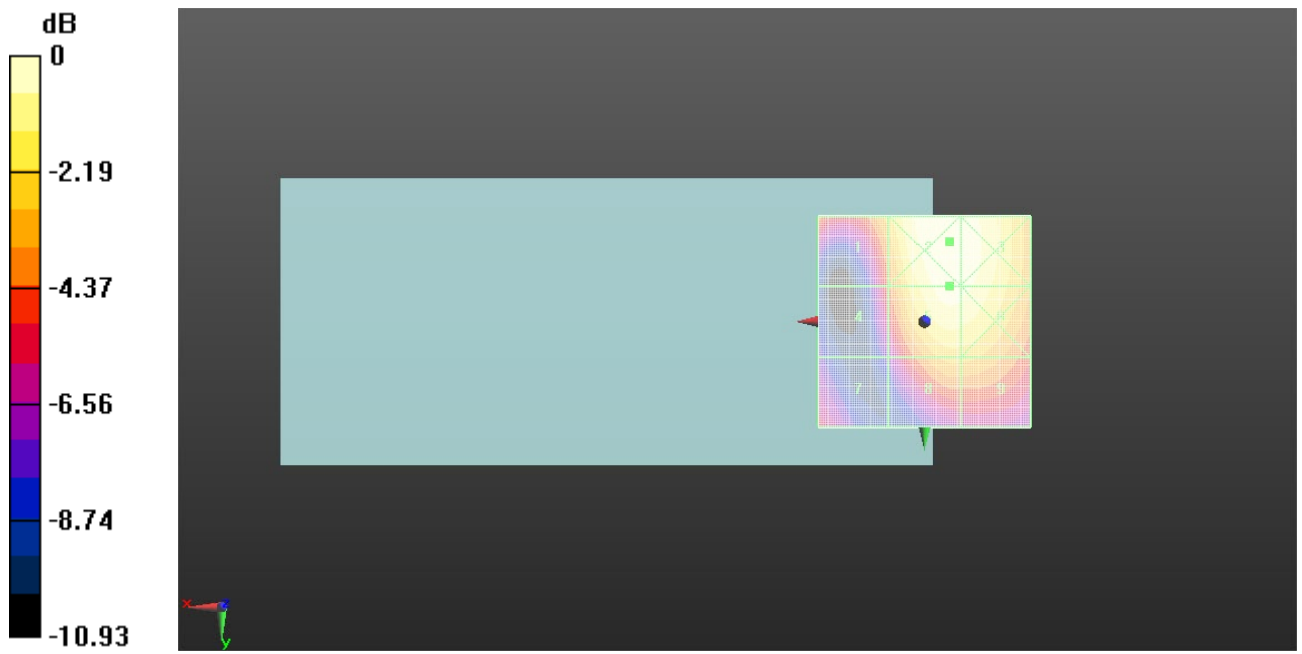

0 dB = 26.71 V/m = 28.53 dBV/m

Test Laboratory: SGS-SAR Lab

**Q6005 HAC-RF-LTE Band 41 PC3 20M QPSK 1RB0 39750CH****DUT: Q6005; Type: Mobinet Phone; Serial: 990019130002357**

Communication System: UID 10172 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 2506 MHz; Duty Cycle: 1:8.33681

Medium: Air; Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Phantom section: RF Section

DASY 5 Configuration:

- Probe: EF3DV3 - SN4051; ConvF(1, 1, 1); Calibrated: 2021-05-28
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1374; Calibrated: 2021-11-05
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Device E-Field measurement/E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1):** Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 13.76 V/m; Power Drift = -0.16 dB

Applied MIF = -1.62 dB

RF audio interference level = 23.37 dBV/m

**Emission category: M4**

MIF scaled E-field


|  |  |  |
|--|--|--|
| <b>Grid 1 M4</b><br><b>25.48 dBV/m</b> | <b>Grid 2 M4</b><br><b>26.32 dBV/m</b> | <b>Grid 3 M4</b><br><b>25.76 dBV/m</b> |
| <b>Grid 4 M4</b><br><b>21.16 dBV/m</b> | <b>Grid 5 M4</b><br><b>23.37 dBV/m</b> | <b>Grid 6 M4</b><br><b>23.24 dBV/m</b> |
| <b>Grid 7 M4</b><br><b>20.98 dBV/m</b> | <b>Grid 8 M4</b><br><b>21.49 dBV/m</b> | <b>Grid 9 M4</b><br><b>20.53 dBV/m</b> |



**Cursor:**

Total = 26.32 dBV/m

E Category: M4

Location: 2.5, -25, 7.7 mm

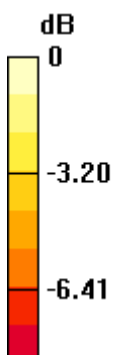

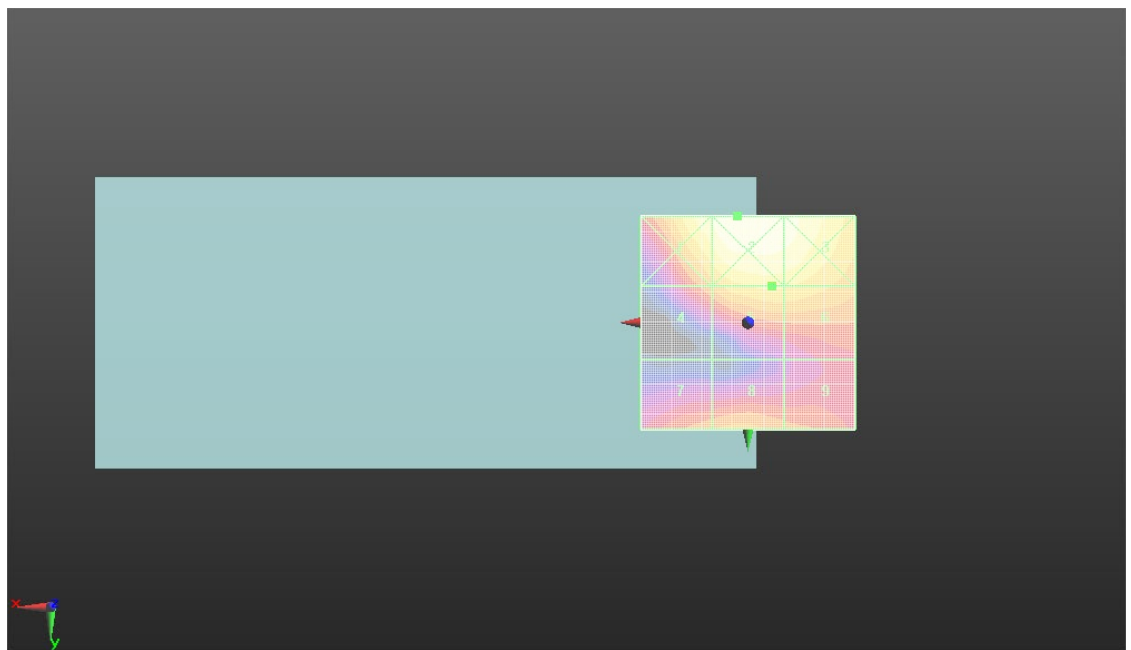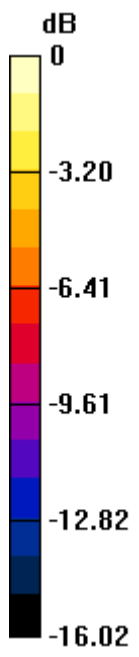

0 dB = 20.71 V/m = 26.32 dBV/m

Test Laboratory: SGS-SAR Lab

**Q6005 HAC-RF-LTE Band 41 PC3 20M QPSK 1RB0 40185CH****DUT: Q6005; Type: Mobinet Phone; Serial: 990019130002357**

Communication System: UID 10172 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 2549.5 MHz; Duty Cycle: 1:8.33681

Medium: Air; Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Phantom section: RF Section

DASY 5 Configuration:

- Probe: EF3DV3 - SN4051; ConvF(1, 1, 1); Calibrated: 2021-05-28
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1374; Calibrated: 2021-11-05
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Device E-Field measurement/E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1):** Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 17.72 V/m; Power Drift = 0.15 dB

Applied MIF = -1.62 dB

RF audio interference level = 24.01 dBV/m

**Emission category: M4**

MIF scaled E-field


|  |  |  |
|--|--|--|
| <b>Grid 1 M4</b><br><b>24.91 dBV/m</b> | <b>Grid 2 M4</b><br><b>25.91 dBV/m</b> | <b>Grid 3 M4</b><br><b>25.2 dBV/m</b>  |
| <b>Grid 4 M4</b><br><b>21.38 dBV/m</b> | <b>Grid 5 M4</b><br><b>24.01 dBV/m</b> | <b>Grid 6 M4</b><br><b>23.84 dBV/m</b> |
| <b>Grid 7 M4</b><br><b>19.71 dBV/m</b> | <b>Grid 8 M4</b><br><b>18.35 dBV/m</b> | <b>Grid 9 M4</b><br><b>19.17 dBV/m</b> |


**Cursor:**

Total = 25.91 dBV/m

E Category: M4

Location: -0.5, -24.5, 7.7 mm

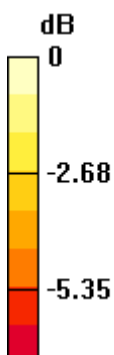

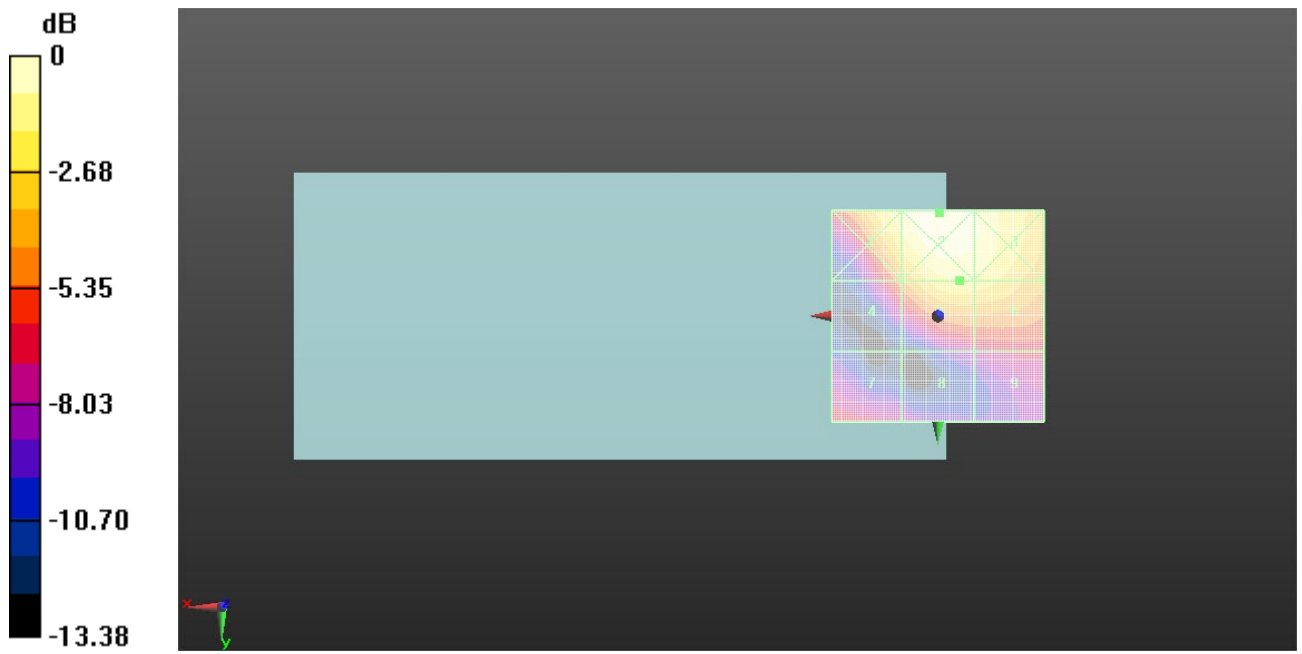

0 dB = 19.75 V/m = 25.91 dBV/m

Test Laboratory: SGS-SAR Lab

**Q6005 HAC-RF-LTE Band 41 PC3 20M QPSK 1RB0 40620CH**

**DUT: Q6005; Type: Mobinet Phone; Serial: 990019130002357**

Communication System: UID 10172 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 2593 MHz; Duty Cycle: 1:8.33681

Medium: Air; Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Phantom section: RF Section

DASY 5 Configuration:

- Probe: EF3DV3 - SN4051; ConvF(1, 1, 1); Calibrated: 2021-05-28
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1374; Calibrated: 2021-11-05
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Device E-Field measurement/E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1):** Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 23.72 V/m; Power Drift = -0.08 dB

Applied MIF = -1.62 dB

RF audio interference level = 25.39 dBV/m

**Emission category: M4**

MIF scaled E-field


|  |  |  |
|--|--|--|
| <b>Grid 1 M4</b><br><b>25.99 dBV/m</b> | <b>Grid 2 M4</b><br><b>27.31 dBV/m</b> | <b>Grid 3 M4</b><br><b>26.44 dBV/m</b> |
| <b>Grid 4 M4</b><br><b>22.88 dBV/m</b> | <b>Grid 5 M4</b><br><b>25.39 dBV/m</b> | <b>Grid 6 M4</b><br><b>25.08 dBV/m</b> |
| <b>Grid 7 M4</b><br><b>20.56 dBV/m</b> | <b>Grid 8 M4</b><br><b>20.49 dBV/m</b> | <b>Grid 9 M4</b><br><b>20.49 dBV/m</b> |

**Cursor:**


Total = 27.31 dBV/m

E Category: M4

Location: -0.5, -25, 7.7 mm

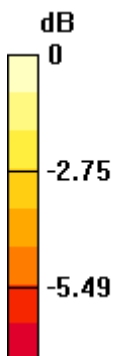



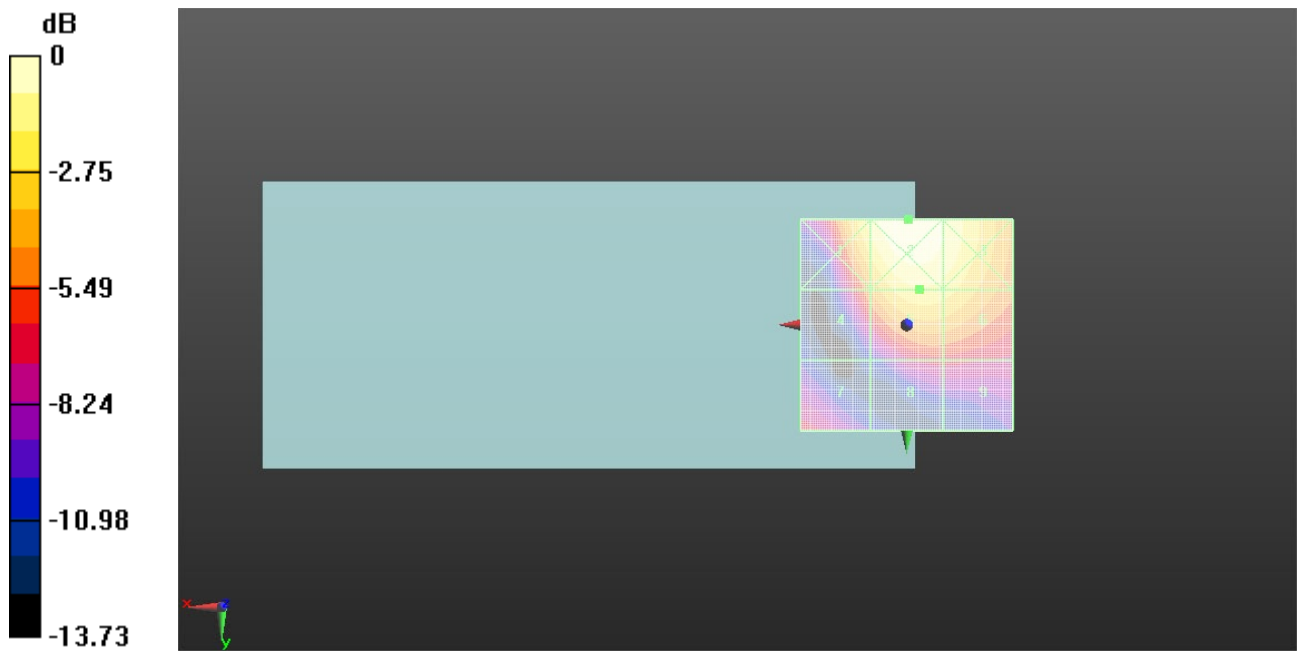

0 dB = 23.21 V/m = 27.31 dBV/m

Test Laboratory: SGS-SAR Lab

**Q6005 HAC-RF-LTE Band 41 PC3 20M QPSK 1RB0 41055CH****DUT: Q6005; Type: Mobinet Phone; Serial: 990019130002357**

Communication System: UID 10172 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 2636.5 MHz; Duty Cycle: 1:8.33681

Medium: Air; Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Phantom section: RF Section

DASY 5 Configuration:

- Probe: EF3DV3 - SN4051; ConvF(1, 1, 1); Calibrated: 2021-05-28
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1374; Calibrated: 2021-11-05
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Device E-Field measurement/E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1):** Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 28.74 V/m; Power Drift = 0.06 dB

Applied MIF = -1.62 dB

RF audio interference level = 26.59 dBV/m

**Emission category: M4**

MIF scaled E-field


|  |  |  |
|--|--|--|
| Grid 1 <b>M4</b><br><b>24.71 dBV/m</b> | Grid 2 <b>M4</b><br><b>27.31 dBV/m</b> | Grid 3 <b>M4</b><br><b>27.04 dBV/m</b> |
| Grid 4 <b>M4</b><br><b>23.1 dBV/m</b>  | Grid 5 <b>M4</b><br><b>26.59 dBV/m</b> | Grid 6 <b>M4</b><br><b>26.41 dBV/m</b> |
| Grid 7 <b>M4</b><br><b>20.96 dBV/m</b> | Grid 8 <b>M4</b><br><b>23.31 dBV/m</b> | Grid 9 <b>M4</b><br><b>23.3 dBV/m</b>  |


**Cursor:**

Total = 27.31 dBV/m

E Category: M4

Location: -4, -21, 7.7 mm

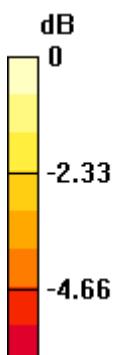

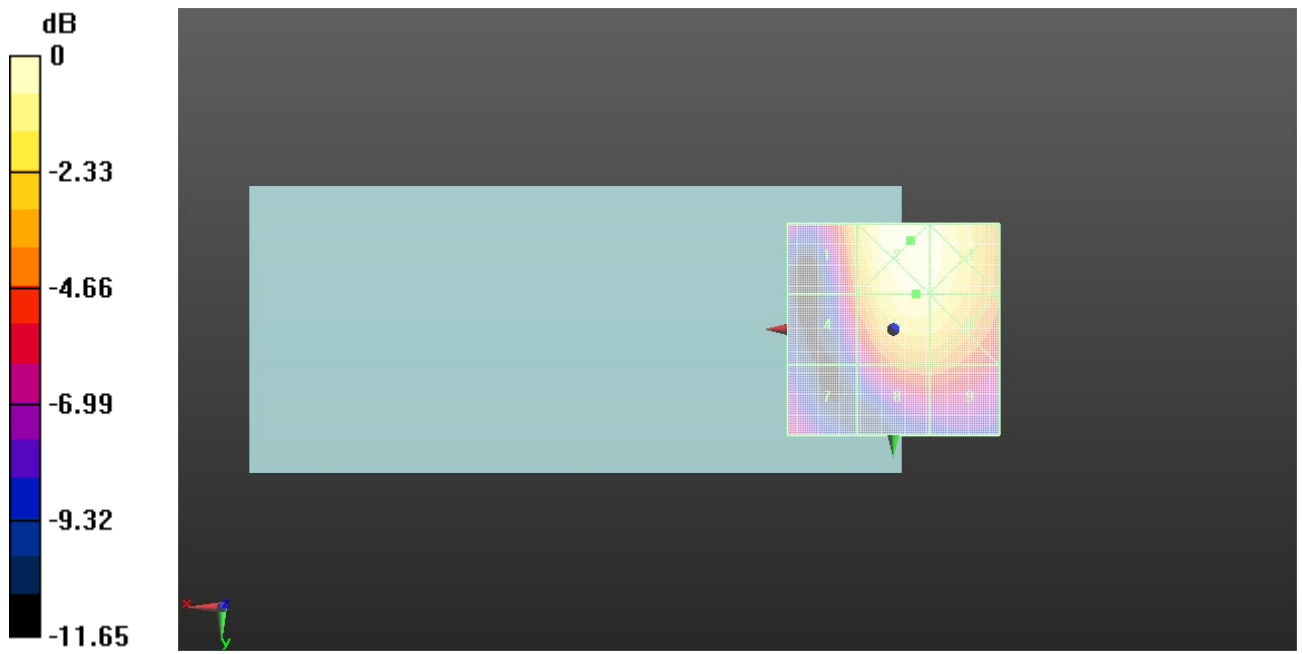

0 dB = 23.19 V/m = 27.31 dBV/m

Test Laboratory: SGS-SAR Lab

**Q6005 HAC-RF-LTE Band 41 PC3 20M QPSK 1RB0 41490CH****DUT: Q6005; Type: Mobinet Phone; Serial: 990019130002357**

Communication System: UID 10172 - CAG, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 2680 MHz; Duty Cycle: 1:8.33681

Medium: Air; Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Phantom section: RF Section

DASY 5 Configuration:

- Probe: EF3DV3 - SN4051; ConvF(1, 1, 1); Calibrated: 2021-05-28
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1374; Calibrated: 2021-11-05
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Device E-Field measurement/E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1):** Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 30.26 V/m; Power Drift = 0.10 dB

Applied MIF = -1.62 dB

RF audio interference level = 26.95 dBV/m

**Emission category: M4**

MIF scaled E-field


|  |  |  |
|--|--|--|
| Grid 1 <b>M4</b><br><b>24.87 dBV/m</b> | Grid 2 <b>M4</b><br><b>27.33 dBV/m</b> | Grid 3 <b>M4</b><br><b>27.23 dBV/m</b> |
| Grid 4 <b>M4</b><br><b>22.78 dBV/m</b> | Grid 5 <b>M4</b><br><b>26.95 dBV/m</b> | Grid 6 <b>M4</b><br><b>26.86 dBV/m</b> |
| Grid 7 <b>M4</b><br><b>22.09 dBV/m</b> | Grid 8 <b>M4</b><br><b>24.65 dBV/m</b> | Grid 9 <b>M4</b><br><b>24.62 dBV/m</b> |


**Cursor:**

Total = 27.33 dBV/m

E Category: M4

Location: -6, -18, 7.7 mm

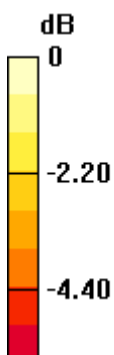

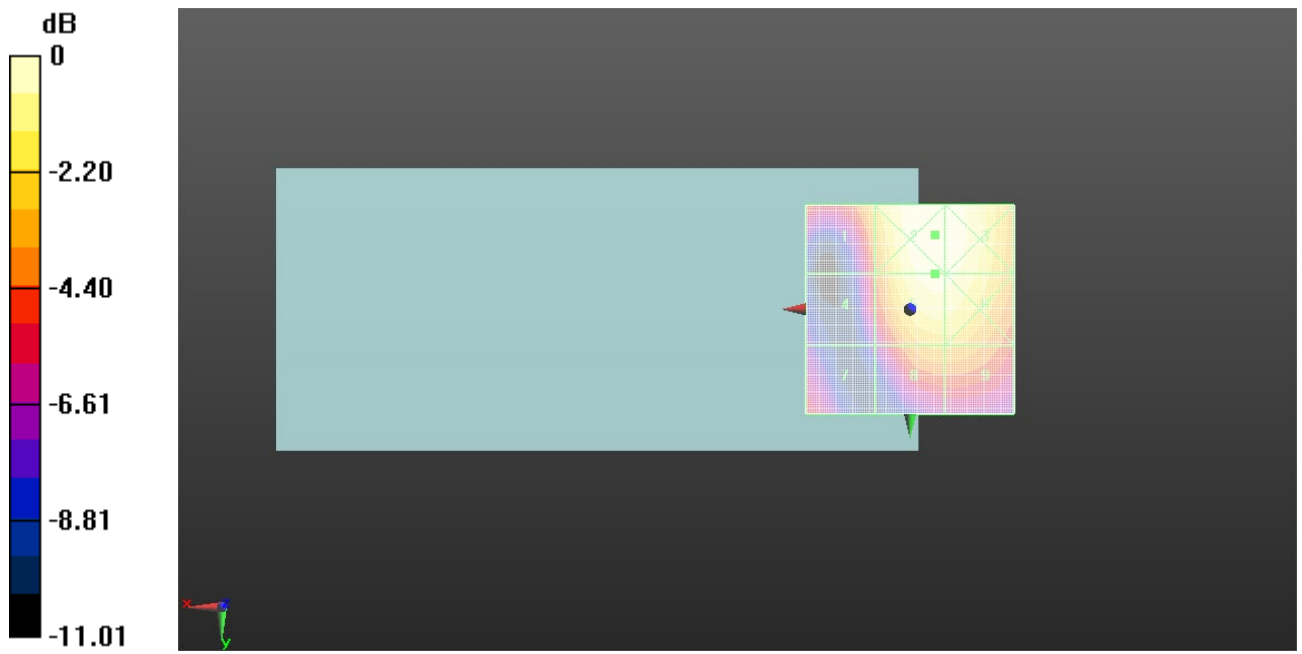

0 dB = 23.25 V/m = 27.33 dBV/m