

# FCC Part 22H & 24E Measurement and Test Report

For

**Servicios Troncalizados SA de CV**

**Av. Revolucion 639 piso 4 Col.San Pedro de los Pinos CP 03800,Mexico**

**City Mexico**

**FCC ID: 2AM58-TVXONE**

**FCC Rules:** FCC Part 22H, FCC Part 24E

**Product Description:** Intelligent Two Way Radio

**Tested Model:** TVXONE

**Report No.:** WTX19X10072351W-1

**Sample Receipt Date:** 2019-03-05

**Tested Date:** 2019-03-05 to 2019-04-23

**Issued Date:** 2019-10-22

**Tested By:** Jason Su / Engineer



**Reviewed By:** Silin Chen / EMC Manager



**Approved & Authorized By:** Jandy So / PSQ Manager



**Prepared By:**

**Shenzhen SEM Test Technology Co., Ltd.**

1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road,

Bao'an District, Shenzhen, P.R.C. (518101)

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen SEM Test Technology Co., Ltd.

**TABLE OF CONTENTS**

**1. GENERAL INFORMATION.....4**

    1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....4

    1.2 TEST STANDARDS.....6

    1.3 TEST METHODOLOGY.....6

    1.4 TEST FACILITY.....6

    1.5 EUT SETUP AND TEST MODE.....7

    1.6 MEASUREMENT UNCERTAINTY.....8

    1.7 TEST EQUIPMENT LIST AND DETAILS.....9

**2. SUMMARY OF TEST RESULTS .....11**

**3. RF EXPOSURE .....12**

    3.1 STANDARD APPLICABLE.....12

    3.2 TEST RESULT.....12

**4. RF OUTPUT POWER .....13**

    4.1 STANDARD APPLICABLE.....13

    4.2 TEST PROCEDURE.....13

    4.3 SUMMARY OF TEST RESULTS/PLOTS.....13

**5. PEAK-TO-AVERAGE RATIO (PAR) OF TRANSMITTER.....18**

    5.1 STANDARD APPLICABLE.....18

    5.2 TEST PROCEDURE.....18

    5.3 SUMMARY OF TEST RESULTS.....18

**6. EMISSION BANDWIDTH.....20**

    6.1 STANDARD APPLICABLE.....20

    6.2 TEST PROCEDURE.....20

    6.3 SUMMARY OF TEST RESULTS/PLOTS.....20

**7. OUT OF BAND EMISSIONS AT ANTENNA TERMINAL.....35**

    7.1 STANDARD APPLICABLE.....35

    7.2 TEST PROCEDURE.....35

    7.3 SUMMARY OF TEST RESULTS/PLOTS.....35

**8. SPURIOUS RADIATED EMISSIONS.....68**

    8.1 STANDARD APPLICABLE.....68

    8.2 TEST PROCEDURE.....68

    8.3 SUMMARY OF TEST RESULTS/PLOTS.....68

**9. FREQUENCY STABILITY .....79**

    9.1 STANDARD APPLICABLE.....79

    9.2 TEST PROCEDURE.....79

    9.3 SUMMARY OF TEST RESULTS/PLOTS.....79

**10. MODULATION CHARACTERISTICS .....83**

    10.1 STANDARD APPLICABLE.....83

    10.2 TEST PROCEDURE.....83

    10.3 SUMMARY OF TEST RESULTS/PLOTS.....83

## Report version

Version No.	Date of issue	Description
Rev.1	2019-10-22	Refer the old report WTX19X03011771W-1, updated the trade name, model name, EUT appearance photos, and cert holder, but the circuit and the electronic construction do not change, declared by the manufacturer.so the test data from the original report.
/	/	/

## 1. GENERAL INFORMATION

### 1.1 Product Description for Equipment Under Test (EUT)

#### Client Information

Applicant: Servicios Troncalizados SA de CV  
Address of applicant: Av. Revolucion 639 piso 4 Col.San Pedro de los Pinos CP  
03800 Mexico City Mexico

Manufacturer: Servicios Troncalizados SA de CV  
Address of manufacturer: Av. Revolucion 639 piso 4 Col.San Pedro de los Pinos CP  
03800 Mexico City Mexico

General Description of EUT:	
Product Name:	Intelligent Two Way Radio
Brand Name:	TeamVOX
Model No.:	TVXONE
Adding Model(s):	/
Rated Voltage:	DC3.7V
Battery:	4000mAh
Adapter Model:	Model: HJ-0501000E1-US Input: AC100-240V 50/60Hz 0.2A; Output:DC5V 1000mA
Software Version:	011019 release-keys
Hardware Version:	TVH30_MB_V2.0_20180704
<i>Note: The test data is gathered from a production sample provided by the manufacturer.</i>	

<b>Technical Characteristics of EUT:</b>	
<b>2G</b>	
Support Networks:	GSM, GPRS, EDGE
Support Band:	GSM850/PCS1900
Uplink Frequency:	GSM/GPRS/EDGE 850: 824~849MHz GSM/GPRS/EDGE 1900: 1850~1910MHz
Downlink Frequency:	GSM/GPRS/EDGE 850: 869~894MHz GSM/GPRS/EDGE 1900: 1930~1990MHz
Max RF Output Power:	GSM850: 32.02dBm, GSM1900: 29.09dBm EDGE850: 26.69dBm, EDGE1900: 25.77dBm
Type of Emission:	GSM850: 251KGXW, GSM1900: 247KGXW EDGE850: 253KG7W, EDGE1900: 247KG7W
Type of Modulation:	GMSK, 8PSK
Type of Antenna:	Integral Antenna
Antenna Gain:	GSM850: 1.21dBi; GSM1900: 1.86dBi
GPRS/EDGE Class:	Class 12
<b>3G</b>	
Support Networks:	WCDMA, HSDPA, HSUPA
Support Band:	WCDMA Band 2, WCDMA Band 5
Uplink Frequency:	WCDMA Band 2: 1850~1910MHz WCDMA Band 5: 824~849MHz
Downlink Frequency:	WCDMA Band 2: 1930~1990MHz WCDMA Band 5: 869~894MHz
RF Output Power:	WCDMA Band 2: 22.84dBm, WCDMA Band 5: 22.88dBm
Type of Emission:	WCDMA Band 2: 4M19F9W WCDMA Band 5: 4M18F9W
Type of Modulation:	BPSK,QPSK
Antenna Type:	Integral Antenna
Antenna Gain:	WCDMA Band 2: 1.86dBi, WCDMA Band 5: 1.21dBi

## 1.2 Test Standards

The tests were performed according to following standards:

**FCC Rules Part 2:** FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS

**FCC Rules Part 22:** PRIVATE LAND MOBILE RADIO SERVICES.

**FCC Rules Part 24:** PUBLIC MOBILE SERVICES

**TIA/EIA 603 E March 2016:** Land Mobile FM or PM Communications Equipment Measurement and Performance Standards.

**ANSI C63.26-2015:** American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services

**KDB 971168 D01 Power Meas License Digital Systems v03r01:** MEASUREMENT GUIDANCE FOR CERTIFICATION OF LICENSED DIGITAL TRANSMITTERS

**Maintenance of compliance** is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

## 1.3 Test Methodology

All measurements contained in this report were conducted with TIA/EIA 603 E/ KDB 971168/ ANSI C63.26

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

## 1.4 Test Facility

### Address of the test laboratory

Laboratory: Shenzhen SEM Test Technology Co., Ltd.

Address: 1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road, Bao'an District, Shenzhen, P.R.C. (518101)

### FCC – Registration No.: 125990

Shenzhen SEM Test Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010

### Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Shenzhen SEM Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

## 1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	GSM 850	Low, Middle, High Channels
TM2	GPRS 850	Low, Middle, High Channels
TM3	EDGE 850	Low, Middle, High Channels
TM4	GSM 1900	Low, Middle, High Channels
TM5	GPRS 1900	Low, Middle, High Channels
TM6	EDGE 1900	Low, Middle, High Channels
TM7	WCDMA Band 5	Low, Middle, High Channels
TM8	HSDPA Band 5	Low, Middle, High Channels
TM9	HSUPA Band 5	Low, Middle, High Channels
TM10	WCDMA Band 2	Low, Middle, High Channels
TM11	HSDPA Band 2	Low, Middle, High Channels
TM12	HSUPA Band 2	Low, Middle, High Channels

Testing Configure			
Support Band	Support Standard	Channel Frequency(MHz)	Channel Number
GSM 850	GSM/GPRS/EDGE	824.2	128
		836.6	190
		848.8	251
PCS 1900	GSM/GPRS/EDGE	1850.2	512
		1880.0	661
		1909.8	810
WCDMA Band 5	WCDMA/HSDPA/HSUPA	826.4	4132
		836.6	4183
		846.6	4233
WCDMA Band 2	WCDMA/HSDPA/HSUPA	1852.4	9262
		1880.0	9400
		1907.6	9538

Note: the transmitter has been tested on the communications mode of GSM, GPRS, EDGE, WCDMA, HSDPA, HSUPA compliance test and record the worst case.

Test Conditions	
Temperature:	22~25 °C
Relative humidity	50~55 %.
ATM Pressure:	1019 mbar

<b>EUT Cable List and Details</b>			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
DC Cable	0.9	Unshielded	Without Ferrite

<b>Special Cable List and Details</b>			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

<b>Auxiliary Equipment List and Details</b>			
Description	Manufacturer	Model	Serial Number
/	/	/	/

## 1.6 Measurement Uncertainty

<b>Measurement uncertainty</b>			
Parameter	Conditions	Uncertainty	
RF Output Power	Conducted	$\pm 0.42\text{dB}$	
Occupied Bandwidth	Conducted	$\pm 1.5\%$	
Frequency Stability	Conducted	2.3%	
Transmitter Spurious Emissions	Conducted	$\pm 0.42\text{dB}$	
Transmitter Spurious Emissions	Radiated	30-200MHz $\pm 4.52\text{dB}$	
		0.2-1GHz $\pm 5.56\text{dB}$	
		1-6GHz $\pm 3.84\text{dB}$	
		6-18GHz $\pm 3.92\text{dB}$	



### 1.7 Test Equipment List and Details

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due. Date
SEMT-1075	Communication Tester	Rohde & Schwarz	CMW500	148650	2018-05-22	2019-05-21
SEMT-1063	GSM Tester	Rohde & Schwarz	CMU200	114403	2018-05-22	2019-05-21
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2018-05-22	2019-05-21
SEMT-1079	Spectrum Analyzer	Agilent	N9020A	US47140102	2018-05-22	2019-05-21
SEMT-1080	Signal Generator	Agilent	83752A	3610A01453	2018-05-22	2019-05-21
SEMT-1081	Vector Signal Generator	Agilent	N5182A	MY47070202	2018-05-22	2019-05-21
SEMT-1028	Power Divider	Weinschel	1506A	PM204	2018-05-22	2019-05-21
SEMT-1082	Power Divider	RF-Lambda	RFLT4W5M18G	14110400027	2018-05-22	2019-05-21
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2018-05-22	2019-05-21
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2018-05-22	2019-05-21
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2018-05-22	2019-05-21
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2018-05-22	2019-05-21
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2017-06-08	2020-06-07
SEMT-1068	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2017-06-08	2020-06-07
SEMT-1042	Horn Antenna	ETS	3117	00086197	2017-06-08	2020-06-07
SEMT-1121	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170582	2017-06-08	2020-06-07
SEMT-1168	Pre-amplifier	Direction Systems Inc.	PAP-0126	14141-12838	2018-05-22	2019-05-21
SEMT-1169	Pre-amplifier	Direction Systems Inc.	PAP-2640	14145-14153	2018-05-22	2019-05-21
SEMT-1163	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2018-05-22	2019-05-21
SEMT-1170	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2018-03-19	2021-03-18
SEMT-1166	Power Limiter	Agilent	N9356B	MY45450376	2018-05-22	2019-05-21
SEMT-1048	RF Limiter	ATTEN	AT-BSF-2400~2500	/	2018-05-22	2019-05-21
SEMT-1076	RF Switcher	Top Precision	RCS03-A2	/	2018-05-22	2019-05-21
SEMT-C001	Cable	Zheng DI	LL142-07-07-10M(A)	/	2019-03-18	2020-03-17
SEMT-C002	Cable	Zheng DI	ZT40-2.92J-2.92J-6M	/	2019-03-18	2020-03-17
SEMT-C003	Cable	Zheng DI	ZT40-2.92J-2.92J-2.5M	/	2019-03-18	2020-03-17
SEMT-C004	Cable	Zheng DI	2M0RFC	/	2019-03-18	2020-03-17

SEMT-C005	Cable	Zheng DI	1M0RFC	/	2019-03-18	2020-03-17
SEMT-C006	Cable	Zheng DI	1M0RFC	/	2019-03-18	2020-03-17
SEMT-C001	Cable	Zheng DI	LL142-07-07-10M(A)	/	2018-03-19	2019-03-18
SEMT-C002	Cable	Zheng DI	ZT40-2.92J-2.92J-6M	/	2018-03-19	2019-03-18
SEMT-C003	Cable	Zheng DI	ZT40-2.92J-2.92J-2.5M	/	2018-03-19	2019-03-18
SEMT-C004	Cable	Zheng DI	2M0RFC	/	2018-03-19	2019-03-18
SEMT-C005	Cable	Zheng DI	1M0RFC	/	2018-03-19	2019-03-18
SEMT-C006	Cable	Zheng DI	1M0RFC	/	2018-03-19	2019-03-18

## 2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§ 1.1307, § 2.1093	RF Exposure	Compliant
§ 22.913 (a), § 24.232 (c)	RF Output Power	Compliant
§ 24.51	Peak-to-average Ratio (PAR) of Transmitter	Compliant
§ 22.917 (b), § 24.238 (b)	Emission Bandwidth	Compliant
§ 22.917 (a), § 24.238 (a)	Spurious Emissions at Antenna Terminal	Compliant
§ 22.917 (a), § 24.238 (a)	Spurious Radiation Emissions	Compliant
§ 22.917 (a), § 24.238 (a)	Out of Band Emissions	Compliant
§ 22.355, § 24.235	Frequency Stability	Compliant

### **3. RF Exposure**

---

#### **3.1 Standard Applicable**

According to § 1.1307 and § 2.1093, the portable transmitter must comply the RF exposure requirements.

#### **3.2 Test Result**

This product complied with the requirement of the RF exposure, please see the SAR report.

## 4. RF Output Power

---


### 4.1 Standard Applicable

According to §22.913(a)(2), The ERP of mobile and portable stations transmitters and auxiliary test transmitters must not exceed 7 Watts.

According to §24.232 (c), Mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

### 4.2 Test Procedure

- Conducted output power test method:

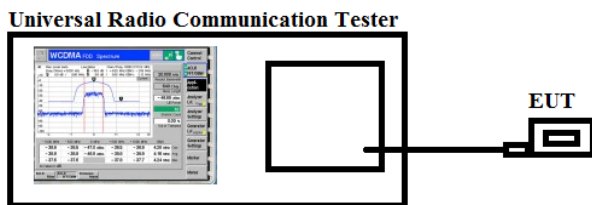

- Radiated power test method:

1. The setup of EUT is according with per ANSI/TIA Standard 603E and ANSI C63.26 measurement procedure.
2. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.
3. The frequency range up to tenth harmonic of the fundamental frequency was investigated.
4. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

### 4.3 Summary of Test Results/Plots

## &gt; Max. Radiated Power

Mode	Channel	Antenna Polar	ERP (dBm)	Limit (dBm)	Result
GSM850	128	V	29.25	<38.45	Pass
		H	25.32		
	190	V	29.08		
		H	25.68		
	251	V	30.01		
		H	26.28		
GPRS850	128	V	29.65	<38.45	Pass
		H	25.65		
	190	V	29.47		
		H	26.21		
	251	V	29.98		
		H	25.36		
EGPRS850	128	V	24.21	<38.45	Pass
		H	21.25		
	190	V	24.65		
		H	21.25		
	251	V	23.85		
		H	21.10		

Mode	Channel	Antenna Polar	EIRP (dBm)	Limit (dBm)	Result
PCS1900	512	V	27.21	<33.00	Pass
		H	24.25		
	661	V	27.85		
		H	24.28		
	810	V	27.65		
		H	24.02		
GPRS1900	512	V	27.02	<33.00	Pass
		H	24.32		
	661	V	27.65		
		H	23.58		
	810	V	27.65		
		H	24.02		
EGPRS1900	512	V	23.21	<33.00	Pass
		H	20.28		
	661	V	23.65		
		H	21.01		
	810	V	23.52		
		H	21.28		

Mode	Channel	Antenna Polar	ERP	Limit (dBm)	Result
WCDMA Band V	4132	V	20.28	<38.45	Pass
		H	18.21		
	4183	V	20.55		
		H	19.21		
	4233	V	20.88		
		H	19.48		

Mode	Channel	Antenna Polar	EIRP	Limit (dBm)	Result
WCDMA Band II	9262	V	20.85	<33.00	Pass
		H	17.25		
	9400	V	20.32		
		H	18.21		
	9538	V	20.65		
		H	18.58		

Note: Pre-scan mode WCDMA/HSDPA/HSUPA find the worst case at WCDMA mode and recorded in the test report.



➤ **Max. Conducted Power (Average power)**

Conducted Average power (dBm)						
Band	GSM850			PCS1900		
Channel	128	190	251	512	661	810
Frequency(MHz)	824.20	836.60	848.80	1850.20	1880.00	1909.80
GSM	31.60	31.85	32.02	29.06	28.79	29.00
GPRS(1Slot)	31.63	31.73	31.73	29.08	28.88	29.09
EGPRS(1Slot)	26.29	26.69	26.67	25.77	25.66	25.52

Conducted Average power (dBm)						
Band	WCDMA Band V			WCDMA Band II		
Channel	4132	4183	4233	9262	9400	9538
Frequency(MHz)	826.4	836.6	846.6	1852.4	1880.0	1907.6
RMC 12.2k	22.88	22.80	22.66	22.84	22.35	22.58
HSDPA Subtest-1	21.41	21.27	21.29	22.50	21.98	21.88
HSDPA Subtest-2	21.38	21.25	21.26	22.48	21.96	21.83
HSDPA Subtest-3	21.39	21.25	21.26	22.47	21.97	21.85
HSDPA Subtest-4	21.38	21.24	21.27	22.46	21.97	21.84
HSUPA Subtest-1	21.33	21.20	21.28	22.53	21.91	21.79
HSUPA Subtest-2	21.31	21.18	21.25	22.52	21.87	21.75
HSUPA Subtest-3	21.31	21.17	21.25	22.51	21.89	21.76
HSUPA Subtest-4	21.3	21.17	21.26	22.51	21.87	21.75
HSUPA Subtest-5	21.3	21.17	21.26	22.52	21.86	21.76

## 5. Peak-to-average Ratio (PAR) of Transmitter

### 5.1 Standard Applicable


According to §24.232(d), Power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of §24.51. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

### 5.2 Test Procedure

According with KDB 971168

1. The signal analyzer's CCDF measurement profile is enabled
2. Frequency = carrier center frequency
3. Measurement BW > Emission bandwidth of signal
4. The signal analyzer was set to collect one million samples to generate the CCDF curve
5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power

Test Configuration for the emission bandwidth testing:

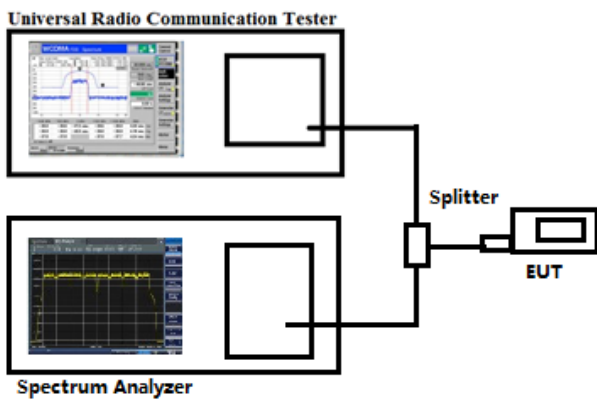

### 5.3 Summary of Test Results

PCS1900				
Test Mode	Channel	Frequency (MHz)	PAR (dB)	Limit (dB)
GSM	661	1850.2	5.11	13
GPRS(1 Slot)	661	1850.2	4.92	13
EDGE(1 Slot)	661	1850.2	5.69	13

WCDMA Band II				
Test Mode	Channel	Frequency (MHz)	PAR (dB)	Limit (dB)
WCDMA	9262	1852.4	6.25	13
	9400	1880.0	5.87	13
	9538	1907.6	5.42	13

Note: Only the worst case was selected to record.

## 6. Emission Bandwidth

### 6.1 Standard Applicable


According to §22.917(b), The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

According to §24.238(b), The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

### 6.2 Test Procedure

The RF output terminal of the transmitter was connected to the input of the spectrum analyzer via a suitable attenuation. The RBW of the spectrum analyzer was set to 10kHz for GSM mode and 100kHz for WCDMA mode, VBW shall be at least 3 times the RBW, and the 26dB bandwidth was recorded.

Test Configuration for the emission bandwidth testing:

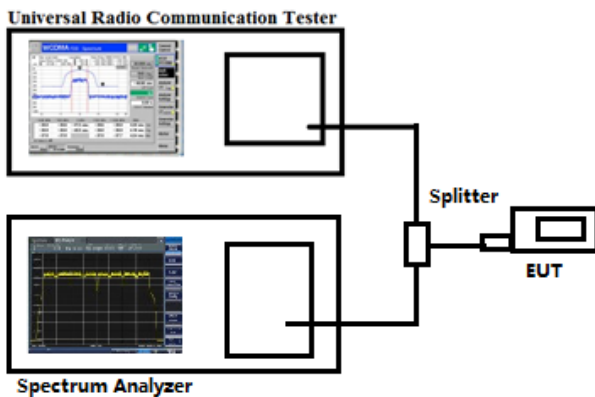


### 6.3 Summary of Test Results/Plots

EUT Mode	Channel	Frequency (MHz)	99% Occupy bandwidth (kHz)	-26dB bandwidth (kHz)
GSM 850 (GMSK)	128	824.20	247.6818	325.574
	190	836.60	248.8814	322.611
	251	848.80	246.1185	321.038
GPRS850 (GMSK,1Slot)	128	824.20	249.4929	317.471
	190	836.60	244.6285	315.295
	251	848.80	251.1204	319.187
EGPRS850 (8PSK,1Slot)	128	824.20	247.4334	318.361
	190	836.60	252.9565	318.745
	251	848.80	246.5466	316.896
PCS1900 (GMSK)	512	1850.20	242.0805	319.765
	661	1880.00	244.3480	321.125
	810	1909.80	246.5255	318.813
GPRS1900 (GMSK,1Slot)	512	1850.20	246.0136	315.534
	661	1880.00	245.4165	319.223
	810	1909.80	245.6669	318.928
EGPRS1900 (8PSK,1Slot)	512	1850.20	247.2957	316.237
	661	1880.00	246.2249	315.991
	810	1909.80	243.6809	308.804


EUT Mode	Channel	Frequency (MHz)	99% Occupy bandwidth (kHz)	-26dB bandwidth (kHz)
WCDMA Band V	4132	826.40	4178.4	4749
	4183	836.60	4182.2	4719
	4233	846.60	4165.1	4716
HSDPA	4132	826.40	4175.4	4725
	4183	836.60	4178.7	4733
	4233	846.60	4169.1	4731
HSUPA	4132	826.40	4169.9	4742
	4183	836.60	4171.5	4719
	4233	846.60	4170.3	4726
WCDMA Band II	9262	1852.40	4181.9	4729
	9400	1880.00	4189.7	4744
	9538	1907.60	4184.6	4731
HSDPA	9262	1852.40	4185.2	4721
	9400	1880.00	4185.1	4712
	9538	1907.60	4174.5	4700
HSUPA	9262	1852.40	4182.2	4901
	9400	1880.00	4178.4	4982
	9538	1907.60	4181.4	4827

## GSM850


Low Channel

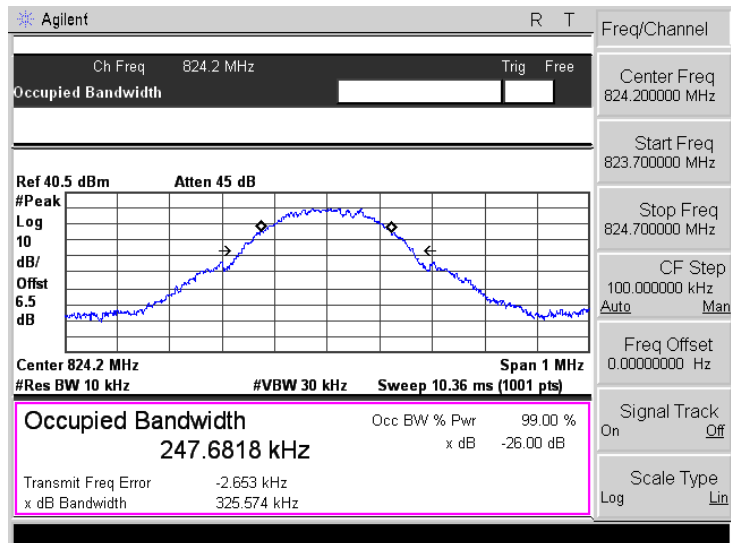

Middle Channel

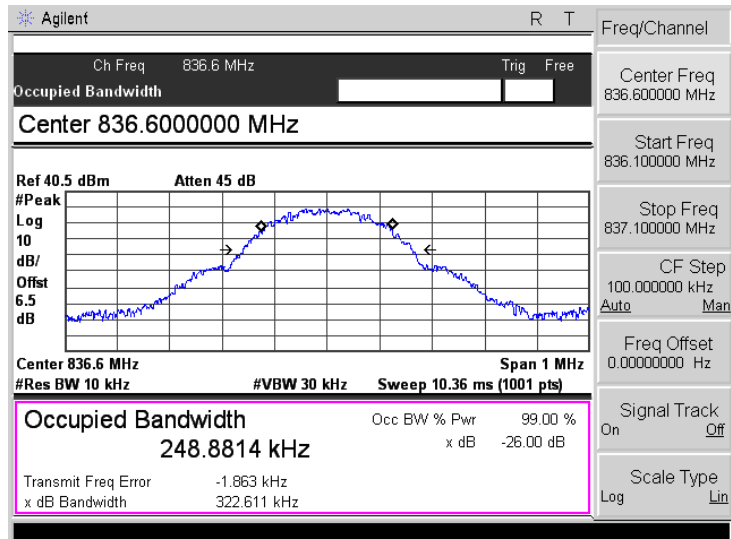


High Channel

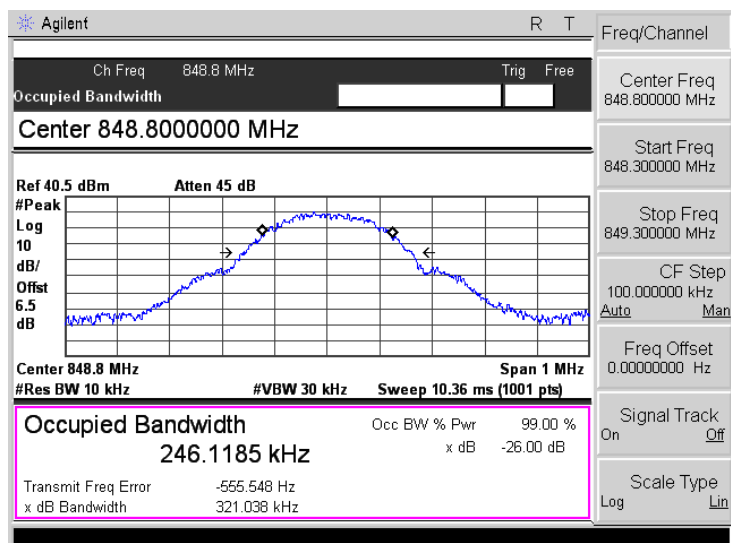


## GPRS850


Low Channel

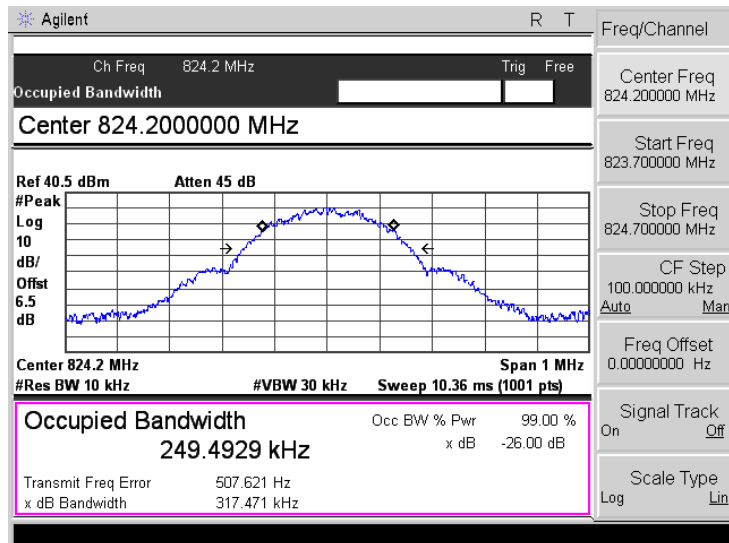

Middle Channel

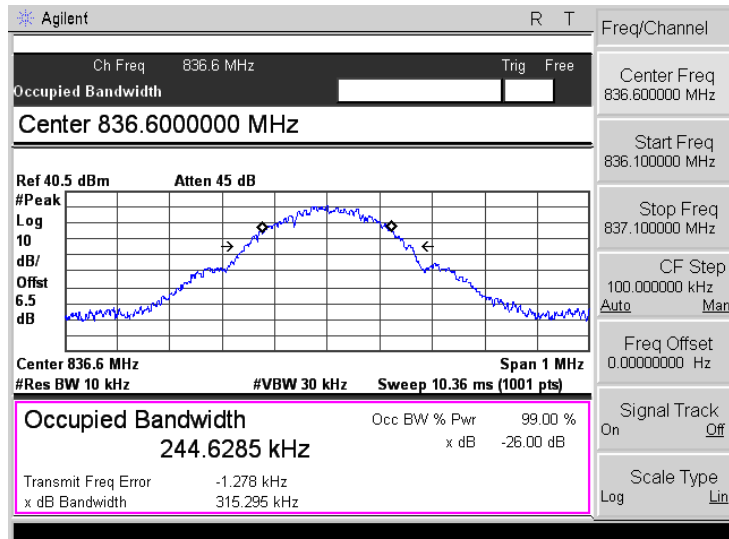


High Channel

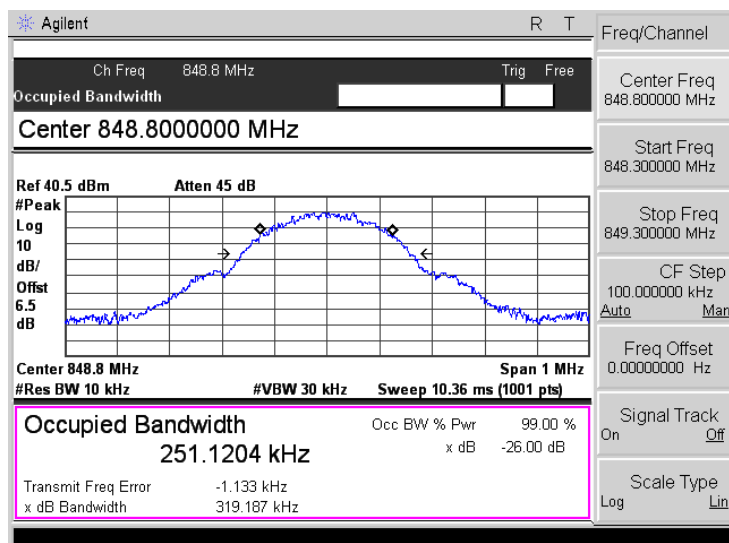




## EGPRS850


Low Channel

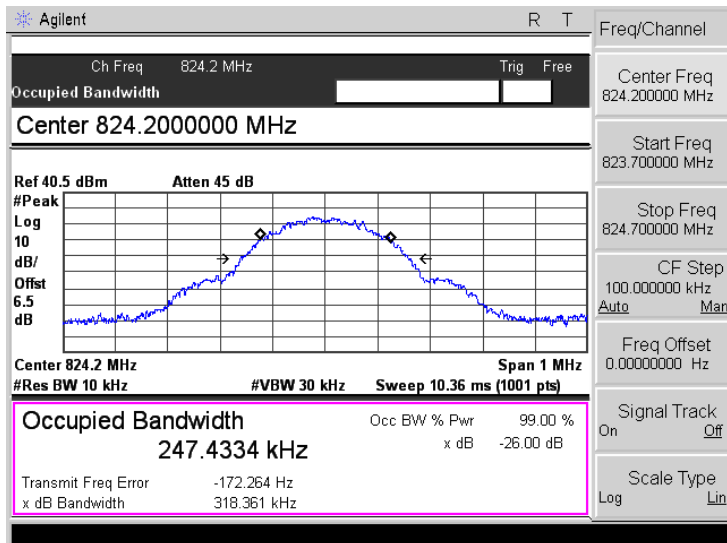

Middle Channel

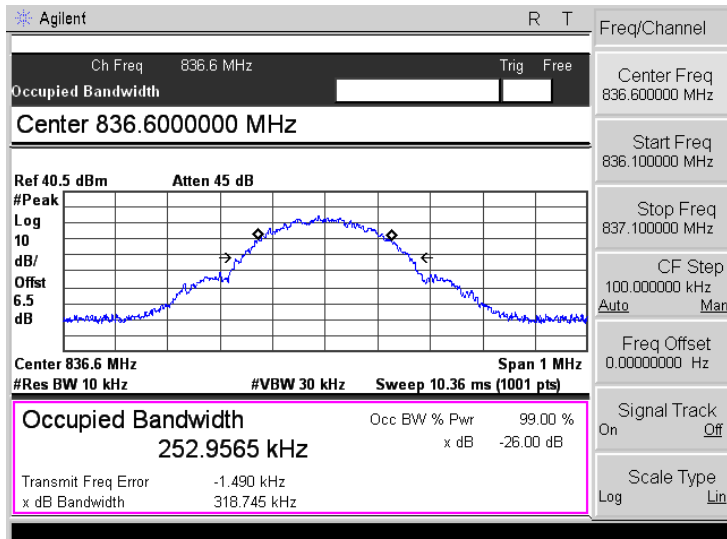


High Channel

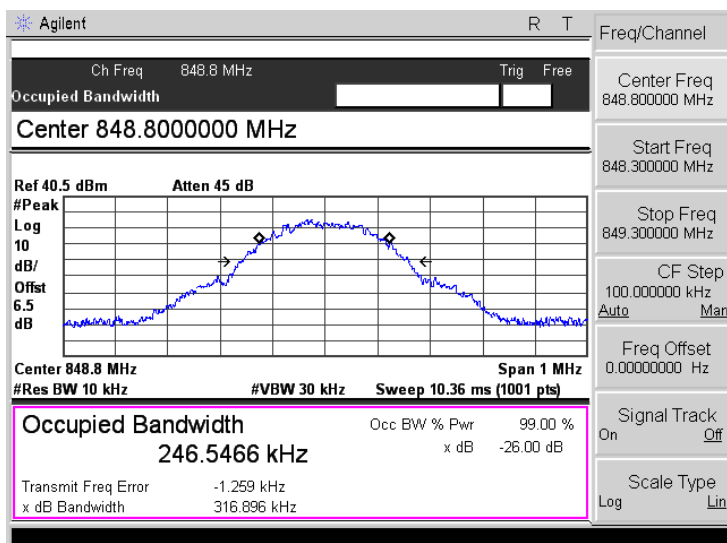


PCS1900


Low Channel

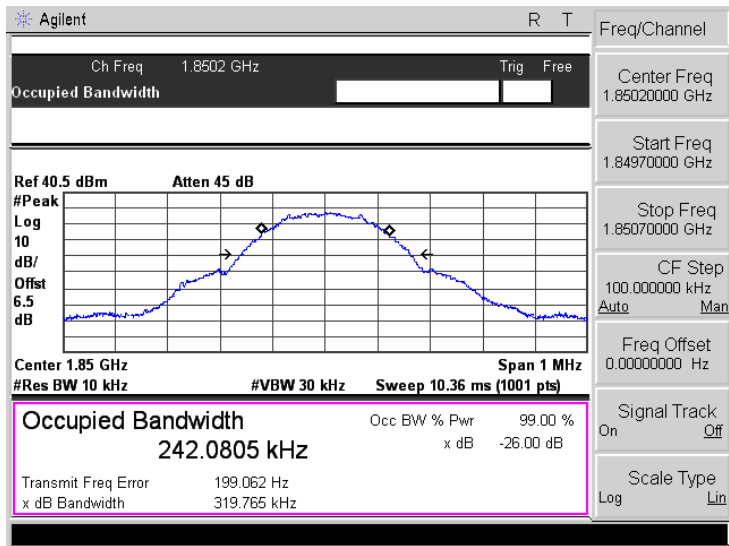

Middle Channel

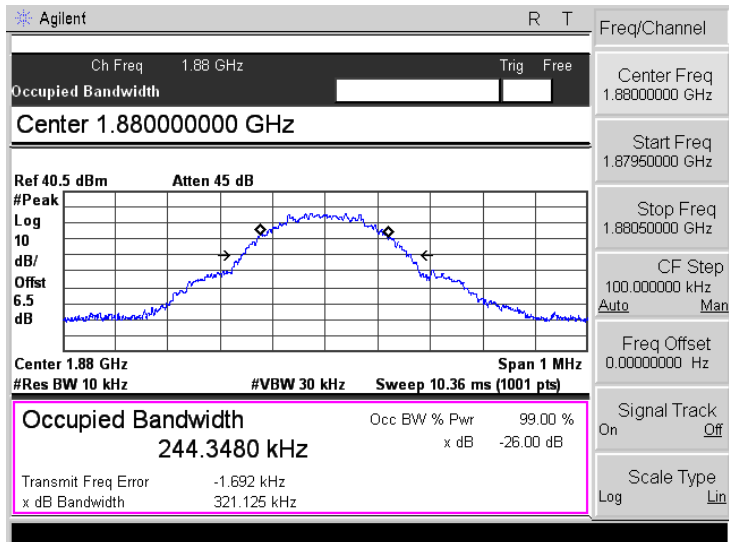


High Channel

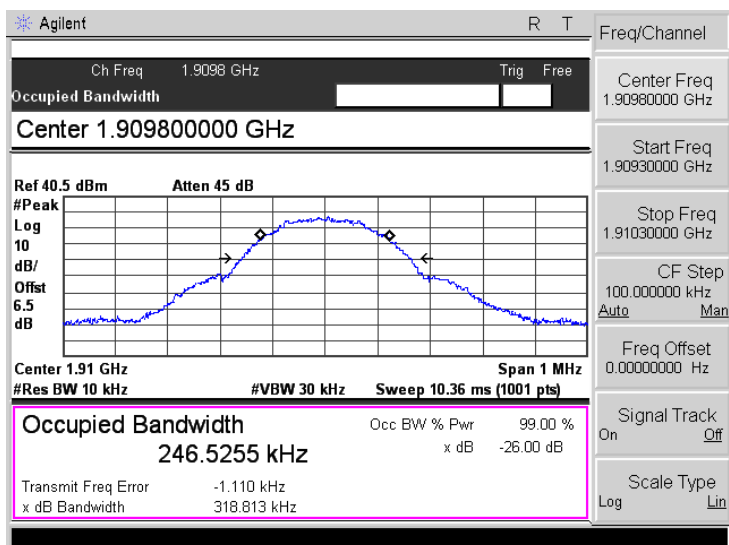


GPRS1900


Low Channel

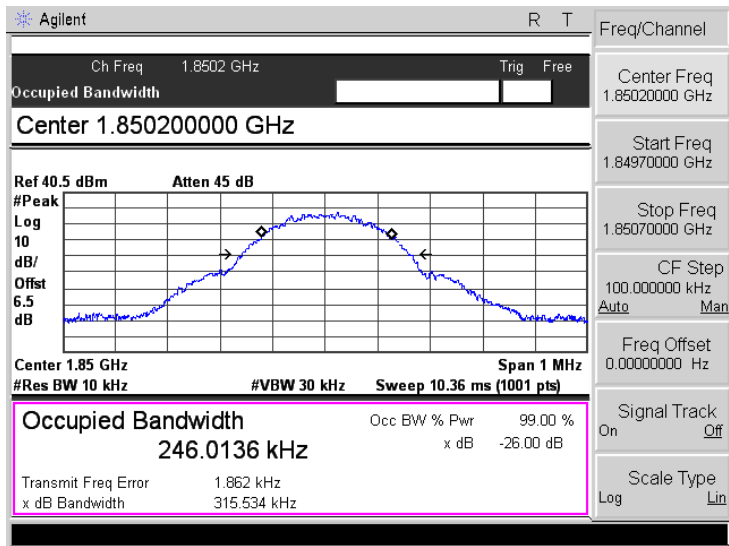

Middle Channel

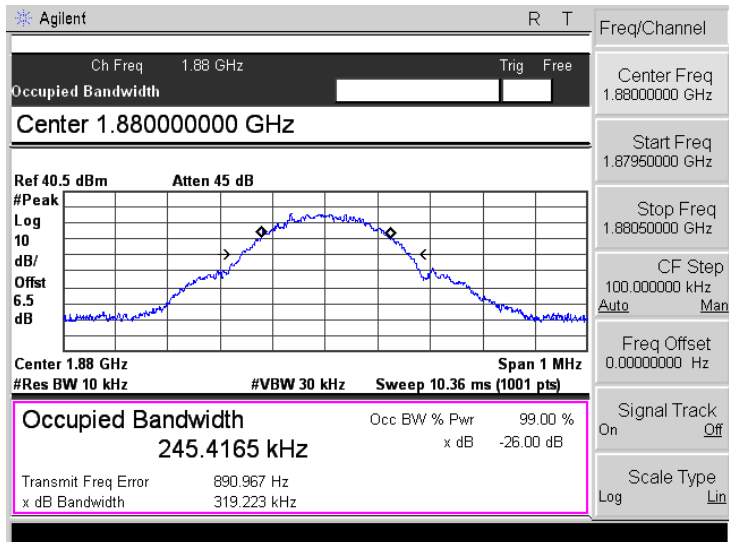


High Channel

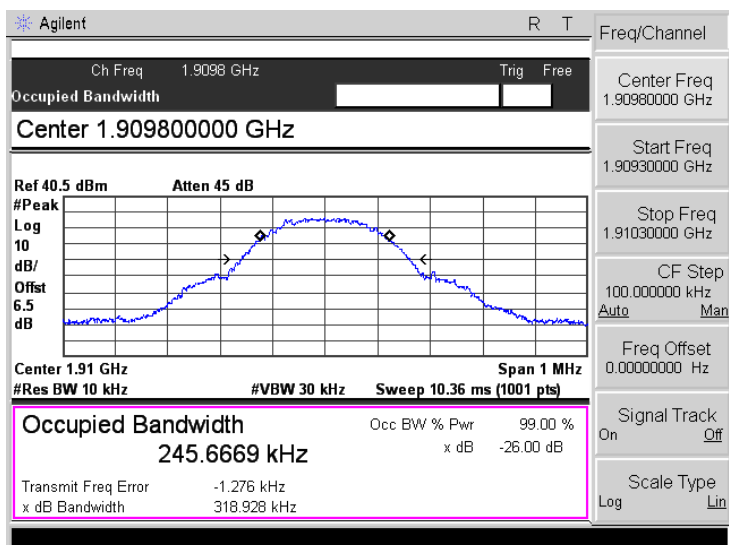


## EGPRS1900


Low Channel

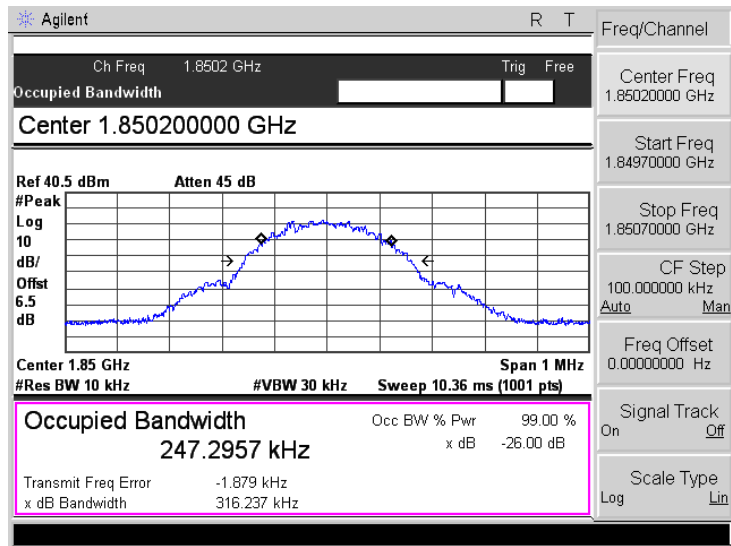

Middle Channel

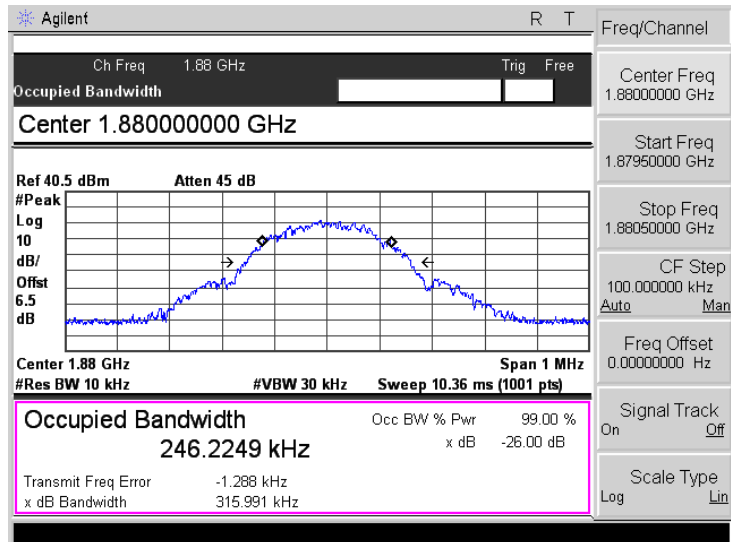


High Channel

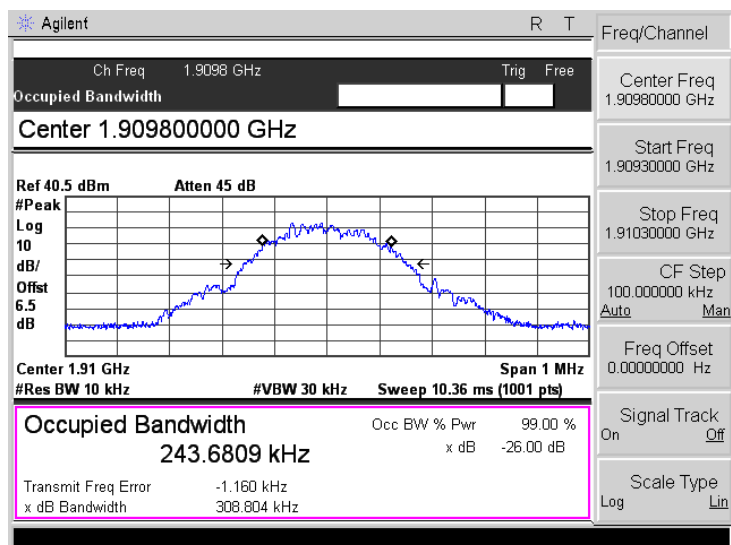


## WCDMA Band V


Low Channel

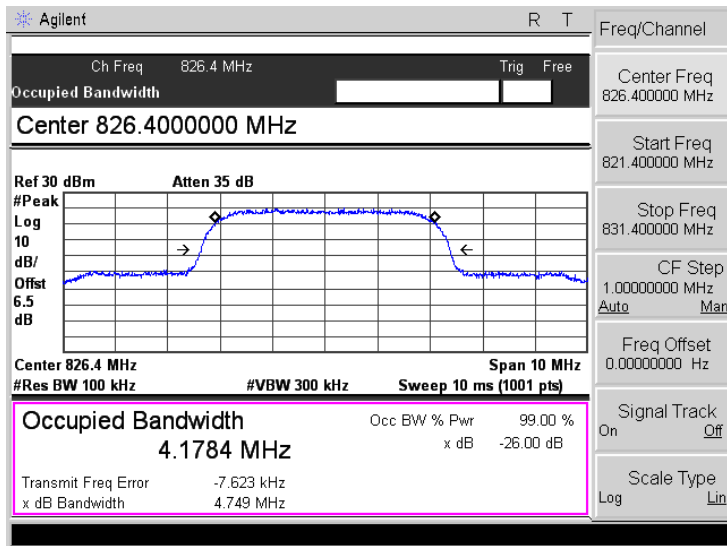

Middle Channel

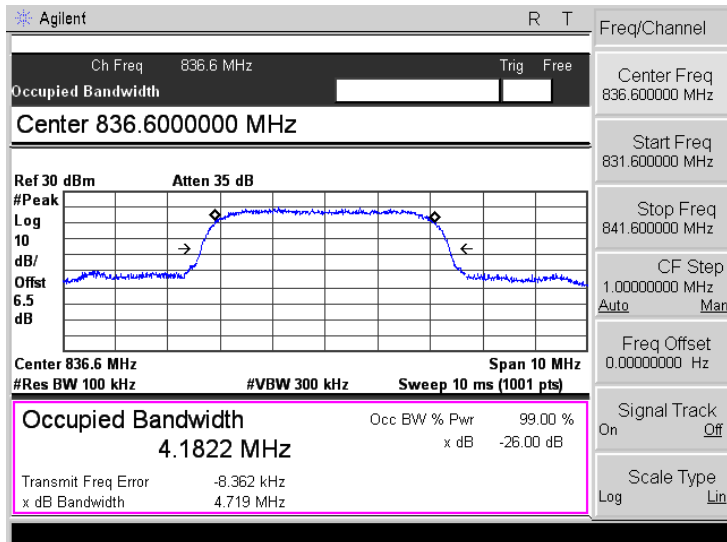


High Channel

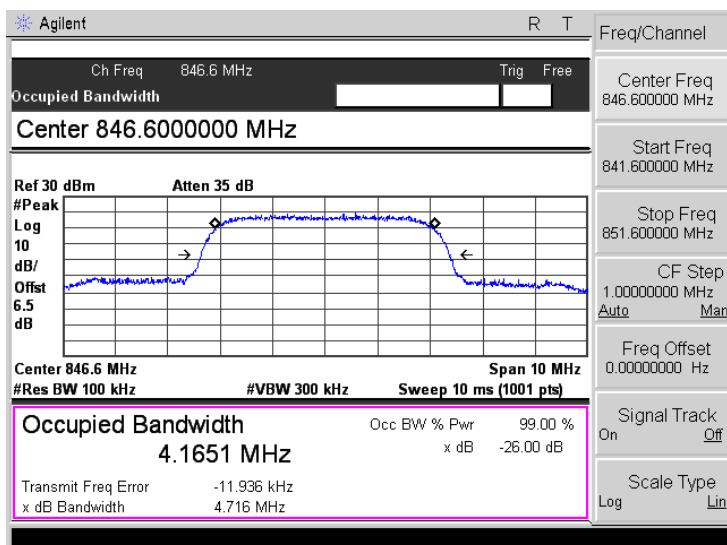


## WCDMA Band V- HSDPA


Low Channel

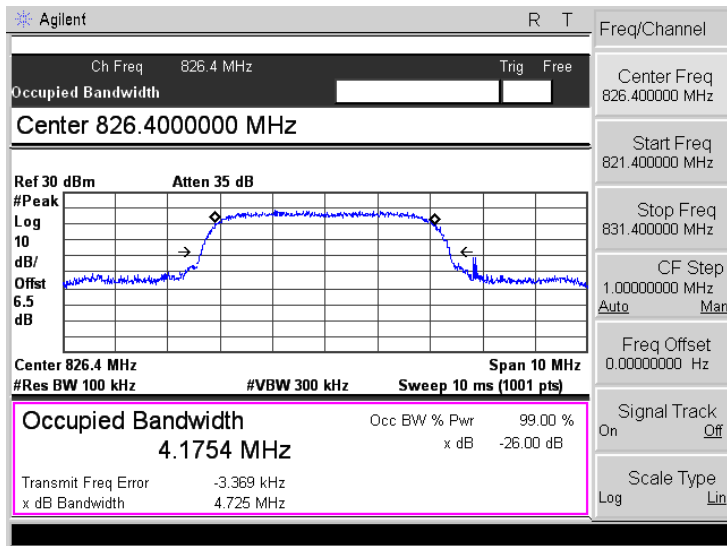

Middle Channel

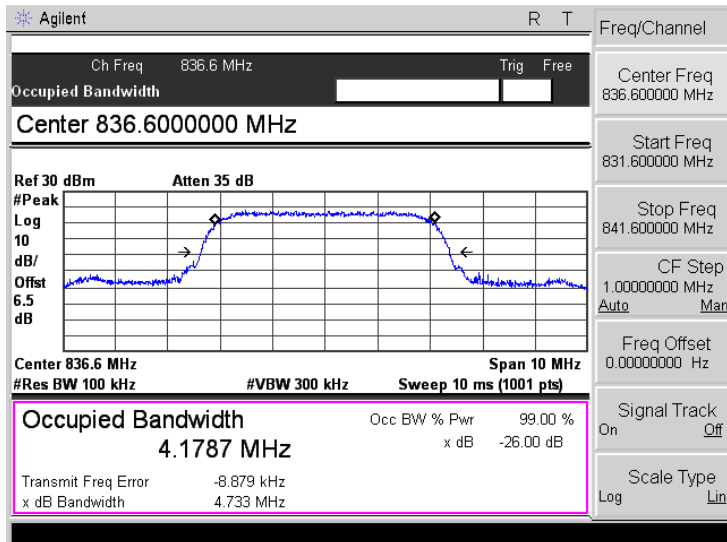


High Channel

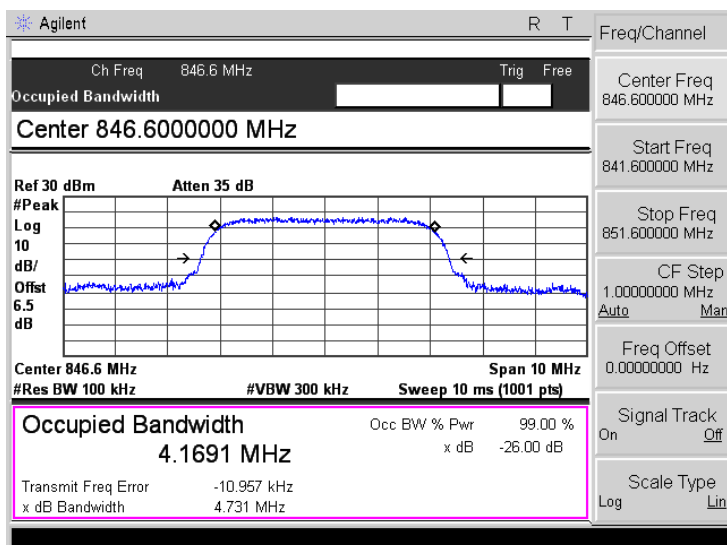


WCDMA Band V- HSUPA


Low Channel

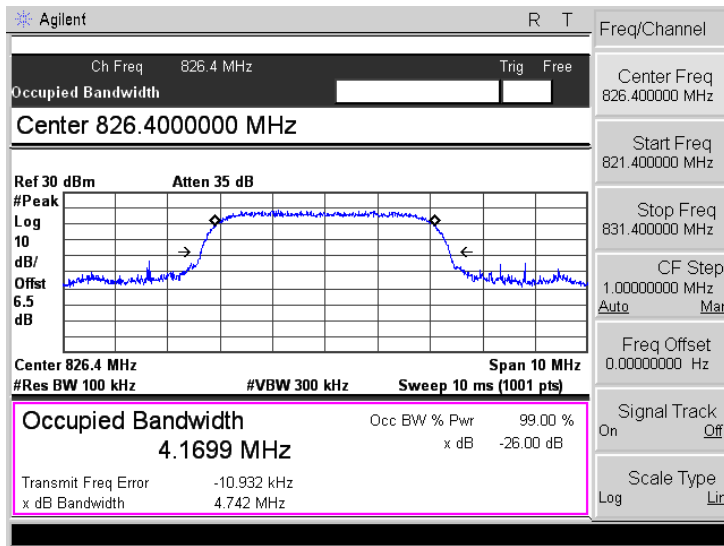

Middle Channel

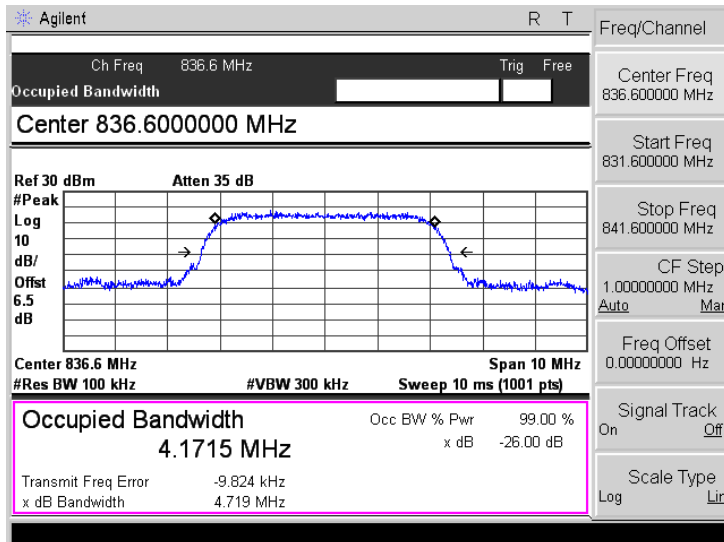


High Channel

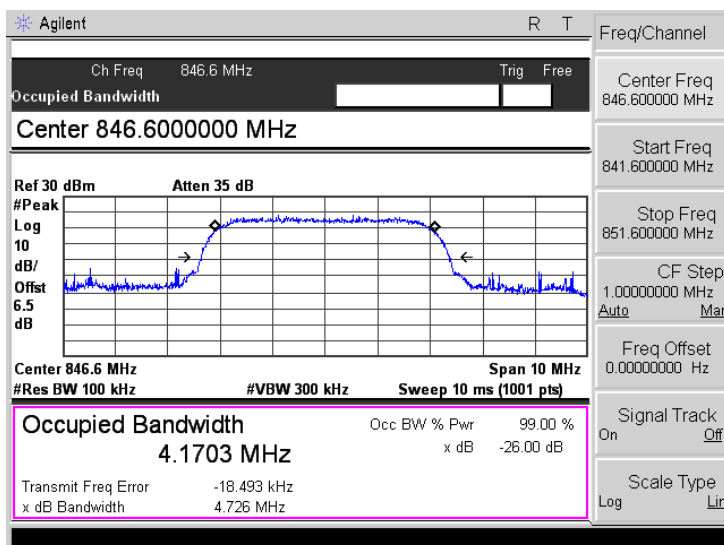


## WCDMA Band II


Low Channel

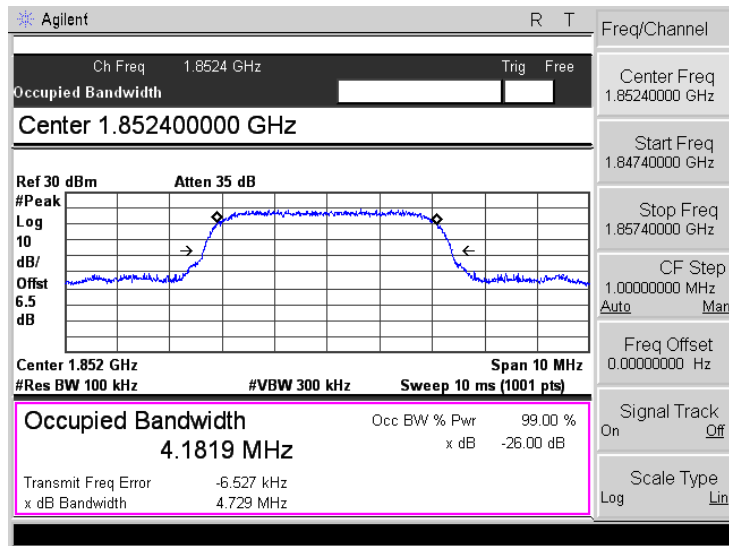

Middle Channel

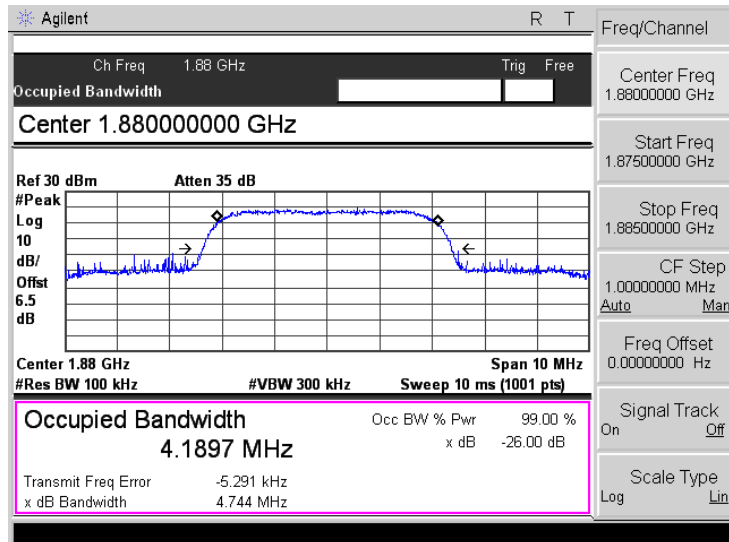


High Channel

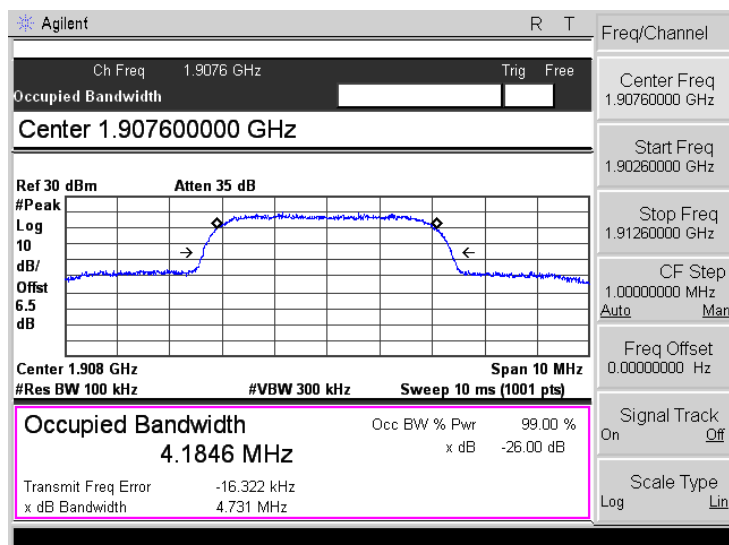




WCDMA Band II- HSDPA


Low Channel

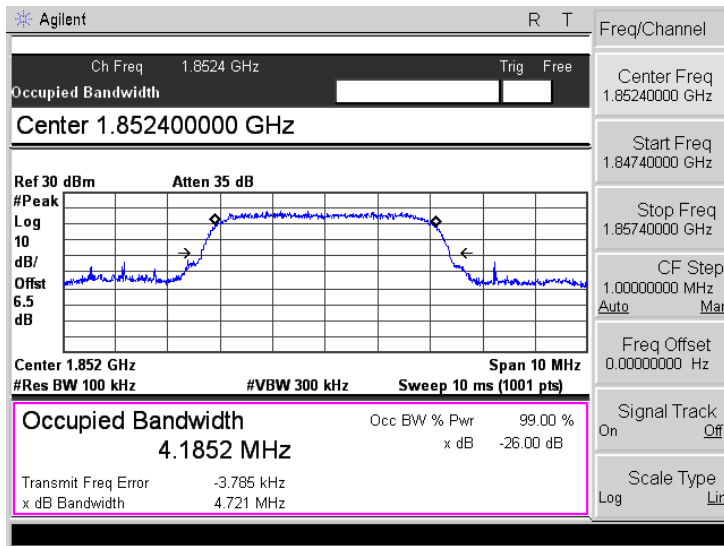

Middle Channel

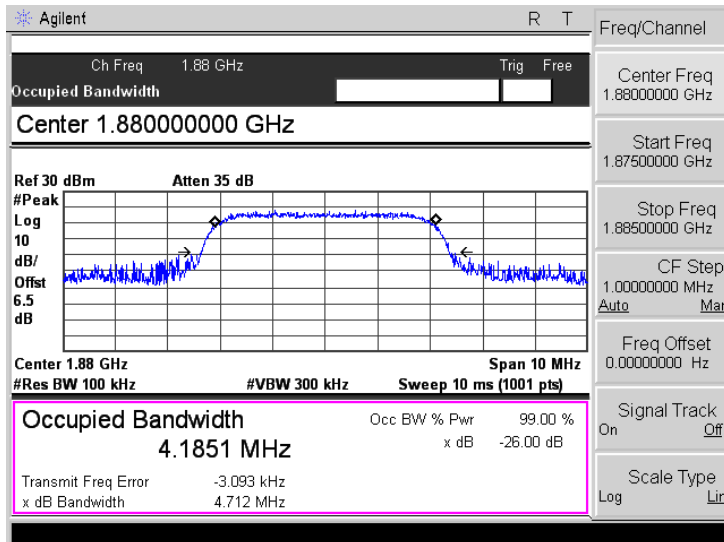


High Channel

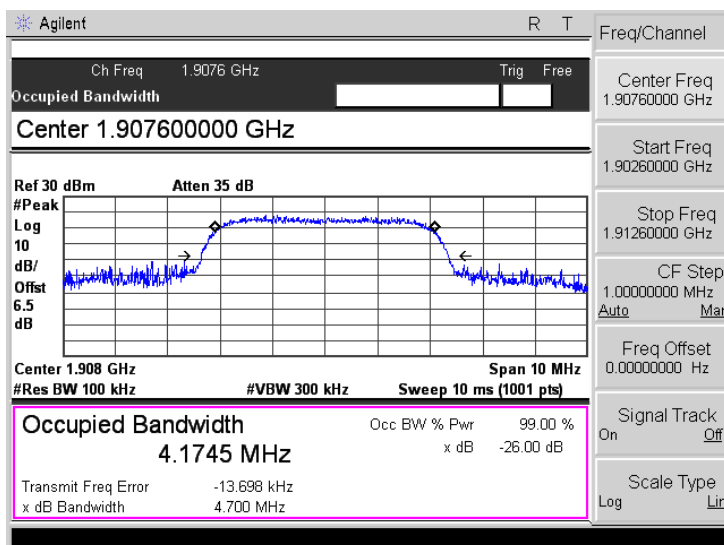


WCDMA Band II- HSUPA


Low Channel

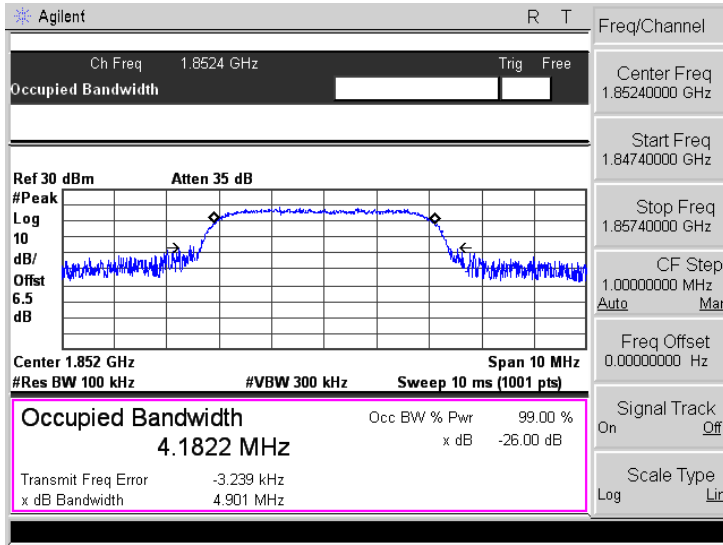

Middle Channel

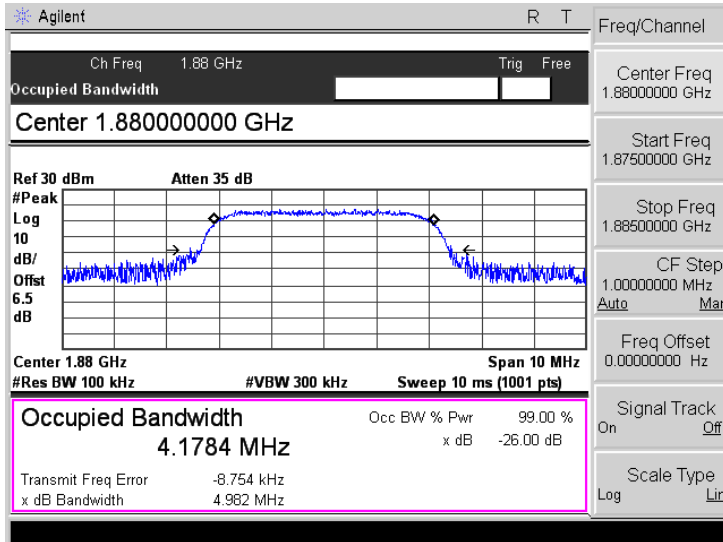

High Channel

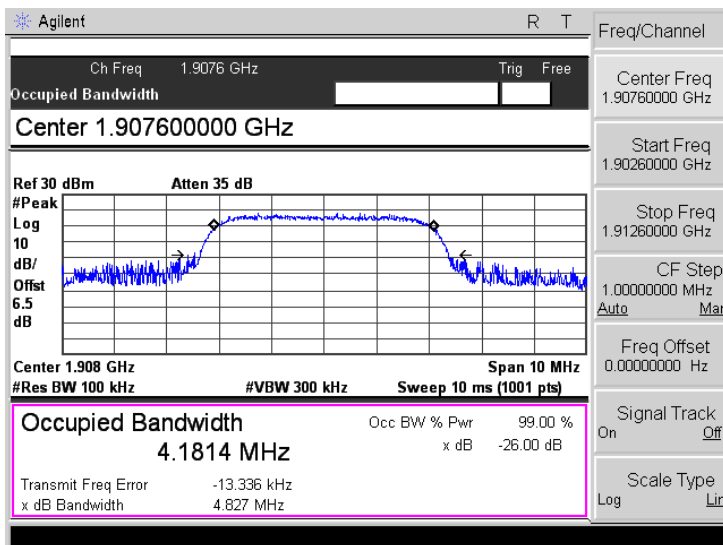

## 7. Out of Band Emissions at Antenna Terminal

### 7.1 Standard Applicable


According to §22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

According to §24.238(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

### 7.2 Test Procedure

The RF output terminal of the transmitter was connected to the input of the spectrum analyzer via a suitable attenuation. The RBW of the spectrum analyzer was set to 100kHz and 1MHz for the scan frequency from 30MHz to 1GHz and the scan frequency from 1GHz to up to 10<sup>th</sup> harmonic.

Test Configuration for the out of band emissions testing:

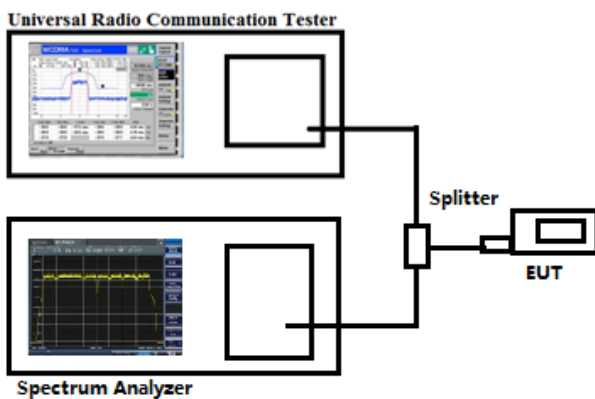



### 7.3 Summary of Test Results/Plots

Note: Pre-scan mode WCDMA/HSDPA/HSUPA find the worst case at WCDMA mode and recorded in the test report.

Please refer to the following test plots



GSM850

Low Channel

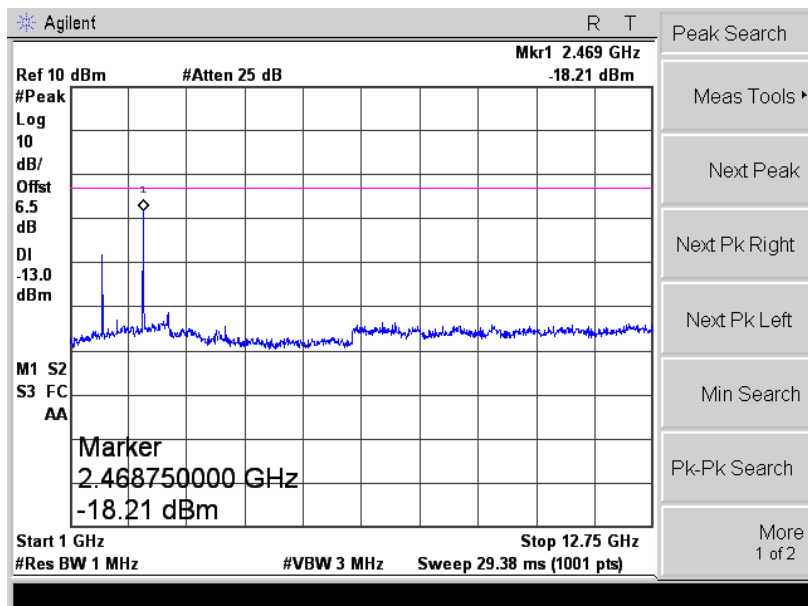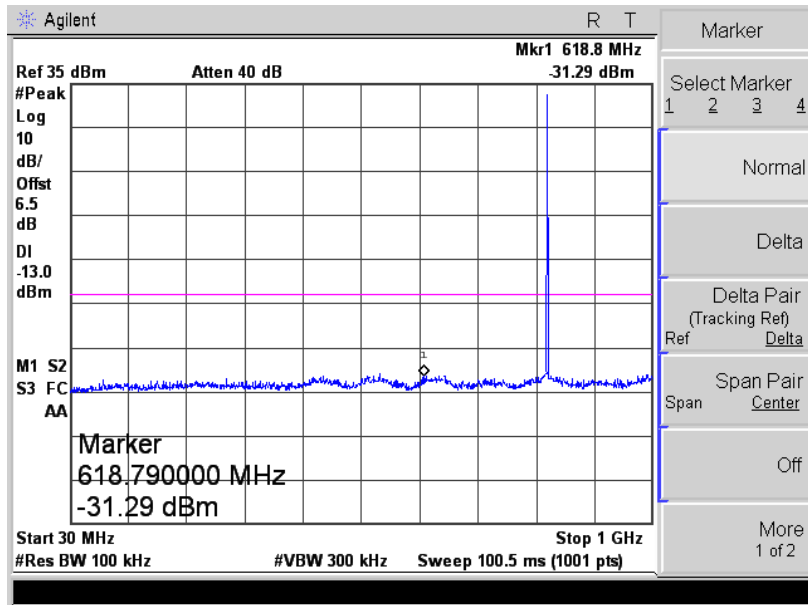



GSM850

Middle Channel

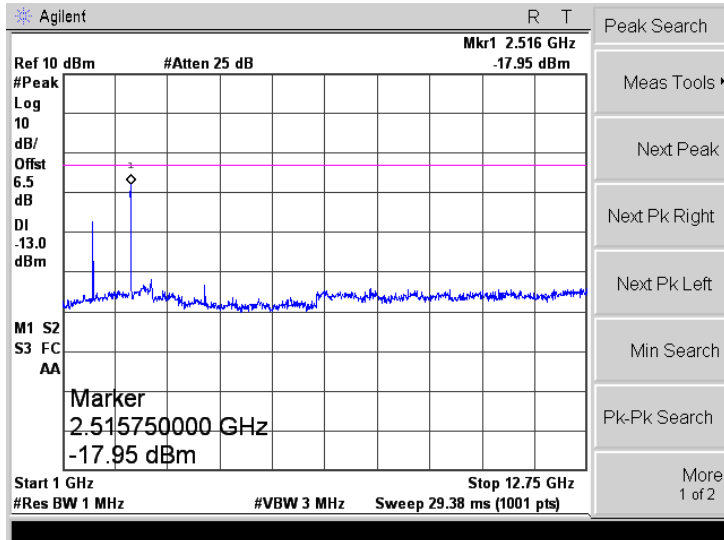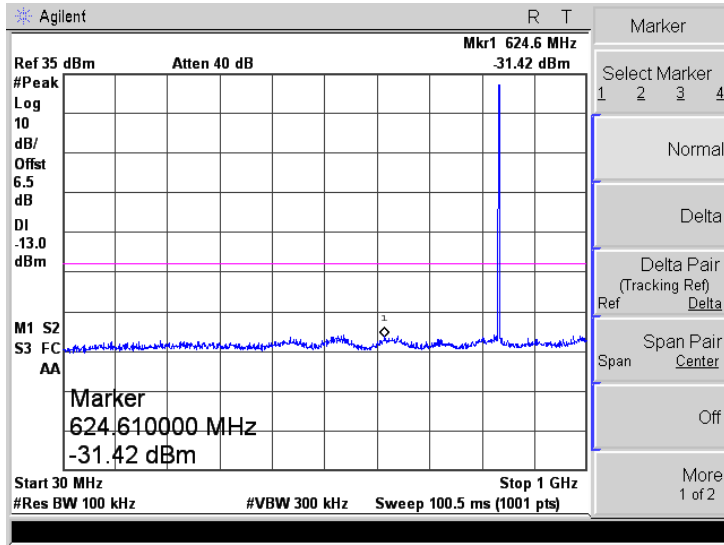


GSM850

High Channel

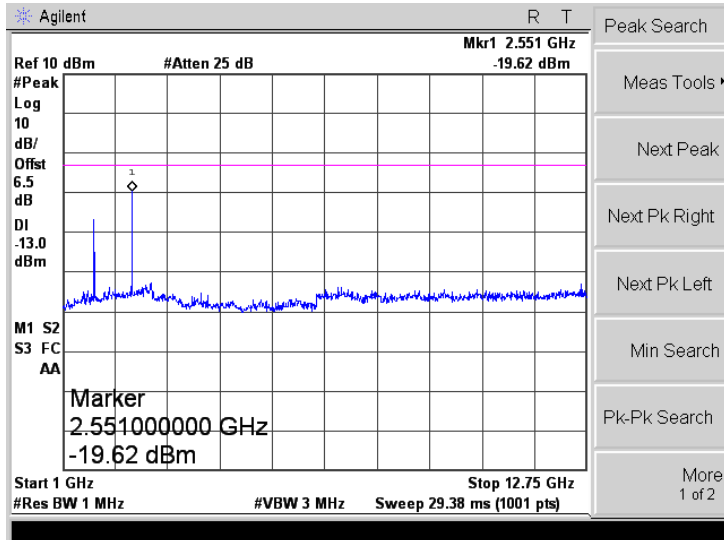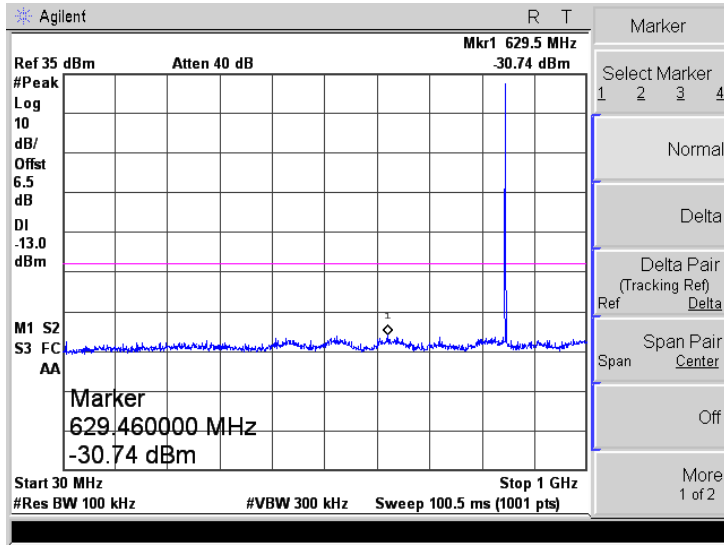


GSM850

Low Band Emission


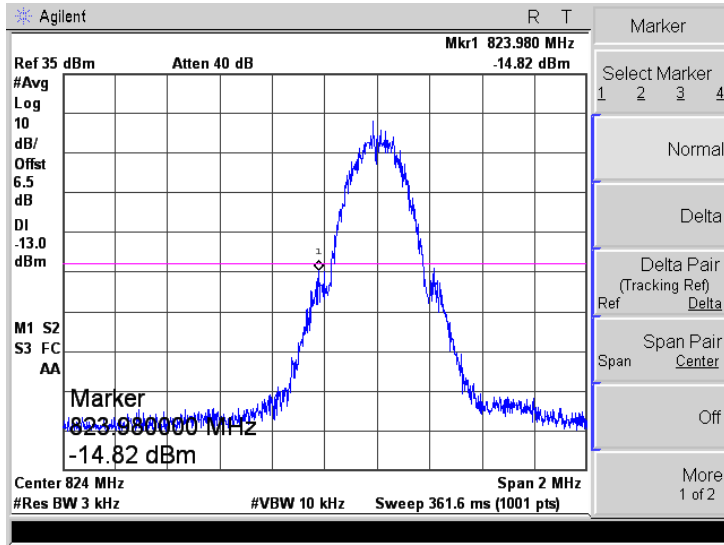


High Band Emission

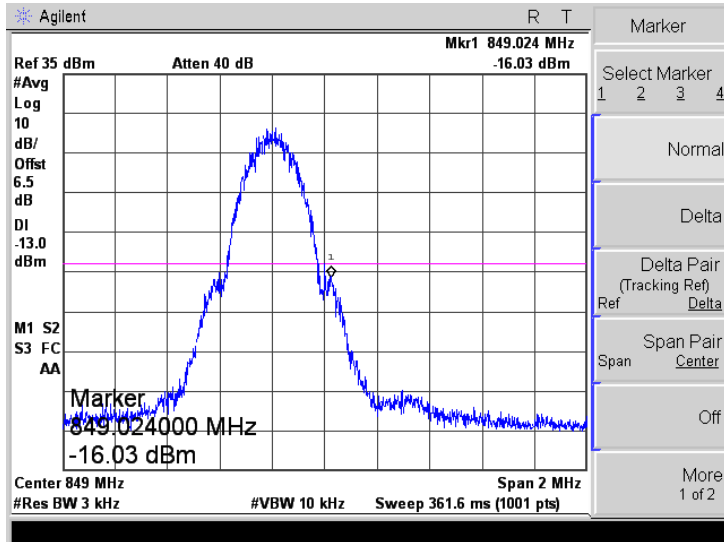

For Cellular Band



GPRS Low Channel

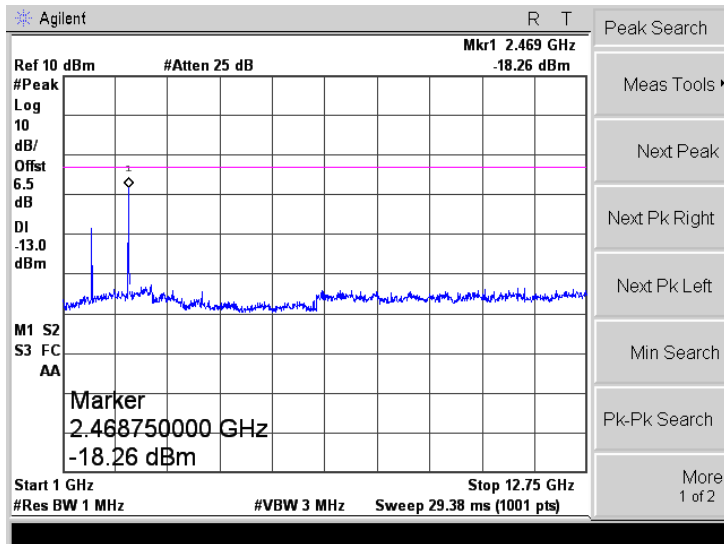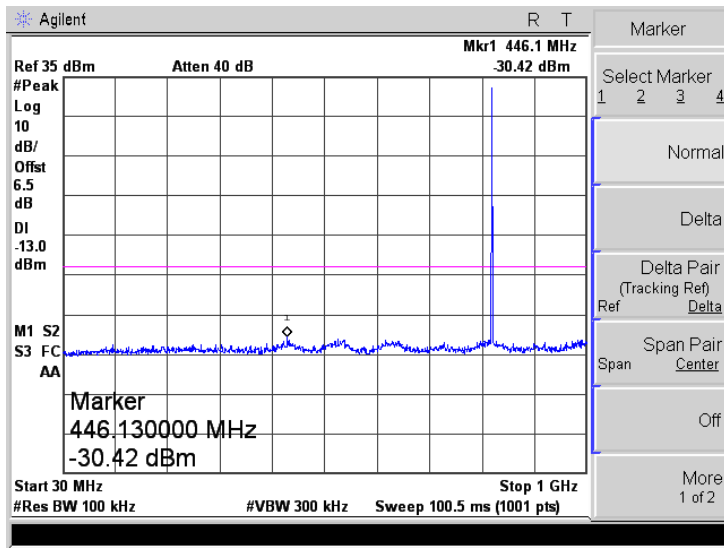





GPRS850

Middle Channel

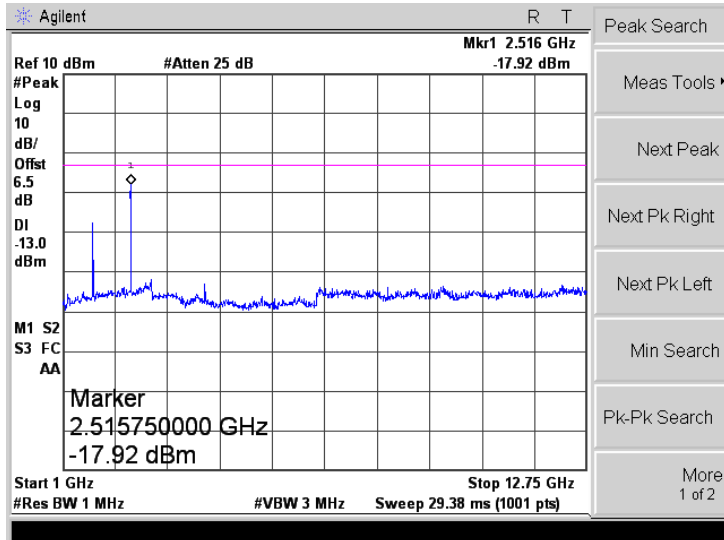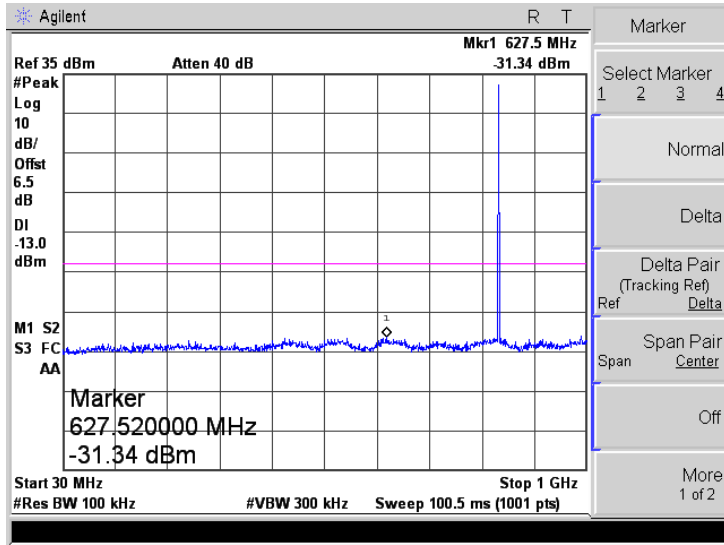


GPRS850

High Channel

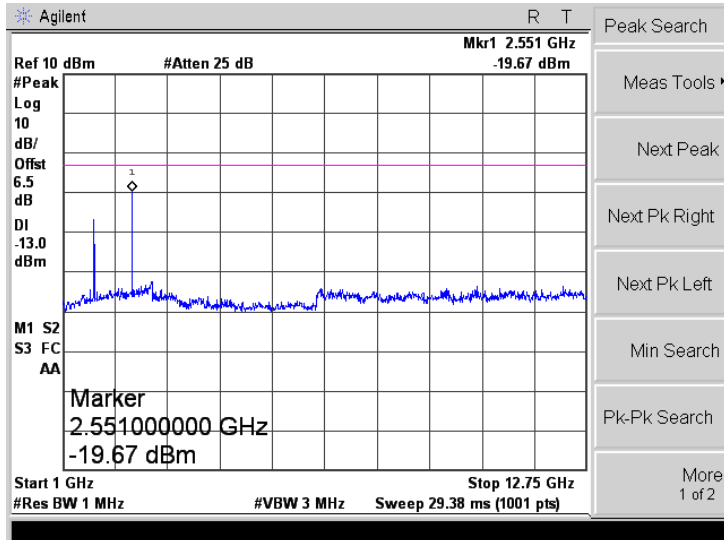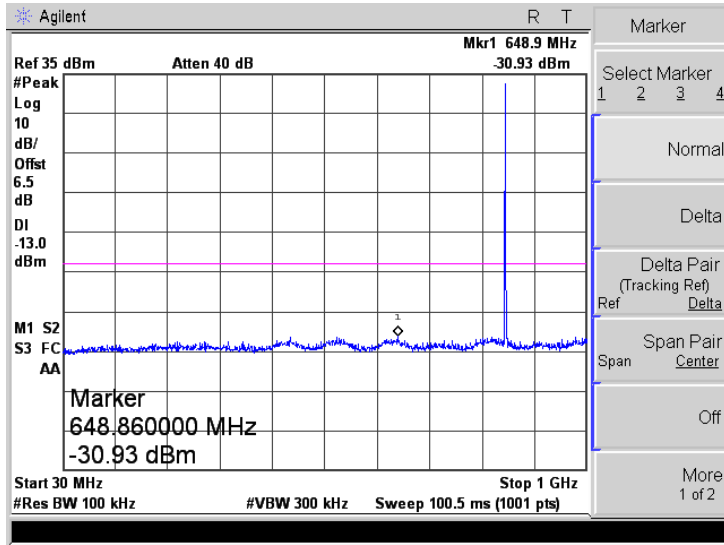


GPRS850

Low Band Emission


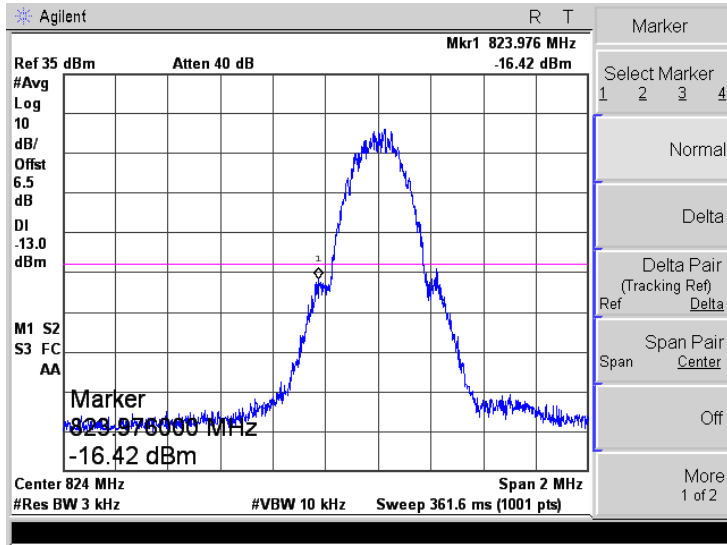


High Band Emission

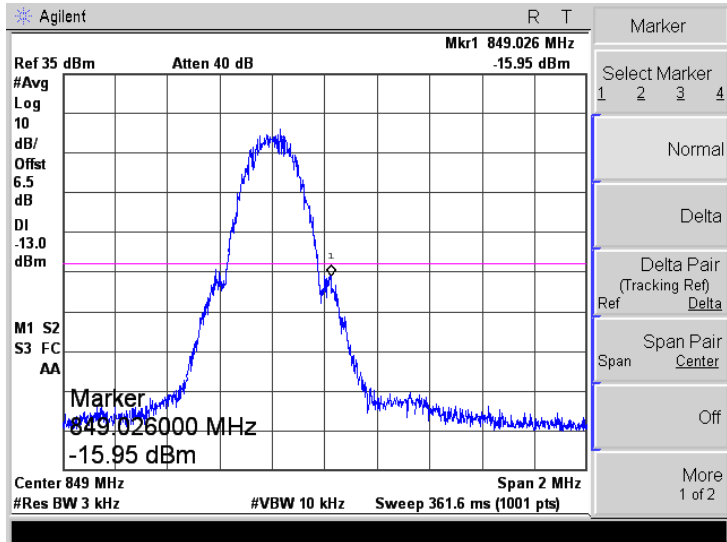



EGPRS850

Low Channel

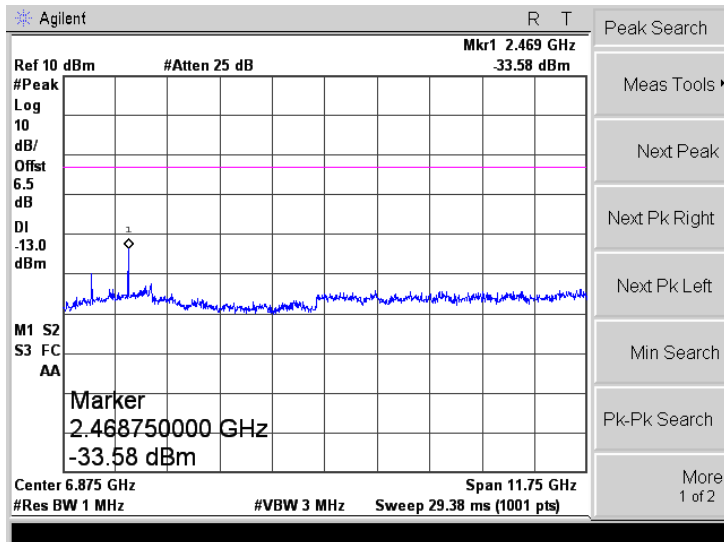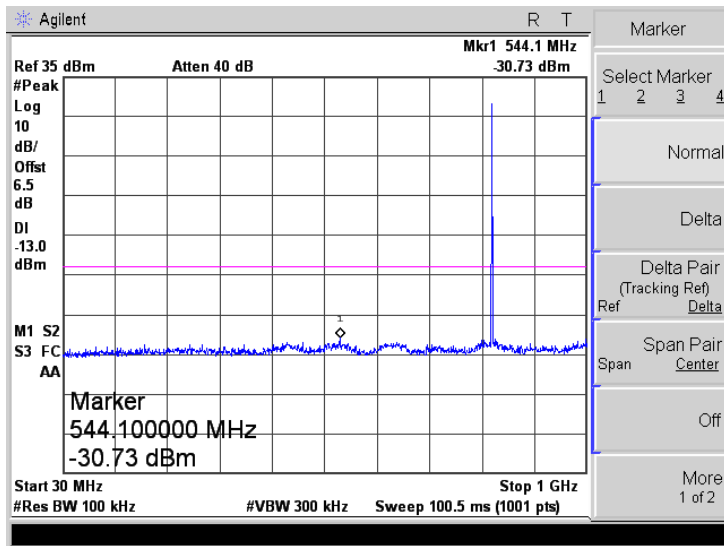



EGPRS850

Middle Channel

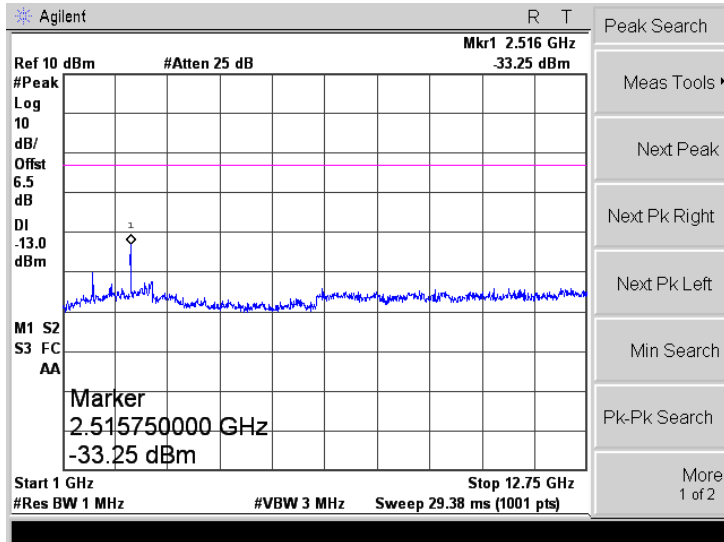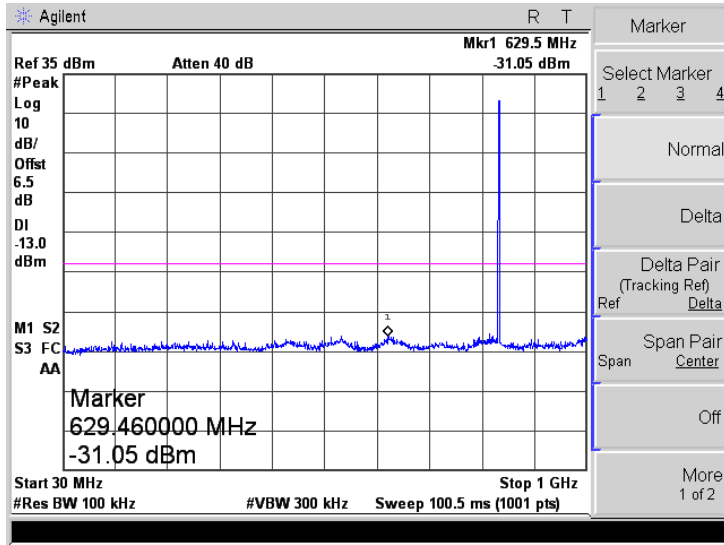

EGPRS850


High Channel

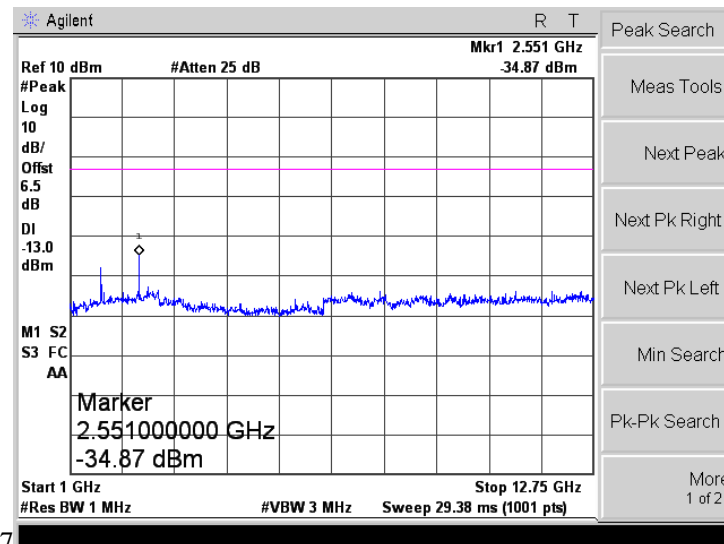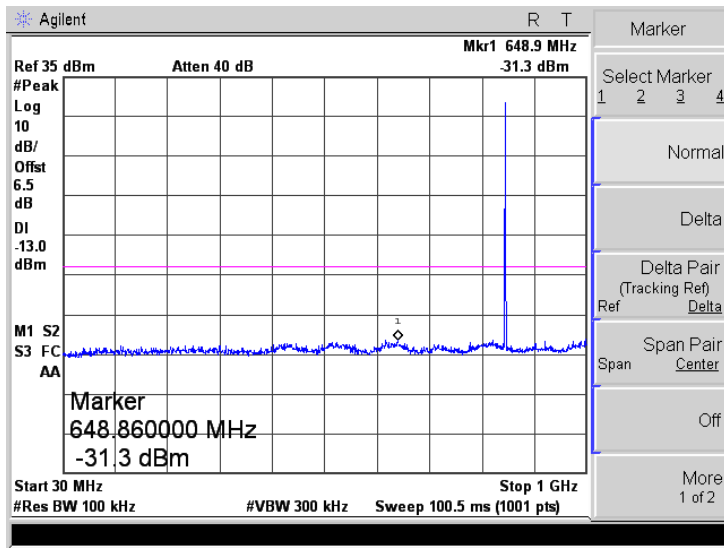


7

EGPRS850

Low Band Emission



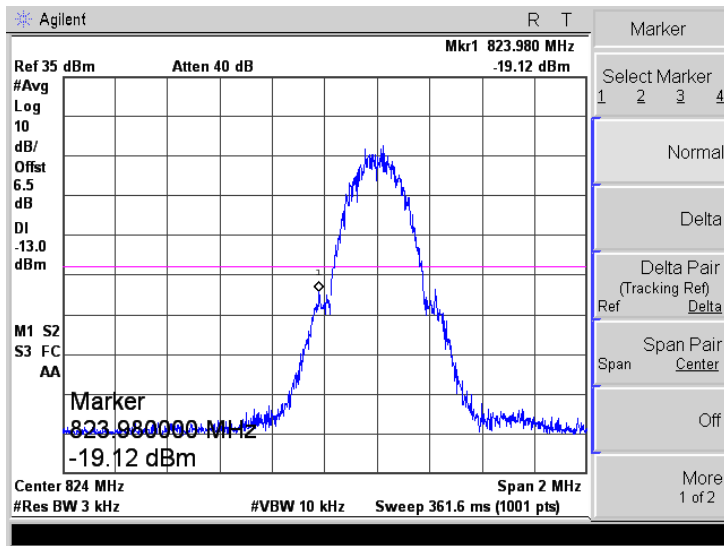


High Band Emission

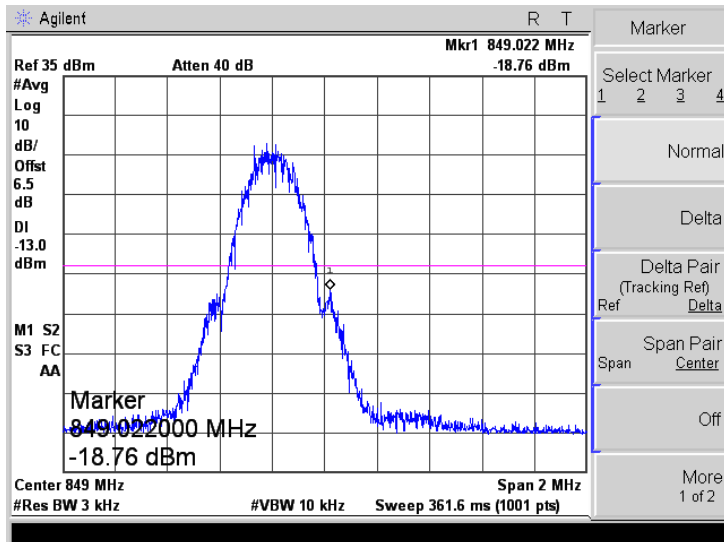

PCS1900




Low Channel

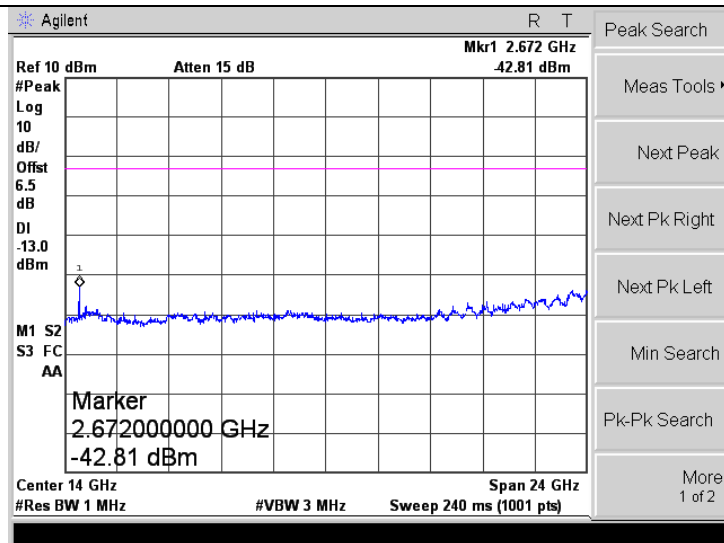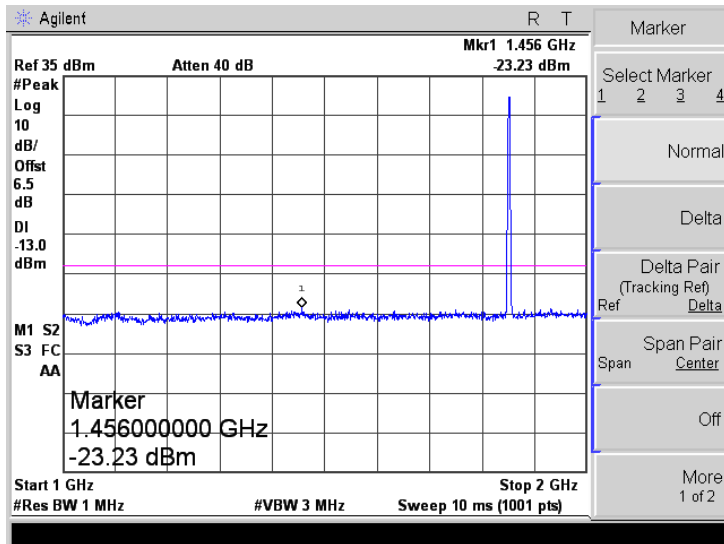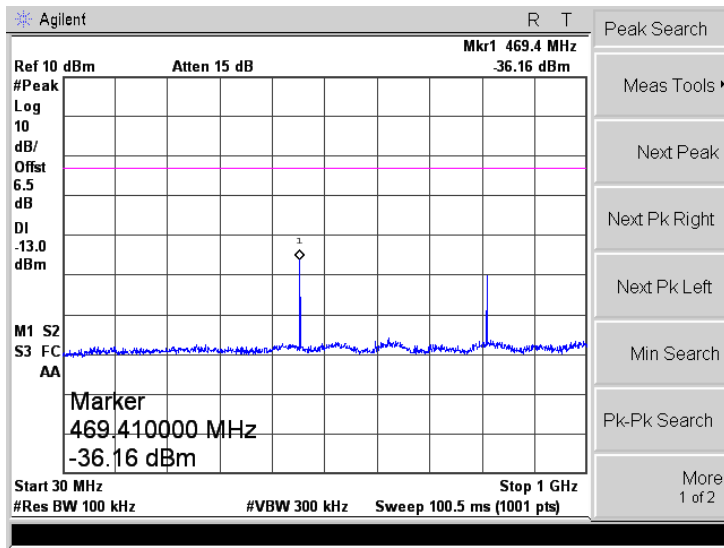






PCS1900

Middle Channel

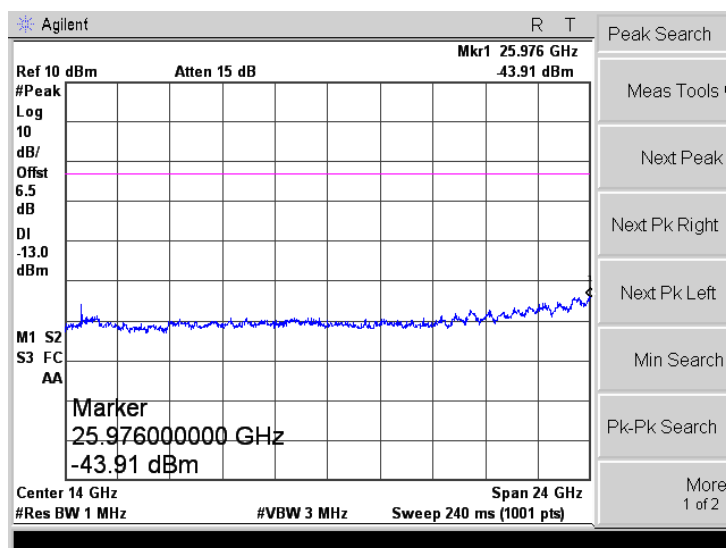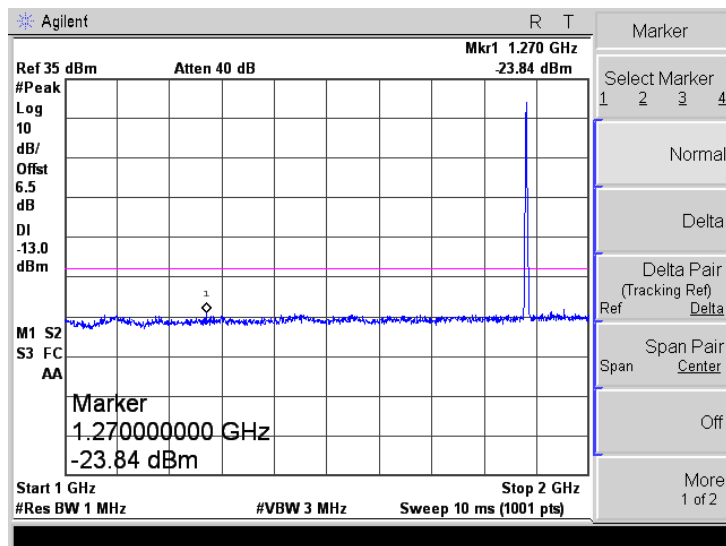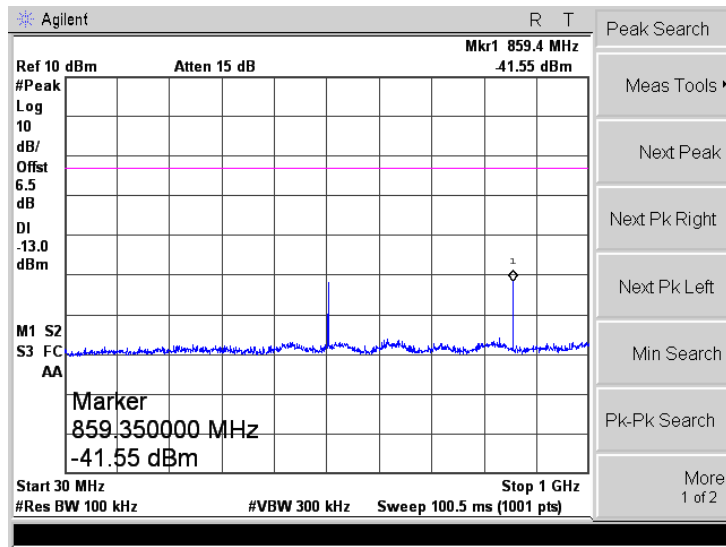


PCS1900

High Channel

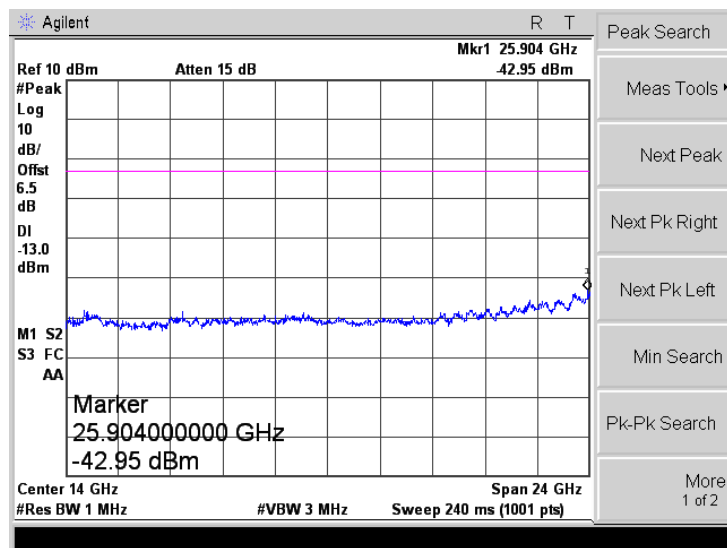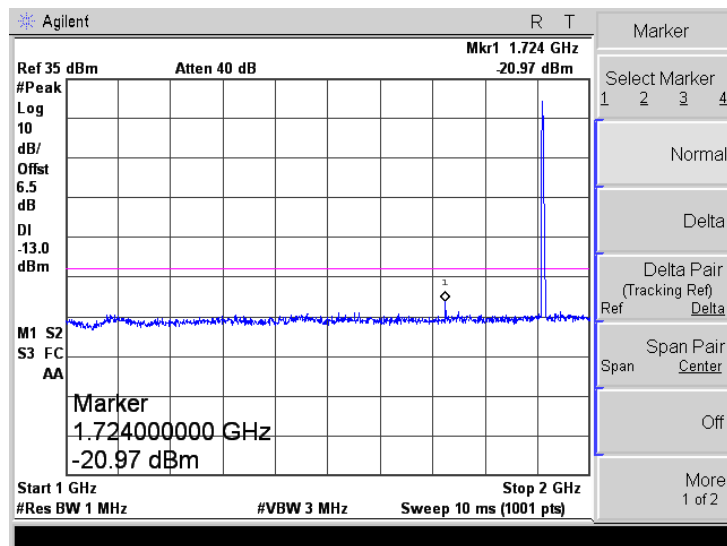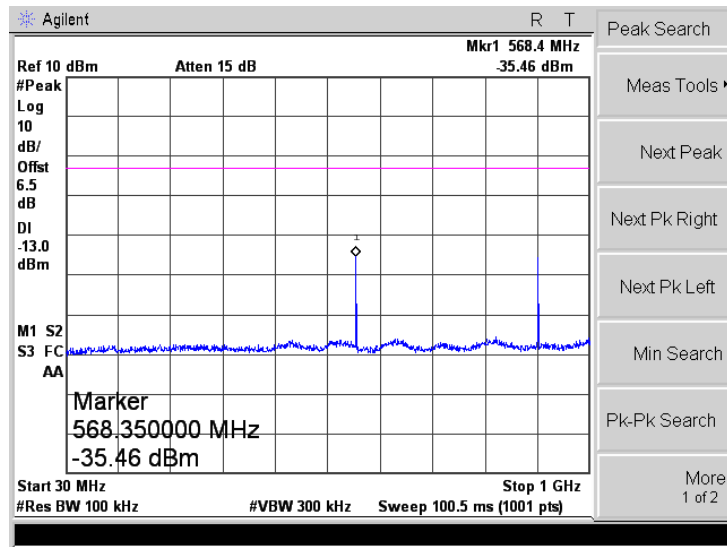


PCS1900

Low Band Emission



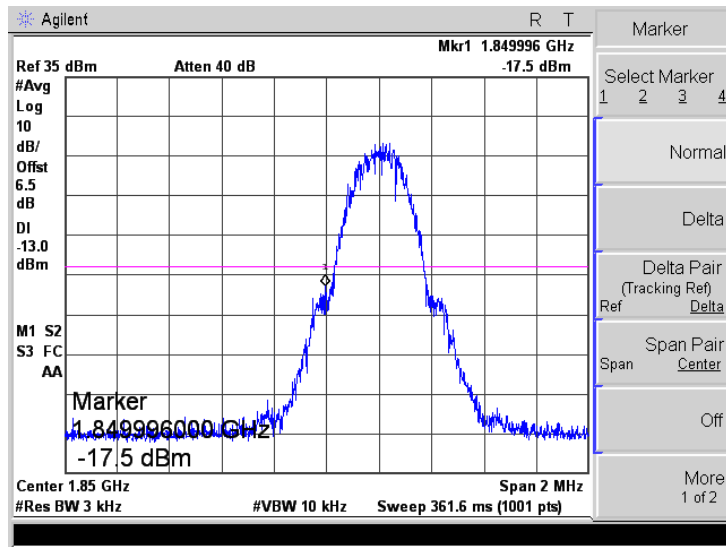


High Band Emission

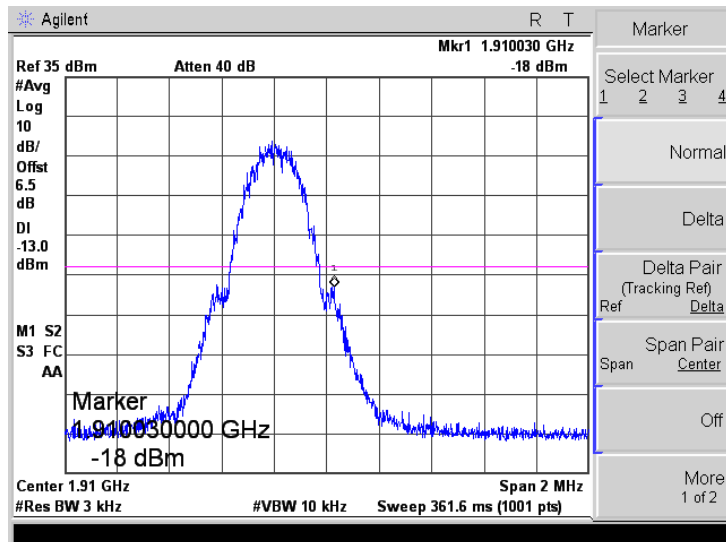




GPRS1900

Low Channel

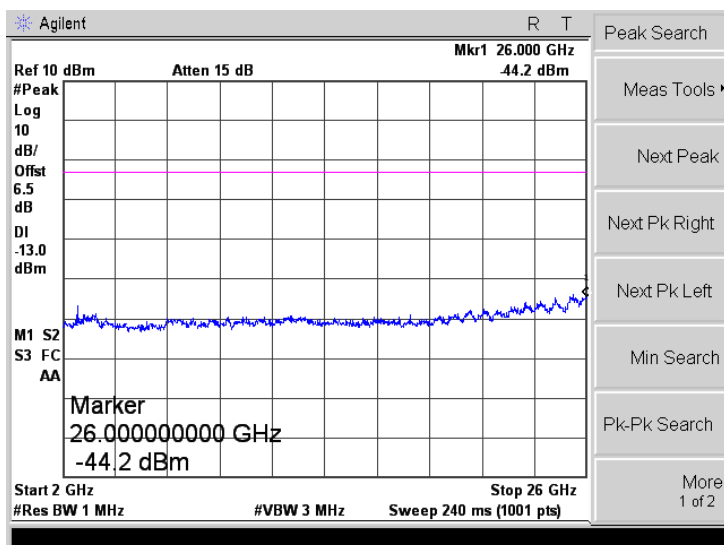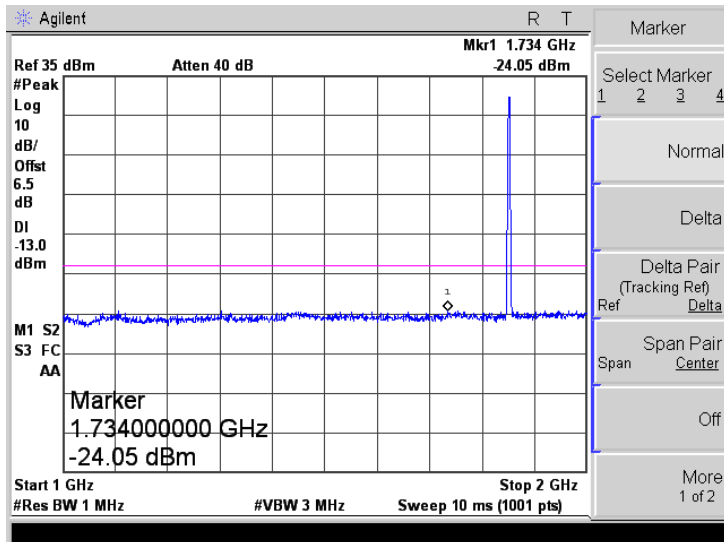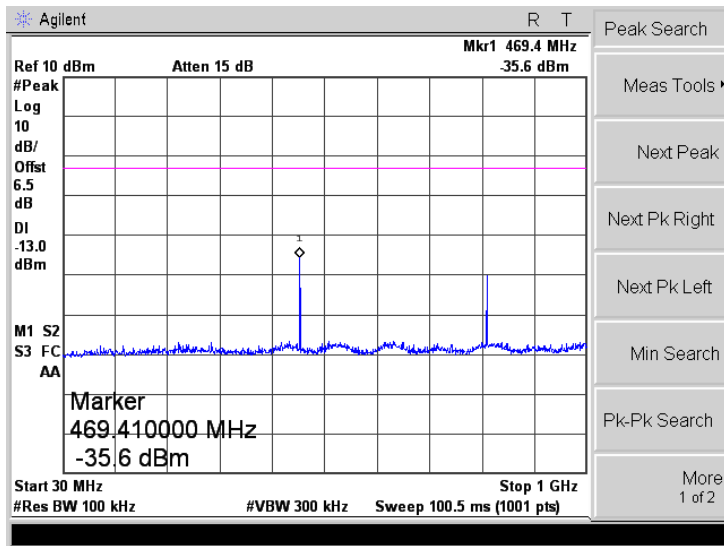




GPRS1900

Middle Channel

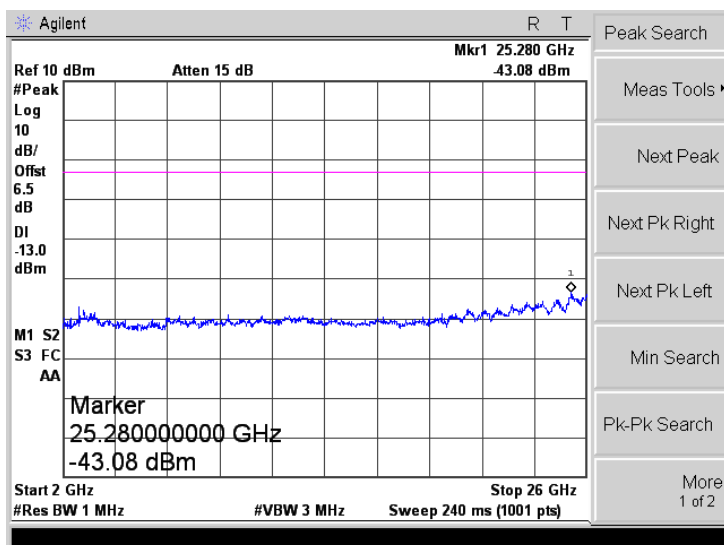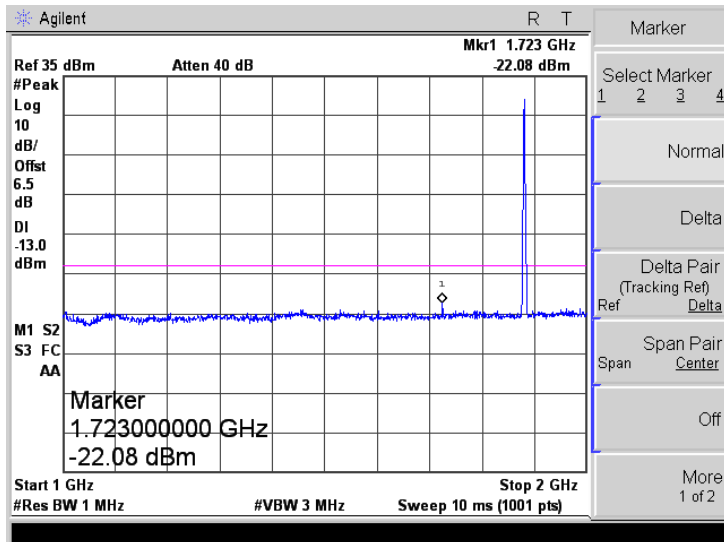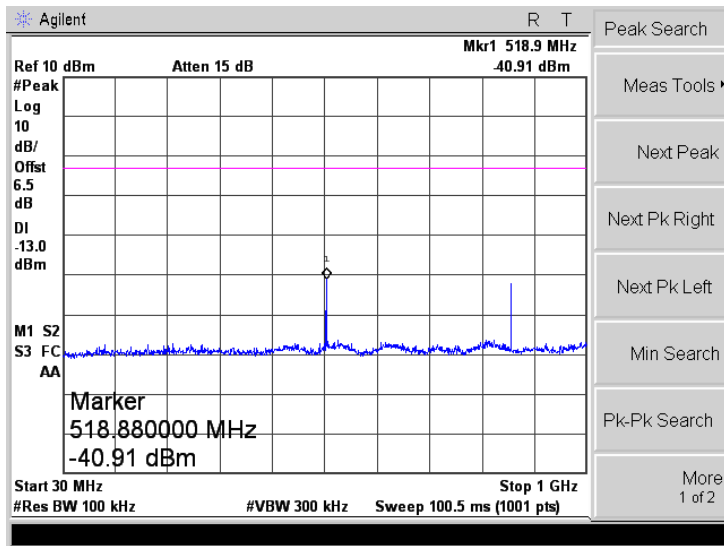


GPRS1900

High Channel

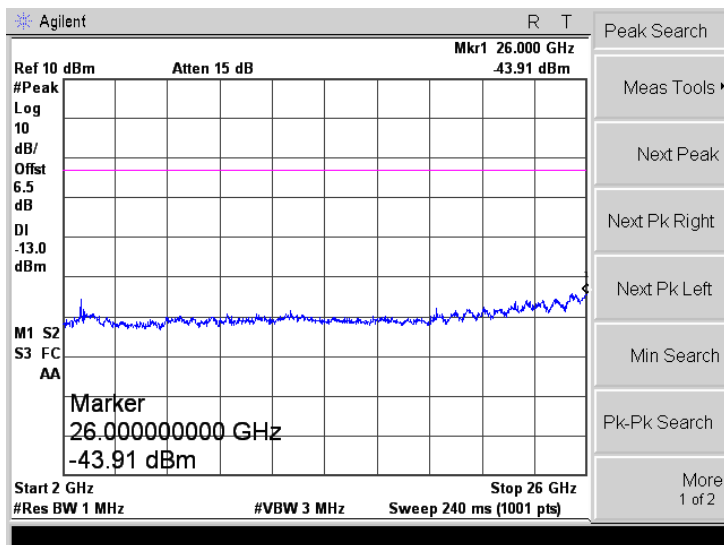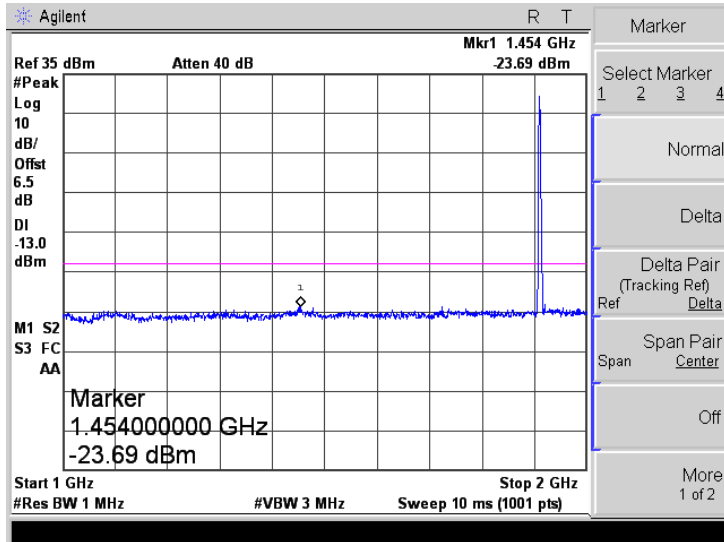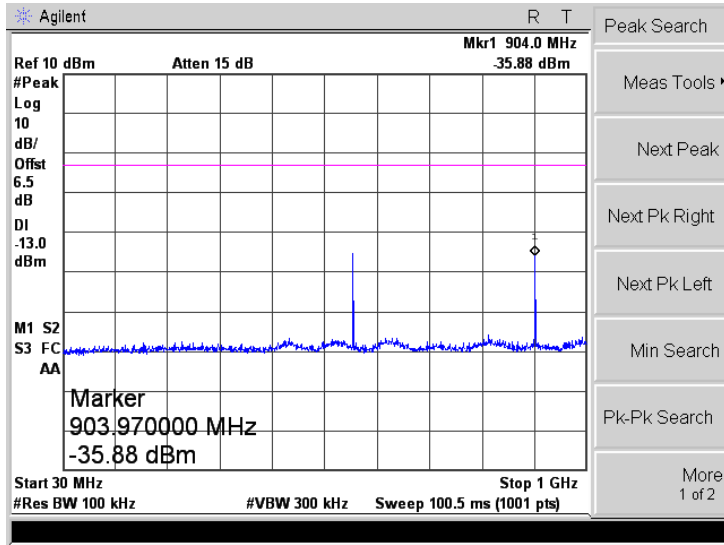


GPRS1900

Low Band Emission



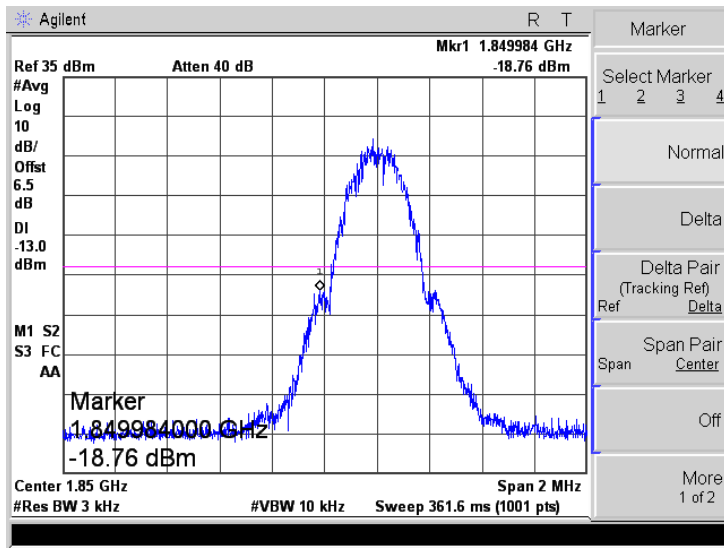


High Band Emission

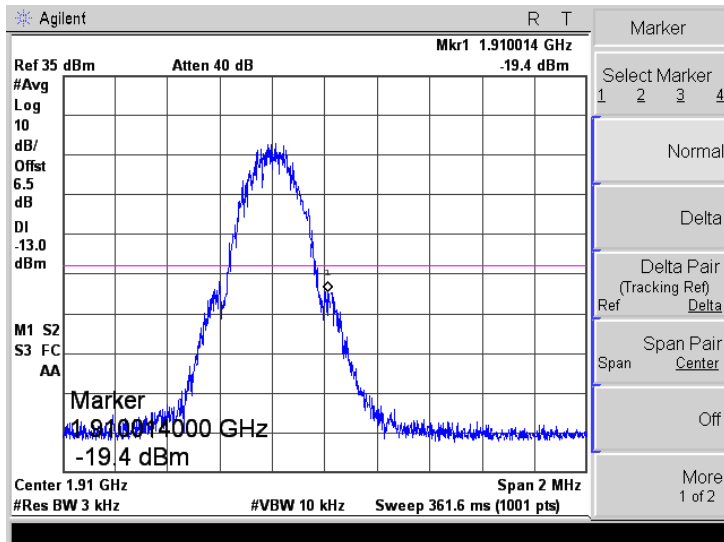

EGPRS1900




Low Channel

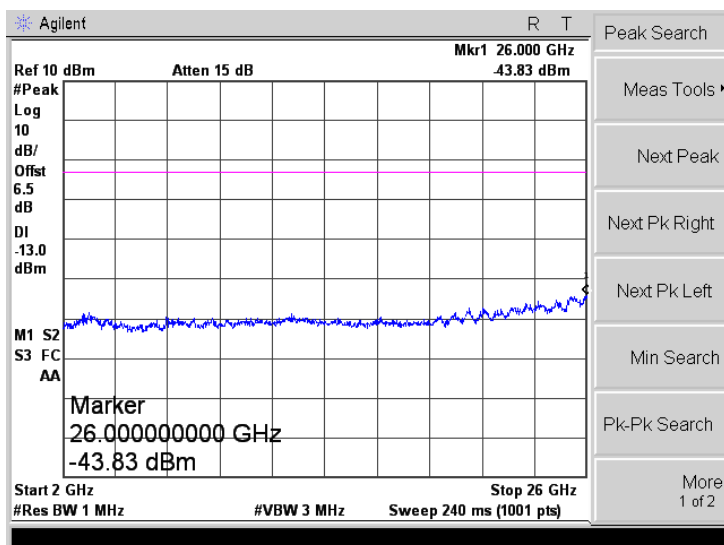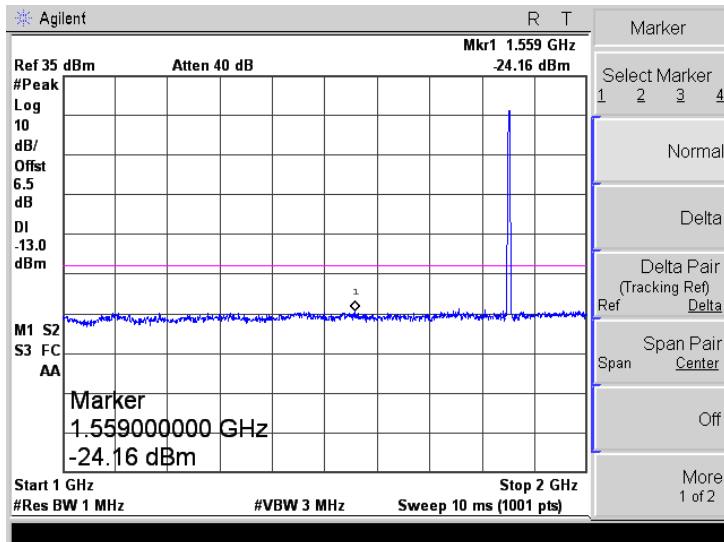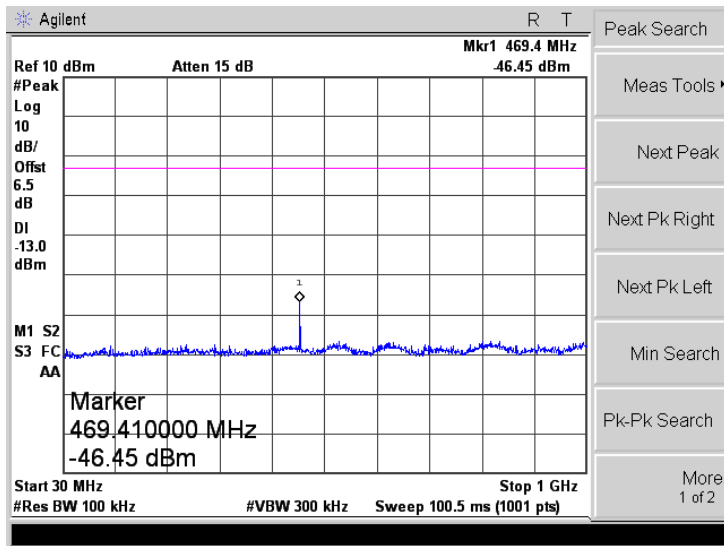






EGPRS1900

Middle Channel

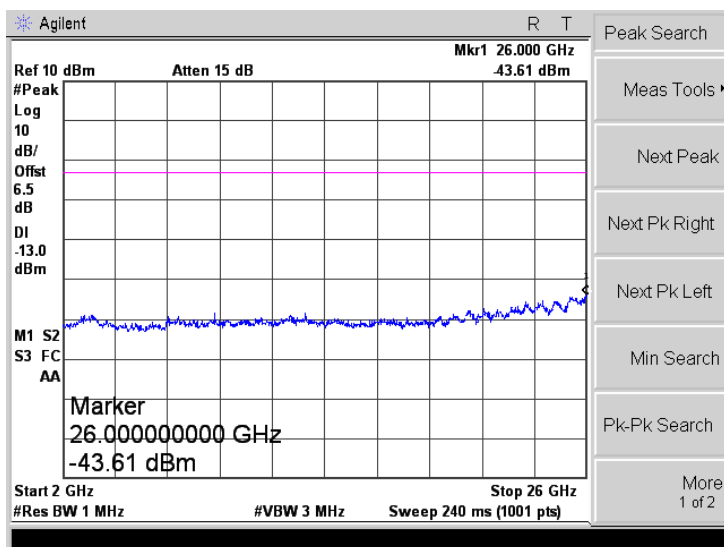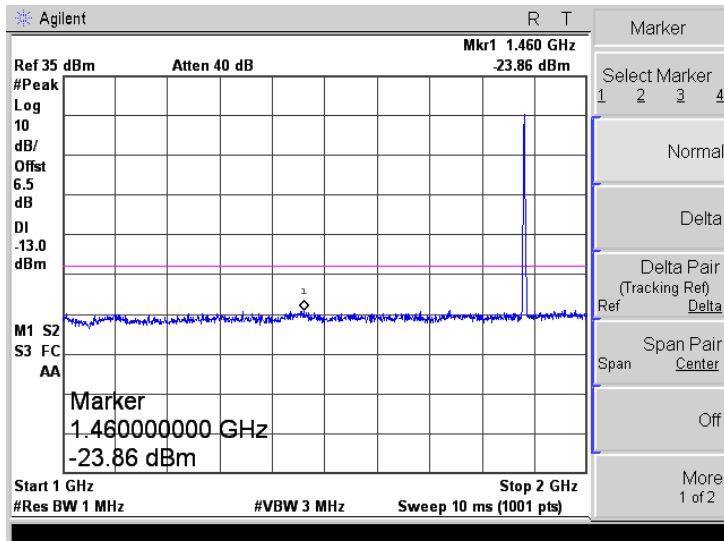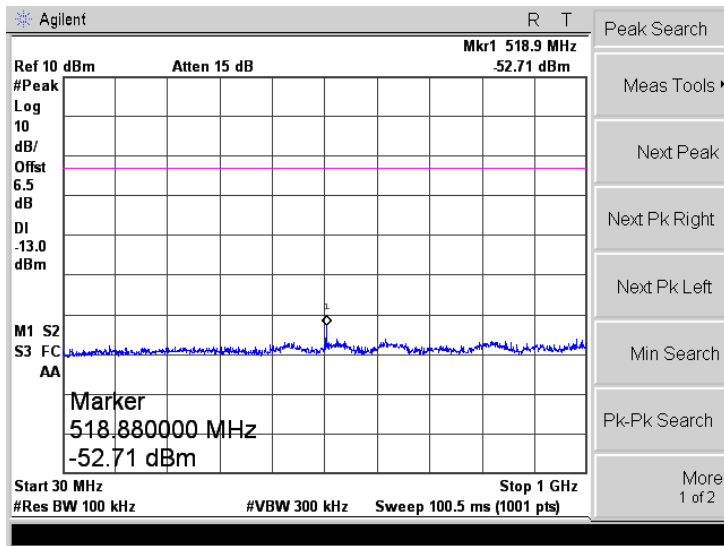


EGPRS1900

High Channel

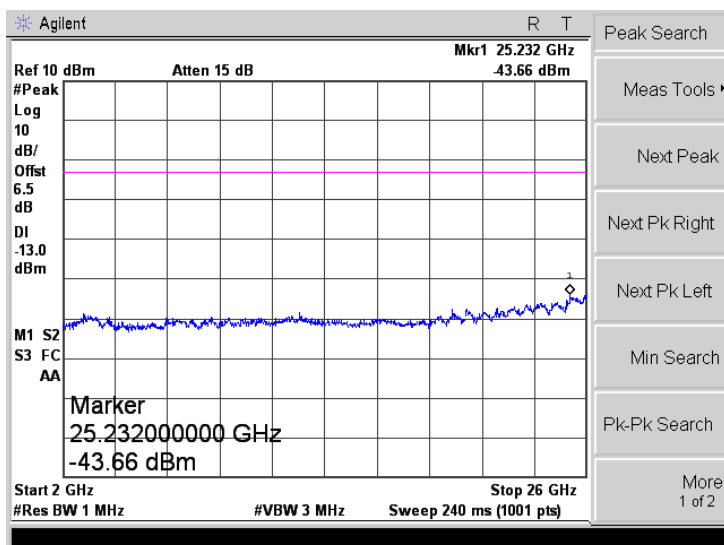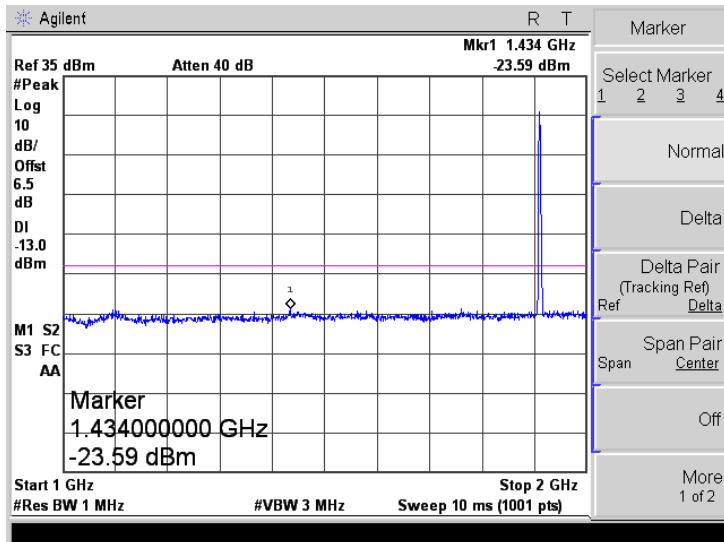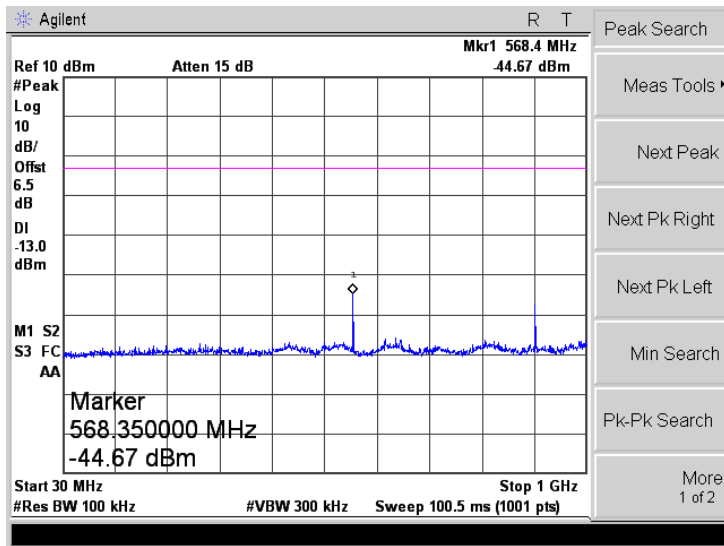


EGPRS1900

Low Band Emission


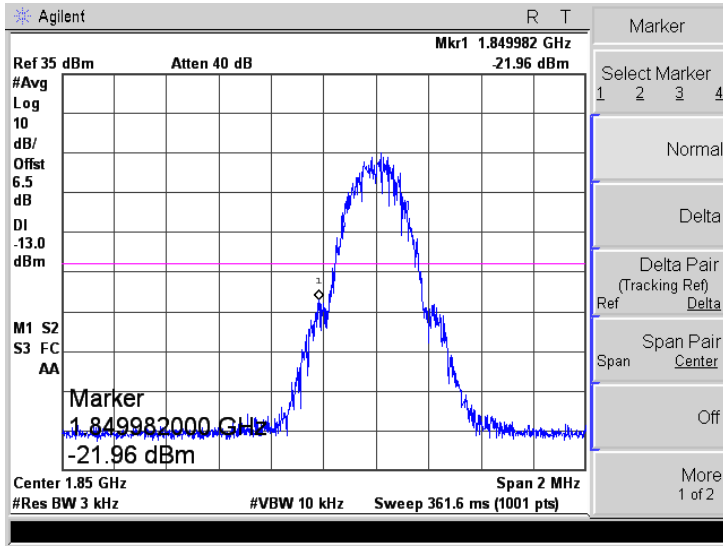


High Band Emission

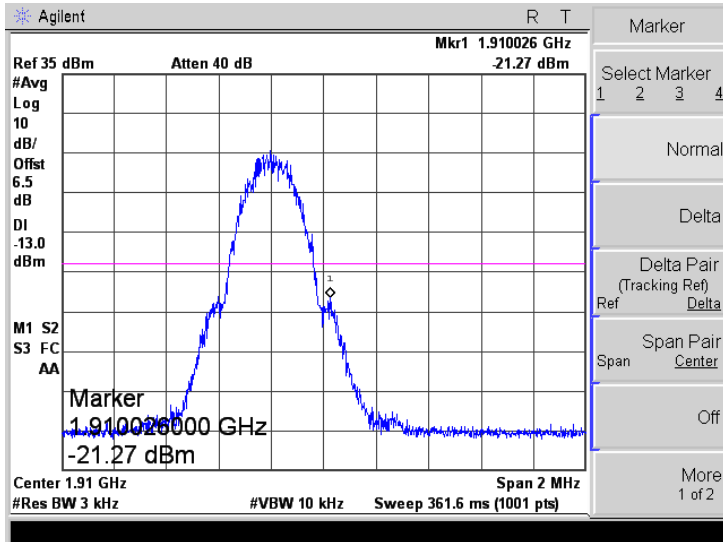



WCDMA Band V

Low Channel

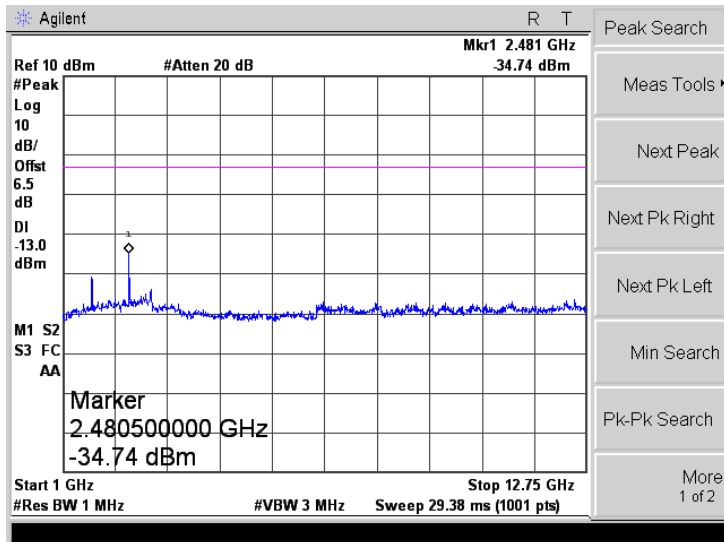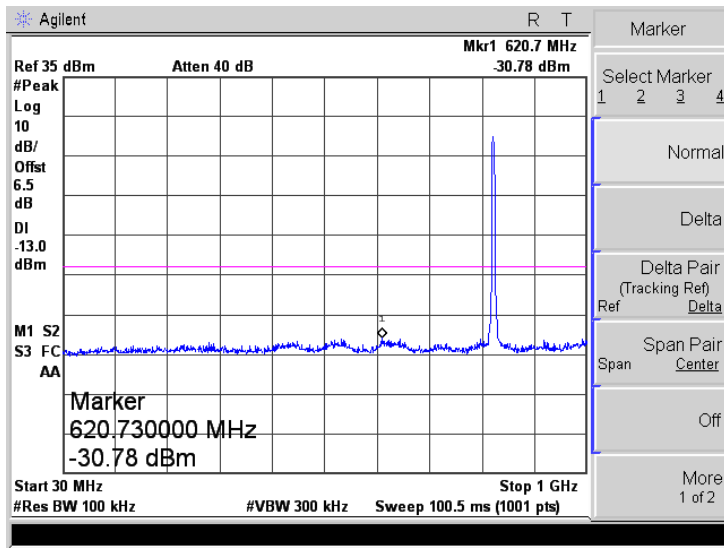



WCDMA Band V

Middle Channel

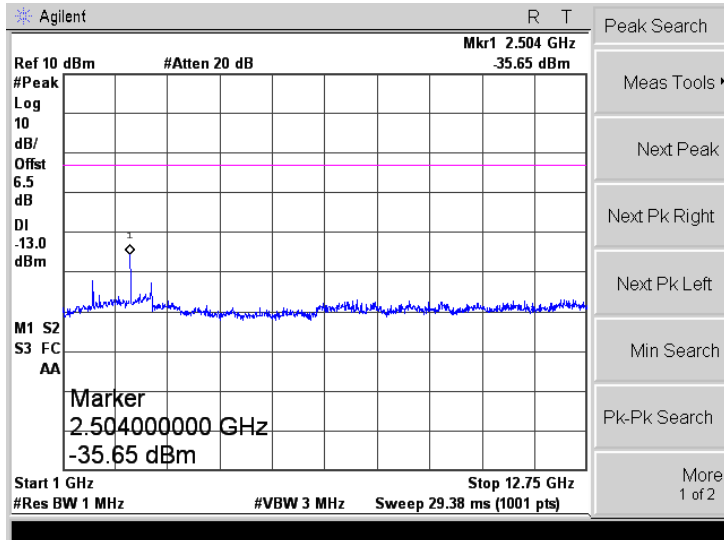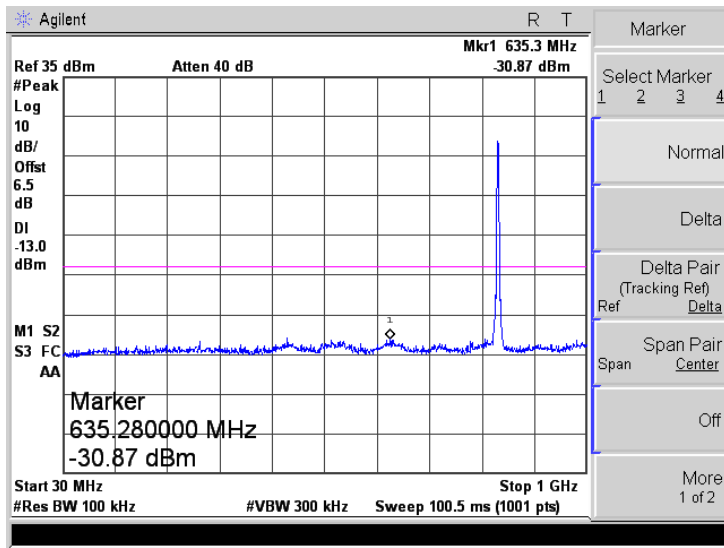


WCDMA Band V

High Channel

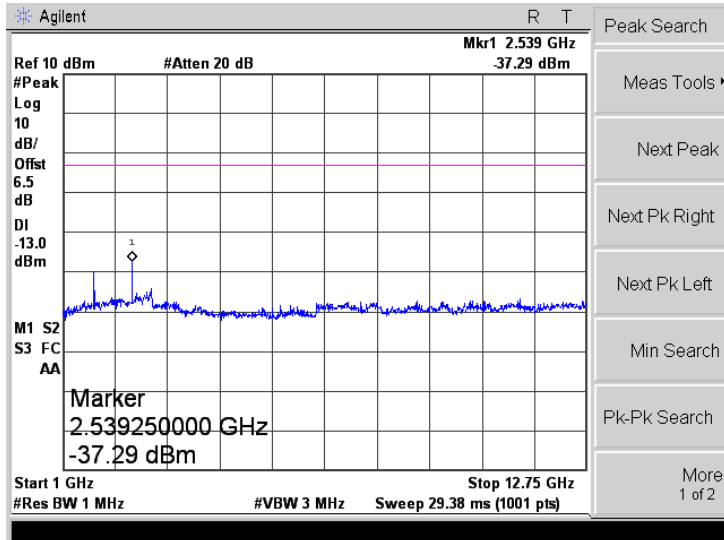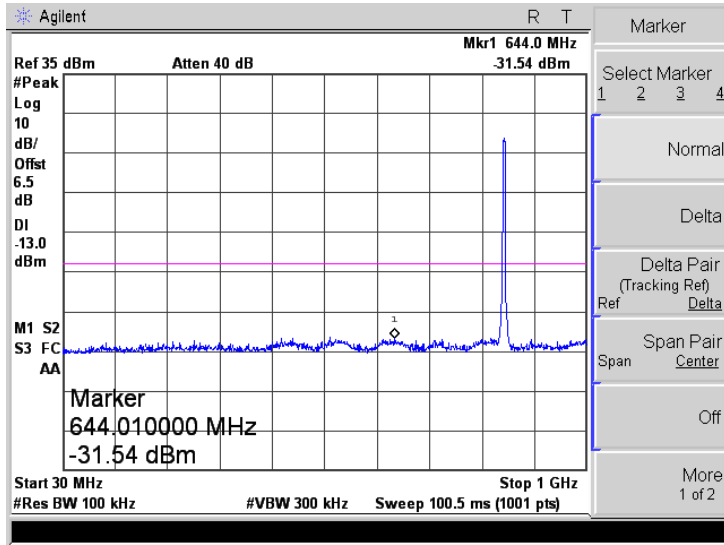


WCDMA Band V

Low Band Emission



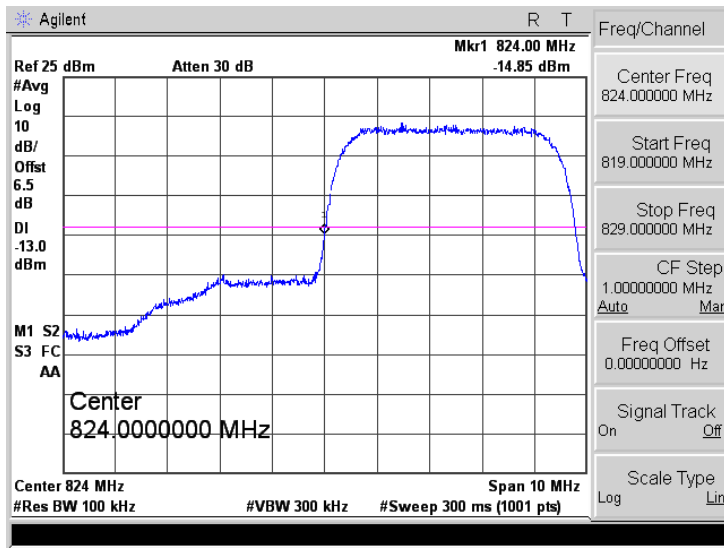


High Band Emission

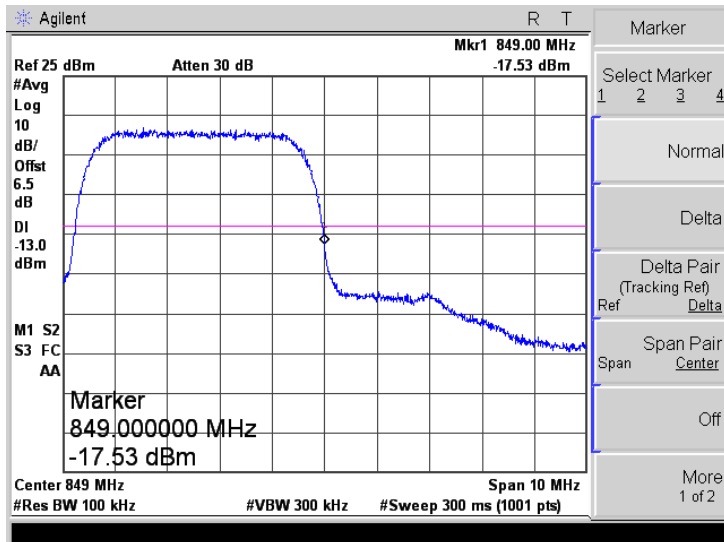

WCDMA Band II




Low Channel

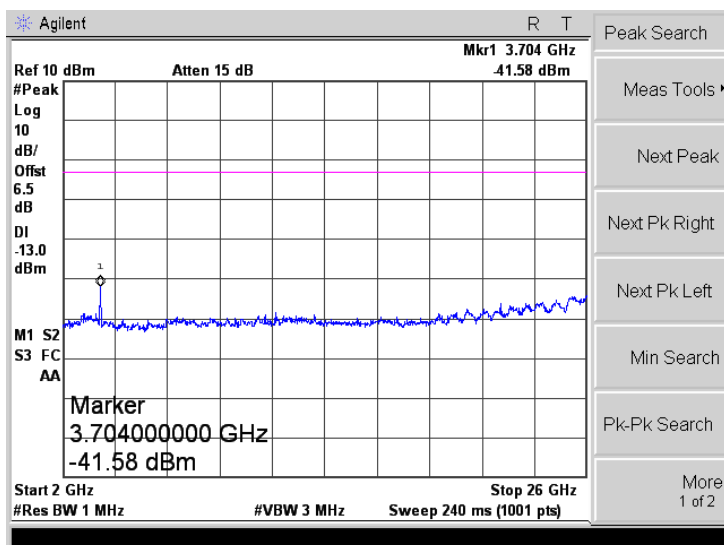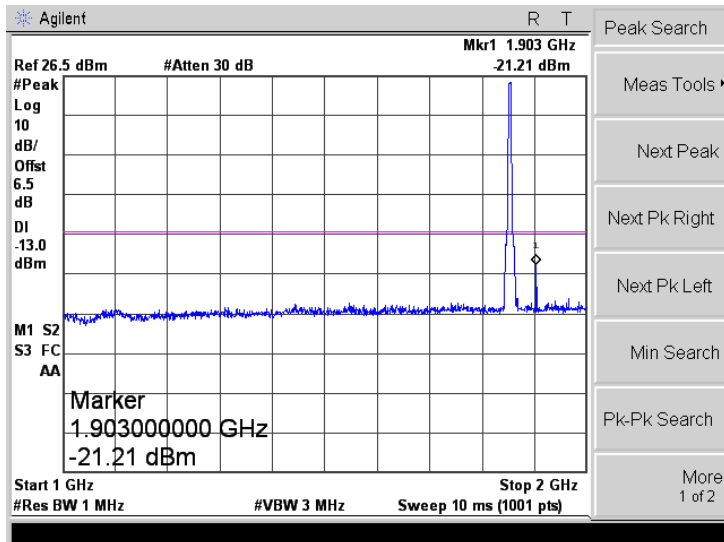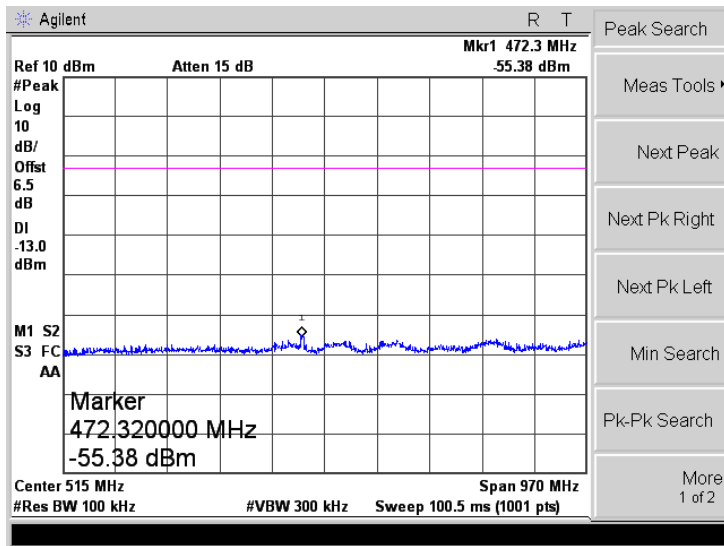






WCDMA Band II

Middle Channel

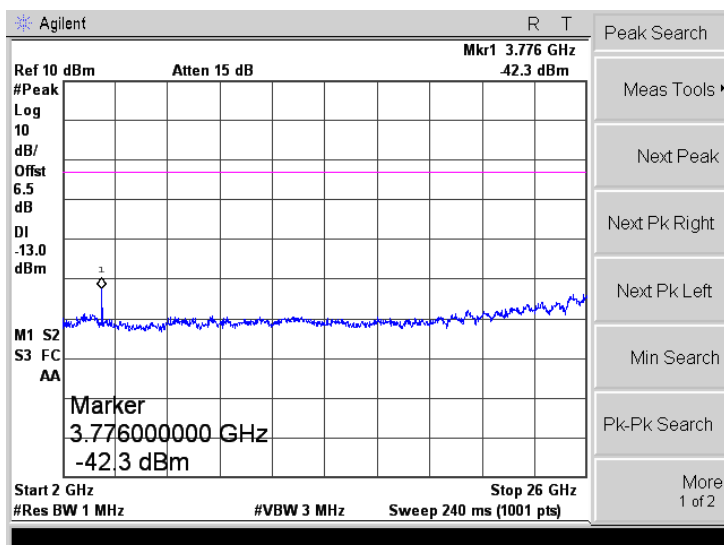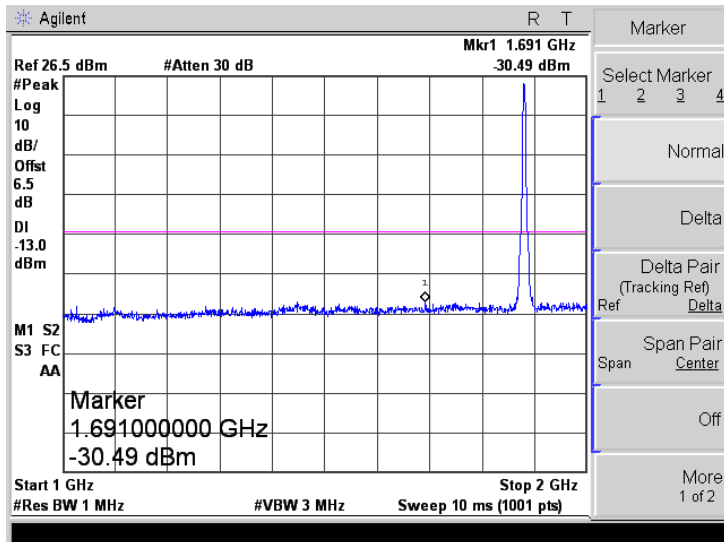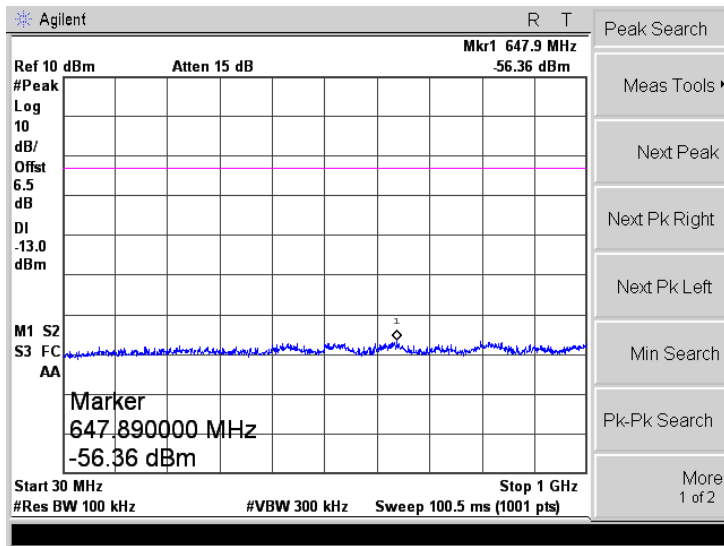


WCDMA Band II

High Channel

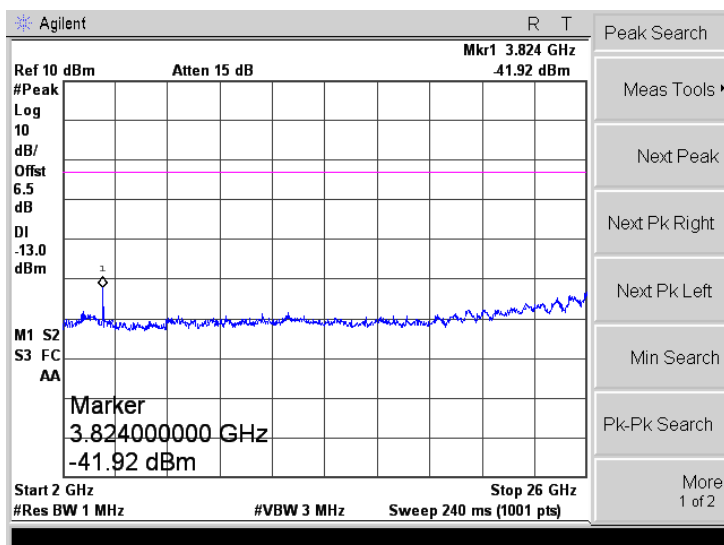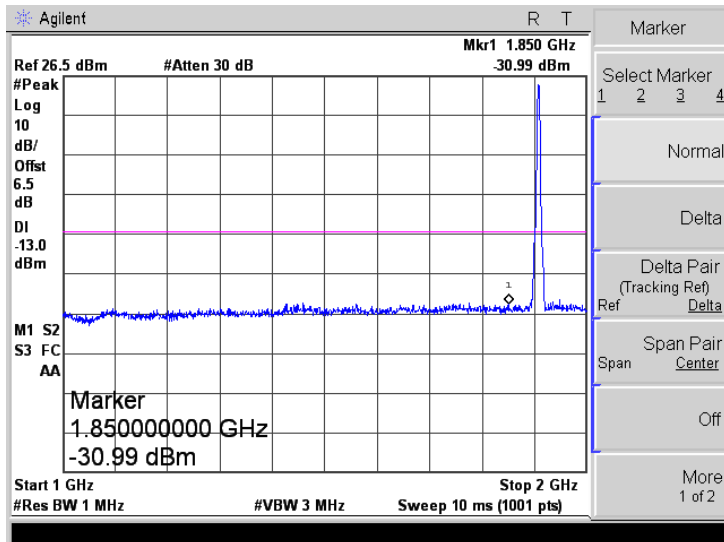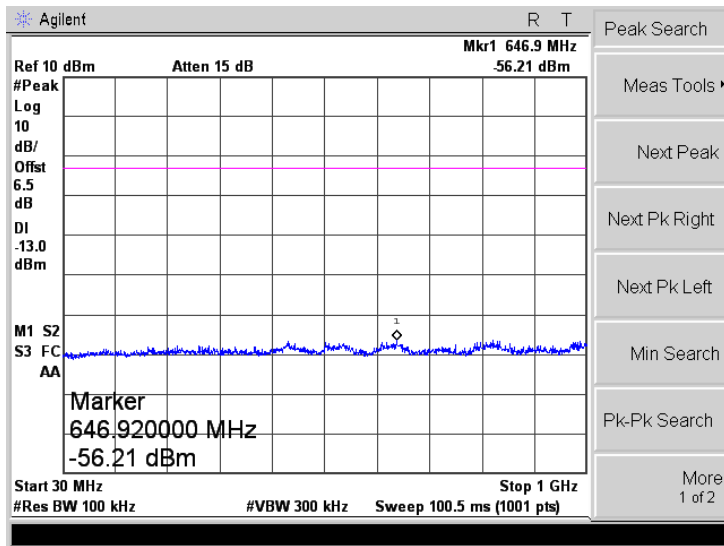


WCDMA Band II

Low Band Emission

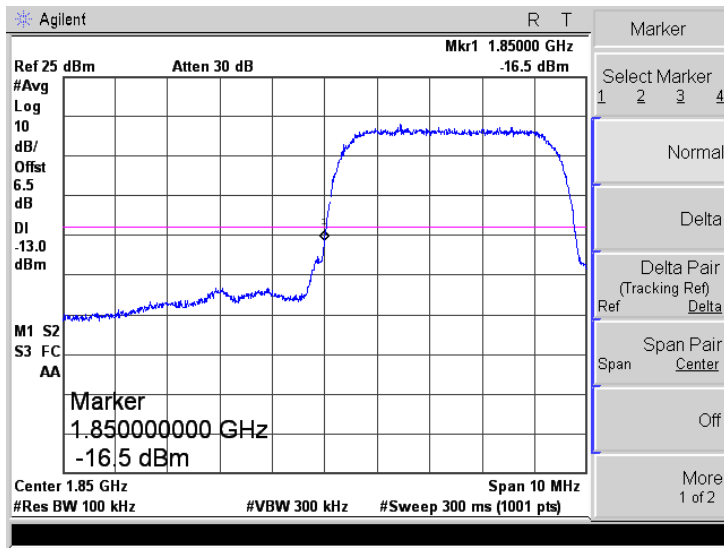

High Band Emission

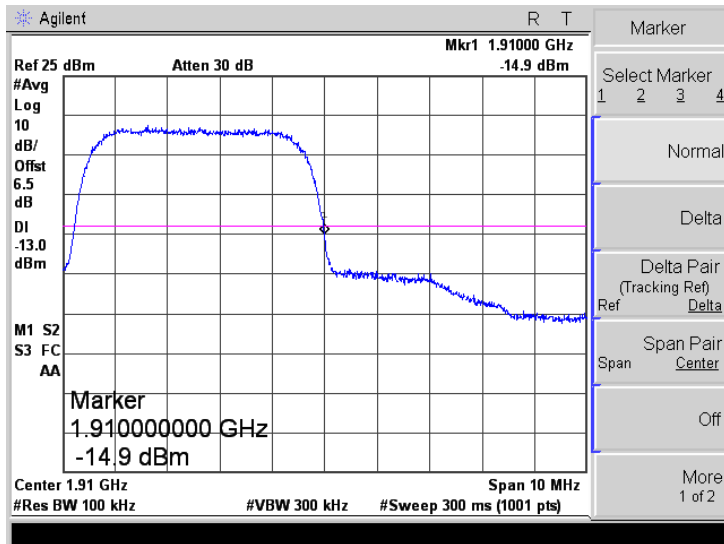

## 8. Spurious Radiated Emissions

---

### 8.1 Standard Applicable

According to §22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

According to §24.238(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

### 8.2 Test Procedure

1. The setup of EUT is according with per ANSI/TIA Standard 603E and ANSI C63.26 measurement procedure.
2. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.
3. The frequency range up to tenth harmonic of the fundamental frequency was investigated.
4. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.


$$\text{Spurious attenuation limit in dB} = 43 + 10 \log_{10}(\text{power out in Watts})$$

### 8.3 Summary of Test Results/Plots

*Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.*


➤ Spurious Emissions Below 1GHz

For Cellular Band			
Test Channel	GSM850	Polarity:	Horizontal

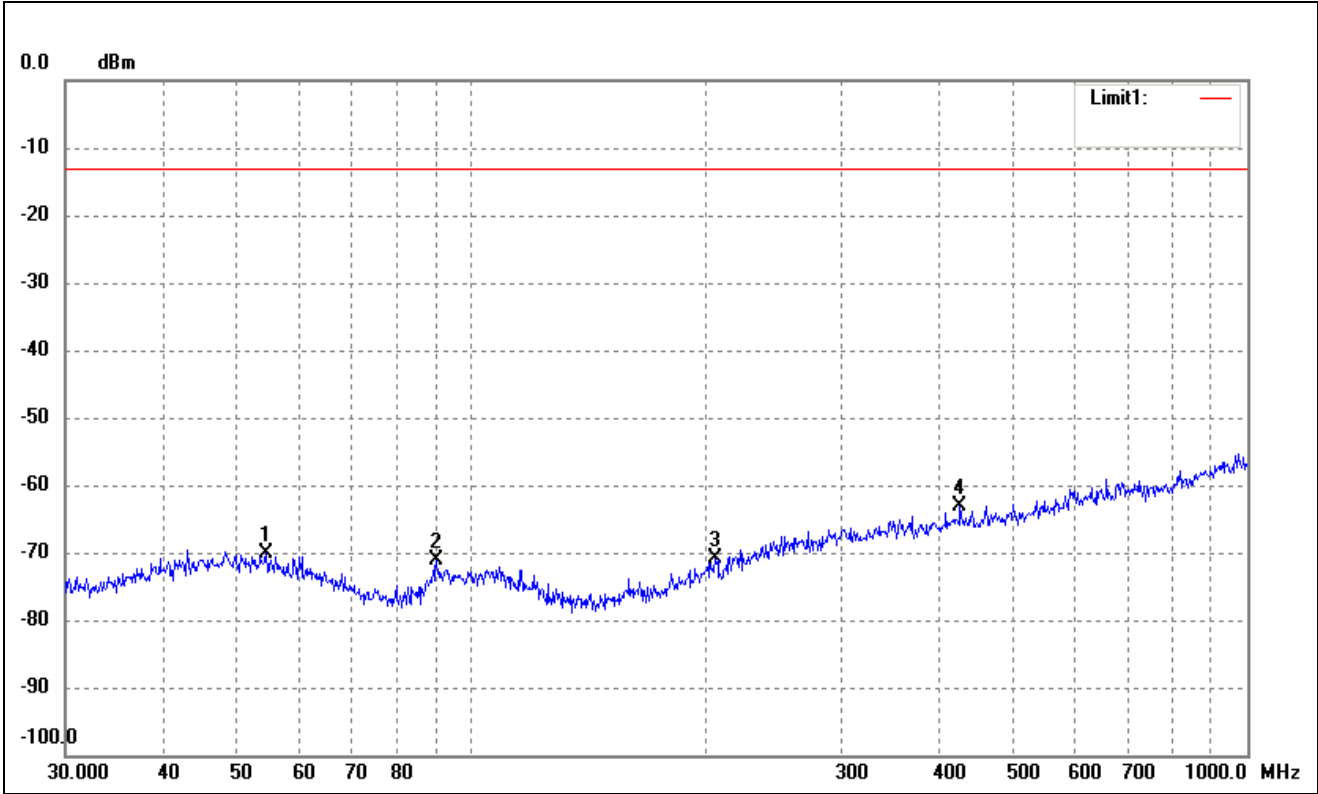


No.	Frequency (MHz)	Reading (dBm)	Correct (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	54.4516	-69.93	-0.18	-70.11	-13.00	-57.11	221	100	peak
2	90.2205	-69.50	-1.64	-71.14	-13.00	-58.14	177	100	peak
3	206.3976	-69.69	-1.27	-70.96	-13.00	-57.96	93	100	peak
4	426.5210	-68.76	5.66	-63.10	-13.00	-50.10	95	100	peak

For Cellular Band			
Test Channel	GSM850	Polarity:	Vertical

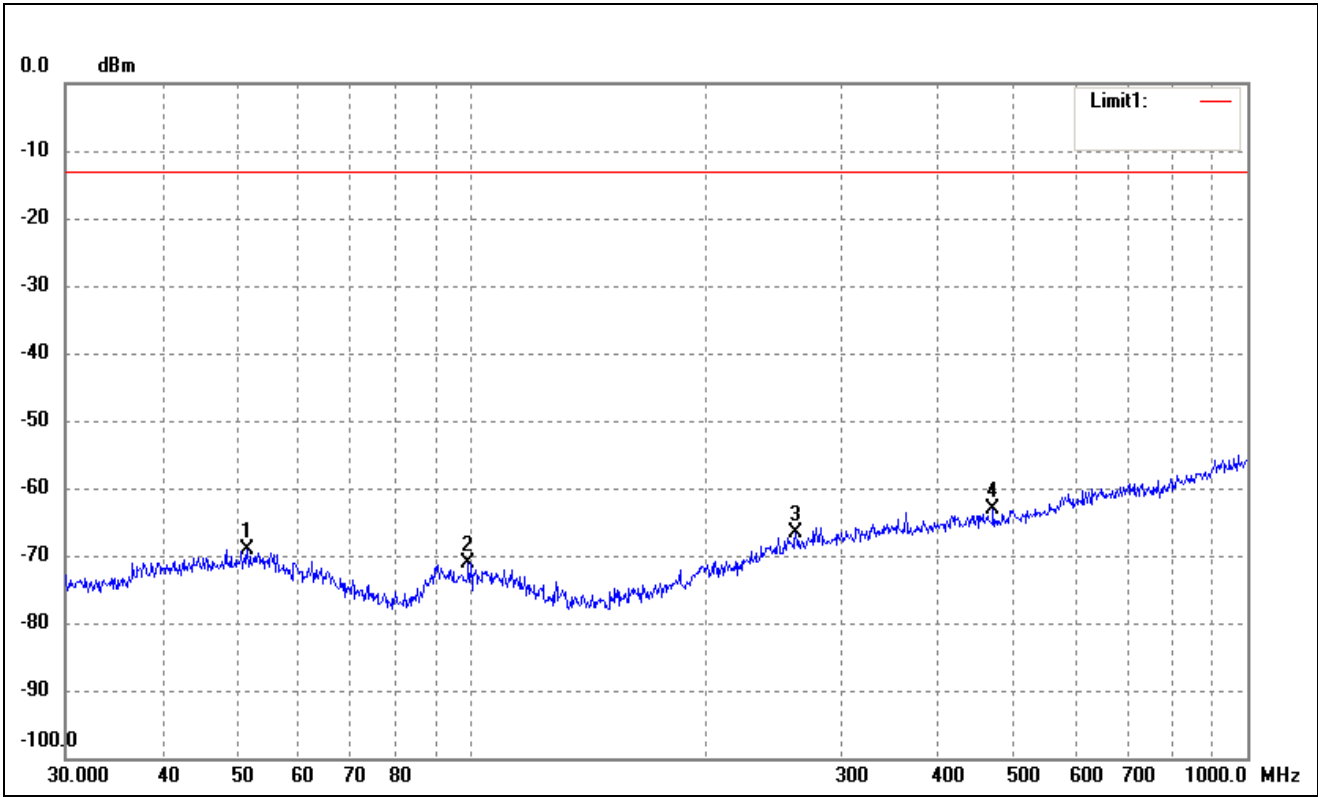


No.	Frequency (MHz)	Reading (dBm)	Correct (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	51.4807	-69.35	0.21	-69.14	-13.00	-56.14	93	100	peak
2	99.1797	-69.11	-2.10	-71.21	-13.00	-58.21	167	100	peak
3	261.9753	-69.14	2.62	-66.52	-13.00	-53.52	91	100	peak
4	470.5232	-68.79	5.68	-63.11	-13.00	-50.11	248	100	peak

For Cellular Band			
Test Channel	GSM1900	Polarity:	Horizontal

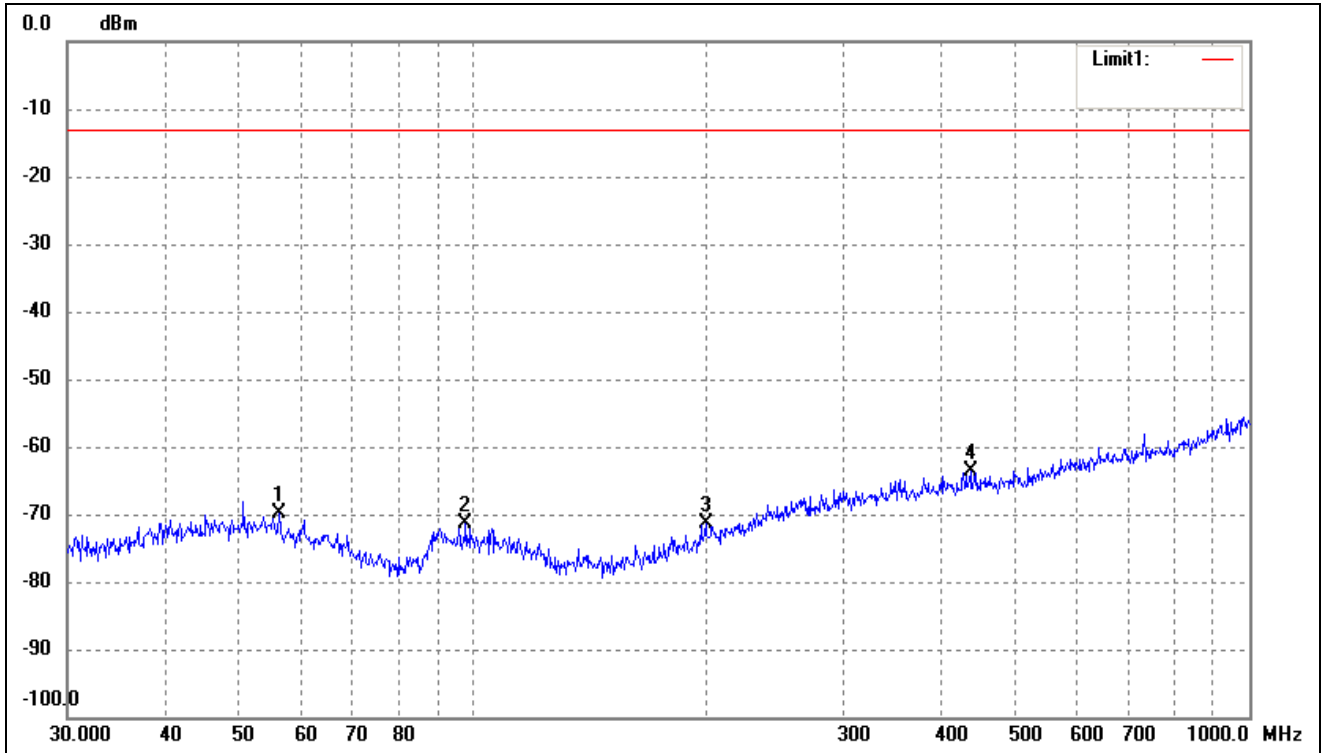

No.	Frequency (MHz)	Reading (dBm)	Correct (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	56.1974	-69.24	-0.64	-69.88	-13.00	-56.88	279	100	peak
2	97.7983	-69.16	-2.26	-71.42	-13.00	-58.42	94	100	peak
3	199.2855	-69.84	-1.47	-71.31	-13.00	-58.31	107	100	peak
4	437.1199	-69.28	5.72	-63.56	-13.00	-50.56	98	100	peak

For Cellular Band			
Test Channel	GSM1900	Polarity:	Vertical

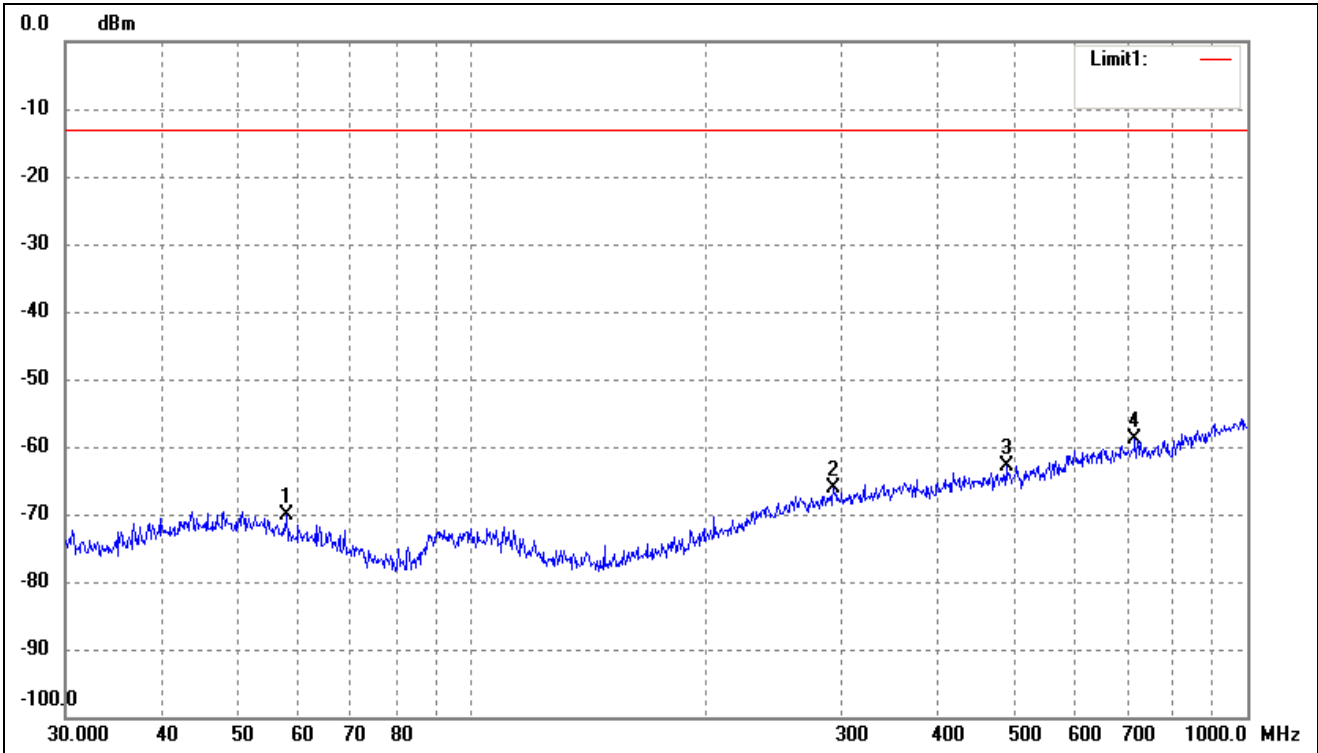


No.	Frequency (MHz)	Reading (dBm)	Correct (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	57.7962	-68.77	-1.27	-70.04	-13.00	-57.04	154	100	peak
2	293.0842	-69.55	3.50	-66.05	-13.00	-53.05	106	100	peak
3	489.0269	-69.12	6.23	-62.89	-13.00	-49.89	86	100	peak
4	716.6820	-68.74	9.86	-58.88	-13.00	-45.88	90	100	peak

Note: Margin= (Reading+ Correct)- Limit




Test Channel	band 5	Polarity:	Horizontal
--------------	--------	-----------	------------

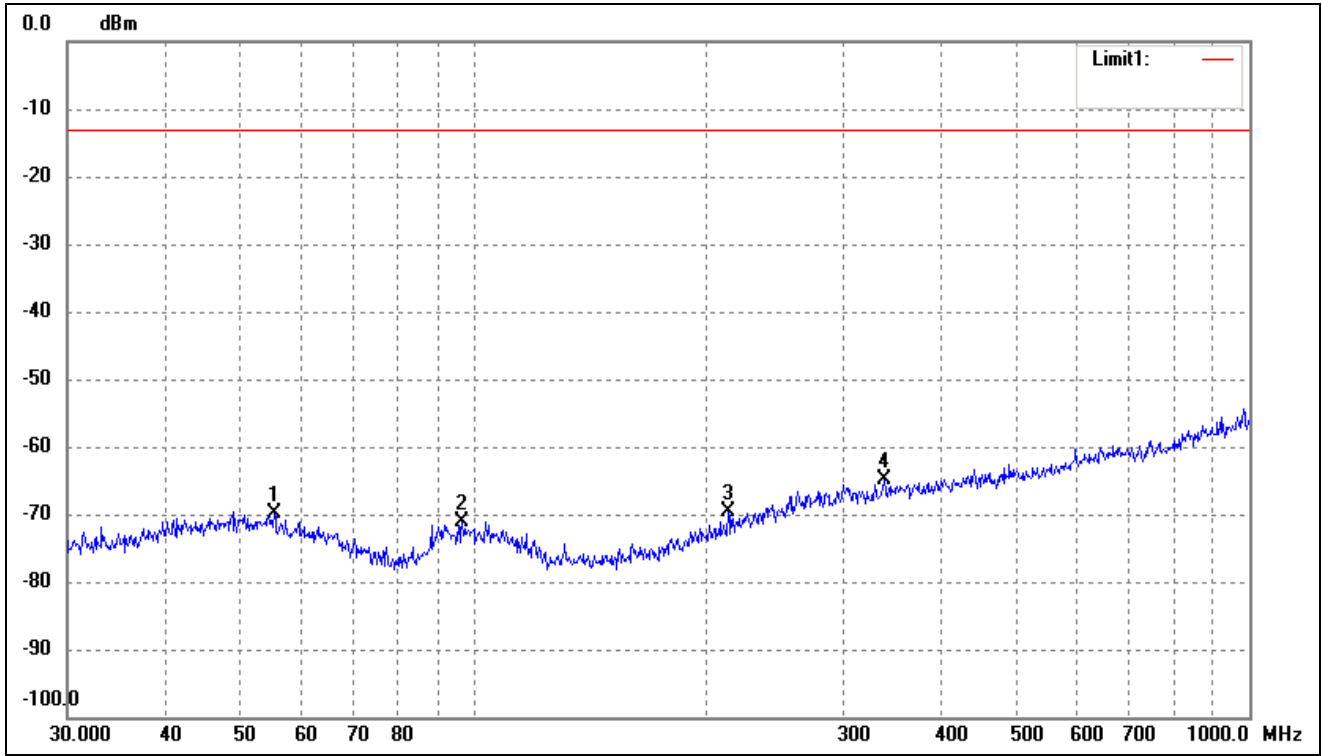


No.	Frequency (MHz)	Reading (dBm)	Correct (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	55.4147	-69.35	-0.41	-69.76	-13.00	-56.76	59	100	peak
2	96.7749	-68.64	-2.39	-71.03	-13.00	-58.03	141	100	peak
3	213.0151	-68.62	-1.12	-69.74	-13.00	-56.74	118	100	peak
4	338.4001	-69.26	4.44	-64.82	-13.00	-51.82	142	100	peak

Test Channel	band 5	Polarity:	Vertical
--------------	--------	-----------	----------

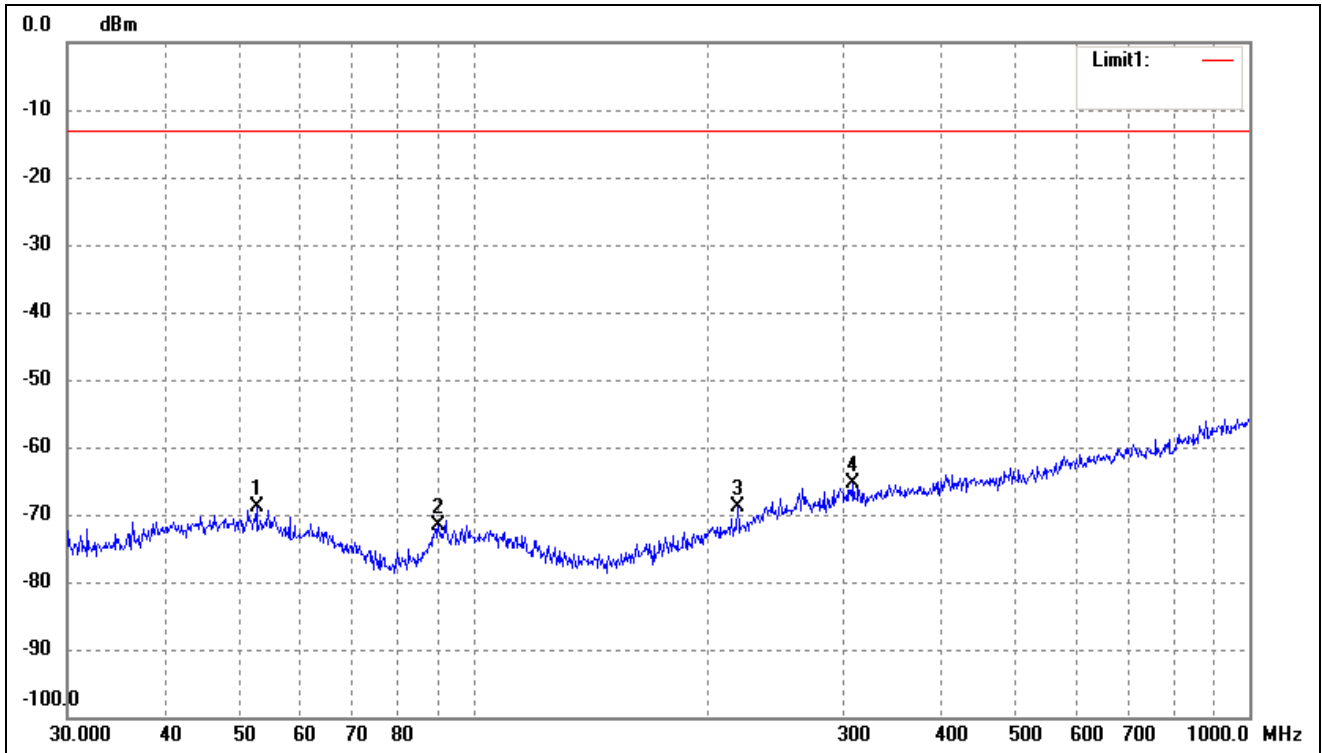


No.	Frequency (MHz)	Reading (dBm)	Correct (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	52.5753	-69.12	0.13	-68.99	-13.00	-55.99	150	100	peak
2	90.2205	-69.97	-1.64	-71.61	-13.00	-58.61	86	100	peak
3	219.0753	-68.34	-0.45	-68.79	-13.00	-55.79	122	100	peak
4	308.9126	-68.75	3.50	-65.25	-13.00	-52.25	250	100	peak

Test Channel	band 2	Polarity:	Horizontal
--------------	--------	-----------	------------

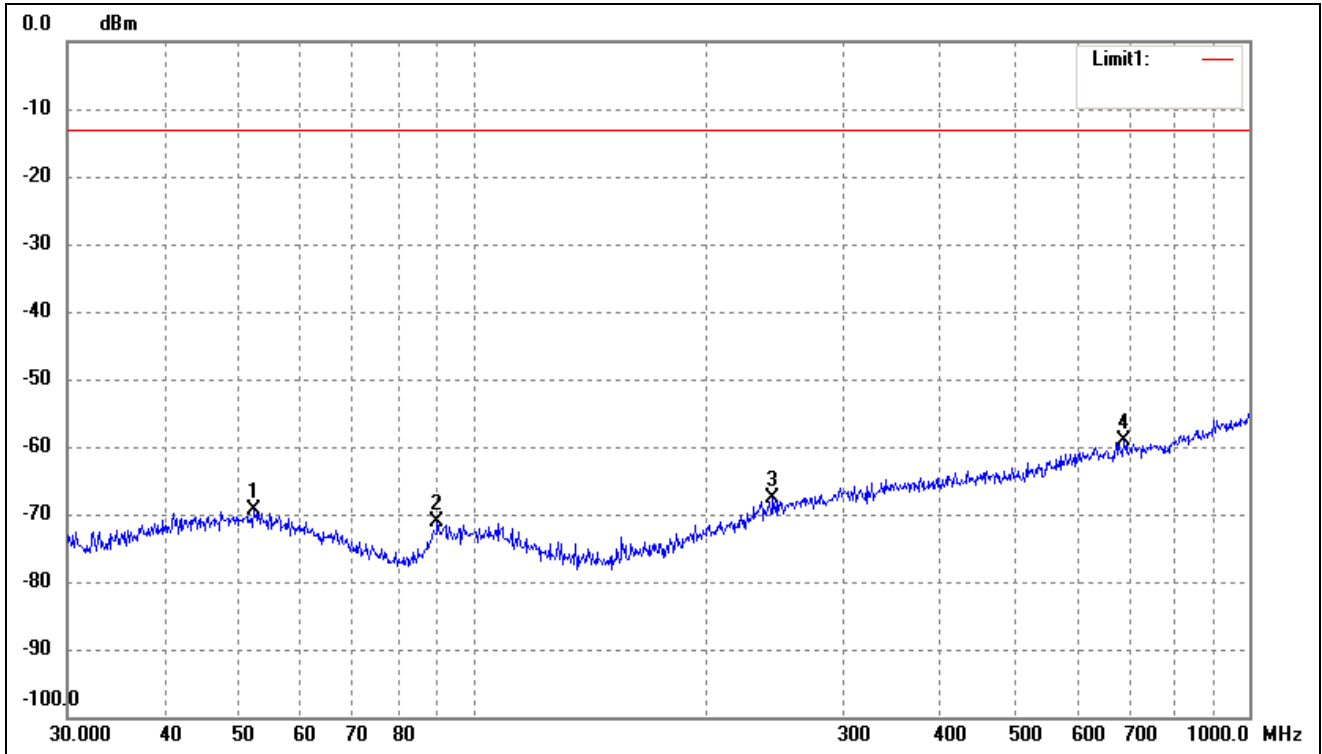

No.	Frequency (MHz)	Reading (dBm)	Correct (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	52.2079	-69.43	0.18	-69.25	-13.00	-56.25	53	100	peak
2	89.9047	-69.48	-1.67	-71.15	-13.00	-58.15	312	100	peak
3	243.3772	-69.24	1.71	-67.53	-13.00	-54.53	85	100	peak
4	689.5644	-69.01	9.79	-59.22	-13.00	-46.22	264	100	peak

Test Channel	band 2	Polarity:	Vertical
--------------	--------	-----------	----------

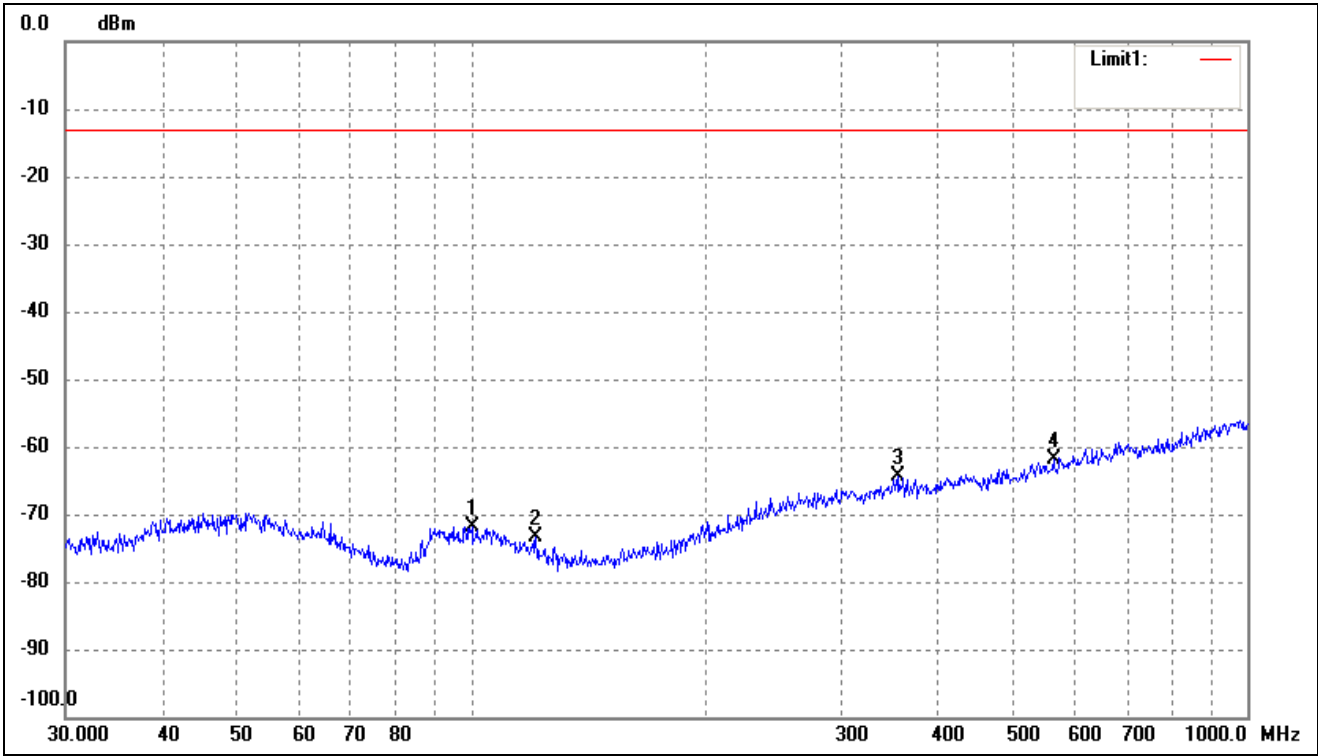

No.	Frequency (MHz)	Reading (dBm)	Correct (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	100.2286	-69.96	-1.98	-71.94	-13.00	-58.94	240	100	peak
2	121.1231	-69.33	-3.97	-73.30	-13.00	-60.30	100	100	peak
3	355.4273	-69.04	4.77	-64.27	-13.00	-51.27	258	100	peak
4	562.6624	-69.25	7.38	-61.87	-13.00	-48.87	117	100	peak

Note: Margin= (Reading+ Correct)- Limit

- Spurious Emissions Above 1GHz
- For Cellular Band\_GSM850 Mode

Frequency	Reading	Correct	Result	Limit	Margin	Polar
(MHz)	(dBm)	dB	(dBm)	(dBm)	(dB)	H/V
Low Channel (824.2MHz)						
1648.4	-35.09	4.94	-30.15	-13	-17.15	H
2472.6	-43.67	8.46	-35.21	-13	-22.21	H
1648.4	-35.38	4.94	-30.44	-13	-17.44	V
2472.6	-43.14	8.46	-34.68	-13	-21.68	V
Middle Channel (836.6MHz)						
1673.2	-34.99	5.11	-29.88	-13	-16.88	H
2509.8	-44.74	8.54	-36.2	-13	-23.2	H
1673.2	-36.17	5.11	-31.06	-13	-18.06	V
2509.8	-44.55	8.54	-36.01	-13	-23.01	V
High Channel (848.8MHz)						
1697.6	-35.04	5.25	-29.79	-13	-16.79	H
2546.4	-41.94	8.57	-33.37	-13	-20.37	H
1697.6	-37.74	5.25	-32.49	-13	-19.49	V
2546.4	-41.37	8.57	-32.8	-13	-19.8	V

- For PCS Band\_GSM1900 Mode

Frequency	Reading	Correct	Result	Limit	Margin	Polar
(MHz)	(dBm)	dB	(dBm)	(dBm)	(dB)	H/V
Low Channel (1850.2MHz)						
3700.4	-39.53	10.54	-28.99	-13	-15.99	H
5550.6	-46.88	13.37	-33.51	-13	-20.51	H
3700.4	-41.2	10.54	-30.66	-13	-17.66	V
5550.6	-47.89	13.37	-34.52	-13	-21.52	V
Middle Channel (1880MHz)						
3760.0	-42.21	10.64	-31.57	-13	-18.57	H
5640.0	-49.27	13.54	-35.73	-13	-22.73	H
3760.0	-42.49	10.64	-31.85	-13	-18.85	V
5640.0	-48.88	13.54	-35.34	-13	-22.34	V
High Channel (1909.8MHz)						
3819.6	-41.98	10.74	-31.24	-13	-18.24	H
5729.4	-46.32	13.71	-32.61	-13	-19.61	H
3819.6	-40.26	10.74	-29.52	-13	-16.52	V
5729.4	-46.37	13.71	-32.66	-13	-19.66	V

## ➤ For WCDMA Band V Mode

Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Polar H/V
Low Channel (826.4MHz)						
1652.8	-34.2	4.94	-29.26	-13	-16.26	H
2479.2	-42.1	8.46	-33.64	-13	-20.64	H
1652.8	-37.51	4.94	-32.57	-13	-19.57	V
2479.2	-44.62	8.46	-36.16	-13	-23.16	V
Middle Channel (836.6MHz)						
1672.8	-36.19	5.11	-31.08	-13	-18.08	H
2509.2	-44.69	8.54	-36.15	-13	-23.15	H
1672.8	-35.04	5.11	-29.93	-13	-16.93	V
2509.2	-41.5	8.54	-32.96	-13	-19.96	V
High Channel (846.6MHz)						
1693.2	-36.66	5.25	-31.41	-13	-18.41	H
2539.8	-43.32	8.57	-34.75	-13	-21.75	H
1693.2	-35.84	5.25	-30.59	-13	-17.59	V
2539.8	-43.98	8.57	-35.41	-13	-22.41	V

## ➤ For WCDMA Band II Mode

Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Polar H/V
Low Channel (1852.4MHz)						
3704.8	-34.6	10.17	-24.43	-13	-11.43	H
5557.2	-41.04	14.69	-26.35	-13	-13.35	H
3704.8	-35.23	10.17	-25.06	-13	-12.06	V
5557.2	-41.59	14.69	-26.9	-13	-13.9	V
Middle Channel (1880MHz)						
3760.8	-37.27	10.26	-27.01	-13	-14.01	H
5640.0	-42.77	14.78	-27.99	-13	-14.99	H
3760.8	-36.27	10.26	-26.01	-13	-13.01	V
5640.0	-44.54	14.78	-29.76	-13	-16.76	V
High Channel (1907.6MHz)						
3815.2	-37.63	10.59	-27.04	-13	-14.04	H
5722.8	-43.19	15.03	-28.16	-13	-15.16	H
3815.2	-34.91	10.59	-24.32	-13	-11.32	V
5722.8	-44.05	15.03	-29.02	-13	-16.02	H

Note: Result=Reading+ Correct, Margin= Result- Limit

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

## 9. Frequency Stability

---

### 9.1 Standard Applicable

According to §22.355, §24.235 the limit is 2.5ppm.

### 9.2 Test Procedure

According to §2.1055, the following test procedure was performed.

The Frequency Stability is measured directly with a Frequency Domain Analyzer. Frequency Deviation in ppm is calculated from the measured peak to peak value.

The Carrier Frequency Stability over Power Supply Voltage and over Temperature is measured with a Frequency Domain Analyzer in histogram mode

### 9.3 Summary of Test Results/Plots

Note: 1. Worst case at GSM850/PCS1900/WCDMA B2/B5 middle channel

2. Normal Voltage NV=DC3.7V; Low Voltage LV=DC3.5V;High Voltage HV=DC4.2V

## ➤ Frequency stability V.S. Temperature measurement

Reference Frequency: GSM850 Middle channel=190 channel=836.6MHz					
Power supplied (Vdc)	Temperature ( °C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
NV	-30	58	0.0699	2.50	Pass
	-20	52	0.0616		
	-10	43	0.0515		
	0	37	0.0441		
	10	32	0.0377		
	20	28	0.0331		
	30	35	0.0414		
	40	41	0.0487		
	50	48	0.0579		
Reference Frequency: PCS1900 Middle channel=661 channel=1880MHz					
Power supplied (Vdc)	Temperature ( °C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
NV	-30	78	0.0417	2.50	Pass
	-20	66	0.0352		
	-10	57	0.0303		
	0	49	0.0262		
	10	42	0.0221		
	20	38	0.0200		
	30	45	0.0241		
	40	49	0.0262		
	50	57	0.0303		



Reference Frequency: WCDMA Band V Middle channel=4183 channel=836.6MHz					
Power supplied (Vdc)	Temperature ( °C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
NV	-30	72	0.0855	2.50	Pass
	-20	59	0.0708		
	-10	48	0.0579		
	0	41	0.0487		
	10	35	0.0423		
	20	28	0.0340		
	30	34	0.0405		
	40	39	0.0469		
	50	47	0.0561		
Reference Frequency: WCDMA Band II Middle channel=9400 channel=1880MHz					
Power supplied (Vdc)	Temperature ( °C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
NV	-30	62	0.0331	2.50	Pass
	-20	49	0.0262		
	-10	45	0.0241		
	0	39	0.0209		
	10	33	0.0176		
	20	26	0.0139		
	30	31	0.0164		
	40	38	0.0205		
	50	46	0.0245		

## ➤ Frequency stability V.S. Voltage measurement

Reference Frequency: GSM850 (GSM link) Middle channel=190 channel=836.6MHz					
Temperature ( °C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	HV	65	0.0782	2.50	Pass
	NV	54	0.0644		
	LV	48	0.0579		
Reference Frequency: PCS1900 (GSM link) Middle channel=661 channel=1880MHz					
Temperature ( °C)	Power supplied (Vdc)	Frequency error			Result
		Hz	ppm		
25	HV	58	0.0311	2.50	Pass
	NV	46	0.0245		
	LV	35	0.0184		
Reference Frequency: WCDMA Band V Middle channel=4183 channel=836.6MHz					
Temperature ( °C)	Power supplied (Vdc)	Frequency error			Result
		Hz	ppm		
25	HV	42	0.0497	2.50	Pass
	NV	37	0.0441		
	LV	32	0.0386		
Reference Frequency: WCDMA Band II Middle channel=9400 channel=1880MHz					
Temperature ( °C)	Power supplied (Vdc)	Frequency error			Result
		Hz	ppm		
25	HV	21	0.0110	2.50	Pass
	NV	25	0.0135		
	LV	32	0.0168		

## 10. Modulation characteristics


### 10.1 Standard Applicable

According to §2.1047, Measurements required: Modulation characteristics is given below:

- (a) Voice modulated communication equipment. A curve or equivalent data showing the frequency response of the audio modulating circuit over a range of 100 to 5000 Hz shall be submitted. For equipment required to have an audio low-pass filter, a curve showing the frequency response of the filter, or of all circuitry installed between the modulation limiter and the modulated stage shall be submitted.
- (b) Equipment which employs modulation limiting. A curve or family of curves showing the percentage of modulation versus the modulation input voltage shall be supplied. The information submitted shall be sufficient to show modulation limiting capability throughout the range of modulating frequencies and input modulating signal levels employed.
- (c) Single sideband and independent sideband radiotelephone transmitters which employ a device or circuit to limit peak envelope power. A curve showing the peak envelope power output versus the modulation input voltage shall be supplied. The modulating signals shall be the same in frequency as specified in paragraph (c) of §2.1049 for the occupied bandwidth tests.
- (d) Other types of equipment. A curve or equivalent data which shows that the equipment will meet the modulation requirements of the rules under which the equipment is to be licensed.

### 10.2 Test Procedure

According to ANSI C63.26-2015 section 5.3.2, the following test setup was performed.

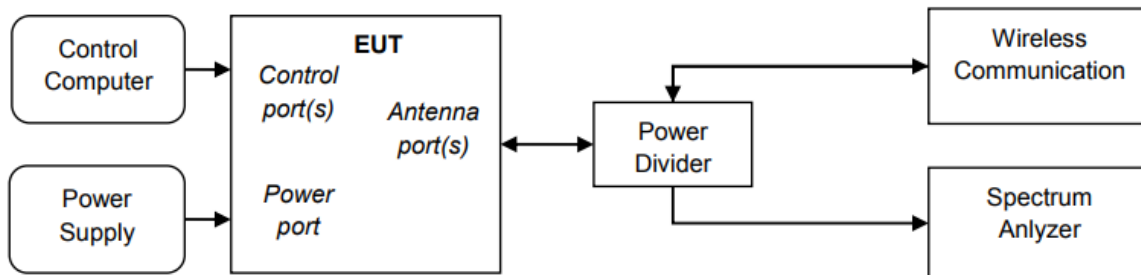


### 10.3 Summary of Test Results/Plots


Only the worst case was selected to record

## GSM850

Middle Channel-GMSK

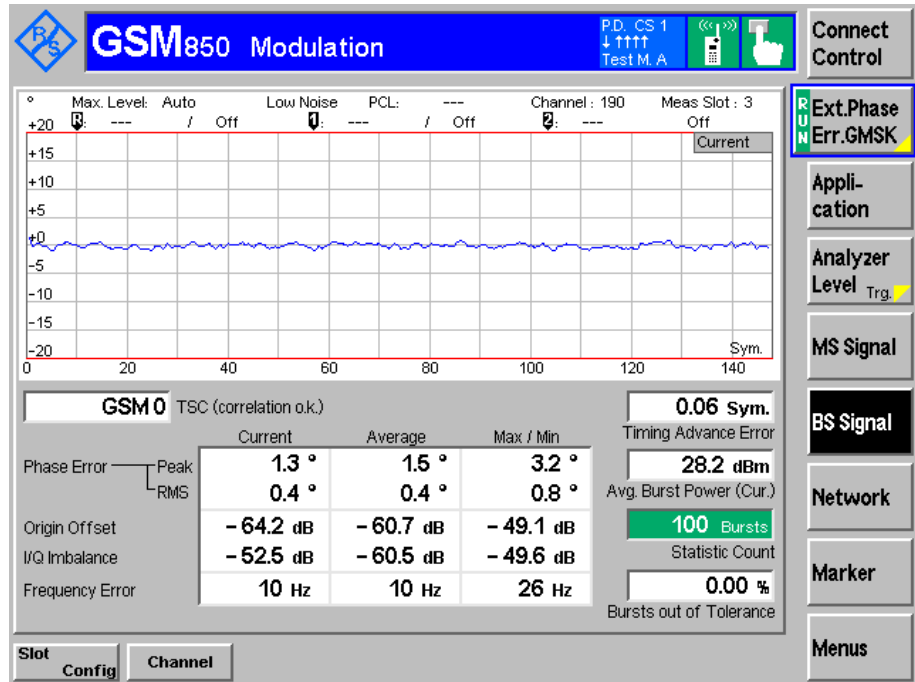


Middle Channel-8PSK

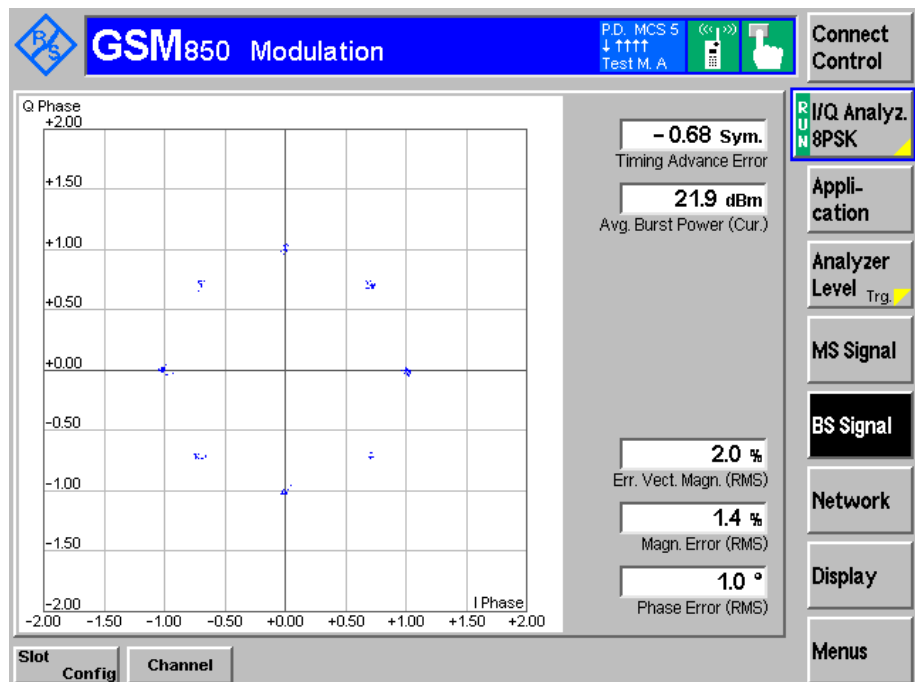



## GSM1900

Middle Channel-GMSK

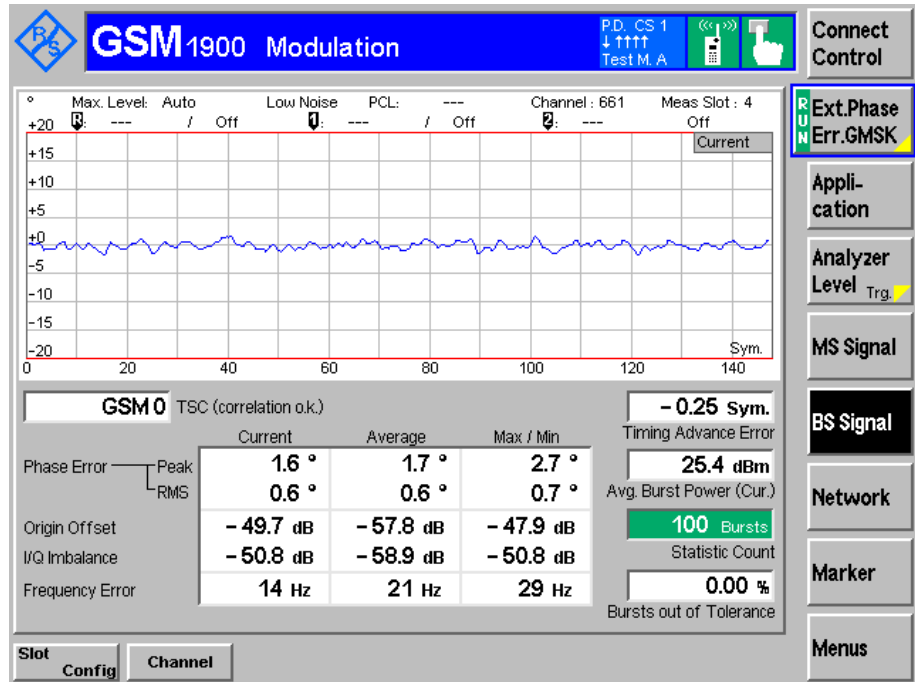

Middle Channel-8PSK

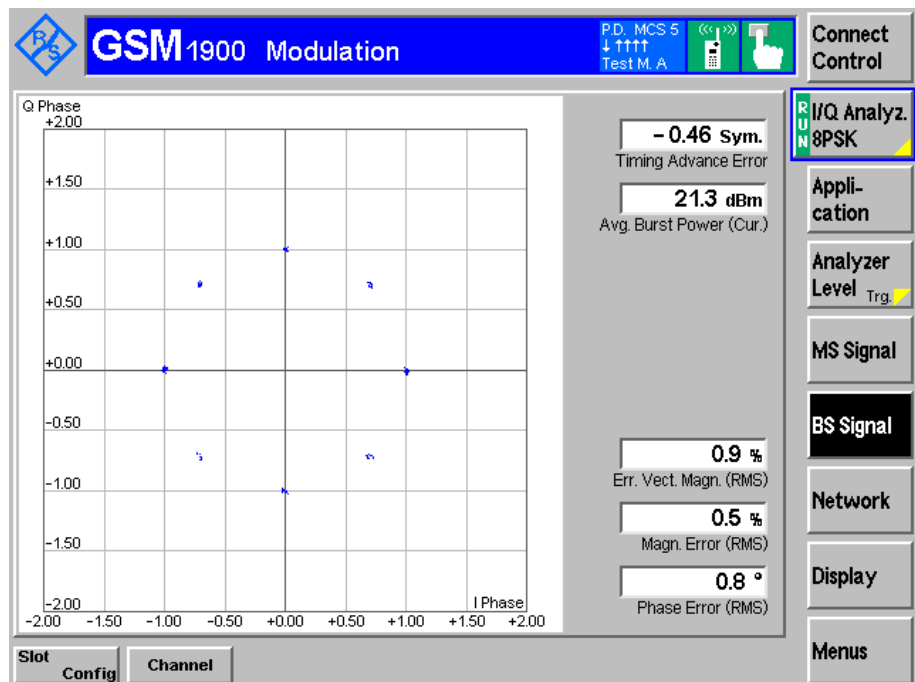

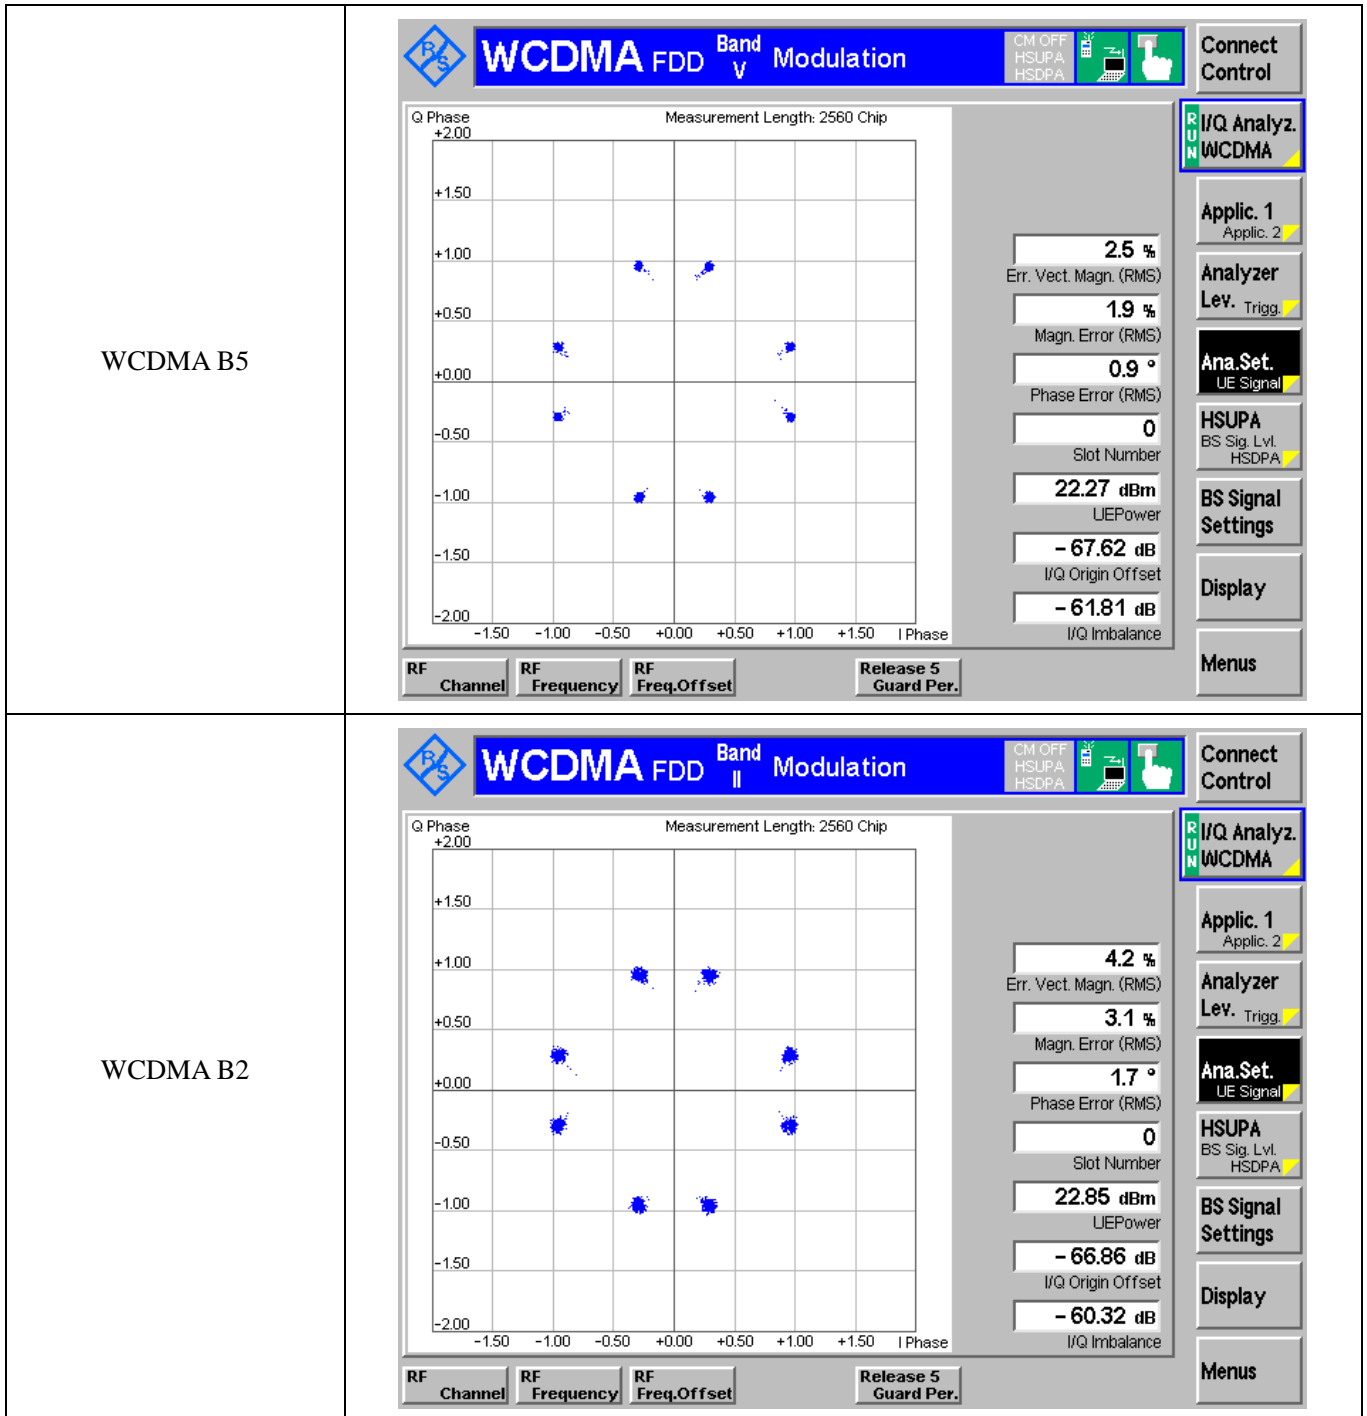

\*\*\*\*\* END OF REPORT \*\*\*\*\*