


2TX Antenna 1 + Antenna 2 CDD MODE

BANDEDGE (LOW CHANNEL, CH 1)


HORIZONTAL RESULT

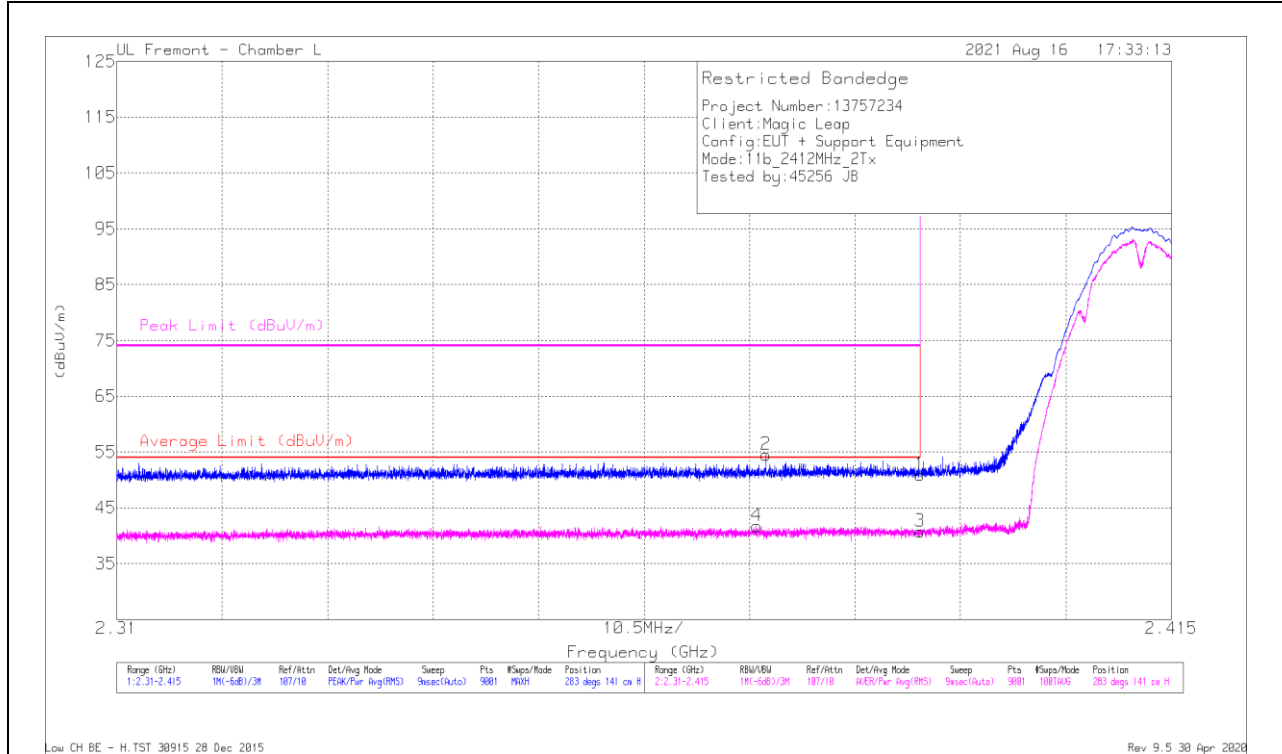

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cb/Fitr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.38999	38.17	Pk	32	-19.3	50.87	-	-	74	-23.13	283	141	H
2	* 2.37462	41.83	Pk	32.1	-19.4	54.53	-	-	74	-19.47	283	141	H
3	* 2.38999	28	RMS	32	-19.3	40.7	54	-13.3	-	-	283	141	H
4	* 2.37373	29.04	RMS	32.1	-19.4	41.74	54	-12.26	-	-	283	141	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

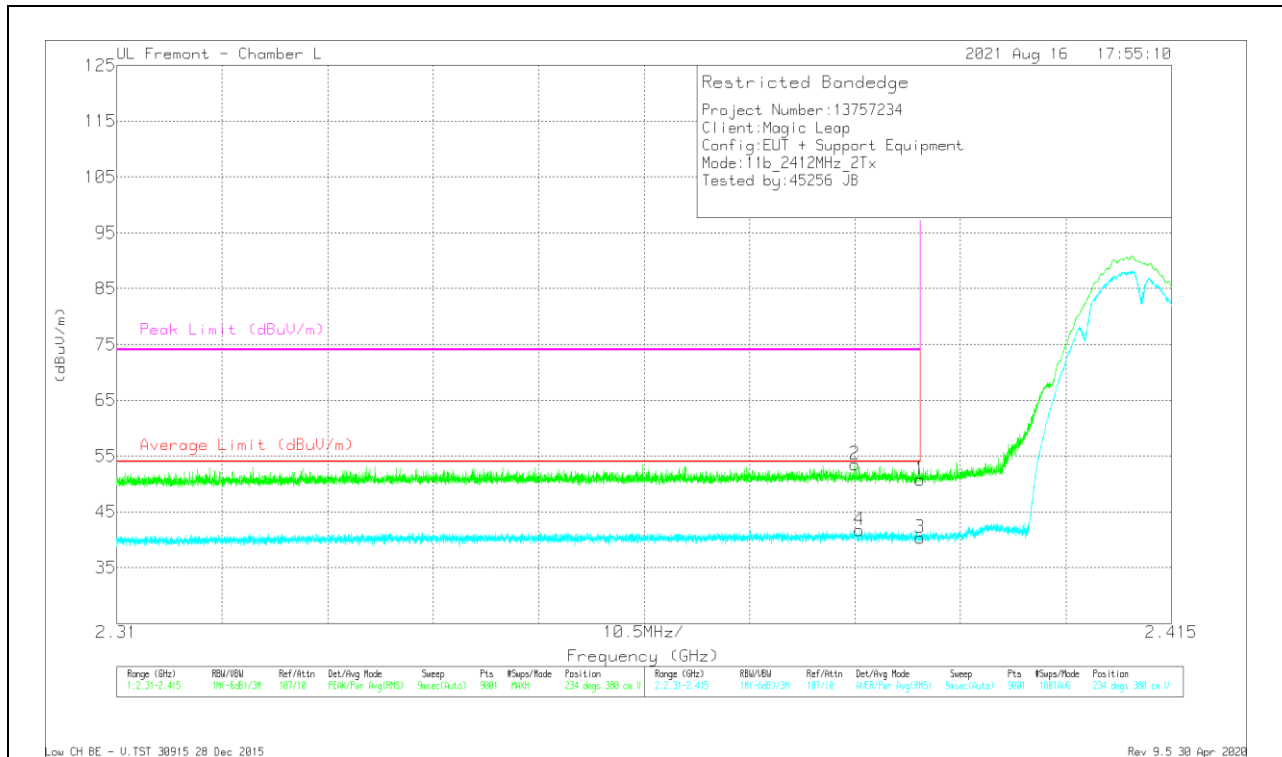


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cb/Fitr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.38999	38.06	Pk	32	-19.3	50.76	-	-	74	-23.24	234	380	V
2	* 2.38347	40.69	Pk	32.1	-19.3	53.49	-	-	74	-20.51	234	380	V
3	* 2.38999	27.66	RMS	32	-19.3	40.36	54	-13.64	-	-	234	380	V
4	* 2.38392	28.91	RMS	32.1	-19.3	41.71	54	-12.29	-	-	234	380	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 11)

HORIZONTAL RESULT

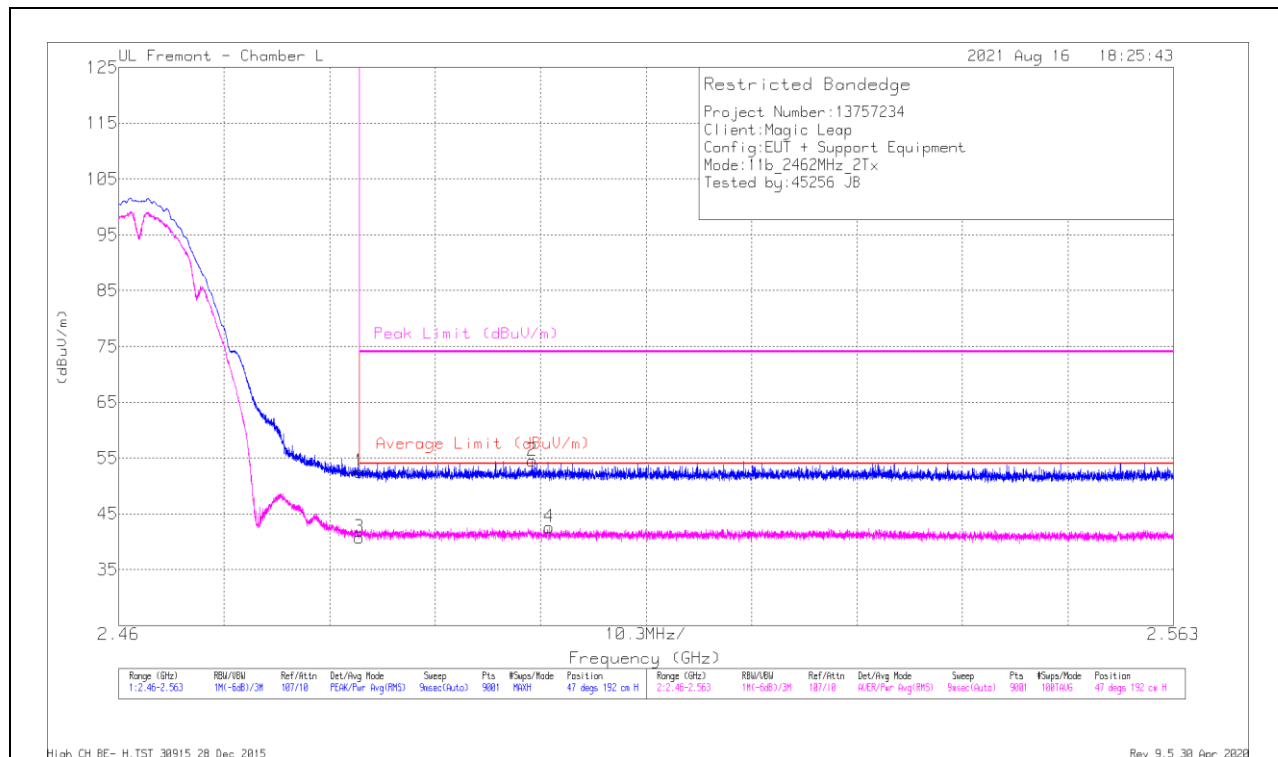


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cb/Filt/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	39.2	Pk	32.3	-19	52.5	-	-	74	-21.5	47	192	H
2	2.50039	41.23	Pk	32.4	-19.1	54.63	-	-	74	-19.47	47	192	H
3	* 2.48351	27.41	RMS	32.3	-19	40.71	54	-13.29	-	-	47	192	H
4	2.50206	29.25	RMS	32.4	-19.1	42.55	54	-11.45	-	-	47	192	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT


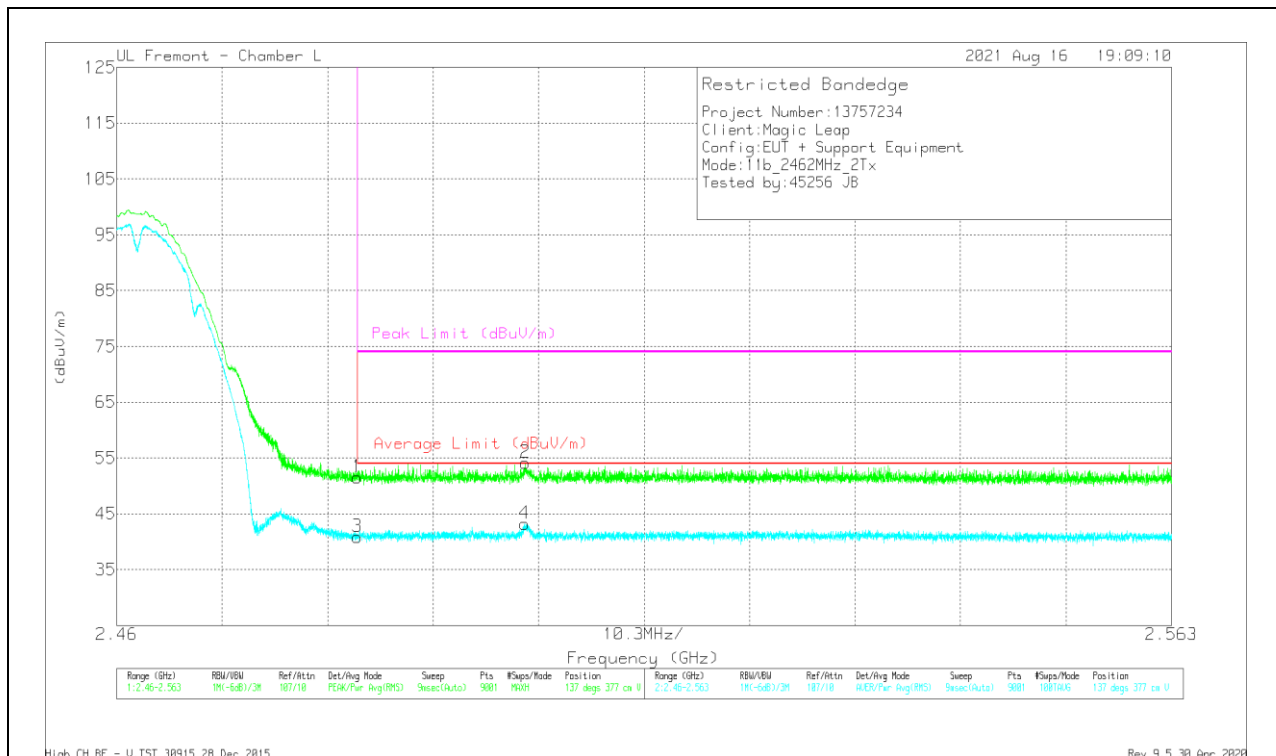


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cb/Fitr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	38.2	Pk	32.3	-19	51.5	-	-	74	-22.5	137	377	V
2	* 2.49988	40.79	Pk	32.4	-19.1	54.09	-	-	74	-19.91	137	377	V
3	* 2.48351	27.51	RMS	32.3	-19	40.81	54	-13.19	-	-	137	377	V
4	* 2.49985	29.9	RMS	32.4	-19.1	43.2	54	-10.8	-	-	137	377	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL, CH 1 RESULTS

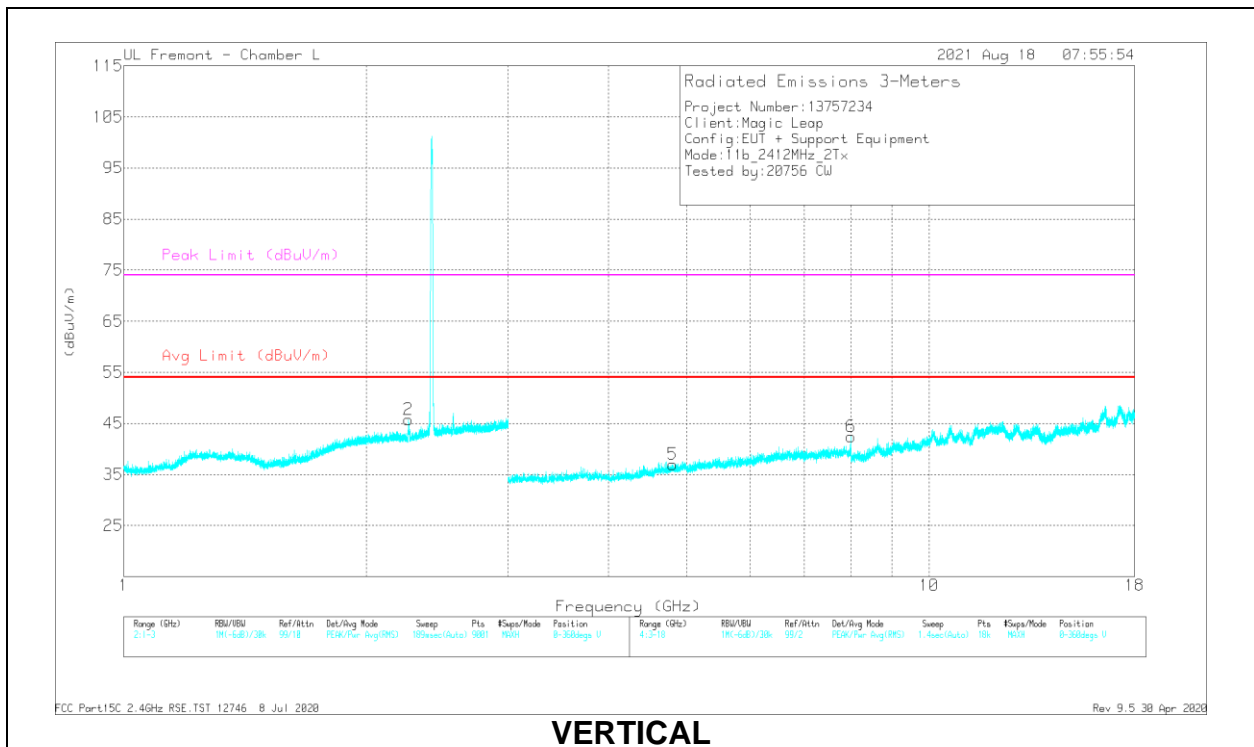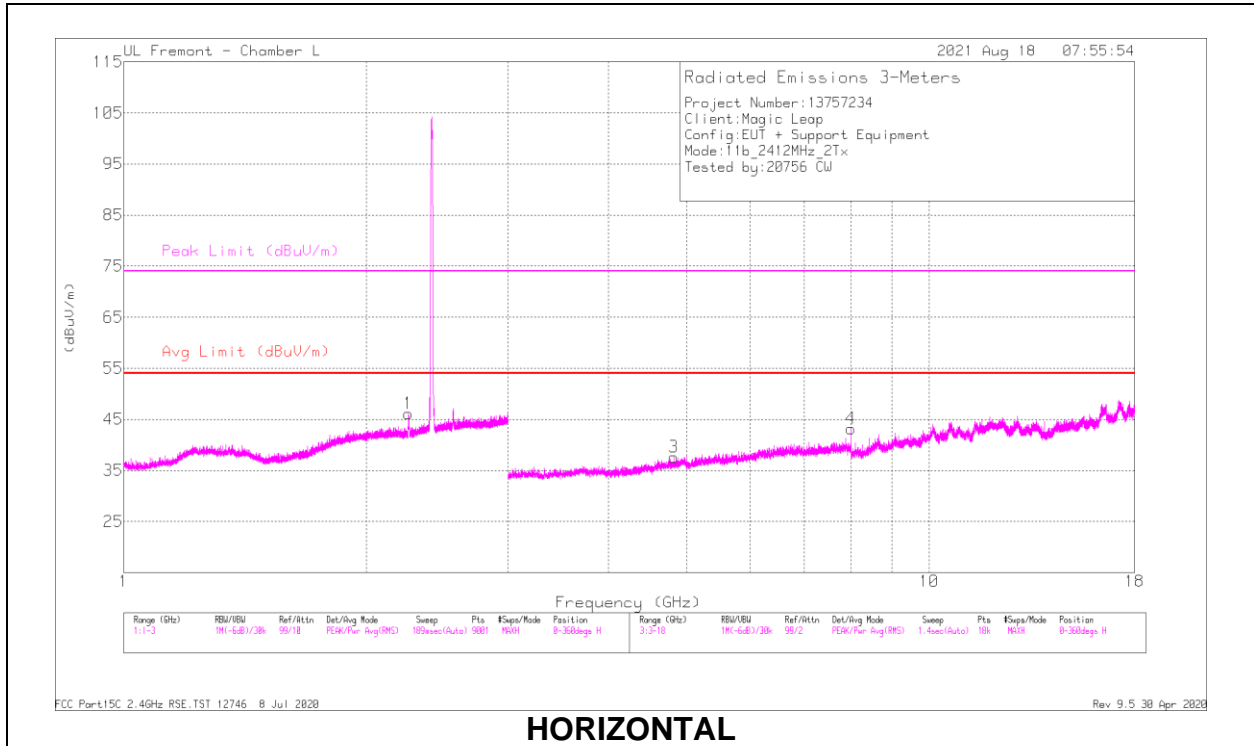

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Fitr/Prod (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.25724	42.25	PK2	31.2	-19.8	53.65	-	-	74	-20.35	272	162	H
	* 2.2575	32.12	MAv1	31.2	-19.8	43.52	54	-10.48	-	-	272	162	H
2	* 2.25927	40.01	PK2	31.2	-19.7	51.51	-	-	74	-22.49	260	319	V
	* 2.25912	30.07	MAv1	31.2	-19.7	41.57	54	-12.43	-	-	260	319	V
3	* 4.82373	34.72	PK2	34.2	-24.6	44.32	-	-	74	-29.68	240	205	H
	* 4.82403	24.94	MAv1	34.2	-24.6	34.54	54	-19.46	-	-	240	205	H
4	8.00016	32.69	PK2	35.8	-19.2	49.29	-	-	-	-	275	123	H
	* 4.80607	35.23	PK2	34.1	-24.5	44.83	-	-	74	-29.17	310	136	V
6	* 4.80705	23.61	MAv1	34.2	-24.5	33.31	54	-20.69	-	-	310	136	V
	8.00002	31.24	PK2	35.8	-19.2	47.84	-	-	-	-	359	120	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

MID CHANNEL, CH 6 RESULTS

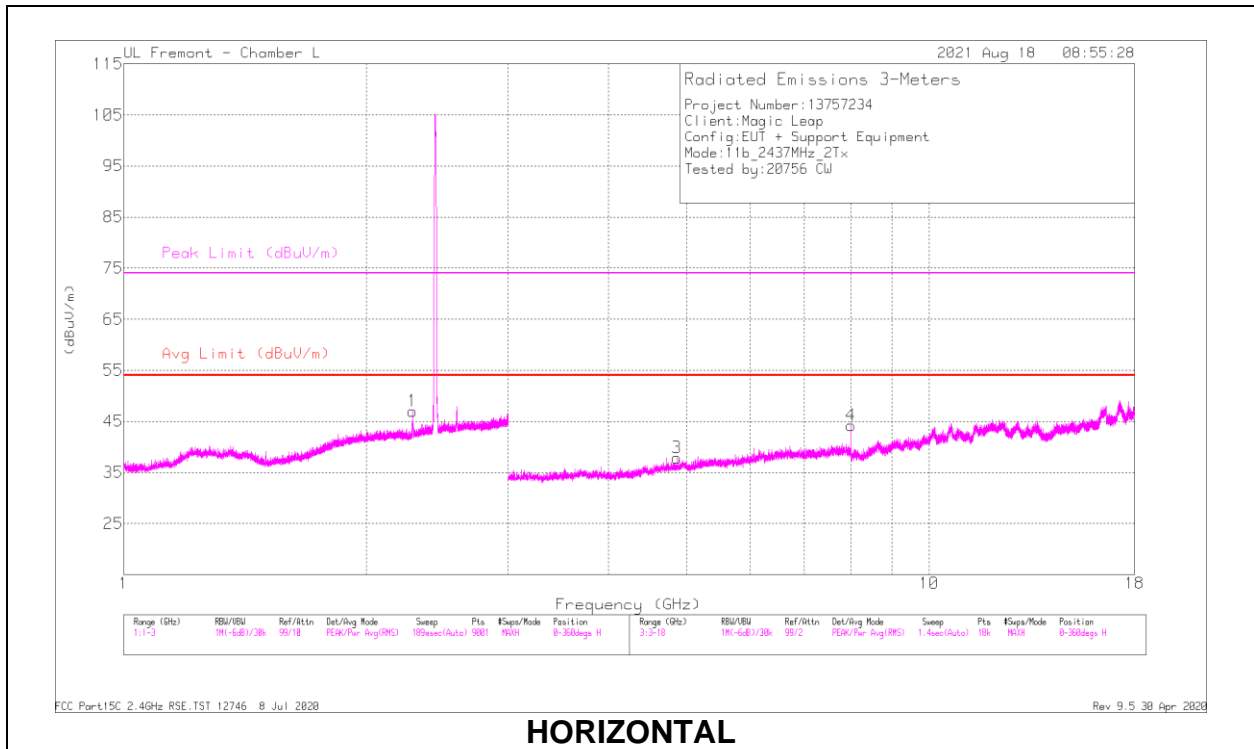

HORIZONTAL

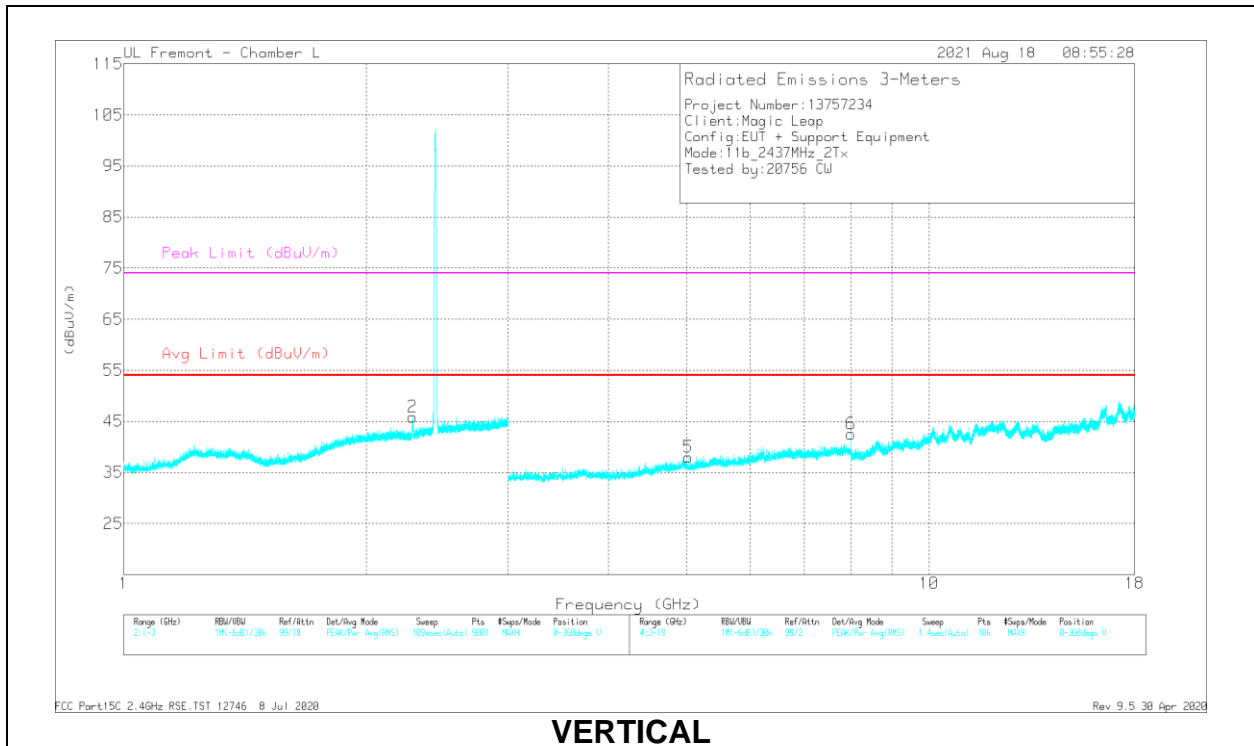

VERTICAL

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Fitr/Prod (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.2842	42.21	PK2	31.4	-19.7	53.91	-	-	74	-20.09	264	167	H
	* 2.28257	34.11	MAv1	31.4	-19.7	45.81	54	-8.19	-	-	264	167	H
2	* 2.2826	41.84	PK2	31.4	-19.7	53.54	-	-	74	-20.46	304	133	V
	* 2.28254	32.59	MAv1	31.4	-19.7	44.29	54	-9.71	-	-	304	133	V
3	* 4.86	34.96	PK2	34.2	-24.7	44.46	-	-	74	-29.54	334	149	H
	* 4.86218	23.53	MAv1	34.2	-24.7	33.03	54	-20.97	-	-	334	149	H
4	8.00025	32.35	PK2	35.8	-19.2	48.95	-	-	-	-	282	142	H
	* 5.02845	34.54	PK2	34.2	-24.4	44.34	-	-	74	-29.66	300	124	V
5	* 5.02483	24.09	MAv1	34.2	-24.3	33.99	54	-20.01	-	-	300	124	V
	8.00008	32.53	PK2	35.8	-19.2	49.13	-	-	-	-	139	191	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

HIGH CHANNEL, CH 11 RESULTS

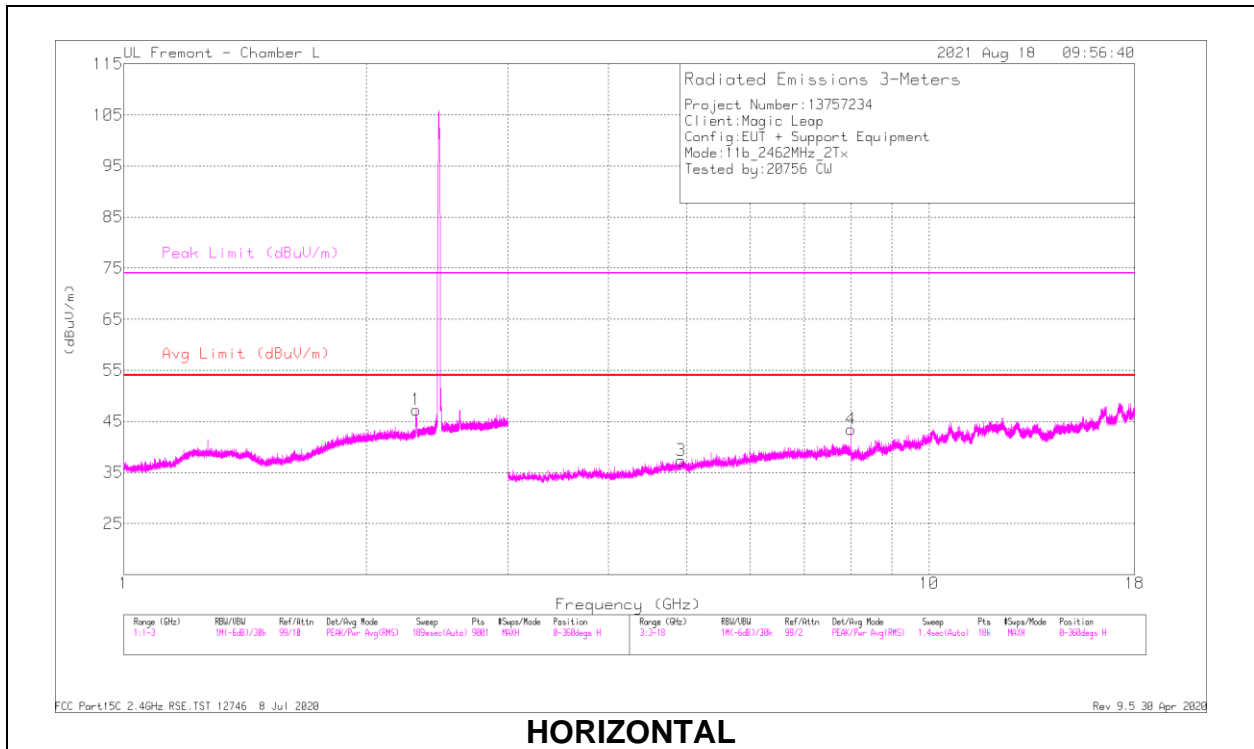

HORIZONTAL

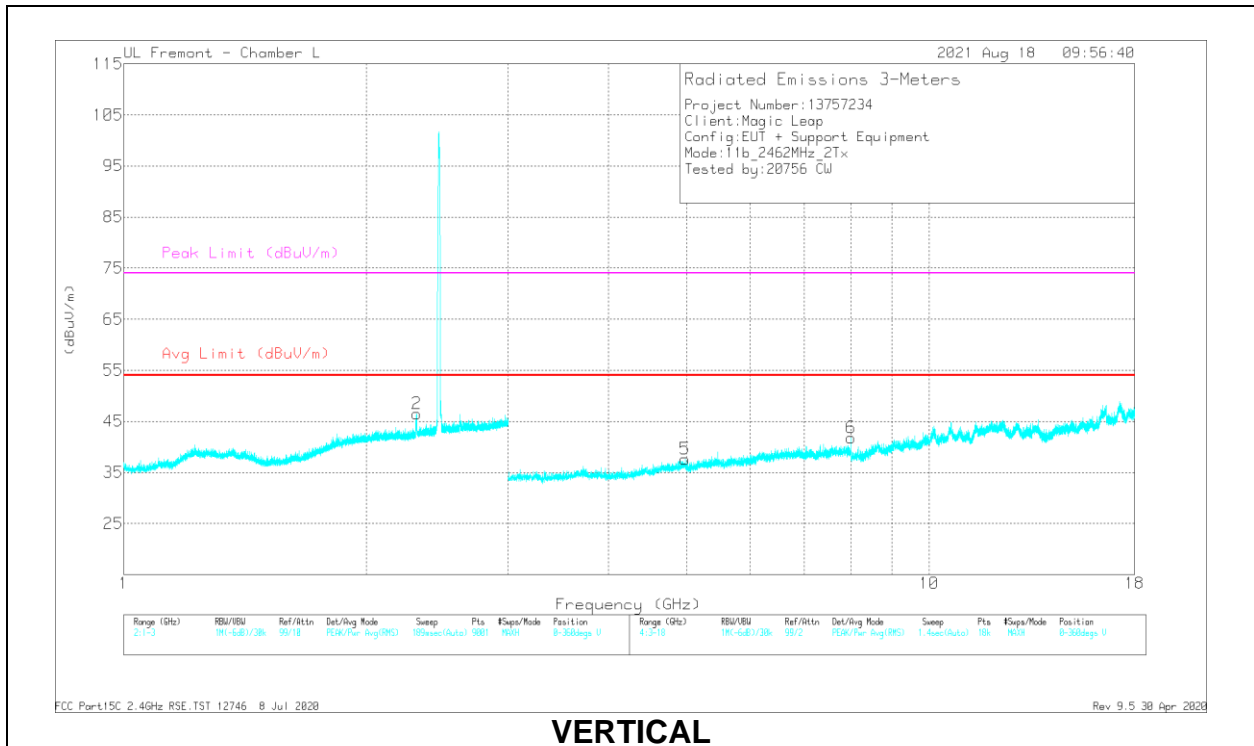

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Fitr/Prod (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.31	41.5	PK2	31.6	-19.6	53.5	-	-	74	-20.5	264	189	H
	* 2.31	33.26	MAv1	31.6	-19.6	45.26	54	-8.74	-	-	264	189	H
2	* 2.31176	38.88	PK2	31.6	-19.6	50.88	-	-	74	-23.12	340	350	V
	* 2.31032	28.61	MAv1	31.6	-19.6	40.61	54	-13.39	-	-	340	350	V
3	* 4.92527	34.68	PK2	34.2	-23.5	45.38	-	-	74	-28.62	320	387	H
	* 4.92518	23.41	MAv1	34.2	-23.5	34.11	54	-19.89	-	-	320	387	H
4	7.99988	29.88	PK2	35.8	-19.2	46.48	-	-	-	-	56	174	H
5	* 4.97759	33.94	PK2	34.2	-23.7	44.44	-	-	74	-29.56	343	203	V
	* 4.97522	22.78	MAv1	34.2	-23.6	33.38	54	-20.62	-	-	343	203	V
6	8.00054	29.81	PK2	35.8	-19.2	46.41	-	-	-	-	218	174	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak


MAv1 - KDB558074 Option 1 Maximum RMS Average

10.1.2. TX ABOVE 1 GHz 802.11g MODE IN THE 2.4 GHz BAND

1TX Antenna 1 MODE

BANDEDGE (LOW CHANNEL, CH 1)

HORIZONTAL RESULT

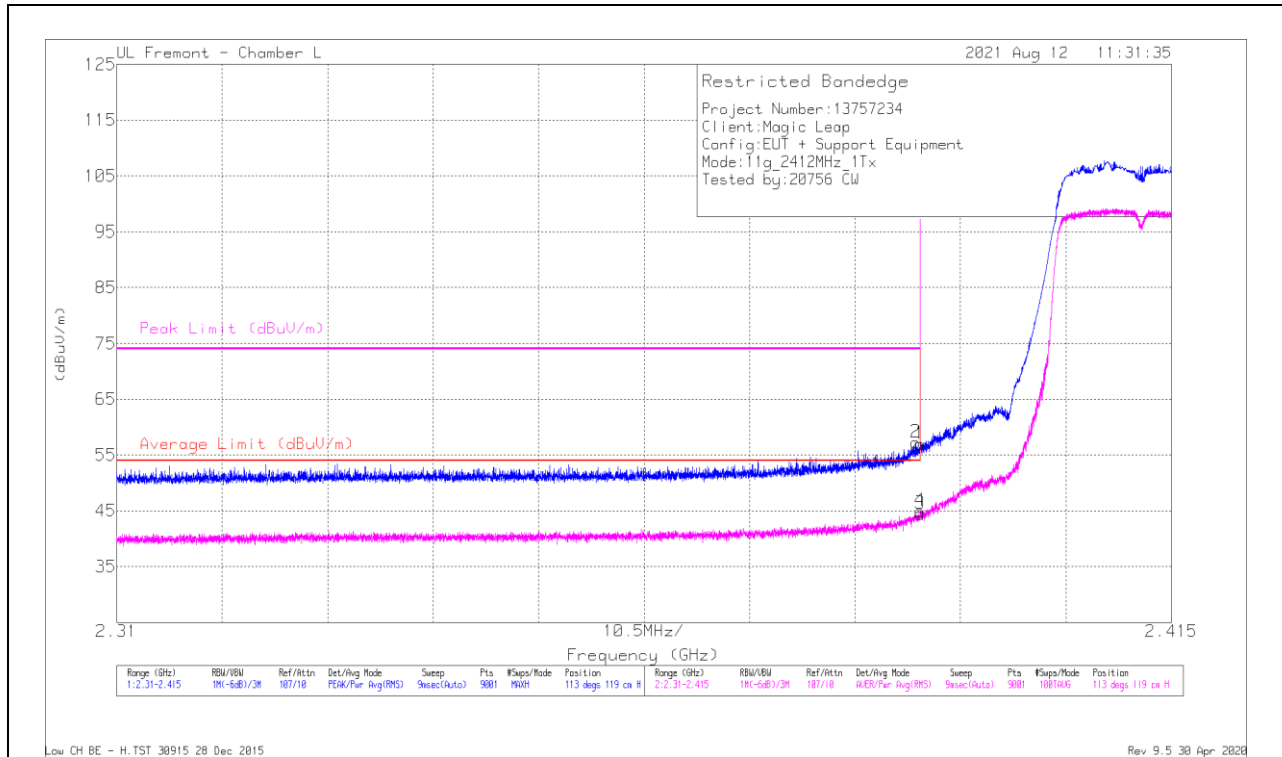


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cb/Ftr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.38999	44.32	Pk	32	-19.3	57.02	-	-	74	-16.98	113	119	H
2	* 2.38956	44.55	Pk	32	-19.3	57.25	-	-	74	-16.75	113	119	H
3	* 2.38999	31.81	RMS	32	-19.3	44.51	54	-9.49	-	-	113	119	H
4	* 2.38998	32.21	RMS	32	-19.3	44.91	54	-9.09	-	-	113	119	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

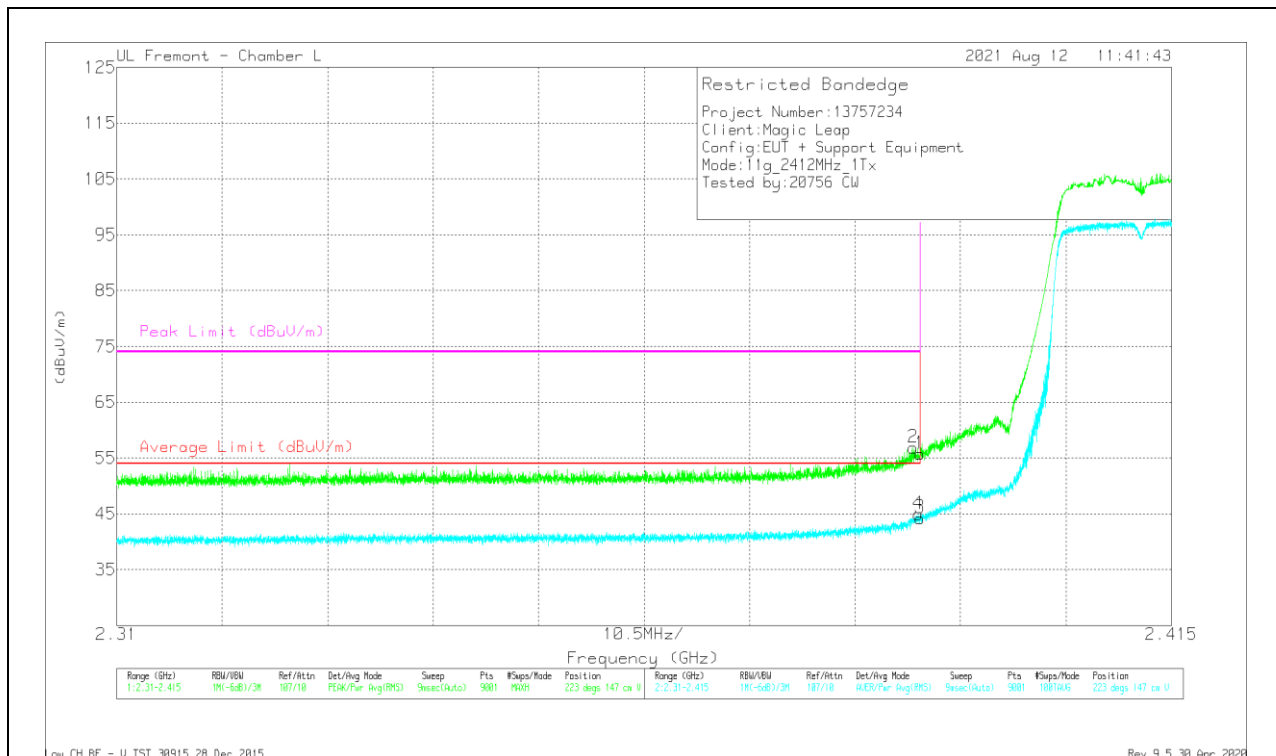

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Fitr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.38999	43.1	Pk	32	-19.3	55.8	-	-	74	-18.2	223	147	V
2	* 2.38993	44.32	Pk	32	-19.4	56.92	-	-	74	-17.08	223	147	V
3	* 2.38999	31.57	RMS	32	-19.3	44.27	54	-9.73	-	-	223	147	V
4	* 2.3898	32.25	RMS	32	-19.3	44.95	54	-9.05	-	-	223	147	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 11)

HORIZONTAL RESULT

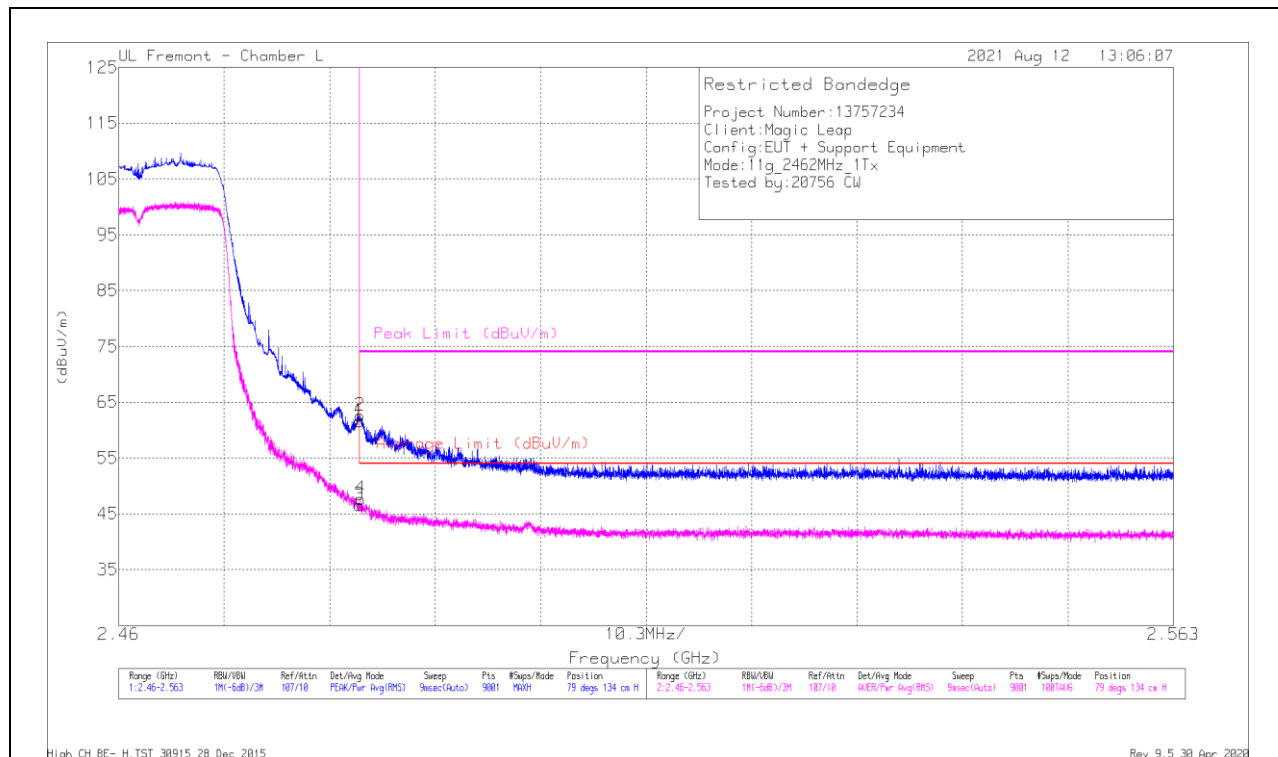


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/CbI/Fltr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	48.25	Pk	32.3	-19	61.55	-	-	74	-12.45	79	134	H
2	* 2.48353	49.3	Pk	32.3	-19	62.6	-	-	74	-11.4	79	134	H
3	* 2.48351	33.25	RMS	32.3	-19	46.55	54	-7.45	-	-	79	134	H
4	* 2.48362	34.33	RMS	32.3	-19	47.63	54	-6.37	-	-	79	134	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT


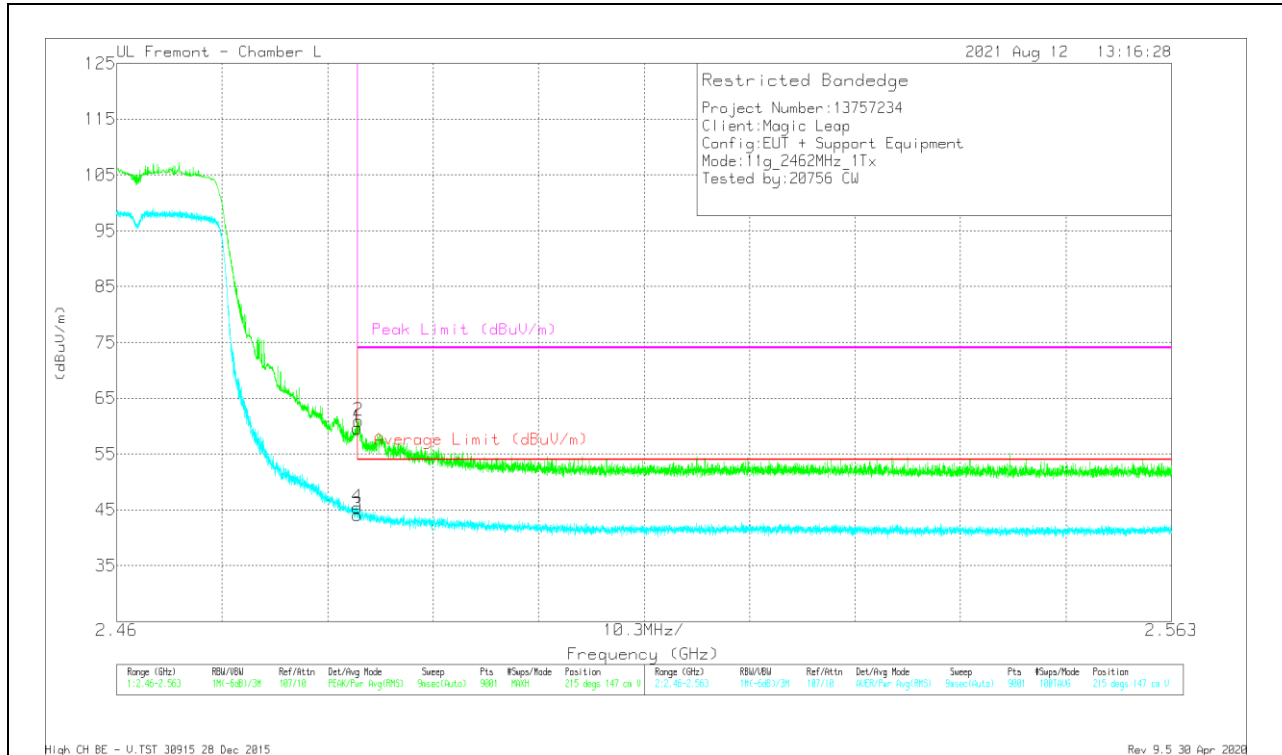


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Fitr/Parad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	46.37	Pk	32.3	-19	59.67	-	-	74	-14.33	215	147	V
2	* 2.4836	47.71	Pk	32.3	-19	61.01	-	-	74	-12.99	215	147	V
3	* 2.48351	30.75	RMS	32.3	-19	44.05	54	-9.95	-	-	215	147	V
4	* 2.48352	32.16	RMS	32.3	-19	45.46	54	-8.54	-	-	215	147	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL, CH 1 RESULTS

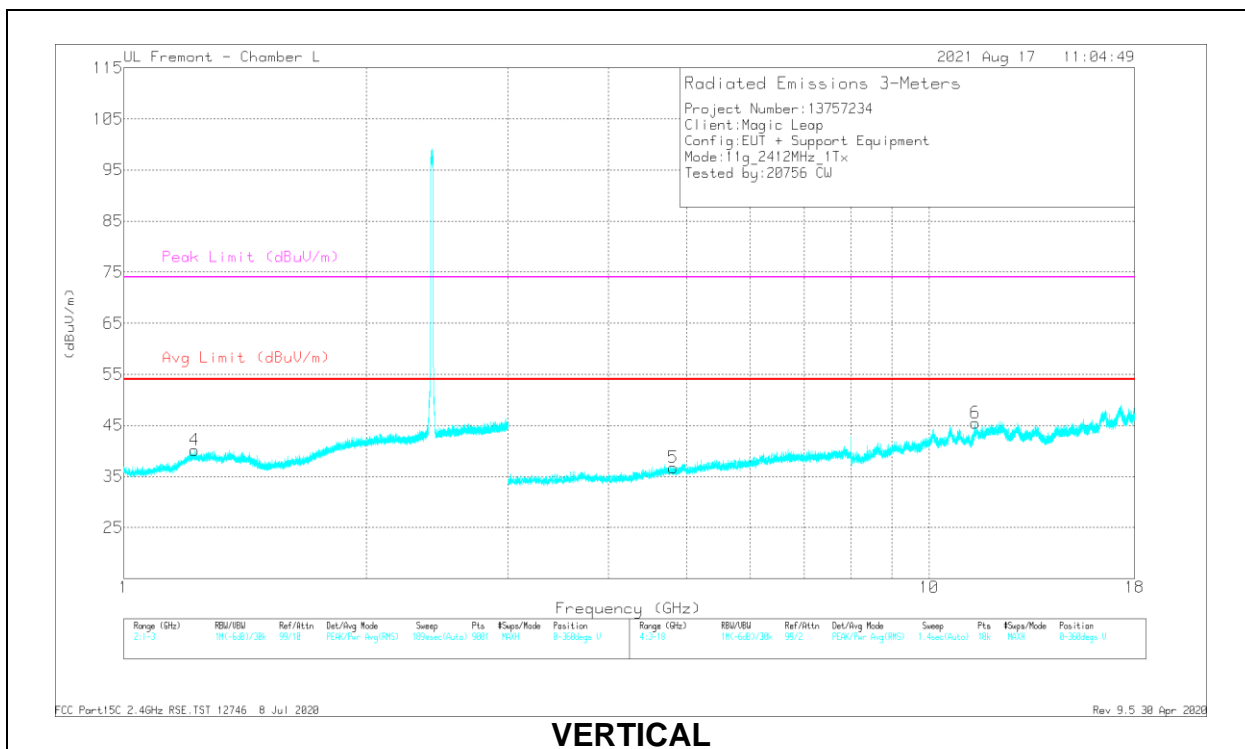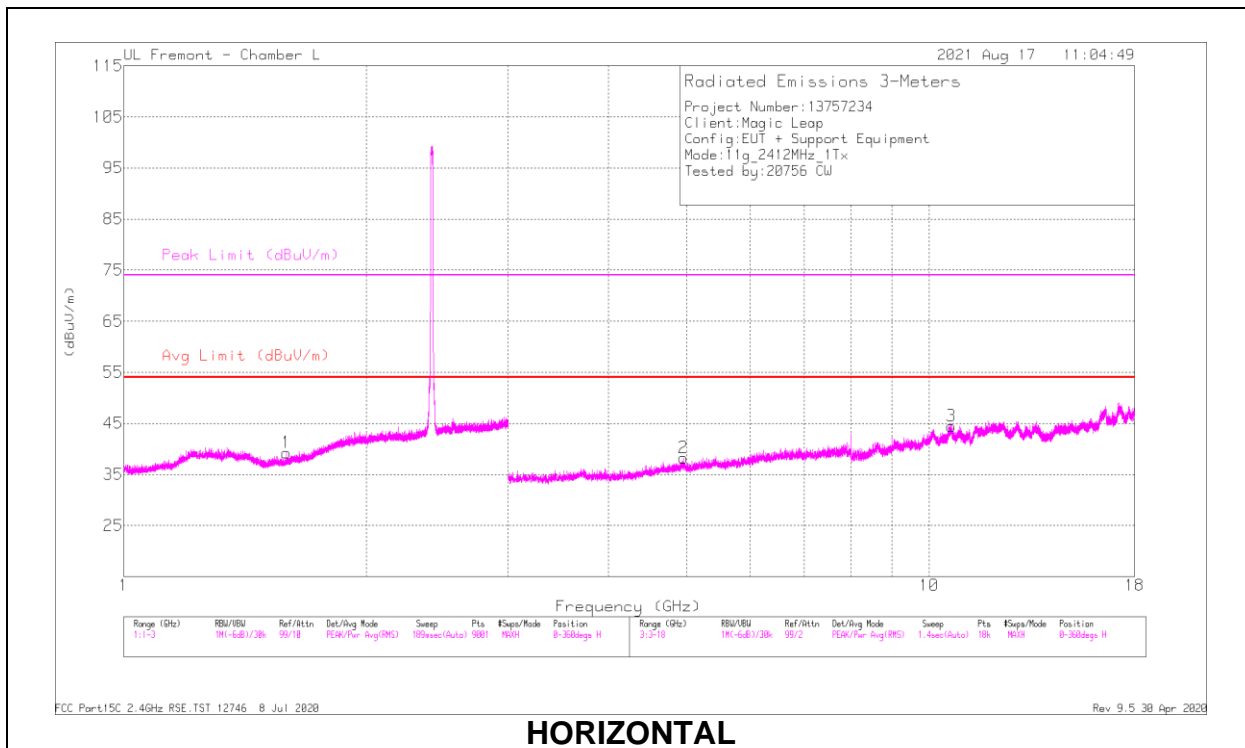


RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cb/Filtr/P ad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.59178	39.53	PK2	28	-21.8	45.73	-	-	74	-28.27	28	169	H
	* 1.59108	28.48	MAv1	28	-21.8	34.68	54	-19.32	-	-	28	169	H
4	* 1.22341	41.14	PK2	30.2	-23.1	48.24	-	-	74	-25.76	192	332	V
	* 1.222	28.77	MAv1	30.1	-23.1	35.77	54	-18.23	-	-	192	332	V
2	* 4.95552	35.16	PK2	34.2	-23.2	46.16	-	-	74	-27.84	40	114	H
	* 4.95432	22.96	MAv1	34.2	-23.1	34.06	54	-19.94	-	-	40	114	H
3	* 10.66807	27.7	PK2	37.8	-14.6	50.9	-	-	74	-23.1	169	150	H
	* 10.66993	16.38	MAv1	37.8	-14.7	39.48	54	-14.52	-	-	169	150	H
5	* 4.80999	34.66	PK2	34.2	-24.6	44.26	-	-	74	-29.74	131	140	V
	* 4.80892	23.8	MAv1	34.1	-24.6	33.3	54	-20.7	-	-	131	140	V
6	* 11.40959	27.54	PK2	38.4	-15.2	50.74	-	-	74	-23.26	292	160	V
	* 11.40876	16.9	MAv1	38.4	-15.2	40.1	54	-13.9	-	-	292	160	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK2 - KDB558074 Method: Maximum Peak
 MAv1 - KDB558074 Option 1 Maximum RMS Average

MID CHANNEL, CH 6 RESULTS

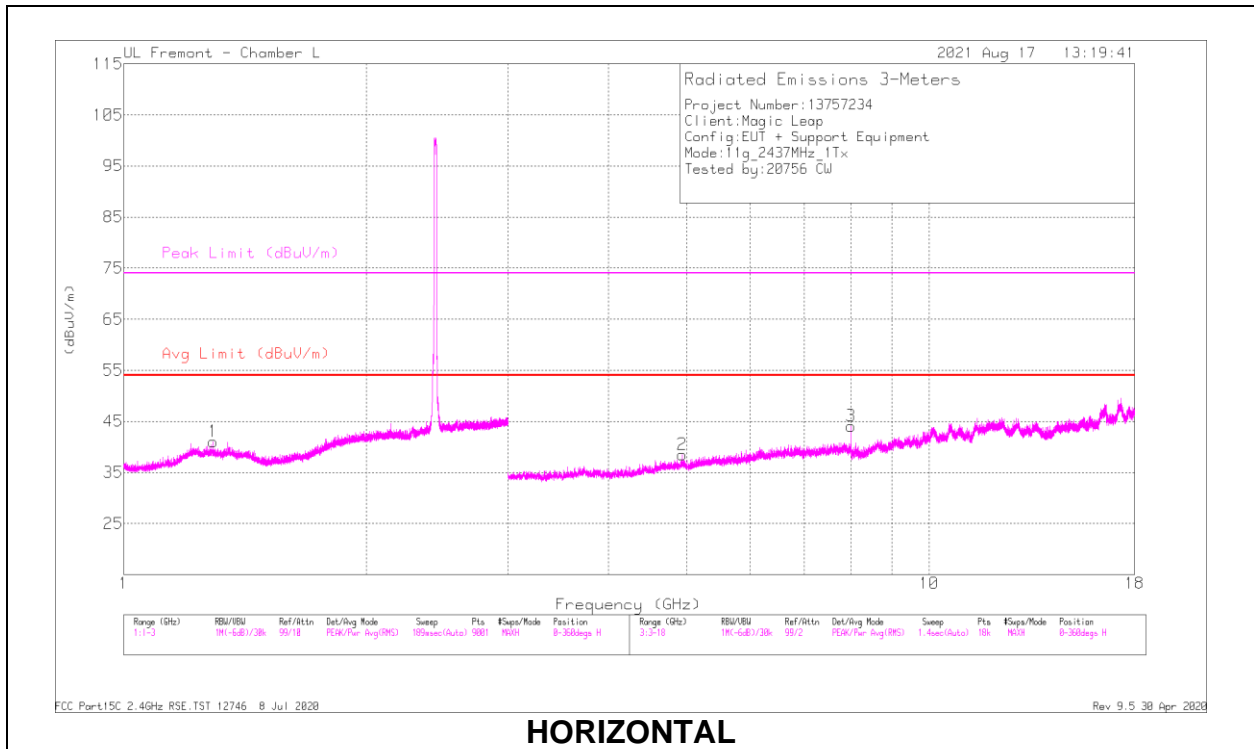

HORIZONTAL

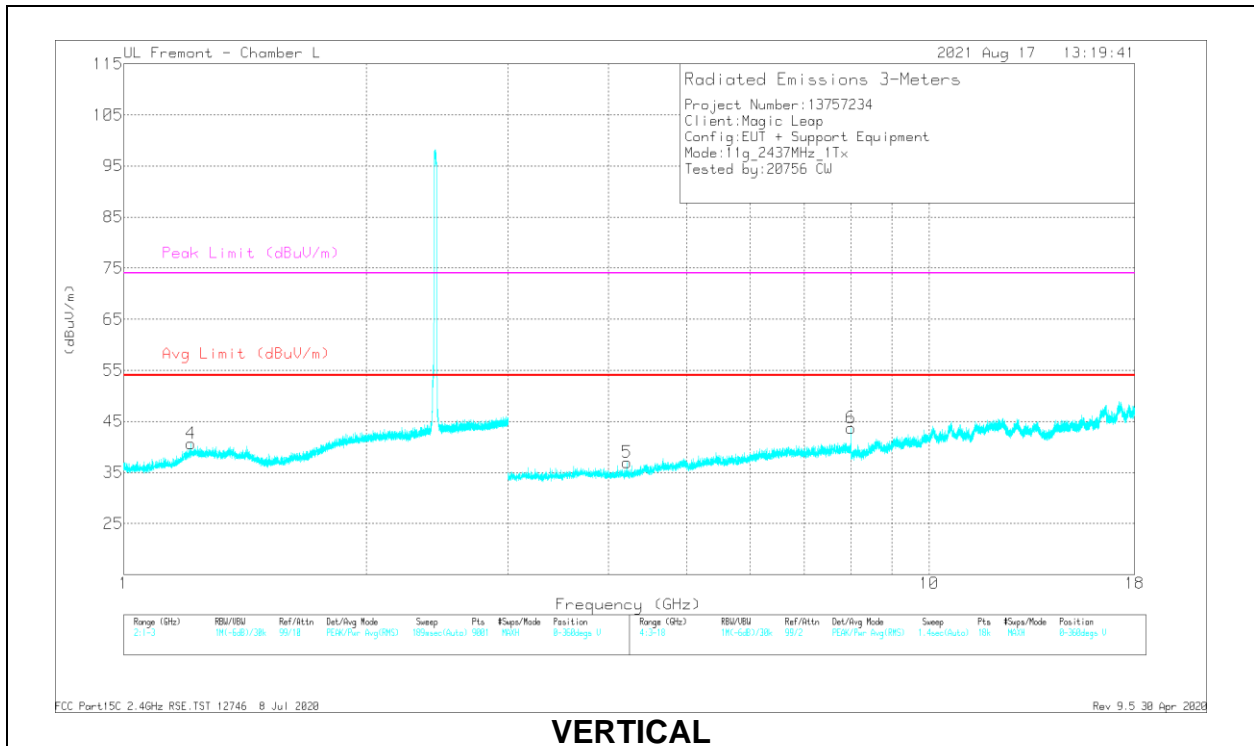

VERTICAL

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.29042	40.71	PK2	29.8	-22.8	47.71	-	-	74	-26.29	170	102	H
	* 1.29236	29.4	MAv1	29.8	-22.8	36.4	54	-17.6	-	-	170	102	H
4	* 1.2111	40.55	PK2	30	-23.1	47.45	-	-	74	-26.55	61	361	V
	* 1.20985	28.77	MAv1	30	-23.1	35.67	54	-18.33	-	-	61	361	V
2	* 4.9364	34.04	PK2	34.2	-23.2	45.04	-	-	74	-28.96	127	350	H
	* 4.93478	22.98	MAv1	34.2	-23.3	33.88	54	-20.12	-	-	127	350	H
3	8.0000	34.36	PK2	35.8	-19.2	50.96	-	-	-	-	122	102	H
5	* 4.22123	35.75	PK2	33	-25.3	43.45	-	-	74	-30.55	205	174	V
	* 4.21953	24.48	MAv1	33	-25.3	32.18	54	-21.82	-	-	205	174	V
6	7.99986	31.51	PK2	35.8	-19.2	48.11	-	-	-	-	133	257	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

HIGH CHANNEL, CH 11 RESULTS

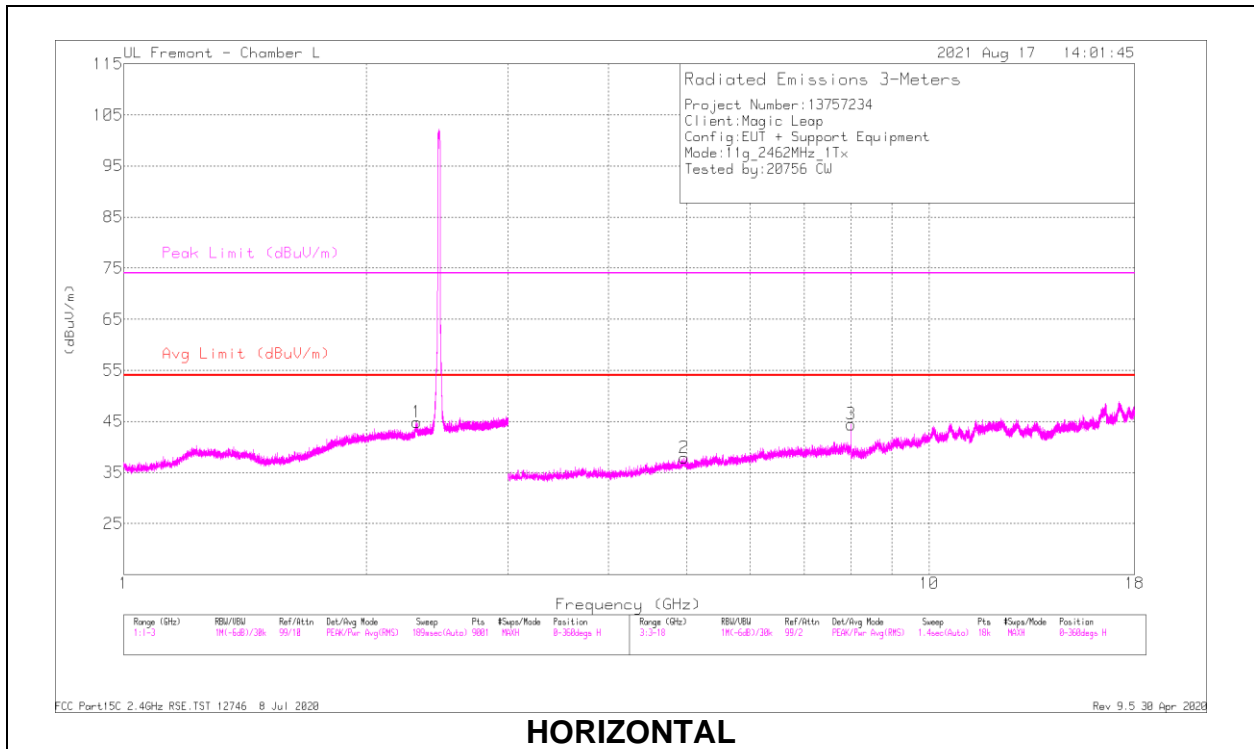

HORIZONTAL

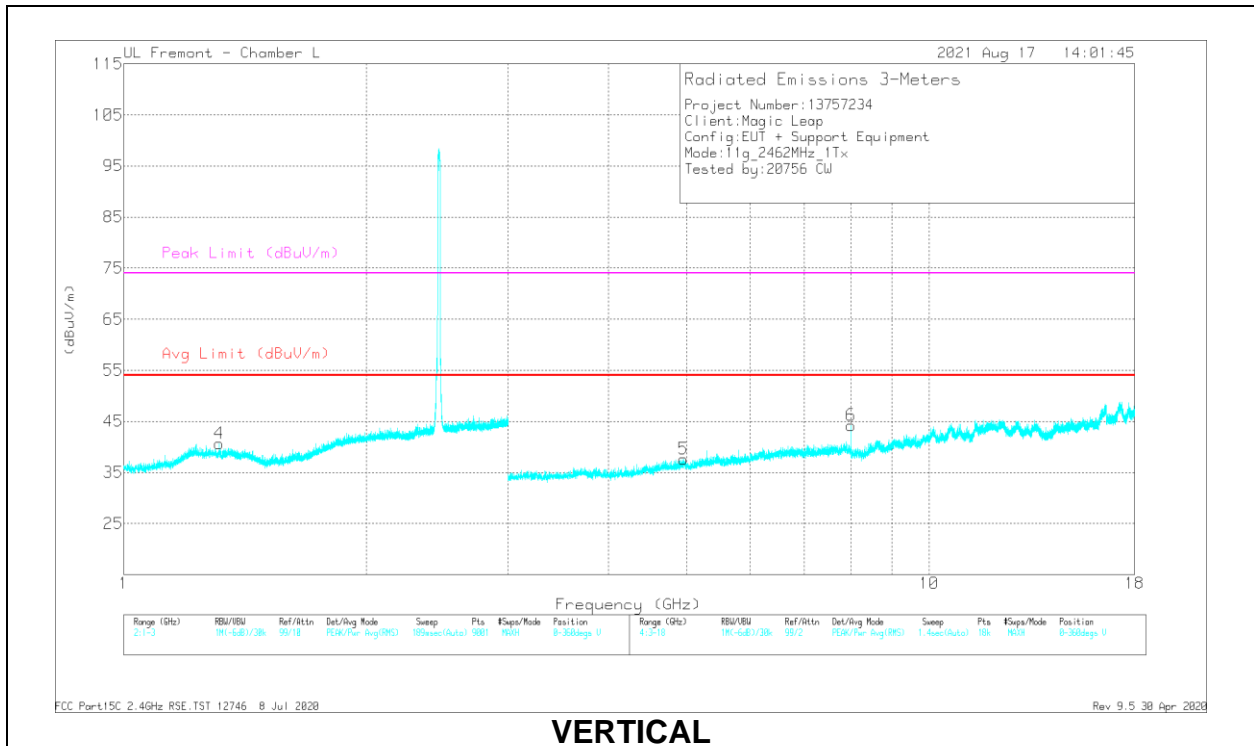

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.31045	38.93	PK2	31.6	-19.6	50.93	-	-	74	-23.07	138	148	H
	* 2.31226	27.93	MAv1	31.6	-19.6	39.93	54	-14.07	-	-	138	148	H
4	* 1.31409	40.09	PK2	29.6	-22.8	46.89	-	-	74	-27.11	81	205	V
	* 1.314	28.78	MAv1	29.6	-22.8	35.58	54	-18.42	-	-	81	205	V
2	* 4.96441	33.69	PK2	34.2	-23.4	44.49	-	-	74	-29.51	32	184	H
	* 4.96185	22.76	MAv1	34.2	-23.3	33.66	54	-20.34	-	-	32	184	H
3	7.99893	31.13	PK2	35.8	-19.2	47.73	-	-	-	-	26	153	H
5	* 4.95078	34.27	PK2	34.2	-23.1	45.37	-	-	74	-28.63	355	115	V
	* 4.95345	23.37	MAv1	34.2	-23.1	34.47	54	-19.53	-	-	355	115	V
6	8.00095	30.27	PK2	35.8	-19.2	46.87	-	-	-	-	80	254	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

1TX Antenna 2 MODE

BANDEDGE (LOW CHANNEL, CH 1)


HORIZONTAL RESULT

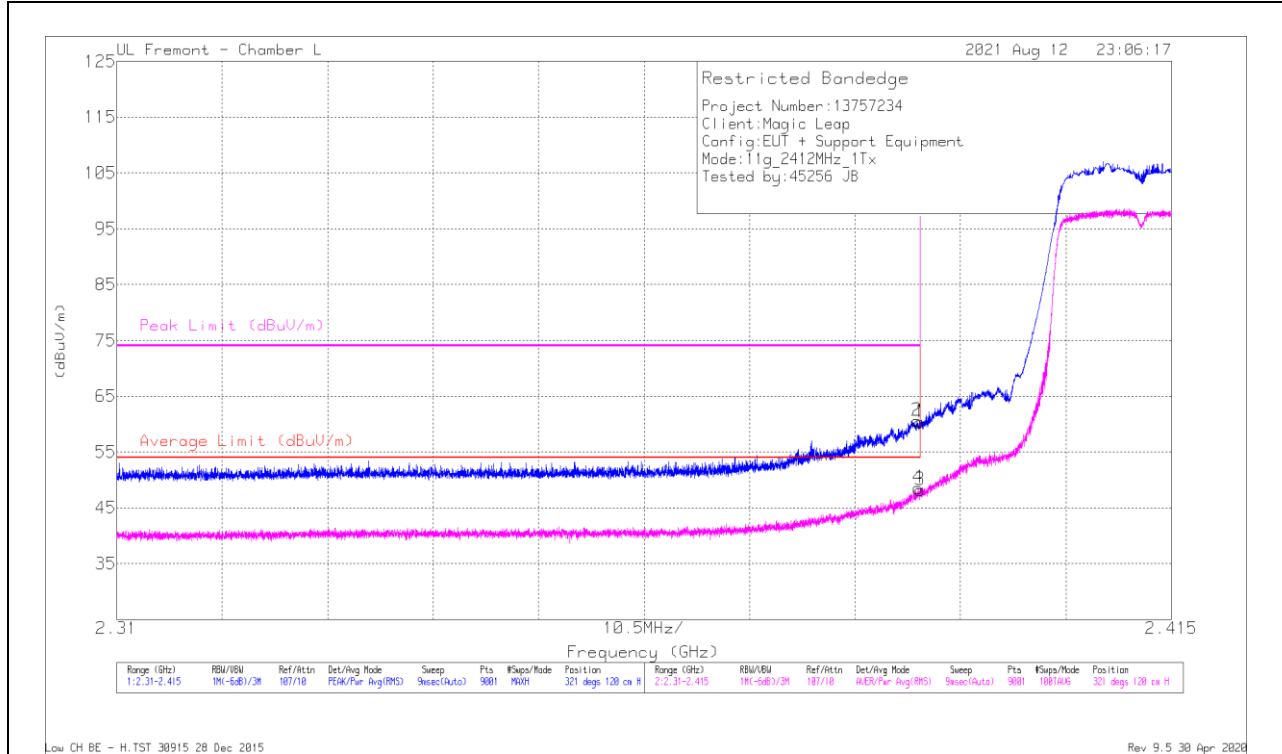

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Ftr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.38999	47.63	Pk	32	-19.3	60.33	-	-	74	-13.67	321	120	H
2	* 2.38964	47.88	Pk	32	-19.3	60.58	-	-	74	-13.42	321	120	H
3	* 2.38999	35.52	RMS	32	-19.3	48.22	54	-5.78	-	-	321	120	H
4	* 2.3898	35.87	RMS	32	-19.3	48.57	54	-5.43	-	-	321	120	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

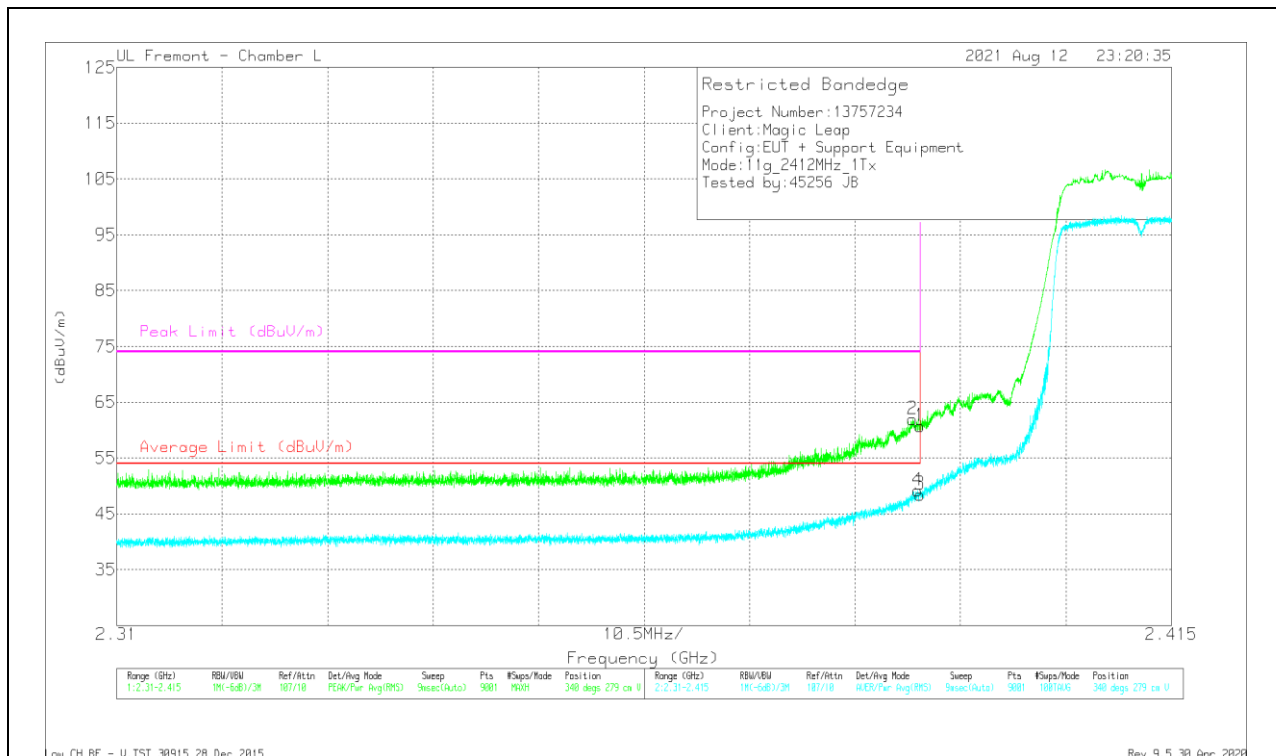

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Fitr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.38999	47.98	Pk	32	-19.3	60.68	-	-	74	-13.32	340	279	V
2	* 2.38922	49.38	Pk	32	-19.4	61.98	-	-	74	-12.02	340	279	V
3	* 2.38999	35.79	RMS	32	-19.3	48.49	54	-5.51	-	-	340	279	V
4	* 2.38976	36.45	RMS	32	-19.3	49.15	54	-4.85	-	-	340	279	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 11)


HORIZONTAL RESULT

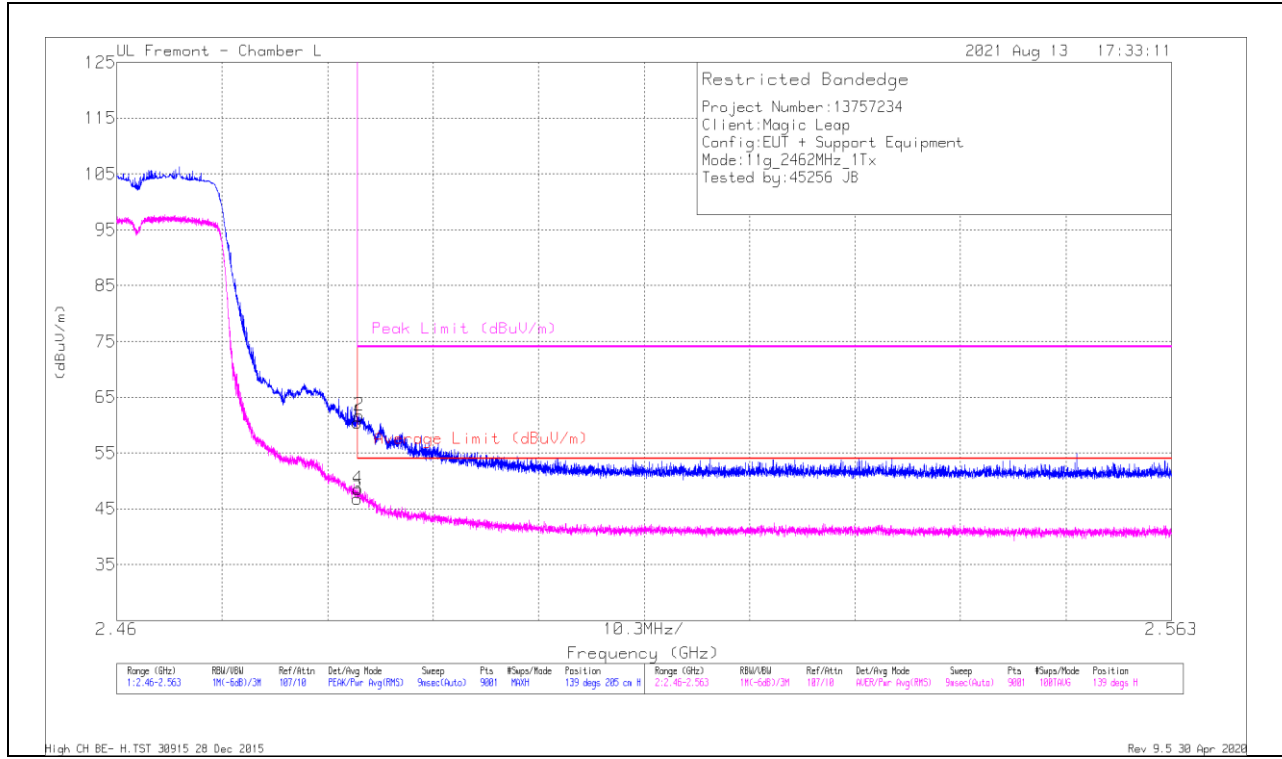

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/CbI/Fltr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	47.14	Pk	32.3	-19	60.44	-	-	74	-13.56	139	205	H
2	* 2.48369	48.44	Pk	32.3	-19	61.74	-	-	74	-12.26	139	205	H
3	* 2.48351	33.47	RMS	32.3	-19	46.77	54	-7.23	-	-	139	205	H
4	* 2.48353	35.21	RMS	32.3	-19	48.51	54	-5.49	-	-	139	205	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

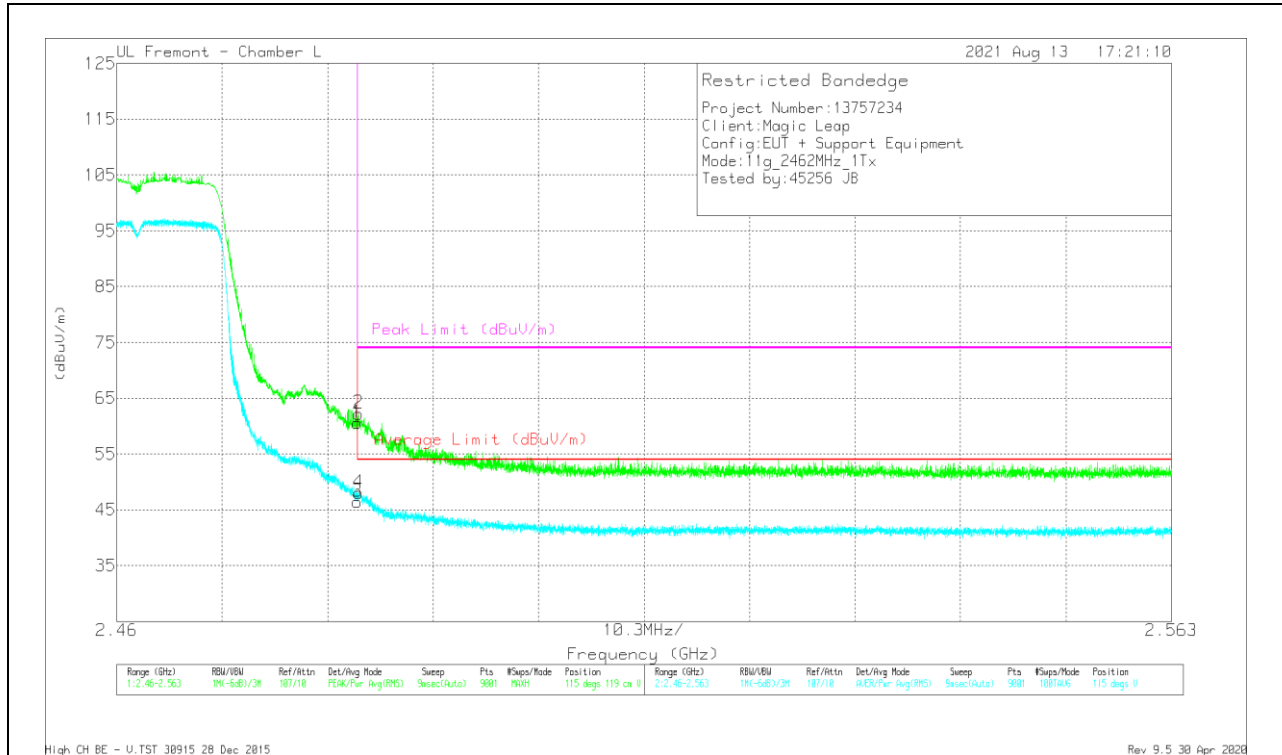

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Fitr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	47.3	Pk	32.3	-19	60.6	-	-	74	-13.4	115	119	V
2	* 2.4836	48.97	Pk	32.3	-19	62.27	-	-	74	-11.73	115	119	V
3	* 2.48351	33.11	RMS	32.3	-19	46.41	54	-7.59	-	-	115	119	V
4	* 2.4836	34.73	RMS	32.3	-19	48.03	54	-5.97	-	-	115	119	V



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL, CH 1 RESULTS

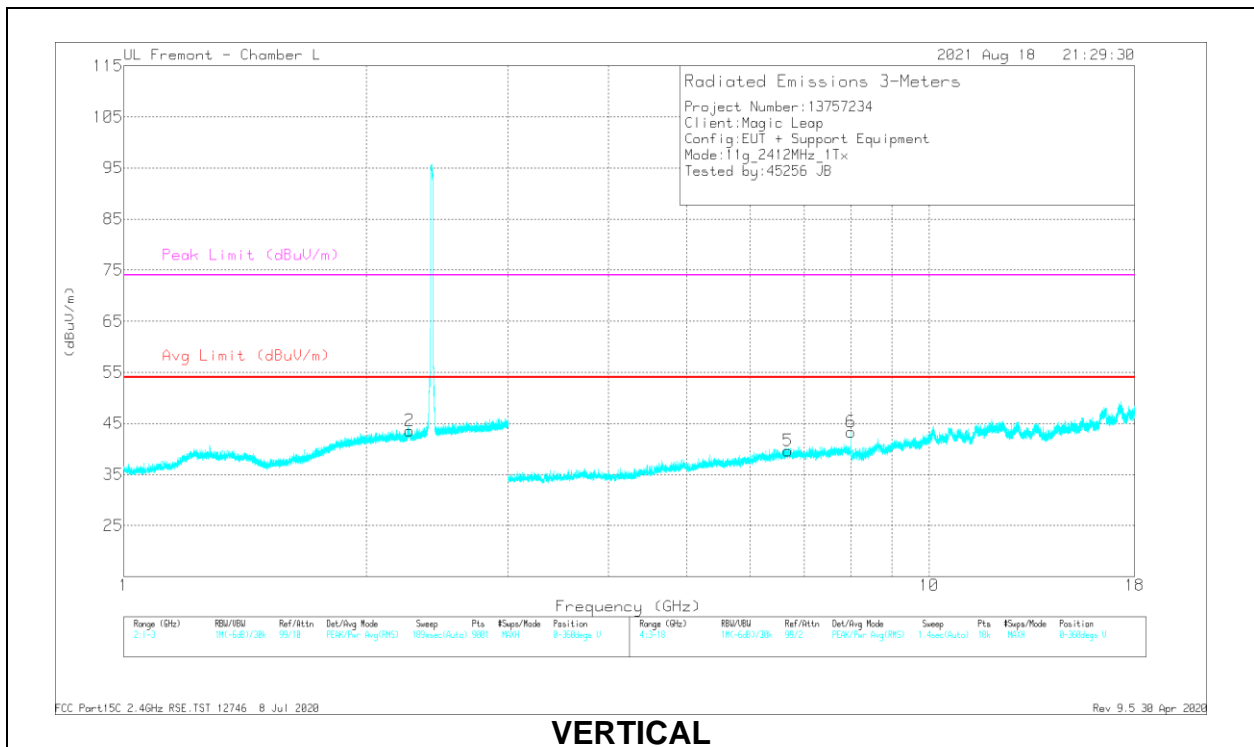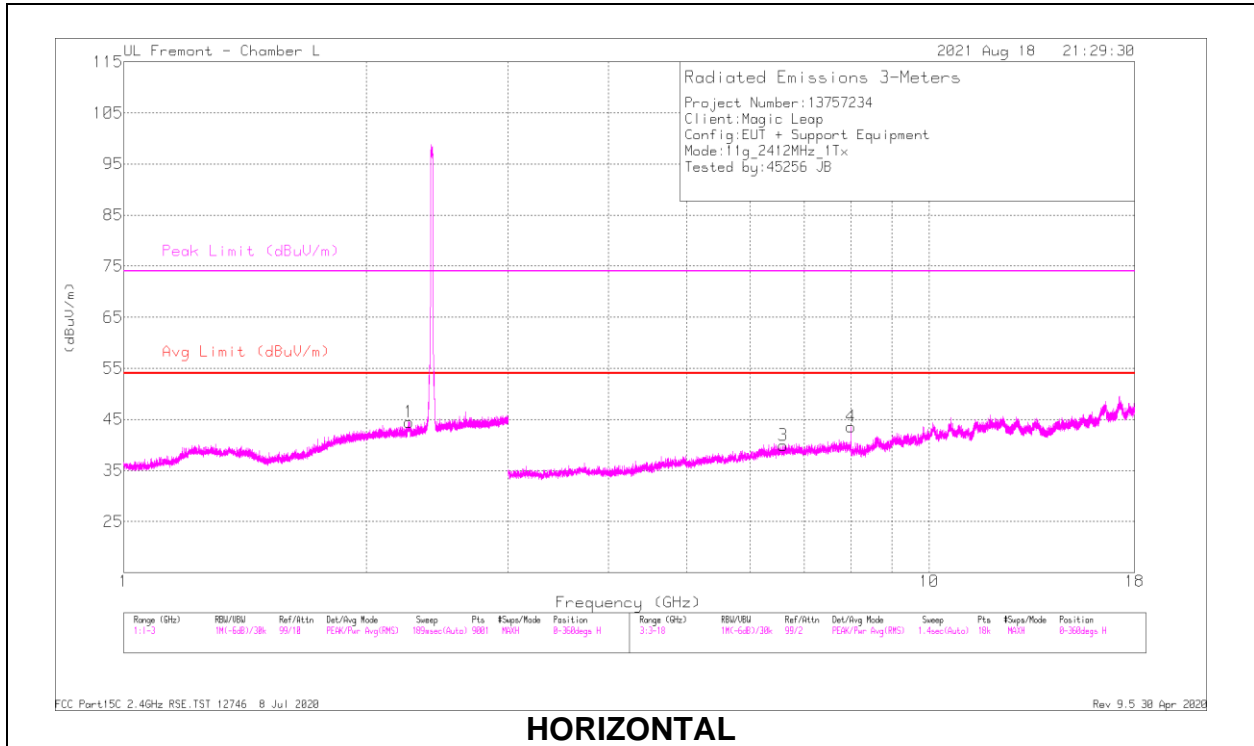

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.26269	41.82	PK2	31.2	-19.7	53.32	-	-	74	-20.68	336	222	H
	* 2.26108	30.64	MAv1	31.2	-19.7	42.14	54	-11.86	-	-	336	222	H
2	* 2.26356	40.37	PK2	31.3	-19.7	51.97	-	-	74	-22.03	45	210	V
	* 2.26444	29.07	MAv1	31.3	-19.7	40.67	54	-13.33	-	-	45	210	V
3	6.59187	25.64	Pk	35.7	-21.4	39.94	-	-	-	-	0-360	199	H
4	8.00001	32.84	PK2	35.8	-19.2	49.44	-	-	-	-	270	109	H
5	6.68271	24.58	Pk	35.8	-20.7	39.68	-	-	-	-	0-360	101	V
6	8.00008	30.73	PK2	35.8	-19.2	47.33	-	-	-	-	356	211	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

MID CHANNEL, CH 6 RESULTS

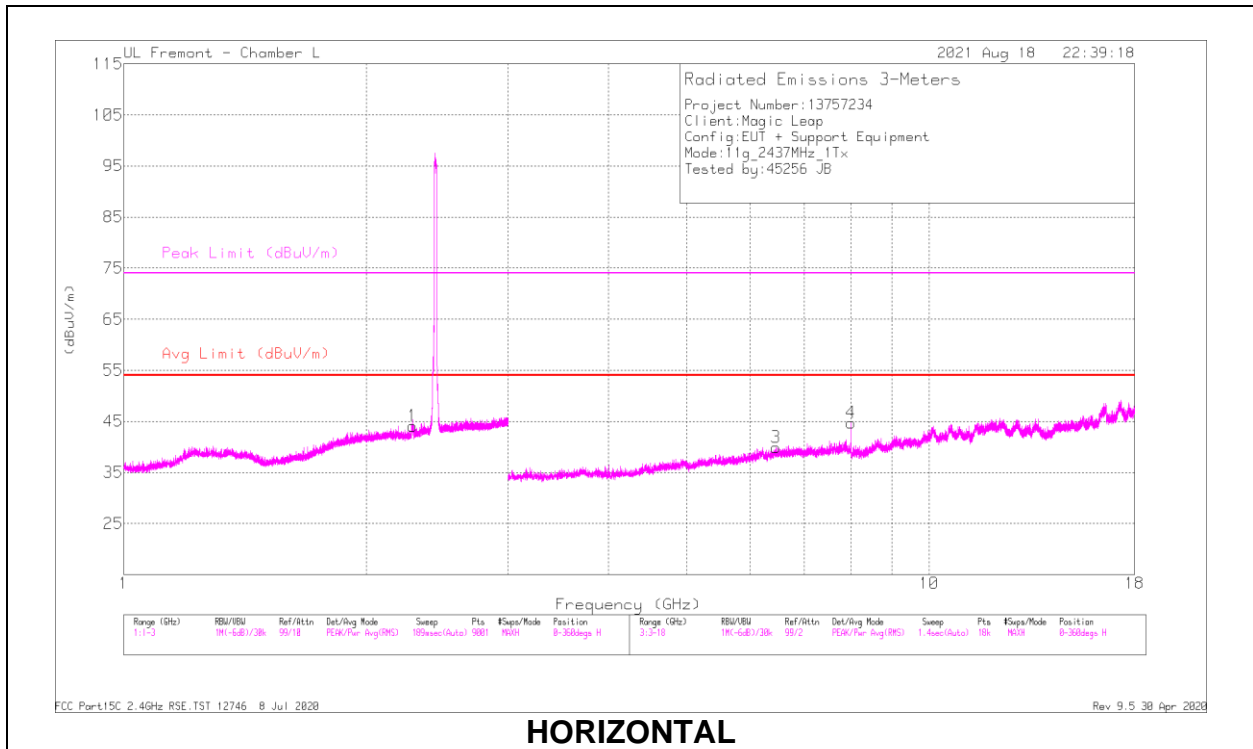

HORIZONTAL

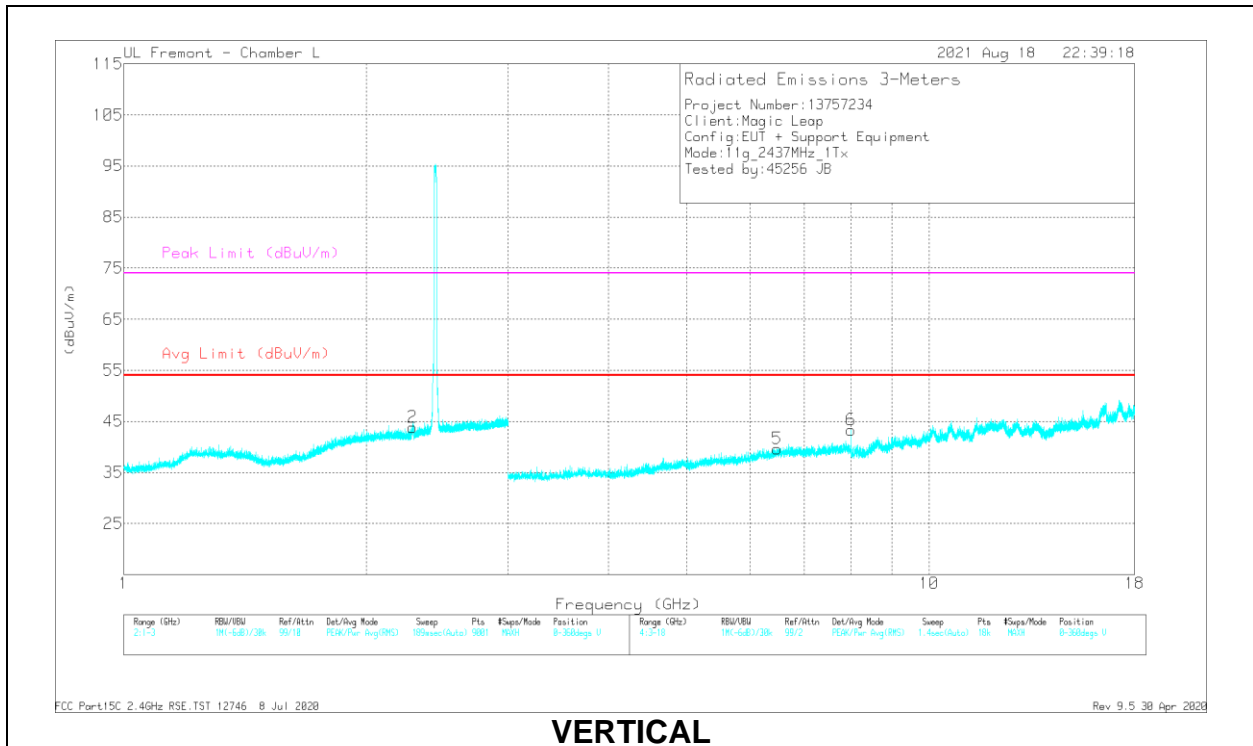

VERTICAL

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Fitr/P ad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.28463	43.1	PK2	31.4	-19.7	54.8	-	-	74	-19.2	348	381	H
	* 2.28593	32.31	MAv1	31.4	-19.7	44.01	54	-9.99	-	-	348	381	H
2	* 2.28103	41.17	PK2	31.4	-19.7	52.87	-	-	74	-21.13	57	210	V
	* 2.28263	29.93	MAv1	31.4	-19.7	41.63	54	-12.37	-	-	57	210	V
3	6.45769	25.52	Pk	35.7	-21.3	39.92	-	-	-	-	0-360	200	H
4	8.00014	33.15	PK2	35.8	-19.2	49.75	-	-	-	-	32	103	H
5	6.47936	25.45	Pk	35.7	-21.5	39.65	-	-	-	-	0-360	101	V
6	7.99995	32.51	PK2	35.8	-19.2	49.11	-	-	-	-	169	137	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

HIGH CHANNEL, CH 11 RESULTS

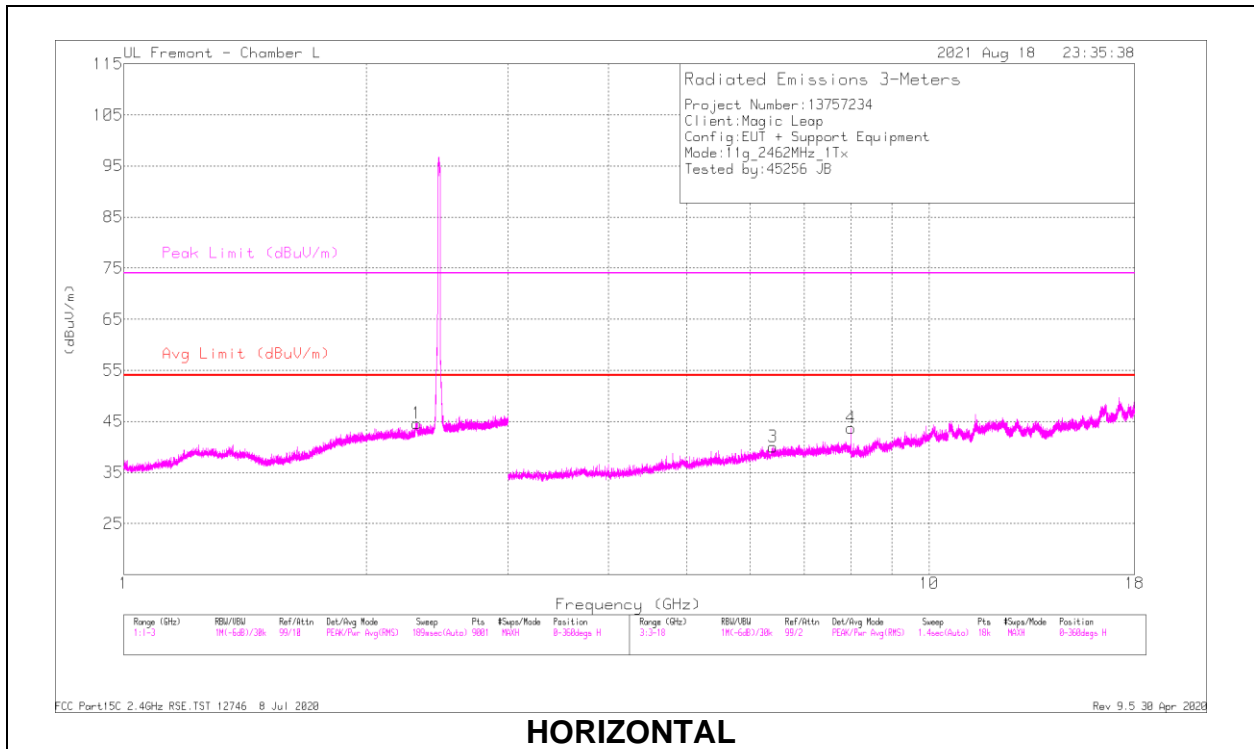

HORIZONTAL

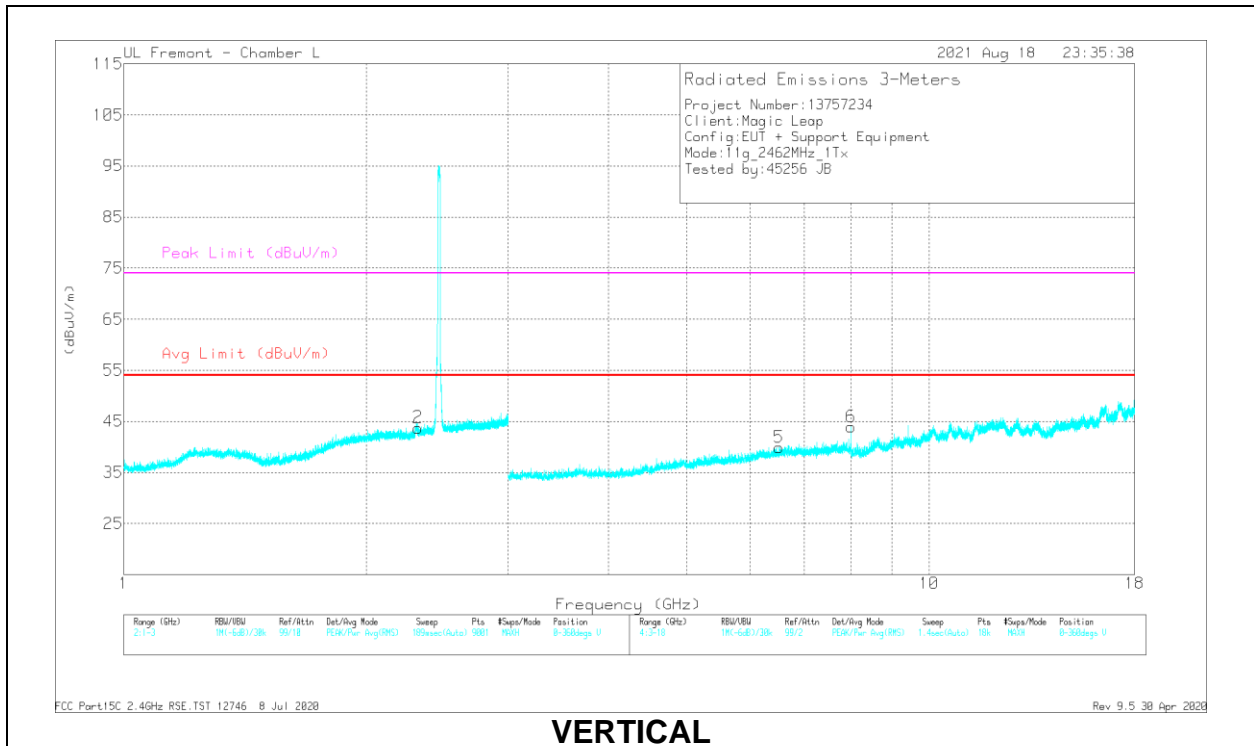

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Fitr/Prod (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.31236	41.37	PK2	31.6	-19.6	53.37	-	-	74	-20.63	134	107	H
	* 2.31076	30.87	MAv1	31.6	-19.6	42.87	54	-11.13	-	-	134	107	H
2	* 2.3202	39.18	PK2	31.7	-19.6	51.28	-	-	74	-22.72	49	177	V
	* 2.31808	27.96	MAv1	31.7	-19.6	40.06	54	-13.94	-	-	49	177	V
3	6.40352	25.74	Pk	35.7	-21.4	40.04	-	-	-	-	0-360	101	H
4	8.00006	33.26	PK2	35.8	-19.2	49.86	-	-	-	-	247	127	H
	6.50853	25.65	Pk	35.8	-21.6	39.85	-	-	-	-	0-360	200	V
6	8.00006	32.92	PK2	35.8	-19.2	49.52	-	-	-	-	338	112	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

2TX Antenna 1 + Antenna 2 CDD MODE

BANDEDGE (LOW CHANNEL, CH 1)


HORIZONTAL RESULT

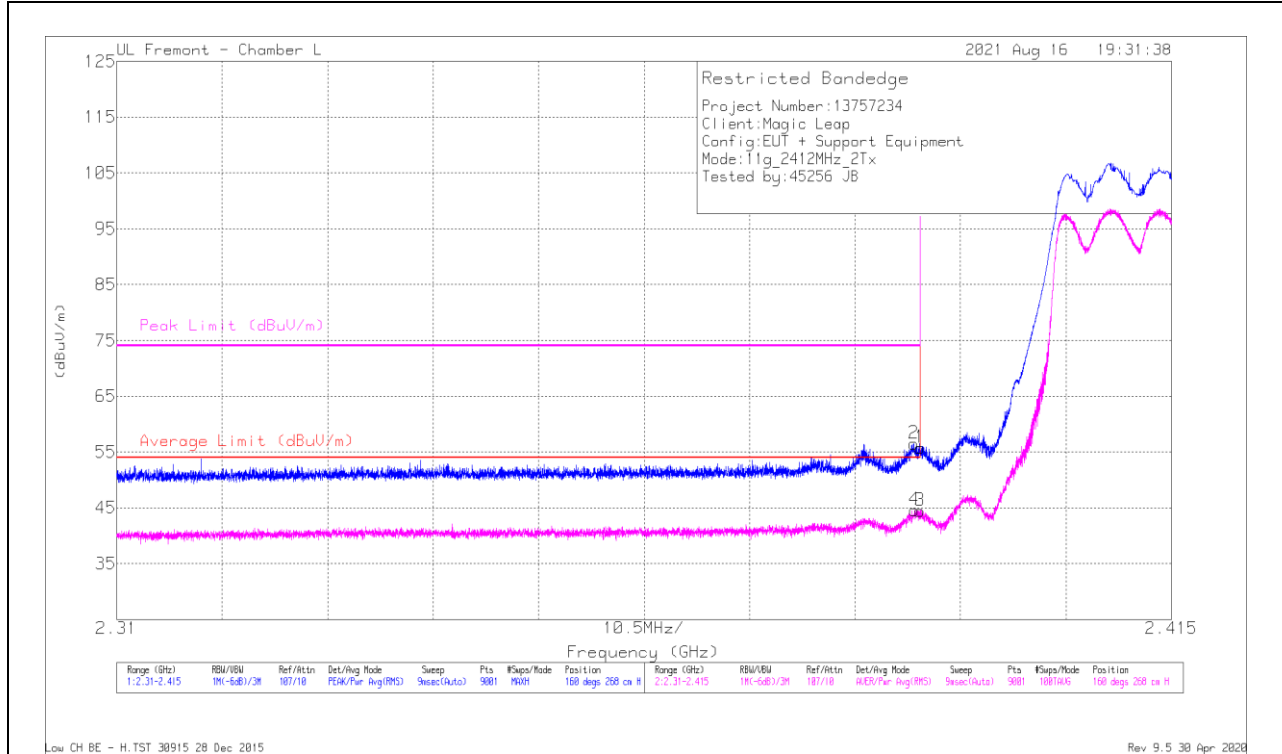

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbll/Ftr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.38999	43.01	Pk	32	-19.3	55.71	-	-	74	-18.29	160	268	H
2	* 2.38936	43.93	Pk	32	-19.4	56.53	-	-	74	-17.47	160	268	H
3	* 2.38999	31.77	RMS	32	-19.3	44.47	54	-9.53	-	-	160	268	H
4	* 2.38942	31.94	RMS	32	-19.4	44.54	54	-9.46	-	-	160	268	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

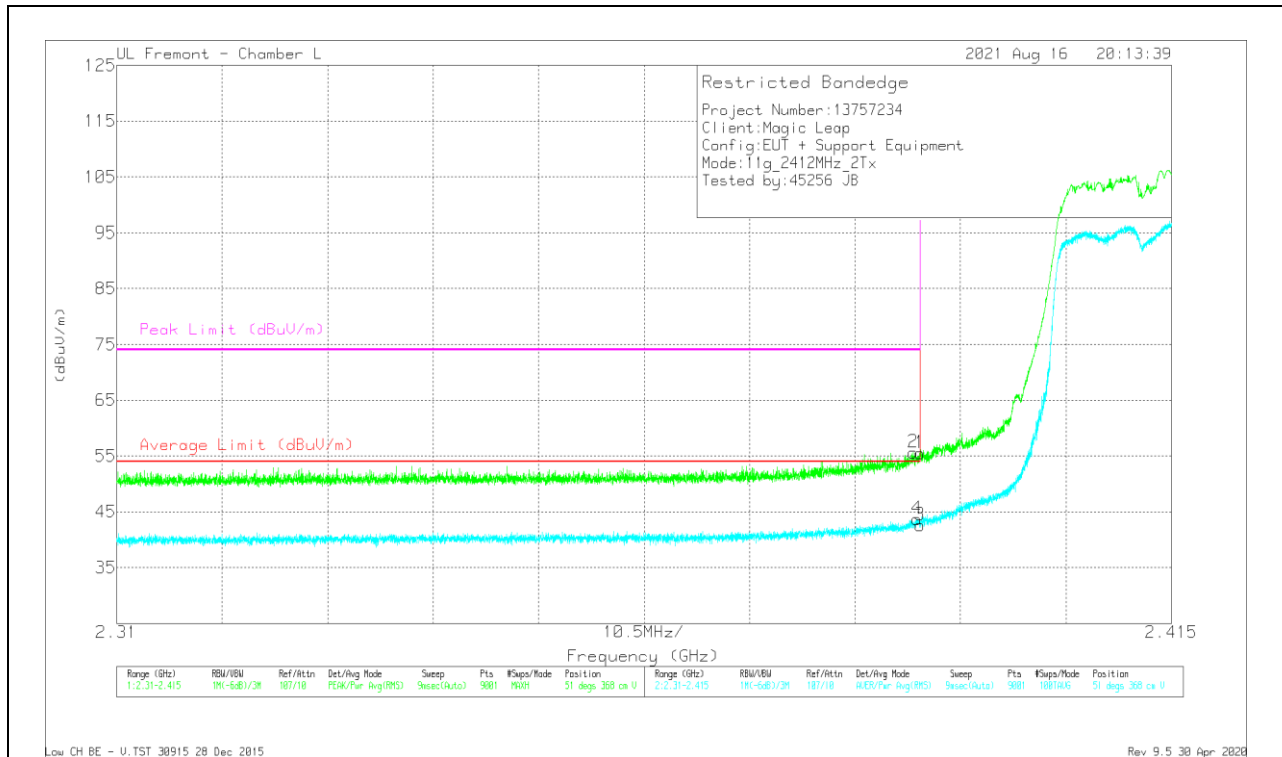


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cb/Fitr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.38999	42.8	Pk	32	-19.3	55.5	-	-	74	-18.5	51	368	V
2	* 2.38927	43.03	Pk	32	-19.4	55.63	-	-	74	-18.37	51	368	V
3	* 2.38999	29.9	RMS	32	-19.3	42.6	54	-11.4	-	-	51	368	V
4	* 2.38965	31.06	RMS	32	-19.3	43.76	54	-10.24	-	-	51	368	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 11)

HORIZONTAL RESULT

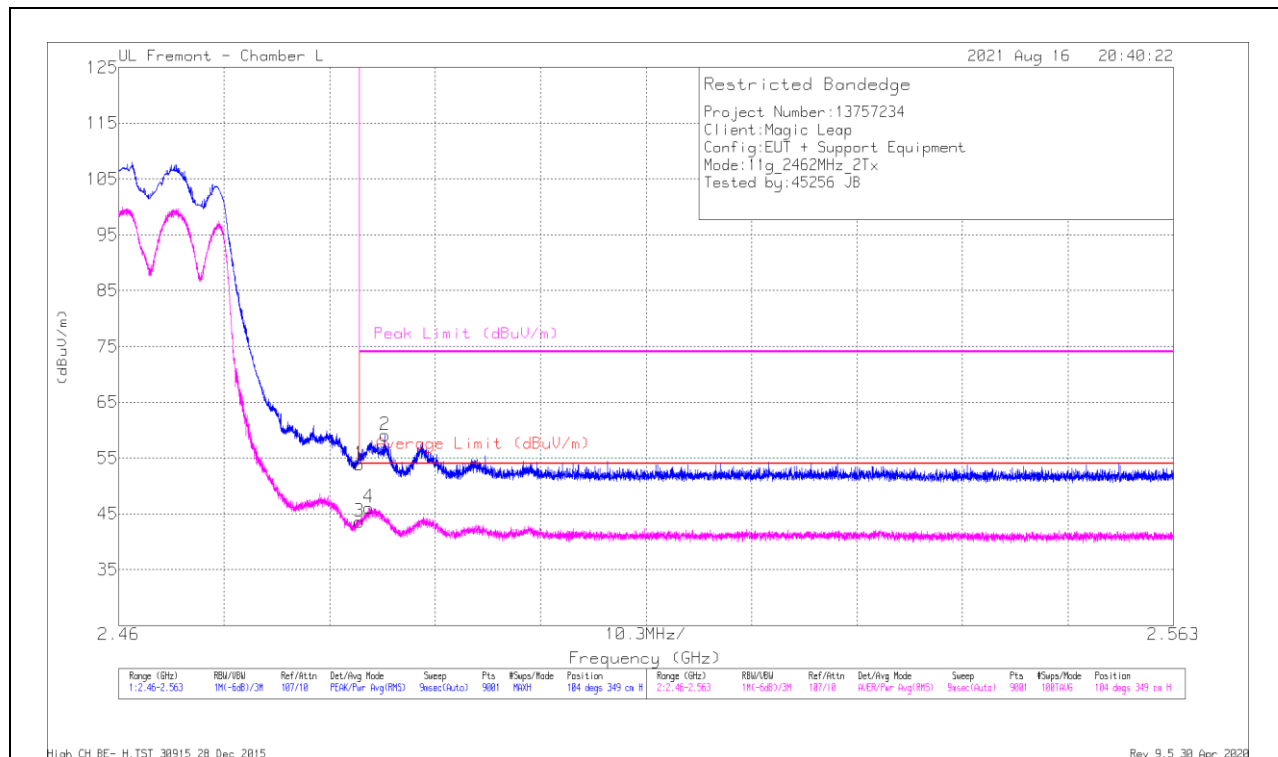


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cb/Filt/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	40.56	Pk	32.3	-19	53.86	-	-	74	-20.14	104	349	H
2	* 2.48601	45.88	Pk	32.3	-19.1	59.08	-	-	74	-14.92	104	349	H
3	* 2.48351	30.29	RMS	32.3	-19	43.59	54	-10.41	-	-	104	349	H
4	* 2.48442	32.83	RMS	32.3	-19	46.13	54	-7.87	-	-	104	349	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

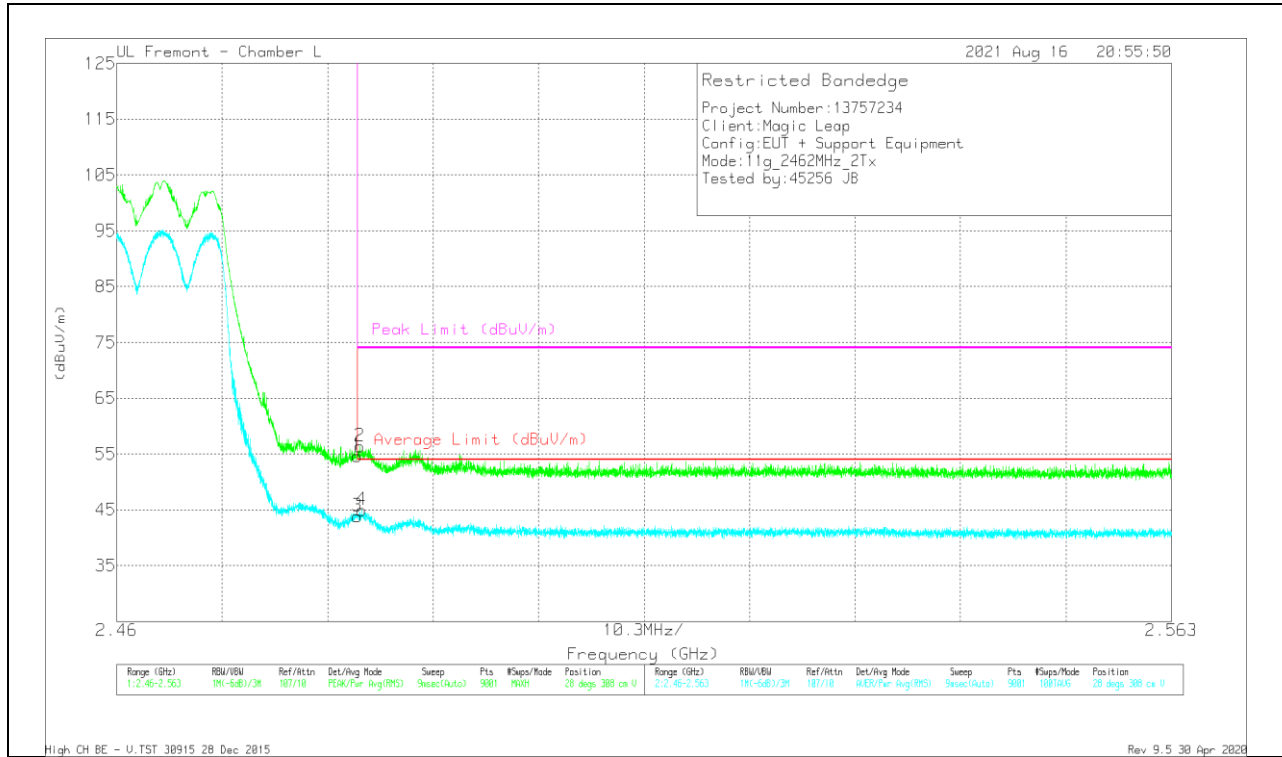

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cb/Fitr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	41.4	Pk	32.3	-19	54.7	-	-	74	-19.3	28	308	V
2	* 2.48372	43.04	Pk	32.3	-19	56.34	-	-	74	-17.66	28	308	V
3	* 2.48351	30.55	RMS	32.3	-19	43.85	54	-10.15	-	-	28	308	V
4	* 2.48393	31.64	RMS	32.3	-19	44.94	54	-9.06	-	-	28	308	V



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL, CH 1 RESULTS

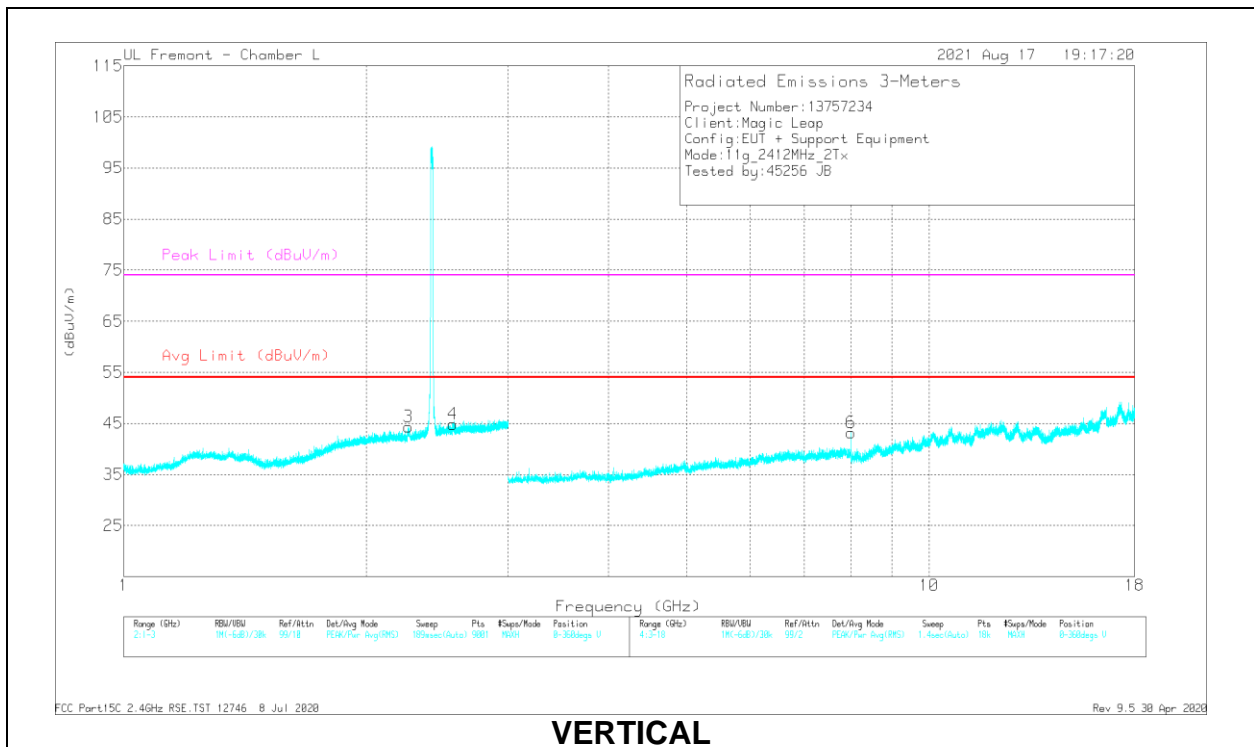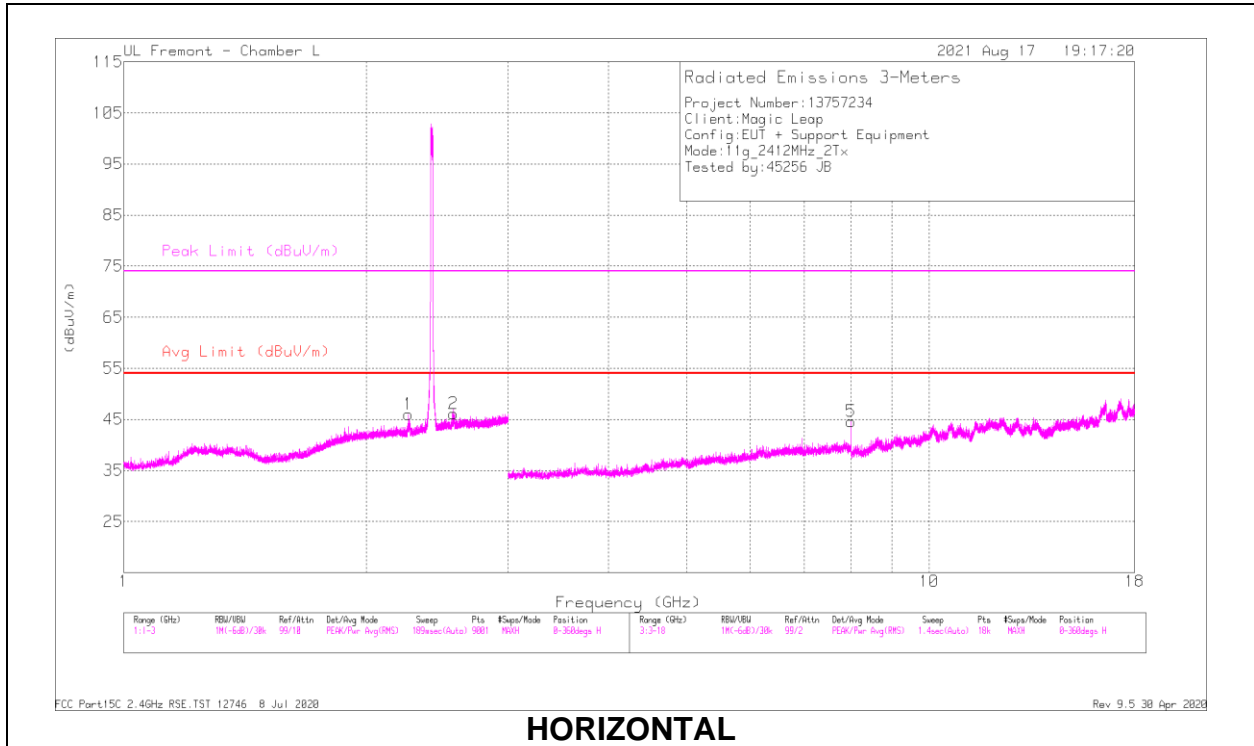

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Fitr/Prod (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.25551	41.92	PK2	31.3	-19.8	53.42	-	-	74	-20.58	175	170	H
	* 2.25742	31.64	MAv1	31.2	-19.8	43.04	54	-10.96	-	-	175	170	H
2	2.5688	41.04	PK2	32.3	-18.9	54.44	-	-	-	-	236	103	H
3	* 2.25709	40.51	PK2	31.2	-19.8	51.91	-	-	74	-22.09	341	290	V
	* 2.25681	30.19	MAv1	31.2	-19.8	41.59	54	-12.41	-	-	341	290	V
4	2.56434	41.3	PK2	32.3	-18.9	54.7	-	-	-	-	239	301	V
5	8.00003	31.19	PK2	35.8	-19.2	47.79	-	-	-	-	91	102	H
6	8.00012	33.07	PK2	35.8	-19.2	49.67	-	-	-	-	129	197	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

MID CHANNEL, CH 6 RESULTS

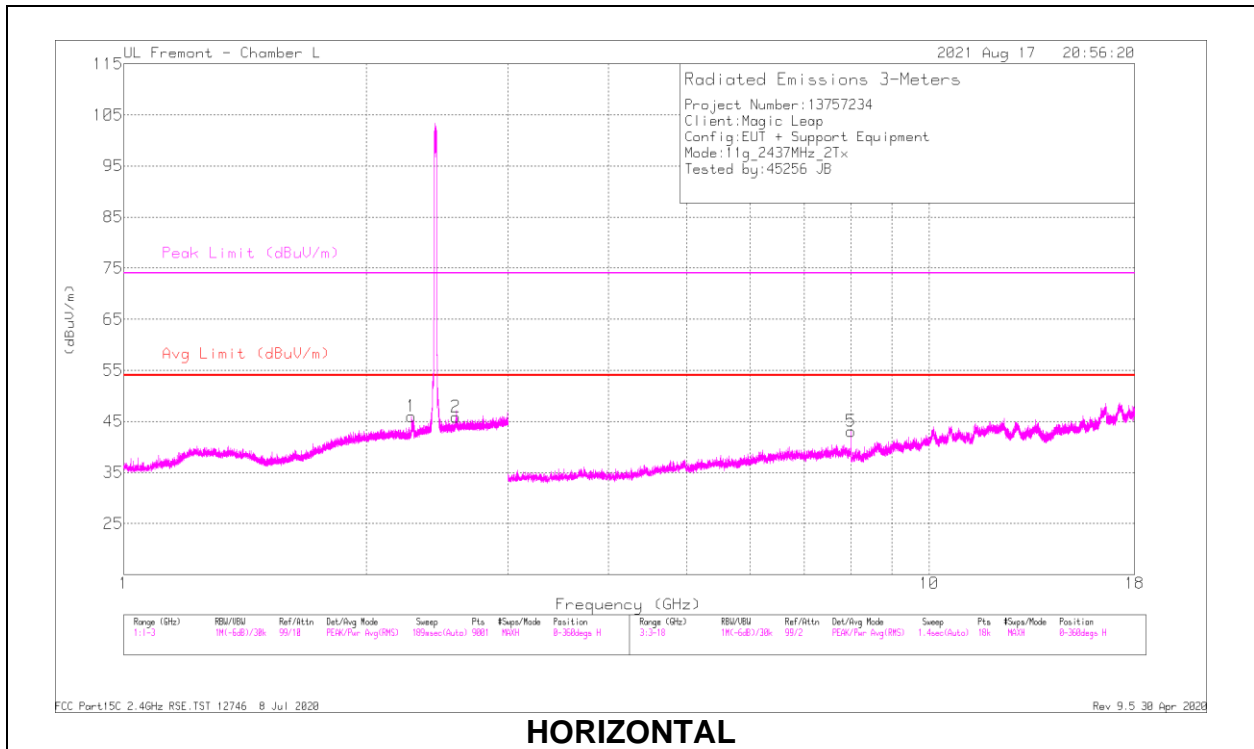

HORIZONTAL

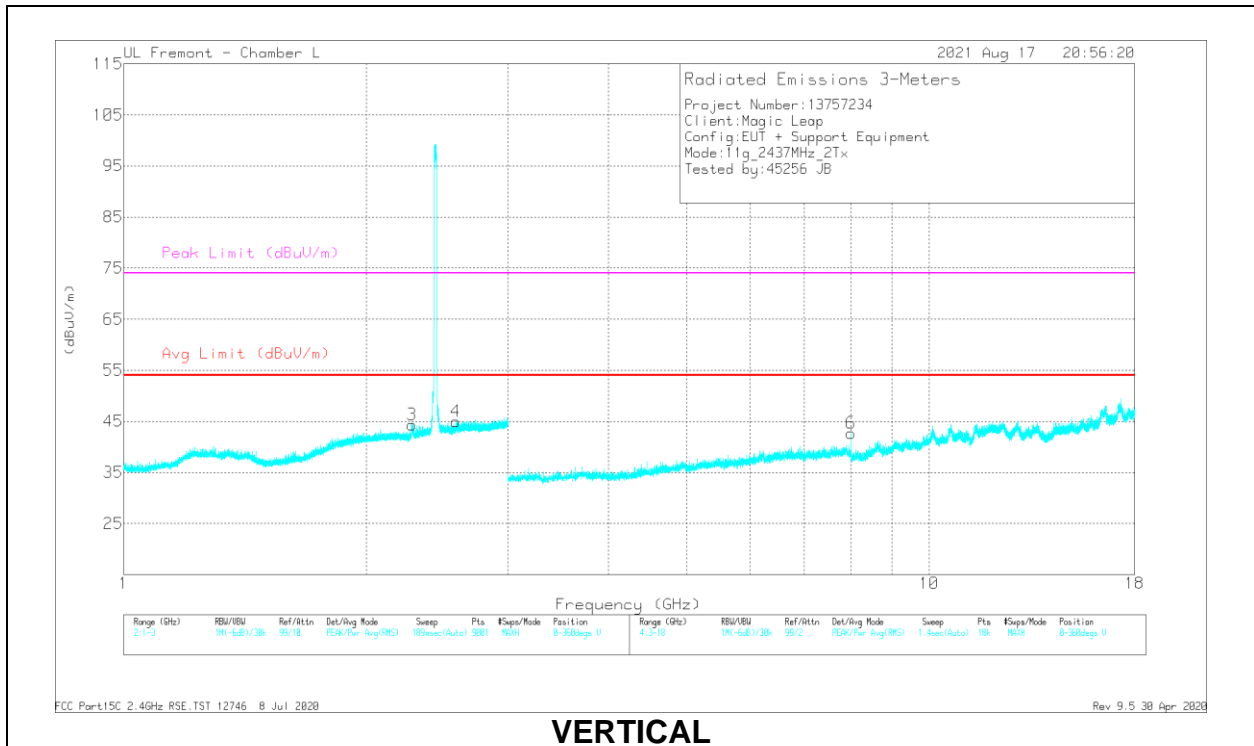

VERTICAL

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Fitr/Prod (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.27647	44.09	PK2	31.4	-19.7	55.79	-	-	74	-18.21	167	220	H
	* 2.27658	31.53	MAv1	31.4	-19.7	43.23	54	-10.77	-	-	167	220	H
2	2.58596	41.14	PK2	32.2	-18.9	54.44	-	-	-	-	233	101	H
3	* 2.28137	41.12	PK2	31.4	-19.7	52.82	-	-	74	-21.18	345	223	V
	* 2.28227	29.8	MAv1	31.4	-19.7	41.5	54	-12.5	-	-	345	223	V
4	2.58399	39.8	PK2	32.2	-18.9	53.1	-	-	-	-	149	124	V
5	7.9999	32.04	PK2	35.8	-19.2	48.64	-	-	-	-	208	114	H
6	8.00005	33.7	PK2	35.8	-19.2	50.3	-	-	-	-	291	103	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

HIGH CHANNEL, CH 11 RESULTS

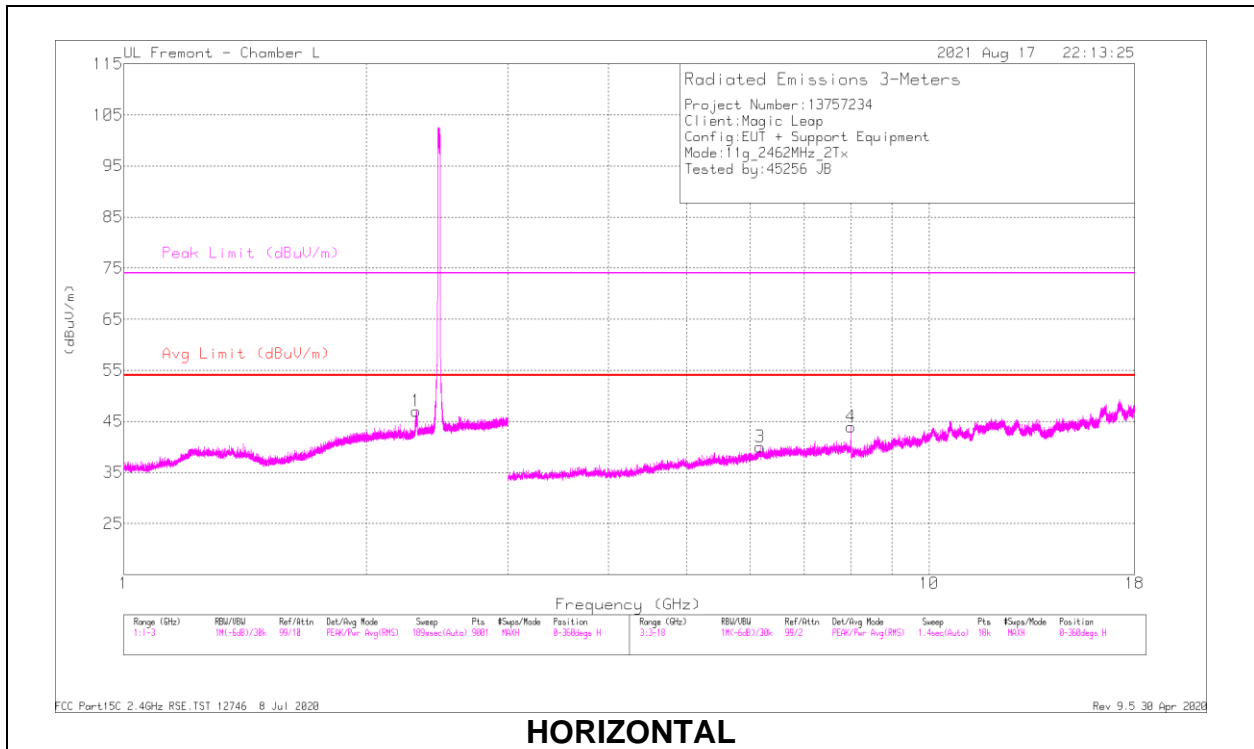

HORIZONTAL

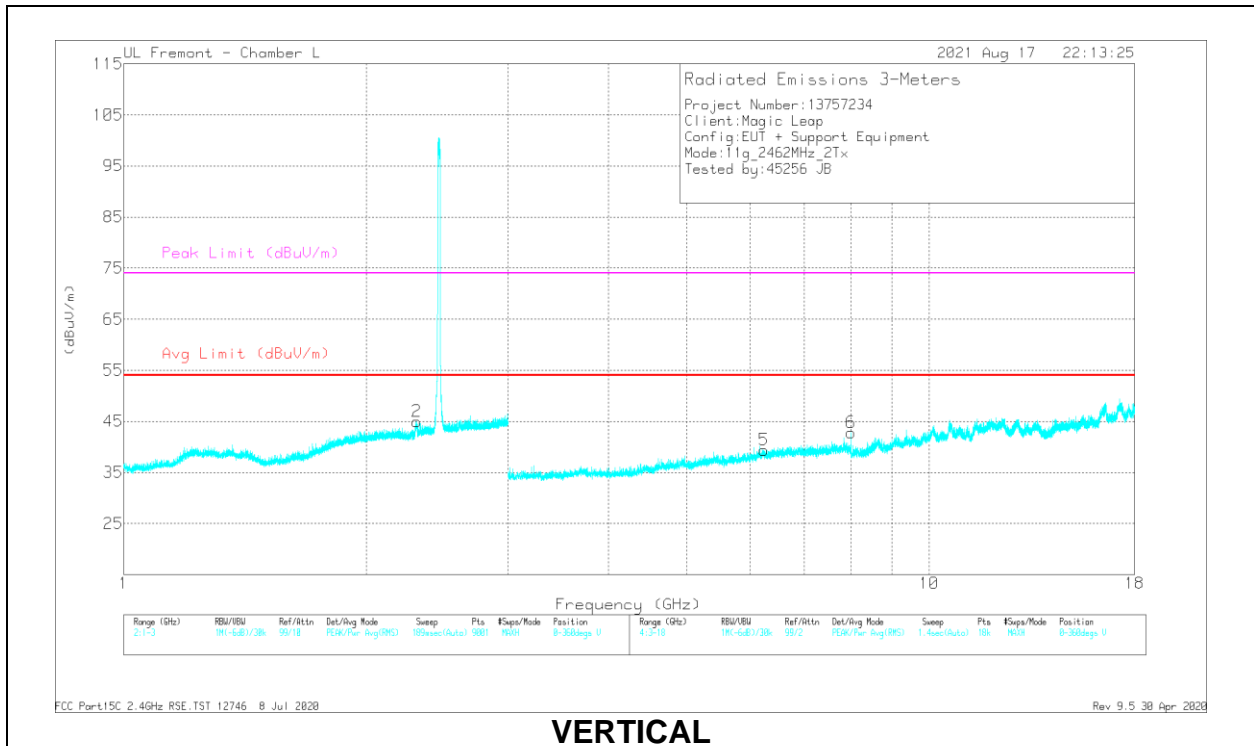

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.30722	42.87	PK2	31.6	-19.6	54.87	-	-	74	-19.13	178	165	H
	* 2.30696	32.17	MAv1	31.6	-19.6	44.17	54	-9.83	-	-	178	165	H
2	* 2.31052	42.83	PK2	31.6	-19.6	54.83	-	-	74	-19.17	134	362	V
	* 2.31116	31.65	MAv1	31.6	-19.6	43.65	54	-10.35	-	-	134	362	V
3	6.16851	25.89	Pk	35.5	-21.4	39.99	-	-	-	-	0-360	101	H
4	8.00003	33.09	PK2	35.8	-19.2	49.69	-	-	-	-	155	211	H
5	6.23351	25.82	Pk	35.5	-21.9	39.42	-	-	-	-	0-360	101	V
6	7.99995	32.15	PK2	35.8	-19.2	48.75	-	-	-	-	107	169	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average