


BANEDGE (MID CHANNEL HIGH EDGE)

HORIZONTAL RESULT

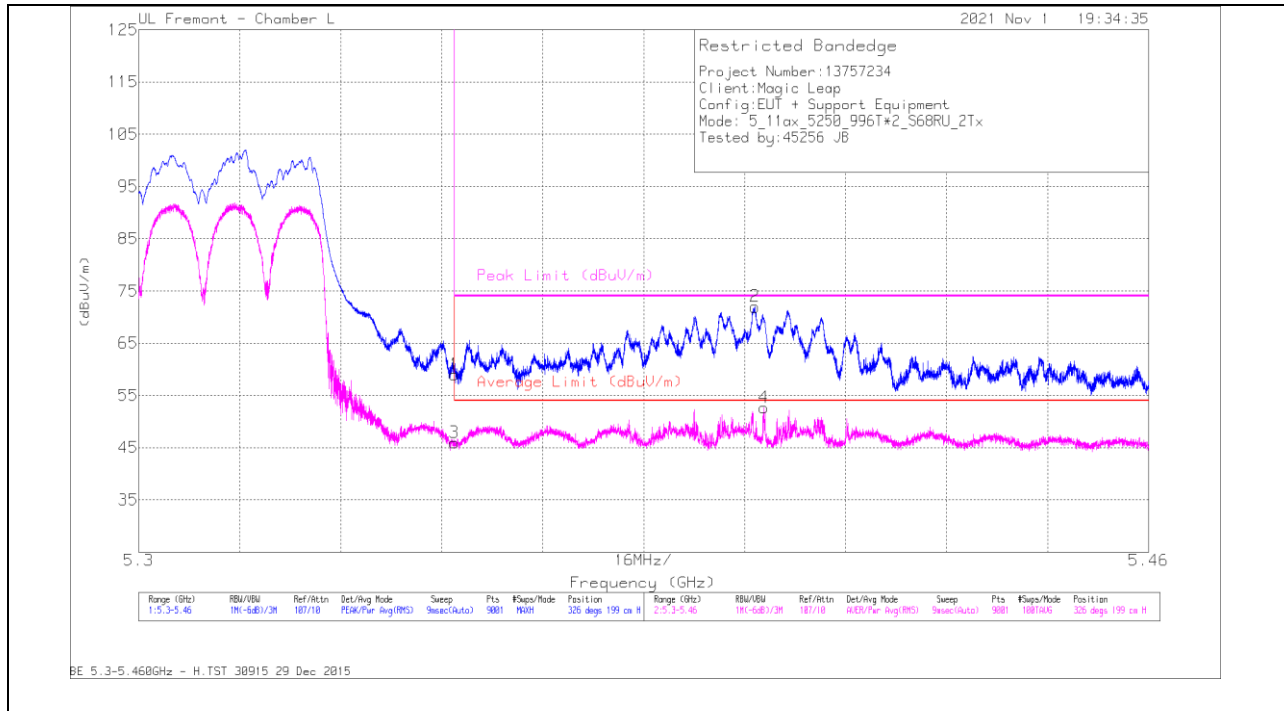


TRACE MARKER

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Fitr/Paid (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35001	38.45	Pk	34.9	-14.4		58.95	-	-	74	-15.05	326	199	H
2	* 5.3976	51.26	Pk	35	-14.3		71.96	-	-	74	-2.04	326	199	H
3	* 5.35001	25.49	RMS	34.9	-14.4	0.1	46.09	54	-7.91	-	-	326	199	H
4	* 5.39908	31.82	RMS	35	-14.2	0.1	52.72	54	-1.28	-	-	326	199	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

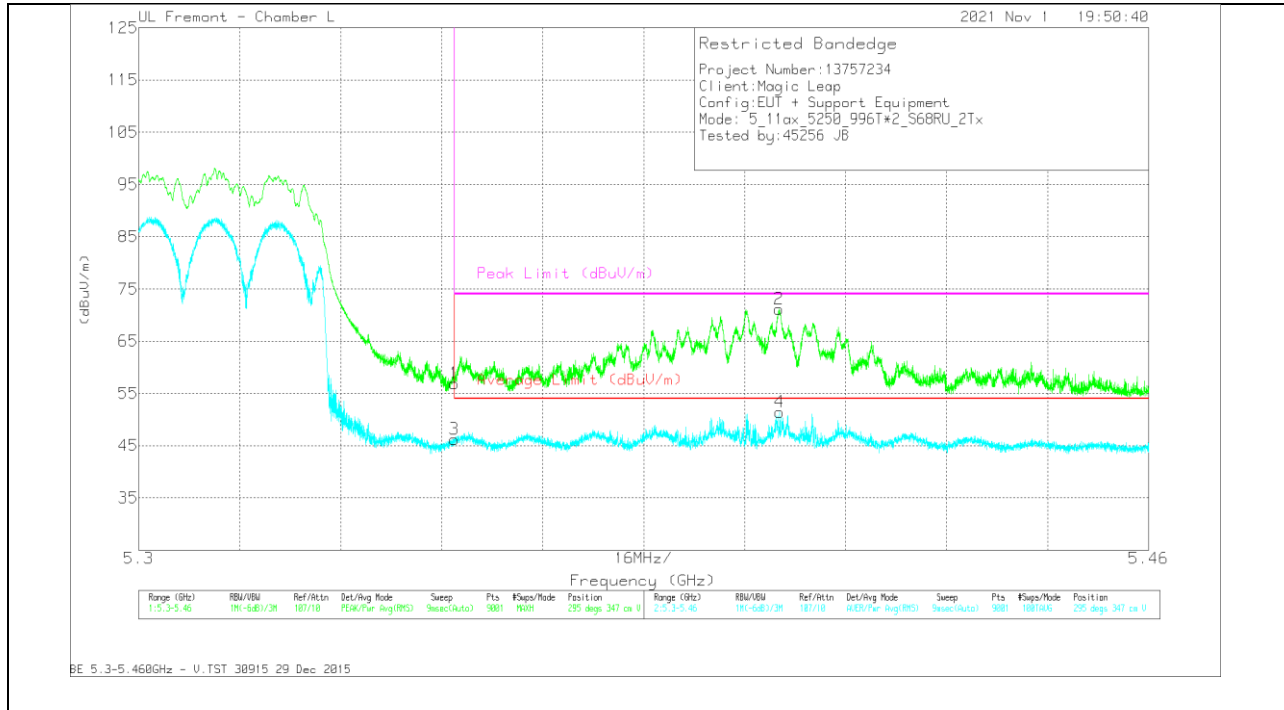

TRACE MARKER

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35001	36.4	Pk	34.9	-14.4	-	56.9	-	-	74	-17.1	295	347	V
2	* 5.40148	50.45	Pk	34.9	-14.2	-	71.15	-	-	74	-2.85	295	347	V
3	* 5.35001	25.71	RMS	34.9	-14.4	0.1	46.31	54	-7.69	-	-	295	347	V
4	* 5.40157	30.66	RMS	34.9	-14.2	0.1	51.46	54	-2.54	-	-	295	347	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector


RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

MID

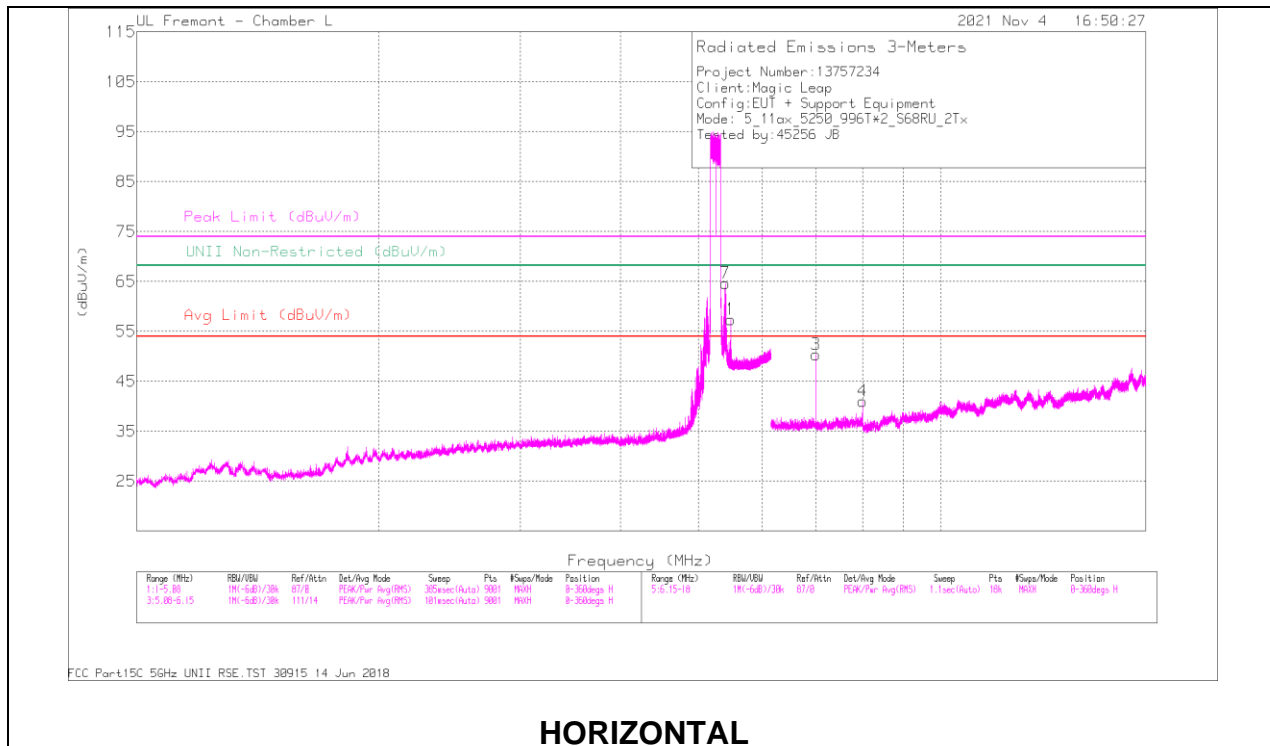

HORIZONTAL

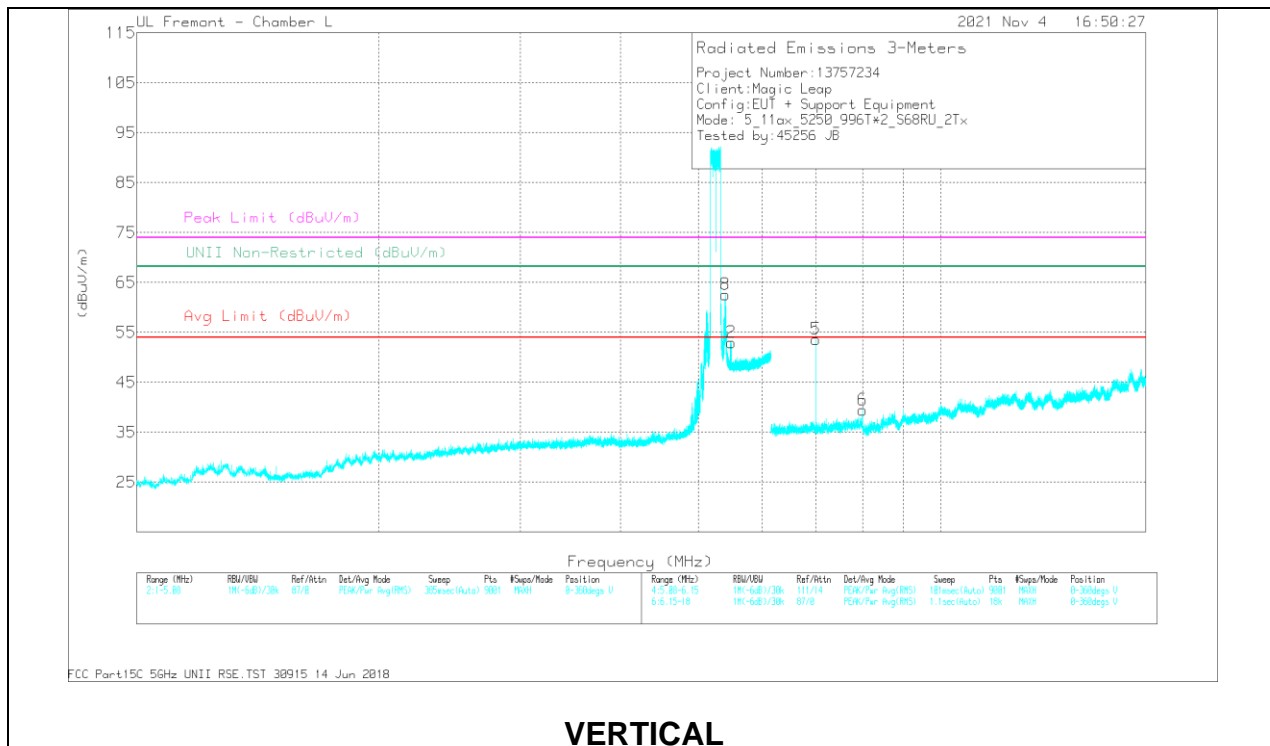

VERTICAL


RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cou/Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5482.7839	43.23	PK-U	34.9	-14.1	-	64.03	-	-	-	-	68.2	-4.17	336	140	H
7	* 5396.1079	51.58	PK-U	34.9	-14.3	-	72.18	-	-	74	-1.82	-	-	334	221	H
	* 5396.028	32.39	ADR	34.9	-14.3	0.1	53.09	54	-0.91	-	-	-	-	334	221	H
2	5491.9714	40.83	PK-U	34.8	-14.2	-	61.43	-	-	-	-	68.2	-6.77	318	220	V
8	* 5398.8713	48.66	PK-U	35	-14.2	-	69.46	-	-	74	-4.54	-	-	309	101	V
	* 5399.163	31.39	ADR	35	-14.2	0.1	52.29	54	-1.71	-	-	-	-	309	101	V
3	6999.9613	39.77	PK-U	35.6	-20.5	-	54.87	-	-	-	-	68.2	-13.33	25	212	H
4	8000.2961	30.63	PK-U	35.8	-18.6	-	47.83	-	-	-	-	68.2	-20.37	358	105	H
5	6999.9253	39.94	PK-U	35.6	-20.5	-	55.04	-	-	-	-	68.2	-13.16	53	104	V
6	8000.3101	29.74	PK-U	35.8	-18.6	-	46.94	-	-	-	-	68.2	-21.26	27	100	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

**2TX Antenna 1 + Antenna 2 OFDMA MODE: 996-Tones, RU Index 67
 BANDEDGE (MID CHANNEL LOW EDGE)**

HORIZONTAL RESULT

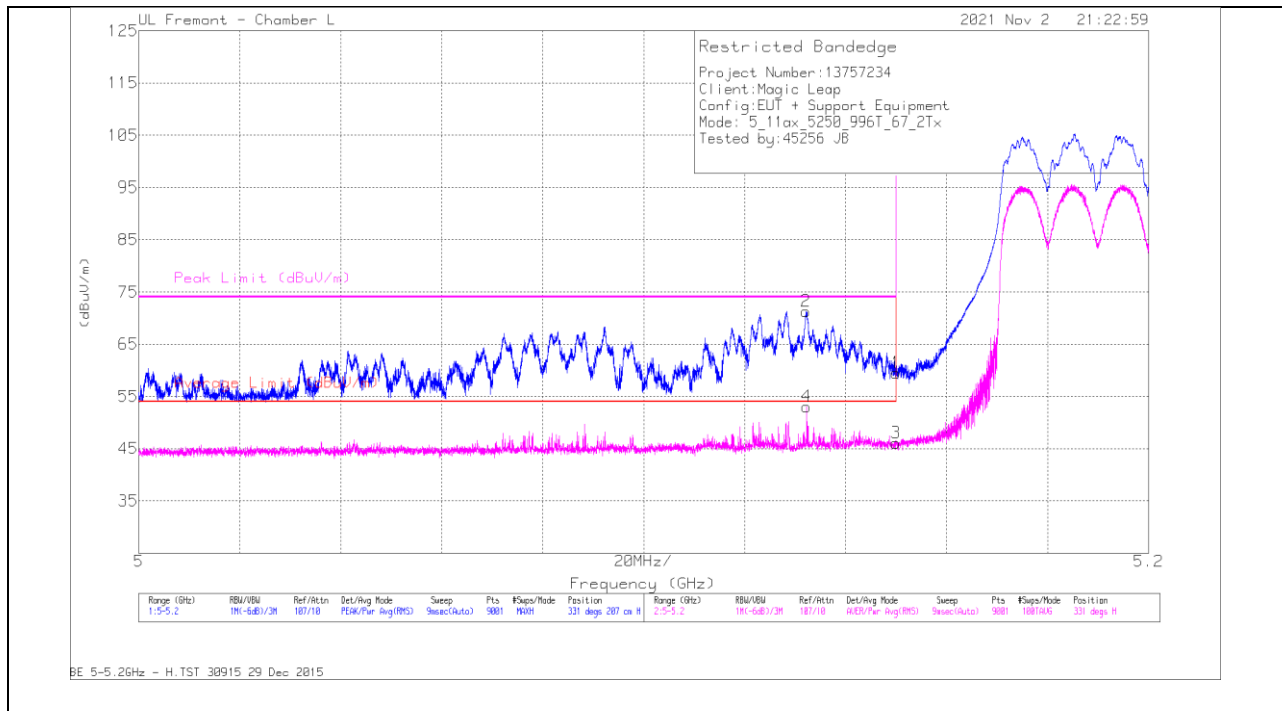


TRACE MARKER

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cb/Flt r/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.15	39.81	Pk	34.6	-14.9	-	59.51	-	-	74	-14.49	331	207	H
2	5.1321	51.58	Pk	34.6	-14.9	-	71.28	-	-	74	-2.72	331	207	H
3	5.15	26.36	RMS	34.6	-14.9	0.1	46.16	54	-7.84	-	-	331	207	H
4	5.1322	33.28	RMS	34.6	-14.9	0.1	53.08	54	-0.92	-	-	331	207	H

Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

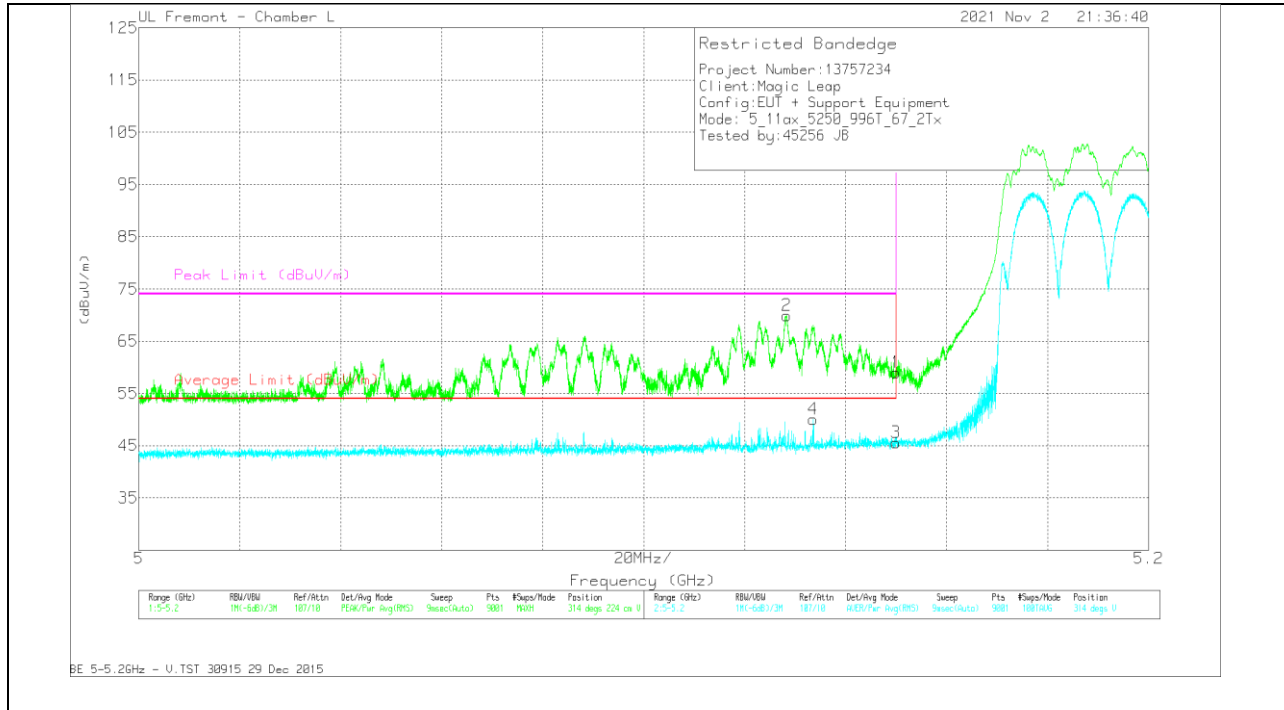


TRACE MARKER

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Fit r/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.15	39.26	Pk	34.6	-14.9	-	58.96	-	-	74	-15.04	314	224	V
2	5.1283	50.26	Pk	34.6	-14.9	-	69.96	-	-	74	-4.04	314	224	V
3	5.15	25.87	RMS	34.6	-14.9	0.1	45.67	54	-8.33	-	-	314	224	V
4	5.1336	30.39	RMS	34.6	-14.9	0.1	50.19	54	-3.81	-	-	314	224	V

Pk - Peak detector
 RMS - RMS detection

**2TX Antenna 1 + Antenna 2 OFDMA MODE: 996-Tones, RU Index S67
 BANDEDGE (MID CHANNEL HIGH EDGE)**

HORIZONTAL RESULT

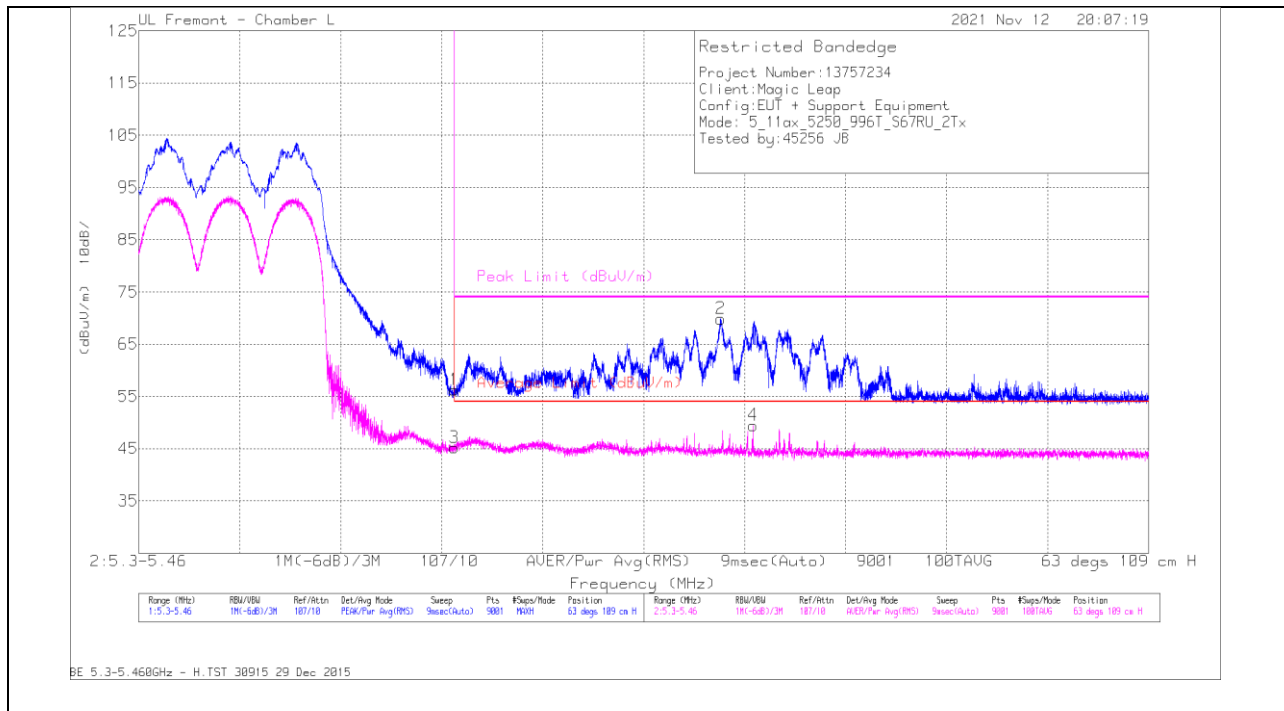


TRACE MARKER

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AFT119 (dB/m)	Amp/Cbl/Filtr/Pa d (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5350	35.76	Pk	34.9	-14.4	-	56.26	-	-	74	-17.74	63	109	H
2	* 5392.1789	49.25	Pk	34.9	-14.3	-	69.85	-	-	74	-4.15	63	109	H
3	* 5350	24.66	RMS	34.9	-14.4	0.1	45.26	54	-8.74	-	-	63	109	H
4	* 5397.3346	28.78	RMS	35	-14.3	0.1	49.58	54	-4.42	-	-	63	109	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

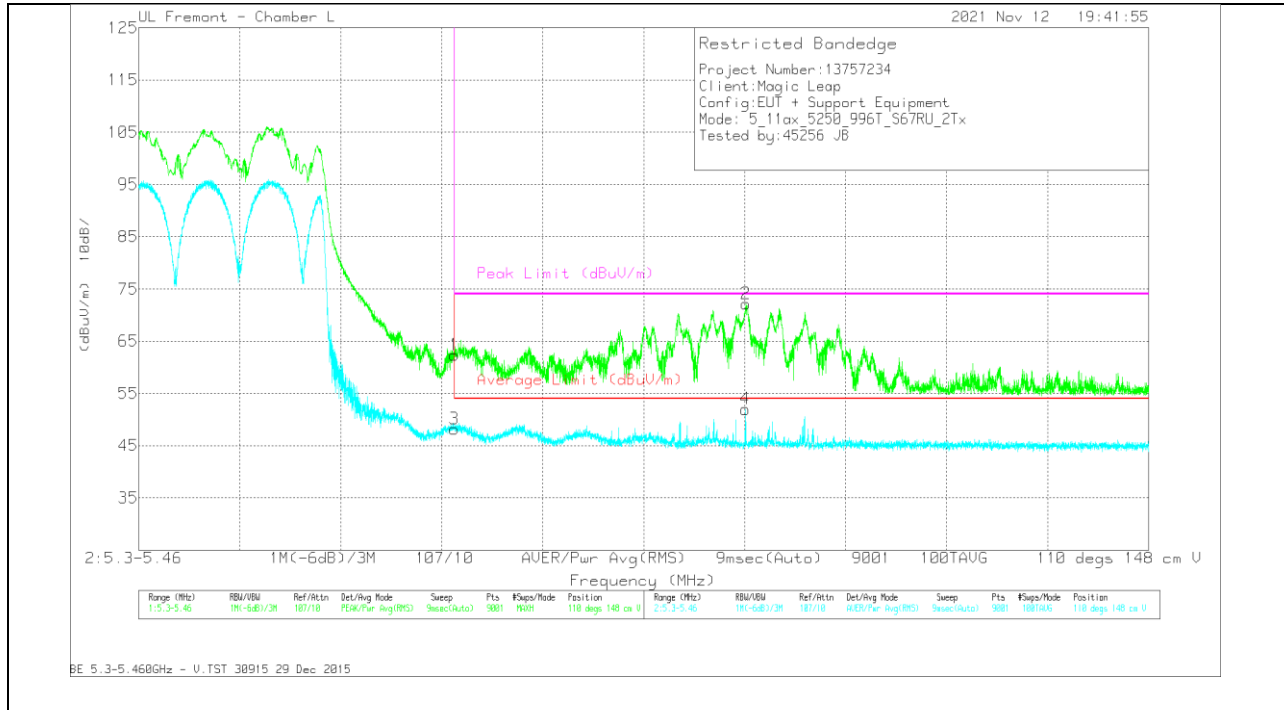

TRACE MARKER

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Par d (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5350	41.85	Pk	34.9	-14.4	-	62.35	-	-	74	-11.65	110	148	V
2	* 5396.2145	51.5	Pk	34.9	-14.3	-	72.1	-	-	74	-1.9	110	148	V
3	* 5350	27.73	RMS	34.9	-14.4	0.1	48.33	54	-5.67	-	-	110	148	V
4	* 5396.1434	31.37	RMS	34.9	-14.3	0.1	52.07	54	-1.93	-	-	110	148	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

RMS - RMS detection

2TX Antenna 1 + Antenna 2 OFDMA MODE: 484-Tones, RU Index 65

BANDEDGE (MID CHANNEL LOW EDGE)

HORIZONTAL RESULT

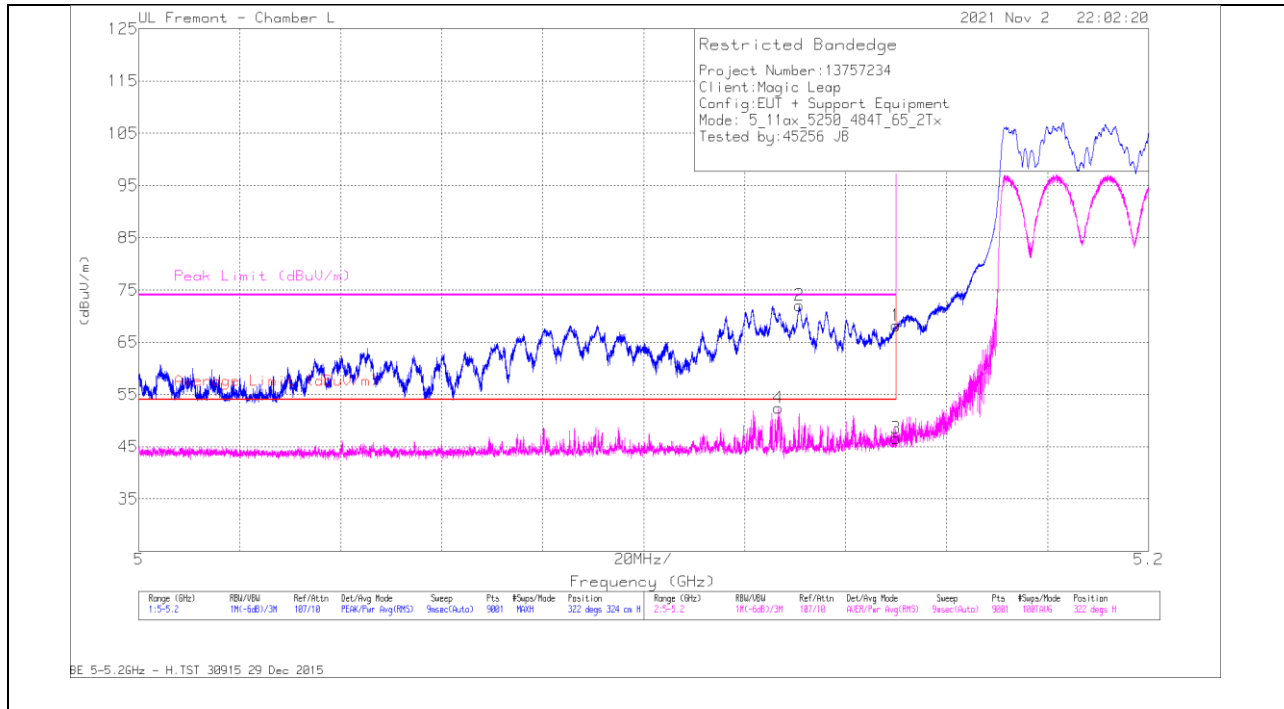


TRACE MARKER

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cb/Flt r/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.15	48.49	Pk	34.6	-14.9	-	68.19	-	-	74	-5.81	322	324	H
2	5.1309	52.28	Pk	34.6	-14.9	-	71.98	-	-	74	-2.02	322	324	H
3	5.15	26.91	RMS	34.6	-14.9	0.1	46.71	54	-7.29	-	-	322	324	H
4	5.1266	32.75	RMS	34.5	-14.9	0.1	52.45	54	-1.55	-	-	322	324	H

Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

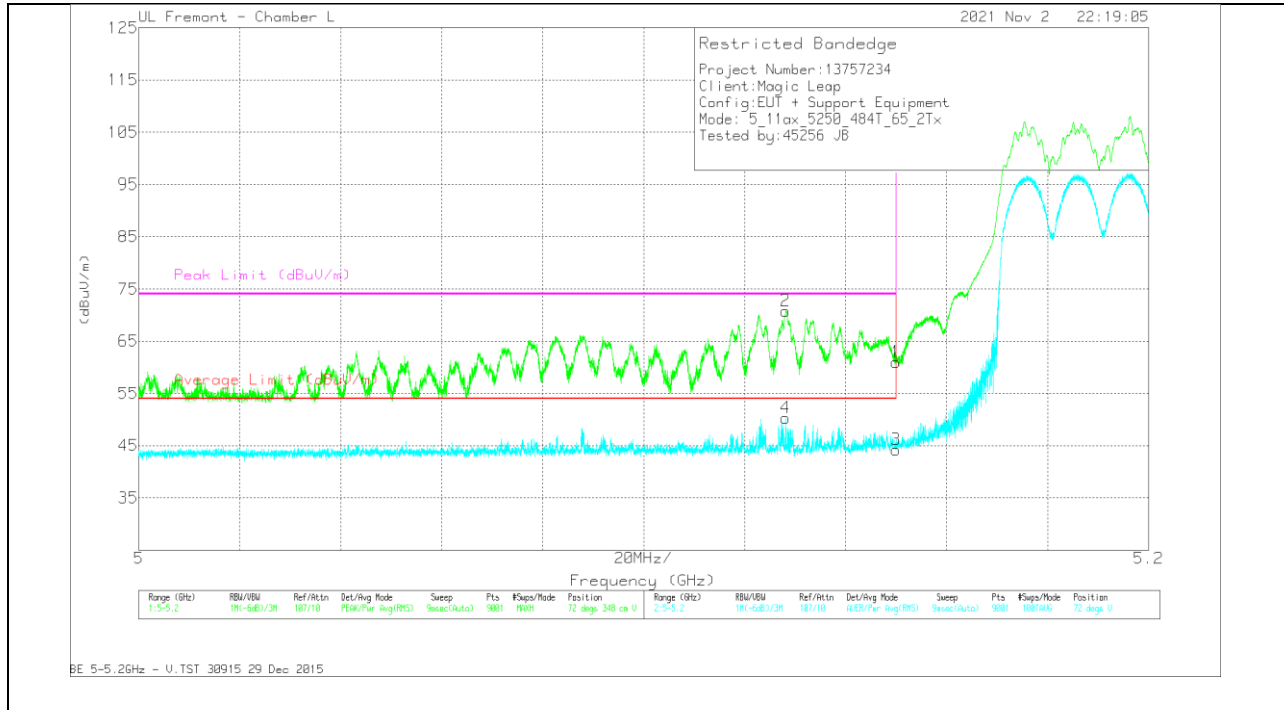


TRACE MARKER

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Fit r/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.15	41.29	Pk	34.6	-14.9	-	60.99	-	-	74	-13.01	72	348	V
2	5.1281	51.13	Pk	34.6	-14.9	-	70.83	-	-	74	-3.17	72	348	V
3	5.15	24.54	RMS	34.6	-14.9	0.1	44.34	54	-9.66	-	-	72	348	V
4	5.1281	30.62	RMS	34.6	-14.9	0.1	50.42	54	-3.58	-	-	72	348	V

Pk - Peak detector
 RMS - RMS detection

**2TX Antenna 1 + Antenna 2 OFDMA MODE: 484-Tones, RU Index S66
 BANEDGE (MID CHANNEL HIGH EDGE)**

HORIZONTAL RESULT

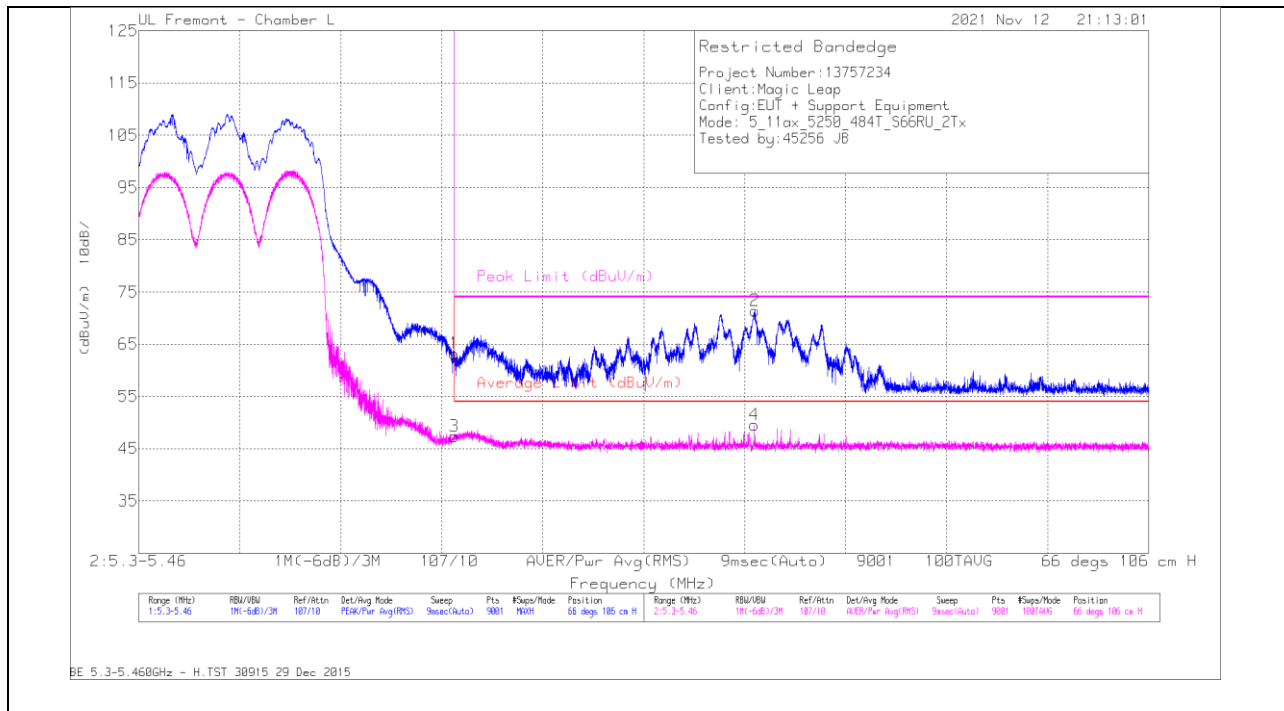


TRACE MARKER

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AFT119 (dB/m)	Amp/Cbl/Filtr/Par d (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5350	42.72	Pk	34.9	-14.4	-	63.22	-	-	74	-10.78	66	106	H
2	* 5397.6012	50.72	Pk	35	-14.3	-	71.42	-	-	74	-2.58	66	106	H
3	* 5350	26.87	RMS	34.9	-14.4	0.1	47.47	54	-6.53	-	-	66	106	H
4	* 5397.5301	28.86	RMS	35	-14.3	0.1	49.66	54	-4.34	-	-	66	106	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

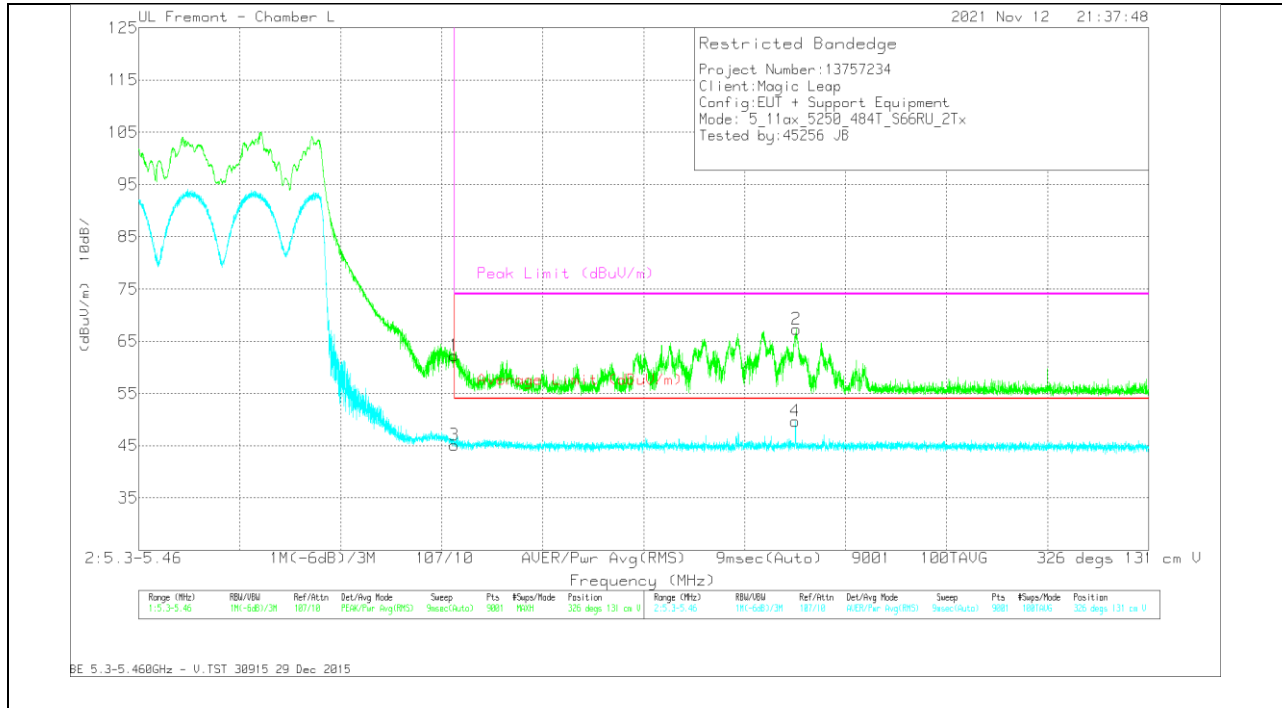

TRACE MARKER

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Par d (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5350	41.73	Pk	34.9	-14.4	-	62.23	-	-	74	-11.77	326	131	V
2	* 5404.1969	46.61	Pk	34.9	-14.2	-	67.31	-	-	74	-6.69	326	131	V
3	* 5350	24.61	RMS	34.9	-14.4	0.1	45.21	54	-8.79	-	-	326	131	V
4	* 5404.0369	28.97	RMS	34.9	-14.2	0.1	49.77	54	-4.23	-	-	326	131	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

**2TX Antenna 1 + Antenna 2 OFDMA MODE: 242-Tones, RU Index 61
 BANDEDGE (MID CHANNEL LOW EDGE)**

HORIZONTAL RESULT

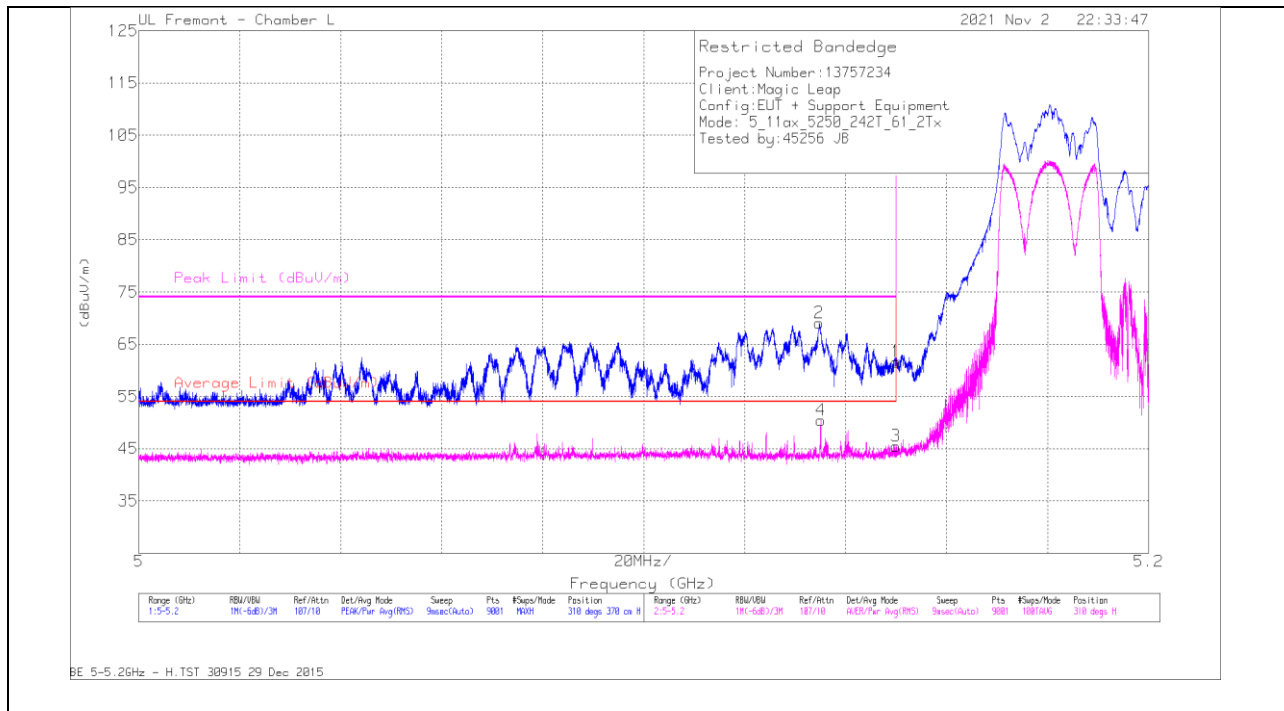


TRACE MARKER

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cb/Flt r/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.15	41.89	Pk	34.6	-14.9	-	61.59	-	-	74	-12.41	310	370	H
2	5.1348	49.37	Pk	34.6	-14.9	-	69.07	-	-	74	-4.93	310	370	H
3	5.15	25.73	RMS	34.6	-14.9	0.1	45.53	54	-8.47	-	-	310	370	H
4	5.1351	30.67	RMS	34.6	-14.9	0.1	50.47	54	-3.53	-	-	310	370	H

Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

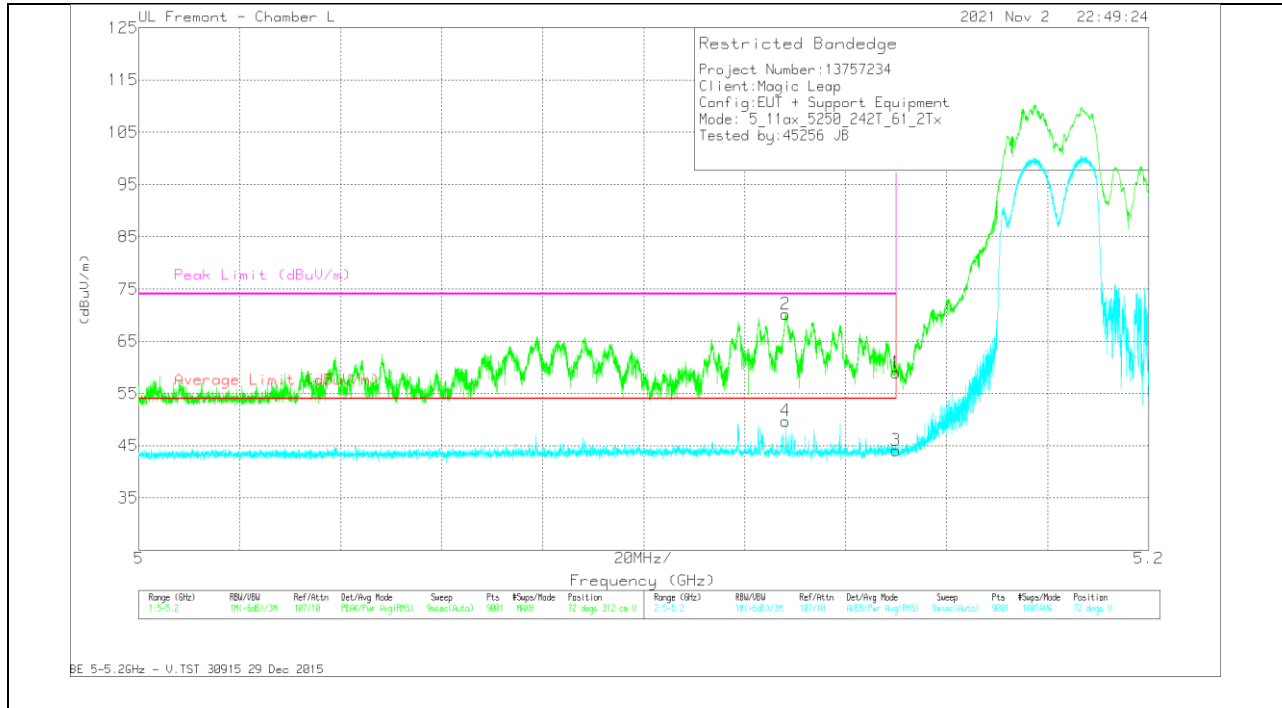


TRACE MARKER

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Fit r/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.15	39.3	Pk	34.6	-14.9	-	59	-	-	74	-15	72	312	V
2	5.128	50.43	Pk	34.6	-14.9	-	70.13	-	-	74	-3.87	72	312	V
3	5.15	24.44	RMS	34.6	-14.9	0.1	44.24	54	-9.76	-	-	72	312	V
4	5.1281	30.03	RMS	34.6	-14.9	0.1	49.83	54	-4.17	-	-	72	312	V

Pk - Peak detector
 RMS - RMS detection

**2TX Antenna 1 + Antenna 2 OFDMA MODE: 242-Tones, RU Index S64
 BANDEDGE (MID CHANNEL HIGH EDGE)**

HORIZONTAL RESULT

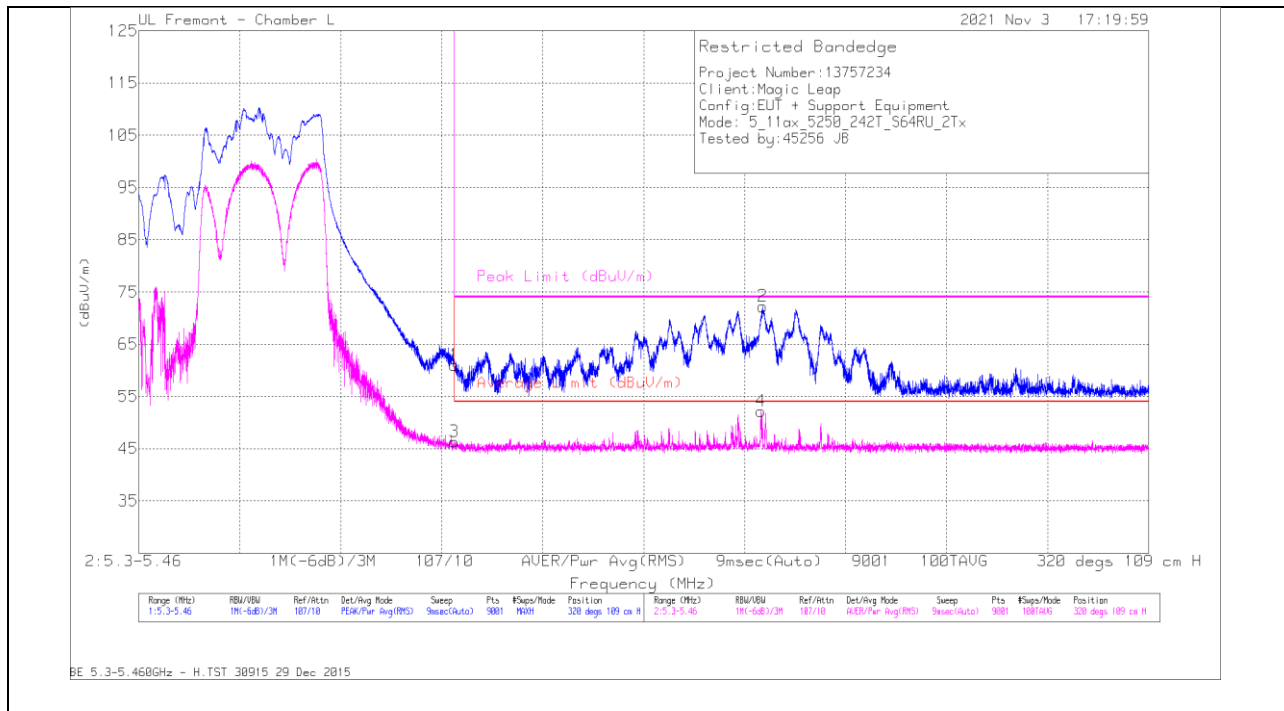


TRACE MARKER

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AFT119 (dB/m)	Amp/CbI/Filt/Pa d (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5350	40.44	Pk	34.9	-14.4	-	60.94	-	-	74	-13.06	320	109	H
2	* 5398.8635	51.41	Pk	35	-14.2	-	72.21	-	-	74	-1.79	320	109	H
3	* 5350	25.82	RMS	34.9	-14.4	0.1	46.42	54	-7.58	-	-	320	109	H
4	* 5398.579	31.38	RMS	35	-14.2	0.1	52.28	54	-1.72	-	-	320	109	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

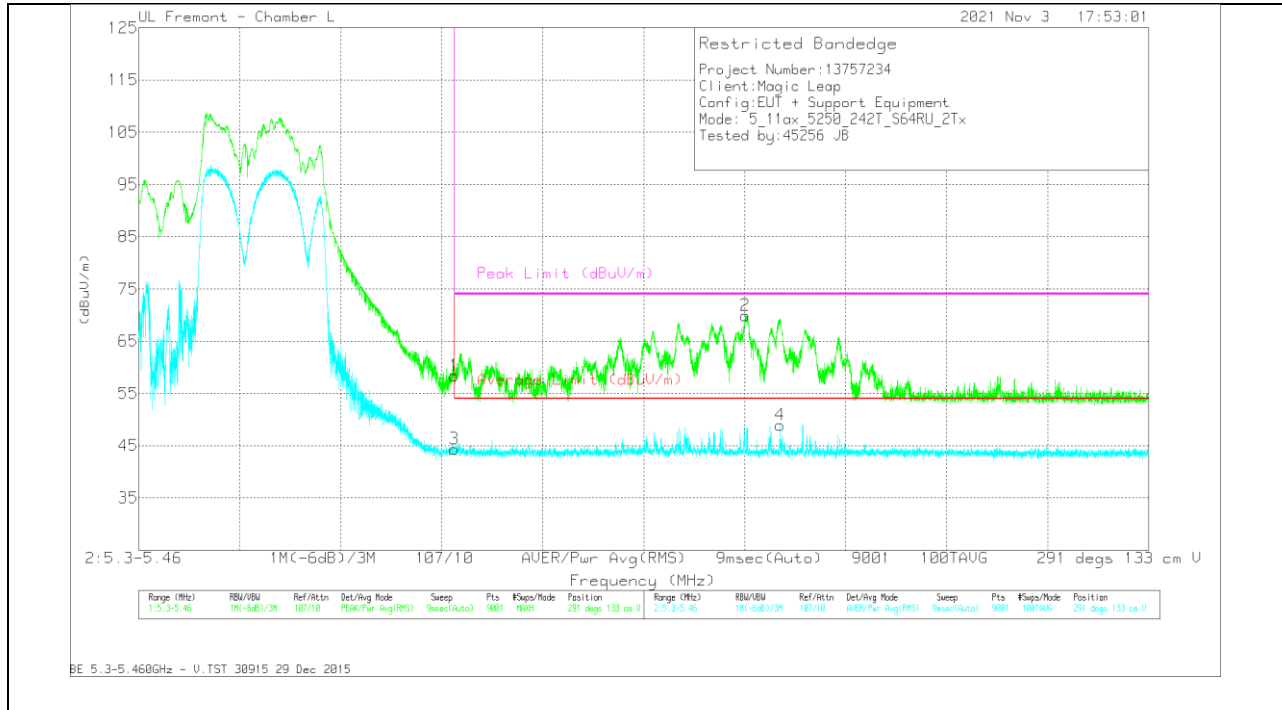

TRACE MARKER

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5350	37.82	Pk	34.9	-14.4	-	58.32	-	-	74	-15.68	291	133	V
2	* 5396.1257	49.33	Pk	34.9	-14.3	-	69.93	-	-	74	-4.07	291	133	V
3	* 5350	23.87	RMS	34.9	-14.4	0.1	44.47	54	-9.53	-	-	291	133	V
4	* 5401.6013	28.22	RMS	34.9	-14.2	0.1	49.02	54	-4.98	-	-	291	133	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

**2TX Antenna 1 + Antenna 2 OFDMA MODE: 106-Tones, RU Index 53
 BANDEDGE (MID CHANNEL LOW EDGE)**

HORIZONTAL RESULT

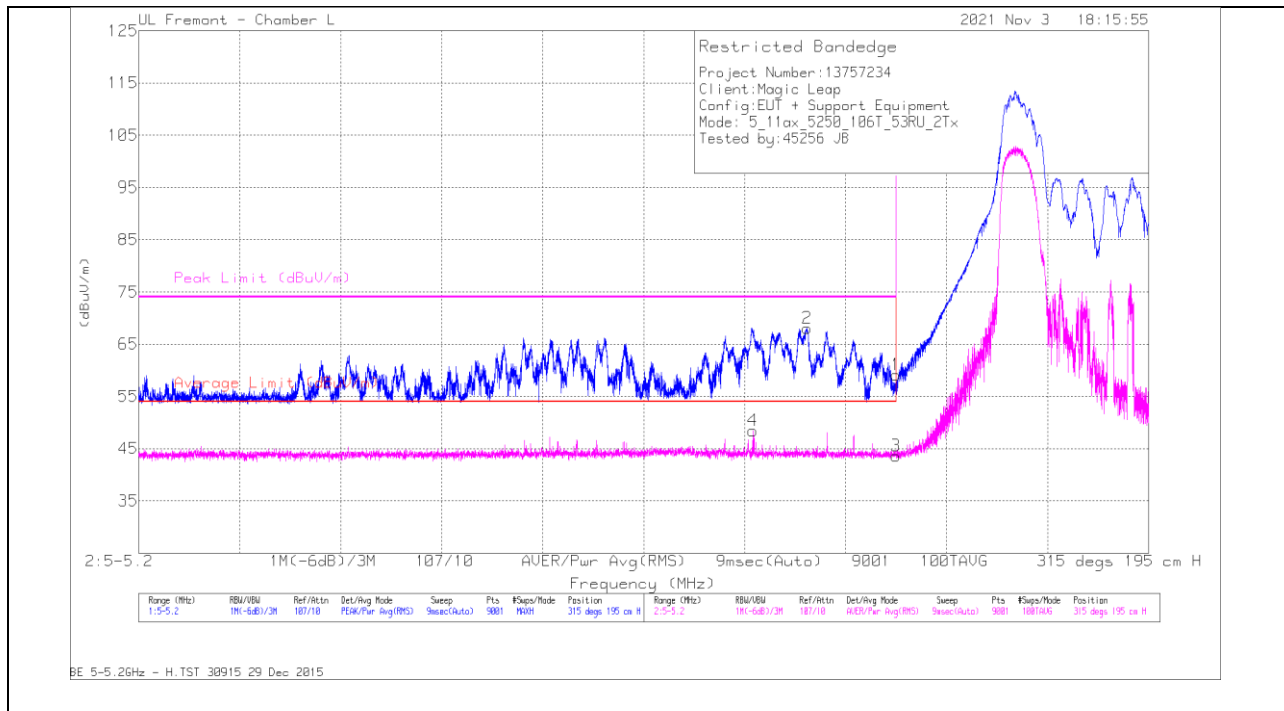


TRACE MARKER

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cb/Filtr/Pa d (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5150	39.44	PK	34.6	-14.9	-	59.14	-	-	74	-14.86	315	195	H
2	* 5132.332	48.37	PK	34.6	-14.9	-	68.07	-	-	74	-5.93	315	195	H
3	* 5150	23.91	RMS	34.6	-14.9	0.1	43.71	54	-10.29	-	-	315	195	H
4	* 5121.621	28.81	RMS	34.5	-14.9	0.1	48.51	54	-5.49	-	-	315	195	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

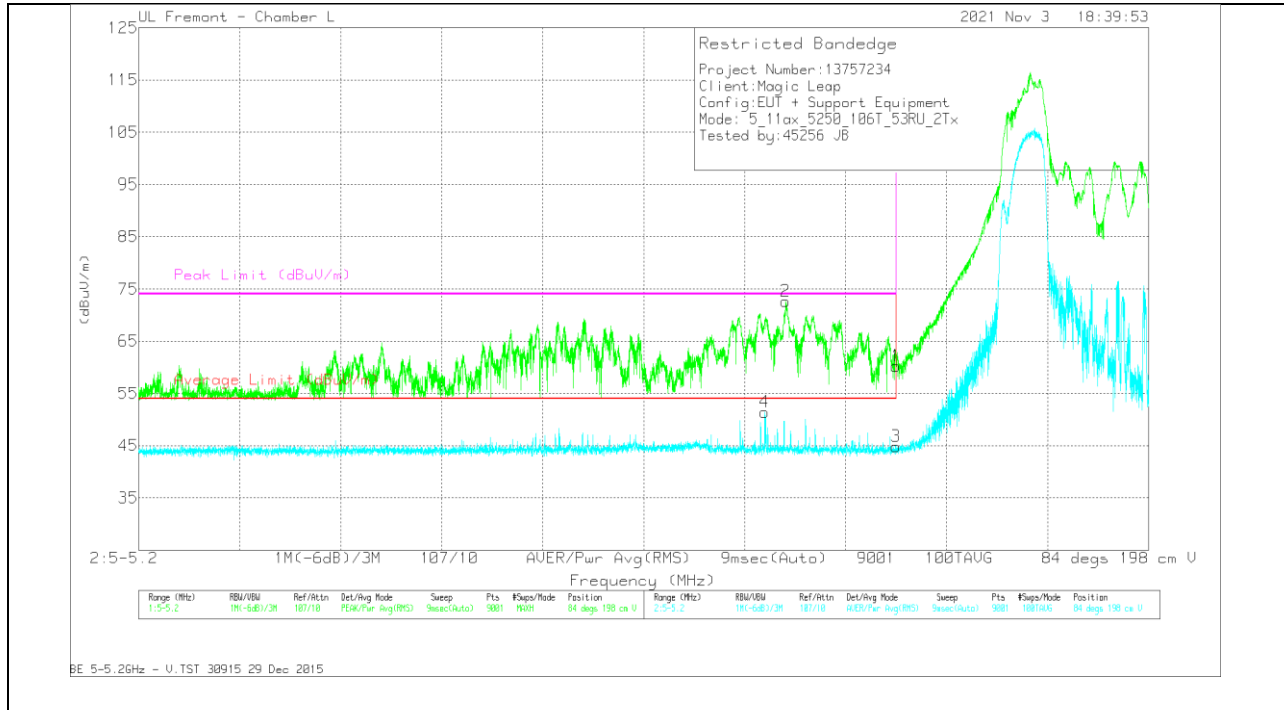

TRACE MARKER

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5150	40.56	Pk	34.6	-14.9	-	60.26	-	-	74	-13.74	84	198	V
2	* 5128.0876	52.9	Pk	34.6	-14.9	-	72.6	-	-	74	-1.4	84	198	V
3	* 5150	25.11	RMS	34.6	-14.9	0.1	44.91	54	-9.09	-	-	84	198	V
4	* 5123.9321	31.85	RMS	34.5	-14.9	0.1	51.55	54	-2.45	-	-	84	198	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

**2TX Antenna 1 + Antenna 2 OFDMA MODE: 106-Tones, RU Index S60
 BANDEDGE (MID CHANNEL HIGH EDGE)**

HORIZONTAL RESULT

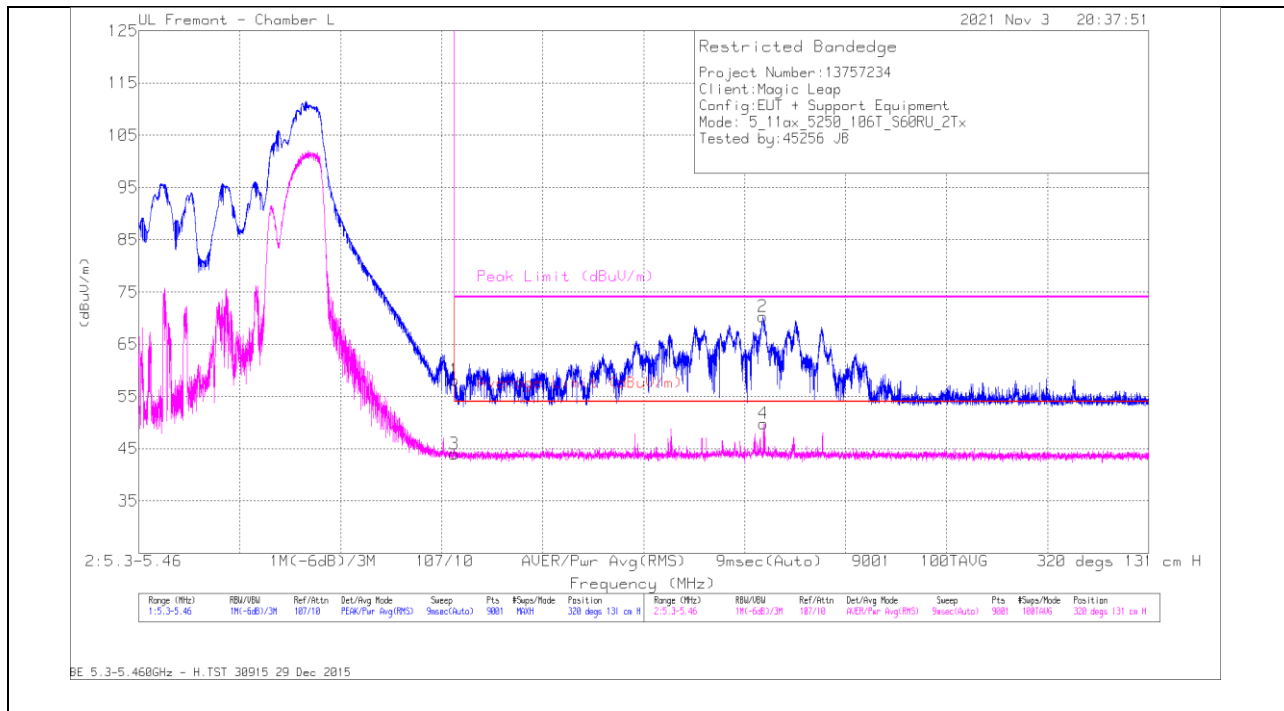


TRACE MARKER

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AFT119 (dB/m)	Amp/Cbl/Filtr/Pa d (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5350	37.58	Pk	34.9	-14.4	-	58.08	-	-	74	-15.92	320	131	H
2	* 5398.8812	49.53	Pk	35	-14.2	-	70.33	-	-	74	-3.67	320	131	H
3	* 5350	23.5	RMS	34.9	-14.4	0.1	44.1	54	-9.9	-	-	320	131	H
4	* 5398.9701	28.97	RMS	35	-14.2	0.1	49.87	54	-4.13	-	-	320	131	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

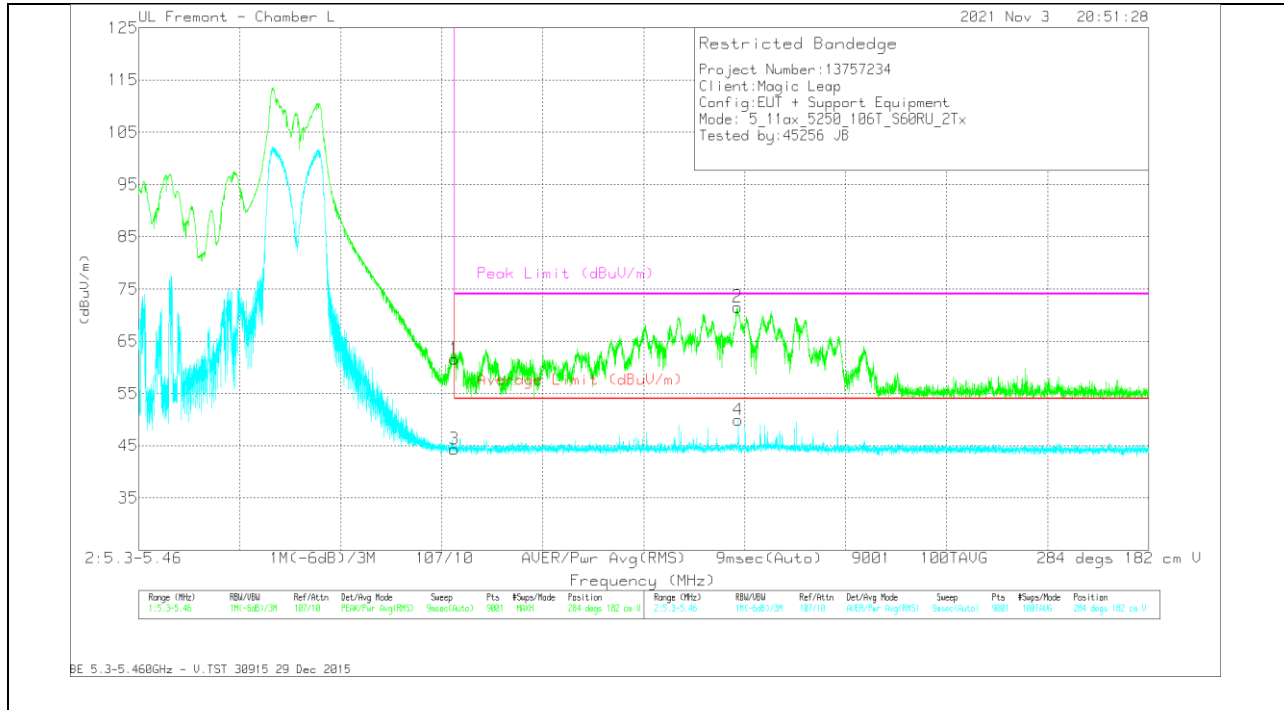

TRACE MARKER

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5350	41.1	Pk	34.9	-14.4	-	61.6	-	-	74	-12.4	284	182	V
2	* 5394.8279	50.98	Pk	34.9	-14.3	-	71.58	-	-	74	-2.42	284	182	V
3	* 5350	23.8	RMS	34.9	-14.4	0.1	44.4	54	-9.6	-	-	284	182	V
4	* 5394.9523	29.36	RMS	34.9	-14.3	0.1	50.06	54	-3.94	-	-	284	182	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

**2TX Antenna 1 + Antenna 2 OFDMA MODE: 52-Tones, RU Index 37
 BANEDGE (MID CHANNEL LOW EDGE)**

HORIZONTAL RESULT

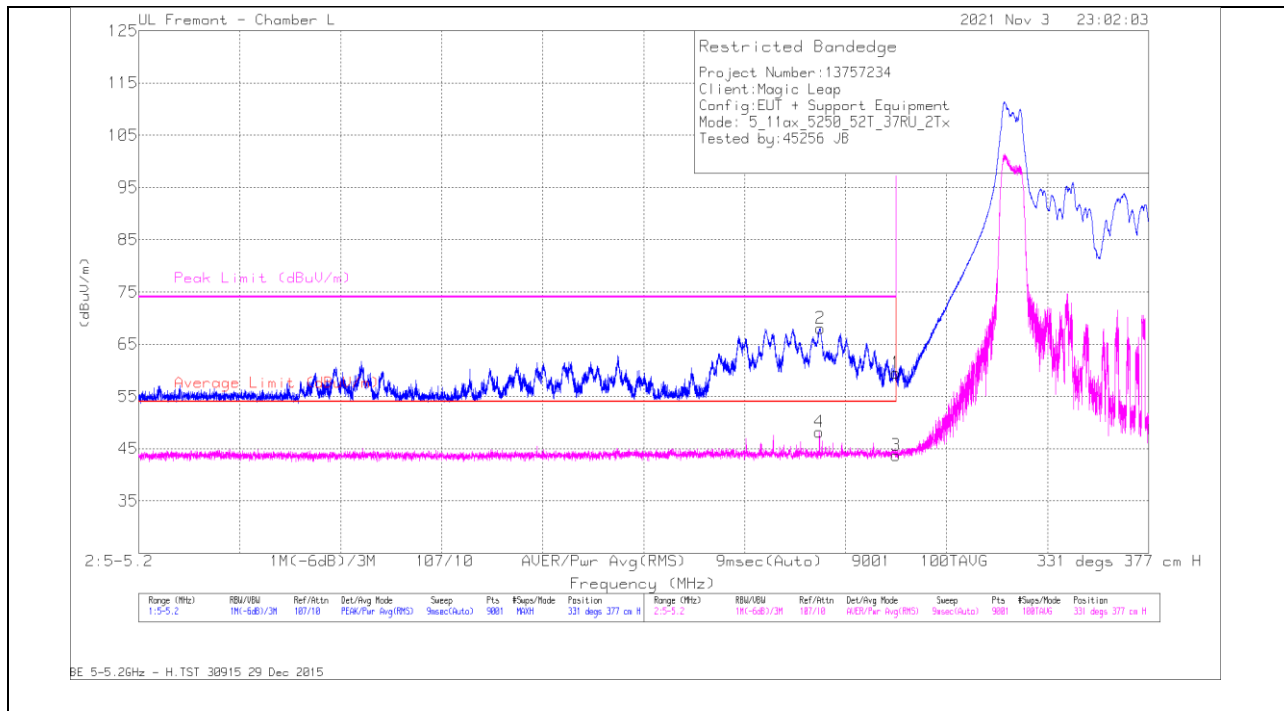


TRACE MARKER

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/CbI/Filt/P ad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5150	39.75	Pk	34.6	-14.9	-	59.45	-	-	74	-14.55	331	377	H
2	* 5134.9542	48.33	Pk	34.6	-14.9	-	68.03	-	-	74	-5.97	331	377	H
3	* 5150	23.96	RMS	34.6	-14.9	0.1	43.76	54	-10.24	-	-	331	377	H
4	* 5134.7987	28.5	RMS	34.6	-14.9	0.1	48.3	54	-5.7	-	-	331	377	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

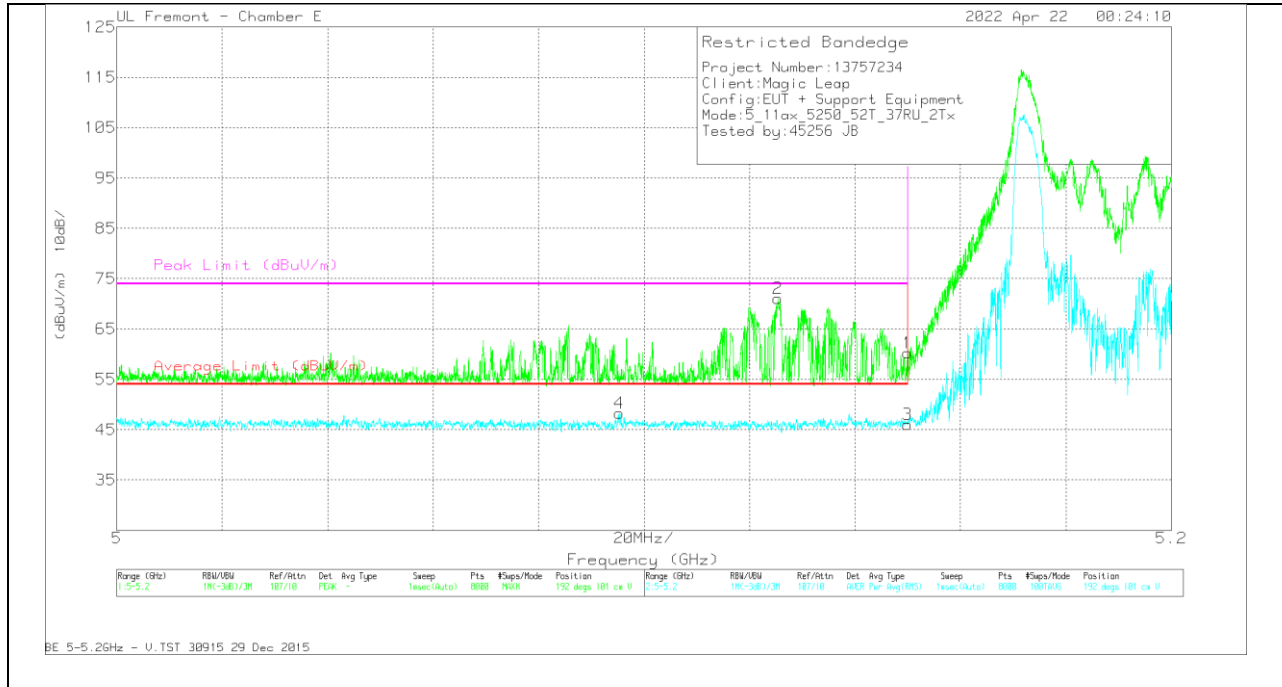

TRACE MARKER

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	200897 ACF (dB/m)	Amp/Cbl/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.15	47.18	Pk	34.5	-21.4	-	60.28	-	-	74	-13.72	192	101	V
2	* 5.12539	57.93	Pk	34.4	-21.3	-	71.03	-	-	74	-2.97	192	101	V
3	* 5.15	32.81	RMS	34.5	-21.4	0.1	46.01	54	-7.99	-	-	192	101	V
4	-	35.35	RMS	34.2	-21.4	0.1	48.25	54	-5.75	-	-	192	101	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

**2TX Antenna 1 + Antenna 2 OFDMA MODE: 52-Tones, RU Index S52
 BANEDGE (MID CHANNEL HIGH EDGE)**

HORIZONTAL RESULT

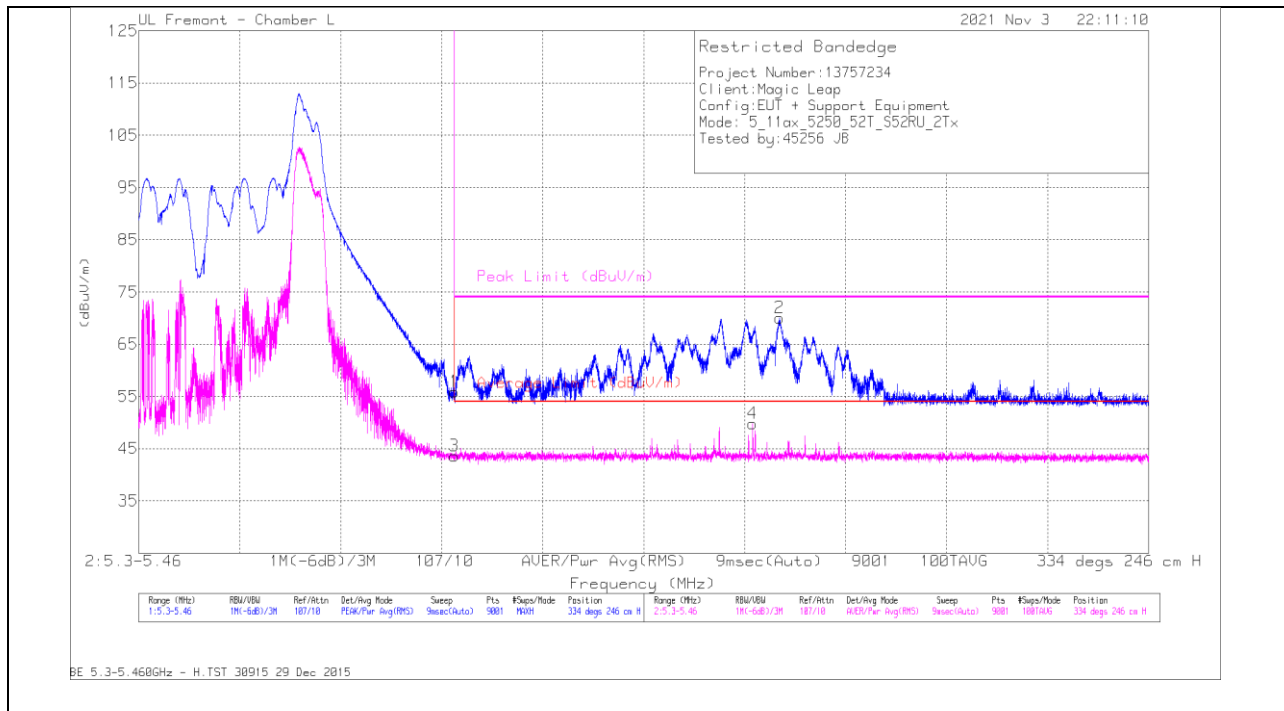


TRACE MARKER

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5350	35.37	Pk	34.9	-14.4	-	55.87	-	-	74	-18.13	334	246	H
2	* 5401.4946	49.31	Pk	34.9	-14.2	-	70.01	-	-	74	-3.99	334	246	H
3	* 5350	23.06	RMS	34.9	-14.4	0.1	43.66	54	-10.34	-	-	334	246	H
4	* 5397.2634	29.05	RMS	35	-14.3	0.1	49.85	54	-4.15	-	-	334	246	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

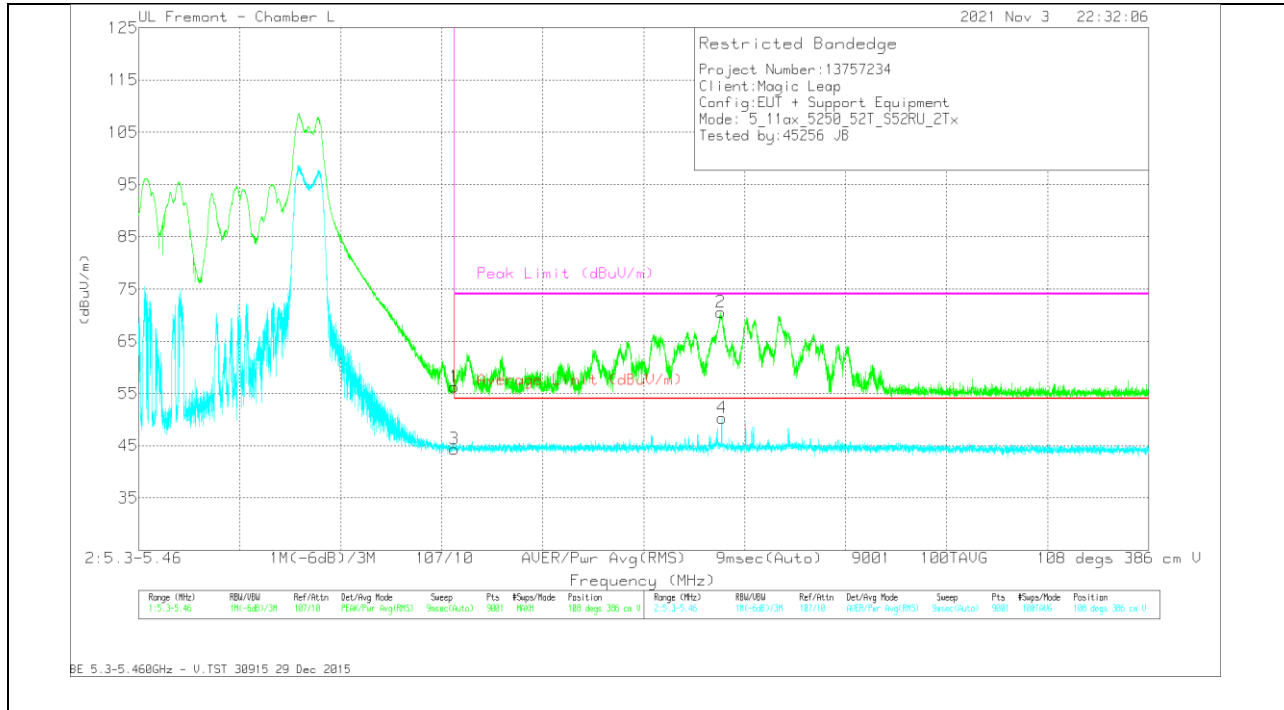

TRACE MARKER

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pa d (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5350	35.8	Pk	34.9	-14.4	-	56.3	-	-	74	-17.7	108	386	V
2	* 5392.1967	49.92	Pk	34.9	-14.3	-	70.52	-	-	74	-3.48	108	386	V
3	* 5350	23.89	RMS	34.9	-14.4	0.1	44.49	54	-9.51	-	-	108	386	V
4	* 5392.3567	29.64	RMS	34.9	-14.3	0.1	50.34	54	-3.66	-	-	108	386	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

**2TX Antenna 1 + Antenna 2 OFDMA MODE: 26-Tones, RU Index 0
 BANEDGE (MID CHANNEL LOW EDGE)**

HORIZONTAL RESULT

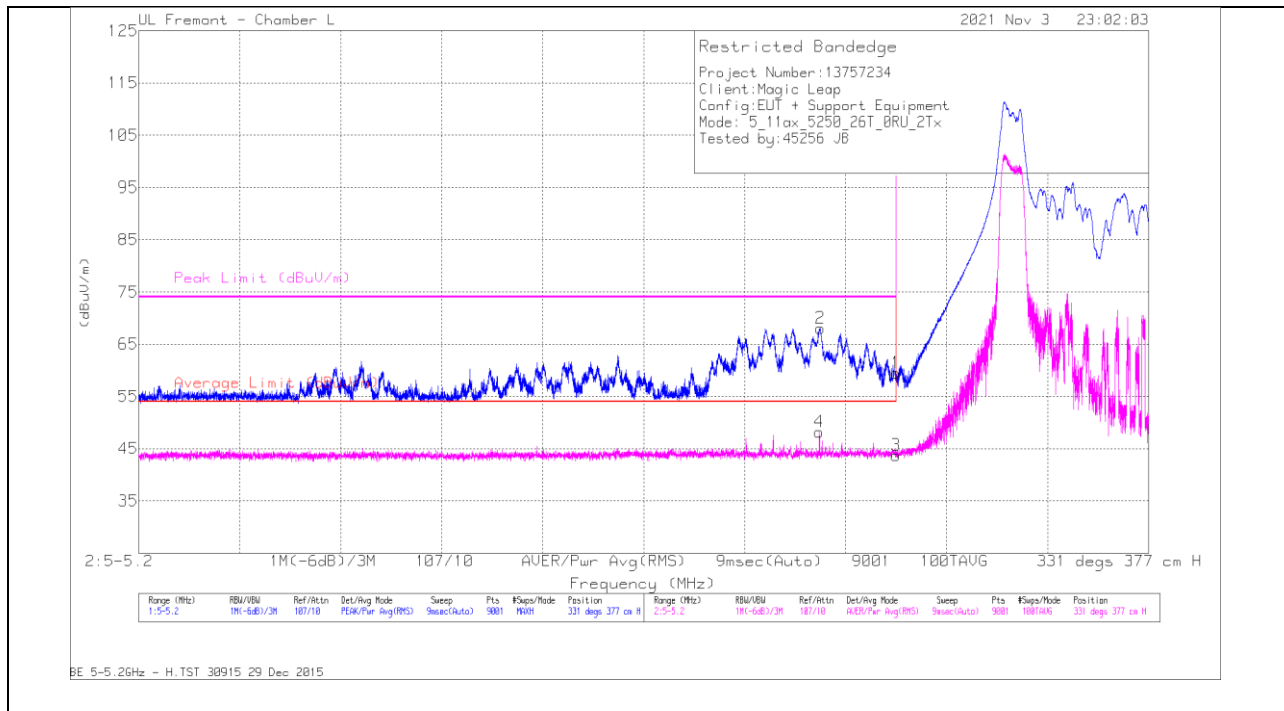


TRACE MARKER

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/CbI/Filt/P ad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5150	39.75	Pk	34.6	-14.9	-	59.45	-	-	74	-14.55	331	377	H
2	* 5134.9542	48.33	Pk	34.6	-14.9	-	68.03	-	-	74	-5.97	331	377	H
3	* 5150	23.96	RMS	34.6	-14.9	0.1	43.76	54	-10.24	-	-	331	377	H
4	* 5134.7987	28.5	RMS	34.6	-14.9	0.1	48.3	54	-5.7	-	-	331	377	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

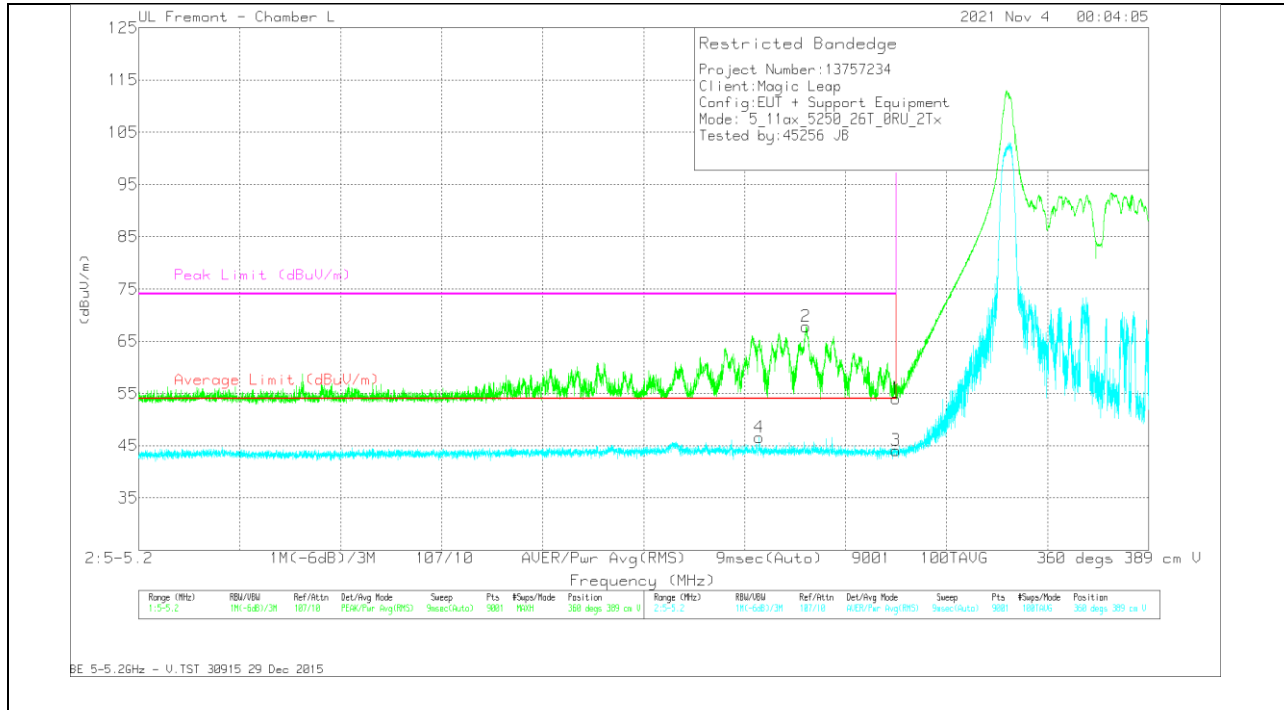

TRACE MARKER

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filt/Pa d (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5150	34.33	Pk	34.6	-14.9	-	54.03	-	-	74	-19.97	360	389	V
2	* 5132.1765	48.1	Pk	34.6	-14.9	-	67.8	-	-	74	-6.2	360	389	V
3	* 5150	24.33	RMS	34.6	-14.9	0.1	44.13	54	-9.87	-	-	360	389	V
4	* 5122.8877	26.97	RMS	34.5	-14.9	0.1	46.67	54	-7.33	-	-	360	389	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector


RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

MID

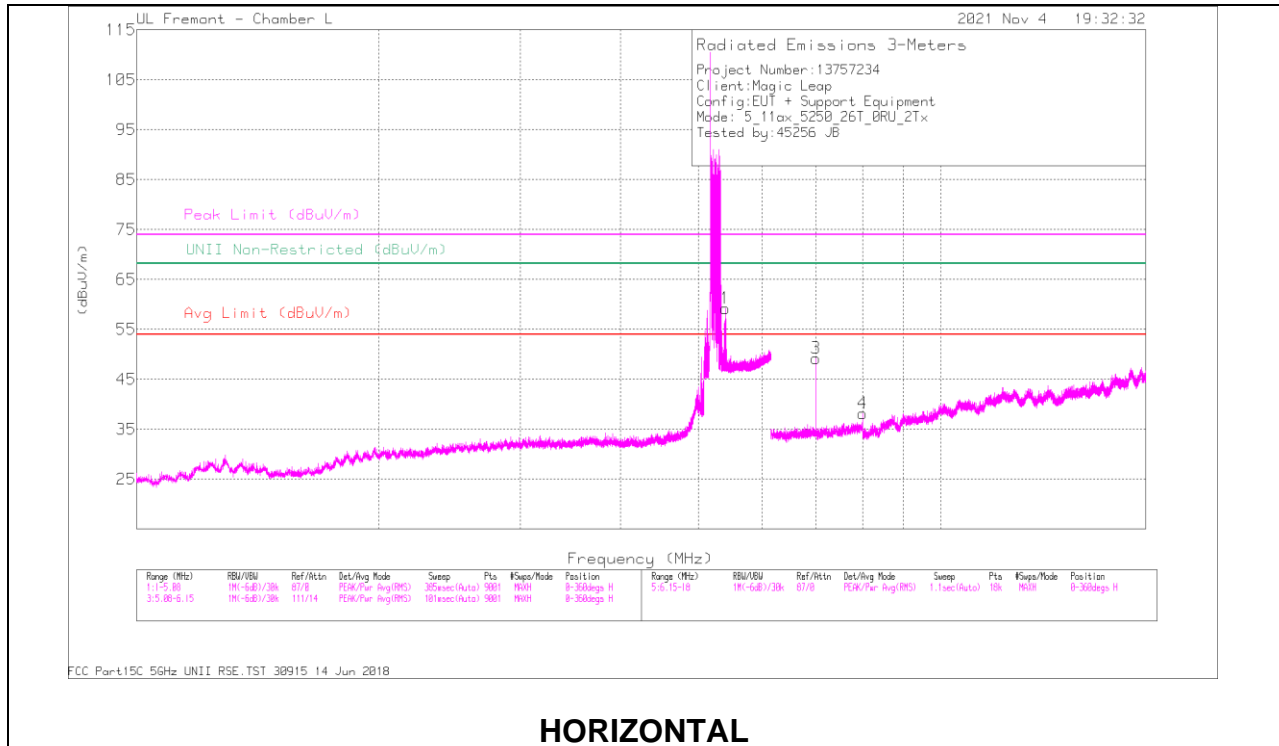

HORIZONTAL

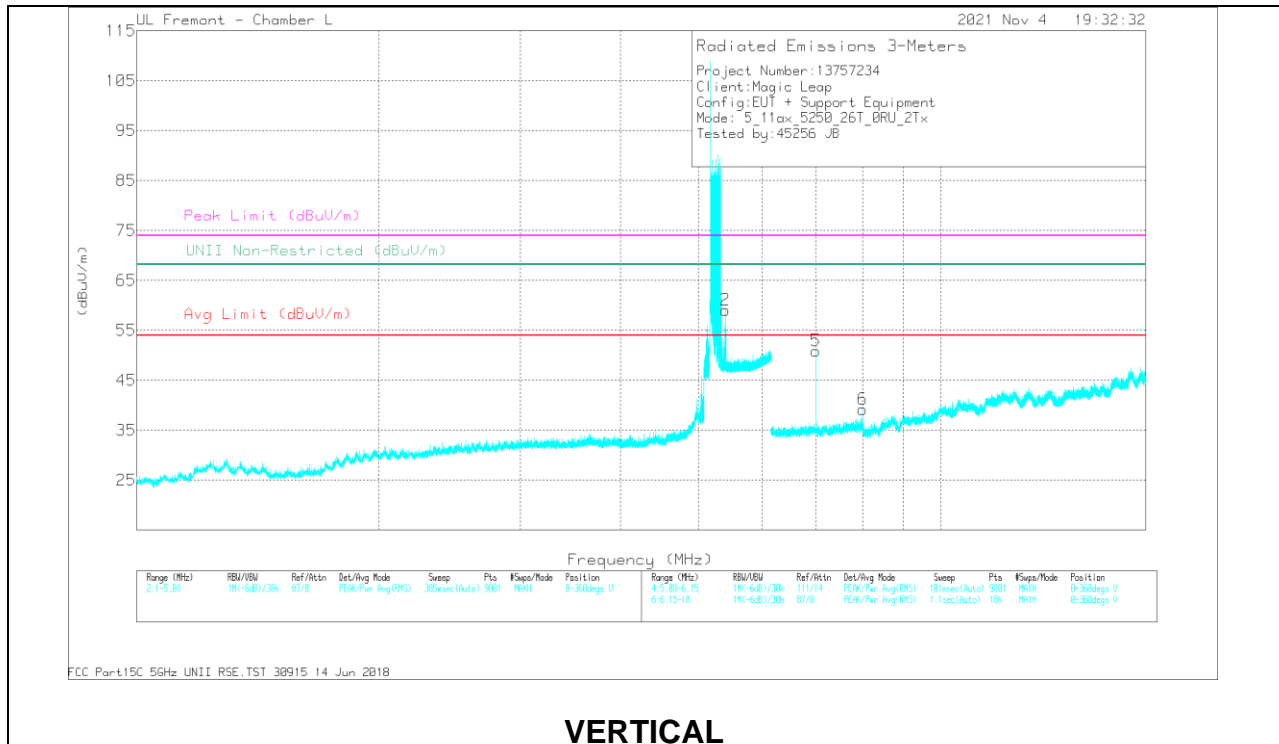

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T119 (dBm)	Amp/Cou/Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNI Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5396.3487	52.28	PK-U	34.9	-14.3	-	72.88	-	-	74	-1.12	-	-	332	219	H
	* 5396.2568	31.84	ADR	34.9	-14.3	0.1	52.54	54	-1.46	-	-	-	-	332	219	H
2	* 5396.2238	50.38	PK-U	34.9	-14.3	-	70.98	-	-	74	-3.02	-	-	321	221	V
	* 5396.2637	29.9	ADR	34.9	-14.3	0.1	50.6	54	-3.4	-	-	-	-	321	221	V
3	6999.9653	37.04	PK-U	35.6	-20.5	-	52.14	-	-	-	-	68.2	-16.06	26	222	H
4	8000.1822	29.82	PK-U	35.8	-18.6	-	47.02	-	-	-	-	68.2	-21.18	358	100	H
5	6999.9653	38.39	PK-U	35.6	-20.5	-	53.49	-	-	-	-	68.2	-14.71	123	100	V
6	8000.0304	28.41	PK-U	35.8	-18.6	-	45.61	-	-	-	-	68.2	-22.59	231	220	V



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

2TX Antenna 1 + Antenna 2 OFDMA MODE: 26-Tones, RU Index 36
HARMONICS AND SPURIOUS EMISSIONS

MID

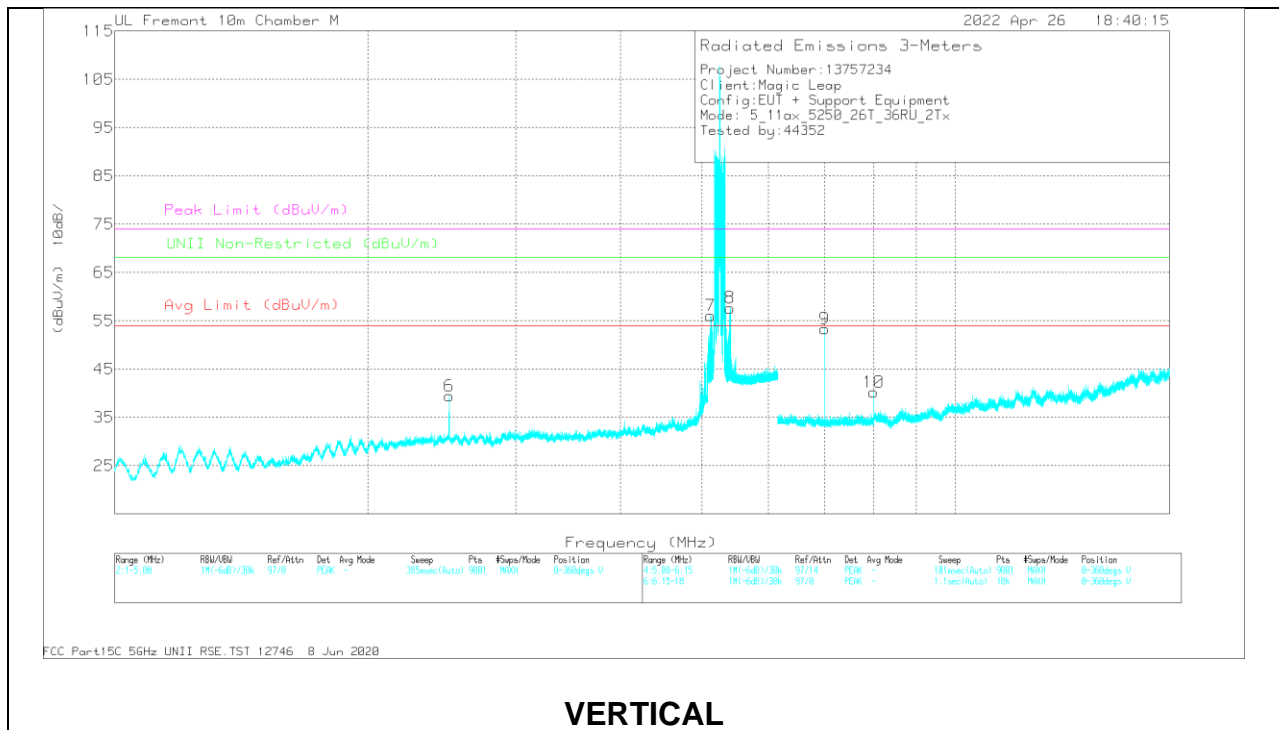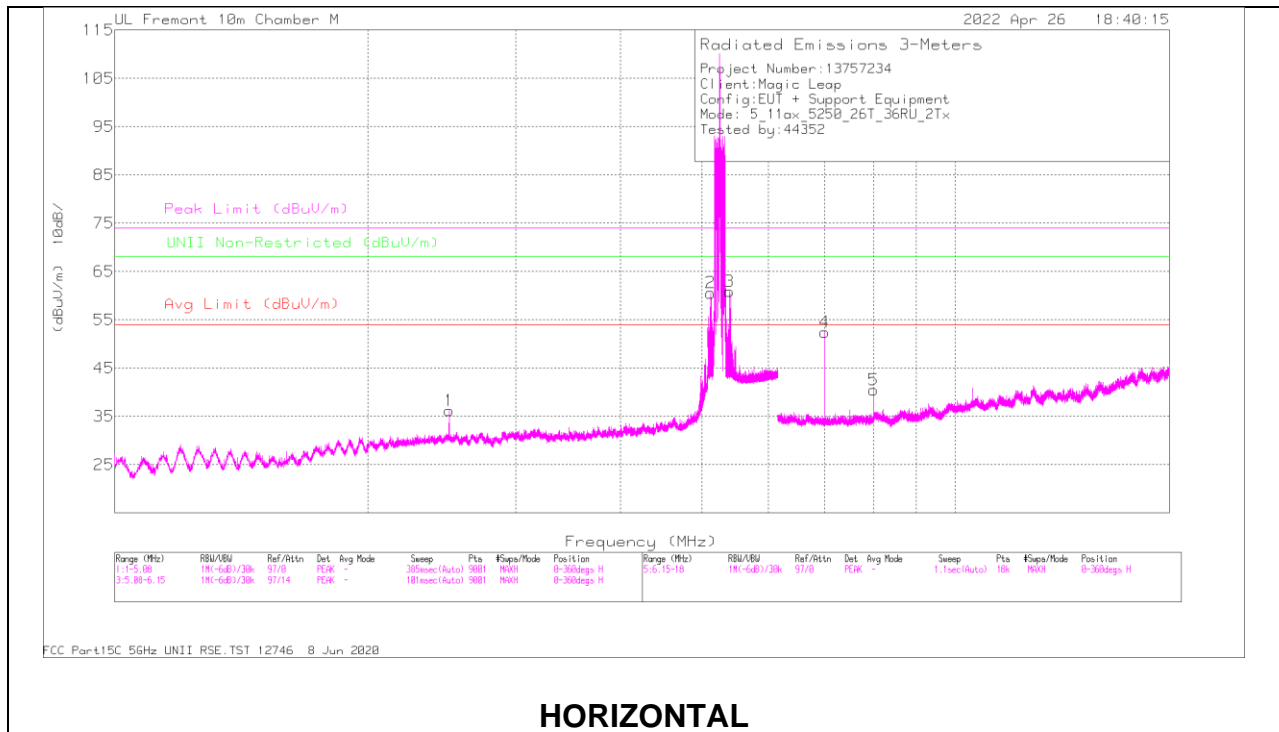


RADIATED EMISSIONS

Marker	Frequency (MHz)	Meas Reading (dBuV)	Det	AF 200784 (dBm)	Amp/Clf/Fn/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNI Non-Restricted (dBuV/m)	PK Margin (dB)	Altitude (ft)	Height (m)	Polarity
1	* 2499.992	54.17	PK-U	32.3	-44	0	42.47	-	-	74	-31.53	-	-	125	233	H
	* 2499.926	44.74	ADR	32.3	-44	.1	33.14	54	-20.86	-	-	-	-	125	233	H
6	* 2499.909	56.36	PK-U	32.3	-44	0	44.66	-	-	74	-29.34	-	-	142	100	V
	* 2499.992	49.02	ADR	32.3	-44	.1	37.42	54	-16.58	-	-	-	-	142	100	V
2	* 5120.179	61.86	PK-U	34.2	-30.6	0	65.46	-	-	74	-8.54	-	-	360	259	H
	* 5120.159	42.2	ADR	34.2	-30.6	.1	45.90	54	-8.10	-	-	-	-	360	259	H
3	* 5392.058	69.73	PK-U	34.5	-30.3	0	73.93	-	-	74	-.07	-	-	6	126	H
	* 5392.609	49.08	ADR	34.5	-30.3	.1	52.38	54	-1.62	-	-	-	-	6	126	H
7	* 5120.23	64.46	PK-U	34.2	-30.6	0	68.06	-	-	74	-5.94	-	-	24	160	V
	* 5118.792	45.67	ADR	34.2	-30.6	.1	49.37	54	-4.63	-	-	-	-	24	160	V
8	* 5400.042	63.99	PK-U	34.5	-30.3	0	68.19	-	-	74	-5.81	-	-	41	195	V
	* 5400.174	43.02	ADR	34.5	-30.3	.1	47.32	54	-6.68	-	-	-	-	41	195	V
9	6999.961	58.22	PK-U	35.7	-38	0	55.92	-	-	-	-	68.2	-12.28	289	188	V
4	6999.973	56.63	PK-U	35.7	-38	0	54.33	-	-	-	-	68.2	-13.87	257	97	H
5	7999.938	49.52	PK-U	35.9	-37.2	0	48.22	-	-	-	-	68.2	-19.98	223	340	H
10	8000.054	49.81	PK-U	35.9	-37.1	0	48.61	-	-	-	-	68.2	-19.59	345	150	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

**2TX Antenna 1 + Antenna 2 OFDMA MODE: 26-Tones, RU Index S36
 BANEDGE (MID CHANNEL HIGH EDGE)**

HORIZONTAL RESULT

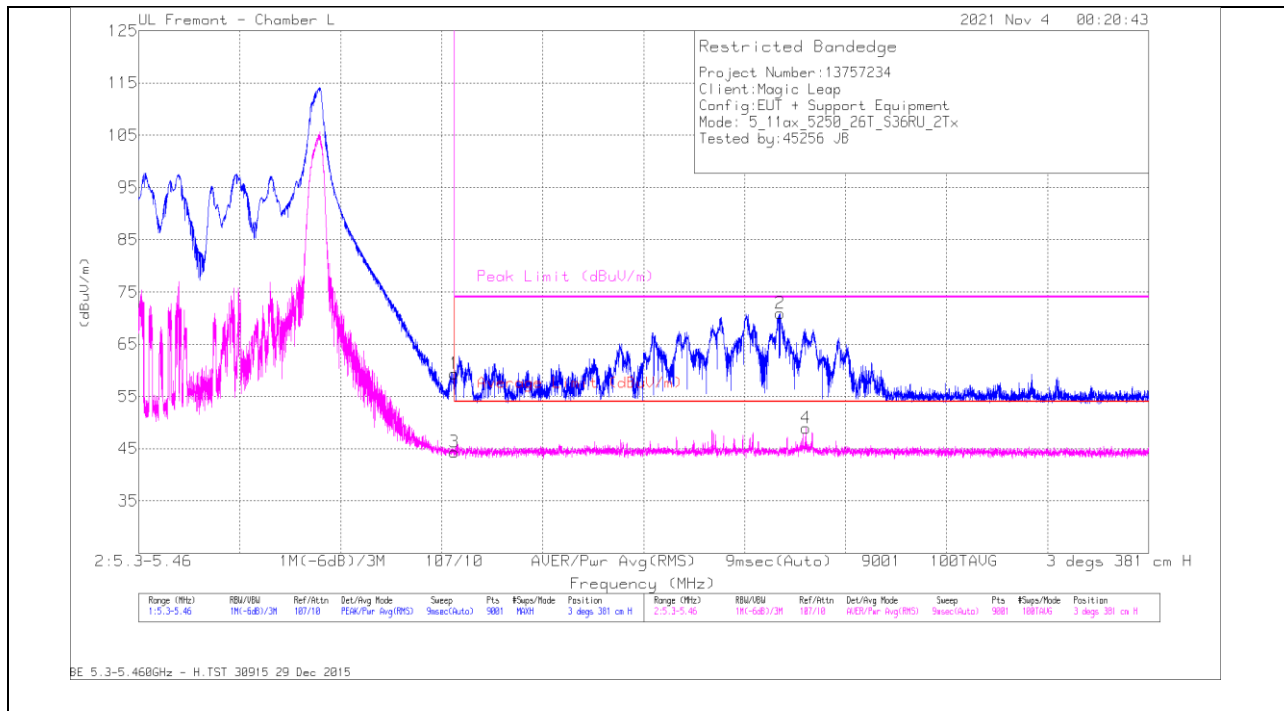


TRACE MARKER

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AFT119 (dB/m)	Amp/Cbl/Filtr/Par d (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5350	38.91	Pk	34.9	-14.4	-	59.41	-	-	74	-14.59	3	381	H
2	* 5401.6368	50.19	Pk	34.9	-14.2	-	70.89	-	-	74	-3.11	3	381	H
3	* 5350	23.89	RMS	34.9	-14.4	0.1	44.49	54	-9.51	-	-	3	381	H
4	* 5405.6902	28.25	RMS	34.9	-14.2	0.1	49.05	54	-4.95	-	-	3	381	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

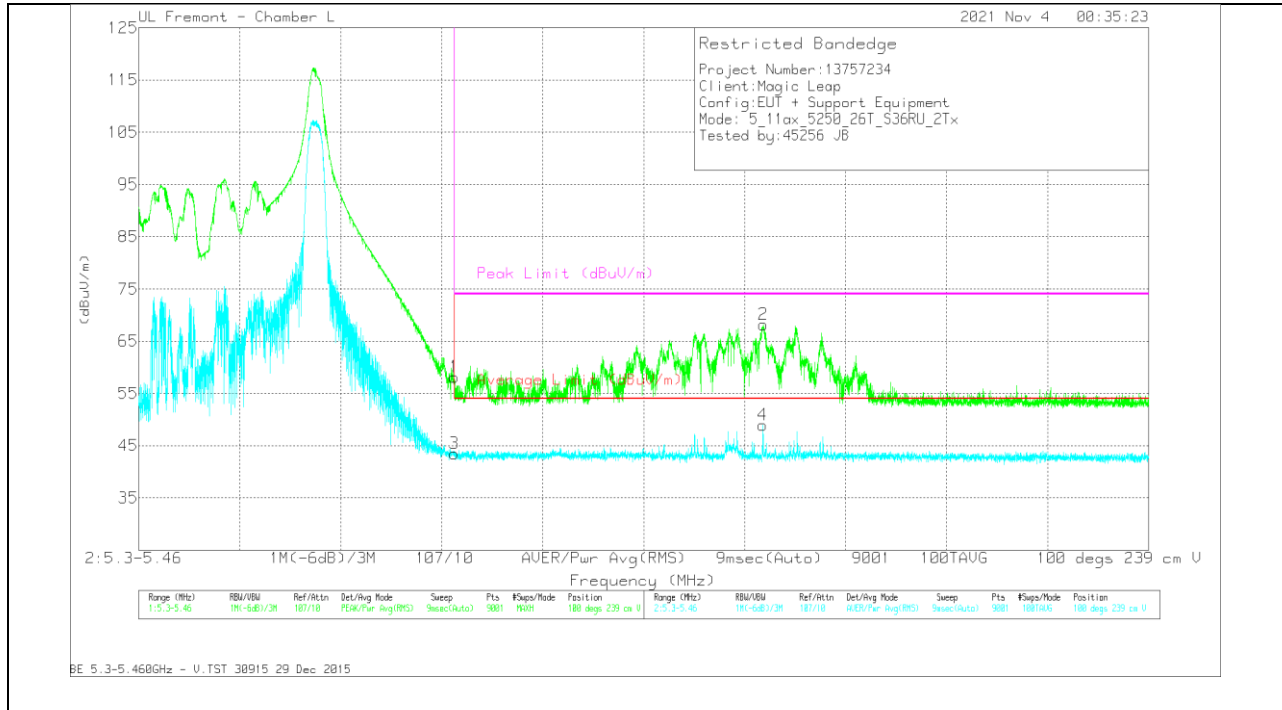

TRACE MARKER

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/P ad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5350	37.61	Pk	34.9	-14.4	-	58.11	-	-	74	-15.89	100	239	V
2	* 5398.9879	47.37	Pk	35	-14.2	-	68.17	-	-	74	-5.83	100	239	V
3	* 5350	22.93	RMS	34.9	-14.4	0.1	43.53	54	-10.47	-	-	100	239	V
4	* 5398.899	28.09	RMS	35	-14.2	0.1	48.99	54	-5.01	-	-	100	239	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector


RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

MID

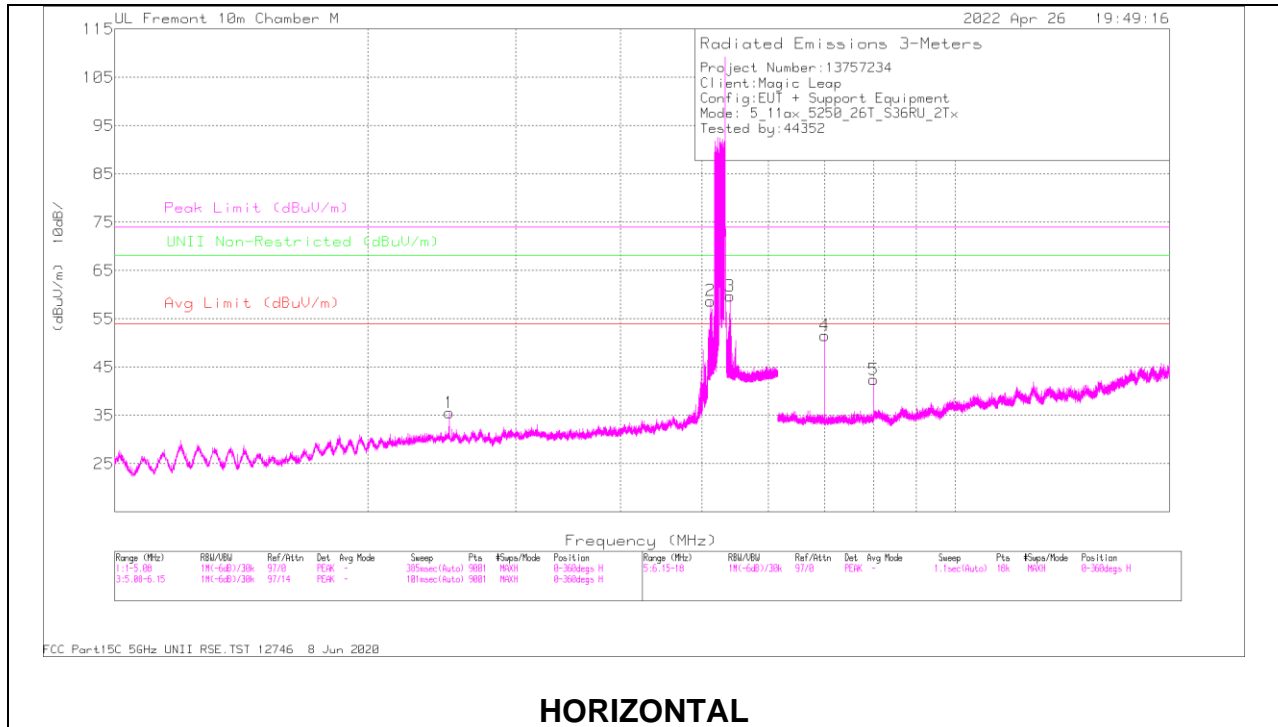

HORIZONTAL

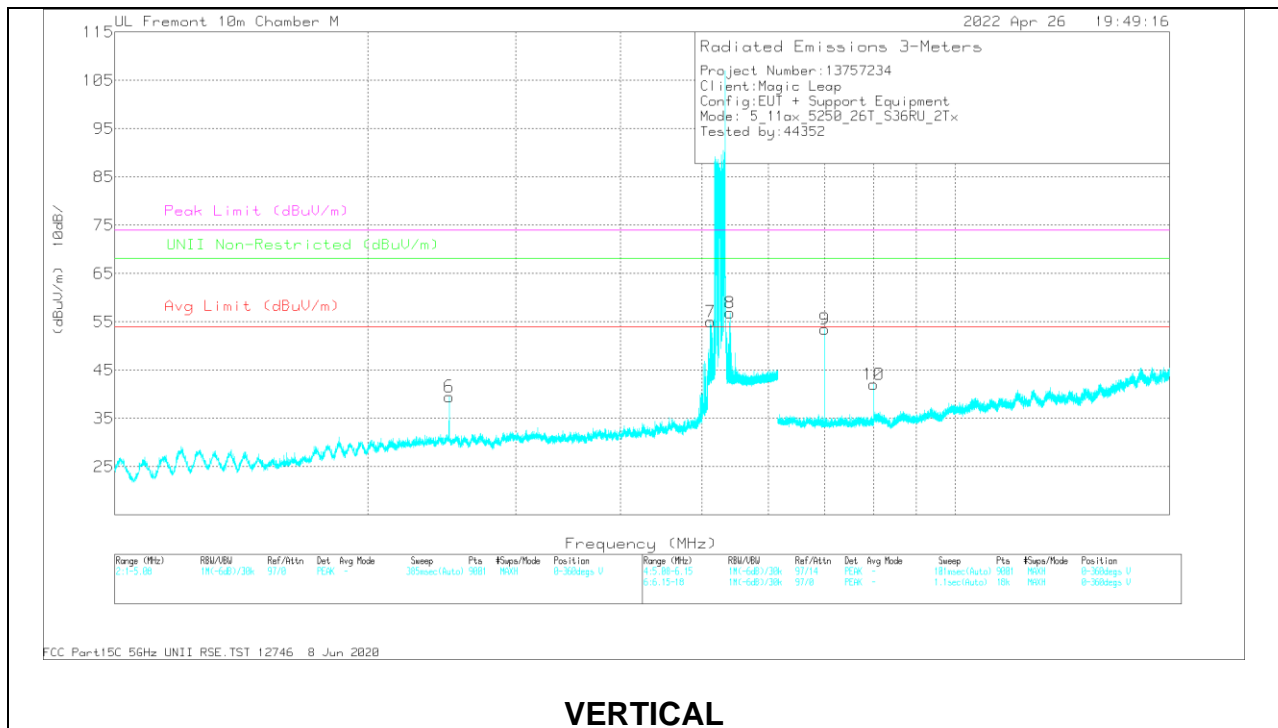

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meas Reading (dBuV)	Det	AF 200/94 (dBm)	Amp/Clf/Fix/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNI Non-Restricted (dBuV/m)	PK Margin (dB)	Altitude (ft/m)	Height (m)	Polarity
1	* 2498.81	53.59	PK-U	32.3	-44	0	41.89	-	-	74	-32.11	-	-	350	253	H
	* 2499.942	43.65	ADR	32.3	-44	-1	32.05	54	-21.95	-	-	-	-	350	253	H
6	* 2499.728	56.57	PK-U	32.3	-44	0	44.87	-	-	74	-29.13	-	-	151	115	V
	* 2499.909	49.08	ADR	32.3	-44	-1	37.48	54	-16.52	-	-	-	-	151	115	V
3	* 5396.228	67.76	PK-U	34.5	-30.3	0	71.96	-	-	74	-2.04	-	-	8	97	H
	* 5396.058	46.37	ADR	34.5	-30.3	-1	50.67	54	-3.33	-	-	-	-	8	97	H
2	* 5121.381	66.67	PK-U	34.2	-30.6	0	70.27	-	-	74	-3.73	-	-	0	102	H
	* 5121.557	46.16	ADR	34.2	-30.6	-1	49.86	54	-4.14	-	-	-	-	0	102	H
7	* 5124.138	64.99	PK-U	34.2	-30.6	0	68.59	-	-	74	-5.41	-	-	21	149	V
	* 5124.222	44.38	ADR	34.2	-30.6	-1	48.08	54	-5.92	-	-	-	-	21	149	V
8	* 5401.612	65.61	PK-U	34.5	-30.3	0	69.81	-	-	74	-4.19	-	-	20	177	V
	* 5400.253	45.03	ADR	34.5	-30.3	-1	49.33	54	-4.67	-	-	-	-	20	177	V
4	6999.865	55.18	PK-U	35.7	-38	0	52.88	-	-	-	-	68.2	-15.32	354	97	V
9	6999.957	56.89	PK-U	35.7	-38	0	54.59	-	-	-	-	68.2	-13.61	268	99	H
10	8000.17	48.67	PK-U	35.9	-37.1	0	47.47	-	-	-	-	68.2	-20.73	149	206	V
5	8000.25	49.67	PK-U	35.9	-37.1	0	48.47	-	-	-	-	68.2	-19.73	228	97	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

10.1.2. TX ABOVE 1 GHz 802.11ax HE20 MODE IN THE 5.6GHz BAND

2TX Antenna 1 + Antenna 2 OFDM MODE: SU, Single User

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

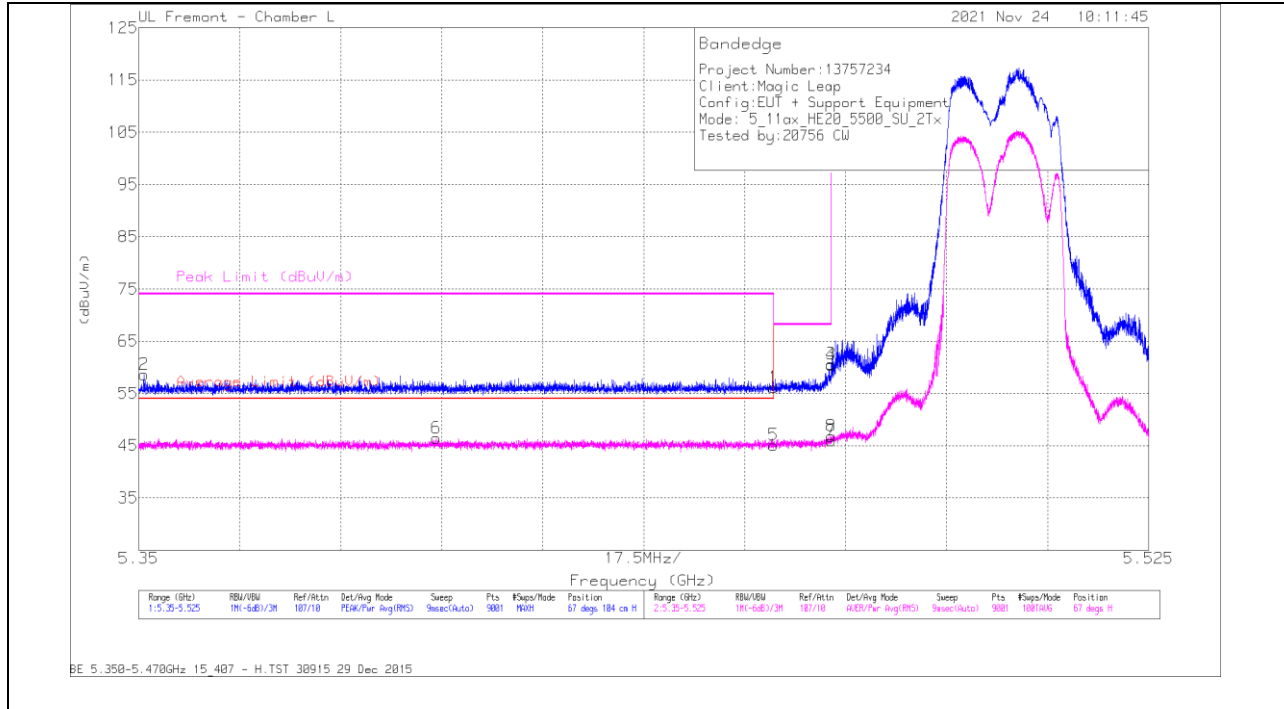

TRACE MARKER


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	35.46	Pk	34.9	-14.2	56.16	-	-	68.2	-12.04	67	104	H
2	* 5.35089	38.09	Pk	34.9	-14.4	58.59	-	-	74	-15.41	67	104	H
3	5.47	39.9	Pk	34.9	-14.2	60.6	-	-	68.2	-7.6	67	104	H
4	5.46999	39.73	Pk	34.9	-14.2	60.43	-	-	68.2	-7.77	67	104	H
5	* 5.46	24.4	RMS	34.9	-14.2	45.1	54	-8.9	-	-	67	104	H
6	* 5.40153	25.75	RMS	34.9	-14.2	46.45	54	-7.55	-	-	67	104	H
7	5.47	25.28	RMS	34.9	-14.2	45.98	-	-	-	-	67	104	H
8	5.46997	26.15	RMS	34.9	-14.2	46.85	-	-	-	-	67	104	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

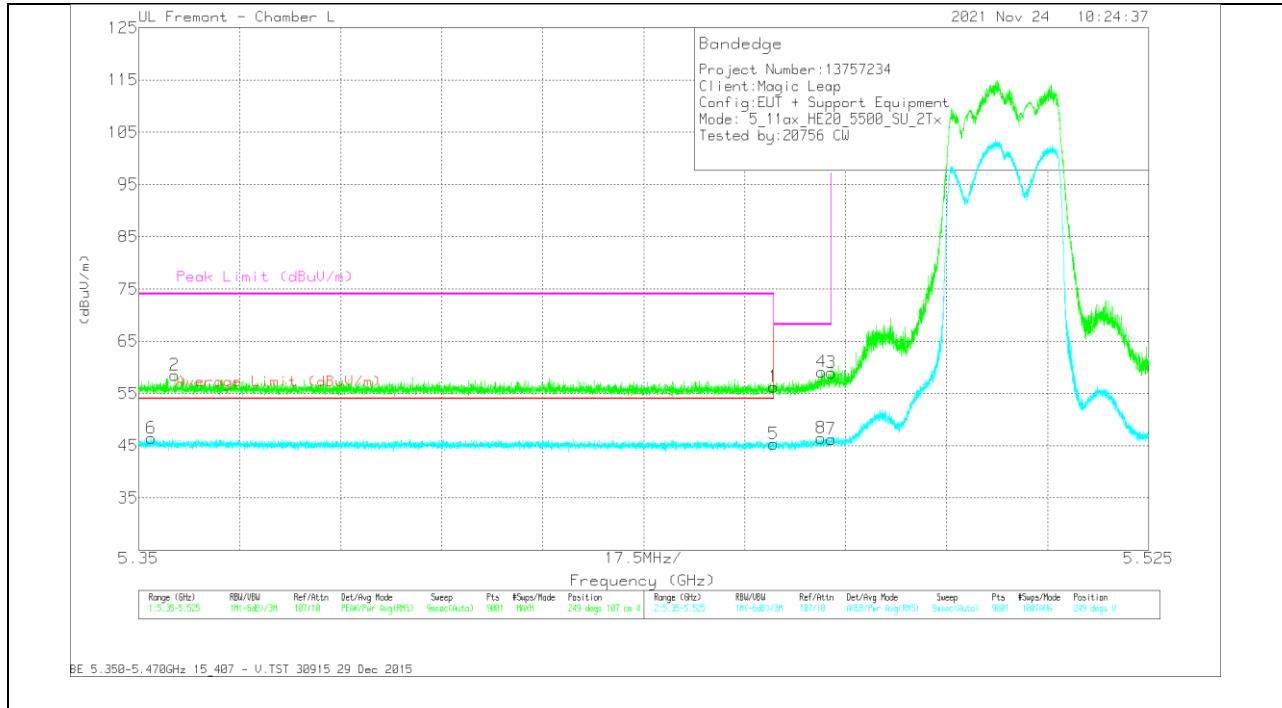


TRACE MARKER

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Fitr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	35.49	Pk	34.9	-14.2	56.19	-	-	68.2	-12.01	249	107	V
2	* 5.3562	37.95	Pk	34.9	-14.4	58.45	-	-	74	-15.55	249	107	V
3	5.47	38.23	Pk	34.9	-14.2	58.93	-	-	68.2	-9.27	249	107	V
4	5.4683	38.4	Pk	34.9	-14.2	59.1	-	-	68.2	-9.1	249	107	V
5	* 5.46	24.6	RMS	34.9	-14.2	45.3	54	-8.7	-	-	249	107	V
6	* 5.35218	25.89	RMS	34.9	-14.4	46.39	54	-7.61	-	-	249	107	V
7	5.47	25.44	RMS	34.9	-14.2	46.14	-	-	-	-	249	107	V
8	5.46822	25.75	RMS	34.9	-14.2	46.45	-	-	-	-	249	107	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

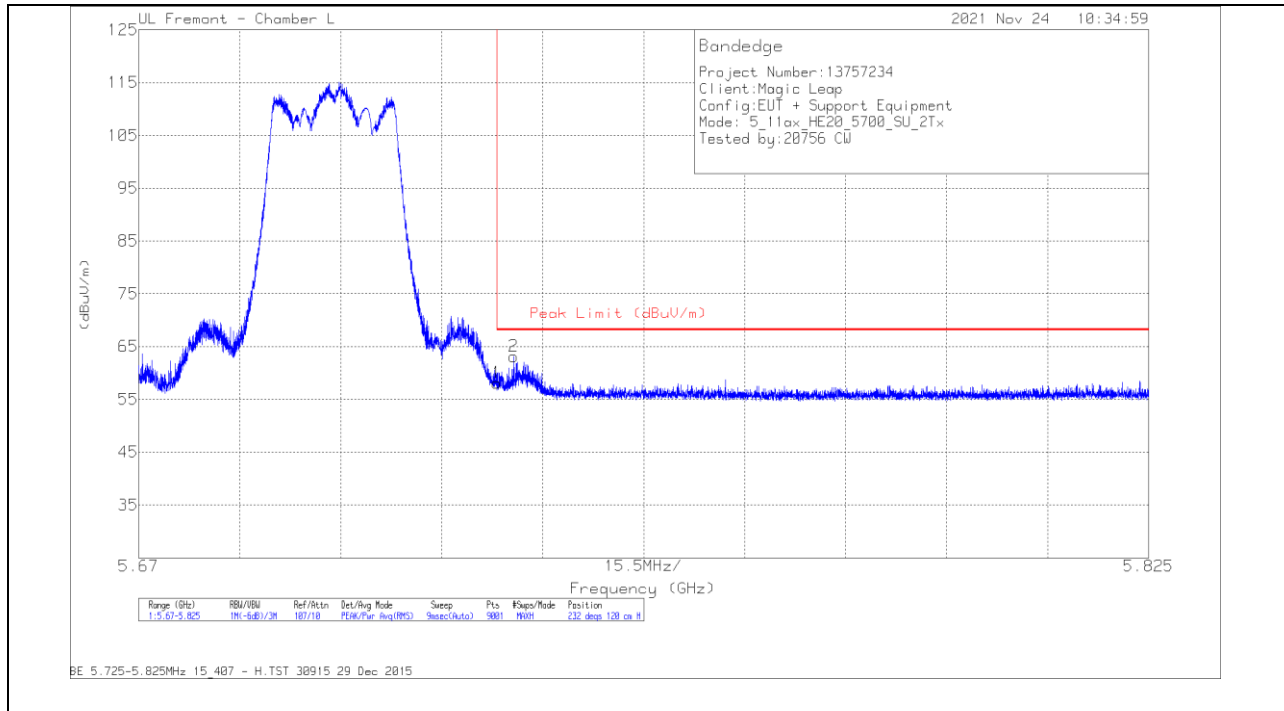


TRACE MARKER

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	37.25	Pk	34.8	-13.9	58.15	68.2	-10.05	232	120	H
2	5.72754	42.18	Pk	34.8	-13.9	63.08	68.2	-5.12	232	120	H

Pk - Peak detector

VERTICAL RESULT

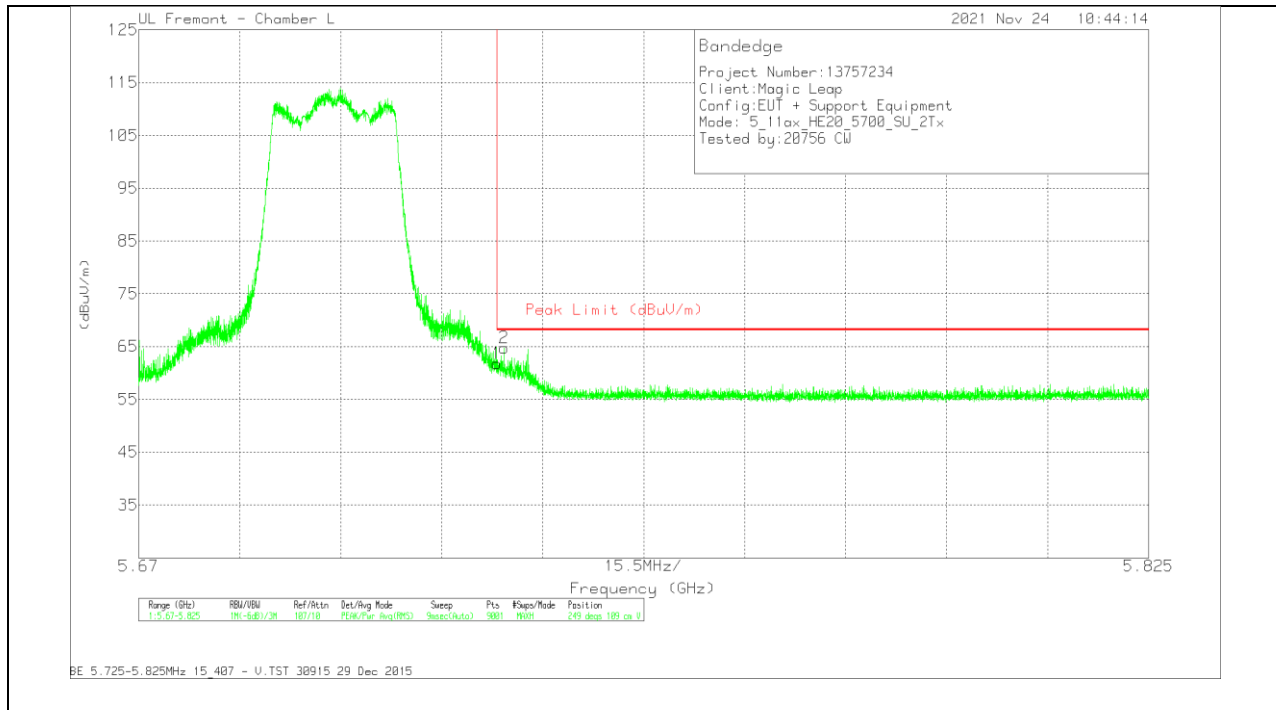


TRACE MARKER

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	40.86	Pk	34.8	-13.9	61.76	68.2	-6.44	249	109	V
2	5.72606	43.86	Pk	34.8	-13.9	64.76	68.2	-3.44	249	109	V

Pk - Peak detector

**2TX Antenna 1 + Antenna 2 OFDMA MODE: 242-Tones, RU Index 61
 BANEDGE (HIGH CHANNEL)**

HORIZONTAL RESULT

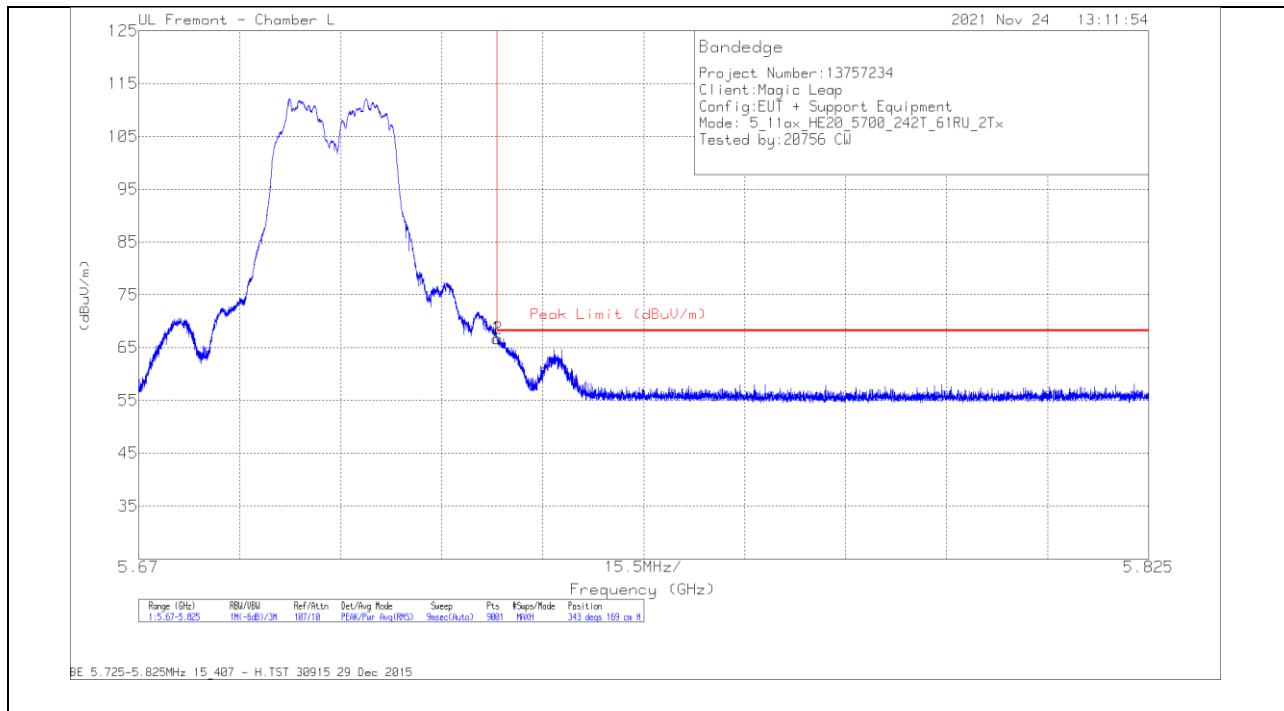


TRACE MARKER

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	45.75	Pk	34.8	-13.9	66.65	68.2	-1.55	343	169	H
2	5.72514	45.85	Pk	34.8	-13.9	66.75	68.2	-1.45	343	169	H

Pk - Peak detector

VERTICAL RESULT

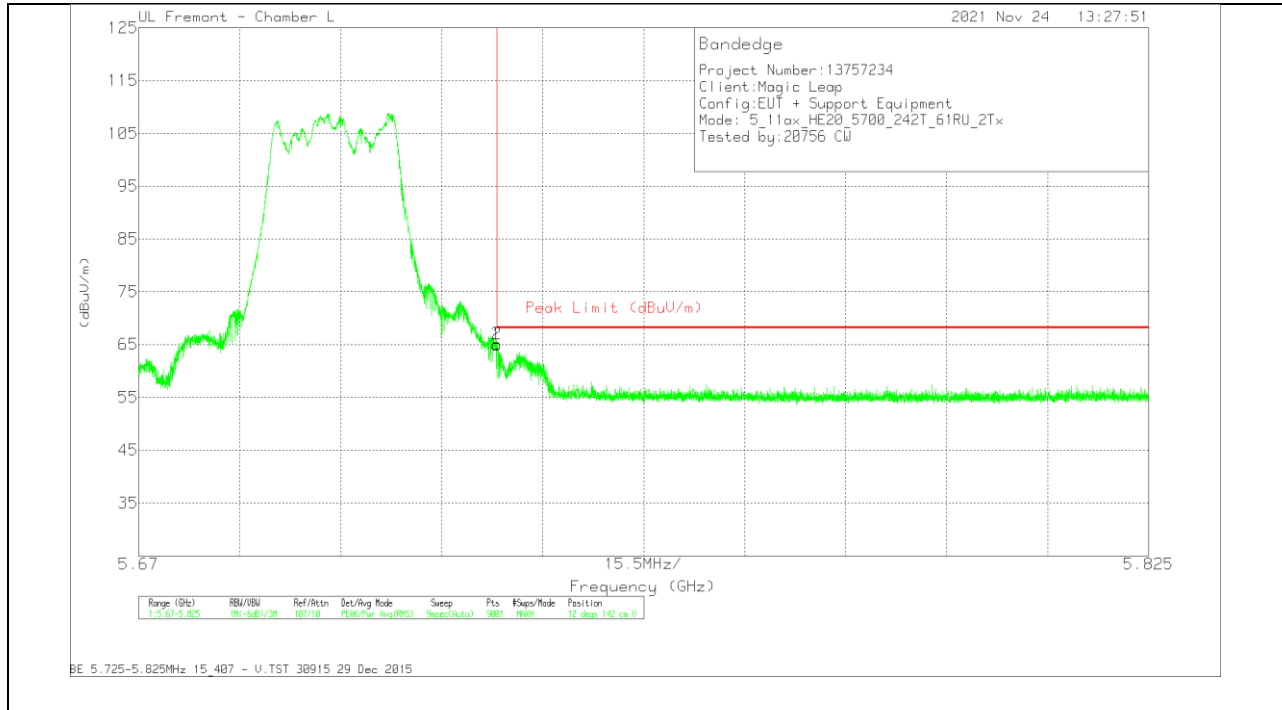


TRACE MARKER

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	44.03	Pk	34.8	-13.9	64.93	68.2	-3.27	12	142	V
2	5.72501	44.18	Pk	34.8	-13.9	65.08	68.2	-3.12	12	142	V


Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

HIGH

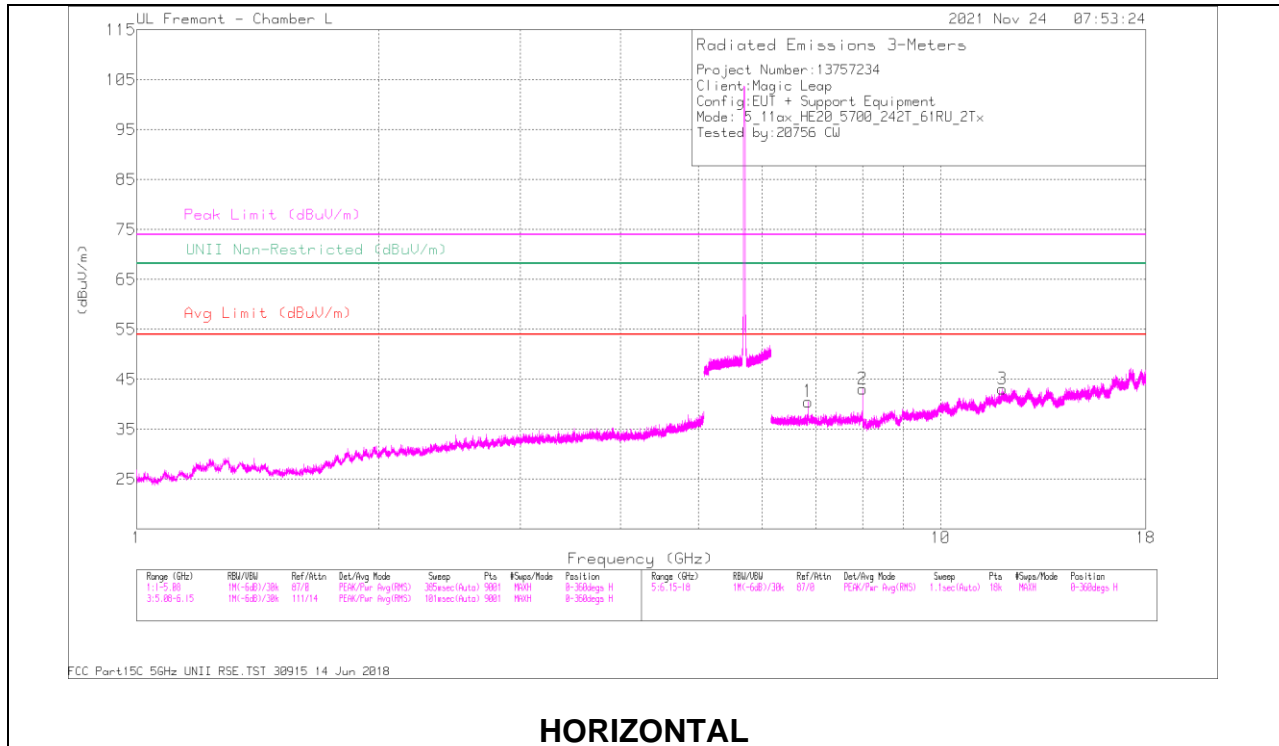

HORIZONTAL

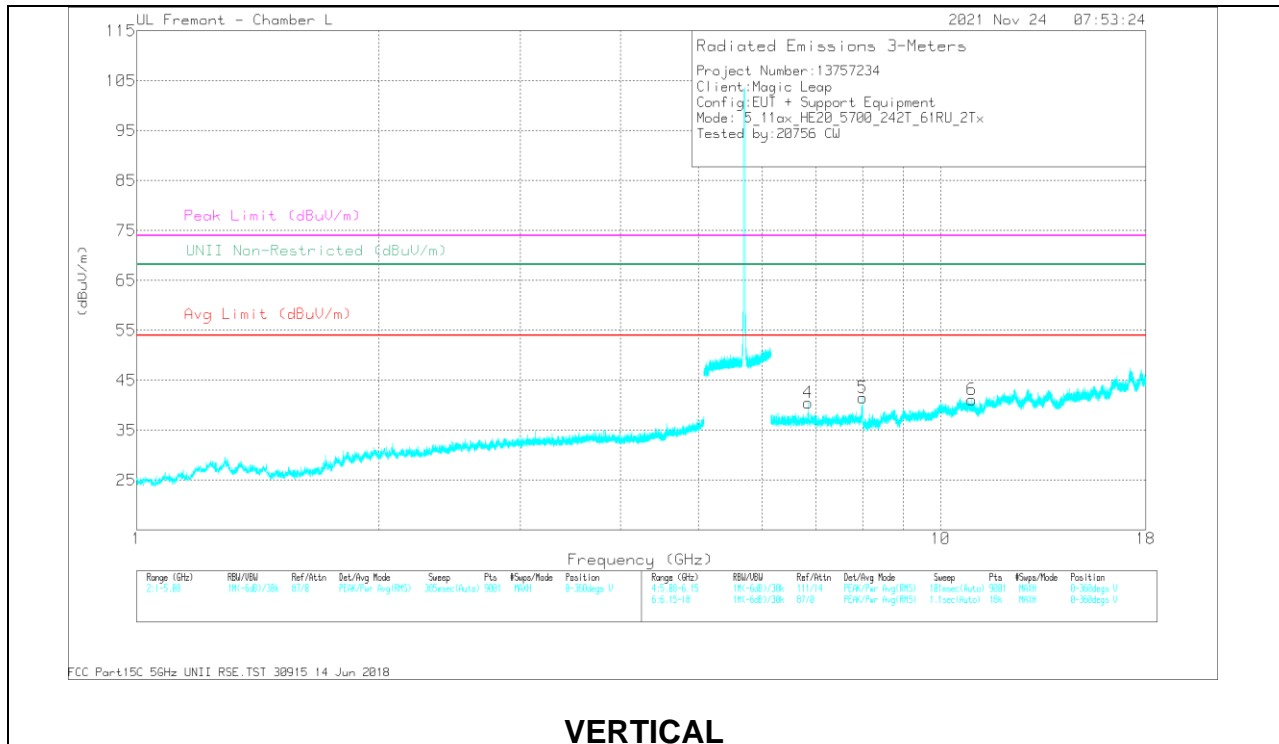

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T119 (dBm)	Amp/Coeff/Trn/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	6.83985	36.71	PK-U	35.6	-21.4	50.91	-	-	-	-	68.2	-17.29	247	229	H
2	7.99994	32.85	PK-U	35.8	-18.6	50.05	-	-	-	-	68.2	-18.15	25	103	H
3	* 11.94098	28.9	PK-U	39.1	-16.4	51.6	-	-	74	-22.4	-	-	243	210	H
	* 11.94097	17.42	ADR	39.1	-16.4	40.12	54	-13.88	-	-	-	-	243	210	H
4	6.84004	35.96	PK-U	35.6	-21.4	50.16	-	-	-	-	68.2	-18.04	270	101	V
5	7.99995	30.86	PK-U	35.8	-18.6	48.06	-	-	-	-	68.2	-20.14	349	244	V
6	* 10.94715	29.1	PK-U	37.7	-16.1	50.7	-	-	74	-23.3	-	-	330	103	V
	* 10.94712	17.24	ADR	37.7	-16.1	38.84	54	-15.16	-	-	-	-	330	103	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

**2TX Antenna 1 + Antenna 2 OFDMA MODE: 106-Tones, RU Index 54
 BANEDGE (HIGH CHANNEL)**

HORIZONTAL RESULT

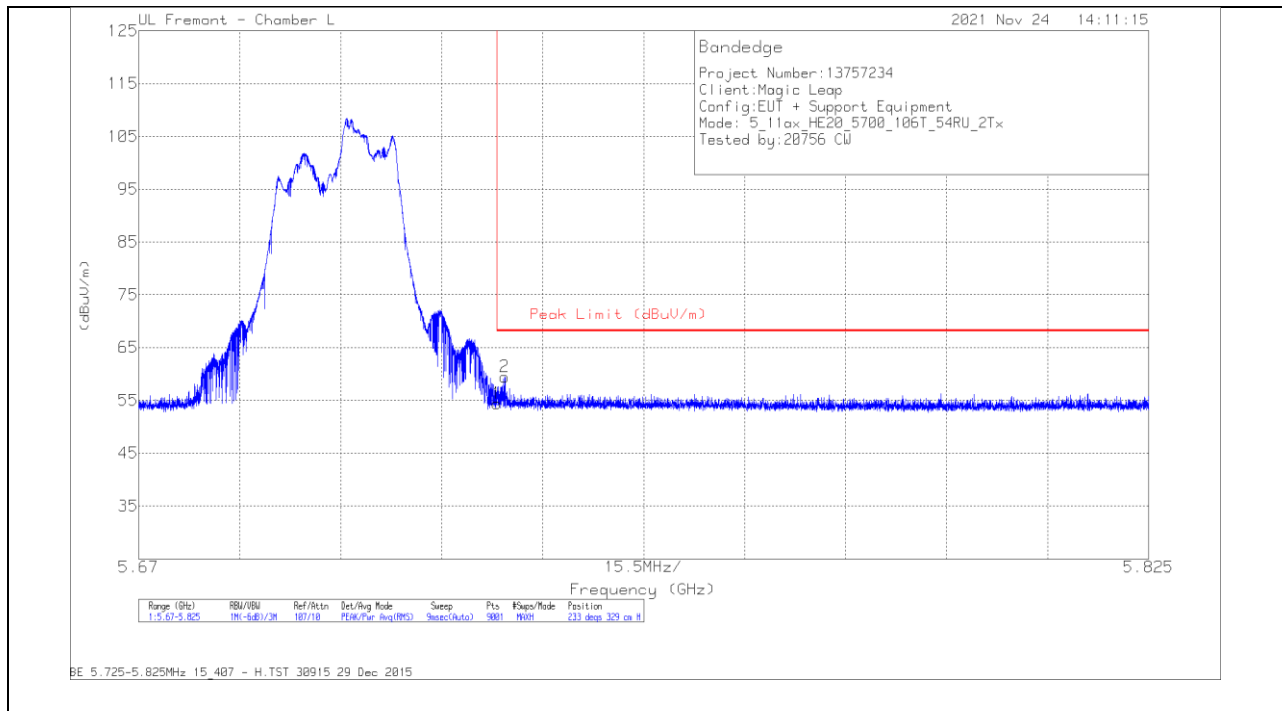


TRACE MARKER

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	33.53	Pk	34.8	-13.9	54.43	68.2	-13.77	233	329	H
2	5.72621	38.55	Pk	34.8	-13.9	59.45	68.2	-8.75	233	329	H

Pk - Peak detector

VERTICAL RESULT

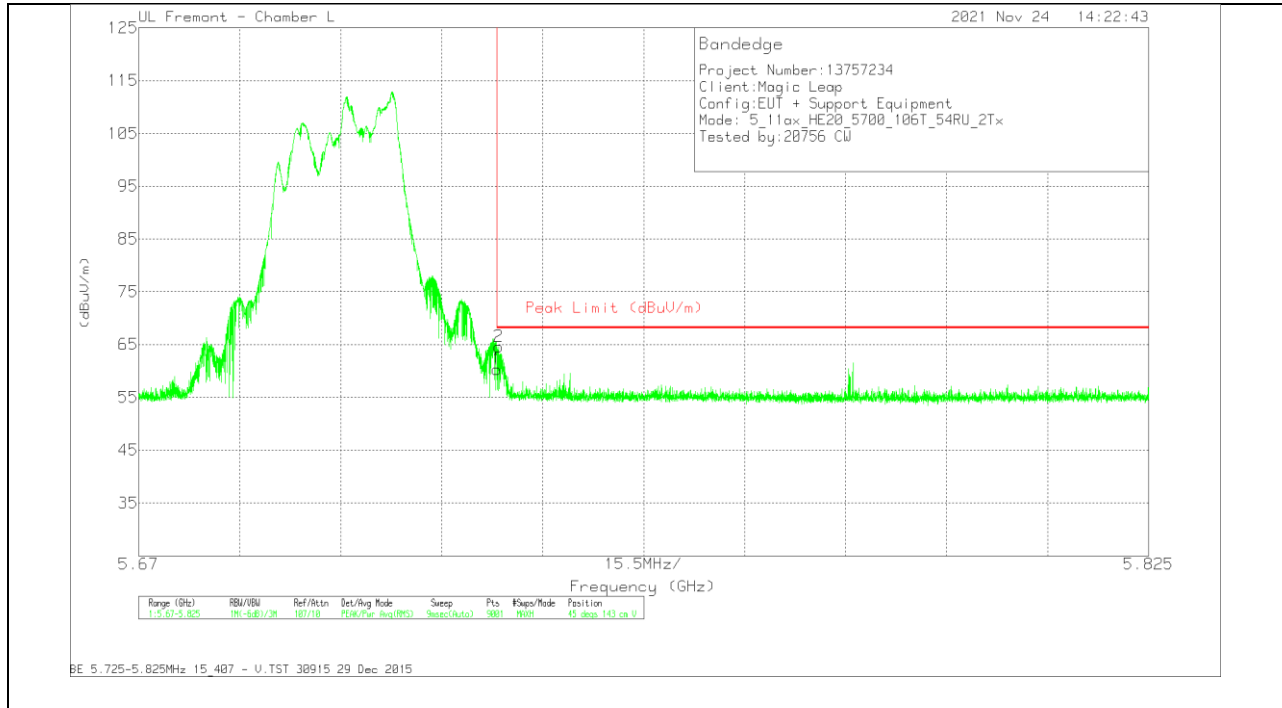


TRACE MARKER

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cb/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	39.36	Pk	34.8	-13.9	60.26	68.2	-7.94	45	143	V
2	5.72525	43.69	Pk	34.8	-13.9	64.59	68.2	-3.61	45	143	V

Pk - Peak detector

**2TX Antenna 1 + Antenna 2 OFDMA MODE: 52-Tones, RU Index 40
 BANDEDGE (HIGH CHANNEL)**

HORIZONTAL RESULT

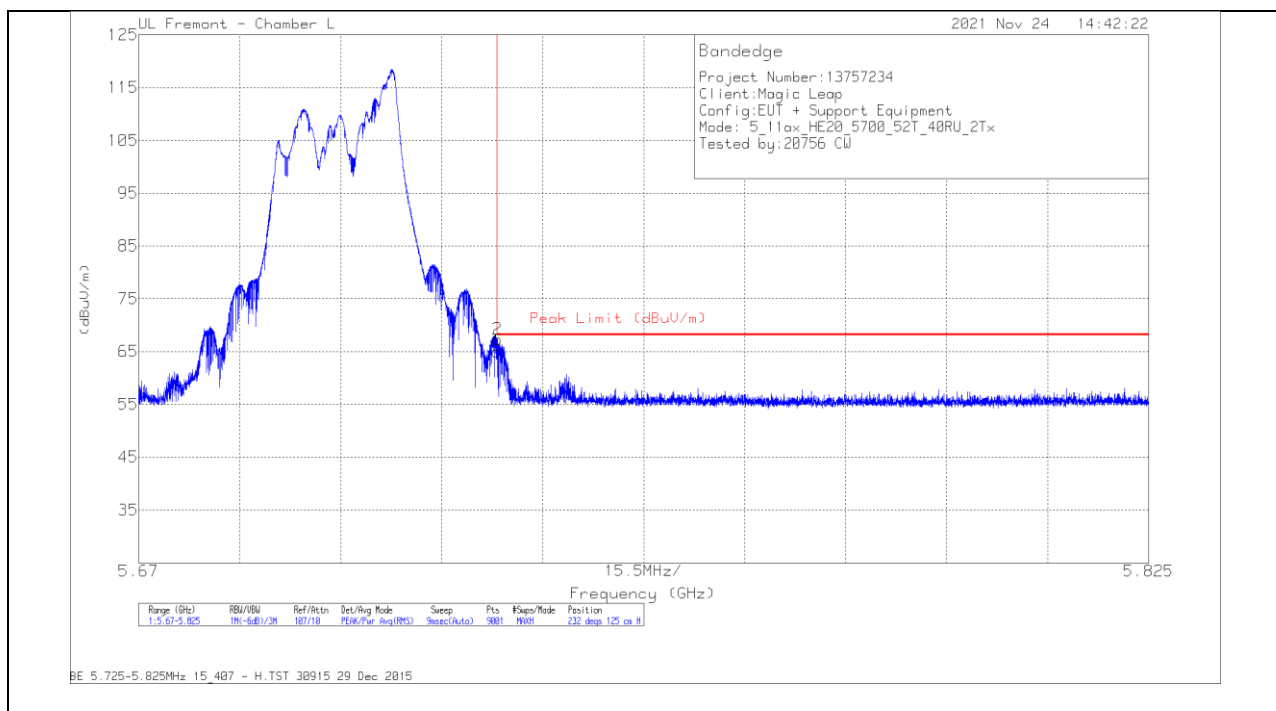


TRACE MARKER

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	44.14	Pk	34.8	-13.9	65.04	68.2	-3.16	232	125	H
2	5.72506	46.38	Pk	34.8	-13.9	67.28	68.2	-.92	232	125	H

Pk - Peak detector

VERTICAL RESULT

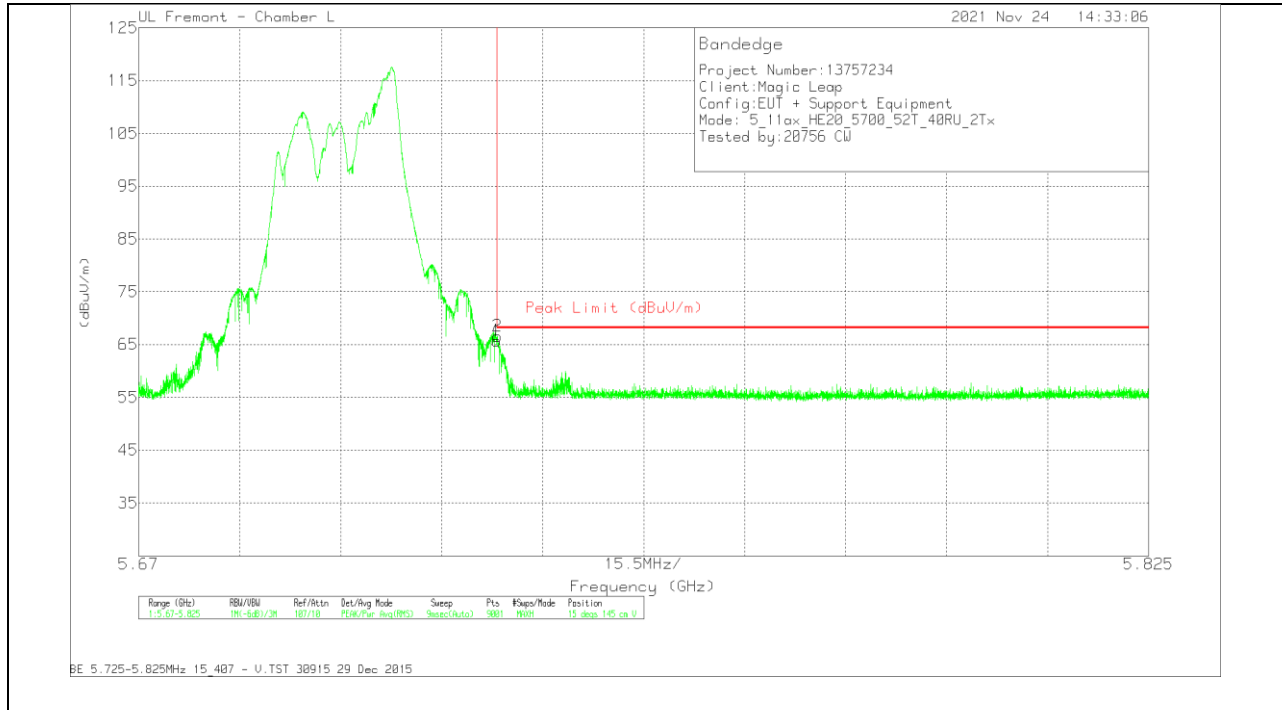


TRACE MARKER

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	44.79	Pk	34.8	-13.9	65.69	68.2	-2.51	15	145	V
2	5.72502	45.64	Pk	34.8	-13.9	66.54	68.2	-1.66	15	145	V

Pk - Peak detector

**2TX Antenna 1 + Antenna 2 OFDMA MODE: 26-Tones, RU Index 8
 BANDEDGE (HIGH CHANNEL)**

HORIZONTAL RESULT

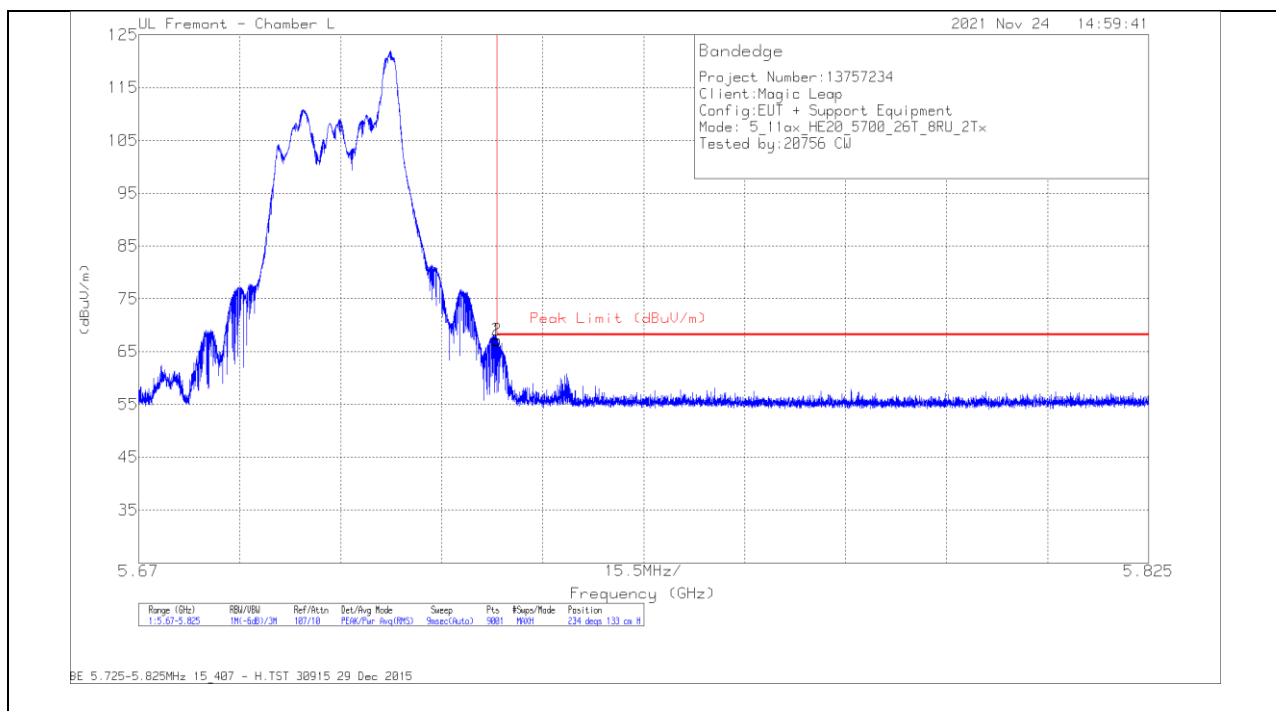


TRACE MARKER

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbi/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	46.11	Pk	34.8	-13.9	67.01	68.2	-1.19	234	133	H
2	5.72501	46.31	Pk	34.8	-13.9	67.21	68.2	-.99	234	133	H

Pk - Peak detector

VERTICAL RESULT

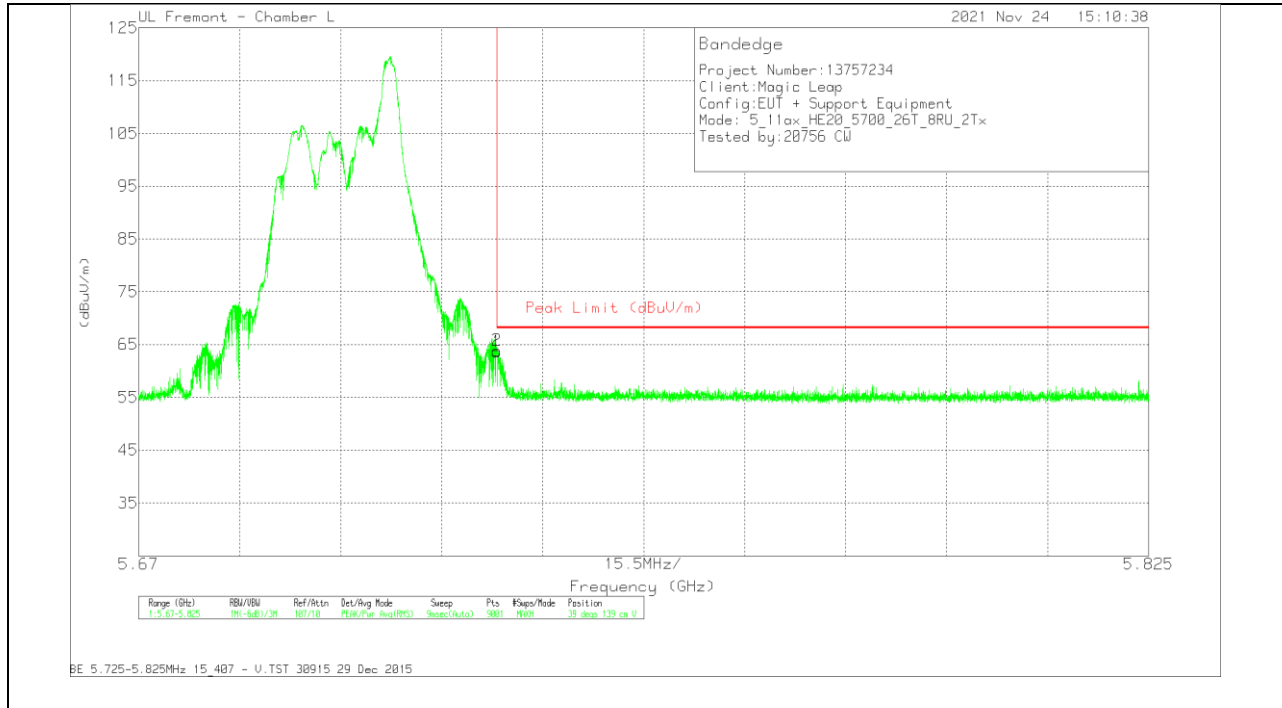


TRACE MARKER

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cb/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	42.72	Pk	34.8	-13.9	63.62	68.2	-4.58	39	139	V
2	5.72501	42.97	Pk	34.8	-13.9	63.87	68.2	-4.33	39	139	V


Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

HIGH

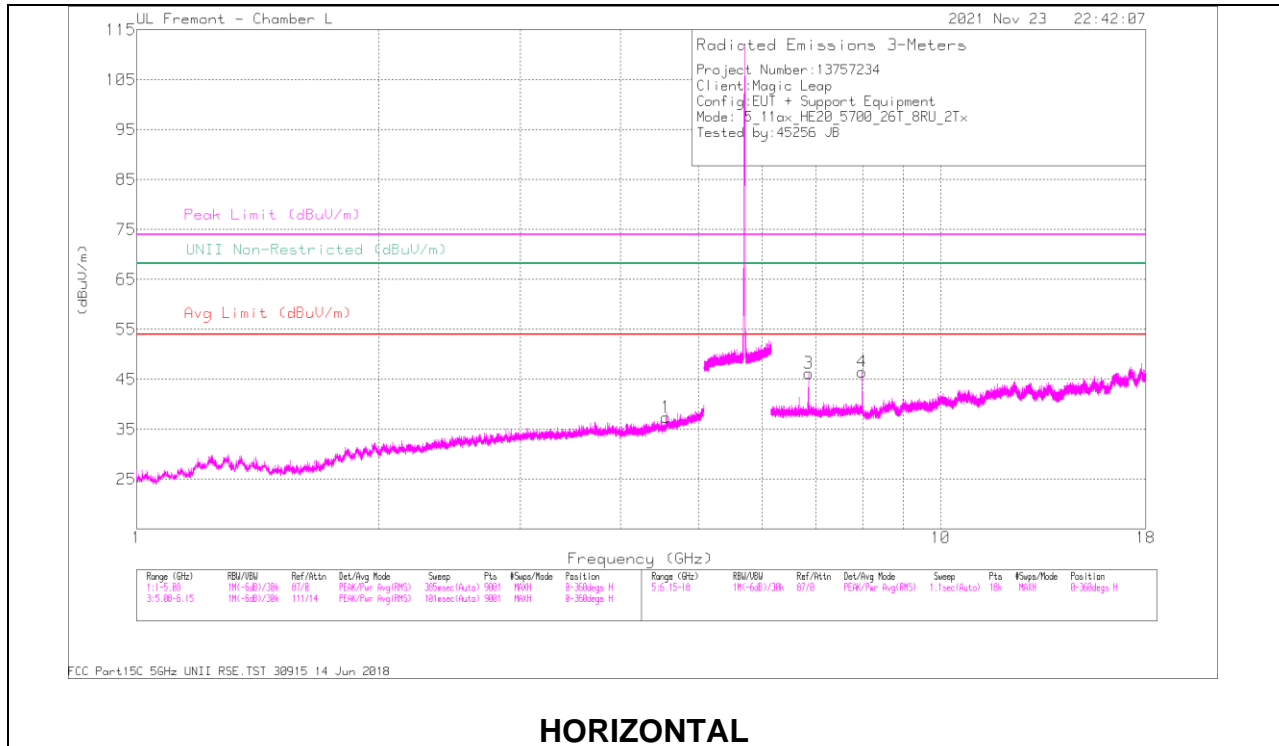

HORIZONTAL

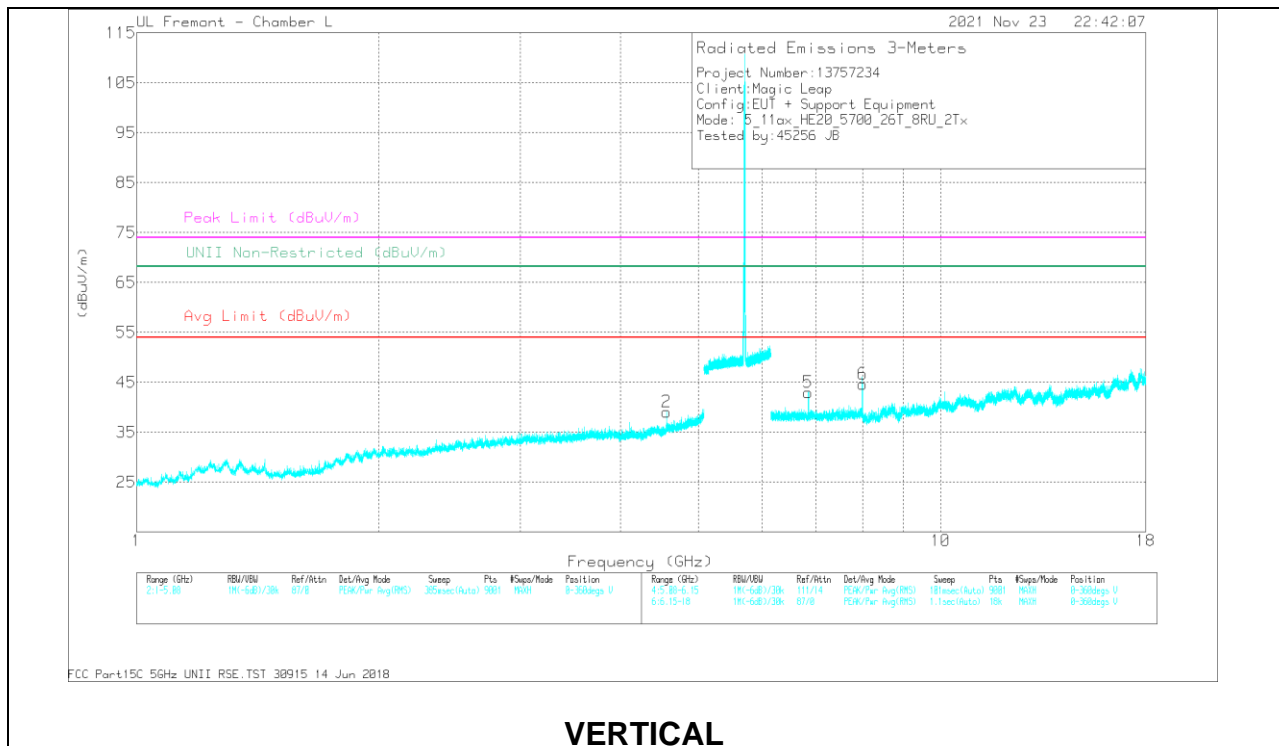

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dBm)	Amp/Coil/Filt/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.55392	37.51	PK-U	33.7	-25	46.21	-	-	74	-27.79	-	-	323	106	H
	* 4.55342	29.95	ADR	33.7	-25	34.65	-	-	-	-	-	-	323	106	H
2	* 4.56022	40.17	PK-U	33.8	-24.9	49.07	-	-	74	-24.93	-	-	15	113	V
	* 4.56001	29.92	ADR	33.8	-24.9	38.82	-	-	-	-	-	-	15	113	V
3	6.85767	45.68	PK-U	35.6	-21.5	59.78	-	-	-	-	68.2	-8.42	237	131	H
4	7.98882	39.45	PK-U	35.8	-18.9	56.35	-	-	-	-	68.2	-11.85	253	104	H
5	6.8398	36.5	PK-U	35.6	-21.4	50.7	-	-	-	-	68.2	-17.5	250	225	V
6	8.00021	32.04	PK-U	35.8	-18.6	49.24	-	-	-	-	68.2	-18.96	313	111	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average