


10.1.3. TX ABOVE 1 GHz 802.11ax HE40 MODE IN THE 5.6GHz BAND
2TX Antenna 1 + Antenna 2 OFDM MODE: SU, Single User
BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

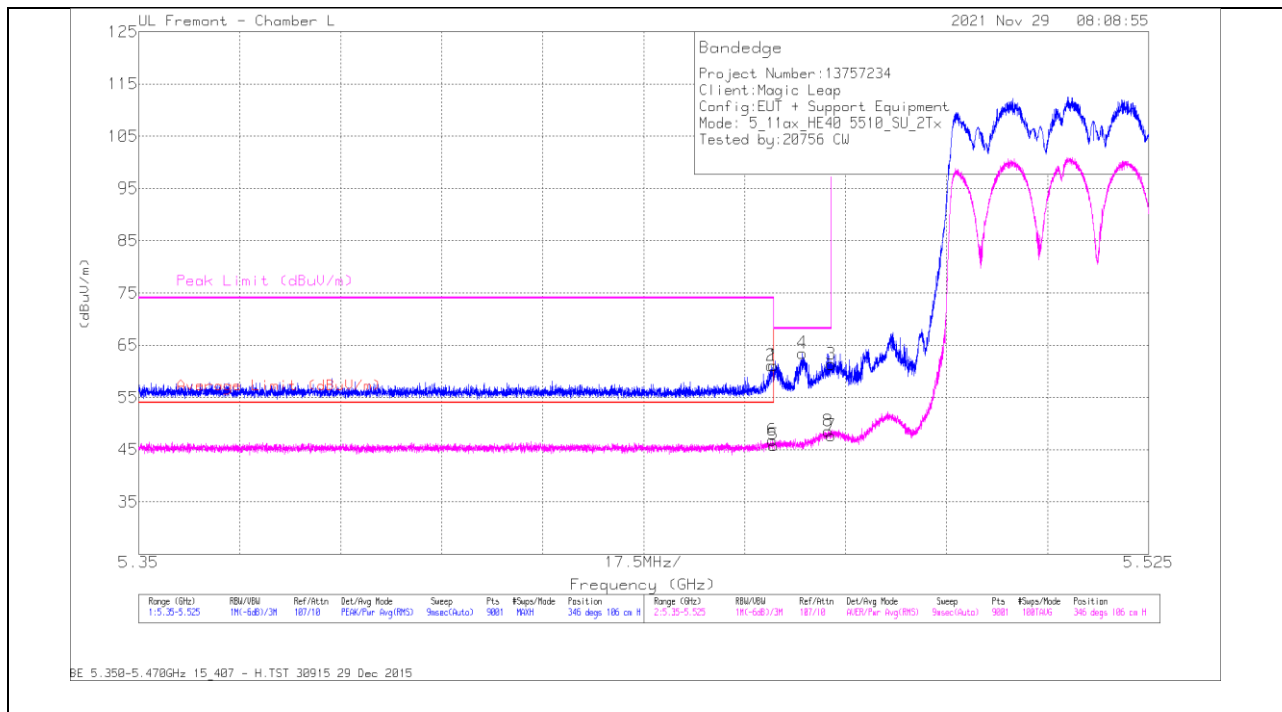

TRACE MARKER


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	40.39	Pk	34.9	-14.2	61.09	-	-	68.2	-7.11	346	106	H
2	* 5.45955	40.45	Pk	34.9	-14.2	61.15	-	-	74	-12.85	346	106	H
3	5.47	40.66	Pk	34.9	-14.2	61.36	-	-	68.2	-6.84	346	106	H
4	5.46503	42.81	Pk	34.9	-14.2	63.51	-	-	68.2	-4.69	346	106	H
5	* 5.46	25.19	RMS	34.9	-14.2	45.89	54	-8.11	-	-	346	106	H
6	* 5.45978	26.16	RMS	34.9	-14.2	46.86	54	-7.14	-	-	346	106	H
7	5.47	26.97	RMS	34.9	-14.2	47.67	-	-	-	-	346	106	H
8	5.46948	27.82	RMS	34.9	-14.2	48.52	-	-	-	-	346	106	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

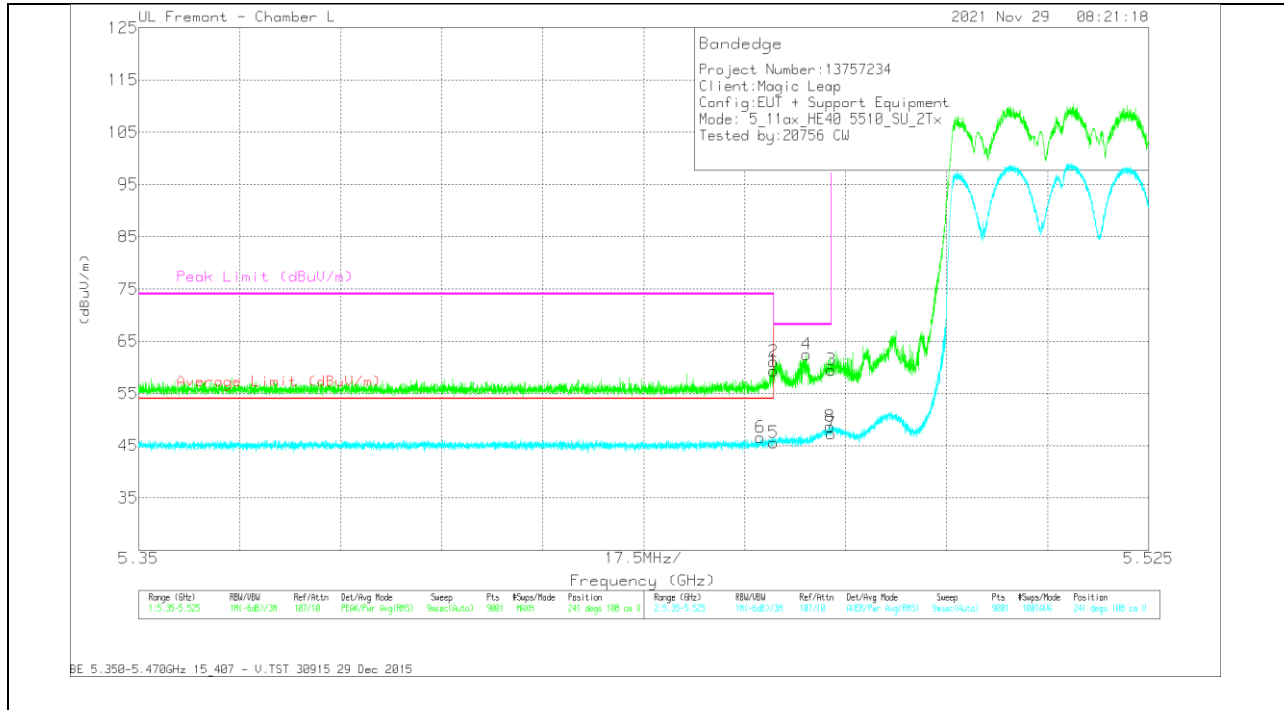


TRACE MARKER

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Fitr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	38.63	Pk	34.9	-14.2	59.33	-	-	68.2	-8.87	241	108	V
2	* 5.45998	40.37	Pk	34.9	-14.2	61.07	-	-	74	-12.93	241	108	V
3	5.47	38.78	Pk	34.9	-14.2	59.48	-	-	68.2	-8.72	241	108	V
4	5.46569	41.77	Pk	34.9	-14.2	62.47	-	-	68.2	-5.73	241	108	V
5	* 5.46	24.9	RMS	34.9	-14.2	45.6	54	-8.4	-	-	241	108	V
6	* 5.45772	25.81	RMS	34.9	-14.2	46.51	54	-7.49	-	-	241	108	V
7	5.47	26.65	RMS	34.9	-14.2	47.35	-	-	-	-	241	108	V
8	5.46976	27.94	RMS	34.9	-14.2	48.64	-	-	-	-	241	108	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

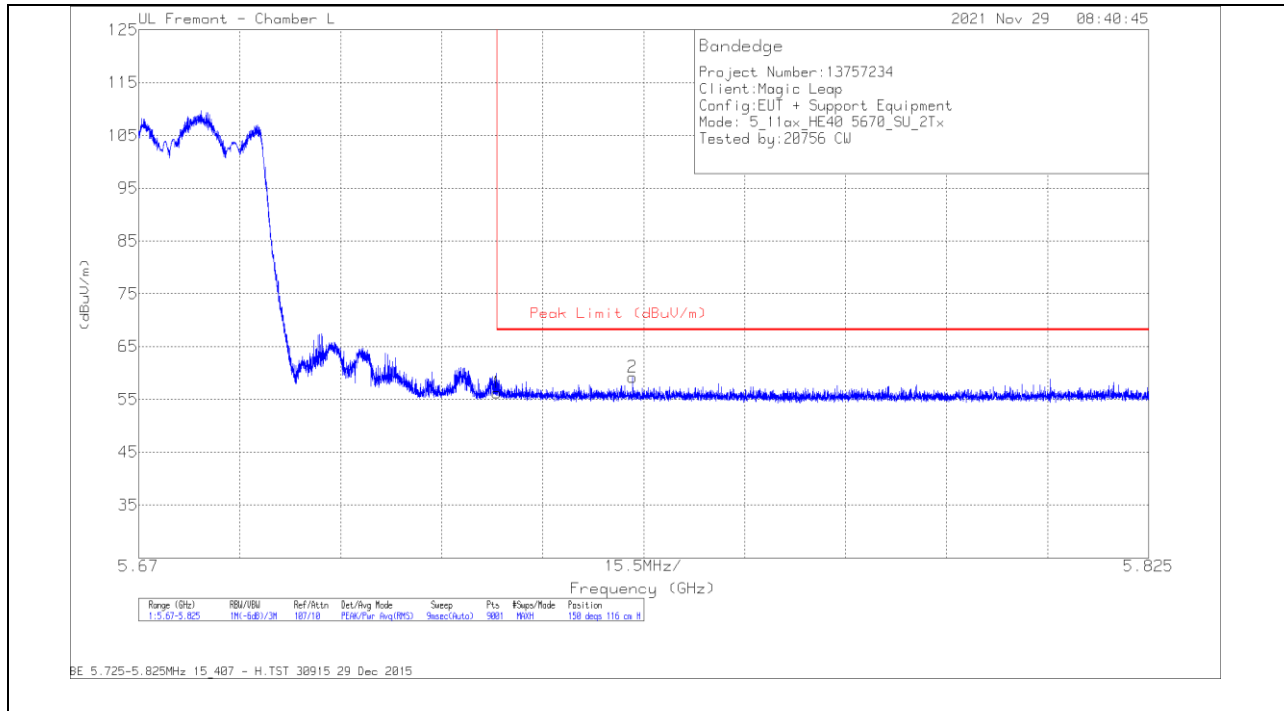


TRACE MARKER

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	35.3	Pk	34.8	-13.9	56.2	68.2	-12	150	116	H
2	5.74581	38.25	Pk	34.8	-13.9	59.15	68.2	-9.05	150	116	H

Pk - Peak detector

VERTICAL RESULT

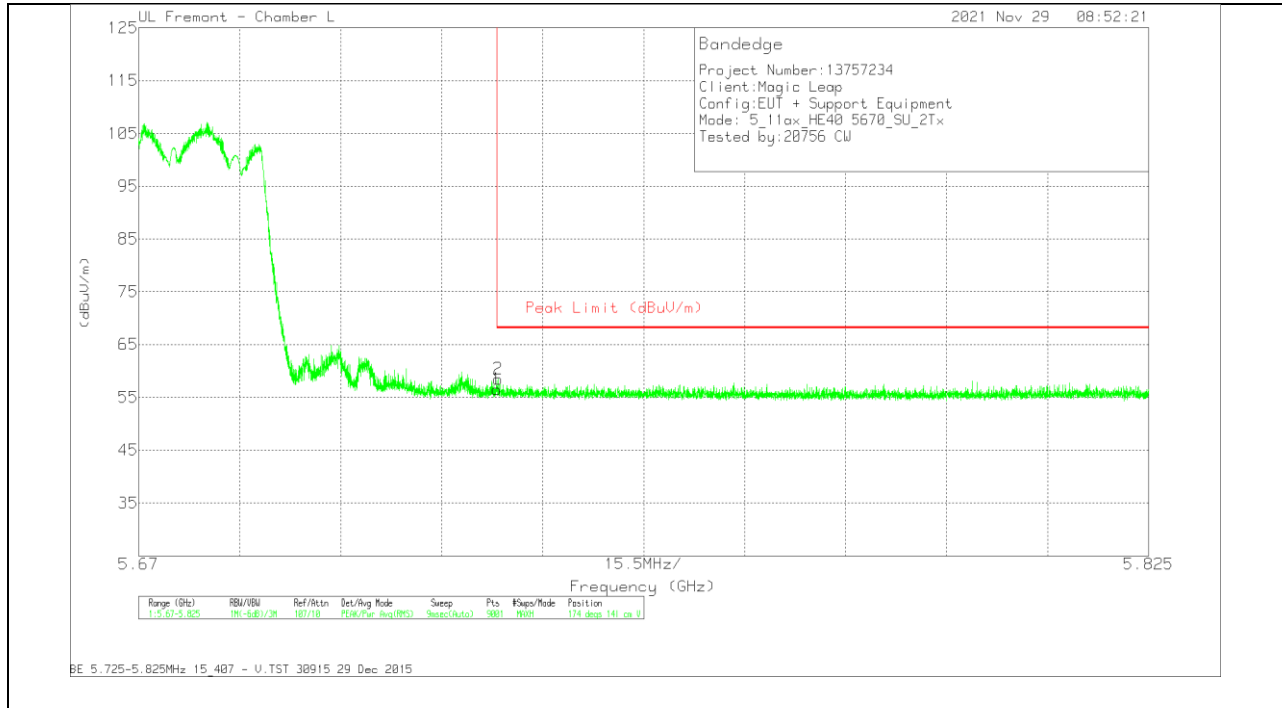


TRACE MARKER

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	35.58	Pk	34.8	-13.9	56.48	68.2	-11.72	174	141	V
2	5.72514	37.54	Pk	34.8	-13.9	58.44	68.2	-9.76	174	141	V

Pk - Peak detector

**2TX Antenna 1 + Antenna 2 OFDMA MODE: 484-Tones, RU Index 65
 BANEDGE (HIGH CHANNEL)**

HORIZONTAL RESULT

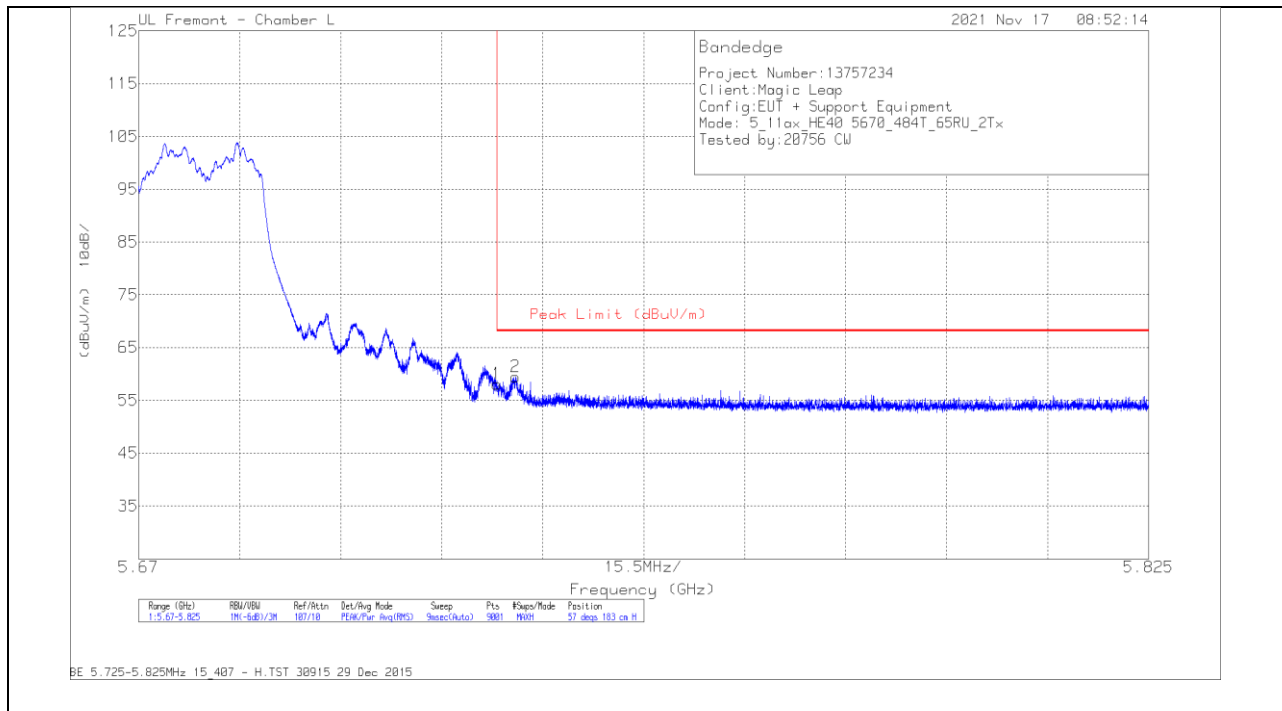


TRACE MARKER

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	37.24	Pk	34.8	-13.9	58.14	68.2	-10.06	57	183	H
2	5.7279	38.59	Pk	34.8	-13.9	59.49	68.2	-8.71	57	183	H

Pk - Peak detector

VERTICAL RESULT

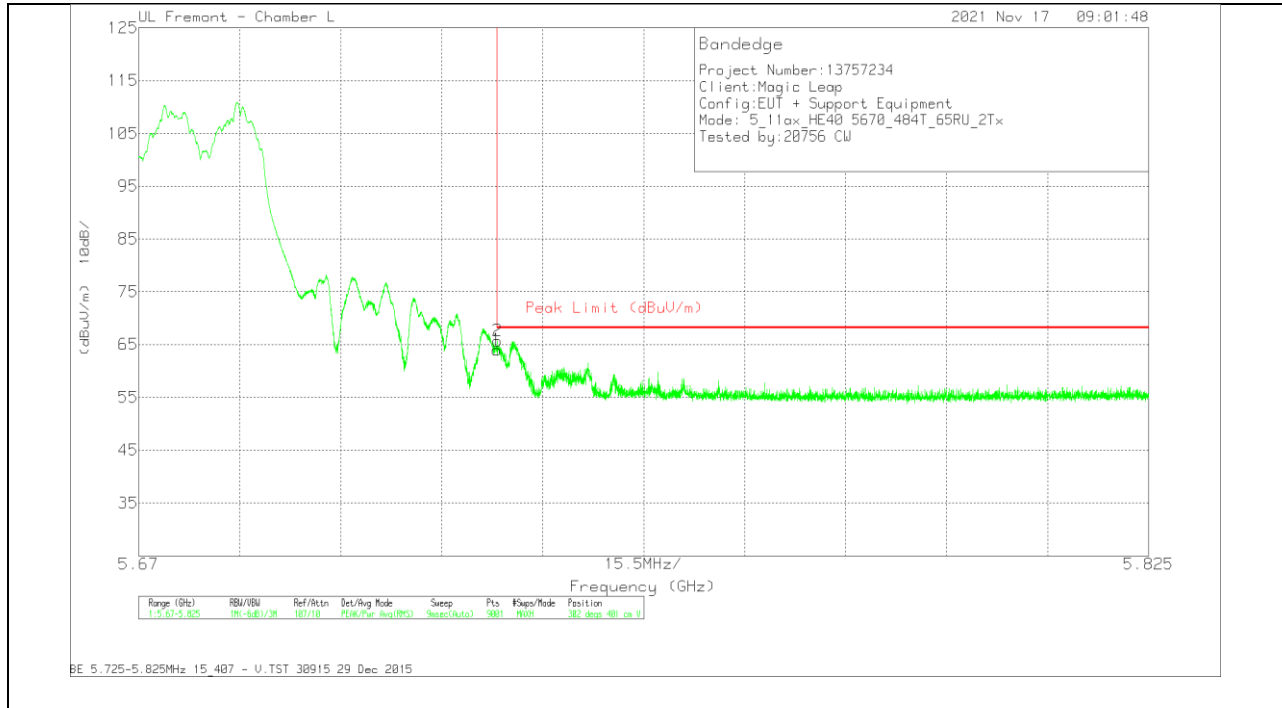


TRACE MARKER

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	43.15	Pk	34.8	-13.9	64.05	68.2	-4.15	302	401	V
2	5.7251	44.86	Pk	34.8	-13.9	65.76	68.2	-2.44	302	401	V


Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

LOW

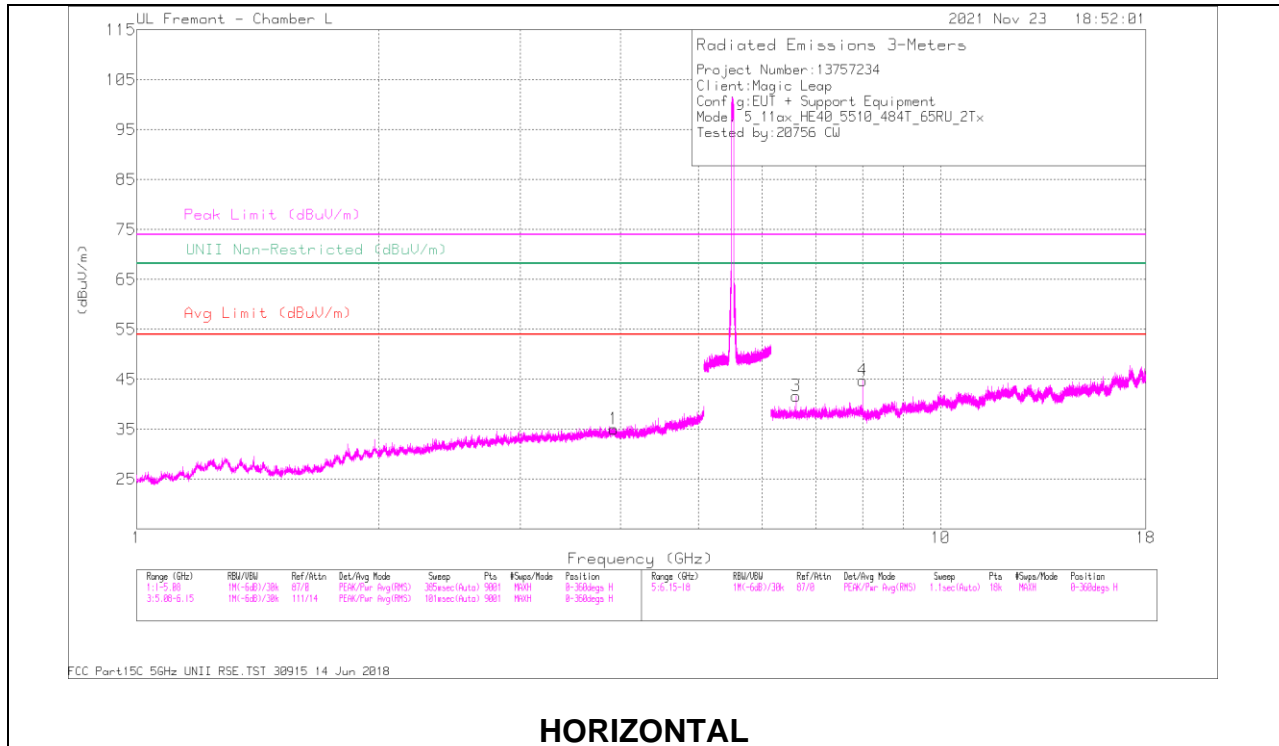

HORIZONTAL

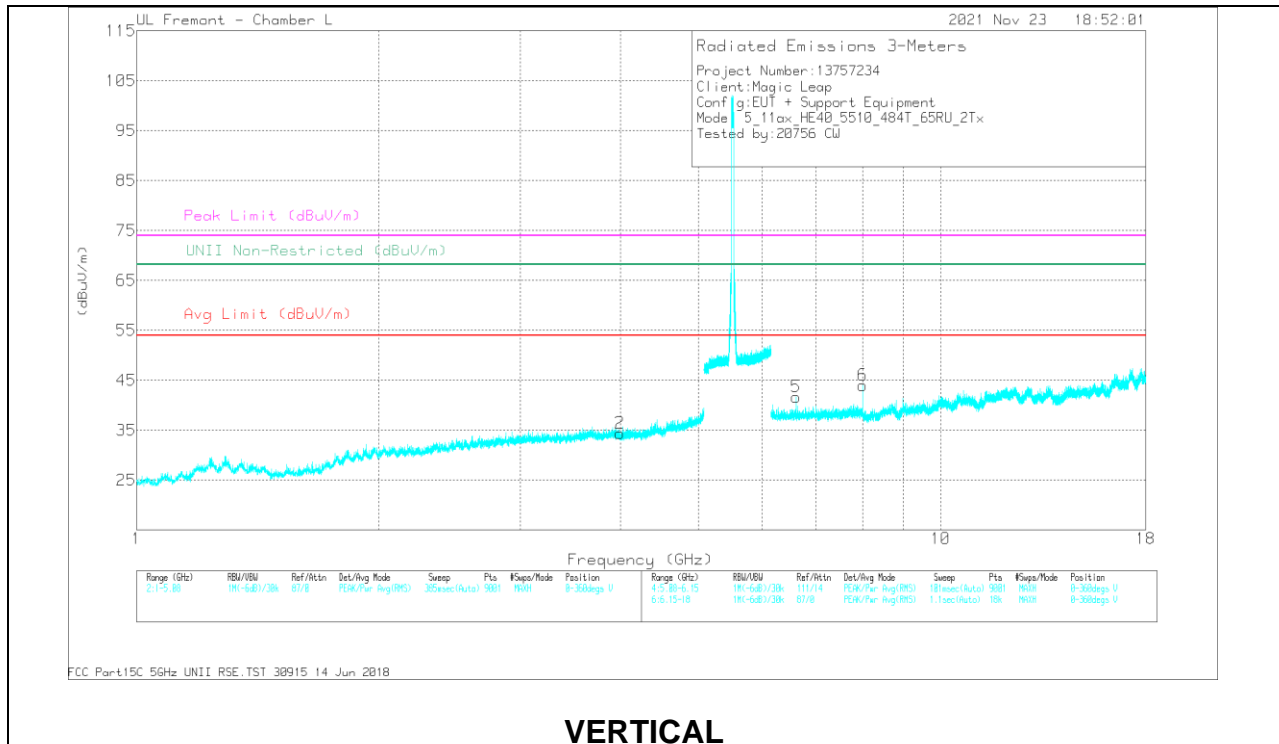

VERTICAL

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Coeff/Tr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.92468	37.24	PK-U	33.1	-25.3	45.04	-	-	74	-28.96	-	-	15	102	H
	* 3.9261	25.42	ADR	33.1	-25.3	33.22	54	-20.78	-	-	-	-	15	102	H
2	* 3.99019	37.81	PK-U	32.9	-26.3	44.41	-	-	74	-29.59	-	-	303	108	V
	* 3.98973	26.12	ADR	32.9	-26.3	32.72	54	-21.28	-	-	-	-	303	108	V
3	6.61197	34.74	PK-U	35.7	-21.2	49.24	-	-	-	-	68.2	-18.96	238	111	H
4	8.00004	33.58	PK-U	35.8	-18.6	50.78	-	-	-	-	68.2	-17.42	305	108	H
5	6.61177	34.35	PK-U	35.7	-21.2	48.85	-	-	-	-	68.2	-19.35	3	114	V
6	8.00029	34.15	PK-U	35.8	-18.6	51.35	-	-	-	-	68.2	-16.85	308	102	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID

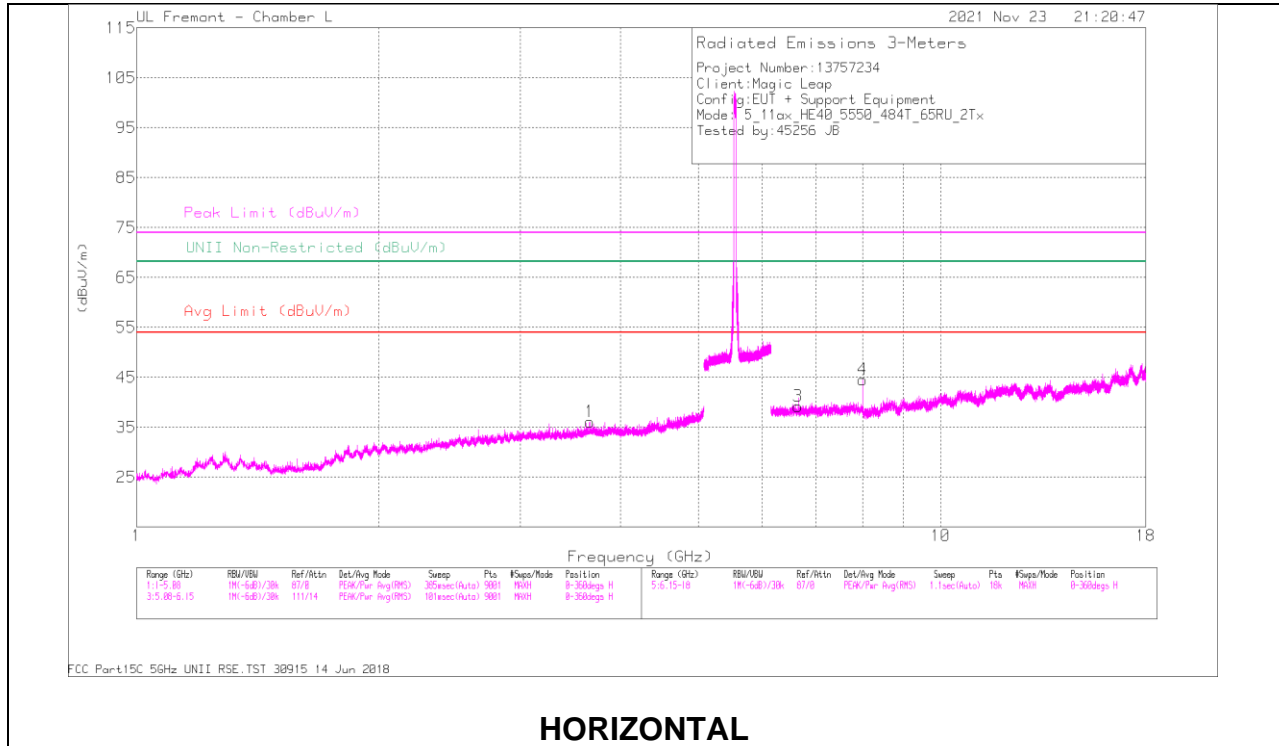

HORIZONTAL

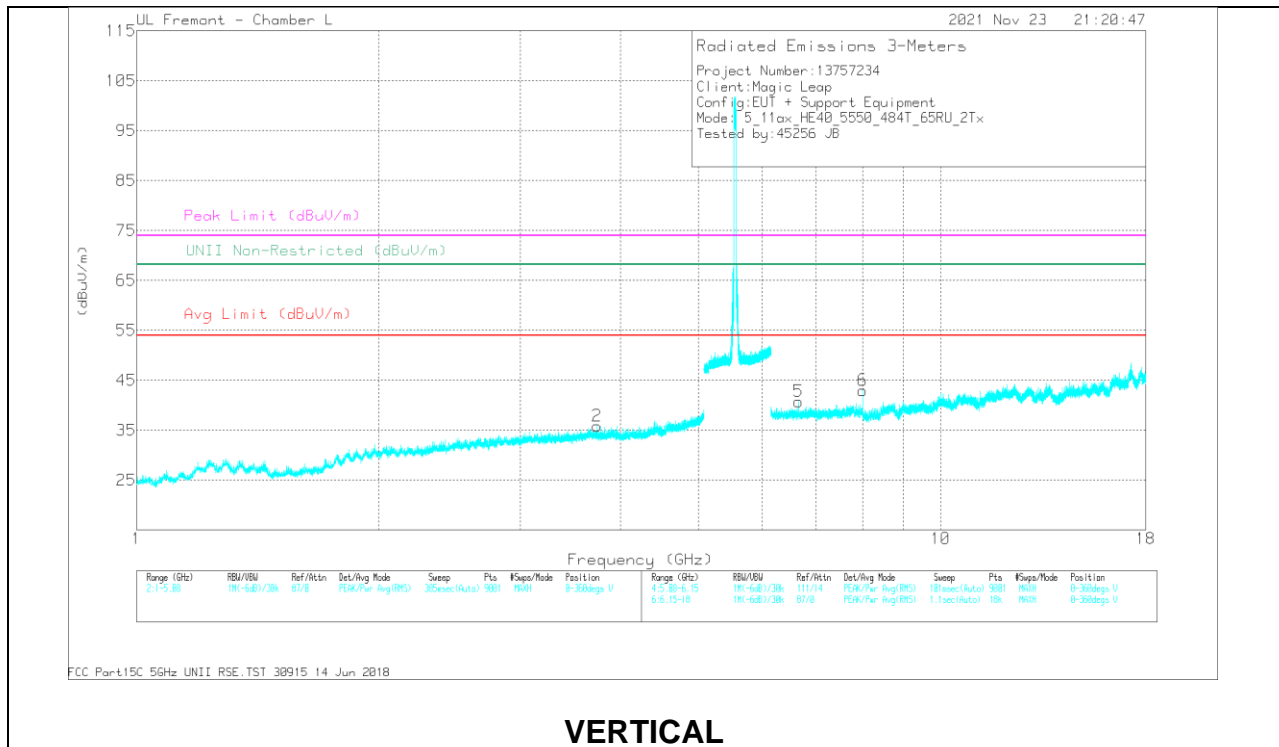

VERTICAL

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dBm)	Amp/Cb/Filt/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.65982	37.04	PK-U	33.2	-25.6	44.64	-	-	74	-29.36	-	-	238	112	H
	* 3.66141	25.68	ADR	33.2	-25.7	33.18	54	-20.82	-	-	-	-	238	112	H
2	* 3.73886	37.96	PK-U	33.3	-26.4	44.86	-	-	74	-29.14	-	-	246	102	V
	* 3.73597	26.39	ADR	33.3	-26.4	33.29	54	-20.71	-	-	-	-	246	102	V
3	6.64858	35.1	PK-U	35.7	-21.5	49.3	-	-	-	-	68.2	-18.9	297	101	H
4	7.99992	34.6	PK-U	35.8	-18.6	51.8	-	-	-	-	68.2	-16.4	304	102	H
5	6.65966	36.57	PK-U	35.8	-21.6	50.77	-	-	-	-	68.2	-17.43	350	107	V
6	7.99997	34.13	PK-U	35.8	-18.6	51.33	-	-	-	-	68.2	-16.87	310	125	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH

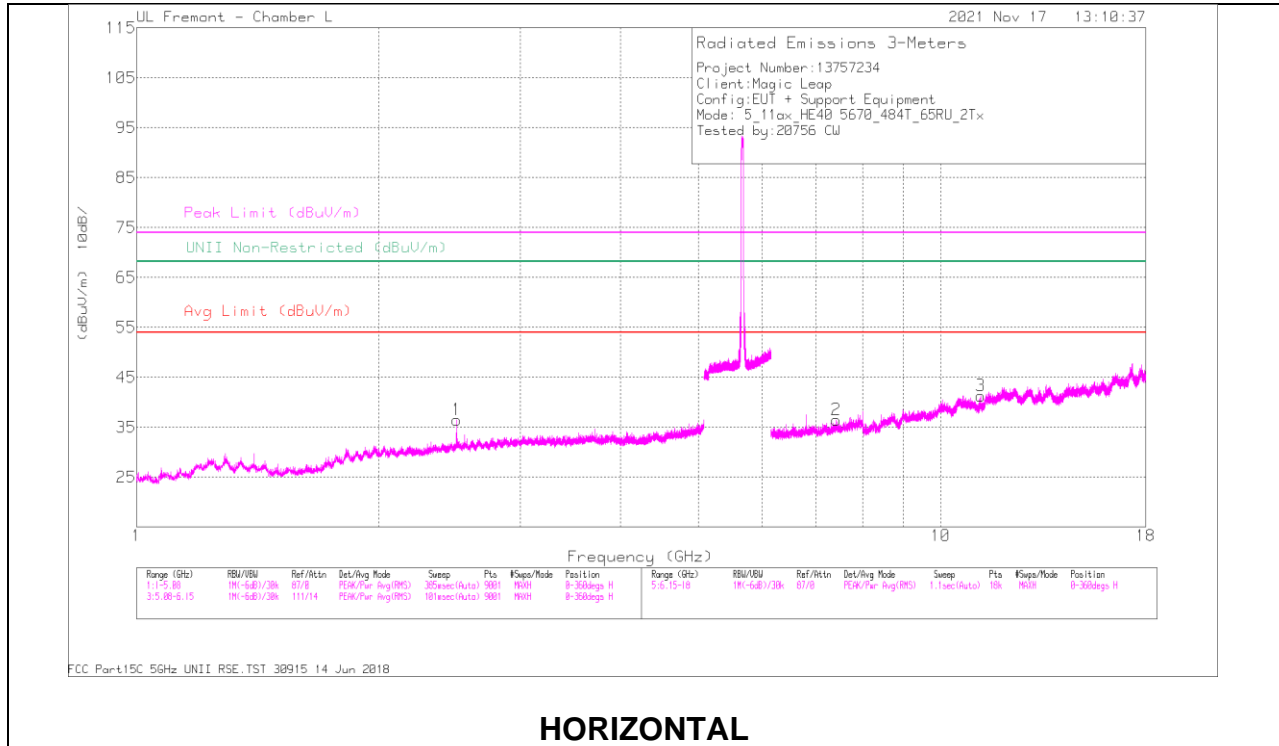

HORIZONTAL

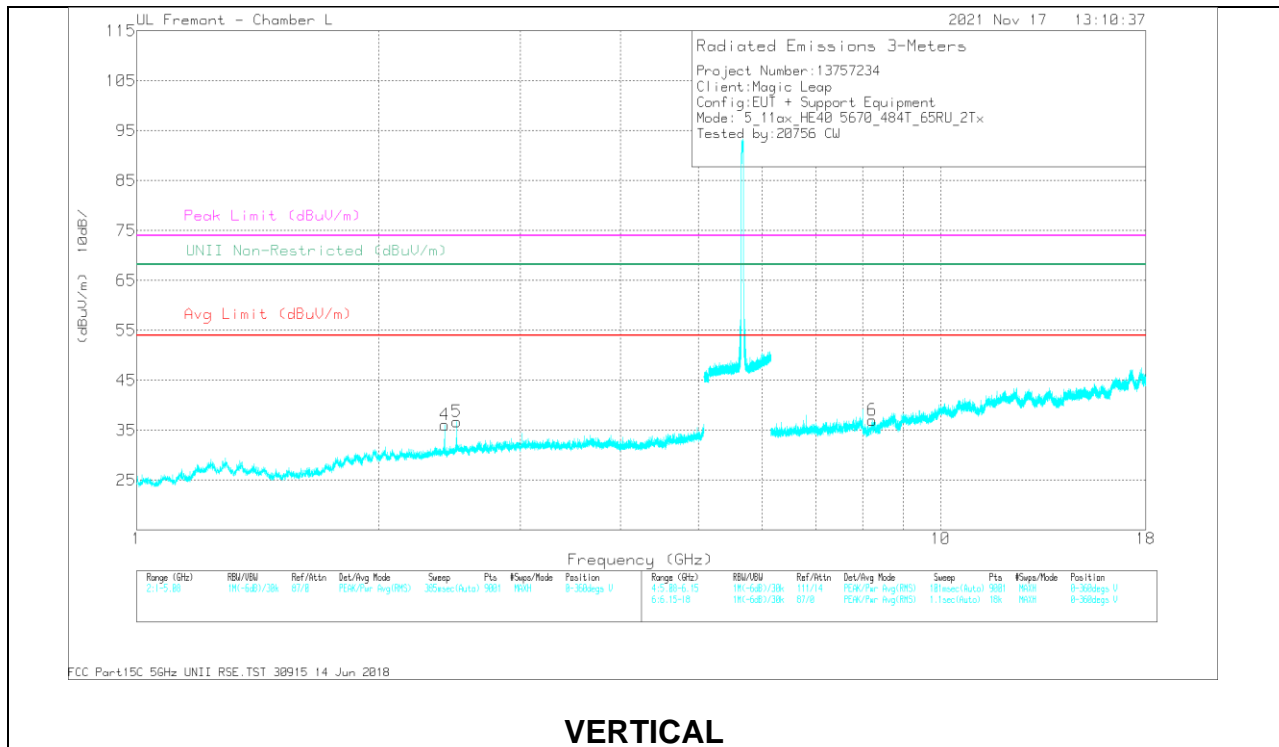

VERTICAL

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dBm)	Amp/Cb/Filt/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNI Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4999	41.3	PK-U	32.4	-29.1	44.6	-	-	74	-29.4	-	-	265	133	H
	* 2.5	32.55	ADR	32.4	-29.1	33.85	54	-18.15	-	-	-	-	265	133	H
4	2.4142	40.16	PK-U	31.9	-29.3	42.76	-	-	-	-	68.2	-25.44	61	168	V
5	* 2.4999	42.47	PK-U	32.4	-29.1	45.77	-	-	74	-28.23	-	-	212	257	V
	* 2.5	35	ADR	32.4	-29.1	38.3	54	-15.7	-	-	-	-	212	257	V
2	* 7.4249	29.65	PK-U	35.7	-19.5	45.85	-	-	74	-28.15	-	-	123	141	H
	* 7.4262	18.22	ADR	35.7	-19.6	34.32	54	-19.68	-	-	-	-	123	141	H
3	* 11.2229	27.21	PK-U	37.9	-16	49.11	-	-	74	-24.89	-	-	250	203	H
	* 11.2228	15.87	ADR	37.9	-16	37.77	54	-16.23	-	-	-	-	250	203	H
6	* 8.2225	26.72	PK-U	35.8	-18	44.52	-	-	74	-29.48	-	-	161	133	V
	* 8.2247	15.99	ADR	35.8	-18	33.79	54	-20.21	-	-	-	-	161	133	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

CHANNEL 142

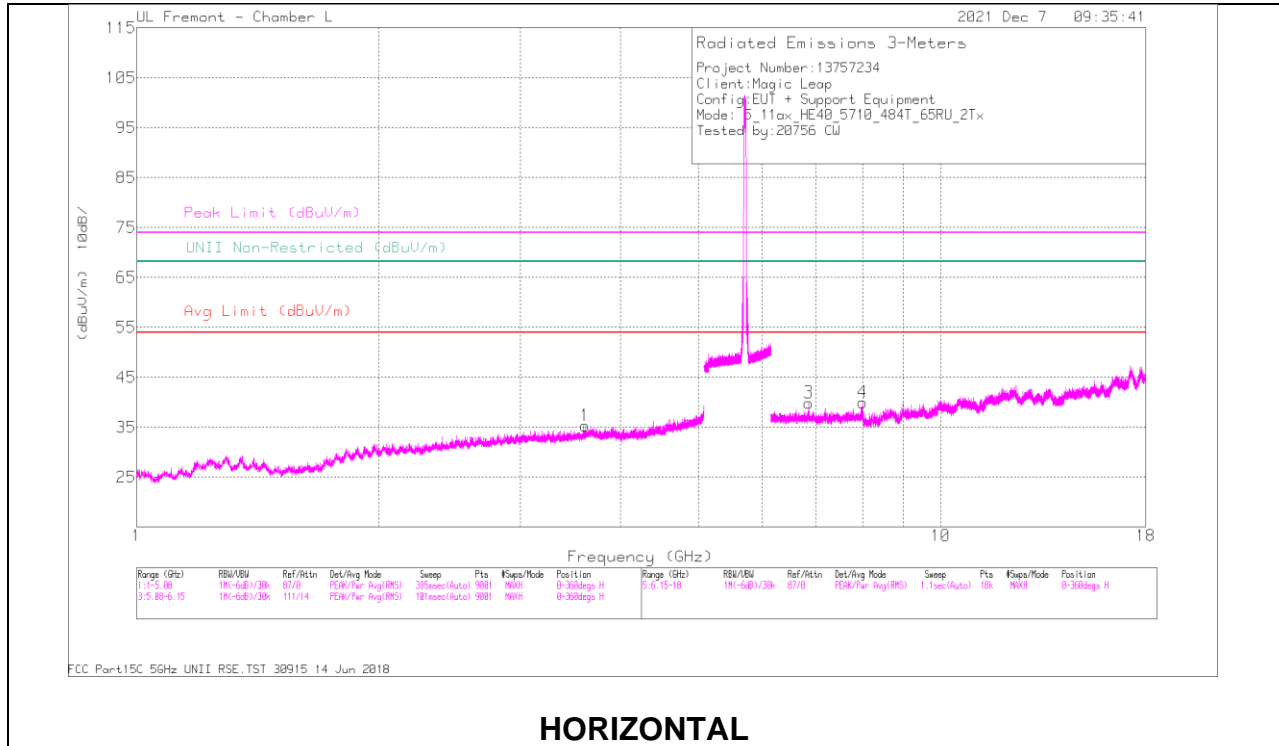

HORIZONTAL

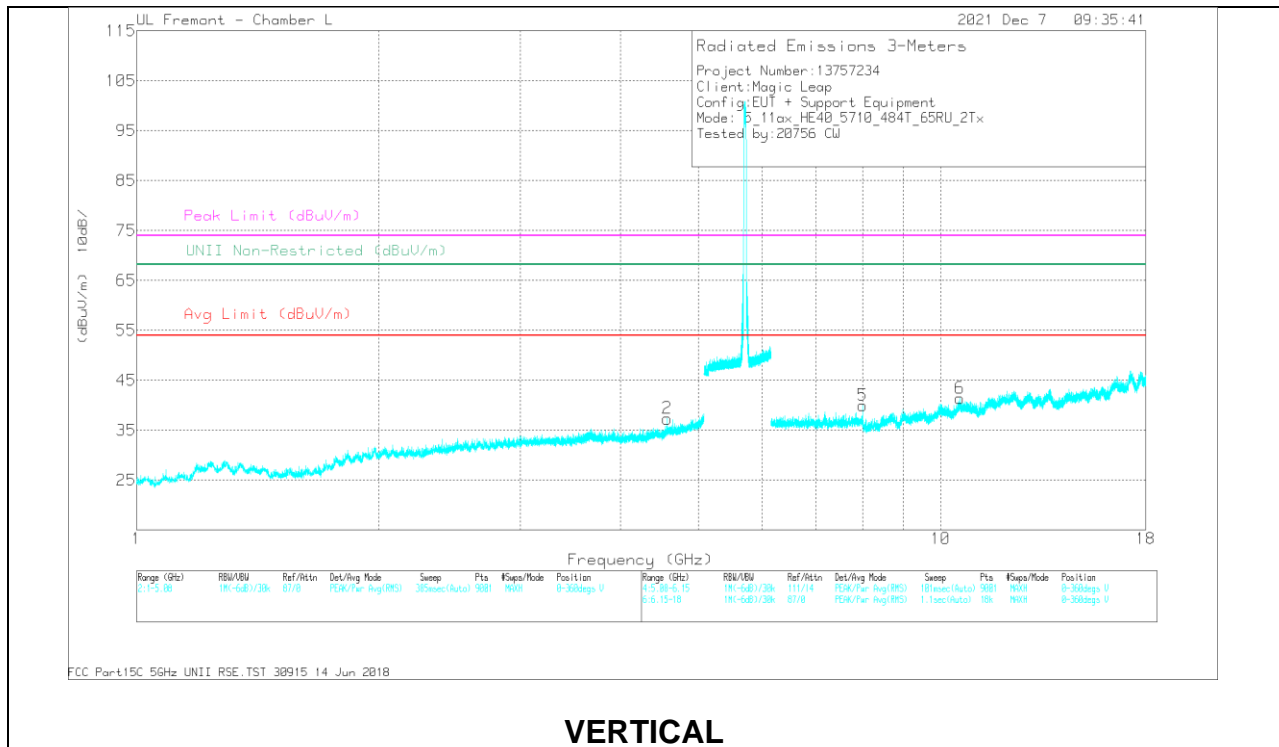

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T119 (dBm)	Amp/Coil/Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degn)	Height (cm)	Polarity
1	* 3.614363	37.27	PK-U	33	-26	44.27	-	-	74	-29.73	-	-	278	335	H
	* 3.615278	25.67	ADR	33	-25.9	32.77	-	-21.23	-	-	-	-	278	335	H
2	* 4.567808	37.24	PK-U	33.8	-24.7	46.34	-	-	74	-27.66	-	-	281	111	V
	* 4.56794	27.21	ADR	33.8	-24.7	36.31	-	-17.69	-	-	-	-	281	111	V
3	6.851521	34.8	PK-U	35.6	-21.5	48.9	-	-	-	-	68.2	-19.3	276	101	H
4	7.999979	32.43	PK-U	35.8	-18.6	49.63	-	-	-	-	68.2	-18.57	148	105	H
5	7.99997	32.23	PK-U	35.8	-18.6	49.43	-	-	-	-	68.2	-18.77	333	103	V
6	10.565254	28.12	PK-U	37.7	-16	49.82	-	-	-	-	68.2	-18.38	181	198	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

**2TX Antenna 1 + Antenna 2 OFDMA MODE: 242-Tones, RU Index 62
 BANEDGE (HIGH CHANNEL)**

HORIZONTAL RESULT

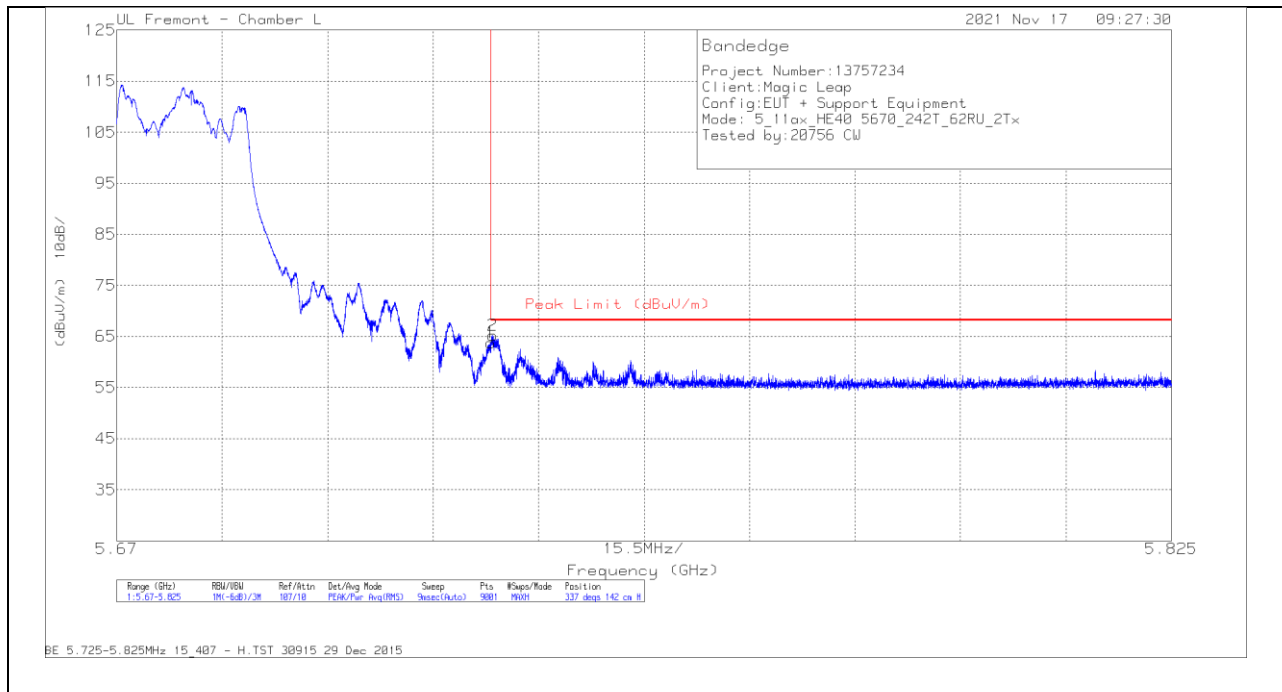


TRACE MARKER

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cb/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	42.87	Pk	34.8	-13.9	63.77	68.2	-4.43	337	142	H
2	5.7253	44.28	Pk	34.8	-13.9	65.18	68.2	-3.02	337	142	H

Pk - Peak detector

VERTICAL RESULT

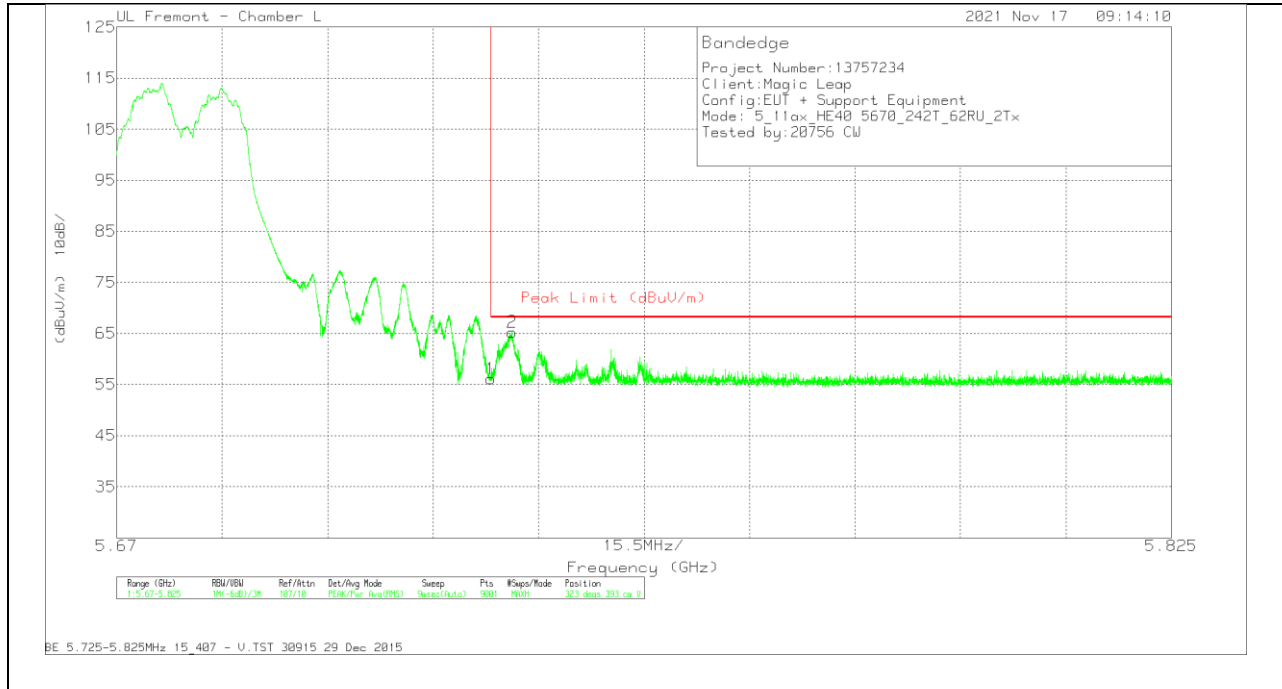


TRACE MARKER

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	35.27	Pk	34.8	-13.9	56.17	68.2	-12.03	323	393	V
2	5.7281	44.38	Pk	34.8	-13.9	65.28	68.2	-2.92	323	393	V

Pk - Peak detector

**2TX Antenna 1 + Antenna 2 OFDMA MODE: 106-Tones, RU Index 56
 BANDEDGE (HIGH CHANNEL)**

HORIZONTAL RESULT

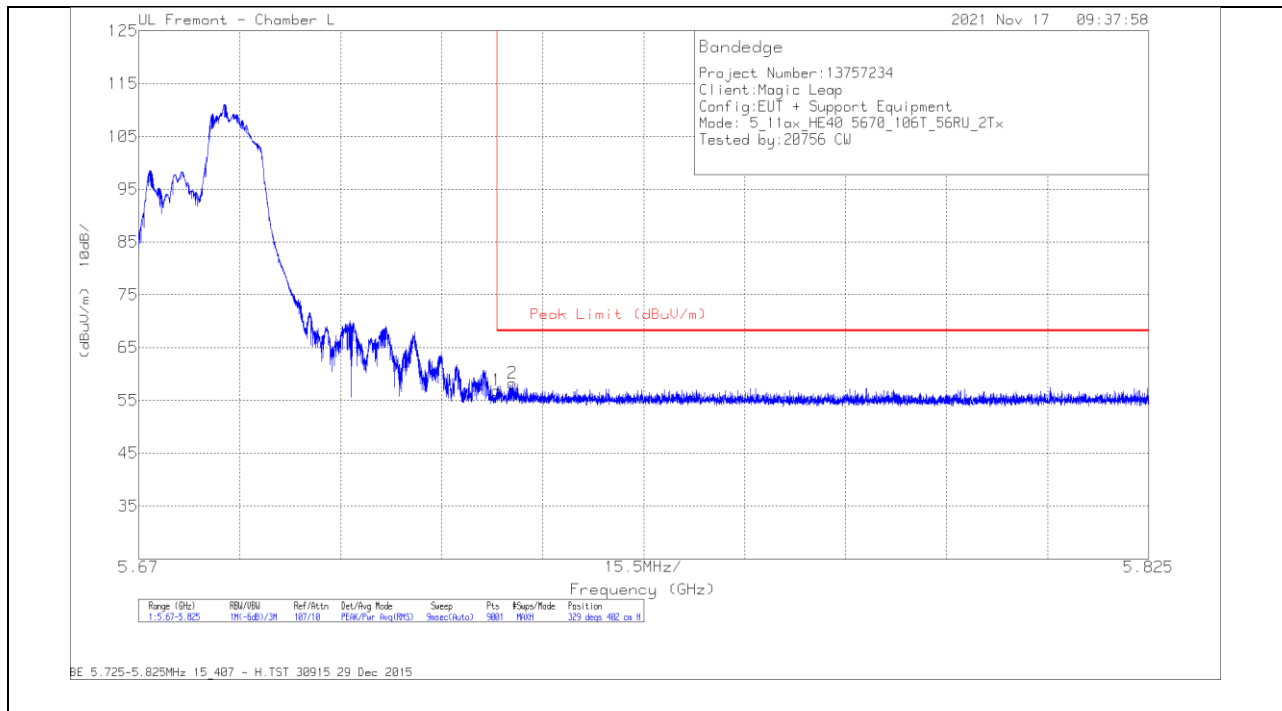


TRACE MARKER

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	35.96	Pk	34.8	-13.9	56.86	68.2	-11.34	329	402	H
2	5.7274	37.37	Pk	34.8	-13.9	58.27	68.2	-9.93	329	402	H

Pk - Peak detector

VERTICAL RESULT

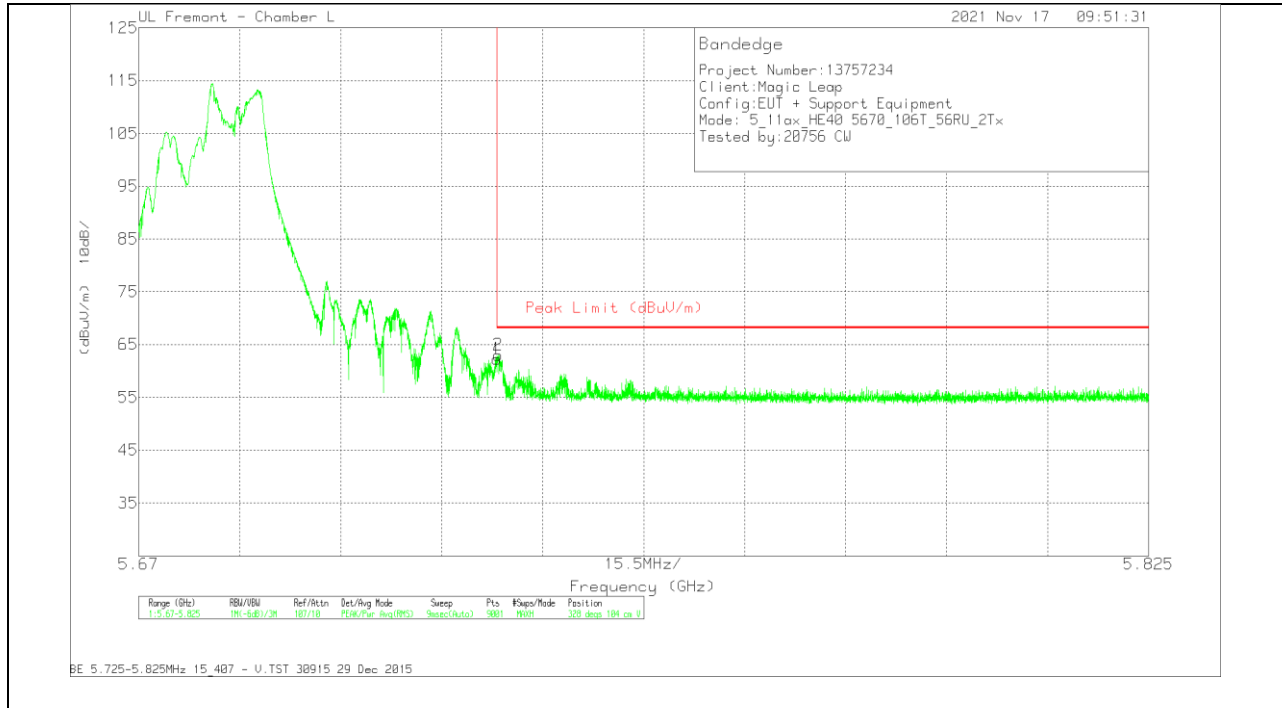


TRACE MARKER

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	41.35	Pk	34.8	-13.9	62.25	68.2	-5.95	328	104	V
2	5.7251	42.12	Pk	34.8	-13.9	63.02	68.2	-5.18	328	104	V

Pk - Peak detector

**2TX Antenna 1 + Antenna 2 OFDMA MODE: 52-Tones, RU Index 44
 BANEDGE (HIGH CHANNEL)**

HORIZONTAL RESULT

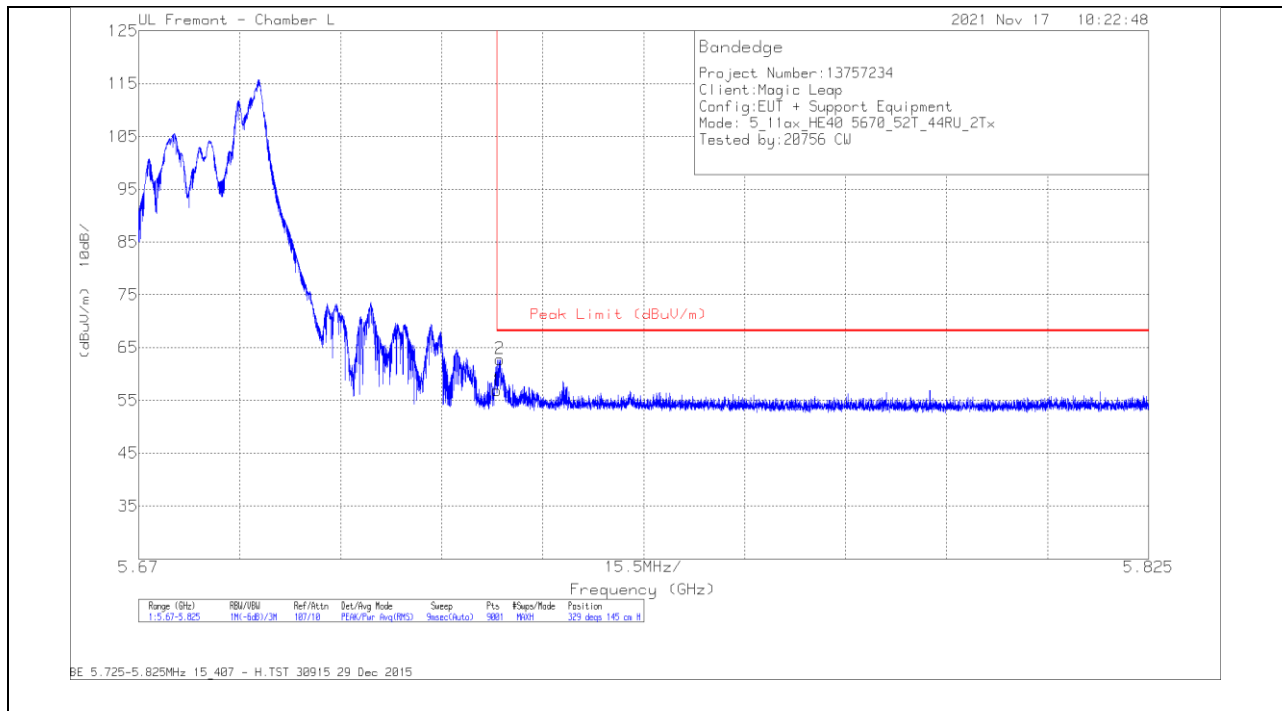


TRACE MARKER

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	35.98	Pk	34.8	-13.9	56.88	68.2	-11.32	329	145	H
2	5.7255	41.93	Pk	34.8	-13.9	62.83	68.2	-5.37	329	145	H

Pk - Peak detector

VERTICAL RESULT

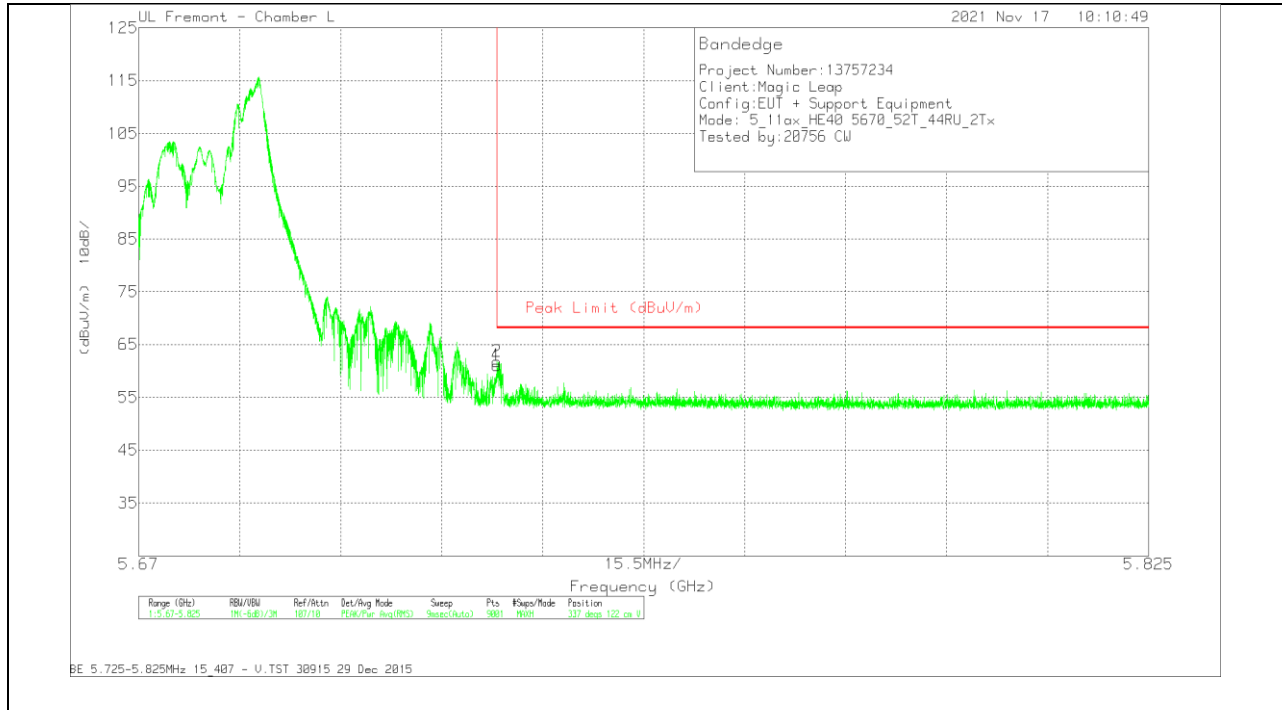


TRACE MARKER

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	40.2	Pk	34.8	-13.9	61.1	68.2	-7.1	337	122	V
2	5.725	40.93	Pk	34.8	-13.9	61.83	68.2	-6.37	337	122	V

Pk - Peak detector

**2TX Antenna 1 + Antenna 2 OFDMA MODE: 26-Tones, RU Index 17
 BANEDGE (HIGH CHANNEL)**

HORIZONTAL RESULT

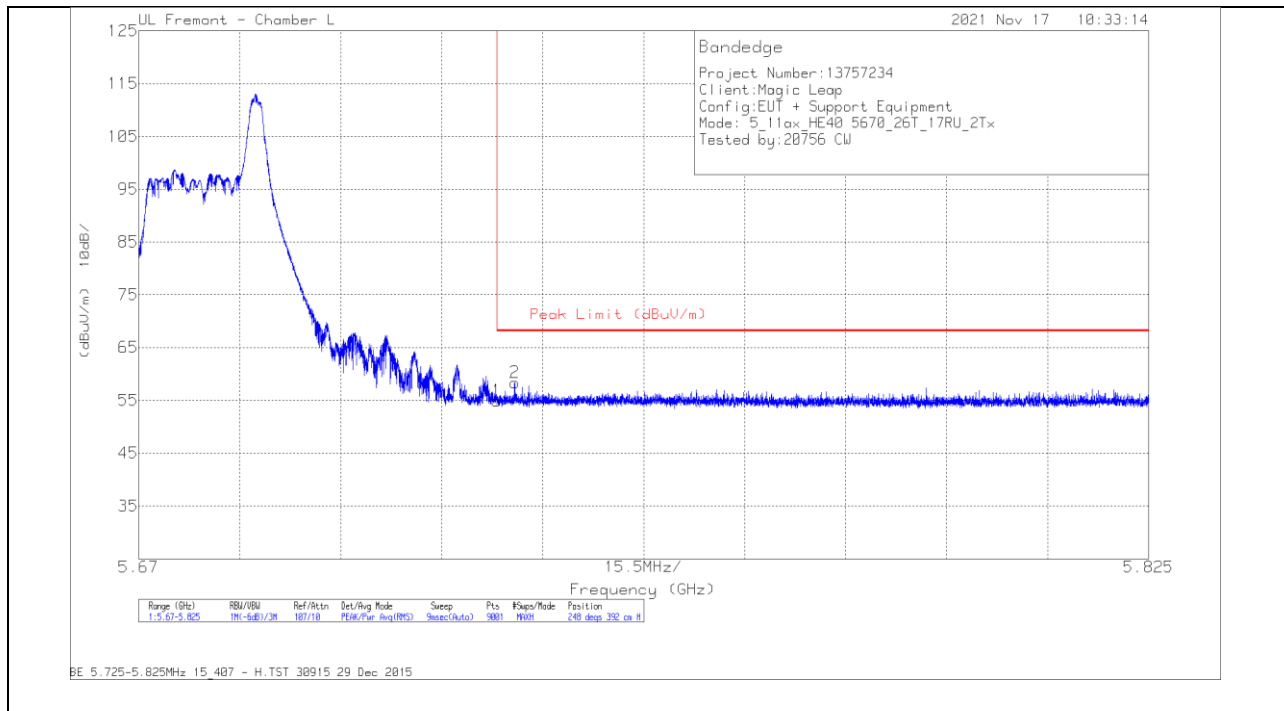


TRACE MARKER

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	34.03	Pk	34.8	-13.9	54.93	68.2	-13.27	248	392	H
2	5.7277	37.4	Pk	34.8	-13.9	58.3	68.2	-9.9	248	392	H

Pk - Peak detector

VERTICAL RESULT

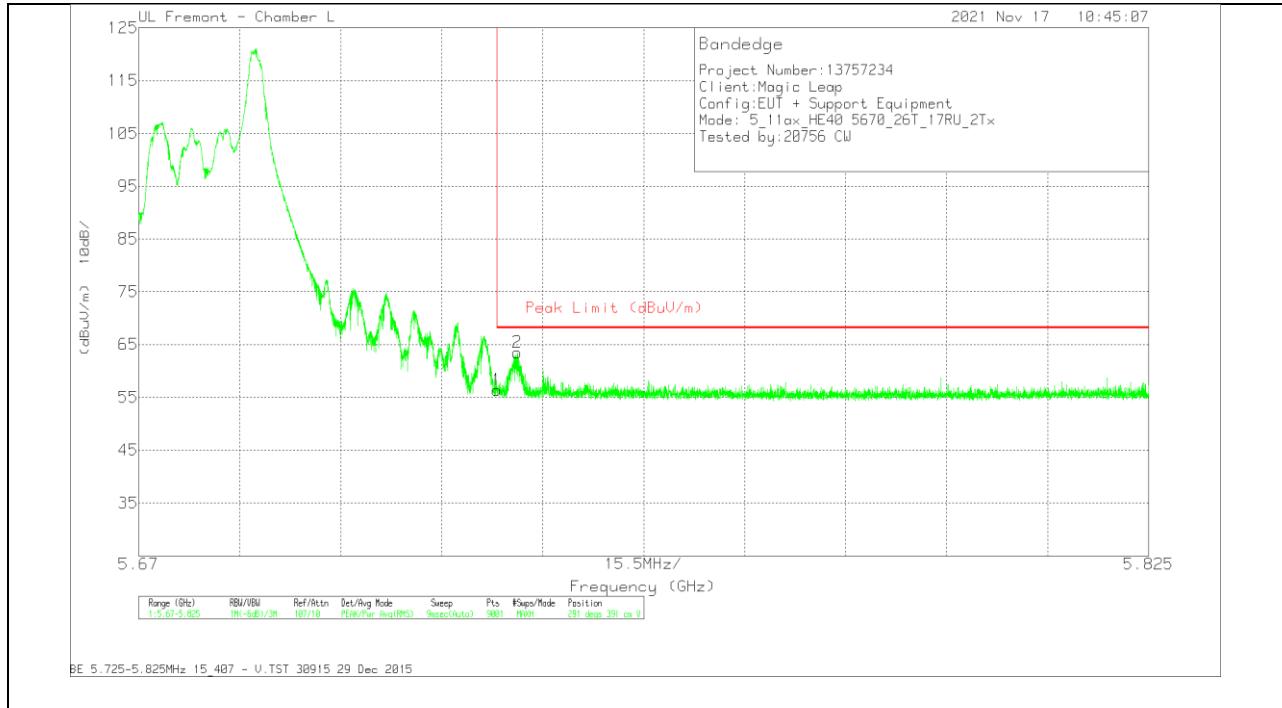


TRACE MARKER

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	35.48	Pk	34.8	-13.9	56.38	68.2	-11.82	291	391	V
2	5.7281	42.61	Pk	34.8	-13.9	63.51	68.2	-4.69	291	391	V


Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

HIGH

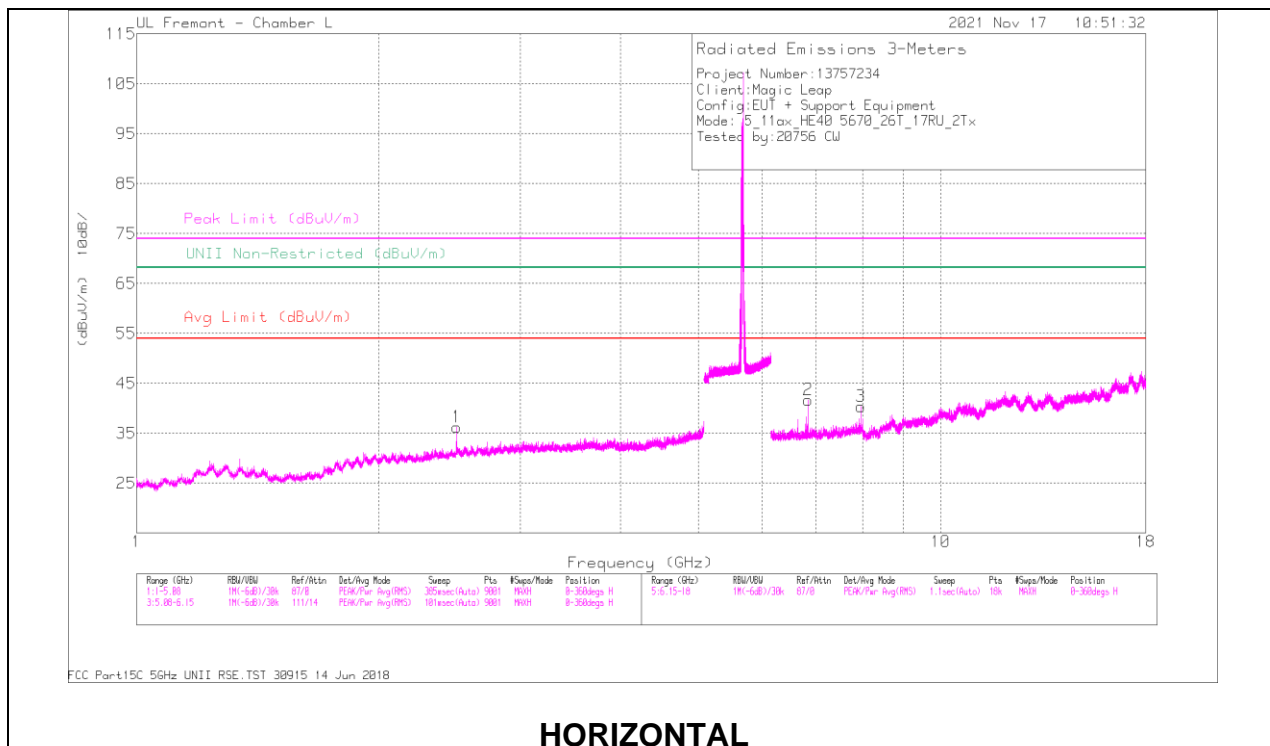

HORIZONTAL

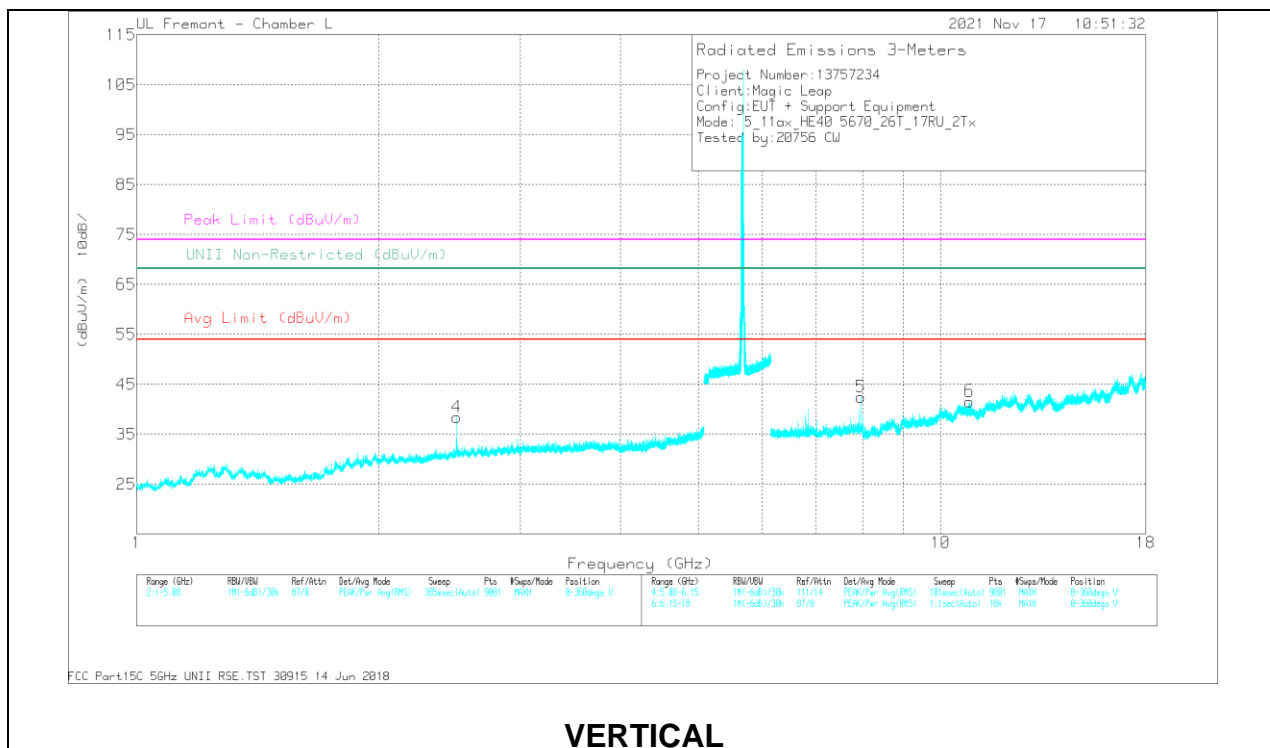

VERTICAL


RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Ch/Filt/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degn)	Height (cm)	Polarity
1	* 2.4994	39.41	PK-U	32.4	-29.1	42.71	-	-	74	-31.29	-	-	180	104	H
	* 2.4995	29.08	ADR	32.4	-29.1	32.38	54	-21.62	-	-	-	-	180	104	H
4	* 2.5	42.12	PK-U	32.4	-29.1	45.42	-	-	74	-28.58	-	-	211	255	V
	* 2.5	34.64	ADR	32.4	-29.1	37.94	54	-16.06	-	-	-	-	211	255	V
2	6.84	38.99	PK-U	35.6	-21.4	53.19	-	-	-	-	68.2	-15.01	334	228	H
3	7.9558	34.9	PK-U	35.8	-19.2	51.5	-	-	-	-	68.2	-16.7	347	190	H
5	7.9555	35.03	PK-U	35.8	-19.2	51.63	-	-	-	-	68.2	-16.57	281	214	V
6	* 10.8613	28.01	PK-U	37.8	-16.5	49.31	-	-	74	-24.69	-	-	47	178	V
	* 10.8615	16.54	ADR	37.8	-16.5	37.84	54	-16.16	-	-	-	-	47	178	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

10.1.4. TX ABOVE 1 GHz 802.11ax HE80 MODE IN THE 5.6GHz BAND
2TX Antenna 1 + Antenna 2 OFDM MODE: SU, Single User
BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

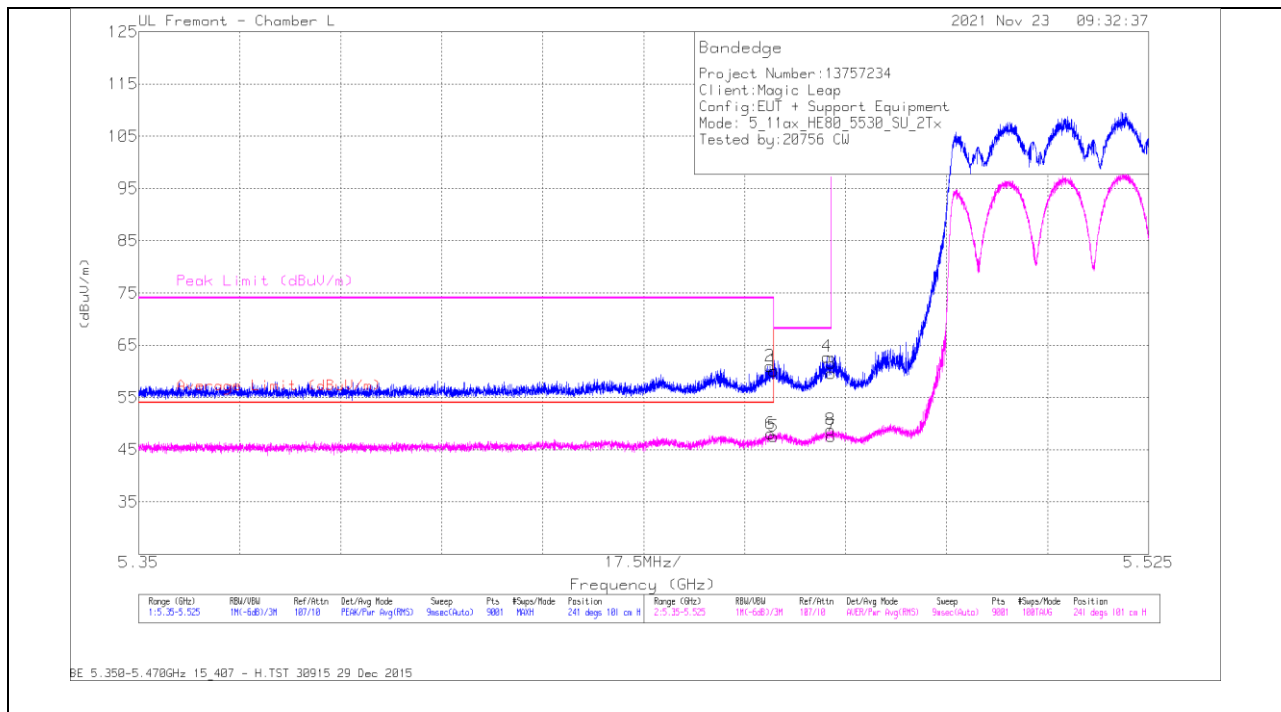

TRACE MARKER


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	39.46	Pk	34.9	-14.2	60.16	-	-	68.2	-8.04	241	101	H
2	* 5.45933	40.3	Pk	34.9	-14.2	61	-	-	74	-13	241	101	H
3	5.47	38.9	Pk	34.9	-14.2	59.6	-	-	68.2	-8.6	241	101	H
4	5.46923	42.07	Pk	34.9	-14.2	62.77	-	-	68.2	-5.43	241	101	H
5	* 5.46	26.81	RMS	34.9	-14.2	47.51	54	-6.49	-	-	241	101	H
6	* 5.45951	27.3	RMS	34.9	-14.2	48	54	-6	-	-	241	101	H
7	5.47	26.87	RMS	34.9	-14.2	47.57	-	-	-	-	241	101	H
8	5.46993	28.13	RMS	34.9	-14.2	48.83	-	-	-	-	241	101	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

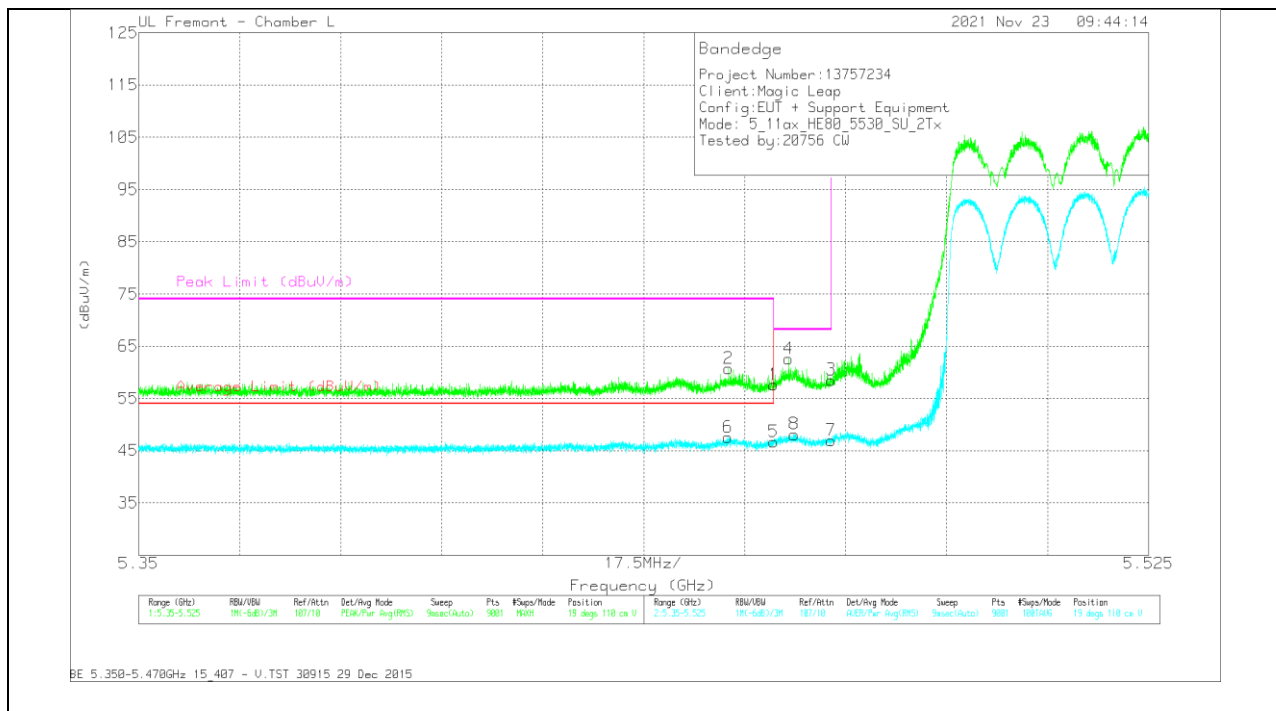

TRACE MARKER

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Fitr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	36.89	Pk	34.9	-14.2	57.59	-	-	68.2	-10.61	19	110	V
2	* 5.45218	40.07	Pk	34.9	-14.2	60.77	-	-	74	-13.23	19	110	V
3	5.47	37.85	Pk	34.9	-14.2	58.55	-	-	68.2	-9.65	19	110	V
4	5.4626	41.93	Pk	34.9	-14.2	62.63	-	-	68.2	-5.57	19	110	V
5	* 5.46	26.05	RMS	34.9	-14.2	46.75	54	-7.25	-	-	19	110	V
6	* 5.45206	26.83	RMS	34.9	-14.2	47.53	54	-6.47	-	-	19	110	V
7	5.47	26.29	RMS	34.9	-14.2	46.99	-	-	-	-	19	110	V
8	5.46359	27.42	RMS	34.9	-14.2	48.12	-	-	-	-	19	110	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

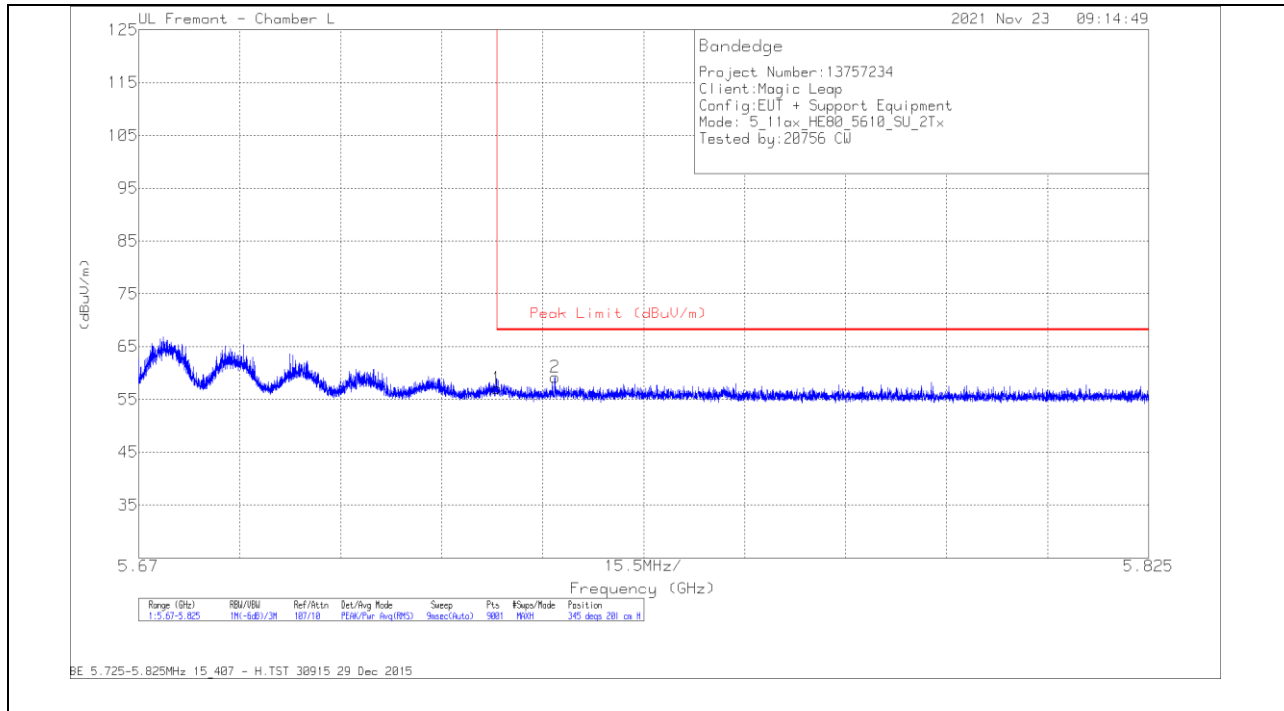


TRACE MARKER

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	36.24	Pk	34.8	-13.9	57.14	68.2	-11.06	345	201	H
2	5.73388	38.35	Pk	34.8	-13.9	59.25	68.2	-8.95	345	201	H

Pk - Peak detector

VERTICAL RESULT

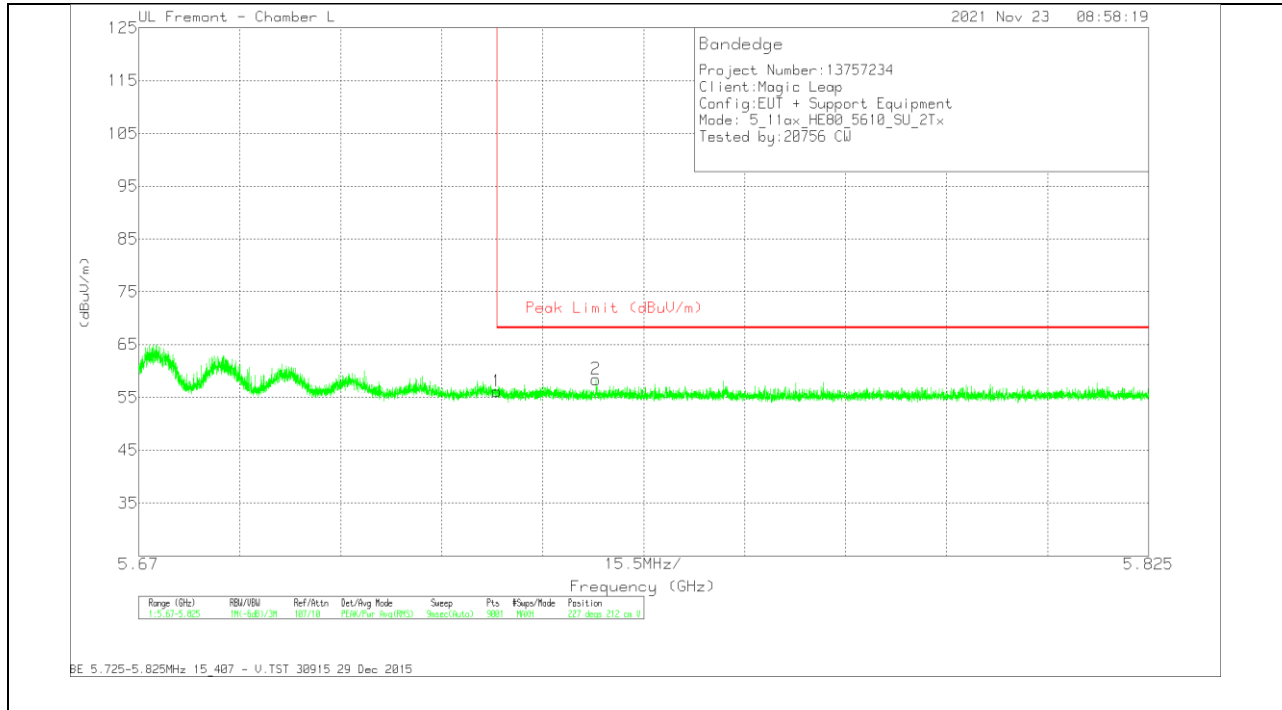

TRACE MARKER


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	35.29	Pk	34.8	-13.9	56.19	68.2	-12.01	227	212	V
2	5.7402	37.51	Pk	34.8	-13.9	58.41	68.2	-9.79	227	212	V

Pk - Peak detector

2TX Antenna 1 + Antenna 2 OFDMA MODE: 996-Tones, RU Index 67

BANDEDGE (MID CHANNEL LOW EDGE)

HORIZONTAL RESULT

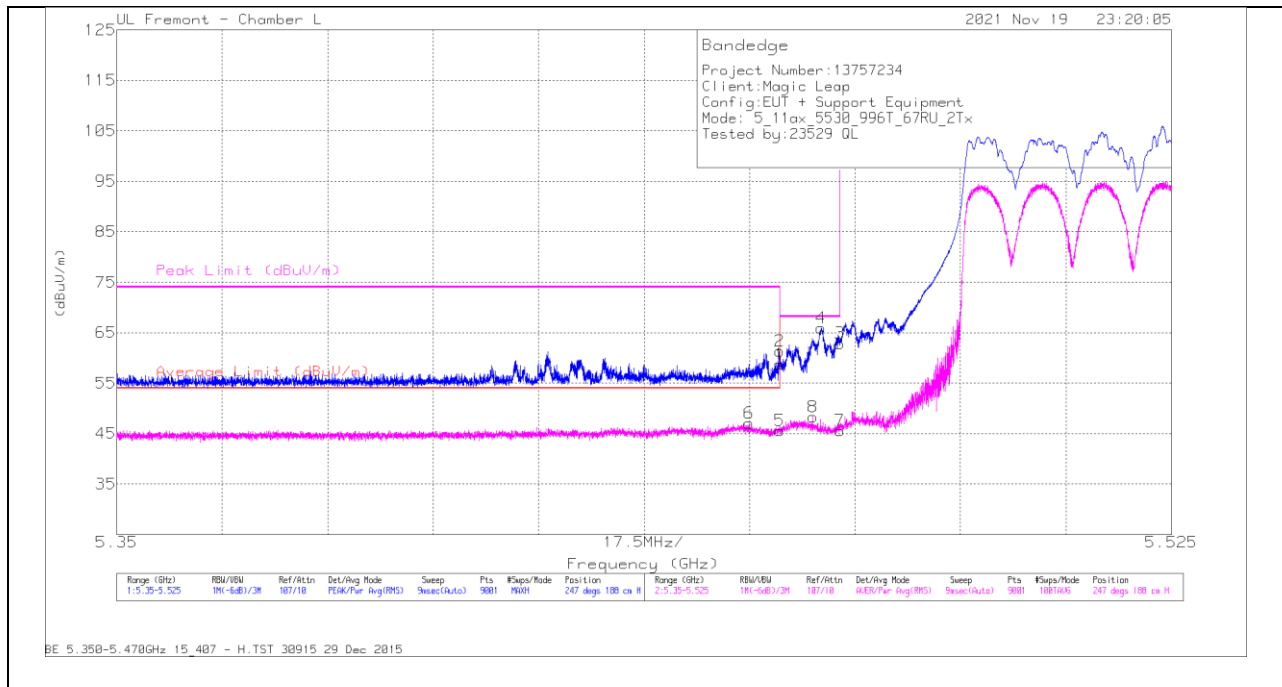

TRACE MARKER


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/CbI/Fitr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	38.01	Pk	34.9	-14.2	58.71	-	-	68.2	-9.49	247	188	H
2	* 5.45996	40.59	Pk	34.9	-14.2	61.29	-	-	74	-12.71	247	188	H
3	5.47	42.19	Pk	34.9	-14.2	62.89	-	-	68.2	-5.31	247	188	H
4	5.4669	45.24	Pk	34.9	-14.2	65.94	-	-	68.2	-2.26	247	188	H
5	* 5.46	24.91	RMS	34.9	-14.2	45.61	54	-8.39	-	-	247	188	H
6	* 5.4549	26.32	RMS	34.9	-14.2	47.02	54	-6.98	-	-	247	188	H
7	5.47	24.9	RMS	34.9	-14.2	45.6	-	-	-	-	247	188	H
8	5.4655	27.65	RMS	34.9	-14.2	48.35	-	-	-	-	247	188	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

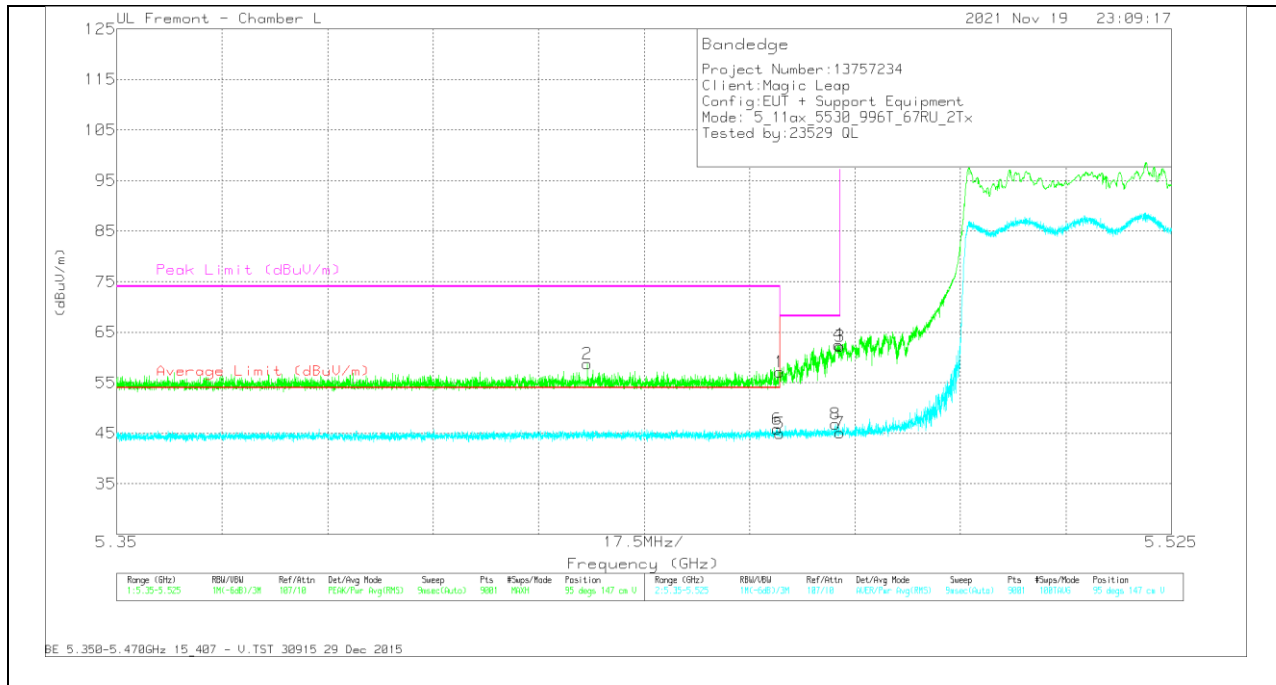


TRACE MARKER

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/CbI/Ftr/Par d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	36.45	Pk	34.9	-14.2	57.15	-	-	68.2	-11.05	95	147	V
2	* 5.42807	38.02	Pk	34.9	-14.2	58.72	-	-	74	-15.28	95	147	V
3	5.47	41.5	Pk	34.9	-14.2	62.2	-	-	68.2	-6	95	147	V
4	5.46981	41.82	Pk	34.9	-14.2	62.52	-	-	68.2	-5.68	95	147	V
5	* 5.46	24.2	RMS	34.9	-14.2	44.9	54	-9.1	-	-	95	147	V
6	* 5.45961	25.16	RMS	34.9	-14.2	45.86	54	-8.14	-	-	95	147	V
7	5.47	24.36	RMS	34.9	-14.2	45.06	-	-	-	-	95	147	V
8	5.46921	26.06	RMS	34.9	-14.2	46.76	-	-	-	-	95	147	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

CHANNEL 138

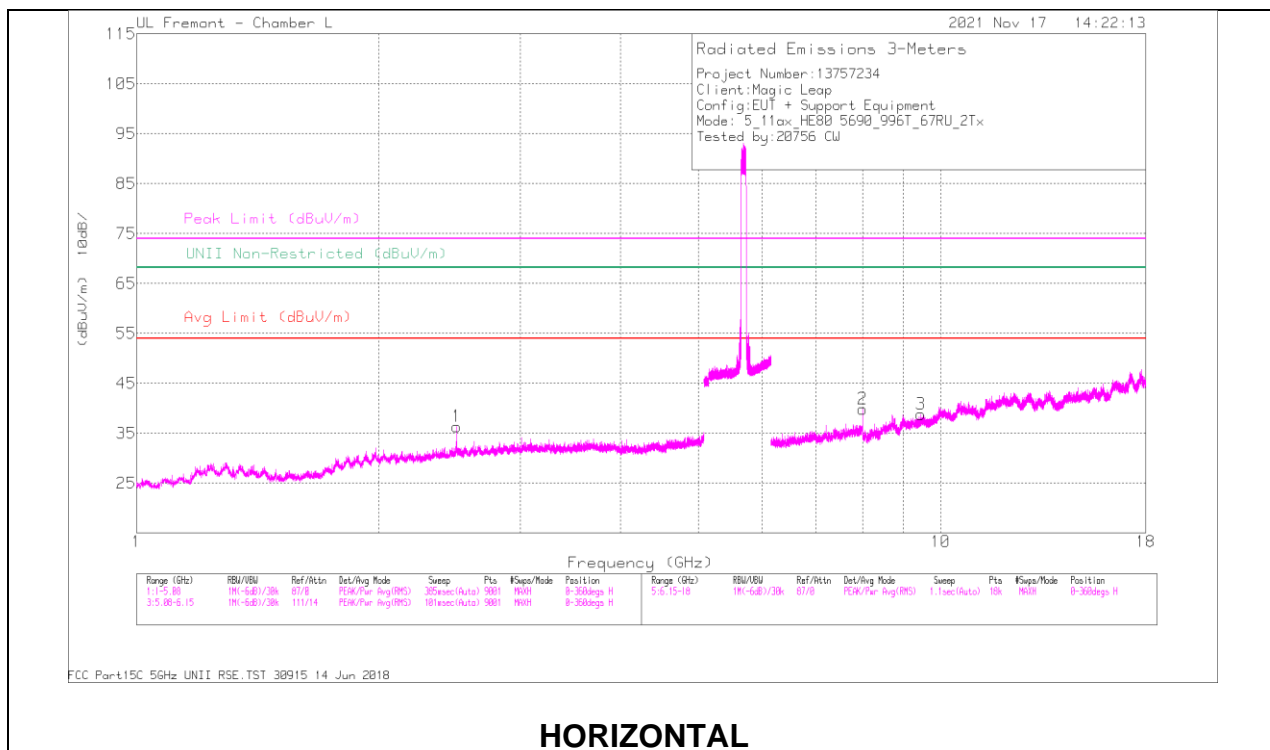

HORIZONTAL

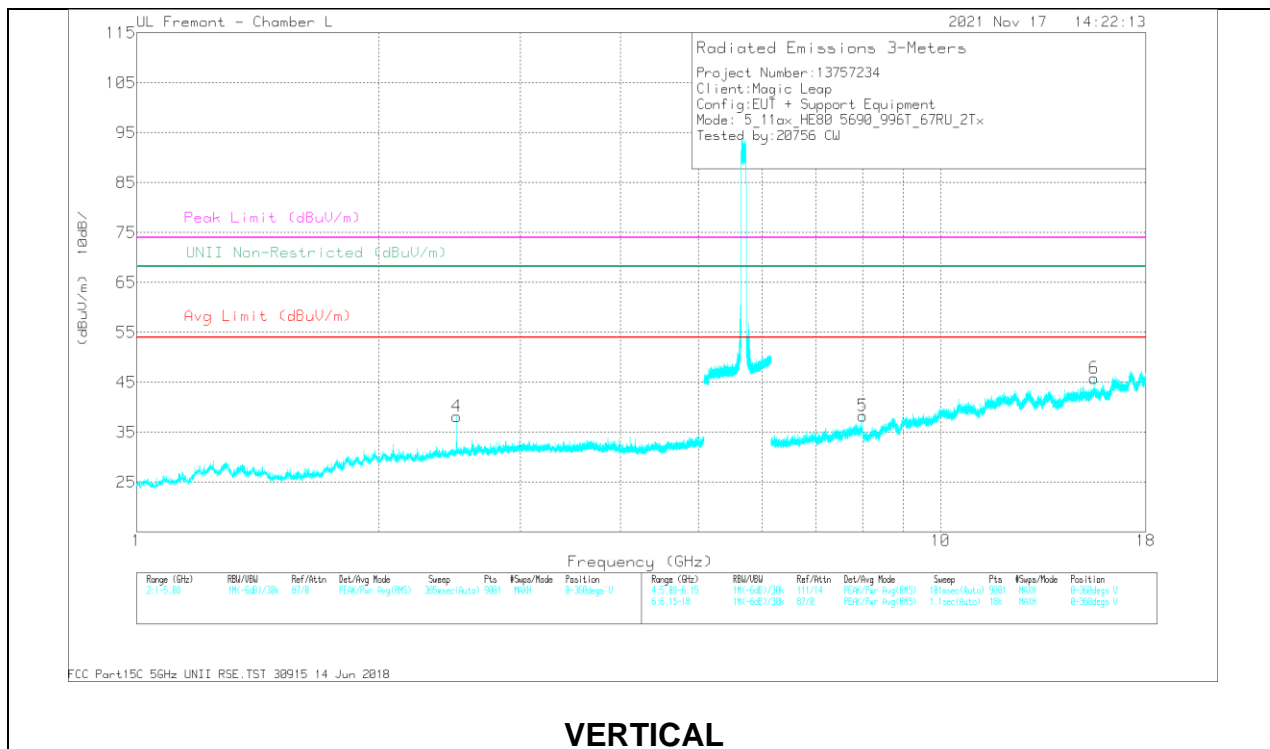

VERTICAL

RADIATED EMISSIONS


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Ch/Fit/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degn)	Height (cm)	Polarity
1	* 2.4996	38.26	PK-U	32.4	-29.1	41.56	-	-	74	-32.44	-	-	165	151	H
	* 2.4982	28.9	ADR	32.4	-29.1	30.2	54	-23.8	-	-	-	-	165	151	H
4	* 2.4991	38.82	PK-U	32.4	-29.1	42.12	-	-	74	-31.88	-	-	310	189	V
	* 2.4982	26.83	ADR	32.4	-29.1	30.13	54	-23.87	-	-	-	-	310	189	V
2	8.0002	30.08	PK-U	35.8	-18.6	47.28	-	-	-	-	68.2	-20.92	69	140	H
3	* 9.4601	28.44	PK-U	36.6	-17.5	47.54	-	-	74	-26.46	-	-	30	197	H
	* 9.4601	16.3	ADR	36.6	-17.5	35.4	54	-18.6	-	-	-	-	30	197	H
5	8.0002	29.56	PK-U	35.8	-18.6	46.76	-	-	-	-	68.2	-21.44	30	141	V
6	* 15.5253	28.8	PK-U	40.3	-15.9	53.2	-	-	74	-20.8	-	-	44	126	V
	* 15.5256	17.19	ADR	40.3	-15.9	41.59	54	-12.41	-	-	-	-	44	126	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

2TX Antenna 1 + Antenna 2 OFDMA MODE: 484-Tones, RU Index 65

BANDEDGE (MID CHANNEL LOW EDGE)

HORIZONTAL RESULT

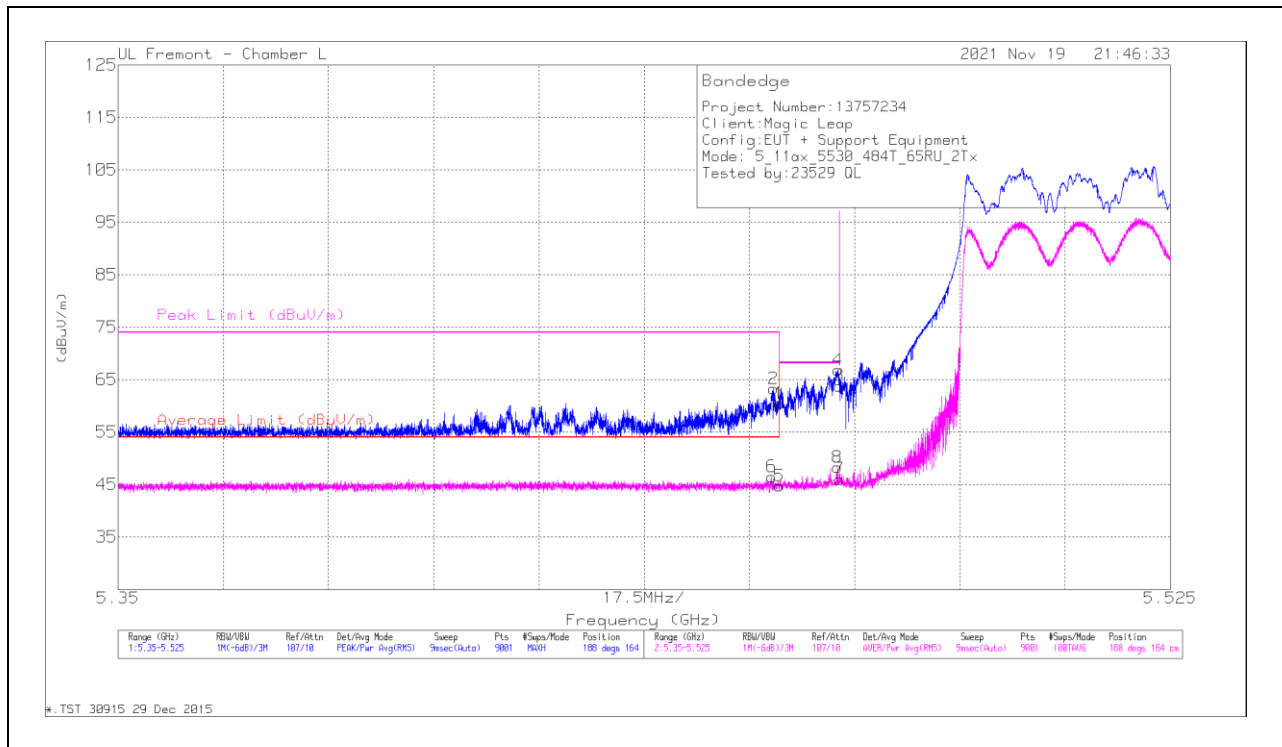

TRACE MARKER


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/CbI/Ftr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	39.79	Pk	34.9	-14.2	60.49	-	-	68.2	-7.71	188	164	H
2	* 5.459	42.57	Pk	34.9	-14.2	63.27	-	-	74	-10.73	188	164	H
3	5.47	43.13	Pk	34.9	-14.2	63.83	-	-	68.2	-4.37	188	164	H
4	5.46972	46.11	Pk	34.9	-14.2	66.81	-	-	68.2	-1.39	188	164	H
5	* 5.46	24.05	RMS	34.9	-14.2	44.75	54	-9.25	-	-	188	164	H
6	* 5.45865	25.8	RMS	34.9	-14.2	46.5	54	-7.5	-	-	188	164	H
7	5.47	25.33	RMS	34.9	-14.2	46.03	-	-	-	-	188	164	H
8	5.4696	27.59	RMS	34.9	-14.2	48.29	-	-	-	-	188	164	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

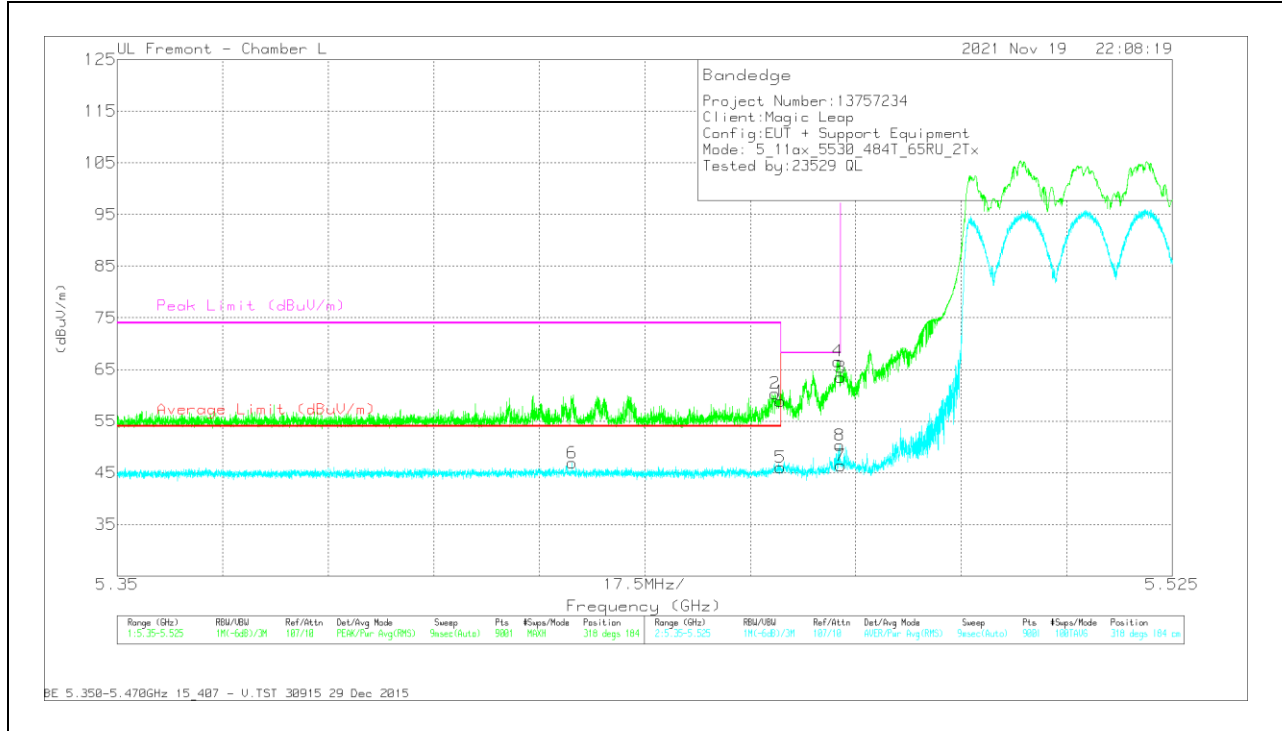


TRACE MARKER

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Ftr/Par d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	38.14	Pk	34.9	-14.2	58.84	-	-	68.2	-9.36	318	184	V
2	* 5.45908	39.67	Pk	34.9	-14.2	60.37	-	-	74	-13.63	318	184	V
3	5.47	42.78	Pk	34.9	-14.2	63.48	-	-	68.2	-4.72	318	184	V
4	5.46952	45.87	Pk	34.9	-14.2	66.57	-	-	68.2	-1.63	318	184	V
5	* 5.46	25.32	RMS	34.9	-14.2	46.02	54	-7.98	-	-	318	184	V
6	* 5.42544	26.21	RMS	34.9	-14.2	46.91	54	-7.09	-	-	318	184	V
7	5.47	25.69	RMS	34.9	-14.2	46.39	-	-	-	-	318	184	V
8	5.46981	29.6	RMS	34.9	-14.2	50.3	-	-	-	-	318	184	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

2TX Antenna 1 + Antenna 2 OFDMA MODE: 26-Tones, RU Index 0
HARMONICS AND SPURIOUS EMISSIONS

CHANNEL 138

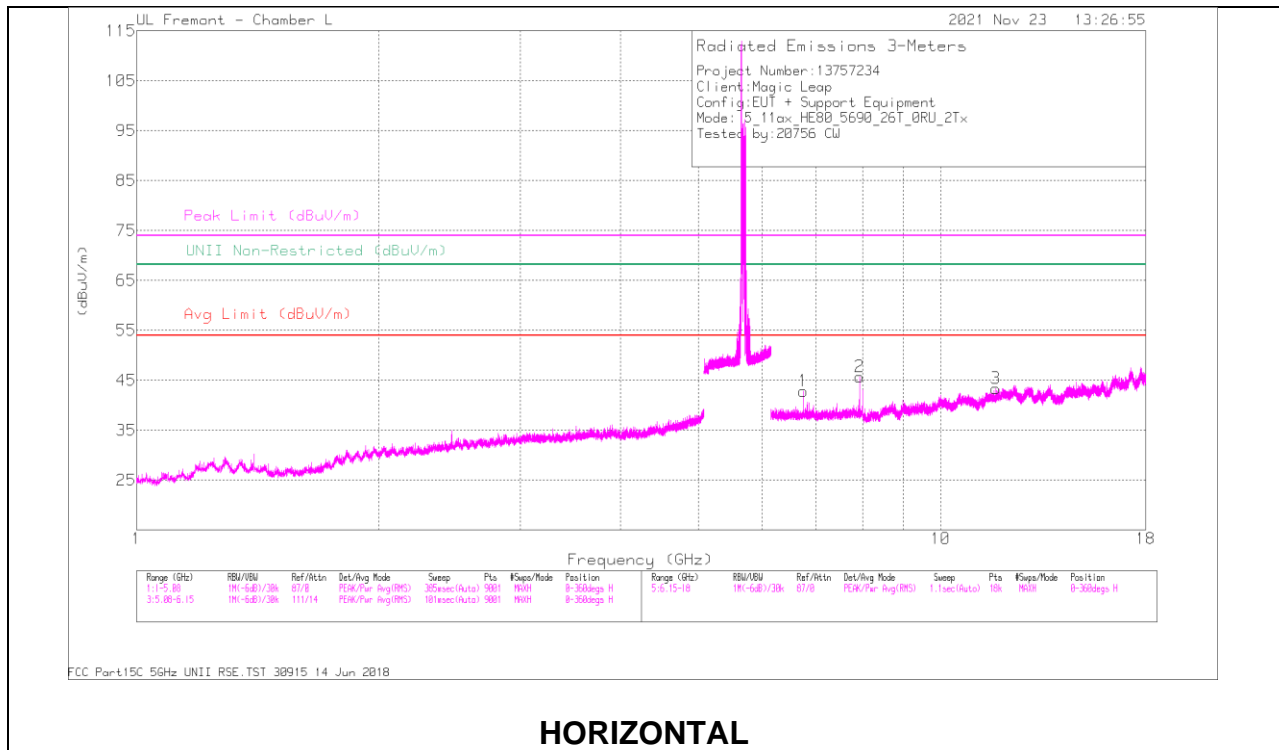

HORIZONTAL

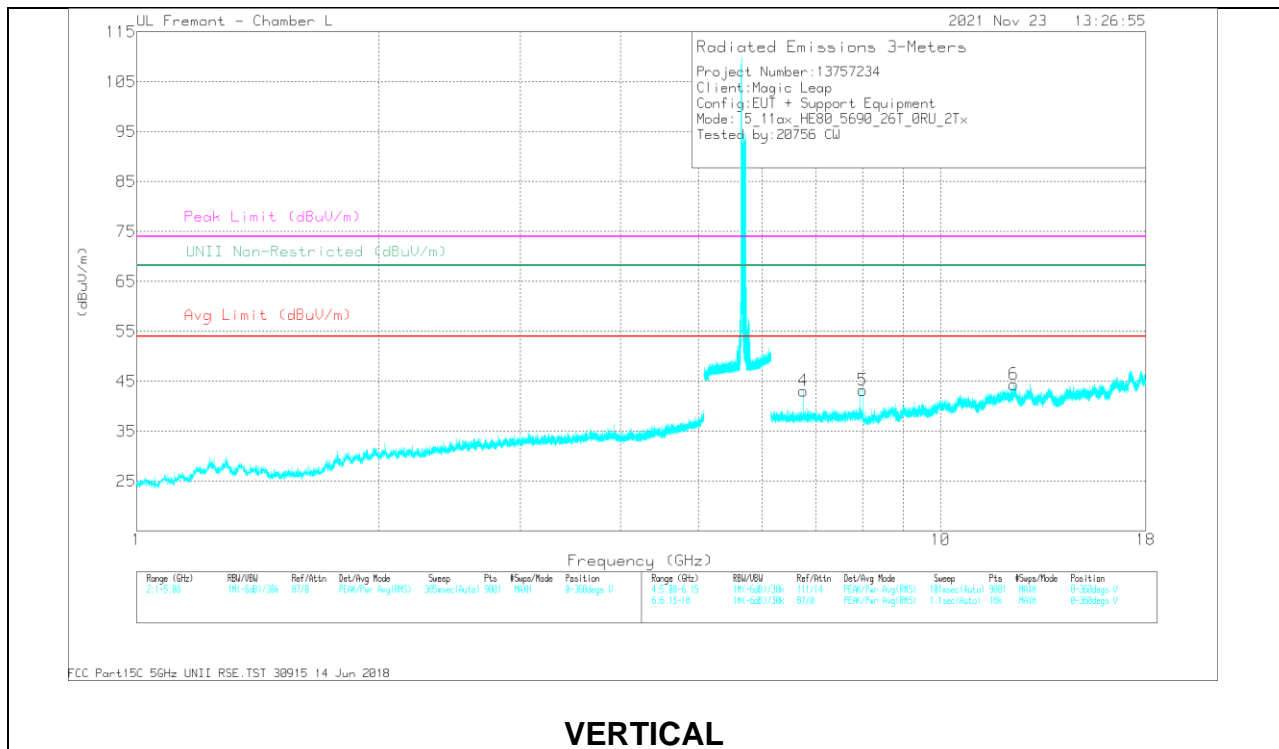

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBµV)	Det	AF T119 (dBm)	Amp/Coil/Ftr/Pad (dB)	Corrected Reading (dBµV/m)	Avg Limit (dBµV/m)	Margin (dB)	Peak Limit (dBµV/m)	PK Margin (dB)	UNII Non-Restricted (dBµV/m)	PK Margin (dB)	Azimuth (Degn)	Height (cm)	Polarity
1	6.75173	40.83	PK-U	35.7	-21	55.53	-	-	-	-	68.2	-12.67	262	103	H
2	7.92801	38.79	PK-U	35.8	-19.8	54.79	-	-	-	-	68.2	-13.41	233	104	H
3	* 11.7161	29.15	PK-U	39	-16.7	51.45	-	-	74	-22.55	-	-	249	107	H
	* 11.71598	17.49	ADR	39	-16.7	39.79	54	-14.21	-	-	-	-	249	107	H
4	6.75175	41.23	PK-U	35.7	-21	55.93	-	-	-	-	68.2	-12.27	260	375	V
5	7.99995	34.63	PK-U	35.8	-18.6	51.83	-	-	-	-	68.2	-16.37	101	107	V
6	* 12.34377	30.01	PK-U	39.1	-16.6	52.51	-	-	74	-21.49	-	-	309	108	V
	* 12.34393	18.73	ADR	39.1	-16.6	41.23	54	-12.77	-	-	-	-	309	108	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

2TX Antenna 1 + Antenna 2 OFDMA MODE: 26-Tones, RU Index 18
HARMONICS AND SPURIOUS EMISSIONS

CHANNEL 138

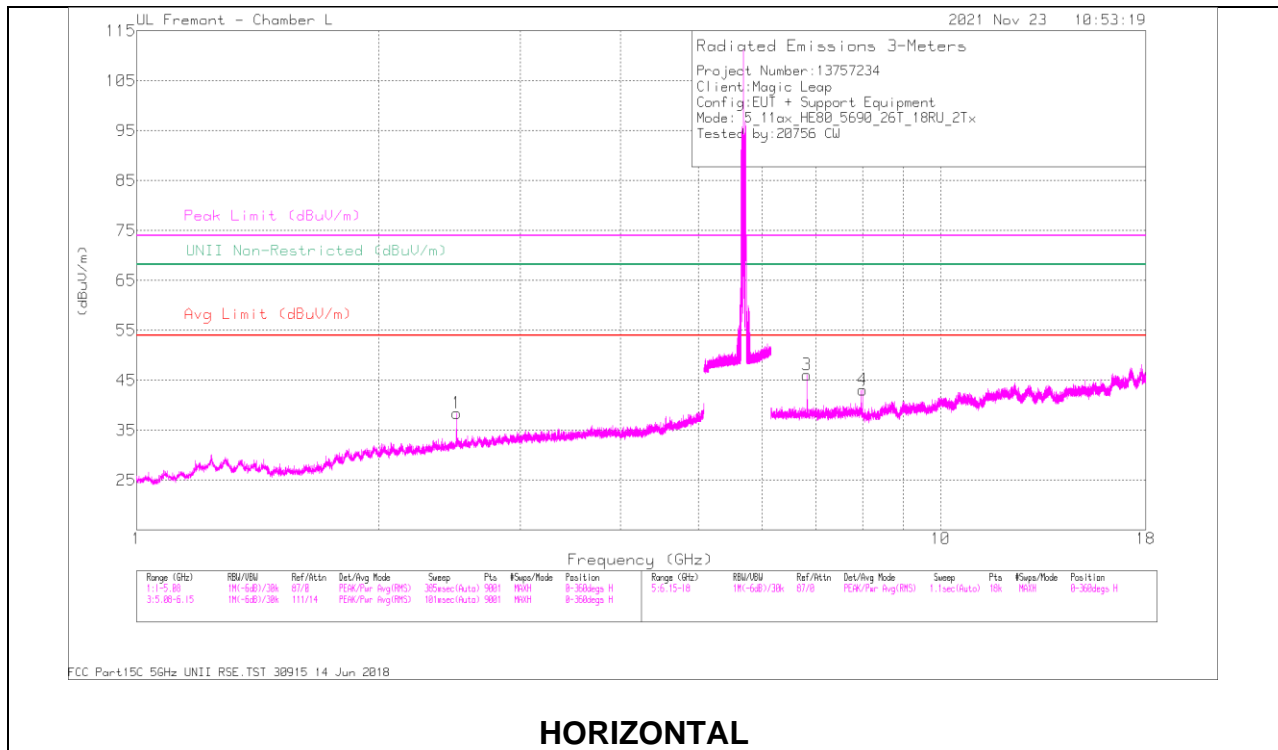

HORIZONTAL

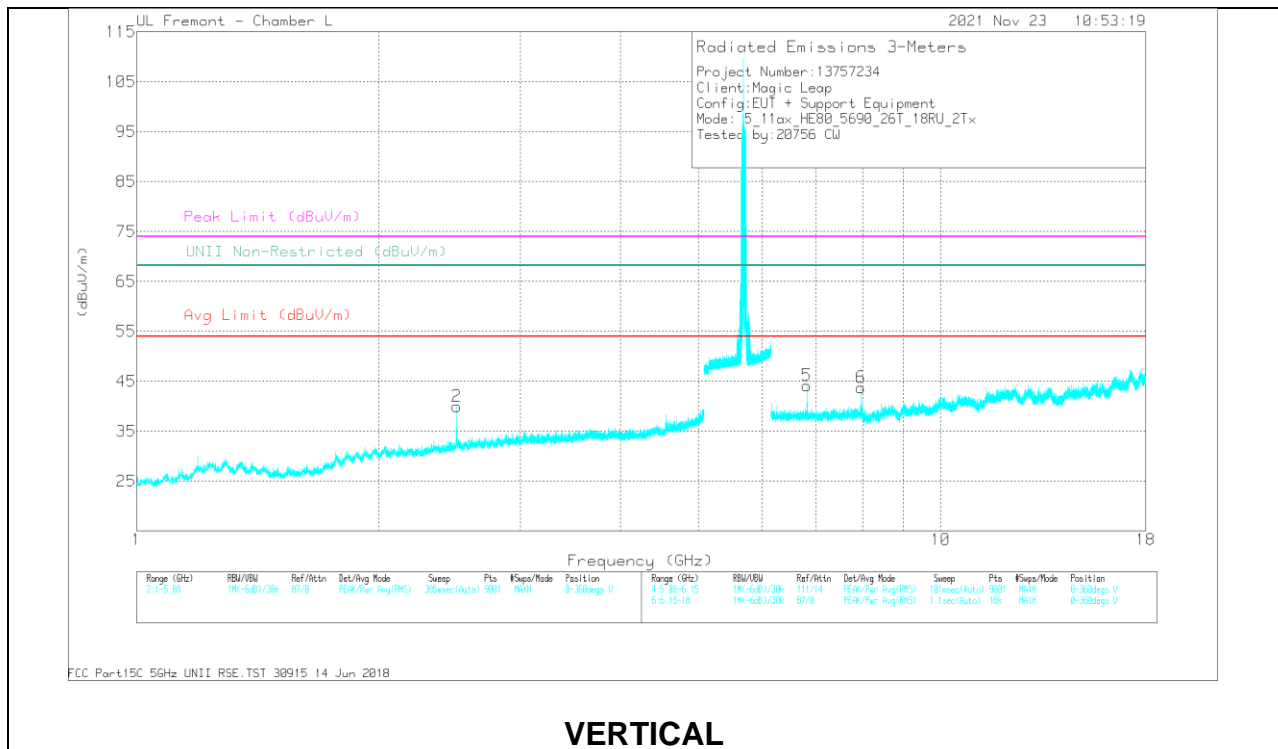

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Ch/Filt/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degn)	Height (cm)	Polarity
1	* 2.49923	39.35	PK-U	32.4	-29.1	42.65	-	-	74	-31.35	-	-	313	106	H
	* 2.49888	27.98	ADR	32.4	-29.1	31.28	54	-22.72	-	-	-	-	313	106	H
2	* 2.49995	38.75	PK-U	32.4	-29.1	42.05	-	-	74	-31.95	-	-	129	223	V
	* 2.49975	26.99	ADR	32.4	-29.1	30.29	54	-23.71	-	-	-	-	129	223	V
3	6.82315	44.43	PK-U	35.6	-21.2	58.83	-	-	-	-	68.2	-9.37	296	102	H
4	8.00007	32.77	PK-U	35.8	-18.6	49.97	-	-	-	-	68.2	-18.23	302	110	H
5	6.82314	42.1	PK-U	35.6	-21.2	56.5	-	-	-	-	68.2	-11.7	209	290	V
6	7.96369	36.77	PK-U	35.8	-19.3	53.27	-	-	-	-	68.2	-14.93	274	109	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

2TX Antenna 1 + Antenna 2 OFDMA MODE: 26-Tones, RU Index 36
HARMONICS AND SPURIOUS EMISSIONS

CHANNEL 138

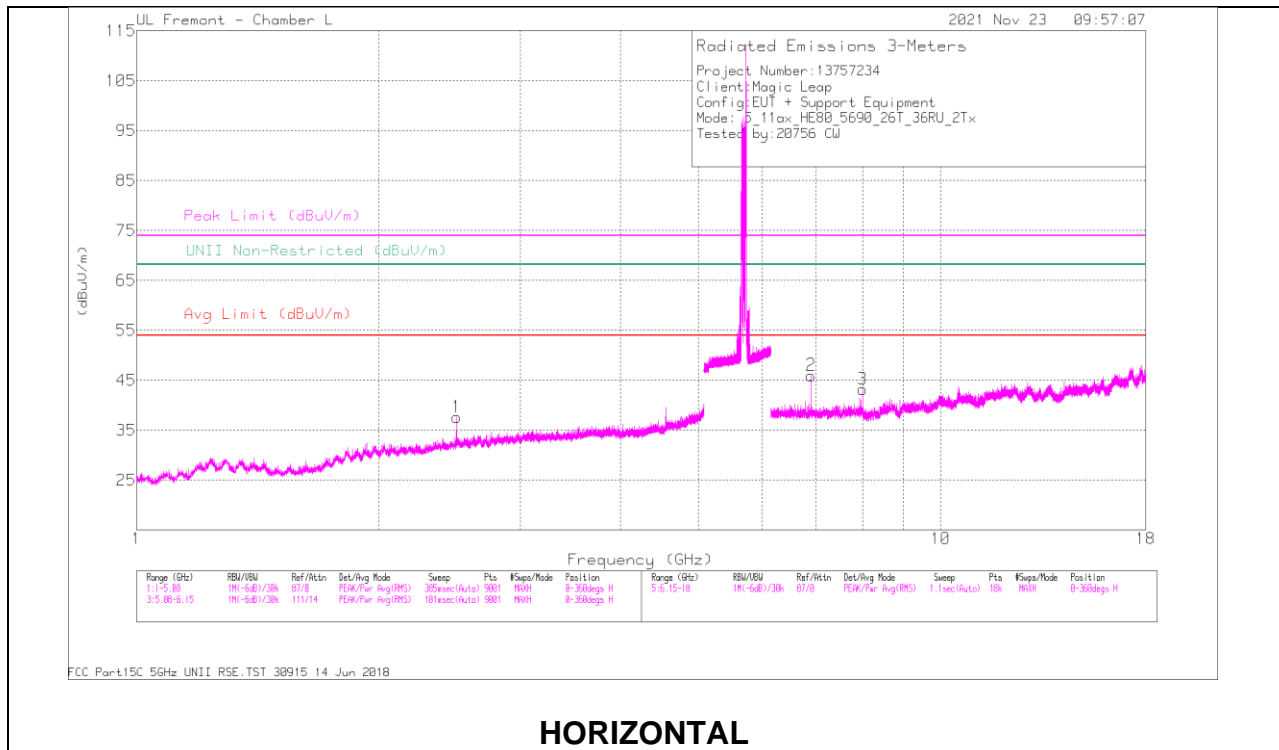

HORIZONTAL

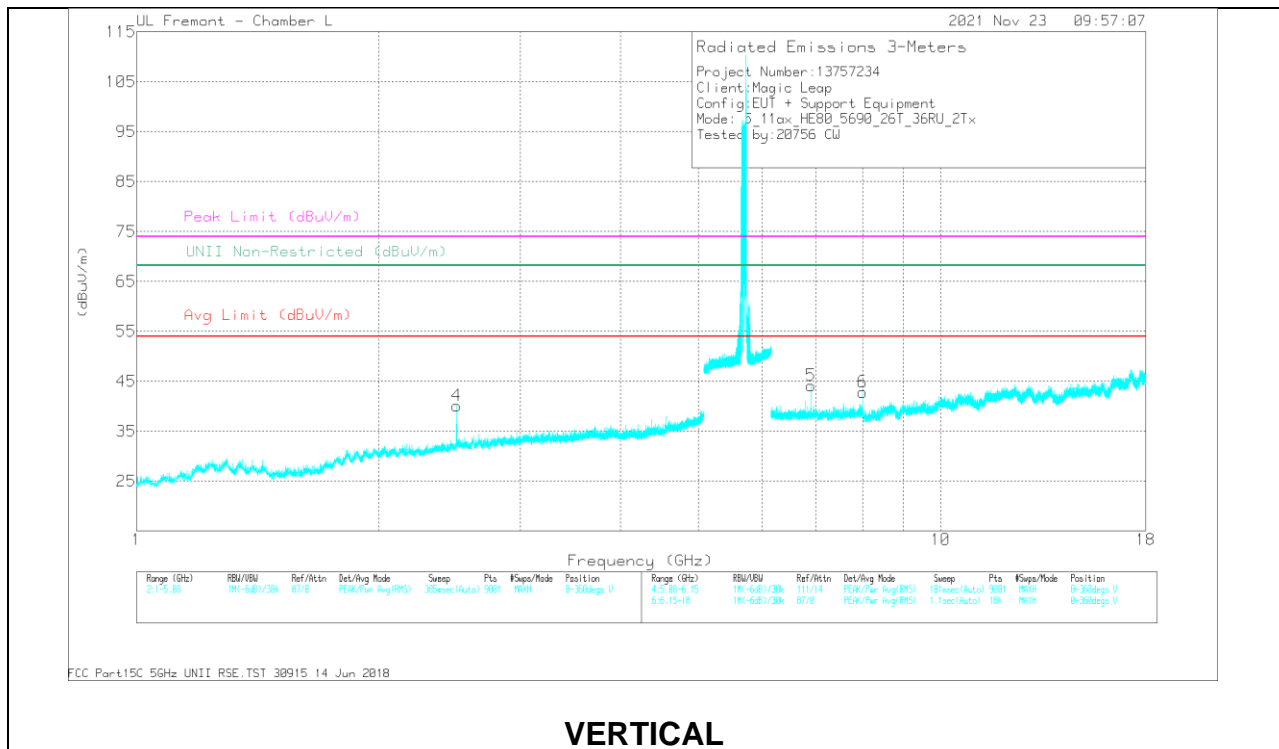

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Ch/Fit/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degn)	Height (cm)	Polarity
1	* 2.49973	41.7	PK-U	32.4	-29.1	45	-	-	74	-29	-	-	98	121	H
	* 2.49998	33.88	ADR	32.4	-29.1	37.18	54	-16.82	-	-	-	-	98	121	H
4	* 2.49992	42.86	PK-U	32.4	-29.1	46.16	-	-	74	-27.84	-	-	126	238	V
	* 2.49992	35.3	ADR	32.4	-29.1	38.6	54	-15.4	-	-	-	-	126	238	V
2	6.90394	43	PK-U	35.6	-20.9	57.7	-	-	-	-	68.2	-10.5	155	106	H
3	8.00363	38.55	PK-U	35.8	-18.5	55.85	-	-	-	-	68.2	-12.35	249	101	H
5	6.90381	42.59	PK-U	35.6	-20.9	57.29	-	-	-	-	68.2	-10.91	219	201	V
6	8.00325	34.03	PK-U	35.8	-18.6	51.23	-	-	-	-	68.2	-16.97	193	109	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

10.1.5. TX ABOVE 1 GHz 802.11ax HE160 MODE IN THE 5.6GHz BAND

2TX Antenna 1 + Antenna 2 OFDM MODE: SU, Single User

BANDEDGE (MID CHANNEL LOW EDGE)

HORIZONTAL RESULT

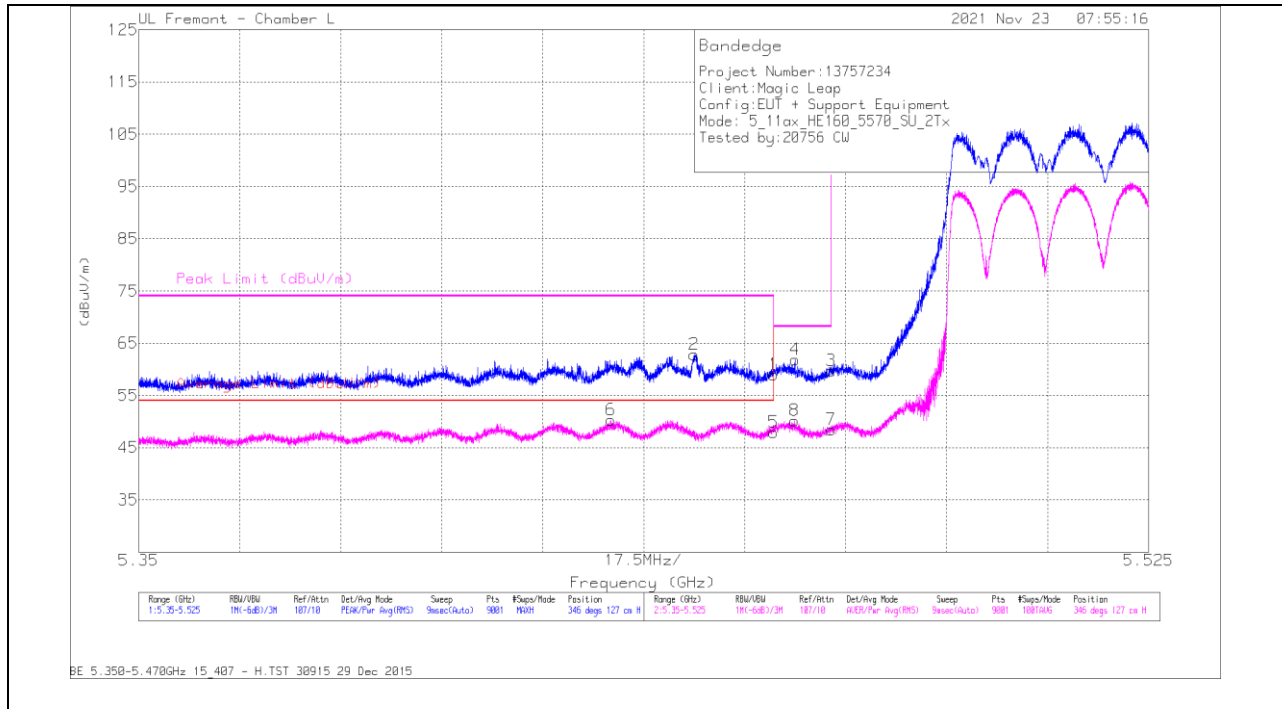

TRACE MARKER


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	38.25	Pk	34.9	-14.2	58.95	-	-	68.2	-9.25	346	127	H
2	* 5.44623	42.17	Pk	34.9	-14.2	62.87	-	-	74	-11.13	346	127	H
3	5.47	39.08	Pk	34.9	-14.2	59.78	-	-	68.2	-8.42	346	127	H
4	5.46371	41.17	Pk	34.9	-14.2	61.87	-	-	68.2	-6.33	346	127	H
5	* 5.46	27.25	RMS	34.9	-14.2	47.95	54	-6.05	-	-	346	127	H
6	* 5.43178	29.62	RMS	34.9	-14.2	50.32	54	-3.68	-	-	346	127	H
7	5.47	27.74	RMS	34.9	-14.2	48.44	-	-	-	-	346	127	H
8	5.46369	29.47	RMS	34.9	-14.2	50.17	-	-	-	-	346	127	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

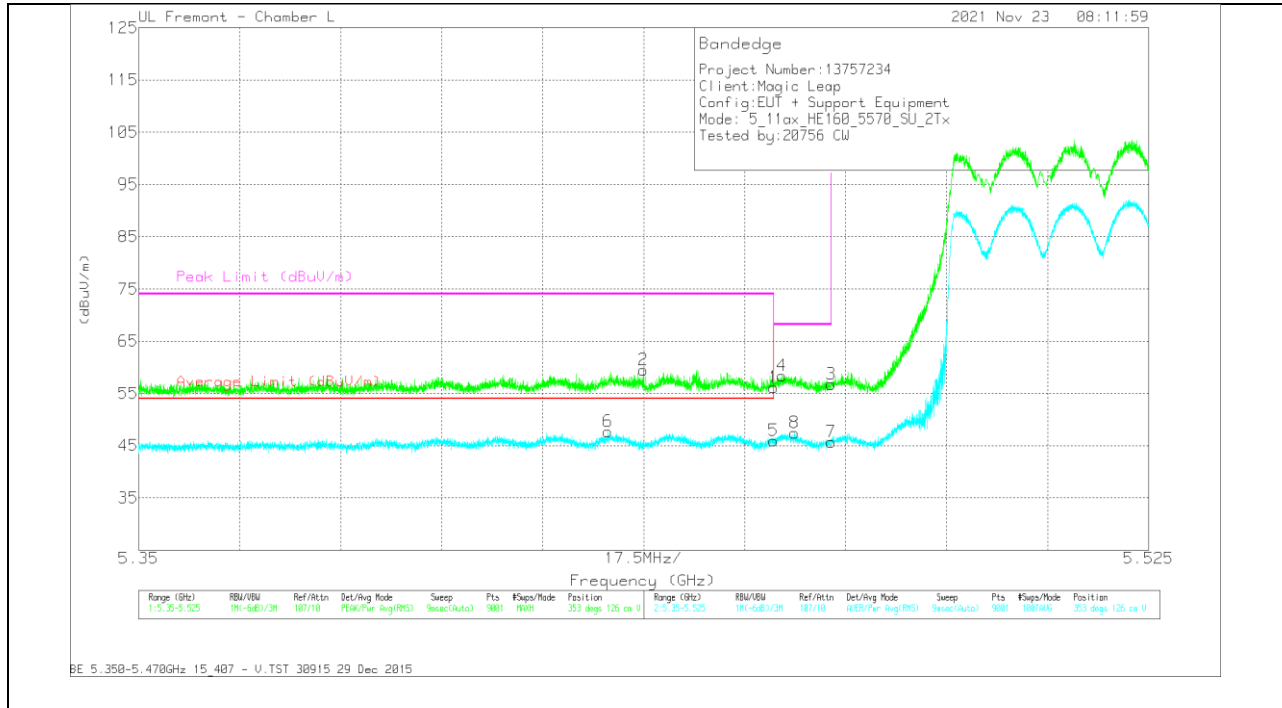


TRACE MARKER

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	35.45	Pk	34.9	-14.2		56.15	-	-	68.2	-12.05	353	126	V
2	* 5.43742	38.91	Pk	34.8	-14.2		59.51	-	-	74	-14.49	353	126	V
3	5.47	36.1	Pk	34.9	-14.2		56.8	-	-	68.2	-11.4	353	126	V
4	5.46149	37.69	Pk	34.9	-14.2		58.39	-	-	68.2	-9.81	353	126	V
5	* 5.46	25.22	RMS	34.9	-14.2	0.1	45.92	54	-8.08	-	-	353	126	V
6	* 5.43135	26.97	RMS	34.9	-14.2	0.1	47.67	54	-6.33	-	-	353	126	V
7	5.47	25	RMS	34.9	-14.2	0.1	45.7	-	-	-	-	353	126	V
8	5.46361	26.75	RMS	34.9	-14.2	0.1	47.45	-	-	-	-	353	126	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (MID CHANNEL HIGH EDGE)

HORIZONTAL RESULT

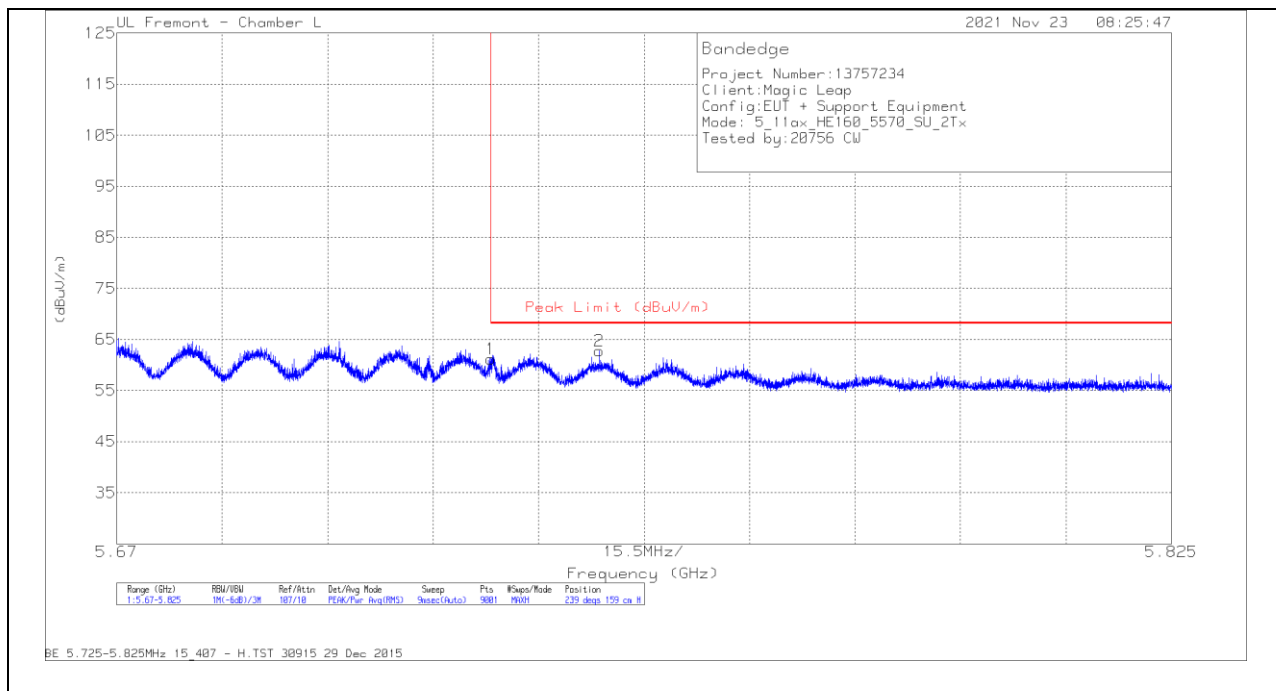

TRACE MARKER


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	40.23	Pk	34.8	-13.9	61.13	68.2	-7.07	239	159	H
2	5.74089	41.85	Pk	34.8	-13.9	62.75	68.2	-5.45	239	159	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

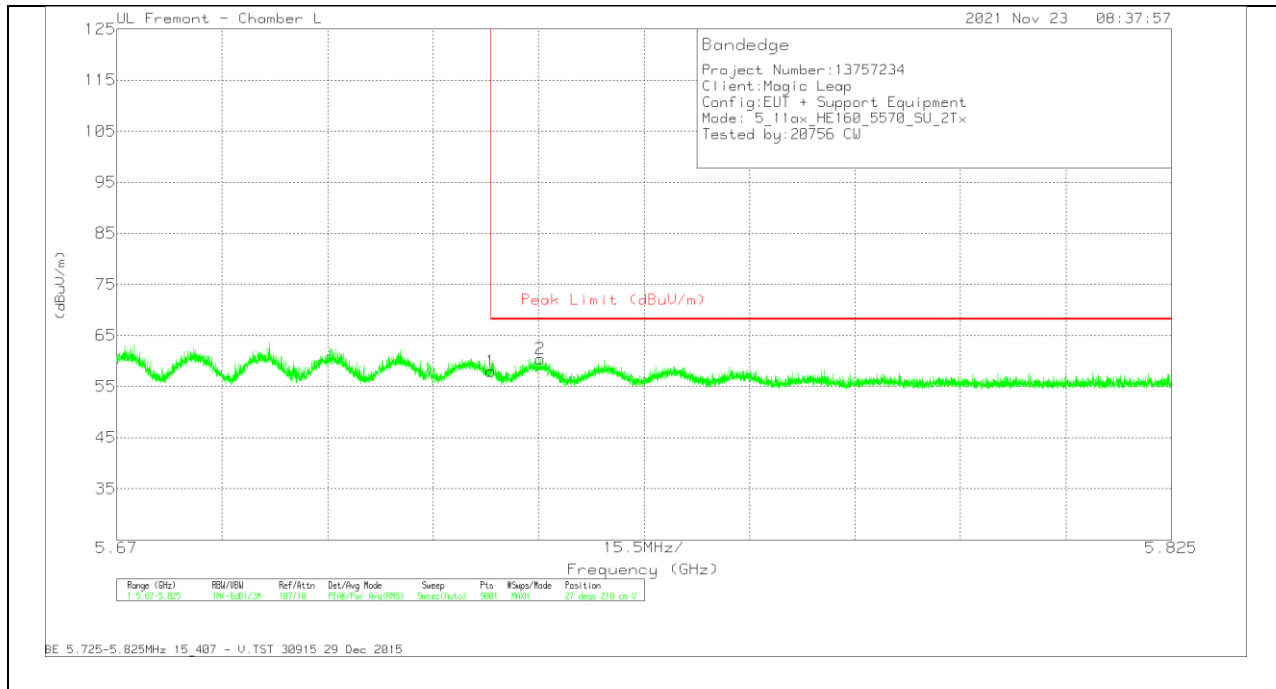

TRACE MARKER

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	37.05	Pk	34.8	-13.9	57.95	68.2	-10.25	27	210	V
2	5.73227	39.57	Pk	34.8	-13.9	60.47	68.2	-7.73	27	210	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector


RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

MID

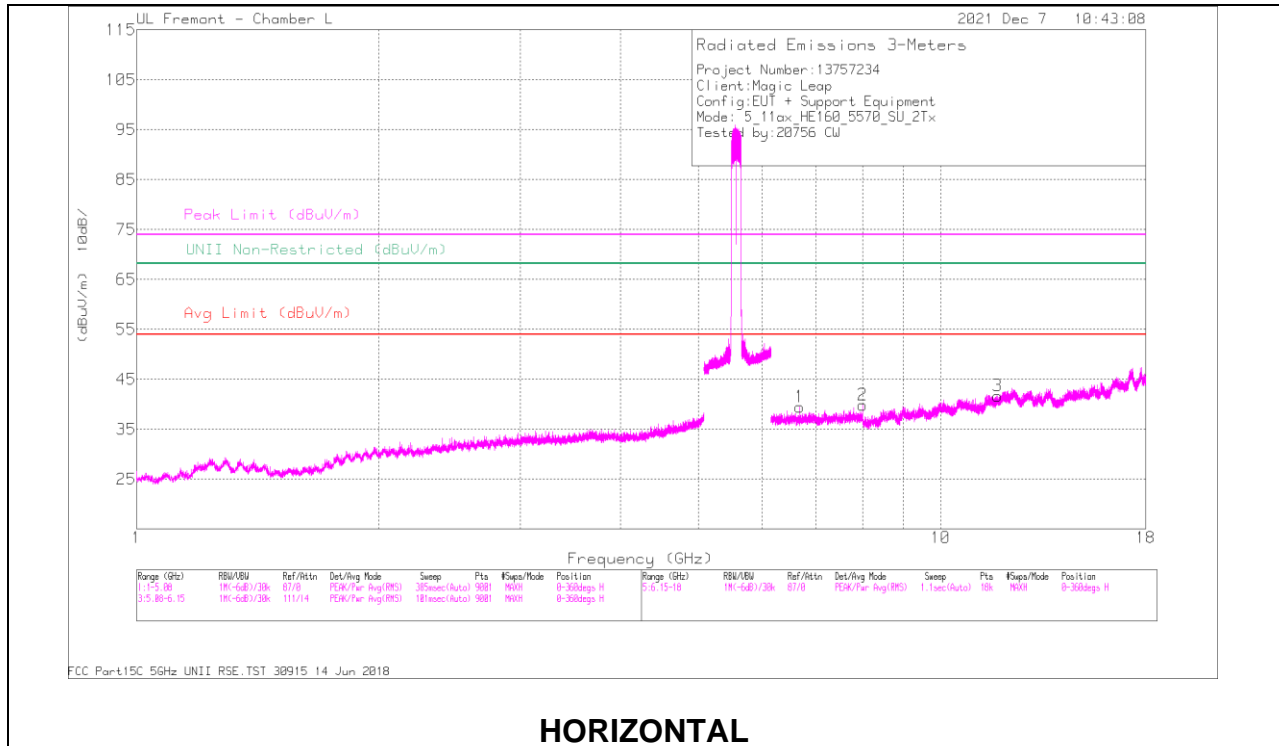

HORIZONTAL

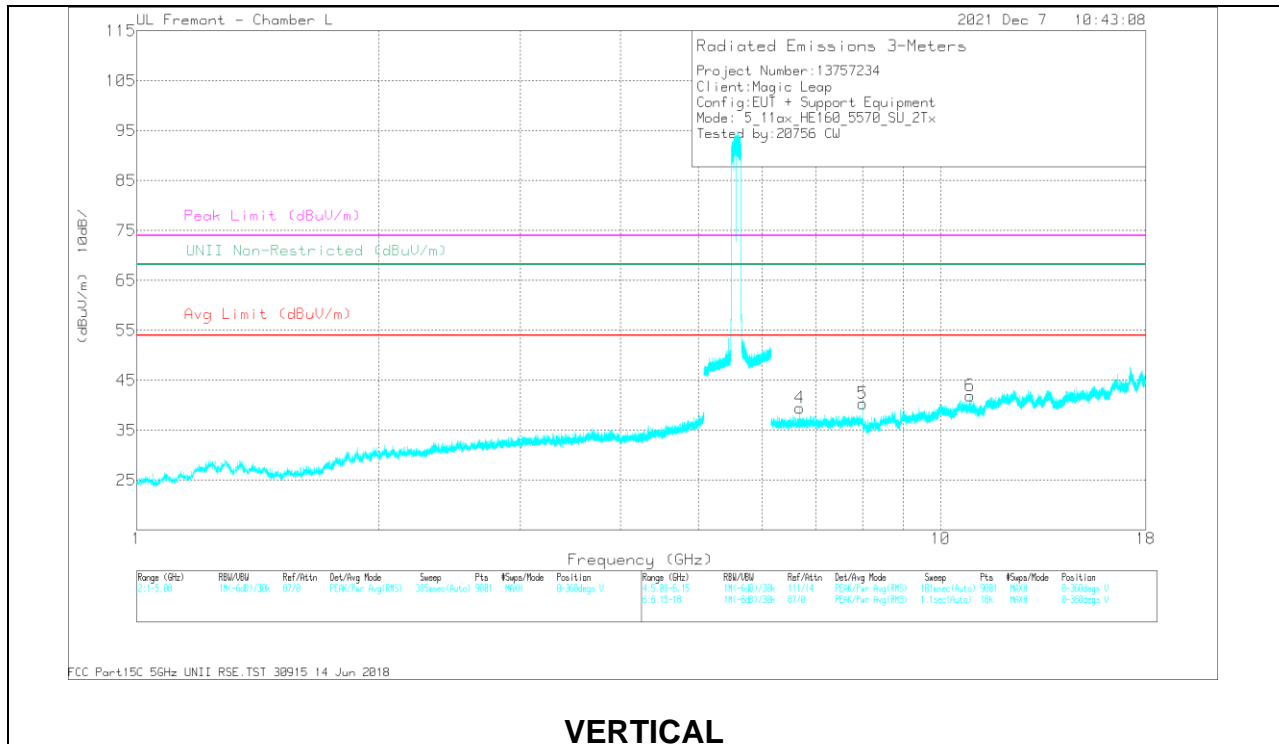

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cb(Filt)/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	6.683783	34.55	PK-U	35.8	-21.5	48.85	-	-	-	-	68.2	-19.35	272	101	H
2	7.99931	31.44	PK-U	35.8	-18.6	48.64	-	-	-	-	68.2	-19.56	150	375	H
3	* 11.772315	28.94	PK-U	39	-16.6	51.34	-	-	74	-22.66	-	-	339	383	H
	* 11.772346	17.47	ADR	39	-16.6	39.87	54	-14.13	-	-	-	-	339	383	H
4	6.684155	34.3	PK-U	35.8	-21.5	48.6	-	-	-	-	68.2	-19.6	148	102	V
5	7.999892	31.59	PK-U	35.8	-18.6	48.79	-	-	-	-	68.2	-19.41	253	109	V
6	* 10.880546	29.11	PK-U	37.8	-16.6	50.31	-	-	74	-23.69	-	-	152	370	V
	* 10.880671	17.69	ADR	37.8	-16.6	38.89	54	-15.11	-	-	-	-	152	370	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

2TX Antenna 1 + Antenna 2 OFDMA MODE: 2x 996-Tones, Index 68

BANDEDGE (MID CHANNEL LOW EDGE)

HORIZONTAL RESULT

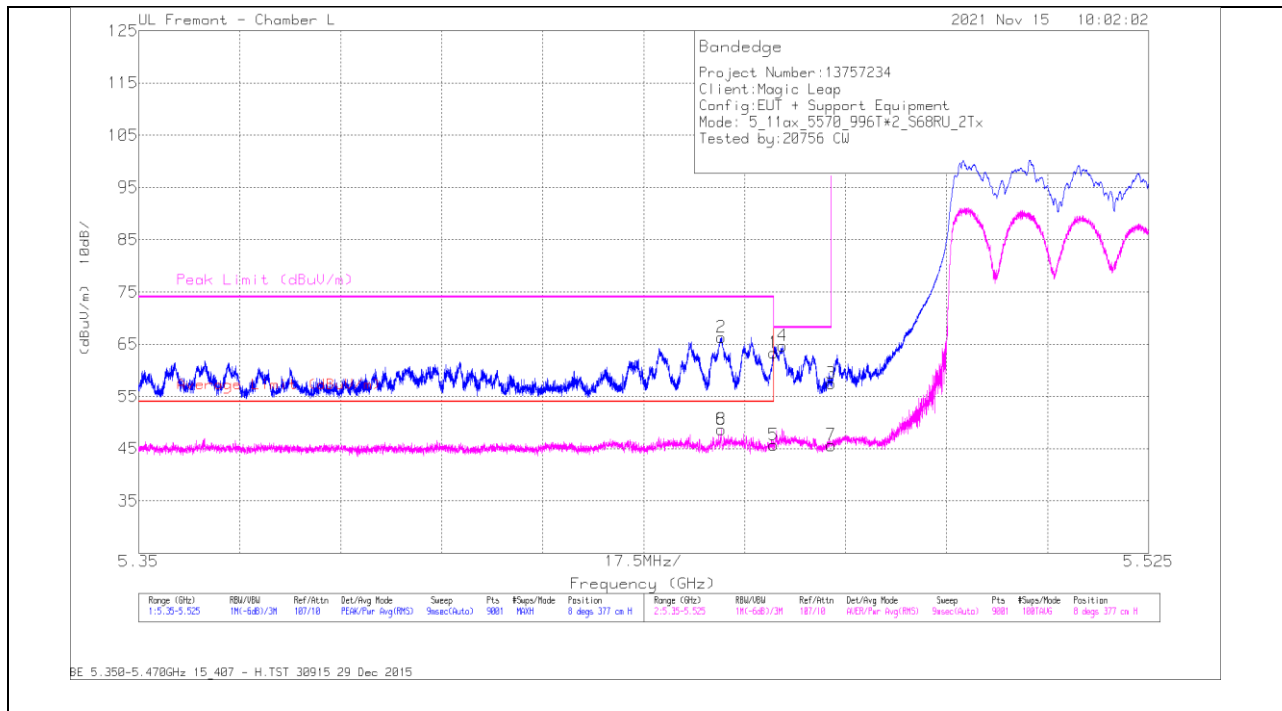

TRACE MARKER


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/CbI/Ftr/Pa d (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	42.6	Pk	34.9	-14.2		63.3	-	-	68.2	-4.9	8	377	H
2	* 5.4509	45.58	Pk	34.9	-14.2		66.28	-	-	74	-7.72	8	377	H
3	5.47	36.75	Pk	34.9	-14.2		57.45	-	-	68.2	-10.75	8	377	H
4	5.4616	43.98	Pk	34.9	-14.2		64.68	-	-	68.2	-3.52	8	377	H
5	* 5.46	25.05	RMS	34.9	-14.2	0.1	45.85	54	-8.15	-	-	8	377	H
6	* 5.451	27.98	RMS	34.9	-14.2	0.1	48.78	54	-5.22	-	-	8	377	H
7	5.47	24.94	RMS	34.9	-14.2		45.64	-	-	-	-	8	377	H
8	* 5.451	27.98	RMS	34.9	-14.2	0.1	48.78	54	-5.22	-	-	8	377	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

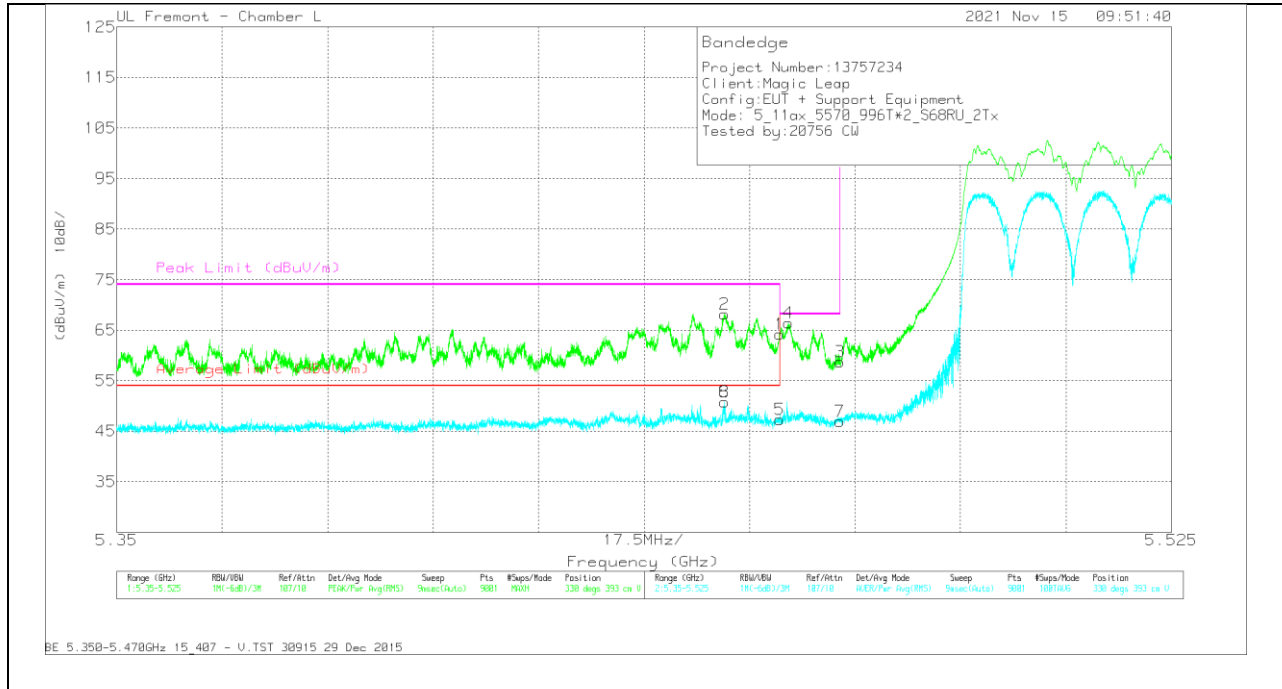

TRACE MARKER

Marker	Frequency (GHz)	Meter Reading (dBu)	Det	AF T119 (dB/m)	Amp/Cb/Fitr/Pa d (dB)	DC Corr (dB)	Corrected Reading (dBu/m)	Average Limit (dBu/m)	Margin (dB)	Peak Limit (dBu/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	43.51	Pk	34.9	-14.2		64.21	-	-	68.2	-3.99	330	393	V
2	* 5.4508	47.52	Pk	34.9	-14.2		68.22	-	-	74	-5.78	330	393	V
3	5.47	38.02	Pk	34.9	-14.2		58.72	-	-	68.2	-9.48	330	393	V
4	5.4614	45.68	Pk	34.9	-14.2		66.38	-	-	68.2	-1.82	330	393	V
5	* 5.46	26.6	RMS	34.9	-14.2	0.1	47.4	54	-6.6	-	-	330	393	V
6	* 5.4509	30.11	RMS	34.9	-14.2	0.1	50.91	54	-3.09	-	-	330	393	V
7	5.47	26.22	RMS	34.9	-14.2		46.92	-	-	-	-	330	393	V
8	* 5.4509	30.11	RMS	34.9	-14.2	0.1	50.91	54	-3.09	-	-	330	393	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (MID CHANNEL HIGH EDGE)

HORIZONTAL RESULT

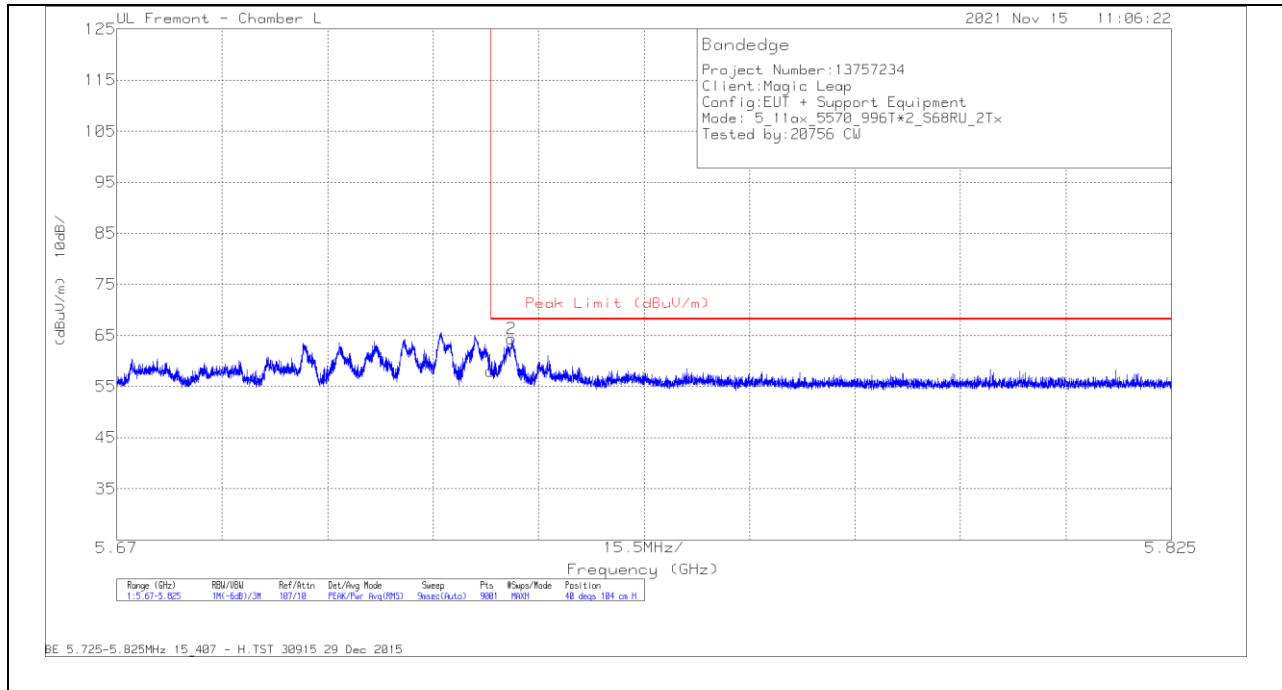


TRACE MARKER

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	37.14	Pk	34.8	-13.9	58.04	68.2	-10.16	40	104	H
2	5.728	43.44	Pk	34.8	-13.9	64.34	68.2	-3.86	40	104	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector

VERTICAL RESULT

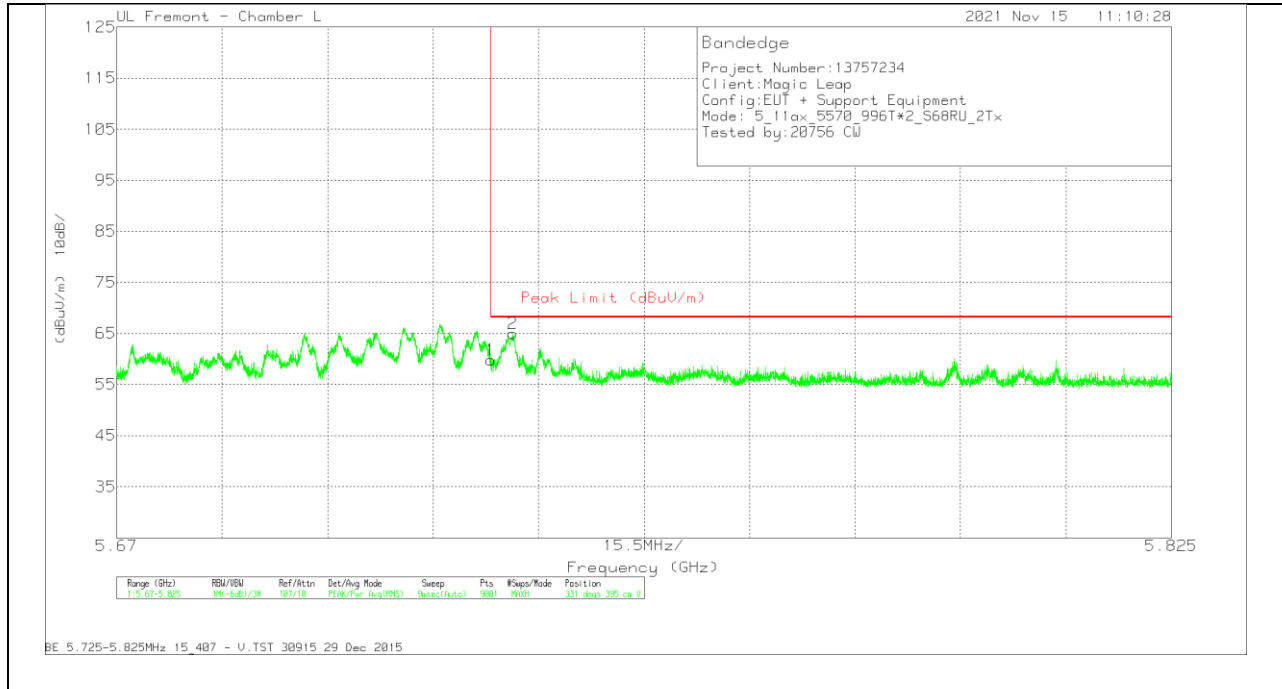

TRACE MARKER

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	38.97	Pk	34.8	-13.9	59.87	68.2	-8.33	331	395	V
2	5.7282	44.09	Pk	34.8	-13.9	64.99	68.2	-3.21	331	395	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector