

承 认 书

供方产品名称: WIFI 无源天线

供方规格型号: WIFI PM2400A23DV2.0 CBT GK5M RM

需方公司名称: 深圳市锐明视讯技术有限公司

需方产品名称: WIFI 天线, 粘贴, 5 米 FAKRA-I,105°

需方规格型号: 5 米 WIFI 弯头天线 耐高温阻燃 IP67

需方物料编码: 1210050A00015

日 期: 2023.12.29

(对于该产品的名称和规格型号, 双方交易过程可在供方命名规则和需方命名规则中选取一种运用)

供应商确认 (签名时请签上日期)

| 审 核 | 确 认 |
|-----|-----|
| | |

锐明视讯确认 (签名时请签上日期)

| 确 认 |
|-----|
| |

供应商: 嘉兴佳利电子有限公司

地 址: 浙江省嘉兴市正原 1 号

电 话: 13957344856


传 真: 0573-83651858

E-mail: tangsy889@163.com

SPECIFICATION FOR APPROVAL

CUSTOMER :

CUSTOMER PART NO:



SUPPLIER: JIAXING GLEAD ELECTRONICS CO.,LTD.

SUPPLIER PART NO: WIFI_PM2400A23DV2.0_CBT_GK5M_RM

DESCRIPTION: 2400~2500MHz/5725~5850MHz/5M(L)/ FAKRA-I/3D-FB/
 耐高温/阻燃/双面泡棉胶/IP67

REMARKS:

| | |
|-----------------------------|-----------------------|
| Customer Signature : | Customer Seal: |
|-----------------------------|-----------------------|

| | |
|----------------------------|------------------------|
| Supplier Signature: | Supplier Seal : |
|----------------------------|------------------------|

NOTE: Please return this copy as a certification of your approval!

| | | | |
|--------------|------------|-----|---|
| Prepared by: | Formed On: | Add | No.66 ZhengyuanRoad,Tanghui Industrial Zone, Jiaxing, Zhejiang, China |
| | | Tel | +86-573-83651818 |
| | | Fax | +86-573-83651858 |
| Wu Zhijun | 2014.12.24 | | |

| | | |
|---------------------------------|---------------|-------------|
| Product name | Prepared date | Page |
| WIFI_PM2400A23DV2.0_CBT_GK5M_RM | 29/12/2023 | 3/7 |
| Prepared by | Checked by | Approved by |
| Fei Lu | Sheng Gao | Jun Hua |

1、Photo (For reference only)



| | | |
|---------------------------------|---------------|-------------|
| Product name | Prepared date | Page |
| WIFI_PM2400A23DV2.0_CBT_GK5M_RM | 29/12/2023 | 4/7 |
| Prepared by | Checked by | Approved by |
| Fei Lu | Sheng Gao | Wenli Yan |

2、Electrical Characteristics


| | | |
|---|---------------------|---------------------------|
| 1 | Frequency Range | 2400-2500MHz/5725~5850MHz |
| 2 | V. S. W. R | 2.0:1 |
| 3 | Impedance | 50 ohm |
| 4 | Gain(Typical) | ≥5.0dBi(Short Cable) |
| 5 | Azimuth | Omni-direction |
| 6 | Polarization | Horizontal |
| 7 | Power Capacity | 50W |
| 8 | Lighting protection | Direct-current earth |

3、Material

| No | Part Name | SPEC |
|----|---------------------|----------------------------------|
| 1 | Antenna Length (mm) | 137.2*20.7mm |
| 2 | Pedestal | 耐高温阻燃材料 |
| 3 | Radome Color | Black |
| 4 | RF Connector | FAKRA-I |
| 5 | RF Cable | 耐高温阻燃 3D-FB 丝印 105° (L=500±30cm) |
| 6 | Mounting | 3M RP45/3M GHP110 |

| | | |
|---------------------------------|---------------|-------------|
| Product name | Prepared date | Page |
| WIFI_PM2400A23DV2.0_CBT_GK5M_RM | 29/12/2023 | 5/7 |
| Prepared by | Checked by | Approved by |
| Fei Lu | Sheng Gao | Wenli Yan |

4、Test curve

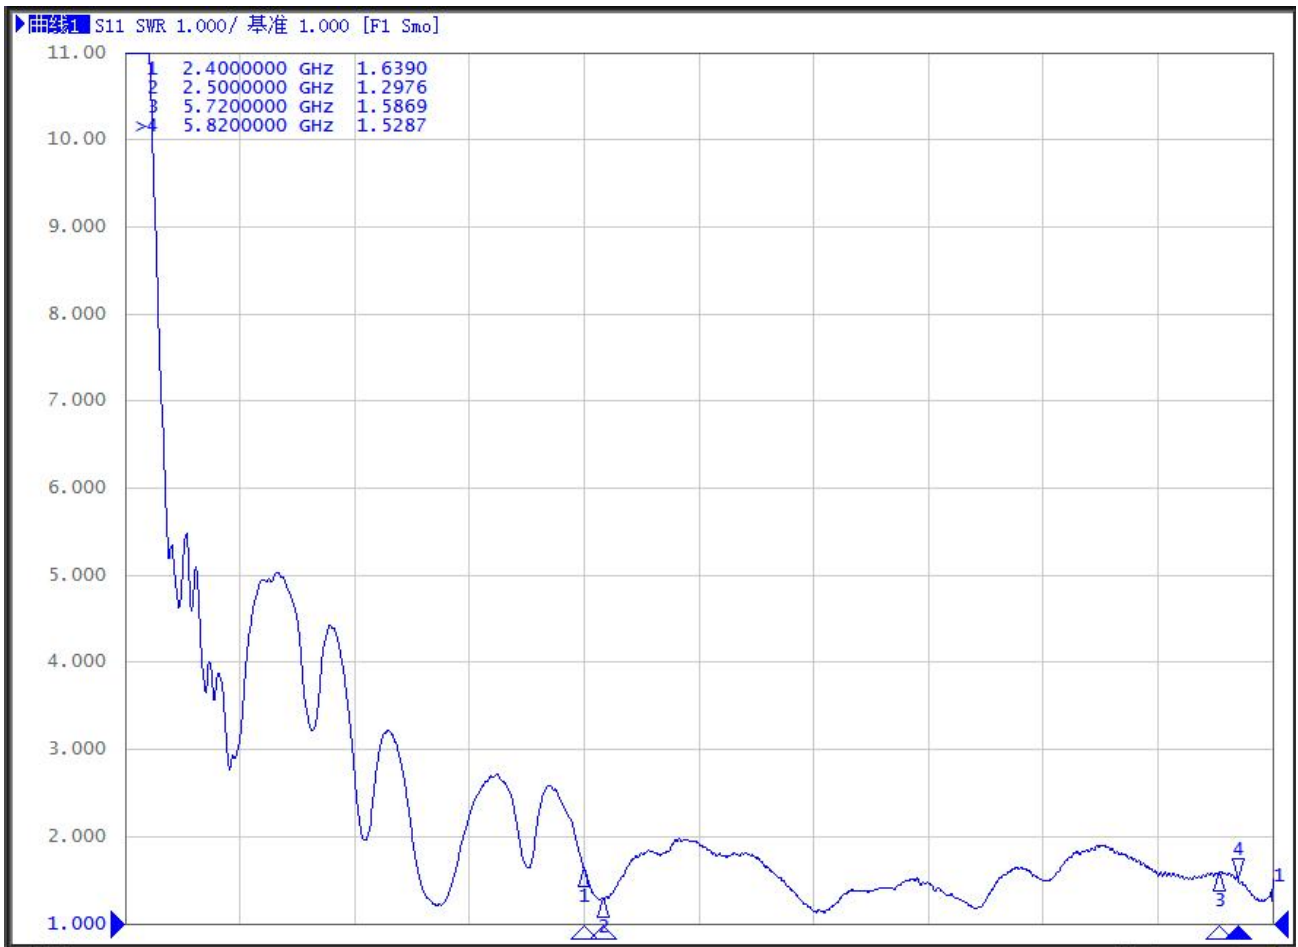

注：测试波纹过多且振荡过大，请打开曲线平滑


Test condition : Around without electronic products

| | | |
|---------------------------------|---------------|-------------|
| Product name | Prepared date | Page |
| WIFI_PM2400A23DV2.0_CBT_GK5M_RM | 29/12/2023 | 6/7 |
| Prepared by | Checked by | Approved by |
| Fei Lu | Sheng Gao | Wenli Yan |

5、 Testing Conditions

| | | |
|---|--------------------------|-----------|
| 1 | Working Temp | -40℃~105℃ |
| 2 | Storage Temp | -40℃~105℃ |
| 3 | Waterproof and dustproof | IP67 |

6、 Structure (Tolerance: ±3mm)

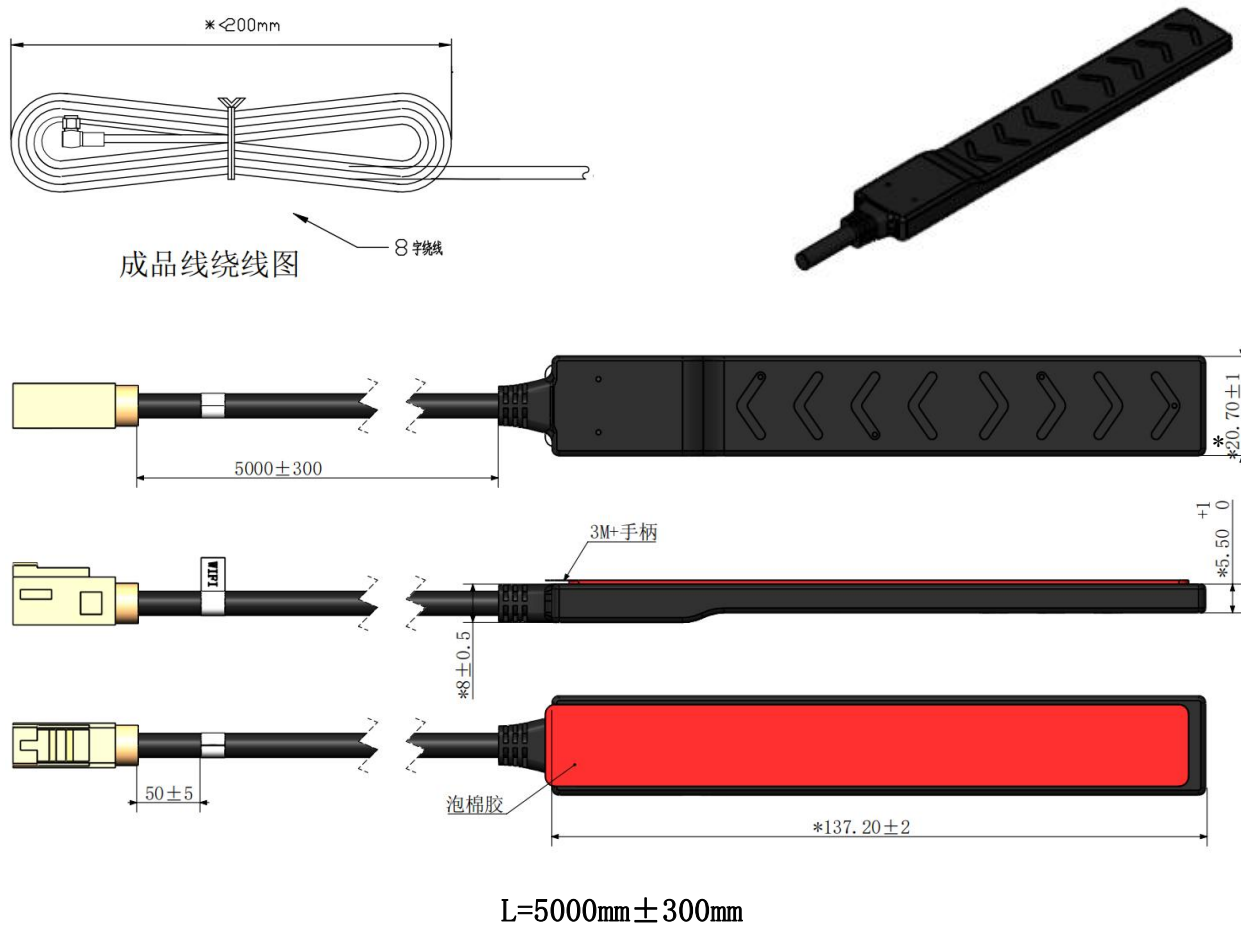

注

产品阻燃要求：水平燃烧特性和垂直燃烧分别满足 GB/T2408 中的 HB 级和 V-0 级；
 线缆标注：3D FB -40° C~105° C YYMM(年月)等；

