






FCC PART 22/24/27 TEST REPORT
FCC Part 22 /Part 24/Part 27

Report Reference No.:	HUAKE180817831E
FCC ID:	2AM6L-SPAD
Compiled by (position+printed name+signature) :	File administrators Gary Qian 
Supervised by (position+printed name+signature) :	Technique principal Eden Hu 
Approved by (position+printed name+signature) :	Manager Jason Zhou 
Date of issue :	Dec. 24, 2018
Testing Laboratory Name :	Shenzhen HUAKE Testing Technology Co., Ltd.
Address :	1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, China
Applicant's name :	Streamax Technology Co.,Ltd
Address :	21-23/F, Building B1, Zhiyuan, No. 1001, Xueyuan Avenue, Nanshan District, Shenzhen, Guangdong,P.R. China
Standard :	FCC Part 22: PUBLIC MOBILE SERVICES FCC Part 24: PERSONAL COMMUNICATIONS SERVICES FCC Part 27: MISCELLANEOUS WIRELESS COMMUNICATIONS SERVICES
Shenzhen HUAKE Testing Technology Co., Ltd. All rights reserved. This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAKE Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen HUAKE Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.	
Test item description :	Tablet
Brand Name :	Streamax
Model :	Smart Pad
Ratings :	DC 12V
Modulation :	QPSK, 16QAM
Hardware version :	1480
Software version :	RMVST_SPAD
Result :	PASS

**TEST REPORT**

Test Report No. :	HUAK180817831E	Dec. 24, 2018 Date of issue
--------------------------	----------------	--------------------------------

Equipment under Test : Tablet
Model /Type : Smart Pad
Applicant : Streamax Technology Co.,Ltd
Address : 21-23/F, Building B1, Zhiyuan, No. 1001, Xueyuan Avenue, Nanshan District, Shenzhen, Guangdong,P.R. China
Manufacturer : Streamax Technology Co.,Ltd
Address : 21-23/F, Building B1, Zhiyuan, No. 1001, Xueyuan Avenue, Nanshan District, Shenzhen, Guangdong,P.R. China
Factory : Streamax Electronics Co.,Ltd.
Address : 5th-6thFloor, West, Chuangxiang 2nd Building, Yanxiang Technology Park, 11# High-tech West Road, Guangming District, Shenzhen, Guangdong Province, P.R. China

Date of Test: Aug. 15, 2018~Dec. 24, 2018
Date of Report: Dec. 24, 2018
Report Number: HUAK180817830E

Test Result:	PASS
---------------------	-------------

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.



Revision	Issue Date	Revisions	Revised By
V1.0	Dec. 24, 2018	Initial Issue	Jason Zhou



TABLE OF CONTENTS

1. TEST STANDARDS	6
2.1 PRODUCT DESCRIPTION	7
2.3 RELATED SUBMITTAL(S) / GRANT (S)	8
2.4 TEST METHODOLOGY	8
2.5 TEST FACILITY	9
2.5 SPECIAL ACCESSORIES	10
2.6 EQUIPMENT MODIFICATIONS	10
3. SYSTEM TEST CONFIGURATION	11
3.1 EUT CONFIGURATION	11
3.2 EUT EXERCISE	11
3.3 GENERAL TECHNICAL REQUIREMENTS	11
3.4 CONFIGURATION OF EUT SYSTEM	12
4. SUMMARY OF TEST RESULTS	13
5. DESCRIPTION OF TEST MODES	14
6. OUTPUT POWER	17
6.1 CONDUCTED OUTPUT POWER	17
6.1.1 MEASUREMENT METHOD	17
6.2 RADIATED OUTPUT POWER	39
6.2.1 MEASUREMENT METHOD	39
6.3. PEAK-TO-AVERAGE RATIO	51
6.3.1 MEASUREMENT METHOD	51
7. SPURIOUS EMISSION	78
7.1 CONDUCTED SPURIOUS EMISSION	78
7.2 RADIATED SPURIOUS EMISSION	81
8. FREQUENCY STABILITY	88
8.1 MEASUREMENT METHOD	88
8.2 PROVISIONS APPLICABLE	89
8.3 MEASUREMENT RESULT (WORST)	90
9. OCCUPIED BANDWIDTH	92
9.1 MEASUREMENT METHOD	92
9.2 PROVISIONS APPLICABLE	92
9.3 MEASUREMENT RESULT	92
10. EMISSION BANDWIDTH	101
10.1 MEASUREMENT METHOD	101



10.2 PROVISIONS APPLICABLE101

10.3 MEASUREMENT RESULT101

11. BAND EDGE.....110

11.1 MEASUREMENT METHOD110

11.2 PROVISIONS APPLICABLE110

11.3 MEASUREMENT RESULT110

APPENDIX A TEST PLOTS FOR CONDUCTED SPURIOUS EMISSION.....111

TEST PLOTS FOR CONDUCTED SPURIOUS EMISSION114

TEST PLOTS FOR CONDUCTED SPURIOUS EMISSION117

TEST PLOTS FOR CONDUCTED SPURIOUS EMISSION120

TEST PLOTS FOR CONDUCTED SPURIOUS EMISSION 错误! 未定义书签。

APPENDIX B TEST PLOTS FOR OCCUPIED BANDWIDTH (99%).....123

EMISSION BANDWIDTH (-26dBC).....123

APPENDIX C TEST PLOTS FOR BAND EDGES.....144

APPENDIX D PHOTOGRAPHS OF TEST SETUP164



1. TEST STANDARDS

The tests were performed according to following standards:

[FCC Part 22 \(10-12-18 Edition\)](#): PUBLIC MOBILE SERVICES

[FCC Part 24\(10-12-18 Edition\)](#): PRIVATE LAND MOBILE RADIO SERVICES

[FCC Part 27\(10-12-18 Edition\)](#): MISCELLANEOUS WIRELESS COMMUNICATIONS SERVICES

[TIA/EIA 603 D June 2010](#): Land Mobile FM or PM Communications Equipment Measurement and Performance Standards.

[FCC Part 2](#): FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS

[KDB971168 D01:v03r01](#) MEASUREMENT GUIDANCE FOR CERTIFICATION OF LICENSED DIGITAL TRANSMITTERS

[ANSI C63.26:2015](#): Compliance Testing of Transmitters Used in Licensed Radio Services



2. SUMMARY

2.1 PRODUCT DESCRIPTION

A major technical description of EUT is described as following:

Radio System Type:	LTE	
Frequency Bands:	<input checked="" type="checkbox"/> FDD Band 2 <input checked="" type="checkbox"/> FDD Band 4 <input checked="" type="checkbox"/> FDD Band 5 <input type="checkbox"/> FDD Band 7 <input checked="" type="checkbox"/> FDD Band 12 <input type="checkbox"/> FDD Band 17 <input type="checkbox"/> FDD Band 25 <input type="checkbox"/> FDD Band 26 <input type="checkbox"/> TDD Band 41 (U.S. Bands) <input type="checkbox"/> FDD Band 1 <input type="checkbox"/> FDD Band 3 <input type="checkbox"/> FDD Band 7 <input type="checkbox"/> FDD Band 8 <input type="checkbox"/> FDD Band 20 <input type="checkbox"/> TDD Band 33 <input type="checkbox"/> TDD Band 34 <input type="checkbox"/> TDD Band 38 <input type="checkbox"/> FDD Band 40 <input type="checkbox"/> FDD Band 42 <input type="checkbox"/> FDD Band 43 (Non-U.S. Bands)	
Frequency Range	LTE Band 2	Transmission (TX): 1850 to 1909.9 MHz Receiving (RX): 1930 to 1989.9 MHz
	LTE Band 4	Transmission (TX): 1710 to 1754.9 MHz Receiving (RX): 2110 to 2154.9 MHz
	LTE Band 5	Transmission (TX): 824 to 848.9 MHz Receiving (RX): 869 to 893.9 MHz
	LTE Band 12	Transmission (TX): 699 to 715.9MHz Receiving (RX): 729 to 745.9MHz
Supported Channel Bandwidth	LTE Band 2	<input checked="" type="checkbox"/> 1.4 MHz <input checked="" type="checkbox"/> 3 MHz <input checked="" type="checkbox"/> 5 MHz <input checked="" type="checkbox"/> 10 MHz <input checked="" type="checkbox"/> 15 MHz <input checked="" type="checkbox"/> 20 MHz
	LTE Band 4	<input checked="" type="checkbox"/> 1.4 MHz <input checked="" type="checkbox"/> 3 MHz <input checked="" type="checkbox"/> 5 MHz <input checked="" type="checkbox"/> 10 MHz <input checked="" type="checkbox"/> 15 MHz <input checked="" type="checkbox"/> 20 MHz
	LTE Band 5	<input checked="" type="checkbox"/> 1.4 MHz <input checked="" type="checkbox"/> 3 MHz <input checked="" type="checkbox"/> 5 MHz <input checked="" type="checkbox"/> 10 MHz
	LTE Band 12	<input checked="" type="checkbox"/> 1.4 MHz <input checked="" type="checkbox"/> 3 MHz <input checked="" type="checkbox"/> 5 MHz <input checked="" type="checkbox"/> 10 MHz
Antenna:	PIFA Antenna	
Type of Modulation	QPSK/16QAM	
Antenna gain:	1.44dBi(LTE band 2),1.37dBi (LTE band 4), 1.26dBi (LTE band 5), 1.29dBi(Band 12)	
Diversity Antenna gain:	1.23dBi(LTE band 2),1.07dBi (LTE band 4), 1.17dBi (LTE band 5), 1.25dBi(Band 12)	
Power Supply:	DC12V	
Single Card:	WCDMA/LTE Card Slot	
Power Class	3	
Extreme Vol. Limits:	DC10.8 V to 13.2 V (Normal: DC12 V)	
Temperature range	-10°C to +50°C	
<p>Note1: The High Voltage DC13.2V and Low Voltage DC10.8V were declared by manufacturer, The EUT couldn't be operating normally with higher or lower voltage..</p>		



2.3 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: 2AM6L-SPAD**, filing to comply with the FCC Part 22, Part 24 and Part 27 requirements

2.4 TEST METHODOLOGY

The radiated emission testing was performed according to the procedures of ANSI/TIA-603-E-2016, and FCC KDB 971168 D01 Power Means License Digital Systems V03R01.

**2.5 TEST FACILITY**

Site	Shenzhen HUAKE Testing Technology Co., Ltd.
Location	1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park, Fuhai Street, Bao'an District, Shenzhen City, China
Designation Number	CN1229
Test Firm Registration Number : 616276	

ALL TEST EQUIPMENT LIST

Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
LISN	ENV216	R&S	HKE-059	2017/12/28	2018/12/27
LISN	R&S	ENV216	HKE-002	2017/12/28	2018/12/27
Broadband antenna	Schwarzbeck	VULB 9163	HKE-012	2017/12/28	2019/12/26
Receiver	R&S	ESCI 7	HKE-010	2017/12/28	2018/12/27
Spectrum analyzer	Agilent	N9020A	HKE-048	2017/12/28	2018/12/27
RF automatic control unit	Tonscend	JS0806-2	HKE-060	2017/12/28	2018/12/27
Horn antenna	Schwarzbeck	9120D	HKE-013	2017/12/28	2019/12/26
Loop antenna	Schwarzbeck	FMZB 1519 B	HKE-014	2017/12/28	2019/12/26
Preamplifier	EMCI	EMC051845SE	HKE-015	2017/12/28	2018/12/27
Preamplifier	Agilent	83051A	HKE-016	2017/12/28	2018/12/27
Temperature and humidity meter	Boyang	HTC-1	HKE-075	2017/12/28	2018/12/27
High pass filter unit	Tonscend	JS0806-F	HKE-055	2017/12/28	2018/12/27
RF cable	Times	1-40G	HKE-034	2017/12/28	2018/12/27
Power meter	Agilent	E4419B	HKE-085	2017/12/28	2018/12/27
Power Sensor	Agilent	E9300A	HKE-086	2017/12/28	2018/12/27
Wireless Communication Test Set	R&S	CMU200	HKE-026	2017/12/28	2018/12/27



2.5 SPECIAL ACCESSORIES

The battery was supplied by the applicant were used as accessories and being tested with EUT intended for FCC grant together.

2.6 EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.



3. SYSTEM TEST CONFIGURATION

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The Transmitter was operated in the maximum output power mode through Communication Tester. The TX frequency was fixed which was for the purpose of the measurements.

3.3 GENERAL TECHNICAL REQUIREMENTS

Item Number	Item Description		FCC Rules
1	Output Power	Conducted output power	2.1046/22.913(a)(2)/24.232(c)/ 27.50(d)(4)/ 27.50(h)(2)
		Radiated output power	
2	Peak-to-Average Ratio	Peak-to-Average Ratio	24.232(d)
3	Spurious Emission	Conducted spurious emission	2.1051/22.917(a)/24.238(a) 27.53(h)/ 27.53(g)
		Radiated spurious emission	
4	Frequency Stability		2.1055/22.355/24.235/27.54
5	Occupied Bandwidth		2.1049 (h)(i)
6	Band Edge		2.1051/22.917(a)/24.238(a) 27.53(h)/ 27.53(g)

Note: Testing was performed by configuring EUT to maximum output power status, the declared output power class for different.



3.4 CONFIGURATION OF EUT SYSTEM

Fig. 2-1 Configuration of EUT System




Table 2-1 Equipment Used in EUT System

Item	Equipment	Model No.	ID or Specification	Remark
1	Tablet	Smart Pad	2AM6L-SPAD	EUT
2	Battery	N/A	DC 3.7V/2400mAh	Accessory
3	Data Hub	N/A	N/A	Accessory
4	Front Panel	N/A	N/A	Accessory

***Note: All the accessories have been used during the test. The following “EUT” in setup diagram means EUT system.

**4. SUMMARY OF TEST RESULTS**

Item Number	Item Description		FCC Rules	Result
1	Output Power	Conducted Output Power	2.1046/22.913(a)(2)/24.232(c)/ 27.50(d)(4)/ 27.50(h)(2)	Pass
		Radiated Output Power		
2	Peak-to-Average Ratio	Peak-to-Average Ratio	24.232(d)	Pass
3	Spurious Emission	Conducted Spurious Emission	2.1051/22.917(a)/24.238(a) 27.53(h)/ 27.53(g)	Pass
		Radiated Spurious Emission		
4	Frequency Stability		2.1055/22.355/24.235/27.54	Pass
5	Occupied Bandwidth		2.1049 (h)(i)	Pass
6	Band Edge		2.1051/22.917(a)/24.238(a) 27.53(h)/ 27.53(g)	Pass



5. DESCRIPTION OF TEST MODES

During the testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication Tester (CMW 500) to ensure max power transmission and proper modulation. Three channels (The top channel, the middle channel and the bottom channel) were chosen for testing on both LTE frequency band.

The worst condition was recorded in the test report if no other modes test data.

Test Mode	Test Modes Description
LTE	LTE system, QPSK modulation
LTE	LTE system, 16QAM modulation

Test Mode	TX / RX	RF Channel		
		Low (B)	Middle (M)	High (T)
LTE Band 2	TX (1.4M)	Channel 18607	Channel 18900	Channel 19193
		1850.7 MHz	1880 MHz	1909.3 MHz
	TX (3M)	Channel 18615	Channel 18900	Channel 19185
		1851.5 MHz	1880 MHz	1908.5 MHz
	TX (5M)	Channel 18625	Channel 18900	Channel 19175
		1852.5 MHz	1880 MHz	1907.5 MHz
	TX (10M)	Channel 18650	Channel 18900	Channel 19150
		1855.0 MHz	1880 MHz	1905.0 MHz
	TX (20M)	Channel 18700	Channel 18900	Channel 19100
		1860.0 MHz	1880 MHz	1900.0 MHz
	RX (1.4M)	Channel 607	Channel 900	Channel 1193
		1930.7 MHz	1960 MHz	1989.3 MHz
	RX (3M)	Channel 615	Channel 900	Channel 1185
		1931.5 MHz	1960 MHz	1988.5 MHz
	RX (5M)	Channel 625	Channel 900	Channel 1175
		1932.5 MHz	1960 MHz	1987.5 MHz
	RX (10M)	Channel 650	Channel 900	Channel 1150
		1935 MHz	1960 MHz	1985 MHz
	RX (20M)	Channel 700	Channel 900	Channel 1100
		1940.0 MHz	1960 MHz	1980 MHz



Test Mode	TX / RX	RF Channel		
		Low (B)	Middle (M)	High (T)
LTE Band 4	TX (1.4M)	Channel 19957	Channel 20175	Channel 20393
		1710.7 MHz	1732.5 MHz	1754.3 MHz
	TX (3M)	Channel 19965	Channel 20175	Channel 20385
		1711.5 MHz	1732.5 MHz	1753.5 MHz
	TX (5M)	Channel 19975	Channel 20175	Channel 20375
		1712.5 MHz	1732.5 MHz	1752.5 MHz
	TX (10M)	Channel 20000	Channel 20175	Channel 20350
		1715 MHz	1732.5 MHz	1750 MHz
	TX (15M)	Channel 20025	Channel 20175	Channel 20325
		1717.5 MHz	1732.5 MHz	1747.5 MHz
	TX (20M)	Channel 20050	Channel 20175	Channel 20300
		1720 MHz	1732.5 MHz	1745 MHz
	RX (1.4M)	Channel 1957	Channel 2175	Channel 2393
		2110.7 MHz	2132.5 MHz	2154.3 MHz
	RX (3M)	Channel 1965	Channel 2175	Channel 2385
		2111.5 MHz	2132.5 MHz	2153.5 MHz
	RX (5M)	Channel 1975	Channel 2175	Channel 2375
		2112.5 MHz	2132.5 MHz	2152.5 MHz
	RX (10M)	Channel 2000	Channel 2175	Channel 2350
		2115 MHz	2132.5 MHz	2150 MHz
	RX (15M)	Channel 2025	Channel 2175	Channel 2325
		2117.5 MHz	2132.5 MHz	2147.5 MHz
	RX (20M)	Channel 2050	Channel 2175	Channel 2300
		2120 MHz	2132.5 MHz	2145 MHz



Test Mode	TX / RX	RF Channel		
		Low (B)	Middle (M)	High (T)
LTE Band 5	TX (1.4M)	Channel 20407	Channel 20525	Channel 20643
		824.7 MHz	836.5 MHz	848.3 MHz
	TX (3M)	Channel 20415	Channel 20525	Channel 20635
		825.5 MHz	836.5 MHz	847.5 MHz
	TX (5M)	Channel 20425	Channel 20525	Channel 20625
		826.5 MHz	836.5 MHz	846.5 MHz
	TX (10M)	Channel 20450	Channel 20525	Channel 20600
		829 MHz	836.5 MHz	844 MHz
	RX (1.4M)	Channel 2404	Channel 2525	Channel 2463
		869.4 MHz	881.5 MHz	893.3 MHz
	RX (3M)	Channel 2415	Channel 2525	Channel 2635
		870.5 MHz	881.5 MHz	892.5 MHz
	RX (5M)	Channel 2425	Channel 2525	Channel 2625
		871.5 MHz	881.5 MHz	891.5 MHz
	RX (10M)	Channel 2450	Channel 2525	Channel 2600
		874 MHz	881.5 MHz	889 MHz

Test Mode	TX / RX	RF Channel		
		Low (B)	Middle (M)	High (T)
LTE Band 12	TX (1.4M)	Channel 23017	Channel 23095	Channel 23173
		699.7 MHz	707.5 MHz	715.3 MHz
	TX (3M)	Channel 23025	Channel 23095	Channel 23165
		700.5 MHz	707.5 MHz	714.5 MHz
	TX (5M)	Channel 23035	Channel 23095	Channel 23155
		701.5 MHz	707.5 MHz	713.5 MHz
	TX (10M)	Channel 23060	Channel 23095	Channel 23130
		704.0 MHz	707.5 MHz	711.0 MHz
	RX (1.4M)	Channel 5017	Channel 5095	Channel 5173
		729.7 MHz	737.5 MHz	745.3 MHz
	RX (3M)	Channel 5025	Channel 5095	Channel 5165
		730.5 MHz	737.5 MHz	744.5 MHz
	RX (5M)	Channel 5035	Channel 5095	Channel 5155
		731.5 MHz	737.5 MHz	743.5 MHz
	RX (10M)	Channel 5060	Channel 5095	Channel 5130
		734.0 MHz	737.5 MHz	741.0 MHz



6. OUTPUT POWER

6.1 CONDUCTED OUTPUT POWER

6.1.1 MEASUREMENT METHOD

The EUT is coupled to the SS with attenuator through power splitter; the RF load attached to EUT antenna terminal is 50ohm, the path loss as the factor is calibrated to correct the reading. A system simulator was used to establish communication with the EUT , Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported. The measurements were performed on all modes at 3 typical channels (the Top Channel, the Middle Channel and the Bottom Channel) for each band.

6.1.2 MEASUREMENT RESULT

Conducted Output Power Limits		
Mode	Average Power	Tolerance(dB)
LTE	23 dBm (0.2W)	± 2.7



LTE Band 2

BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)
20MHz	18700	1860.0	QPSK	1	0	0	22.59
				1	49	0	22.72
				1	99	0	22.70
				50	0	1	21.65
				50	25	1	21.50
				50	49	1	21.54
			16QAM	100	0	1	20.45
				1	0	1	20.32
				1	49	1	20.68
				1	99	1	20.98
				50	0	2	22.00
				50	25	2	22.04
	18900	1880.0	QPSK	50	49	2	22.19
				100	0	2	20.89
				1	0	0	20.75
				1	49	0	20.65
				1	99	0	21.28
				50	0	1	21.33
			16QAM	50	25	1	21.18
				50	49	1	20.44
				100	0	1	20.06
				1	0	1	20.45
				1	49	1	22.77
				1	99	1	22.41
	19100	1900.0	QPSK	50	0	2	22.11
				50	25	2	22.20
				50	49	2	22.14
				100	0	2	22.25
				1	0	0	21.67
				1	49	0	21.43
16QAM			1	99	0	21.13	
			50	0	1	21.32	
			50	25	1	21.37	
			50	49	1	21.12	
			100	0	1	19.75	
			1	0	1	19.99	
				1	49	1	19.83
				1	99	1	20.71
				50	0	2	20.33
				50	25	2	20.93
				50	49	2	20.85
				100	0	2	21.99



BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)
15MHz	18675	1857.5	QPSK	1	0	0	22.44
				1	37	0	22.57
				1	74	0	22.61
				36	0	1	20.38
				36	16	1	20.25
				36	35	1	20.96
				75	0	1	22.13
			16QAM	1	0	1	22.10
				1	37	1	22.15
				1	74	1	21.66
				36	0	2	21.62
				36	16	2	21.51
				36	35	2	21.63
				75	0	2	21.40
	18900	1880.0	QPSK	1	0	0	21.07
				1	37	0	21.09
				1	74	0	21.32
				36	0	1	20.05
				36	16	1	20.17
				36	35	1	20.07
				75	0	1	21.14
			16QAM	1	0	1	21.11
				1	37	1	21.10
				1	74	1	22.24
				36	0	2	22.09
				36	16	2	22.20
				36	35	2	21.66
				75	0	2	21.93
	19125	1902.5	QPSK	1	0	0	21.56
				1	37	0	21.38
1				74	0	21.63	
36				0	1	19.52	
36				16	1	19.40	
36				35	1	19.99	
75				0	1	19.12	
16QAM			1	0	1	20.72	
			1	37	1	20.54	
			1	74	1	20.52	
			36	0	2	20.79	
			36	16	2	20.55	
			36	35	2	20.92	
			75	0	2	21.64	



BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)
10MHz	18650	1855.0	QPSK	1	0	0	22.40
				1	24	0	22.25
				1	49	0	22.18
				25	0	1	20.63
				25	12	1	20.09
				25	25	1	20.50
				50	0	1	20.51
			16QAM	1	0	1	19.48
				1	24	1	19.31
				1	49	1	19.26
				25	0	2	20.58
				25	12	2	20.42
				25	25	2	20.49
				50	0	2	20.77
	18900	1880.0	QPSK	1	0	0	21.63
				1	24	0	21.59
				1	49	0	21.35
				25	0	1	20.78
				25	12	1	20.63
				25	25	1	20.53
				50	0	1	20.93
			16QAM	1	0	1	19.28
				1	24	1	19.68
				1	49	1	19.63
				25	0	2	22.16
				25	12	2	22.13
				25	25	2	22.01
				50	0	2	22.33
	19150	1905.0	QPSK	1	0	0	19.90
				1	24	0	19.18
1				49	0	19.51	
25				0	1	21.46	
25				12	1	21.20	
25				25	1	21.51	
50				0	1	21.04	
16QAM			1	0	1	21.17	
			1	24	1	21.39	
			1	49	1	21.12	
			25	0	2	19.48	
			25	12	2	19.25	
			25	25	2	19.44	
			50	0	2	20.31	



BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)
5MHz	18625	1852.5	QPSK	1	0	0	22.66
				1	12	0	22.32
				1	24	0	22.82
				12	0	1	21.76
				12	6	1	21.58
				12	11	1	21.25
				25	0	1	21.88
			16QAM	1	0	1	20.17
				1	12	1	20.12
				1	24	1	20.30
				12	0	2	21.20
				12	6	2	21.26
				12	11	2	21.22
				25	0	2	22.16
	18900	1880.0	QPSK	1	0	0	21.43
				1	12	0	21.34
				1	24	0	21.32
				12	0	1	21.46
				12	6	1	21.23
				12	11	1	21.06
				25	0	1	20.30
			16QAM	1	0	1	21.15
				1	12	1	21.18
				1	24	1	21.33
				12	0	2	20.72
				12	6	2	20.28
				12	11	2	20.52
				25	0	2	20.34
	19175	1907.5	QPSK	1	0	0	21.43
				1	12	0	21.56
				1	24	0	21.58
				12	0	1	19.73
				12	6	1	19.74
				12	11	1	19.53
				25	0	1	21.16
			16QAM	1	0	1	20.65
1				12	1	20.45	
1				24	1	20.57	
12				0	2	21.58	
12				6	2	21.72	
12				11	2	21.46	
25				0	2	21.32	



BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)
3MHz	18615	1851.5	QPSK	1	0	0	21.06
				1	7	0	21.49
				1	14	0	21.40
				8	0	1	21.04
				8	4	1	21.08
				8	7	1	21.77
				15	0	1	21.55
			16QAM	1	0	1	22.06
				1	7	1	22.10
				1	14	1	22.04
				8	0	2	21.37
				8	4	2	21.81
				8	7	2	21.08
				15	0	2	21.79
	18900	1880.0	QPSK	1	0	0	21.42
				1	7	0	21.47
				1	14	0	21.26
				8	0	1	21.11
				8	4	1	21.32
				8	7	1	21.38
				15	0	1	20.89
			16QAM	1	0	1	21.31
				1	7	1	21.44
				1	14	1	21.63
				8	0	2	22.35
				8	4	2	22.25
				8	7	2	22.22
				15	0	2	22.12
	19185	1908.5	QPSK	1	0	0	19.72
				1	7	0	19.86
1				14	0	19.82	
8				0	1	19.95	
8				4	1	19.68	
8				7	1	19.32	
15				0	1	21.05	
16QAM			1	0	1	21.20	
			1	7	1	21.40	
			1	14	1	21.25	
			8	0	2	21.20	
			8	4	2	21.32	
			8	7	2	21.17	
			15	0	2	21.75	



BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)
1.4MHz	18607	1850.7	QPSK	1	0	0	22.82
				1	2	0	22.99
				1	5	0	22.10
				3	0	0	21.07
				3	1	0	21.54
				3	2	0	21.32
			16QAM	6	0	1	22.42
				1	0	1	21.58
				1	2	1	21.23
				1	5	1	21.79
				3	0	1	21.45
				3	1	1	21.62
				3	2	1	21.32
				6	0	2	21.06
	18900	1880.0	QPSK	1	0	0	21.13
				1	2	0	21.19
				1	5	0	21.51
				3	0	0	21.54
				3	1	0	21.49
				3	2	0	21.83
			16QAM	6	0	1	21.40
				1	0	1	22.11
				1	2	1	22.20
				1	5	1	22.91
				3	0	1	22.63
				3	1	1	22.06
				3	2	1	22.40
				6	0	2	22.00
	19193	1909.3	QPSK	1	0	0	21.18
				1	2	0	21.37
1				5	0	21.89	
3				0	0	21.49	
3				1	0	21.65	
3				2	0	21.86	
16QAM			6	0	1	22.52	
			1	0	1	19.86	
			1	2	1	19.81	
			1	5	1	19.43	
			3	0	1	20.52	
			3	1	1	20.55	
			3	2	1	20.85	
			6	0	2	20.02	



LTE Band 4

BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)
20MHz	20050	1720.0	QPSK	1	0	0	23.34
				1	49	0	23.37
				1	99	0	23.25
				50	0	1	21.10
				50	25	1	21.45
				50	49	1	21.64
				100	0	1	22.00
			16QAM	1	0	1	22.18
				1	49	1	22.09
				1	99	1	20.73
				50	0	2	20.36
				50	25	2	20.07
				50	49	2	20.16
				100	0	2	20.39
	20175	1732.5	QPSK	1	0	0	21.18
				1	49	0	21.10
				1	99	0	21.63
				50	0	1	21.30
				50	25	1	21.40
				50	49	1	21.65
				100	0	1	21.41
			16QAM	1	0	1	20.13
				1	49	1	20.92
				1	99	1	20.14
				50	0	2	22.19
				50	25	2	22.03
				50	49	2	22.37
				100	0	2	22.62
	20300	1745.0	QPSK	1	0	0	21.86
				1	49	0	21.93
1				99	0	21.33	
50				0	1	21.95	
50				25	1	21.81	
50				49	1	21.02	
100				0	1	21.32	
16QAM			1	0	1	20.95	
			1	49	1	20.93	
			1	99	1	20.72	
			50	0	2	22.43	
			50	25	2	22.03	
			50	49	2	22.18	
			100	0	2	22.47	



BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)
15MHz	20025	1717.5	QPSK	1	0	0	22.42
				1	37	0	22.42
				1	74	0	22.23
				36	0	1	20.40
				36	16	1	20.05
				36	35	1	20.07
				75	0	1	20.67
			16QAM	1	0	1	20.81
				1	37	1	20.31
				1	74	1	20.94
				36	0	2	19.79
				36	16	2	19.78
				36	35	2	19.81
				75	0	2	20.58
	20175	1732.5	QPSK	1	0	0	21.02
				1	37	0	21.37
				1	74	0	21.06
				36	0	1	21.37
				36	16	1	21.53
				36	35	1	21.44
				75	0	1	20.72
			16QAM	1	0	1	22.71
				1	37	1	22.19
				1	74	1	22.20
				36	0	2	21.98
				36	16	2	21.43
				36	35	2	21.88
				75	0	2	22.76
	20325	1747.5	QPSK	1	0	0	21.95
				1	37	0	21.05
				1	74	0	21.36
				36	0	1	21.40
				36	16	1	21.65
				36	35	1	21.05
				75	0	1	20.65
			16QAM	1	0	1	21.75
1				37	1	21.72	
1				74	1	21.64	
36				0	2	21.94	
36				16	2	21.00	
36				35	2	20.79	
75				0	2	21.42	



BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)
10MHz	20000	1715.0	QPSK	1	0	0	22.70
				1	24	0	22.39
				1	49	0	22.15
				25	0	1	21.50
				25	12	1	21.30
				25	25	1	21.24
				50	0	1	20.90
			16QAM	1	0	1	20.96
				1	24	1	20.45
				1	49	1	20.86
				25	0	2	19.70
				25	12	2	19.58
				25	25	2	19.18
				50	0	2	20.24
	20175	1732.5	QPSK	1	0	0	21.31
				1	24	0	21.49
				1	49	0	21.47
				25	0	1	21.75
				25	12	1	21.45
				25	25	1	21.72
				50	0	1	20.30
			16QAM	1	0	1	20.71
				1	24	1	20.49
				1	49	1	22.81
				25	0	2	22.29
				25	12	2	22.65
				25	25	2	22.15
				50	0	2	22.75
	20350	1750.0	QPSK	1	0	0	21.12
				1	24	0	21.60
1				49	0	21.67	
25				0	1	22.11	
25				12	1	22.08	
25				25	1	22.28	
50				0	1	21.21	
16QAM			1	0	1	20.79	
			1	24	1	20.87	
			1	49	1	22.28	
			25	0	2	22.50	
			25	12	2	22.65	
			25	25	2	22.10	
			50	0	2	21.19	



BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)
5MHz	19975	1712.5	QPSK	1	0	0	22.05
				1	12	0	22.52
				1	24	0	22.87
				12	0	1	21.55
				12	6	1	21.58
				12	11	1	21.89
				25	0	1	21.68
			16QAM	1	0	1	21.90
				1	12	1	21.39
				1	24	1	21.38
				12	0	2	20.51
				12	6	2	20.34
				12	11	2	20.69
				25	0	2	19.45
	20175	1732.5	QPSK	1	0	0	21.34
				1	12	0	21.80
				1	24	0	21.29
				12	0	1	21.22
				12	6	1	21.50
				12	11	1	21.71
				25	0	1	21.84
			16QAM	1	0	1	21.90
				1	12	1	21.27
				1	24	1	21.84
				12	0	2	21.40
				12	6	2	21.43
				12	11	2	21.53
				25	0	2	20.30
	20375	1752.5	QPSK	1	0	0	20.27
				1	12	0	20.49
1				24	0	20.12	
12				0	1	19.77	
12				6	1	19.11	
12				11	1	19.70	
25				0	1	20.05	
16QAM			1	0	1	21.86	
			1	12	1	21.41	
			1	24	1	21.44	
			12	0	2	19.96	
			12	6	2	19.43	
			12	11	2	19.59	
			25	0	2	20.72	



BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)
3MHz	19965	1711.5	QPSK	1	0	0	22.52
				1	7	0	22.38
				1	14	0	22.14
				8	0	1	20.45
				8	4	1	20.21
				8	7	1	20.53
				15	0	1	20.26
			16QAM	1	0	1	20.80
				1	7	1	20.81
				1	14	1	20.22
				8	0	2	20.69
				8	4	2	20.53
				8	7	2	20.13
				15	0	2	19.72
	20175	1732.5	QPSK	1	0	0	19.79
				1	7	0	19.55
				1	14	0	19.70
				8	0	1	21.92
				8	4	1	21.29
				8	7	1	21.58
				15	0	1	19.60
			16QAM	1	0	1	21.48
				1	7	1	21.94
				1	14	1	21.12
				8	0	2	20.60
				8	4	2	20.91
				8	7	2	20.52
				15	0	2	22.44
	20385	1753.5	QPSK	1	0	0	20.86
				1	7	0	20.60
				1	14	0	20.39
				8	0	1	20.48
				8	4	1	20.71
				8	7	1	20.43
				15	0	1	20.29
			16QAM	1	0	1	20.22
1				7	1	20.59	
1				14	1	20.91	
8				0	2	20.62	
8				4	2	21.35	
8				7	2	21.18	
15				0	2	21.30	



BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)
1.4MHz	19957	1710.7	QPSK	1	0	0	21.82
				1	2	0	21.49
				1	5	0	21.86
				3	0	0	21.30
				3	1	0	19.38
				3	2	0	21.26
			6	0	1	21.99	
			16QAM	1	0	1	21.01
				1	2	1	21.63
				1	5	1	21.71
				3	0	1	20.73
				3	1	1	20.88
				3	2	1	20.55
				6	0	2	21.32
	20175	1732.5		QPSK	1	0	0
			1		2	0	20.99
			1		5	0	20.90
			3		0	0	20.90
			3		1	0	20.11
			3		2	0	20.09
			6	0	1	20.68	
			16QAM	1	0	1	20.93
				1	2	1	20.43
				1	5	1	20.90
				3	0	1	21.96
				3	1	1	21.77
				3	2	1	21.15
				6	0	2	20.33
	20393	1754.3		QPSK	1	0	0
			1		2	0	21.23
			1		5	0	21.56
			3		0	0	20.28
			3		1	0	20.45
			3		2	0	20.50
			6	0	1	20.05	
			16QAM	1	0	1	19.92
1				2	1	19.52	
1				5	1	19.64	
3				0	1	20.51	
3				1	1	20.58	
3				2	1	20.11	
6				0	2	20.85	



LTE Band 5

BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)
10MHz	20450	829	QPSK	1	0	0	22.59
				1	24	0	22.96
				1	49	0	22.58
				25	0	1	21.38
				25	12	1	21.87
				25	25	1	21.02
			16QAM	50	0	1	21.36
				1	0	1	20.75
				1	24	1	20.42
				1	49	1	20.68
				25	0	2	21.79
				25	12	2	21.48
				25	25	2	21.60
				50	0	2	19.58
	20525	836.5	QPSK	1	0	0	18.65
				1	24	0	18.43
				1	49	0	18.71
				25	0	1	20.42
				25	12	1	20.52
				25	25	1	20.40
			16QAM	50	0	1	22.64
				1	0	1	22.04
				1	24	1	22.46
				1	49	1	22.09
				25	0	2	21.11
				25	12	2	21.47
				25	25	2	21.28
				50	0	2	21.12
	20600	844	QPSK	1	0	0	21.14
				1	24	0	21.45
1				49	0	21.26	
25				0	1	21.53	
25				12	1	21.85	
25				25	1	21.92	
16QAM			50	0	1	20.70	
			1	0	1	20.61	
			1	24	1	20.13	
			1	49	1	20.48	
			25	0	2	21.26	
			25	12	2	21.02	
			25	25	2	21.04	
			50	0	2	20.95	



BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)
5MHz	20425	826.5	QPSK	1	0	0	22.64
				1	12	0	22.62
				1	24	0	22.84
				12	0	1	20.92
				12	6	1	20.28
				12	11	1	20.79
				25	0	1	19.96
			16QAM	1	0	1	19.77
				1	12	1	19.67
				1	24	1	19.21
				12	0	2	21.68
				12	6	2	21.70
				12	11	2	21.26
				25	0	2	21.12
	20525	836.5	QPSK	1	0	0	20.99
				1	12	0	20.47
				1	24	0	20.30
				12	0	1	21.17
				12	6	1	21.53
				12	11	1	21.81
				25	0	1	20.85
			16QAM	1	0	1	21.70
				1	12	1	21.80
				1	24	1	21.40
				12	0	2	21.77
				12	6	2	21.82
				12	11	2	21.17
				25	0	2	20.59
	20625	846.5	QPSK	1	0	0	19.79
				1	12	0	19.62
1				24	0	19.35	
12				0	1	20.49	
12				6	1	20.76	
12				11	1	20.99	
25				0	1	21.30	
16QAM			1	0	1	21.21	
			1	12	1	21.05	
			1	24	1	21.66	
			12	0	2	19.22	
			12	6	2	19.06	
			12	11	2	19.34	
			25	0	2	19.96	



BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)
3MHz	20415	825.5	QPSK	1	0	0	23.23
				1	7	0	23.45
				1	14	0	23.16
				8	0	1	21.07
				8	4	1	21.26
				8	7	1	21.15
				15	0	1	20.12
			16QAM	1	0	1	20.15
				1	7	1	20.75
				1	14	1	21.27
				8	0	2	19.70
				8	4	2	19.99
				8	7	2	19.19
				15	0	2	19.95
	20525	836.5	QPSK	1	0	0	20.22
				1	7	0	20.48
				1	14	0	20.40
				8	0	1	21.03
				8	4	1	21.35
				8	7	1	21.18
				15	0	1	18.54
			16QAM	1	0	1	19.29
				1	7	1	19.48
				1	14	1	19.94
				8	0	2	21.04
				8	4	2	21.89
				8	7	2	21.29
				15	0	2	21.72
	20635	847.5	QPSK	1	0	0	19.79
				1	7	0	19.30
1				14	0	19.95	
8				0	1	21.51	
8				4	1	21.53	
8				7	1	21.43	
15				0	1	21.62	
16QAM			1	0	1	20.76	
			1	7	1	20.51	
			1	14	1	20.00	
			8	0	2	19.97	
			8	4	2	19.75	
			8	7	2	19.84	
			15	0	2	20.41	



BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)
1.4MHz	20407	824.7	QPSK	1	0	0	23.12
				1	2	0	23.56
				1	5	0	23.73
				3	0	0	21.29
				3	1	0	21.84
				3	2	0	21.15
			16QAM	6	0	1	21.83
				1	0	1	21.04
				1	2	1	21.04
				1	5	1	21.56
				3	0	1	19.89
				3	1	1	19.13
	20525	836.5	QPSK	3	2	1	19.10
				6	0	2	20.21
				1	0	0	20.36
				1	2	0	20.57
				1	5	0	19.62
				3	0	0	19.73
			16QAM	3	1	0	19.07
				3	2	0	19.28
				6	0	1	22.60
				1	0	1	22.77
				1	2	1	22.49
				1	5	1	22.05
	20643	848.3	QPSK	3	0	1	22.19
				3	1	1	22.27
				3	2	1	22.15
				6	0	2	22.99
				1	0	0	21.77
				1	2	0	21.83
			16QAM	1	5	0	21.54
				3	0	0	21.83
				3	1	0	21.66
				3	2	0	21.45
				6	0	1	19.94
				1	0	1	19.73
16QAM	1	2	1	19.00			
	1	5	1	21.58			
	3	0	1	21.01			
	3	1	1	21.77			
	3	2	1	21.45			
	6	0	2	20.63			



LTE Band 12

BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)
10MHz	23060	704.0	QPSK	1	0	0	22.76
				1	24	0	22.61
				1	49	0	22.59
				25	0	1	20.58
				25	12	1	20.49
				25	25	1	20.49
			16QAM	50	0	1	21.61
				1	0	1	21.39
				1	24	1	21.58
				1	49	1	21.76
				25	0	2	20.18
				25	12	2	20.11
				25	25	2	20.20
				50	0	2	21.02
	23095	707.5	QPSK	1	0	0	21.17
				1	24	0	21.90
				1	49	0	21.19
				25	0	1	21.87
				25	12	1	21.00
				25	25	1	21.69
			16QAM	50	0	1	21.67
				1	0	1	21.82
				1	24	1	21.02
				1	49	1	22.36
				25	0	2	22.11
				25	12	2	22.19
				25	25	2	22.22
				50	0	2	21.83
	23130	711.0	QPSK	1	0	0	20.17
				1	24	0	20.48
1				49	0	20.39	
25				0	1	20.24	
25				12	1	20.87	
25				25	1	20.78	
16QAM			50	0	1	20.71	
			1	0	1	22.20	
			1	24	1	22.16	
			1	49	1	22.26	
			25	0	2	21.15	
			25	12	2	21.22	
			25	25	2	21.92	
			50	0	2	20.94	



BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)
5MHz	23035	701.5	QPSK	1	0	0	22.41
				1	12	0	22.51
				1	24	0	23.67
				12	0	1	21.56
				12	6	1	21.67
				12	13	1	21.16
				25	0	1	21.29
			16QAM	1	0	1	21.01
				1	12	1	21.00
				1	24	1	21.07
				12	0	2	21.08
				12	6	2	21.04
				12	13	2	21.51
				25	0	2	19.69
	23095	707.5	QPSK	1	0	0	21.13
				1	12	0	21.30
				1	24	0	21.75
				12	0	1	21.88
				12	6	1	21.02
				12	13	1	21.32
				25	0	1	21.13
			16QAM	1	0	1	21.49
				1	12	1	21.85
				1	24	1	21.75
				12	0	2	21.52
				12	6	2	21.93
				12	13	2	21.97
				25	0	2	21.65
	23155	713.5	QPSK	1	0	0	21.33
				1	12	0	21.46
1				24	0	21.60	
12				0	1	21.09	
12				6	1	21.97	
12				13	1	21.01	
25				0	1	21.70	
16QAM			1	0	1	21.20	
			1	12	1	21.75	
			1	24	1	21.31	
			12	0	2	21.93	
			12	6	2	21.50	
			12	13	2	21.03	
			25	0	2	22.45	



BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)
3MHz	23025	700.5	QPSK	1	0	0	23.24
				1	7	0	23.48
				1	14	0	23.61
				8	0	1	22.67
				8	4	1	22.72
				8	7	1	22.22
				15	0	1	22.23
			16QAM	1	0	1	20.46
				1	7	1	20.10
				1	14	1	20.87
				8	0	2	21.41
				8	4	2	21.97
				8	7	2	21.01
				15	0	2	21.67
	23095	707.5	QPSK	1	0	0	19.58
				1	7	0	19.77
				1	14	0	19.31
				8	0	1	20.74
				8	4	1	20.82
				8	7	1	20.19
				15	0	1	21.84
			16QAM	1	0	1	21.33
				1	7	1	21.73
				1	14	1	21.46
				8	0	2	22.21
				8	4	2	22.56
				8	7	2	22.80
				15	0	2	22.00
	23165	714.5	QPSK	1	0	0	20.08
				1	7	0	20.29
1				14	0	20.05	
8				0	1	21.46	
8				4	1	21.69	
8				7	1	21.57	
15				0	1	21.17	
16QAM			1	0	1	22.19	
			1	7	1	22.20	
			1	14	1	22.25	
			8	0	2	20.83	
			8	4	2	20.54	
			8	7	2	20.04	
			15	0	2	20.60	



BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Offset	MPR	Average power (dBm)
1.4MHz	23017	699.7	QPSK	1	0	0	22.23
				1	2	0	22.56
				1	5	0	22.23
				3	0	0	20.05
				3	1	0	20.10
				3	2	0	20.17
			16QAM	6	0	1	21.33
				1	0	1	19.40
				1	2	1	19.47
				1	5	1	19.84
				3	0	1	21.24
				3	1	1	21.48
	23095	707.5	QPSK	3	2	1	21.72
				6	0	2	21.43
				1	0	0	20.29
				1	2	0	20.29
				1	5	0	20.71
				3	0	0	20.67
			16QAM	3	1	0	20.80
				3	2	0	20.98
				6	0	1	21.83
				1	0	1	21.19
				1	2	1	21.42
				1	5	1	21.43
	23173	715.3	QPSK	3	0	1	20.15
				3	1	1	20.66
				3	2	1	20.95
				6	0	2	21.47
				1	0	0	21.80
				1	2	0	21.43
16QAM			1	5	0	20.67	
			3	0	0	20.28	
			3	1	0	20.04	
			3	2	0	20.94	
			6	0	1	21.04	
			1	0	1	21.81	
16QAM	1	2	1	21.52			
	1	5	1	22.16			
	3	0	1	21.08			
	3	1	1	21.38			
	3	2	1	21.28			
	6	0	2	20.76			



According to 3GPP 36.521 sub-clause 6.2.3.3, the maximum output power is allowed to be reduced by following the table.

Table 6.2.3.3-1: Maximum Power Reduction (MPR) for Power Class 3

Modulation	Channel bandwidth / Transmission bandwidth configuration [RB]						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

The device supports MPR to solve linearity issues (ACLR or SEM) due to the higher peak-to-average ratios (PAR) of the HSUPA signal. This prevents saturating the full range of the TX DAC inside of device and provides a reduced power output to the RF transceiver chip according to the Cubic Metric (For PRACH, PUCCH and SRS transmission, the allowed MPR is according to that specified for PUSCH QPSK modulation for the corresponding transmission bandwidth.).

When PRACH, PUCCH are present the beta gains on those channels are reduced firsts to try to get the power under the allowed limit. If the beta gains are lowered as far as possible, then a hard limiting is applied at the maximum allowed level.

For each subframe, the MPR is evaluated per slot and given by the maximum value taken over the transmission(s) within the slot, the maximum MPR over the two slots is then applied for the entire subframe.

For the UE maximum output power modified by MPR, the power limits specified in subclause 6.2.5.3 apply. The normative reference for this requirement is TS 36.101 clause 6.2.3.

The end effect is that the DUT output power is identical to the case where there is no MPR in the device.



6.2 RADIATED OUTPUT POWER

6.2.1 MEASUREMENT METHOD


The measurements procedures specified in ANSI/TIA-603-E-2016 were applied.

- 1 In an anechoic antenna test chamber, a half-wave dipole antenna for the frequency band of interest is placed at the reference centre of the chamber. An RF Signal source for the frequency band of interest is connected to the dipole with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A known (measured) power (P_{in}) is applied to the input of the dipole, and the power received (P_r) at the chamber's probe antenna is recorded.
- 2 The substitution method is used. Substitution values at each frequency are measured before and saved to the test software. A "reference path loss" is established as $AR_{pl} = P_{in} + 2.15 - P_r$. The AR_{pl} is the attenuation of "reference path loss", and including the gain of receive antenna, the cable loss and the air loss. The measurement results are obtained as described below: $Power = P_{Mea} + AR_{pl}$
- 3 The EUT is substituted for the dipole at the reference centre of the chamber and a scan is performed to obtain the radiation pattern.
- 4 From the radiation pattern, the co-ordinates where the maximum antenna gain occurs are identified.
- 5 The EUT is then put into continuously transmitting mode at its maximum power level.
- 6 Power mode measurements are performed with the receiving antenna placed at the coordinates determined in Step 3 to determine the output power as defined in Rule 27.50(d)(4). The "reference path loss" from Step1 is added to this result.
- 7 This value is EIRP since the measurement is calibrated using a half-wave dipole antenna of known gain (2.15 dBi) and known input power (P_{in}).
- 8 ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15dBi..$


Test Setup

NOTE: Effective radiated power (ERP) refers to the radiation power output of the EUT, assuming all emissions are radiated from half-wave dipole antennas.

Step 1: Pre-test

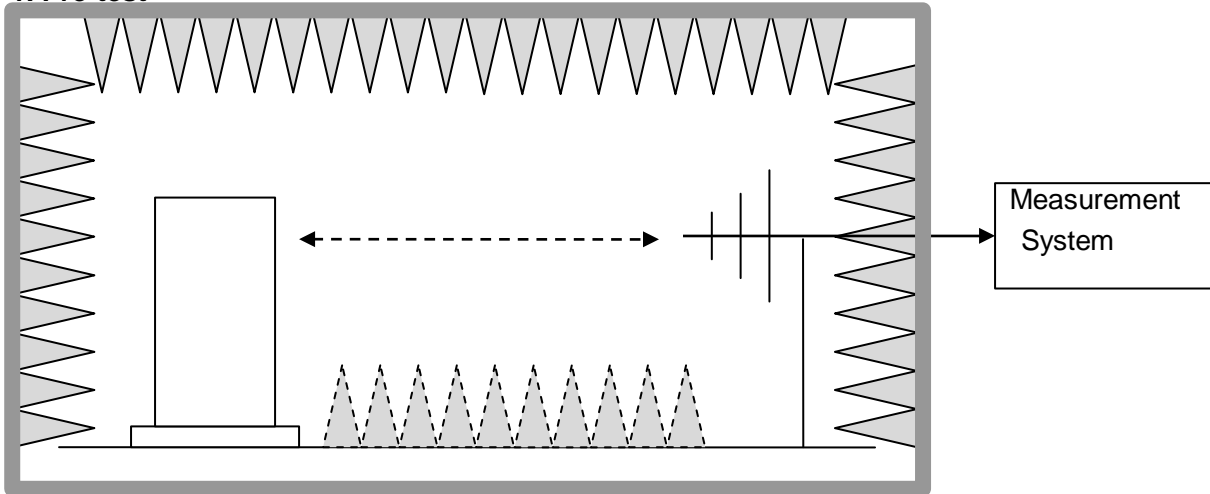

Step 2: Substitution method to verify the maximum ERP

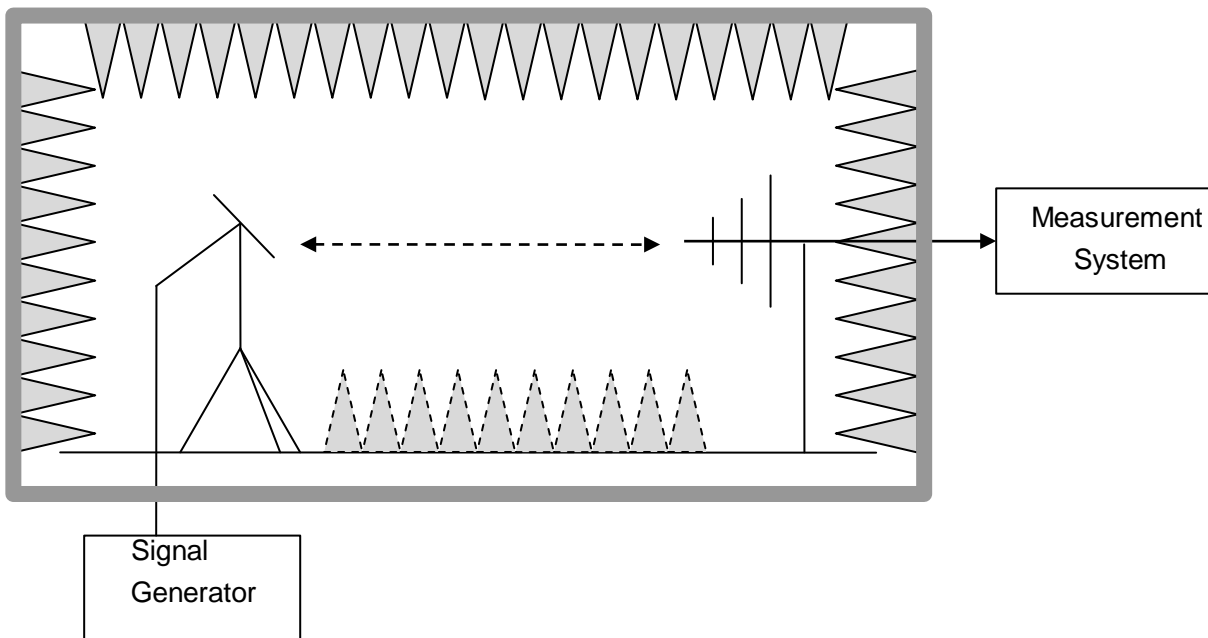



6.2.2 PROVISIONS APPLICABLE

This is the test for the maximum radiated power from the EUT. Rule Part 24.232(c) specifies, “Mobile/portable stations are limited to 2 watts e.i.r.p.

Mode	FCC Part Section(s)	Nominal Peak Power
LTE Band 2	24.232(c)	≤ 33 dBm (2W)
LTE Band 4	27.50(d)(4)	≤ 30 dBm (1W)
LTE Band 5	22.913(a)(2)	≤ 38.45 dBm (7W)
LTE Band 12	27.50(b)(10)	≤ 34.77 dBm(3W)

**6.2.3 MEASUREMENT RESULT****EIRP for LTE Band 2**

Frequency	Channel Bandwidth	Mode.	RB	Substituted level	Antenna Polarization	Antenna Gain correction	Cable Loss	Absolute Level	Limit (dBm)
1850.7	1.4	QPSK	1/0	11.58	V	7.95	0.79	18.74	33
1880.0	1.4	QPSK	1/0	11.16	V	7.95	0.79	18.32	33
1909.3	1.4	QPSK	1/0	10.73	V	7.95	0.79	17.89	33
1850.7	1.4	QPSK	1/0	10.82	H	7.95	0.79	17.98	33
1880.0	1.4	QPSK	1/0	11.67	H	7.95	0.79	18.83	33
1909.3	1.4	QPSK	1/0	9.87	H	7.95	0.79	17.03	33
1850.7	1.4	16-QAM	1/5	10.07	V	7.95	0.79	17.23	33
1880.0	1.4	16-QAM	1/0	9.49	V	7.95	0.79	16.65	33
1909.3	1.4	16-QAM	1/0	10.12	V	7.95	0.79	17.28	33
1850.7	1.4	16-QAM	1/5	11.37	H	7.95	0.79	18.53	33
1880.0	1.4	16-QAM	1/0	11.55	H	7.95	0.79	18.71	33
1909.3	1.4	16-QAM	1/0	11.44	H	7.95	0.79	18.60	33
1851.5	3	QPSK	1/0	10.78	V	7.95	0.79	17.94	33
1880.0	3	QPSK	1/0	10.26	V	7.95	0.79	17.42	33
1908.5	3	QPSK	1/0	11.94	V	7.95	0.79	19.10	33
1851.5	3	QPSK	1/0	10.01	H	7.95	0.79	17.17	33
1880.0	3	QPSK	1/0	11.49	H	7.95	0.79	18.65	33
1908.5	3	QPSK	1/0	10.68	H	7.95	0.79	17.84	33
1851.5	3	16-QAM	1/0	10.35	V	7.95	0.79	17.51	33
1880.0	3	16-QAM	1/0	10.87	V	7.95	0.79	18.03	33
1908.5	3	16-QAM	1/0	10.33	V	7.95	0.79	17.49	33
1851.5	3	16-QAM	1/0	9.88	H	7.95	0.79	17.04	33
1880.0	3	16-QAM	1/0	12.05	H	7.95	0.79	19.21	33
1908.5	3	16-QAM	1/0	12.09	H	7.95	0.79	19.25	33
1852.5	5	QPSK	1/0	11.37	V	7.95	0.79	18.53	33
1880.0	5	QPSK	1/0	11.79	V	7.95	0.79	18.95	33
1907.5	5	QPSK	1/24	10.62	V	7.95	0.79	17.78	33
1852.5	5	QPSK	1/0	11.69	H	7.95	0.79	18.85	33
1880.0	5	QPSK	1/0	10.58	H	7.95	0.79	17.74	33
1907.5	5	QPSK	1/24	10.59	H	7.95	0.79	17.75	33
1852.5	5	16-QAM	1/0	10.68	V	7.95	0.79	17.84	33
1880.0	5	16-QAM	1/0	10.36	V	7.95	0.79	17.52	33



1907.5	5	16-QAM	1/24	11.35	V	7.95	0.79	18.51	33
1852.5	5	16-QAM	1/0	11.09	H	7.95	0.79	18.25	33
1880.0	5	16-QAM	1/0	11.09	H	7.95	0.79	18.25	33
1907.5	5	16-QAM	1/24	10.50	H	7.95	0.79	17.66	33
1855	10	QPSK	1/0	11.14	V	7.95	0.79	18.30	33
1880	10	QPSK	1/49	11.50	V	7.95	0.79	18.66	33
1905	10	QPSK	1/0	12.04	V	7.95	0.79	19.20	33
1855	10	QPSK	1/0	10.27	H	7.95	0.79	17.43	33
1880	10	QPSK	1/49	10.87	H	7.95	0.79	18.03	33
1905	10	QPSK	1/0	10.89	H	7.95	0.79	18.05	33
1855	10	16-QAM	1/0	11.46	V	7.95	0.79	18.62	33
1880	10	16-QAM	1/49	11.25	V	7.95	0.79	18.41	33
1905	10	16-QAM	1/0	10.47	V	7.95	0.79	17.63	33
1855	10	16-QAM	1/0	11.48	H	7.95	0.79	18.64	33
1880	10	16-QAM	1/49	10.36	H	7.95	0.79	17.52	33
1905	10	16-QAM	1/0	10.73	H	7.95	0.79	17.89	33
1857.5	15	QPSK	1/0	12.02	V	7.95	0.79	19.18	33
1880	15	QPSK	1/74	11.73	V	7.95	0.79	18.89	33
1902.5	15	QPSK	1/0	11.32	V	7.95	0.79	18.48	33
1857.5	15	QPSK	1/0	10.90	H	7.95	0.79	18.06	33
1880	15	QPSK	1/74	11.43	H	7.95	0.79	18.59	33
1902.5	15	QPSK	1/0	11.23	H	7.95	0.79	18.39	33
1857.5	15	16-QAM	1/0	12.10	V	7.95	0.79	19.26	33
1880	15	16-QAM	1/74	12.86	V	7.95	0.79	20.02	33
1902.5	15	16-QAM	1/0	11.56	V	7.95	0.79	18.72	33
1857.5	15	16-QAM	1/0	9.90	H	7.95	0.79	17.06	33
1880	15	16-QAM	1/74	12.12	H	7.95	0.79	19.28	33
1902.5	15	16-QAM	1/0	12.40	H	7.95	0.79	19.56	33
1860	20	QPSK	1/99	12.17	V	7.95	0.79	19.33	33
1880	20	QPSK	1/99	12.62	V	7.95	0.79	19.78	33
1900	20	QPSK	1/0	10.91	V	7.95	0.79	18.07	33
1860	20	QPSK	1/99	11.57	H	7.95	0.79	18.73	33
1880	20	QPSK	1/99	11.46	H	7.95	0.79	18.62	33
1900	20	QPSK	1/0	10.24	H	7.95	0.79	17.40	33
1860	20	16-QAM	1/99	10.34	V	7.95	0.79	17.50	33
1880	20	16-QAM	1/99	11.75	V	7.95	0.79	18.91	33
1900	20	16-QAM	1/0	12.68	V	7.95	0.79	19.84	33



1860	20	16-QAM	1/99	10.34	H	7.95	0.79	17.50	33
1880	20	16-QAM	1/99	12.24	H	7.95	0.79	19.40	33
1900	20	16-QAM	1/0	10.90	H	7.95	0.79	18.06	33

**EIRP for LTE Band 4**

Frequency	Channel Bandwidth	Mode.	RB	Substituted level	Antenna Polarization	Antenna Gain correction	Cable Loss	Absolute Level	Limit (dBm)
1710.7	1.4	QPSK	1/0	12.19	V	7.95	0.79	19.35	30
1732.5	1.4	QPSK	1/0	12.22	V	7.95	0.79	19.38	30
1754.3	1.4	QPSK	1/0	11.74	V	7.95	0.79	18.90	30
1710.7	1.4	QPSK	1/0	11.57	H	7.95	0.79	18.73	30
1732.5	1.4	QPSK	1/0	11.07	H	7.95	0.79	18.23	30
1754.3	1.4	QPSK	1/0	10.85	H	7.95	0.79	18.01	30
1710.7	1.4	16-QAM	1/5	11.94	V	7.95	0.79	19.10	30
1732.5	1.4	16-QAM	1/0	11.04	V	7.95	0.79	18.20	30
1754.3	1.4	16-QAM	1/0	11.84	V	7.95	0.79	19.00	30
1710.7	1.4	16-QAM	1/5	11.59	H	7.95	0.79	18.75	30
1732.5	1.4	16-QAM	1/0	11.21	H	7.95	0.79	18.37	30
1754.3	1.4	16-QAM	1/0	13.17	H	7.95	0.79	20.33	30
1711.5	3	QPSK	1/0	12.41	V	7.95	0.79	19.57	30
1732.5	3	QPSK	1/0	11.84	V	7.95	0.79	19.00	30
1753.5	3	QPSK	1/0	11.60	V	7.95	0.79	18.76	30
1711.5	3	QPSK	1/0	11.17	H	7.95	0.79	18.33	30
1732.5	3	QPSK	1/0	11.09	H	7.95	0.79	18.25	30
1753.5	3	QPSK	1/0	12.81	H	7.95	0.79	19.97	30
1711.5	3	16-QAM	1/0	12.51	V	7.95	0.79	19.67	30
1732.5	3	16-QAM	1/0	12.48	V	7.95	0.79	19.64	30
1753.5	3	16-QAM	1/0	11.51	V	7.95	0.79	18.67	30
1711.5	3	16-QAM	1/0	11.44	H	7.95	0.79	18.60	30
1732.5	3	16-QAM	1/0	12.88	H	7.95	0.79	20.04	30
1753.5	3	16-QAM	1/0	11.77	H	7.95	0.79	18.93	30
1712.5	5	QPSK	1/0	11.99	V	7.95	0.79	19.15	30
1732.5	5	QPSK	1/0	12.72	V	7.95	0.79	19.88	30
1752.5	5	QPSK	1/24	10.33	V	7.95	0.79	17.49	30
1712.5	5	QPSK	1/0	11.32	H	7.95	0.79	18.48	30
1732.5	5	QPSK	1/0	11.29	H	7.95	0.79	18.45	30
1752.5	5	QPSK	1/24	13.20	H	7.95	0.79	20.36	30
1712.5	5	16-QAM	1/0	11.54	V	7.95	0.79	18.70	30
1732.5	5	16-QAM	1/0	12.55	V	7.95	0.79	19.71	30
1752.5	5	16-QAM	1/24	13.13	V	7.95	0.79	20.29	30
1712.5	5	16-QAM	1/0	10.84	H	7.95	0.79	18.00	30
1732.5	5	16-QAM	1/0	11.43	H	7.95	0.79	18.59	30
1752.5	5	16-QAM	1/24	12.71	H	7.95	0.79	19.87	30



1715	10	QPSK	1/0	12.56	V	7.95	0.79	19.72	30
1732.5	10	QPSK	1/49	10.63	V	7.95	0.79	17.79	30
1750	10	QPSK	1/0	11.12	V	7.95	0.79	18.28	30
1715	10	QPSK	1/0	12.25	H	7.95	0.79	19.41	30
1732.5	10	QPSK	1/49	11.75	H	7.95	0.79	18.91	30
1750	10	QPSK	1/0	10.67	H	7.95	0.79	17.83	30
1715	10	16-QAM	1/0	11.77	V	7.95	0.79	18.93	30
1732.5	10	16-QAM	1/49	11.59	V	7.95	0.79	18.75	30
1750	10	16-QAM	1/0	12.39	V	7.95	0.79	19.55	30
1715	10	16-QAM	1/0	11.69	H	7.95	0.79	18.85	30
1732.5	10	16-QAM	1/49	11.33	H	7.95	0.79	18.49	30
1750	10	16-QAM	1/0	11.10	H	7.95	0.79	18.26	30
1717.5	15	QPSK	1/0	11.03	V	7.95	0.79	18.19	30
1732.5	15	QPSK	1/74	11.01	V	7.95	0.79	18.17	30
1747.5	15	QPSK	1/0	12.33	V	7.95	0.79	19.49	30
1717.5	15	QPSK	1/0	11.21	H	7.95	0.79	18.37	30
1732.5	15	QPSK	1/74	10.39	H	7.95	0.79	17.55	30
1747.5	15	QPSK	1/0	11.71	H	7.95	0.79	18.87	30
1717.5	15	16-QAM	1/0	11.06	V	7.95	0.79	18.22	30
1732.5	15	16-QAM	1/74	11.35	V	7.95	0.79	18.51	30
1747.5	15	16-QAM	1/0	10.17	V	7.95	0.79	17.33	30
1717.5	15	16-QAM	1/0	10.22	H	7.95	0.79	17.38	30
1732.5	15	16-QAM	1/74	10.72	H	7.95	0.79	17.88	30
1747.5	15	16-QAM	1/0	10.06	H	7.95	0.79	17.22	30
1720	20	QPSK	1/99	10.56	V	7.95	0.79	17.72	30
1732.5	20	QPSK	1/99	12.11	V	7.95	0.79	19.27	30
1745	20	QPSK	1/0	12.34	V	7.95	0.79	19.50	30
1720	20	QPSK	1/99	12.47	H	7.95	0.79	19.63	30
1732.5	20	QPSK	1/99	11.24	H	7.95	0.79	18.40	30
1745	20	QPSK	1/0	12.41	H	7.95	0.79	19.57	30
1720	20	16-QAM	1/99	11.43	V	7.95	0.79	18.59	30
1732.5	20	16-QAM	1/99	11.55	V	7.95	0.79	18.71	30
1745	20	16-QAM	1/0	12.62	V	7.95	0.79	19.78	30
1720	20	16-QAM	1/99	11.96	H	7.95	0.79	19.12	30
1732.5	20	16-QAM	1/99	11.26	H	7.95	0.79	18.42	30
1745	20	16-QAM	1/0	11.48	H	7.95	0.79	18.64	30



EIRP for LTE Band 5

Frequency	Channel Bandwidth	Mode.	RB	Substituted level	Antenna Polarization	Antenna Gain correction	Cable Loss	Absolute Level	Limit (dBm)
824.7	1.4	QPSK	1/0	13.59	V	6.7	0.49	19.80	38.45
836.5	1.4	QPSK	1/0	11.45	V	6.7	0.49	17.66	38.45
848.3	1.4	QPSK	1/0	12.25	V	6.7	0.49	18.46	38.45
824.7	1.4	QPSK	1/0	13.67	H	6.7	0.49	19.88	38.45
836.5	1.4	QPSK	1/0	11.06	H	6.7	0.49	17.27	38.45
848.3	1.4	QPSK	1/0	10.18	H	6.7	0.49	16.39	38.45
824.7	1.4	16-QAM	1/0	10.81	V	6.7	0.49	17.02	38.45
836.5	1.4	16-QAM	1/0	13.75	V	6.7	0.49	19.96	38.45
848.3	1.4	16-QAM	1/0	12.38	V	6.7	0.49	18.59	38.45
824.7	1.4	16-QAM	1/0	13.04	H	6.7	0.49	19.25	38.45
836.5	1.4	16-QAM	1/0	10.95	H	6.7	0.49	17.16	38.45
848.3	1.4	16-QAM	1/0	11.54	H	6.7	0.49	17.75	38.45
825.5	3	QPSK	1/0	11.19	V	6.7	0.49	17.40	38.45
836.5	3	QPSK	1/0	12.46	V	6.7	0.49	18.67	38.45
847.5	3	QPSK	1/0	13.10	V	6.7	0.49	19.31	38.45
825.5	3	QPSK	1/0	11.95	H	6.7	0.49	18.16	38.45
836.5	3	QPSK	1/0	13.04	H	6.7	0.49	19.25	38.45
847.5	3	QPSK	1/0	13.25	H	6.7	0.49	19.46	38.45
825.5	3	16-QAM	1/0	14.27	V	6.7	0.49	20.48	38.45
836.5	3	16-QAM	1/0	13.47	V	6.7	0.49	19.68	38.45
847.5	3	16-QAM	1/0	13.05	V	6.7	0.49	19.26	38.45
825.5	3	16-QAM	1/0	11.72	H	6.7	0.49	17.93	38.45
836.5	3	16-QAM	1/0	13.95	H	6.7	0.49	20.16	38.45
847.5	3	16-QAM	1/0	13.53	H	6.7	0.49	19.74	38.45
826.5	5	QPSK	1/0	13.70	V	6.7	0.49	19.91	38.45
836.5	5	QPSK	1/0	13.55	V	6.7	0.49	19.76	38.45
846.5	5	QPSK	1/0	13.89	V	6.7	0.49	20.10	38.45
826.5	5	QPSK	1/0	13.08	H	6.7	0.49	19.29	38.45
836.5	5	QPSK	1/0	11.54	H	6.7	0.49	17.75	38.45
846.5	5	QPSK	1/0	11.85	H	6.7	0.49	18.06	38.45
826.5	5	16-QAM	1/0	12.56	V	6.7	0.49	18.77	38.45
836.5	5	16-QAM	1/0	11.99	V	6.7	0.49	18.20	38.45
846.5	5	16-QAM	1/0	11.44	V	6.7	0.49	17.65	38.45
826.5	5	16-QAM	1/0	12.33	H	6.7	0.49	18.54	38.45
836.5	5	16-QAM	1/0	12.54	H	6.7	0.49	18.75	38.45
846.5	5	16-QAM	1/0	12.63	H	6.7	0.49	18.84	38.45



829	10	QPSK	1/0	12.80	V	6.7	0.49	19.01	38.45
836.5	10	QPSK	1/0	13.31	V	6.7	0.49	19.52	38.45
844	10	QPSK	1/0	12.44	V	6.7	0.49	18.65	38.45
829	10	QPSK	1/0	12.27	H	6.7	0.49	18.48	38.45
836.5	10	QPSK	1/0	11.05	H	6.7	0.49	17.26	38.45
844	10	QPSK	1/0	12.34	H	6.7	0.49	18.55	38.45
829	10	16-QAM	1/0	12.85	V	6.7	0.49	19.06	38.45
836.5	10	16-QAM	1/0	11.45	V	6.7	0.49	17.66	38.45
844	10	16-QAM	1/0	13.77	V	6.7	0.49	19.98	38.45
829	10	16-QAM	1/0	11.25	H	6.7	0.49	17.46	38.45
836.5	10	16-QAM	1/0	13.50	H	6.7	0.49	19.71	38.45
844	10	16-QAM	1/0	13.08	H	6.7	0.49	19.29	38.45



EIRP for LTE Band 12

Frequency	Channel Bandwidth	Mode.	RB	Substituted level	Antenna Polarization	Antenna Gain correction	Cable Loss	Absolute Level	Limit (dBm)
699.7	1.4	QPSK	1/0	12.61	V	6.6	0.47	18.74	34.77
707.5	1.4	QPSK	1/0	13.22	V	6.6	0.47	19.35	34.77
715.3	1.4	QPSK	1/24	12.51	V	6.6	0.47	18.64	34.77
699.7	1.4	QPSK	1/0	14.90	H	6.6	0.47	21.03	34.77
707.5	1.4	QPSK	1/0	13.10	H	6.6	0.47	19.23	34.77
715.3	1.4	QPSK	1/24	13.09	H	6.6	0.47	19.22	34.77
699.7	1.4	16-QAM	1/0	13.15	V	6.6	0.47	19.28	34.77
707.5	1.4	16-QAM	1/0	12.96	V	6.6	0.47	19.09	34.77
715.3	1.4	16-QAM	1/24	11.85	V	6.6	0.47	17.98	34.77
699.7	1.4	16-QAM	1/0	12.84	H	6.6	0.47	18.97	34.77
707.5	1.4	16-QAM	1/0	12.08	H	6.6	0.47	18.21	34.77
715.3	1.4	16-QAM	1/24	12.40	H	6.6	0.47	18.53	34.77
700.5	3	QPSK	1/0	13.06	V	6.6	0.47	19.19	34.77
707.5	3	QPSK	1/49	12.61	V	6.6	0.47	18.74	34.77
714.5	3	QPSK	1/0	10.89	V	6.6	0.47	17.02	34.77
700.5	3	QPSK	1/0	11.78	H	6.6	0.47	17.91	34.77
707.5	3	QPSK	1/49	13.51	H	6.6	0.47	19.64	34.77
714.5	3	QPSK	1/0	13.29	H	6.6	0.47	19.42	34.77
700.5	3	16-QAM	1/0	11.03	V	6.6	0.47	17.16	34.77
707.5	3	16-QAM	1/49	13.14	V	6.6	0.47	19.27	34.77
714.5	3	16-QAM	1/0	11.81	V	6.6	0.47	17.94	34.77
700.5	3	16-QAM	1/0	13.35	H	6.6	0.47	19.48	34.77
707.5	3	16-QAM	1/49	11.82	H	6.6	0.47	17.95	34.77
714.5	3	16-QAM	1/0	12.89	H	6.6	0.47	19.02	34.77
701.5	5	QPSK	1/0	13.13	V	6.6	0.47	19.26	34.77
707.5	5	QPSK	1/74	12.70	V	6.6	0.47	18.83	34.77
713.5	5	QPSK	1/0	12.58	V	6.6	0.47	18.71	34.77
701.5	5	QPSK	1/0	13.09	H	6.6	0.47	19.22	34.77
707.5	5	QPSK	1/74	11.69	H	6.6	0.47	17.82	34.77
713.5	5	QPSK	1/0	13.26	H	6.6	0.47	19.39	34.77
701.5	5	16-QAM	1/0	13.23	V	6.6	0.47	19.36	34.77
707.5	5	16-QAM	1/74	13.32	V	6.6	0.47	19.45	34.77
713.5	5	16-QAM	1/0	12.94	V	6.6	0.47	19.07	34.77
701.5	5	16-QAM	1/0	12.70	H	6.6	0.47	18.83	34.77
707.5	5	16-QAM	1/74	11.49	H	6.6	0.47	17.62	34.77
713.5	5	16-QAM	1/0	12.20	H	6.6	0.47	18.33	34.77
704.0	10	QPSK	1/99	12.83	V	6.6	0.47	18.96	34.77



707.5	10	QPSK	1/99	13.15	V	6.6	0.47	19.28	34.77
711.0	10	QPSK	1/0	12.82	V	6.6	0.47	18.95	34.77
704.0	10	QPSK	1/99	12.78	H	6.6	0.47	18.91	34.77
707.5	10	QPSK	1/99	13.06	H	6.6	0.47	19.19	34.77
711.0	10	QPSK	1/0	10.97	H	6.6	0.47	17.10	34.77
704.0	10	16-QAM	1/99	12.59	V	6.6	0.47	18.72	34.77
707.5	10	16-QAM	1/99	12.59	V	6.6	0.47	18.72	34.77
711.0	10	16-QAM	1/0	13.69	V	6.6	0.47	19.82	34.77
704.0	10	16-QAM	1/99	12.63	H	6.6	0.47	18.76	34.77
707.5	10	16-QAM	1/99	12.07	H	6.6	0.47	18.20	34.77
711.0	10	16-QAM	1/0	13.35	H	6.6	0.47	19.48	34.77

Note: Above is the worst mode data.



6.3. PEAK-TO-AVERAGE RATIO

6.3.1 MEASUREMENT METHOD

The peak-to-average power ratio (PAPR) of the transmitter output power must not exceed 13 dB. The PAPR measurements should be made using either an instrument with complementary cumulative distribution function (CCDF) capabilities to determine that PAPR will not exceed 13 dB for more than 0.1 percent of the time or other Commission approved procedure. The measurement must be performed using a signal corresponding to the highest PAPR expected during periods of continuous transmission.

According to KDB 971168 D01v03 - Section 5.7:

- a) Refer to instrument's analyzer instruction manual for details on how to use the power statistics /CCDF function;
- b) Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
- c) Set the number of counts to a value that stabilizes the measured CCDF curve;
- d) Set the measurement interval to 1 ms
- e) Record the maximum PAPR level associated with a probability of 0.1%

6.3.2 PROVISIONS APPLICABLE

This is the test for the Peak-to-Average Ratio from the EUT.

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.



6.3.3 MEASUREMENT RESULT

LTE Band 2
Channel Bandwidth: 1.4 MHz

Channel Bandwidth: 1.4 MHz						
Modulation	Channel	RB Configuration		Peak-to-Average Ratio (dB)	Limit (dB)	Verdict
		Size	Offset			
QPSK	LCH	1	0	4.51	<13	PASS
		1	3	4.33	<13	PASS
		1	5	4.59	<13	PASS
		3	0	4.32	<13	PASS
		3	2	4.52	<13	PASS
		3	3	4.63	<13	PASS
		6	0	5.05	<13	PASS
	MCH	1	0	3.67	<13	PASS
		1	3	3.56	<13	PASS
		1	5	3.62	<13	PASS
		3	0	4.12	<13	PASS
		3	2	3.55	<13	PASS
		3	3	3.81	<13	PASS
		6	0	4.52	<13	PASS
	HCH	1	0	3.85	<13	PASS
		1	3	4.12	<13	PASS
		1	5	3.87	<13	PASS
		3	0	3.55	<13	PASS
		3	2	4.58	<13	PASS
		3	3	3.91	<13	PASS
		6	0	4.41	<13	PASS
16QAM	LCH	1	0	5.48	<13	PASS
		1	3	4.12	<13	PASS
		1	5	5.49	<13	PASS
		3	0	5.12	<13	PASS
		3	2	4.36	<13	PASS
		3	3	5.57	<13	PASS
		6	0	5.98	<13	PASS
	MCH	1	0	4.76	<13	PASS
		1	3	3.56	<13	PASS
		1	5	4.62	<13	PASS
		3	0	4.12	<13	PASS
		3	2	5.13	<13	PASS
		3	3	4.97	<13	PASS



	HCH	6	0	5.31	<13	PASS
		1	0	4.92	<13	PASS
		1	3	4.11	<13	PASS
		1	5	4.79	<13	PASS
		3	0	5.22	<13	PASS
		3	2	4.12	<13	PASS
		3	3	4.65	<13	PASS
		6	0	5.26	<13	PASS

Channel Bandwidth: 3 MHz

Channel Bandwidth: 3 MHz						
Modulation	Channel	RB Configuration		Peak-to-Average Ratio [dB]	Limit [dB]	Verdict
		Size	Offset			
QPSK	LCH	1	0	4.37	<13	PASS
		1	7	4.11	<13	PASS
		1	14	4.42	<13	PASS
		8	0	3.56	<13	PASS
		8	4	4.12	<13	PASS
		8	7	5.02	<13	PASS
		15	0	5.09	<13	PASS
	MCH	1	0	3.78	<13	PASS
		1	7	5.10	<13	PASS
		1	14	3.77	<13	PASS
		8	0	4.55	<13	PASS
		8	4	4.13	<13	PASS
		8	7	4.33	<13	PASS
		15	0	4.54	<13	PASS
	HCH	1	0	3.67	<13	PASS
		1	7	3.52	<13	PASS
		1	14	3.71	<13	PASS
		8	0	4.15	<13	PASS
		8	4	5.25	<13	PASS
		8	7	4.26	<13	PASS
		15	0	4.42	<13	PASS
16QAM	LCH	1	0	5.17	<13	PASS
		1	7		<13	PASS
		1	14	5.39	<13	PASS



		8	0	4.12	<13	PASS
		8	4	5.36	<13	PASS
		8	7	5.86	<13	PASS
		15	0	6.00	<13	PASS
	MCH	1	0	4.63	<13	PASS
		1	7	5.15	<13	PASS
		1	14	4.63	<13	PASS
		8	0	4.28	<13	PASS
		8	4	3.55	<13	PASS
		8	7	5.13	<13	PASS
		15	0	5.28	<13	PASS
	HCH	1	0	4.72	<13	PASS
		1	7	5.25	<13	PASS
		1	14	4.83	<13	PASS
		8	0	4.12	<13	PASS
8		4	5.11	<13	PASS	
8		7	5.17	<13	PASS	
15		0	5.21	<13	PASS	

Channel Bandwidth: 5 MHz

Channel Bandwidth: 5 MHz						
Modulation	Channel	RB Configuration		Peak-to-Average Ratio [dB]	Limit [dB]	Verdict
		Size	Offset			
QPSK	LCH	1	0	4.33	<13	PASS
		1	12	5.12	<13	PASS
		1	24	4.07	<13	PASS
		12	0	3.22	<13	PASS
		12	6	4.13	<13	PASS
		12	13	4.84	<13	PASS
		25	0	5.28	<13	PASS
	MCH	1	0	3.81	<13	PASS
		1	12	3.11	<13	PASS
		1	24	3.65	<13	PASS
		12	0	4.00	<13	PASS
		12	6	2.55	<13	PASS
		12	13	4.29	<13	PASS



		25	0	4.58	<13	PASS
	HCH	1	0	3.57	<13	PASS
		1	12	3.56	<13	PASS
		1	24	3.49	<13	PASS
		12	0	4.12	<13	PASS
		12	6	5.12	<13	PASS
		12	13	4.18	<13	PASS
		25	0	4.47	<13	PASS
16QAM	LCH	1	0	5.42	<13	PASS
		1	12	3.11	<13	PASS
		1	24	5.34	<13	PASS
		12	0	5.11	<13	PASS
		12	6	3.55	<13	PASS
		12	13	5.79	<13	PASS
		25	0	5.99	<13	PASS
	MCH	1	0	4.78	<13	PASS
		1	12	5.12	<13	PASS
		1	24	4.63	<13	PASS
		12	0	3.15	<13	PASS
		12	6	4.13	<13	PASS
		12	13	5.16	<13	PASS
		25	0	5.45	<13	PASS
	HCH	1	0	4.46	<13	PASS
		1	12	5.12	<13	PASS
		1	24	4.28	<13	PASS
		12	0	2.36	<13	PASS
		12	6	4.13	<13	PASS
		12	13	5.14	<13	PASS
		25	0	5.3	<13	PASS

Channel Bandwidth: 10 MHz

Channel Bandwidth: 10 MHz						
Modulation	Channel	RB Configuration		Peak-to-Average Ratio [dB]	Limit [dB]	Verdict
		Size	Offset			
QPSK	LCH	1	0	4.52	<13	PASS
		1	24	5.12	<13	PASS



		1	49	4.79	<13	PASS	
		25	0	4.15	<13	PASS	
		25	12	5.22	<13	PASS	
		25	25	5.09	<13	PASS	
		50	0	5.21	<13	PASS	
	MCH	1	0	3.73	<13	PASS	
		1	24	3.44	<13	PASS	
		1	49	4.23	<13	PASS	
		25	0	3.58	<13	PASS	
		25	12	4.13	<13	PASS	
		25	25	4.32	<13	PASS	
		50	0	4.55	<13	PASS	
	HCH	1	0	4.39	<13	PASS	
		1	24	4.33	<13	PASS	
		1	49	3.96	<13	PASS	
		25	0	4.25	<13	PASS	
		25	12	3.55	<13	PASS	
		25	25	4.23	<13	PASS	
		50	0	4.59	<13	PASS	
	16QAM	LCH	1	0	5.24	<13	PASS
			1	24	5.12	<13	PASS
1			49	5.45	<13	PASS	
25			0	6.15	<13	PASS	
25			12	5.22	<13	PASS	
25			25	5.96	<13	PASS	
50			0	6.06	<13	PASS	
MCH		1	0	4.55	<13	PASS	
		1	24	3.59	<13	PASS	
		1	49	4.68	<13	PASS	
		25	0	4.15	<13	PASS	
		25	12	4.29	<13	PASS	
		25	25	5.25	<13	PASS	
		50	0	5.36	<13	PASS	
HCH		1	0	5.56	<13	PASS	
		1	24	4.15	<13	PASS	
		1	49	4.86	<13	PASS	
		25	0	3.56	<13	PASS	



		25	12	5.11	<13	PASS
		25	25	5.16	<13	PASS
		50	0	5.38	<13	PASS

Channel Bandwidth: 15 MHz

Channel Bandwidth: 15 MHz						
Modulation	Channel	RB Configuration		Peak-to-Average Ratio [dB]	Limit [dB]	Verdict
		Size	Offset			
QPSK	LCH	1	0	4.55	<13	PASS
		1	37	5.12	<13	PASS
		1	74	4.56	<13	PASS
		37	0	4.33	<13	PASS
		37	18	5.13	<13	PASS
		37	38	4.99	<13	PASS
		75	0	5.32	<13	PASS
	MCH	1	0	3.77	<13	PASS
		1	37	4.13	<13	PASS
		1	74	4.17	<13	PASS
		37	0	5.33	<13	PASS
		37	18	5.22	<13	PASS
		37	38	4.38	<13	PASS
		75	0	4.78	<13	PASS
	HCH	1	0	4.42	<13	PASS
		1	37	4.26	<13	PASS
		1	74	3.84	<13	PASS
		37	0	6.23	<13	PASS
		37	18	4.23	<13	PASS
		37	38	4.41	<13	PASS
		75	0	4.81	<13	PASS
16QAM	LCH	1	0	5.36	<13	PASS
		1	37	3.12	<13	PASS
		1	74	5.17	<13	PASS
		37	0	5.12	<13	PASS
		37	18	4.36	<13	PASS
		37	38	5.85	<13	PASS
		75	0	6.11	<13	PASS
	MCH	1	0	4.63	<13	PASS
		1	37	4.15	<13	PASS
		1	74	4.98	<13	PASS



		37	0	3.22	<13	PASS
		37	18	4.12	<13	PASS
		37	38	5.21	<13	PASS
		75	0	5.52	<13	PASS
	HCH	1	0	5.47	<13	PASS
		1	37	3.55	<13	PASS
		1	74	4.86	<13	PASS
		37	0	4.25	<13	PASS
		37	18	5.26	<13	PASS
		37	38	5.27	<13	PASS
		75	0	5.61	<13	PASS

Channel Bandwidth: 20 MHz

Channel Bandwidth: 20 MHz						
Modulation	Channel	RB Configuration		Peak-to-Average Ratio [dB]	Limit [dB]	Verdict
		Size	Offset			
QPSK	LCH	1	0	4.63	<13	PASS
		1	49	2.33	<13	PASS
		1	99	4.16	<13	PASS
		50	0	5.21	<13	PASS
		50	25	4.36	<13	PASS
		50	50	4.93	<13	PASS
		100	0	5.08	<13	PASS
	MCH	1	0	4.03	<13	PASS
		1	49	5.19	<13	PASS
		1	99	4.37	<13	PASS
		50	0	5.13	<13	PASS
		50	25	3.13	<13	PASS
		50	50	4.51	<13	PASS
		100	0	4.91	<13	PASS
	HCH	1	0	4.43	<13	PASS
		1	49	3.49	<13	PASS
		1	99	3.78	<13	PASS
		50	0	4.58	<13	PASS
		50	25	6.11	<13	PASS
		50	50	4.51	<13	PASS
		100	0	4.75	<13	PASS
16QAM	LCH	1	0	5.41	<13	PASS
		1	49	4.13	<13	PASS
		1	99	5.15	<13	PASS



		50	0	3.11	<13	PASS	
		50	25	3.42	<13	PASS	
		50	50	5.82	<13	PASS	
		100	0	5.94	<13	PASS	
	MCH		1	0	4.96	<13	PASS
			1	49	6.33	<13	PASS
			1	99	5.18	<13	PASS
			50	0	4.12	<13	PASS
			50	25	3.33	<13	PASS
			50	50	5.44	<13	PASS
			100	0	5.65	<13	PASS
			HCH		1	0	5.46
	1	49			4.23	<13	PASS
	1	99			4.71	<13	PASS
	50	0			3.11	<13	PASS
	50	25			7.12	<13	PASS
	50	50			5.39	<13	PASS
	100	0			5.68	<13	PASS



LTE Band 4
Channel Bandwidth: 1.4 MHz

Channel Bandwidth: 1.4 MHz						
Modulation	Channel	RB Configuration		Peak-to-Average Ratio (dB)	Limit (dB)	Verdict
		Size	Offset			
QPSK	LCH	1	0	4.71	<13	PASS
		1	3	5.12	<13	PASS
		1	5	4.86	<13	PASS
		3	0	4.39	<13	PASS
		3	2	5.66	<13	PASS
		3	3	4.88	<13	PASS
		6	0	5.27	<13	PASS
	MCH	1	0	4.58	<13	PASS
		1	3	3.25	<13	PASS
		1	5	4.58	<13	PASS
		3	0	4.16	<13	PASS
		3	2	3.69	<13	PASS
		3	3	4.41	<13	PASS
		6	0	4.96	<13	PASS
	HCH	1	0	4.03	<13	PASS
		1	3	5.22	<13	PASS
		1	5	4.03	<13	PASS
		3	0	4.28	<13	PASS
		3	2	4.61	<13	PASS
		3	3	4.11	<13	PASS
		6	0	4.57	<13	PASS
16QAM	LCH	1	0	5.73	<13	PASS
		1	3	3.25	<13	PASS
		1	5	5.72	<13	PASS
		3	0	3.33	<13	PASS
		3	2	4.28	<13	PASS
		3	3	5.69	<13	PASS
		6	0	6.12	<13	PASS
	MCH	1	0	5.39	<13	PASS
		1	3	6.00	<13	PASS
		1	5	5.47	<13	PASS
		3	0	5.39	<13	PASS
		3	2	5.11	<13	PASS
		3	3	5.39	<13	PASS
		6	0	5.76	<13	PASS



	HCH	1	0	4.59	<13	PASS
		1	3	4.17	<13	PASS
		1	5	5.03	<13	PASS
		3	0	4.39	<13	PASS
		3	2	3.33	<13	PASS
		3	3	4.93	<13	PASS
		6	0	5.43	<13	PASS

Channel Bandwidth: 3 MHz

Channel Bandwidth: 3 MHz						
Modulation	Channel	RB Configuration		Peak-to-Average Ratio [dB]	Limit [dB]	Verdict
		Size	Offset			
QPSK	LCH	1	0	4.63	<13	PASS
		1	7	3.66	<13	PASS
		1	14	4.44	<13	PASS
		8	0	3.12	<13	PASS
		8	4	4.22	<13	PASS
		8	7	4.86	<13	PASS
		15	0	5.14	<13	PASS
	MCH	1	0	4.48	<13	PASS
		1	7	3.52	<13	PASS
		1	14	4.45	<13	PASS
		8	0	4.22	<13	PASS
		8	4	4.28	<13	PASS
		8	7	4.93	<13	PASS
		15	0	5.05	<13	PASS
	HCH	1	0	3.97	<13	PASS
		1	7	2.55	<13	PASS
		1	14	3.95	<13	PASS
		8	0	4.11	<13	PASS
		8	4	3.69	<13	PASS
		8	7	4.51	<13	PASS
		15	0	4.63	<13	PASS
16QAM	LCH	1	0	5.38	<13	PASS
		1	7	4.28	<13	PASS
		1	14	5.18	<13	PASS
		8	0	3.55	<13	PASS
		8	4		<13	PASS
		8	7	5.71	<13	PASS



	MCH	15	0	6.05	<13	PASS
		1	0	5.32	<13	PASS
		1	7	4.21	<13	PASS
		1	14	5.40	<13	PASS
		8	0	3.25	<13	PASS
		8	4	5.26	<13	PASS
		8	7	5.67	<13	PASS
		15	0	5.89	<13	PASS
	HCH	1	0	5.01	<13	PASS
		1	7	3.53	<13	PASS
		1	14	5.15	<13	PASS
		8	0	4.10	<13	PASS
		8	4	3.20	<13	PASS
		8	7	5.35	<13	PASS
		15	0	5.43	<13	PASS

Channel Bandwidth: 5 MHz

Channel Bandwidth: 5 MHz						
Modulation	Channel	RB Configuration		Peak-to-Average Ratio [dB]	Limit [dB]	Verdict
		Size	Offset			
QPSK	LCH	1	0	4.49	<13	PASS
		1	12	3.66	<13	PASS
		1	24	4.23	<13	PASS
		12	0	4.22	<13	PASS
		12	6	2.56	<13	PASS
		12	13	4.81	<13	PASS
		25	0	5.14	<13	PASS
	MCH	1	0	4.13	<13	PASS
		1	12	3.66	<13	PASS
		1	24	3.89	<13	PASS
		12	0	4.29	<13	PASS
		12	6	6.33	<13	PASS
		12	13	4.78	<13	PASS
		25	0	5.14	<13	PASS
	HCH	1	0	3.79	<13	PASS
		1	12	3.33	<13	PASS
		1	24	3.34	<13	PASS
		12	0	4.75	<13	PASS
		12	6	3.11	<13	PASS



16QAM		12	13	4.32	<13	PASS
		25	0	4.64	<13	PASS
	LCH	1	0	5.51	<13	PASS
		1	12	5.11	<13	PASS
		1	24	5.28	<13	PASS
		12	0	3.19	<13	PASS
		12	6	5.12	<13	PASS
		12	13	5.65	<13	PASS
		25	0	5.92	<13	PASS
	MCH	1	0	5.02	<13	PASS
		1	12	3.33	<13	PASS
		1	24	4.77	<13	PASS
		12	0	4.11	<13	PASS
		12	6	4.23	<13	PASS
		12	13	5.64	<13	PASS
		25	0	5.92	<13	PASS
	HCH	1	0	4.64	<13	PASS
		1	12	3.56	<13	PASS
		1	24	4.21	<13	PASS
		12	0	5.02	<13	PASS
		12	6	4.33	<13	PASS
		12	13	5.22	<13	PASS
		25	0	5.43	<13	PASS

Channel Bandwidth: 10 MHz

Channel Bandwidth: 20 MHz						
Modulation	Channel	RB Configuration		Peak-to-Average Ratio [dB]	Limit [dB]	Verdict
		Size	Offset			
QPSK	LCH	1	0	4.46	<13	PASS
		1	49	4.28	<13	PASS
		1	99	4.39	<13	PASS
		50	0	3.19	<13	PASS
		50	25	3.12	<13	PASS
		50	50	3.63	<13	PASS
		100	0	4.96	<13	PASS
	MCH	1	0	4.49	<13	PASS
		1	49	5.23	<13	PASS
		1	99	4.57	<13	PASS
		50	0	4.44	<13	PASS



		50	25	4.16	<13	PASS
		50	50	4.88	<13	PASS
		100	0	5.06	<13	PASS
	HCH	1	0	4.23	<13	PASS
		1	49	3.56	<13	PASS
		1	99	4.06	<13	PASS
		50	0	3.33	<13	PASS
		50	25	2.63	<13	PASS
		50	50	4.39	<13	PASS
		100	0	4.65	<13	PASS
16QAM	LCH	1	0	5.27	<13	PASS
		1	49	4.23	<13	PASS
		1	99	5.13	<13	PASS
		50	0	6.10	<13	PASS
		50	25	5.11	<13	PASS
		50	50	5.6	<13	PASS
		100	0	5.82	<13	PASS
	MCH	1	0	5.26	<13	PASS
		1	49	3.26	<13	PASS
		1	99	5.62	<13	PASS
		50	0	4.28	<13	PASS
		50	25	3.10	<13	PASS
		50	50	5.79	<13	PASS
		100	0	5.93	<13	PASS
	HCH	1	0	5.05	<13	PASS
		1	49	4.33	<13	PASS
		1	99	5.05	<13	PASS
		50	0	3.59	<13	PASS
		50	25	2.85	<13	PASS
		50	50	5.28	<13	PASS
		100	0	5.56	<13	PASS

Channel Bandwidth: 15 MHz

Channel Bandwidth: 15 MHz						
Modulation	Channel	RB Configuration		Peak-to-Average Ratio [dB]	Limit [dB]	Verdict
		Size	Offset			
QPSK	LCH	1	0	4.62	<13	PASS
		1	37	3.59	<13	PASS
		1	74	4.24	<13	PASS
		37	0	3.47	<13	PASS



		37	18	2.59	<13	PASS
		37	38	4.71	<13	PASS
		75	0	5.14	<13	PASS
	MCH	1	0	4.51	<13	PASS
		1	37	3.22	<13	PASS
		1	74	4.54	<13	PASS
		37	0	5.16	<13	PASS
		37	18	3.42	<13	PASS
		37	38	4.97	<13	PASS
		75	0	5.22	<13	PASS
		HCH	1	0	4.21	<13
	1		37	3.55	<13	PASS
	1		74	4.02	<13	PASS
	37		0	3.59	<13	PASS
	37		18	3.44	<13	PASS
37	38		4.57	<13	PASS	
75	0		4.89	<13	PASS	
16QAM	LCH	1	0	5.44	<13	PASS
		1	37	4.11	<13	PASS
		1	74	5.09	<13	PASS
		37	0	3.19	<13	PASS
		37	18	4.12	<13	PASS
		37	38	5.52	<13	PASS
		75	0	5.91	<13	PASS
	MCH	1	0	5.21	<13	PASS
		1	37	5.31	<13	PASS
		1	74	5.23	<13	PASS
		37	0	2.86	<13	PASS
		37	18	3.12	<13	PASS
		37	38	5.79	<13	PASS
		75	0	5.98	<13	PASS
	HCH	1	0	5.28	<13	PASS
		1	37	5.12	<13	PASS
		1	74	4.97	<13	PASS
		37	0	3.12	<13	PASS
		37	18	3.46	<13	PASS
		37	38	5.4	<13	PASS
		75	0	5.62	<13	PASS



Channel Bandwidth: 20 MHz

Channel Bandwidth: 20 MHz						
Modulation	Channel	RB Configuration		Peak-to-Average Ratio [dB]	Limit [dB]	Verdict
		Size	Offset			
QPSK	LCH	1	0	4.52	<13	PASS
		1	49	3.22	<13	PASS
		1	99	4.68	<13	PASS
		50	0	4.11	<13	PASS
		50	25	5.16	<13	PASS
		50	50	4.71	<13	PASS
		100	0	5.05	<13	PASS
	MCH	1	0	4.32	<13	PASS
		1	49	5.22	<13	PASS
		1	99	4.49	<13	PASS
		50	0	3.46	<13	PASS
		50	25	5.10	<13	PASS
		50	50	4.91	<13	PASS
		100	0	5.12	<13	PASS
	HCH	1	0	4.71	<13	PASS
		1	49	6.11	<13	PASS
		1	99	4.05	<13	PASS
		50	0	3.19	<13	PASS
		50	25	3.55	<13	PASS
		50	50	4.51	<13	PASS
		100	0	4.82	<13	PASS
16QAM	LCH	1	0	5.24	<13	PASS
		1	49	3.41	<13	PASS
		1	99	5.46	<13	PASS
		50	0	5.00	<13	PASS
		50	25	3.49	<13	PASS
		50	50	5.56	<13	PASS
		100	0	5.91	<13	PASS
	MCH	1	0	5.22	<13	PASS
		1	49	5.13	<13	PASS
		1	99	5.29	<13	PASS
		50	0	4.26	<13	PASS
		50	25	4.13	<13	PASS
		50	50	5.72	<13	PASS
		100	0	5.88	<13	PASS
HCH	1	0	5.42	<13	PASS	



		1	49	2.13	<13	PASS
		1	99	4.87	<13	PASS
		50	0	3.19	<13	PASS
		50	25	4.28	<13	PASS
		50	50	5.32	<13	PASS
		100	0	5.66	<13	PASS



LTE BAND 5
Channel Bandwidth: 1.4 MHz

Channel Bandwidth: 1.4 MHz						
Modulation	Channel	RB Configuration		Peak-to-Average Ratio (dB)	Limit (dB)	Verdict
		Size	Offset			
QPSK	LCH	1	0	4.81	<13	PASS
		1	3	3.66	<13	PASS
		1	5	4.92	<13	PASS
		3	0	4.13	<13	PASS
		3	2	3.69	<13	PASS
		3	3	4.88	<13	PASS
		6	0	5.13	<13	PASS
	MCH	1	0	4.79	<13	PASS
		1	3	5.13	<13	PASS
		1	5	4.88	<13	PASS
		3	0	3.55	<13	PASS
		3	2	5.16	<13	PASS
		3	3	4.72	<13	PASS
		6	0	5.26	<13	PASS
	HCH	1	0	4.71	<13	PASS
		1	3	3.55	<13	PASS
		1	5	4.85	<13	PASS
		3	0	3.49	<13	PASS
		3	2	5.12	<13	PASS
		3	3	4.79	<13	PASS
		6	0	5.22	<13	PASS
16QAM	LCH	1	0	5.85	<13	PASS
		1	3	4.65	<13	PASS
		1	5	5.83	<13	PASS
		3	0	3.22	<13	PASS
		3	2	4.13	<13	PASS
		3	3	5.46	<13	PASS
		6	0	5.96	<13	PASS
	MCH	1	0	5.79	<13	PASS
		1	3	6.22	<13	PASS
		1	5	5.74	<13	PASS
		3	0	5.10	<13	PASS
		3	2	4.29	<13	PASS
		3	3	5.67	<13	PASS
		6	0	5.91	<13	PASS



	HCH	1	0	5.81	<13	PASS
		1	3	4.26	<13	PASS
		1	5	5.73	<13	PASS
		3	0	5.03	<13	PASS
		3	2	4.66	<13	PASS
		3	3	5.72	<13	PASS
		6	0	5.97	<13	PASS

Channel Bandwidth: 3 MHz

Channel Bandwidth: 3 MHz						
Modulation	Channel	RB Configuration		Peak-to-Average Ratio [dB]	Limit [dB]	Verdict
		Size	Offset			
QPSK	LCH	1	0	4.75	<13	PASS
		1	7	3.59	<13	PASS
		1	14	4.77	<13	PASS
		8	0	4.26	<13	PASS
		8	4	3.33	<13	PASS
		8	7	5.22	<13	PASS
		15	0	5.14	<13	PASS
	MCH	1	0	4.72	<13	PASS
		1	7	4.26	<13	PASS
		1	14	4.52	<13	PASS
		8	0	5.23	<13	PASS
		8	4	5.13	<13	PASS
		8	7	5.23	<13	PASS
		15	0	5.15	<13	PASS
	HCH	1	0	4.87	<13	PASS
		1	7	3.22	<13	PASS
		1	14	4.62	<13	PASS
		8	0	3.16	<13	PASS
		8	4	4.16	<13	PASS
		8	7	5.26	<13	PASS
		15	0	5.19	<13	PASS
16QAM	LCH	1	0	5.49	<13	PASS
		1	7	5.23	<13	PASS
		1	14	5.45	<13	PASS
		8	0	4.11	<13	PASS
		8	4	3.12	<13	PASS
		8	7	5.89	<13	PASS



	MCH	15	0	6.01	<13	PASS
		1	0	5.51	<13	PASS
		1	7	2.13	<13	PASS
		1	14	5.26	<13	PASS
		8	0	2.33	<13	PASS
		8	4	3.26	<13	PASS
		8	7	5.91	<13	PASS
		15	0	5.79	<13	PASS
	HCH	1	0	5.77	<13	PASS
		1	7	3.26	<13	PASS
		1	14	5.42	<13	PASS
		8	0	5.18	<13	PASS
		8	4	2.56	<13	PASS
		8	7	6.18	<13	PASS
		15	0	5.95	<13	PASS

Channel Bandwidth: 5 MHz

Channel Bandwidth: 5 MHz						
Modulation	Channel	RB Configuration		Peak-to-Average Ratio [dB]	Limit [dB]	Verdict
		Size	Offset			
QPSK	LCH	1	0	4.42	<13	PASS
		1	12	3.03	<13	PASS
		1	24	4.09	<13	PASS
		12	0	3.11	<13	PASS
		12	6	5.19	<13	PASS
		12	13	5.15	<13	PASS
		25	0	5.27	<13	PASS
	MCH	1	0	4.31	<13	PASS
		1	12	4.55	<13	PASS
		1	24	4.11	<13	PASS
		12	0	4.96	<13	PASS
		12	6	6.22	<13	PASS
		12	13	4.97	<13	PASS
		25	0	5.29	<13	PASS
	HCH	1	0	4.49	<13	PASS
		1	12	5.36	<13	PASS
		1	24	3.89	<13	PASS
		12	0	2.97	<13	PASS
		12	6	3.44	<13	PASS



16QAM		12	13	5.18	<13	PASS
		25	0	5.39	<13	PASS
	LCH	1	0	5.32	<13	PASS
		1	12	4.64	<13	PASS
		1	24	4.75	<13	PASS
		12	0	3.66	<13	PASS
		12	6	3.46	<13	PASS
		12	13	5.96	<13	PASS
		25	0	5.95	<13	PASS
	MCH	1	0	5.17	<13	PASS
		1	12	4.55	<13	PASS
		1	24	4.91	<13	PASS
		12	0	5.66	<13	PASS
		12	6	4.11	<13	PASS
		12	13	5.83	<13	PASS
		25	0	6.05	<13	PASS
	HCH	1	0	5.15	<13	PASS
		1	12	6.33	<13	PASS
		1	24	4.45	<13	PASS
		12	0	4.11	<13	PASS
		12	6	6.59	<13	PASS
		12	13	5.89	<13	PASS
		25	0	6.03	<13	PASS

Channel Bandwidth: 10 MHz

Channel Bandwidth: 10 MHz						
Modulation	Channel	RB Configuration		Peak-to-Average Ratio [dB]	Limit [dB]	Verdict
		Size	Offset			
QPSK	LCH	1	0	2.63	<13	PASS
		1	24	5.26	<13	PASS
		1	49	5.14	<13	PASS
		25	0	5.20	<13	PASS
		25	12	5.00	<13	PASS
		25	25	4.39	<13	PASS
		50	0	3.66	<13	PASS
	MCH	1	0	3.19	<13	PASS
		1	24	6.00	<13	PASS
		1	49	5.69	<13	PASS
		25	0	2.56	<13	PASS
		25	12	3.33	<13	PASS



		25	25	4.22	<13	PASS
		50	0	6.59	<13	PASS
	HCH	1	0	4.25	<13	PASS
		1	24	6.13	<13	PASS
		1	49	5.56	<13	PASS
		25	0	4.59	<13	PASS
		25	12	4.00	<13	PASS
		25	25	3.66	<13	PASS
		50	0	2.63	<13	PASS
16QAM	LCH	1	0	2.69	<13	PASS
		1	24	3.99	<13	PASS
		1	49	4.59	<13	PASS
		25	0	5.85	<13	PASS
		25	12	6.26	<13	PASS
		25	25	3.55	<13	PASS
		50	0	4.23	<13	PASS
	MCH	1	0	3.33	<13	PASS
		1	24	4.10	<13	PASS
		1	49	4.00	<13	PASS
		25	0	3.99	<13	PASS
		25	12	2.59	<13	PASS
		25	25	2.66	<13	PASS
		50	0	3.55	<13	PASS
	HCH	1	0	4.12	<13	PASS
		1	24	4.23	<13	PASS
		1	49	4.28	<13	PASS
		25	0	3.51	<13	PASS
		25	12	3.11	<13	PASS
		25	25	2.19	<13	PASS
		50	0	3.10	<13	PASS



LTE BAND 12
Channel Bandwidth: 1.4 MHz

Channel Bandwidth: 1.4 MHz						
Modulation	Channel	RB Configuration		Peak-to-Average Ratio (dB)	Limit (dB)	Verdict
		Size	Offset			
QPSK	LCH	1	0	4.59	<13	PASS
		1	3	3.66	<13	PASS
		1	5	4.63	<13	PASS
		3	0	5.12	<13	PASS
		3	2	2.13	<13	PASS
		3	3	4.66	<13	PASS
		6	0	5.11	<13	PASS
	MCH	1	0	4.96	<13	PASS
		1	3	4.13	<13	PASS
		1	5	4.85	<13	PASS
		3	0	3.10	<13	PASS
		3	2	3.09	<13	PASS
		3	3	4.88	<13	PASS
		6	0	5.22	<13	PASS
	HCH	1	0	4.48	<13	PASS
		1	3	5.27	<13	PASS
		1	5	4.43	<13	PASS
		3	0	3.19	<13	PASS
		3	2	4.15	<13	PASS
		3	3	4.65	<13	PASS
		6	0	4.98	<13	PASS
16QAM	LCH	1	0	5.46	<13	PASS
		1	3	2.63	<13	PASS
		1	5	5.39	<13	PASS
		3	0	3.11	<13	PASS
		3	2	3.16	<13	PASS
		3	3	5.58	<13	PASS
		6	0	6.12	<13	PASS
	MCH	1	0	5.78	<13	PASS
		1	3	5.13	<13	PASS
		1	5	5.8	<13	PASS
		3	0	5.13	<13	PASS
		3	2	3.55	<13	PASS
		3	3	5.59	<13	PASS
		6	0	5.97	<13	PASS



	HCH	1	0	5.3	<13	PASS
		1	3	6.13	<13	PASS
		1	5	5.51	<13	PASS
		3	0	5.13	<13	PASS
		3	2	5.13	<13	PASS
		3	3	5.39	<13	PASS
		6	0	5.75	<13	PASS

Channel Bandwidth: 3 MHz

Channel Bandwidth: 3 MHz						
Modulation	Channel	RB Configuration		Peak-to-Average Ratio [dB]	Limit [dB]	Verdict
		Size	Offset			
QPSK	LCH	1	0	4.42	<13	PASS
		1	7	3.16	<13	PASS
		1	14	4.56	<13	PASS
		8	0	4.13	<13	PASS
		8	4	5.22	<13	PASS
		8	7	5.04	<13	PASS
		15	0	5.17	<13	PASS
	MCH	1	0	4.61	<13	PASS
		1	7	3.15	<13	PASS
		1	14	4.43	<13	PASS
		8	0	3.22	<13	PASS
		8	4	4.11	<13	PASS
		8	7	5.05	<13	PASS
		15	0	5.19	<13	PASS
	HCH	1	0	4.16	<13	PASS
		1	7	3.13	<13	PASS
		1	14	4.32	<13	PASS
		8	0	5.11	<13	PASS
		8	4	5.06	<13	PASS
		8	7	4.93	<13	PASS
		15	0	4.94	<13	PASS
16QAM	LCH	1	0	5.29	<13	PASS
		1	7	3.16	<13	PASS
		1	14	5.05	<13	PASS
		8	0	5.10	<13	PASS
		8	4	3.66	<13	PASS
		8	7	5.83	<13	PASS



	MCH	15	0	6.01	<13	PASS
		1	0	5.38	<13	PASS
		1	7	4.12	<13	PASS
		1	14	5.37	<13	PASS
		8	0	3.22	<13	PASS
		8	4	3.10	<13	PASS
		8	7	3.26	<13	PASS
		15	0	4.69	<13	PASS
	HCH	1	0	5.22	<13	PASS
		1	7	4.16	<13	PASS
		1	14	5.34	<13	PASS
		8	0	4.16	<13	PASS
		8	4	5.03	<13	PASS
		8	7	5.77	<13	PASS
		15	0	5.72	<13	PASS

Channel Bandwidth: 5 MHz

Channel Bandwidth: 5 MHz						
Modulation	Channel	RB Configuration		Peak-to-Average Ratio [dB]	Limit [dB]	Verdict
		Size	Offset			
QPSK	LCH	1	0	4.19	<13	PASS
		1	12	3.16	<13	PASS
		1	24	3.94	<13	PASS
		12	0	4.13	<13	PASS
		12	6	3.16	<13	PASS
		12	13	4.92	<13	PASS
		25	0	5.19	<13	PASS
	MCH	1	0	4.15	<13	PASS
		1	12	4.13	<13	PASS
		1	24	3.54	<13	PASS
		12	0	3.00	<13	PASS
		12	6	4.39	<13	PASS
		12	13	4.73	<13	PASS
		25	0	5.26	<13	PASS
	HCH	1	0	3.99	<13	PASS
		1	12	4.22	<13	PASS
		1	24	3.72	<13	PASS
		12	0	3.47	<13	PASS
		12	6	4.74	<13	PASS



		12	13	4.69	<13	PASS
		25	0	5.03	<13	PASS
16QAM	LCH	1	0	5.13	<13	PASS
		1	12	6.22	<13	PASS
		1	24	4.75	<13	PASS
		12	0	5.29	<13	PASS
		12	6	5.17	<13	PASS
		12	13	5.79	<13	PASS
		25	0	5.98	<13	PASS
	MCH	1	0	5.26	<13	PASS
		1	12	5.05	<13	PASS
		1	24	4.82	<13	PASS
		12	0	4.19	<13	PASS
		12	6	4.39	<13	PASS
		12	13	5.66	<13	PASS
		25	0	5.94	<13	PASS
	HCH	1	0	4.82	<13	PASS
		1	12	4.16	<13	PASS
		1	24	4.65	<13	PASS
		12	0	4.13	<13	PASS
		12	6	4.22	<13	PASS
		12	13	5.54	<13	PASS
		25	0	5.86	<13	PASS

Channel Bandwidth: 10 MHz

Channel Bandwidth: 10 MHz						
Modulation	Channel	RB Configuration		Peak-to-Average Ratio [dB]	Limit [dB]	Verdict
		Size	Offset			
QPSK	LCH	1	0	3.26	<13	PASS
		1	24	3.11	<13	PASS
		1	49	3.49	<13	PASS
		25	0	3.11	<13	PASS
		25	12	3.22	<13	PASS
		25	25	4.56	<13	PASS
		50	0	6.11	<13	PASS
	MCH	1	0	4.29	<13	PASS
		1	24	4.61	<13	PASS
		1	49	5.22	<13	PASS
		25	0	6.23	<13	PASS



		25	12	4.26	<13	PASS
		25	25	3.22	<13	PASS
		50	0	4.11	<13	PASS
	HCH	1	0	5.23	<13	PASS
		1	24	6.14	<13	PASS
		1	49	3.55	<13	PASS
		25	0	4.25	<13	PASS
		25	12	6.12	<13	PASS
		25	25	6.23	<13	PASS
		50	0	4.11	<13	PASS
16QAM	LCH	1	0	5.33	<13	PASS
		1	24	4.19	<13	PASS
		1	49	3.44	<13	PASS
		25	0	4.26	<13	PASS
		25	12	4.25	<13	PASS
		25	25	4.11	<13	PASS
		50	0	3.66	<13	PASS
	MCH	1	0	4.28	<13	PASS
		1	24	4.18	<13	PASS
		1	49	4.15	<13	PASS
		25	0	6.23	<13	PASS
		25	12	4.22	<13	PASS
		25	25	4.18	<13	PASS
		50	0	4.28	<13	PASS
	HCH	1	0	4.17	<13	PASS
		1	24	3.62	<13	PASS
		1	49	4.52	<13	PASS
		25	0	6.11	<13	PASS
		25	12	5.98	<13	PASS
		25	25	5.48	<13	PASS
		50	0	5.74	<13	PASS



7. SPURIOUS EMISSION

7.1 CONDUCTED SPURIOUS EMISSION

7.1.1 MEASUREMENT METHOD

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

The minimum permissible attenuation level of any spurious emission is $43 + \log_{10}(P[\text{Watts}])$, where P is the transmitter power in Watts.

For Band 7:

- (i) $40 + 10 \log_{10} p$ from the channel edges to 5 MHz away
- (ii) $43 + 10 \log_{10} p$ between 5 MHz and X MHz from the channel edges, and
- (iii) $55 + 10 \log_{10} p$ at X MHz and beyond from the channel edges

Test Procedure Used


KDB 971168 D01v03 – Section 6.0

Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to at least $10 \times$ the fundamental frequency (separated into at least two plots per channel)
2. Detector = RMS
3. Trace mode = max hold
4. Sweep time = auto couple
5. The trace was allowed to stabilize
6. Please see test notes below for RBW and VBW settings

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

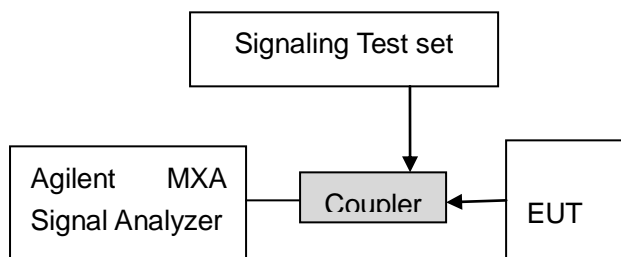

Test Instrument & Measurement Setup

shall be attenuated below the transmitter power (P, in Watts) by at least $43+10\log(P)$ dB. For all power



levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.

Test Note

Compliance with the applicable limits is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater for frequencies less than 1 GHz and 1 MHz or greater for frequencies greater than 1 GHz. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.



7.1.2 MEASUREMENT RESULT

PLEASE REFER TO: APPENDIX A TEST PLOTS FOR CONDUCTED SPURIOUS EMISSION

Note: 1. No emission found in standby or receive mode, no recording in this report.



7.2 RADIATED SPURIOUS EMISSION


7.2.1. MEASUREMENT PROCEDURE

1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High - Low scan is not required in this case.




7.2.2. TEST SETUP


Radiated Emission Test-Setup Frequency Below 30MHz

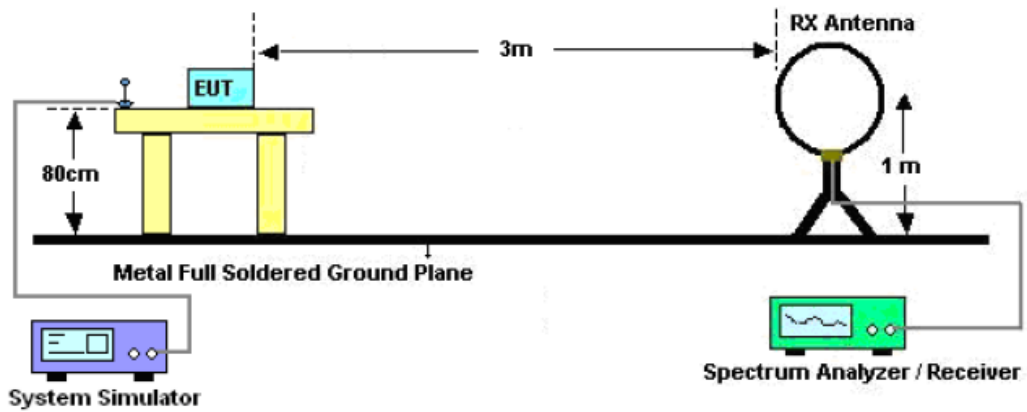

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

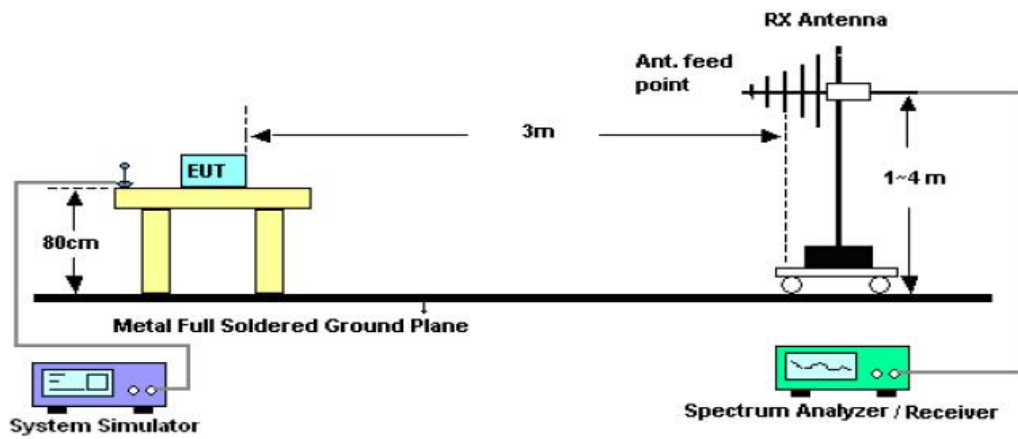

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

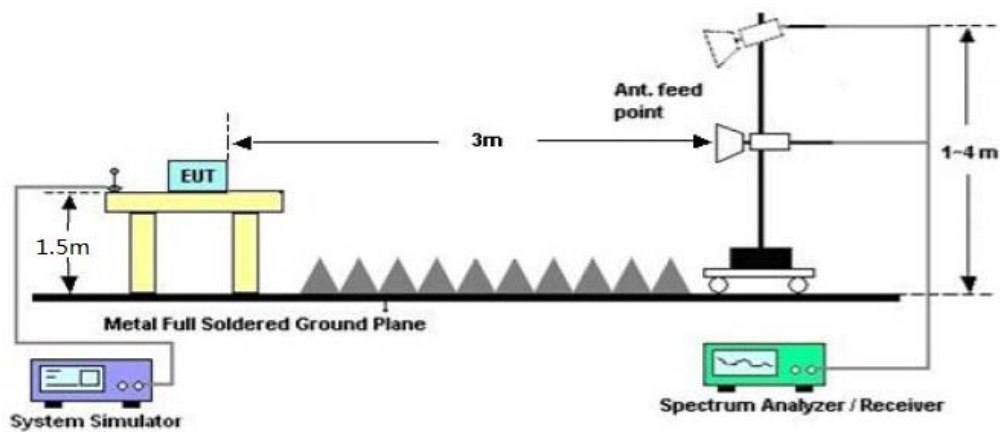



7.2.3 PROVISIONS APPLICABLE

(a) On any frequency outside a licensee's frequency block (e.g. A, D, B, etc.) within the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least $43+10\log(P)$ dB. The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

Note: Only record the worst condition of each test mode:

**7.2.4 MEASUREMENT RESULT****LTE Band 2
Low channel**

Frequency (MHz)	Polarity (H/V)	Emission Level (dBm)	Limit (dBm)	Margin (dB)
3720	V	-36.02	-13	-23.02
747.2	V	-40.92	-13	-27.92
289.4	V	-45.15	-13	-32.15
3720	H	-35.54	-13	-22.54
690.2	H	-42.15	-13	-29.15
291.4	H	-44.20	-13	-31.20

Middle channel

Frequency (MHz)	Polarity (H/V)	Emission Level (dBm)	Limit (dBm)	Margin (dB)
3760	V	-35.24	-13	-22.95
586.1	V	-40.90	-13	-29.01
361.5	V	-40.45	-13	-27.57
3760	H	-36.12	-13	-24.42
614.3	H	-42.30	-13	-29.33
388.9	H	-42.76	-13	-30.95

High channel

Frequency (MHz)	Polarity (H/V)	Emission Level (dBm)	Limit (dBm)	Margin (dB)
3800	V	-35.57	-13	-23.85
635.4	V	-40.87	-13	-28.03
289.1	V	-41.94	-13	-29.88
3800	H	-34.35	-13	-22.48
577.9	H	-40.22	-13	-28.05
413.1	H	-41.30	-13	-29.50

**LTE Band 4
Low channel**

Frequency (MHz)	Polarity (H/V)	Emission Level (dBm)	Limit (dBm)	Margin (dB)
3440	V	-36.31	-13	-23.31
785.4	V	-43.96	-13	-30.96
469.5	V	-43.15	-13	-30.15
3440	H	-36.93	-13	-23.93
715.3	H	-41.22	-13	-28.22
515.9	H	-41.21	-13	-28.21

Middle channel

Frequency (MHz)	Polarity (H/V)	Emission Level (dBm)	Limit (dBm)	Margin (dB)
3465	V	-35.34	-13	-22.34
800.3	V	-41.50	-13	-28.50
569.4	V	-44.25	-13	-31.25
3465	H	-34.81	-13	-21.81
645.5	H	-41.94	-13	-28.94
365.4	H	-42.04	-13	-29.04

High channel

Frequency (MHz)	Polarity (H/V)	Emission Level (dBm)	Limit (dBm)	Margin (dB)
3490	V	-35.24	-13	-22.24
778.5	V	-43.71	-13	-30.71
669.4	V	-42.64	-13	-29.64
3490	H	-36.72	-13	-23.72
478.1	H	-41.42	-13	-28.42
369.3	H	-42.47	-13	-29.47



LTE Band 5
Low channel

Frequency (MHz)	Polarity (H/V)	Emission Level (dBm)	Limit (dBm)	Margin (dB)
1658	V	-36.29	-13	-23.29
535.1	V	-42.69	-13	-29.69
374.5	V	-44.03	-13	-31.03
1658	H	-36.57	-13	-23.57
569.4	H	-41.59	-13	-28.59
347.6	H	-41.80	-13	-28.80

Middle channel

Frequency (MHz)	Polarity (H/V)	Emission Level (dBm)	Limit (dBm)	Margin (dB)
1673	V	-37.05	-13	-24.05
786.1	V	-42.15	-13	-29.15
569.3	V	-43.51	-13	-30.51
1673	H	-35.61	-13	-22.61
694.1	H	-41.05	-13	-28.05
389.4	H	-40.91	-13	-27.91

High channel

Frequency (MHz)	Polarity (H/V)	Emission Level (dBm)	Limit (dBm)	Margin (dB)
1688	V	-35.05	-13	-22.05
531.1	V	-42.49	-13	-29.49
359.2	V	-42.46	-13	-29.46
1688	H	-35.45	-13	-22.45
333.5	H	-41.78	-13	-28.78
259.4	H	-41.97	-13	-28.97

**LTE Band 12
Low channel**

Frequency (MHz)	Polarity (H/V)	Emission Level (dBm)	Limit (dBm)	Margin (dB)
1408	V	-35.73	-13	-22.73
599.4	V	-41.74	-13	-28.74
470.4	V	-43.36	-13	-30.36
1408	H	-36.45	-13	-23.45
529.3	H	-41.58	-13	-28.58
425.3	H	-40.81	-13	-27.81

Middle channel

Frequency (MHz)	Polarity (H/V)	Emission Level (dBm)	Limit (dBm)	Margin (dB)
1415	V	-37.24	-13	-22.73
511.3	V	-41.74	-13	-28.74
425.3	V	-42.02	-13	-30.36
1415	H	-35.48	-13	-23.45
653.3	H	-41.35	-13	-28.58
563.1	H	-43.26	-13	-27.81

High channel

Frequency (MHz)	Polarity (H/V)	Emission Level (dBm)	Limit (dBm)	Margin (dB)
1422	V	-37.02	-13	-24.02
631.1	V	-42.54	-13	-29.54
563.5	V	-43.19	-13	-30.19
1422	H	-36.12	-13	-23.12
643.3	H	-39.82	-13	-26.82
596.1	H	-43.59	-13	-30.59

Note: 1. Margin = Emission Level -Limit

2. (30MHz-26GHz) Below 30MHz no Spurious found and above is the worst mode data



8. FREQUENCY STABILITY

8.1 MEASUREMENT METHOD

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a “call mode”. This is accomplished with the use of R&S CMW500 DIGITAL RADIO COMMUNICATION TESTER.

- 1 Measure the carrier frequency at room temperature.
- 2 Subject the EUT to overnight soak at -10°C . With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on channel 20175 for LTE band 4 measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
- 3 Repeat the above measurements at 10°C increments from -10°C to $+50^{\circ}\text{C}$. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
- 4 Re-measure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments re-measuring carrier frequency at each voltage. Pause at nominal voltage for 1 1/2 hours unpowered, to allow any self-heating to stabilize, before continuing.
- 5 Subject the EUT to overnight soak at $+50^{\circ}\text{C}$.
- 6 With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
- 7 Repeat the above measurements at 10°C increments from $+50^{\circ}\text{C}$ to -10°C . Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
- 8 At all temperature levels hold the temperature to $\pm 0.5^{\circ}\text{C}$ during the measurement procedure.



8.2 PROVISIONS APPLICABLE

8.2.1 For Hand carried battery powered equipment

Frequency stability testing is performed in accordance with the guidelines of ANSI/TIA-603-E-2016. The frequency stability of the transmitter is measured by:

- a.) Temperature: The temperature is varied from -30°C to $+50^{\circ}\text{C}$ in 10°C increments using an environmental chamber.
- b.) Primary Supply Voltage: The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

For Part 22, the frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ (± 2.5 ppm) of the center frequency. For Part 24 and Part 27, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

8.2.2 For equipment powered by primary supply voltage

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to $+50^{\circ}\text{C}$. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.



8.3 MEASUREMENT RESULT (WORST)

LTE Band 2

Middle Channel, $f_0 = 1880$ MHz			
Temperature (°C)	Power Supplied (VDC)	Frequency Error (Hz)	Frequency Error (ppm)
-10	12	-1.67	-0.000904
0		-2.76	-0.001469
10		-4.55	-0.002420
20		-1.96	-0.001059
30		-2.80	-0.001515
40		-3.25	-0.001755
50		-2.10	-0.001136
25	13.2	-4.25	-0.002260
	10.8	-2.23	-0.001187

LTE Band 4

Middle Channel, $f_0 = 1732.5$ MHz			
Temperature (°C)	Power Supplied (VDC)	Frequency Error (Hz)	Frequency Error (ppm)
-10	12	0.43	0.000225
0		-0.13	-0.000067
10		1.00	0.000524
20		1.60	0.000839
30		-1.76	-0.000951
40		-3.25	-0.001755
50		-2.99	-0.001615
25	13.2	-4.06	-0.002195
	10.8	-4.19	-0.002229

Note: Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.



LTE Band 5

Middle Channel, $f_0 = 836.5$ MHz				
Temperature (°C)	Power Supplied (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10	12	-1.27	-0.001544	± 2.5
0		-1.39	-0.001683	± 2.5
10		-2.36	-0.002862	± 2.5
20		-0.37	-0.000451	± 2.5
30		-1.27	-0.001544	± 2.5
40		-0.50	-0.000599	± 2.5
50		-1.40	-0.001676	± 2.5
25	13.2	-0.93	-0.001112	± 2.5
	10.8	-1.22	-0.001454	± 2.5

LTE Band 12

Middle Channel, $f_0 = 1882.5$ MHz			
Temperature (°C)	Power Supplied (VDC)	Frequency Error (Hz)	Frequency Error (ppm)
-10	12	-0.51	-0.000736
0		-0.29	-0.000409
10		-0.10	-0.000143
20		-0.17	-0.000245
30		-0.19	-0.000263
40		-0.74	-0.001051
50		-0.56	-0.000789
25	13.2	-0.46	-0.000647
	10.8	-0.19	-0.000263

Note: Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

The EUT doesn't work below -10°C



9. OCCUPIED BANDWIDTH

9.1 MEASUREMENT METHOD

The test set up and general procedure is similar to conducted peak output power test. Only different for setting the measurement configuration of the measuring instrument of Spectrum Analyzer.

9.2 PROVISIONS APPLICABLE

The emission bandwidth is defined as two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26dB below the transmitter power

9.3 MEASUREMENT RESULT

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

**LTE Band 2****Channel Bandwidth: 1.4 MHz**

Channel Bandwidth: 1.4 MHz					
Modulation	Channel	RB Configuration		Occupied Bandwidth(MHz)	Verdict
		Size	Offset		
QPSK	LCH	6	0	1.0784	PASS
	MCH	6	0	1.0765	PASS
	HCH	6	0	1.0795	PASS
16QAM	LCH	6	0	1.0790	PASS
	MCH	6	0	1.0804	PASS
	HCH	6	0	1.0785	PASS

Channel Bandwidth: 3 MHz

Channel Bandwidth: 3 MHz					
Modulation	Channel	RB Configuration		Occupied Bandwidth(MHz)	Verdict
		Size	Offset		
QPSK	LCH	15	0	2.6823	PASS
	MCH	15	0	2.6826	PASS
	HCH	15	0	2.6853	PASS
16QAM	LCH	15	0	2.6849	PASS
	MCH	15	0	2.6845	PASS
	HCH	15	0	2.6817	PASS

Channel Bandwidth: 5 MHz

Channel Bandwidth: 5 MHz					
Modulation	Channel	RB Configuration		Occupied Bandwidth(MHz)	Verdict
		Size	Offset		
QPSK	LCH	25	0	4.4755	PASS
	MCH	25	0	4.4752	PASS
	HCH	25	0	4.4734	PASS
16QAM	LCH	25	0	4.4747	PASS
	MCH	25	0	4.4722	PASS
	HCH	25	0	4.4710	PASS

**Channel Bandwidth: 10 MHz**

Channel Bandwidth: 10 MHz					
Modulation	Channel	RB Configuration		Occupied Bandwidth (MHz)	Verdict
		Size	Offset		
QPSK	LCH	50	0	8.9255	PASS
	MCH	50	0	8.9265	PASS
	HCH	50	0	8.9211	PASS
16QAM	LCH	50	0	8.9318	PASS
	MCH	50	0	8.9371	PASS
	HCH	50	0	8.8931	PASS

Channel Bandwidth: 15 MHz

Channel Bandwidth: 15 MHz					
Modulation	Channel	RB Configuration		Occupied Bandwidth (MHz)	Verdict
		Size	Offset		
QPSK	LCH	75	0	13.392	PASS
	MCH	75	0	13.386	PASS
	HCH	75	0	13.336	PASS
16QAM	LCH	75	0	13.373	PASS
	MCH	75	0	13.383	PASS
	HCH	75	0	13.349	PASS

Channel Bandwidth: 20 MHz

Channel Bandwidth: 20 MHz					
Modulation	Channel	RB Configuration		Occupied Bandwidth (MHz)	Verdict
		Size	Offset		
QPSK	LCH	100	0	17.857	PASS
	MCH	100	0	17.829	PASS
	HCH	100	0	17.777	PASS
16QAM	LCH	100	0	17.801	PASS
	MCH	100	0	17.850	PASS
	HCH	100	0	17.759	PASS

**LTE Band 4****Channel Bandwidth: 1.4 MHz**

Channel Bandwidth: 1.4 MHz					
Modulation	Channel	RB Configuration		Occupied Bandwidth(MHz)	Verdict
		Size	Offset		
QPSK	LCH	6	0	1.0744	PASS
	MCH	6	0	1.0770	PASS
	HCH	6	0	1.0762	PASS
16QAM	LCH	6	0	1.0781	PASS
	MCH	6	0	1.0762	PASS
	HCH	6	0	1.0798	PASS

Channel Bandwidth: 3 MHz

Channel Bandwidth: 3 MHz					
Modulation	Channel	RB Configuration		Occupied Bandwidth(MHz)	Verdict
		Size	Offset		
QPSK	LCH	15	0	2.6782	PASS
	MCH	15	0	2.6804	PASS
	HCH	15	0	2.6769	PASS
16QAM	LCH	15	0	2.6763	PASS
	MCH	15	0	2.6819	PASS
	HCH	15	0	2.6779	PASS

Channel Bandwidth: 5 MHz

Channel Bandwidth: 5 MHz					
Modulation	Channel	RB Configuration		Occupied Bandwidth(MHz)	Verdict
		Size	Offset		
QPSK	LCH	25	0	4.4760	PASS
	MCH	25	0	4.4795	PASS
	HCH	25	0	4.4742	PASS
16QAM	LCH	25	0	4.4838	PASS
	MCH	25	0	4.4803	PASS
	HCH	25	0	4.4760	PASS

**Channel Bandwidth: 10 MHz**

Channel Bandwidth: 10 MHz					
Modulation	Channel	RB Configuration		Occupied Bandwidth (MHz)	Verdict
		Size	Offset		
QPSK	LCH	50	0	8.9426	PASS
	MCH	50	0	8.9382	PASS
	HCH	50	0	8.9395	PASS
16QAM	LCH	50	0	8.9394	PASS
	MCH	50	0	8.9396	PASS
	HCH	50	0	8.9294	PASS

Channel Bandwidth: 15 MHz

Channel Bandwidth: 15 MHz					
Modulation	Channel	RB Configuration		Occupied Bandwidth (MHz)	Verdict
		Size	Offset		
QPSK	LCH	75	0	13.394	PASS
	MCH	75	0	13.399	PASS
	HCH	75	0	13.400	PASS
16QAM	LCH	75	0	13.403	PASS
	MCH	75	0	13.393	PASS
	HCH	75	0	13.405	PASS

Channel Bandwidth: 20 MHz

Channel Bandwidth: 20 MHz					
Modulation	Channel	RB Configuration		Occupied Bandwidth (MHz)	Verdict
		Size	Offset		
QPSK	LCH	100	0	17.841	PASS
	MCH	100	0	17.845	PASS
	HCH	100	0	17.883	PASS
16QAM	LCH	100	0	17.848	PASS
	MCH	100	0	17.821	PASS
	HCH	100	0	17.869	PASS

**LTE Band 5****Channel Bandwidth: 1.4 MHz**

Channel Bandwidth: 1.4 MHz					
Modulation	Channel	RB Configuration		Occupied Bandwidth(MHz)	Verdict
		Size	Offset		
QPSK	LCH	6	0	1.0762	PASS
	MCH	6	0	1.0760	PASS
	HCH	6	0	1.0801	PASS
16QAM	LCH	6	0	1.0798	PASS
	MCH	6	0	1.0786	PASS
	HCH	6	0	1.0780	PASS

Channel Bandwidth: 3 MHz

Channel Bandwidth: 3 MHz					
Modulation	Channel	RB Configuration		Occupied Bandwidth(MHz)	Verdict
		Size	Offset		
QPSK	LCH	15	0	2.6806	PASS
	MCH	15	0	2.6861	PASS
	HCH	15	0	2.6809	PASS
16QAM	LCH	15	0	2.6809	PASS
	MCH	15	0	2.6854	PASS
	HCH	15	0	2.6822	PASS

**Channel Bandwidth: 5 MHz**

Channel Bandwidth: 5 MHz					
Modulation	Channel	RB Configuration		Occupied Bandwidth(MHz)	Verdict
		Size	Offset		
QPSK	LCH	25	0	4.4738	PASS
	MCH	25	0	4.4729	PASS
	HCH	25	0	4.4827	PASS
16QAM	LCH	25	0	4.4769	PASS
	MCH	25	0	4.4803	PASS
	HCH	25	0	4.4783	PASS

Channel Bandwidth: 10 MHz

Channel Bandwidth: 10 MHz					
Modulation	Channel	RB Configuration		Occupied Bandwidth (MHz)	Verdict
		Size	Offset		
QPSK	LCH	50	0	8.9349	PASS
	MCH	50	0	8.9482	PASS
	HCH	50	0	8.9334	PASS
16QAM	LCH	50	0	8.9279	PASS
	MCH	50	0	8.9509	PASS
	HCH	50	0	8.9206	PASS

**LTE Band 12****Channel Bandwidth: 1.4 MHz**

Channel Bandwidth: 1.4 MHz					
Modulation	Channel	RB Configuration		Occupied Bandwidth(MHz)	Verdict
		Size	Offset		
QPSK	LCH	6	0	1.0746	PASS
	MCH	6	0	1.0789	PASS
	HCH	6	0	1.0766	PASS
16QAM	LCH	6	0	1.0775	PASS
	MCH	6	0	1.0772	PASS
	HCH	6	0	1.0803	PASS

Channel Bandwidth: 3 MHz

Channel Bandwidth:3 MHz					
Modulation	Channel	RB Configuration		Occupied Bandwidth(MHz)	Verdict
		Size	Offset		
QPSK	LCH	15	0	2.6850	PASS
	MCH	15	0	2.6853	PASS
	HCH	15	0	2.6802	PASS
16QAM	LCH	15	0	2.6828	PASS
	MCH	15	0	2.6846	PASS
	HCH	15	0	2.6800	PASS

Channel Bandwidth: 5 MHz

Channel Bandwidth: 5 MHz					
Modulation	Channel	RB Configuration		Occupied Bandwidth(MHz)	Verdict
		Size	Offset		
QPSK	LCH	25	0	4.4711	PASS
	MCH	25	0	4.4709	PASS
	HCH	25	0	4.4677	PASS
16QAM	LCH	25	0	4.4728	PASS
	MCH	25	0	4.4759	PASS
	HCH	25	0	4.4643	PASS



Channel Bandwidth: 10 MHz

Channel Bandwidth: 10 MHz					
Modulation	Channel	RB Configuration		Occupied Bandwidth (MHz)	Verdict
		Size	Offset		
QPSK	LCH	50	0	8.9289	PASS
	MCH	50	0	8.9184	PASS
	HCH	50	0	8.9041	PASS
16QAM	LCH	50	0	8.9301	PASS
	MCH	50	0	8.9209	PASS
	HCH	50	0	8.8939	PASS

Note: Please refers to Appendix B for compliance test plots for Occupied Bandwidth (99%)



10. EMISSION BANDWIDTH

10.1 MEASUREMENT METHOD

The test set up and general procedure is similar to conducted peak output power test. Only different for setting the measurement configuration of the measuring instrument of Spectrum Analyzer.

10.2 PROVISIONS APPLICABLE

The emission bandwidth is defined as two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26dB below the transmitter power.

10.3 MEASUREMENT RESULT

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

**LTE Band 2****Channel Bandwidth: 1.4 MHz**

Channel Bandwidth: 1.4 MHz					
Modulation	Channel	RB Configuration		26dB Bandwidth (MHz)	Verdict
		Size	Offset		
QPSK	LCH	6	0	1.229	PASS
	MCH	6	0	1.229	PASS
	HCH	6	0	1.225	PASS
16QAM	LCH	6	0	1.248	PASS
	MCH	6	0	1.226	PASS
	HCH	6	0	1.243	PASS

Channel Bandwidth: 3 MHz

Channel Bandwidth: 3 MHz					
Modulation	Channel	RB Configuration		26dB Bandwidth (MHz)	Verdict
		Size	Offset		
QPSK	LCH	15	0	2.891	PASS
	MCH	15	0	2.899	PASS
	HCH	15	0	2.858	PASS
16QAM	LCH	15	0	2.881	PASS
	MCH	15	0	2.893	PASS
	HCH	15	0	2.878	PASS

Channel Bandwidth: 5 MHz

Channel Bandwidth: 5 MHz					
Modulation	Channel	RB Configuration		26dB Bandwidth (MHz)	Verdict
		Size	Offset		
QPSK	LCH	25	0	4.813	PASS
	MCH	25	0	4.804	PASS
	HCH	25	0	4.788	PASS
16QAM	LCH	25	0	4.799	PASS
	MCH	25	0	4.744	PASS
	HCH	25	0	4.820	PASS

**Channel Bandwidth: 10 MHz**

Channel Bandwidth: 10 MHz					
Modulation	Channel	RB Configuration		26dB Bandwidth (MHz)	Verdict
		Size	Offset		
QPSK	LCH	50	0	9.493	PASS
	MCH	50	0	9.468	PASS
	HCH	50	0	9.420	PASS
16QAM	LCH	50	0	9.451	PASS
	MCH	50	0	9.492	PASS
	HCH	50	0	9.362	PASS

Channel Bandwidth: 15 MHz

Channel Bandwidth: 15 MHz					
Modulation	Channel	RB Configuration		26dB Bandwidth (MHz)	Verdict
		Size	Offset		
QPSK	LCH	75	0	14.04	PASS
	MCH	75	0	14.05	PASS
	HCH	75	0	13.99	PASS
16QAM	LCH	75	0	13.99	PASS
	MCH	75	0	14.03	PASS
	HCH	75	0	14.01	PASS

Channel Bandwidth: 20 MHz

Channel Bandwidth: 20 MHz					
Modulation	Channel	RB Configuration		26dB Bandwidth (MHz)	Verdict
		Size	Offset		
QPSK	LCH	100	0	18.61	PASS
	MCH	100	0	18.63	PASS
	HCH	100	0	18.53	PASS
16QAM	LCH	100	0	18.56	PASS
	MCH	100	0	18.58	PASS
	HCH	100	0	18.47	PASS

**LTE Band 4****Channel Bandwidth: 1.4 MHz**

Channel Bandwidth: 1.4 MHz					
Modulation	Channel	RB Configuration		26dB Bandwidth (MHz)	Verdict
		Size	Offset		
QPSK	LCH	6	0	1.211	PASS
	MCH	6	0	1.235	PASS
	HCH	6	0	1.249	PASS
16QAM	LCH	6	0	1.227	PASS
	MCH	6	0	1.228	PASS
	HCH	6	0	1.257	PASS

Channel Bandwidth: 3 MHz

Channel Bandwidth: 3 MHz					
Modulation	Channel	RB Configuration		26dB Bandwidth (MHz)	Verdict
		Size	Offset		
QPSK	LCH	15	0	2.823	PASS
	MCH	15	0	2.847	PASS
	HCH	15	0	2.818	PASS
16QAM	LCH	15	0	2.849	PASS
	MCH	15	0	2.832	PASS
	HCH	15	0	2.827	PASS

Channel Bandwidth: 5 MHz

Channel Bandwidth: 5 MHz					
Modulation	Channel	RB Configuration		26dB Bandwidth (MHz)	Verdict
		Size	Offset		
QPSK	LCH	25	0	4.892	PASS
	MCH	25	0	4.863	PASS
	HCH	25	0	4.826	PASS
16QAM	LCH	25	0	4.819	PASS
	MCH	25	0	4.777	PASS
	HCH	25	0	4.844	PASS

**Channel Bandwidth: 10 MHz**

Channel Bandwidth: 10 MHz					
Modulation	Channel	RB Configuration		26dB Bandwidth (MHz)	Verdict
		Size	Offset		
QPSK	LCH	50	0	9.491	PASS
	MCH	50	0	9.496	PASS
	HCH	50	0	9.491	PASS
16QAM	LCH	50	0	9.580	PASS
	MCH	50	0	9.438	PASS
	HCH	50	0	9.482	PASS

Channel Bandwidth: 15 MHz

Channel Bandwidth: 15 MHz					
Modulation	Channel	RB Configuration		26dB Bandwidth (MHz)	Verdict
		Size	Offset		
QPSK	LCH	75	0	14.14	PASS
	MCH	75	0	14.01	PASS
	HCH	75	0	14.14	PASS
16QAM	LCH	75	0	14.13	PASS
	MCH	75	0	14.12	PASS
	HCH	75	0	14.13	PASS

Channel Bandwidth: 20 MHz

Channel Bandwidth: 20 MHz					
Modulation	Channel	RB Configuration		26dB Bandwidth (MHz)	Verdict
		Size	Offset		
QPSK	LCH	100	0	18.65	PASS
	MCH	100	0	18.59	PASS
	HCH	100	0	18.73	PASS
16QAM	LCH	100	0	18.65	PASS
	MCH	100	0	18.62	PASS
	HCH	100	0	18.63	PASS

**LTE Band 5****Channel Bandwidth: 1.4 MHz**

Channel Bandwidth: 1.4 MHz					
Modulation	Channel	RB Configuration		Occupied Bandwidth(MHz)	Verdict
		Size	Offset		
QPSK	LCH	6	0	1.257	PASS
	MCH	6	0	1.225	PASS
	HCH	6	0	1.232	PASS
16QAM	LCH	6	0	1.255	PASS
	MCH	6	0	1.237	PASS
	HCH	6	0	1.238	PASS

Channel Bandwidth: 3 MHz

Channel Bandwidth: 3 MHz					
Modulation	Channel	RB Configuration		Occupied Bandwidth(MHz)	Verdict
		Size	Offset		
QPSK	LCH	15	0	2.873	PASS
	MCH	15	0	2.861	PASS
	HCH	15	0	2.881	PASS
16QAM	LCH	15	0	2.893	PASS
	MCH	15	0	2.899	PASS
	HCH	15	0	2.900	PASS

**Channel Bandwidth: 5 MHz**

Channel Bandwidth: 5 MHz					
Modulation	Channel	RB Configuration		Occupied Bandwidth(MHz)	Verdict
		Size	Offset		
QPSK	LCH	25	0	4.833	PASS
	MCH	25	0	4.867	PASS
	HCH	25	0	4.866	PASS
16QAM	LCH	25	0	4.846	PASS
	MCH	25	0	4.784	PASS
	HCH	25	0	4.897	PASS

Channel Bandwidth: 10 MHz

Channel Bandwidth: 10 MHz					
Modulation	Channel	RB Configuration		Occupied Bandwidth (MHz)	Verdict
		Size	Offset		
QPSK	LCH	50	0	9.479	PASS
	MCH	50	0	9.527	PASS
	HCH	50	0	9.460	PASS
16QAM	LCH	50	0	9.428	PASS
	MCH	50	0	9.547	PASS
	HCH	50	0	9.492	PASS

**LTE Band 12****Channel Bandwidth: 1.4 MHz**

Channel Bandwidth: 1.4MHz					
Modulation	Channel	RB Configuration		26dB Bandwidth (MHz)	Verdict
		Size	Offset		
QPSK	LCH	6	0	1.226	PASS
	MCH	6	0	1.239	PASS
	HCH	6	0	1.244	PASS
16QAM	LCH	6	0	1.233	PASS
	MCH	6	0	1.235	PASS
	HCH	6	0	1.244	PASS

Channel Bandwidth: 3 MHz

Channel Bandwidth: 3MHz					
Modulation	Channel	RB Configuration		26dB Bandwidth (MHz)	Verdict
		Size	Offset		
QPSK	LCH	15	0	2.867	PASS
	MCH	15	0	2.917	PASS
	HCH	15	0	2.867	PASS
16QAM	LCH	15	0	2.869	PASS
	MCH	15	0	2.907	PASS
	HCH	15	0	2.887	PASS

**Channel Bandwidth: 5 MHz**

Channel Bandwidth: 5MHz					
Modulation	Channel	RB Configuration		26dB Bandwidth (MHz)	Verdict
		Size	Offset		
QPSK	LCH	25	0	4.816	PASS
	MCH	25	0	4.810	PASS
	HCH	25	0	4.778	PASS
16QAM	LCH	25	0	4.802	PASS
	MCH	25	0	4.739	PASS
	HCH	25	0	4.786	PASS

Channel Bandwidth: 10 MHz

Channel Bandwidth: 10MHz					
Modulation	Channel	RB Configuration		26dB Bandwidth (MHz)	Verdict
		Size	Offset		
QPSK	LCH	50	0	9.461	PASS
	MCH	50	0	9.399	PASS
	HCH	50	0	9.429	PASS
16QAM	LCH	50	0	9.465	PASS
	MCH	50	0	9.452	PASS
	HCH	50	0	9.374	PASS

Note: Please refer to Appendix B for compliance test plots for emission bandwidth (-26dBc)



11. BAND EDGE

11.1 MEASUREMENT METHOD

The test set up and general procedure is similar to conducted peak output power test. Only different for setting the measurement configuration of the measuring instrument of Spectrum Analyzer.

11.2 PROVISIONS APPLICABLE

As Specified in FCC rules of §2.1051 §24.238(a) §27.53(g) §27.53(h) §27.53(m)
KDB 971168 D01v03 – Section 6.0

11.3 MEASUREMENT RESULT

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequency. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section. The minimum permissible attenuation level of any spurious emission is $43 + 10 \log_{10}(P[\text{Watts}])$, where P is the transmitter power in Watts.

For Band 7:

- (i) $40 + 10 \log_{10} p$ from the channel edges to 5 MHz away
- (ii) $43 + 10 \log_{10} p$ between 5 MHz and X MHz from the channel edges, and
- (iii) $55 + 10 \log_{10} p$ at X MHz and beyond from the channel edges

Please refers to Appendix C for compliance test plots for band edge









APPENDIX A TEST PLOTS FOR CONDUCTED SPURIOUS EMISSION

LTE BAND 2

1.4MHz_LCH_QPSK_1RB#0






20MHz_LCH_QPSK_1RB#0

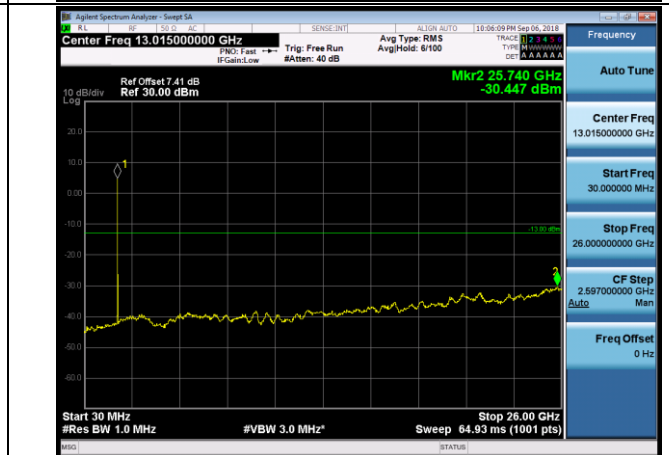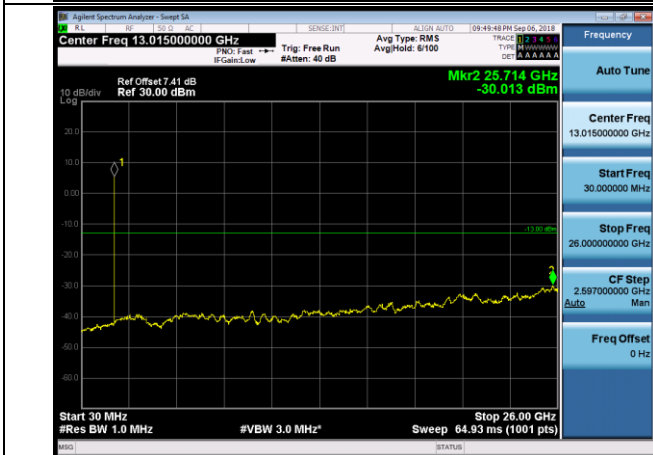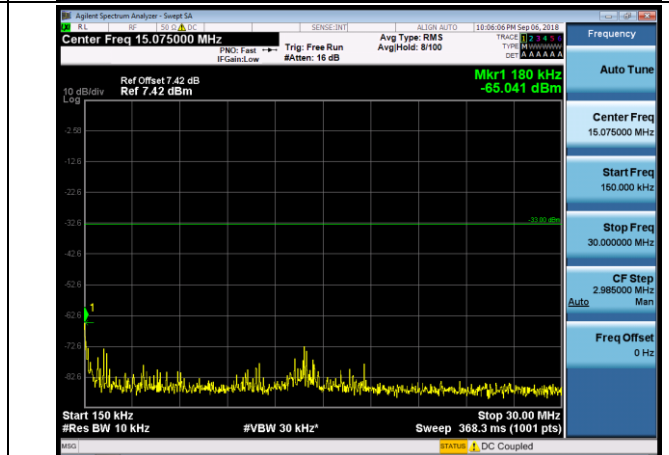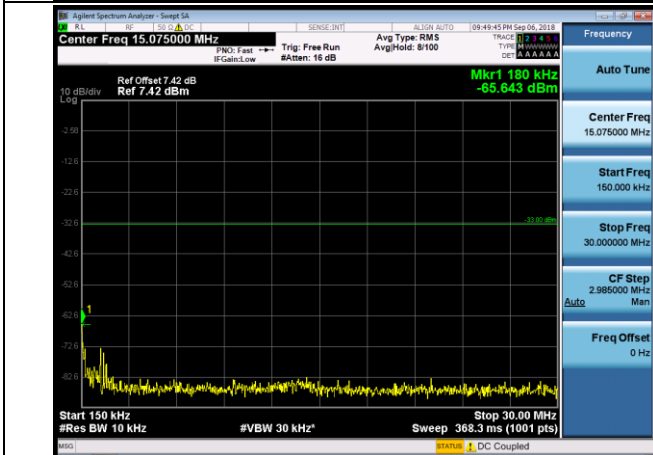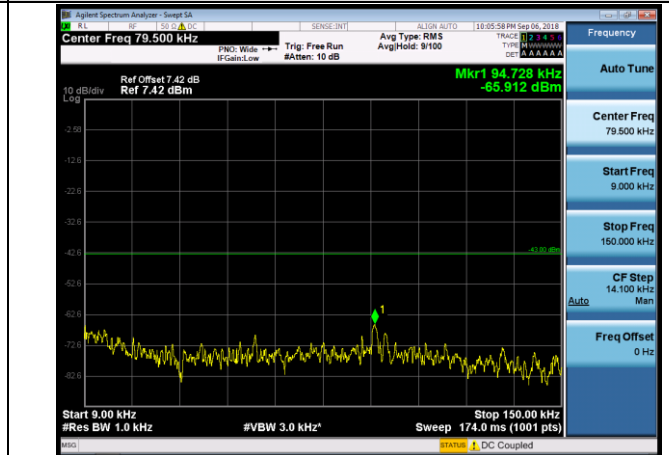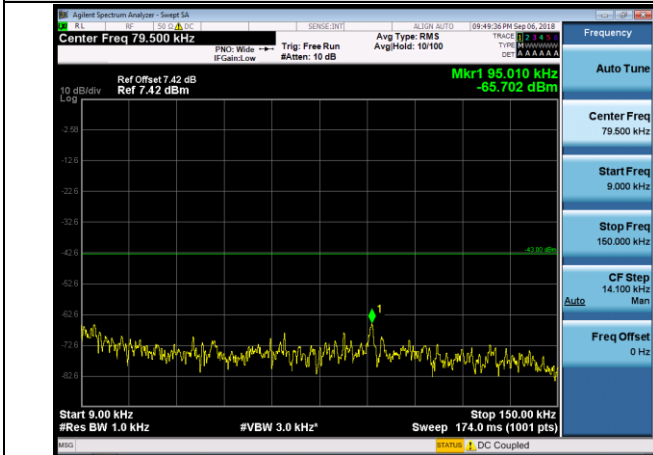



1.4MHz_MCH_QPSK_1RB#0

20MHz_MCH_QPSK_1RB#0

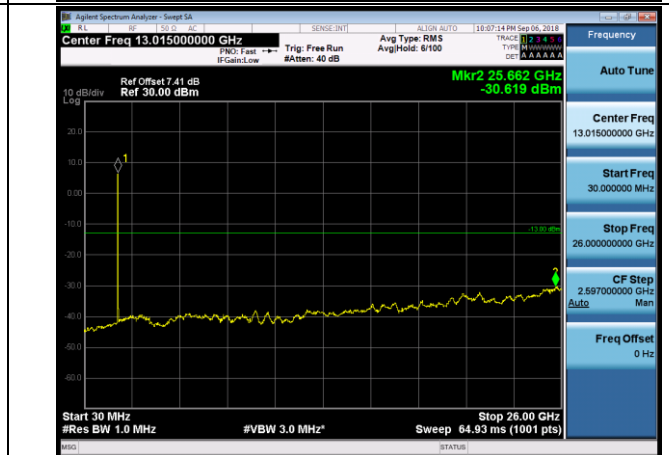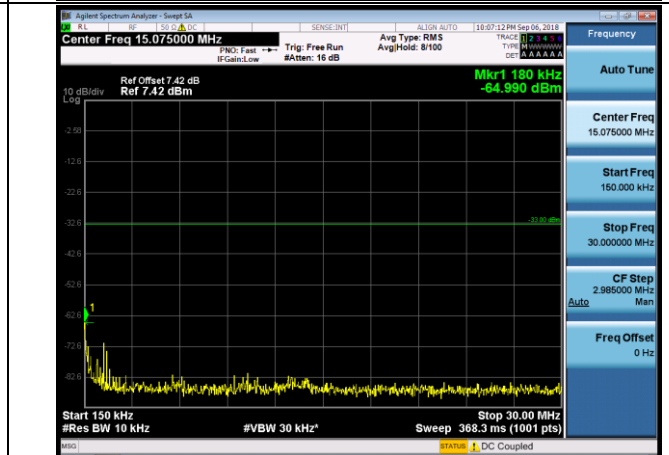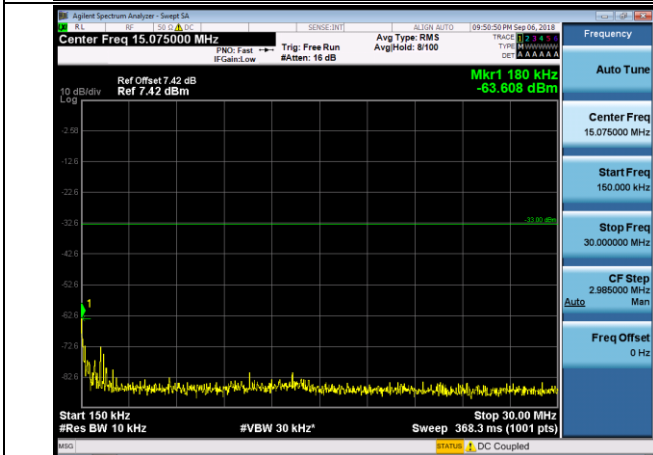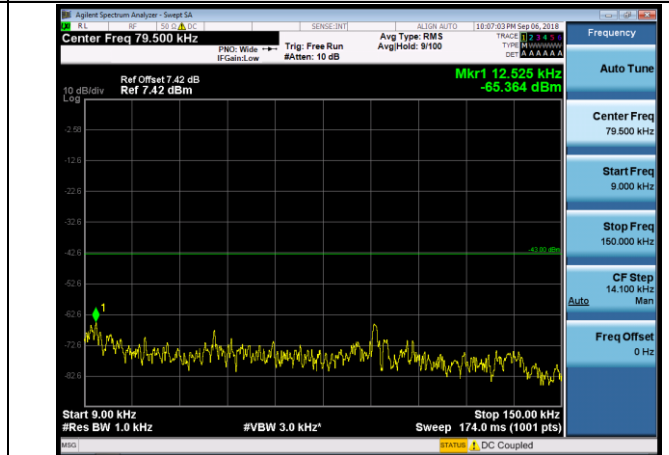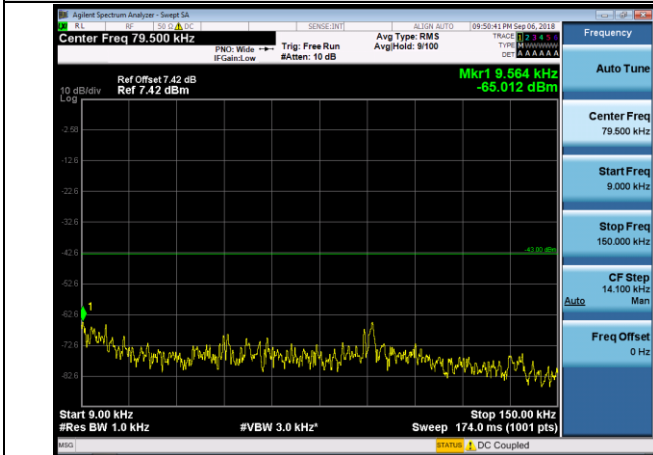



1.4MHz_HCH_QPSK_1RB#0

20MHz_HCH_QPSK_1RB#0

