

Test Plot1#: LTE Band 7_Body Front_1RB_Middle_Thin Battery**DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: Generic LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f=2535$ MHz; $\sigma = 1.878$ S/m; $\epsilon_r = 38.917$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.42, 7.42, 7.42) @2535 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (10x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.375 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.232 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.478 W/kg

SAR(1 g) = 0.246 W/kg; SAR(10 g) = 0.136 W/kg

Maximum value of SAR (measured) = 0.383 W/kg

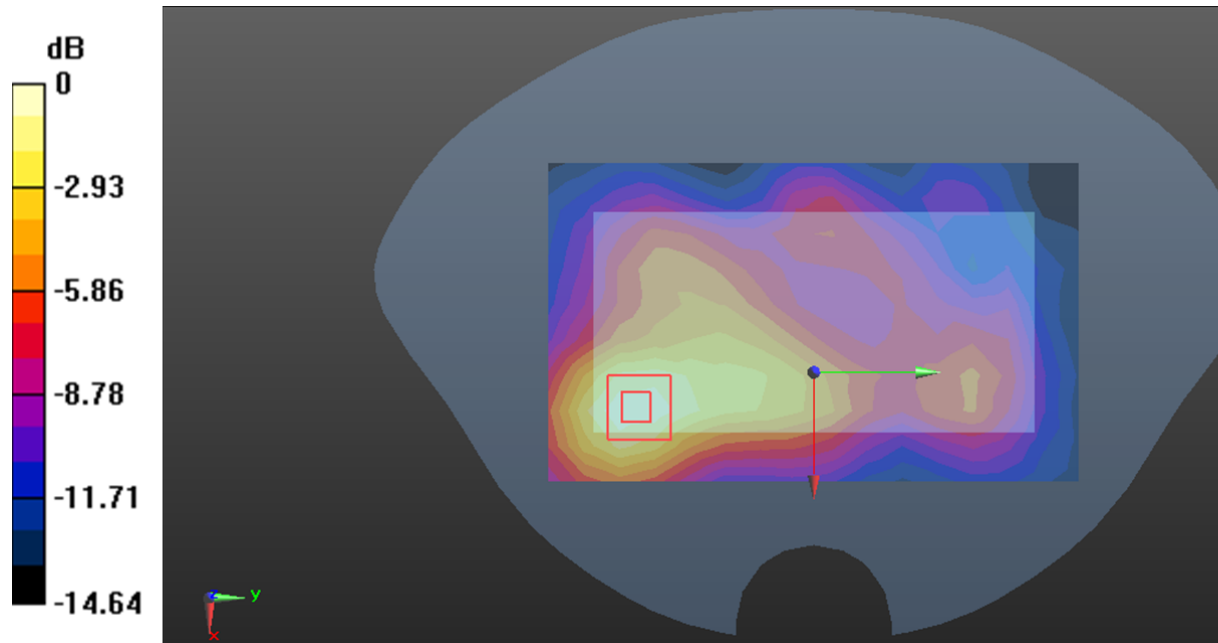

0 dB = 0.383 W/kg = -4.17 dB dBW/kg

Test Plot2#: LTE Band 7_Body Front_50%RB_Middle_Thin Battery**DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: Generic LTE (0); Frequency: 2535 MHz;Duty Cycle: 1:1
Medium parameters used: $f=2535$ MHz; $\sigma = 1.878$ S/m; $\epsilon_r = 38.917$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.42, 7.42, 7.42) @2535 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (10x16x1):Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.292 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.803 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.383 W/kg

SAR(1 g) = 0.200 W/kg; SAR(10 g) = 0.114 W/kg

Maximum value of SAR (measured) = 0.212 W/kg

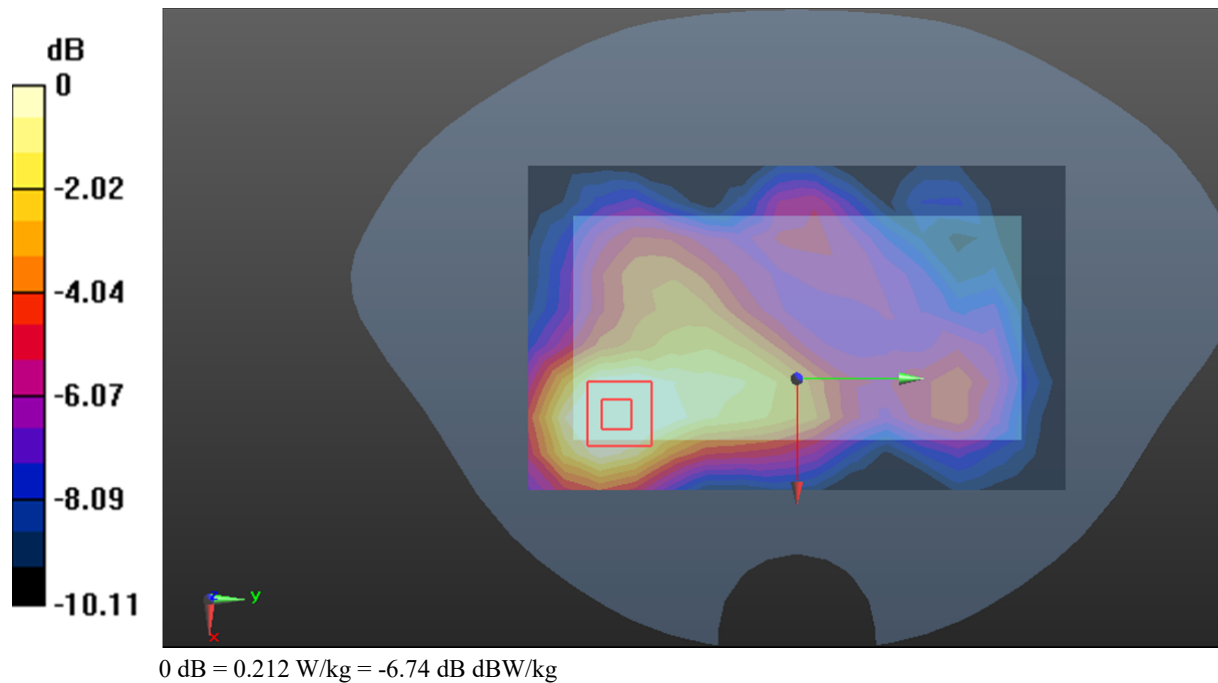

Test Plot3#: LTE Band 7_Body Back_1RB_Middle_Thin Battery**DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: Generic LTE (0); Frequency: 2535 MHz;Duty Cycle: 1:1
Medium parameters used: $f=2535$ MHz; $\sigma = 1.878$ S/m; $\epsilon_r = 38.917$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.42, 7.42, 7.42) @2535 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (10x16x1):Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.180 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.449 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.368 W/kg

SAR(1 g) = 0.180 W/kg; SAR(10 g) = 0.096 W/kg

Maximum value of SAR (measured) = 0.195 W/kg

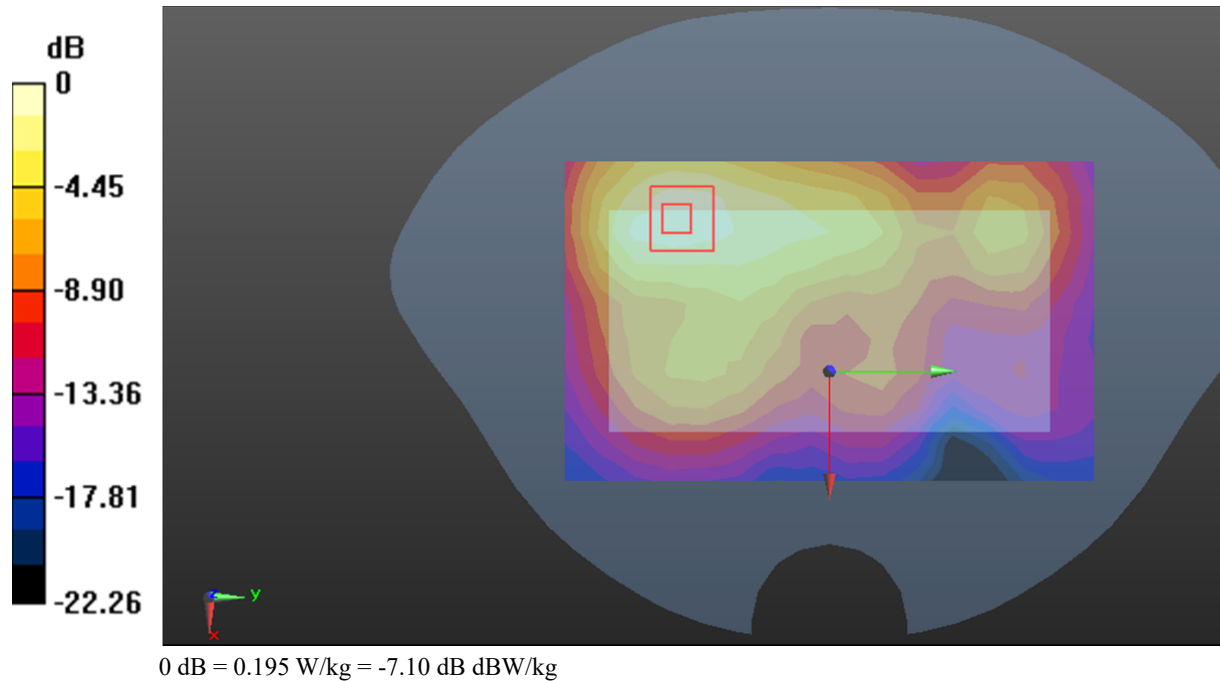

Test Plot4#: LTE Band 7_Body Back_50%RB_Middle_Thin Battery**DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: Generic LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f=2535$ MHz; $\sigma = 1.878$ S/m; $\epsilon_r = 38.917$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.42, 7.42, 7.42) @2535 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (10x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.143 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.628 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.180 W/kg

SAR(1 g) = 0.140 W/kg; SAR(10 g) = 0.105 W/kg

Maximum value of SAR (measured) = 0.147 W/kg

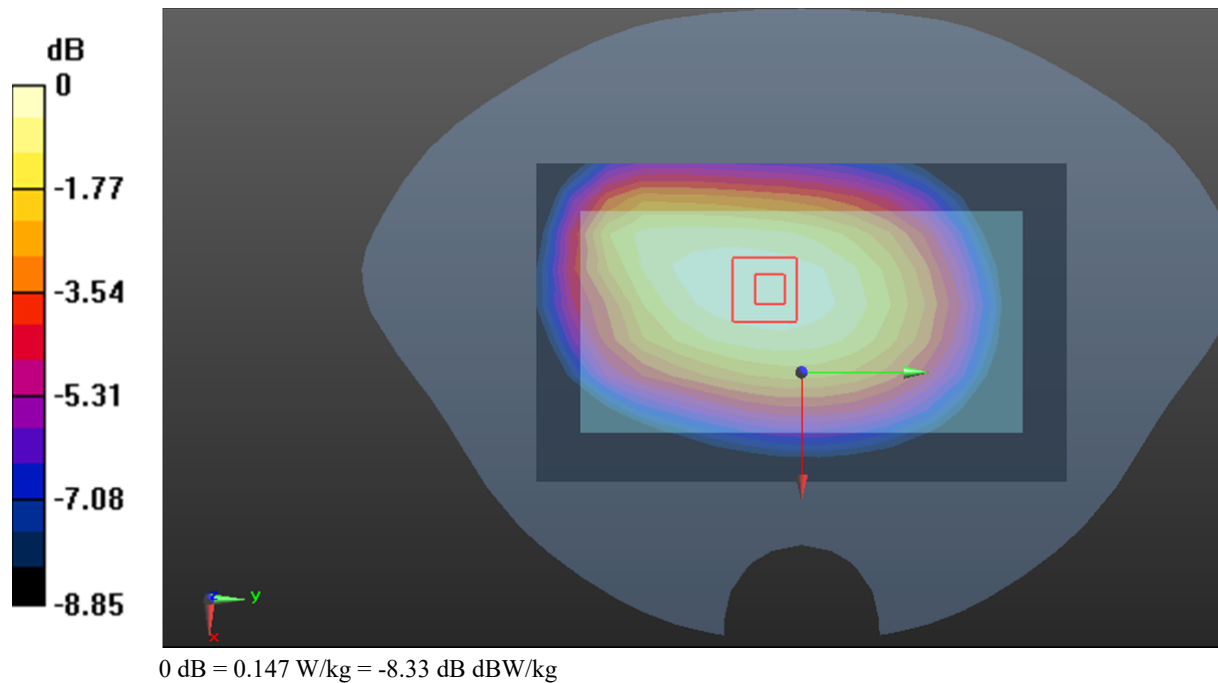

Test Plot5#: LTE Band 7_Body Left_1RB_Middle_Thin Battery**DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: Generic LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f=2535$ MHz; $\sigma = 1.878$ S/m; $\epsilon_r = 38.917$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.42, 7.42, 7.42) @2535 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0734 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.140 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.0990 W/kg

SAR(1 g) = 0.052 W/kg; SAR(10 g) = 0.031 W/kg

Maximum value of SAR (measured) = 0.0801 W/kg

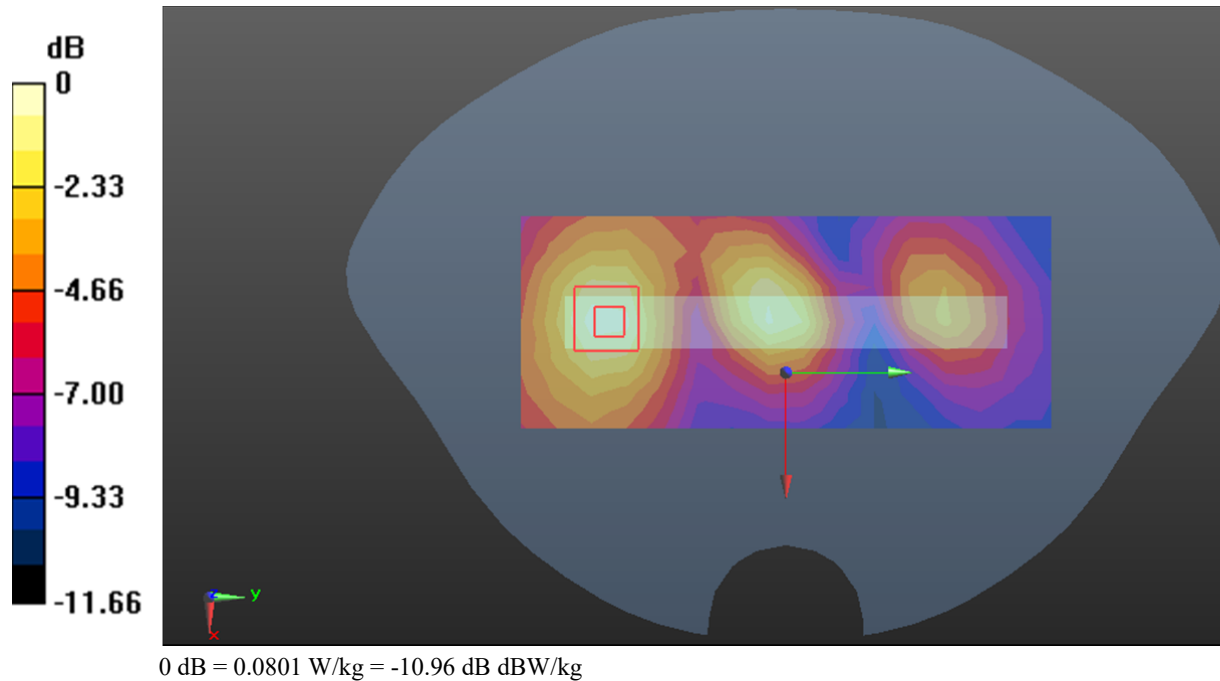

Test Plot6#: LTE Band 7_Body Left_50%RB_Middle_Thin Battery**DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: Generic LTE (0); Frequency: 2535 MHz;Duty Cycle: 1:1
Medium parameters used: $f=2535$ MHz; $\sigma = 1.878$ S/m; $\epsilon_r = 38.917$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.42, 7.42, 7.42) @2535 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x16x1):Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0634 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.750 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.0860 W/kg

SAR(1 g) = 0.045 W/kg; SAR(10 g) = 0.028 W/kg

Maximum value of SAR (measured) = 0.0695 W/kg

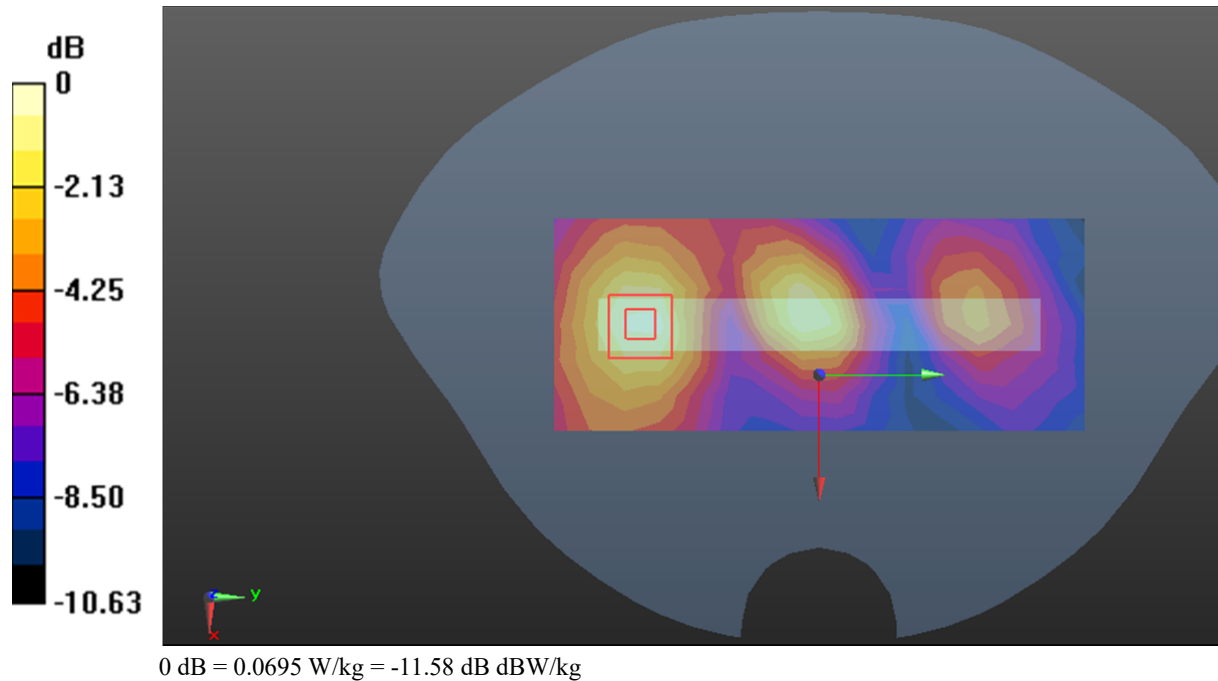

Test Plot7#: LTE Band 7_Body Right_1RB_Middle_Thin Battery**DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: Generic LTE (0); Frequency: 2535 MHz;Duty Cycle: 1:1
Medium parameters used: $f=2535$ MHz; $\sigma = 1.878$ S/m; $\epsilon_r = 38.917$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.42, 7.42, 7.42) @2535 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x16x1):Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.621 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.73 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.792 W/kg

SAR(1 g) = 0.392 W/kg; SAR(10 g) = 0.204 W/kg

Maximum value of SAR (measured) = 0.622 W/kg

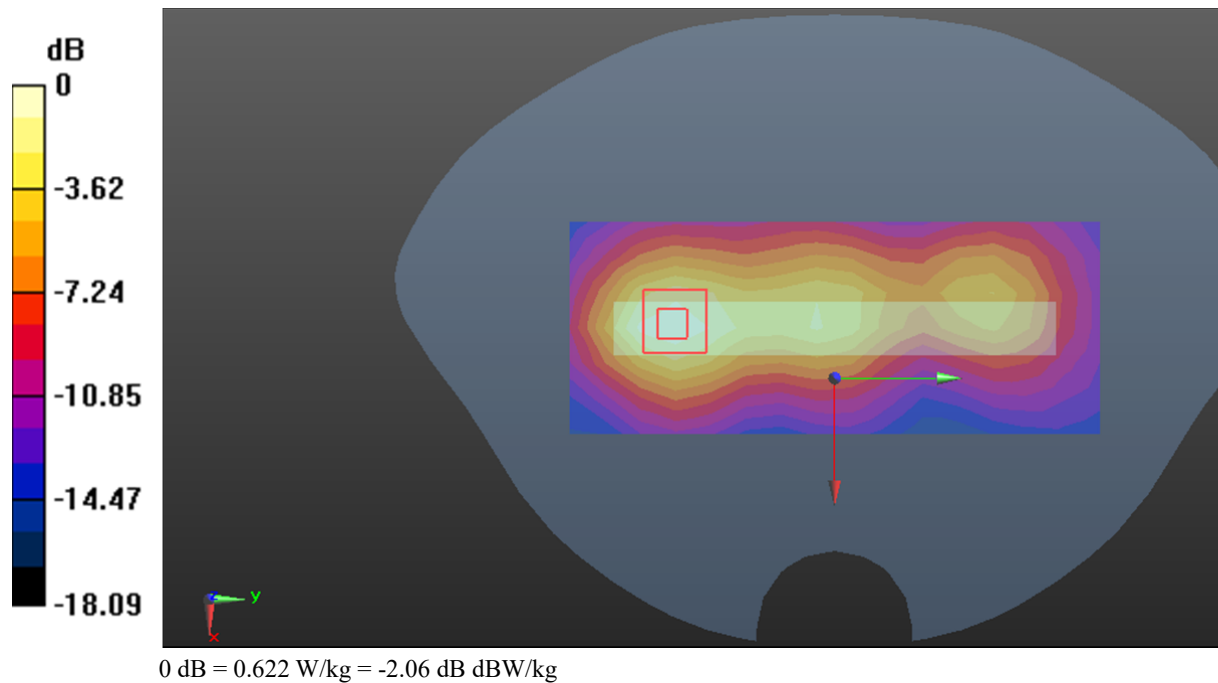

Test Plot8#: LTE Band 7_Body Right_50%RB_Middle_Thin Battery**DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: Generic LTE (0); Frequency: 2535 MHz;Duty Cycle: 1:1
Medium parameters used: $f=2535$ MHz; $\sigma = 1.878$ S/m; $\epsilon_r = 38.917$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.42, 7.42, 7.42) @2535 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x16x1):Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.484 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.11 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.623 W/kg

SAR(1 g) = 0.307 W/kg; SAR(10 g) = 0.160 W/kg

Maximum value of SAR (measured) = 0.491 W/kg

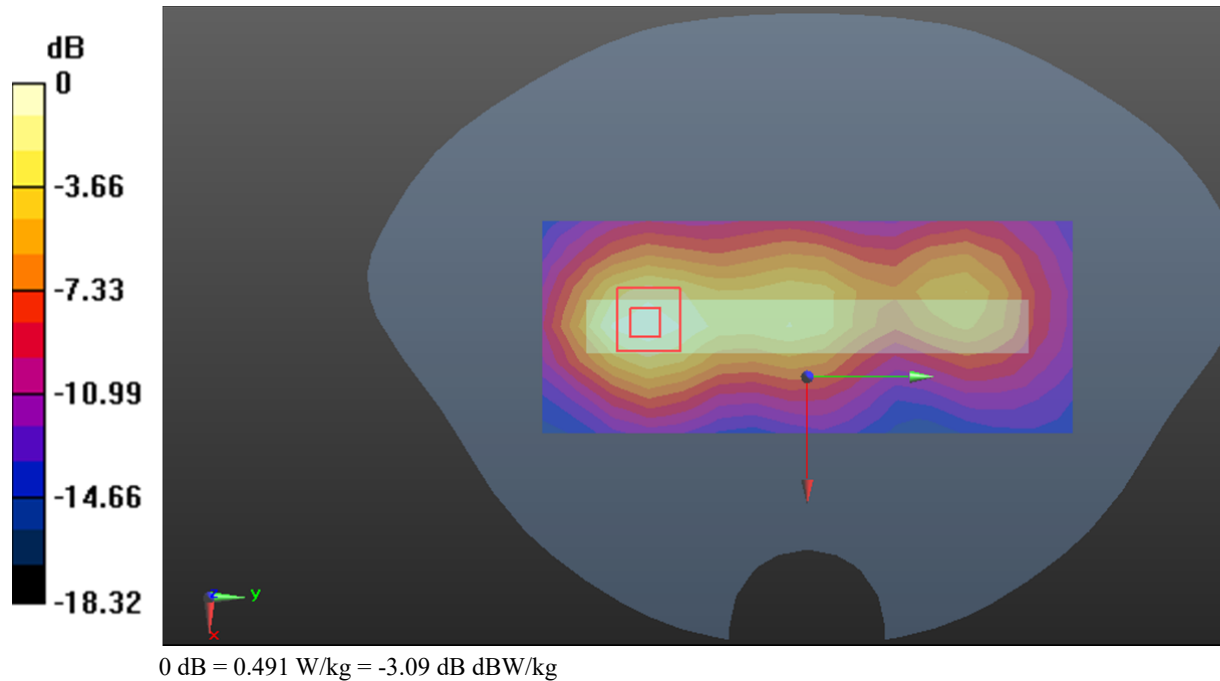

Test Plot9#: LTE Band 7_Body Bottom_1RB_Middle_Thin Battery**DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: Generic LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1
Medium parameters used: $f=2535$ MHz; $\sigma = 1.878$ S/m; $\epsilon_r = 38.917$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.42, 7.42, 7.42) @2535 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (6x11x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.186 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.603 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.301 W/kg

SAR(1 g) = 0.134 W/kg; SAR(10 g) = 0.067 W/kg

Maximum value of SAR (measured) = 0.237 W/kg

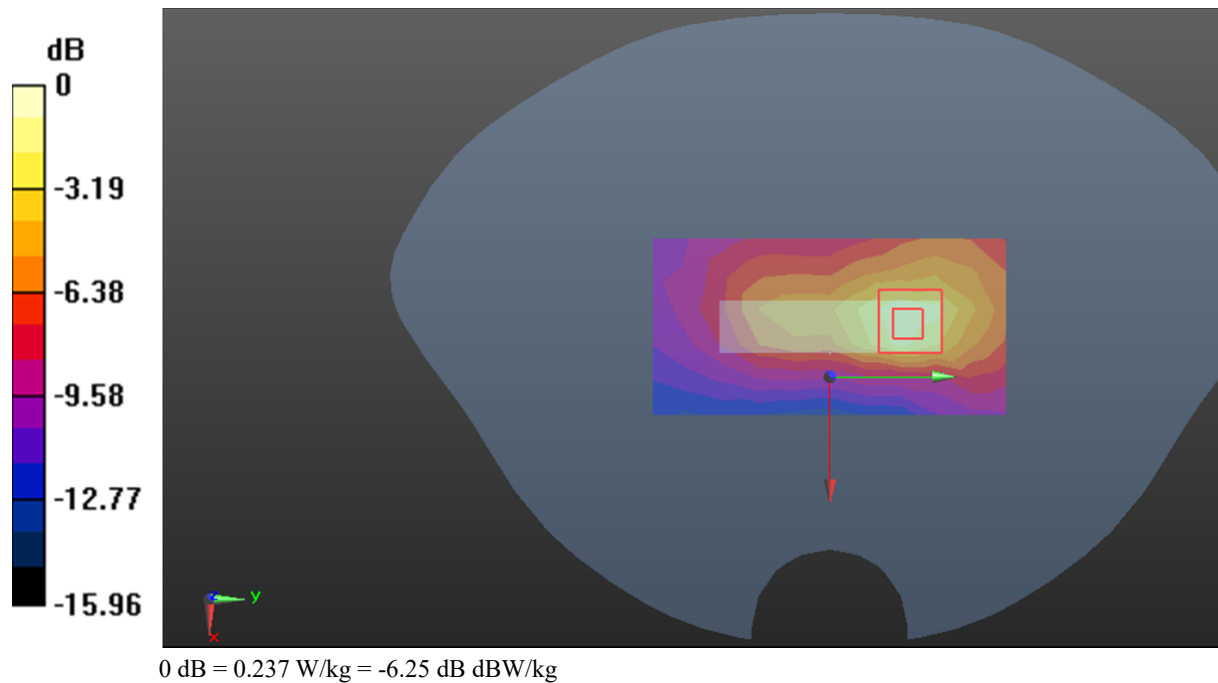

Test Plot10#: LTE Band 7_Body Bottom_50%RB_Middle_Thin Battery**DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: Generic LTE (0); Frequency: 2535 MHz;Duty Cycle: 1:1
Medium parameters used: $f=2535$ MHz; $\sigma = 1.878$ S/m; $\epsilon_r = 38.917$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.42, 7.42, 7.42) @2535 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (6x11x1):Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.147 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.095 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.242 W/kg

SAR(1 g) = 0.110 W/kg; SAR(10 g) = 0.058 W/kg

Maximum value of SAR (measured) = 0.187 W/kg

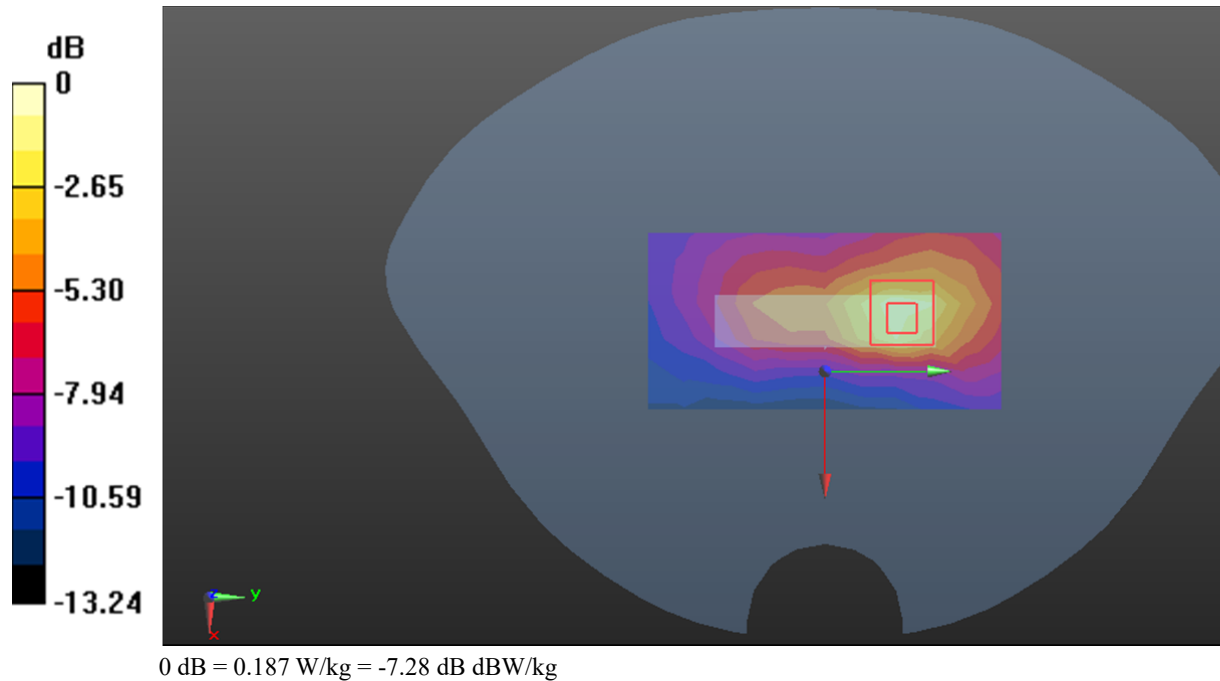

Test Plot11#: LTE Band 12_Body Front_1RB_Middle_Thin Battery**DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: Generic LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f=707.5$ MHz; $\sigma=0.873$ S/m; $\epsilon_r=42.282$; $\rho=1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @707.5 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0637 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.631 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.265 W/kg

SAR(1 g) = 0.108 W/kg; SAR(10 g) = 0.057 W/kg

Maximum value of SAR (measured) = 0.0647 W/kg

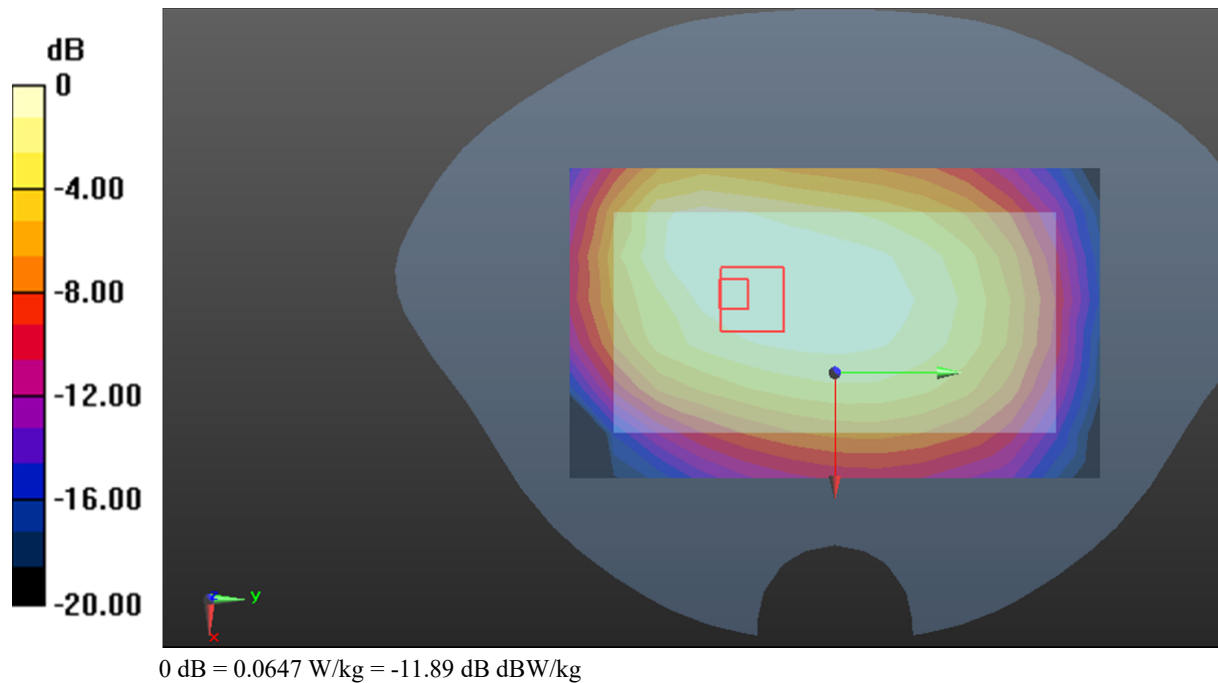

Test Plot12#: LTE Band 12_Body Front_50%RB_Middle_Thin Battery**DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: Generic LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f=707.5$ MHz; $\sigma=0.873$ S/m; $\epsilon_r=42.282$; $\rho=1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @707.5 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0529 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.657 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.0700 W/kg

SAR(1 g) = 0.052 W/kg; SAR(10 g) = 0.038 W/kg

Maximum value of SAR (measured) = 0.0544 W/kg

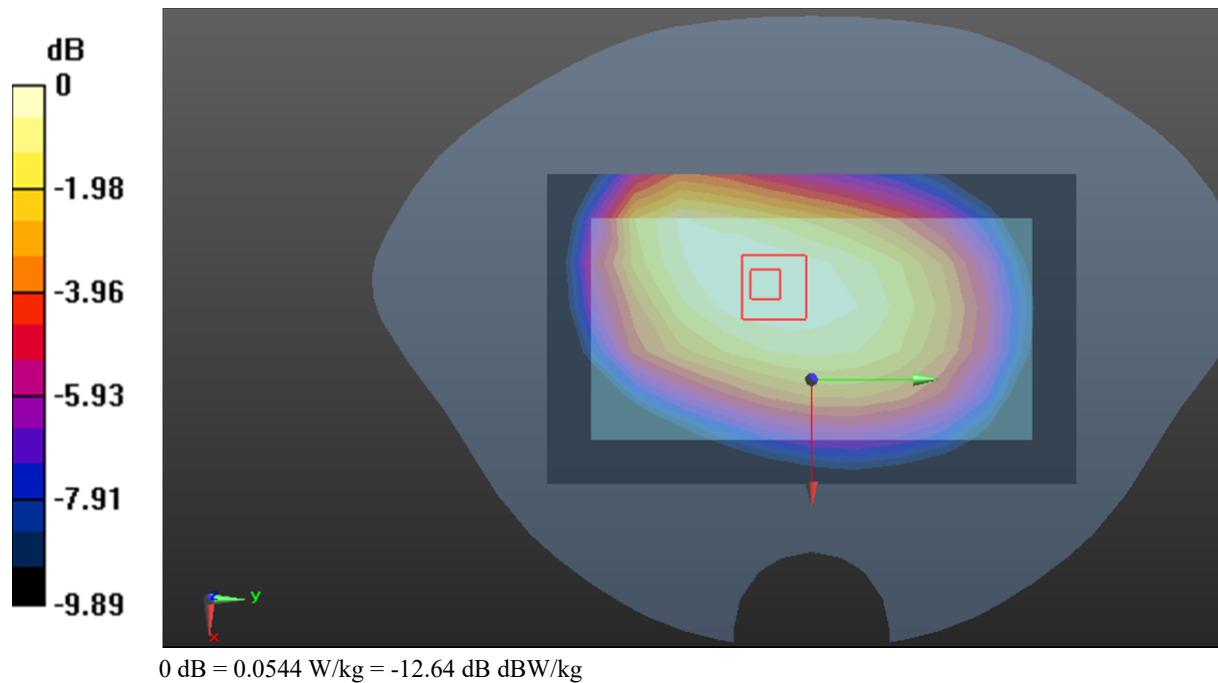

Test Plot13#: LTE Band 12_Body Back_1RB_Middle_Thin Battery**DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: Generic LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f=707.5$ MHz; $\sigma = 0.873$ S/m; $\epsilon_r = 42.282$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @707.5 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0302 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.189 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.0390 W/kg

SAR(1 g) = 0.031 W/kg; SAR(10 g) = 0.024 W/kg

Maximum value of SAR (measured) = 0.0324 W/kg

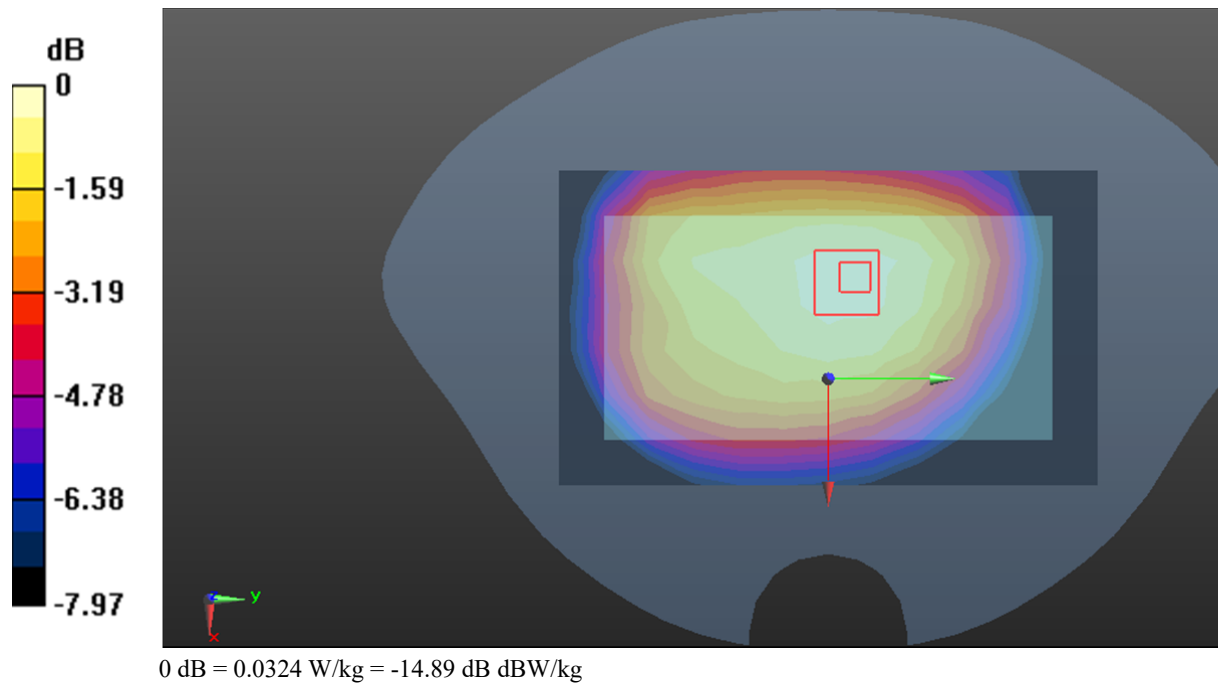

Test Plot14#: LTE Band 12_Body Back_50%RB_Middle_Thin Battery**DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: Generic LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f=707.5$ MHz; $\sigma=0.873$ S/m; $\epsilon_r=42.282$; $\rho=1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @707.5 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0251 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.372 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.0310 W/kg

SAR(1 g) = 0.025 W/kg; SAR(10 g) = 0.019 W/kg

Maximum value of SAR (measured) = 0.0258 W/kg

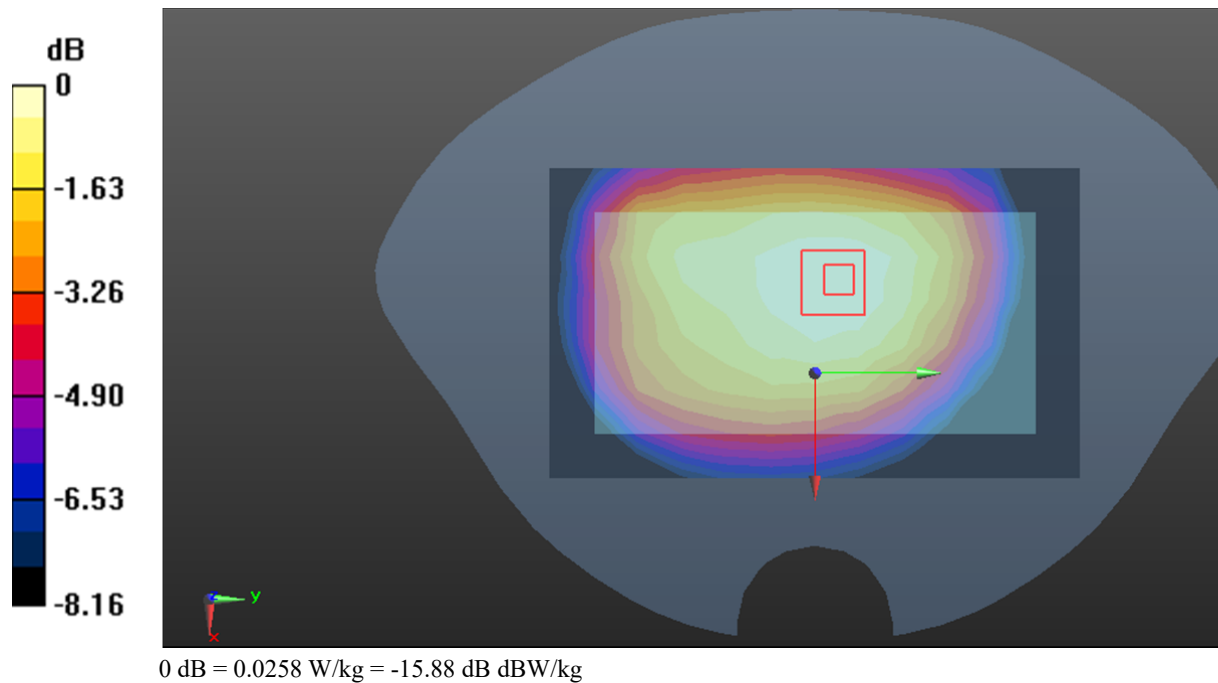

Test Plot15#: LTE Band 12_Body Left_1RB_Middle_Thin Battery**DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: Generic LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f=707.5$ MHz; $\sigma=0.873$ S/m; $\epsilon_r=42.282$; $\rho=1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @707.5 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (5x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0788 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.347 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.0950 W/kg

SAR(1 g) = 0.059 W/kg; SAR(10 g) = 0.041 W/kg

Maximum value of SAR (measured) = 0.0805 W/kg

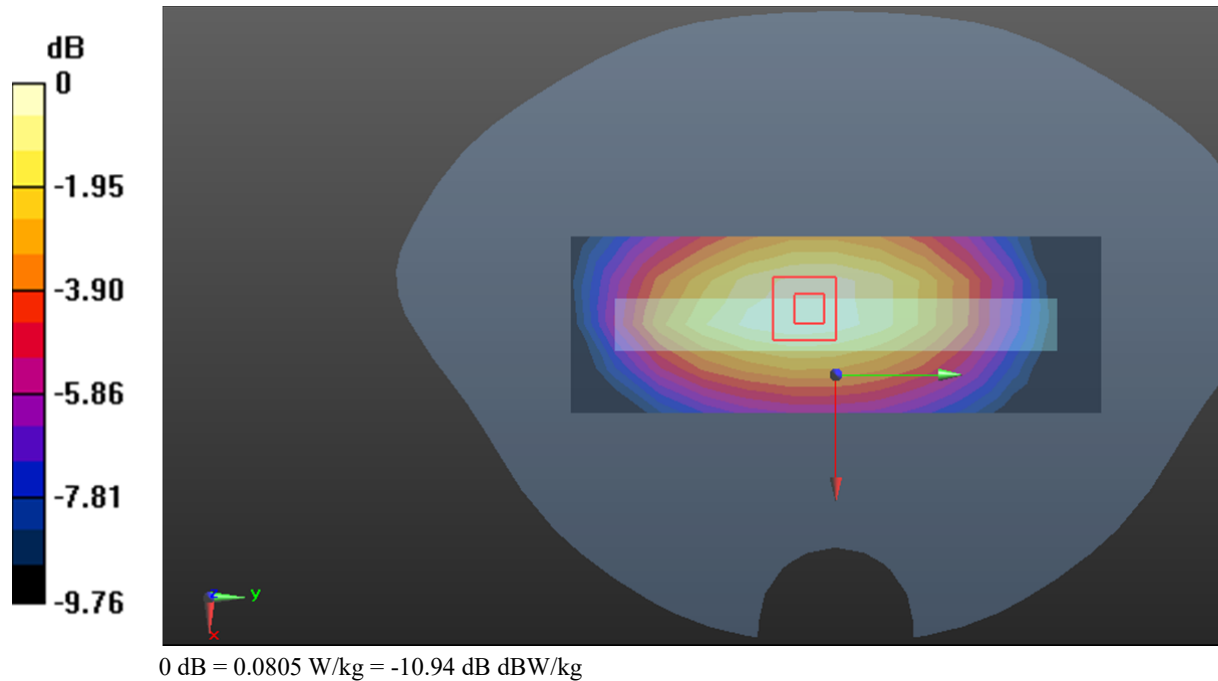

Test Plot16#: LTE Band 12_Body Left_50%RB_Middle_Thin Battery**DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: Generic LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f=707.5$ MHz; $\sigma=0.873$ S/m; $\epsilon_r=42.282$; $\rho=1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @707.5 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (6x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0662 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.301 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.0800 W/kg

SAR(1 g) = 0.049 W/kg; SAR(10 g) = 0.033 W/kg

Maximum value of SAR (measured) = 0.0673 W/kg

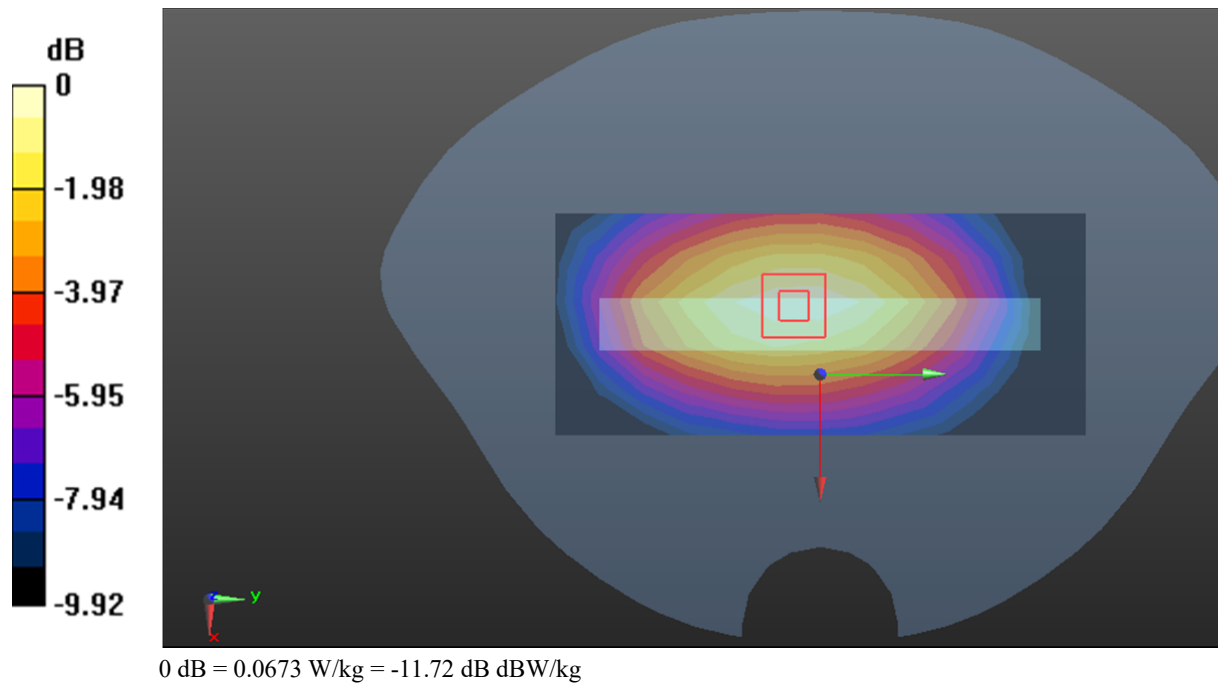

Test Plot17#: LTE Band 12_Body Right_1RB_Middle_Thin Battery**DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: Generic LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f=707.5$ MHz; $\sigma=0.873$ S/m; $\epsilon_r=42.282$; $\rho=1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @707.5 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (6x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0524 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.854 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.0630 W/kg

SAR(1 g) = 0.039 W/kg; SAR(10 g) = 0.027 W/kg

Maximum value of SAR (measured) = 0.0535 W/kg

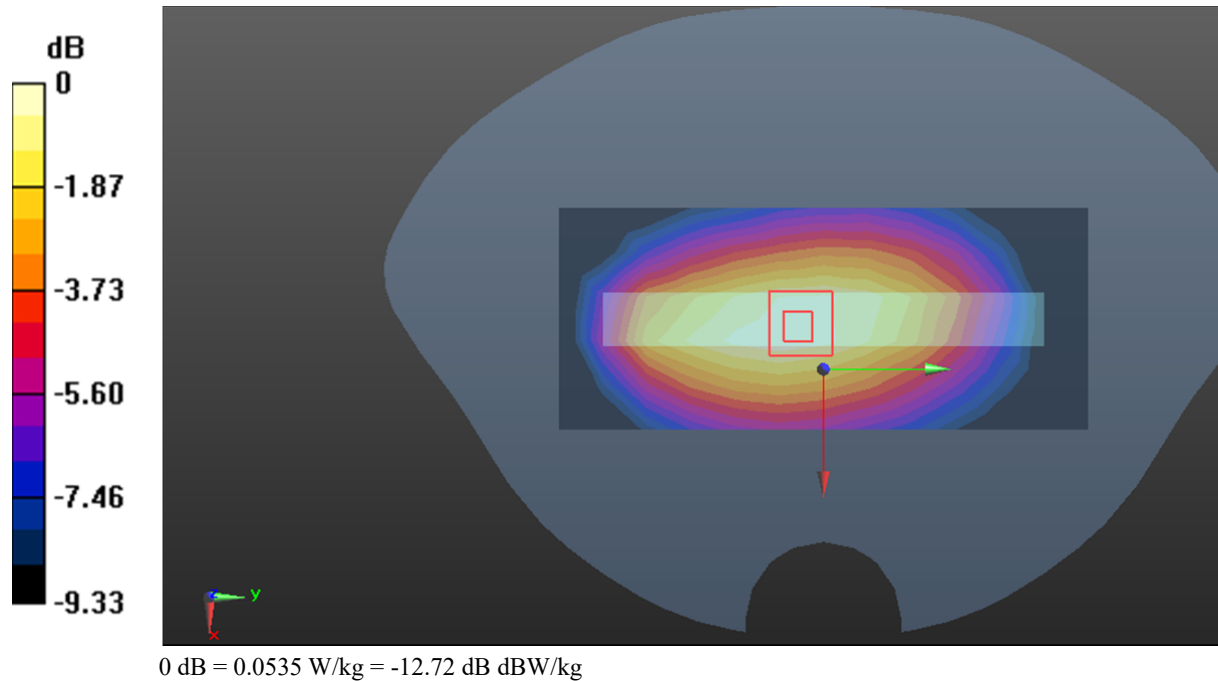

Test Plot18#: LTE Band 12_Body Right_50%RB_Middle_Thin Battery**DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: Generic LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f=707.5$ MHz; $\sigma=0.873$ S/m; $\epsilon_r=42.282$; $\rho=1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @707.5 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (6x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0418 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.114 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.0520 W/kg

SAR(1 g) = 0.032 W/kg; SAR(10 g) = 0.022 W/kg

Maximum value of SAR (measured) = 0.0440 W/kg

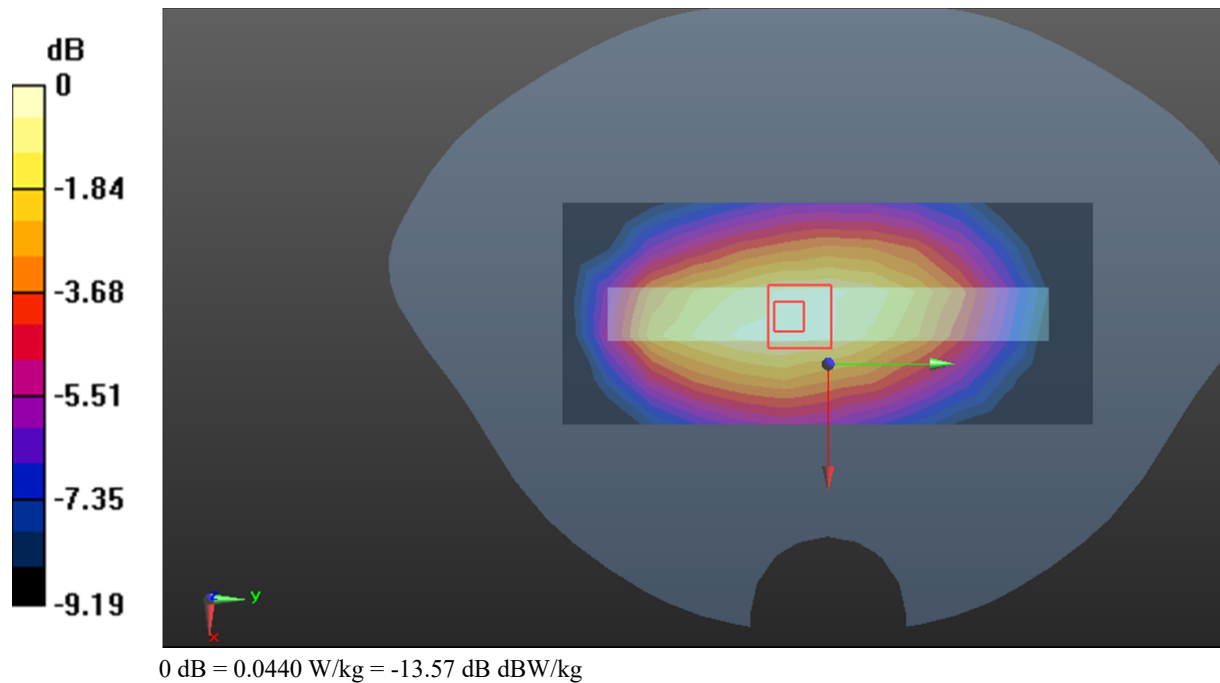

Test Plot19#: LTE Band 12_Body Bottom_1RB_Middle_Thin Battery**DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: Generic LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f=707.5$ MHz; $\sigma = 0.873$ S/m; $\epsilon_r = 42.282$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @707.5 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (6x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0127 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.772 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.0280 W/kg

SAR(1 g) = 0.011 W/kg; SAR(10 g) = 0.00658 W/kg

Maximum value of SAR (measured) = 0.0186 W/kg

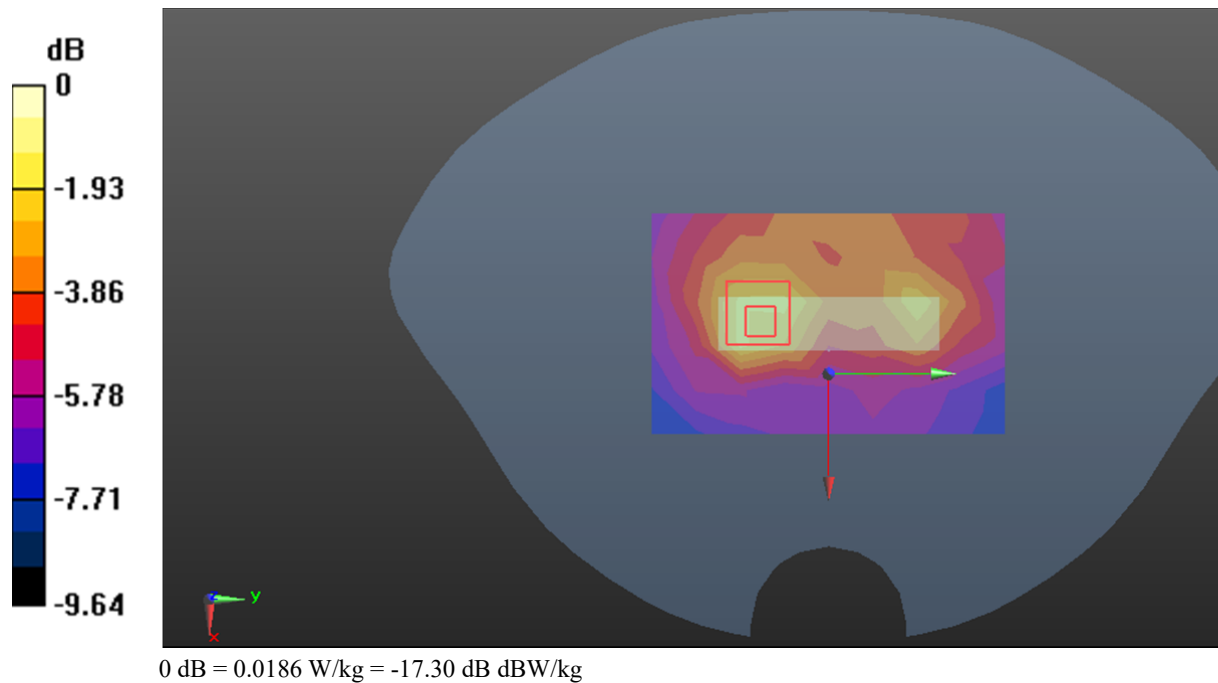

Test Plot20#: LTE Band 12_Body Bottom_50%RB_Middle_Thin Battery**DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: Generic LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f=707.5$ MHz; $\sigma=0.873$ S/m; $\epsilon_r=42.282$; $\rho=1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @707.5 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (6x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0101 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.458 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.0230 W/kg

SAR(1 g) = 0.009 W/kg; SAR(10 g) = 0.00561 W/kg

Maximum value of SAR (measured) = 0.0158 W/kg

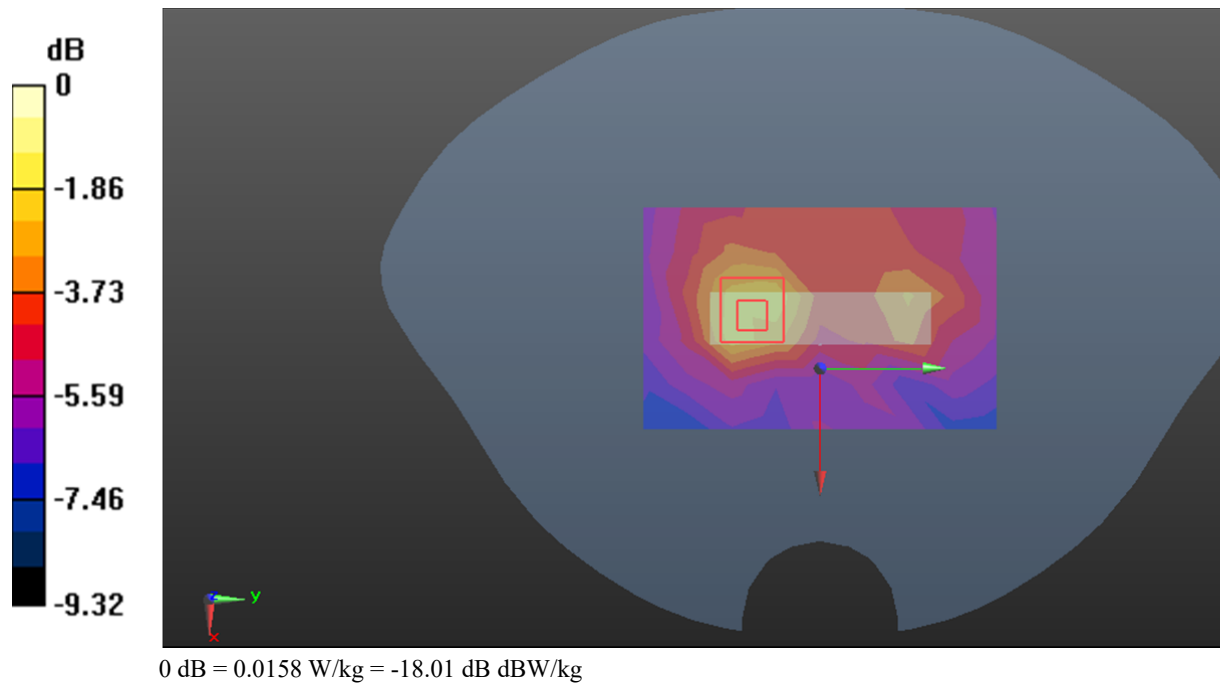

Test Plot21#: LTE Band 13_Body Front_1RB_Middle_Thin Battery**DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: Generic LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1
Medium parameters used: $f=782$ MHz; $\sigma = 0.897$ S/m; $\epsilon_r = 41.754$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @782 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0610 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.617 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.0740 W/kg

SAR(1 g) = 0.044 W/kg; SAR(10 g) = 0.030 W/kg

Maximum value of SAR (measured) = 0.0615 W/kg

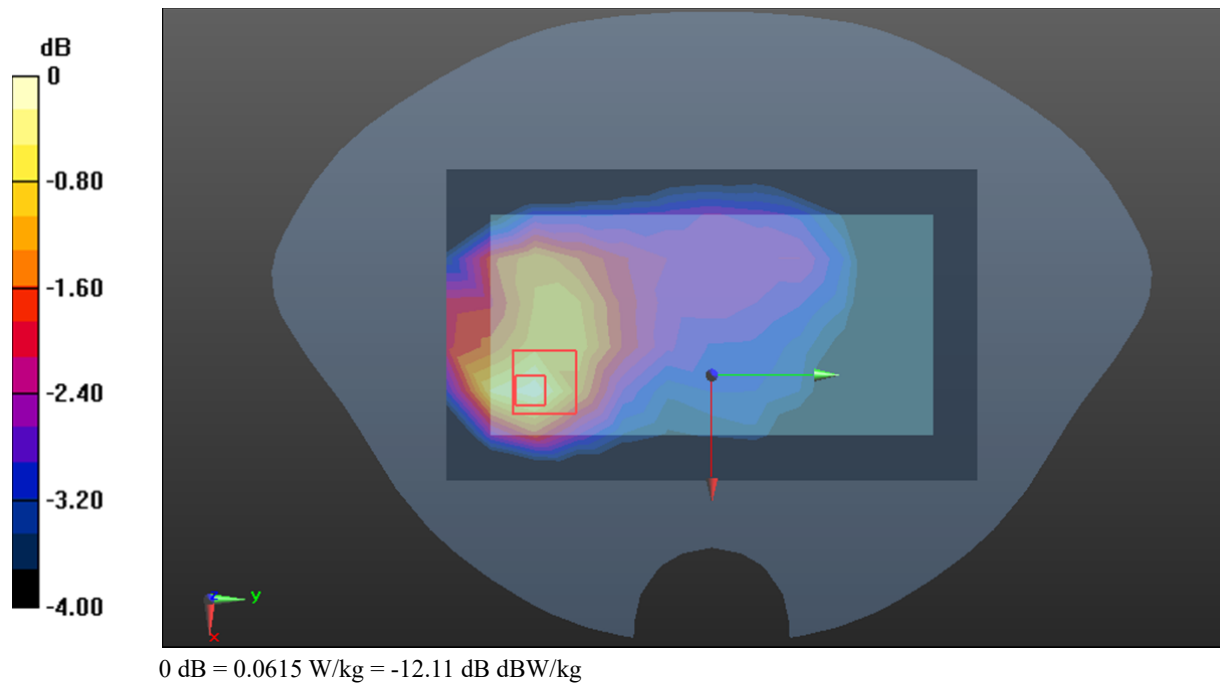

Test Plot22#: LTE Band 13_Body Front_50%RB_Middle_Thin Battery**DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: Generic LTE (0); Frequency: 782 MHz;Duty Cycle: 1:1
 Medium parameters used: $f=782$ MHz; $\sigma = 0.897$ S/m; $\epsilon_r = 41.754$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @782 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x13x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0526 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.295 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.0630 W/kg

SAR(1 g) = 0.039 W/kg; SAR(10 g) = 0.027 W/kg

Maximum value of SAR (measured) = 0.0528 W/kg

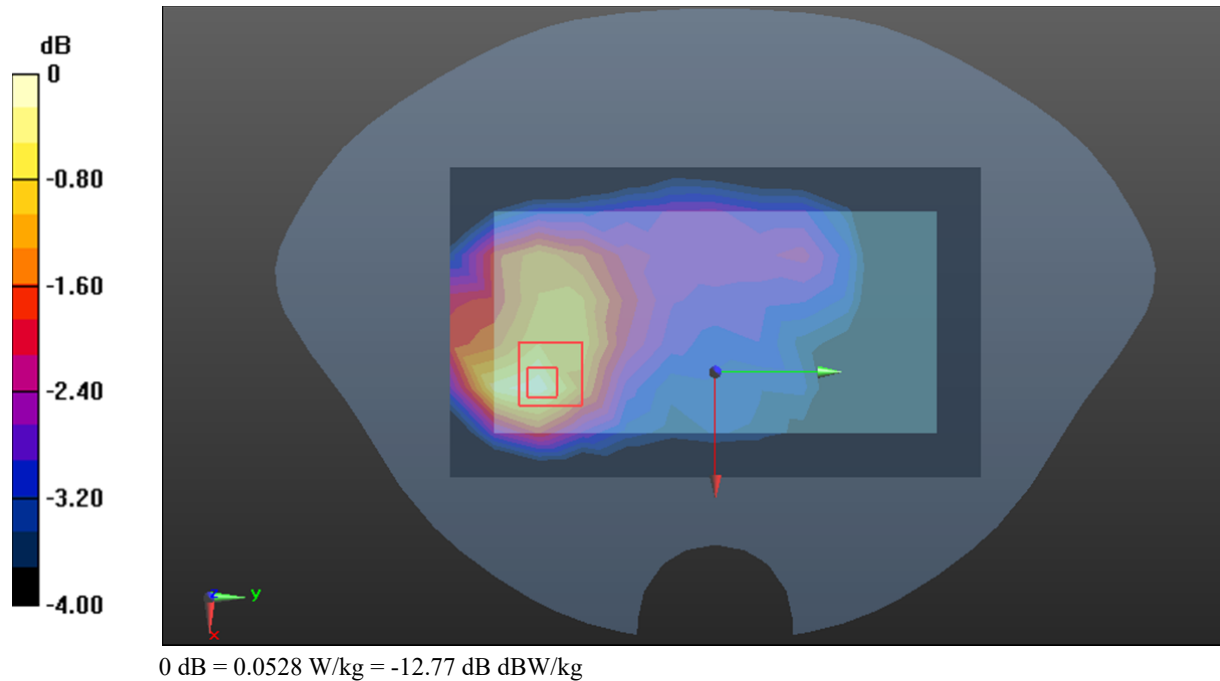

Test Plot23#: LTE Band 13_Body Back_1RB_Middle_Thin Battery**DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: Generic LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1
Medium parameters used: $f=782$ MHz; $\sigma = 0.897$ S/m; $\epsilon_r = 41.754$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @782 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.156 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.05 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.215 W/kg

SAR(1 g) = 0.105 W/kg; SAR(10 g) = 0.065 W/kg

Maximum value of SAR (measured) = 0.168 W/kg

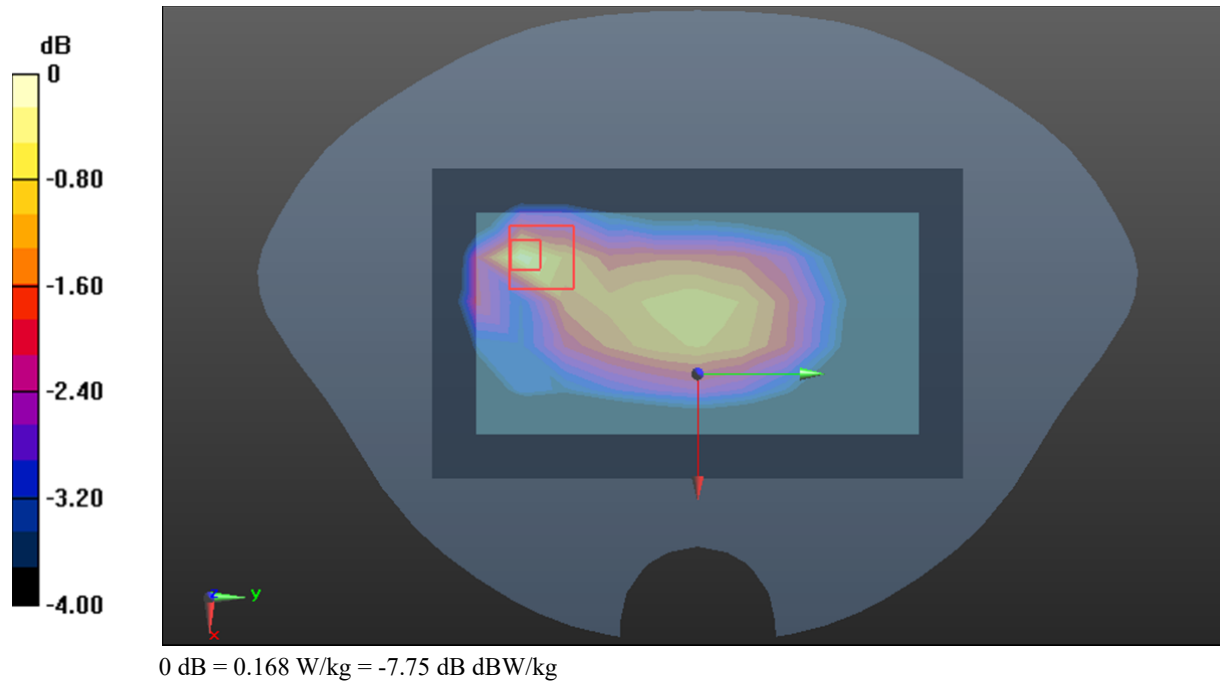

Test Plot24#: LTE Band 13_Body Back_50%RB_Middle_Thin Battery**DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: Generic LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1
Medium parameters used: $f=782$ MHz; $\sigma = 0.897$ S/m; $\epsilon_r = 41.754$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @782 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.136 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.18 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.176 W/kg

SAR(1 g) = 0.086 W/kg; SAR(10 g) = 0.053 W/kg

Maximum value of SAR (measured) = 0.134 W/kg

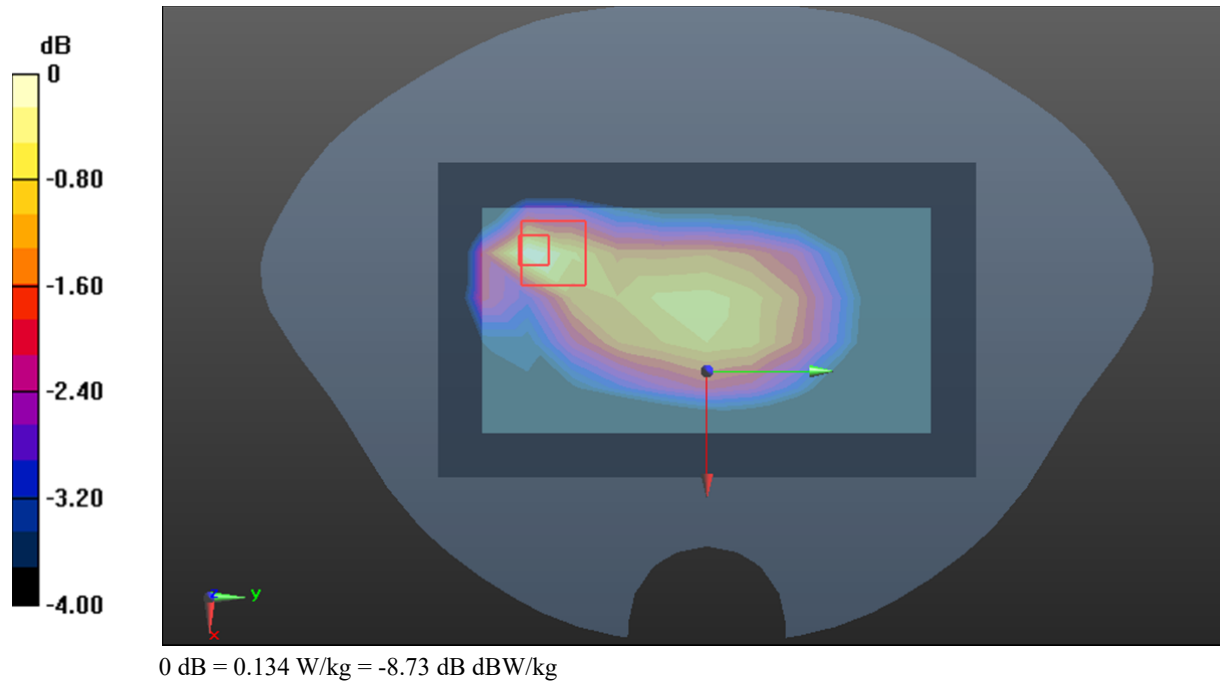

Test Plot25#: LTE Band 13_Body Left_1RB_Middle_Thin Battery**DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: Generic LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1
Medium parameters used: $f=782$ MHz; $\sigma = 0.897$ S/m; $\epsilon_r = 41.754$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @782 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (5x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.107 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.588 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.141 W/kg

SAR(1 g) = 0.087 W/kg; SAR(10 g) = 0.061 W/kg

Maximum value of SAR (measured) = 0.120 W/kg

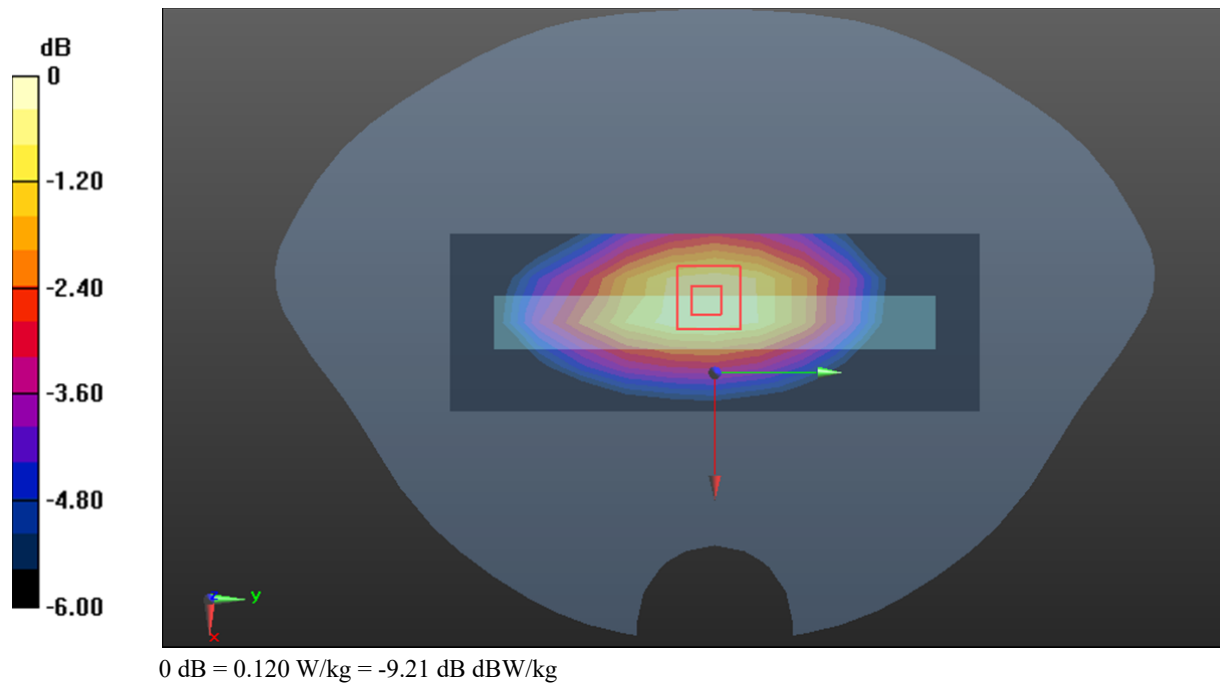

Test Plot26#: LTE Band 13_Body Left_50%RB_Middle_Thin Battery**DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: Generic LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1
Medium parameters used: $f=782$ MHz; $\sigma = 0.897$ S/m; $\epsilon_r = 41.754$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @782 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (5x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0903 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.769 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.114 W/kg

SAR(1 g) = 0.072 W/kg; SAR(10 g) = 0.051 W/kg

Maximum value of SAR (measured) = 0.0969 W/kg

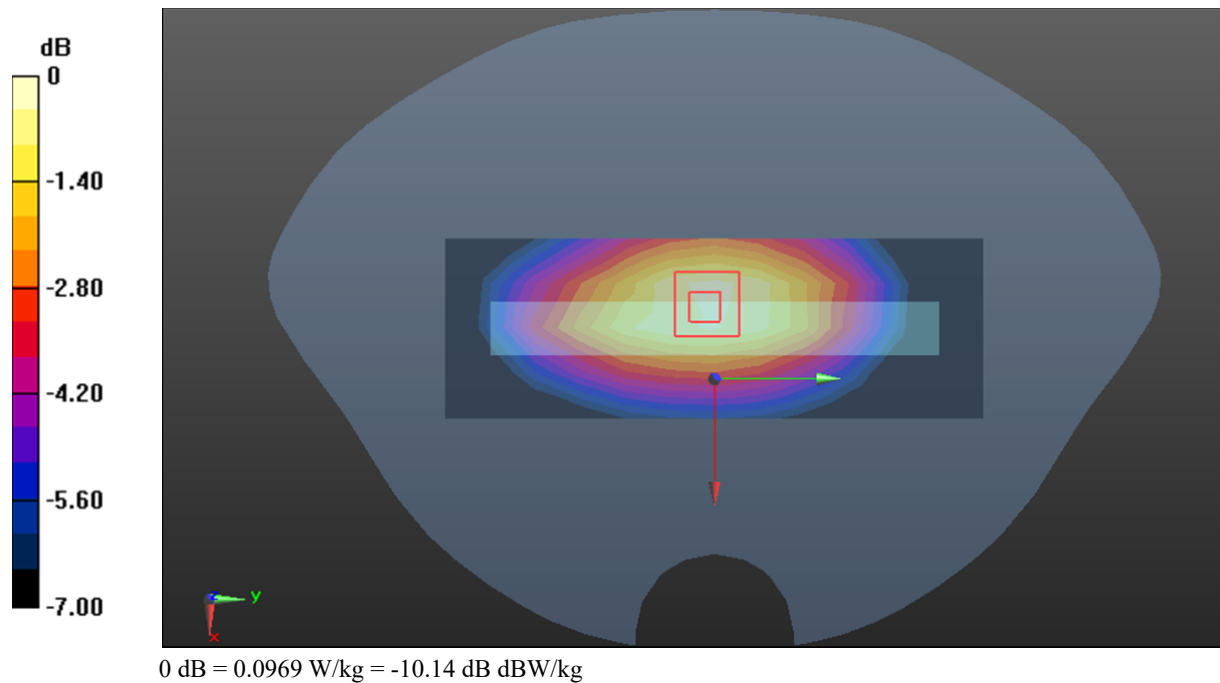

Test Plot27#: LTE Band 13_Body Right_1RB_Middle_Thin Battery**DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: Generic LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1
Medium parameters used: $f=782$ MHz; $\sigma = 0.897$ S/m; $\epsilon_r = 41.754$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @782 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (6x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0657 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.643 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.0780 W/kg

SAR(1 g) = 0.051 W/kg; SAR(10 g) = 0.038 W/kg

Maximum value of SAR (measured) = 0.0672 W/kg

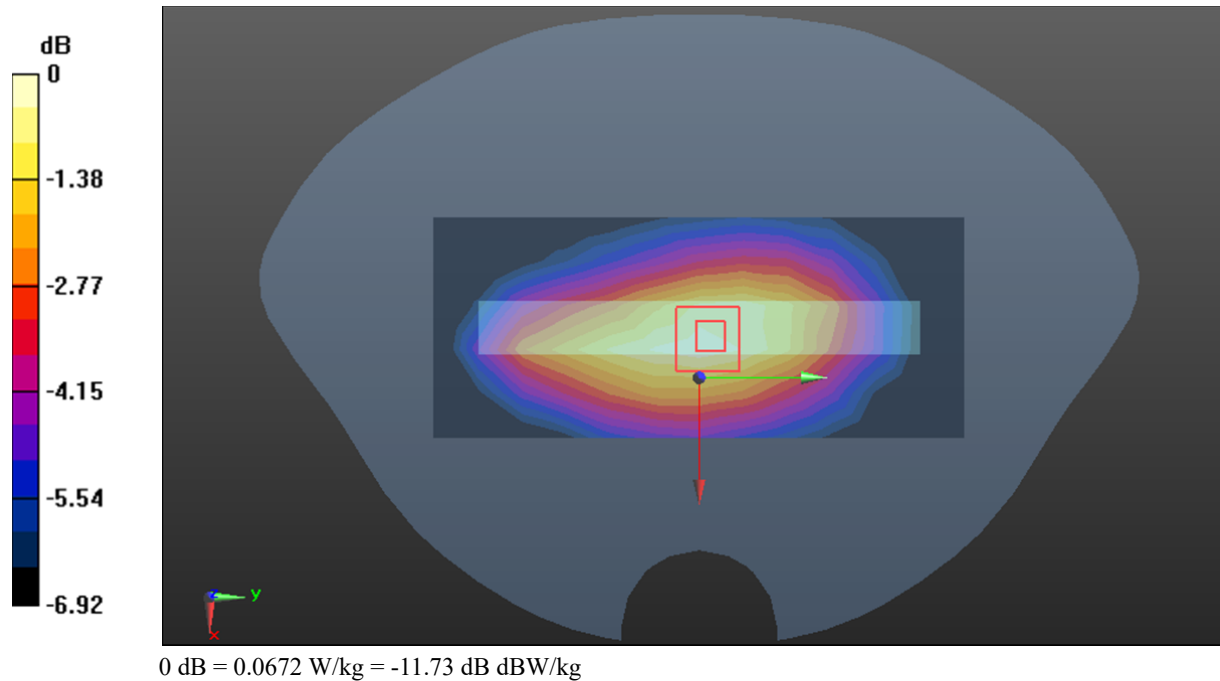

Test Plot28#: LTE Band 13_Body Right_50%RB_Middle_Thin Battery**DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: Generic LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1
Medium parameters used: $f=782$ MHz; $\sigma = 0.897$ S/m; $\epsilon_r = 41.754$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @782 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (6x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0517 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.827 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.0620 W/kg

SAR(1 g) = 0.042 W/kg; SAR(10 g) = 0.031 W/kg

Maximum value of SAR (measured) = 0.0538 W/kg

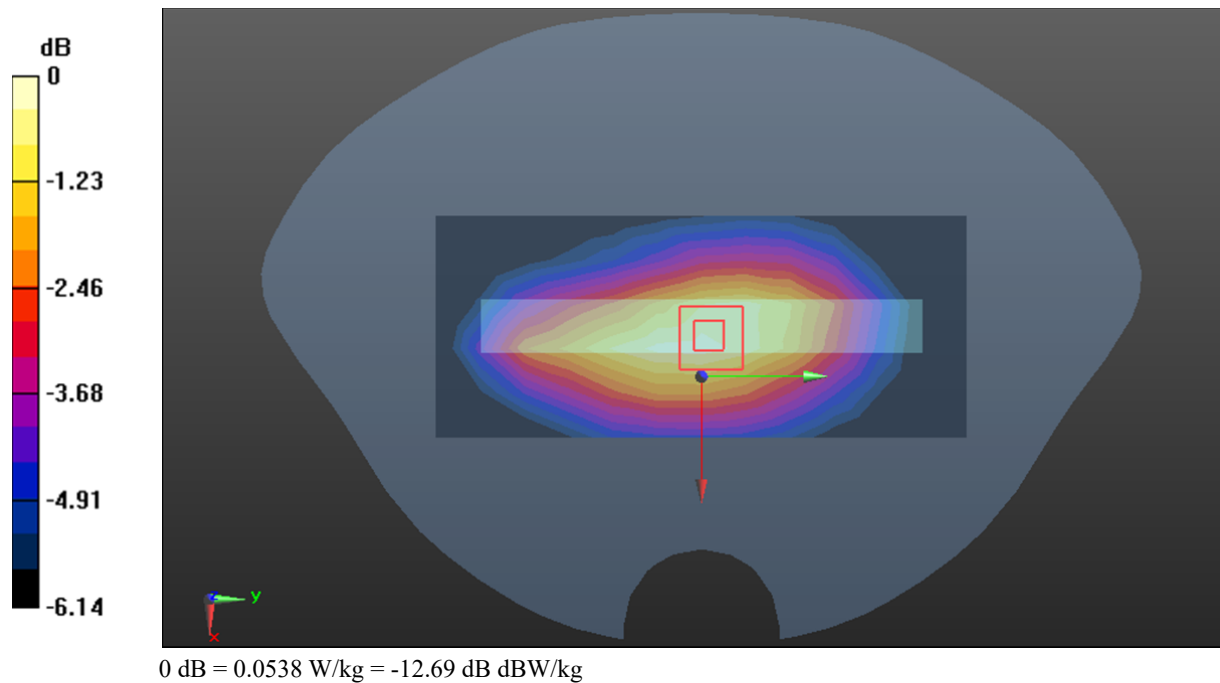

Test Plot29#: LTE Band 13_Body Bottom_1RB_Middle_Thin Battery**DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: Generic LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1
Medium parameters used: $f=782$ MHz; $\sigma = 0.897$ S/m; $\epsilon_r = 41.754$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @782 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (5x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0291 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.830 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.0490 W/kg

SAR(1 g) = 0.029 W/kg; SAR(10 g) = 0.018 W/kg

Maximum value of SAR (measured) = 0.0316 W/kg

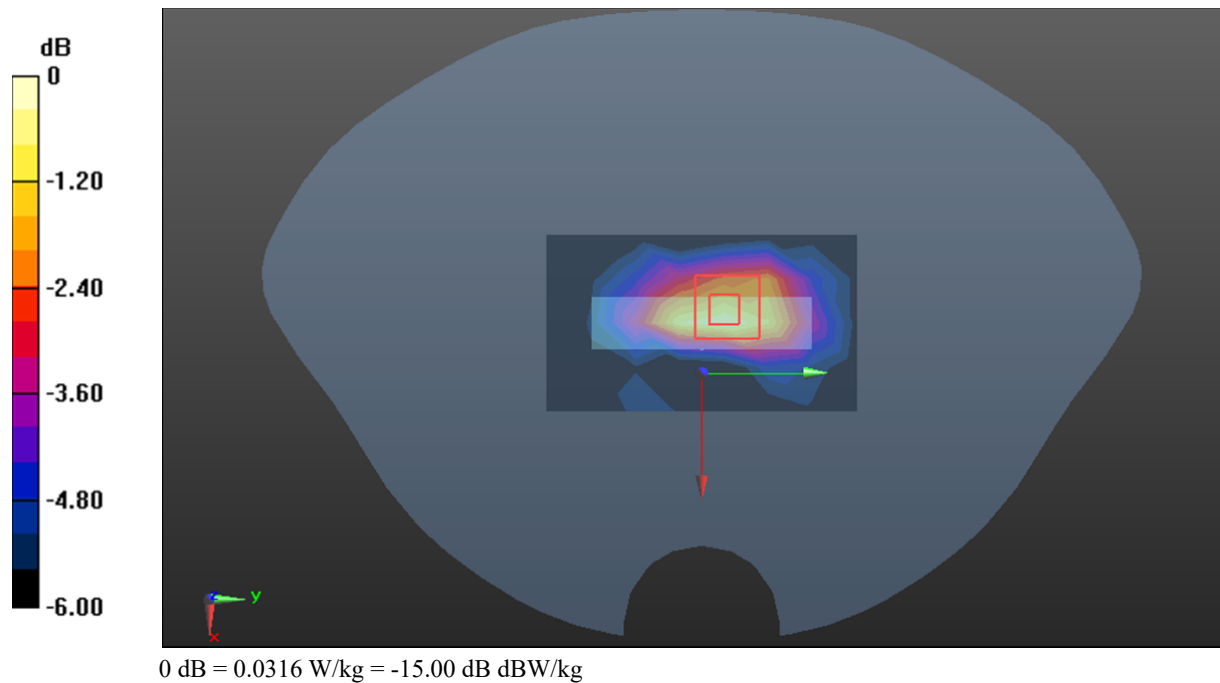

Test Plot30#: LTE Band 13_Body Bottom_50%RB_Middle_Thin Battery**DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: Generic LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1
Medium parameters used: $f=782$ MHz; $\sigma = 0.897$ S/m; $\epsilon_r = 41.754$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @782 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (5x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0253 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.427 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.0450 W/kg

SAR(1 g) = 0.026 W/kg; SAR(10 g) = 0.017 W/kg

Maximum value of SAR (measured) = 0.0286 W/kg

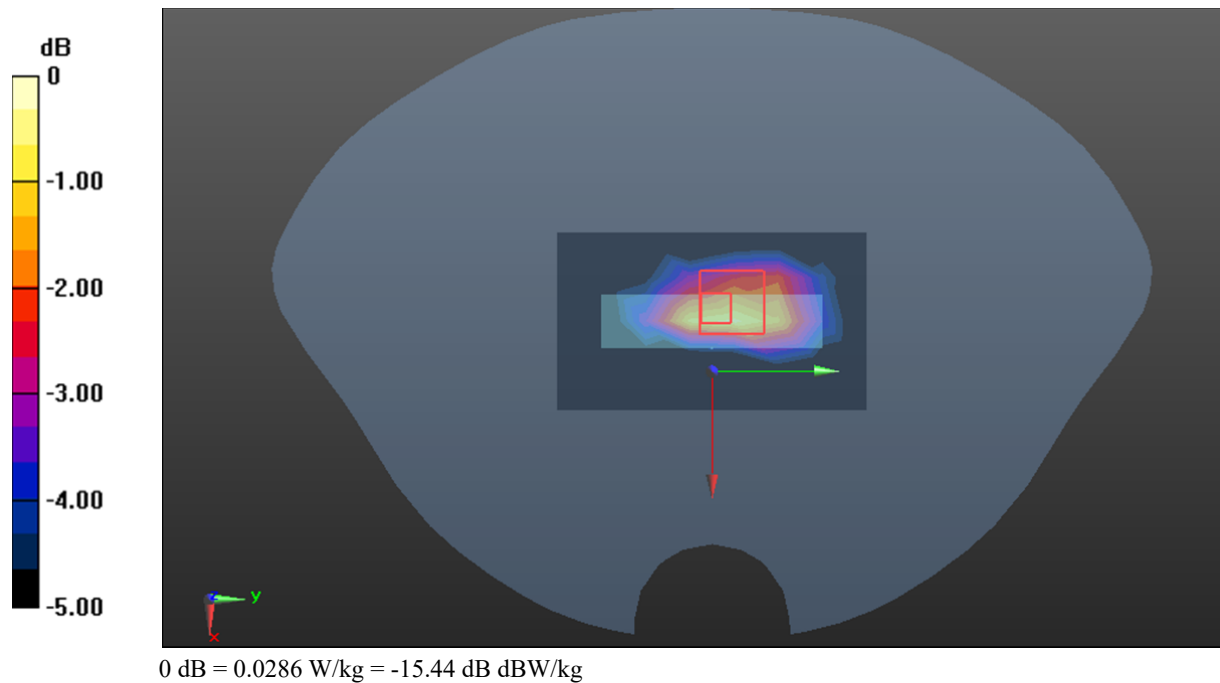

Test Plot31#: LTE Band 14_Body Front_1RB_Middle_Thin Battery**DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: Generic LTE (0); Frequency: 793 MHz; Duty Cycle: 1:1
Medium parameters used: $f=793$ MHz; $\sigma = 0.902$ S/m; $\epsilon_r = 41.579$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @793 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0805 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.860 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.0970 W/kg

SAR(1 g) = 0.057 W/kg; SAR(10 g) = 0.038 W/kg

Maximum value of SAR (measured) = 0.0797 W/kg

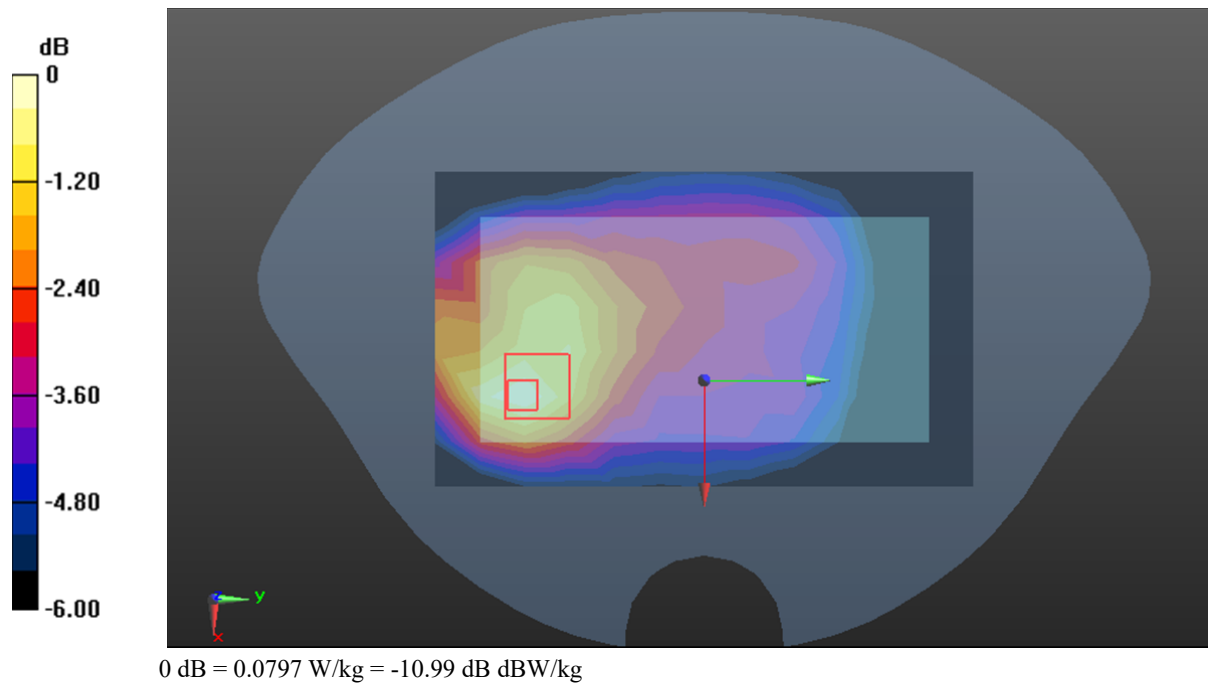

Test Plot32#: LTE Band 14_Body Front_50%RB_Middle_Thin Battery**DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: Generic LTE (0); Frequency: 793 MHz; Duty Cycle: 1:1
Medium parameters used: $f=793$ MHz; $\sigma = 0.902$ S/m; $\epsilon_r = 41.579$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @793 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0649 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.407 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.0760 W/kg

SAR(1 g) = 0.046 W/kg; SAR(10 g) = 0.031 W/kg

Maximum value of SAR (measured) = 0.0640 W/kg

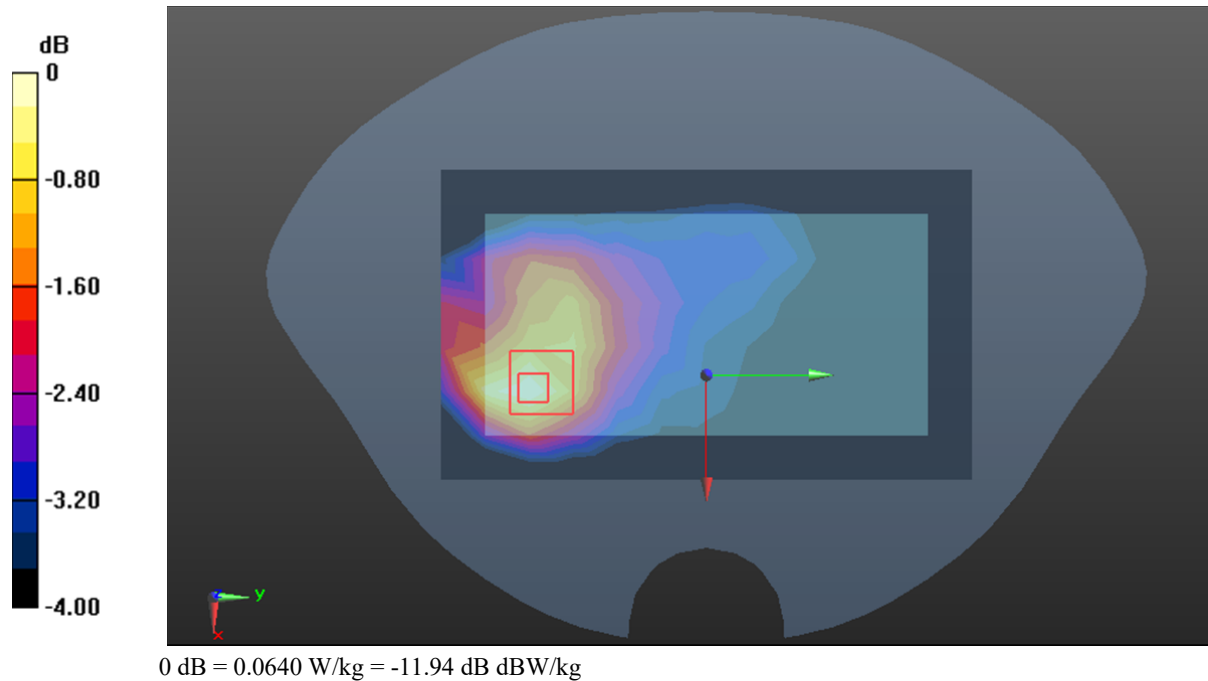

Test Plot33#: LTE Band 14_Body Back_1RB_Middle_Thin Battery**DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: Generic LTE (0); Frequency: 793 MHz;Duty Cycle: 1:1
Medium parameters used: $f=793$ MHz; $\sigma = 0.902$ S/m; $\epsilon_r = 41.579$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @793 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x13x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.204 W/kg


Zoom Scan (5x5x7)/Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.04 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.261 W/kg

SAR(1 g) = 0.127 W/kg; SAR(10 g) = 0.076 W/kg

Maximum value of SAR (measured) = 0.203 W/kg

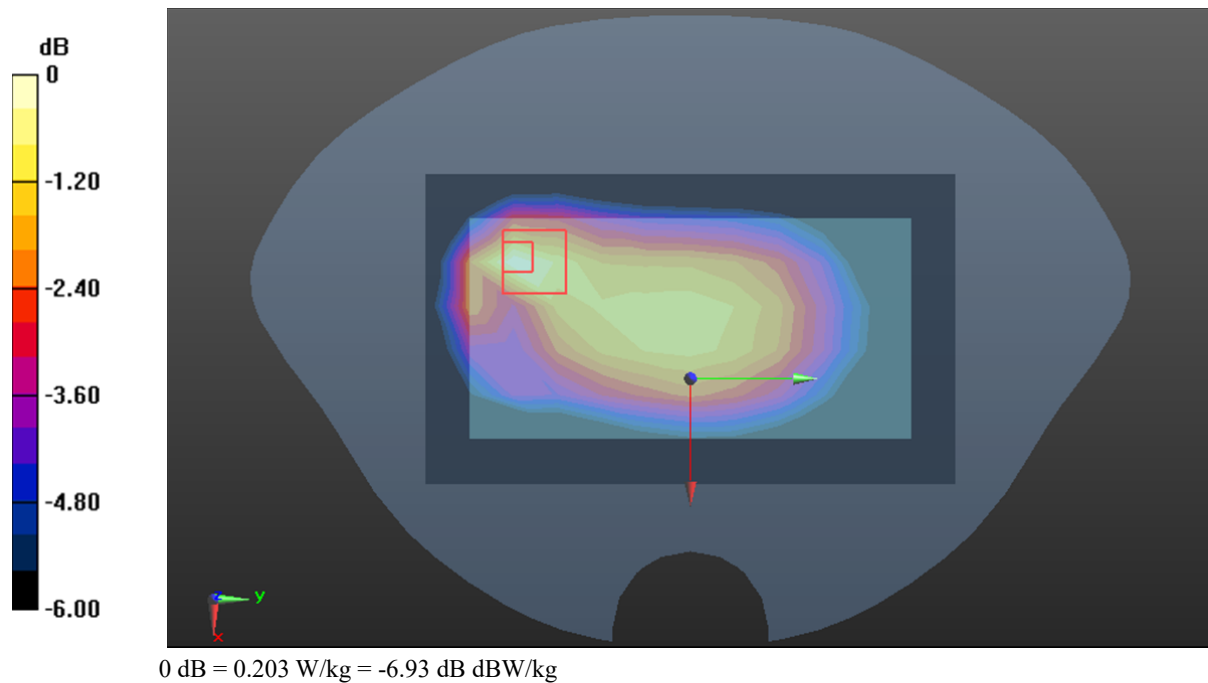

Test Plot34#: LTE Band 14_Body Back_50%RB_Middle_Thin Battery**DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: Generic LTE (0); Frequency: 793 MHz; Duty Cycle: 1:1
Medium parameters used: $f=793$ MHz; $\sigma = 0.902$ S/m; $\epsilon_r = 41.579$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @793 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.159 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.53 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.205 W/kg

SAR(1 g) = 0.099 W/kg; SAR(10 g) = 0.059 W/kg

Maximum value of SAR (measured) = 0.158 W/kg

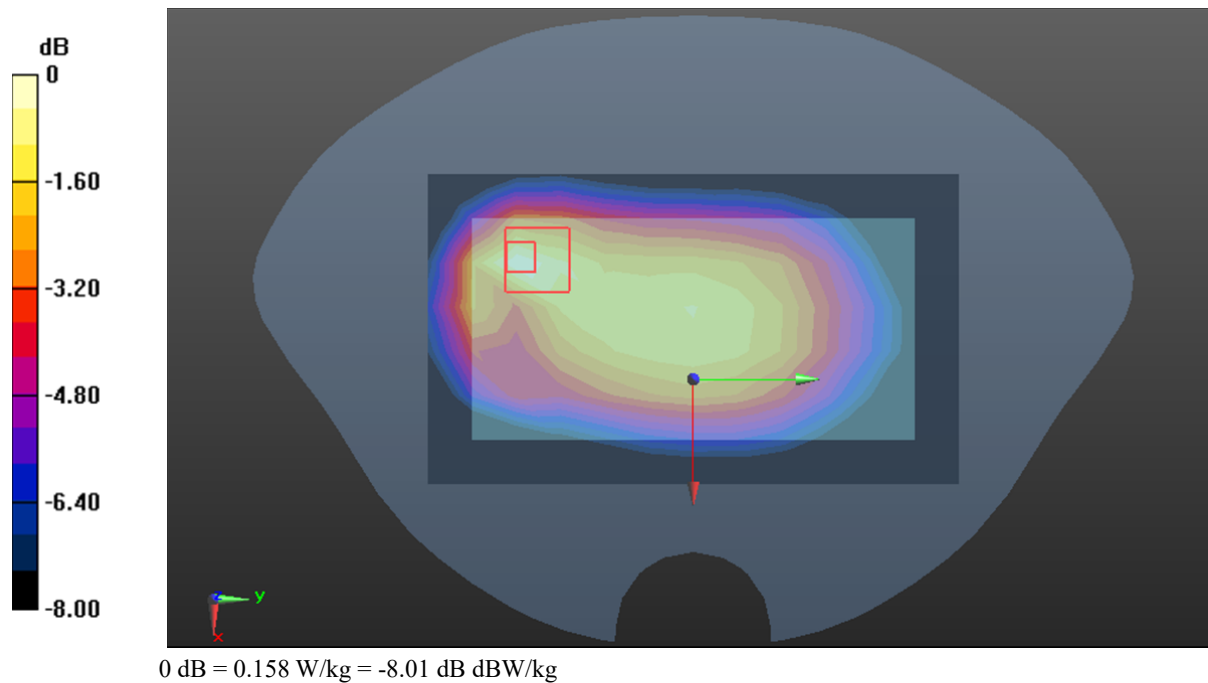

Test Plot35#: LTE Band 14_Body Left_1RB_Middle_Thin Battery**DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: Generic LTE (0); Frequency: 793 MHz; Duty Cycle: 1:1
Medium parameters used: $f=793$ MHz; $\sigma = 0.902$ S/m; $\epsilon_r = 41.579$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @793 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (5x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.125 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.22 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.161 W/kg

SAR(1 g) = 0.101 W/kg; SAR(10 g) = 0.071 W/kg

Maximum value of SAR (measured) = 0.137 W/kg

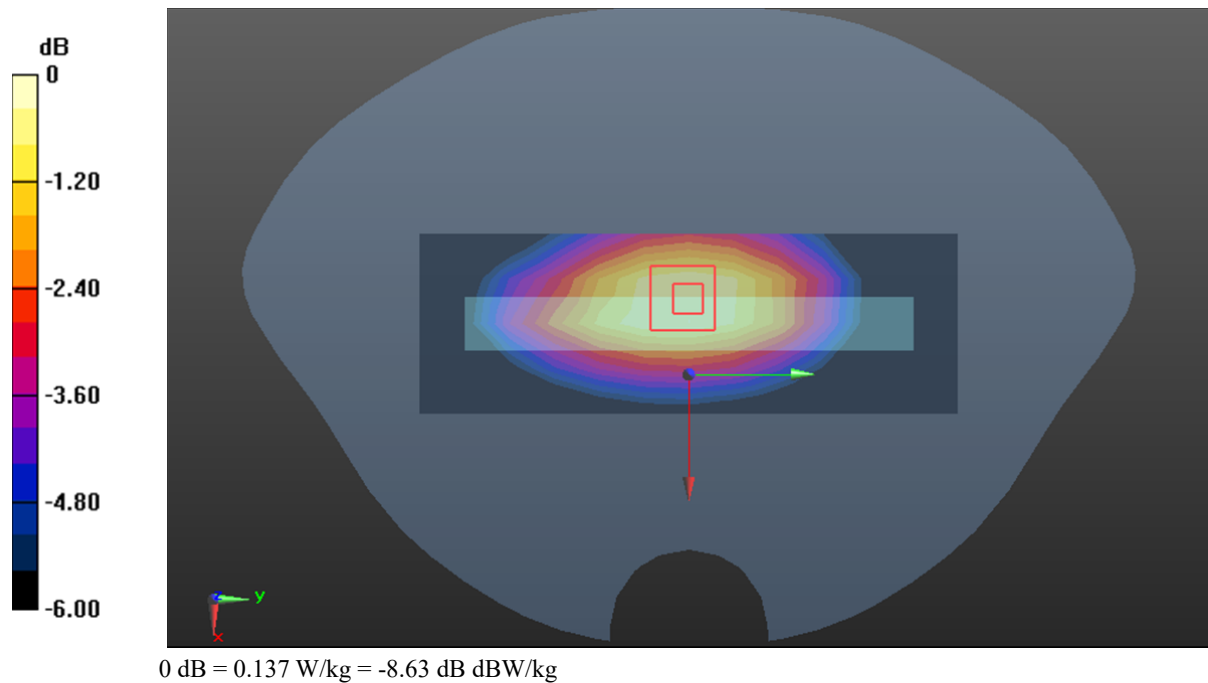

Test Plot36#: LTE Band 14_Body Left_50%RB_Middle_Thin Battery**DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: Generic LTE (0); Frequency: 793 MHz; Duty Cycle: 1:1
Medium parameters used: $f=793$ MHz; $\sigma = 0.902$ S/m; $\epsilon_r = 41.579$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @793 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (5x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.100 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.198 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.127 W/kg

SAR(1 g) = 0.080 W/kg; SAR(10 g) = 0.057 W/kg

Maximum value of SAR (measured) = 0.107 W/kg

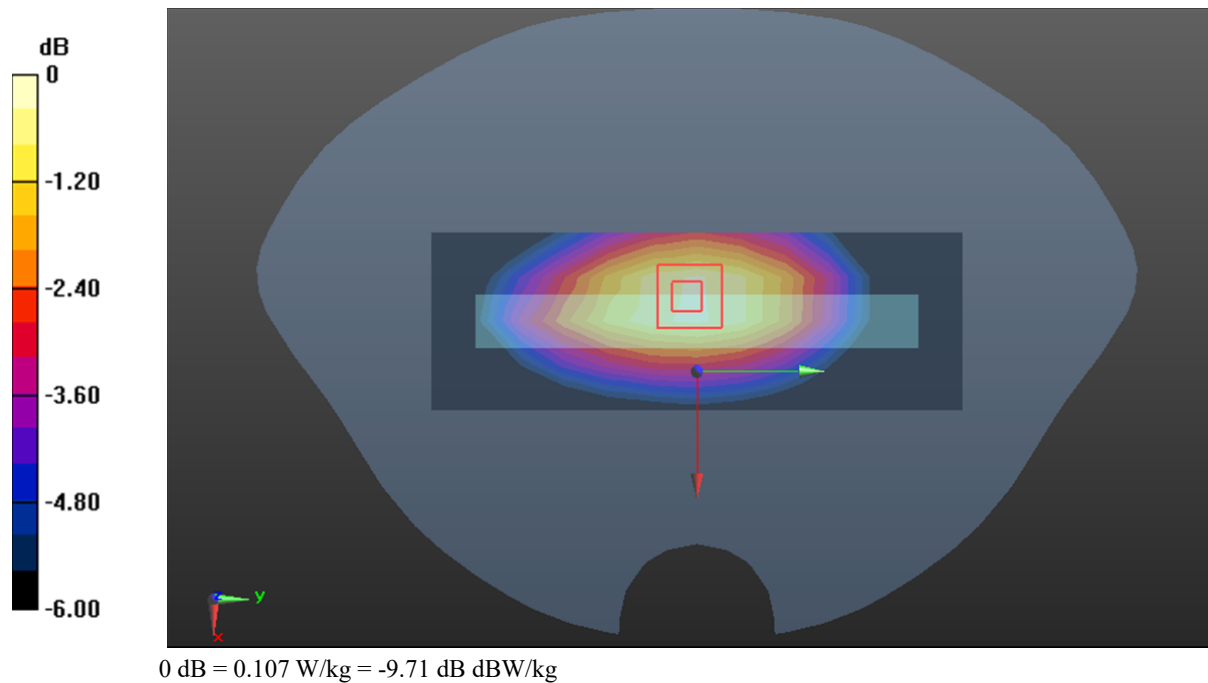

Test Plot37#: LTE Band 14_Body Right_1RB_Middle_Thin Battery**DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: Generic LTE (0); Frequency: 793 MHz; Duty Cycle: 1:1
 Medium parameters used: $f=793$ MHz; $\sigma = 0.902$ S/m; $\epsilon_r = 41.579$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @793 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (5x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0999 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.377 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.123 W/kg

SAR(1 g) = 0.078 W/kg; SAR(10 g) = 0.055 W/kg

Maximum value of SAR (measured) = 0.104 W/kg

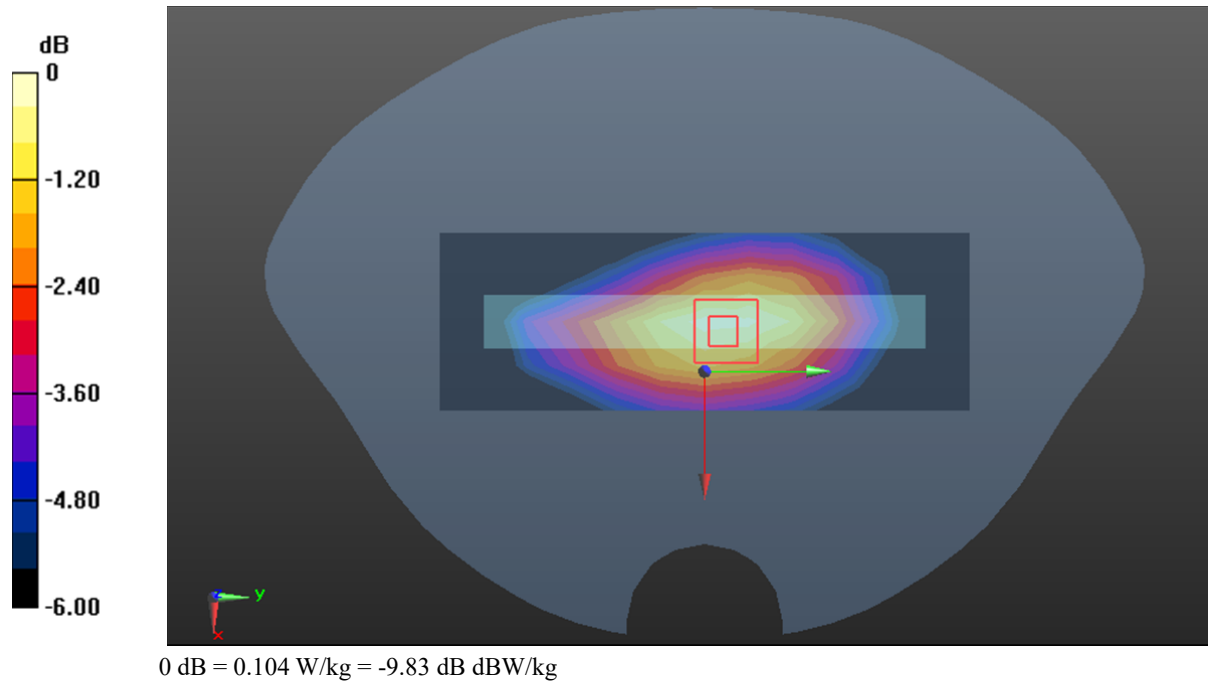

Test Plot38#: LTE Band 14_Body Right_50%RB_Middle_Thin Battery**DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: Generic LTE (0); Frequency: 793 MHz; Duty Cycle: 1:1
 Medium parameters used: $f=793$ MHz; $\sigma = 0.902$ S/m; $\epsilon_r = 41.579$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @793 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (5x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0804 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.271 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.0970 W/kg

SAR(1 g) = 0.062 W/kg; SAR(10 g) = 0.044 W/kg

Maximum value of SAR (measured) = 0.0826 W/kg

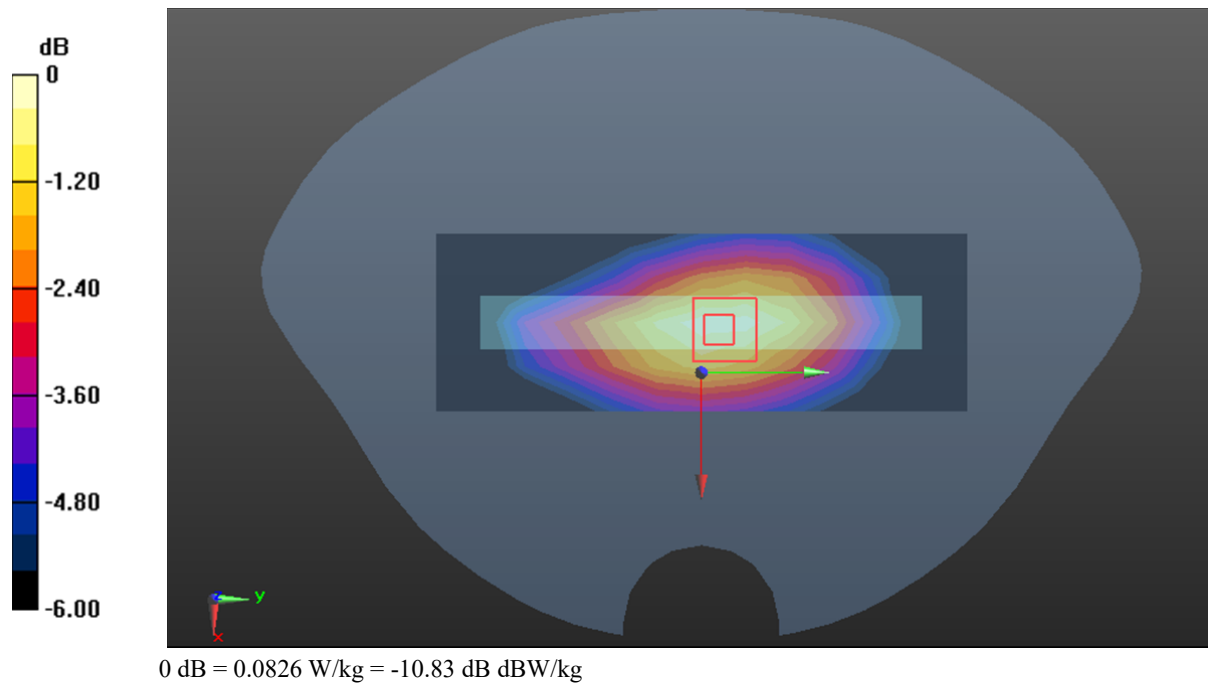

Test Plot39#: LTE Band 14_Body Bottom_1RB_Middle_Thin Battery**DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: Generic LTE (0); Frequency: 793 MHz; Duty Cycle: 1:1
Medium parameters used: $f=793$ MHz; $\sigma = 0.902$ S/m; $\epsilon_r = 41.579$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @793 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (6x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0360 W/kg


Zoom Scan (5x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.171 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.0850 W/kg

SAR(1 g) = 0.035 W/kg; SAR(10 g) = 0.023 W/kg

Maximum value of SAR (measured) = 0.0576 W/kg

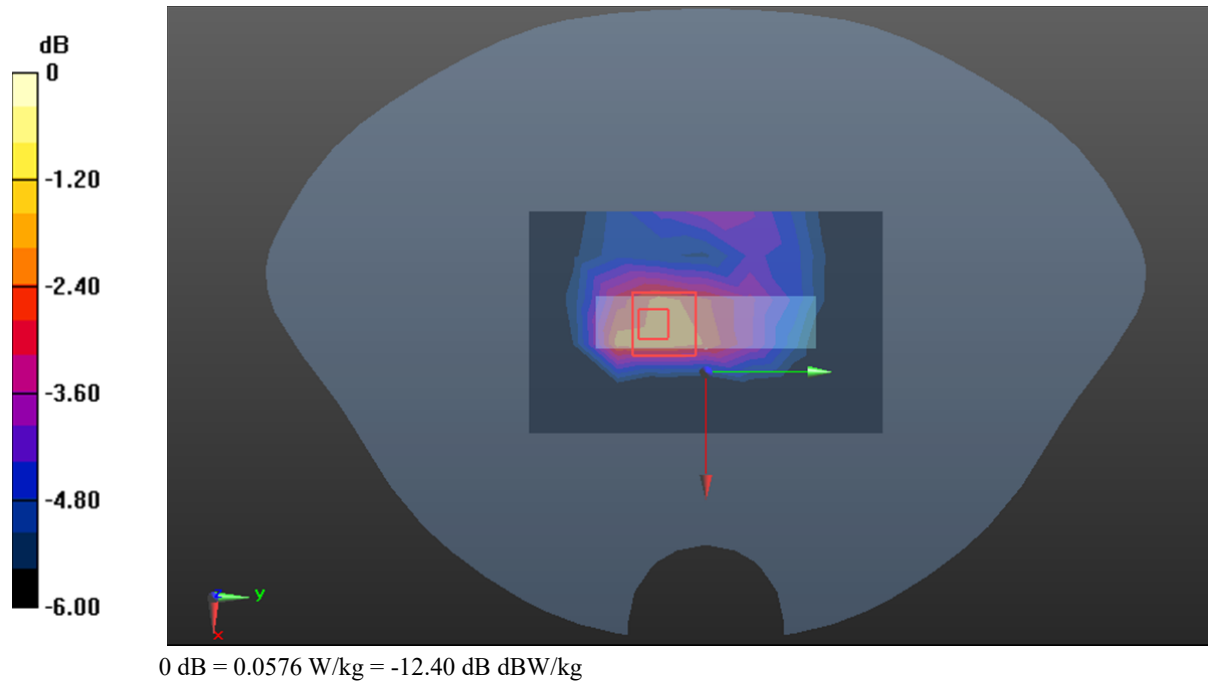

Test Plot40#: LTE Band 14_Body Bottom_50%RB_Middle_Thin Battery**DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: Generic LTE (0); Frequency: 793 MHz; Duty Cycle: 1:1
Medium parameters used: $f=793$ MHz; $\sigma = 0.902$ S/m; $\epsilon_r = 41.579$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @793 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (6x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0314 W/kg


Zoom Scan (5x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.721 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.0680 W/kg

SAR(1 g) = 0.030 W/kg; SAR(10 g) = 0.020 W/kg

Maximum value of SAR (measured) = 0.0457 W/kg

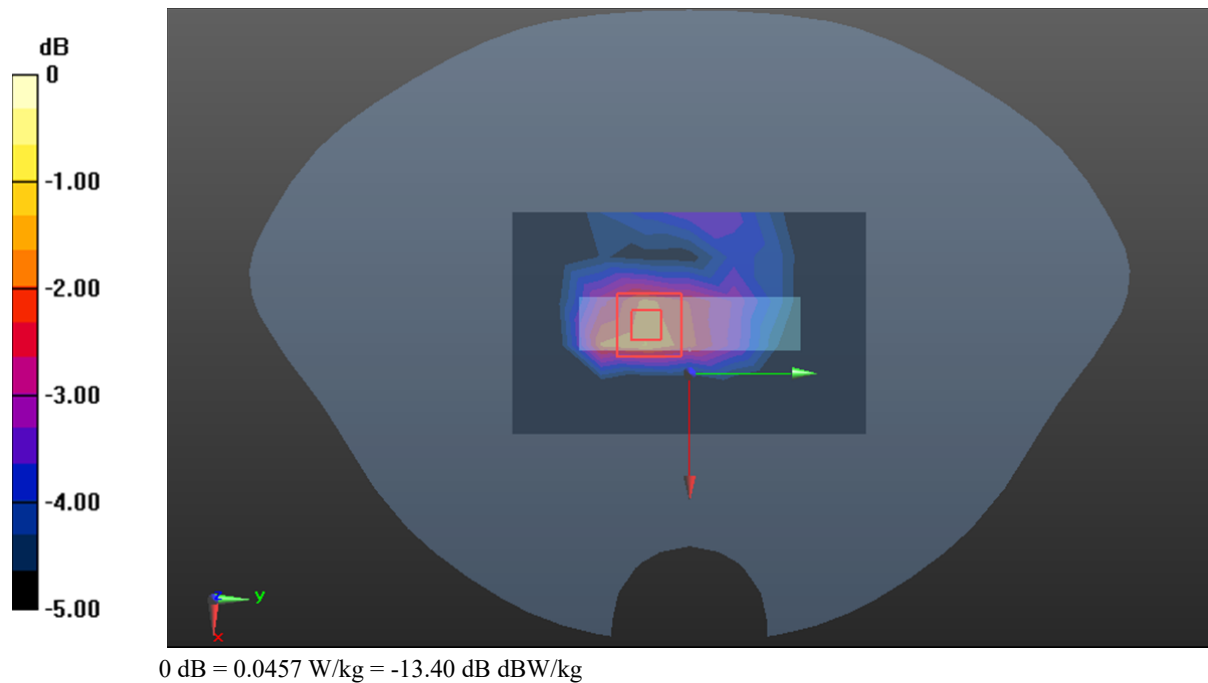

Test Plot41#: LTE Band 25_Body Front_1RB_Middle_Thin Battery**DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: Generic LTE (0); Frequency: 1882.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f=1882.5$ MHz; $\sigma = 1.384$ S/m; $\epsilon_r = 40.066$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.94, 7.94, 7.94) @1882.5 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.320 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.720 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.386 W/kg

SAR(1 g) = 0.226 W/kg; SAR(10 g) = 0.144 W/kg

Maximum value of SAR (measured) = 0.323 W/kg

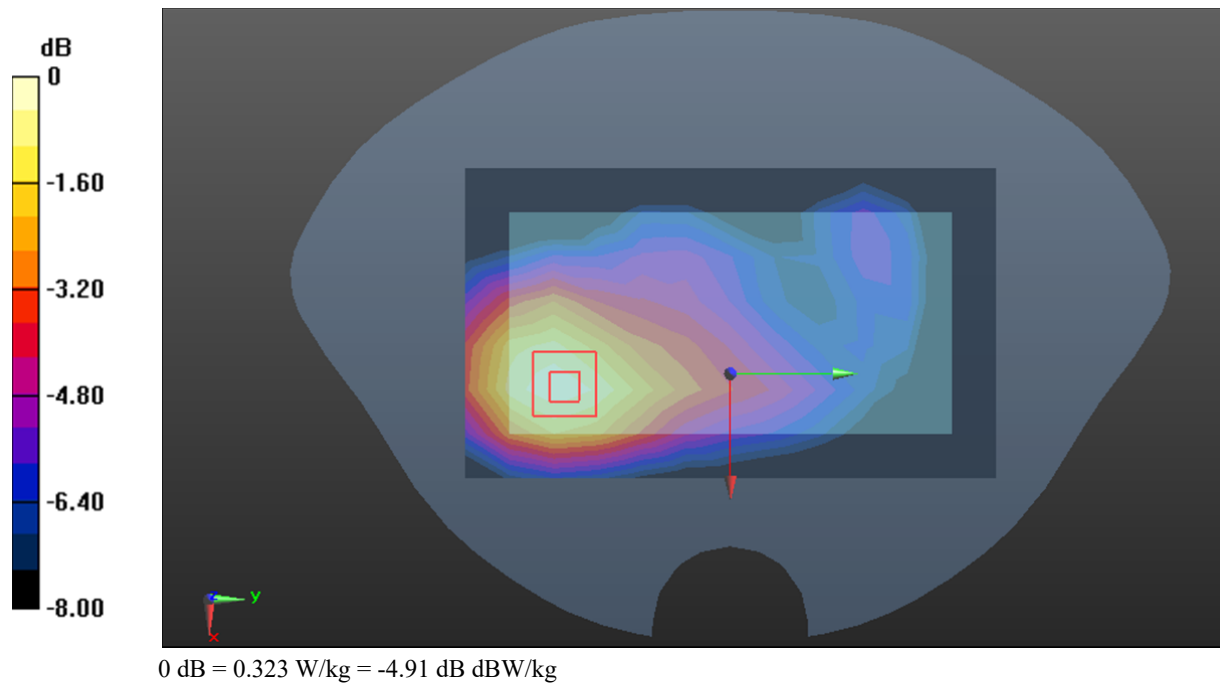

Test Plot42#: LTE Band 25_Body Front_50%RB_Middle_Thin Battery**DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: Generic LTE (0); Frequency: 1882.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f=1882.5$ MHz; $\sigma = 1.384$ S/m; $\epsilon_r = 40.066$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.94, 7.94, 7.94) @1882.5 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.247 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.839 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.292 W/kg

SAR(1 g) = 0.175 W/kg; SAR(10 g) = 0.113 W/kg

Maximum value of SAR (measured) = 0.243 W/kg

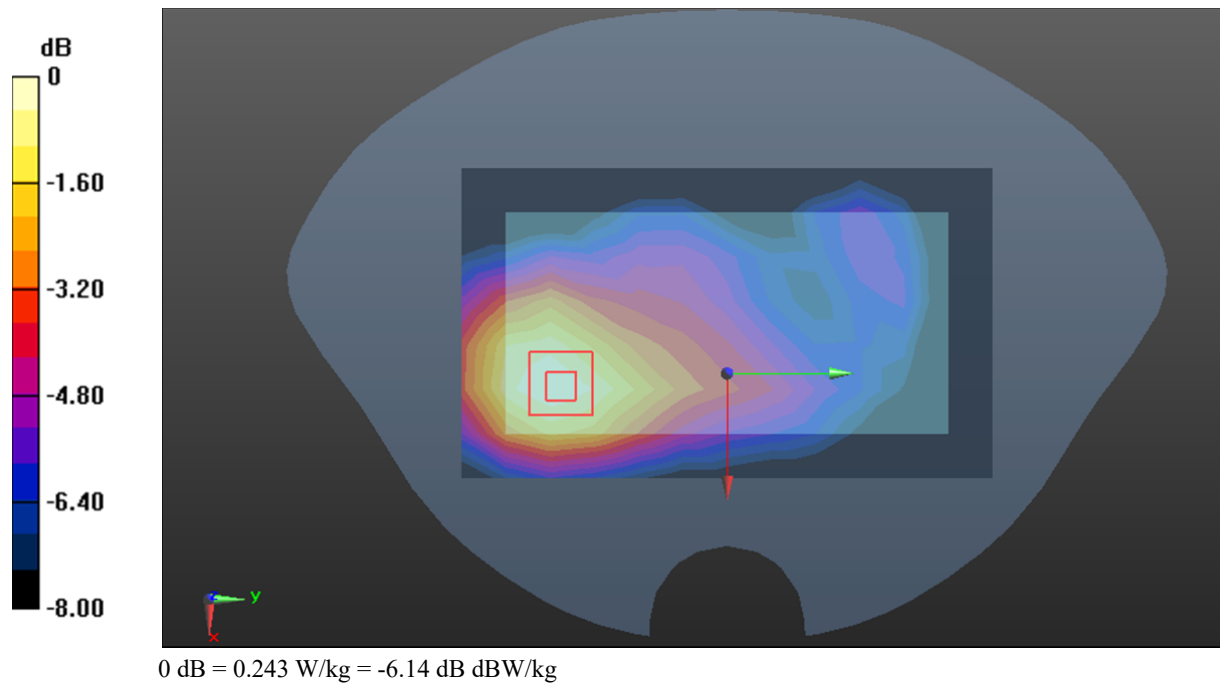

Test Plot43#: LTE Band 25_Body Back_1RB_Middle_Thin Battery**DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: Generic LTE (0); Frequency: 1882.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f=1882.5$ MHz; $\sigma = 1.384$ S/m; $\epsilon_r = 40.066$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.94, 7.94, 7.94) @1882.5 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.564 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.297 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.818 W/kg

SAR(1 g) = 0.390 W/kg; SAR(10 g) = 0.220 W/kg

Maximum value of SAR (measured) = 0.643 W/kg

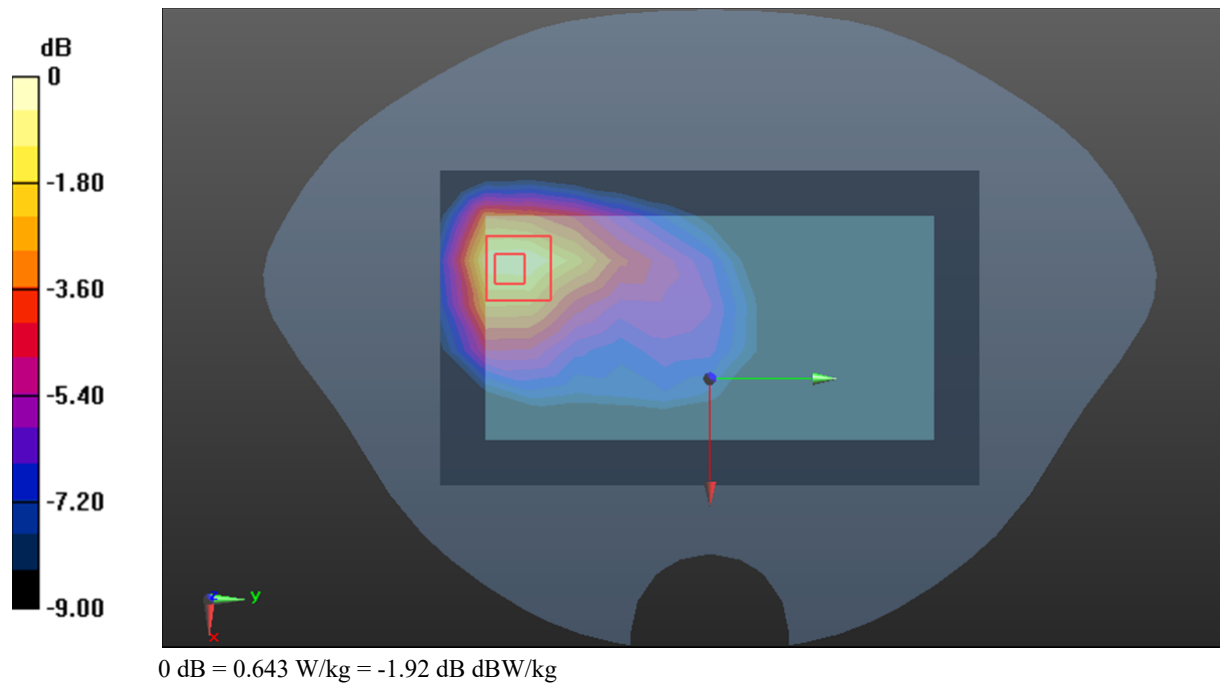

Test Plot44#: LTE Band 25_Body Back_50%RB_Middle_Thin Battery**DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: Generic LTE (0); Frequency: 1882.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f=1882.5$ MHz; $\sigma = 1.384$ S/m; $\epsilon_r = 40.066$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.94, 7.94, 7.94) @1882.5 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.439 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.458 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.634 W/kg

SAR(1 g) = 0.303 W/kg; SAR(10 g) = 0.174 W/kg

Maximum value of SAR (measured) = 0.486 W/kg

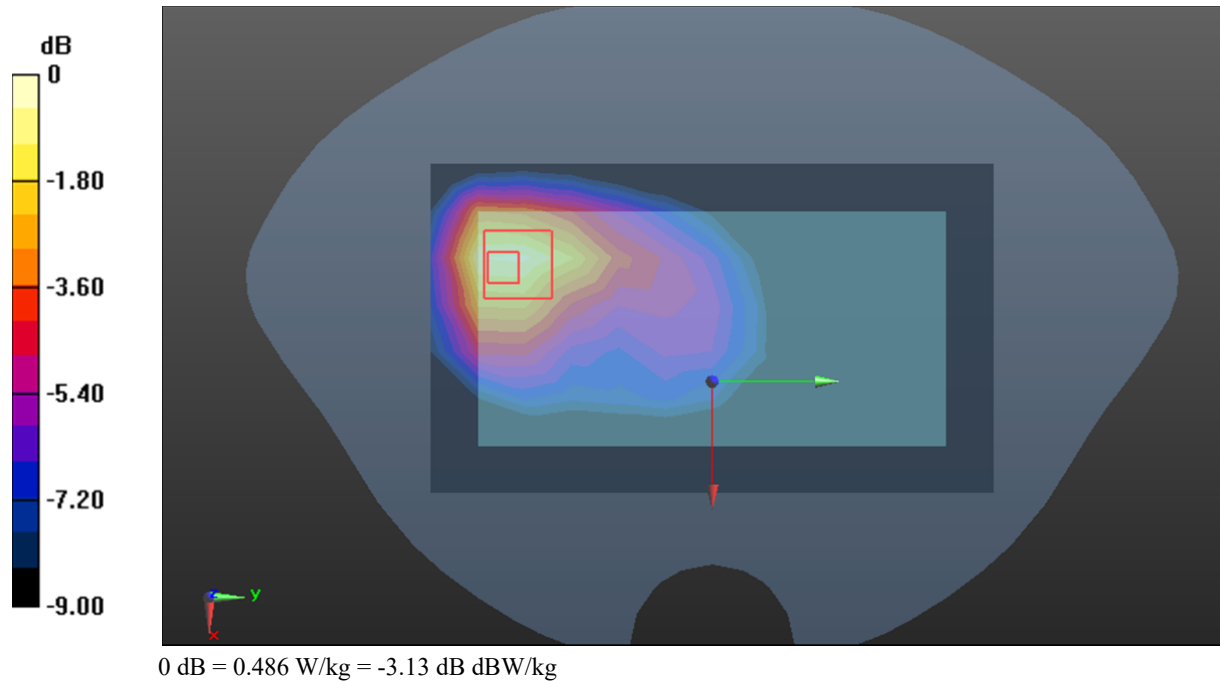

Test Plot45#: LTE Band 25_Body Left_1RB_Middle_Thin Battery**DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: Generic LTE (0); Frequency: 1882.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f=1882.5$ MHz; $\sigma = 1.384$ S/m; $\epsilon_r = 40.066$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.94, 7.94, 7.94) @1882.5 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (5x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0744 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.195 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.0950 W/kg

SAR(1 g) = 0.060 W/kg; SAR(10 g) = 0.040 W/kg

Maximum value of SAR (measured) = 0.0819 W/kg

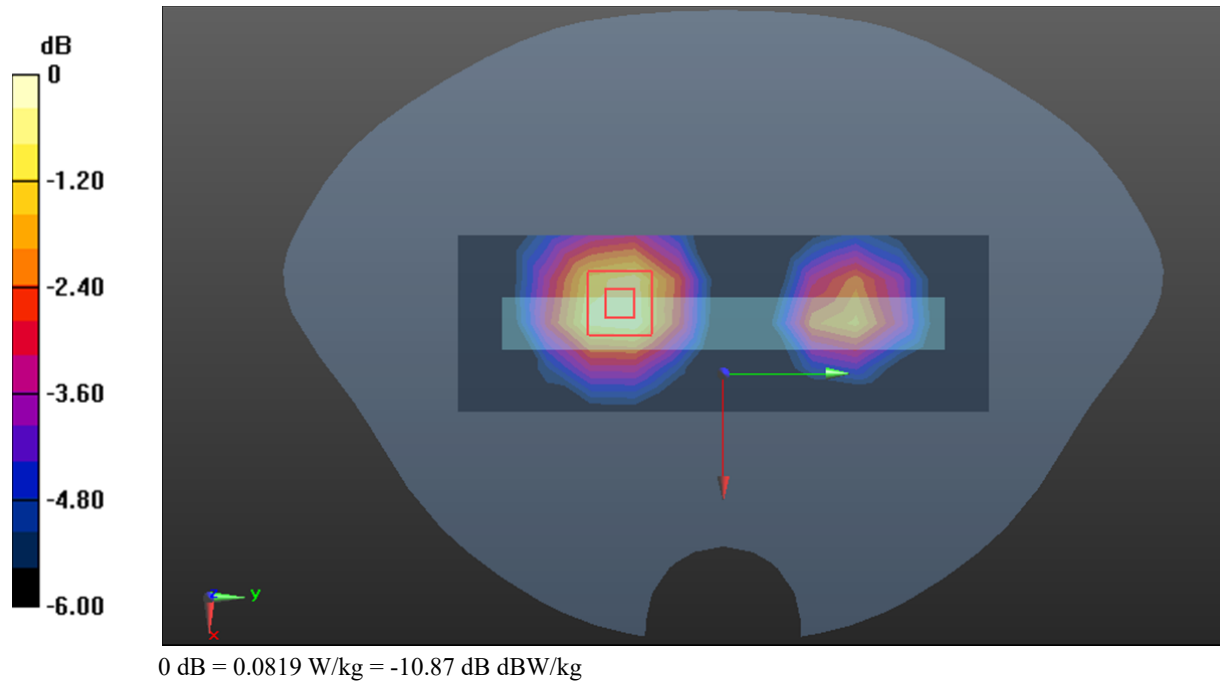

Test Plot46#: LTE Band 25_Body Left_50%RB_Middle_Thin Battery**DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: Generic LTE (0); Frequency: 1882.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f=1882.5$ MHz; $\sigma = 1.384$ S/m; $\epsilon_r = 40.066$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.94, 7.94, 7.94) @1882.5 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (5x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0603 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.159 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.0780 W/kg

SAR(1 g) = 0.050 W/kg; SAR(10 g) = 0.034 W/kg

Maximum value of SAR (measured) = 0.0672 W/kg

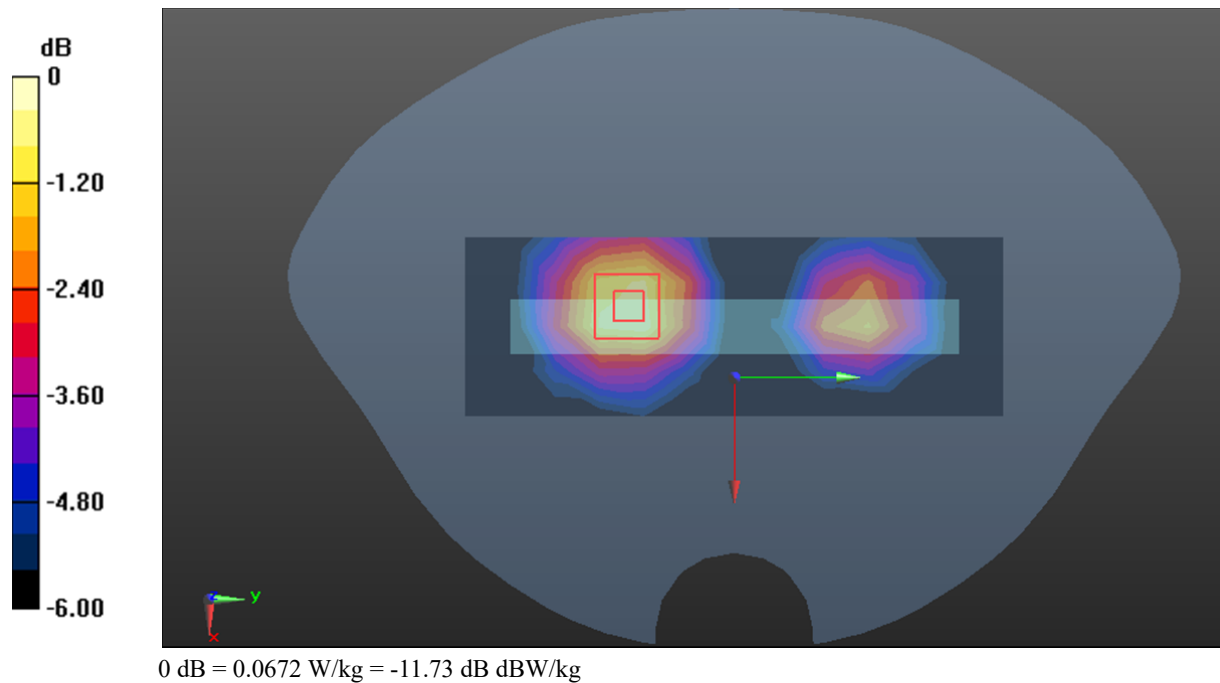

Test Plot47#: LTE Band 25_Body Right_1RB_Middle_Thin Battery**DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: Generic LTE (0); Frequency: 1882.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f=1882.5$ MHz; $\sigma = 1.384$ S/m; $\epsilon_r = 40.066$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.94, 7.94, 7.94) @1882.5 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (5x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.510 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.610 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.611 W/kg

SAR(1 g) = 0.347 W/kg; SAR(10 g) = 0.209 W/kg

Maximum value of SAR (measured) = 0.502 W/kg

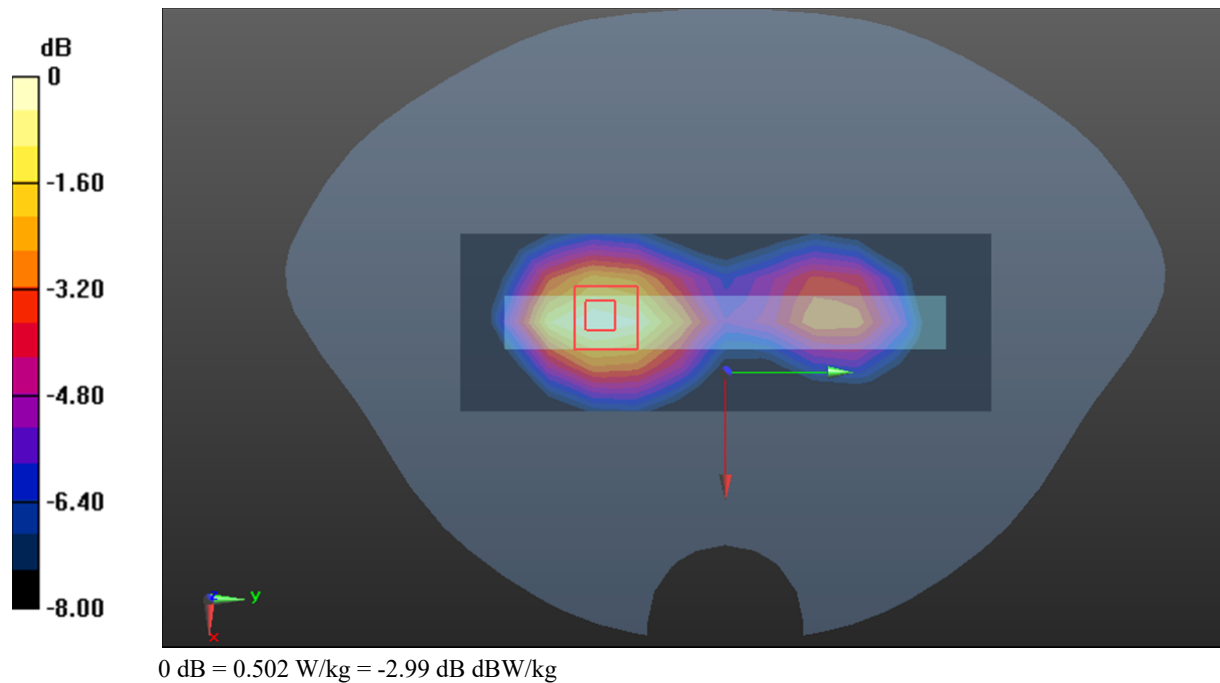

Test Plot48#: LTE Band 25_Body Right_50%RB_Middle_Thin Battery**DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: Generic LTE (0); Frequency: 1882.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f=1882.5$ MHz; $\sigma = 1.384$ S/m; $\epsilon_r = 40.066$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.94, 7.94, 7.94) @1882.5 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (5x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.394 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.699 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.473 W/kg

SAR(1 g) = 0.270 W/kg; SAR(10 g) = 0.164 W/kg

Maximum value of SAR (measured) = 0.389 W/kg

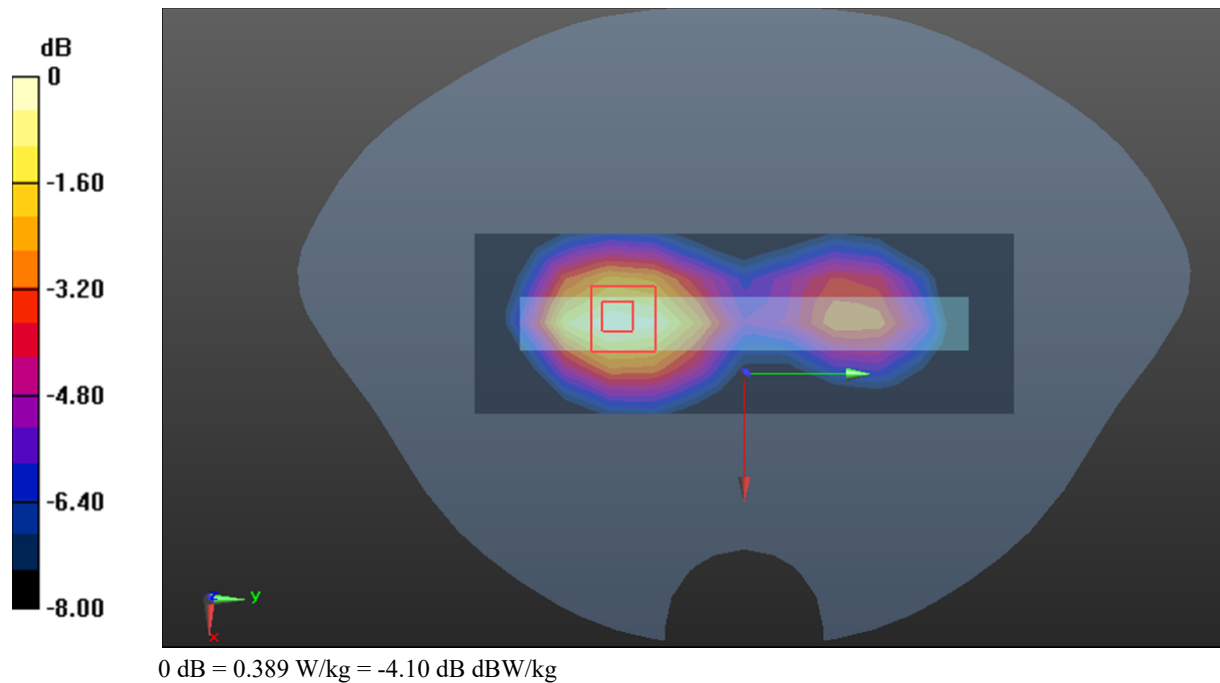

Test Plot49#: LTE Band 25_Body Bottom_1RB_Middle_Thin Battery**DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: Generic LTE (0); Frequency: 1882.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f=1882.5$ MHz; $\sigma = 1.384$ S/m; $\epsilon_r = 40.066$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.94, 7.94, 7.94) @1882.5 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (6x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.346 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.71 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.484 W/kg

SAR(1 g) = 0.257 W/kg; SAR(10 g) = 0.145 W/kg

Maximum value of SAR (measured) = 0.388 W/kg

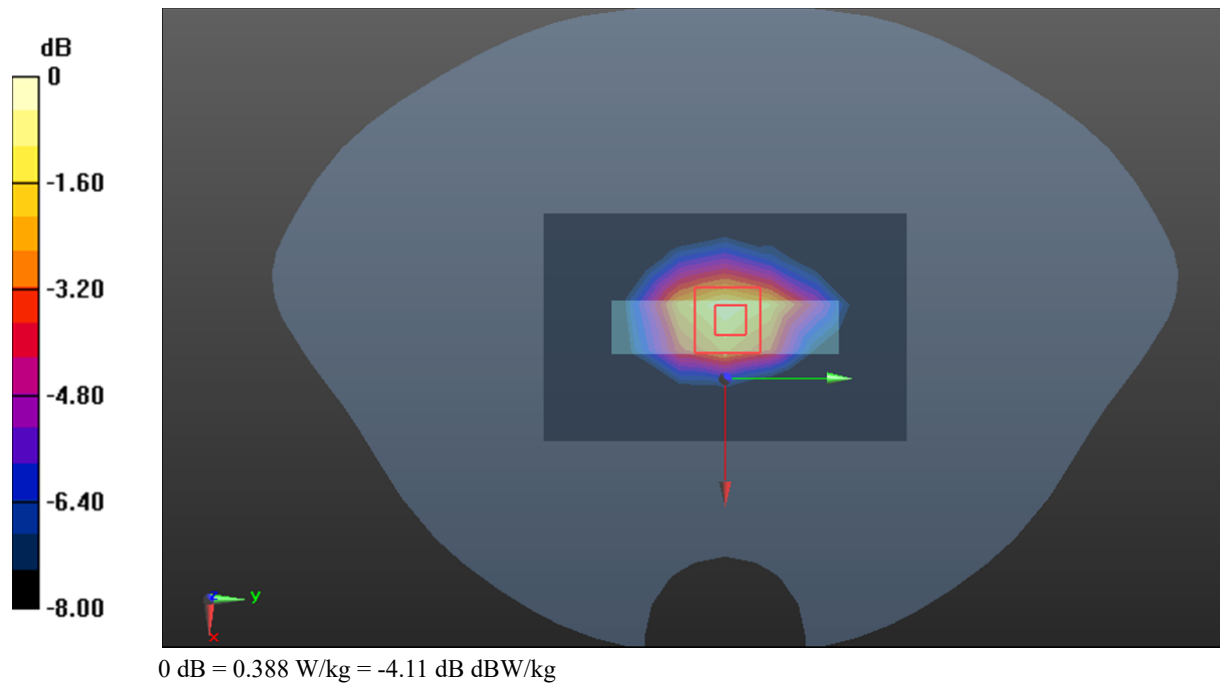

Test Plot50#: LTE Band 25_Body Bottom_50%RB_Middle_Thin Battery**DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: Generic LTE (0); Frequency: 1882.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f=1882.5$ MHz; $\sigma = 1.384$ S/m; $\epsilon_r = 40.066$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.94, 7.94, 7.94) @1882.5 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (6x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.268 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.07 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.370 W/kg

SAR(1 g) = 0.200 W/kg; SAR(10 g) = 0.114 W/kg

Maximum value of SAR (measured) = 0.301 W/kg

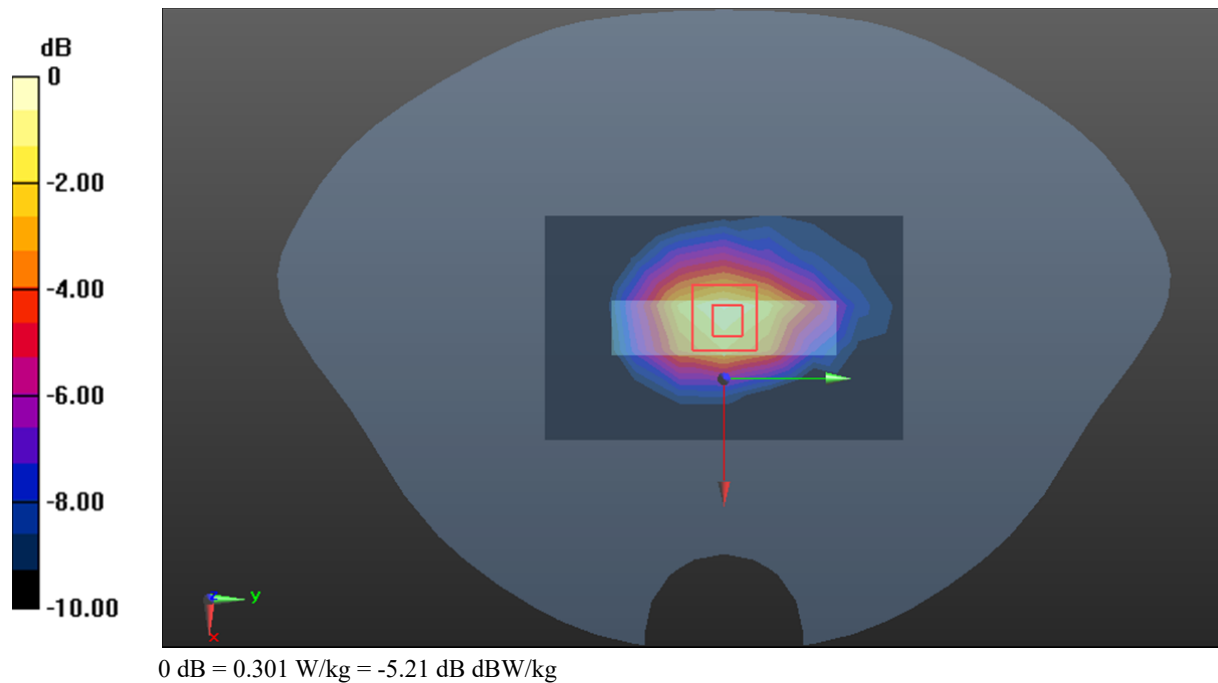

Test Plot51#: LTE Band 26_Body Front_1RB_Middle_Thin Battery**DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: Generic LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f=831.5$ MHz; $\sigma = 0.921$ S/m; $\epsilon_r = 41.364$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @831.5 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0949 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.721 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.116 W/kg

SAR(1 g) = 0.066 W/kg; SAR(10 g) = 0.044 W/kg

Maximum value of SAR (measured) = 0.0949 W/kg

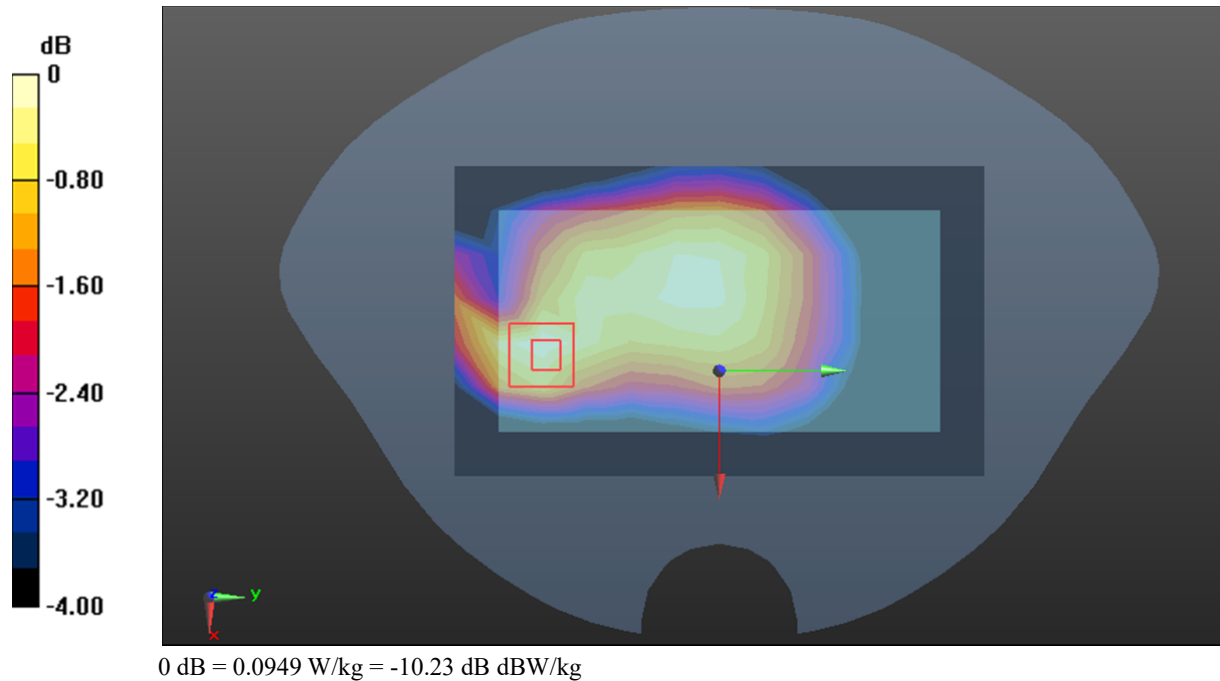

Test Plot52#: LTE Band 26_Body Front_50%RB_Middle_Thin Battery**DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: Generic LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f=831.5$ MHz; $\sigma = 0.921$ S/m; $\epsilon_r = 41.364$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @831.5 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0764 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.780 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.0990 W/kg

SAR(1 g) = 0.056 W/kg; SAR(10 g) = 0.038 W/kg

Maximum value of SAR (measured) = 0.0805 W/kg

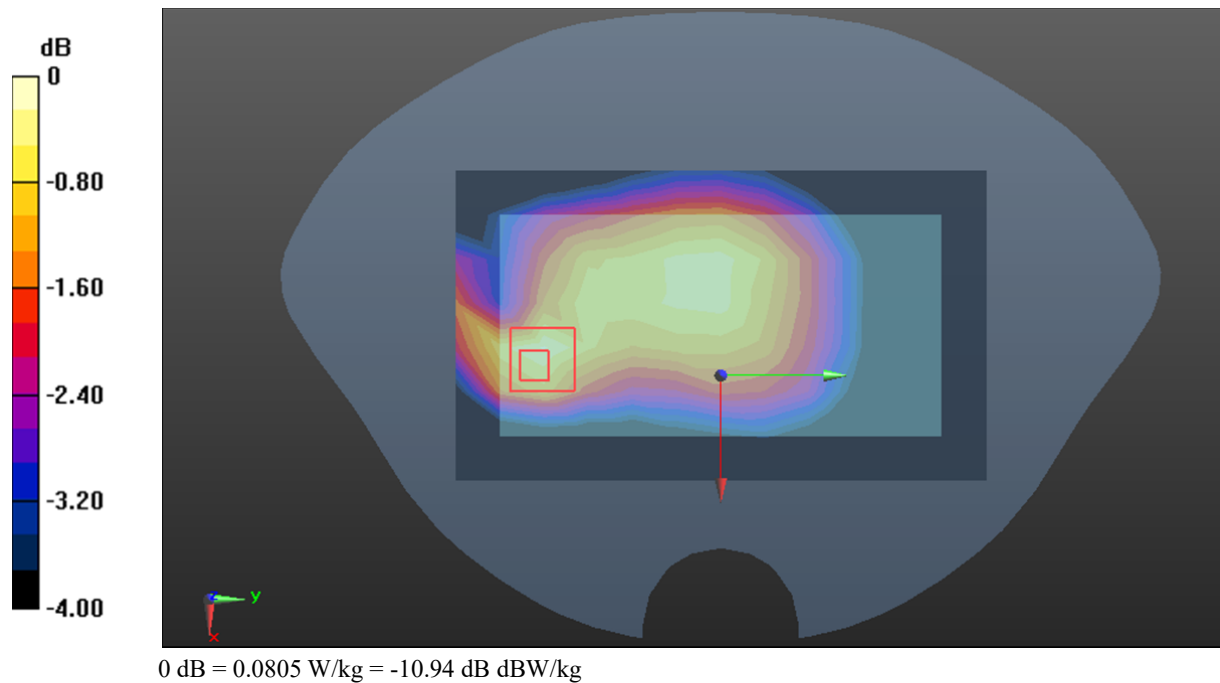

Test Plot53#: LTE Band 26_Body Back_1RB_Middle_Thin Battery**DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: Generic LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f=831.5$ MHz; $\sigma = 0.921$ S/m; $\epsilon_r = 41.364$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @831.5 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.221 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.63 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.287 W/kg

SAR(1 g) = 0.139 W/kg; SAR(10 g) = 0.079 W/kg

Maximum value of SAR (measured) = 0.215 W/kg

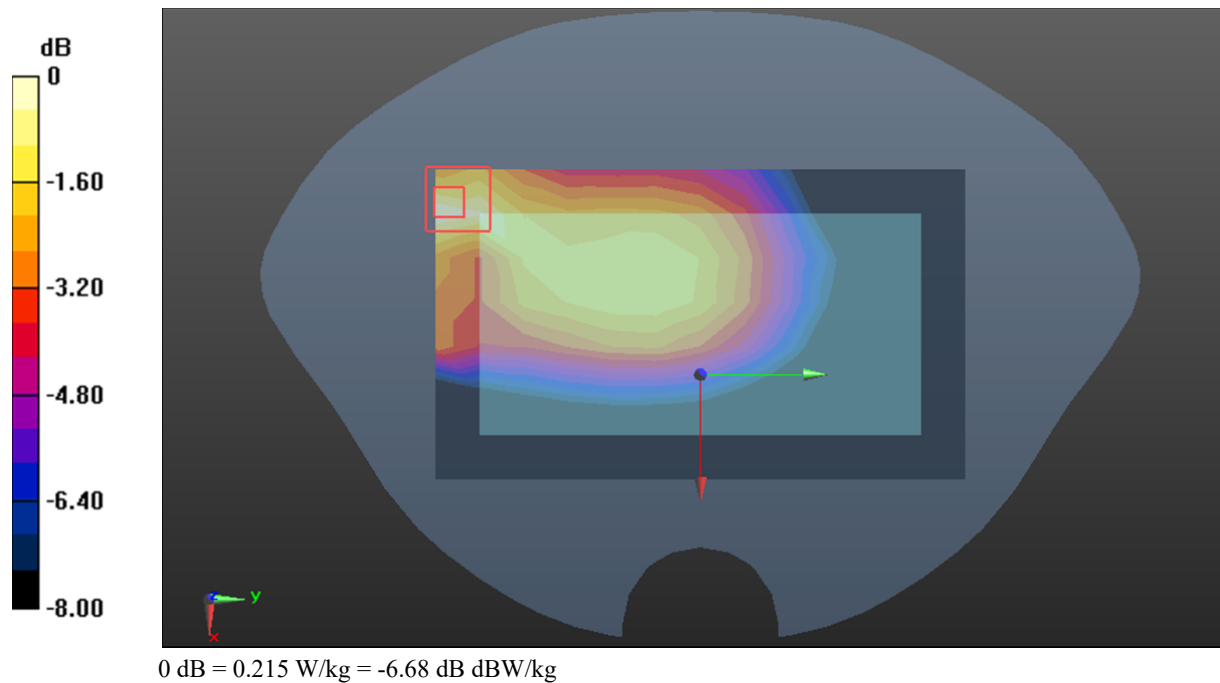

Test Plot54#: LTE Band 26_Body Back_50%RB_Middle_Thin Battery**DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: Generic LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f=831.5$ MHz; $\sigma = 0.921$ S/m; $\epsilon_r = 41.364$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @831.5 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.154 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.936 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.215 W/kg

SAR(1 g) = 0.104 W/kg; SAR(10 g) = 0.060 W/kg

Maximum value of SAR (measured) = 0.158 W/kg

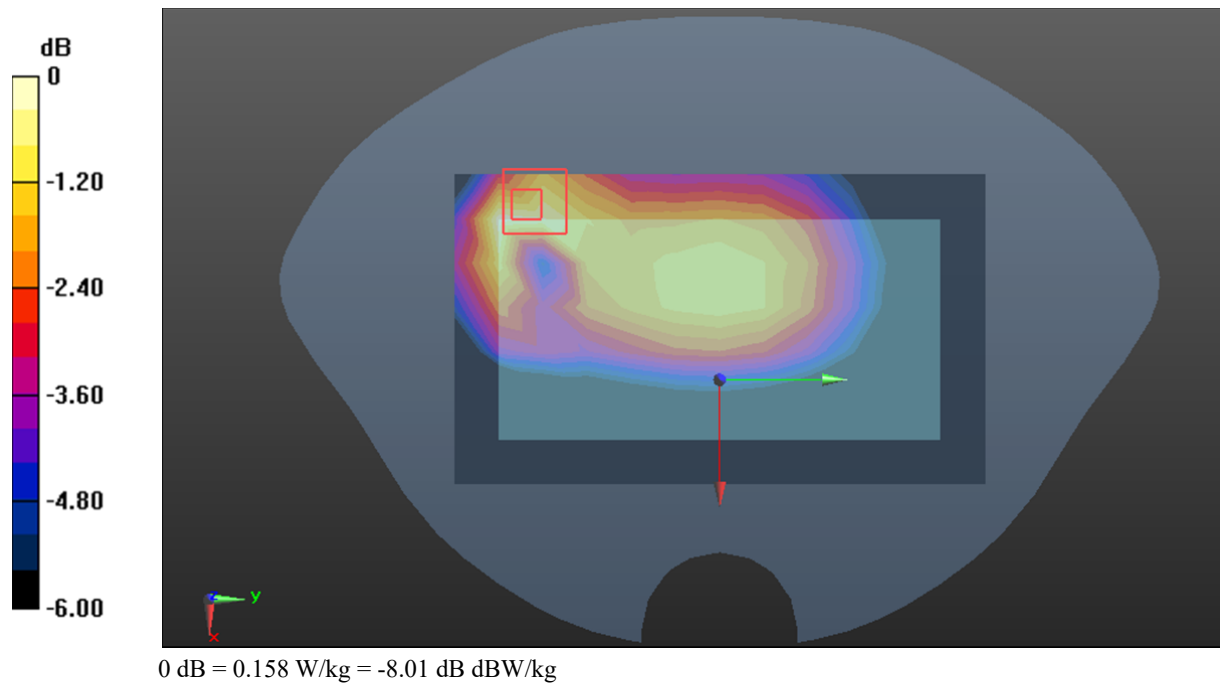

Test Plot55#: LTE Band 26_Body Left_1RB_Middle_Thin Battery**DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: Generic LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f=831.5$ MHz; $\sigma = 0.921$ S/m; $\epsilon_r = 41.364$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @831.5 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (5x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.182 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.00 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.223 W/kg

SAR(1 g) = 0.139 W/kg; SAR(10 g) = 0.095 W/kg

Maximum value of SAR (measured) = 0.188 W/kg

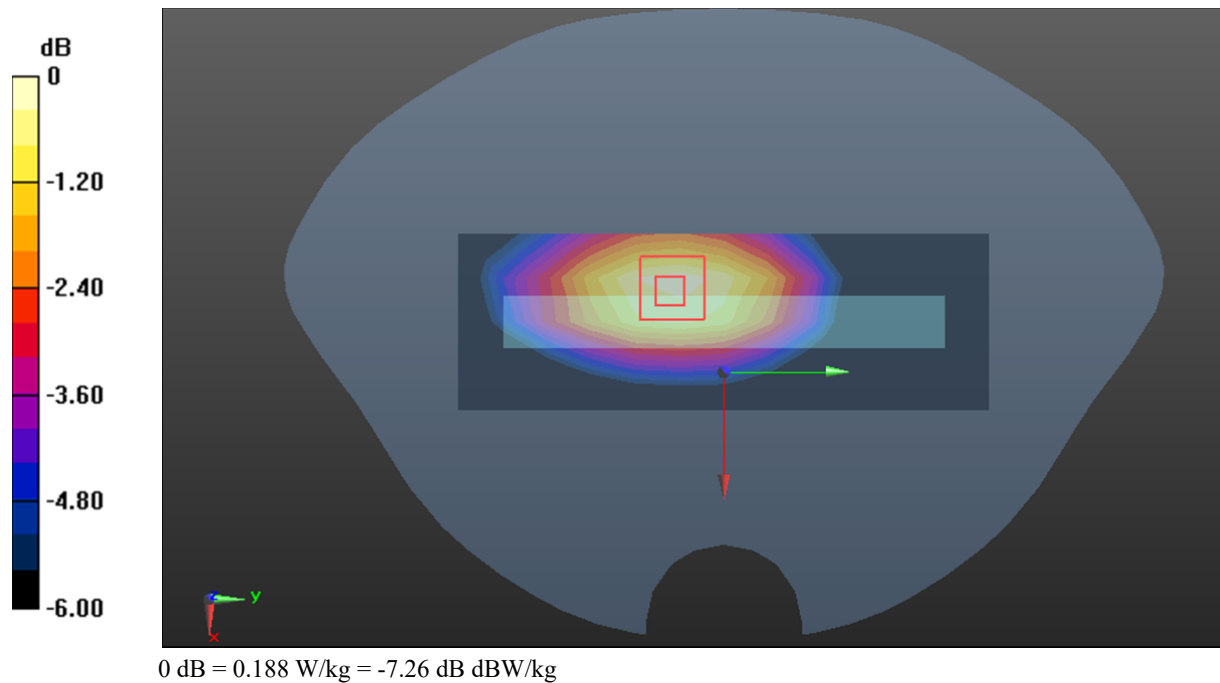

Test Plot56#: LTE Band 26_Body Left_50%RB_Middle_Thin Battery**DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: Generic LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f=831.5$ MHz; $\sigma=0.921$ S/m; $\epsilon_r=41.364$; $\rho=1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @831.5 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (5x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.143 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.812 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.175 W/kg

SAR(1 g) = 0.110 W/kg; SAR(10 g) = 0.077 W/kg

Maximum value of SAR (measured) = 0.149 W/kg

