

**Test Plot57#: LTE Band 26\_Body Right\_1RB\_Middle\_Thin Battery****DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: Generic LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f=831.5$  MHz;  $\sigma=0.921$  S/m;  $\epsilon_r=41.364$ ;  $\rho=1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @831.5 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (5x13x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.139 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.735 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.163 W/kg

**SAR(1 g) = 0.103 W/kg; SAR(10 g) = 0.070 W/kg**

Maximum value of SAR (measured) = 0.138 W/kg

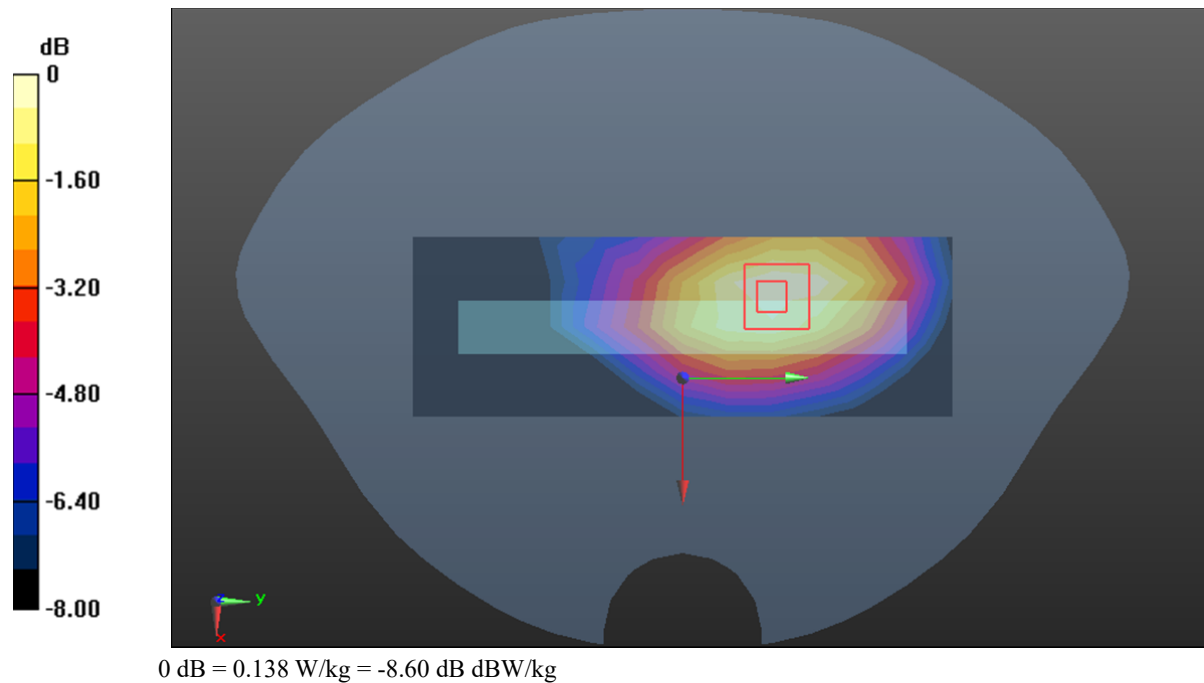

**Test Plot58#: LTE Band 26\_Body Right\_50%RB\_Middle\_Thin Battery****DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: Generic LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f=831.5$  MHz;  $\sigma = 0.921$  S/m;  $\epsilon_r = 41.364$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @831.5 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (5x13x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.107 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.654 V/m; Power Drift = -0.1 dB

Peak SAR (extrapolated) = 0.127 W/kg

**SAR(1 g) = 0.081 W/kg; SAR(10 g) = 0.056 W/kg**

Maximum value of SAR (measured) = 0.108 W/kg

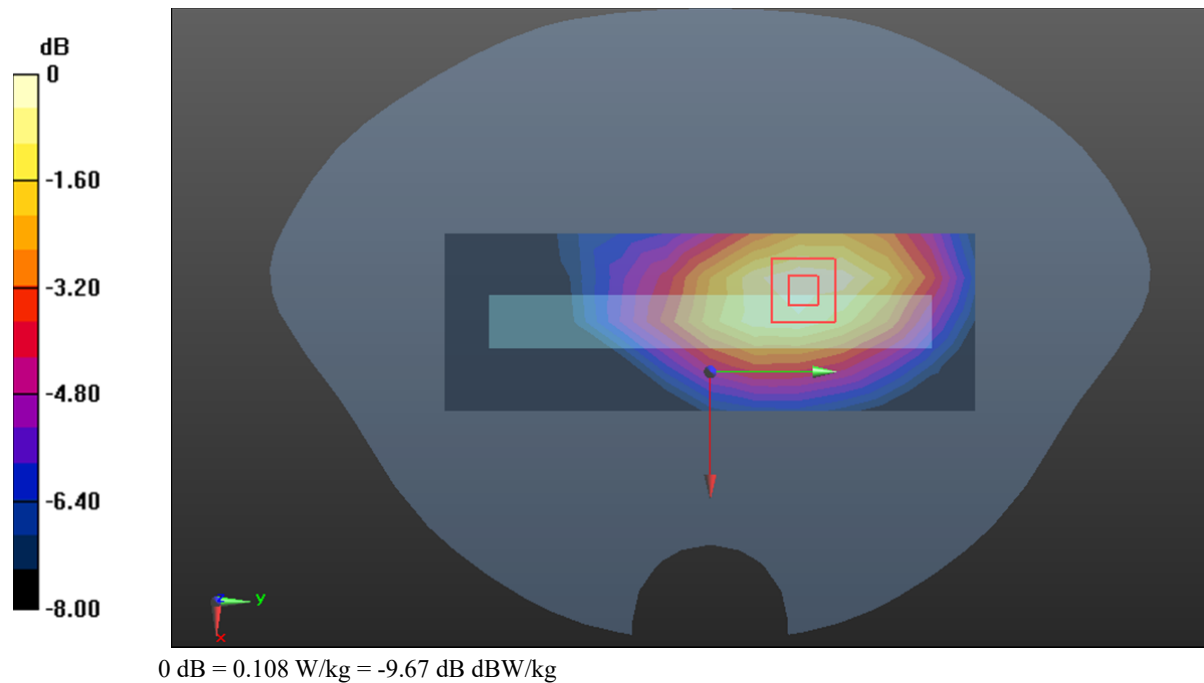

**Test Plot59#: LTE Band 26\_Body Bottom\_1RB\_Middle\_Thin Battery****DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: Generic LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f=831.5$  MHz;  $\sigma = 0.921$  S/m;  $\epsilon_r = 41.364$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @831.5 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (6x9x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0931 W/kg


**Zoom Scan (5x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.486 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.147 W/kg

**SAR(1 g) = 0.068 W/kg; SAR(10 g) = 0.037 W/kg**

Maximum value of SAR (measured) = 0.105 W/kg

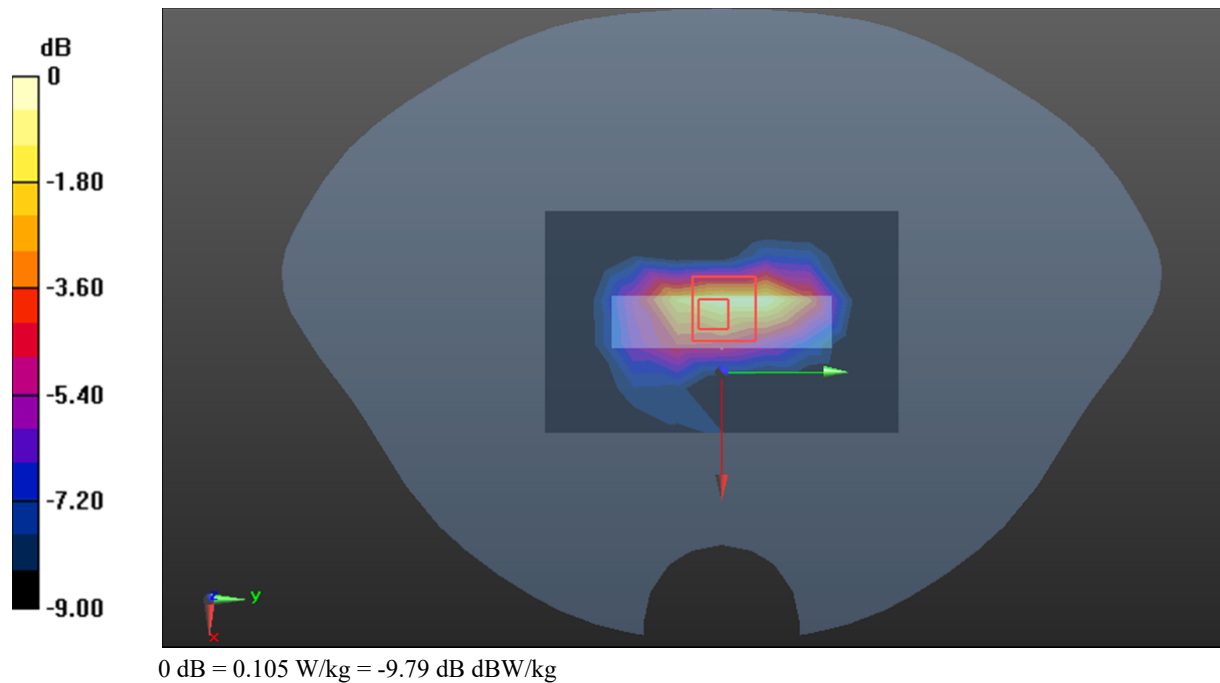

**Test Plot60#: LTE Band 26\_Body Bottom\_50%RB\_Middle\_Thin Battery****DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: Generic LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f=831.5$  MHz;  $\sigma = 0.921$  S/m;  $\epsilon_r = 41.364$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @831.5 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (6x9x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0769 W/kg


**Zoom Scan (5x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.678 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.122 W/kg

**SAR(1 g) = 0.056 W/kg; SAR(10 g) = 0.031 W/kg**

Maximum value of SAR (measured) = 0.0876 W/kg

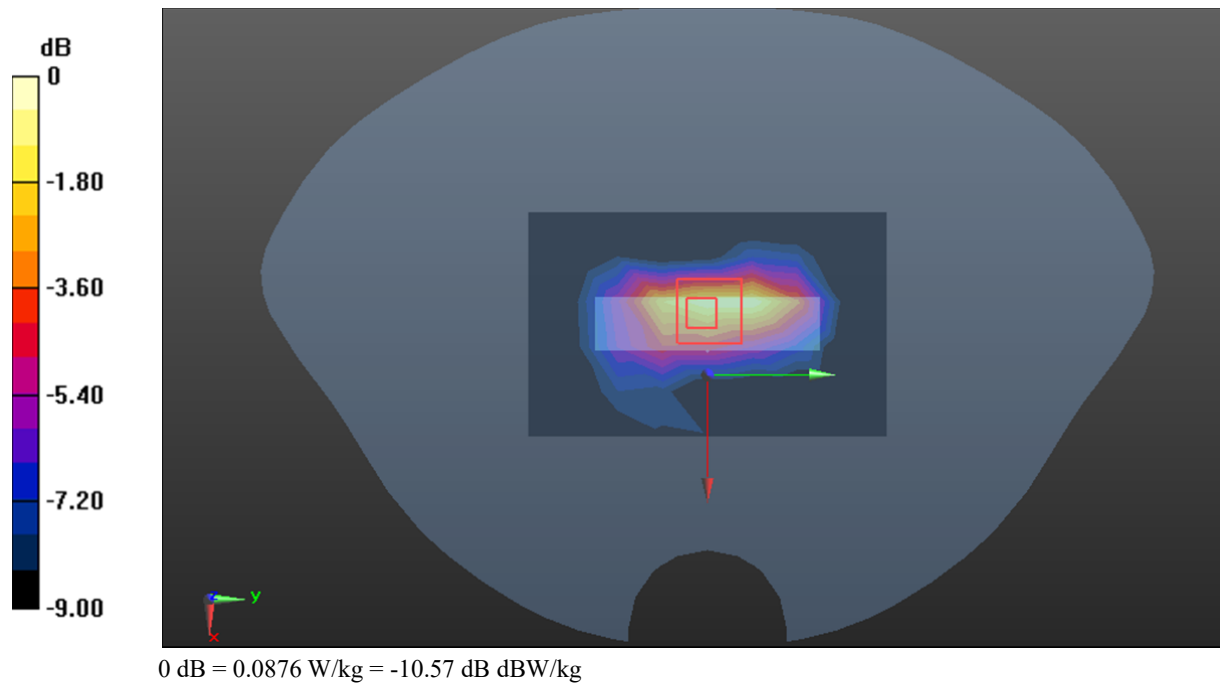

**Test Plot61#: LTE Band 41\_Body Front\_1RB\_Middle\_Thin Battery****DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: Generic LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.58  
Medium parameters used:  $f=2595$  MHz;  $\sigma = 1.945$  S/m;  $\epsilon_r = 38.743$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.23, 7.23, 7.23) @2595 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (10x16x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.165 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.566 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.214 W/kg

**SAR(1 g) = 0.118 W/kg; SAR(10 g) = 0.073 W/kg**

Maximum value of SAR (measured) = 0.174 W/kg

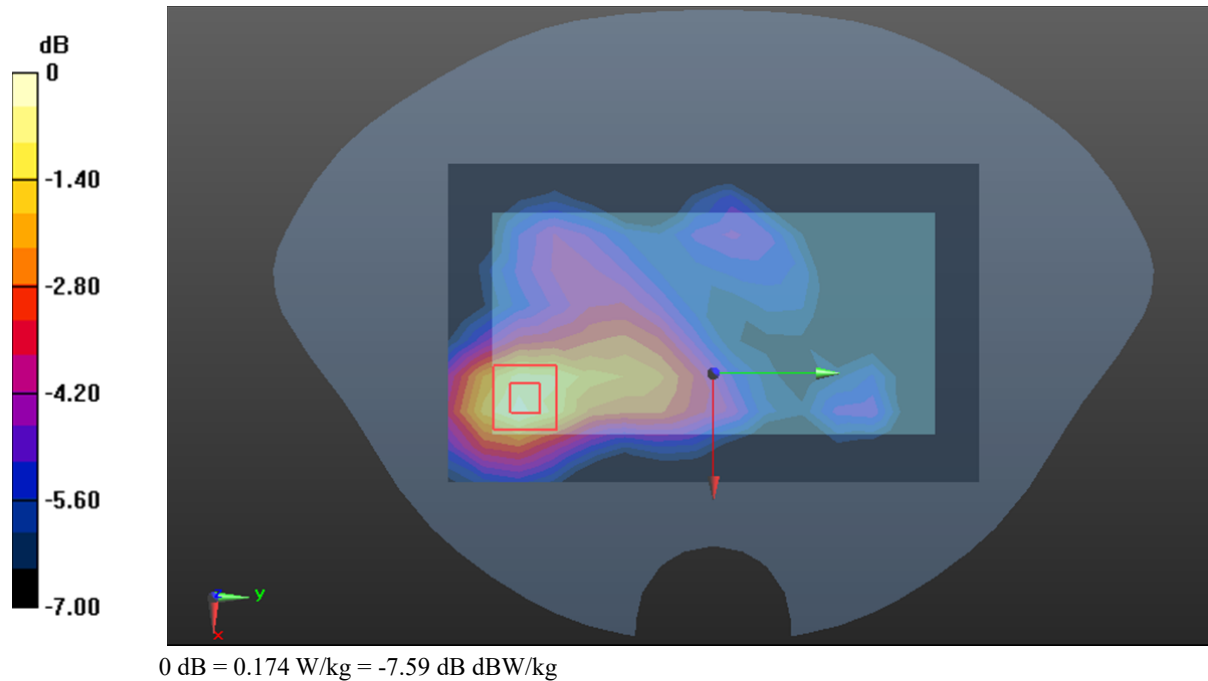

**Test Plot62#: LTE Band 41\_Body Front\_50%RB\_Middle\_Thin Battery****DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: Generic LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.58  
Medium parameters used:  $f=2595$  MHz;  $\sigma = 1.945$  S/m;  $\epsilon_r = 38.743$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.23, 7.23, 7.23) @2595 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (10x16x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.127 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.455 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.163 W/kg

**SAR(1 g) = 0.089 W/kg; SAR(10 g) = 0.057 W/kg**

Maximum value of SAR (measured) = 0.132 W/kg

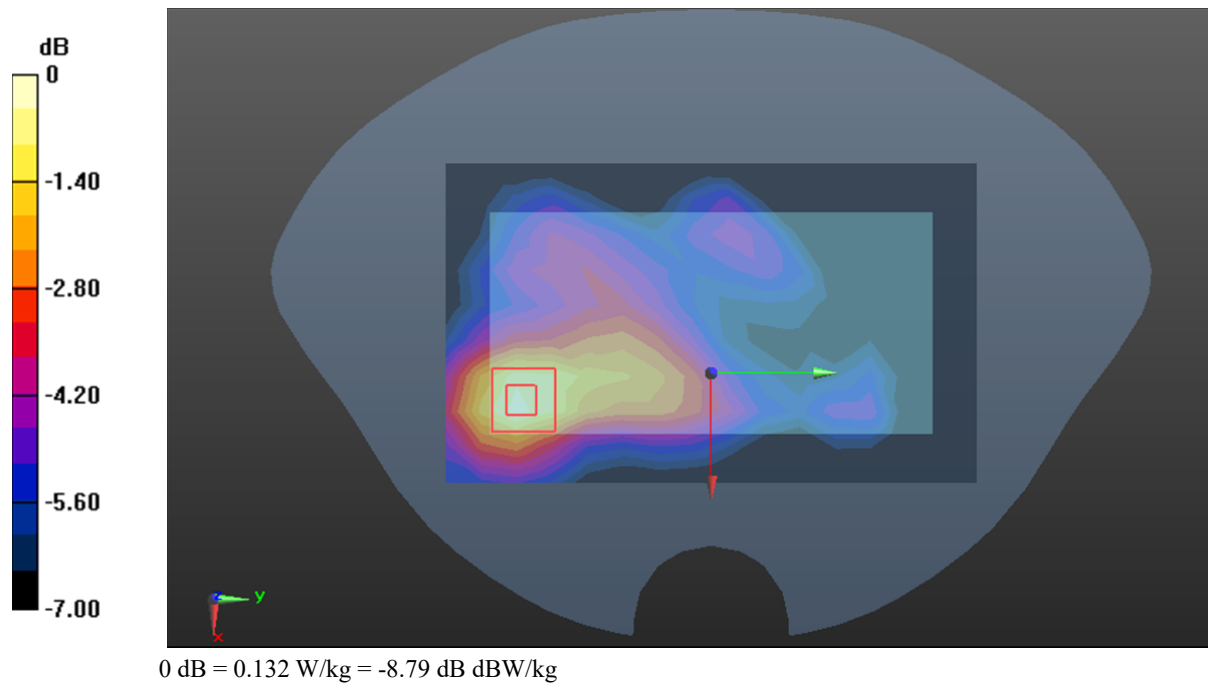

**Test Plot63#: LTE Band 41\_Body Back\_1RB\_Middle\_Thin Battery****DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: Generic LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.58  
Medium parameters used:  $f=2595$  MHz;  $\sigma = 1.945$  S/m;  $\epsilon_r = 38.743$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.23, 7.23, 7.23) @2595 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (10x16x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.244 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.990 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.330 W/kg

**SAR(1 g) = 0.155 W/kg; SAR(10 g) = 0.086 W/kg**

Maximum value of SAR (measured) = 0.255 W/kg

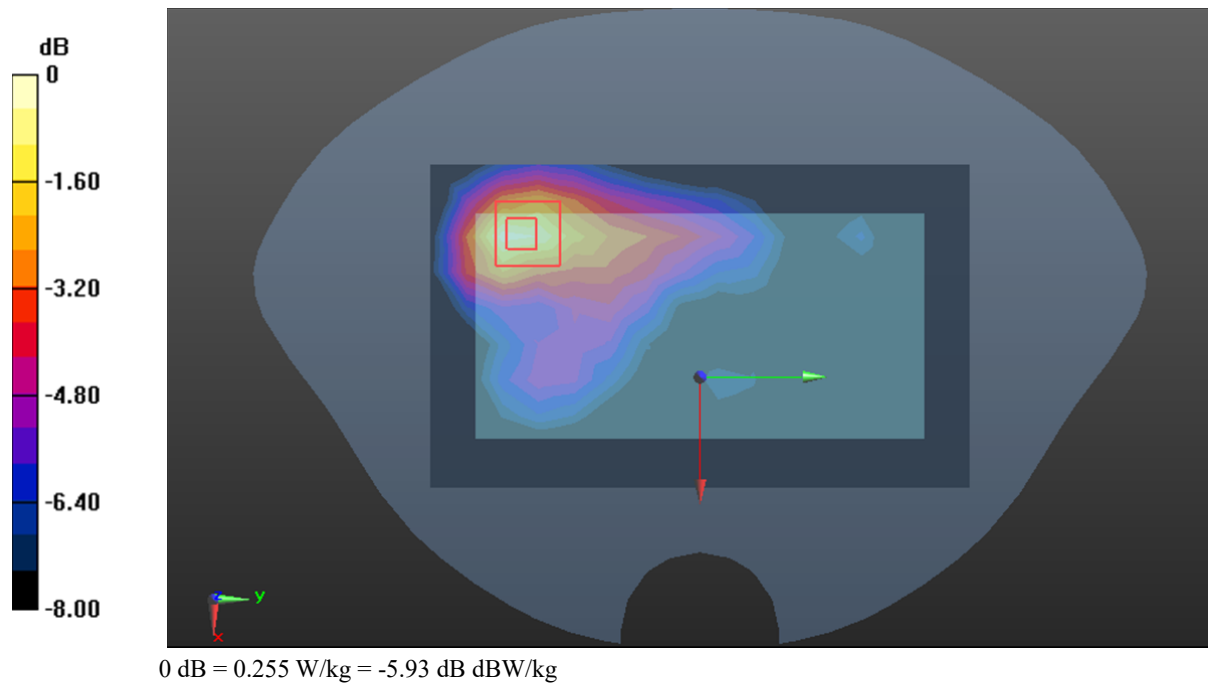

**Test Plot64#: LTE Band 41\_Body Back\_50%RB\_Middle\_Thin Battery****DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: Generic LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.58  
 Medium parameters used:  $f=2595$  MHz;  $\sigma = 1.945$  S/m;  $\epsilon_r = 38.743$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.23, 7.23, 7.23) @2595 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (10x16x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.185 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.081 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.252 W/kg

**SAR(1 g) = 0.123 W/kg; SAR(10 g) = 0.071 W/kg**

Maximum value of SAR (measured) = 0.195 W/kg

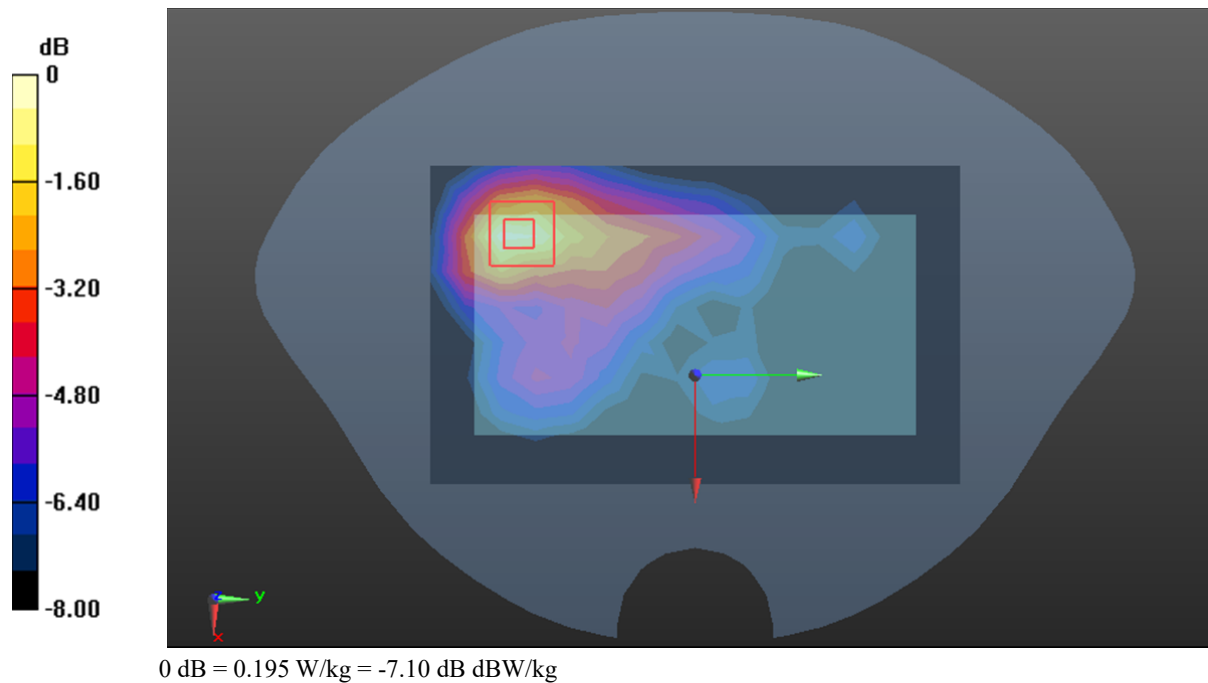



**Test Plot65#: LTE Band 41\_Body Left\_1RB\_Middle\_Thin Battery****DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: Generic LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.58

Medium parameters used:  $f=2595$  MHz;  $\sigma = 1.945$  S/m;  $\epsilon_r = 38.743$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.23, 7.23, 7.23) @ 2595 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7470)

**Area Scan (7x16x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0668 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.015 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.0760 W/kg

**SAR(1 g) = 0.053 W/kg; SAR(10 g) = 0.041 W/kg**

Maximum value of SAR (measured) = 0.0664 W/kg

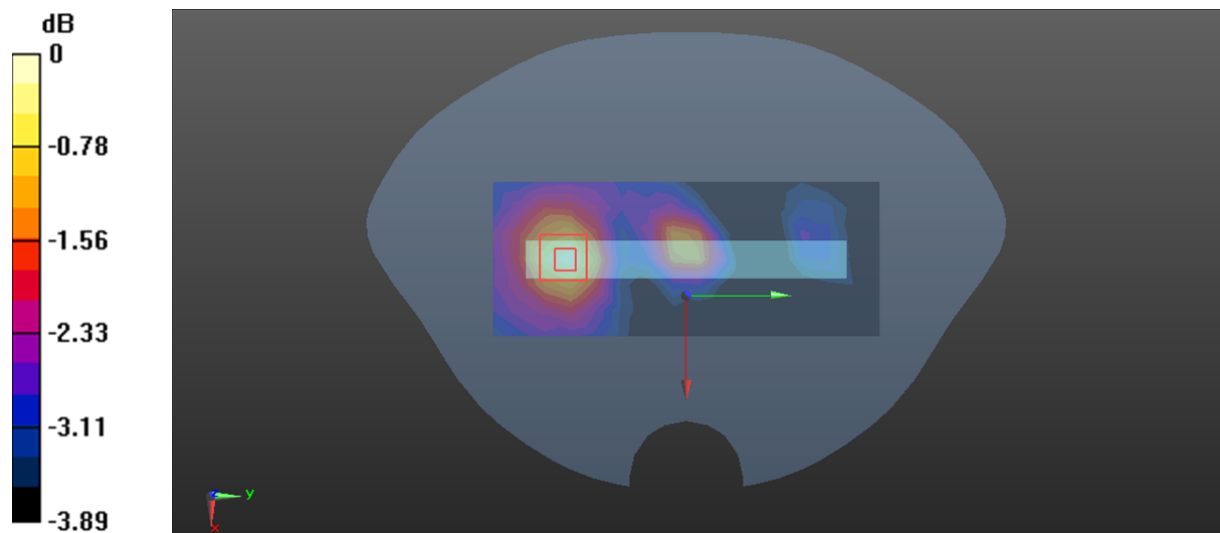

0 dB = 0.0664 W/kg = -11.78 dBW/kg

**Test Plot66#: LTE Band 41\_Body Left\_50%RB\_Middle\_Thin Battery****DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: Generic LTE (0); Frequency: 2595 MHz;Duty Cycle: 1:1.58  
Medium parameters used:  $f=2595$  MHz;  $\sigma = 1.945$  S/m;  $\epsilon_r = 38.743$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.23, 7.23, 7.23) @2595 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (7x16x1):**Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0594 W/kg


**Zoom Scan (5x5x7)/Cube 0:**Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.748 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.0680 W/kg

**SAR(1 g) = 0.050 W/kg; SAR(10 g) = 0.040 W/kg**

Maximum value of SAR (measured) = 0.0606 W/kg

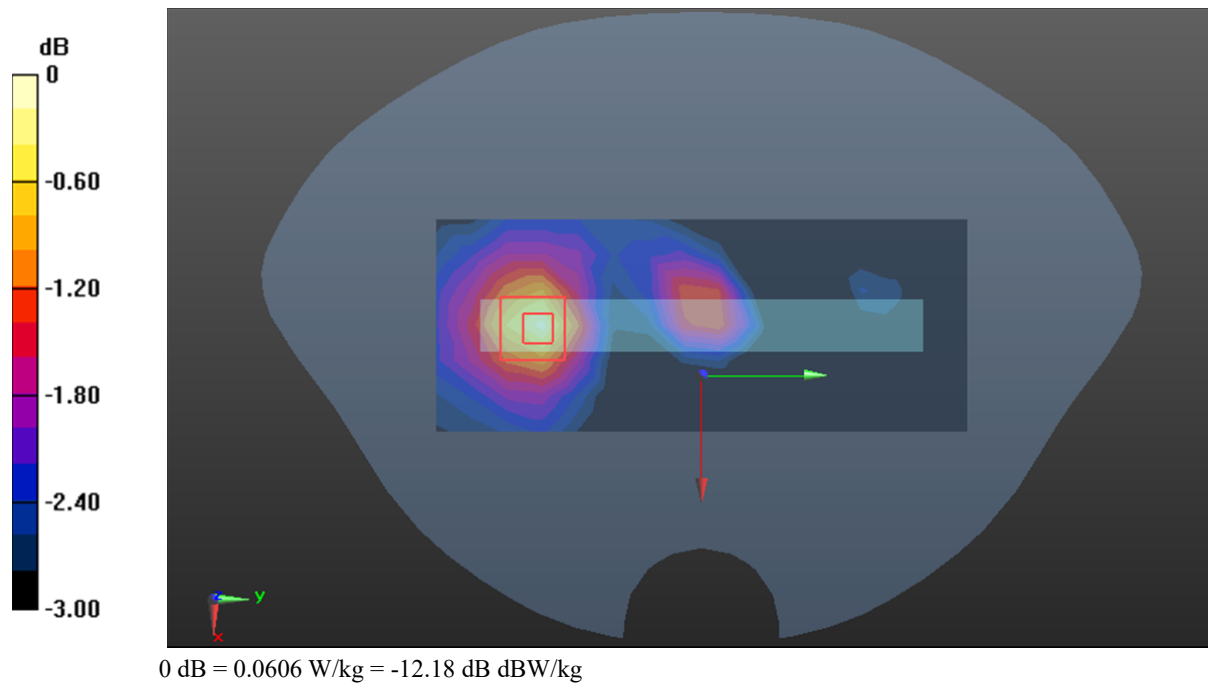

**Test Plot67#: LTE Band 41\_Body Right\_1RB\_Middle\_Thin Battery****DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: Generic LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.58  
Medium parameters used:  $f=2595$  MHz;  $\sigma = 1.945$  S/m;  $\epsilon_r = 38.743$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.23, 7.23, 7.23) @2595 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (7x16x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.292 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.022 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.389 W/kg

**SAR(1 g) = 0.203 W/kg; SAR(10 g) = 0.113 W/kg**

Maximum value of SAR (measured) = 0.314 W/kg

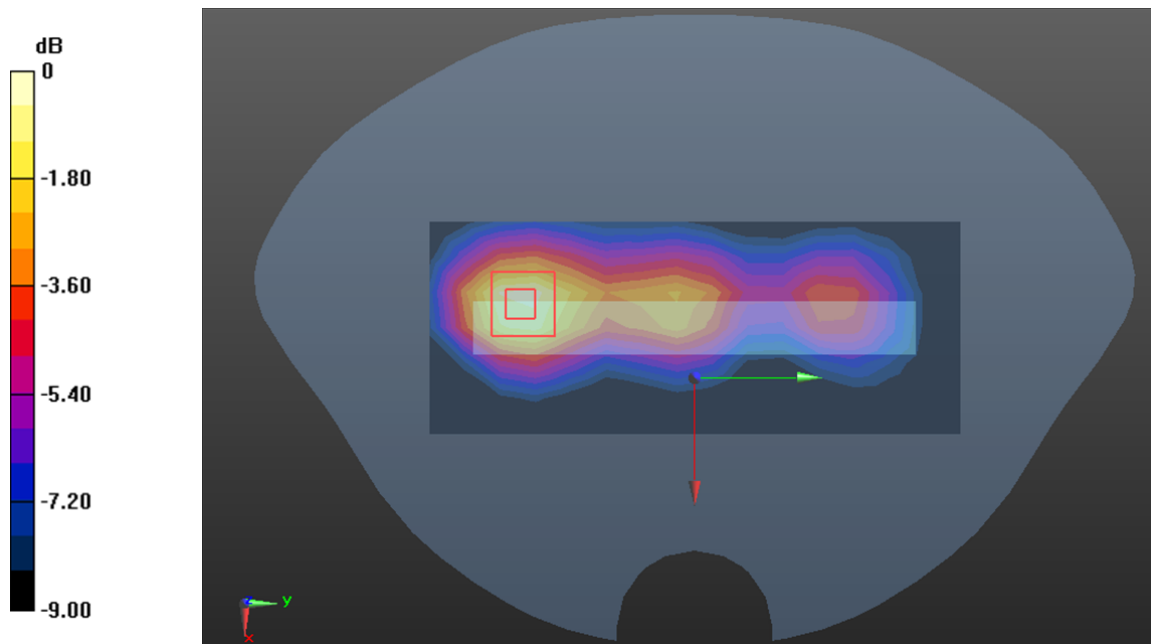

**Test Plot68#: LTE Band 41\_Body Right\_50%RB\_Middle\_Thin Battery****DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: Generic LTE (0); Frequency: 2595 MHz;Duty Cycle: 1:1.58  
Medium parameters used:  $f=2595$  MHz;  $\sigma = 1.945$  S/m;  $\epsilon_r = 38.743$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.23, 7.23, 7.23) @2595 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (7x16x1):**Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.243 W/kg


**Zoom Scan (5x5x7)/Cube 0:**Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.394 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.311 W/kg

**SAR(1 g) = 0.164 W/kg; SAR(10 g) = 0.094 W/kg**

Maximum value of SAR (measured) = 0.251 W/kg

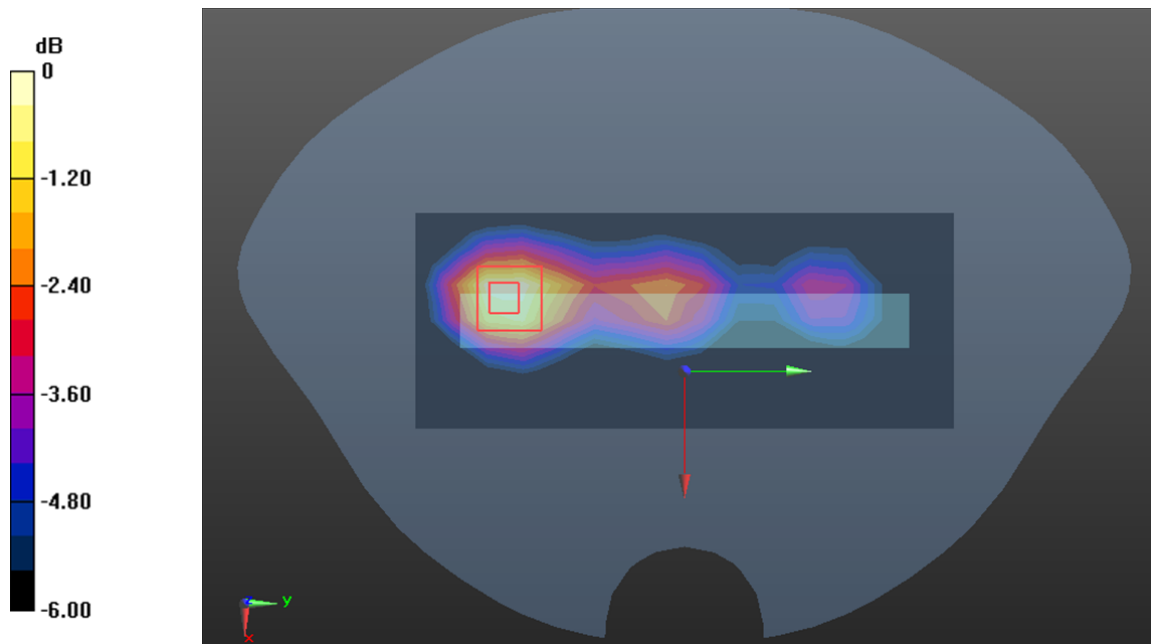

0 dB = 0.251 W/kg = -6.00 dB dBW/kg

**Test Plot69#: LTE Band 41\_Body Bottom\_1RB\_Middle\_Thin Battery****DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: Generic LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.58  
Medium parameters used:  $f=2595$  MHz;  $\sigma = 1.945$  S/m;  $\epsilon_r = 38.743$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.23, 7.23, 7.23) @2595 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (6x11x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0895 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.960 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.127 W/kg

**SAR(1 g) = 0.067 W/kg; SAR(10 g) = 0.044 W/kg**

Maximum value of SAR (measured) = 0.0996 W/kg

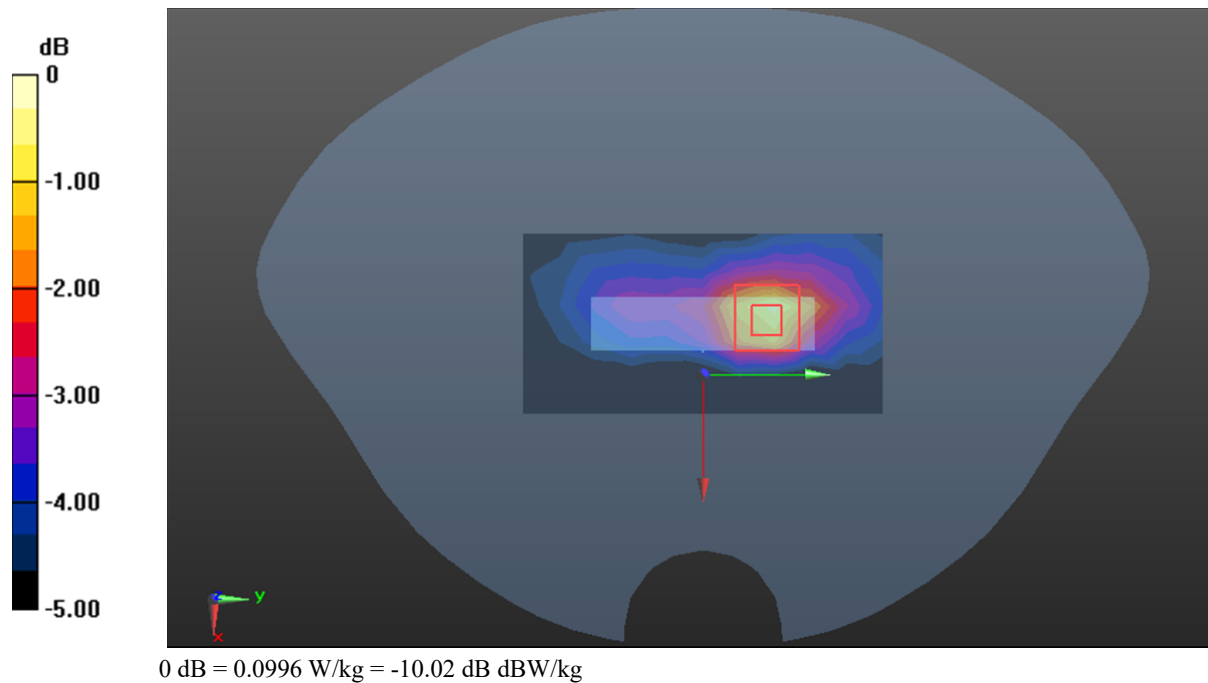

**Test Plot70#: LTE Band 41\_Body Bottom\_50%RB\_Middle\_Thin Battery****DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: Generic LTE (0); Frequency: 2595 MHz;Duty Cycle: 1:1.58  
Medium parameters used:  $f=2595$  MHz;  $\sigma = 1.945$  S/m;  $\epsilon_r = 38.743$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.23, 7.23, 7.23) @2595 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (6x11x1):**Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0738 W/kg


**Zoom Scan (5x5x7)/Cube 0:**Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.624 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.100 W/kg

**SAR(1 g) = 0.057 W/kg; SAR(10 g) = 0.039 W/kg**

Maximum value of SAR (measured) = 0.0798 W/kg

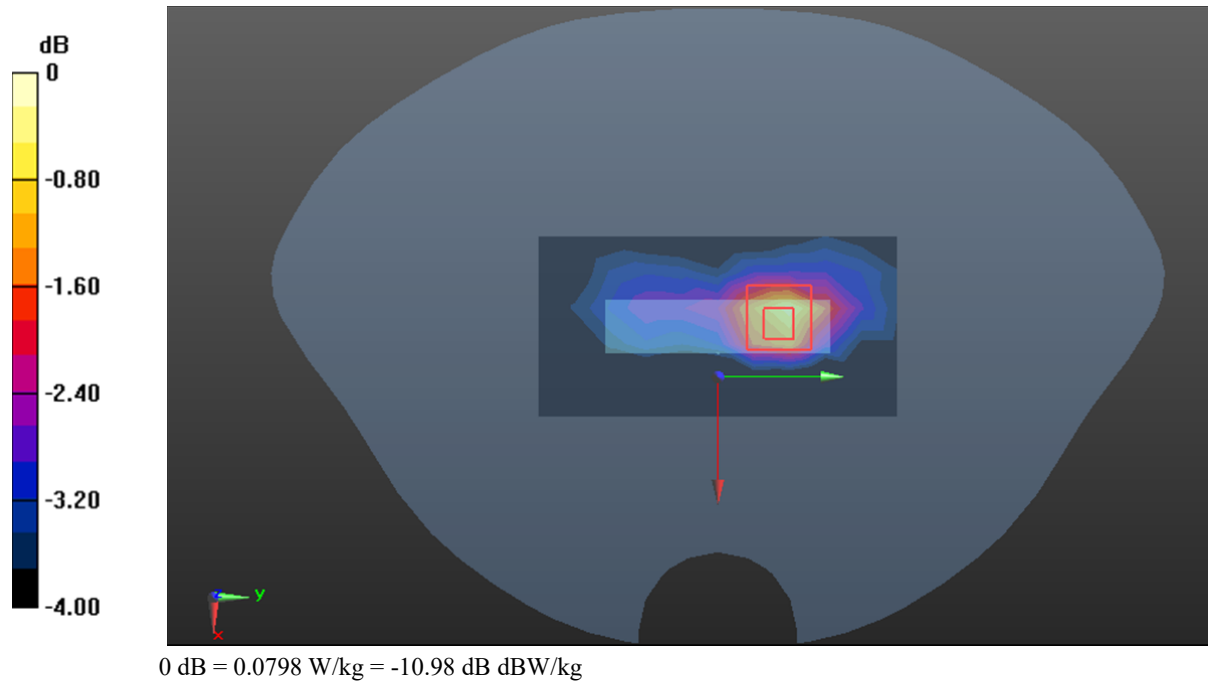

**Test Plot71#: LTE Band 66\_Body Front\_1RB\_Middle\_Thin Battery****DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: Generic LTE (0); Frequency: 1745 MHz;Duty Cycle: 1:1  
Medium parameters used:  $f=1745$  MHz;  $\sigma = 1.334$  S/m;  $\epsilon_r = 40.095$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.15, 8.15, 8.15) @1745 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x13x1):**Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.457 W/kg


**Zoom Scan (5x5x7)/Cube 0:**Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.635 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.564 W/kg

**SAR(1 g) = 0.310 W/kg; SAR(10 g) = 0.188 W/kg**

Maximum value of SAR (measured) = 0.466 W/kg

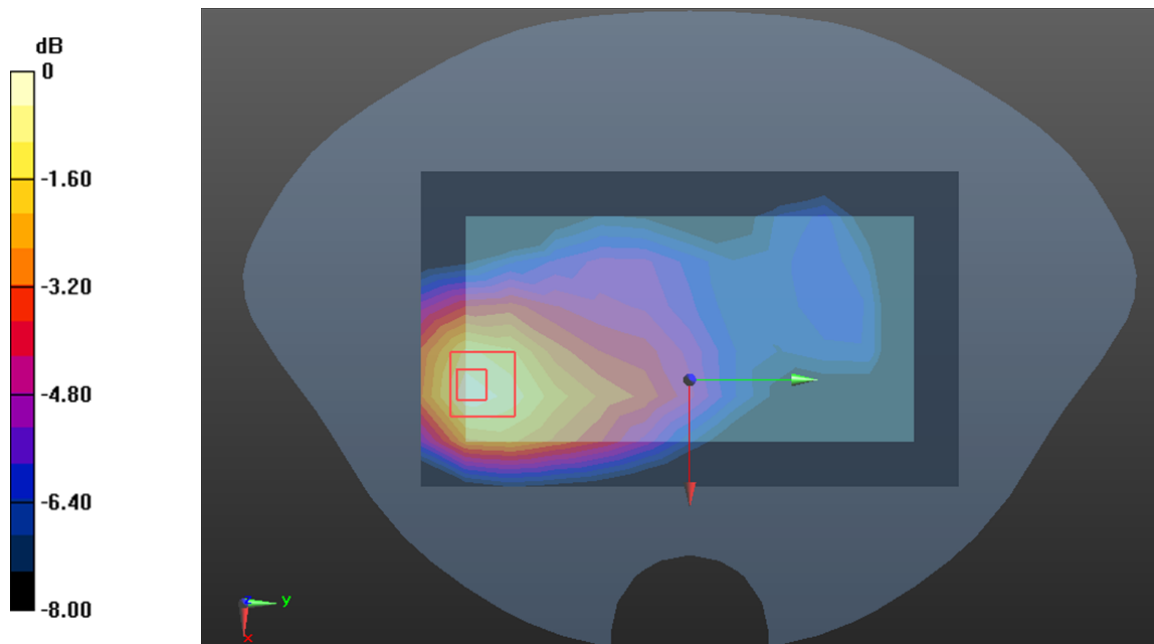

0 dB = 0.466 W/kg = -3.32 dB dBW/kg

**Test Plot72#: LTE Band 66\_Body Front\_50%RB\_Middle\_Thin Battery****DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: Generic LTE (0); Frequency: 1745 MHz;Duty Cycle: 1:1  
Medium parameters used:  $f=1745$  MHz;  $\sigma = 1.334$  S/m;  $\epsilon_r = 40.095$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.15, 8.15, 8.15) @1745 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x13x1):**Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.358 W/kg


**Zoom Scan (5x5x7)/Cube 0:**Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.707 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.441 W/kg

**SAR(1 g) = 0.242 W/kg; SAR(10 g) = 0.149 W/kg**

Maximum value of SAR (measured) = 0.355 W/kg

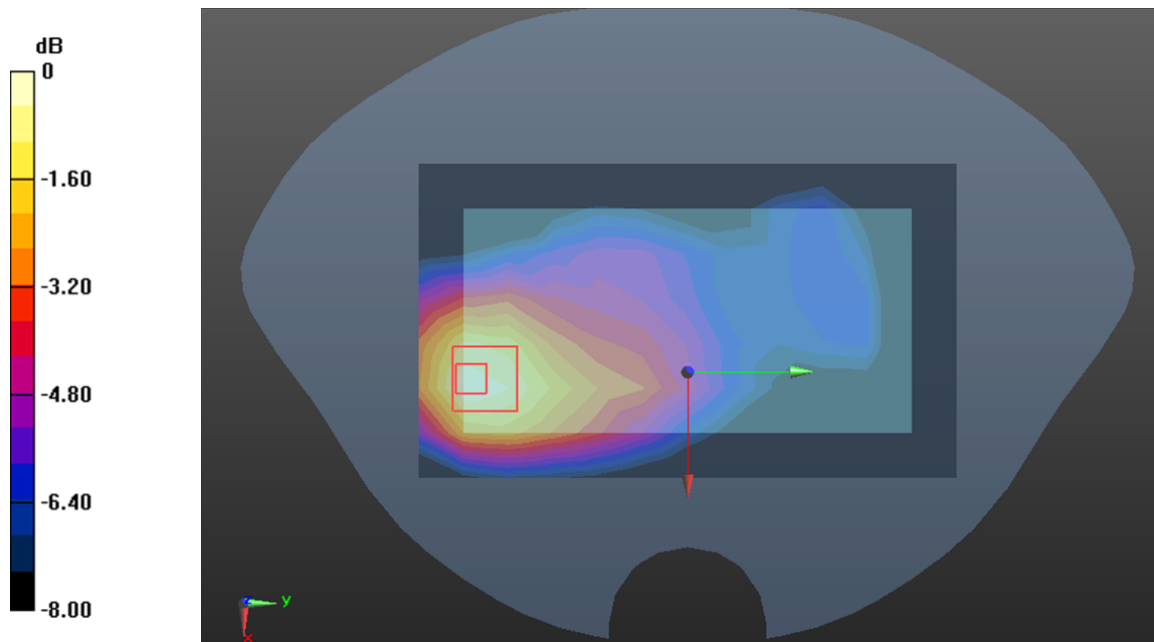

0 dB = 0.355 W/kg = -4.50 dB dBW/kg



**Test Plot73#: LTE Band 66\_Body Back\_1RB\_Middle\_Thin Battery****DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: Generic LTE (0); Frequency: 1745 MHz;Duty Cycle: 1:1  
Medium parameters used:  $f=1745$  MHz;  $\sigma = 1.334$  S/m;  $\epsilon_r = 40.095$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.15, 8.15, 8.15) @1745 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x13x1):**Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.308 W/kg


**Zoom Scan (5x5x7)/Cube 0:**Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.686 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.548 W/kg

**SAR(1 g) = 0.298 W/kg; SAR(10 g) = 0.164 W/kg**

Maximum value of SAR (measured) = 0.326 W/kg

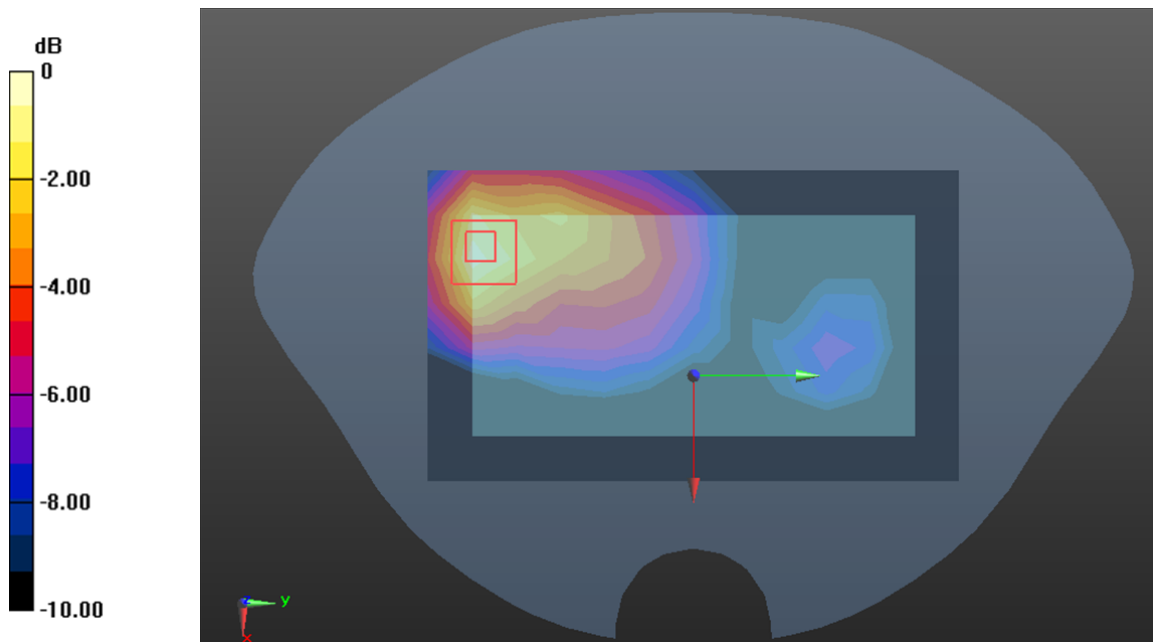

0 dB = 0.326 W/kg = -4.87 dB dBW/kg

**Test Plot74#: LTE Band 66\_Body Back\_50%RB\_Middle\_Thin Battery****DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: Generic LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f=1745$  MHz;  $\sigma = 1.334$  S/m;  $\epsilon_r = 40.095$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.15, 8.15, 8.15) @1745 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x13x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.275 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.278 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.492 W/kg

**SAR(1 g) = 0.266 W/kg; SAR(10 g) = 0.146 W/kg**

Maximum value of SAR (measured) = 0.292 W/kg

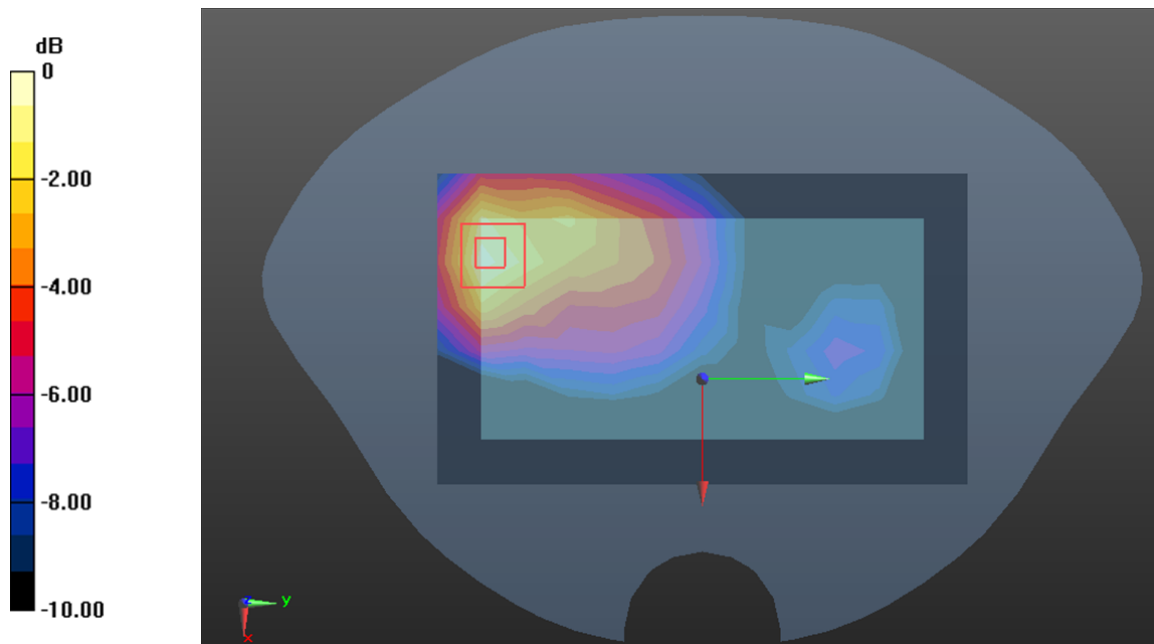

0 dB = 0.292 W/kg = -5.35 dB dBW/kg

**Test Plot75#: LTE Band 66\_Body Left\_1RB\_Middle\_Thin Battery****DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: Generic LTE (0); Frequency: 1745 MHz;Duty Cycle: 1:1  
Medium parameters used:  $f=1745$  MHz;  $\sigma = 1.334$  S/m;  $\epsilon_r = 40.095$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.15, 8.15, 8.15) @1745 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (6x13x1):**Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.102 W/kg


**Zoom Scan (5x5x7)/Cube 0:**Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.809 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.127 W/kg

**SAR(1 g) = 0.073 W/kg; SAR(10 g) = 0.045 W/kg**

Maximum value of SAR (measured) = 0.104 W/kg

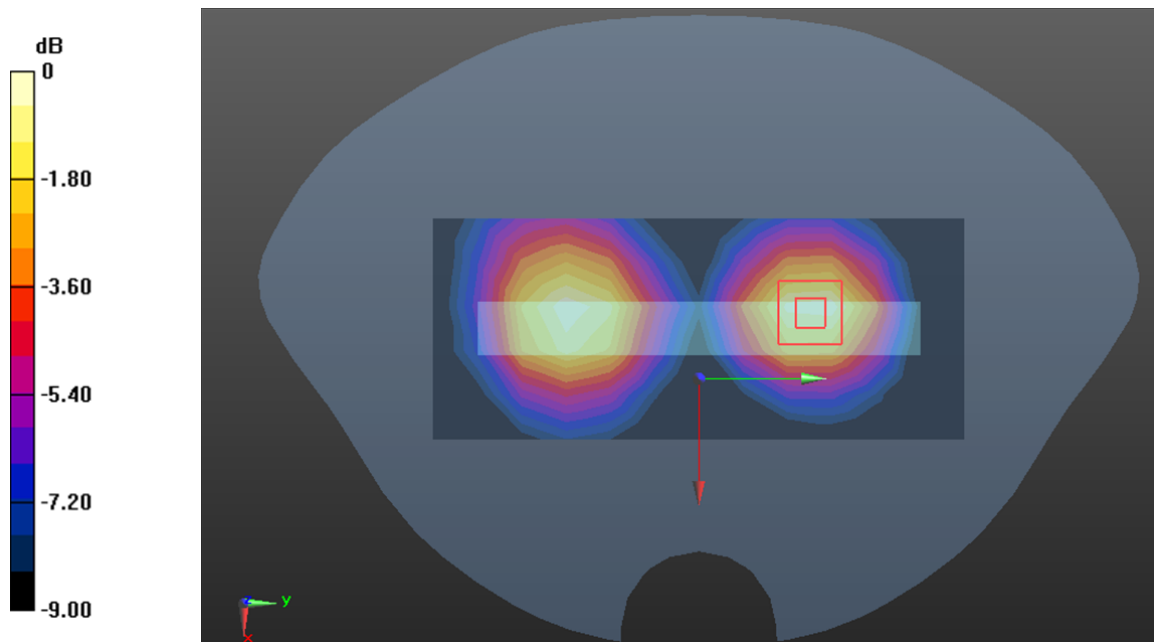

0 dB = 0.104 W/kg = -9.83 dB dBW/kg

**Test Plot76#: LTE Band 66\_Body Left\_50%RB\_Middle\_Thin Battery****DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: Generic LTE (0); Frequency: 1745 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $f=1745$  MHz;  $\sigma = 1.334$  S/m;  $\epsilon_r = 40.095$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.15, 8.15, 8.15) @1745 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (6x13x1):**Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0834 W/kg


**Zoom Scan (5x5x7)/Cube 0:**Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.481 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.102 W/kg

**SAR(1 g) = 0.060 W/kg; SAR(10 g) = 0.038 W/kg**

Maximum value of SAR (measured) = 0.0860 W/kg

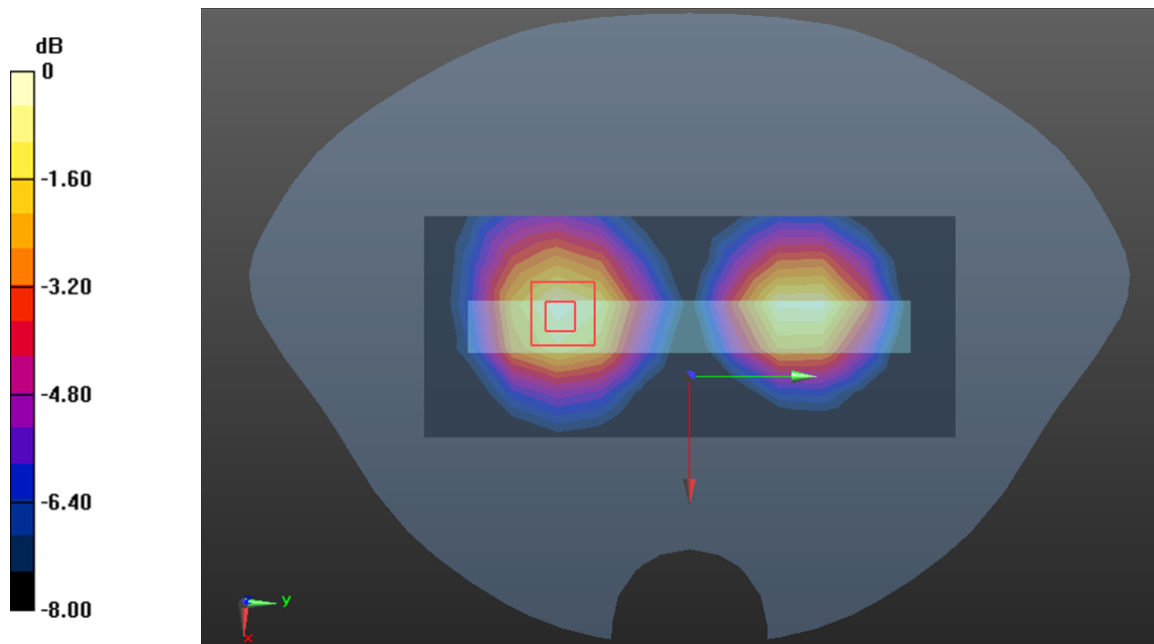

0 dB = 0.0860 W/kg = -10.66 dB dBW/kg

**Test Plot77#: LTE Band 66\_Body Right\_1RB\_Middle\_Thin Battery****DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: Generic LTE (0); Frequency: 1745 MHz;Duty Cycle: 1:1  
Medium parameters used:  $f=1745$  MHz;  $\sigma = 1.334$  S/m;  $\epsilon_r = 40.095$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.15, 8.15, 8.15) @1745 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (6x13x1):**Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.526 W/kg


**Zoom Scan (5x5x7)/Cube 0:**Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.11 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.715 W/kg

**SAR(1 g) = 0.407 W/kg; SAR(10 g) = 0.238 W/kg**

Maximum value of SAR (measured) = 0.591 W/kg

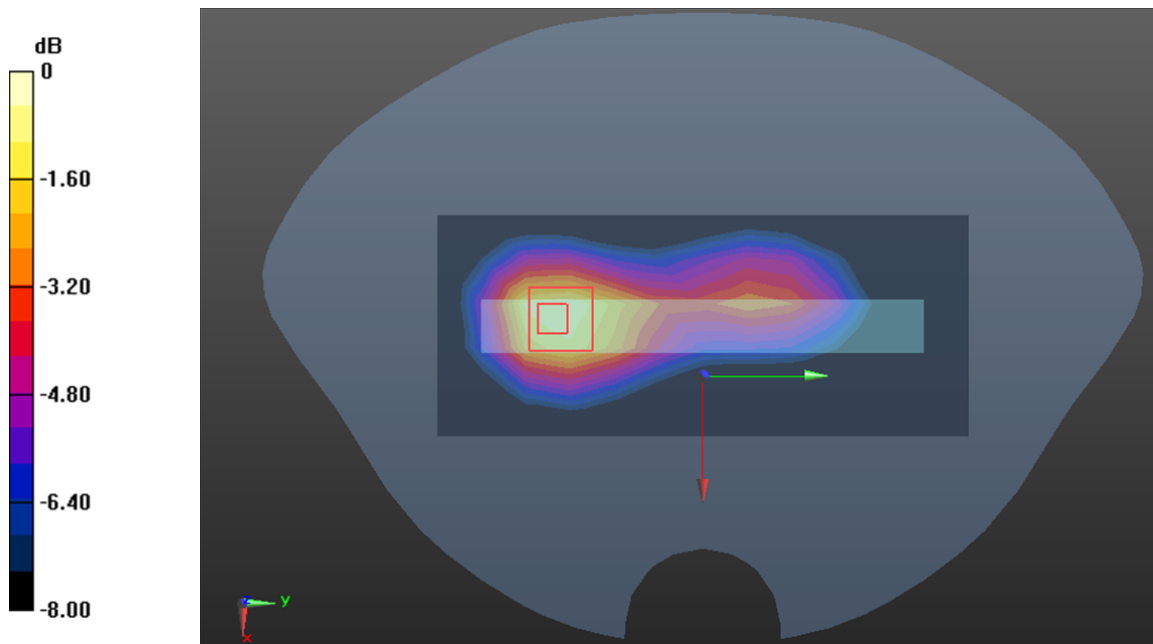

0 dB = 0.591 W/kg = -2.28 dB dBW/kg

**Test Plot78#: LTE Band 66\_Body Right\_50%RB\_Middle\_Thin Battery****DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: Generic LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f=1745$  MHz;  $\sigma = 1.334$  S/m;  $\epsilon_r = 40.095$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.15, 8.15, 8.15) @1745 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (6x13x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.421 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.745 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.571 W/kg

**SAR(1 g) = 0.325 W/kg; SAR(10 g) = 0.190 W/kg**

Maximum value of SAR (measured) = 0.475 W/kg

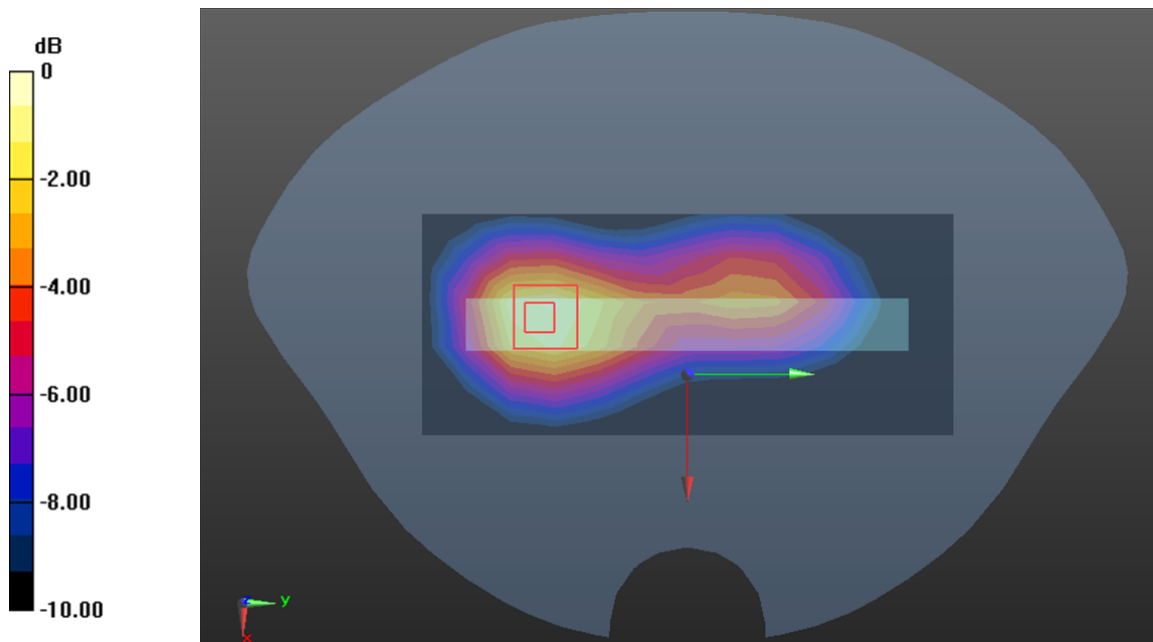

0 dB = 0.475 W/kg = -3.23 dB dBW/kg

**Test Plot79#: LTE Band 66\_Body Bottom\_1RB\_Middle\_Thin Battery****DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: Generic LTE (0); Frequency: 1745 MHz;Duty Cycle: 1:1  
Medium parameters used:  $f=1745$  MHz;  $\sigma = 1.334$  S/m;  $\epsilon_r = 40.095$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.15, 8.15, 8.15) @1745 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (5x8x1):**Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.390 W/kg


**Zoom Scan (5x5x7)/Cube 0:**Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.67 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.614 W/kg

**SAR(1 g) = 0.356 W/kg; SAR(10 g) = 0.197 W/kg**

Maximum value of SAR (measured) = 0.392 W/kg

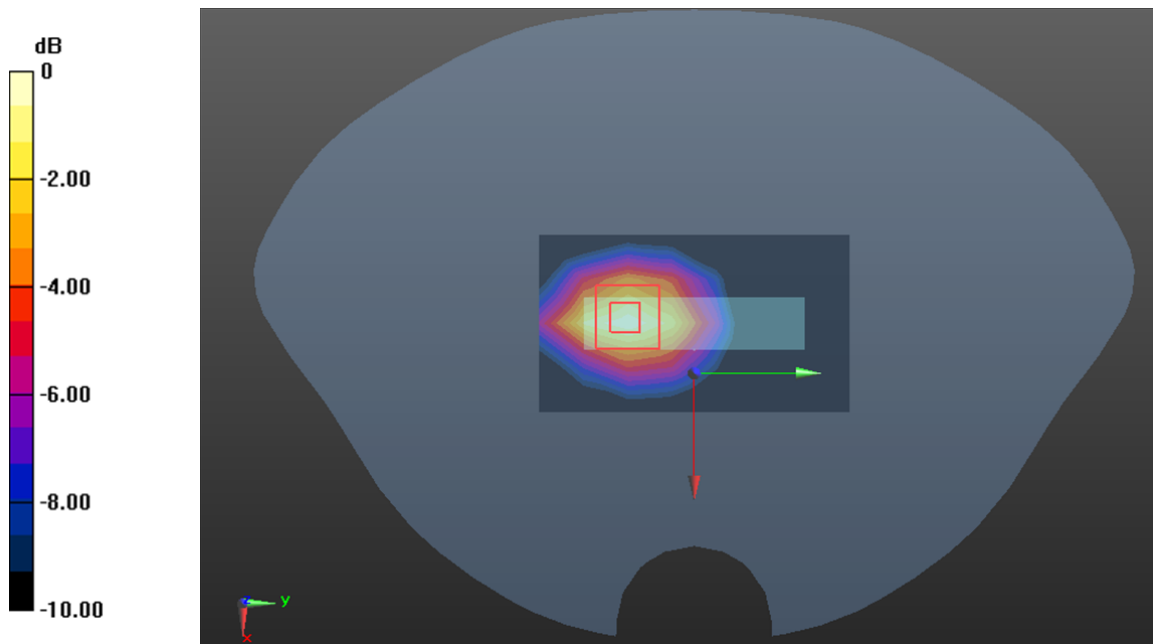

0 dB = 0.392 W/kg = -4.07 dB dBW/kg

**Test Plot80#: LTE Band 66\_Body Bottom\_50%RB\_Middle\_Thin Battery****DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: Generic LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f=1745$  MHz;  $\sigma = 1.334$  S/m;  $\epsilon_r = 40.095$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.15, 8.15, 8.15) @1745 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (5x8x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.348 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.06 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.557 W/kg

**SAR(1 g) = 0.321 W/kg; SAR(10 g) = 0.178 W/kg**

Maximum value of SAR (measured) = 0.351 W/kg

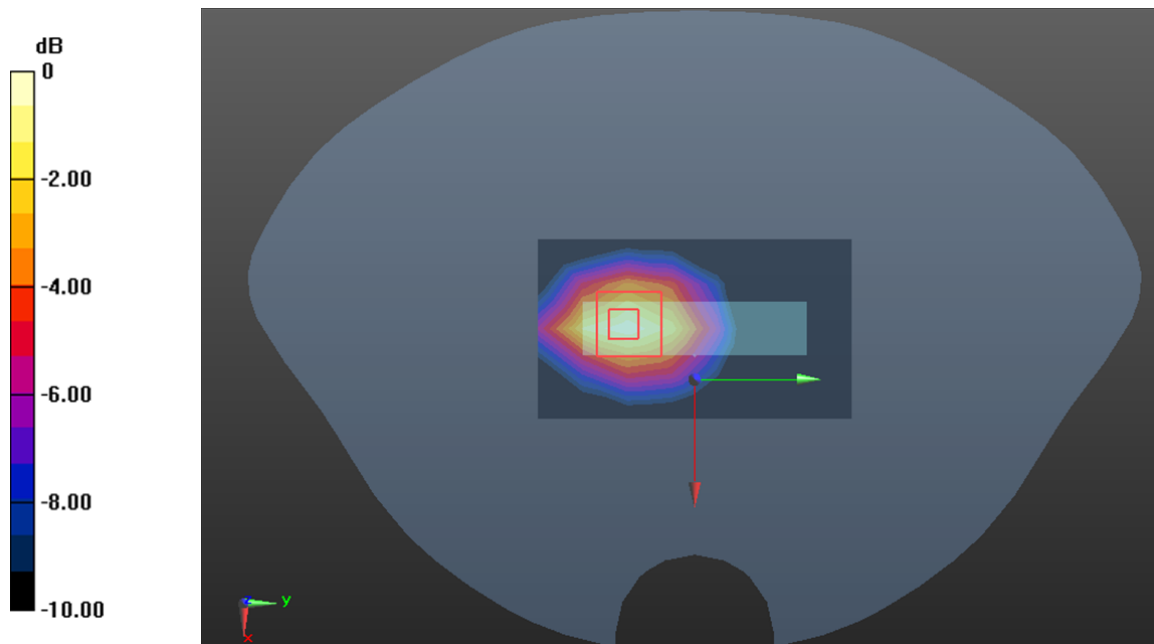

0 dB = 0.351 W/kg = -4.55 dB dBW/kg



**Test Plot81#: LTE Band 71\_Body Front\_1RB\_Middle\_Thin Battery****DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: Generic LTE (0); Frequency: 680.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f=680.5$  MHz;  $\sigma = 0.852$  S/m;  $\epsilon_r = 42.694$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @680.5 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x13x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0473 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.700 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.0550 W/kg

**SAR(1 g) = 0.038 W/kg; SAR(10 g) = 0.029 W/kg**

Maximum value of SAR (measured) = 0.0475 W/kg

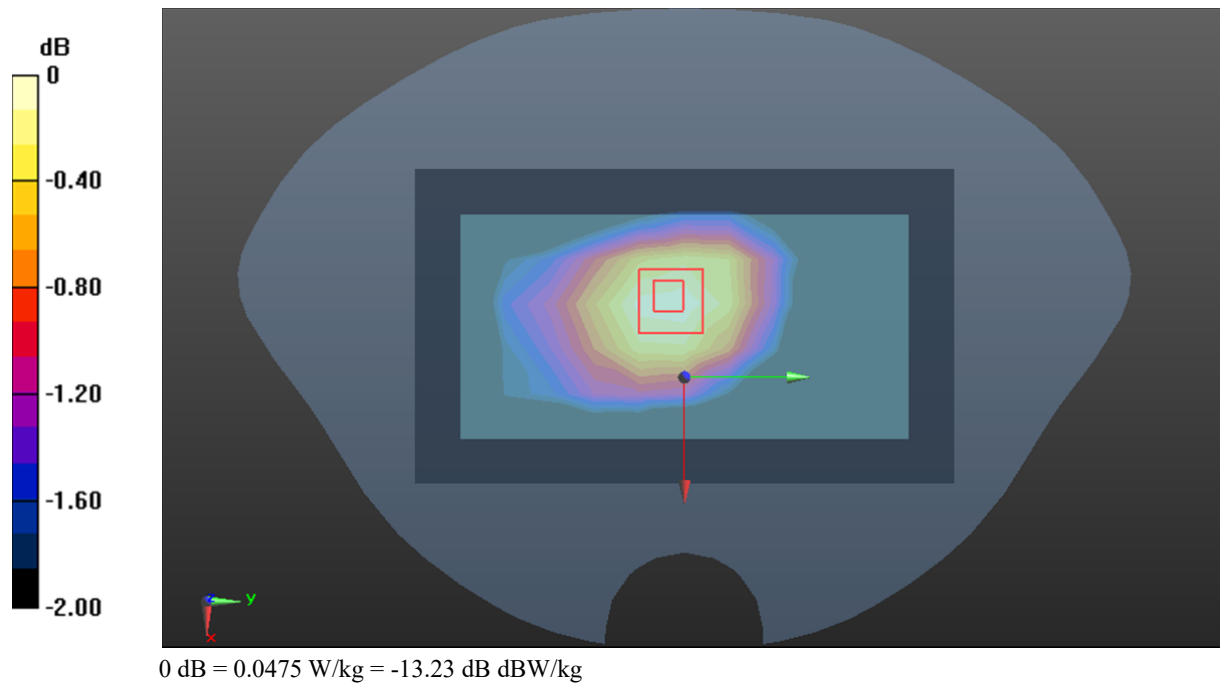

**Test Plot82#: LTE Band 71\_Body Front\_50%RB\_Middle\_Thin Battery****DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: Generic LTE (0); Frequency: 680.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f=680.5$  MHz;  $\sigma = 0.852$  S/m;  $\epsilon_r = 42.694$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @680.5 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x13x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0337 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.715 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.0360 W/kg

**SAR(1 g) = 0.027 W/kg; SAR(10 g) = 0.021 W/kg**

Maximum value of SAR (measured) = 0.0329 W/kg

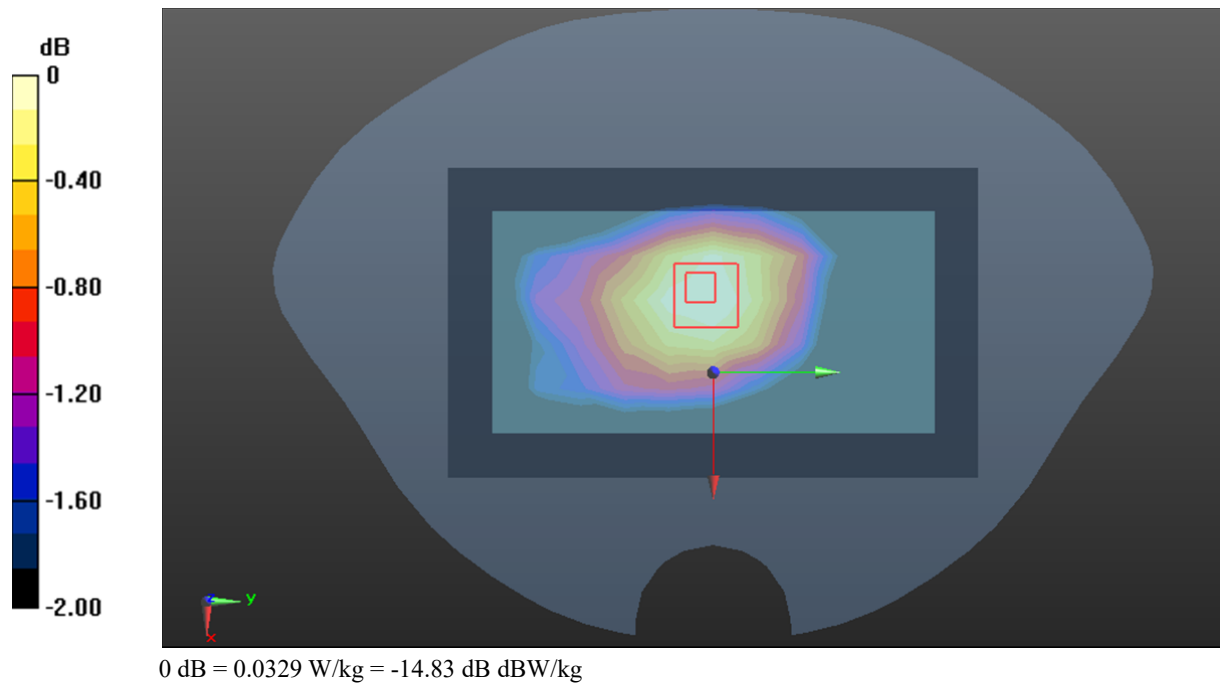

**Test Plot83#: LTE Band 71\_Body Back\_1RB\_Middle\_Thin Battery****DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: Generic LTE (0); Frequency: 680.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f=680.5$  MHz;  $\sigma = 0.852$  S/m;  $\epsilon_r = 42.694$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @680.5 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x13x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0765 W/kg


**Zoom Scan (7x8x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.322 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.110 W/kg

**SAR(1 g) = 0.055 W/kg; SAR(10 g) = 0.039 W/kg**

Maximum value of SAR (measured) = 0.0836 W/kg

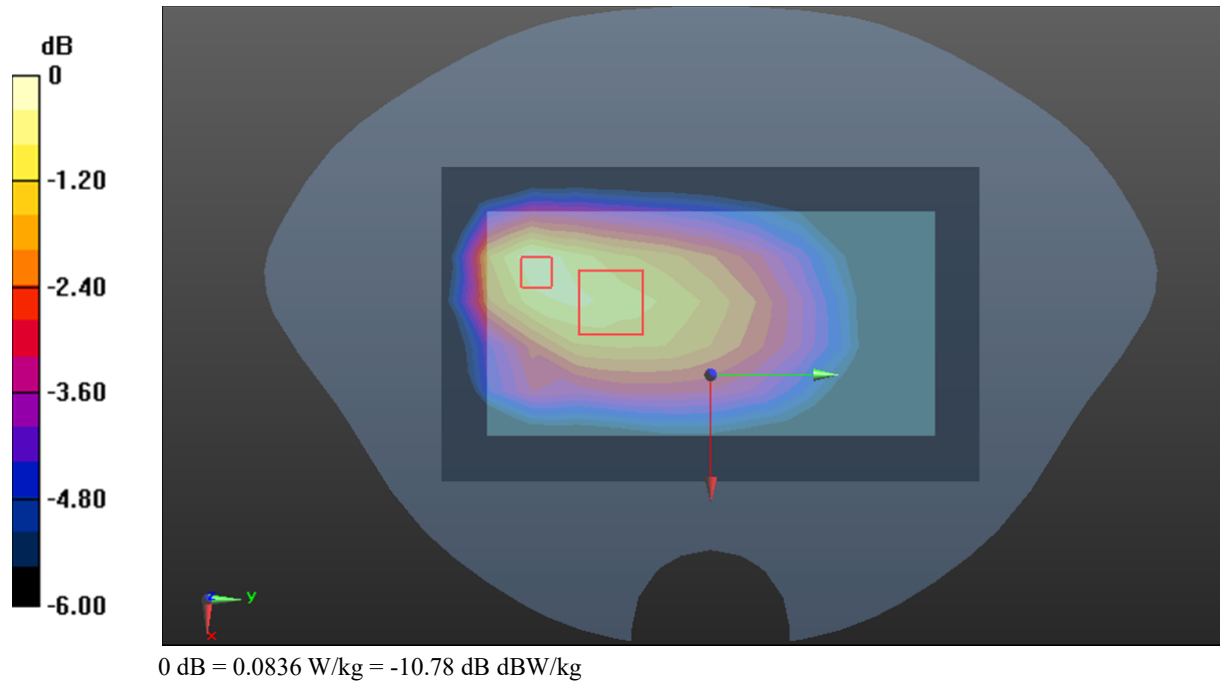

**Test Plot84#: LTE Band 71\_Body Back\_50%RB\_Middle\_Thin Battery****DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: Generic LTE (0); Frequency: 680.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f=680.5$  MHz;  $\sigma = 0.852$  S/m;  $\epsilon_r = 42.694$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @680.5 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x13x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0412 W/kg


**Zoom Scan (7x8x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.383 V/m; Power Drift = -0.1 dB

Peak SAR (extrapolated) = 0.0580 W/kg

**SAR(1 g) = 0.031 W/kg; SAR(10 g) = 0.023 W/kg**

Maximum value of SAR (measured) = 0.0445 W/kg

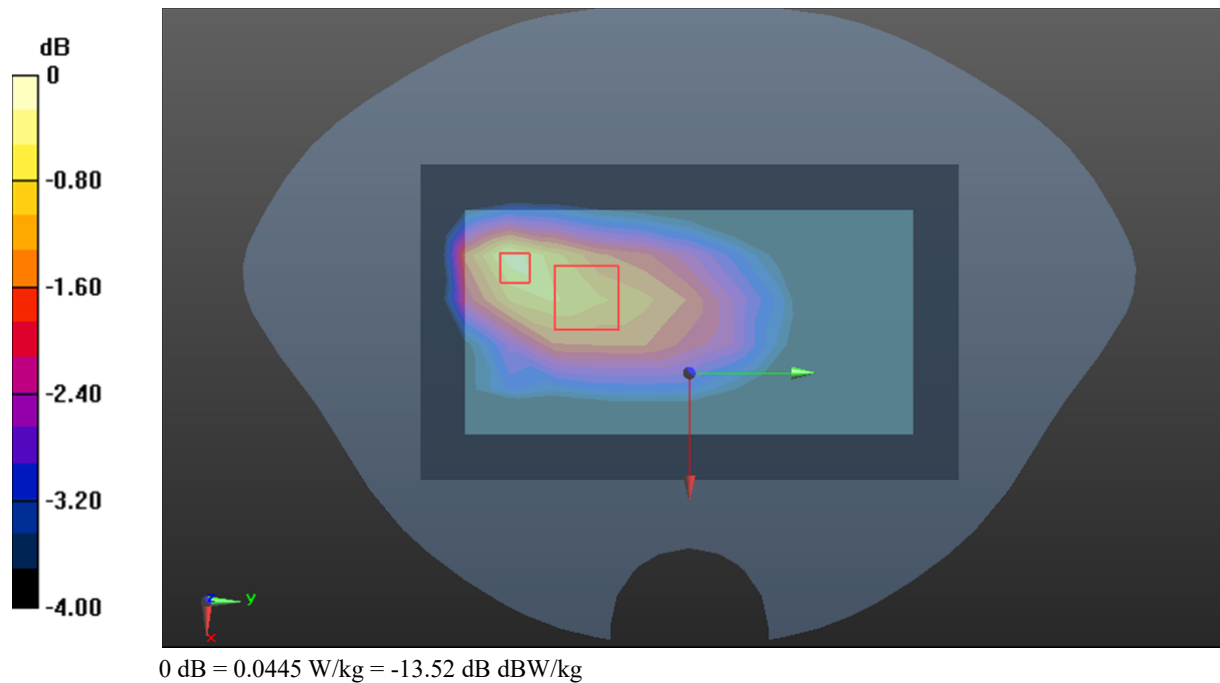

**Test Plot85#: LTE Band 71\_Body Left\_1RB\_Middle\_Thin Battery****DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: Generic LTE (0); Frequency: 680.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f=680.5$  MHz;  $\sigma=0.852$  S/m;  $\epsilon_r=42.694$ ;  $\rho=1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @680.5 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (5x13x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0786 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.335 V/m; Power Drift = 0.1 dB

Peak SAR (extrapolated) = 0.0900 W/kg

**SAR(1 g) = 0.056 W/kg; SAR(10 g) = 0.040 W/kg**

Maximum value of SAR (measured) = 0.0755 W/kg

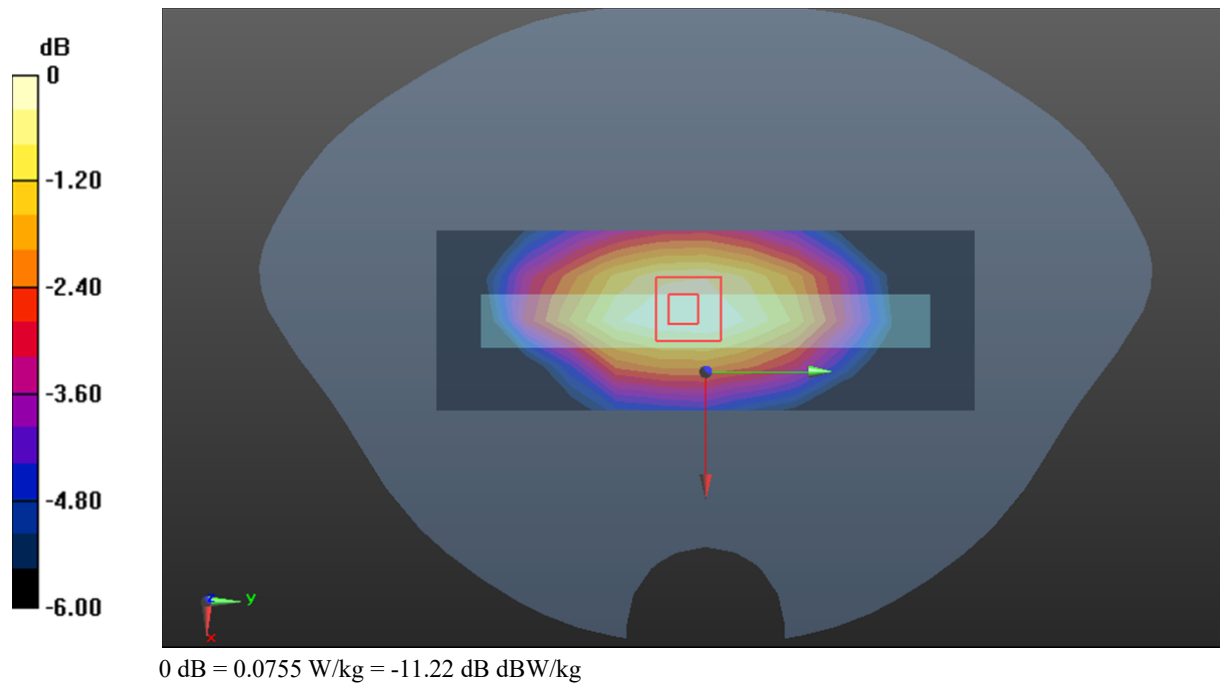

**Test Plot86#: LTE Band 71\_Body Left\_50%RB\_Middle\_Thin Battery****DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: Generic LTE (0); Frequency: 680.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f=680.5$  MHz;  $\sigma = 0.852$  S/m;  $\epsilon_r = 42.694$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @680.5 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (5x13x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0672 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.885 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.0810 W/kg

**SAR(1 g) = 0.051 W/kg; SAR(10 g) = 0.037 W/kg**

Maximum value of SAR (measured) = 0.0683 W/kg

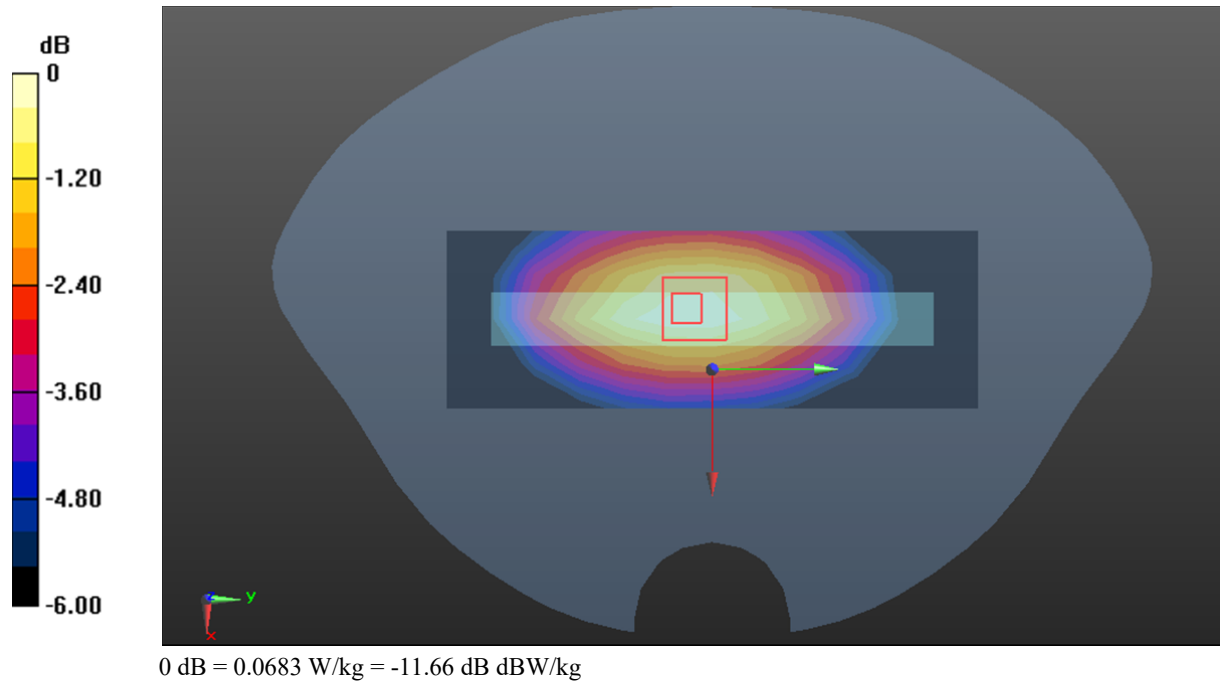

**Test Plot87#: LTE Band 71\_Body Right\_1RB\_Middle\_Thin Battery****DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: Generic LTE (0); Frequency: 680.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f=680.5$  MHz;  $\sigma = 0.852$  S/m;  $\epsilon_r = 42.694$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @680.5 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (5x13x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0632 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.635 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.0750 W/kg

**SAR(1 g) = 0.047 W/kg; SAR(10 g) = 0.034 W/kg**

Maximum value of SAR (measured) = 0.0632 W/kg

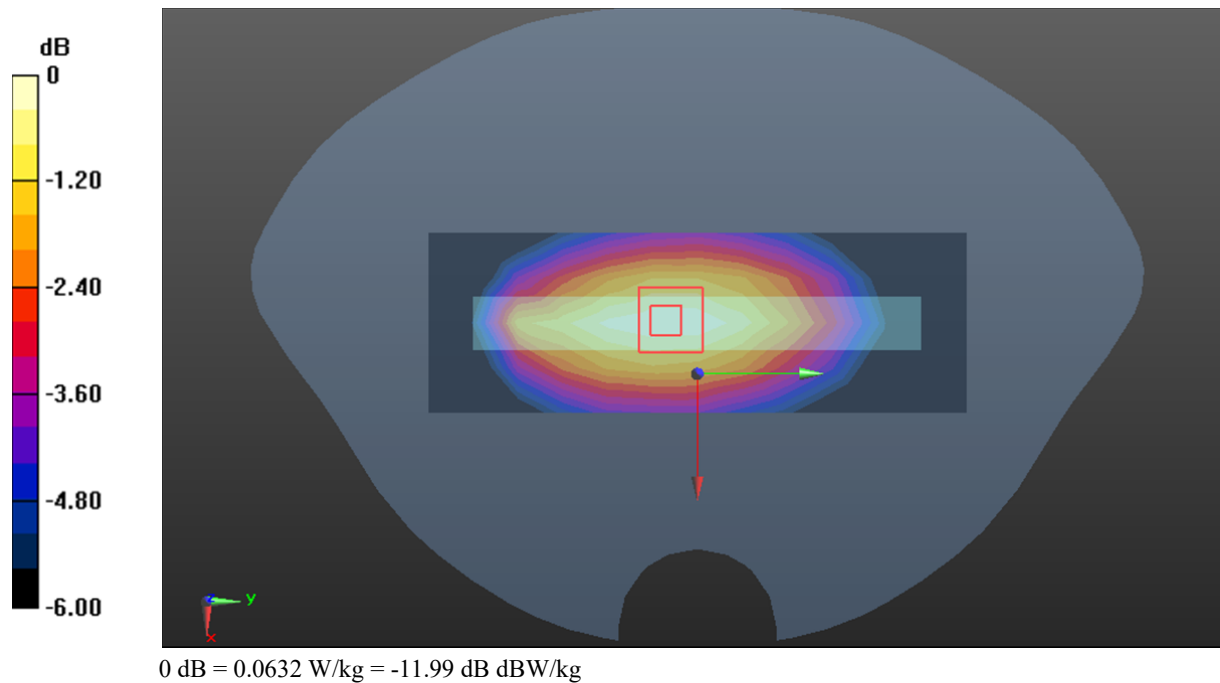

**Test Plot88#: LTE Band 71\_Body Right\_50%RB\_Middle\_Thin Battery****DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: Generic LTE (0); Frequency: 680.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f=680.5$  MHz;  $\sigma = 0.852$  S/m;  $\epsilon_r = 42.694$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @680.5 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (5x13x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0321 W/kg


**Zoom Scan (5x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.492 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.0370 W/kg

**SAR(1 g) = 0.026 W/kg; SAR(10 g) = 0.019 W/kg**

Maximum value of SAR (measured) = 0.0322 W/kg

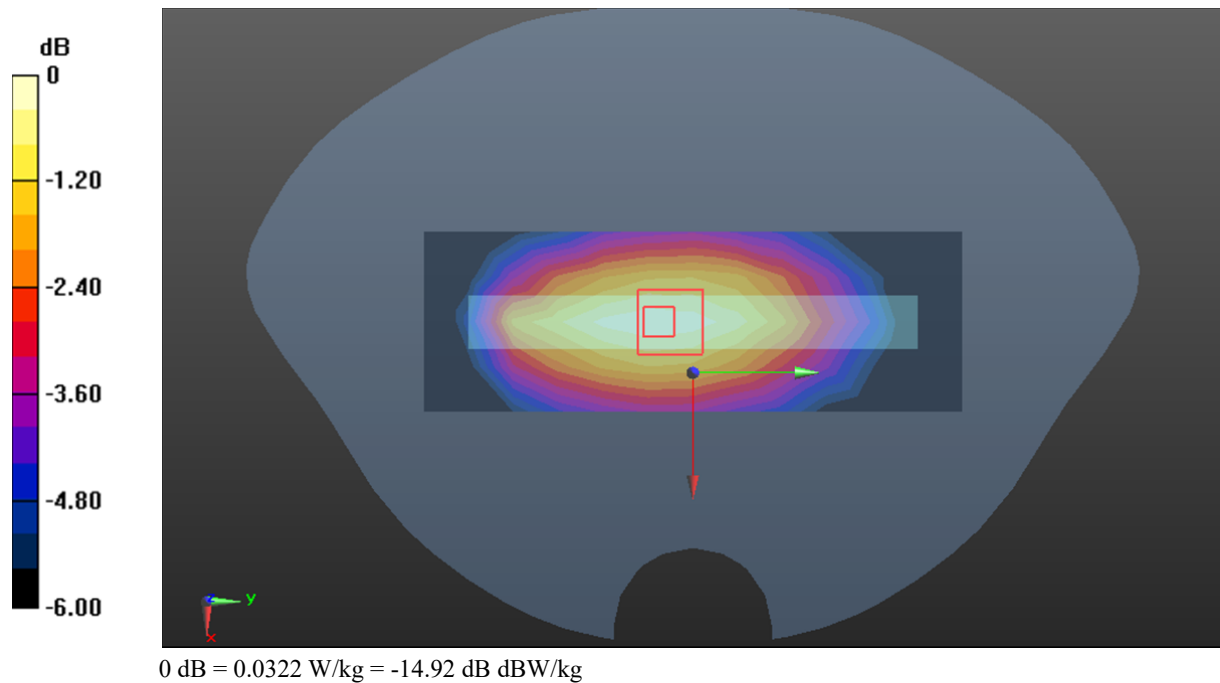



**Test Plot89#: LTE Band 71\_Body Bottom\_1RB\_Middle\_Thin Battery****DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: Generic LTE (0); Frequency: 680.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f=680.5$  MHz;  $\sigma=0.852$  S/m;  $\epsilon_r=42.694$ ;  $\rho=1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @680.5 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (6x9x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0169 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.164 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.0310 W/kg

**SAR(1 g) = 0.012 W/kg; SAR(10 g) = 0.00855 W/kg**

Maximum value of SAR (measured) = 0.0195 W/kg

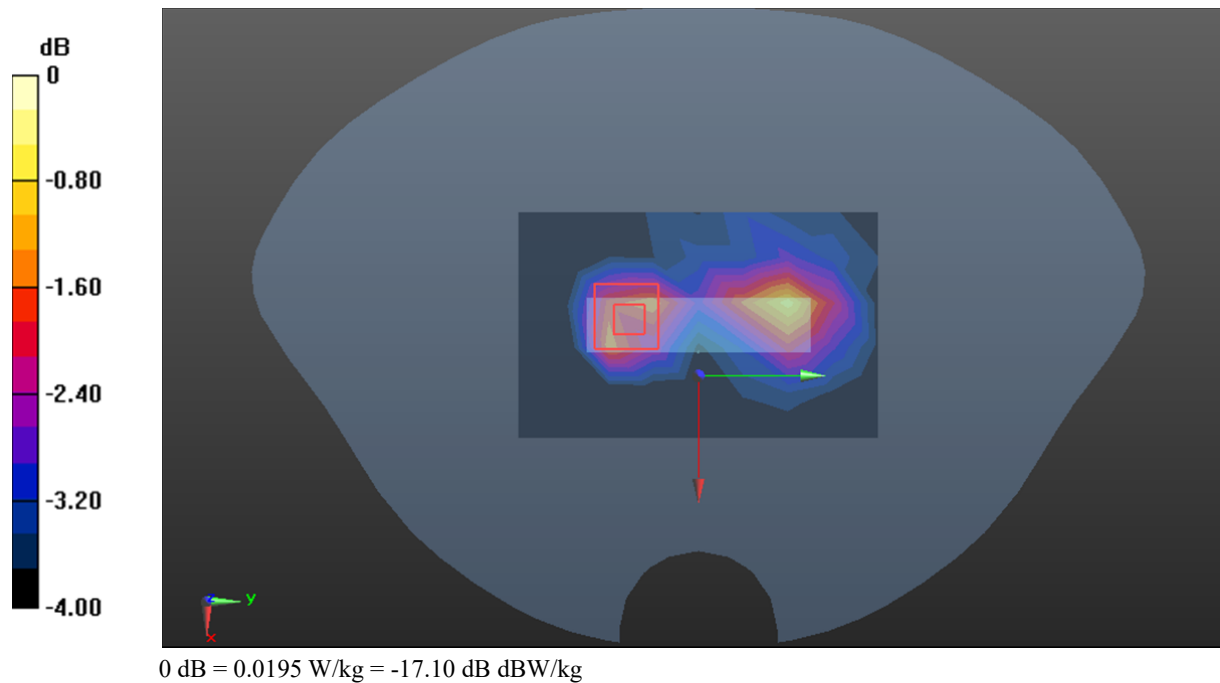

**Test Plot90#: LTE Band 71\_Body Bottom\_50%RB\_Middle\_Thin Battery****DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: Generic LTE (0); Frequency: 680.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f=680.5$  MHz;  $\sigma = 0.852$  S/m;  $\epsilon_r = 42.694$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @680.5 MHz; Calibrated: 2023/5/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (6x9x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0102 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.840 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.0190 W/kg

**SAR(1 g) = 0.009 W/kg; SAR(10 g) = 0.00678 W/kg**

Maximum value of SAR (measured) = 0.0126 W/kg

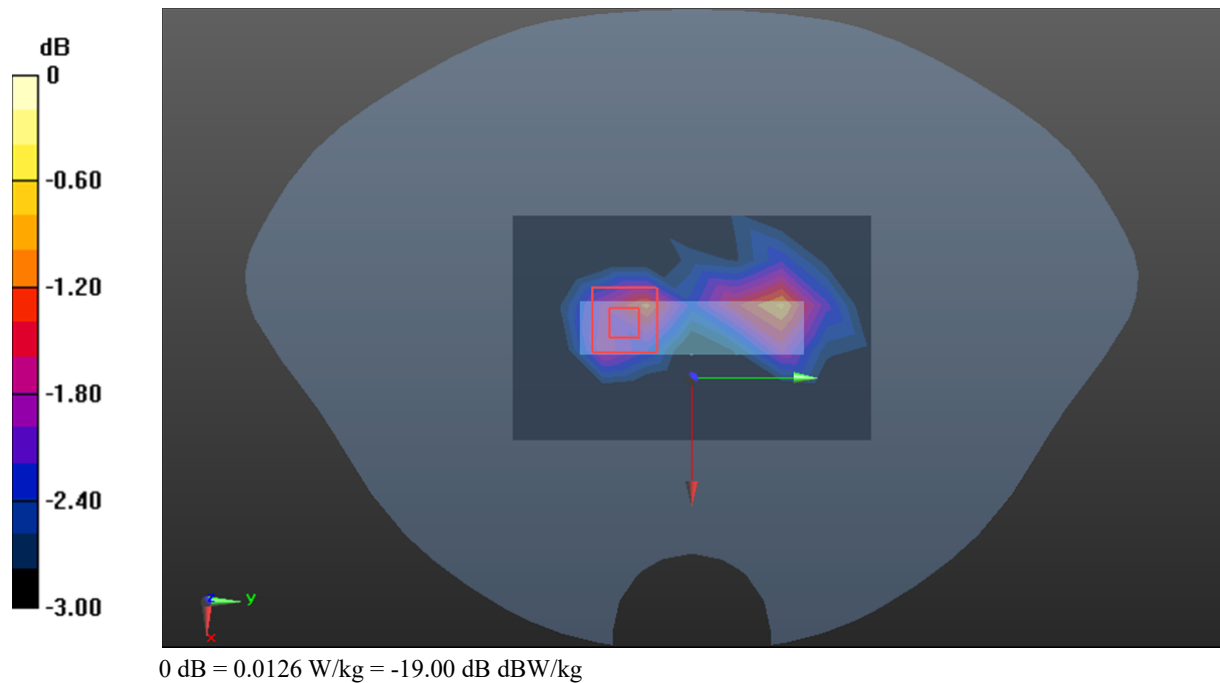

**Test Plot 91#: 2.4G WIFI\_Body Front\_Middle\_Thin Battery****DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: 802.11b (0); Frequency: 2437 MHz; Duty Cycle: 1:1.01

Medium parameters used:  $f = 2437$  MHz;  $\sigma = 1.791$  S/m;  $\epsilon_r = 39.378$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.42, 7.42, 7.42) @ 2437 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7470)

**Area Scan (10x16x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.267 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.954 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.451 W/kg

**SAR(1 g) = 0.236 W/kg; SAR(10 g) = 0.131 W/kg**

Maximum value of SAR (measured) = 0.255 W/kg

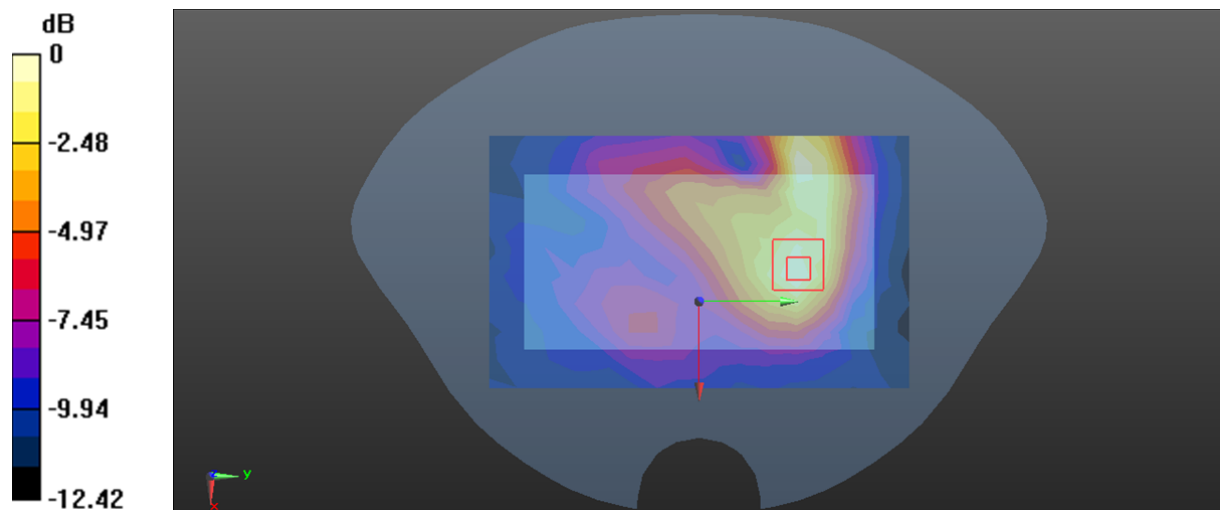

0 dB = 0.255 W/kg = -5.93 dBW/kg

**Test Plot 92#: 2.4G WIFI\_Body Back\_Middle\_Thin Battery****DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: 802.11b (0); Frequency: 2437 MHz; Duty Cycle: 1:1.01

Medium parameters used:  $f = 2437$  MHz;  $\sigma = 1.791$  S/m;  $\epsilon_r = 39.378$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.42, 7.42, 7.42) @ 2437 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7470)

**Area Scan (10x16x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.116 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.407 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.201 W/kg

**SAR(1 g) = 0.114 W/kg; SAR(10 g) = 0.068 W/kg**

Maximum value of SAR (measured) = 0.123 W/kg

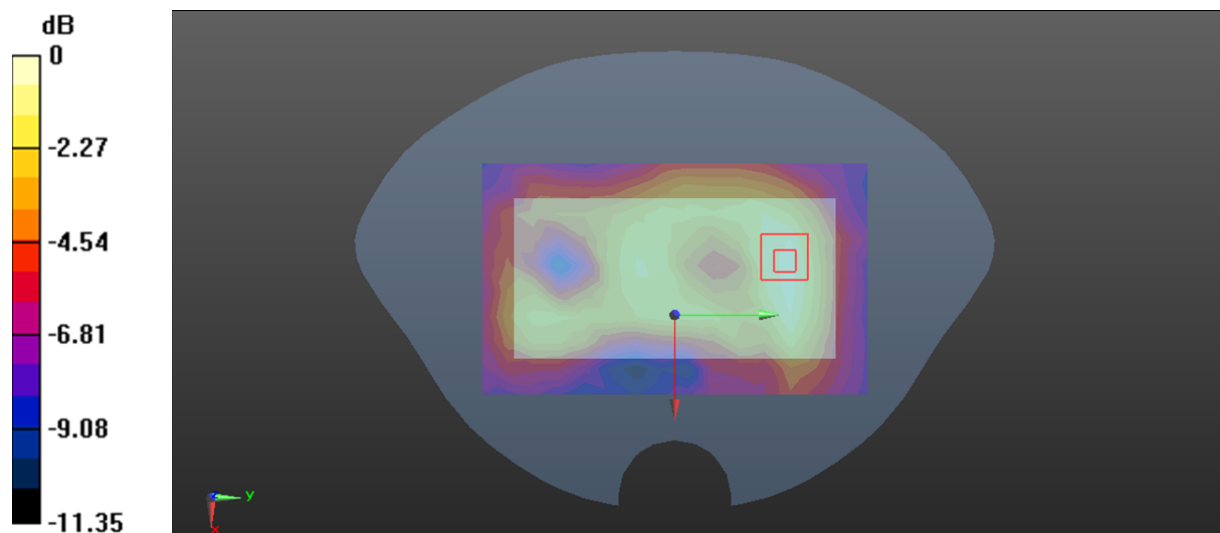

0 dB = 0.123 W/kg = -9.10 dBW/kg

**Test Plot 93#: 2.4G WIFI\_Body Right\_Middle\_Thin Battery****DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: 802.11b (0); Frequency: 2437 MHz; Duty Cycle: 1:1.01

Medium parameters used:  $f = 2437$  MHz;  $\sigma = 1.791$  S/m;  $\epsilon_r = 39.378$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.42, 7.42, 7.42) @ 2437 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7470)

**Area Scan (6x16x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.223 W/kg


**Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.571 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.402 W/kg

**SAR(1 g) = 0.205 W/kg; SAR(10 g) = 0.123 W/kg**

Maximum value of SAR (measured) = 0.220 W/kg

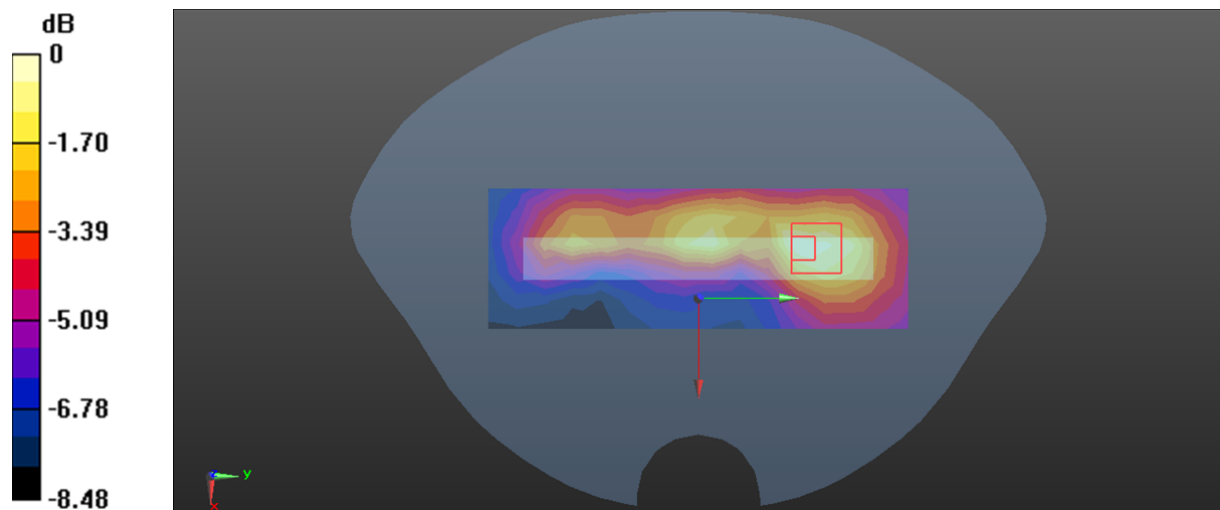

0 dB = 0.220 W/kg = -6.58 dBW/kg

**Test Plot 94#: 2.4G WIFI\_Body Top\_Middle\_Thin Battery****DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: 802.11b (0); Frequency: 2437 MHz; Duty Cycle: 1:1.01

Medium parameters used:  $f = 2437$  MHz;  $\sigma = 1.791$  S/m;  $\epsilon_r = 39.378$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.42, 7.42, 7.42) @ 2437 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7470)

**Area Scan (6x11x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.305 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.128 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.413 W/kg

**SAR(1 g) = 0.205 W/kg; SAR(10 g) = 0.117 W/kg**

Maximum value of SAR (measured) = 0.326 W/kg

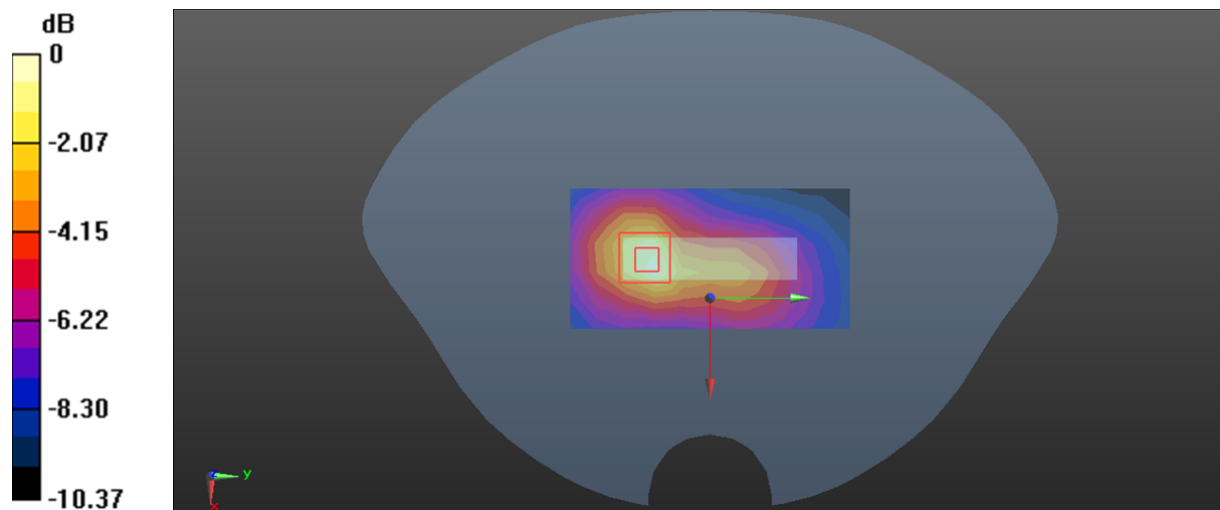

0 dB = 0.326 W/kg = -4.87 dBW/kg

**Test Plot 95#: 5.2G WIFI\_Body Front\_Middle\_Thin Battery****DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: 802.11a (0); Frequency: 5200 MHz; Duty Cycle: 1:1.02

Medium parameters used:  $f = 5200$  MHz;  $\sigma = 4.801$  S/m;  $\epsilon_r = 36.695$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(5.36, 5.36, 5.36) @ 5200 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7470)

**Area Scan (11x19x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.118 W/kg


**Zoom Scan (8x7x6)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 4.034 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.292 W/kg

**SAR(1 g) = 0.086 W/kg; SAR(10 g) = 0.068 W/kg**

Maximum value of SAR (measured) = 0.0944 W/kg

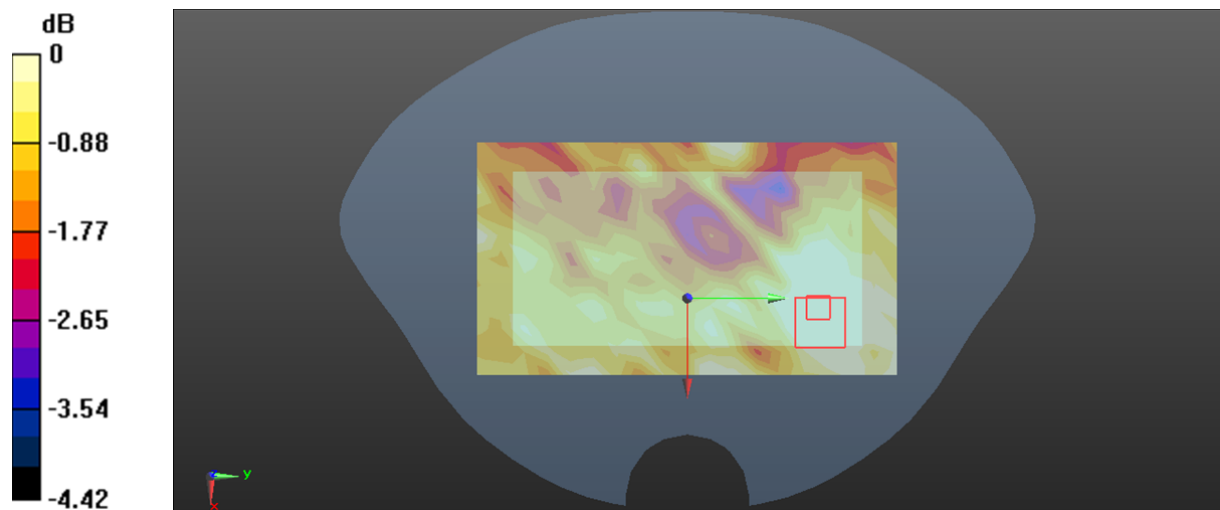

0 dB = 0.0944 W/kg = -10.25 dBW/kg

**Test Plot 96#: 5.2G WIFI\_Body Back\_Middle\_Thin Battery****DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: 802.11a (0); Frequency: 5200 MHz; Duty Cycle: 1:1.02

Medium parameters used:  $f = 5200$  MHz;  $\sigma = 4.801$  S/m;  $\epsilon_r = 36.695$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(5.36, 5.36, 5.36) @ 5200 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7470)

**Area Scan (11x19x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.424 W/kg


**Zoom Scan (7x7x6)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 4.590 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 1.36 W/kg

**SAR(1 g) = 0.413 W/kg; SAR(10 g) = 0.192 W/kg**

Maximum value of SAR (measured) = 0.415 W/kg

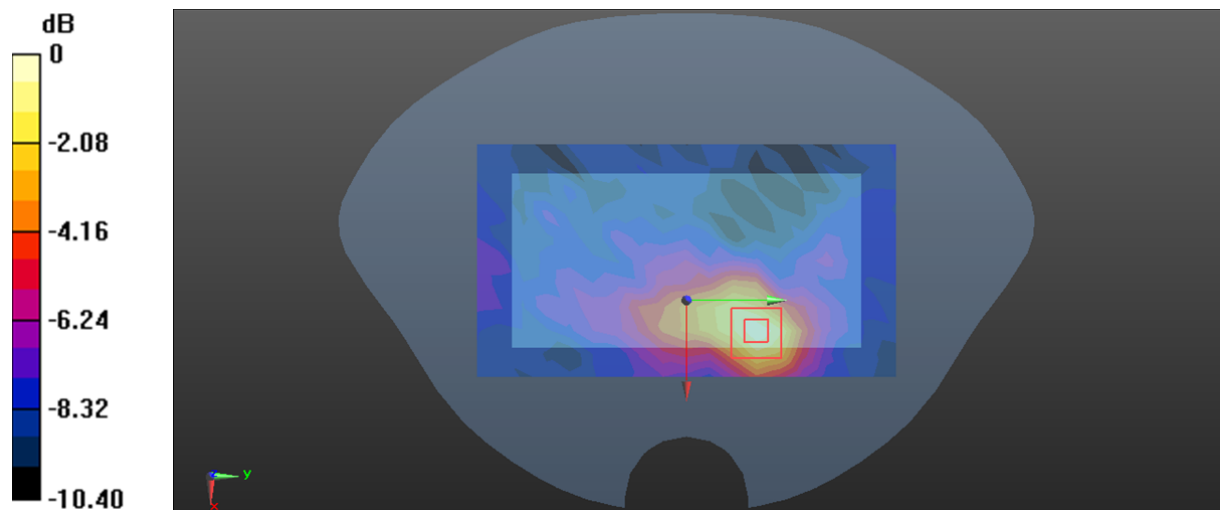



**Test Plot 97#: 5.2G WIFI\_Body Right\_Middle\_Thin Battery****DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: 802.11a (0); Frequency: 5200 MHz; Duty Cycle: 1:1.02

Medium parameters used:  $f = 5200$  MHz;  $\sigma = 4.801$  S/m;  $\epsilon_r = 36.695$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(5.36, 5.36, 5.36) @ 5200 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7470)

**Area Scan (7x19x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.516 W/kg


**Zoom Scan (7x7x6)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 5.750 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 1.54 W/kg

**SAR(1 g) = 0.497 W/kg; SAR(10 g) = 0.213 W/kg**

Maximum value of SAR (measured) = 0.515 W/kg

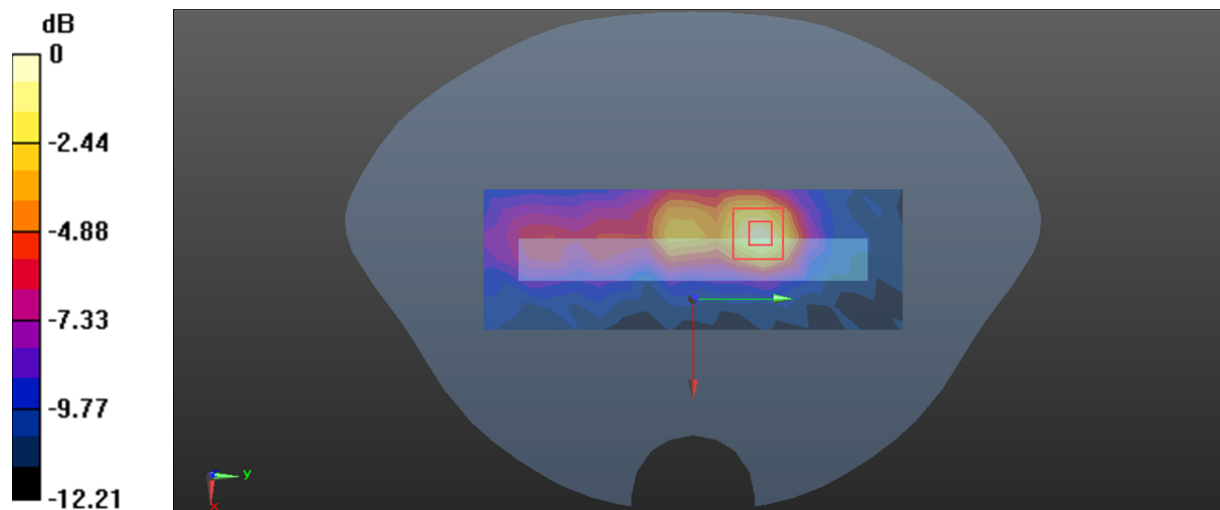

0 dB = 0.515 W/kg = -2.88 dBW/kg

**Test Plot 98#: 5.2G WIFI\_Body Top\_Middle\_Thin Battery****DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: 802.11a (0); Frequency: 5200 MHz; Duty Cycle: 1:1.02

Medium parameters used:  $f = 5200$  MHz;  $\sigma = 4.801$  S/m;  $\epsilon_r = 36.695$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(5.36, 5.36, 5.36) @ 5200 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7470)

**Area Scan (7x13x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.171 W/kg


**Zoom Scan (7x7x6)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 4.691 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.229 W/kg

**SAR(1 g) = 0.128 W/kg; SAR(10 g) = 0.101 W/kg**

Maximum value of SAR (measured) = 0.173 W/kg

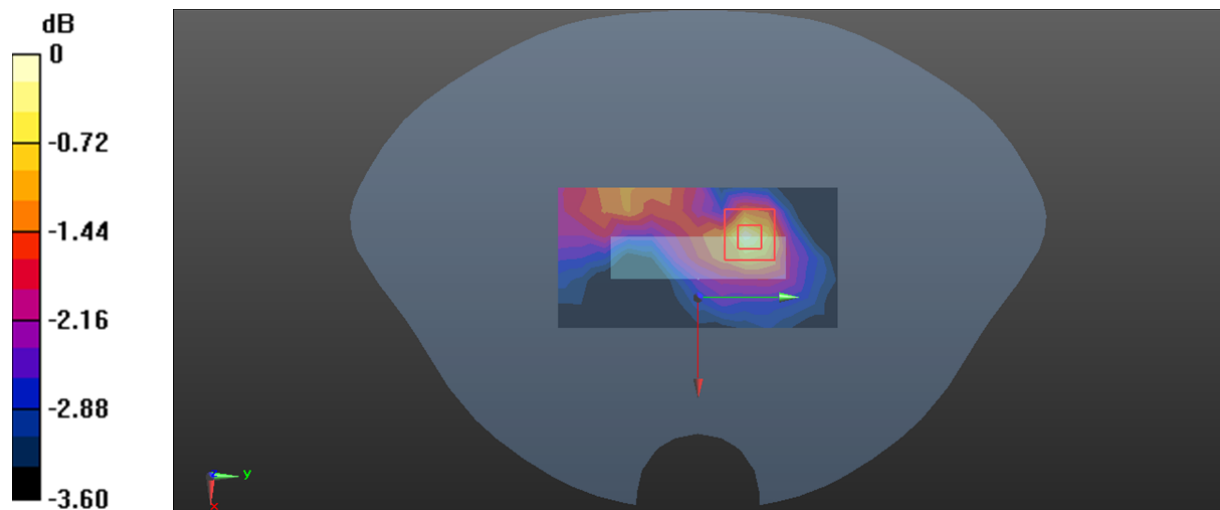

0 dB = 0.173 W/kg = -7.62 dBW/kg

**Test Plot 99#: 5.3G WIFI\_Body Front\_Middle\_Thin Battery****DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: 802.11a (0); Frequency: 5280 MHz; Duty Cycle: 1:1.02

Medium parameters used:  $f = 5280$  MHz;  $\sigma = 4.857$  S/m;  $\epsilon_r = 35.885$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(5.36, 5.36, 5.36) @ 5280 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7470)

**Area Scan (11x19x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.253 W/kg


**Zoom Scan (8x7x6)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 4.850 V/m; Power Drift = -0.20 dB

Peak SAR (extrapolated) = 0.378 W/kg

**SAR(1 g) = 0.186 W/kg; SAR(10 g) = 0.138 W/kg**

Maximum value of SAR (measured) = 0.272 W/kg

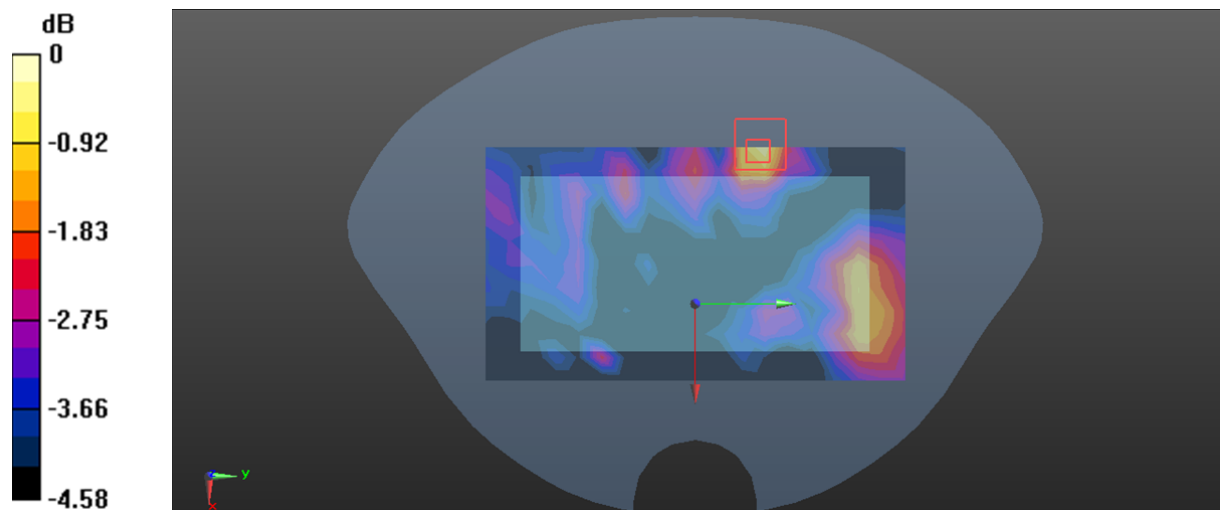

0 dB = 0.272 W/kg = -5.65 dBW/kg

**Test Plot 100#: 5.3G WIFI\_Body Back\_Middle\_Thin Battery****DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: 802.11a (0); Frequency: 5280 MHz; Duty Cycle: 1:1.02

Medium parameters used:  $f = 5280$  MHz;  $\sigma = 4.857$  S/m;  $\epsilon_r = 35.885$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(5.36, 5.36, 5.36) @ 5280 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7470)

**Area Scan (11x19x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.08 W/kg


**Zoom Scan (7x7x6)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 5.713 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 1.62 W/kg

**SAR(1 g) = 0.534 W/kg; SAR(10 g) = 0.282 W/kg**

Maximum value of SAR (measured) = 1.01 W/kg

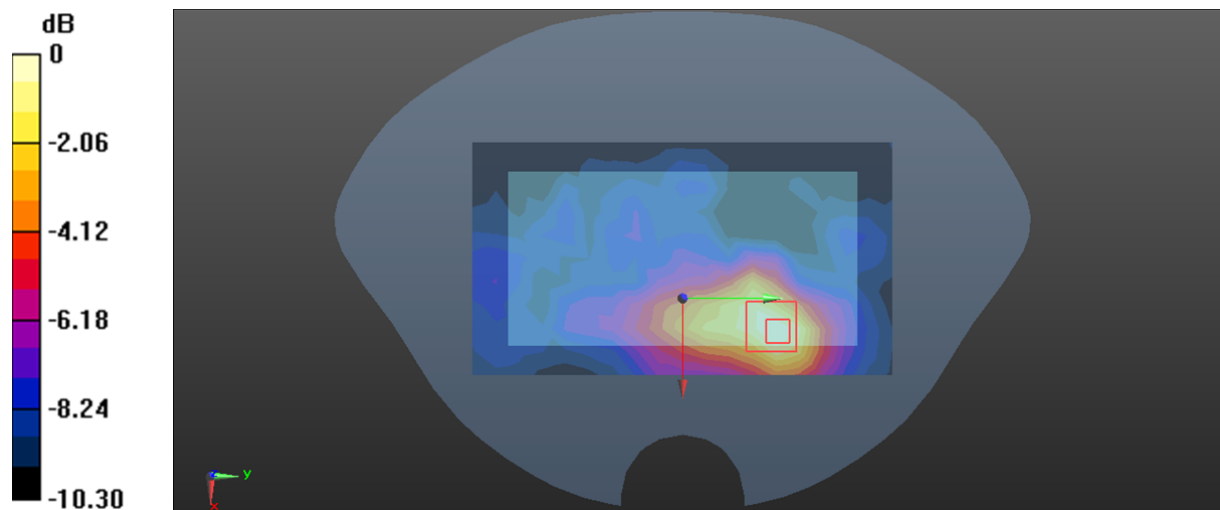

0 dB = 1.01 W/kg = 0.04 dBW/kg

**Test Plot 101#: 5.3G WIFI\_Body Right\_Low\_Thin Battery****DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: 802.11a (0); Frequency: 5260 MHz; Duty Cycle: 1:1.02

Medium parameters used:  $f = 5260$  MHz;  $\sigma = 4.843$  S/m;  $\epsilon_r = 35.963$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(5.36, 5.36, 5.36) @ 5260 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7470)

**Area Scan (7x19x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.84 W/kg


**Zoom Scan (7x7x6)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 9.741 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 3.04 W/kg

**SAR(1 g) = 0.993 W/kg; SAR(10 g) = 0.410 W/kg**

Maximum value of SAR (measured) = 1.90 W/kg

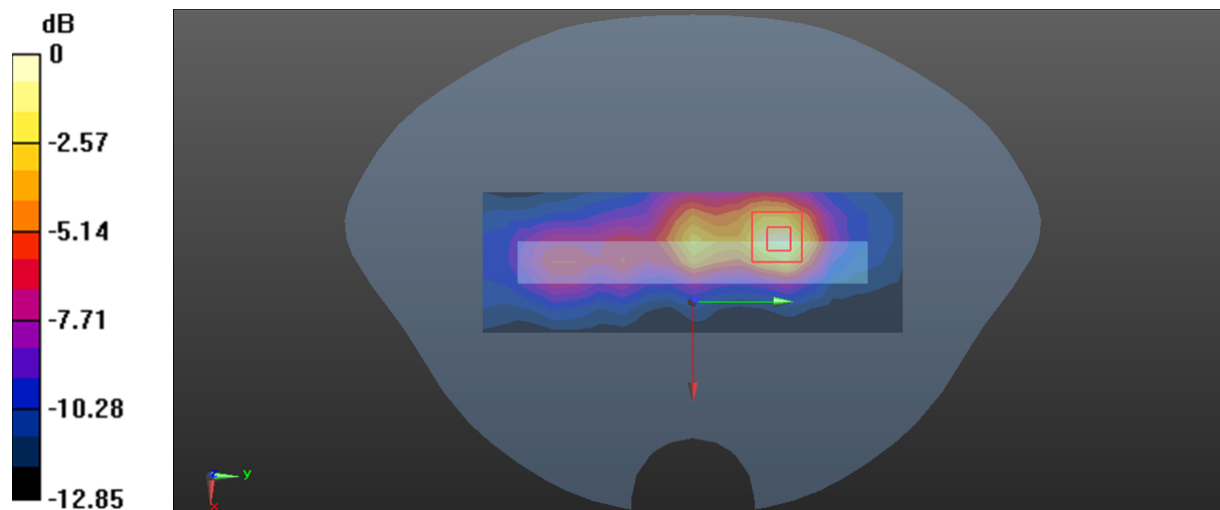

0 dB = 1.90 W/kg = 2.79 dBW/kg

**Test Plot 102#: 5.3G WIFI\_Body Right\_Middle\_Thin Battery****DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: 802.11a (0); Frequency: 5280 MHz; Duty Cycle: 1:1.02

Medium parameters used:  $f = 5280$  MHz;  $\sigma = 4.857$  S/m;  $\epsilon_r = 35.885$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(5.36, 5.36, 5.36) @ 5280 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7470)

**Area Scan (7x19x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.69 W/kg


**Zoom Scan (7x7x6)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 8.985 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 3.05 W/kg

**SAR(1 g) = 0.899 W/kg; SAR(10 g) = 0.387 W/kg**

Maximum value of SAR (measured) = 1.91 W/kg

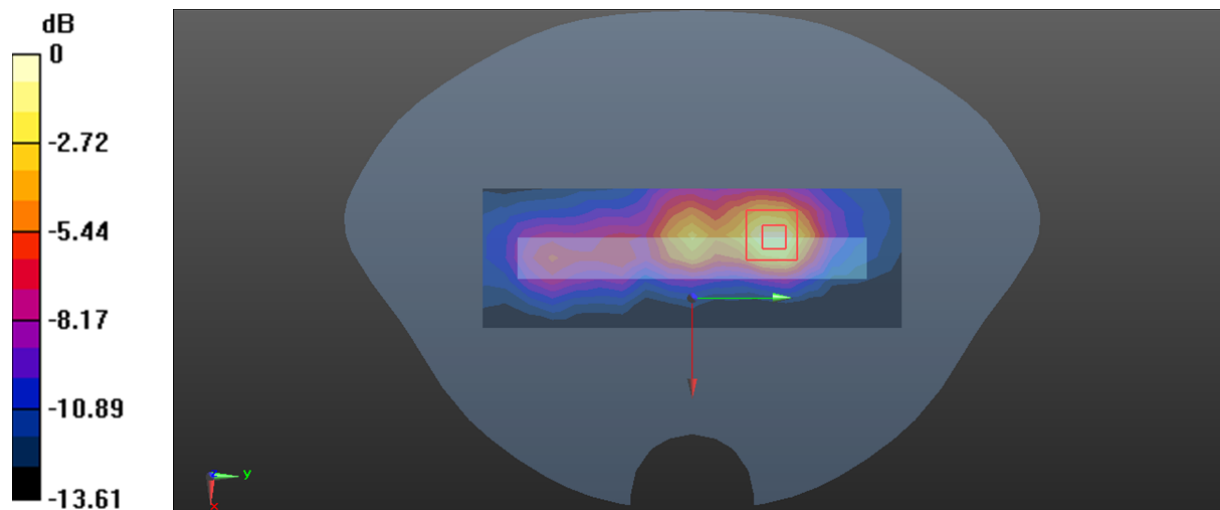

0 dB = 1.91 W/kg = 2.81 dBW/kg

**Test Plot 103#: 5.3G WIFI\_Body Right\_High\_Thin Battery****DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: 802.11a (0); Frequency: 5320 MHz; Duty Cycle: 1:1.02

Medium parameters used:  $f = 5320$  MHz;  $\sigma = 4.888$  S/m;  $\epsilon_r = 35.815$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(5.36, 5.36, 5.36) @ 5320 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7470)

**Area Scan (7x19x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 2.35 W/kg


**Zoom Scan (7x7x6)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 10.05 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 4.09 W/kg

**SAR(1 g) = 1.03 W/kg; SAR(10 g) = 0.500 W/kg**

Maximum value of SAR (measured) = 2.55 W/kg

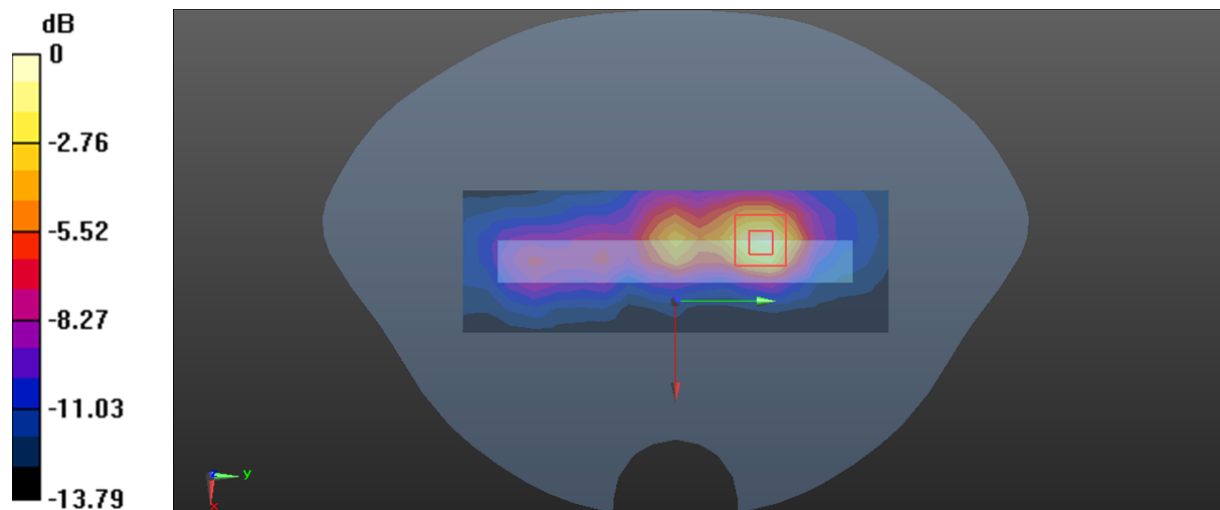

0 dB = 2.55 W/kg = 4.07 dBW/kg

**Test Plot 104#: 5.3G WIFI\_ Body Top\_Middle\_Thin Battery****DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: 802.11a (0); Frequency: 5280 MHz; Duty Cycle: 1:1.02

Medium parameters used:  $f = 5280$  MHz;  $\sigma = 4.857$  S/m;  $\epsilon_r = 35.885$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(5.36, 5.36, 5.36) @ 5280 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7470)

**Area Scan (7x13x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.218 W/kg


**Zoom Scan (8x8x6)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 5.327 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.319 W/kg

**SAR(1 g) = 0.163 W/kg; SAR(10 g) = 0.124 W/kg**

Maximum value of SAR (measured) = 0.236 W/kg

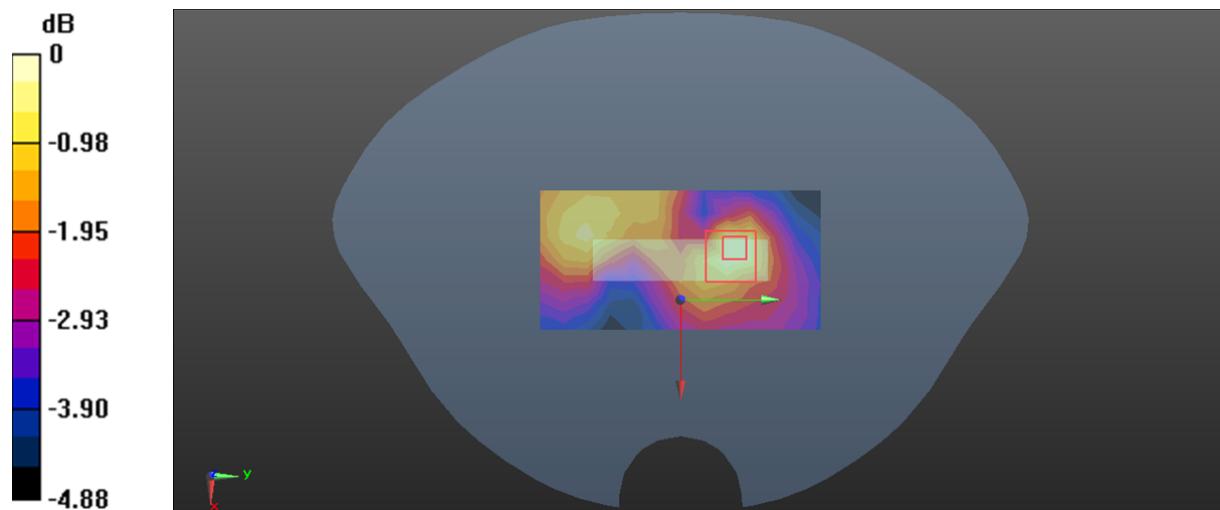

0 dB = 0.236 W/kg = -6.27 dBW/kg



**Test Plot 105#: 5.6G WIFI\_Body Front\_Middle\_Thin Battery****DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: 802.11a (0); Frequency: 5580 MHz; Duty Cycle: 1:1.02

Medium parameters used:  $f = 5580$  MHz;  $\sigma = 4.943$  S/m;  $\epsilon_r = 35.613$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(4.85, 4.85, 4.85) @ 5580 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7470)

**Area Scan (11x19x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.172 W/kg


**Zoom Scan (8x9x6)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 4.649 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.186 W/kg

**SAR(1 g) = 0.132 W/kg; SAR(10 g) = 0.120 W/kg**

Maximum value of SAR (measured) = 0.159 W/kg

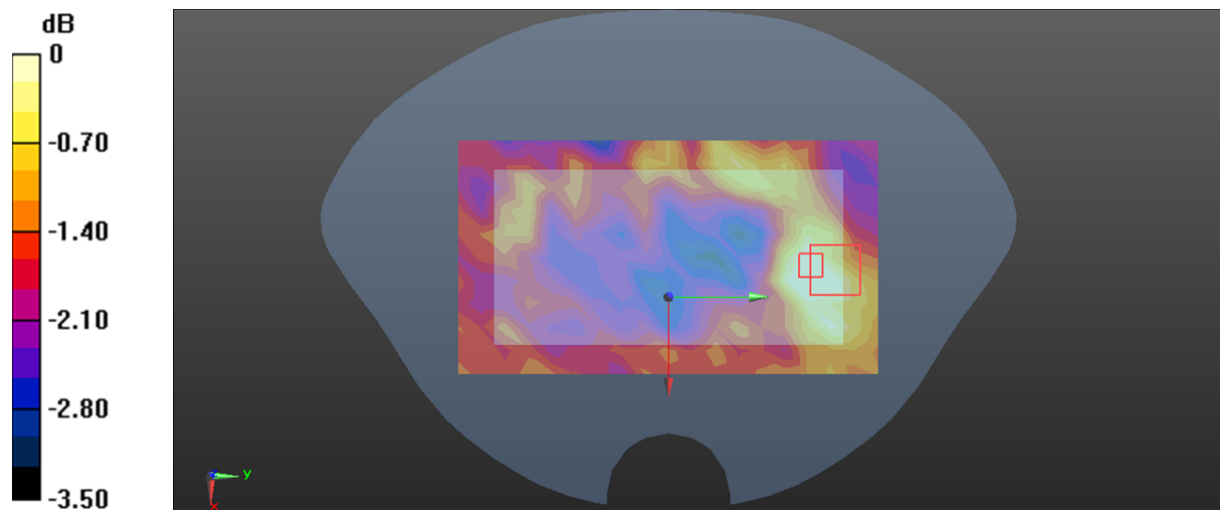

0 dB = 0.159 W/kg = -7.99 dBW/kg

**Test Plot 106#: 5.6G WIFI\_Body Back\_Middle\_Thin Battery****DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: 802.11a (0); Frequency: 5580 MHz; Duty Cycle: 1:1.02

Medium parameters used:  $f = 5580$  MHz;  $\sigma = 4.943$  S/m;  $\epsilon_r = 35.613$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(4.85, 4.85, 4.85) @ 5580 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7470)

**Area Scan (11x19x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.611 W/kg


**Zoom Scan (7x7x6)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 5.793 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.960 W/kg

**SAR(1 g) = 0.373 W/kg; SAR(10 g) = 0.226 W/kg**

Maximum value of SAR (measured) = 0.650 W/kg

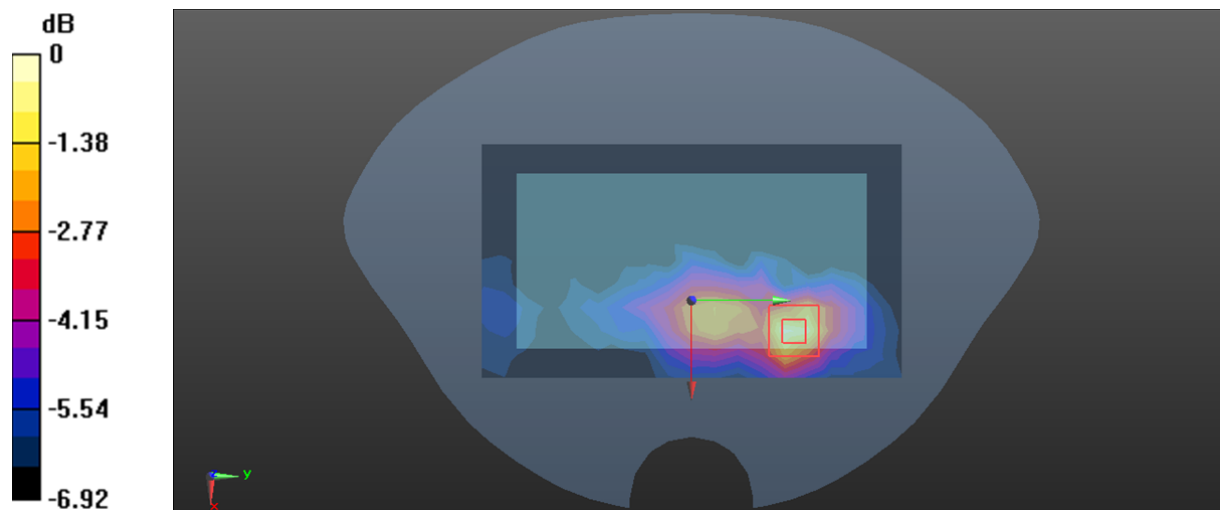

0 dB = 0.650 W/kg = -1.87 dBW/kg

**Test Plot 107#: 5.6G WIFI\_Body Right\_Middle\_Thin Battery****DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: 802.11a (0); Frequency: 5580 MHz; Duty Cycle: 1:1.02

Medium parameters used:  $f = 5580$  MHz;  $\sigma = 4.943$  S/m;  $\epsilon_r = 35.613$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(4.85, 4.85, 4.85) @ 5580 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7470)

**Area Scan (7x19x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.580 W/kg


**Zoom Scan (7x7x6)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 6.768 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.940 W/kg

**SAR(1 g) = 0.333 W/kg; SAR(10 g) = 0.204 W/kg**

Maximum value of SAR (measured) = 0.578 W/kg

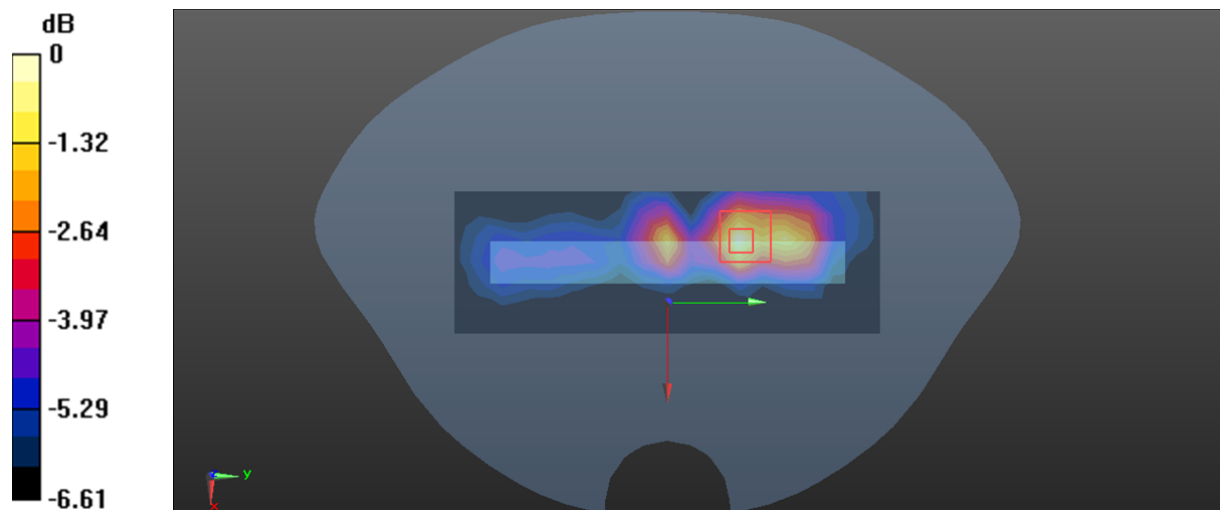

0 dB = 0.578 W/kg = -2.38 dBW/kg

**Test Plot 108#: 5.6G WIFI\_ Body Top\_Middle\_Thin Battery****DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: 802.11a (0); Frequency: 5580 MHz; Duty Cycle: 1:1.02

Medium parameters used:  $f = 5580$  MHz;  $\sigma = 4.943$  S/m;  $\epsilon_r = 35.613$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(4.85, 4.85, 4.85) @ 5580 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7470)

**Area Scan (7x13x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.215 W/kg


**Zoom Scan (8x8x6)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 5.364 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.273 W/kg

**SAR(1 g) = 0.176 W/kg; SAR(10 g) = 0.151 W/kg**

Maximum value of SAR (measured) = 0.221 W/kg

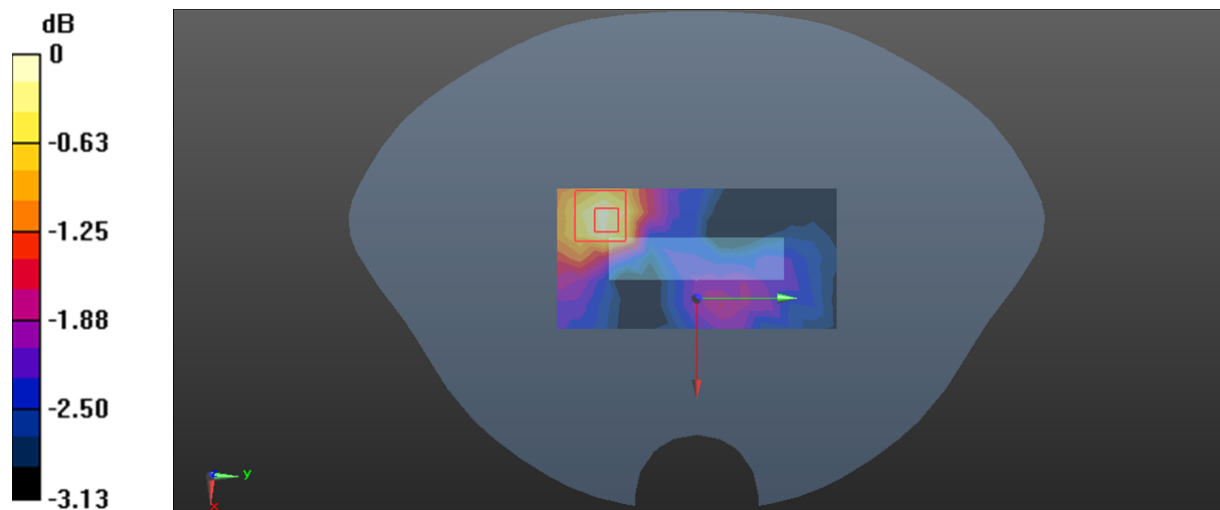

0 dB = 0.221 W/kg = -6.56 dBW/kg

**Test Plot 109#: 5.8G WIFI\_Body Front\_Middle\_Thin Battery****DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: 802.11a (0); Frequency: 5785 MHz; Duty Cycle: 1:1.02

Medium parameters used:  $f = 5785$  MHz;  $\sigma = 5.256$  S/m;  $\epsilon_r = 34.664$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(4.9, 4.9, 4.9) @ 5785 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7470)

**Area Scan (11x19x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.142 W/kg


**Zoom Scan (7x7x6)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 4.109 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.187 W/kg

**SAR(1 g) = 0.119 W/kg; SAR(10 g) = 0.104 W/kg**

Maximum value of SAR (measured) = 0.151 W/kg

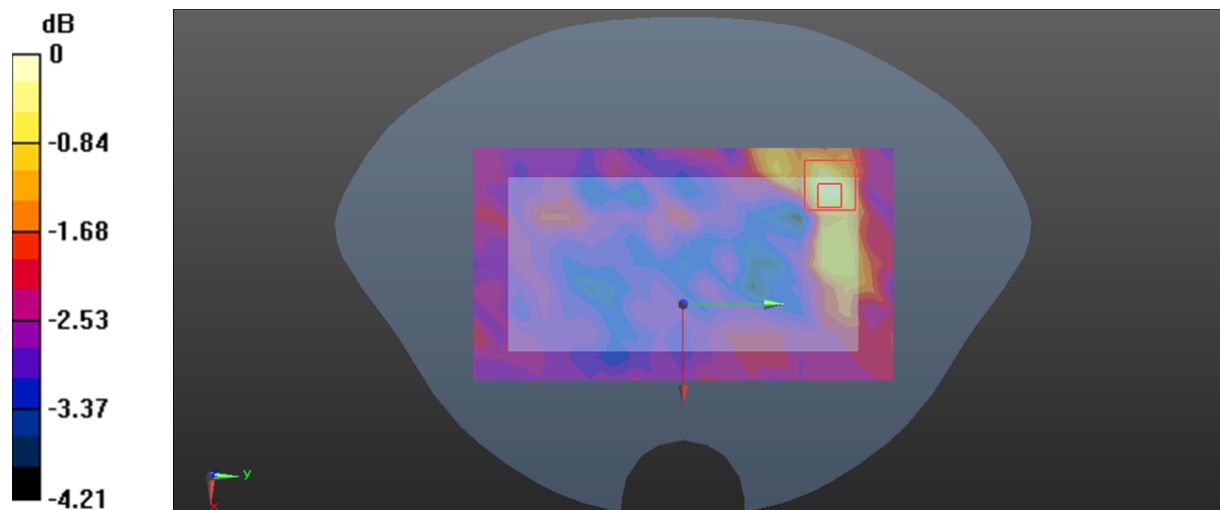

0 dB = 0.151 W/kg = -8.21 dBW/kg

**Test Plot 110#: 5.8G WIFI\_Body Back\_Middle\_Thin Battery****DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: 802.11a (0); Frequency: 5785 MHz; Duty Cycle: 1:1.02

Medium parameters used:  $f = 5785$  MHz;  $\sigma = 5.256$  S/m;  $\epsilon_r = 34.664$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(4.9, 4.9, 4.9) @ 5785 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7470)

**Area Scan (11x19x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.285 W/kg


**Zoom Scan (7x7x6)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 4.330 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.526 W/kg

**SAR(1 g) = 0.198 W/kg; SAR(10 g) = 0.138 W/kg**

Maximum value of SAR (measured) = 0.299 W/kg

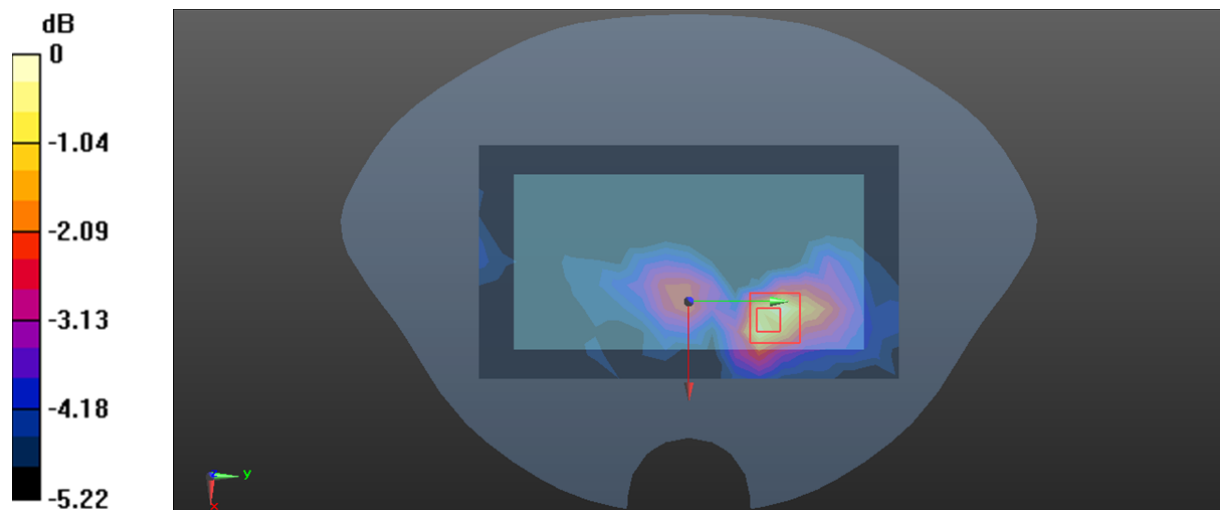

0 dB = 0.299 W/kg = -5.24 dBW/kg

**Test Plot 111#: 5.8G WIFI\_Body Right\_Middle\_Thin Battery****DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: 802.11a (0); Frequency: 5785 MHz; Duty Cycle: 1:1.02

Medium parameters used:  $f = 5785$  MHz;  $\sigma = 5.256$  S/m;  $\epsilon_r = 34.664$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(4.9, 4.9, 4.9) @ 5785 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7470)

**Area Scan (7x19x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.295 W/kg


**Zoom Scan (7x7x6)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 5.098 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.539 W/kg

**SAR(1 g) = 0.168 W/kg; SAR(10 g) = 0.105 W/kg**

Maximum value of SAR (measured) = 0.295 W/kg

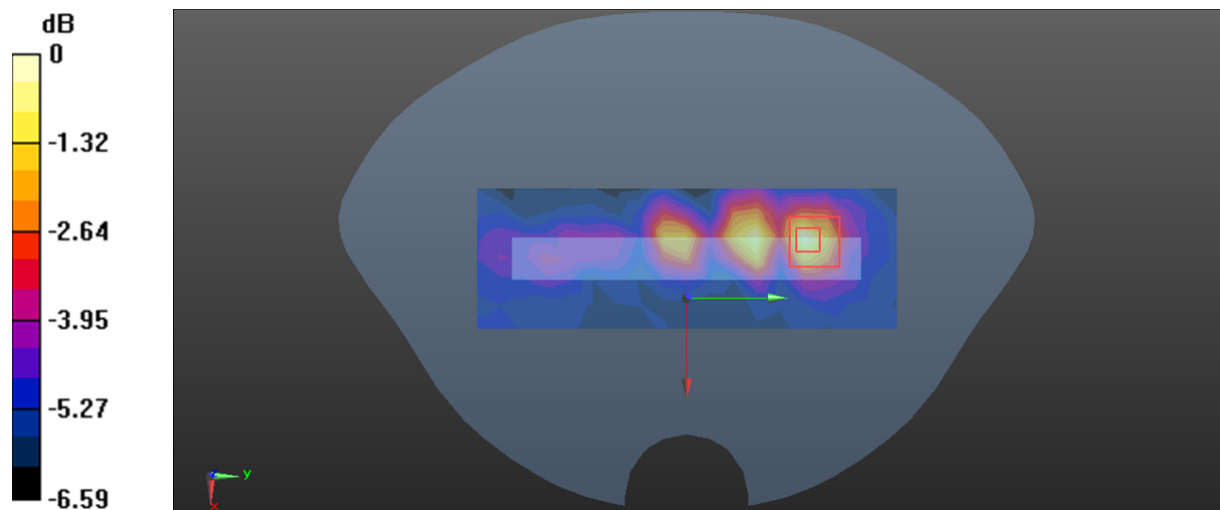

0 dB = 0.295 W/kg = -5.30 dBW/kg

**Test Plot 112#: 5.8G WIFI\_ Body Top\_Middle\_Thin Battery****DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: 802.11a (0); Frequency: 5785 MHz; Duty Cycle: 1:1.02

Medium parameters used:  $f = 5785$  MHz;  $\sigma = 5.256$  S/m;  $\epsilon_r = 34.664$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(4.9, 4.9, 4.9) @ 5785 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: TP:1470
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.12 (7470)

**Area Scan (7x13x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.185 W/kg


**Zoom Scan (7x7x6)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 2.265 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.266 W/kg

**SAR(1 g) = 0.134 W/kg; SAR(10 g) = 0.108 W/kg**

Maximum value of SAR (measured) = 0.183 W/kg

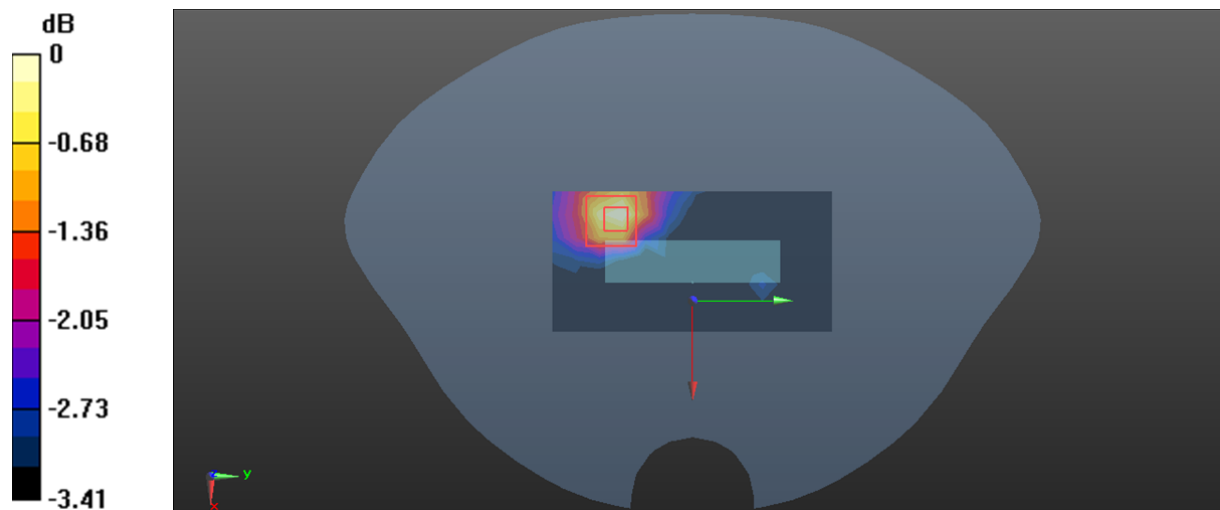

0 dB = 0.183 W/kg = -7.38 dBW/kg



**Test Plot 113#: BT\_Body Front\_Middle\_Thin Battery****DUT: POS Terminal; Type: N750; Serial: 26OC-1;**Communication System: Bluetooth( $\pi/4$ -DQPSK, 2DH5) (0); Frequency: 2441 MHz; Duty Cycle: 1:1.3Medium parameters used:  $f = 2441$  MHz;  $\sigma = 1.798$  S/m;  $\epsilon_r = 39.343$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.42, 7.42, 7.42) @ 2441 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: SAM 1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (9x15x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0613 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.599 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.0510 W/kg

**SAR(1 g) = 0.030 W/kg; SAR(10 g) = 0.014 W/kg**

Maximum value of SAR (measured) = 0.0495 W/kg

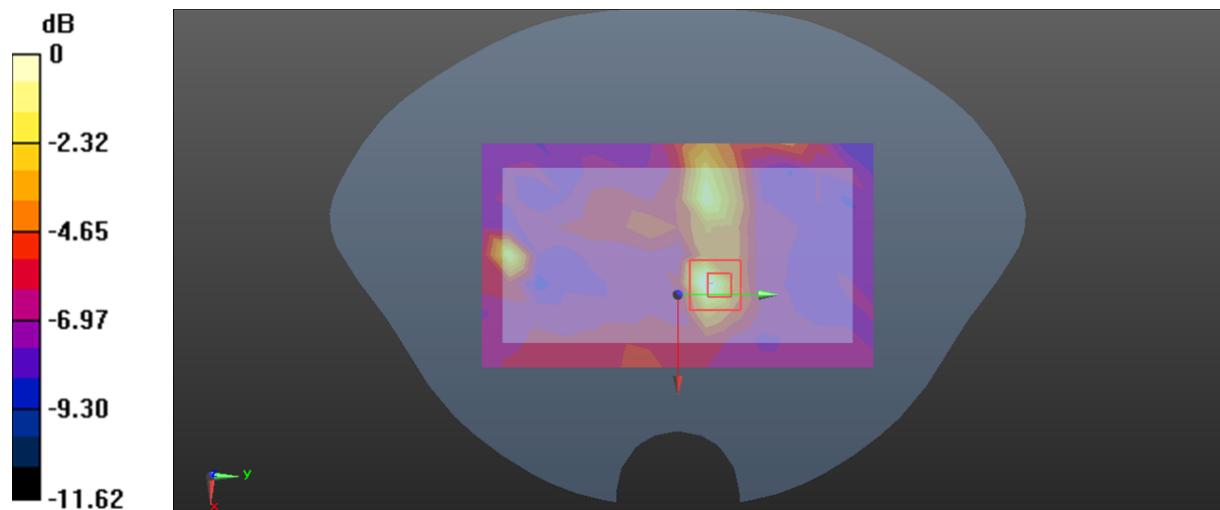

0 dB = 0.0495 W/kg = -13.05 dBW/kg

**Test Plot 114#: BT\_Body Back\_Middle\_Thin Battery****DUT: POS Terminal; Type: N750; Serial: 26OC-1;**Communication System: Bluetooth( $\pi/4$ -DQPSK, 2DH5) (0); Frequency: 2441 MHz; Duty Cycle: 1:1.3Medium parameters used:  $f = 2441$  MHz;  $\sigma = 1.798$  S/m;  $\epsilon_r = 39.343$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.42, 7.42, 7.42) @ 2441 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: SAM 1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (9x15x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0641 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.777 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.0220 W/kg

**SAR(1 g) = 0.015 W/kg; SAR(10 g) = 0.013 W/kg**

Maximum value of SAR (measured) = 0.0162 W/kg

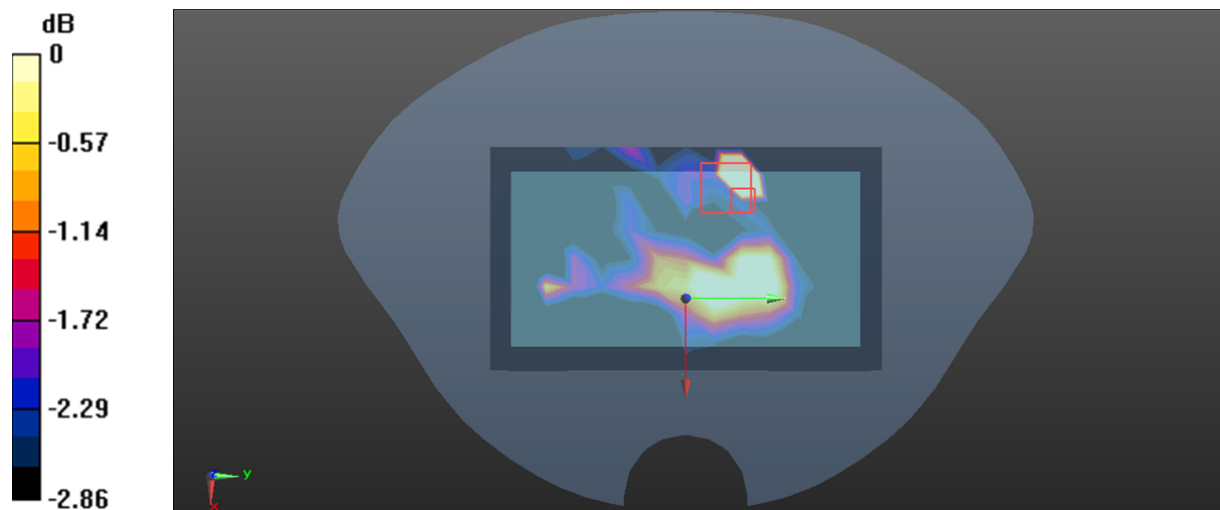

0 dB = 0.0162 W/kg = -17.90 dBW/kg

**Test Plot 115#: BT\_Body Left\_Middle\_Thin Battery****DUT: POS Terminal; Type: N750; Serial: 26OC-1;**Communication System: Bluetooth( $\pi/4$ -DQPSK, 2DH5) (0); Frequency: 2441 MHz; Duty Cycle: 1:1.3Medium parameters used:  $f = 2441$  MHz;  $\sigma = 1.798$  S/m;  $\epsilon_r = 39.343$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.42, 7.42, 7.42) @ 2441 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: SAM 1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (6x16x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0235 W/kg


**Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.533 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.0330 W/kg

**SAR(1 g) = 0.017 W/kg; SAR(10 g) = 0.011 W/kg**

Maximum value of SAR (measured) = 0.0182 W/kg

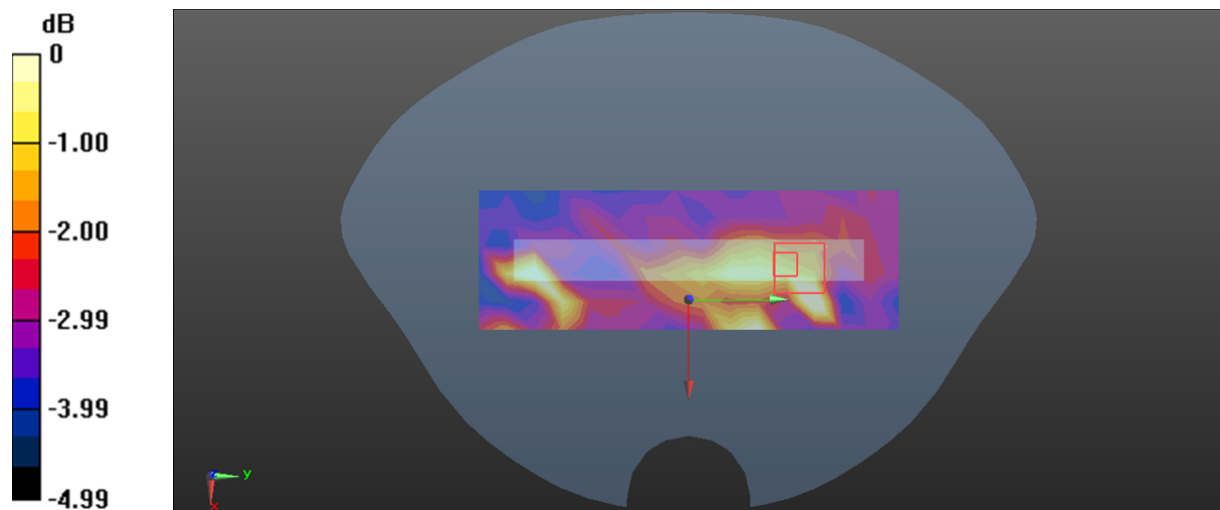

0 dB = 0.0182 W/kg = -17.40 dBW/kg

**Test Plot 116#: BT\_ Body Top\_Middle\_Thin Battery****DUT: POS Terminal; Type: N750; Serial: 26OC-1;**Communication System: Bluetooth( $\pi/4$ -DQPSK, 2DH5) (0); Frequency: 2441 MHz; Duty Cycle: 1:1.3Medium parameters used:  $f = 2441$  MHz;  $\sigma = 1.798$  S/m;  $\epsilon_r = 39.343$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.42, 7.42, 7.42) @ 2441 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: SAM 1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (6x11x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0266 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.728 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.0350 W/kg

**SAR(1 g) = 0.021 W/kg; SAR(10 g) = 0.014 W/kg**

Maximum value of SAR (measured) = 0.0294 W/kg

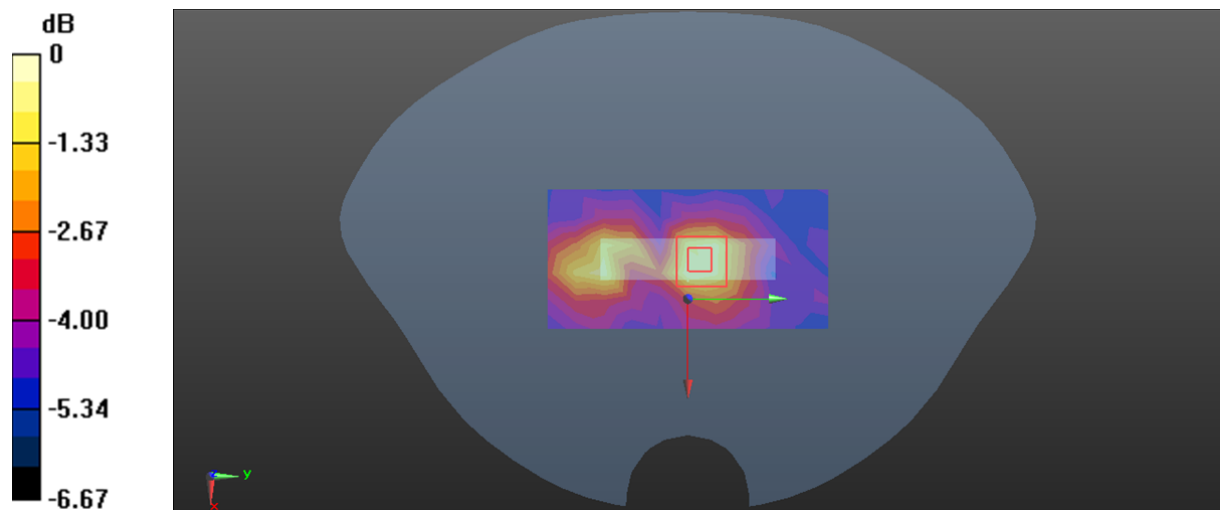

0 dB = 0.0294 W/kg = -15.32 dBW/kg

**Test Plot117#: LTE Band 7\_Body Right\_1RB\_Middle\_Thick Battery****DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz;Duty Cycle: 1:1

Medium parameters used:  $f=2535$  MHz;  $\sigma = 1.878$  S/m;  $\epsilon_r = 38.917$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.42, 7.42, 7.42) @ 2535 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (7x16x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.504 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.60 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.633 W/kg

**SAR(1 g) = 0.339 W/kg; SAR(10 g) = 0.182 W/kg**

Maximum value of SAR (measured) = 0.518 W/kg

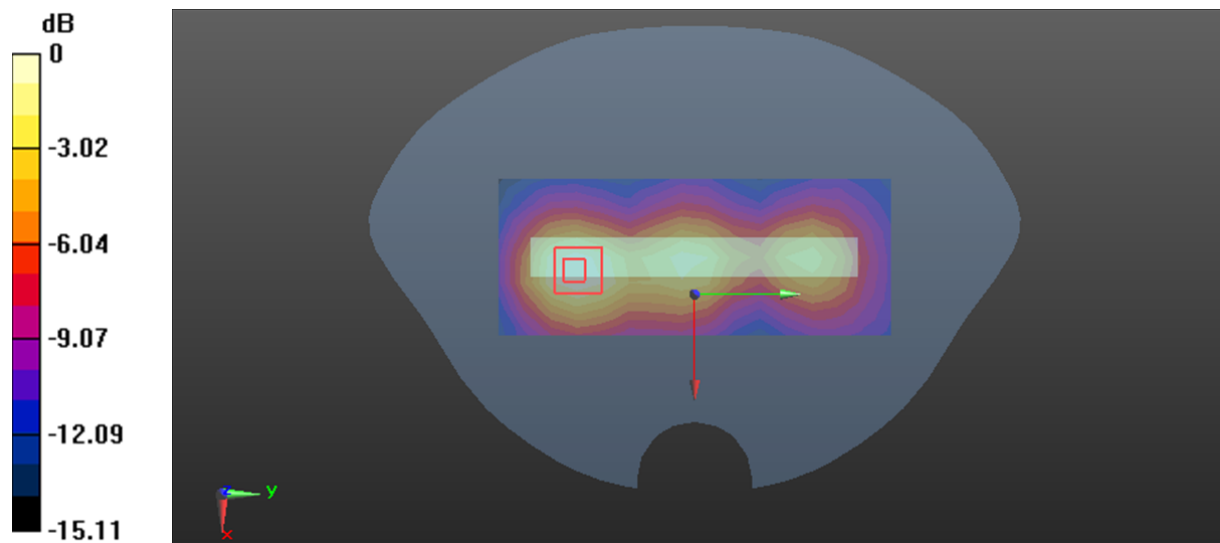

0 dB = 0.518 W/kg = -2.86 dBW/kg

**Test Plot118#: LTE Band 12\_Body Front\_1RB\_Middle\_Thick Battery****DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: Generic LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 707.5$  MHz;  $\sigma = 0.873$  S/m;  $\epsilon_r = 42.282$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @ 707.5 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x13x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0529 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.466 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 0.105 W/kg

**SAR(1 g) = 0.085 W/kg; SAR(10 g) = 0.047 W/kg**

Maximum value of SAR (measured) = 0.0538 W/kg

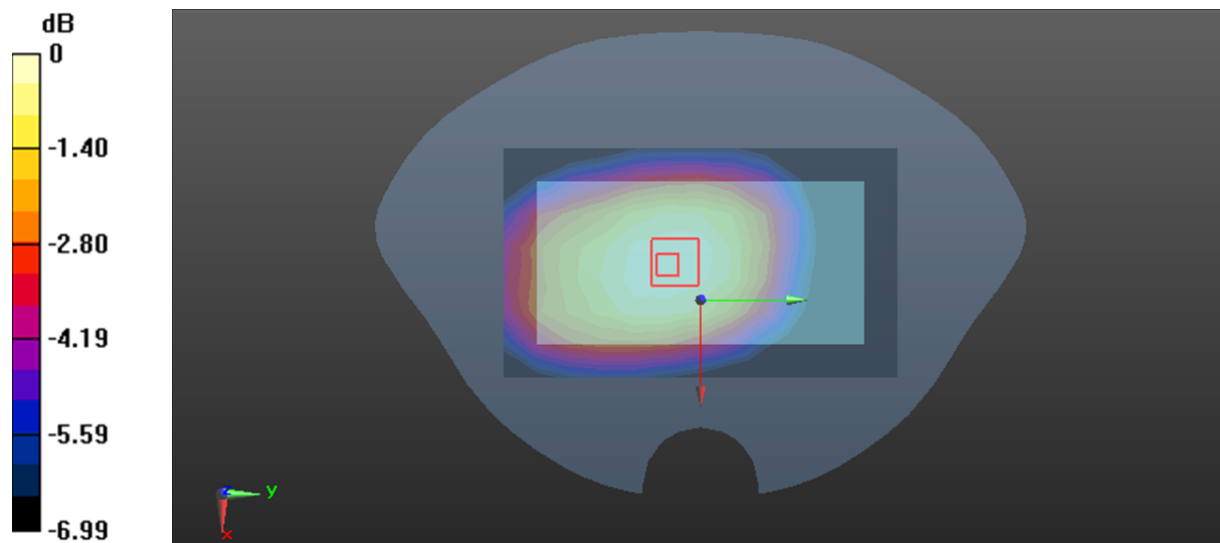

0 dB = 0.0538 W/kg = -12.69 dBW/kg

**Test Plot119#: LTE Band 13\_Body Back\_1RB\_Middle\_Thick Battery****DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: Generic FDD-LTE (0); Frequency: 782 MHz;Duty Cycle: 1:1

Medium parameters used:  $f=782$  MHz;  $\sigma = 0.897$  S/m;  $\epsilon_r = 41.754$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @ 782 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x13x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.235 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.53 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.267 W/kg

**SAR(1 g) = 0.185 W/kg; SAR(10 g) = 0.138 W/kg**

Maximum value of SAR (measured) = 0.236 W/kg

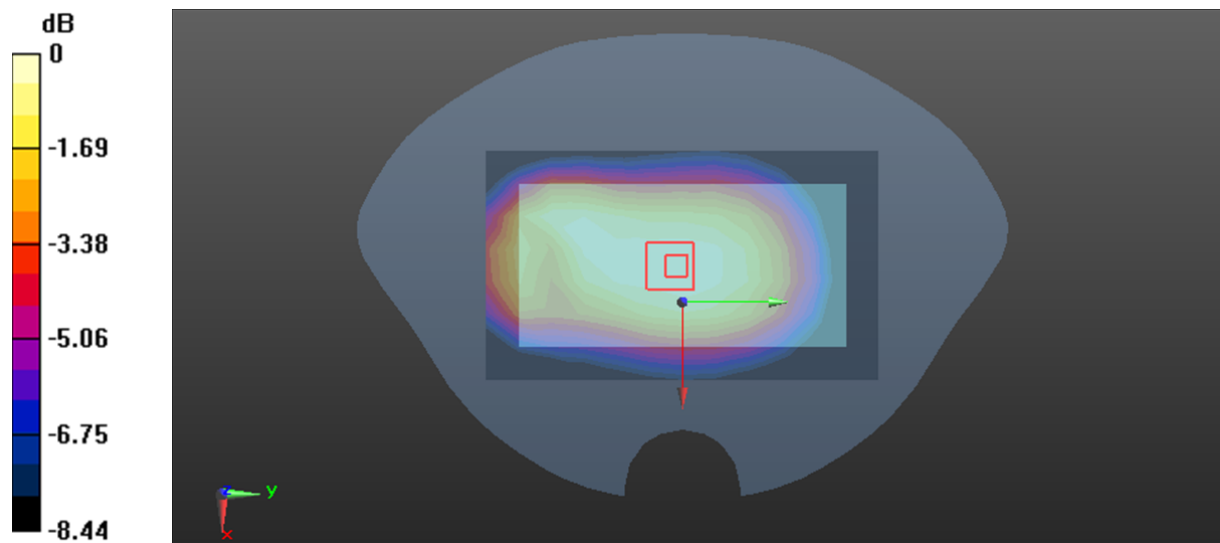

0 dB = 0.236 W/kg = -6.27 dBW/kg

**Test Plot120#: LTE Band 14\_Body Back\_1RB\_Middle\_Thick Battery****DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: Generic FDD-LTE (0); Frequency: 793 MHz;Duty Cycle: 1:1

Medium parameters used used:  $f=793$  MHz;  $\sigma = 0.902$  S/m;  $\epsilon_r = 41.579$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @ 793 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x13x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.222 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.36 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.272 W/kg

**SAR(1 g) = 0.189 W/kg; SAR(10 g) = 0.139 W/kg**

Maximum value of SAR (measured) = 0.240 W/kg

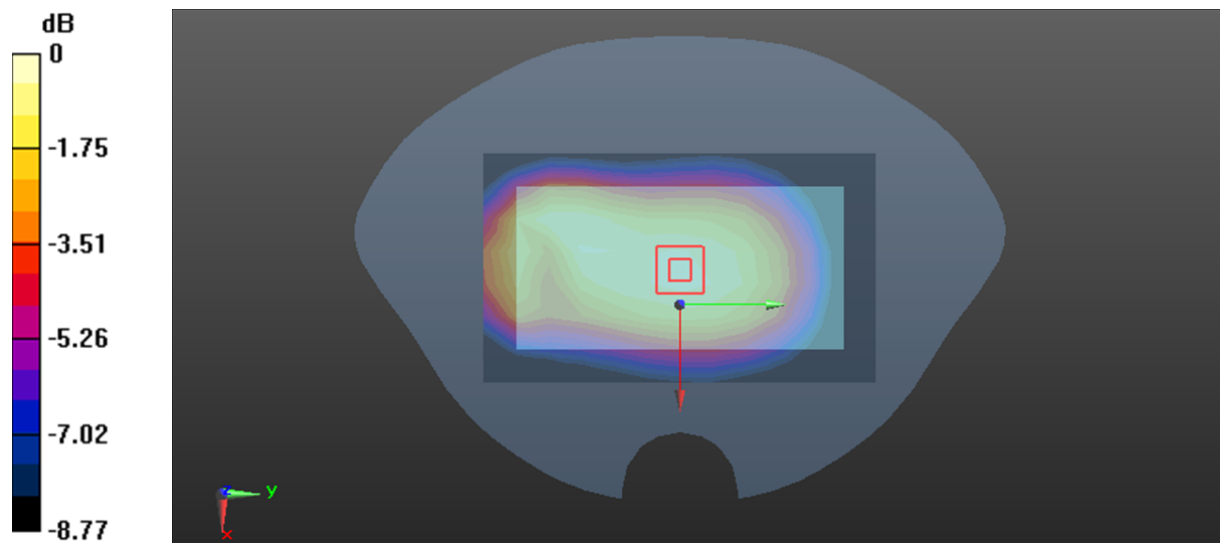

0 dB = 0.240 W/kg = -6.20 dBW/kg



**Test Plot121#: LTE Band 25\_Body Back\_1RB\_Middle\_Thick Battery****DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: Generic LTE (0); Frequency: 1882.5 MHz; Duty Cycle: 1:1

Medium parameters used:  $f=1882.5$  MHz;  $\sigma = 1.384$  S/m;  $\epsilon_r = 40.066$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.15, 8.15, 8.15) @ 1882.5 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x13x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.467 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.533 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.617 W/kg

**SAR(1 g) = 0.342 W/kg; SAR(10 g) = 0.195 W/kg**

Maximum value of SAR (measured) = 0.514 W/kg

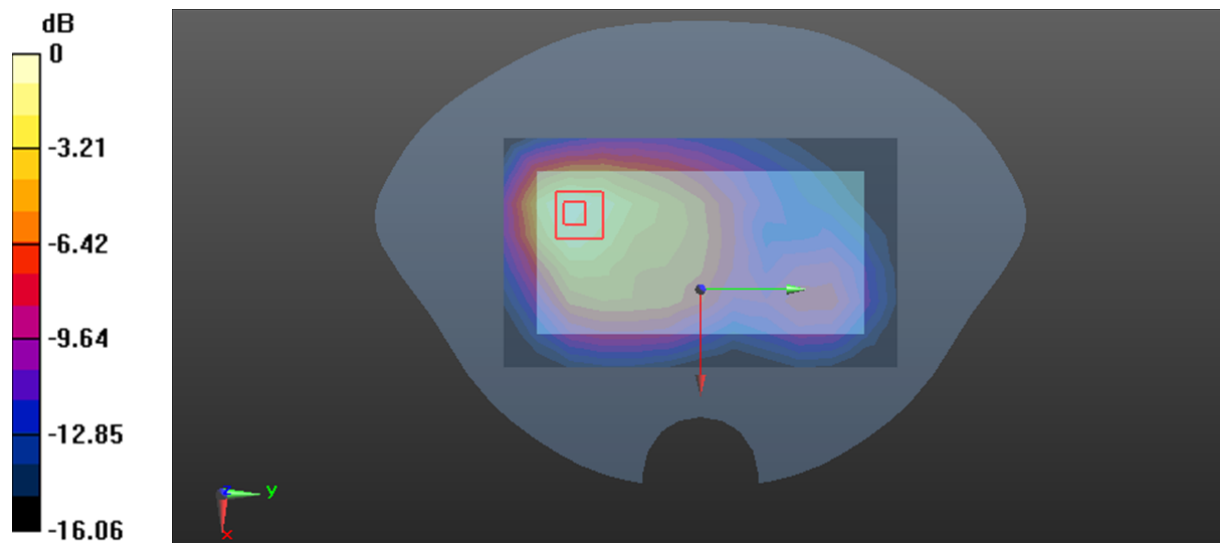

0 dB = 0.514 W/kg = -2.89 dBW/kg

**Test Plot122#: LTE Band 26\_Body Back\_1RB\_Middle\_Thick Battery****DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: Generic FDD-LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium parameters used:  $f=831.5$  MHz;  $\sigma = 0.921$  S/m;  $\epsilon_r = 41.364$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.9, 9.9, 9.9) @ 831.5 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x13x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.111 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.269 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.132 W/kg

**SAR(1 g) = 0.094 W/kg; SAR(10 g) = 0.055 W/kg**

Maximum value of SAR (measured) = 0.105 W/kg

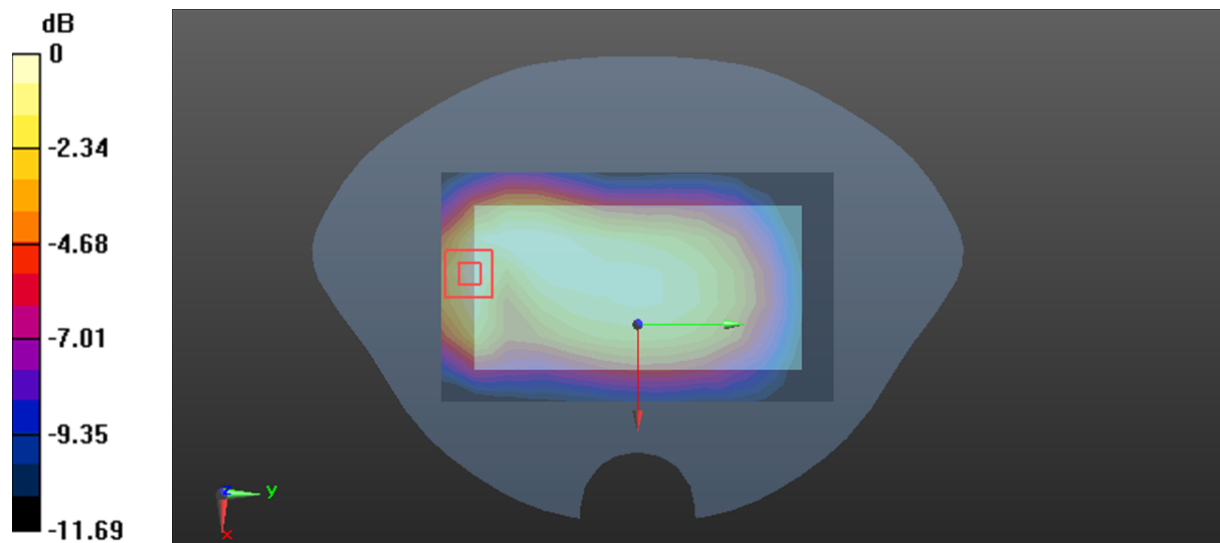

0 dB = 0.105 W/kg = -9.79 dBW/kg

**Test Plot123#: LTE Band 41\_Body Right\_1RB\_Middle\_Thick Battery****DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: Generic TDD-LTE (0); Frequency: 2593 MHz; Duty Cycle: 1:1.58

Medium parameters used:  $f = 2595$  MHz;  $\sigma = 1.945$  S/m;  $\epsilon_r = 38.743$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.23, 7.23, 7.23) @ 2593 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (7x16x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.175 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.197 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.245 W/kg

**SAR(1 g) = 0.128 W/kg; SAR(10 g) = 0.072 W/kg**

Maximum value of SAR (measured) = 0.200 W/kg

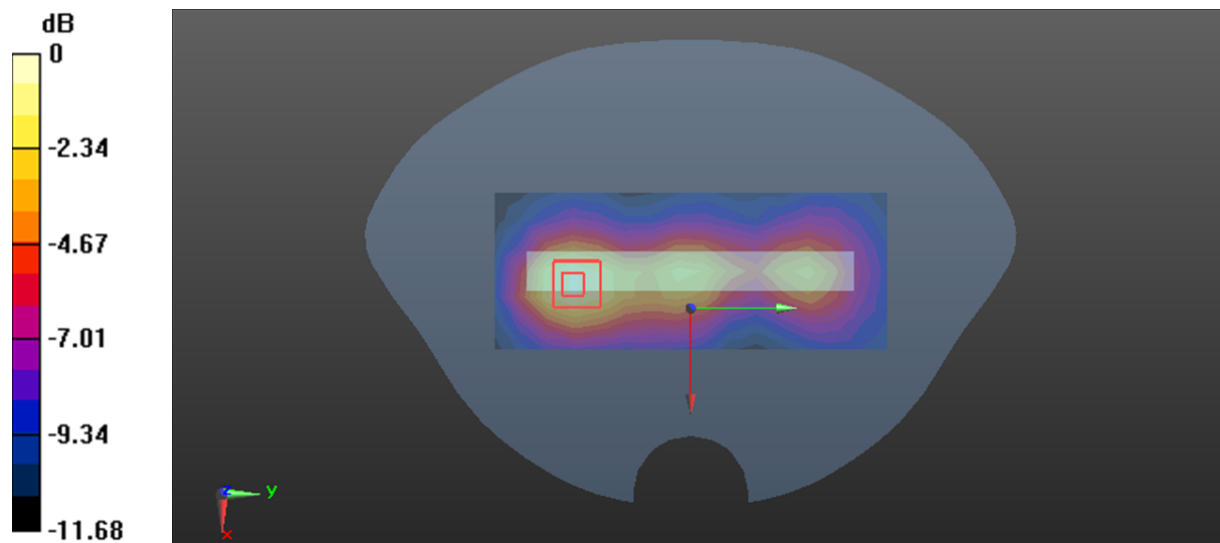

0 dB = 0.200 W/kg = -6.99 dBW/kg

**Test Plot124#: LTE Band 66\_Body Right\_1RB\_Middle\_Thick Battery****DUT: POS Terminal; Type: N750; Serial: 26OC-1;**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz;Duty Cycle: 1:1  
Medium parameters used:  $f=1745$  MHz;  $\sigma = 1.334$  S/m;  $\epsilon_r = 40.095$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.15, 8.15, 8.15) @ 1745 MHz; Calibrated: 2023/5/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493;Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1470
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (6x13x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.579 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.00 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.727 W/kg

**SAR(1 g) = 0.419 W/kg; SAR(10 g) = 0.256 W/kg**

Maximum value of SAR (measured) = 0.618 W/kg

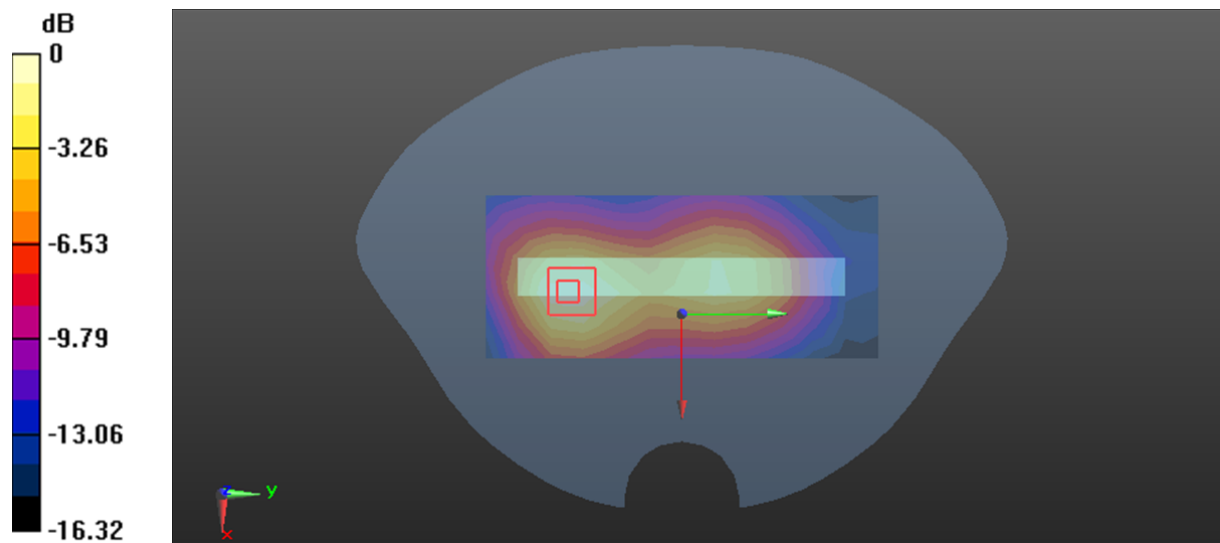

0 dB = 0.618 W/kg = -2.09 dBW/kg