

BT

Communication System: BT ; Frequency: 2480 MHz;Duty Cycle: 1:1.2987

Medium: H2450 Medium parameters used: $f = 2480$ MHz; $\sigma = 1.833$ S/m; $\epsilon_r = 40.33$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.1 °C; Liquid Temperature : 21.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3970; ConvF(7.91, 7.91, 7.91); Calibrated: 2022/4/18;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1418; Calibrated: 2022/3/24
- Phantom: SAM; Type: QD000P40CD; Serial: TP:1794
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Back-High/Area Scan (8x9x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0115 W/kg


Back-High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.741 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.0170 W/kg

SAR(1 g) = 0.0642 W/kg; SAR(10 g) = 0.036 W/kg

Maximum value of SAR (measured) = 0.0102 W/kg

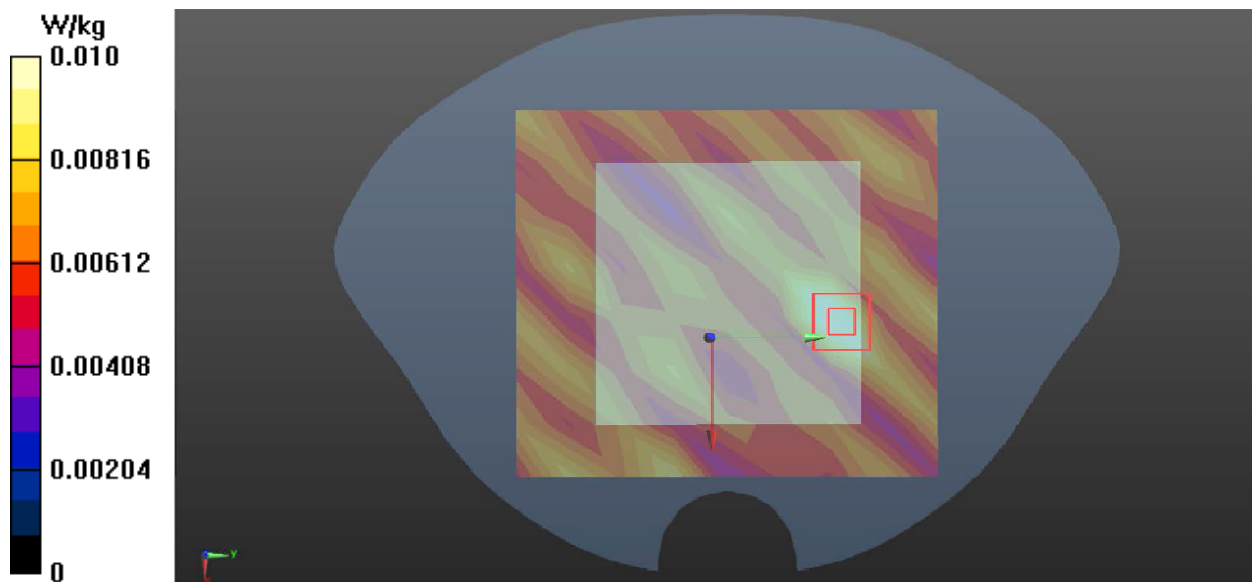

2.4G

Communication System: SRD ; Frequency: 2480 MHz;Duty Cycle: 1:1

Medium: H2450 Medium parameters used: $f = 2480 \text{ MHz}$; $\sigma = 1.833 \text{ S/m}$; $\epsilon_r = 40.33$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $22.1 \text{ }^\circ\text{C}$; Liquid Temperature : $21.9 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3970; ConvF(7.91, 7.91, 7.91); Calibrated: 2022/4/18;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1418; Calibrated: 2022/3/24
- Phantom: SAM; Type: QD000P40CD; Serial: TP:1794
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Back-High Ant1/Area Scan (8x9x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.0125 W/kg


Back-High Ant1/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 1.804 V/m ; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.0130 W/kg

SAR(1 g) = 0.0432 W/kg ; SAR(10 g) = 0.0213 W/kg

Maximum value of SAR (measured) = 0.0109 W/kg

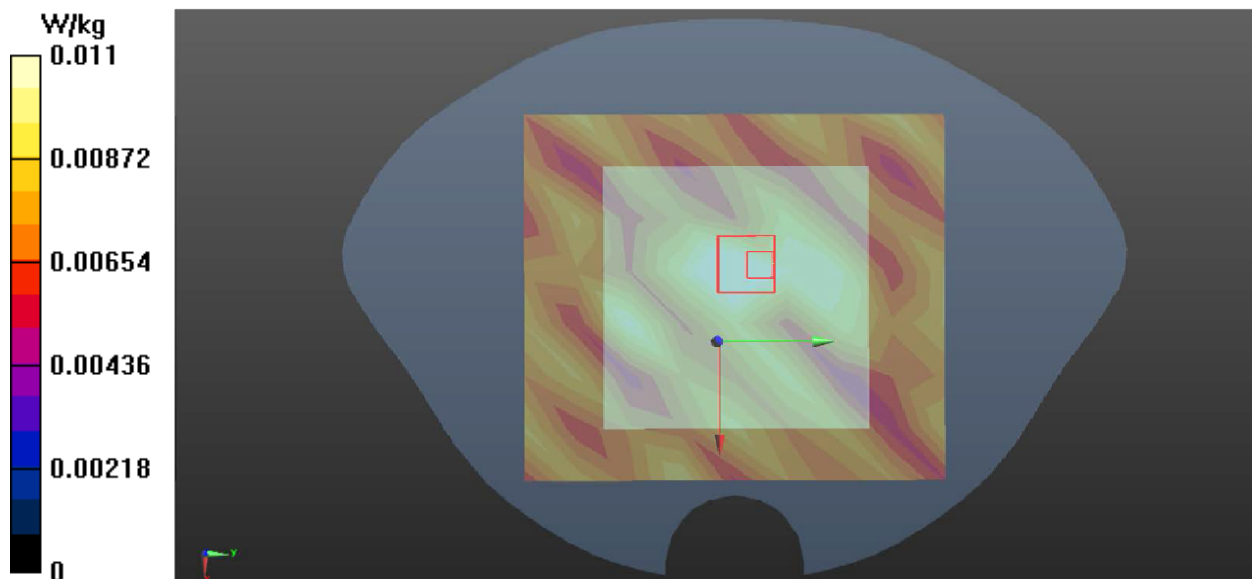

2.4

Communication System: SRD ; Frequency: 2480 MHz;Duty Cycle: 1:1

Medium: H2450 Medium parameters used: $f = 2480 \text{ MHz}$; $\sigma = 1.833 \text{ S/m}$; $\epsilon_r = 40.33$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $22.1 \text{ }^\circ\text{C}$; Liquid Temperature : $21.9 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3970; ConvF(7.91, 7.91, 7.91); Calibrated: 2022/4/18;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1418; Calibrated: 2022/3/24
- Phantom: SAM; Type: QD000P40CD; Serial: TP:1794
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Back-High Ant2/Area Scan (8x9x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.00923 W/kg

Back-High Ant2/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 1.607 V/m ; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.0200 W/kg

SAR(1 g) = 0.0353 W/kg ; SAR(10 g) = 0.0164 W/kg

Maximum value of SAR (measured) = 0.00848 W/kg

