客户名稱:朝阳 CUSTOMER:朝阳

Documnet No.:	
Approval Sheet Rev.: A0	
Spec. Rev. : P3	

承認書

APPROVAL SHEET

產品品名/Product WA-F-LA-02-136

客户料號/Customer No.: 1029-000190

發行日期/ Issue Date: 2023-03-31

承認日期/ Approved Date: 2023-03-31

Approved by customer: (signing or stamping here)

- ★邦電子(蘇州)有限公司 INPAQ TECHNOLOGY(SuZhou) Co.,Ltd
- 蘇州市相城區黃埭鎮潘陽工業園區中心大 道5號

No.5,zhongxin Road, PanYang industrial Park,HuangDai town,XiangCheng district ,Suzhou City 传 生邦科技股份有限公司 INPAQ TECHNOLOGY Co.,Ltd

] 苗栗縣竹南鎮大厝裏9鄰59-12號

No. 59-12, 9 Lin, Ta Tsuo Li, Chu Nan Chen, Miao Li Hsien, Taiwan, R.O.C.

WA-F-LA-02-136 Specification

Model: WA-F-LA-02-136

1. Explanation of part number:

$$\frac{WA}{(1)} - \frac{F}{(2)} - \frac{LA}{(3)} - \frac{02}{(4)} - \frac{136}{(5)}$$

- (1) Product Type: Wireless Antenna
- (2) Material: FPC+CABLE
- (3) Frequency: 2.4GHz-2.5GHz
- (4) Coaxial Cable Type: 02
- (5) Suffix:136

2. Storage Condition:

Temperature -40 to +70 °C Humidity 65 ± 20 % RH

3. Operating Condition:

Temperature -40 to +70 °C Humidity 65±20 % RH

4. Electrical Specification:

Those specifications were specially defined for 朝阳-ATC PARTY-BT5 model, and all characteristics were measured under the model's handset testing.

4-1. Frequency Band:

Frequency Band	MHz		
ISM	2400-2500		

UNLESS OTHER SPECIFIED	TOLERANCES ON:		11. 50	→ H—		ļ
$X=\pm$ $X.X=\pm$	$X.XX=\pm$		佳邦科技股份有	列 [公司	ij
ANGLES=±	HOLEDIA=±		INPAQ TECHNOLOGY	Y CO.	, LTC).
SCALE:	UNIT: mm	THIS DRAWING	SS AND SPECIFICATIONS ARE THE P	ROPERT	Y OF IN	PAQ
DRAWN BY:靳静	CHECKED BY: 赵付辉		CO.,LTD.AND SHALL NOT BE REPF FOR THE MANUFACTURE OR SALE			
DESIGNED BY: Ziv	APPROVED BY:赵付辉	DEVICES WITH	IOUT PERMISSION			
TITLE: WA-F-LA-02-136 S	Specification	DOCUMENT	т		PAGE	REV.
111 EE : WA-1 - EA-02-130 S	pecinication	NO.			P3	
			PAGE 1	OF	7	

4-2. Impedance

50 ohm nominal

4-3. Matching circuit

None


4-4. **VSWR**

4-4.1 Measuring Method

- 1.A $50\,\Omega$ coaxial cable is connected to the antenna. Then this cable is connected to a network analyzer to measure the VSWR
- 2. Keeping this jig away from metal at least 20cm

4-4.2 Measurement frequency points and VSWR value

Frequency (Unit MHz)	2400	2450	2500
VSWR	1.74	1.12	1.81

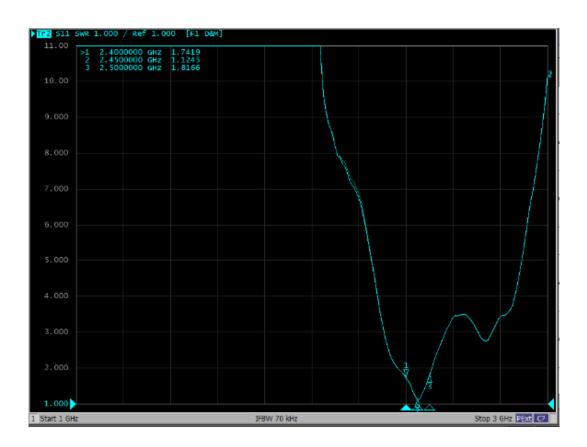


UNLESS OTHER SPECIFIED	TOLERANCES ON:		た *p */	— 7	11 -	.
$X=\pm$ $X.X=\pm$	$X.XX = \pm$		佳邦科技股份有	別官	公豆]
ANGLES=±	HOLEDIA=±		INPAQ TECHNOLOG	Y CO.	., LTD.	
SCALE:	UNIT: mm		S AND SPECIFICATIONS ARE THE P			
DRAWN BY:靳静	CHECKED BY: 赵付辉		CO.,LTD.AND SHALL NOT BE REPI FOR THE MANUFACTURE OR SALE			
DESIGNED BY: Ziv	APPROVED BY:赵付辉	DEVICES WITH	OUT PERMISSION			
TITLE: WA-F-LA-02-136	Specification	DOCUMENT			PAGE R	₹EV.
111EE : WA-1 -EA-02-130 (Specification	NO.			P3	
			PAGE 2	OF	7	

4-5. Efficiency and Gain

4-5.1 Measure method

- 1. Using a low loss coaxial cable to link a standard handset
- 2. Fixed this handset jig on chamber's rotator plane
- 3. Linking jig into network analyzer port and using a probing horn antenna to collect data.
- 4. Using another standard gain horn antenna to calibrated those data

4-5.2 Chamber definition

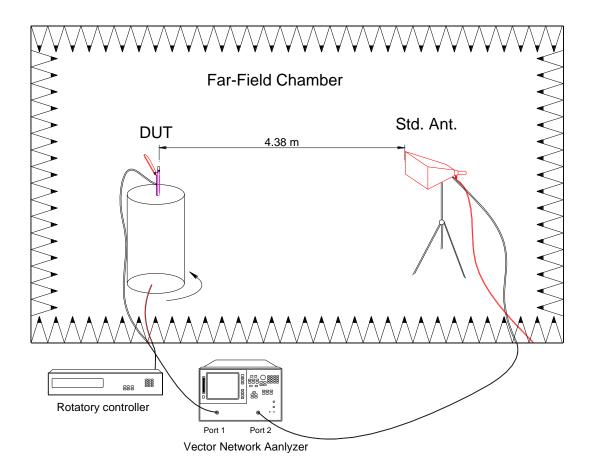

- 1. An anechoic chamber (7mx4mx3m) which satisfied far-field condition was applied to avoid multi-path effect
- 2. The quite room region is 40cmx40cmx40cm at the center of rotator
- 3. The distance between DUT and standard antenna is 4.38 m
- Probing antenna (9120D horn antenna) and standard gain horn antenna (BBHA9120 LPF 700MHz ~6GHz)

PAGE 3 OF 7						
TITLE: WA-F-LA-02-136 Specification		NO.		P3		
	L A-02-126	Specification	DOCUMEN [*]	т	PAGE REV.	
DESIGNED B	Y:Ziv	APPROVED BY:赵付辉	DEVICES WITHOUT PERMISSION			
DRAWN BY:	靳静	CHECKED BY: 赵付辉	TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USEI AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OF			
SCALE:		UNIT: mm		GS AND SPECIFICATIONS ARE THE PR		
ANGLES=±		HOLEDIA=±		INPAQ TECHNOLOGY		
X=±	$X.X=\pm$	$X.XX=\pm$	G	佳邦科技股份有	限公司	
UNLESS OTHE	R SPECIFIED	TOLERANCES ON:		生产 以 上 田 <i>以</i> 土	· ਸਾ	

4-5.3 Efficiency and Gain


Antenna gain is marked (dBi) and is based on STANDARD HORN antenna. The data shows Peak Gain and Average Gain.

Frequency (MHz)	2400	2450	2500
Efficiency (%)	44.28	48.68	43.09
Peak Gain (dBi)	2.95	4.43	2.45


Freq.	Efficiency	Peak Gain
(MHz)	(%)	(dBi)
2400	44.28	2.95
2410	45.45	3.44
2420	46.44	3.89
2430	47.62	4.22
2440	47.47	4.35
2450	48.68	4.43
2460	48.3	4.18
2470	47.45	3.85
2480	47.82	3.5
2490	46.39	3.13
2500	43.09	2.45
AVG	46.64	


UNLESS OTHER	R SPECIFIED	TOLERANCES ON:			,, ,, <u> </u>
X=±	$X.X=\pm$	$X.XX=\pm$	G	佳邦科技股份有	限公司
ANGLES=±		HOLEDIA=±		INPAQ TECHNOLOGY	O., LTD.
SCALE:		UNIT: mm		GS AND SPECIFICATIONS ARE THE PROF	
DRAWN BY:	斯静	CHECKED BY: 赵付辉		/ CO.,LTD.AND SHALL NOT BE REPROD S FOR THE MANUFACTURE OR SALE OF	
DESIGNED BY	' : Ziv	APPROVED BY:赵付辉	DEVICES WITH	HOUT PERMISSION	
TITLE : WA-F-	Ι Δ-02-136 9	Specification	DOCUMEN	Т	PAGE REV.
	LA-02-130 (ppecinication	NO.		P3
				PAGE 4 C)F 7

4-5.4 2D&3D Radiation Pattern Results

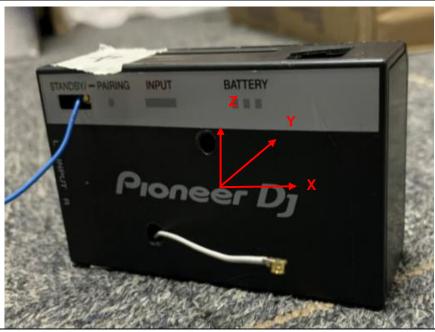


2D Radiation Pattern





H面



UNLESS OTHER SPECIFIED TOLERANCES ON:

 $X=\pm$ $X.X=\pm$ $X.XX=\pm$ ANGLES= \pm HOLEDIA= \pm

SCALE: UNIT: mm

DRAWN BY: 靳静 CHECKED BY: 赵付辉 DESIGNED BY: Ziv APPROVED BY: 赵付辉

TITLE: WA-F-LA-02-136 Specification




佳邦科技股份有限公司 INPAQ TECHNOLOGY CO., LTD.

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

DOCUMENT PAGE REV.
NO. P3

PAGE 5 **OF** 7

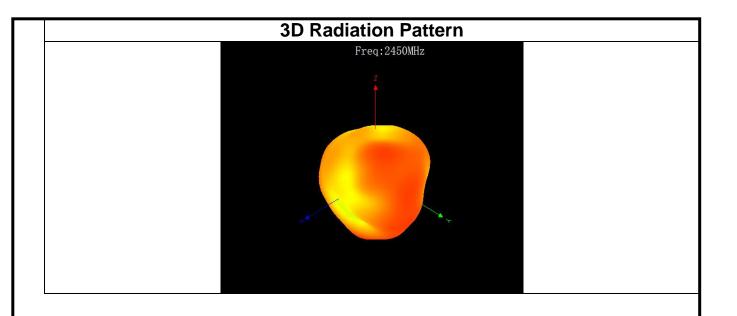


UNLESS OTHER SPECIFIED	TOLERANCES ON:		/ 	<u>- пл /л</u>	/ - 70	м =	_≕ ∣
$X=\pm$ $X.X=\pm$	$X.XX = \pm$	(Ja	佳邦科技	及股份か	月収	公口	ij
ANGLES=±	HOLEDIA=±		INPAQ TEC	HNOLOG	Y CO.	, LTC).
SCALE:	UNIT: mm		S AND SPECIFICATI	ONS ARE THE	PROPERT	Y OF INI	PAQ
DRAWN BY:靳静	CHECKED BY: 赵付辉		CO.,LTD.AND SHAL				
DESIGNED BY: Ziv	APPROVED BY:赵付辉	DEVICES WITH	OUT PERMISSION				
TITLE: WA-F-LA-02-136	Specification	DOCUMENT	Г			PAGE	REV.
111LE : WA-1 - LA-02-130	opeomeation	NO.				P3	
				PAGE 6	OF	7	

5. Mechanical Specification:

5-1. Mechanical Configuration (Unit: mm)

The appearance of the antenna is according to drawing Figure 5-1-1

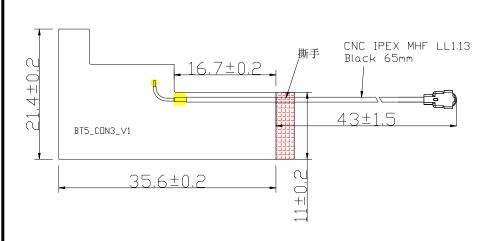

0,25±0,05
(不含离型纸)

UNLESS OTHER SPECIFIED	TOLERANCES ON :		た チャイバ に	L HH	٠, ٠, ـــــــــــــــــــــــــــــــــ	→ 171	<i>2</i> 3 -	
$X=\pm$ $X.X=\pm$	$X.XX = \pm$		佳邦科技	瓦股 化	分乍	別	公司	到
ANGLES=±	HOLEDIA=±		INPAQ TEC	CHNOL	.OGY	CO.	., LT[) .
SCALE:	UNIT: mm		S AND SPECIFICAT					
DRAWN BY:靳静	CHECKED BY: 赵付辉		CO.,LTD.AND SHAP					
DESIGNED BY: Ziv	APPROVED BY:赵付辉	DEVICES WITH	OUT PERMISSION					
TITLE: WA-F-LA-02-136 S	Specification	DOCUMENT	1				PAGE	REV.
111EE : WA-1-EA-02-130 C	pecinication	NO.					P3	
				PAGE	7	OF	7	