



TEST REPORT

No. I18Z62189-WMD03

for

Vodafone

Smart Phone

Model Name: VFD 630

FCC ID: 2AM86VFD630

with

Hardware Version: V0.2

Software Version: VFD 630-V01/VFD 630-V02

Issued Date: 2019-04-01



Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

Test Laboratory:

CTTL, Telecommunication Technology Labs, CAICT

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504

Email: ctl_terminals@caict.ac.cn, website: www.caict.ac.cn

REPORT HISTORY

Report Number	Revision	Description	Issue Date
I18Z62189-WMD03	Rev.0	1 st edition	2019-02-21
I18Z62189-WMD03	Rev.1	2 nd edition Added the statements in Summary of test results	2019-04-01



CONTENTS

1. TEST LABORATORY	4
1.1. TESTING LOCATION	4
1.2. TESTING ENVIRONMENT	4
1.3. PROJECT DATA.....	4
1.4. SIGNATURE	4
2. CLIENT INFORMATION	5
2.1. APPLICANT INFORMATION.....	5
2.2. MANUFACTURER INFORMATION.....	5
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	6
3.1. ABOUT EUT	6
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	6
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST.....	6
3.4. GENERAL DESCRIPTION	6
4. REFERENCE DOCUMENTS	7
4.1. REFERENCE DOCUMENTS FOR TESTING	7
5. LABORATORY ENVIRONMENT	8
6. SUMMARY OF TEST RESULTS.....	9
6.1. SUMMARY OF TEST RESULTS	9
6.2. STATEMENTS	10
7. TEST EQUIPMENTS UTILIZED.....	11
ANNEX A: MEASUREMENT RESULTS	12
A.1 OUTPUT POWER.....	12
A.2 EMISSION LIMIT	24
A.3 FREQUENCY STABILITY	30
A.4 OCCUPIED BANDWIDTH	32
A.5 EMISSION BANDWIDTH.....	41
A.6 BAND EDGE COMPLIANCE	50
A.7 CONDUCTED SPURIOUS EMISSION	60
A.8 PEAK-TO-AVERAGE POWER RATIO	62
ANNEX B: ACCREDITATION CERTIFICATE	63

1. Test Laboratory

1.1. Testing Location

Location 1: CTTL(huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,
P. R. China 100191

Location 2: CTTL(Shouxiang)

Address: No. 51 Shouxiang Science Building, Xueyuan Road,
Haidian District, Beijing, P. R. China 100191

1.2. Testing Environment

Normal Temperature: 15-35°C

Relative Humidity: 20-75%

1.3. Project data

Testing Start Date: 2019-01-20

Testing End Date: 2019-02-19

1.4. Signature



Dong Yuan
(Prepared this test report)



Zhou Yu
(Reviewed this test report)



Zhao Hui Lin
Deputy Director of the laboratory
(Approved this test report)



2. Client Information

2.1. Applicant Information

Company Name: Wiko SAS
Address /Post: 1, rue Capitaine Dessemond 13007 - Marseille - France.
Contact: Laurent Dahan
Email: ldahan@wikomobile.com
Telephone: 33488089515
Fax: 33488089520

2.2. Manufacturer Information

Company Name: Vodafone Procurement Company S.à r.l.,
Address /Post: 15 rue Edward Steichen, L-2540 Luxembourg, Grand-Duché de
Luxembourg
Contact: /
Email: /
Telephone: /
Fax: /

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	Smart Phone
Model Name	VFD 630
FCC ID	2AM86VFD630
Antenna	Embedded
Output power	23.12dBm maximum EIRP measured for Band 7
Extreme vol. Limits	3.5VDC to 4.4VDC (nominal: 3.85VDC)
Extreme temp. Tolerance	-10°C to +55°C

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of CTTL.

3.2. Internal Identification of EUT used during the test

EUT ID*	IMEI	HW Version	SW Version	Date of receipt
UT32a	359956100019025/	V0.2	VFD 630-V01/	2019-01-07
	359956100027028		VFD 630-V02	
UT15a	359956100019140/	V0.2	VFD 630-V01/	2019-01-09
	359956100027143		VFD 630-V02	

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

AE ID*	Description
AE1	Battery
AE1	
Model	PT30H415870W
Manufacturer	Shenzhen BYD Lithium Battery Company Limited
Capacitance	2920mAh

*AE ID: is used to identify the test sample in the lab internally.

3.4. General Description

The Equipment Under Test (EUT) is a model of Smart Phone with embedded antenna. Manual and specifications of the EUT were provided to fulfil the test.



4. Reference Documents

4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part 22	PUBLIC MOBILE SERVICES	10-1-18 Edition
FCC Part 27	MISCELLANEOUS WIRELESS COMMUNICATIONS SERVICES	10-1-18 Edition
ANSI/TIA-603-E	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards	2016
TIA-102.CAAA-E	DIGITAL C4FMCQPSK TRANSCEIVER MEASUREMENT METHODS	2016
ANSI C63.26	American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services	2015
KDB 971168 D01	MEASUREMENT GUIDANCE FOR CERTIFICATION OF LICENSED DIGITAL TRANSMITTERS	v03r01

5. LABORATORY ENVIRONMENT

Semi-anechoic chamber SAC-2 (10 meters×6.7meters×6.1meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 15 %, Max. = 75 %
Shielding effectiveness	0.014MHz - 1MHz, >60dB; 1MHz - 1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4 Ω
Normalised site attenuation (NSA)	< ± 4 dB, 3m distance, from 30 to 1000 MHz
Site voltage standing-wave ratio (S_{VSWR})	Between 0 and 6 dB, from 1GHz to 18GHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 3000 MHz

Fully-anechoic chamber FAC-3 (9 meters×6.5 meters×4 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 15 %, Max. = 75 %
Shielding effectiveness	0.014MHz - 1MHz, >60dB; 1MHz - 1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4 Ω
Site voltage standing-wave ratio (S_{VSWR})	Between 0 and 6 dB, from 1GHz to 18GHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 4000 MHz

6. SUMMARY OF TEST RESULTS

6.1. Summary of test results

Abbreviations used in this clause:		
Verdict Column	P	Pass
	F	Fail
	NA	Not applicable
	NM	Not measured
Location Column	A/B/C/D	The test is performed in test location A, B, C or D which are described in section 1.1 of this report

LTE Band 5

Items	Test Name	Clause in FCC rules	Section in this report	Verdict
1	Output Power	§2.1046(a), 22.913(a)	A.1	P
2	Emission Limit	22.917, 2.1051	A.2	P
3	Frequency Stability	22.235, 2.1055	A.3	P
4	Occupied Bandwidth	2.1049(h)(i)	A.4	P
5	Emission Bandwidth	22.917(b)	A.5	P
6	Band Edge Compliance	22.917(b)	A.6	P
7	Conducted Spurious Emission	22.917, 2.1057	A.7	P

LTE Band 7

Items	Test Name	Clause in FCC rules	Section in this report	Verdict
1	Output Power	27.50(h)(2)	A.1	P
2	Emission Limit	27.53(m), 2.1051	A.2	P
3	Frequency Stability	27.54, 2.1055	A.3	P
4	Occupied Bandwidth	2.1049(h)(i)	A.4	P
5	Emission Bandwidth	27.53(m)	A.5	P
6	Band Edge Compliance	27.53(m)	A.6	P
7	Conducted Spurious Emission	27.53(m), 2.1057	A.7	P
8	Peak to Average Power Ratio	27.50(a)	A.8	P

The VFD 630, manufactured by Vodafone Procurement Company S.à r.l., is a new product for conformance test. The only difference between the two SW is that, VFD 630-V02 supports dual SIM, while VFD 630-V01 supports single SIM. All the test cases in this report have been executed on SW VFD 630-V02.



6.2. Statements

The test cases listed in section 6.1 of this report for the EUT specified in section 3 were performed by CTTL according to the standards or reference documents in section 4.1

The EUT met all applicable requirements of the standards or reference documents in section 4.1.

This report only deals with the LTE functions among the features described in section 3.

7. Test Equipments Utilized

NO	Description	TYPE	series number	MANUFACTURER	CAL DUE DATE	Calibration interval
1	Universal Radio Communication Tester	CMW500	159082	R&S	2019-12-25	1 year
2	Spectrum Analyzer	FSU26	200030	R&S	2019-06-04	1 year
3	Climate chamber	SH-242	93008556	ESPEC	2019-12-21	2 year
4	Universal Radio Communication Tester	CMW500	143008	R&S	2019-12-26	1 Year
5	Spectrum Analyzer	E4440A	MY48250642	Agilent	2019-03-31	1 Year
6	EMI Antenna	VULB9163	9163-235	Schwarzbeck	2019-11-20	3 year
7	EMI Antenna	3117	00119024	ETS-Lindgren	2020-01-21	3 Years
8	EMI Antenna	3117	00058889	ETS-Lindgren	2020-01-12	3 year
9	EMI Antenna	167	9117	Schwarzbeck	2019-04-13	3 year
10	Signal Generator	N5183A	MY49060052	Agilent	2019-03-31	1 year
11	Power Amplifier	5S30G4	0341863	AR	/	/

ANNEX A: MEASUREMENT RESULTS

A.1 OUTPUT POWER

A.1.1 Summary

During the process of testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication tester (CMW500) to ensure max power transmission and proper modulation.

In all cases, output power is within the specified limits.

A.1.2 Conducted

A.1.2.1 Method of Measurements

The EUT was set up for the max output power with pseudo random data modulation.

These measurements were done at 3 frequencies (bottom, middle and top of operational frequency range) for each bandwidth.

A.1.2.2 Measurement result

LTE band 5

Bandwidth	RB size/offset	Frequency (MHz)	Power(dBm)	
			QPSK	16QAM
1.4MHz	1 RB high	848.3	22.95	22.21
		836.5	22.84	22.22
		824.7	23.00	22.33
	1 RB low	848.3	22.91	22.23
		836.5	22.54	22.29
		824.7	22.48	22.26
	50% RB mid	848.3	23.01	22.15
		836.5	22.98	22.19
		824.7	23.04	22.22
	100% RB	848.3	21.96	20.85
		836.5	21.94	20.86
		824.7	21.96	20.89

3MHz	1 RB high	847.5	22.94	22.25
		836.5	22.86	22.31
		825.5	22.98	22.36
	1 RB low	847.5	23.01	22.28
		836.5	23.02	22.33
		825.5	23.03	22.33
	50% RB mid	847.5	21.97	21.08
		836.5	21.97	21.10
		825.5	22.03	21.15
	100% RB	847.5	21.93	20.99
		836.5	21.94	21.02
		825.5	21.96	21.03
5MHz	1 RB high	846.5	22.81	22.30
		836.5	22.85	22.37
		826.5	22.85	22.35
	1 RB low	846.5	22.83	22.31
		836.5	22.89	22.37
		826.5	22.90	22.36
	50% RB mid	846.5	21.97	21.13
		836.5	22.02	21.17
		826.5	22.05	21.16



	100% RB	846.5	21.98	20.99
		836.5	21.95	21.04
		826.5	21.95	21.10
10MHz	1 RB high	844.0	22.91	22.20
		836.5	22.94	22.29
		829.0	22.98	22.31
	1 RB low	844.0	22.95	22.28
		836.5	22.91	22.34
		829.0	22.93	22.31
	50% RB mid	844.0	22.03	21.07
		836.5	22.01	21.08
		829.0	22.01	21.11
	100% RB	844.0	22.00	21.02
		836.5	22.03	21.03
		829.0	22.00	21.04

LTE band 7

Bandwidth	RB size/offset	Frequency (MHz)	Power(dBm)		
			QPSK	16QAM	
5MHz	1 RB high	2567.5	22.65	21.62	
		2535	22.61	21.67	
		2502.5	22.61	21.62	
	1 RB low	2567.5	22.67	21.59	
		2535	22.60	21.64	
		2502.5	22.58	22.12	
	50% RB mid	2567.5	21.74	20.84	
		2535	21.63	20.76	
		2502.5	21.78	20.96	
	100% RB	2567.5	21.70	20.75	
		2535	21.64	20.69	
		2502.5	21.70	20.86	
	10MHz	1 RB high	2565	22.62	21.63
			2535	22.53	21.49
			2505	22.68	22.02
1 RB low		2565	22.65	21.70	
		2535	22.59	21.52	
		2505	22.79	22.02	
50% RB mid		2565	21.77	20.93	
		2535	21.64	20.77	



	100% RB	2505	21.78	20.90	
		2565	21.74	20.85	
		2535	21.69	20.79	
		2505	21.80	20.88	
15MHz	1 RB high	2562.5	22.59	21.94	
		2535	22.43	21.45	
		2507.5	22.58	21.95	
	1 RB low	2562.5	22.66	22.02	
		2535	22.52	21.47	
		2507.5	22.74	21.98	
	50% RB mid	2562.5	21.79	20.76	
		2535	21.73	20.74	
		2507.5	21.76	20.86	
	100% RB	2562.5	21.77	20.75	
		2535	21.69	20.70	
		2507.5	21.81	20.85	
	20MHz	1 RB high	2560	22.37	21.95
			2535	22.35	21.82
			2510	22.35	21.78
1 RB low		2560	22.45	22.01	
		2535	22.40	21.83	



		2510	22.51	21.86
	50% RB mid	2560	21.73	20.85
		2535	21.72	20.79
		2510	21.77	20.79
	100% RB	2560	21.66	20.77
		2535	21.66	20.75
		2510	21.76	20.83

A.1.3 Radiated

A.1.3.1 Description

This is the test for the maximum radiated power from the EUT.


Rule Part 22.913(a) specifies “Mobile stations are limited to 7.0 watts EIRP.”

Rule Part 27.50(h)(2) specifies “Mobile stations are limited to 2.0 watts EIRP.”


A.1.3.2 Method of Measurement

The measurements procedures in TIA-603-E-2016 are used.

1. EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.

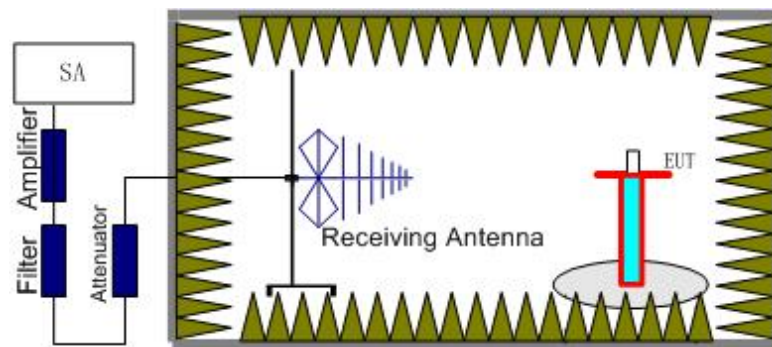

2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (Pr).
3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

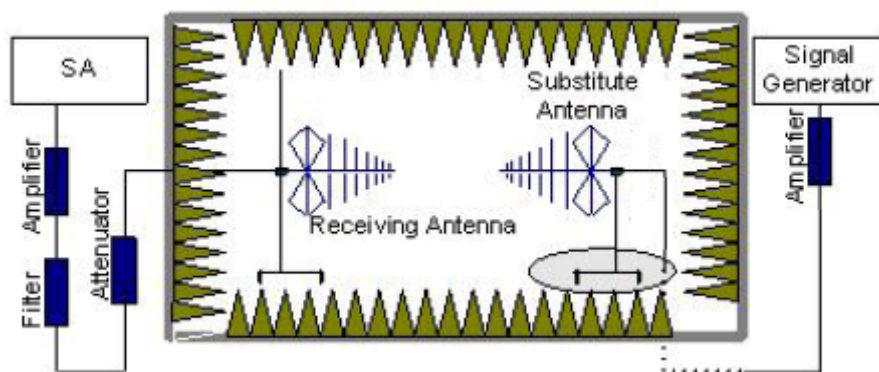

In the chamber, a substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna. Adjust the level of the signal generator output until the value of the

receiver reaches the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. An amplifier should be connected to the Signal Source output port. And the cable should be connected between the amplifier and the substitution antenna.
The cable loss (P_{cl}), the substitution antenna Gain (G_a) and the amplifier Gain (P_{Ag}) should be recorded after test.

The measurement results are obtained as described below:

$$\text{Power (EIRP)} = P_{Mea} - P_{Ag} - P_{cl} - G_a$$

5. This value is EIRP since the measurement is calibrated using an antenna of known gain (unit dBi) and known input power.
6. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15$.



A.1.3.3 Measurement result

LTE Band 5- ERP 22.913(a)

Limits: $\leq 38.45\text{dBm}$ (7W)

LTE Band 5_1.4MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{ci} (dB)	P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Margin(dB)	Polarization
824.70	-22.19	2.26	45.79	0.95	2.15	20.14	38.45	18.31	H
836.50	-22.16	2.26	45.66	0.82	2.15	19.91	38.45	18.54	H
848.30	-23.93	2.27	45.55	0.80	2.15	18.00	38.45	20.45	H

LTE Band 5_3MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{ci} (dB)	P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Margin(dB)	Polarization
825.50	-22.39	2.26	45.79	0.94	2.15	19.93	38.45	18.52	H
836.50	-22.34	2.26	45.66	0.82	2.15	19.73	38.45	18.72	H
847.50	-23.61	2.27	45.56	0.81	2.15	18.34	38.45	20.11	H

LTE Band 5_5MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{ci} (dB)	P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Margin(dB)	Polarization
826.50	-22.68	2.25	45.77	0.93	2.15	19.62	38.45	18.83	H
836.50	-22.67	2.26	45.66	0.82	2.15	19.40	38.45	19.05	H
846.50	-23.89	2.26	45.56	0.82	2.15	18.08	38.45	20.37	H

LTE Band 5_10MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _{ci} (dB)	P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Margin(dB)	Polarization
829.00	-22.33	2.13	45.74	0.90	2.15	20.03	38.45	18.42	H
836.50	-22.11	2.26	45.66	0.82	2.15	19.96	38.45	18.49	H
844.00	-23.08	2.26	45.59	0.82	2.15	18.92	38.45	19.53	H



LTE Band 5_1.4MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{ci} (dB)	P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Margin(dB)	Polarization
824.70	-23.17	2.26	45.79	0.95	2.15	19.16	38.45	19.29	H
836.50	-23.11	2.26	45.66	0.82	2.15	18.96	38.45	19.49	H
848.30	-25.04	2.27	45.55	0.80	2.15	16.89	38.45	21.56	H

LTE Band 5_3MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{ci} (dB)	P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Margin(dB)	Polarization
825.50	-23.29	2.26	45.79	0.94	2.15	19.03	38.45	19.42	H
836.50	-23.18	2.26	45.66	0.82	2.15	18.89	38.45	19.56	H
847.50	-24.61	2.27	45.56	0.81	2.15	17.34	38.45	21.11	H

LTE Band 5_5MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{ci} (dB)	P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Margin(dB)	Polarization
826.50	-23.45	2.25	45.77	0.93	2.15	18.85	38.45	19.60	H
836.50	-23.60	2.26	45.66	0.82	2.15	18.47	38.45	19.98	H
846.50	-24.79	2.26	45.56	0.82	2.15	17.18	38.45	21.27	H

LTE Band 5_10MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{ci} (dB)	P _{Ag} (dB)	Ga Antenna Gain(dBi)	Correction (dB)	ERP(dBm)	Limit(dBm)	Margin(dB)	Polarization
829.00	-23.12	2.13	45.74	0.90	2.15	19.24	38.45	19.21	H
836.50	-23.08	2.26	45.66	0.82	2.15	18.99	38.45	19.46	H
844.00	-24.01	2.26	45.59	0.82	2.15	17.99	38.45	20.46	H



LTE Band 7- EIRP 27.50(h)(2)

Limits: ≤33 dBm (2W)

LTE Band 7_5MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _c (dB)	P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
2502.50	-26.11	3.58	45.68	6.10	22.09	33.00	10.91	H
2535.00	-24.62	3.63	44.82	6.16	22.73	33.00	10.27	H
2567.50	-25.04	3.65	44.92	6.22	22.45	33.00	10.55	H

LTE Band 7_10MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _c (dB)	P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
2505.00	-25.40	3.59	45.64	6.11	22.76	33.00	10.24	H
2535.00	-24.28	3.63	44.82	6.16	23.07	33.00	9.93	H
2565.00	-25.02	3.65	44.97	6.22	22.52	33.00	10.48	H

LTE Band 7_15MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _c (dB)	P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
2507.50	-24.68	3.59	44.92	6.11	22.76	33.00	10.24	H
2535.00	-25.47	3.63	44.82	6.16	21.88	33.00	11.12	H
2562.50	-25.79	3.65	45.67	6.21	22.44	33.00	10.56	H

LTE Band 7_20MHz_QPSK

Frequency(MHz)	P _{Mea} (dBm)	P _c (dB)	P _{Ag} (dB)	Ga Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
2510.00	-24.84	3.58	45.36	6.12	23.06	33.00	9.94	H
2535.00	-24.45	3.63	44.82	6.16	22.90	33.00	10.10	H
2560.00	-26.09	3.64	45.98	6.21	22.46	33.00	10.54	H



LTE Band 7_5MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
2502.50	-26.02	3.58	45.68	6.10	22.18	33.00	10.82	H
2535.00	-24.35	3.63	44.82	6.16	23.00	33.00	10.00	H
2567.50	-24.79	3.65	44.92	6.22	22.70	33.00	10.30	H

LTE Band 7_10MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
2505.00	-25.38	3.59	45.64	6.11	22.78	33.00	10.22	H
2535.00	-24.26	3.63	44.82	6.16	23.09	33.00	9.91	H
2565.00	-24.99	3.65	44.97	6.22	22.55	33.00	10.45	H

LTE Band 7_15MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
2507.50	-24.65	3.59	44.92	6.11	22.79	33.00	10.21	H
2535.00	-25.44	3.63	44.82	6.16	21.91	33.00	11.09	H
2562.50	-25.74	3.65	45.67	6.21	22.49	33.00	10.51	H

LTE Band 7_20MHz_16QAM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dBi)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
2510.00	-24.78	3.58	45.36	6.12	23.12	33.00	9.88	H
2535.00	-24.40	3.63	44.82	6.16	22.95	33.00	10.05	H
2560.00	-26.06	3.64	45.98	6.21	22.49	33.00	10.51	H

Frequency: 2510.00MHz

Peak EIRP(dBm) = P_{Mea}(-24.78dBm) - G_a (-6.12dBi) - P_{Ag} (-45.36dB) - P_{cl} (3.58dB) = 23.12dBm

ANALYZER SETTINGS: RBW = VBW = 3MHz

Note: Expanded measurement uncertainty for this test item is U=2.84, k=2.

A.2 EMISSION LIMIT


A.2.1 Measurement Method

The measurements procedures in TIA-603-E-2016 are used. This measurement is carried out in fully-anechoic chamber FAC-3.


The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier. The resolution bandwidth is set 1MHz. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of the LTE Bands 5/7.

The procedure of radiated spurious emissions is as follows:

1. EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic were measured with peak detector.

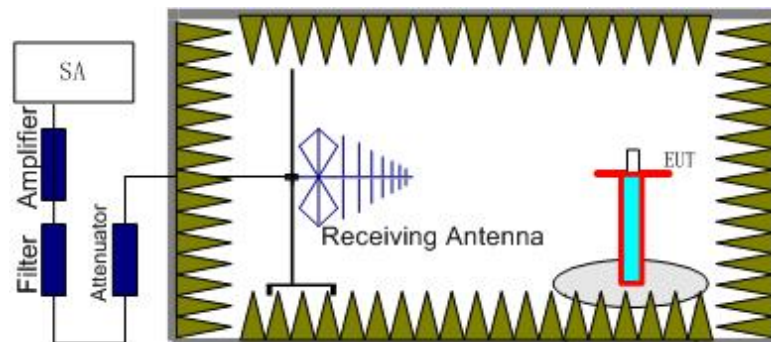

2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (Pr).
3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

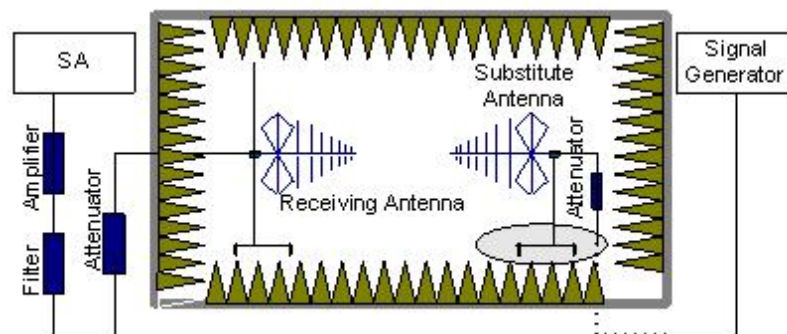

In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere

with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna. Adjust the level of the signal generator output until the value of the receiver reaches the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. The Path loss (P_{pl}) between the Signal Source with the Substitution Antenna and the Substitution Antenna Gain (G_a) should be recorded after test.

An amplifier should be connected in for the test.

The Path loss (P_{pl}) is the summation of the cable loss and the gain of the amplifier.

The measurement results are obtained as described below:

$$\text{Power (EIRP)} = P_{Mea} + P_{pl} + G_a$$

5. This value is EIRP since the measurement is calibrated using an antenna of known gain (unit: dBi) and known input power.
6. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15\text{dB}$.

A.2.2 Measurement Limit

Part 22.917, Part 27.53(g), Part 27.53(h) specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

A.2.3 Measurement Results

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of the LTE Bands 5-7. It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the LTE Bands 5-7 into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this. The evaluated frequency range is from 30MHz to 26GHz.



LTE Band 5, 1.4MHz, QPSK, Channel 20407

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Correction (dB)	Peak ERP(dBm)	Limit (dBm)	Margin(dB)	Polarization
1650.01	-58.01	3.57	5.23	2.15	-58.50	-13.00	45.50	H
2474.00	-51.24	4.60	6.02	2.15	-51.97	-13.00	38.97	H
3305.02	-55.39	5.29	7.73	2.15	-55.10	-13.00	42.10	H
4113.02	-56.24	6.04	9.01	2.15	-55.42	-13.00	42.42	V
4949.01	-56.05	6.69	9.85	2.15	-55.04	-13.00	42.04	V
5766.01	-54.61	7.24	10.55	2.15	-53.45	-13.00	40.45	H

LTE Band 5, 1.4MHz, QPSK, Channel 20525

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Correction (dB)	Peak ERP(dBm)	Limit (dBm)	Margin(dB)	Polarization
1673.01	-55.24	3.58	5.19	2.15	-55.78	-13.00	42.78	H
2510.00	-50.35	4.63	6.12	2.15	-51.01	-13.00	38.01	H
3357.02	-54.95	5.32	7.86	2.15	-54.56	-13.00	41.56	H
4176.02	-55.64	6.15	9.08	2.15	-54.86	-13.00	41.86	V
5027.01	-55.09	6.57	9.94	2.15	-53.87	-13.00	40.87	V
5849.01	-53.70	7.23	10.53	2.15	-52.55	-13.00	39.55	H

LTE Band 5, 1.4MHz, QPSK, Channel 20643

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Correction (dB)	Peak ERP(dBm)	Limit (dBm)	Margin(dB)	Polarization
1697.01	-57.14	3.60	5.15	2.15	-57.74	-13.00	44.74	H
2545.00	-46.95	4.66	6.18	2.15	-47.58	-13.00	34.58	H
3380.02	-55.65	5.34	7.91	2.15	-55.23	-13.00	42.23	V
4236.02	-55.67	6.25	9.14	2.15	-54.93	-13.00	41.93	H
5077.01	-56.00	6.71	10.01	2.15	-54.85	-13.00	41.85	H
5931.01	-53.32	7.47	10.51	2.15	-52.43	-13.00	39.43	H



LTE Band 5, 1.4MHz, 16QAM, Channel 20407

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Correction (dB)	Peak ERP(dBm)	Limit (dBm)	Margin(dB)	Polarization
1649.01	-57.85	3.56	5.23	2.15	-58.33	-13.00	45.33	H
2474.00	-50.87	4.60	6.02	2.15	-51.60	-13.00	38.60	H
3301.02	-54.79	5.29	7.72	2.15	-54.51	-13.00	41.51	H
4113.02	-56.14	6.04	9.01	2.15	-55.32	-13.00	42.32	H
4934.01	-55.45	6.72	9.83	2.15	-54.49	-13.00	41.49	H
5772.01	-54.85	7.23	10.55	2.15	-53.68	-13.00	40.68	V

LTE Band 5, 1.4MHz, 16QAM, Channel 20525

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Correction (dB)	Peak ERP(dBm)	Limit (dBm)	Margin(dB)	Polarization
1673.01	-55.68	3.58	5.19	2.15	-56.22	-13.00	43.22	H
2510.00	-46.46	4.63	6.12	2.15	-47.12	-13.00	34.12	H
3357.02	-52.10	5.32	7.86	2.15	-51.71	-13.00	38.71	H
4189.02	-56.31	6.18	9.09	2.15	-55.55	-13.00	42.55	V
5015.01	-55.79	6.58	9.92	2.15	-54.60	-13.00	41.60	V
5846.01	-54.44	7.22	10.53	2.15	-53.28	-13.00	40.28	H

LTE Band 5, 1.4MHz, 16QAM, Channel 20643

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Correction (dB)	Peak ERP(dBm)	Limit (dBm)	Margin(dB)	Polarization
1697.01	-56.18	3.60	5.15	2.15	-56.78	-13.00	43.78	H
2545.00	-49.42	4.66	6.18	2.15	-50.05	-13.00	37.05	H
3394.02	-55.69	5.36	7.95	2.15	-55.25	-13.00	42.25	V
4243.02	-56.14	6.25	9.14	2.15	-55.40	-13.00	42.40	H
5100.01	-56.02	6.77	10.04	2.15	-54.90	-13.00	41.90	H
5941.01	-53.80	7.47	10.51	2.15	-52.91	-13.00	39.91	H



LTE Band 7, 5 MHz, QPSK, Channel 20775

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Margin(dB)	Polarization
5010.02	-51.50	6.59	9.91	-48.18	-25.00	23.18	H
7511.01	-49.24	8.35	12.21	-45.38	-25.00	20.38	V
10026.01	-43.49	9.25	12.91	-39.83	-25.00	14.83	H
12554.01	-49.16	10.33	13.23	-46.26	-25.00	21.26	V
15049.00	-42.45	11.28	13.97	-39.76	-25.00	14.76	H
17545.00	-42.01	12.90	14.96	-39.95	-25.00	14.95	V

LTE Band 7, 5 MHz, QPSK, Channel 21100

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Margin(dB)	Polarization
5073.02	-46.97	6.70	10.00	-43.67	-25.00	18.67	H
7609.01	-49.86	8.01	12.29	-45.58	-25.00	20.58	V
10156.01	-40.80	9.37	12.96	-37.21	-25.00	12.21	H
12676.01	-49.67	10.34	13.31	-46.70	-25.00	21.70	H
15227.00	-45.81	11.37	13.86	-43.32	-25.00	18.32	V
17763.00	-43.81	12.53	15.27	-41.07	-25.00	16.07	H

LTE Band 7, 5 MHz, QPSK, Channel 21425

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Margin(dB)	Polarization
5138.02	-50.90	6.86	10.09	-47.67	-25.00	22.67	H
7706.01	-50.06	8.42	12.36	-46.12	-25.00	21.12	V
10280.01	-38.31	9.57	13.01	-34.87	-25.00	9.87	H
12852.01	-50.30	10.63	13.41	-47.52	-25.00	22.52	H
15419.00	-46.91	11.42	13.75	-44.58	-25.00	19.58	V
17991.00	-43.24	12.90	15.59	-40.55	-25.00	15.55	V



LTE Band 7, 5 MHz, 16QAM, Channel 20775

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Margin(dB)	Polarization
5008.02	-46.00	6.59	9.91	-42.68	-25.00	17.68	H
7511.01	-48.72	8.35	12.21	-44.86	-25.00	19.86	V
10025.01	-43.39	9.25	12.91	-39.73	-25.00	14.73	H
12518.01	-50.02	10.23	13.21	-47.04	-25.00	22.04	H
15030.00	-41.86	11.26	13.98	-39.14	-25.00	14.14	V
17528.00	-41.94	12.83	14.94	-39.83	-25.00	14.83	H

LTE Band 7, 5 MHz, 16QAM, Channel 21100

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Margin(dB)	Polarization
5070.02	-49.93	6.69	10.00	-46.62	-25.00	21.62	H
7606.01	-51.96	8.00	12.28	-47.68	-25.00	22.68	H
10145.01	-41.06	9.39	12.96	-37.49	-25.00	12.49	V
12670.01	-50.79	10.35	13.30	-47.84	-25.00	22.84	H
15217.00	-44.76	11.38	13.87	-42.27	-25.00	17.27	V
17759.00	-43.05	12.51	15.26	-40.30	-25.00	15.30	V

LTE Band 7, 5 MHz, 16QAM, Channel 21425

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Margin(dB)	Polarization
5135.02	-49.53	6.86	10.09	-46.30	-25.00	21.30	H
7707.01	-49.78	8.42	12.37	-45.83	-25.00	20.83	V
10277.01	-37.54	9.56	13.01	-34.09	-25.00	9.09	V
12828.01	-49.85	10.69	13.40	-47.14	-25.00	22.14	H
15386.00	-46.55	11.38	13.77	-44.16	-25.00	19.16	H
17959.00	-43.24	12.89	15.54	-40.59	-25.00	15.59	H

Note: Expanded measurement uncertainty for this test item is U=5.16, k=2.

A.3 FREQUENCY STABILITY

A.3.1 Method of Measurement

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a “call mode”. This is accomplished with the use of R&S CMW500 DIGITAL RADIO COMMUNICATION TESTER.

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at -10°C.
3. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on middle channel for LTE band 5 7, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
4. Repeat the above measurements at 10°C increments from -10°C to +50°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
5. Re-measure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments re-measuring carrier frequency at each voltage. Pause at nominal voltage for 1.5 hours unpowered, to allow any self-heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at +50°C.
7. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
8. Repeat the above measurements at 10 °C increments from -10°C to +50°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

A.3.2 Measurement Limit

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d) (2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 3.5VDC and 4.4VDC, with a nominal voltage of 3.85VDC. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress. These voltages represent a tolerance from -5.4% to 10.8%. For the purposes of measuring frequency stability these voltage limits are to be used.

A.3.3 Measurement results

LTE Band 5, 1.4MHz bandwidth (worst case of all bandwidths)

Frequency Error vs Voltage

Voltage (V)	Frequency error (Hz)		Frequency error (ppm)	
	QPSK	16QAM	QPSK	16QAM
3.5	22.97	-29.54	0.0275	0.0353
3.85	-12.23	-31.06	0.0146	0.0371
4.4	-12.86	-30.87	0.0154	0.0369

Frequency Error vs Temperature

Temperature (°C)	Frequency error (Hz)		Frequency error (ppm)	
	QPSK	16QAM	QPSK	16QAM
50	-11.43	-33.35	0.0137	0.0399
40	-7.64	-30.11	0.0091	0.0360
30	-9.60	-33.73	0.0115	0.0403
20	-11.37	-32.74	0.0136	0.0391
10	-11.39	-28.44	0.0136	0.0340
0	-14.58	-32.82	0.0174	0.0392
- 10	-16.92	-32.33	0.0202	0.0386

LTE Band 7, 10MHz bandwidth (worst case of all bandwidths)

Frequency Error vs Voltage

Voltage (V)	Frequency error (Hz)		Frequency error (ppm)	
	QPSK	16QAM	QPSK	16QAM
3.5	-14.71	19.67	0.0058	0.0078
3.85	-18.98	-20.87	0.0075	0.0082
4.4	-19.43	-19.07	0.0077	0.0075

Frequency Error vs Temperature

Temperature (°C)	Frequency error (Hz)		Frequency error (ppm)	
	QPSK	16QAM	QPSK	16QAM
50	-21.40	-23.47	0.0084	0.0093
40	-24.16	-23.59	0.0095	0.0093
30	-23.00	-28.92	0.0091	0.0114
20	-21.44	22.39	0.0085	0.0088
10	-20.06	19.80	0.0079	0.0078
0	-20.11	-28.25	0.0079	0.0111
- 10	-20.43	-23.45	0.0081	0.0093



A.4 OCCUPIED BANDWIDTH

A.4.1 Occupied Bandwidth Results

Occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of the US Cellular/PCS frequency bands. The table below lists the measured 99% BW. Spectrum analyzer plots are included on the following pages.


The measurement method is from KDB 971168 4.2:

- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be set wide enough to capture all modulation products including the emission skirts (i.e., two to five times the OBW).
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
- c) Set the reference level of the instrument as required to keep the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope must be at least $10\log(\text{OBW} / \text{RBW})$ below the reference level.
- d) Set the detection mode to peak, and the trace mode to max hold.
- e) Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

LTE band 5, 1.4MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
836.5	QPSK	16QAM
	1097.76	1089.74

LTE band 5, 1.4MHz Bandwidth, QPSK (99% BW)

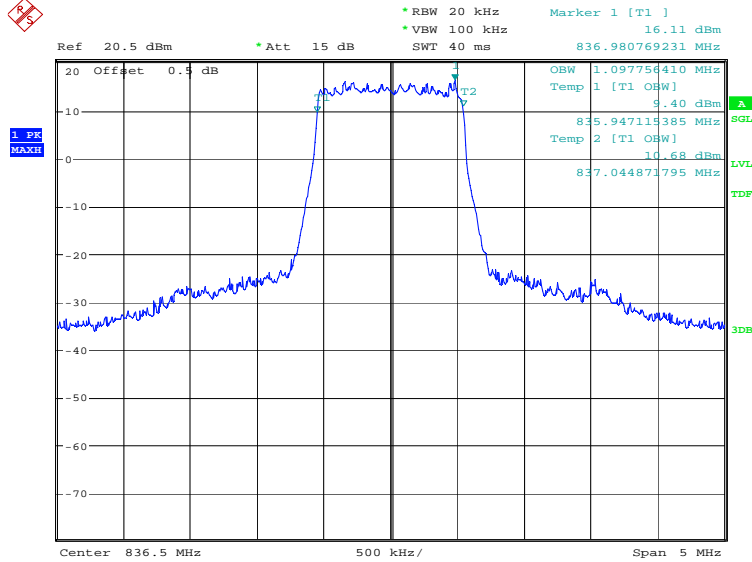

Date: 22.JAN.2019 14:10:20

LTE band 5, 1.4MHz Bandwidth, 16QAM (99% BW)

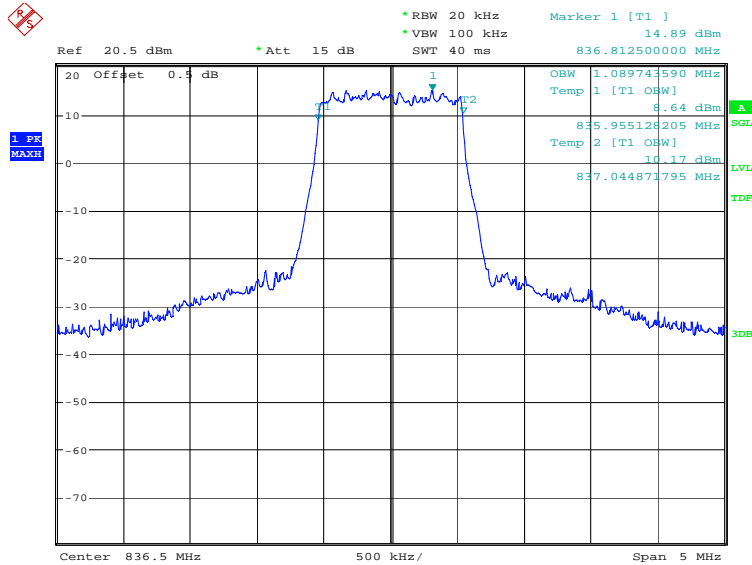


Date: 22.JAN.2019 14:11:44

LTE band 5, 3MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
836.5	QPSK	16QAM
	2692.31	2692.31

LTE band 5, 3MHz Bandwidth, QPSK (99% BW)

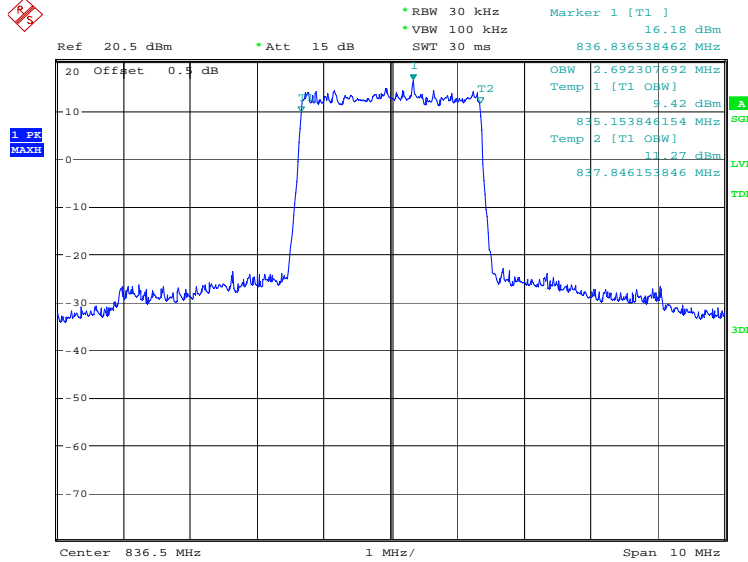

Date: 22.JAN.2019 14:13:57

LTE band 5, 3MHz Bandwidth, 16QAM (99% BW)

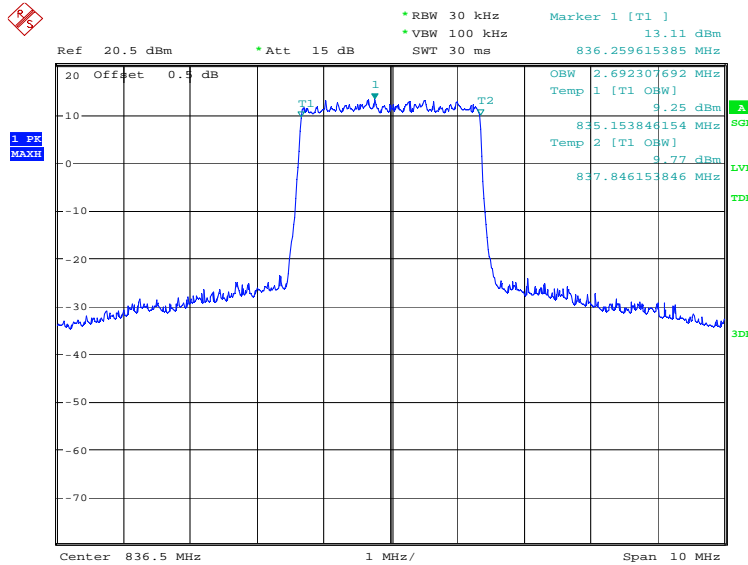


Date: 22.JAN.2019 14:15:21

LTE band 5, 5MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
836.5	QPSK	16QAM
	4495.19	4495.19

LTE band 5, 5MHz Bandwidth, QPSK (99% BW)

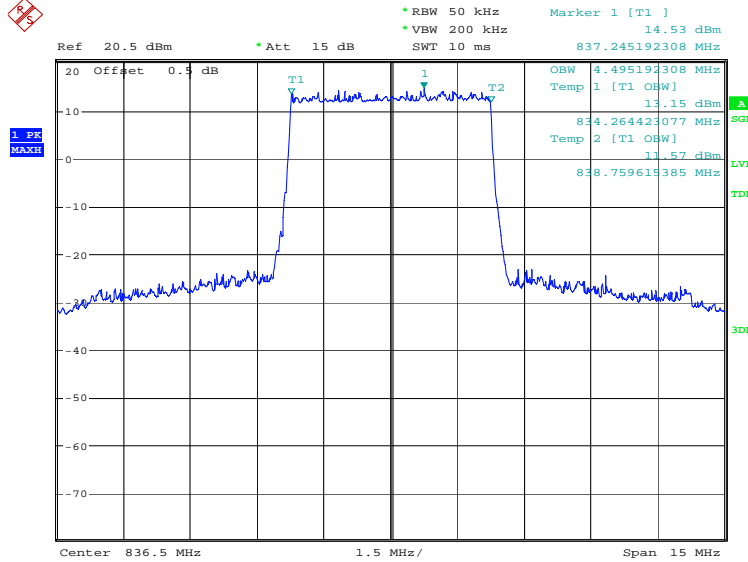

Date: 22.JAN.2019 14:17:34

LTE band 5, 5MHz Bandwidth, 16QAM (99% BW)

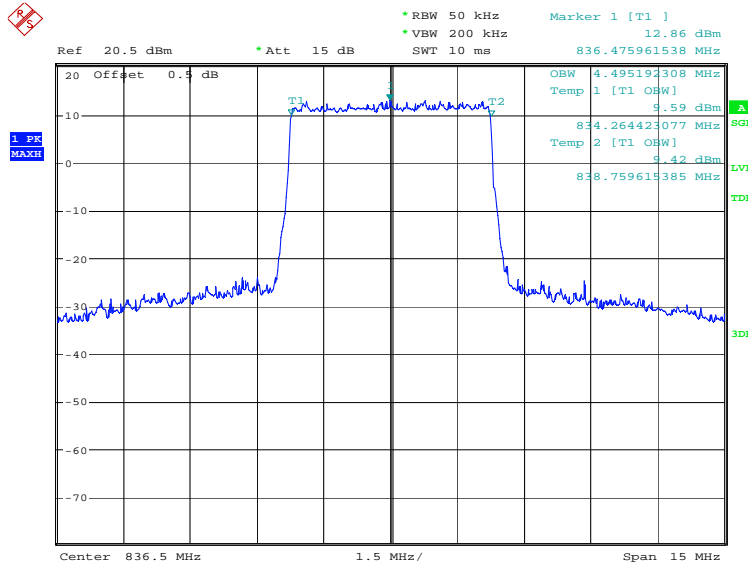


Date: 22.JAN.2019 14:18:58

LTE band 5, 10MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
836.5	QPSK	16QAM
	8990.38	8990.38

LTE band 5, 10MHz Bandwidth, QPSK (99% BW)

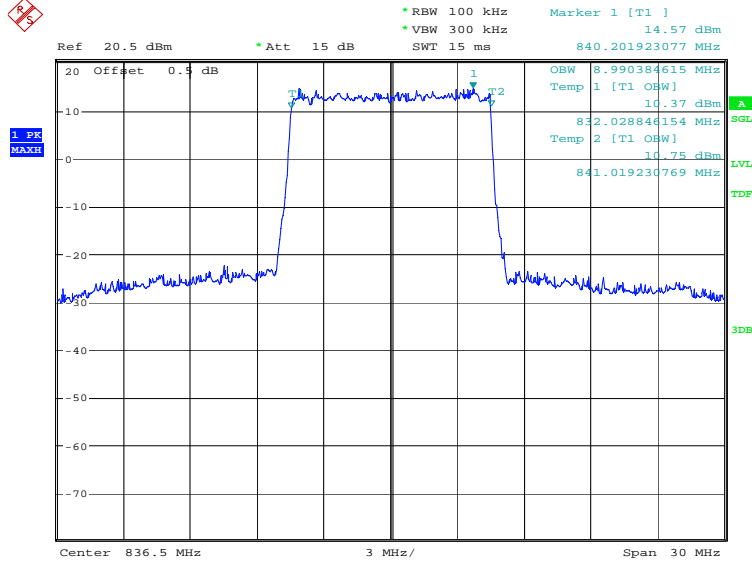

Date: 22.JAN.2019 14:21:11

LTE band 5, 10MHz Bandwidth, 16QAM (99% BW)

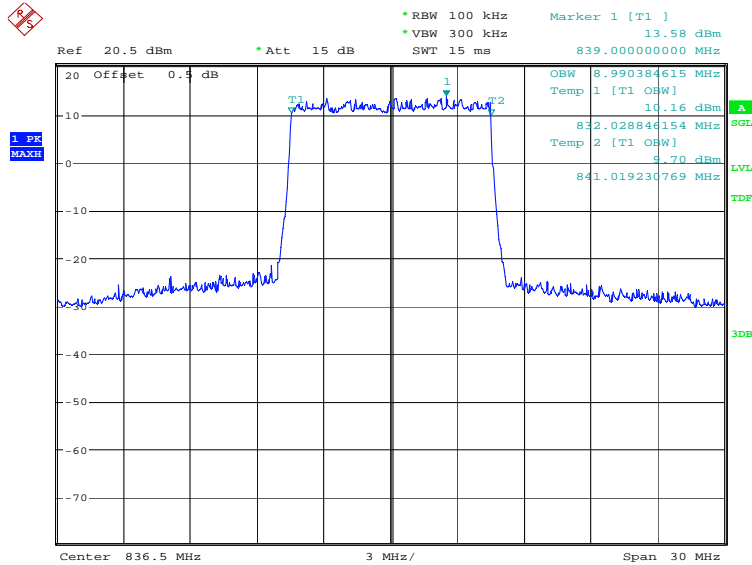


Date: 22.JAN.2019 14:22:35

LTE band 7, 5MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
2535.0	QPSK	16QAM
	4495.19	4519.23

LTE band 7, 5MHz Bandwidth, QPSK (99% BW)

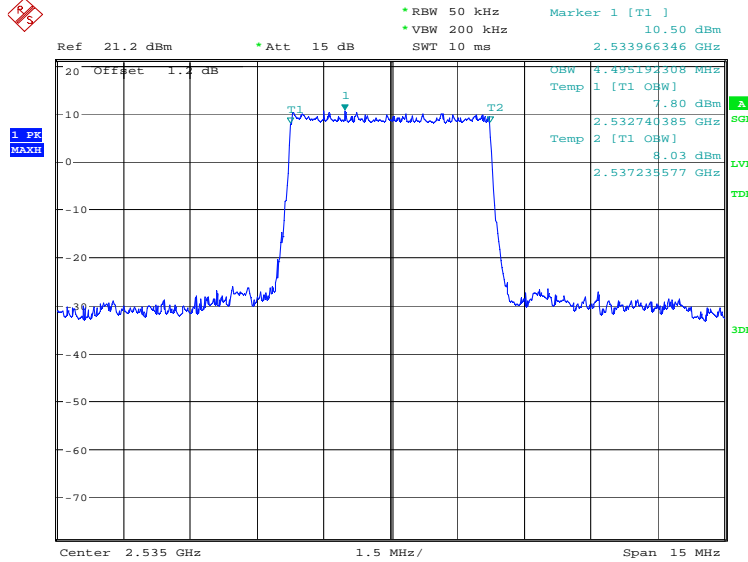

Date: 22.JAN.2019 14:24:49

LTE band 7, 5MHz Bandwidth, 16QAM (99% BW)

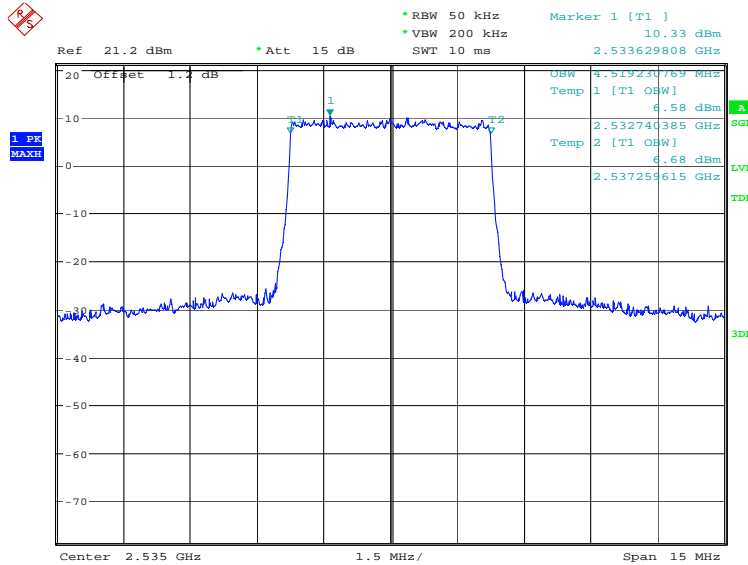


Date: 22.JAN.2019 14:26:13

LTE band 7, 10MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
2535.0	QPSK	16QAM
	8942.31	8990.38

LTE band 7, 10MHz Bandwidth, QPSK (99% BW)

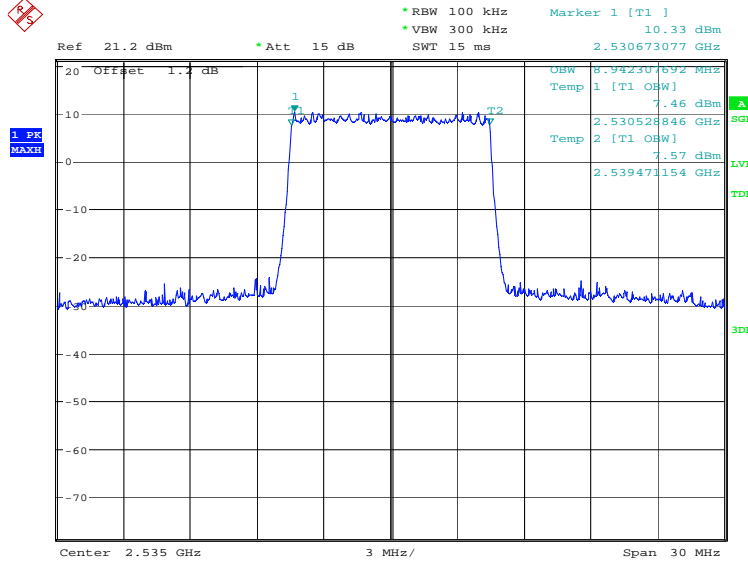

Date: 22.JAN.2019 14:28:26

LTE band 7, 10MHz Bandwidth, 16QAM (99% BW)

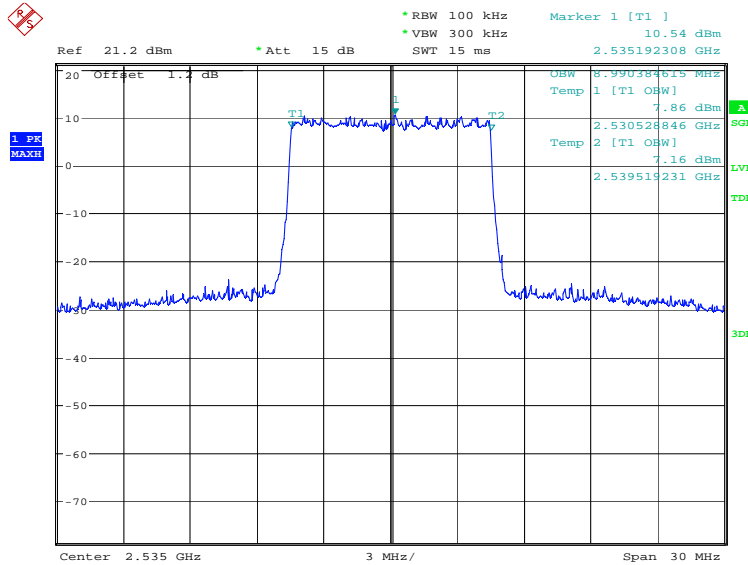


Date: 22.JAN.2019 14:29:50

LTE band 7, 15MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
2535.0	QPSK	16QAM
	13485.58	13485.58

LTE band 7, 15MHz Bandwidth, QPSK (99% BW)

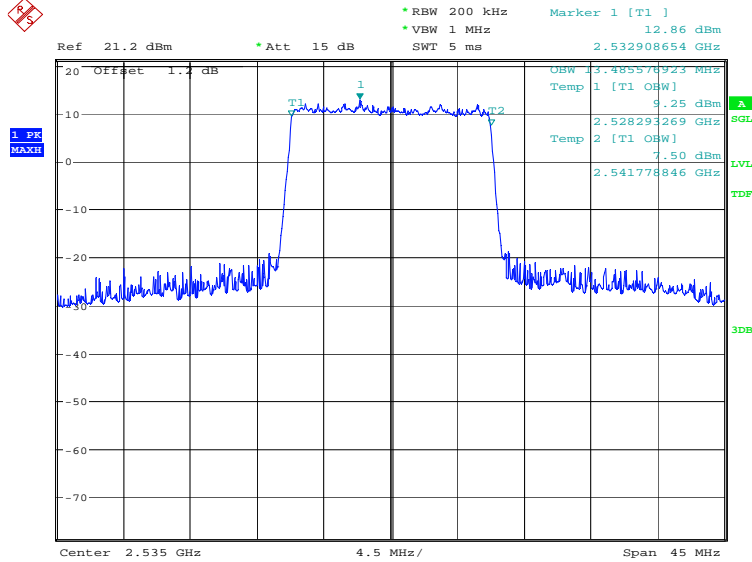

Date: 22.JAN.2019 14:32:03

LTE band 7, 15MHz Bandwidth, 16QAM (99% BW)

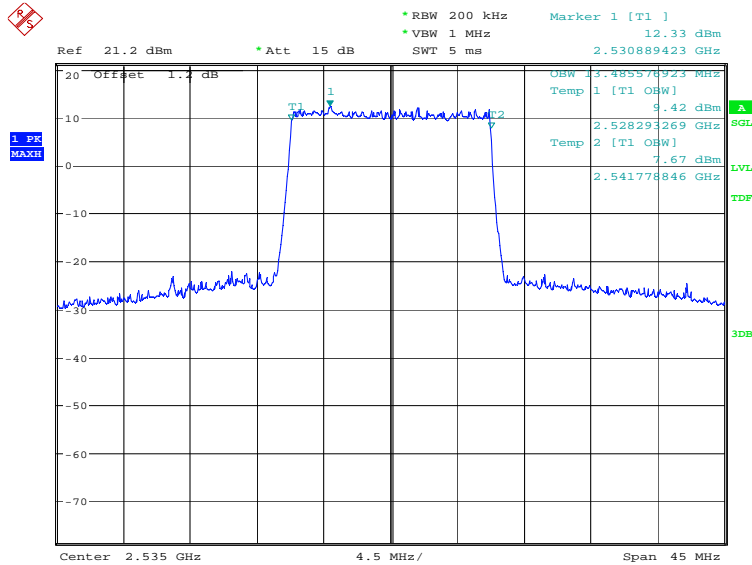


Date: 22.JAN.2019 14:33:28

LTE band 7, 20MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
2535.0	QPSK	16QAM
	17980.77	17884.62

LTE band 7, 20MHz Bandwidth, QPSK (99% BW)

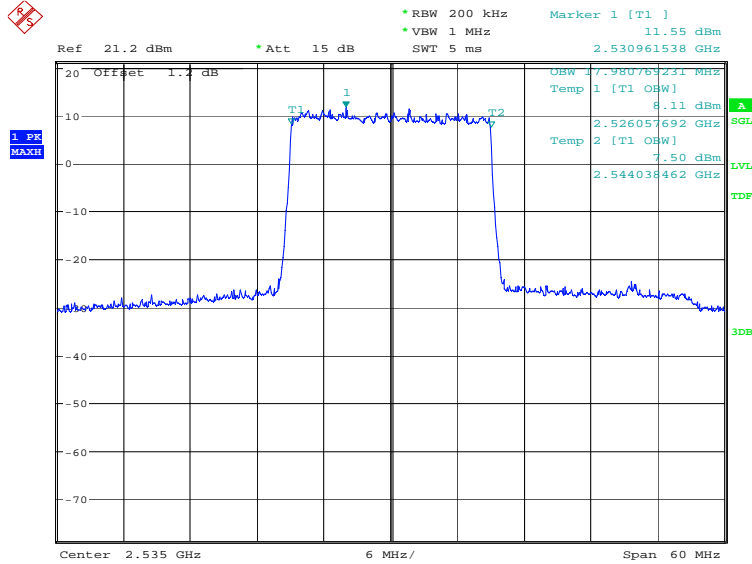

Date: 22.JAN.2019 14:35:41

LTE band 7, 20MHz Bandwidth, 16QAM (99% BW)

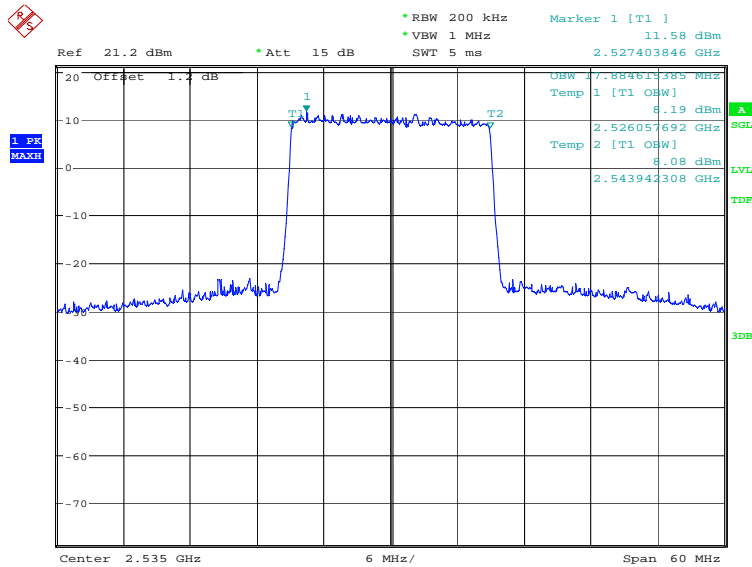

Date: 22.JAN.2019 14:37:05



A.5 EMISSION BANDWIDTH


A.5.1 Emission Bandwidth Results

The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power. Table below lists the measured -26dBc BW. Spectrum analyzer plots are included on the following pages.

LTE band 5, 1.4MHz (-26dBc)


Frequency(MHz)	Occupied Bandwidth (-26dBc)(kHz)	
	836.5	QPSK
1290.06		1282.05

LTE band 5, 1.4MHz Bandwidth, QPSK (-26dBc BW)

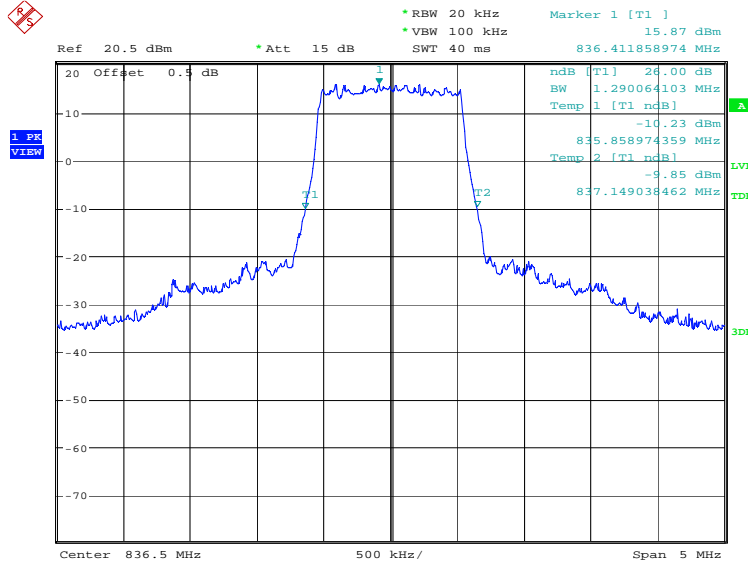

Date: 22.JAN.2019 14:39:05

LTE band 5, 1.4MHz Bandwidth, 16QAM (-26dBc BW)

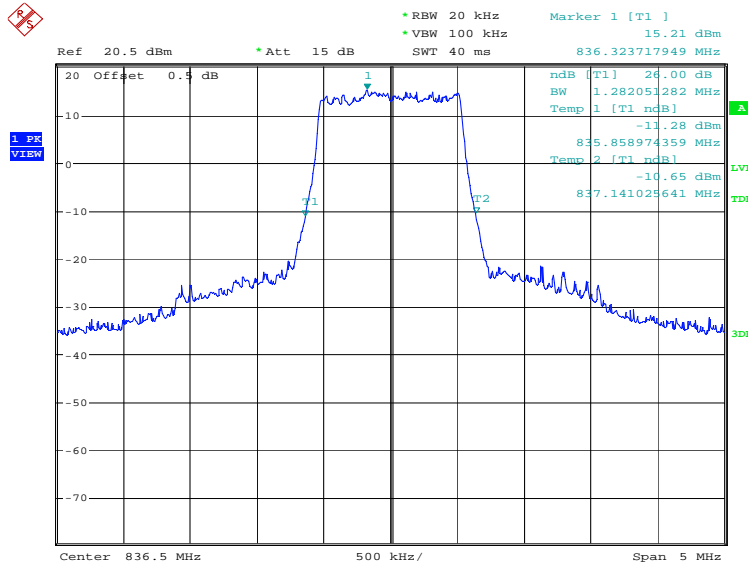


Date: 22.JAN.2019 14:40:29

LTE band 5, 3MHz (-26dBc)


Frequency(MHz)	Occupied Bandwidth (-26dBc)(kHz)	
836.5	QPSK	16QAM
	2884.62	2900.64

LTE band 5, 3MHz Bandwidth, QPSK (-26dBc BW)

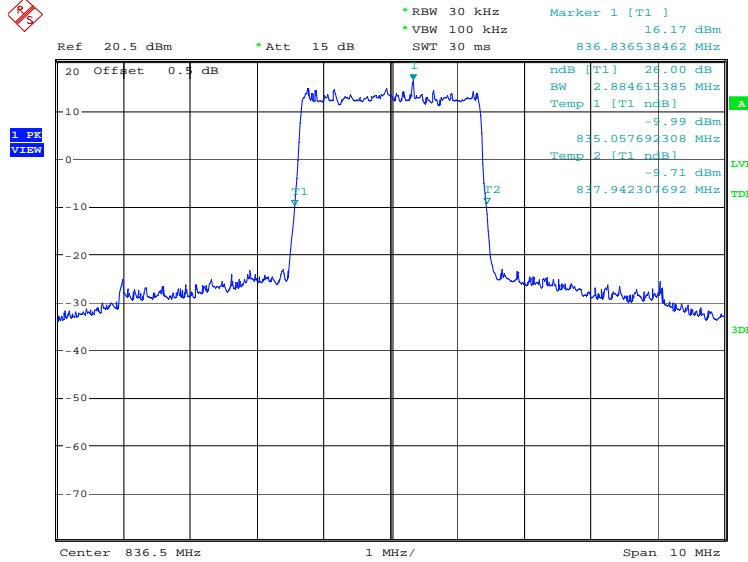

Date: 22.JAN.2019 14:42:42

LTE band 5, 3MHz Bandwidth, 16QAM (-26dBc BW)

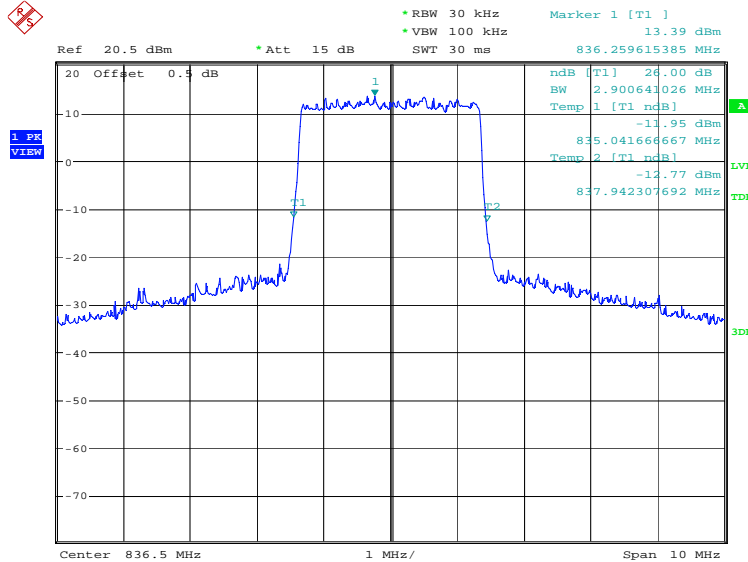


Date: 22.JAN.2019 14:44:06

LTE band 5, 5MHz (-26dBc)


Frequency(MHz)	Occupied Bandwidth (-26dBc)(kHz)	
836.5	QPSK	16QAM
	4831.73	4879.81

LTE band 5, 5MHz Bandwidth, QPSK (-26dBc BW)

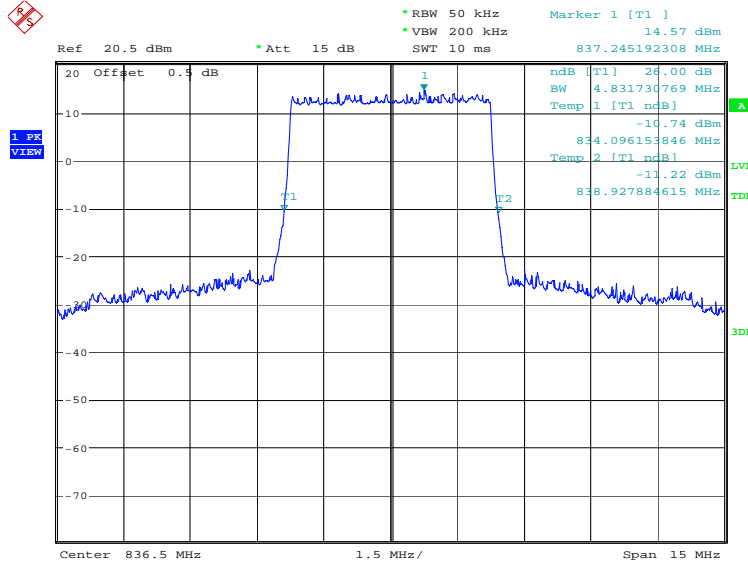

Date: 22.JAN.2019 14:46:20

LTE band 5, 5MHz Bandwidth, 16QAM (-26dBc BW)

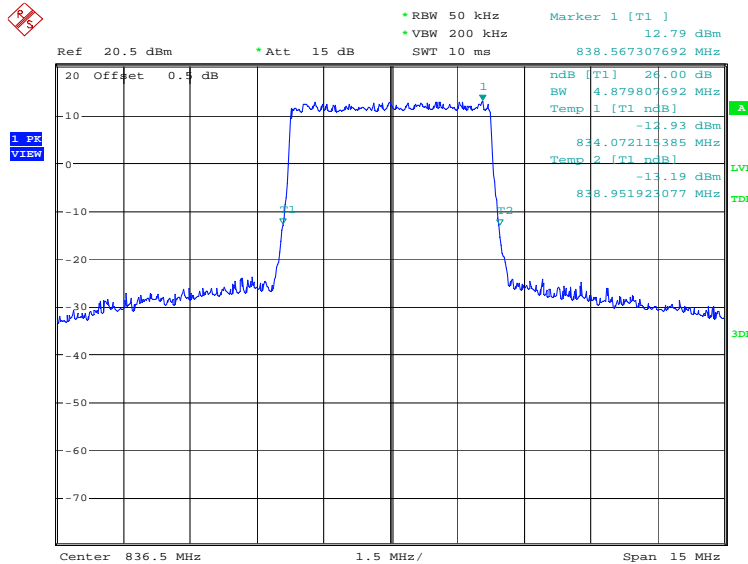


Date: 22.JAN.2019 14:47:44

LTE band 5, 10MHz (-26dBc)


Frequency(MHz)	Occupied Bandwidth (-26dBc)(kHz)	
836.5	QPSK	16QAM
	9663.46	9663.46

LTE band 5, 10MHz Bandwidth, QPSK (-26dBc BW)

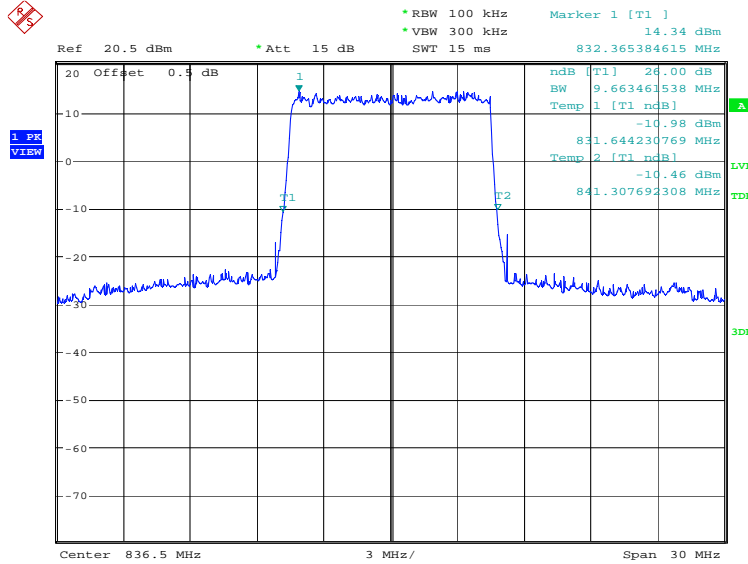

Date: 22.JAN.2019 14:49:57

LTE band 5, 10MHz Bandwidth, 16QAM (-26dBc BW)

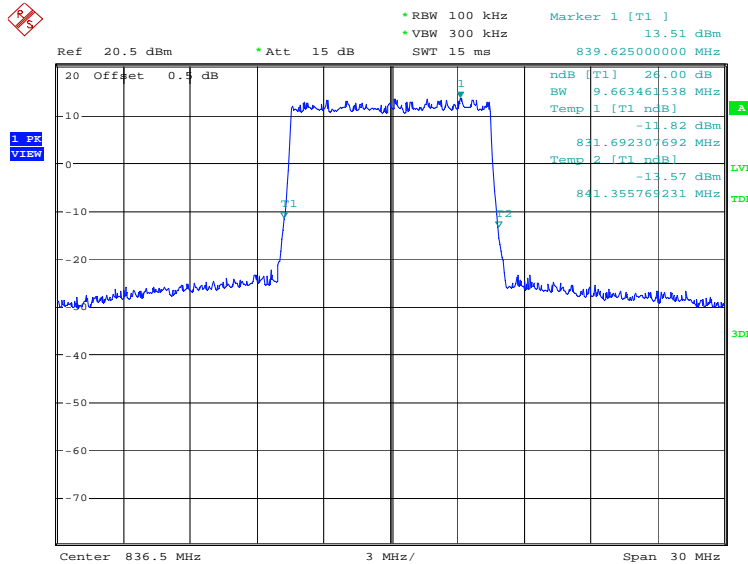


Date: 22.JAN.2019 14:51:21

LTE band 7, 5MHz (-26dBc)


Frequency(MHz)	Occupied Bandwidth (-26dBc)(kHz)	
2535.0	QPSK	16QAM
	4879.81	4879.81

LTE band 7, 5MHz Bandwidth, QPSK (-26dBc BW)

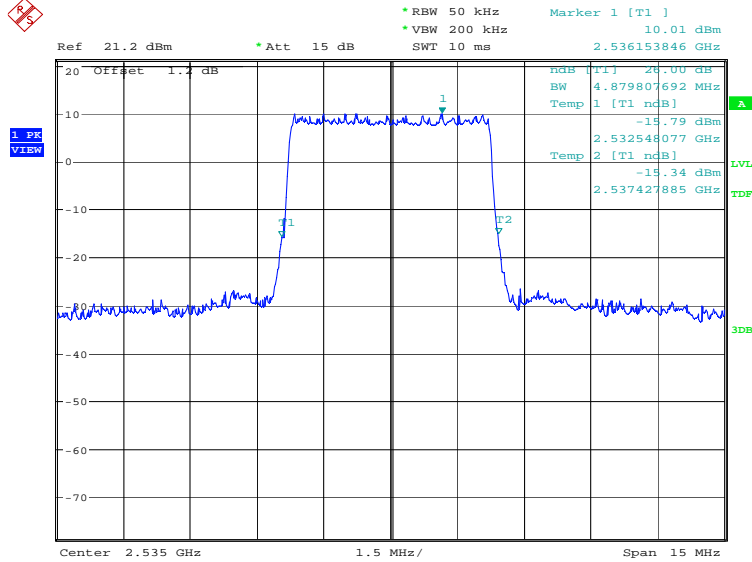

Date: 22.JAN.2019 14:53:36

LTE band 7, 5MHz Bandwidth,16QAM (-26dBc BW)

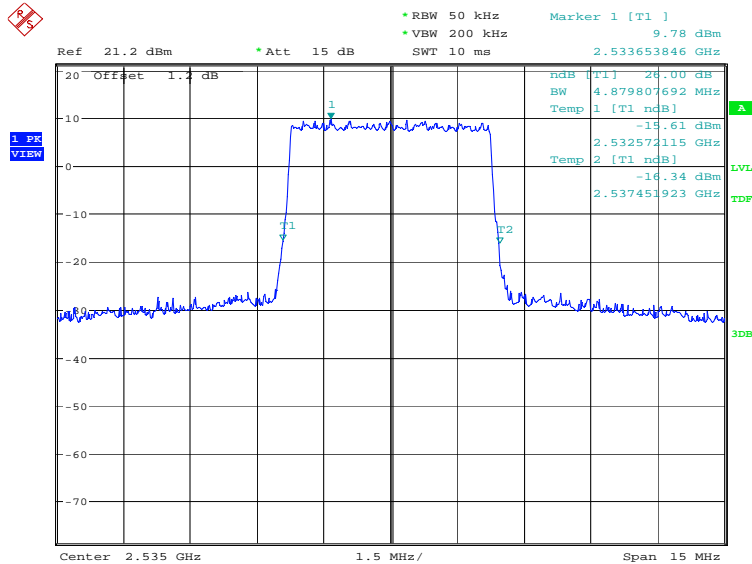


Date: 22.JAN.2019 14:55:00

LTE band 7, 10MHz (-26dBc)


Frequency(MHz)	Occupied Bandwidth (-26dBc)(kHz)	
2535.0	QPSK	16QAM
	9711.54	9663.46

LTE band 7, 10MHz Bandwidth, QPSK (-26dBc BW)

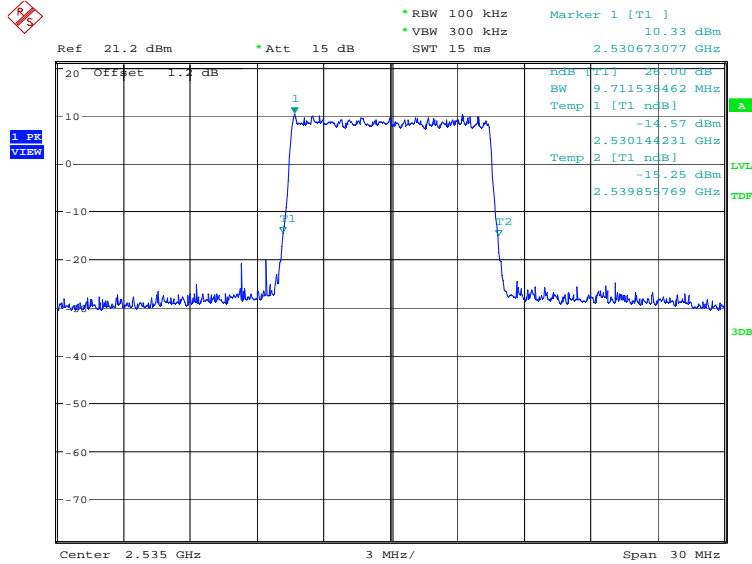

Date: 22.JAN.2019 14:57:13

LTE band 7, 10MHz Bandwidth, 16QAM (-26dBc BW)

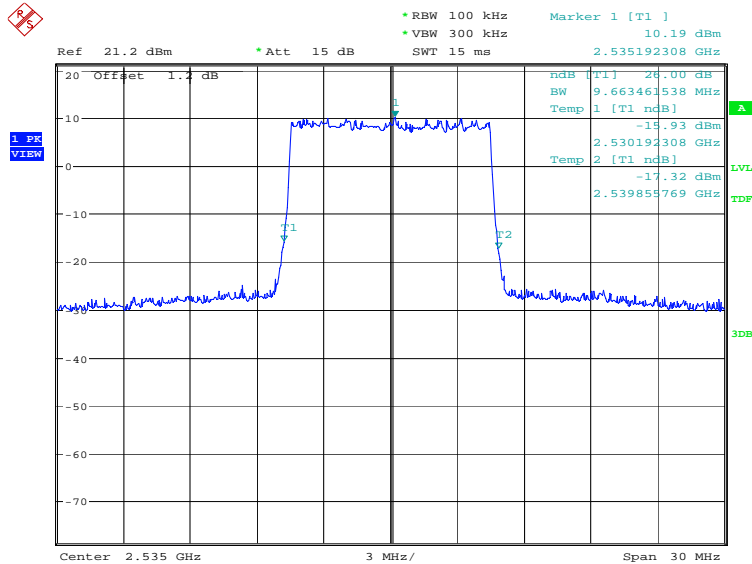


Date: 22.JAN.2019 14:58:38

LTE band 7, 15MHz (-26dBc)


Frequency(MHz)	Occupied Bandwidth (-26dBc)(kHz)	
2535.0	QPSK	16QAM
	14711.54	14711.54

LTE band 7, 15MHz Bandwidth, QPSK (-26dBc BW)

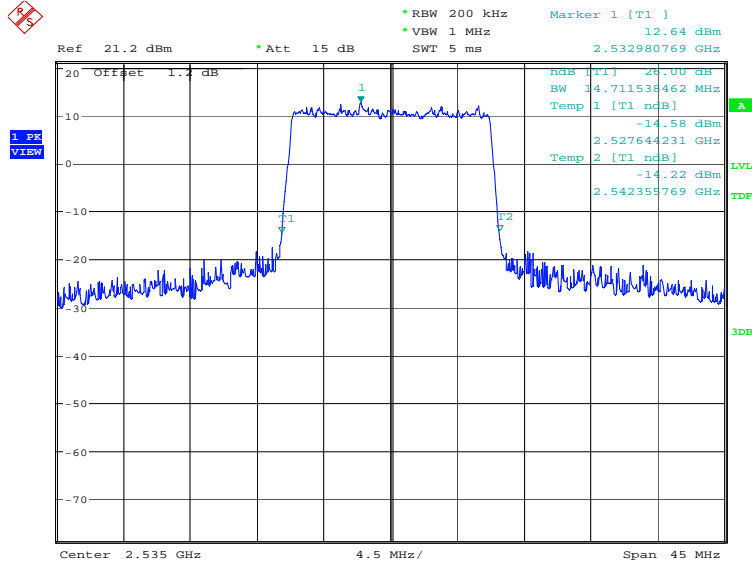

Date: 22.JAN.2019 15:00:51

LTE band 7, 15MHz Bandwidth, 16QAM (-26dBc BW)

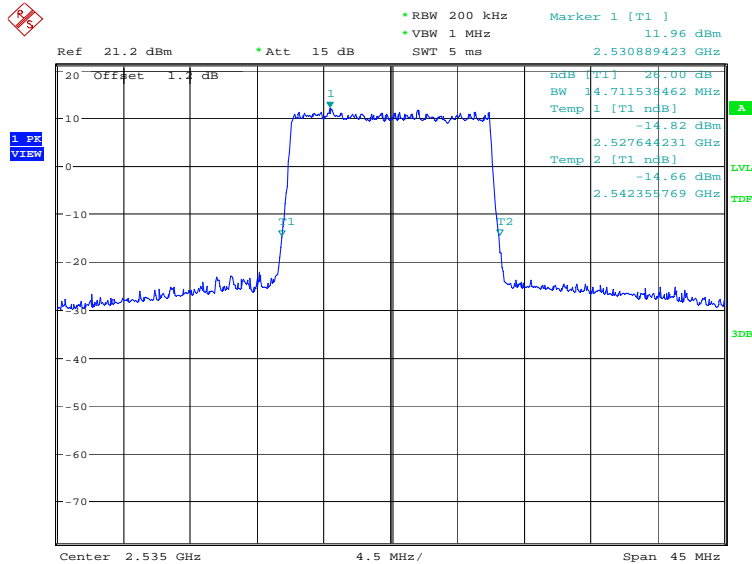


Date: 22.JAN.2019 15:02:15

LTE band 7, 20MHz (-26dBc)


Frequency(MHz)	Occupied Bandwidth (-26dBc)(kHz)	
2535.0	QPSK	16QAM
	19134.62	19134.62

LTE band 7, 20MHz Bandwidth, QPSK (-26dBc BW)

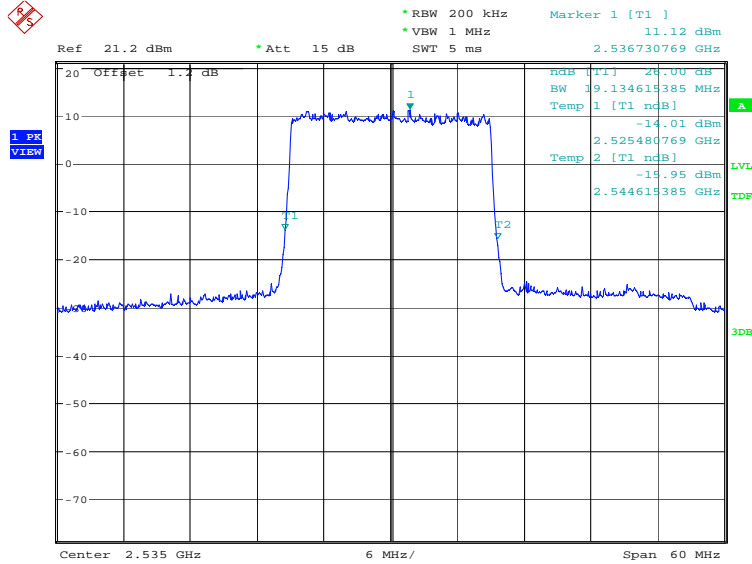

Date: 22.JAN.2019 15:04:29

LTE band 7, 20MHz Bandwidth, 16QAM (-26dBc BW)

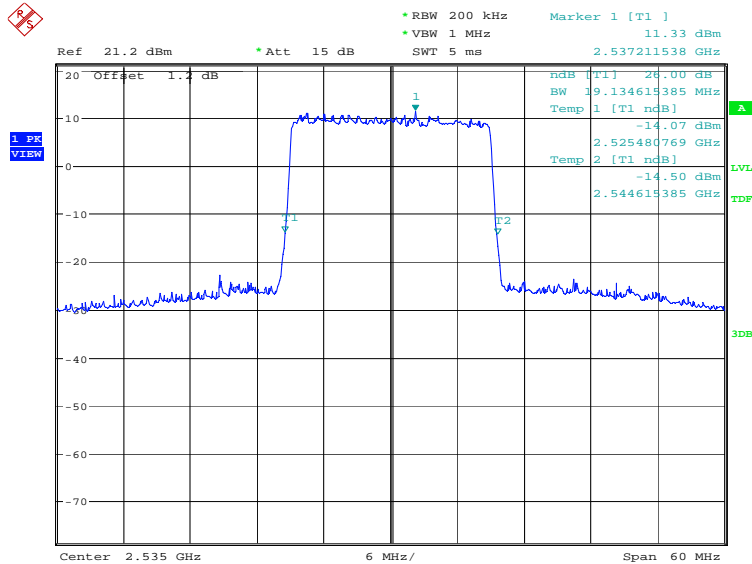

Date: 22.JAN.2019 15:05:53



A.6 BAND EDGE COMPLIANCE

A.6.1 Measurement limit


Part 22.917(b), 27.53(h) state that on any frequency outside frequency band of the US Cellular/PCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least $43 + 10 \log(P)$ dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.

According to KDB 971168 6.0, a relaxation of the reference bandwidth is often provided for measurements within a specified frequency range at the edge of the authorized frequency block/band. This is often implemented by permitting the use of a narrower RBW (typically limited to a minimum RBW of 1% of the OBW) for measuring the out-of-band emissions without a requirement to integrate the result over the full reference bandwidth.

Part 27.53(m) states that for mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log(P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log(P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log(P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log(P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log(P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.


Part 27.53(c) states for operations in the 746-758 MHz band and the 776-788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following: (1) On any frequency outside the 746-758 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log(P)$ dB; (2) On any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log(P)$ dB; (4) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $65 + 10 \log(P)$ dB in a 6.25 kHz band segment, for mobile and portable stations

A.6.2 Measurement result
Only worst case result is given below
LTE band 5
OBW: 1RB-low_offset

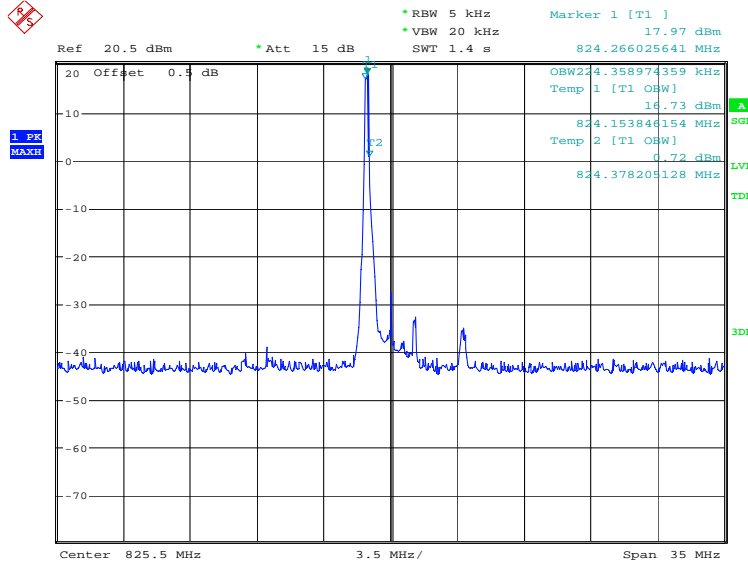


Date: 30.JAN.2019 11:36:15

LOW BAND EDGE BLOCK-1RB-low_offset

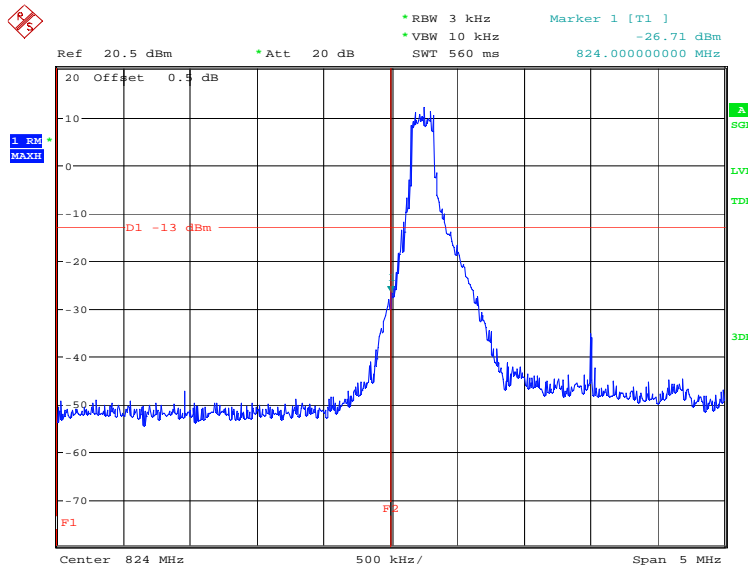


Date: 30.JAN.2019 11:36:30

OBW: 1RB-high_offset

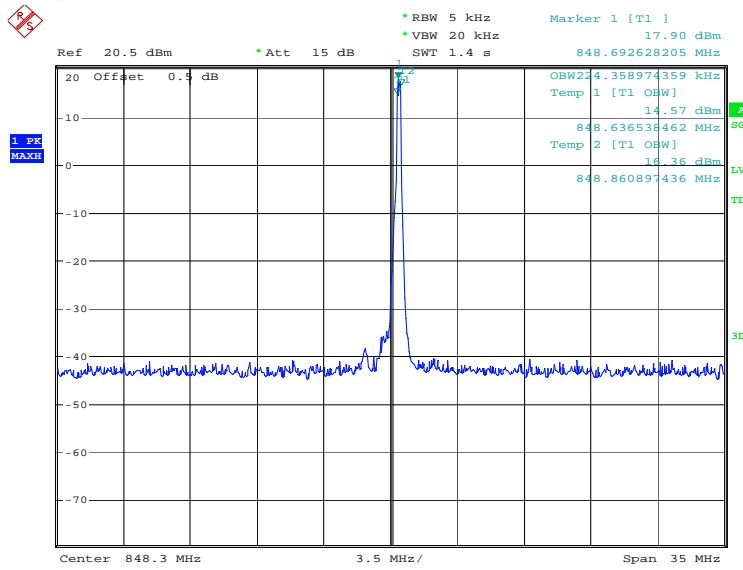


Date: 30.JAN.2019 11:38:51

HIGH BAND EDGE BLOCK-1RB-high_offset

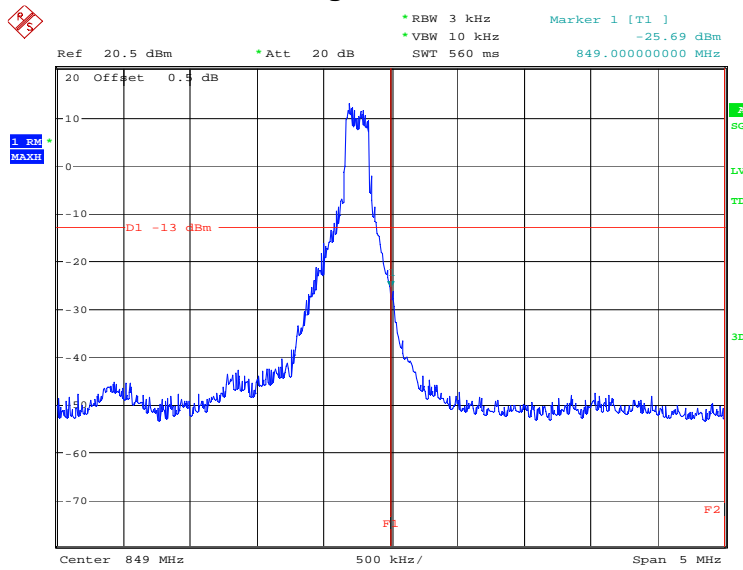


Date: 30.JAN.2019 11:39:07

LOW BAND EDGE BLOCK-10MHz-100%RB

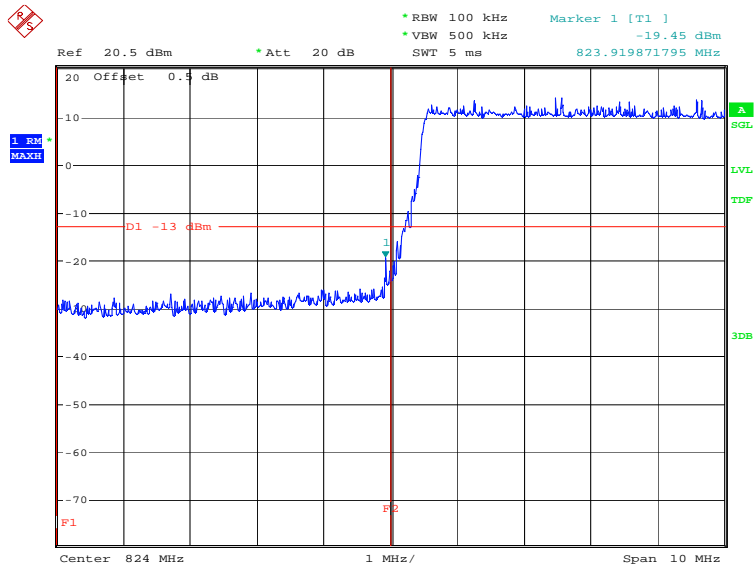

Date: 30.JAN.2019 11:37:06


HIGH BAND EDGE BLOCK-10MHz-100%RB

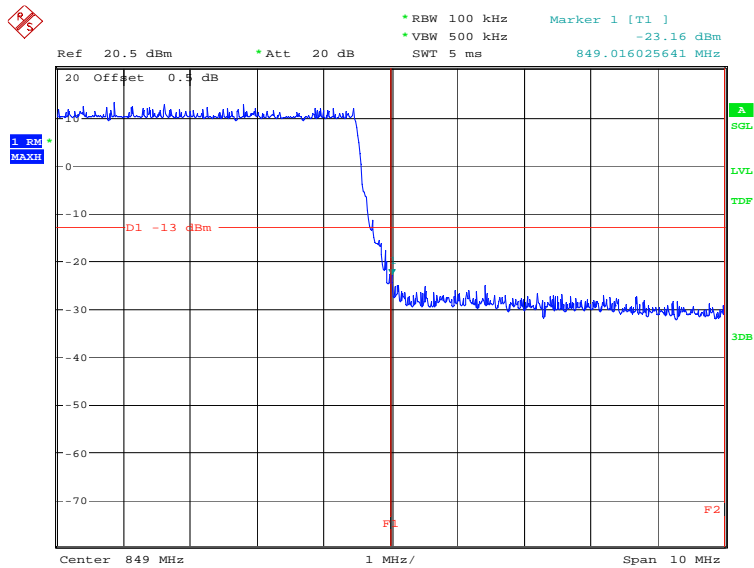

Date: 30.JAN.2019 11:40:05




LTE band 7
OBW: 1RB-low_offset

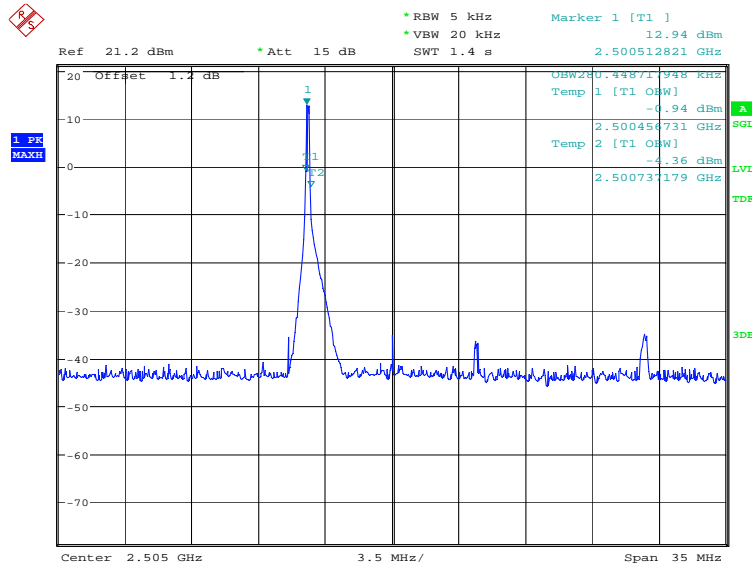


Date: 30.JAN.2019 11:43:13

LOW BAND EDGE BLOCK-1RB-low_offset

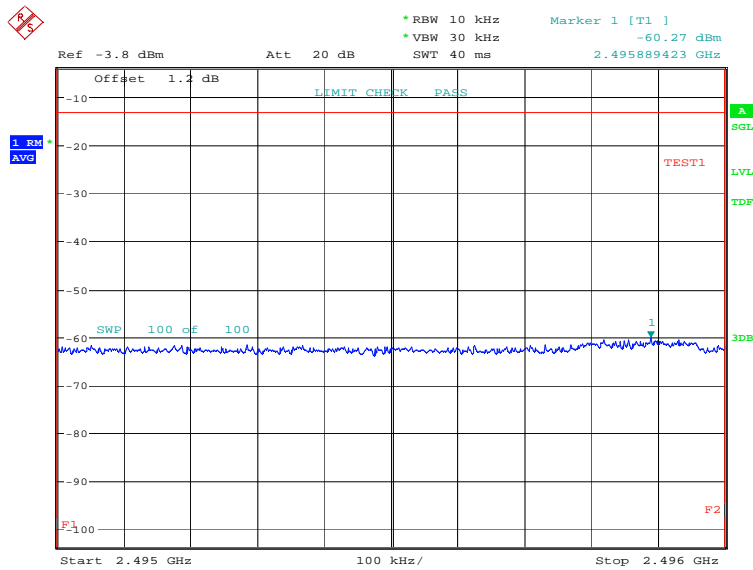


Date: 30.JAN.2019 11:43:33

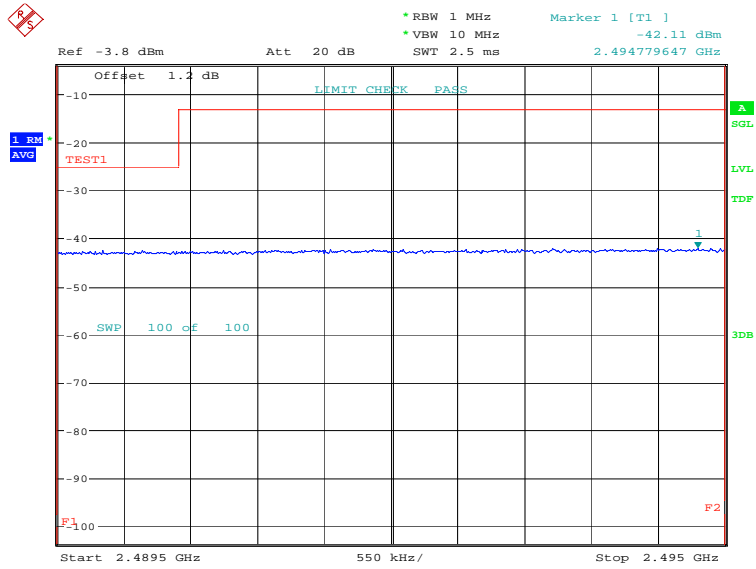

Date: 30.JAN.2019 11:43:48




OBW: 1RB-high_offset

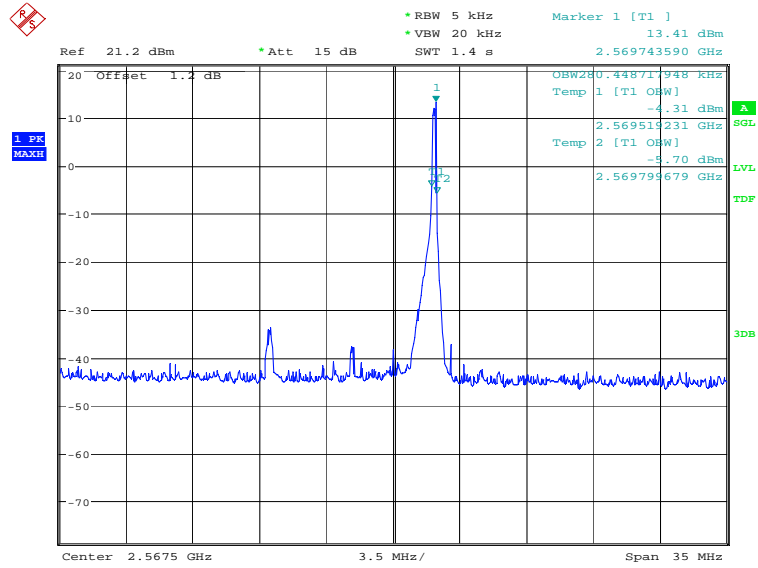


Date: 30.JAN.2019 11:46:25

HIGH BAND EDGE BLOCK-1RB-high_offset

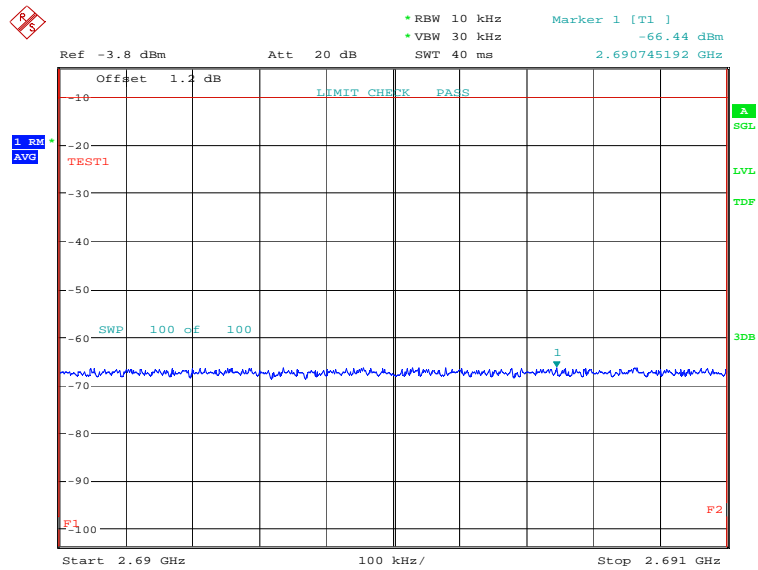


Date: 30.JAN.2019 11:46:46

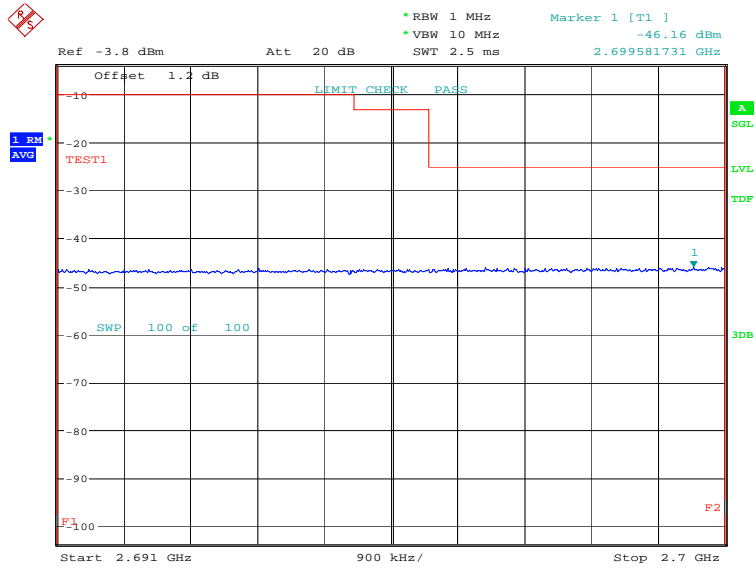


Date: 30.JAN.2019 11:47:01



LOW BAND EDGE BLOCK-20MHz-100%RB

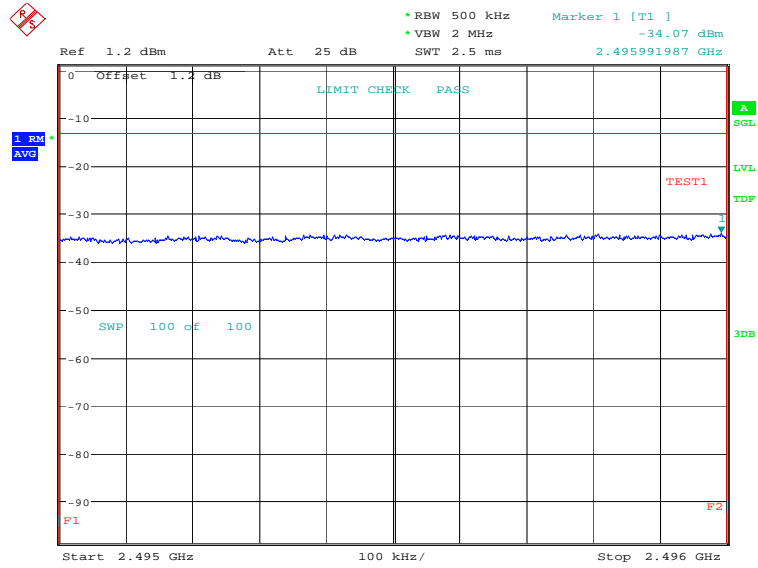


Date: 30.JAN.2019 11:44:29

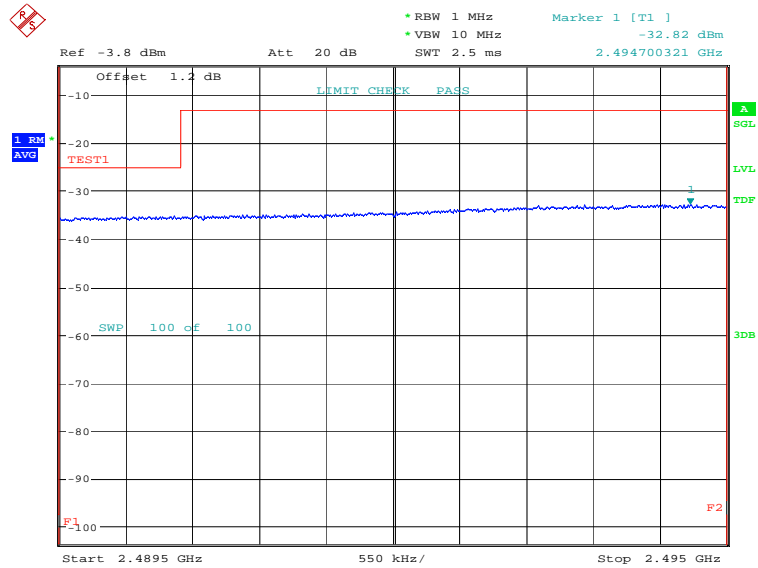


Date: 30.JAN.2019 11:44:44



HIGH BAND EDGE BLOCK-20MHz-100%RB

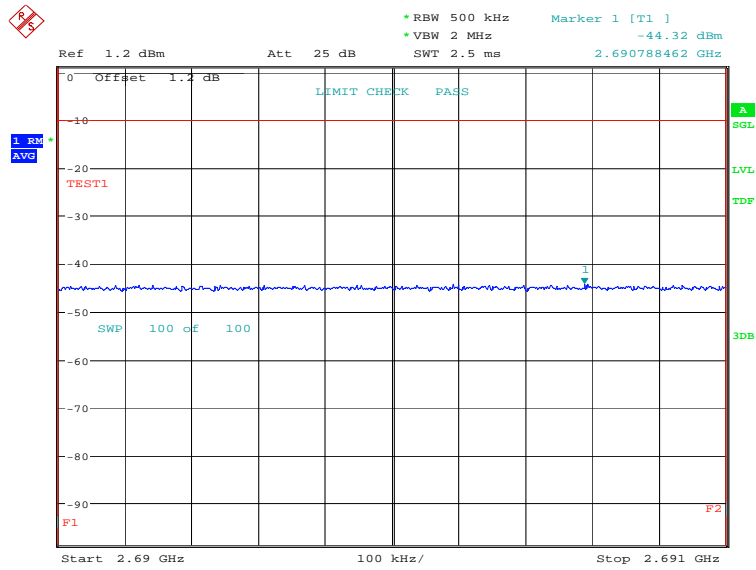

Date: 30.JAN.2019 11:47:41

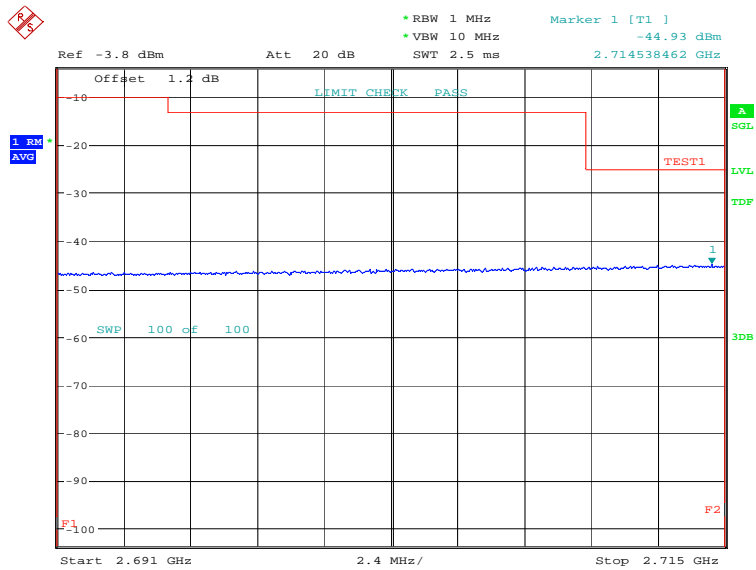

Date: 30.JAN.2019 11:47:56

A.7 CONDUCTED SPURIOUS EMISSION

A.7.1 Measurement Method

The following steps outline the procedure used to measure the conducted emissions from the EUT.

1. Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the mobile station equipment tested, this equates to a frequency range of 13 MHz to 9 GHz, data taken from 10 MHz to 25 GHz.
2. Determine EUT transmit frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.
3. The number of sweep points of spectrum analyzer is set to 30001 which is greater than span/RBW.

A. 7.2 Measurement Limit


Part 22.917, Part 27.53(h) specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

Part 27.53(m)(4) specifies for mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log(P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log(P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log(P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log(P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log(P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.


A. 7.2 Measurement result
Only worst case result is given below

LTE band 5: 30MHz – 8.49GHz
Spurious emission limit –13dBm.

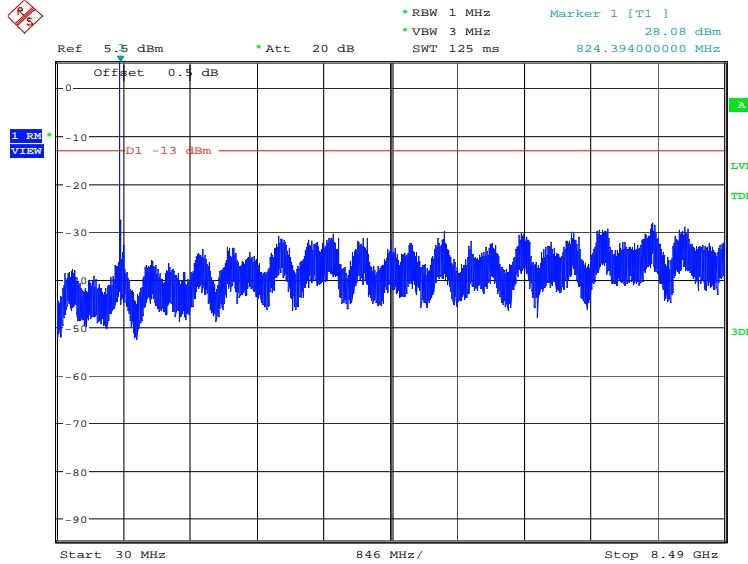

Date: 30.JAN.2019 11:51:18

LTE band 7: 30MHz – 26.5GHz
Spurious emission limit –13dBm.

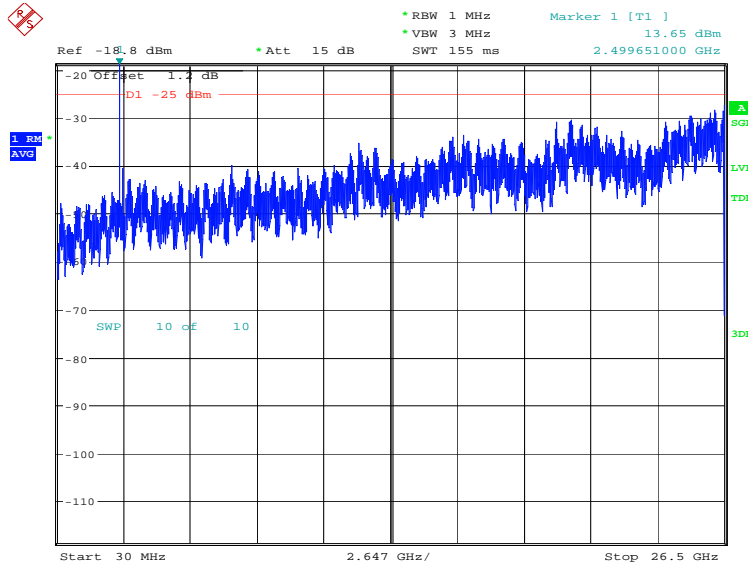

Date: 30.JAN.2019 11:54:03



A.8 PEAK-TO-AVERAGE POWER RATIO

Reference

FCC: CFR Part 27.50(a)

The peak-to-average power ratio (PAPR) of the transmitter output power must not exceed 13 dB. The PAPR measurements should be made using either an instrument with complementary cumulative distribution function (CCDF) capabilities to determine that PAPR will not exceed 13 dB for more than 0.1 percent of the time or other Commission approved procedure. The measurement must be performed using a signal corresponding to the highest PAPR expected during periods of continuous transmission.

According to KDB 971168 5.7.1:

- a) Refer to instrument's analyzer instruction manual for details on how to use the power statistics/CCDF function;
- b) Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
- c) Set the number of counts to a value that stabilizes the measured CCDF curve;
- d) Set the measurement interval to 1 ms
- e) Record the maximum PAPR level associated with a probability of 0.1%

A.8.1 Measurement limit

not exceed 13 dB

A.8.2 Measurement results

LTE band 7, 20MHz

Frequency(MHz)	PAPR(dB)	
	QPSK	16QAM
2510.0	7.08	7.53

ANNEX B: Accreditation Certificate

**United States Department of Commerce
National Institute of Standards and Technology**



Certificate of Accreditation to ISO/IEC 17025:2005

NVLAP LAB CODE: 600118-0

Telecommunication Technology Labs, CAICT
Beijing
China

*is accredited by the National Voluntary Laboratory Accreditation Program for specific services,
listed on the Scope of Accreditation, for:*

Electromagnetic Compatibility & Telecommunications

*This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005.
This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality
management system (refer to joint ISO-ILAC-IAF Communique dated January 2009).*

2018-09-28 through 2019-09-30
Effective Dates




For the National Voluntary Laboratory Accreditation Program

END OF REPORT