



# TEST REPORT

No. I18Z62006-WMD06

for

**Wiko SAS**

**SMART PHONE**

**Model Name: W-U300**

**FCC ID: 2AM86WU300AS**

with

**Hardware Version: V1.0**

**Software Version: W-U300-V01.28**

**Issued Date: 2018-12-10**



**Note:**

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

*The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.*

**Test Laboratory:**

CTTL, Telecommunication Technology Labs, CAICT

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504

Email: [ctl\\_terminals@caict.ac.cn](mailto:ctl_terminals@caict.ac.cn), website: [www.caict.ac.cn](http://www.caict.ac.cn)

## **REPORT HISTORY**

<b>Report Number</b>	<b>Revision</b>	<b>Description</b>	<b>Issue Date</b>
I18Z62006-WMD06	Rev.0	1 <sup>st</sup> edition	2018-12-10



## **CONTENTS**

<b>1. TEST LABORATORY</b> .....	<b>4</b>
1.1. TESTING LOCATION .....	4
1.2. TESTING ENVIRONMENT .....	4
1.3. PROJECT DATA.....	4
1.4. SIGNATURE .....	4
<b>2. CLIENT INFORMATION</b> .....	<b>5</b>
2.1. APPLICANT INFORMATION.....	5
2.2. MANUFACTURER INFORMATION.....	5
<b>3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)</b> .....	<b>6</b>
3.1. ABOUT EUT .....	6
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST .....	6
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST.....	6
3.4. GENERAL DESCRIPTION .....	6
<b>4. REFERENCE DOCUMENTS</b> .....	<b>7</b>
4.1. REFERENCE DOCUMENTS FOR TESTING .....	7
<b>5. LABORATORY ENVIRONMENT</b> .....	<b>8</b>
<b>6. SUMMARY OF TEST RESULTS</b> .....	<b>9</b>
6.1. SUMMARY OF TEST RESULTS .....	9
6.2. STATEMENTS .....	9
<b>7. TEST EQUIPMENTS UTILIZED</b> .....	<b>10</b>
<b>ANNEX A: MEASUREMENT RESULTS</b> .....	<b>11</b>
A.1 OUTPUT POWER.....	11
A.2 EMISSION LIMIT .....	24
A.3 FREQUENCY STABILITY .....	32
A.4 OCCUPIED BANDWIDTH .....	34
A.5 EMISSION BANDWIDTH.....	54
A.6 BAND EDGE COMPLIANCE .....	74
A.7 CONDUCTED SPURIOUS EMISSION .....	85
A.8 PEAK-TO-AVERAGE POWER RATIO .....	87
<b>ANNEX B: ACCREDITATION CERTIFICATE</b> .....	<b>88</b>

## **1. Test Laboratory**

### **1.1. Testing Location**

Location 1: CTTL(huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,  
P. R. China 100191

Location 2: CTTL(Shouxiang)

Address: No. 51 Shouxiang Science Building, Xueyuan Road,  
Haidian District, Beijing, P. R. China 100191

### **1.2. Testing Environment**

Normal Temperature: 15-35°C

Relative Humidity: 20-75%

### **1.3. Project data**

Testing Start Date: 2018-11-07

Testing End Date: 2018-12-07

### **1.4. Signature**



---

**Dong Yuan**  
**(Prepared this test report)**



---

**Zhou Yu**  
**(Reviewed this test report)**



---

**Zhao Hui Lin**  
**Deputy Director of the laboratory**  
**(Approved this test report)**



## **2. Client Information**

### **2.1. Applicant Information**

Company Name: Wiko SAS  
Address /Post: 1, rue Capitaine Dessemond 13007 - Marseille - France.  
Contact Person: Laurent Dahan  
Contact Email: ldahan@wikomobile.com  
Telephone: 33488089515  
Fax: 33488089520

### **2.2. Manufacturer Information**

Company Name: Shenzhen Tinno Mobile Technology Corp.  
Address /Post: 4/F, H-3 Building, OCT Eastern industrial Park, No.1 XiangShan East Road., Nan Shan District, Shenzhen, P.R. China  
Contact Person: Jingwen.Guo  
Contact Email: jingwen.guo@tinno.com  
Telephone: 0755-86095550  
Fax: 0755-86095551

### **3. Equipment Under Test (EUT) and Ancillary Equipment (AE)**

#### **3.1. About EUT**

Description	SMART PHONE
Model Name	W-U300
FCC ID	2AM86WU300AS
Antenna	Embedded
Output power	23.79dBm maximum EIRP measured for Band 41
Extreme vol. Limits	3.55VDC to 4.35VDC (nominal: 3.8 VDC)
Extreme temp. Tolerance	-10°C to +55°C

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of CTTL.

#### **3.2. Internal Identification of EUT used during the test**

<b>EUT ID*</b>	<b>IMEI</b>	<b>HW Version</b>	<b>SW Version</b>	<b>Date of receipt</b>
UT02a	352798100012861	V1.0	W-U300-V01.28	2018-11-06
UT08a	352798100012841	V1.0	W-U300-V01.28	2018-11-06

\*EUT ID: is used to identify the test sample in the lab internally.

#### **3.3. Internal Identification of AE used during the test**

<b>AE ID*</b>	<b>Description</b>
AE1	Battery
AE1	
Model	C210AEBATT
Manufacturer	Ningbo Veken Battery Co.,Ltd
Capacitance	2500mAh

\*AE ID: is used to identify the test sample in the lab internally.

#### **3.4. General Description**

The Equipment Under Test (EUT) is a model of SMART PHONE with embedded antenna. Manual and specifications of the EUT were provided to fulfil the test.



## 4. Reference Documents

### 4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

<b>Reference</b>	<b>Title</b>	<b>Version</b>
FCC Part 27	MISCELLANEOUS WIRELESS COMMUNICATIONS SERVICES	10-1-17 Edition
ANSI/TIA-603-E	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards	2016
TIA-102.CAAA-E	DIGITAL C4FMCQPSK TRANSCEIVER MEASUREMENT METHODS	2016
ANSI C63.26	American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services	2015
KDB 971168 D01	Measurement Guidance for Certification of Licensed Digital Transmitters	v03r01

## 5. LABORATORY ENVIRONMENT

**Control room / conducted chamber** did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. =20 %, Max. = 80 %
Shielding effectiveness	> 110 dB
Electrical insulation	>2 MΩ
Ground system resistance	< 0.5 Ω

**Fully-anechoic chamber 2** (8.6 meters X 6.1 meters X 3.85 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 35 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	>2 MΩ
Ground system resistance	< 1 Ω
Site voltage standing-wave ratio ( $S_{VSWR}$ )	Between 0 and 6 dB, from 1GHz to 18GHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 4000 MHz

**Fully-anechoic chamber FAC-3** (9 meters X 6.5 meters X 4 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 15 %, Max. = 75 %
Shielding effectiveness	0.014MHz - 1MHz, >60dB; 1MHz - 1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4 Ω
Site voltage standing-wave ratio ( $S_{VSWR}$ )	Between 0 and 6 dB, from 1GHz to 18GHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 4000 MHz



## 6. SUMMARY OF TEST RESULTS

### 6.1. Summary of test results

#### LTE Band 41

Items	Test Name	Clause in FCC rules	Section in this report	Verdict
1	Output Power	27.50(h)(2)	A.1	P
2	Emission Limit	27.53(m), 2.1051	A.2	P
3	Frequency Stability	27.54, 2.1055	A.3	P
4	Occupied Bandwidth	2.1049(h)(i)	A.4	P
5	Emission Bandwidth	27.53(m)	A.5	P
6	Band Edge Compliance	27.53(m)	A.6	P
7	Conducted Spurious Emission	27.53(m), 2.1057	A.7	P
8	Peak to Average Power Ratio	27.50(a)	A.8	P

#### Terms used in Verdict column

P	Pass, The EUT complies with the essential requirements in the standard.
NP	Not Perform, The test was not performed by CTTL
NA	Not Applicable, The test was not applicable
BR	Re-use test data from basic model report.
F	Fail, The EUT does not comply with the essential requirements in the standard

### 6.2. Statements

The test cases listed in section 6.1 of this report for the EUT specified in section 3 were performed by CTTL according to the standards or reference documents in section 4.1

The EUT met all applicable requirements of the standards or reference documents in section 4.1. This report only deals with the LTE functions among the features described in section 3.



## 7. Test Equipments Utilized

NO.	Description	TYPE	series number	MANUFACTURE	CAL DUE DATE	Calibration interval
1	EMI Antenna	VULB9163	9163-483	Schwarzbeck	2019-09-21	1 year
2	EMI Antenna	3117	00058889	ETS-Lindgren	2020-01-12	3 years
3	EMI Antenna	3117	00119024	ETS-Lindgren	2020-01-21	3 years
4	EMI Antenna	9117	167	Schwarzbeck	2019-04-13	1 year
5	Signal Generator	N5183A	MY49060052	Agilent	2019-03-31	1 year
6	Test Receiver	E4440A	MY48250642	Agilent	2019-03-31	1 year
7	Universal Radio Communication Tester	MT8821C	6201623363	Anritsu	2019-06-21	1 year
8	Power Amplifier	5S1G4	0341863	AR	/	
9	Universal Radio Communication Tester	CMW500	159082	R&S	2019-01-05	1 year
10	Spectrum Analyzer	FSU26	200030	R&S	2019-06-04	1 year
11	Climate chamber	SH-242	93008556	ESPEC	2019-12-21	2 years

### Test Software Utilized

Test Item	Test Software and Version	Software Vendor
ERP/EIRP/RSE	Tile V7.2.3.5	ETS-Lindgren

## **ANNEX A: MEASUREMENT RESULTS**

### **A.1 OUTPUT POWER**

#### **A.1.1 Summary**

During the process of testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication tester (CMW500) to ensure max power transmission and proper modulation. In all cases, output power is within the specified limits.

#### **A.1.2 Conducted**

##### **A.1.2.1 Method of Measurements**

The EUT was set up for the max output power with pseudo random data modulation. These measurements were done at 3 frequencies (bottom, middle and top of operational frequency range) for each bandwidth.

##### **A.1.2.2 Measurement result**

#### **LTE band 41**

Bandwidth	Frequency (MHz)	Frequency (MHz)	Modulation	PCC RB		SCC RB		Conducted Power(dBm)
				Size	Offset	Size	Offset	
5MHz/ 20MHz	2499.3	2511.0	QPSK	1	24	1	0	26.15
				25	0	100	0	24.23
			16QAM	1	24	1	0	25.17
				25	0	100	0	23.25
			64QAM	1	24	1	0	23.55
				25	0	100	0	23.40
	2583.8	2595.5	QPSK	1	24	1	0	25.86
				25	0	100	0	23.96
			16QAM	1	24	1	0	24.61
				25	0	100	0	23.02
			64QAM	1	24	1	0	23.07
				25	0	100	0	23.22
2668.3	2680.0	QPSK	1	24	1	0	25.52	
			25	0	100	0	23.75	
		16QAM	1	24	1	0	24.73	
			25	0	100	0	22.70	
		64QAM	1	24	1	0	23.24	
			25	0	100	0	23.07	
20MHz/ 5MHz	2506.0	QPSK	1	99	1	0	26.20	
			100	0	25	0	24.30	
		16QAM	1	99	1	0	25.06	

			64QAM	100	0	25	0	23.33
				1	99	1	0	23.63
						100	0	25
	2590.5	2602.2	QPSK	1	99	1	0	25.85
				100	0	25	0	24.02
			16QAM	1	99	1	0	24.98
				100	0	25	0	23.05
			64QAM	1	99	1	0	22.88
				100	0	25	0	23.23
	2675.0	2686.7	QPSK	1	99	1	0	25.62
				100	0	25	0	23.50
			16QAM	1	99	1	0	24.77
100				0	25	0	22.74	
64QAM			1	99	1	0	22.99	
			100	0	25	0	22.99	
10MHz/ 15MHz	2501.3	QPSK	1	49	1	0	26.65	
			50	0	75	0	26.49	
		16QAM	1	49	1	0	26.39	
			50	0	75	0	26.42	
		64QAM	1	49	1	0	26.22	
			50	0	75	0	26.37	
	2585.9	2597.9	QPSK	1	49	1	0	25.82
				50	0	75	0	25.92
			16QAM	1	49	1	0	25.63
				50	0	75	0	25.87
			64QAM	1	49	1	0	26.10
				50	0	75	0	26.11
	2670.5	2682.5	QPSK	1	49	1	0	25.58
				50	0	75	0	25.61
			16QAM	1	49	1	0	25.33
				50	0	75	0	25.58
			64QAM	1	49	1	0	25.99
				50	0	75	0	25.69
	15MHz/ 10MHz	2503.5	QPSK	1	74	1	0	26.20
				75	0	50	0	26.31
			16QAM	1	74	1	0	26.11
				75	0	50	0	26.24
			64QAM	1	74	1	0	26.16
				75	0	50	0	26.39
2588.1		2600.1	QPSK	1	74	1	0	25.99
				75	0	50	0	25.93
			16QAM	1	74	1	0	25.79
				75	0	50	0	25.88

			64QAM	1	74	1	0	25.98		
				75	0	50	0	26.08		
			2672.7	2684.7	QPSK	1	74	1	0	25.74
						75	0	50	0	25.69
			16QAM	1	74	1	0	25.72		
				75	0	50	0	25.55		
64QAM	1	74	1	0	25.66					
	75	0	50	0	25.96					
10MHz/ 20MHz	2501.5	2515.9	QPSK	1	40	1	0	26.13		
				50	0	100	0	24.19		
			16QAM	1	40	1	0	24.80		
				50	0	100	0	23.10		
			64QAM	1	40	1	0	23.33		
				50	0	100	0	23.46		
	2583.6	2598.0	QPSK	1	40	1	0	25.82		
				50	0	100	0	24.04		
			16QAM	1	40	1	0	24.77		
				50	0	100	0	22.96		
			64QAM	1	40	1	0	22.97		
				50	0	100	0	23.19		
	2665.6	2680.0	QPSK	1	40	1	0	25.58		
				50	0	100	0	23.69		
			16QAM	1	40	1	0	24.23		
				50	0	100	0	22.73		
			64QAM	1	40	1	0	22.89		
				50	0	100	0	23.13		
20MHz/ 10MHz	2506.0	2520.4	QPSK	1	99	1	0	26.26		
				100	0	50	0	24.31		
			16QAM	1	99	1	0	25.37		
				100	0	50	0	23.24		
			64QAM	1	99	1	0	23.35		
				100	0	50	0	23.47		
	2588.1	2602.5	QPSK	1	99	1	0	25.85		
				100	0	50	0	24.02		
			16QAM	1	99	1	0	24.60		
				100	0	50	0	22.95		
			64QAM	1	99	1	0	23.23		
				100	0	50	0	23.21		
	2670.1	2684.5	QPSK	1	99	1	0	25.65		
				100	0	50	0	23.76		
			16QAM	1	99	1	0	24.80		
				100	0	50	0	22.20		
			64QAM	1	99	1	0	22.75		

				100	0	50	0	23.02
15MHz/ 15MHz	2503.5	2518.5	QPSK	1	74	1	0	26.10
				75	0	75	0	24.24
			16QAM	1	74	1	0	25.08
				75	0	75	0	23.16
	64QAM	1	74	1	0	23.55		
		75	0	75	0	23.44		
	2585.5	2600.5	QPSK	1	74	1	0	25.87
				75	0	75	0	24.03
			16QAM	1	74	1	0	24.72
				75	0	75	0	22.96
	64QAM	1	74	1	0	23.04		
		75	0	75	0	23.27		
2667.5	2682.5	QPSK	1	74	1	0	25.56	
			75	0	75	0	23.71	
		16QAM	1	74	1	0	24.65	
			75	0	75	0	22.69	
64QAM	1	74	1	0	22.83			
	75	0	75	0	22.98			
15MHz/ 20MHz	2503.8	2520.9	QPSK	1	74	1	0	26.05
				75	0	100	0	24.22
			16QAM	1	74	1	0	25.19
				75	0	100	0	23.16
	64QAM	1	74	1	0	23.41		
		75	0	100	0	23.40		
	2583.3	2600.4	QPSK	1	74	1	0	25.72
				75	0	100	0	23.97
			16QAM	1	74	1	0	24.86
				75	0	100	0	22.94
	64QAM	1	74	1	0	23.36		
		75	0	100	0	23.28		
2662.9	2680.0	QPSK	1	74	1	0	25.49	
			75	0	100	0	23.77	
		16QAM	1	74	1	0	24.55	
			75	0	100	0	22.71	
64QAM	1	74	1	0	22.95			
	75	0	100	0	23.16			
20MHz/ 15MHz	2506	2523.1	QPSK	1	99	1	0	26.25
				100	0	75	0	24.22
			16QAM	1	99	1	0	25.06
				100	0	75	0	23.23
64QAM	1	99	1	0	23.29			
	100	0	75	0	23.45			

	2585.6	2602.7	QPSK	1	99	1	0	25.92
				100	0	75	0	24.03
			16QAM	1	99	1	0	25.02
				100	0	75	0	22.98
			64QAM	1	99	1	0	23.27
				100	0	75	0	23.24
	2665.1	2682.2	QPSK	1	99	1	0	25.76
				100	0	75	0	23.79
			16QAM	1	99	1	0	24.83
				100	0	75	0	22.82
			64QAM	1	99	1	0	22.66
				100	0	75	0	23.13
20MHz/ 20MHz	2506	2525.8	QPSK	1	99	1	0	26.12
				100	0	100	0	24.19
			16QAM	1	99	1	0	24.93
				100	0	100	0	23.17
			64QAM	1	99	1	0	23.68
				100	0	100	0	23.38
	2583.1	2602.9	QPSK	1	99	1	0	25.93
				100	0	100	0	24.05
			16QAM	1	99	1	0	24.97
				100	0	100	0	23.01
			64QAM	1	99	1	0	23.01
				100	0	100	0	23.29
	2660.2	2680.0	QPSK	1	99	1	0	25.64
				100	0	100	0	23.79
			16QAM	1	99	1	0	24.72
				100	0	100	0	22.69
			64QAM	1	99	1	0	23.01
				100	0	100	0	23.07

### A.1.3 Radiated

#### A.1.3.1 Description


This is the test for the maximum radiated power from the EUT.

Rule Part 27.50(h)(2) specifies “Mobile stations are limited to 2.0 watts EIRP.”.


#### A.1.3.2 Method of Measurement

The measurements procedures in TIA-603E-2016 are used.

1. EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.

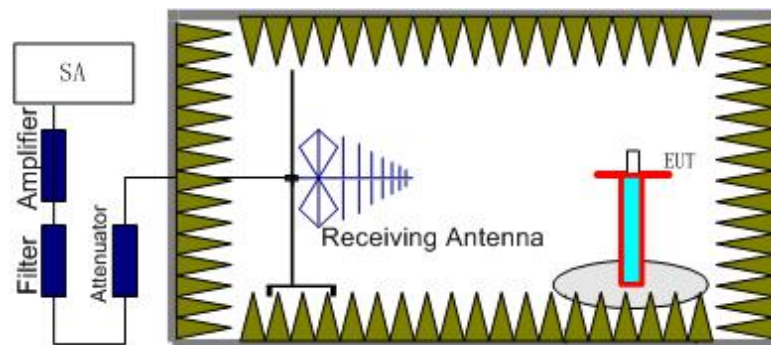

2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as ( $P_r$ ).
3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

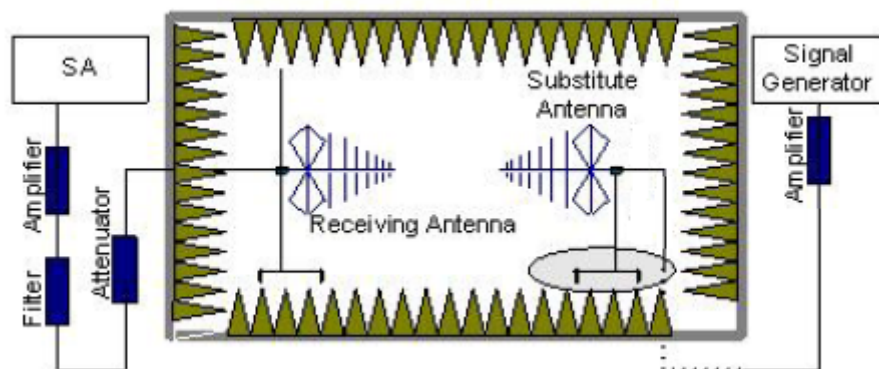

In the chamber, a substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power ( $P_{Mea}$ ) is applied to the input of the substitution antenna. Adjust the level of the signal generator output until the value of the receiver reaches the previously recorded ( $P_r$ ). The power of signal source ( $P_{Mea}$ ) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna



polarization.

4. An amplifier should be connected to the Signal Source output port. And the cable should be connected between the amplifier and the substitution antenna.

The cable loss ( $P_{cl}$ ), the substitution antenna Gain ( $G_a$ ) and the amplifier Gain ( $P_{Ag}$ ) should be recorded after test.

The measurement results are obtained as described below:

$$\text{Power (EIRP)} = P_{\text{Mea}} - P_{\text{Ag}} - P_{\text{cl}} - G_a$$

5. This value is EIRP since the measurement is calibrated using an antenna of known gain (unit dBi) and known input power.
6. ERP can be calculated from EIRP by subtracting the gain of the dipole,  $\text{ERP} = \text{EIRP} - 2.15$ .

**A.1.3.3 Measurement result**

**LTE Band 41- EIRP Part 27.50(h)(2)**

Limits:  $\leq 33\text{dBm}$  (2W)

**LTE Band 41\_5MHz+20MHz\_QPSK**

Frequency(MHz)	Frequency(MHz)	Pmea(dBm)	Cable Loss(dB)	PAg(dB)	Antenna Gain(dBi)	RMS EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
2499.30	2511.00	-33.47	3.58	45.61	6.10	21.82	33.00	11.18	H
2583.80	2595.50	-33.04	3.67	44.92	6.25	21.80	33.00	11.20	V
2668.30	2680.00	-31.63	3.74	44.96	6.41	23.48	33.00	9.52	H

**LTE Band 41\_10MHz+20MHz\_QPSK**

Frequency(MHz)	Frequency(MHz)	Pmea(dBm)	Cable Loss(dB)	PAg(dB)	Antenna Gain(dBi)	RMS EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
2501.50	2515.90	-33.12	3.58	45.66	6.10	22.22	33.00	10.78	H
2583.60	2598.00	-33.13	3.67	44.92	6.24	21.70	33.00	11.30	V
2665.60	2680.00	-31.75	3.73	44.96	6.40	23.34	33.00	9.66	H

**LTE Band 41\_15MHz+20MHz\_QPSK**

Frequency(MHz)	Frequency(MHz)	Pmea(dBm)	Cable Loss(dB)	PAg(dB)	Antenna Gain(dBi)	RMS EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
2503.80	2520.90	-26.04	3.58	45.65	6.11	22.14	33.00	10.86	H
2583.30	2595.50	-25.89	3.67	44.92	6.24	21.60	33.00	11.40	V
2662.90	2680.00	-24.44	3.72	44.96	6.40	23.20	33.00	9.80	H

**LTE Band 41\_20MHz+5MHz\_QPSK**

Frequency(MHz)	Frequency(MHz)	Pmea(dBm)	Cable Loss(dB)	PAg(dB)	Antenna Gain(dBi)	RMS EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
2506.00	2517.70	-25.50	3.59	45.15	6.11	22.17	33.00	10.83	H
2590.50	2602.50	-25.69	3.69	44.93	6.26	21.81	33.00	11.19	V
2675.00	2686.70	-23.86	3.74	44.97	6.42	23.79	33.00	9.21	H

**LTE Band 41\_20MHz+10MHz\_QPSK**

Frequency(MHz)	Frequency(MHz)	Pmea(dBm)	Cable Loss(dB)	PAg(dB)	Antenna Gain(dBi)	RMS EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
2506.00	2520.40	-25.48	3.59	45.15	6.11	22.19	33.00	10.81	H
2588.10	2602.50	-25.61	3.69	44.93	6.26	21.89	33.00	11.11	V
2670.10	2684.50	-24.10	3.74	44.97	6.41	23.54	33.00	9.46	H



**LTE Band 41\_20MHz+15MHz\_QPSK**

Frequency(MHz)	Frequency(MHz)	Pmea(dBm)	Cable Loss(dB)	PAg(dB)	Antenna Gain(dBi)	RMS EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
2506.00	2523.00	-25.46	3.59	45.15	6.11	22.21	33.00	10.79	H
2585.60	2602.70	-25.65	3.68	44.92	6.25	21.84	33.00	11.16	V
2665.10	2682.20	-24.13	3.73	44.96	6.40	23.50	33.00	9.50	H

**LTE Band 41\_15MHz+15MHz\_QPSK**

Frequency(MHz)	Frequency(MHz)	Pmea(dBm)	Cable Loss(dB)	PAg(dB)	Antenna Gain(dBi)	RMS EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
2503.50	2518.50	-25.88	3.58	45.65	6.11	22.30	33.00	10.70	H
2585.50	2600.50	-25.63	3.68	44.92	6.25	21.86	33.00	11.14	V
2667.50	2682.50	-23.88	3.74	44.96	6.41	23.75	33.00	9.25	H

**LTE Band 41\_20MHz+20MHz\_QPSK**

Frequency(MHz)	Frequency(MHz)	Pmea(dBm)	Cable Loss(dB)	PAg(dB)	Antenna Gain(dBi)	RMS EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
2506.00	2525.80	-25.40	3.59	45.15	6.11	22.27	33.00	10.73	H
2583.10	2602.90	-25.89	3.67	44.92	6.24	21.60	33.00	11.40	V
2660.20	2680.00	-24.13	3.71	44.96	6.39	23.51	33.00	9.49	H

**LTE Band 41\_15MHz+10MHz\_QPSK**

Frequency(MHz)	Frequency(MHz)	Pmea(dBm)	Cable Loss(dB)	PAg(dB)	Antenna Gain(dBi)	RMS EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
2503.50	2515.50	-25.94	3.58	45.65	6.11	22.24	33.00	10.76	H
2588.10	2600.10	-25.77	3.69	44.93	6.26	21.73	33.00	11.27	V
2672.70	2684.70	-25.00	3.74	44.97	6.42	22.65	33.00	10.35	H

**LTE Band 41\_10MHz+15MHz\_QPSK**

Frequency(MHz)	Frequency(MHz)	Pmea(dBm)	Cable Loss(dB)	PAg(dB)	Antenna Gain(dBi)	RMS EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
2501.50	2513.30	-25.96	3.58	45.66	6.10	22.22	33.00	10.78	H
2585.90	2597.90	-25.66	3.68	44.92	6.25	21.83	33.00	11.17	V
2670.50	2680.00	-25.76	3.74	44.97	6.42	21.89	33.00	11.11	H



**LTE Band 41\_5MHz+20MHz\_16QAM**

Frequency(MHz)	Frequency(MHz)	Pmea(dBm)	Cable Loss(dB)	PAg(dB)	Antenna Gain(dBi)	RMS EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
2499.30	2511.00	-34.38	3.58	45.61	6.10	20.91	33.00	12.09	H
2583.80	2595.50	-34.01	3.67	44.92	6.25	20.83	33.00	12.17	V
2668.30	2680.00	-32.58	3.74	44.96	6.41	22.53	33.00	10.47	H

**LTE Band 41\_10MHz+20MHz\_16QAM**

Frequency(MHz)	Frequency(MHz)	Pmea(dBm)	Cable Loss(dB)	PAg(dB)	Antenna Gain(dBi)	RMS EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
2501.50	2515.90	-34.01	3.58	45.66	6.10	21.33	33.00	11.67	H
2583.60	2598.00	-33.96	3.67	44.92	6.24	20.87	33.00	12.13	V
2665.60	2680.00	-32.67	3.73	44.96	6.40	22.42	33.00	10.58	H

**LTE Band 41\_15MHz+20MHz\_16QAM**

Frequency(MHz)	Frequency(MHz)	Pmea(dBm)	Cable Loss(dB)	PAg(dB)	Antenna Gain(dBi)	RMS EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
2503.80	2520.90	-26.90	3.58	45.65	6.11	21.28	33.00	11.72	H
2583.30	2595.50	-26.60	3.67	44.92	6.24	20.89	33.00	12.11	V
2662.90	2680.00	-25.36	3.72	44.96	6.40	22.28	33.00	10.72	H

**LTE Band 41\_20MHz+5MHz\_16QAM**

Frequency(MHz)	Frequency(MHz)	Pmea(dBm)	Cable Loss(dB)	PAg(dB)	Antenna Gain(dBi)	RMS EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
2506.00	2517.70	-26.33	3.59	45.15	6.11	21.34	33.00	11.66	H
2590.50	2602.50	-26.58	3.69	44.93	6.26	20.92	33.00	12.08	V
2675.00	2686.70	-24.64	3.74	44.97	6.42	23.01	33.00	9.99	H

**LTE Band 41\_20MHz+10MHz\_16QAM**

Frequency(MHz)	Frequency(MHz)	Pmea(dBm)	Cable Loss(dB)	PAg(dB)	Antenna Gain(dBi)	RMS EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
2506.00	2520.40	-26.39	3.59	45.15	6.11	21.28	33.00	11.72	H
2588.10	2602.50	-26.29	3.69	44.93	6.26	21.21	33.00	11.79	V
2670.10	2684.50	-25.05	3.74	44.97	6.41	22.59	33.00	10.41	H



**LTE Band 41\_20MHz+15MHz\_16QAM**

Frequency(MHz)	Frequency(MHz)	Pmea(dBm)	Cable Loss(dB)	PAg(dB)	Antenna Gain(dBi)	RMS EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
2506.00	2523.00	-26.38	3.59	45.15	6.11	21.29	33.00	11.71	H
2585.60	2602.70	-26.40	3.68	44.92	6.25	21.09	33.00	11.91	V
2665.10	2682.20	-24.97	3.73	44.96	6.40	22.66	33.00	10.34	H

**LTE Band 41\_15MHz+15MHz\_16QAM**

Frequency(MHz)	Frequency(MHz)	Pmea(dBm)	Cable Loss(dB)	PAg(dB)	Antenna Gain(dBi)	RMS EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
2503.50	2518.50	-26.87	3.58	45.65	6.11	21.31	33.00	11.69	H
2585.50	2600.50	-26.45	3.68	44.92	6.25	21.04	33.00	11.96	V
2667.50	2682.50	-24.99	3.74	44.96	6.41	22.64	33.00	10.36	H

**LTE Band 41\_20MHz+20MHz\_16QAM**

Frequency(MHz)	Frequency(MHz)	Pmea(dBm)	Cable Loss(dB)	PAg(dB)	Antenna Gain(dBi)	RMS EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
2506.00	2525.80	-26.32	3.59	45.15	6.11	21.35	33.00	11.65	H
2583.10	2602.90	-26.77	3.67	44.92	6.24	20.72	33.00	12.28	V
2660.20	2680.00	-25.10	3.71	44.96	6.39	22.54	33.00	10.46	H

**LTE Band 41\_15MHz+10MHz\_16QAM**

Frequency(MHz)	Frequency(MHz)	Pmea(dBm)	Cable Loss(dB)	PAg(dB)	Antenna Gain(dBi)	RMS EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
2503.50	2515.50	-25.75	3.58	45.65	6.11	22.43	33.00	10.57	H
2588.10	2600.10	-25.72	3.69	44.93	6.26	21.78	33.00	11.22	V
2672.70	2684.70	-24.97	3.74	44.97	6.42	22.68	33.00	10.32	H

**LTE Band 41\_10MHz+15MHz\_16QAM**

Frequency(MHz)	Frequency(MHz)	Pmea(dBm)	Cable Loss(dB)	PAg(dB)	Antenna Gain(dBi)	RMS EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
2501.50	2513.30	-25.82	3.58	45.66	6.10	22.36	33.00	10.64	H
2585.90	2597.90	-25.63	3.68	44.92	6.25	21.86	33.00	11.14	V
2670.50	2680.00	-25.39	3.74	44.97	6.42	22.26	33.00	10.74	H



**LTE Band 41\_5MHz+20MHz\_64QAM**

Frequency(MHz)	Frequency(MHz)	Pmea(dBm)	Cable Loss(dB)	PAg(dB)	Antenna Gain(dBi)	RMS EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
2499.30	2511.00	-36.33	3.58	45.61	6.10	18.96	33.00	14.04	H
2583.80	2595.50	-35.86	3.67	44.92	6.25	18.98	33.00	14.02	V
2668.30	2680.00	-34.63	3.74	44.96	6.41	20.48	33.00	12.52	H

**LTE Band 41\_10MHz+20MHz\_64QAM**

Frequency(MHz)	Frequency(MHz)	Pmea(dBm)	Cable Loss(dB)	PAg(dB)	Antenna Gain(dBi)	RMS EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
2501.50	2515.90	-35.97	3.58	45.66	6.10	19.37	33.00	13.63	H
2583.60	2598.00	-35.76	3.67	44.92	6.24	19.07	33.00	13.93	V
2665.60	2680.00	-34.74	3.73	44.96	6.40	20.35	33.00	12.65	H

**LTE Band 41\_15MHz+20MHz\_64QAM**

Frequency(MHz)	Frequency(MHz)	Pmea(dBm)	Cable Loss(dB)	PAg(dB)	Antenna Gain(dBi)	RMS EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
2503.80	2520.90	-28.86	3.58	45.65	6.11	19.32	33.00	13.68	H
2583.30	2595.50	-28.54	3.67	44.92	6.24	18.95	33.00	14.05	V
2662.90	2680.00	-27.39	3.72	44.96	6.40	20.25	33.00	12.75	H

**LTE Band 41\_20MHz+5MHz\_64QAM**

Frequency(MHz)	Frequency(MHz)	Pmea(dBm)	Cable Loss(dB)	PAg(dB)	Antenna Gain(dBi)	RMS EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
2506.00	2517.70	-28.40	3.59	45.15	6.11	19.27	33.00	13.73	H
2590.50	2602.50	-28.33	3.69	44.93	6.26	19.17	33.00	13.83	V
2675.00	2686.70	-25.70	3.74	44.97	6.42	21.95	33.00	11.05	H

**LTE Band 41\_20MHz+10MHz\_64QAM**

Frequency(MHz)	Frequency(MHz)	Pmea(dBm)	Cable Loss(dB)	PAg(dB)	Antenna Gain(dBi)	RMS EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
2506.00	2520.40	-28.43	3.59	45.15	6.11	19.24	33.00	13.76	H
2588.10	2602.50	-28.23	3.69	44.93	6.26	19.27	33.00	13.73	V
2670.10	2684.50	-27.07	3.74	44.97	6.41	20.57	33.00	12.43	H



**LTE Band 41\_20MHz+15MHz\_64QAM**

Frequency(MHz)	Frequency(MHz)	Pmea(dBm)	Cable Loss(dB)	PAg(dB)	Antenna Gain(dBi)	RMS EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
2506.00	2523.00	-28.46	3.59	45.15	6.11	19.21	33.00	13.79	H
2585.60	2602.70	-28.29	3.68	44.92	6.25	19.20	33.00	13.80	V
2665.10	2682.20	-27.08	3.73	44.96	6.40	20.55	33.00	12.45	H

**LTE Band 41\_15MHz+15MHz\_64QAM**

Frequency(MHz)	Frequency(MHz)	Pmea(dBm)	Cable Loss(dB)	PAg(dB)	Antenna Gain(dBi)	RMS EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
2503.50	2518.50	-28.75	3.58	45.65	6.11	19.43	33.00	13.57	H
2585.50	2600.50	-28.29	3.68	44.92	6.25	19.20	33.00	13.80	V
2667.50	2682.50	-26.88	3.74	44.96	6.41	20.75	33.00	12.25	H

**LTE Band 41\_20MHz+20MHz\_64QAM**

Frequency(MHz)	Frequency(MHz)	Pmea(dBm)	Cable Loss(dB)	PAg(dB)	Antenna Gain(dBi)	RMS EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
2506.00	2525.80	-28.21	3.59	45.15	6.11	19.46	33.00	13.54	H
2583.10	2602.90	-28.50	3.67	44.92	6.24	18.99	33.00	14.01	V
2660.20	2680.00	-26.95	3.71	44.96	6.39	20.69	33.00	12.31	H

**LTE Band 41\_15MHz+10MHz\_64QAM**

Frequency(MHz)	Frequency(MHz)	Pmea(dBm)	Cable Loss(dB)	PAg(dB)	Antenna Gain(dBi)	RMS EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
2503.50	2515.50	-25.89	3.58	45.65	6.11	22.29	33.00	10.71	H
2588.10	2600.10	-25.88	3.69	44.93	6.26	21.62	33.00	11.38	V
2672.70	2684.70	-25.13	3.74	44.97	6.42	22.52	33.00	10.48	H

**LTE Band 41\_10MHz+15MHz\_64QAM**

Frequency(MHz)	Frequency(MHz)	Pmea(dBm)	Cable Loss(dB)	PAg(dB)	Antenna Gain(dBi)	RMS EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
2501.50	2513.30	-25.96	3.58	45.66	6.10	22.22	33.00	10.78	H
2585.90	2597.90	-25.78	3.68	44.92	6.25	21.71	33.00	11.29	V
2670.50	2680.00	-25.56	3.74	44.97	6.42	22.09	33.00	10.91	H

Peak EIRP(dBm) = P<sub>Mea</sub>(-23.86dBm) - G<sub>a</sub> (-6.42dBi) - P<sub>Ag</sub> (-44.97dB) - P<sub>cl</sub> (3.74dB) = 23.79dBm

**ANALYZER SETTINGS:**

RBW = VBW = 8MHz for occupied bandwidths equal to or less than 5MHz.

RBW = VBW = 20MHz for occupied bandwidths equal to or greater than 10MHz.

Note: Expanded measurement uncertainty is  $U = 2.84 \text{ dB}$ ,  $k = 2$ .

## A.2 EMISSION LIMIT


### A.2.1 Measurement Method

The measurements procedures in TIA-603E-2016 are used. This measurement is carried out in fully-anechoic chamber FAC-3.


The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier. The resolution bandwidth is set 1MHz. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of the LTE Band 41.

#### The procedure of radiated spurious emissions is as follows:

1. EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic were measured with peak detector.

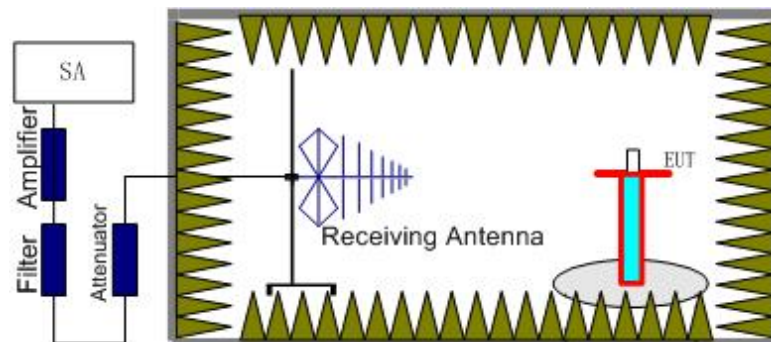

2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (Pr).
3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

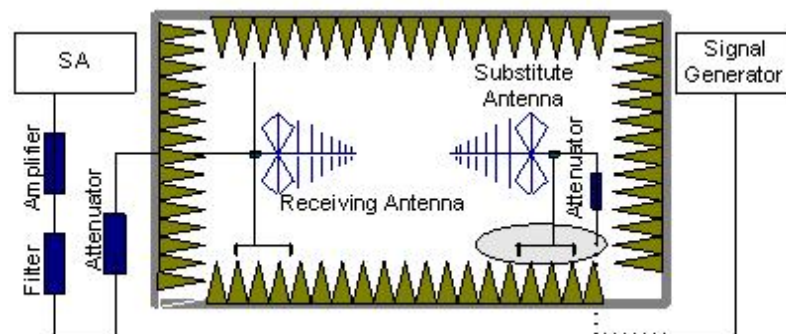

In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere



with the radiation pattern of the antenna. A power ( $P_{Mea}$ ) is applied to the input of the substitution antenna. Adjust the level of the signal generator output until the value of the receiver reaches the previously recorded ( $P_r$ ). The power of signal source ( $P_{Mea}$ ) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. The Path loss ( $P_{pl}$ ) between the Signal Source with the Substitution Antenna and the Substitution Antenna Gain ( $G_a$ ) should be recorded after test.

An amplifier should be connected in for the test.

The Path loss ( $P_{pl}$ ) is the summation of the cable loss and the gain of the amplifier.

The measurement results are obtained as described below:

$$\text{Power (EIRP)} = P_{Mea} + P_{pl} + G_a$$

5. This value is EIRP since the measurement is calibrated using an antenna of known gain (unit: dBi) and known input power.
6. ERP can be calculated from EIRP by subtracting the gain of the dipole,  $ERP = EIRP - 2.15\text{dB}$ .

### A.2.2 Measurement Limit

Part 27.53(m) states that for mobile digital stations, the attenuation factor shall be not less than  $40 + 10 \log (P)$  dB on all frequencies between the channel edge and 5 megahertz from the channel edge,  $43 + 10 \log (P)$  dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and  $55 + 10 \log (P)$  dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less that  $43 + 10 \log (P)$  dB on all frequencies between 2490.5 MHz and 2496 MHz and  $55 + 10 \log (P)$  dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

### A.2.3 Measurement Results

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of the LTE Band 41. It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the LTE Band 41 into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this. The evaluated frequency range is from 30MHz to 26GHz.



RSE1\_S31\_LB41C\_20MHz+5MHz\_CH39750+CH39867\_QPSK\_1P

Frequency (MHz)	SG (dBm)	CableLoss (dB)	AntennaGain (dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polorization
4999.02	-57.58	6.60	9.90	-54.28	-13.00	41.28	V
7526.01	-54.19	8.28	12.22	-50.25	-13.00	37.25	V
10027.01	-53.13	9.26	12.91	-49.48	-13.00	36.48	V
12536.01	-50.17	10.28	13.22	-47.23	-13.00	34.23	V
15045.00	-45.80	11.28	13.97	-43.11	-13.00	30.11	V
17535.00	-42.96	12.86	14.95	-40.87	-13.00	27.87	H

RSE1\_S31\_LB41C\_20MHz+5MHz\_CH40595+CH40712\_QPSK\_1P

Frequency (MHz)	SG (dBm)	CableLoss (dB)	AntennaGain (dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polorization
5192.02	-57.86	6.95	10.17	-54.64	-13.00	41.64	H
7781.01	-55.70	8.31	12.42	-51.59	-13.00	38.59	V
10373.01	-51.67	9.76	13.05	-48.38	-13.00	35.38	H
12944.01	-50.21	10.49	13.47	-47.23	-13.00	34.23	V
15553.00	-45.56	11.51	13.70	-43.37	-13.00	30.37	V
16836.00	-42.75	12.07	13.73	-41.09	-13.00	28.09	V

RSE1\_S31\_LB41C\_20MHz+5MHz\_CH41440+CH41557\_QPSK\_1P

Frequency (MHz)	SG (dBm)	CableLoss (dB)	AntennaGain (dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polorization
5346.02	-57.29	6.94	10.38	-53.85	-13.00	40.85	H
8009.01	-55.48	8.32	12.61	-51.19	-13.00	38.19	V
10707.01	-51.88	9.32	13.14	-48.06	-13.00	35.06	V
13363.01	-48.36	10.57	14.01	-44.92	-13.00	31.92	V
16048.00	-46.40	11.84	13.69	-44.55	-13.00	31.55	H
17367.00	-42.87	12.46	14.61	-40.72	-13.00	27.72	V



RSE1\_S31\_LB41C\_20MHz+5MHz\_CH39750+CH39867\_16QAM\_1P

Frequency (MHz)	SG (dBm)	CableLoss (dB)	AntennaGain (dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polorization
5012.02	-58.16	6.58	9.92	-54.82	-13.00	41.82	V
7506.01	-55.22	8.37	12.20	-51.39	-13.00	38.39	H
10013.01	-53.31	9.22	12.91	-49.62	-13.00	36.62	H
12530.01	-50.30	10.26	13.22	-47.34	-13.00	34.34	V
15048.00	-45.83	11.28	13.97	-43.14	-13.00	30.14	V
17534.00	-43.00	12.85	14.95	-40.90	-13.00	27.90	H

RSE1\_S31\_LB41C\_20MHz+5MHz\_CH40595+CH40712\_16QAM\_1P

Frequency (MHz)	SG (dBm)	CableLoss (dB)	AntennaGain (dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polorization
5189.02	-57.60	6.94	10.16	-54.38	-13.00	41.38	H
7780.01	-54.49	8.31	12.42	-50.38	-13.00	37.38	H
10368.01	-51.99	9.75	13.05	-48.69	-13.00	35.69	H
12964.01	-50.21	10.48	13.48	-47.21	-13.00	34.21	H
15543.00	-45.98	11.51	13.70	-43.79	-13.00	30.79	H
16833.00	-41.94	12.08	13.73	-40.29	-13.00	27.29	H

RSE1\_S31\_LB41C\_20MHz+5MHz\_CH41440+CH41557\_16QAM\_1P

Frequency (MHz)	SG (dBm)	CableLoss (dB)	AntennaGain (dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polorization
5348.02	-57.78	6.94	10.39	-54.33	-13.00	41.33	H
8030.01	-56.02	8.32	12.62	-51.72	-13.00	38.72	H
10699.01	-51.33	9.30	13.14	-47.49	-13.00	34.49	H
13359.01	-48.29	10.57	14.00	-44.86	-13.00	31.86	H
16054.00	-46.25	11.84	13.69	-44.40	-13.00	31.40	H
17387.00	-43.65	12.48	14.65	-41.48	-13.00	28.48	H



RSE1\_S31\_LB41C\_20MHz+5MHz\_CH39750+CH39867\_64QAM\_1P

Frequency (MHz)	SG (dBm)	CableLoss (dB)	AntennaGain (dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polorization
5023.02	-57.73	6.56	9.93	-54.36	-13.00	41.36	H
7520.01	-55.06	8.31	12.22	-51.15	-13.00	38.15	H
10019.01	-53.69	9.23	12.91	-50.01	-13.00	37.01	H
12522.01	-49.93	10.24	13.21	-46.96	-13.00	33.96	V
15027.00	-46.14	11.25	13.98	-43.41	-13.00	30.41	V
17554.00	-43.18	12.93	14.98	-41.13	-13.00	28.13	H

RSE1\_S31\_LB41C\_20MHz+5MHz\_CH40595+CH40712\_64QAM\_1P

Frequency (MHz)	SG (dBm)	CableLoss (dB)	AntennaGain (dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polorization
5193.02	-57.27	6.95	10.17	-54.05	-13.00	41.05	H
7784.01	-55.59	8.31	12.43	-51.47	-13.00	38.47	H
10357.01	-50.74	9.73	13.04	-47.43	-13.00	34.43	H
12935.01	-49.55	10.49	13.46	-46.58	-13.00	33.58	H
15539.00	-45.13	11.51	13.70	-42.94	-13.00	29.94	H
16831.00	-42.85	12.08	13.73	-41.20	-13.00	28.20	V

RSE1\_S31\_LB41C\_20MHz+5MHz\_CH41440+CH41557\_64QAM\_1P

Frequency (MHz)	SG (dBm)	CableLoss (dB)	AntennaGain (dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polorization
5352.02	-57.53	6.93	10.39	-54.07	-13.00	41.07	H
8011.01	-56.20	8.32	12.61	-51.91	-13.00	38.91	H
10701.01	-51.90	9.31	13.14	-48.07	-13.00	35.07	H
13359.01	-48.31	10.57	14.00	-44.88	-13.00	31.88	V
16048.00	-45.27	11.84	13.69	-43.42	-13.00	30.42	V
17386.00	-43.37	12.48	14.65	-41.20	-13.00	28.20	V



RSE1\_S31\_LB41C\_20MHz+20MHz\_CH39750+CH39948\_QPSK\_1P

Frequency (MHz)	SG (dBm)	CableLoss (dB)	AntennaGain (dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polorization
5026.02	-57.63	6.56	9.94	-54.25	-13.00	41.25	H
7515.01	-55.06	8.33	12.21	-51.18	-13.00	38.18	H
10032.01	-52.80	9.27	12.91	-49.16	-13.00	36.16	V
12522.01	-50.32	10.24	13.21	-47.35	-13.00	34.35	V
15042.00	-44.96	11.27	13.97	-42.26	-13.00	29.26	H
17555.00	-43.31	12.94	14.98	-41.27	-13.00	28.27	H

RSE1\_S31\_LB41C\_20MHz+20MHz\_CH40521+CH40719\_QPSK\_1P

Frequency (MHz)	SG (dBm)	CableLoss (dB)	AntennaGain (dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polorization
5161.02	-56.46	6.90	10.13	-53.23	-13.00	40.23	H
7746.01	-55.66	8.36	12.40	-51.62	-13.00	38.62	V
10337.01	-51.77	9.70	13.03	-48.44	-13.00	35.44	H
12933.01	-49.77	10.49	13.46	-46.80	-13.00	33.80	V
15493.00	-46.07	11.53	13.70	-43.90	-13.00	30.90	V
16796.00	-42.01	12.10	13.72	-40.39	-13.00	27.39	H

RSE1\_S31\_LB41C\_20MHz+20MHz\_CH41292+CH41490\_QPSK\_1P

Frequency (MHz)	SG (dBm)	CableLoss (dB)	AntennaGain (dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polorization
5321.02	-56.57	6.99	10.35	-53.21	-13.00	40.21	V
7982.01	-55.14	8.34	12.59	-50.89	-13.00	37.89	H
10641.01	-51.16	9.29	13.13	-47.32	-13.00	34.32	H
13302.01	-45.98	10.58	13.92	-42.64	-13.00	29.64	H
15956.00	-45.27	11.73	13.70	-43.30	-13.00	30.30	H
17288.00	-43.20	12.37	14.43	-41.14	-13.00	28.14	H



RSE1\_S31\_LB41C\_20MHz+20MHz\_CH39750+CH39948\_16QAM\_1P

Frequency (MHz)	SG (dBm)	CableLoss (dB)	AntennaGain (dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polorization
5000.02	-57.70	6.60	9.90	-54.40	-13.00	41.40	V
7529.01	-55.46	8.27	12.22	-51.51	-13.00	38.51	H
10024.01	-53.77	9.25	12.91	-50.11	-13.00	37.11	H
12524.01	-49.73	10.24	13.21	-46.76	-13.00	33.76	H
15035.00	-46.13	11.26	13.98	-43.41	-13.00	30.41	V
17531.00	-43.98	12.84	14.94	-41.88	-13.00	28.88	V

RSE1\_S31\_LB41C\_20MHz+20MHz\_CH40521+CH40719\_16QAM\_1P

Frequency (MHz)	SG (dBm)	CableLoss (dB)	AntennaGain (dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polorization
5169.02	-57.94	6.91	10.14	-54.71	-13.00	41.71	V
7743.01	-54.41	8.37	12.39	-50.39	-13.00	37.39	V
10343.01	-52.18	9.71	13.04	-48.85	-13.00	35.85	V
12933.01	-50.28	10.49	13.46	-47.31	-13.00	34.31	V
15515.00	-46.45	11.53	13.70	-44.28	-13.00	31.28	H
16781.00	-42.73	12.04	13.71	-41.06	-13.00	28.06	H

RSE1\_S31\_LB41C\_20MHz+20MHz\_CH41292+CH41490\_16QAM\_1P

Frequency (MHz)	SG (dBm)	CableLoss (dB)	AntennaGain (dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polorization
5161.02	-56.46	6.90	10.13	-53.23	-13.00	40.23	H
7746.01	-55.66	8.36	12.40	-51.62	-13.00	38.62	V
10337.01	-51.77	9.70	13.03	-48.44	-13.00	35.44	H
12933.01	-49.77	10.49	13.46	-46.80	-13.00	33.80	V
15493.00	-46.07	11.53	13.70	-43.90	-13.00	30.90	V
16796.00	-42.01	12.10	13.72	-40.39	-13.00	27.39	H

RSE1\_S31\_LB41C\_20MHz+20MHz\_CH39750+CH39948\_64QAM\_1P

Frequency (MHz)	SG (dBm)	CableLoss (dB)	AntennaGain (dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polorization
5010.02	-57.87	6.59	9.91	-54.55	-13.00	41.55	V
7513.01	-55.36	8.34	12.21	-51.49	-13.00	38.49	V
10036.01	-53.60	9.28	12.91	-49.97	-13.00	36.97	H
12539.01	-49.88	10.29	13.22	-46.95	-13.00	33.95	H
15038.00	-45.93	11.27	13.98	-43.22	-13.00	30.22	V
17552.00	-43.78	12.92	14.97	-41.73	-13.00	28.73	H

RSE1\_S31\_LB41C\_20MHz+20MHz\_CH40521+CH40719\_64QAM\_1P

Frequency (MHz)	SG (dBm)	CableLoss (dB)	AntennaGain (dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polorization
5176.02	-57.86	6.92	10.15	-54.63	-13.00	41.63	V
7751.01	-54.52	8.36	12.40	-50.48	-13.00	37.48	V
10331.01	-52.34	9.69	13.03	-49.00	-13.00	36.00	H
12926.01	-48.51	10.50	13.46	-45.55	-13.00	32.55	H
15518.00	-46.23	11.53	13.70	-44.06	-13.00	31.06	H
16792.00	-42.39	12.08	13.72	-40.75	-13.00	27.75	H

RSE1\_S31\_LB41C\_20MHz+20MHz\_CH41292+CH41490\_64QAM\_1P

Frequency (MHz)	SG (dBm)	CableLoss (dB)	AntennaGain (dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polorization
5329.02	-56.86	6.98	10.36	-53.48	-13.00	40.48	H
7975.01	-55.37	8.35	12.58	-51.14	-13.00	38.14	V
10631.01	-51.38	9.29	13.13	-47.54	-13.00	34.54	H
13296.01	-48.64	10.58	13.91	-45.31	-13.00	32.31	H
15974.00	-45.58	11.77	13.70	-43.65	-13.00	30.65	H
17291.00	-42.68	12.37	14.44	-40.61	-13.00	27.61	H

Note: The maximum value of expanded measurement uncertainty for this test item is  $U = 5.16$  dB,  $k = 2$ .

### **A.3 FREQUENCY STABILITY**

#### **A.3.1 Method of Measurement**

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMW500 DIGITAL RADIO COMMUNICATION TESTER.

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at -10°C.
3. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on middle channel for LTE band 41, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
4. Repeat the above measurements at 10°C increments from -10°C to +50°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
5. Re-measure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments re-measuring carrier frequency at each voltage. Pause at nominal voltage for 1.5 hours unpowered, to allow any self-heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at +50°C.
7. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
8. Repeat the above measurements at 10 °C increments from -10°C to +50°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

#### **A.3.2 Measurement Limit**

##### **A.3.2.1 For Hand carried battery powered equipment**

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d)(2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 3.55VDC and 4.35VDC, with a nominal voltage of 3.8VDC.

##### **A.3.2.2 For equipment powered by primary supply voltage**

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. For this EUT section 2.1055(d)(1) applies. This requires varying primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.



### A.3.3 Measurement results

#### LTE Band 41, 10MHz+15MHz bandwidth (worst case of all bandwidths)

##### Frequency Error vs Voltage

Voltage (V)	Frequency error (Hz)			Frequency error (ppm)		
	QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
3.55	30.11	40.87	58.91	0.012	0.016	0.023
3.8	22.19	39.30	66.40	0.009	0.015	0.026
4.35	30.40	34.45	94.39	0.012	0.013	0.036

##### Frequency Error vs Temperature

Temperature (°C)	Frequency error (Hz)			Frequency error (ppm)		
	QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
50	18.63	41.20	92.37	0.007	0.016	0.036
40	19.11	26.91	99.10	0.007	0.010	0.038
30	37.56	36.64	63.44	0.014	0.014	0.024
20	38.54	31.99	60.01	0.015	0.012	0.023
10	29.71	34.45	86.45	0.011	0.013	0.033
0	13.58	37.05	98.55	0.005	0.014	0.038
- 10	33.63	39.07	79.71	0.013	0.015	0.031

## A.4 OCCUPIED BANDWIDTH

### A.4.1 Occupied Bandwidth Results

Occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of the US Cellular/PCS frequency bands. The table below lists the measured 99% BW. Spectrum analyzer plots are included on the following pages.


The measurement method is from KDB 971168 4.2:

- The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be set wide enough to capture all modulation products including the emission skirts (i.e., two to five times the OBW).
- The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
- Set the reference level of the instrument as required to keep the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope must be at least  $10\log(\text{OBW} / \text{RBW})$  below the reference level.
- Set the detection mode to peak, and the trace mode to max hold.
- Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

#### LTE band 41, 5MHz+20MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(MHz)		
	QPSK	16QAM	64QAM
2593.0	23.720	23.638	23.558

#### LTE band 41, 5MHz+20MHz Bandwidth, QPSK (99% BW)

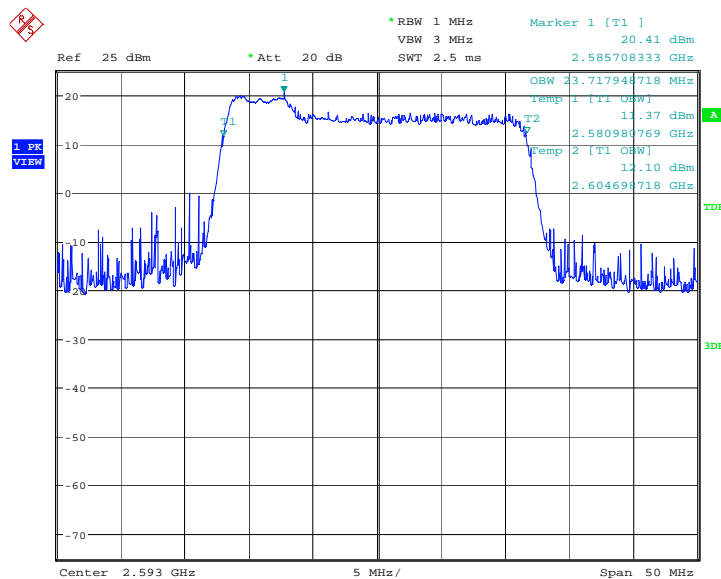


Date: 1.DEC.2018 10:09:40

**LTE band 41, 5MHz+20MHz Bandwidth,16QAM (99% BW)**

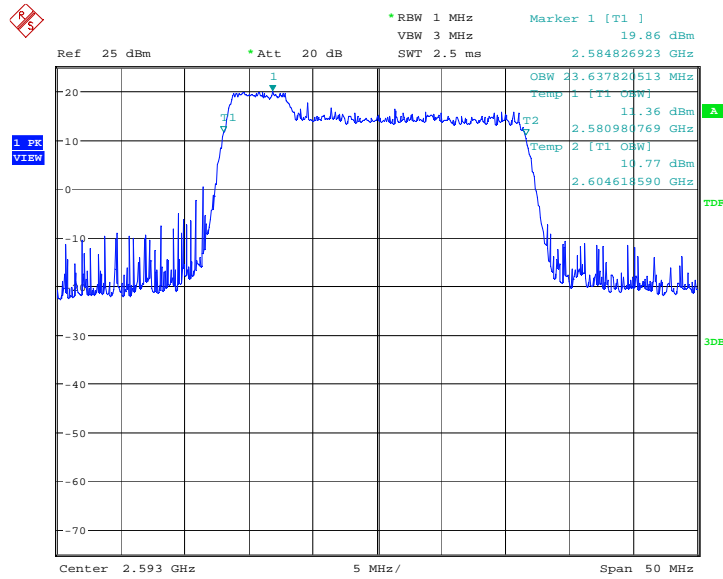

Date: 1.DEC.2018 10:16:22

**LTE band 41, 5MHz+20MHz Bandwidth,64QAM (99% BW)**

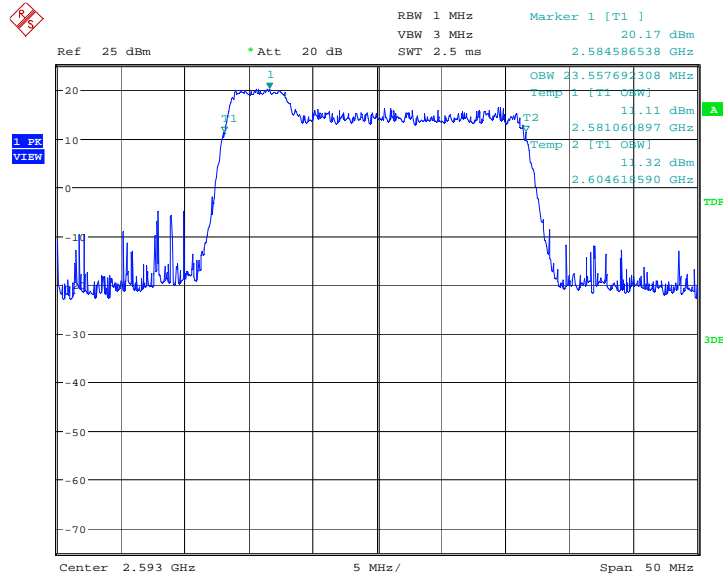


Date: 3.DEC.2018 11:11:29

**LTE band 41, 20MHz+5MHz (99%)**


Frequency(MHz)	Occupied Bandwidth (99%)(MHz)		
	QPSK	16QAM	64QAM
2593.0	23.638	23.638	23.638

**LTE band 41, 20MHz+5MHz Bandwidth, QPSK (99% BW)**

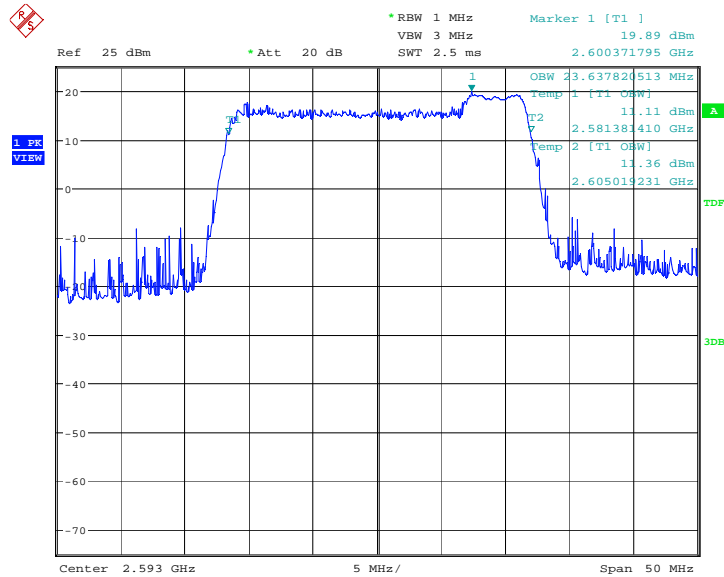


Date: 1.DEC.2018 10:19:11

**LTE band 41, 20MHz+5MHz Bandwidth,16QAM (99% BW)**

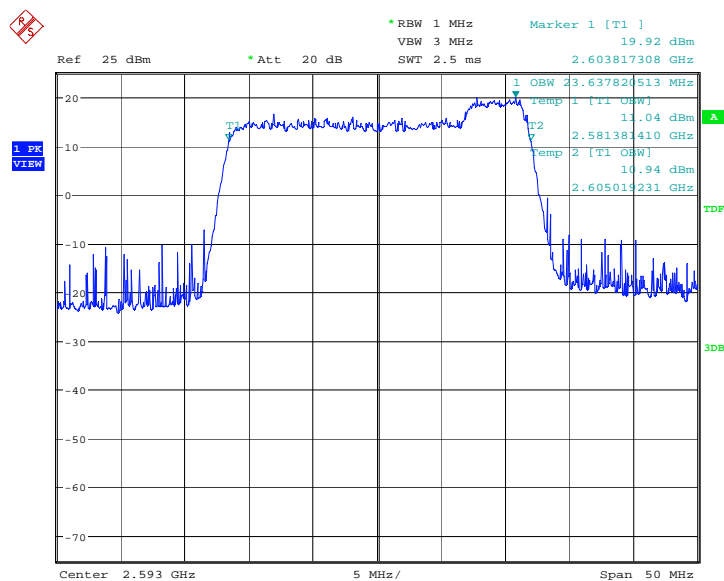

Date: 1.DEC.2018 10:33:14

**LTE band 41, 20MHz+5MHz Bandwidth,64QAM (99% BW)**

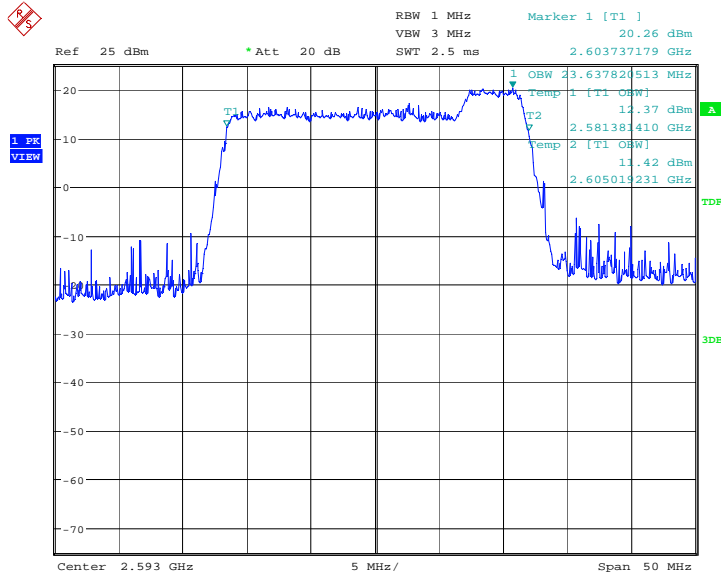


Date: 3.DEC.2018 11:14:59

**LTE band 41, 10MHz+15MHz (99%)**


Frequency(MHz)	Occupied Bandwidth (99%)(MHz)		
	QPSK	16QAM	64QAM
2593.0	23.878	23.878	23.958

**LTE band 41, 10MHz+15MHz Bandwidth, QPSK (99% BW)**

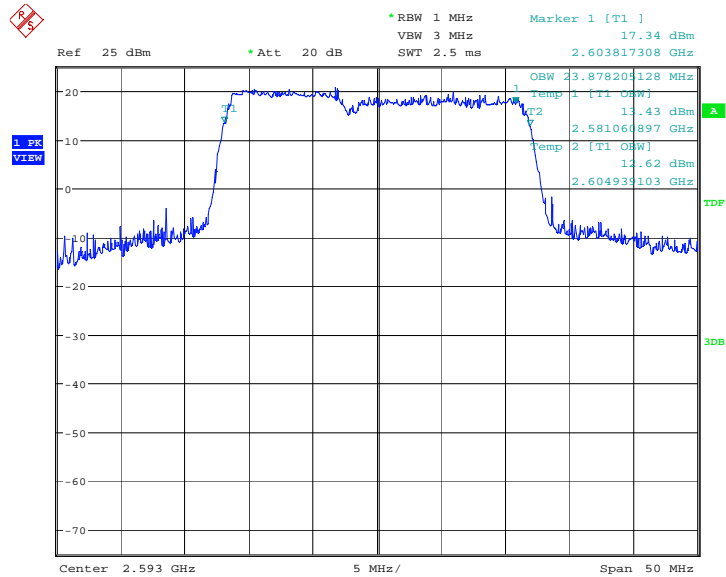


Date: 1.DEC.2018 10:36:49

**LTE band 41, 10MHz+15MHz Bandwidth,16QAM (99% BW)**

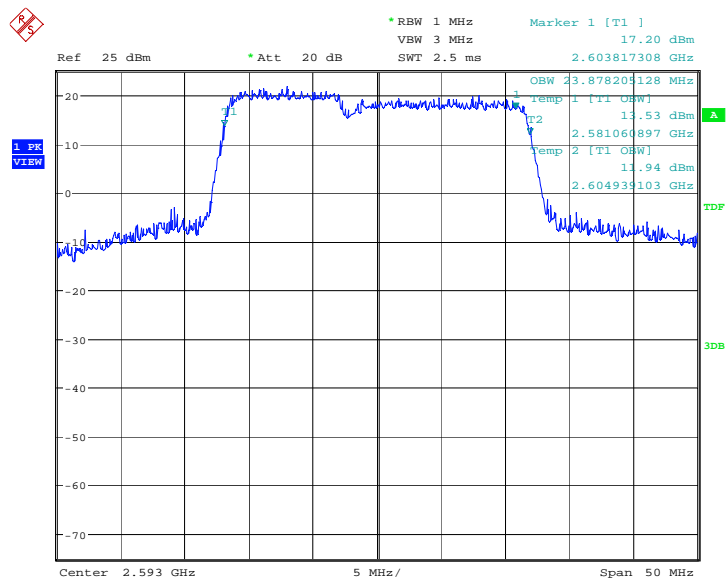

Date: 1.DEC.2018 10:41:16

**LTE band 41, 10MHz+15MHz Bandwidth,64QAM (99% BW)**

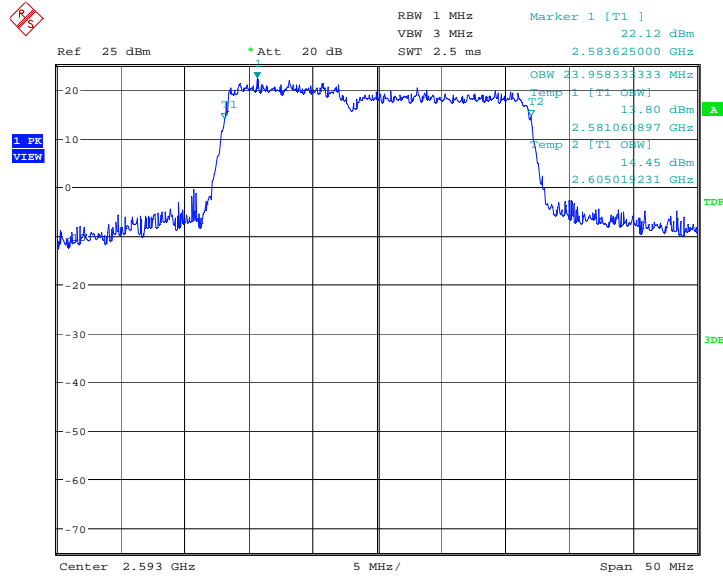


Date: 3.DEC.2018 11:16:22

**LTE band 41, 15MHz+10MHz (99%)**


Frequency(MHz)	Occupied Bandwidth (99%)(MHz)		
	QPSK	16QAM	64QAM
2593.0	23.958	23.958	23.958

**LTE band 41, 15MHz+10MHz Bandwidth, QPSK (99% BW)**

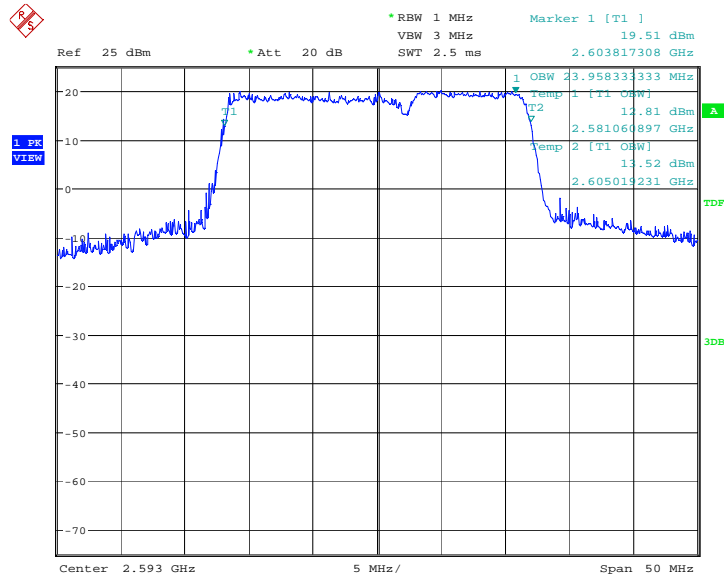

Date: 1.DEC.2018 10:43:27


**LTE band 41, 15MHz+10MHz Bandwidth,16QAM (99% BW)**

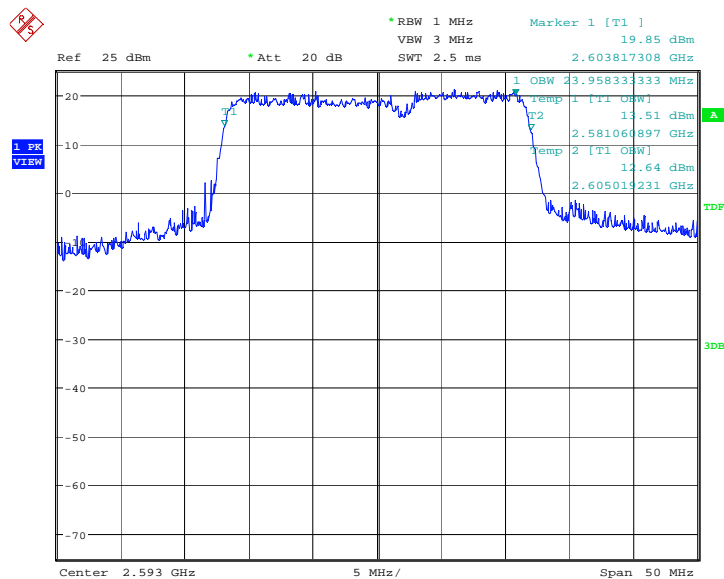

Date: 1.DEC.2018 10:50:08



**LTE band 41, 15MHz+10MHz Bandwidth,64QAM (99% BW)**

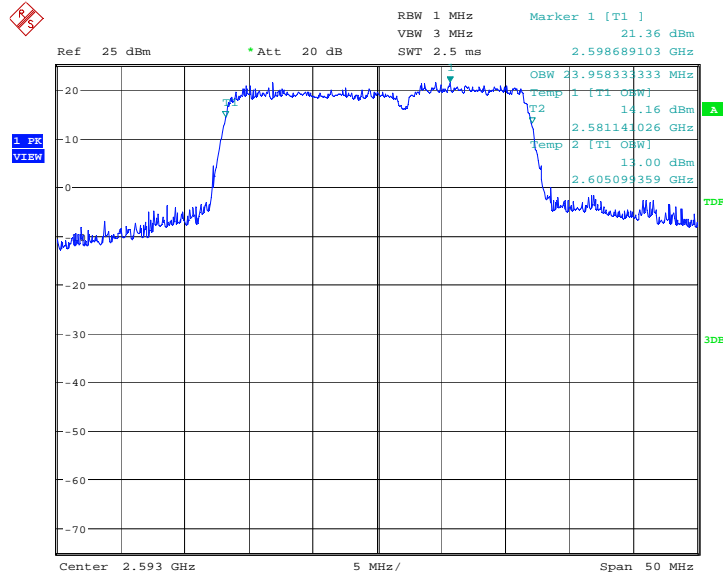


Date: 3.DEC.2018 11:18:50

**LTE band 41, 10MHz+20MHz (99%)**


Frequency(MHz)	Occupied Bandwidth (99%)(MHz)		
	QPSK	16QAM	64QAM
2593.0	28.285	28.285	28.365

**LTE band 41, 10MHz+20MHz Bandwidth, QPSK (99% BW)**

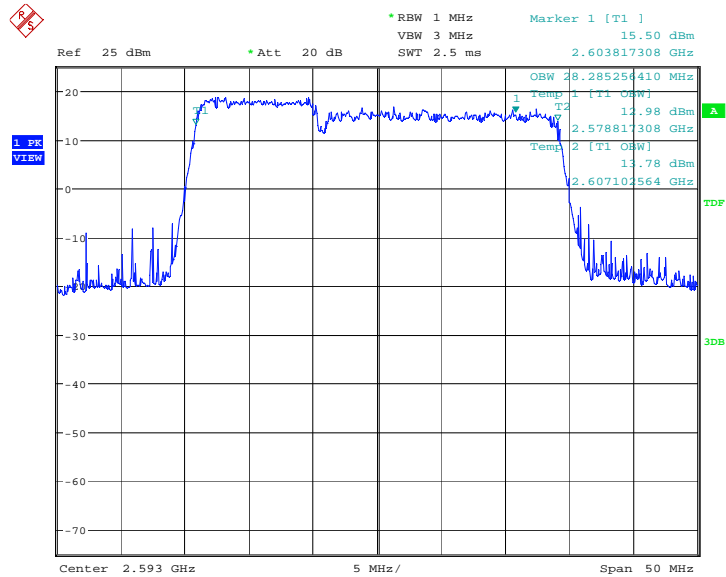


Date: 1.DEC.2018 10:52:47

**LTE band 41, 10MHz+20MHz Bandwidth,16QAM (99% BW)**

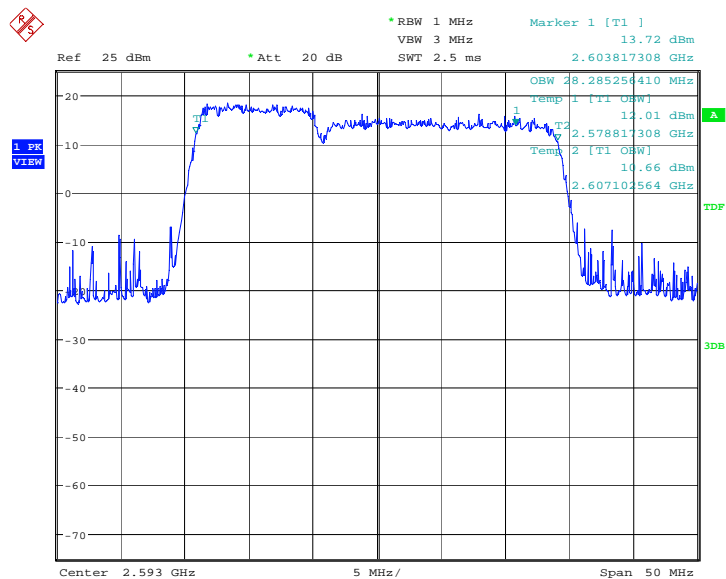

Date: 1.DEC.2018 10:57:07

**LTE band 41, 10MHz+20MHz Bandwidth,64QAM (99% BW)**

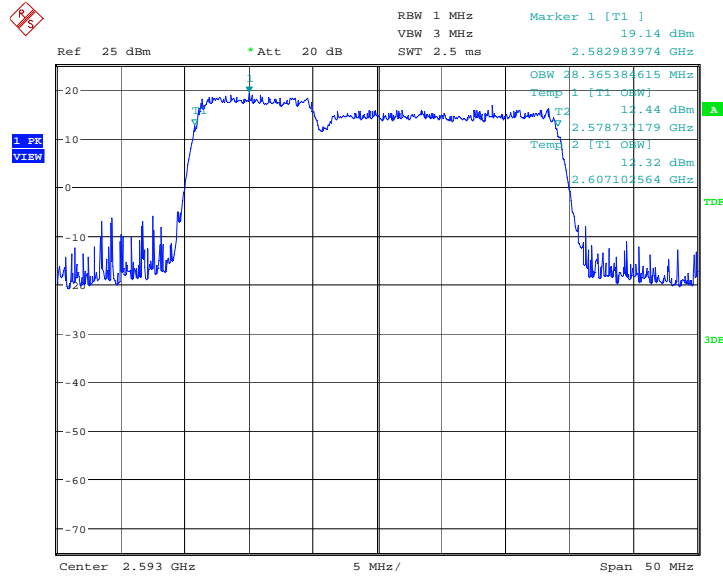


Date: 3.DEC.2018 11:20:13

**LTE band 41, 20MHz+10MHz (99%)**


Frequency(MHz)	Occupied Bandwidth (99%)(MHz)		
	QPSK	16QAM	64QAM
2593.0	28.365	28.365	28.365

**LTE band 41, 20MHz+10MHz Bandwidth, QPSK (99% BW)**

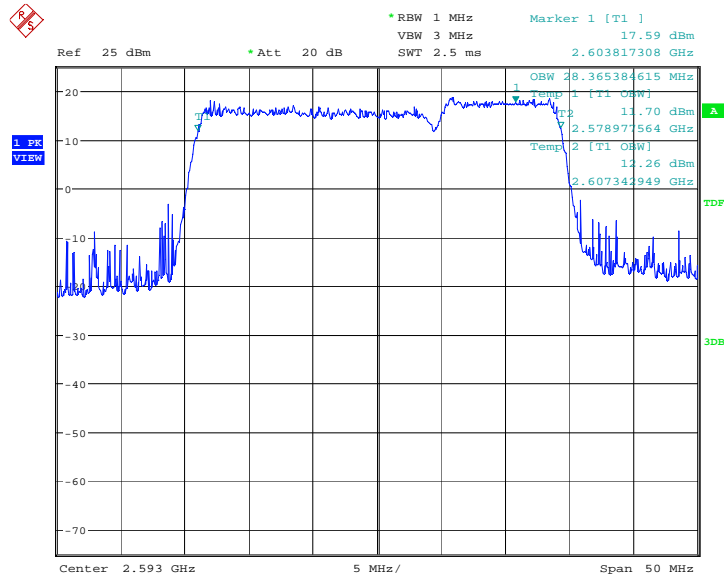


Date: 1.DEC.2018 11:04:29

**LTE band 41, 20MHz+10MHz Bandwidth,16QAM (99% BW)**

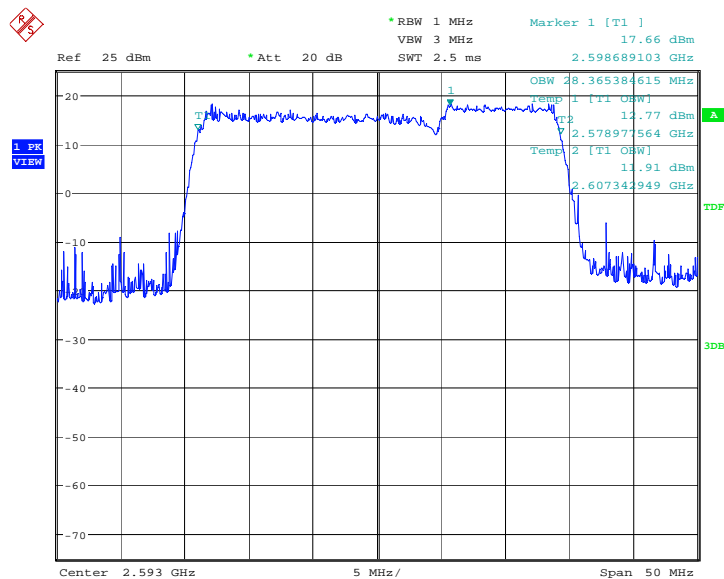

Date: 1.DEC.2018 11:08:46

**LTE band 41, 20MHz+10MHz Bandwidth,64QAM (99% BW)**

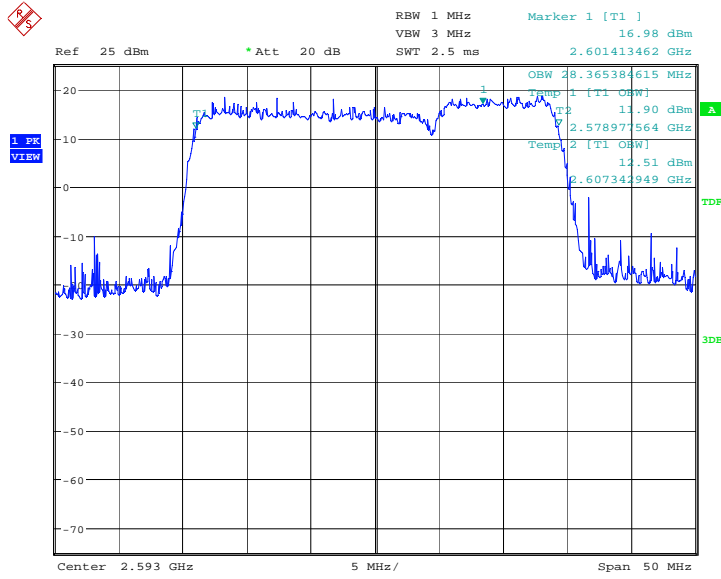


Date: 3.DEC.2018 11:23:50

**LTE band 41, 15MHz+15MHz (99%)**


Frequency(MHz)	Occupied Bandwidth (99%)(MHz)		
	QPSK	16QAM	64QAM
2593.0	28.926	28.846	29.006

**LTE band 41, 15MHz+15MHz Bandwidth, QPSK (99% BW)**

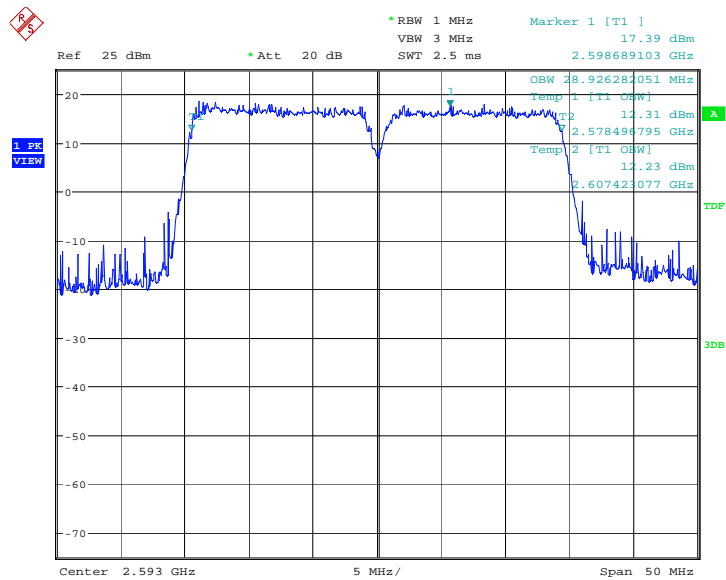


Date: 1.DEC.2018 11:11:45

**LTE band 41, 15MHz+15MHz Bandwidth,16QAM (99% BW)**

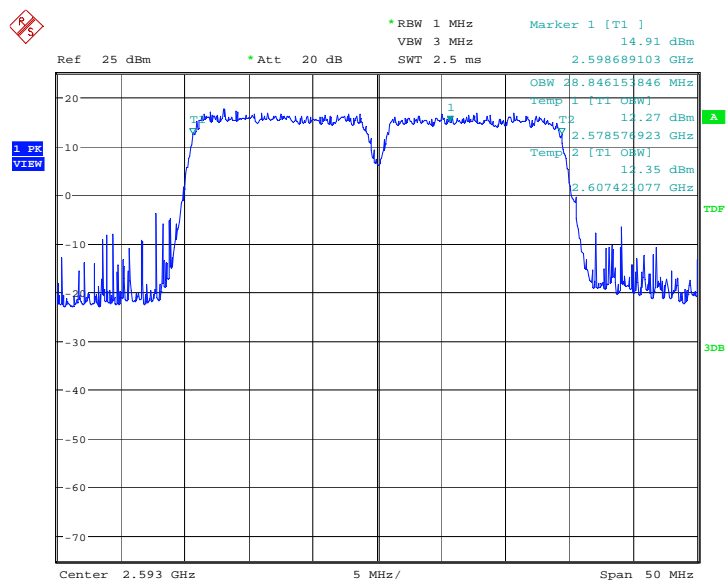

Date: 1.DEC.2018 11:13:53

**LTE band 41, 15MHz+15MHz Bandwidth,64QAM (99% BW)**

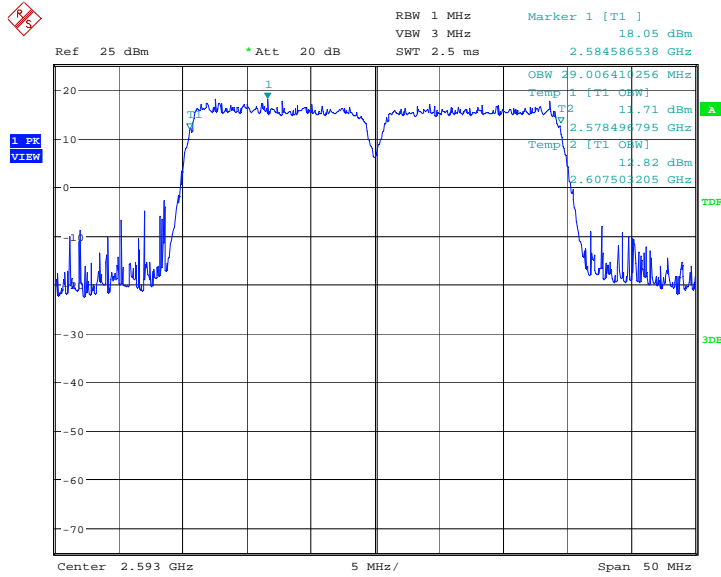


Date: 3.DEC.2018 11:25:01

**LTE band 41, 15MHz+20MHz (99%)**


Frequency(MHz)	Occupied Bandwidth (99%)(MHz)		
	QPSK	16QAM	64QAM
2593.0	33.173	33.173	33.173

**LTE band 41, 15MHz+20MHz Bandwidth, QPSK (99% BW)**

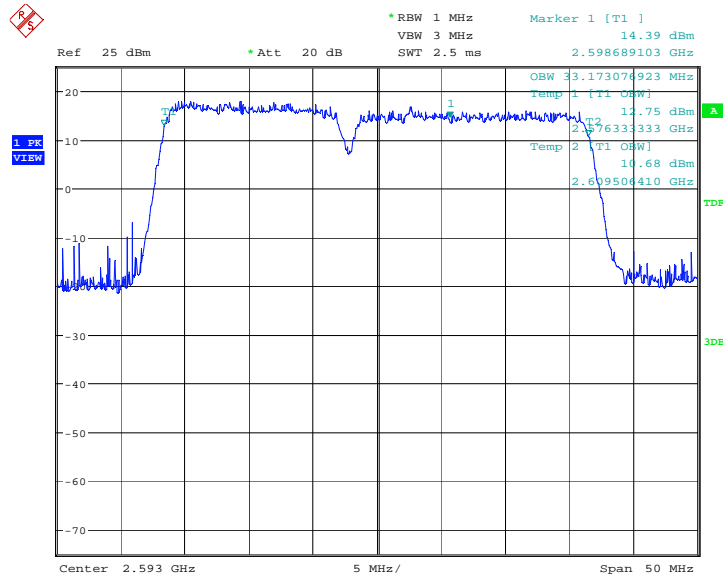

Date: 1.DEC.2018 11:17:50


**LTE band 41, 15MHz+20MHz Bandwidth,16QAM (99% BW)**

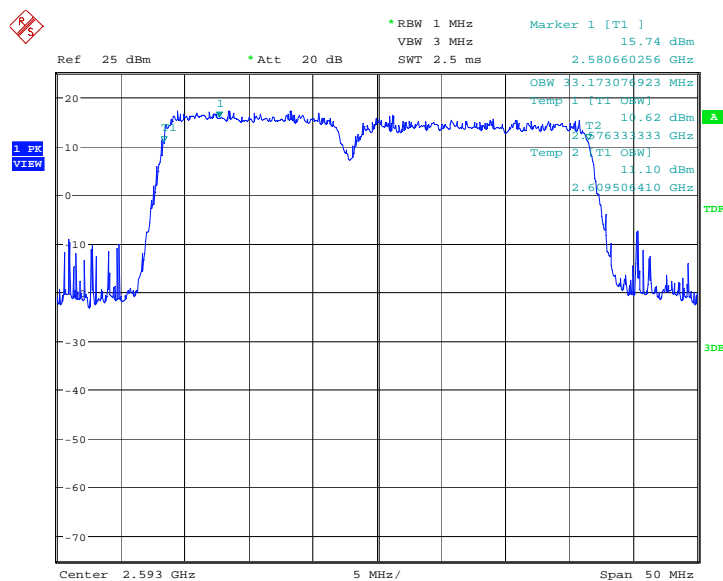

Date: 1.DEC.2018 11:23:08



**LTE band 41, 15MHz+20MHz Bandwidth,64QAM (99% BW)**

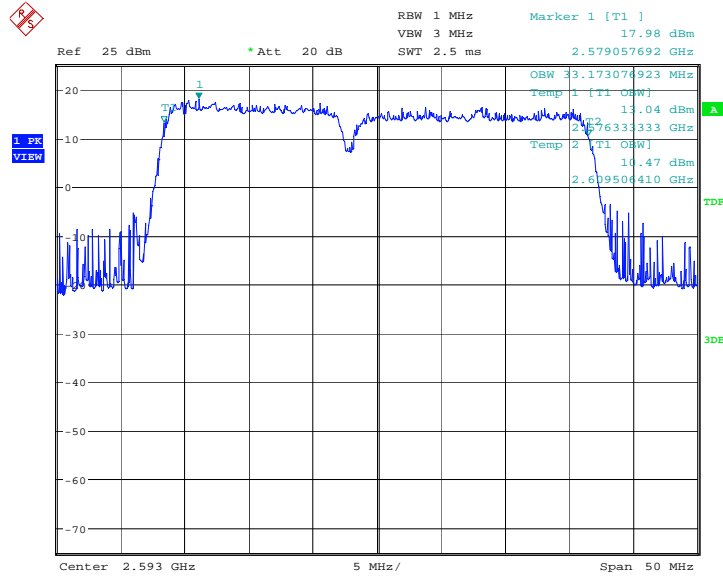


Date: 3.DEC.2018 11:27:11

**LTE band 41, 20MHz+15MHz (99%)**


Frequency(MHz)	Occupied Bandwidth (99%)(MHz)		
	QPSK	16QAM	64QAM
2593.0	33.093	33.253	33.013

**LTE band 41, 20MHz+15MHz Bandwidth, QPSK (99% BW)**

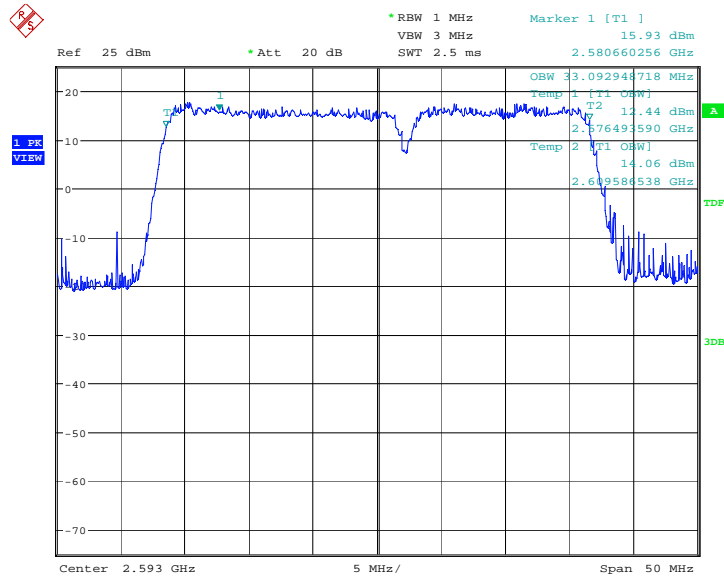


Date: 1.DEC.2018 11:25:28

**LTE band 41, 20MHz+15MHz Bandwidth,16QAM (99% BW)**

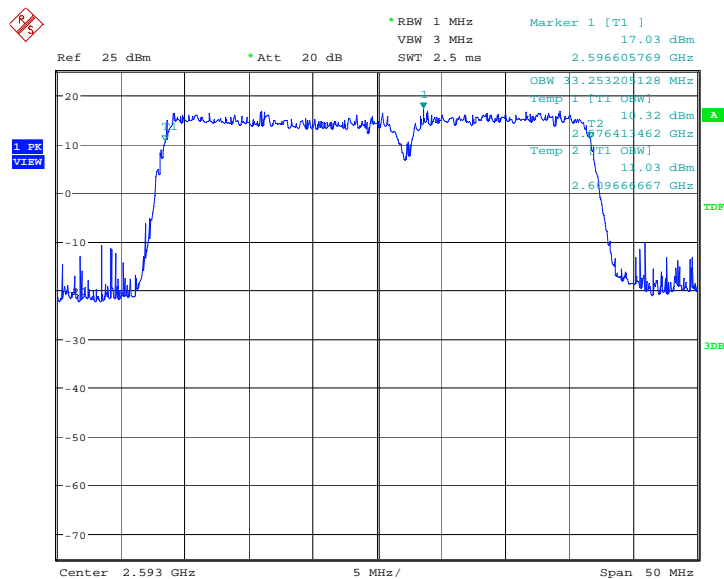

Date: 1.DEC.2018 11:27:49

**LTE band 41, 20MHz+15MHz Bandwidth,64QAM (99% BW)**

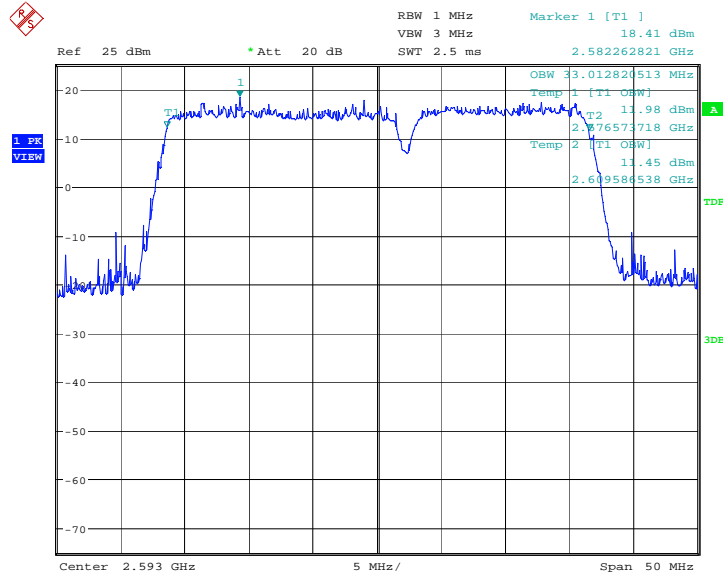


Date: 3.DEC.2018 11:28:11

**LTE band 41, 20MHz+20MHz (99%)**


Frequency(MHz)	Occupied Bandwidth (99%)(MHz)		
	QPSK	16QAM	64QAM
2593.0	37.981	37.981	37.981

**LTE band 41, 20MHz+20MHz Bandwidth, QPSK (99% BW)**

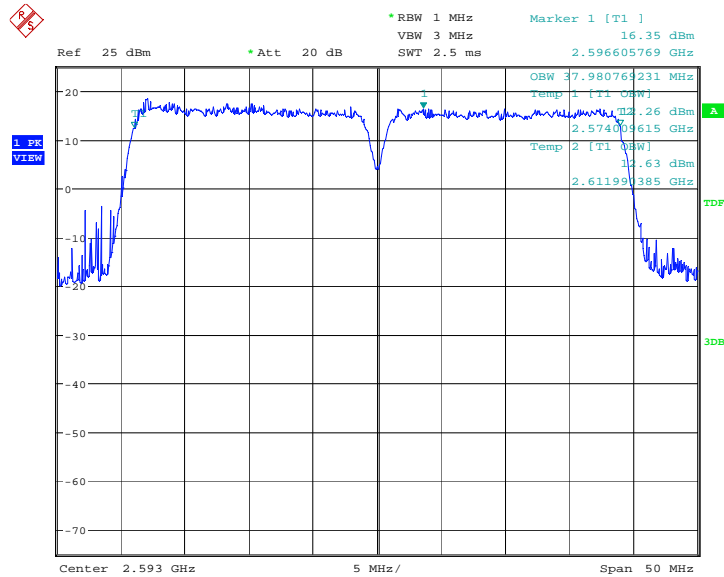


Date: 1.DEC.2018 11:30:48

**LTE band 41, 20MHz+20MHz Bandwidth,16QAM (99% BW)**

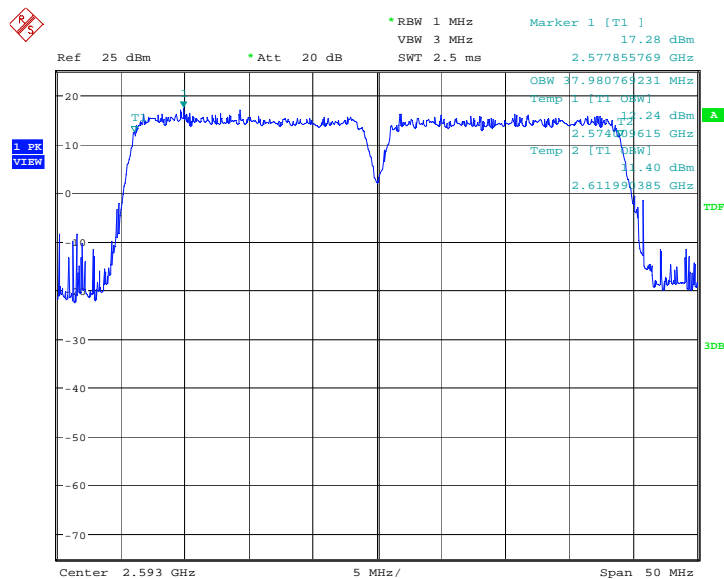

Date: 1.DEC.2018 11:32:58

**LTE band 41, 20MHz+20MHz Bandwidth,64QAM (99% BW)**

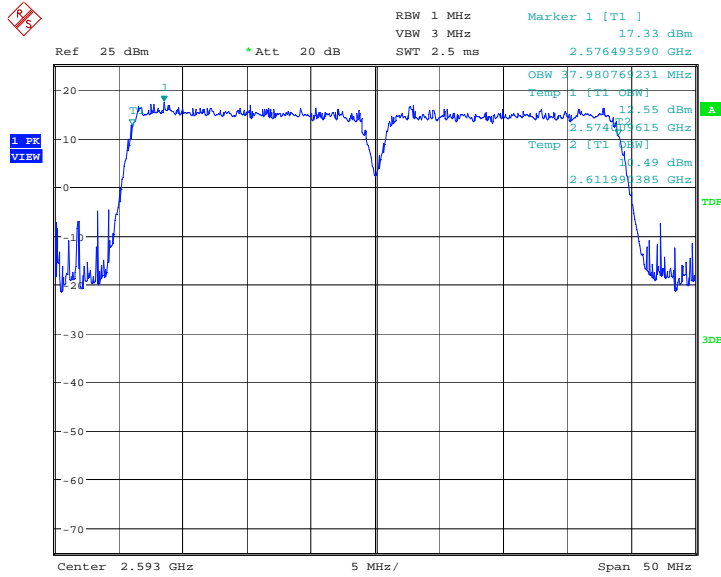

Date: 3.DEC.2018 11:30:12

## A.5 EMISSION BANDWIDTH


### A.5.1 Emission Bandwidth Results

The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power. Table below lists the measured -26dBc BW. Spectrum analyzer plots are included on the following pages.

#### LTE band 41, 5MHz+20MHz (-26dBc BW)


Frequency(MHz)	Emission Bandwidth (-26dBc BW)(MHz)		
	QPSK	16QAM	64QAM
2593.0	26.282	25.721	25.801

#### LTE band 41, 5MHz+20MHz Bandwidth, QPSK (-26dBc BW)

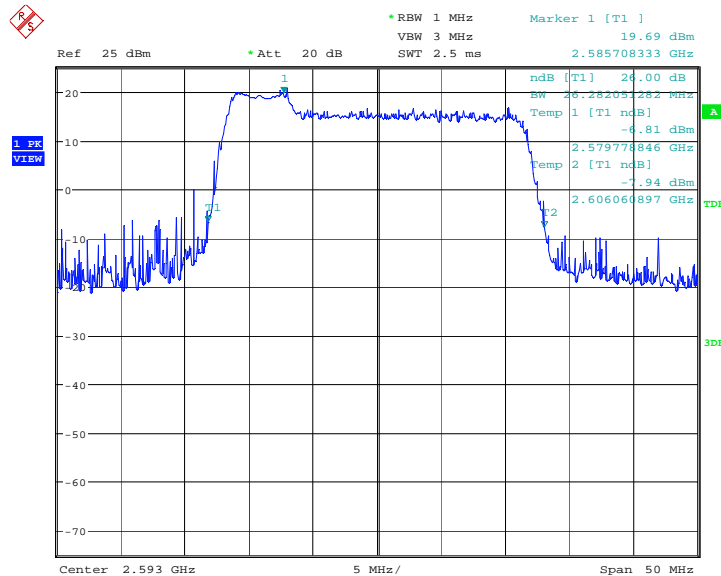


Date: 1.DEC.2018 10:13:03

**LTE band 41, 5MHz+20MHz Bandwidth,16QAM (-26dBc BW)**

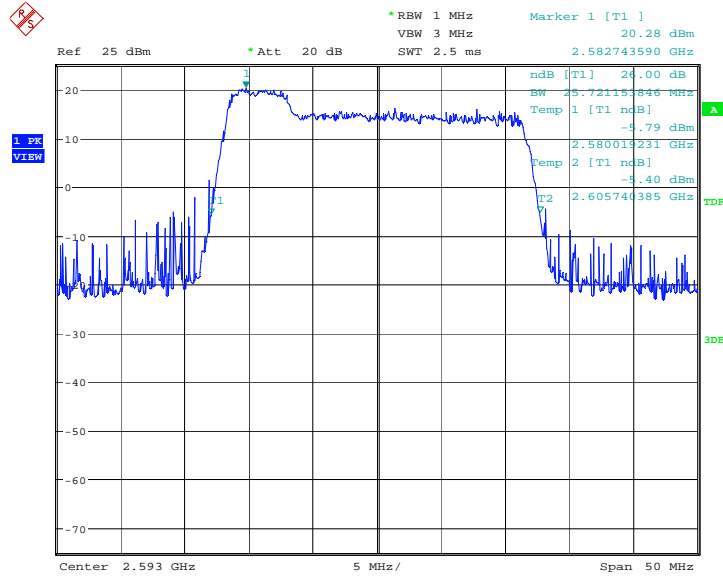

Date: 1.DEC.2018 13:42:18

**LTE band 41, 5MHz+20MHz Bandwidth,64QAM (-26dBc BW)**

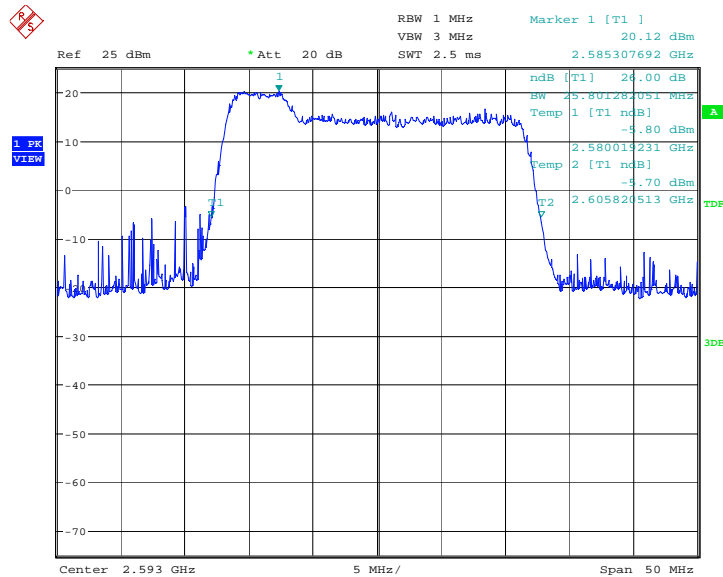


Date: 3.DEC.2018 11:12:23

**LTE band 41, 20MHz+5MHz (-26dBc BW)**


Frequency(MHz)	Emission Bandwidth (-26dBc BW) (MHz)		
	QPSK	16QAM	64QAM
2593.0	26.122	25.881	25.881

**LTE band 41, 20MHz+5MHz Bandwidth, QPSK (-26dBc BW)**

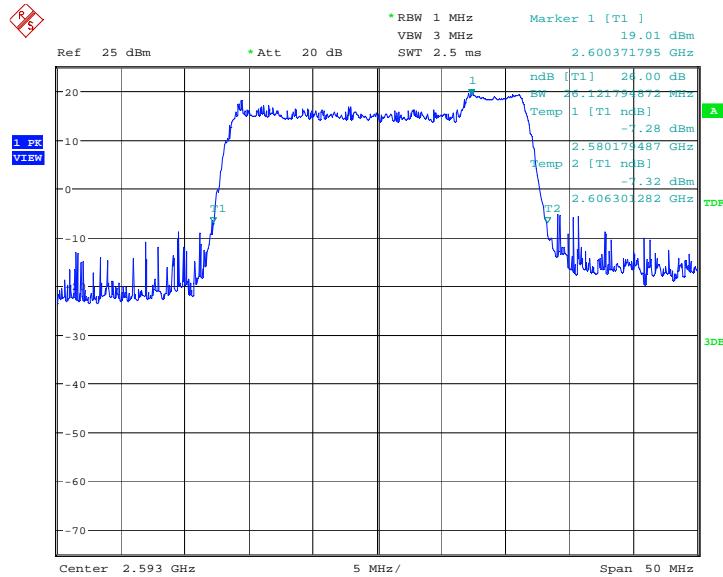

Date: 1.DEC.2018 10:20:35


**LTE band 41, 20MHz+5MHz Bandwidth,16QAM (-26dBc BW)**

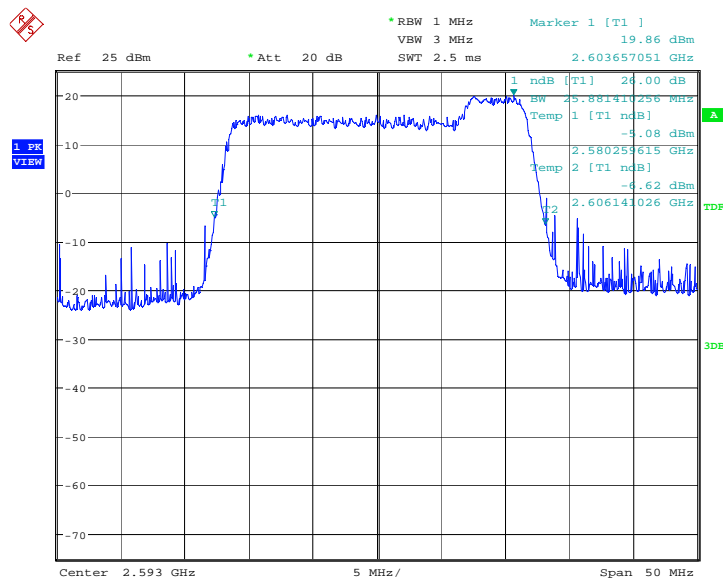

Date: 1.DEC.2018 13:45:24



**LTE band 41, 20MHz+5MHz Bandwidth,64QAM (-26dBc BW)**

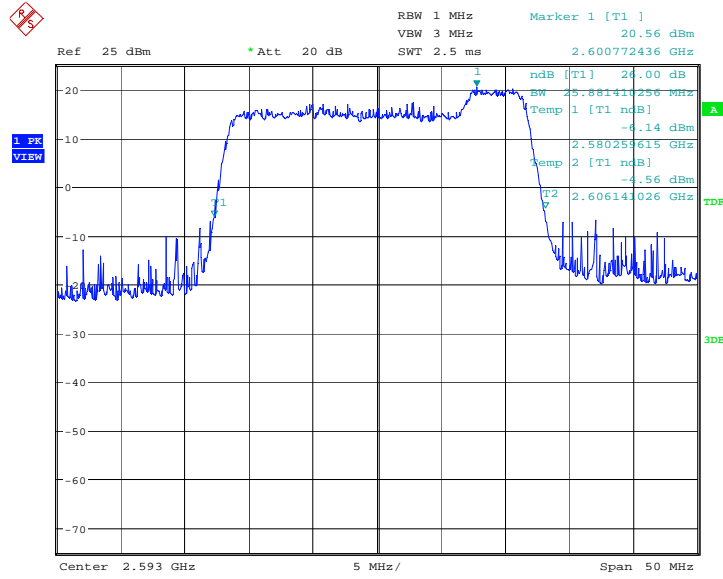


Date: 3.DEC.2018 11:14:22

**LTE band 41, 10MHz+15MHz (-26dBc BW)**


Frequency(MHz)	Emission Bandwidth (-26dBc BW) (MHz)		
	QPSK	16QAM	64QAM
2593.0	26.923	26.763	26.923

**LTE band 41, 10MHz+15MHz Bandwidth, QPSK (-26dBc BW)**

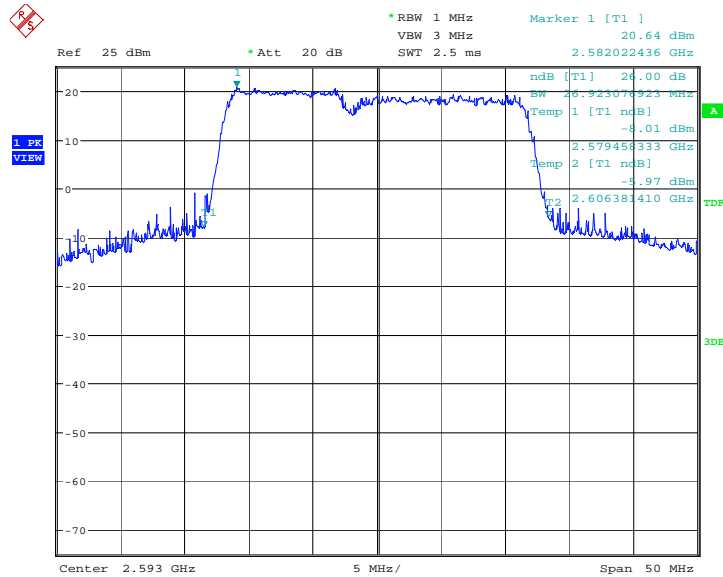


Date: 1.DEC.2018 13:47:17

**LTE band 41, 10MHz+15MHz Bandwidth,16QAM (-26dBc BW)**

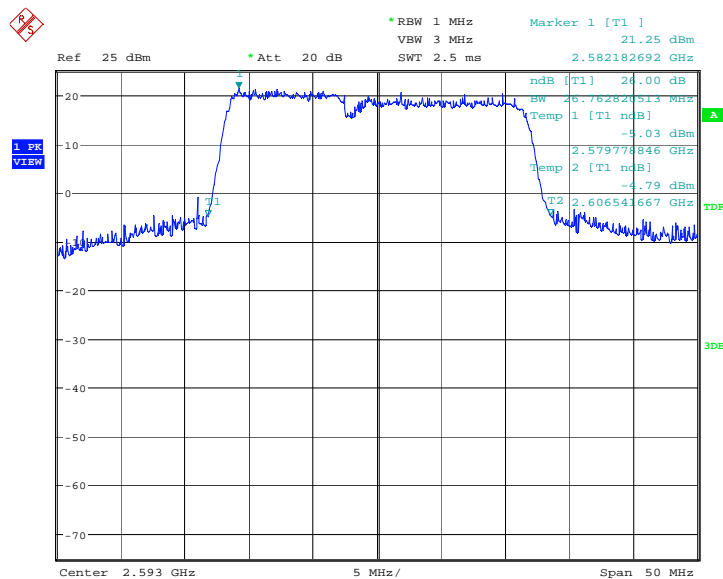

Date: 1.DEC.2018 13:48:38

**LTE band 41, 10MHz+15MHz Bandwidth,64QAM (-26dBc BW)**

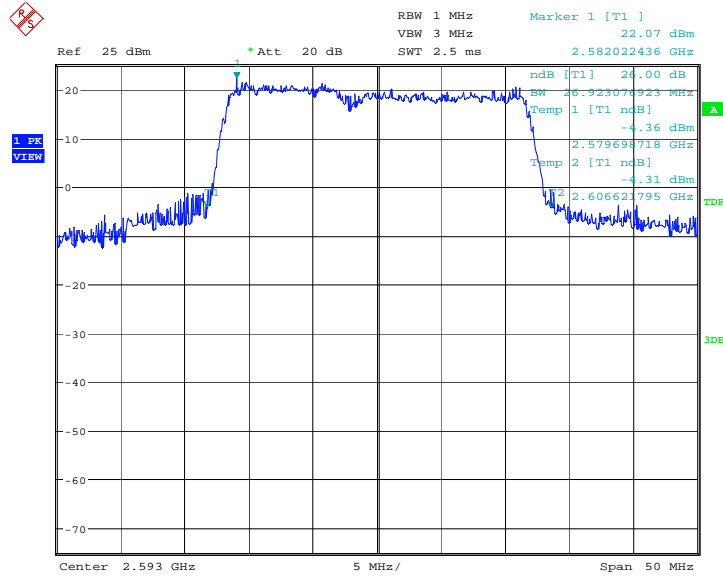


Date: 3.DEC.2018 11:16:54

**LTE band 41, 15MHz+10MHz (-26dBc BW)**


Frequency(MHz)	Emission Bandwidth (-26dBc BW) (MHz)		
	QPSK	16QAM	64QAM
2593.0	26.923	26.923	26.603

**LTE band 41, 15MHz+10MHz Bandwidth, QPSK (-26dBc BW)**

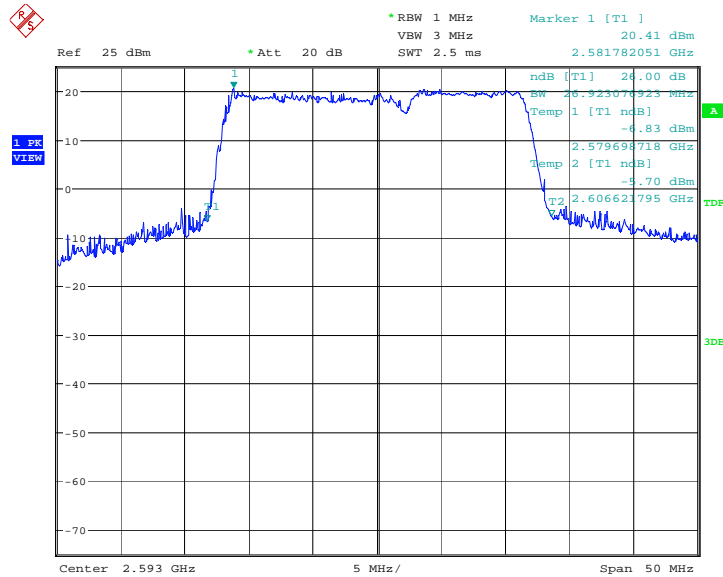

Date: 1.DEC.2018 13:50:51


**LTE band 41, 15MHz+10MHz Bandwidth,16QAM (-26dBc BW)**

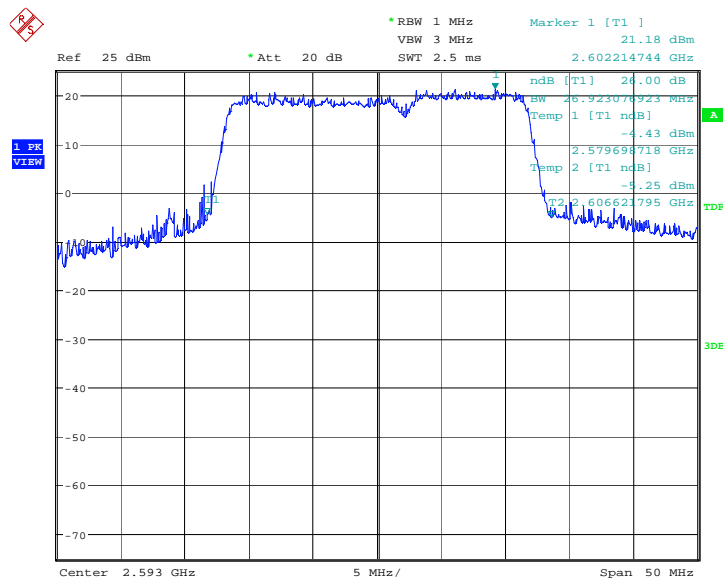

Date: 1.DEC.2018 13:51:37



### LTE band 41, 15MHz+10MHz Bandwidth,64QAM (-26dBc BW)

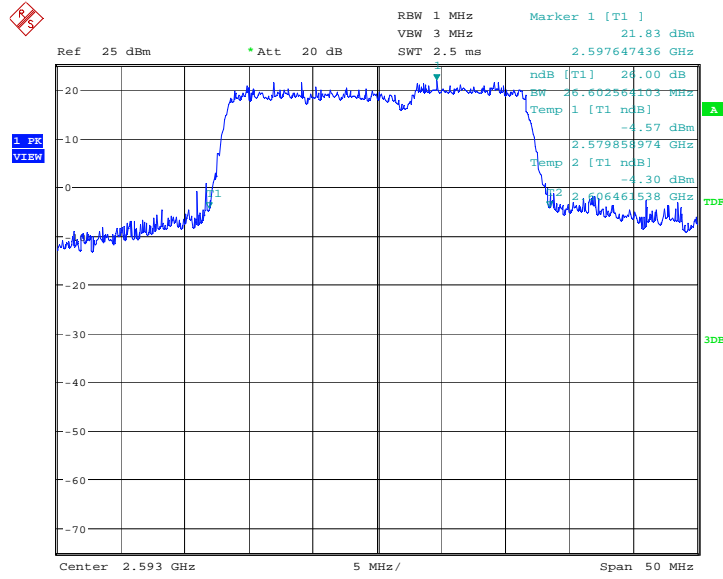


Date: 3.DEC.2018 11:18:03

**LTE band 41, 10MHz+20MHz (-26dBc BW)**


Frequency(MHz)	Emission Bandwidth (-26dBc BW) (MHz)		
	QPSK	16QAM	64QAM
2593.0	31.010	30.849	30.929

**LTE band 41, 10MHz+20MHz Bandwidth, QPSK (-26dBc BW)**

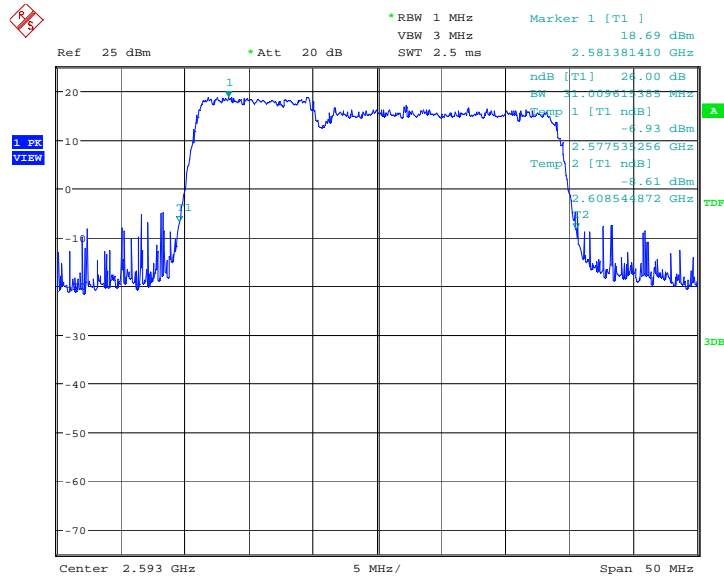


Date: 1.DEC.2018 13:53:36

**LTE band 41, 10MHz+20MHz Bandwidth,16QAM (-26dBc BW)**

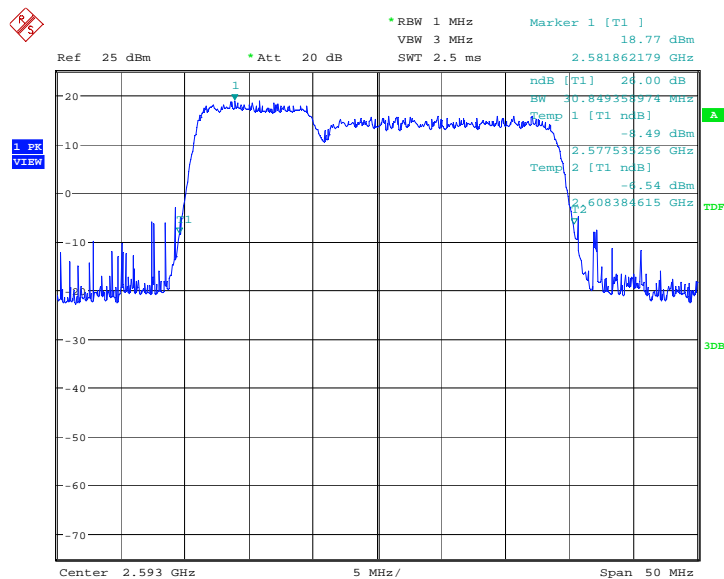

Date: 1.DEC.2018 13:54:21

**LTE band 41, 10MHz+20MHz Bandwidth,64QAM (-26dBc BW)**

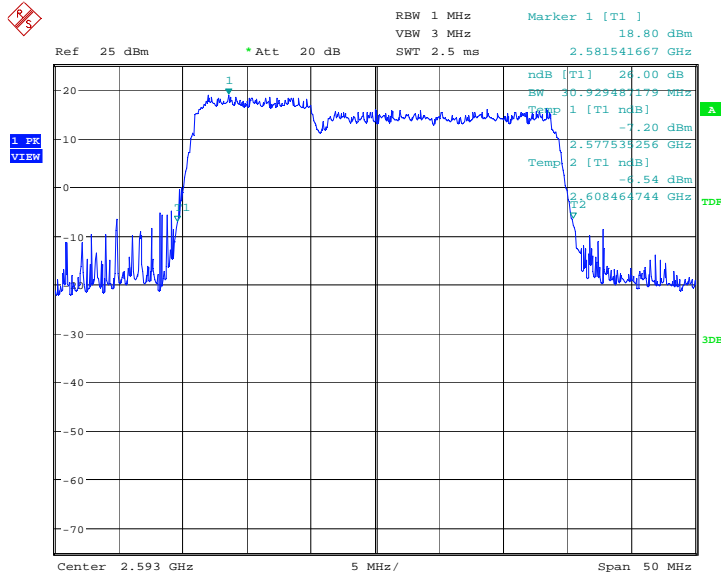


Date: 3.DEC.2018 11:20:48

**LTE band 41, 20MHz+10MHz (-26dBc BW)**


Frequency(MHz)	Emission Bandwidth (-26dBc BW) (MHz)		
2593.0	QPSK	16QAM	64QAM
	31.090	31.010	31.250

**LTE band 41, 20MHz+10MHz Bandwidth, QPSK (-26dBc BW)**

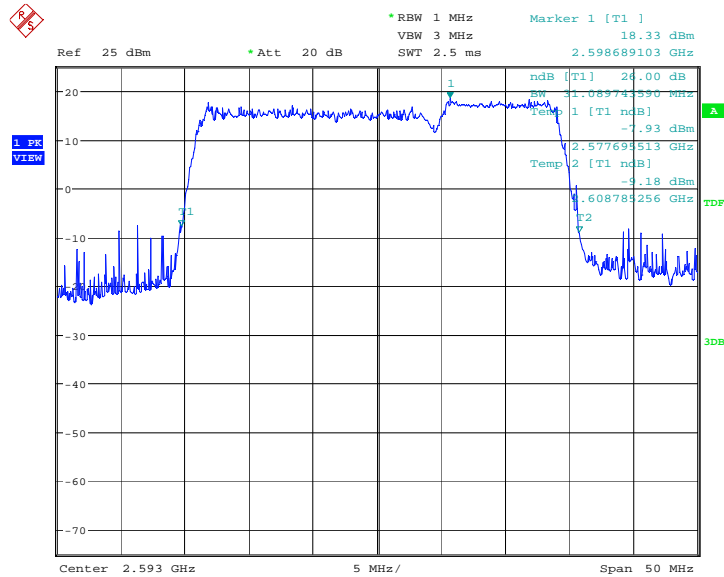

Date: 1.DEC.2018 11:07:00


**LTE band 41, 20MHz+10MHz Bandwidth,16QAM (-26dBc BW)**

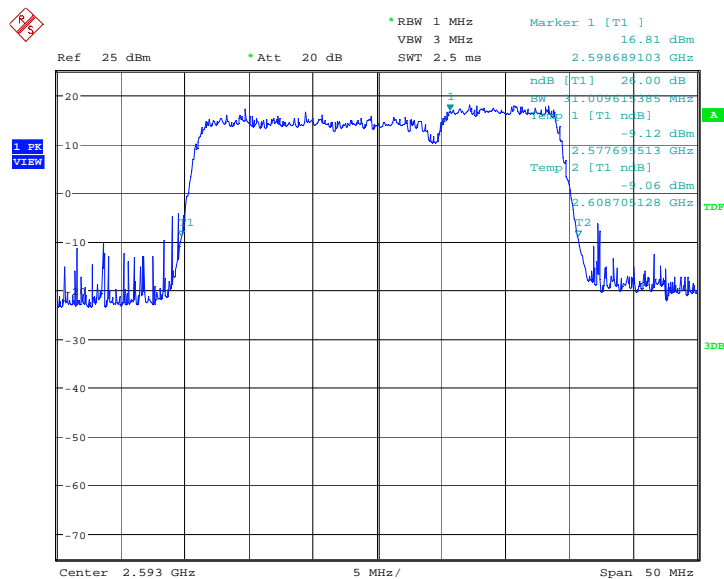

Date: 1.DEC.2018 11:07:57



**LTE band 41, 20MHz+10MHz Bandwidth,64QAM (-26dBc BW)**

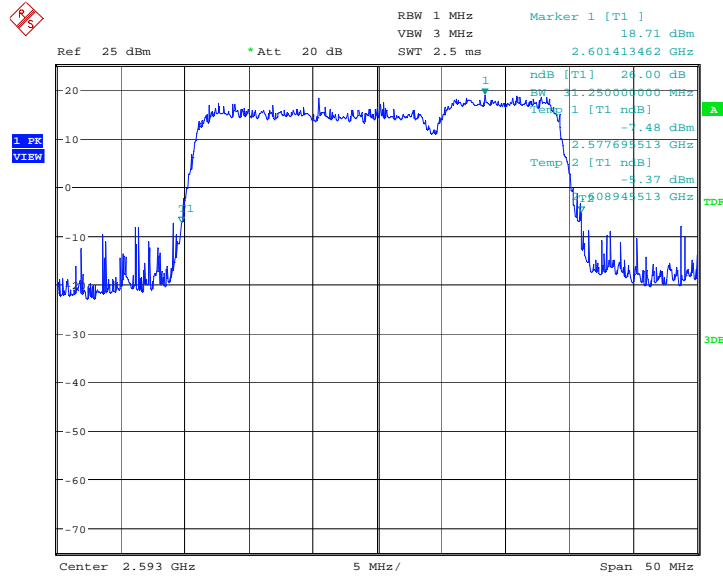


Date: 3.DEC.2018 11:23:13

**LTE band 41, 15MHz+15MHz (-26dBc BW)**


Frequency(MHz)	Emission Bandwidth (-26dBc BW) (MHz)		
	QPSK	16QAM	64QAM
2593.0	31.811	31.971	31.490

**LTE band 41, 15MHz+15MHz Bandwidth, QPSK (-26dBc BW)**

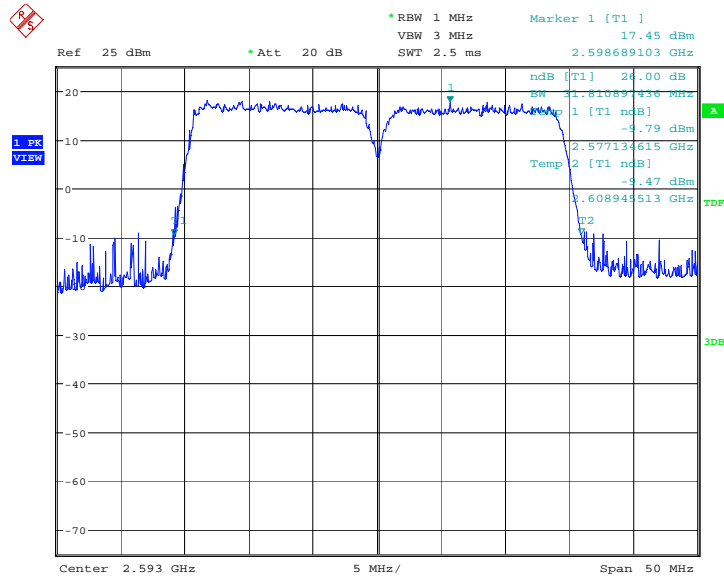


Date: 1.DEC.2018 11:12:23

**LTE band 41, 15MHz+15MHz Bandwidth,16QAM (-26dBc BW)**

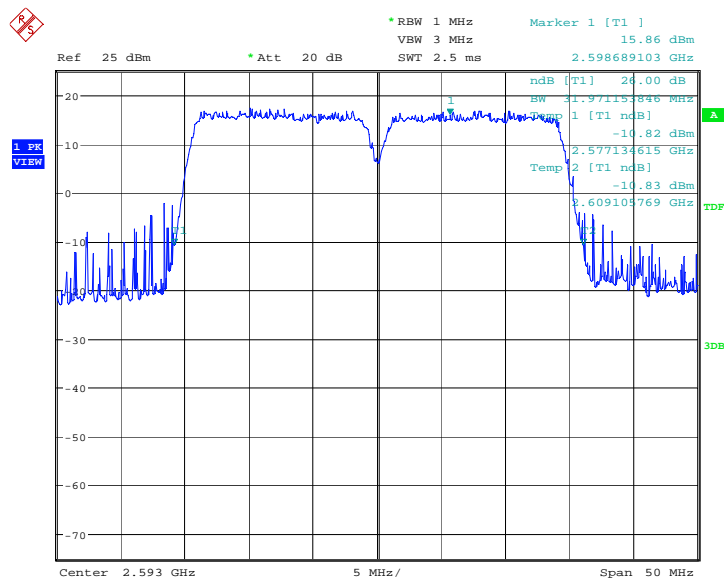

Date: 1.DEC.2018 11:13:15

**LTE band 41, 15MHz+15MHz Bandwidth,64QAM (-26dBc BW)**

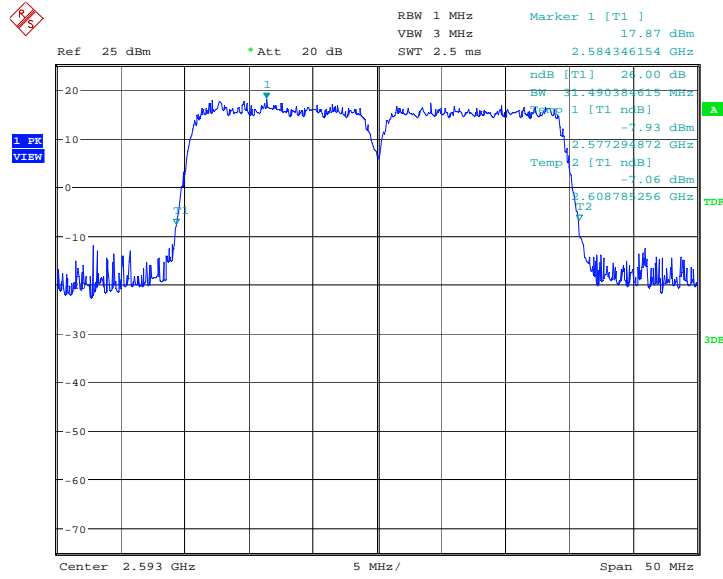


Date: 3.DEC.2018 11:25:34

**LTE band 41, 15MHz+20MHz (-26dBc BW)**


Frequency(MHz)	Emission Bandwidth (-26dBc BW) (MHz)		
	QPSK	16QAM	64QAM
2593.0	35.897	35.978	35.978

**LTE band 41, 15MHz+20MHz Bandwidth, QPSK (-26dBc BW)**

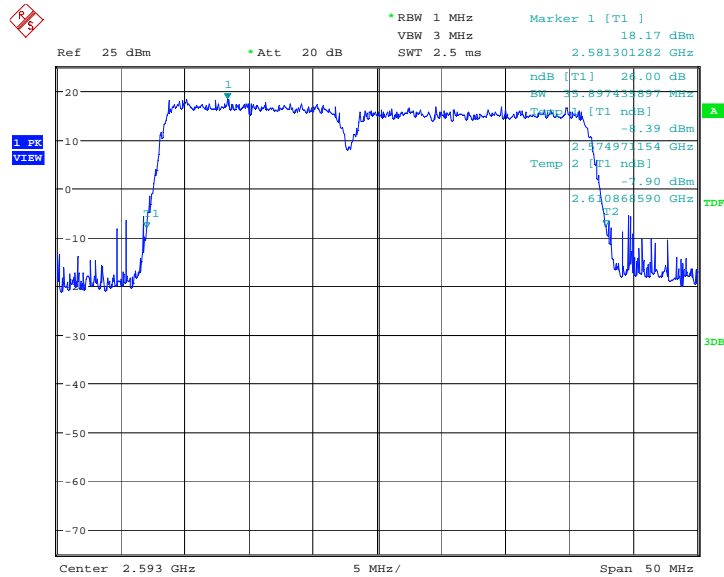


Date: 1.DEC.2018 13:56:18

**LTE band 41, 15MHz+20MHz Bandwidth,16QAM (-26dBc BW)**

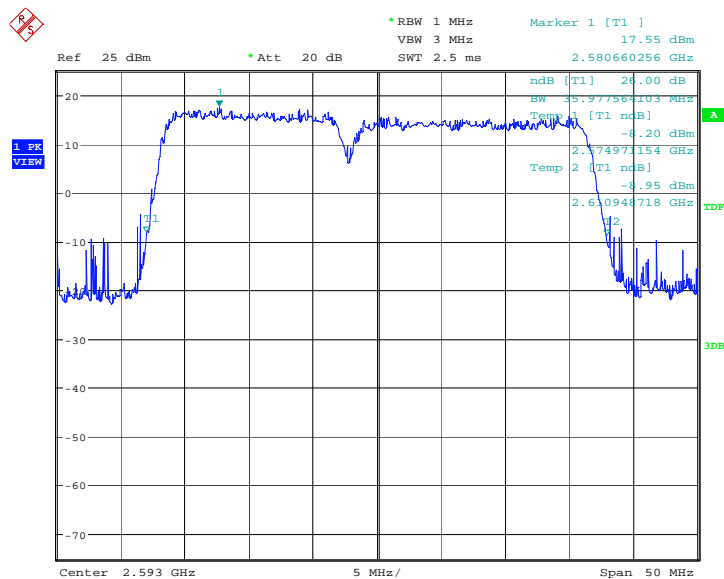

Date: 1.DEC.2018 11:21:47

LTE band 41, 15MHz+20MHz Bandwidth,64QAM (-26dBc BW)

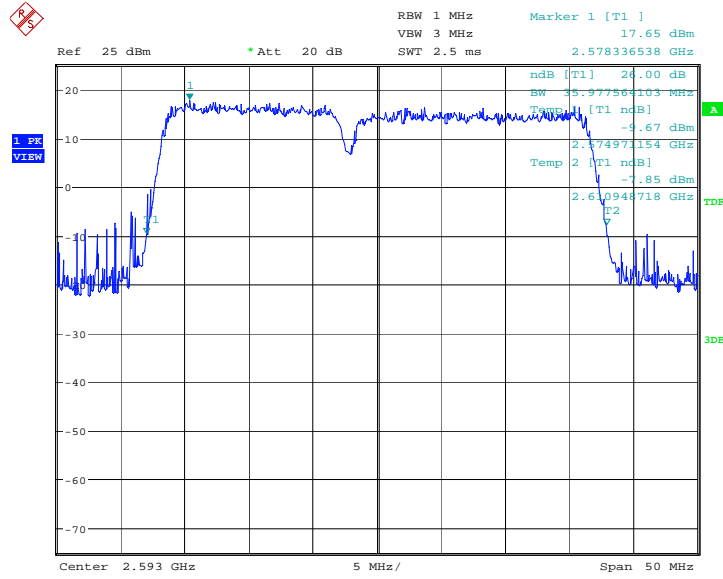


Date: 3.DEC.2018 11:26:40

**LTE band 41, 20MHz+15MHz (-26dBc BW)**


Frequency(MHz)	Emission Bandwidth (-26dBc BW) (MHz)		
	QPSK	16QAM	64QAM
2593.0	36.058	36.298	35.897

**LTE band 41, 20MHz+15MHz Bandwidth, QPSK (-26dBc BW)**

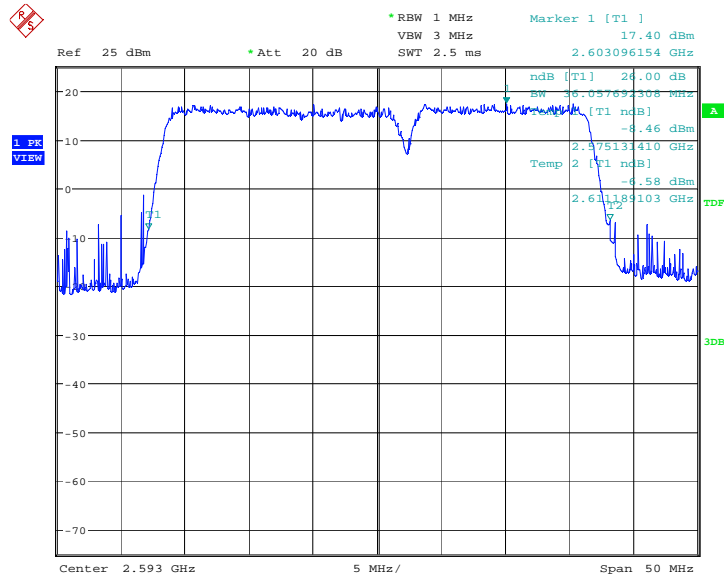


Date: 1.DEC.2018 13:58:18

**LTE band 41, 20MHz+15MHz Bandwidth,16QAM (-26dBc BW)**

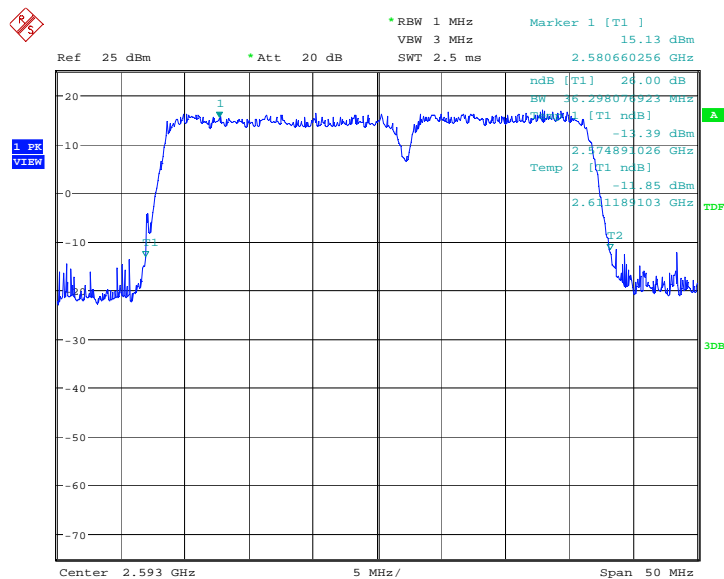

Date: 1.DEC.2018 11:27:02

**LTE band 41, 20MHz+15MHz Bandwidth,64QAM (-26dBc BW)**

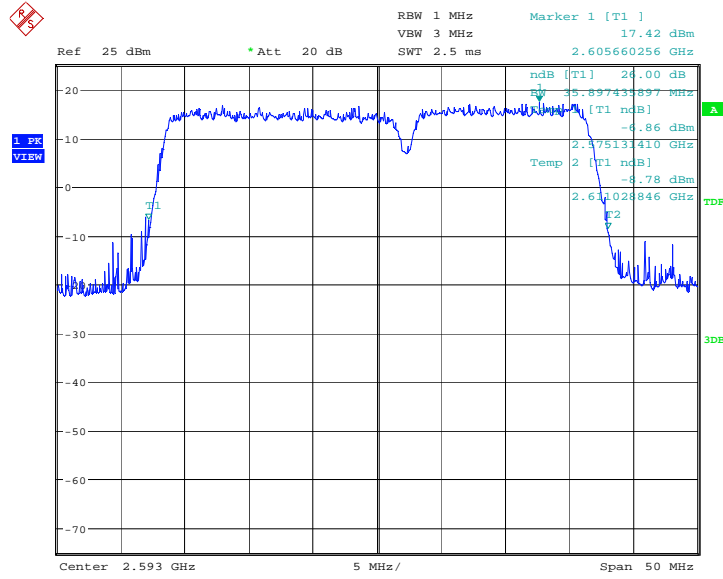


Date: 3.DEC.2018 11:28:38

**LTE band 41, 20MHz+20MHz (-26dBc BW)**


Frequency(MHz)	Emission Bandwidth (-26dBc BW) (MHz)		
	QPSK	16QAM	64QAM
2593.0	40.946	40.946	41.186

**LTE band 41, 20MHz+20MHz Bandwidth, QPSK (-26dBc BW)**

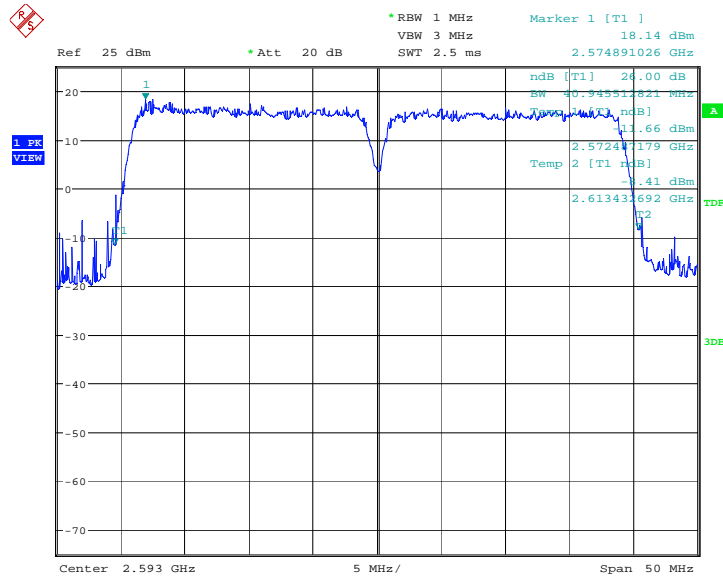

Date: 1.DEC.2018 11:31:24


**LTE band 41, 20MHz+20MHz Bandwidth,16QAM (-26dBc BW)**

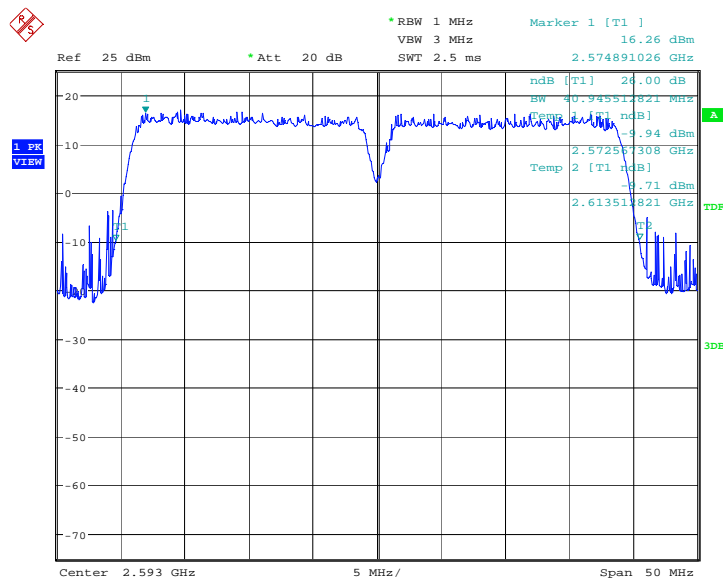

Date: 1.DEC.2018 11:32:15



**LTE band 41, 20MHz+20MHz Bandwidth,64QAM (-26dBc BW)**

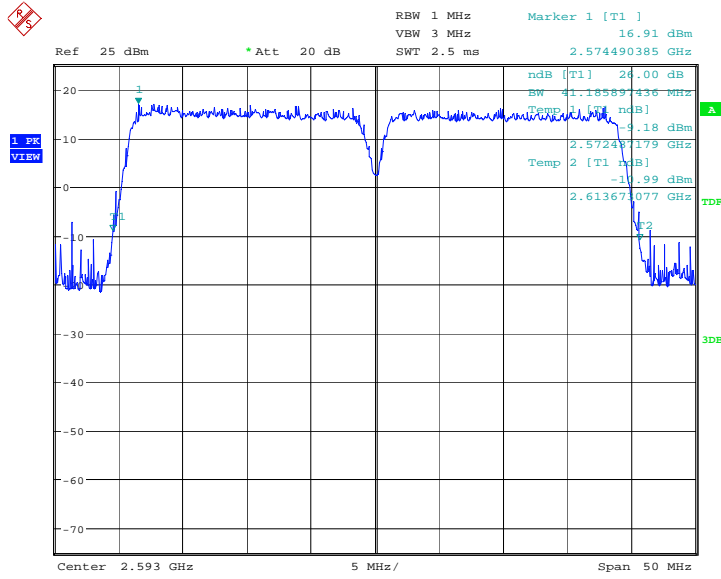

Date: 3.DEC.2018 11:29:39



## **A.6 BAND EDGE COMPLIANCE**


### **A.6.1 Measurement limit**

Part 27.53(m) states that for mobile digital stations, the attenuation factor shall be not less than  $40 + 10 \log (P)$  dB on all frequencies between the channel edge and 5 megahertz from the channel edge,  $43 + 10 \log (P)$  dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and  $55 + 10 \log (P)$  dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than  $43 + 10 \log (P)$  dB on all frequencies between 2490.5 MHz and 2496 MHz and  $55 + 10 \log (P)$  dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

### A.6.2 Measurement result


#### LTE band 41

#### LOW BAND EDGE BLOCK-5MHz+20MHz-1RB

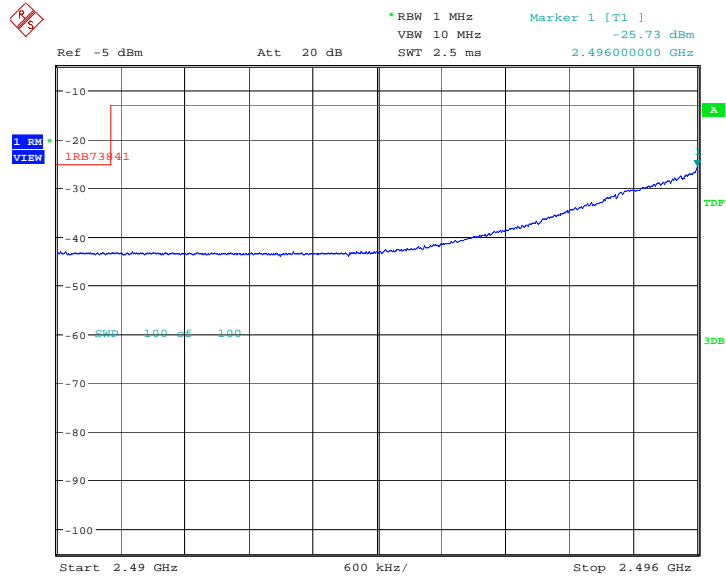


Date: 2.DEC.2018 11:23:24

#### LOW BAND EDGE BLOCK-5MHz+20MHz -100%RB

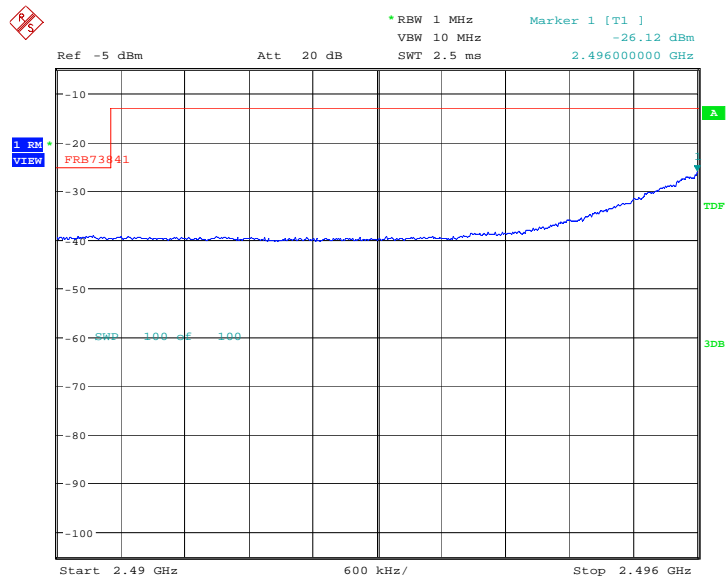


Date: 2.DEC.2018 11:27:38

**LOW BAND EDGE BLOCK-10MHz+20MHz-1RB**

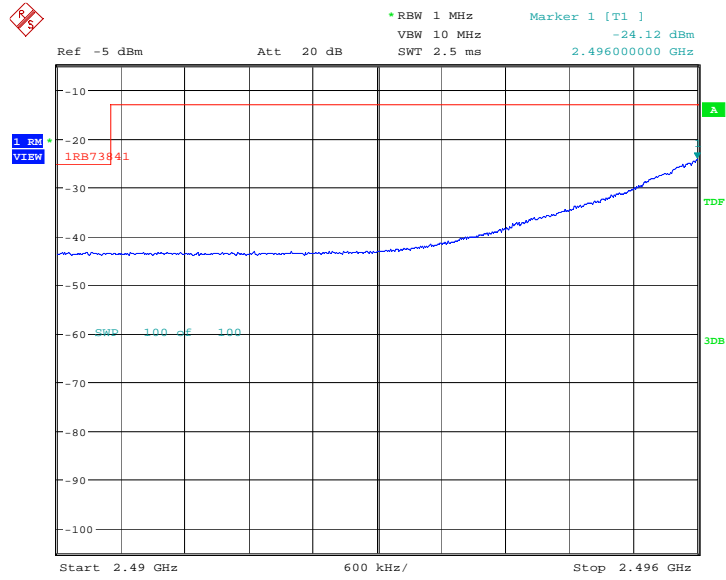


Date: 2.DEC.2018 11:22:18

**LOW BAND EDGE BLOCK-10MHz+20MHz -100%RB**

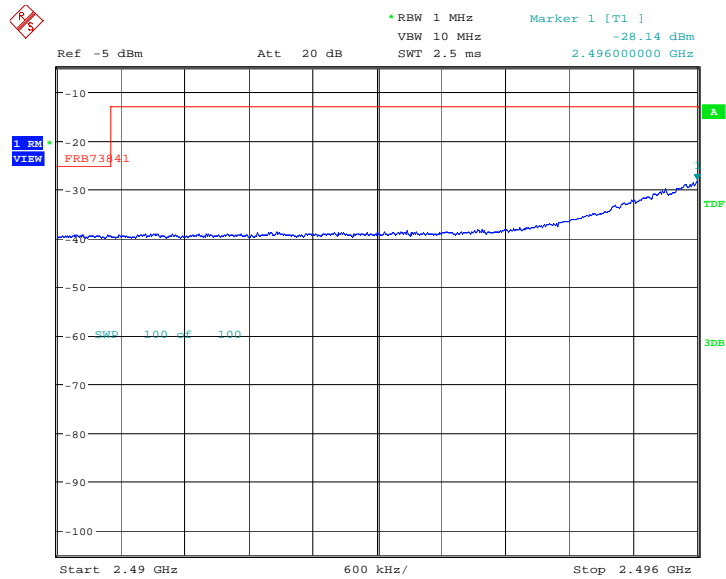


Date: 2.DEC.2018 11:28:10

**LOW BAND EDGE BLOCK-15MHz+15MHz-1RB**

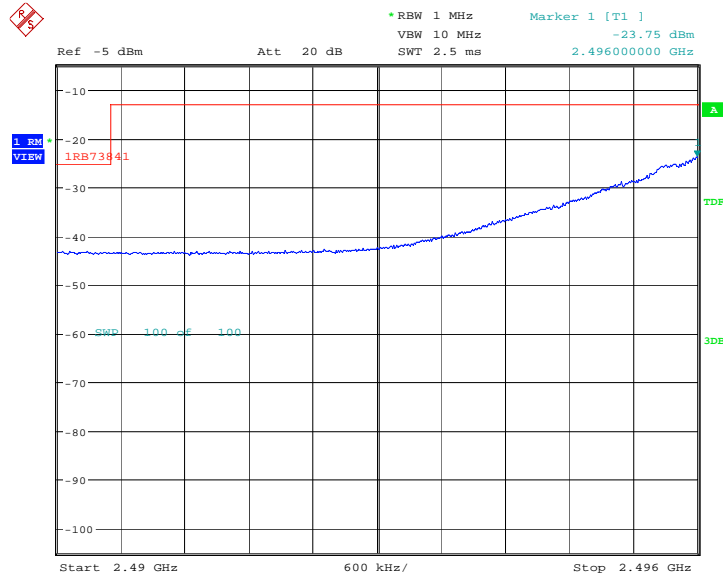


Date: 2.DEC.2018 11:14:37

**LOW BAND EDGE BLOCK-15MHz+15MHz -100%RB**

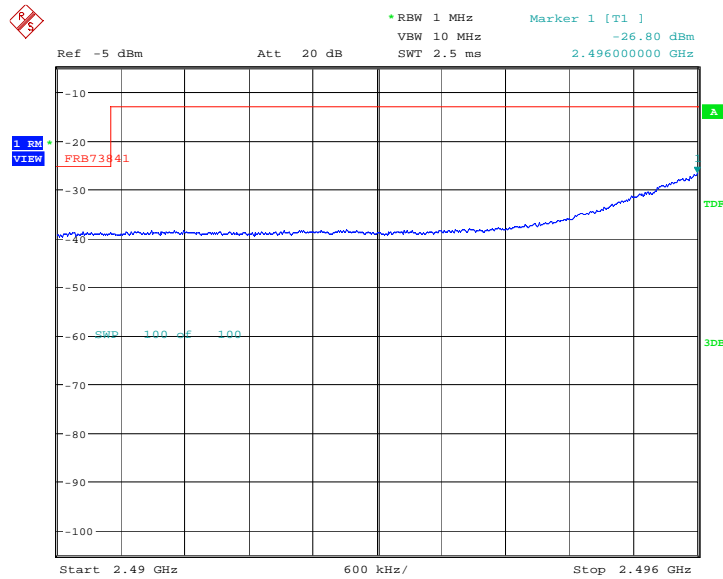


Date: 2.DEC.2018 11:32:25

**LOW BAND EDGE BLOCK-15MHz+20MHz-1RB**

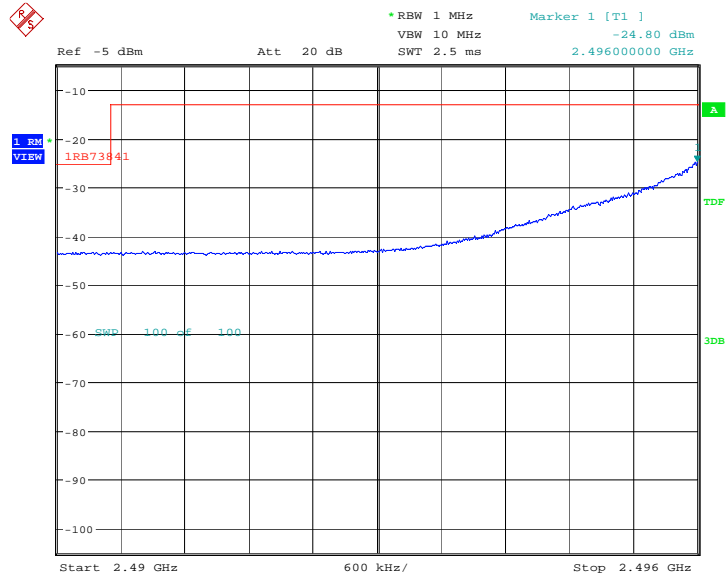


Date: 2.DEC.2018 11:18:28

**LOW BAND EDGE BLOCK-15MHz+20MHz -100%RB**

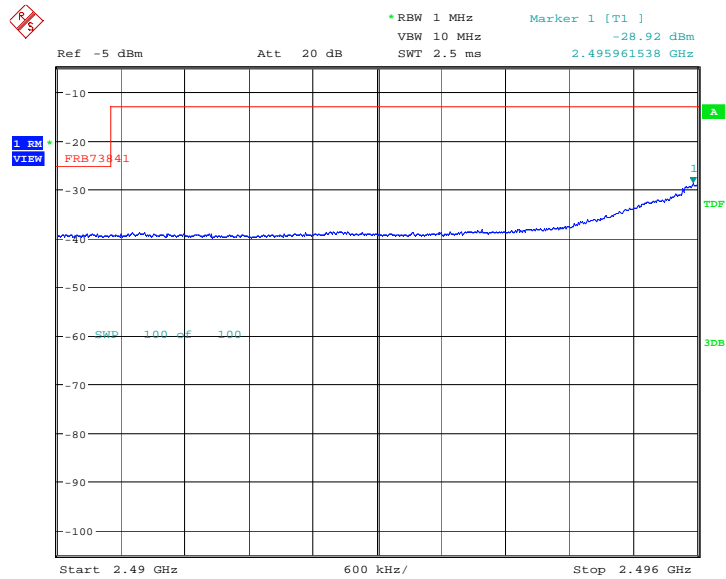


Date: 2.DEC.2018 11:31:13

### LOW BAND EDGE BLOCK-20MHz+20MHz-1RB

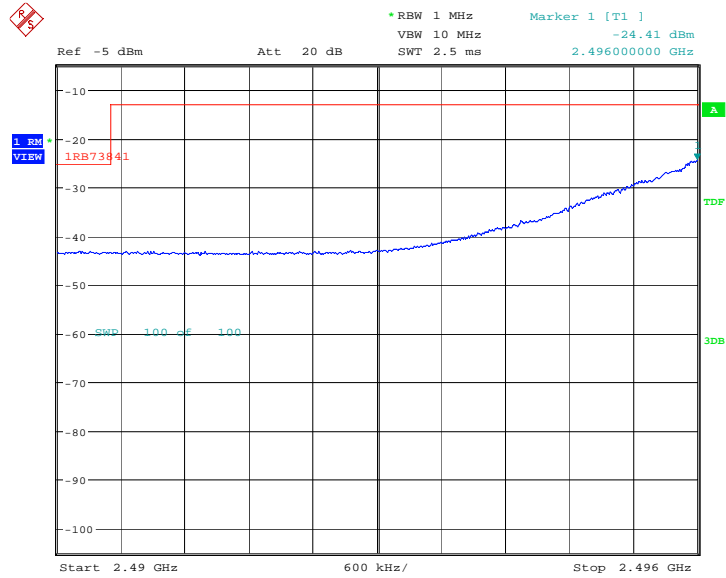


Date: 2.DEC.2018 11:00:04

### LOW BAND EDGE BLOCK-20MHz+20MHz -100%RB

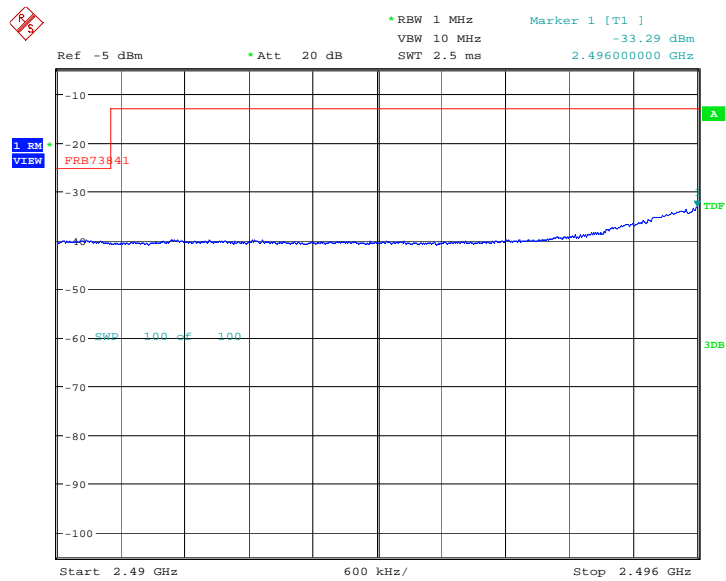


Date: 1.DEC.2018 14:24:27

### HIGH BAND EDGE BLOCK-20MHz+5MHz-1RB

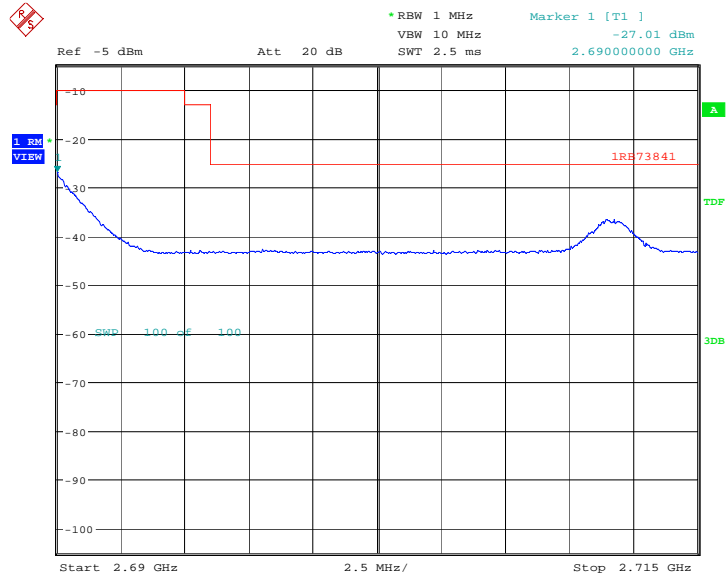

Date: 2.DEC.2018 11:24:42


### HIGH BAND EDGE BLOCK-20MHz+5MHz -100%RB

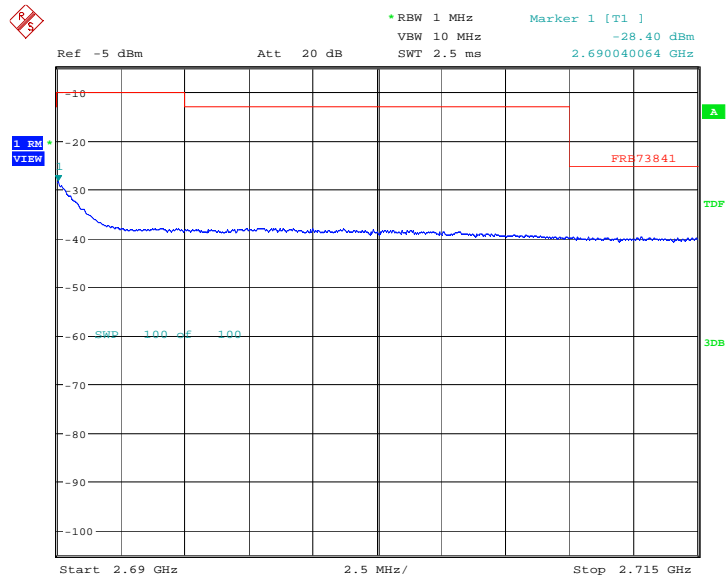

Date: 2.DEC.2018 11:26:06




### HIGH BAND EDGE BLOCK-20MHz+10MHz-1RB

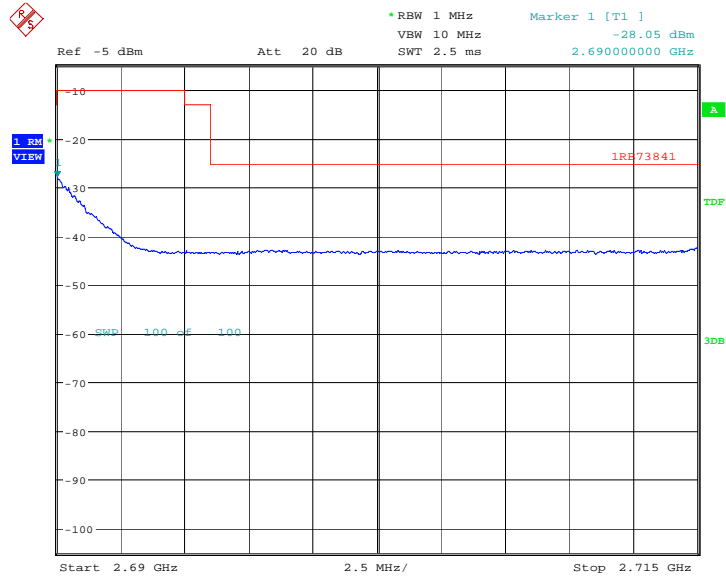


Date: 2.DEC.2018 11:20:36

### HIGH BAND EDGE BLOCK-20MHz+10MHz -100%RB

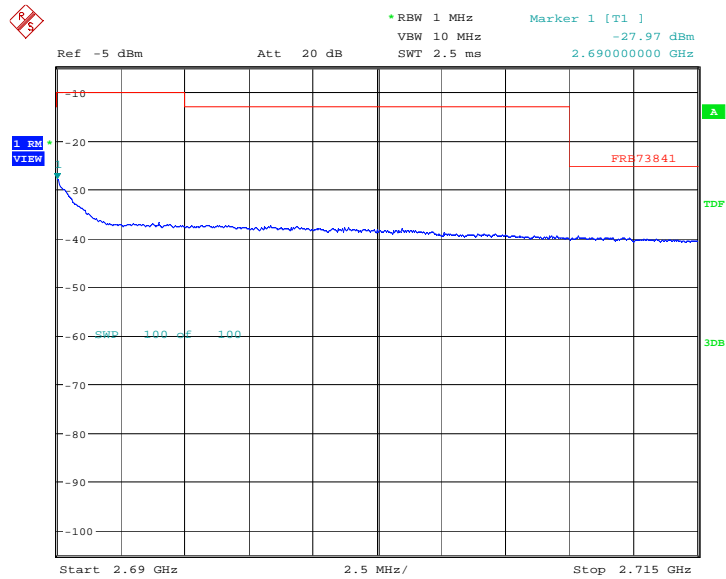


Date: 2.DEC.2018 11:29:16

### HIGH BAND EDGE BLOCK-15MHz+15MHz-1RB

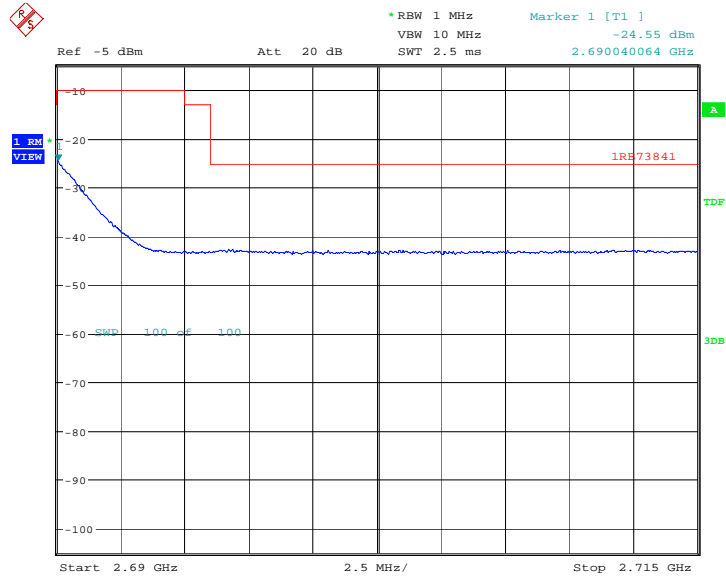


Date: 2.DEC.2018 11:15:50

### HIGH BAND EDGE BLOCK-15MHz+15MHz -100%RB

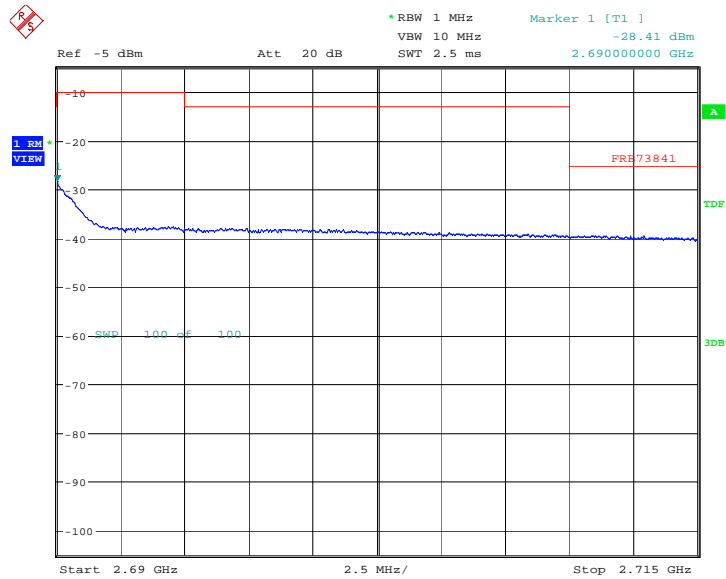


Date: 2.DEC.2018 11:33:25

### HIGH BAND EDGE BLOCK-20MHz+15MHz-1RB

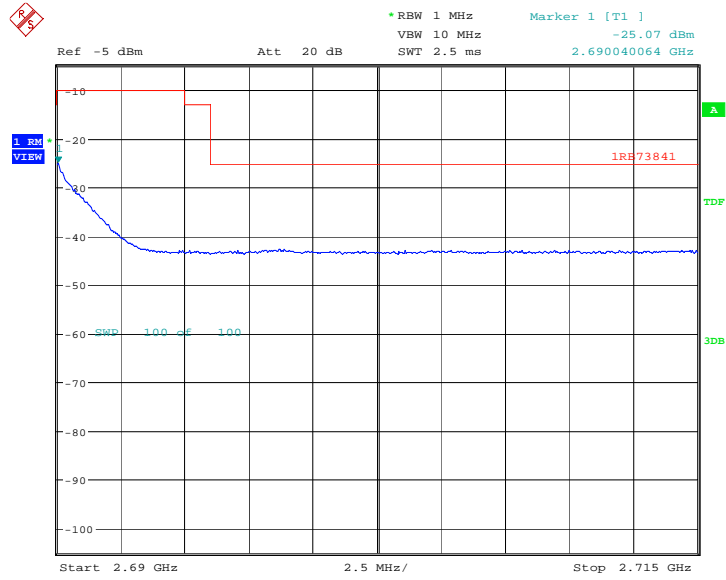


Date: 2.DEC.2018 11:19:33

### HIGH BAND EDGE BLOCK-20MHz+15MHz -100%RB

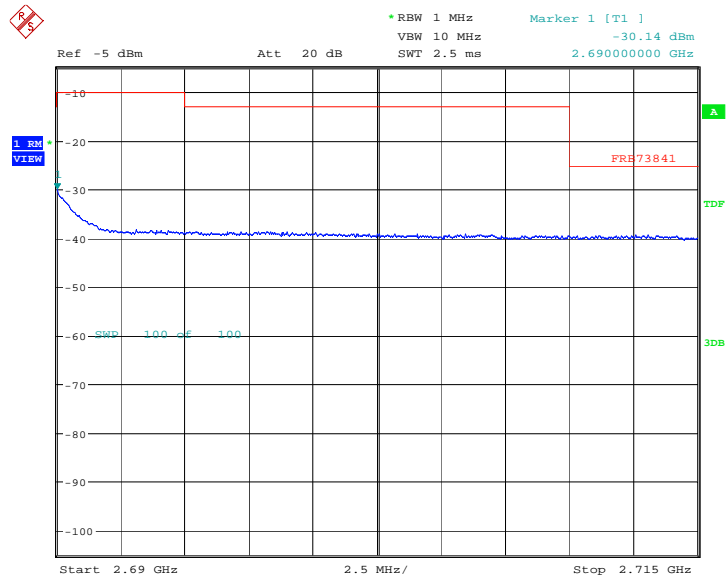


Date: 2.DEC.2018 11:30:03

### HIGH BAND EDGE BLOCK-20MHz+20MHz-1RB

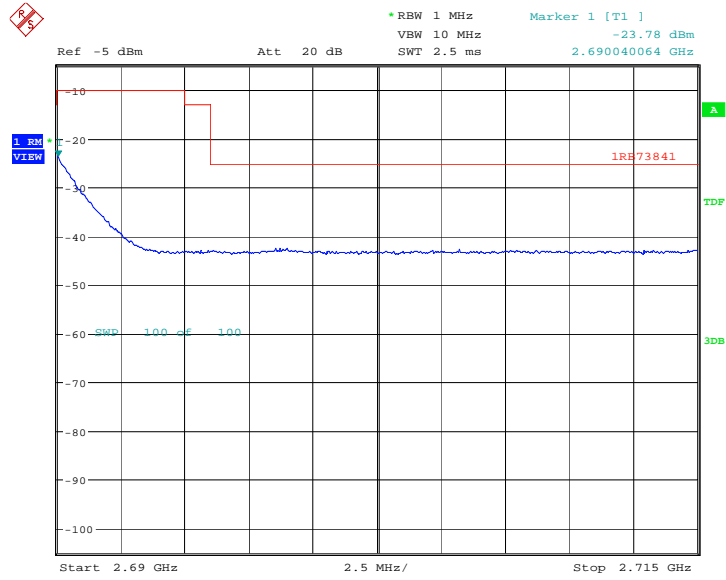

Date: 2.DEC.2018 11:01:16

### HIGH BAND EDGE BLOCK-20MHz+20MHz -100%RB

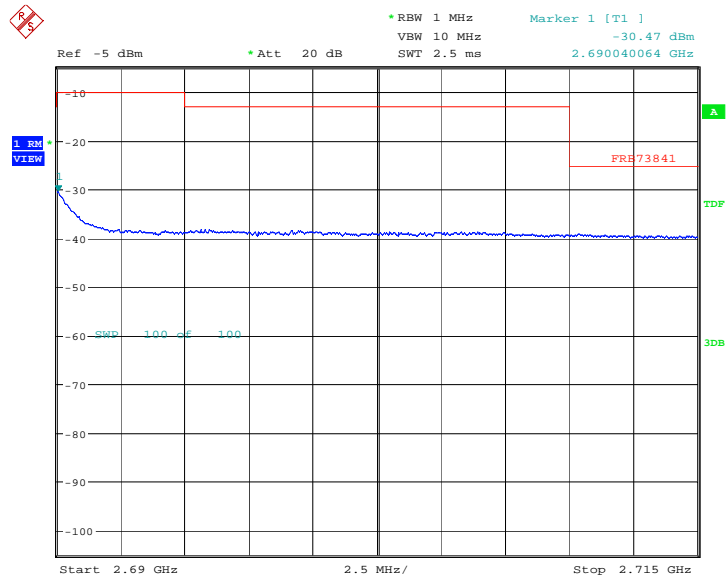

Date: 1.DEC.2018 14:27:04

## **A.7 CONDUCTED SPURIOUS EMISSION**

### **A.7.1 Measurement Method**

The following steps outline the procedure used to measure the conducted emissions from the EUT.

1. Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the mobile station equipment tested, this equates to a frequency range of 13 MHz to 9 GHz, data taken from 10 MHz to 25 GHz.
2. Determine EUT transmit frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.
3. The number of sweep points of spectrum analyzer is set to 30001 which is greater than span/RBW.

### **A. 7.2 Measurement Limit**


Part 27.53(m) states that for mobile digital stations, the attenuation factor shall be not less than  $40 + 10 \log (P)$  dB on all frequencies between the channel edge and 5 megahertz from the channel edge,  $43 + 10 \log (P)$  dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and  $55 + 10 \log (P)$  dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than  $43 + 10 \log (P)$  dB on all frequencies between 2490.5 MHz and 2496 MHz and  $55 + 10 \log (P)$  dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

### A. 7.3 Measurement result

Only worst case result is given below

**LTE band 41: 30MHz – 26GHz**

Spurious emission limit -25dBm

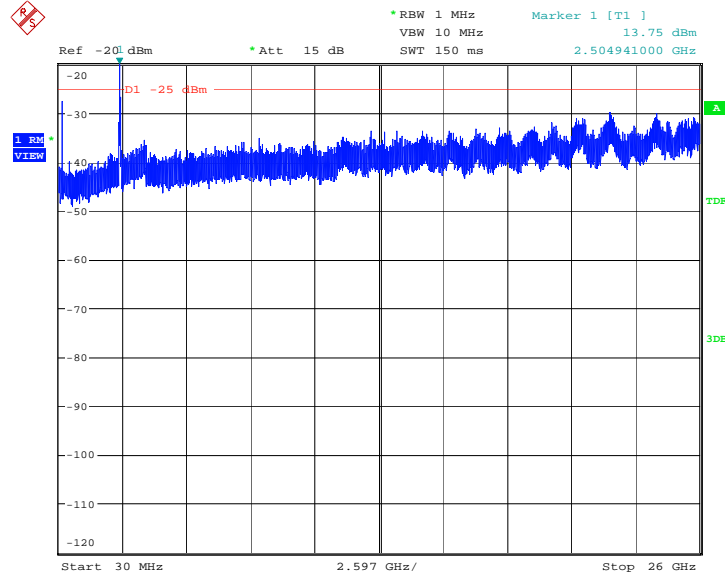

Date: 4.DEC.2018 16:58:35

## **A.8 PEAK-TO-AVERAGE POWER RATIO**

### **Reference**

FCC: CFR Part 27.50(a)

The peak-to-average power ratio (PAPR) of the transmitter output power must not exceed 13 dB. The PAPR measurements should be made using either an instrument with complementary cumulative distribution function (CCDF) capabilities to determine that PAPR will not exceed 13 dB for more than 0.1 percent of the time or other Commission approved procedure. The measurement must be performed using a signal corresponding to the highest PAPR expected during periods of continuous transmission.

According to KDB 971168 5.7.1:

- a) Refer to instrument's analyzer instruction manual for details on how to use the power statistics/CCDF function;
- b) Set resolution/measurement bandwidth  $\geq$  signal's occupied bandwidth;
- c) Set the number of counts to a value that stabilizes the measured CCDF curve;
- d) Set the measurement interval to 1 ms
- e) Record the maximum PAPR level associated with a probability of 0.1%

### **A.8.1 Measurement limit**

not exceed 13 dB

### **A.8.2 Measurement results**

#### **LTE band 41, 20MHz+20MHz**

Frequency(MHz)	PAPR(dB)		
	QPSK	16QAM	64QAM
2593.0	9.87	10.01	10.06

**ANNEX B: Accreditation Certificate**

**United States Department of Commerce  
National Institute of Standards and Technology**



---

**Certificate of Accreditation to ISO/IEC 17025:2005**

---

NVLAP LAB CODE: 600118-0

**Telecommunication Technology Labs, CAICT**  
Beijing  
China

*is accredited by the National Voluntary Laboratory Accreditation Program for specific services,  
listed on the Scope of Accreditation, for:*

**Electromagnetic Compatibility & Telecommunications**

*This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005.  
This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality  
management system (refer to joint ISO-ILAC-IAF Communique dated January 2009).*

---

2018-09-28 through 2019-09-30  
*Effective Dates*



  
*For the National Voluntary Laboratory Accreditation Program*

\*\*\*END OF REPORT\*\*\*