



# SAR TEST REPORT

No. I18Z62006-SEM01

For

**Wiko SAS**

**smart phone**

**Model Name: W-U300**

**With**

**Hardware Version: V1.0**

**Software Version: W-U300-V01.28**

**FCC ID: 2AM86WU300AS**

**Issued Date: 2019-2-28**



**Note:**

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

**Test Laboratory:**

CTTL, Telecommunication Technology Labs, CAICT

No. 51, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504

Email: [ctl\\_terminals@caict.ac.cn](mailto:ctl_terminals@caict.ac.cn), website: [www.caict.ac.cn](http://www.caict.ac.cn)



## REPORT HISTORY

Report Number	Revision	Issue Date	Description
I18Z62006-SEM01	Rev.0	2018-12-28	Initial creation of test report
I18Z62006-SEM01	Rev.1	2019-1-14	Update Table2.1 and remove the conclusion
I18Z62006-SEM01	Rev.2	2019-2-13	Add note on page 30&33.
I18Z62006-SEM01	Rev.3	2019-2-15	Add note on page 64
I18Z62006-SEM01	Rev.4	2019-2-20	Add the KDB in section 5.2 on page 10 and update the note on page 33
I18Z62006-SEM01	Rev.5	2019-2-23	Update the table 14-34 on page 90 and Add a table about the number of RB on page 33
I18Z62006-SEM01	Rev.6	2019-2-24	Update the table 14-34 on page 90. For 20MHz, QPSK 1RB, the scaling factor should be 1.03 instead of 1.11.
I18Z62006-SEM01	Rev.7	2019-2-28	Add note for Table 14-14&14-34 and remove the result of 1g SAR with the distance of 0mm in the table.

## TABLE OF CONTENT

<b>1 TEST LABORATORY .....</b>	<b>5</b>
1.1 TESTING LOCATION .....	5
1.2 TESTING ENVIRONMENT .....	5
1.3 PROJECT DATA .....	5
1.4 SIGNATURE .....	5
<b>2 STATEMENT OF COMPLIANCE .....</b>	<b>6</b>
<b>3 CLIENT INFORMATION .....</b>	<b>8</b>
3.1 APPLICANT INFORMATION .....	8
3.2 MANUFACTURER INFORMATION .....	8
<b>4 EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE) .....</b>	<b>9</b>
4.1 ABOUT EUT .....	9
4.2 INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST .....	9
4.3 INTERNAL IDENTIFICATION OF AE USED DURING THE TEST .....	9
<b>5 TEST METHODOLOGY .....</b>	<b>10</b>
5.1 APPLICABLE LIMIT REGULATIONS .....	10
5.2 APPLICABLE MEASUREMENT STANDARDS .....	10
<b>6 SPECIFIC ABSORPTION RATE (SAR) .....</b>	<b>11</b>
6.1 INTRODUCTION .....	11
6.2 SAR DEFINITION .....	11
<b>7 TISSUE SIMULATING LIQUIDS .....</b>	<b>12</b>
7.1 TARGETS FOR TISSUE SIMULATING LIQUID .....	12
7.2 DIELECTRIC PERFORMANCE .....	12
<b>8 SYSTEM VERIFICATION .....</b>	<b>19</b>
8.1 SYSTEM SETUP .....	19
8.2 SYSTEM VERIFICATION .....	20
<b>9 MEASUREMENT PROCEDURES .....</b>	<b>21</b>
9.1 TESTS TO BE PERFORMED .....	21
9.2 GENERAL MEASUREMENT PROCEDURE .....	23
9.3 WCDMA MEASUREMENT PROCEDURES FOR SAR .....	24
9.4 SAR MEASUREMENT FOR LTE .....	25
9.5 BLUETOOTH & Wi-Fi MEASUREMENT PROCEDURES FOR SAR .....	27
9.6 POWER DRIFT .....	28
<b>10 AREA SCAN BASED 1-G SAR .....</b>	<b>29</b>
10.1 REQUIREMENT OF KDB .....	29
10.2 FAST SAR ALGORITHMS .....	29
<b>11 CONDUCTED OUTPUT POWER .....</b>	<b>30</b>

11.1	GSM MEASUREMENT RESULT .....	30
11.2	WCDMA MEASUREMENT RESULT .....	31
11.3	CDMA MEASUREMENT RESULT .....	32
11.4	LTE MEASUREMENT RESULT .....	33
11.5	WI-FI AND BT MEASUREMENT RESULT .....	58
<b>12</b>	<b>SIMULTANEOUS TX SAR CONSIDERATIONS .....</b>	<b>61</b>
12.1	INTRODUCTION .....	61
12.2	TRANSMIT ANTENNA SEPARATION DISTANCES .....	61
12.3	SAR MEASUREMENT POSITIONS .....	61
12.4	STANDALONE SAR TEST EXCLUSION CONSIDERATIONS.....	62
<b>13</b>	<b>EVALUATION OF SIMULTANEOUS .....</b>	<b>63</b>
<b>14</b>	<b>SAR TEST RESULT .....</b>	<b>64</b>
14.1	SAR RESULTS .....	65
14.2	FULL SAR .....	95
14.3	WLAN EVALUATION .....	96
<b>15</b>	<b>SAR MEASUREMENT VARIABILITY .....</b>	<b>99</b>
<b>16</b>	<b>MEASUREMENT UNCERTAINTY .....</b>	<b>100</b>
16.1	MEASUREMENT UNCERTAINTY FOR NORMAL SAR TESTS (300MHz~3GHz) .....	100
16.2	MEASUREMENT UNCERTAINTY FOR NORMAL SAR TESTS (3~6GHz).....	101
16.3	MEASUREMENT UNCERTAINTY FOR FAST SAR TESTS (300MHz~3GHz) .....	102
16.4	MEASUREMENT UNCERTAINTY FOR FAST SAR TESTS (3~6GHz).....	103
<b>17</b>	<b>MAIN TEST INSTRUMENTS.....</b>	<b>105</b>
<b>ANNEX A</b>	<b>GRAPH RESULTS.....</b>	<b>106</b>
<b>ANNEX B</b>	<b>SYSTEM VERIFICATION RESULTS.....</b>	<b>160</b>
<b>ANNEX C</b>	<b>SAR MEASUREMENT SETUP .....</b>	<b>173</b>
<b>ANNEX D</b>	<b>POSITION OF THE WIRELESS DEVICE IN RELATION TO THE PHANTOM .....</b>	<b>179</b>
<b>ANNEX E</b>	<b>EQUIVALENT MEDIA RECIPES .....</b>	<b>182</b>
<b>ANNEX F</b>	<b>SYSTEM VALIDATION .....</b>	<b>183</b>
<b>ANNEX G</b>	<b>PROBE CALIBRATION CERTIFICATE .....</b>	<b>184</b>
<b>ANNEX H</b>	<b>DIPOLE CALIBRATION CERTIFICATE.....</b>	<b>195</b>
<b>ANNEX I</b>	<b>EXTENDED CALIBRATION SAR DIPOLE.....</b>	<b>243</b>
<b>ANNEX J</b>	<b>ACCREDITATION CERTIFICATE .....</b>	<b>246</b>

## 1 Test Laboratory

### 1.1 Testing Location

Company Name:	CTTL(Shouxiang)
Address:	No. 51 Shouxiang Science Building, Xueyuan Road, Haidian District, Beijing, P. R. China100191

### 1.2 Testing Environment

Temperature:	18°C~25 °C,
Relative humidity:	30%~ 70%
Ground system resistance:	< 0.5 Ω
Ambient noise & Reflection:	< 0.012 W/kg


### 1.3 Project Data

Project Leader:	Qi Dianyuan
Test Engineer:	Lin Xiaojun
Testing Start Date:	December 1, 2018
Testing End Date:	December 6, 2018

### 1.4 Signature



Lin Xiaojun  
(Prepared this test report)

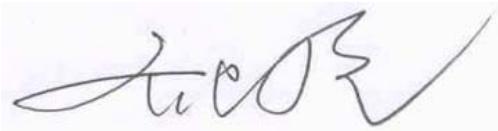

Qi Dianyuan  
(Reviewed this test report)



Lu Bingsong  
Deputy Director of the laboratory  
(Approved this test report)

## 2 Statement of Compliance

The maximum results of SAR found during testing for Wiko SAS smart phone W-U300 is as follows:

**Table 2.1: Highest Reported SAR (1g)**

Exposure Configuration	Technology Band	Highest Reported SAR 1g (W/Kg)	Equipment Class
Head (Separation Distance 0mm)	GSM 850	0.33	PCE
	PCS 1900	0.44	
	UMTS FDD 2	0.68	
	UMTS FDD 4	0.58	
	UMTS FDD 5	0.40	
	CDMA800-BC0	0.48	
	CDMA1900-BC1	0.38	
	CDMA800-BC10	0.44	
	LTE Band 2	0.59	
	LTE Band 4	0.49	
	LTE Band 5	0.32	
	LTE Band 12	0.26	
	LTE Band 13	0.30	
	LTE Band 25	0.66	
	LTE Band 26	0.35	
	LTE Band 41 PC3	0.18	
	LTE Band 41 PC2	0.20	
	LTE Band 71	0.19	
	WLAN 2.4 GHz	0.91	DTS
Hotspot (Separation Distance 10mm)	GSM 850	0.60	PCE
	PCS 1900	0.85	
	UMTS FDD 2	0.95	
	UMTS FDD 4	1.05	
	UMTS FDD 5	0.46	
	CDMA800-BC0	0.64	
	CDMA1900-BC1	1.34	
	CDMA800-BC10	0.64	
	LTE Band 2	0.79	
	LTE Band 4	0.91	
	LTE Band 5	0.49	
	LTE Band 12	0.42	
	LTE Band 13	0.57	
	LTE Band 25	0.99	
	LTE Band 26	0.44	
	LTE Band 41 PC3	0.63	
	LTE Band 41 PC2	1.19	

	LTE Band 71	0.34	
	WLAN 2.4 GHz	0.37	DTS
Body worn (Separation Distance 15mm)	LTE Band 41 PC3	0.25	PCE
	LTE Band 41 PC2	0.31	

The SAR values found for the Mobile Phone are below the maximum recommended levels of 1.6 W/Kg as averaged over any 1g tissue according to the ANSI C95.1-1992.

For body worn operation, this device has been tested and meets FCC RF exposure guidelines when used with any accessory that contains no metal and which provides a minimum separation distance of 0/15/10 mm between this device and the body of the user. Use of other accessories may not ensure compliance with FCC RF exposure guidelines.

The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power output.

The measurement together with the test system set-up is described in annex C of this test report. A detailed description of the equipment under test can be found in chapter 4 of this test report.

The highest reported SAR value is obtained at the case of (**Table 2.1**), and the values are: 1.34 W/kg (1g).

**Table 2.2: The sum of reported SAR values for main antenna and WiFi**

	Position	Main antenna	WLAN 2.4G	Highest Simultaneous Transmission
<b>Maximum reported SAR value for Head</b>	Left hand, Touch cheek (WCDMA 1900)	0.68	0.91	<b>1.59</b>
<b>Maximum reported SAR value for Body</b>	Rear (CDMA BC1)	1.17	0.37	<b>1.54</b>
	Rear 15mm (LTE Band41 PC2)	0.31	0.37 (10mm)	<b>0.68</b>

**Table 2.3: The sum of reported SAR values for main antenna and BT**

	Position	Main antenna	BT	Sum
<b>Maximum reported SAR value for Head</b>	Left hand, Touch cheek (WCDMA1900)	0.68	0.05	<b>0.73</b>
<b>Maximum reported SAR value for Body</b>	Rear (CDMA BC1)	1.34	0.15	<b>1.49</b>
<b>Maximum reported SAR value for Body</b>	Rear (LTE Band41 PC2)	0.31	0.10	<b>0.41</b>

[1] - Estimated SAR for Bluetooth (see the table 13.3)

### 3 Client Information

#### 3.1 Applicant Information

Company Name:	Wiko SAS
Address /Post:	1, rue Capitaine Dessemond 13007 - Marseille - France.
Contact Person:	Laurent Dahan
E-mail:	Idahan@wikomobile.com
Telephone:	33488089515
Fax:	33488089520

#### 3.2 Manufacturer Information

Company Name:	Shenzhen Tinno Mobile Technology Corp.
Address /Post:	4/F, H-3 Building, OCT Eastern industrial Park, No.1 XiangShan East Road., Nan Shan District, Shenzhen, P.R. China
Contact Person:	Jingwen.Guo
E-mail:	jingwen.guo@tinno.com
Telephone:	0755-86095550
Fax:	0755-86095551

## 4 Equipment Under Test (EUT) and Ancillary Equipment (AE)

### 4.1 About EUT

Description:	smart phone
Model name:	W-U300
Operating mode(s):	GSM 850/1900 WCDMA850/1700/1900 CDMA BC0/1/10 LTE B2/4/5/12/13/25/26/41/71, BT, WLAN
Tested Tx Frequency:	825 – 848.8 MHz (GSM 850) 1850.2 – 1910 MHz (GSM 1900) 826.4–846.6 MHz (WCDMA 850 Band V) 1712.4 – 1752.6 MHz (WCDMA 1700 Band IV) 1852.4–1907.6 MHz (WCDMA1900 Band II) 1860 – 1900 MHz (LTE Band 2) 1720 – 1745 MHz (LTE Band 4) 824.7 – 848.3 MHz (LTE Band 5) 699.7 – 715.3 MHz (LTE Band 12) 779.5 – 784.5 MHz (LTE Band 13) 1850.7 –1914.3 MHz (LTE Band 25) 814.7–848.3 MHz (LTE Band 26) 2498.5 – 2687.5 MHz (LTE Band41) 665.5 – 695.5 MHz (LTE Band 71) 2412 – 2462 MHz (Wi-Fi 2.4G)
GRPS/EGPRS Multislot Class:	12
GRPS capability Class:	B
Test device Production information:	Production unit
Device type:	Portable device
Antenna type:	Integrated antenna
Hotspot mode:	Support
Product dimension	Long 150mm ;Wide 72.6mm ; Overall Diagonal 166.65mm

### 4.2 Internal Identification of EUT used during the test

EUTID	IMEI	HW Version	SW Version
1	35279810001301	V1.0	W-U300-V01.28
2	35279810001281	V1.0	W-U300-V01.28

\*EUT ID: is used to identify the test sample in the lab internally.

**Note:** It is performed to test SAR with the EUT1 and conducted power with the EUT2.

### 4.3 Internal Identification of AE used during the test

\*AE ID: is used to identify the test sample in the lab internally.

## 5 TEST METHODOLOGY

### 5.1 Applicable Limit Regulations

**ANSI C95.1-1992:** IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.

It specifies the maximum exposure limit of **1.6 W/kg** as averaged over any 1 gram of tissue for portable devices being used within 20 cm of the user in the uncontrolled environment.

### 5.2 Applicable Measurement Standards

**IEEE 1528:2013** Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques.

**KDB447498 D01 General RF Exposure Guidance v06** Mobile and Portable Devices RF Exposure Procedures and Equipment Authorization Policies.

**KDB648474 D04 Handset SAR v01r03** SAR Evaluation Considerations for Wireless Handsets.

**KDB941225 D01 SAR test for 3G devices v03r01** SAR Measurement Procedures for 3G Devices

**KDB941225 D05 SAR for LTE Devices v02r05** SAR Evaluation Considerations for LTE Devices

**KDB941225 D05A LTE Rel.10 KDB Inquiry Sheet v01r02** REL.10 LTE SAR TEST GUIDANCE AND KDB INQUIRIES

**KDB941225 D06 Hotspot Mode SAR v02r01** SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities

**KDB248227 D01 802.11 Wi-Fi SAR v02r02** SAR GUIDANCE FOR IEEE 802.11 (Wi-Fi) TRANSMITTERS

**KDB865664 D01 SAR measurement 100 MHz to 6 GHz v01r04** SAR Measurement Requirements for 100 MHz to 6 GHz.

**KDB865664 D02 RF Exposure Reporting v01r02** RF Exposure Compliance Reporting and Documentation Considerations

**In addition to the above, the following information was used:**

**TCB workshop May 2017; RF Exposure Procedures (LTE Band 41 Power Class 2)**

**TCB workshop November 2017; RF Exposure Procedures (LTE UL/DL Carrier Aggregation SAR)**

## 6 Specific Absorption Rate (SAR)

### 6.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

### 6.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy ( $dW$ ) absorbed by (dissipated in) an incremental mass ( $dm$ ) contained in a volume element ( $dv$ ) of a given density ( $\rho$ ). The equation description is as below:

$$SAR = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$SAR = c \left( \frac{\delta T}{\delta t} \right)$$

Where:  $C$  is the specific heat capacity,  $\delta T$  is the temperature rise and  $\delta t$  is the exposure duration, or related to the electrical field in the tissue by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where:  $\sigma$  is the conductivity of the tissue,  $\rho$  is the mass density of tissue and  $E$  is the RMS electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

## 7 Tissue Simulating Liquids

### 7.1 Targets for tissue simulating liquid


**Table 7.1: Targets for tissue simulating liquid**

Frequency(MHz)	Liquid Type	Conductivity( $\sigma$ )	$\pm 5\%$ Range	Permittivity( $\epsilon$ )	$\pm 5\%$ Range
835	Head	0.90	0.86~0.95	41.5	39.4~43.6
835	Body	0.97	0.92~1.02	55.2	52.4~58.0
1900	Head	1.40	1.33~1.47	40.0	38.0~42.0
1900	Body	1.52	1.44~1.60	53.3	50.6~56.0
2450	Head	1.80	1.71~1.89	39.2	37.2~41.2
2450	Body	1.95	1.85~2.05	52.7	50.1~55.3
2600	Head	1.96	1.86~2.06	39.01	37.06~40.96
2600	Body	2.16	2.05~2.27	52.5	49.9~55.1
5250	Head	4.71	4.47~4.95	35.93	34.1~37.7
5250	Body	5.36	5.09~5.63	48.9	46.5~51.3
5600	Head	5.07	4.82~5.32	35.53	33.8~37.3
5600	Body	5.77	5.48~6.06	48.5	46.1~50.9
5750	Head	5.22	4.96~5.48	35.36	33.6~37.1
5750	Body	5.94	5.64~6.24	48.3	45.9~50.7

### 7.2 Dielectric Performance

**Table 7.2: Dielectric Performance of Tissue Simulating Liquid**


Measurement Date yyyy/mm/dd	Frequency	Type	Permittivity $\epsilon$	Drift (%)	Conductivity $\sigma$ (S/m)	Drift (%)
2018/12/1	750 MHz	Head	42.5	1.34	0.89	0.00
		Body	55.24	-0.47	0.97	1.04
2018/12/2	835 MHz	Head	40.69	-1.95	0.888	-1.33
		Body	54.43	-1.39	0.955	-1.55
2018/12/3	1750 MHz	Head	40.2	0.30	1.354	-1.17
		Body	53.07	-0.62	1.482	-0.54
2018/12/4	1900 MHz	Head	39.38	-1.55	1.411	0.79
		Body	52.85	-0.84	1.496	-1.58
2018/12/5	2450 MHz	Head	39.83	1.61	1.818	1.00
		Body	52.24	-0.87	1.947	-0.15
2018/12/6	2600 MHz	Head	39.01	0.00	1.956	-0.20
		Body	52.3	-0.38	2.177	0.79

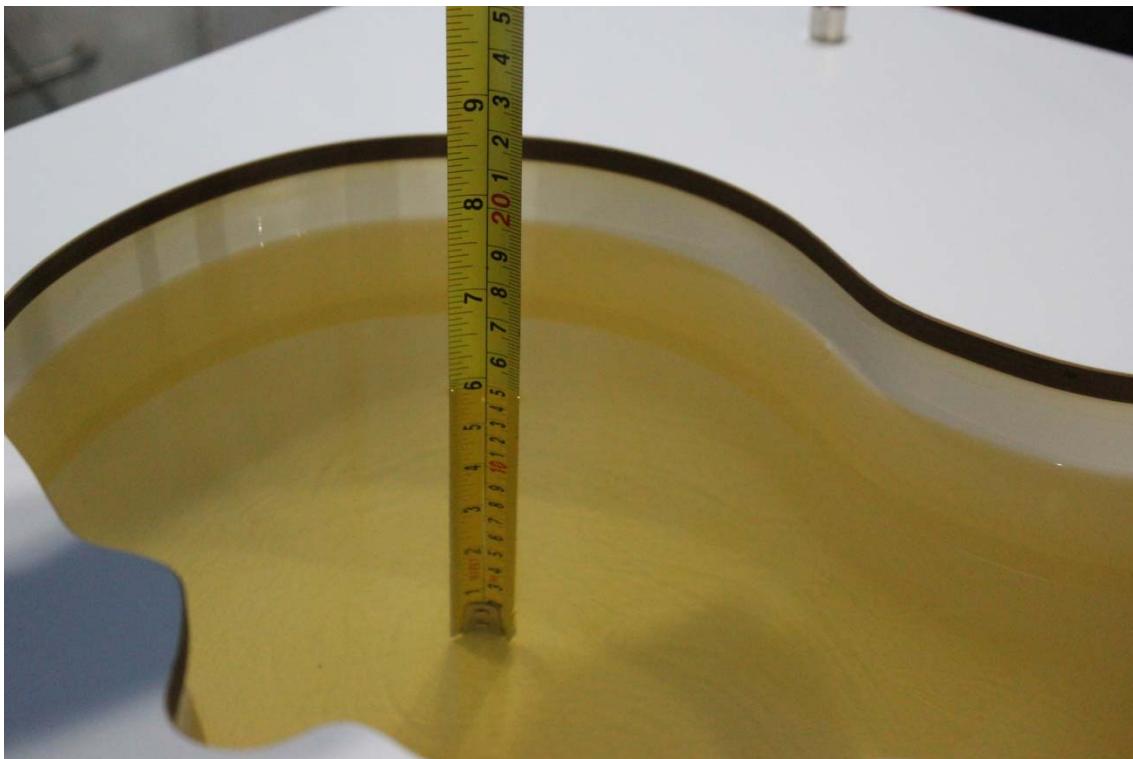

**Picture 7-1 Liquid depth in the Head Phantom (750 MHz)**



**Picture 7-2 Liquid depth in the Flat Phantom (750 MHz)**

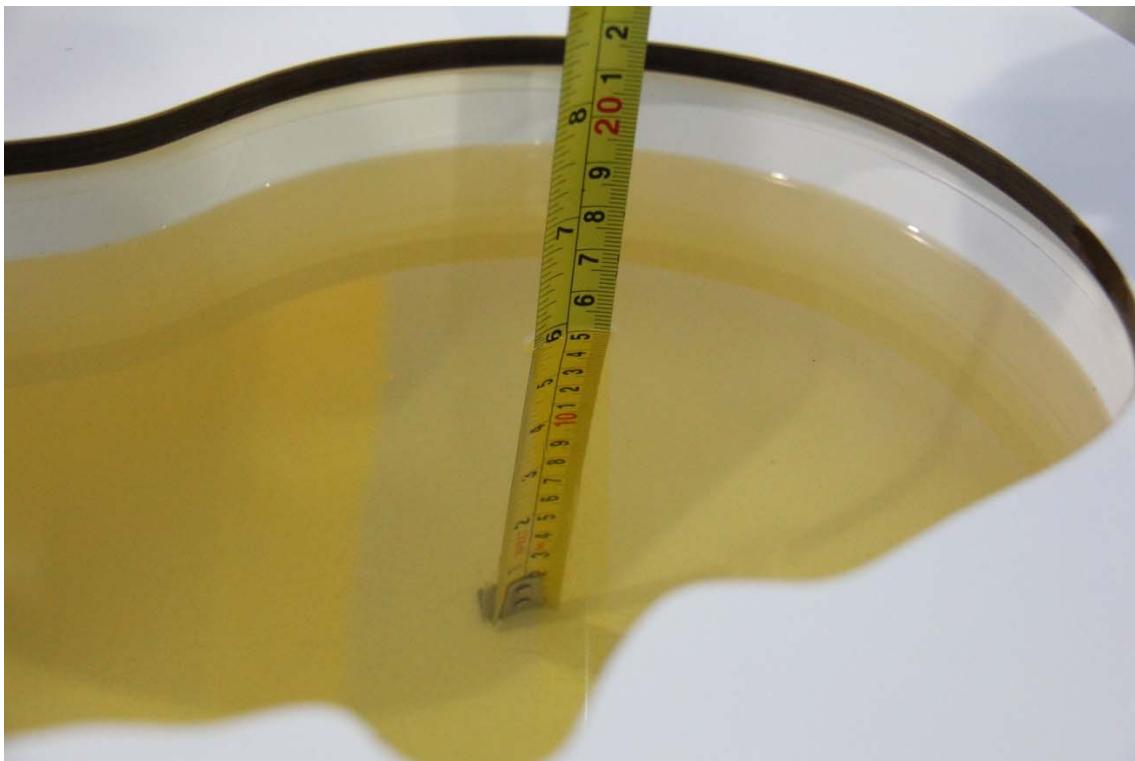


Picture 7-3 Liquid depth in the Head Phantom (835MHz)



Picture 7-4 Liquid depth in the Flat Phantom (835MHz)



**Picture 7-5 Liquid depth in the Head Phantom (1750 MHz)**

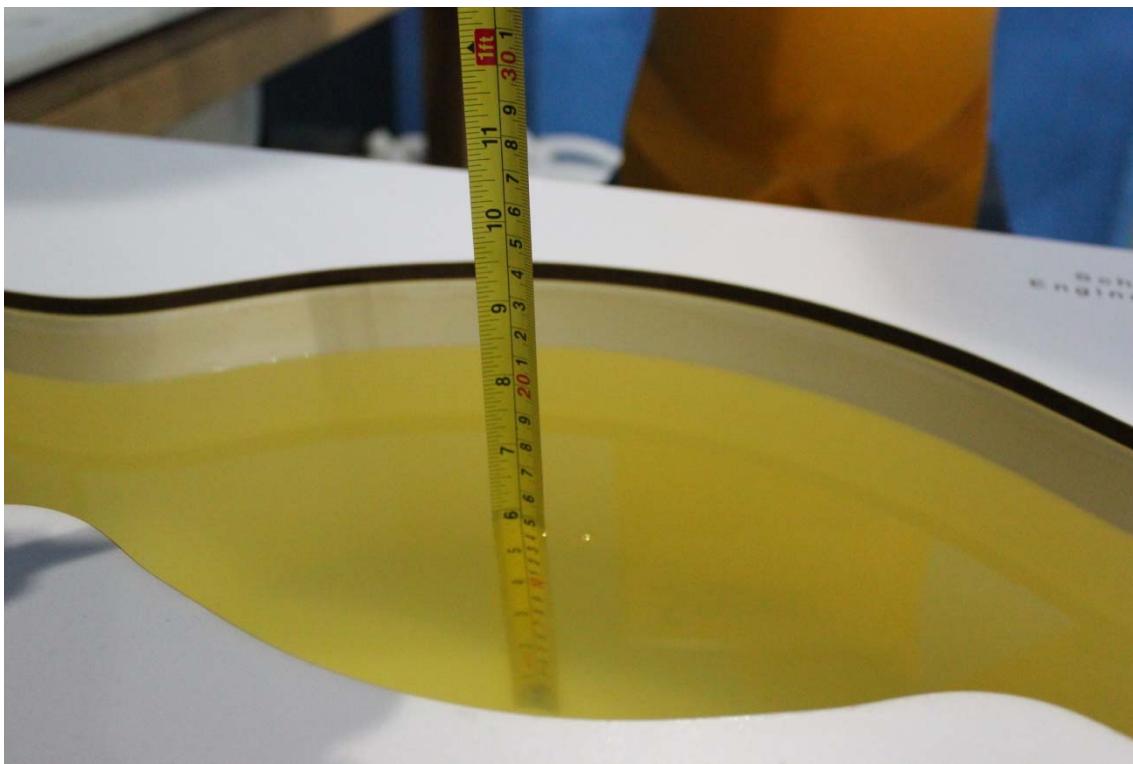

**Picture 7-6 Liquid depth in the Flat Phantom (1750MHz)**




Picture 7-7 Liquid depth in the Head Phantom (1900 MHz)



Picture 7-8 Liquid depth in the Flat Phantom (1900MHz)




**Picture 7-9 Liquid depth in the Head Phantom (2450MHz)**

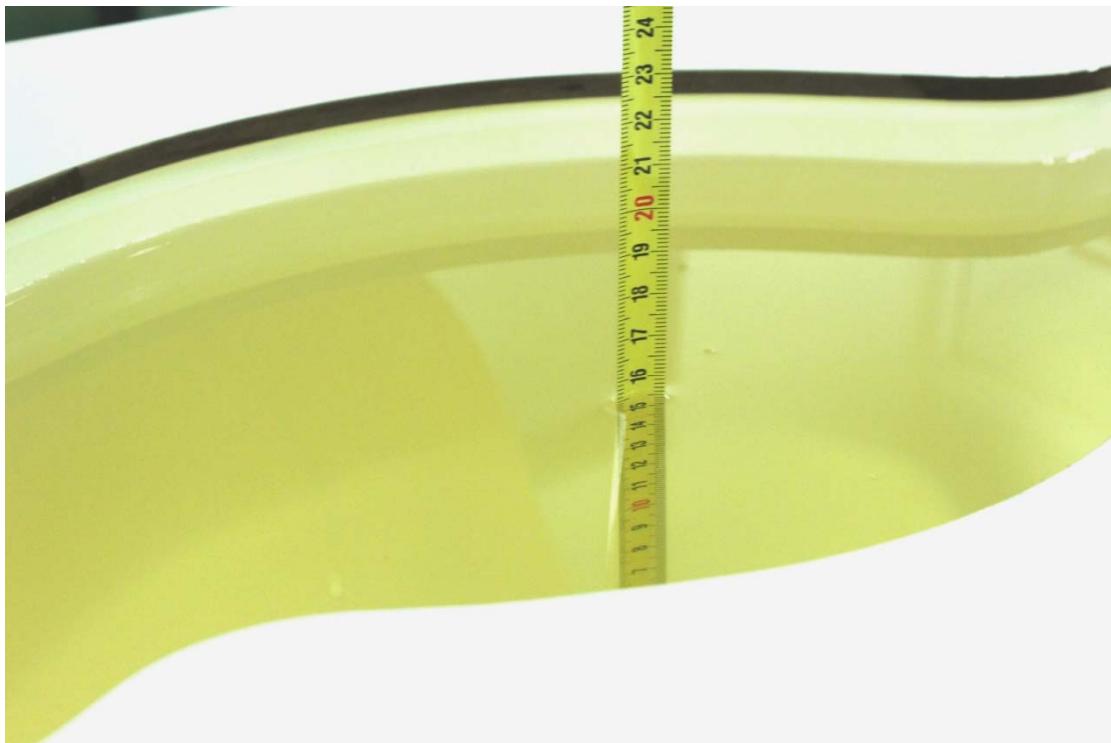

**Picture 7-10 Liquid depth in the Flat Phantom (2450MHz)**



Picture 7-11 Liquid depth in the Head Phantom (2600 MHz Head)

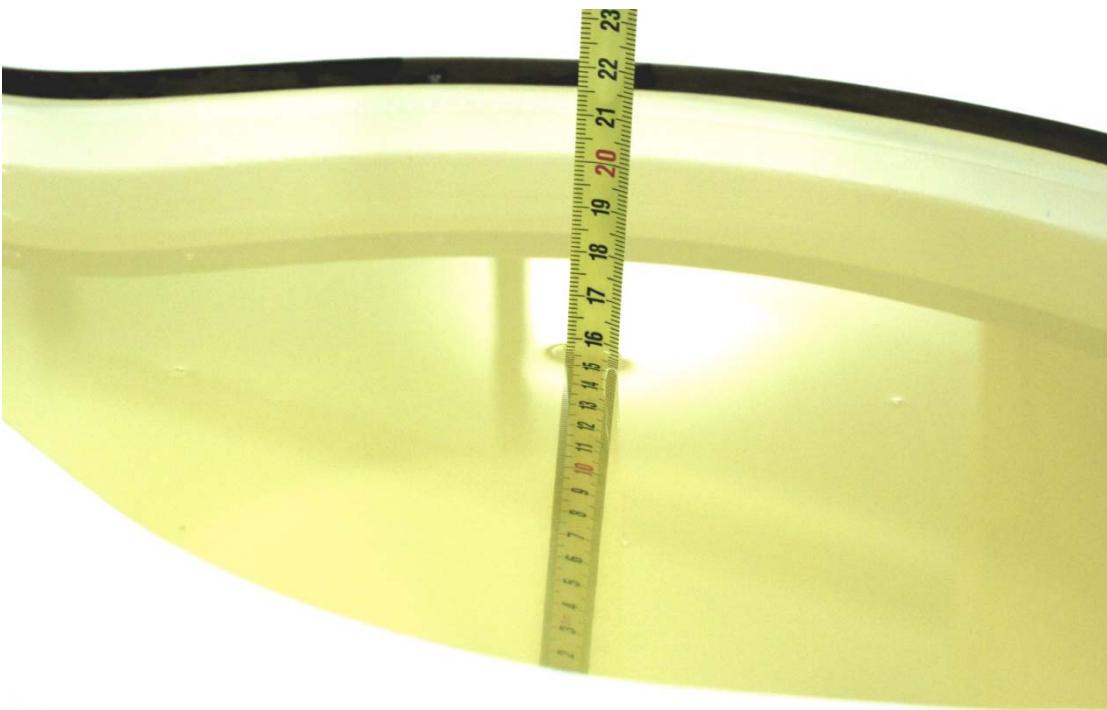


Picture 7-12 Liquid depth in the Flat Phantom (2600MHz)

## 8 System verification

### 8.1 System Setup

In the simplified setup for system evaluation, the DUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

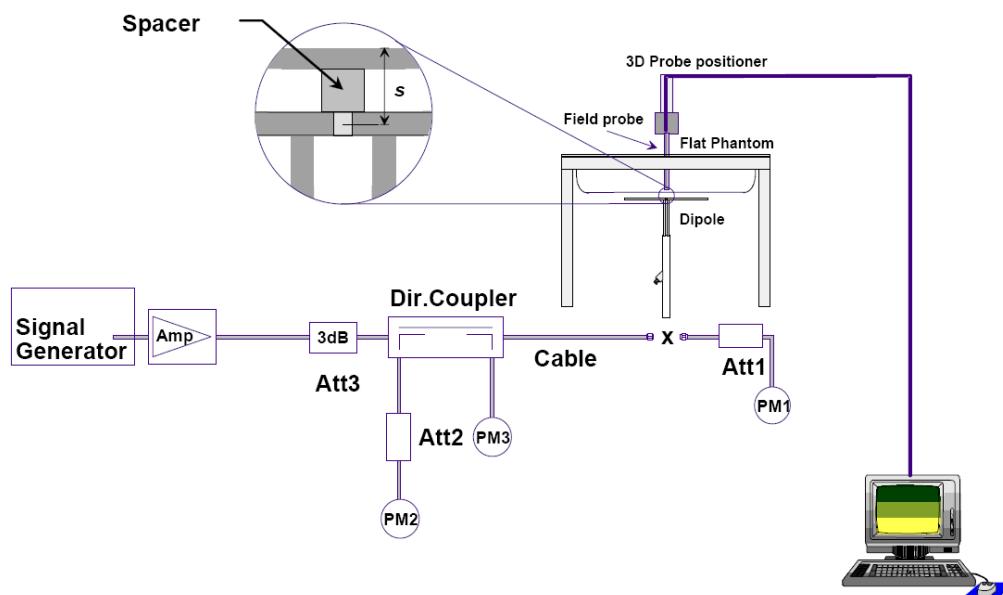

**Picture 8.1 System Setup for System Evaluation**



**Picture 8.2 Photo of Dipole Setup**

## 8.2 System Verification

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device.

The system verification results are required that the area scan estimated 1-g SAR is within 3% of the zoom scan 1-g SAR. The details are presented in annex B.

**Table 8.1: System Verification of Head**

Measurement Date (yyyy-mm-dd)	Frequency	Target value (W/kg)		Measured value (W/kg)		Deviation	
		10 g Average	1 g Average	10 g Average	1 g Average	10 g Average	1 g Average
2018/12/1	750 MHz	5.42	8.32	5.32	8.48	-1.85%	1.92%
2018/12/2	835 MHz	6.06	9.37	6	9.48	-0.99%	1.17%
2018/12/3	1750 MHz	19.4	36.7	19.76	36.56	1.86%	-0.38%
2018/12/4	1900 MHz	21.0	40.0	20.92	40.36	-0.38%	0.90%
2018/12/5	2450 MHz	24.7	52.2	25	51.72	1.21%	-0.92%
2018/12/6	2600 MHz	25.8	57.9	25.88	57.72	0.31%	-0.31%

**Table 8.2: System Verification of Body**

Measurement Date (yyyy-mm-dd)	Frequency	Target value (W/kg)		Measured value (W/kg)		Deviation	
		10 g Average	1 g Average	10 g Average	1 g Average	10 g Average	1 g Average
2018/12/1	750 MHz	5.68	8.66	5.68	8.64	0.00%	-0.23%
2018/12/2	835 MHz	6.12	9.41	6.12	9.52	0.00%	1.17%
2018/12/3	1750 MHz	19.8	37.1	19.6	37.56	-1.01%	1.24%
2018/12/4	1900 MHz	21.5	40.5	21.88	40.76	1.77%	0.64%
2018/12/5	2450 MHz	23.8	50.4	24.16	50.4	1.51%	0.00%
2018/12/6	2600 MHz	24.8	55.5	25.08	55.6	1.13%	0.18%

## 9 Measurement Procedures

### 9.1 Tests to be performed

In order to determine the highest value of the peak spatial-average SAR of a handset, all device positions, configurations and operational modes shall be tested for each frequency band according to steps 1 to 3 below. A flowchart of the test process is shown in picture 9.1.


**Step 1:** The tests described in 9.2 shall be performed at the channel that is closest to the center of the transmit frequency band ( $f_c$ ) for:

- a) all device positions (cheek and tilt, for both left and right sides of the SAM phantom, as described in annex D),
- b) all configurations for each device position in a), e.g., antenna extended and retracted, and
- c) all operational modes, e.g., analogue and digital, for each device position in a) and configuration in b) in each frequency band.

If more than three frequencies need to be tested according to 11.1 (i.e.,  $N_c > 3$ ), then all frequencies, configurations and modes shall be tested for all of the above test conditions.

**Step 2:** For the condition providing highest peak spatial-average SAR determined in Step 1, perform all tests described in 9.2 at all other test frequencies, i.e., lowest and highest frequencies. In addition, for all other conditions (device position, configuration and operational mode) where the peak spatial-average SAR value determined in Step 1 is within 3 dB of the applicable SAR limit, it is recommended that all other test frequencies shall be tested as well.

**Step 3:** Examine all data to determine the highest value of the peak spatial-average SAR found in Steps 1 to 2.

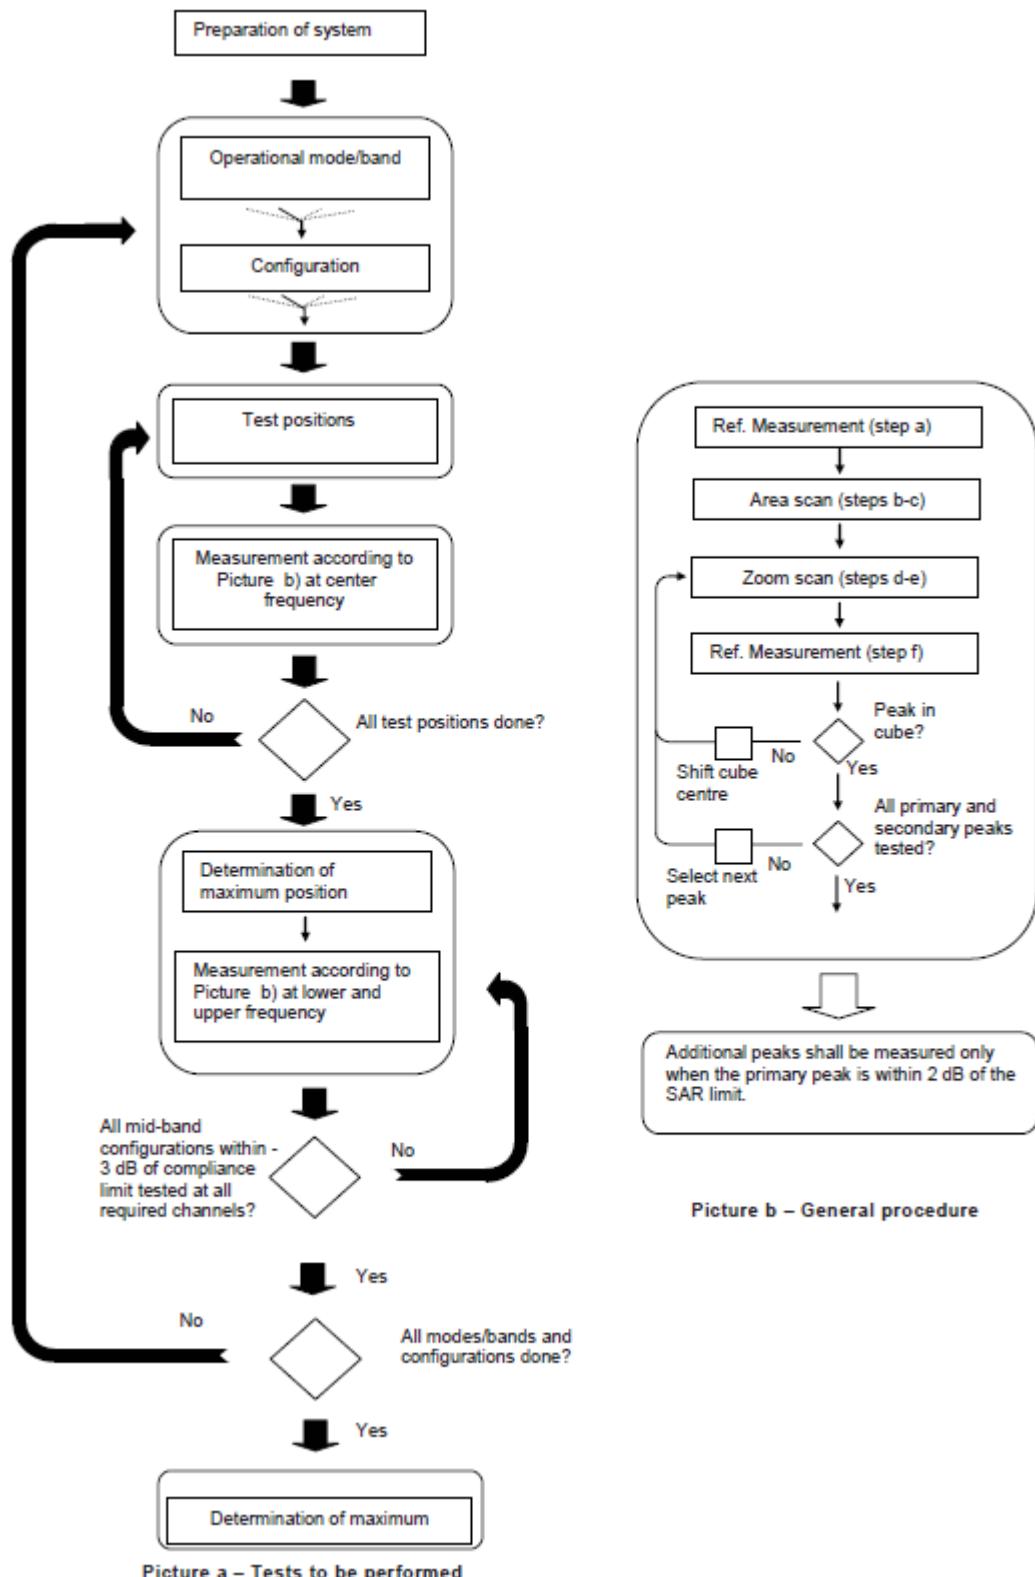

**Picture 9.1 Block diagram of the tests to be performed**

## 9.2 General Measurement Procedure

The area and zoom scan resolutions specified in the table below must be applied to the SAR measurements and fully documented in SAR reports to qualify for TCB approval. Probe boundary effect error compensation is required for measurements with the probe tip closer than half a probe tip diameter to the phantom surface. Both the probe tip diameter and sensor offset distance must satisfy measurement protocols; to ensure probe boundary effect errors are minimized and the higher fields closest to the phantom surface can be correctly measured and extrapolated to the phantom surface for computing 1-g SAR. Tolerances of the post-processing algorithms must be verified by the test laboratory for the scan resolutions used in the SAR measurements, according to the reference distribution functions specified in IEEE Std 1528-2013. The results should be documented as part of the system validation records and may be requested to support test results when all the measurement parameters in the following table are not satisfied.

		$\leq 3 \text{ GHz}$	$> 3 \text{ GHz}$
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface		$5 \pm 1 \text{ mm}$	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5 \text{ mm}$
Maximum probe angle from probe axis to phantom surface normal at the measurement location		$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
		$\leq 2 \text{ GHz}: \leq 15 \text{ mm}$ $2 - 3 \text{ GHz}: \leq 12 \text{ mm}$	$3 - 4 \text{ GHz}: \leq 12 \text{ mm}$ $4 - 6 \text{ GHz}: \leq 10 \text{ mm}$
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$		When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$		$\leq 2 \text{ GHz}: \leq 8 \text{ mm}$ $2 - 3 \text{ GHz}: \leq 5 \text{ mm}^*$	$3 - 4 \text{ GHz}: \leq 5 \text{ mm}^*$ $4 - 6 \text{ GHz}: \leq 4 \text{ mm}^*$
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$	$\leq 5 \text{ mm}$	$3 - 4 \text{ GHz}: \leq 4 \text{ mm}$ $4 - 5 \text{ GHz}: \leq 3 \text{ mm}$ $5 - 6 \text{ GHz}: \leq 2 \text{ mm}$
	graded grid	$\Delta z_{\text{Zoom}}(1): \text{between 1}^{\text{st}}$ two points closest to phantom surface	$\leq 4 \text{ mm}$
		$\Delta z_{\text{Zoom}}(n>1): \text{between}$ subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$
Minimum zoom scan volume	x, y, z	$\geq 30 \text{ mm}$	$3 - 4 \text{ GHz}: \geq 28 \text{ mm}$ $4 - 5 \text{ GHz}: \geq 25 \text{ mm}$ $5 - 6 \text{ GHz}: \geq 22 \text{ mm}$
Note: $\delta$ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.			
* When zoom scan is required and the <u>reported</u> SAR from the area scan based 1-g SAR estimation procedures of KDB 447498 is $\leq 1.4 \text{ W/kg}$ , $\leq 8 \text{ mm}$ , $\leq 7 \text{ mm}$ and $\leq 5 \text{ mm}$ zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.			

### 9.3 WCDMA Measurement Procedures for SAR

The following procedures are applicable to WCDMA handsets operating under 3GPP Release99, Release 5 and Release 6. The default test configuration is to measure SAR with an established radio link between the DUT and a communication test set using a 12.2kbps RMC (reference measurement channel) configured in Test Loop Mode 1. SAR is selectively confirmed for other physical channel configurations (DPCCH & DPDCH<sub>n</sub>), HSDPA and HSPA (HSUPA/HSDPA) modes according to output power, exposure conditions and device operating capabilities. Both uplink and downlink should be configured with the same RMC or AMR, when required. SAR for Release 5 HSDPA and Release 6 HSPA are measured using the applicable FRC (fixed reference channel) and E-DCH reference channel configurations. Maximum output power is verified according to applicable versions of 3GPP TS 34.121 and SAR must be measured according to these maximum output conditions. When Maximum Power Reduction (MPR) is not implemented according to Cubic Metric (CM) requirements for Release 6 HSPA, the following procedures do not apply.

#### For Release 5 HSDPA Data Devices:

Sub-test	$\beta_c$	$\beta_d$	$\beta_d$ (SF)	$\beta_c/\beta_d$	$\beta_{hs}$	CM/dB
1	2/15	15/15	64	2/15	4/15	0.0
2	12/15	15/15	64	12/15	24/25	1.0
3	15/15	8/15	64	15/8	30/15	1.5
4	15/15	4/15	64	15/4	30/15	1.5

#### For Release 6 HSPA Data Devices

Sub-test	$\beta_c$	$\beta_d$	$\beta_d$ (SF)	$\beta_c/\beta_d$	$\beta_{hs}$	$\beta_{ec}$	$\beta_{ed}$	$\beta_{ed}$ (SF)	$\beta_{ed}$ (codes)	CM (dB)	MPR (dB)	AG Index	E-TFCI
1	11/15	15/15	64	11/15	22/15	209/225	1039/225	4	1	1.5	1.5	20	75
2	6/15	15/15	64	6/15	12/15	12/15	12/15	4	1	1.5	1.5	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}^{47/15}$	4	2	1.5	1.5	15	92
4	2/15	15/15	64	2/15	4/15	4/15	56/75	4	1	1.5	1.5	17	71
5	15/15	15/15	64	15/15	24/15	30/15	134/15	4	1	1.5	1.5	21	81

#### Rel.8 DC-HSDPA (Cat 24)

SAR test exclusion for Rel.8 DC-HSDPA must satisfy the SAR test exclusion requirements of Rel.5 HSDPA. SAR test exclusion for DC-HSDPA devices is determined by power measurements according to the H-Set 12, Fixed Reference Channel (FRC) configuration in Table C.8.1.12 of 3GPP TS 34.121-1. A primary and a secondary serving HS-DSCH Cell are required to perform the power measurement and for the results to qualify for SAR test exclusion.

## 9.4 SAR Measurement for LTE

SAR tests for LTE are performed with a base station simulator, Rohde & Schwarz CMW500. Closed loop power control was used so the UE transmits with maximum output power during SAR testing. All powers were measured with the CMW 500.

It is performed for conducted power and SAR based on the KDB941225 D05.

SAR is evaluated separately according to the following procedures for the different test positions in each exposure condition – head, body, body-worn accessories and other use conditions. The procedures in the following subsections are applied separately to test each LTE frequency band.

### 1) QPSK with 1 RB allocation

Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is  $\leq 0.8$  W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. When the reported SAR of a required test channel is  $> 1.45$  W/kg, SAR is required for all three RB offset configurations for that required test channel.

### 2) QPSK with 50% RB allocation


The procedures required for 1 RB allocation in 1) are applied to measure the SAR for QPSK with 50% RB allocation.

### 3) QPSK with 100% RB allocation

For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation in 1) and 2) are  $\leq 0.8$  W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is  $> 1.45$  W/kg, the remaining required test channels must also be tested.

According to KDB 941225 D05, for Time-Division Duplex (TDD) systems, SAR must be tested using a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by the defined 3GPP LTE TDD configurations.

TDD LTE Band supports 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations and Table 4.2-1 for Special subframe configurations.

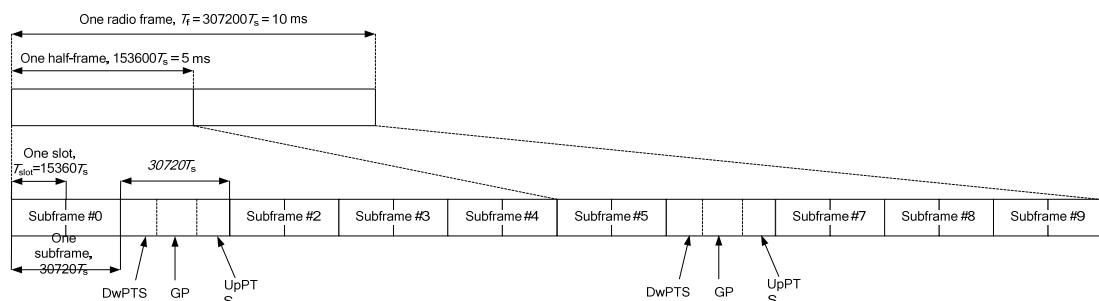

**Picture 10-4 Frame structure type 2**

Table 11.6-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS)

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$			$7680 \cdot T_s$		
5	$6592 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$20480 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$		
8	$24144 \cdot T_s$			-		
9	$13168 \cdot T_s$			-		

Table 11.6-2: Uplink-downlink configurations

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

According to Picture 11.1, one radio frame is configured by 10 subframes, which consist of Uplink-subframe, Downlink-subframe and Special subframe. For TDD-LTE, the Duty Cycle should be calculated on Uplink-subframes and Special subframes, due to Special subframe containing both

Uplink transmissions. So for one radio frame, Duty Cycle can be calculated with formula as below.  
The count of Uplink subframes are according to Table 11.6-2:

$$\text{Duty cycle} = (30720\text{Ts} * \text{Ups} + \text{Uplink Component} * \text{Specials}) / (307200\text{Ts})$$

About the uplink component of Special subframes, we can figure out by Table 11.6-1:

#### Uplink Component=UpPTS

In conclusion, for the **TDD LTE Band 40**, Duty Cycle can be calculated with formula as below .all these sets are ok when we test, or we can set as below.

$$\text{Duty cycle} = [(30720\text{Ts} * \text{Ups}) + \text{UpPTS} * \text{Specials}] / (307200\text{Ts})$$

And we can get different Duty cycles under different configurations:

Uplink-downlink configuration	Subframe number			Configuration of special subframe							
				Normal cyclic prefix in downlink				Extended cyclic prefix in downlink			
	Normal cyclic prefix in uplink		Extended cyclic prefix in uplink		Normal cyclic prefix in uplink		Extended cyclic prefix in uplink				
	D	S	U	configuration 0~4	configuration 5~9	configuration 0~4	configuration 5~9	configuration 0~3	configuration 4~7	configuration 0~3	configuration 4~7
0	2	2	6	61.43%	62.85%	61.67%	63.33%	61.43%	62.85%	61.67%	63.33%
1	4	2	4	41.43%	42.85%	41.67%	43.33%	41.43%	42.85%	41.67%	43.33%
2	6	2	2	21.43%	22.85%	21.67%	23.33%	21.43%	22.85%	21.67%	23.33%
3	6	1	3	30.71%	31.43%	30.83%	31.67%	30.71%	31.43%	30.83%	31.67%
4	7	1	2	20.71%	21.43%	20.83%	21.67%	20.71%	21.43%	20.83%	21.67%
5	8	1	1	10.71%	11.43%	10.83%	11.67%	10.71%	11.43%	10.83%	11.67%
6	3	2	5	51.43%	52.85%	51.67%	53.33%	51.43%	52.85%	51.67%	53.33%

**SAR test Plan:** For TDD LTE, SAR should be tested with the highest transmission duty factor (**63.33%**) using Uplink-downlink configuration **0** and Special subframe configuration **7** for Frame structure **type 2**.

**Note:**

1. From May 2017 TCB Workshop, HPUE does not support uplink-downlink configurations **0** and **6**.
2. This device supports uplink-downlink configurations **0-6**. The configuration with highest duty cycle was used for SAR Testing: configuration **0** at **63.3%** (Power Class 3) and configuration **1** at **43.3%** (Power Class 2) duty cycle.

## 9.5 Bluetooth & Wi-Fi Measurement Procedures for SAR

Normal network operating configurations are not suitable for measuring the SAR of 802.11 transmitters in general. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure that the results are consistent and reliable.

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in a test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters. The test frequencies should correspond to actual channel frequencies defined for domestic use. SAR for devices with switched diversity should be measured with only one antenna transmitting at a time during each SAR measurement, according to a fixed modulation and data rate. The same data pattern should be used for all measurements.

## 9.6 Power Drift

To control the output power stability during the SAR test, DASY4 system calculates the power drift by measuring the E-field at the same location at the beginning and at the end of the measurement for each test position. These drift values can be found in section 14 labeled as: (Power Drift [dB]). This ensures that the power drift during one measurement is within 5%.

## 10 Area Scan Based 1-g SAR

### 10.1 Requirement of KDB

According to the KDB447498 D01 v06, when the implementation is based the specific polynomial fit

algorithm as presented at the 29th Bioelectromagnetics Society meeting (2007) and the estimated 1-g SAR is  $\leq 1.2 \text{ W/kg}$ , a zoom scan measurement is not required provided it is also not needed for any other purpose; for example, if the peak SAR location required for simultaneous transmission SAR test exclusion can be determined accurately by the SAR system or manually to discriminate between distinctive peaks and scattered noisy SAR distributions from area scans.

There must not be any warning or alert messages due to various measurement concerns identified by the SAR system; for example, noise in measurements, peaks too close to scan boundary, peaks are too sharp, spatial resolution and uncertainty issues etc. The SAR system verification must also demonstrate that the area scan estimated 1-g SAR is within 3% of the zoom scan 1-g SAR (See Annex B). When all the SAR results for each exposure condition in a frequency band and wireless mode are based on estimated 1-g SAR, the 1-g SAR for the highest SAR configuration must be determined by a zoom scan.

### 10.2 Fast SAR Algorithms

The approach is based on the area scan measurement applying a frequency dependent attenuation parameter. This attenuation parameter was empirically determined by analyzing a large number of phones. The MOTOROLA FAST SAR was developed and validated by the MOTOROLA Research Group in Ft. Lauderdale.

In the initial study, an approximation algorithm based on Linear fit was developed. The accuracy of the algorithm has been demonstrated across a broad frequency range (136-2450 MHz) and for both 1- and 10-g averaged SAR using a sample of 264 SAR measurements from 55 wireless handsets. For the sample size studied, the root-mean-squared errors of the algorithm are 1.2% and 5.8% for 1- and 10-g averaged SAR, respectively. The paper describing the algorithm in detail is expected to be published in August 2004 within the Special Issue of Transactions on MTT.

In the second step, the same research group optimized the fitting algorithm to an Polynomial fit whereby the frequency validity was extended to cover the range 30-6000MHz. Details of this study can be found in the BEMS 2007 Proceedings.

Both algorithms are implemented in DASY software.

## 11 Conducted Output Power

**Note:** This product has two working power levels for WLAN and Cellular band LTE B41. WLAN shall work in low power level if audio receiver is active (Receiver ON), otherwise, WLAN shall work in normal level (Receiver OFF). Cellular band LTE B41 shall work in low power if hotspot function being enabled (AP ON), otherwise, it shall work in normal level (AP OFF)

### 11.1 GSM Measurement result

During the process of testing, the EUT was controlled via Agilent Digital Radio Communication tester (E5515C) to ensure the maximum power transmission and proper modulation. This result contains conducted output power for the EUT. In all cases, the measured peak output power should be greater and within 5% than EMI measurement.

**Table 11-1 GSM850 #1**

GSM850 #1								
Config	Tune-up	Measured Power (dBm)			Calculation	Frame Burst Power (dBm)		
		CH251 848.8 MHz	CH190 836.6 MHz	CH128 824.2 MHz		CH251 848.8 MHz	CH190 836.6 MHz	CH128 824.2 MHz
GSM Speech	34.00	32.62	32.66	32.65				
GPRS 1 Txslot	34.00	32.62	32.67	32.65	-9.03	23.59	23.64	23.62
GPRS 2 Txslots	32.00	31.21	31.22	31.19	-6.02	25.19	25.20	25.17
GPRS 3 Txslots	30.00	29.09	29.12	29.12	-4.26	24.83	24.86	24.86
GPRS 4 Txslots	28.00	27.04	27.12	27.11	-3.01	24.03	24.11	24.10
EGPRS GMSK 1 Txslot	34.00	32.61	32.67	32.66	-9.03	23.58	23.64	23.63
EGPRS GMSK 2 Txslots	32.00	31.22	31.23	31.20	-6.02	25.20	25.21	25.18
EGPRS GMSK 3 Txslots	30.00	29.08	29.13	29.13	-4.26	24.82	24.87	24.87
EGPRS GMSK 4 Txslots	28.00	27.04	27.12	27.11	-3.01	24.03	24.11	24.10
EGPRS 8PSK 1 Txslot	28.50	27.07	27.04	27.00	-9.03	18.04	18.01	17.97
EGPRS 8PSK 2 Txslots	26.50	24.81	24.84	24.94	-6.02	18.79	18.82	18.92
EGPRS 8PSK 3 Txslots	24.50	22.68	22.79	22.80	-4.26	18.42	18.53	18.54
EGPRS 8PSK 4 Txslots	22.50	20.52	20.58	20.64	-3.01	17.51	17.57	17.63

**Table 11-2 PCS1900 #1**

PCS1900 #1								
Config	Tune-up	Measured Power (dBm)			Calculation	Frame Burst Power (dBm)		
		CH810 1909.8 MHz	CH661 1880 MHz	CH512 1850.2 MHz		CH810 1909.8 MHz	CH661 1880 MHz	CH512 1850.2 MHz
GSM Speech	30.50	29.76	29.61	29.40				
GPRS 1 Txslot	30.50	29.54	29.58	29.39	-9.03	20.51	20.55	20.36
GPRS 2 Txslots	28.50	28.35	28.11	28.11	-6.02	22.33	22.09	22.09
GPRS 3 Txslots	27.00	26.21	26.16	26.13	-4.26	21.95	21.90	21.87
GPRS 4 Txslots	25.00	24.26	24.16	24.11	-3.01	21.25	21.15	21.10
EGPRS GMSK 1 Txslot	30.50	29.51	29.57	29.38	-9.03	20.48	20.54	20.35
EGPRS GMSK 2 Txslots	28.50	28.14	28.11	28.11	-6.02	22.12	22.09	22.09
EGPRS GMSK 3 Txslots	27.00	26.21	26.15	26.12	-4.26	21.95	21.89	21.86
EGPRS GMSK 4 Txslots	25.00	24.26	24.16	24.11	-3.01	21.25	21.15	21.10
EGPRS 8PSK 1 Txslot	27.00	25.78	25.88	25.74	-9.03	16.75	16.85	16.71
EGPRS 8PSK 2 Txslots	25.00	23.77	23.86	23.78	-6.02	17.75	17.84	17.76
EGPRS 8PSK 3 Txslots	23.00	21.68	21.73	21.69	-4.26	17.42	17.47	17.43
EGPRS 8PSK 4 Txslots	21.00	19.65	19.71	19.59	-3.01	16.64	16.70	16.58

OTES:

Division Factors

To average the power, the division factor is as follows:

1TX-slot = 1 transmit time slot out of 8 time slots=> conducted power divided by (8/1) => -9.03dB

2TX-slots = 2 transmit time slots out of 8 time slots=> conducted power divided by (8/2) => -6.02dB

3TX-slots = 3 transmit time slots out of 8 time slots=> conducted power divided by (8/3) => -4.26dB

4TX-slots = 4 transmit time slots out of 8 time slots=> conducted power divided by (8/4) => -3.01dB

**According to the conducted power as above, the body measurements are performed with 2Txslots for 850MHz and 1900MHz.**

## 11.2 WCDMA Measurement result

Table 11-3 WCDMA1900-BII #1

WCDMA1900-BII #1					
		Measured Power (dBm)			
Item		Tune-up	CH9538 1907.6 MHz	CH9400 1880 MHz	CH9262 1852.4 MHz
WCDMA	RMC	24.00	22.91	22.83	22.78
HSUPA	subtest1	23.00	21.93	21.83	21.71
	subtest2	23.00	21.89	21.79	21.82
	subtest3	22.50	21.45	21.35	21.32
	subtest4	23.00	21.97	21.92	21.78
	subtest5	22.00	20.92	20.83	20.78
HSPA+	\	22.50	21.73	21.65	21.74
DC-HSDPA	subtest1	23.00	21.72	21.64	21.68
	subtest2	23.00	21.74	21.67	21.69
	subtest3	23.00	21.73	21.68	21.68
	subtest4	23.00	21.71	21.67	21.70

Table 11-4 WCDMA1700-BIV #1

WCDMA1700-BIV #1					
		Measured Power (dBm)			
Item		Tune-up	CH1513 1752.6 MHz	CH1412 1732.4 MHz	CH1312 1712.4 MHz
WCDMA	RMC	24.00	22.95	22.91	22.98
HSUPA	subtest1	23.00	21.97	21.95	21.92
	subtest2	23.00	21.94	21.96	21.99
	subtest3	22.50	21.46	21.48	21.56
	subtest4	23.00	22.03	22.08	21.97
	subtest5	22.00	21.02	20.93	20.94
HSPA+	\	22.50	21.73	21.76	21.64
DC-HSDPA	subtest1	23.00	21.75	21.72	21.66
	subtest2	23.00	21.76	21.73	21.67
	subtest3	23.00	21.74	21.72	21.66
	subtest4	23.00	21.73	21.71	21.67

Table 11-5 WCDMA850-BV #1

WCDMA850-BV #1					
		Measured Power (dBm)			
Item		Tune-up	CH4233 846.6 MHz	CH4182 835.4 MHz	CH4132 826.4 MHz
WCDMA	RMC	24.50	23.17	23.10	23.15
HSUPA	subtest1	23.50	22.21	22.19	22.16
	subtest2	23.50	22.35	22.27	22.17
	subtest3	23.00	21.75	21.67	21.78
	subtest4	23.50	22.28	22.17	22.26
	subtest5	22.50	21.16	21.23	21.25
HSPA+	\	22.50	21.91	21.85	21.81
DC-HSDPA	subtest1	23.50	21.91	21.86	21.83
	subtest2	23.50	21.93	21.85	21.86
	subtest3	23.50	21.92	21.84	21.87
	subtest4	23.50	21.93	21.85	21.86

### 11.3 CDMA Measurement result

Table 11-6 CDMA800-BC0 #1

CDMA800-BC0 #1					
			Measured Power (dBm)		
Item		Tune-up	CH777 848.3 MHz	CH384 836.5 MHz	CH1013 824.7 MHz
1xRTT	SO55/RC1	25.50	23.71	23.72	23.51
	SO55/RC3	25.50	23.72	23.73	23.50
	SO32/RC3 (FCH only)	25.50	23.75	23.79	23.54
	SO32/RC3 (FCH+SCHn )	24.00	22.42	22.45	22.26
EVDO Rev.0		25.50	23.71	23.75	23.53
EVDO Rev.A		25.50	23.70	23.71	23.57

Table 11-7 CDMA1900-BC1 #1

CDMA1900-BC1 #1					
			Measured Power (dBm)		
Item		Tune-up	CH1175 1908.75 MHz	CH600 1880 MHz	CH25 1851.25 MHz
1xRTT	SO55/RC1	24.50	23.95	23.92	23.87
	SO55/RC3	24.50	23.96	23.93	23.87
	SO32/RC3 (FCH only)	24.50	23.97	23.94	23.91
	SO32/RC3 (FCH+SCHn )	23.50	22.91	22.92	22.85
EVDO Rev.0		24.50	23.92	23.95	23.97
EVDO Rev.A		24.50	23.94	23.79	23.84

Table 11-8 CDMA800-BC10 #1

CDMA800-BC10 #1					
			Measured Power (dBm)		
Item		Tune-up	CH684 823.1 MHz	CH580 820.5 MHz	CH476 817.9 MHz
1xRTT	SO55/RC1	25.50	23.88	23.86	23.81
	SO55/RC3	25.50	23.88	23.86	23.82
	SO32/RC3 (FCH only)	25.50	23.88	23.86	23.89
	SO32/RC3 (FCH+SCHn )	24.00	22.87	22.85	22.82
EVDO Rev.0		25.50	23.87	23.83	23.78
EVDO Rev.A		25.50	23.84	23.85	23.81

## 11.4 LTE Measurement result

Note: H,M,L stand for High, Medium, Low. For each bandwidth and the number of block numbers are show in the table below:

1.4M Hz	1RB-High (5)	3MHz	1RB-High (14)	5MHz	1RB-High (24)
	1RB-Middle (3)		1RB-Middle (7)		1RB-Middle (12)
	1RB-Low (0)		1RB-Low (0)		1RB-Low (0)
	3RB-High (3)		8RB-High (7)		12RB-High (13)
	3RB-Middle (1)		8RB-Middle (4)		12RB-Middle (6)
	3RB-Low (0)		8RB-Low (0)		12RB-Low (0)
	6RB (0)		15RB (0)		25RB (0)
10M Hz	1RB-High (49)	15MHz	1RB-High (74)	20MHz	1RB-High (99)
	1RB-Middle (24)		1RB-Middle (37)		1RB-Middle (50)
	1RB-Low (0)		1RB-Low (0)		1RB-Low (0)
	25RB-High (25)		36RB-High (38)		50RB-High (50)
	25RB-Middle (12)		36RB-Middle (19)		50RB-Middle (25)
	25RB-Low (0)		36RB-Low (0)		50RB-Low (0)
	50RB (0)		75RB (0)		100RB (0)

**Table 11-9 LTE1900-FDD2 #1**

LTE1900-FDD2 #1				Measured Power (dBm) & MPR					
BandWidth	RB No./Start	Channel	Tune-up	QPSK		16QAM		64QAM	
				Measured Power	MPR	Measured Power	MPR	Measured Power	MPR
1.4MHz	1H	19193	23.5	22.97	0	21.85	1	20.52	2
		18900	23.5	22.91	0	21.86	1	20.43	2
		18607	23.5	22.92	0	21.86	1	20.19	2
	1M	19193	23.5	22.91	0	21.96	1	20.57	2
		18900	23.5	22.97	0	21.99	1	20.48	2
		18607	23.5	22.91	0	21.99	1	20.34	2
	1L	19193	23.5	22.88	0	21.84	1	20.38	2
		18900	23.5	22.81	0	21.87	1	20.28	2
		18607	23.5	22.76	0	21.90	1	20.15	2
	3H	19193	23.5	22.94	0	21.90	1	20.46	2
		18900	23.5	22.86	0	21.82	1	20.42	2
		18607	23.5	22.84	0	21.94	1	20.18	2
	3M	19193	23.5	22.92	0	21.93	1	20.49	2
		18900	23.5	22.94	0	21.90	1	20.46	2
		18607	23.5	22.91	0	22.00	1	20.17	2
	3L	19193	23.5	22.96	0	21.96	1	20.32	2
		18900	23.5	22.88	0	21.86	1	20.38	2
		18607	23.5	22.84	0	21.98	1	20.11	2
	6	19193	23.5	21.95	1	20.95	2	19.38	3
		18900	23.5	21.85	1	20.92	2	19.25	3
		18607	23.5	21.83	1	20.76	2	19.06	3
3MHz	1H	19185	23.5	22.93	0	21.88	1	20.53	2
		18900	23.5	22.89	0	21.74	1	20.37	2
		18615	23.5	22.83	0	21.94	1	20.25	2
	1M	19185	23.5	22.86	0	21.92	1	20.39	2
		18900	23.5	22.84	0	21.88	1	20.23	2
		18615	23.5	22.88	0	21.98	1	20.31	2
	1L	19185	23.5	22.98	0	21.93	1	20.36	2
		18900	23.5	22.96	0	21.78	1	20.49	2
		18615	23.5	22.94	0	21.95	1	20.30	2
	8H	19185	23.5	21.89	1	20.95	2	19.38	3
		18900	23.5	21.87	1	20.95	2	19.20	3
		18615	23.5	21.78	1	20.86	2	19.23	3
	8M	19185	23.5	21.98	1	20.99	2	19.36	3
		18900	23.5	21.90	1	20.92	2	19.21	3
		18615	23.5	21.81	1	20.93	2	19.17	3
	8L	19185	23.5	21.96	1	20.97	2	19.32	3
		18900	23.5	21.91	1	20.98	2	19.21	3
		18615	23.5	21.85	1	20.94	2	19.22	3
	15	19185	23.5	21.93	1	20.87	2	19.24	3
		18900	23.5	21.89	1	20.90	2	19.12	3
		18615	23.5	21.78	1	20.83	2	19.11	3
5MHz	1H	19175	23.5	22.96	0	21.99	1	20.64	2
		18900	23.5	22.87	0	21.99	1	20.48	2
		18625	23.5	22.82	0	21.99	1	20.54	2
	1M	19175	23.5	22.90	0	21.98	1	20.35	2
		18900	23.5	22.92	0	21.94	1	20.43	2
		18625	23.5	22.97	0	21.99	1	20.38	2
	1L	19175	23.5	22.95	0	21.91	1	20.31	2
		18900	23.5	22.86	0	21.98	1	20.56	2
		18625	23.5	22.89	0	21.92	1	20.25	2
	12H	19175	23.5	21.84	1	20.97	2	19.32	3
		18900	23.5	21.87	1	20.94	2	19.24	3
		18625	23.5	21.80	1	20.94	2	19.21	3
	12M	19175	23.5	21.98	1	20.98	2	19.31	3
		18900	23.5	21.93	1	20.98	2	19.35	3
		18625	23.5	21.86	1	20.90	2	19.16	3
	12L	19175	23.5	21.91	1	20.90	2	19.41	3
		18900	23.5	21.94	1	20.93	2	19.36	3
		18625	23.5	21.83	1	21.00	2	19.28	3
	25	19175	23.5	21.96	1	20.94	2	19.27	3
		18900	23.5	21.88	1	20.92	2	19.23	3
		18625	23.5	21.79	1	20.91	2	19.25	3

10MHz	1H	19150	23.5	22.92	0	21.95	1	20.59	2
		18900	23.5	22.92	0	21.83	1	20.48	2
		18650	23.5	22.87	0	21.75	1	20.54	2
	1M	19150	23.5	22.95	0	21.99	1	20.51	2
		18900	23.5	22.92	0	21.94	1	20.52	2
		18650	23.5	22.91	0	21.76	1	20.48	2
	1L	19150	23.5	22.90	0	21.98	1	20.36	2
		18900	23.5	22.89	0	21.85	1	20.67	2
		18650	23.5	22.86	0	21.68	1	20.48	2
	25H	19150	23.5	21.74	1	20.88	2	19.21	3
		18900	23.5	21.82	1	20.94	2	19.22	3
		18650	23.5	21.86	1	20.89	2	19.23	3
	25M	19150	23.5	21.94	1	20.96	2	19.29	3
		18900	23.5	21.91	1	20.98	2	19.28	3
		18650	23.5	21.90	1	20.92	2	19.17	3
	25L	19150	23.5	21.96	1	20.98	2	19.26	3
		18900	23.5	21.87	1	20.96	2	19.12	3
		18650	23.5	21.85	1	20.90	2	19.21	3
	50	19150	23.5	21.89	1	20.93	2	19.24	3
		18900	23.5	21.85	1	20.87	2	19.28	3
		18650	23.5	21.83	1	20.86	2	19.14	3
15MHz	1H	19125	23.5	22.97	0	21.99	1	20.37	2
		18900	23.5	22.90	0	21.77	1	20.56	2
		18675	23.5	22.91	0	21.97	1	20.45	2
	1M	19125	23.5	22.99	0	21.95	1	20.49	2
		18900	23.5	22.94	0	21.78	1	20.51	2
		18675	23.5	22.91	0	21.96	1	20.31	2
	1L	19125	23.5	22.92	0	21.94	1	20.58	2
		18900	23.5	22.89	0	21.79	1	20.70	2
		18675	23.5	22.94	0	21.95	1	20.36	2
	36H	19125	23.5	21.99	1	20.87	2	19.32	3
		18900	23.5	21.98	1	20.87	2	19.24	3
		18675	23.5	21.92	1	20.94	2	19.22	3
	36M	19125	23.5	21.99	1	20.99	2	19.37	3
		18900	23.5	21.94	1	20.96	2	19.29	3
		18675	23.5	21.94	1	20.91	2	19.21	3
	36L	19125	23.5	21.98	1	20.92	2	19.26	3
		18900	23.5	21.90	1	20.92	2	19.21	3
		18675	23.5	21.98	1	20.96	2	19.18	3
	75	19125	23.5	21.91	1	20.93	2	19.29	3
		18900	23.5	21.96	1	20.91	2	19.18	3
		18675	23.5	21.97	1	20.91	2	19.15	3
20MHz	1H	19100	23.5	22.92	0	<b>21.93</b>	1	20.61	2
		18900	23.5	22.95	0	<b>21.96</b>	1	20.58	2
		18700	23.5	22.88	0	21.91	1	20.51	2
	1M	19100	23.5	<b>23.19</b>	0	21.92	1	20.41	2
		18900	23.5	<b>23.16</b>	0	<b>21.96</b>	1	20.53	2
		18700	23.5	<b>23.09</b>	0	<b>21.98</b>	1	20.52	2
	1L	19100	23.5	22.95	0	21.91	1	20.55	2
		18900	23.5	22.84	0	21.92	1	20.21	2
		18700	23.5	22.86	0	21.97	1	20.33	2
	50H	19100	23.5	21.85	1	20.87	2	19.18	3
		18900	23.5	21.85	1	20.89	2	19.09	3
		18700	23.5	<b>21.99</b>	1	20.99	2	19.22	3
	50M	19100	23.5	<b>22.04</b>	1	20.94	2	19.37	3
		18900	23.5	<b>21.96</b>	1	20.95	2	19.28	3
		18700	23.5	21.91	1	20.98	2	19.25	3
	50L	19100	23.5	21.95	1	20.98	2	19.26	3
		18900	23.5	21.88	1	20.88	2	19.09	3
		18700	23.5	21.96	1	20.99	2	19.19	3
	100	19100	23.5	21.92	1	20.93	2	19.25	3
		18900	23.5	21.85	1	20.87	2	19.18	3
		18700	23.5	21.94	1	20.97	2	19.22	3

Table 11-10 LTE1700-FDD4 #1

LTE1700-FDD4 #1				Measured Power (dBm) & MPR					
BandWidth	RB No./Start	Channel	Tune-up	QPSK		16QAM		64QAM	
				Measured Power	MPR	Measured Power	MPR	Measured Power	MPR
1.4MHz	1H	20393	24	22.54	0	21.68	1	20.73	2
		20175	24	22.63	0	21.94	1	20.75	2
		19957	24	22.63	0	21.72	1	21.39	2
	1M	20393	24	22.70	0	21.82	1	20.86	2
		20175	24	22.76	0	22.04	1	20.50	2
		19957	24	22.79	0	21.88	1	21.17	2
	1L	20393	24	22.56	0	21.65	1	20.98	2
		20175	24	22.68	0	21.97	1	20.96	2
		19957	24	22.63	0	21.75	1	20.98	2
	3H	20393	24	22.70	0	21.71	1	20.91	2
		20175	24	22.67	0	21.91	1	20.85	2
		19957	24	22.79	0	21.95	1	21.17	2
	3M	20393	24	22.67	0	21.69	1	20.95	2
		20175	24	22.68	0	21.87	1	20.67	2
		19957	24	22.77	0	21.96	1	21.06	2
	3L	20393	24	22.68	0	21.68	1	20.87	2
		20175	24	22.65	0	21.83	1	20.81	2
		19957	24	22.74	0	21.91	1	21.23	2
	6	20393	24	21.65	1	20.76	2	19.54	3
		20175	24	21.66	1	20.58	2	19.84	3
		19957	24	21.74	1	20.92	2	19.92	3
3MHz	1H	20385	24	22.55	0	21.61	1	20.82	2
		20175	24	22.65	0	21.58	1	20.77	2
		19965	24	22.79	0	22.14	1	21.31	2
	1M	20385	24	22.67	0	21.73	1	20.84	2
		20175	24	22.69	0	21.66	1	20.98	2
		19965	24	22.85	0	22.21	1	21.18	2
	1L	20385	24	22.62	0	21.68	1	20.98	2
		20175	24	22.64	0	21.62	1	20.95	2
		19965	24	22.79	0	22.08	1	21.17	2
	8H	20385	24	21.59	1	20.63	2	19.79	3
		20175	24	21.61	1	20.71	2	19.94	3
		19965	24	21.66	1	20.78	2	20.02	3
	8M	20385	24	21.63	1	20.73	2	19.76	3
		20175	24	21.67	1	20.75	2	19.81	3
		19965	24	21.76	1	20.85	2	20.04	3
	8L	20385	24	21.64	1	20.67	2	19.63	3
		20175	24	21.63	1	20.77	2	19.87	3
		19965	24	21.73	1	20.81	2	20.08	3
	15	20385	24	21.63	1	20.59	2	19.74	3
		20175	24	21.64	1	20.65	2	19.84	3
		19965	24	21.70	1	20.74	2	19.96	3
5MHz	1H	20375	24	22.64	0	21.73	1	20.95	2
		20175	24	22.70	0	21.78	1	20.97	2
		19975	24	22.73	0	22.20	1	21.17	2
	1M	20375	24	22.79	0	21.88	1	20.96	2
		20175	24	22.82	0	21.93	1	20.90	2
		19975	24	22.83	0	22.31	1	21.18	2
	1L	20375	24	22.65	0	21.76	1	20.77	2
		20175	24	22.70	0	21.80	1	20.80	2
		19975	24	22.72	0	22.19	1	20.95	2
	12H	20375	24	21.62	1	20.66	2	19.78	3
		20175	24	21.63	1	20.66	2	19.82	3
		19975	24	21.73	1	20.84	2	19.95	3
	12M	20375	24	21.69	1	20.72	2	19.71	3
		20175	24	21.67	1	20.72	2	19.76	3
		19975	24	21.78	1	20.86	2	19.97	3
	12L	20375	24	21.63	1	20.68	2	19.77	3
		20175	24	21.63	1	20.70	2	19.70	3
		19975	24	21.69	1	20.84	2	19.86	3
	25	20375	24	21.63	1	20.59	2	19.72	3
		20175	24	21.65	1	20.63	2	19.85	3
		19975	24	21.72	1	20.75	2	19.96	3

10MHz	1H	20350	24	22.53	0	21.58	1	20.98	2
		20175	24	22.58	0	21.51	1	20.92	2
		20000	24	22.70	0	22.03	1	20.86	2
	1M	20350	24	22.69	0	21.69	1	20.96	2
		20175	24	22.70	0	21.64	1	20.80	2
		20000	24	22.83	0	22.13	1	20.67	2
	1L	20350	24	22.52	0	21.52	1	20.85	2
		20175	24	22.58	0	21.54	1	20.76	2
		20000	24	22.70	0	22.04	1	20.87	2
	25H	20350	24	21.62	1	20.69	2	19.79	3
		20175	24	21.65	1	20.67	2	19.90	3
		20000	24	21.78	1	20.84	2	19.95	3
	25M	20350	24	21.64	1	20.70	2	19.74	3
		20175	24	21.69	1	20.68	2	19.96	3
		20000	24	21.77	1	20.77	2	19.90	3
	25L	20350	24	21.60	1	20.68	2	19.78	3
		20175	24	21.68	1	20.65	2	19.78	3
		20000	24	21.70	1	20.77	2	20.08	3
	50	20350	24	21.63	1	20.63	2	19.76	3
		20175	24	21.62	1	20.61	2	19.82	3
		20000	24	21.73	1	20.75	2	19.97	3
15MHz	1H	20325	24	22.59	0	21.92	1	20.80	2
		20175	24	22.56	0	21.50	1	20.66	2
		20025	24	22.67	0	22.00	1	20.65	2
	1M	20325	24	22.59	0	21.99	1	20.92	2
		20175	24	22.59	0	21.57	1	20.99	2
		20025	24	22.71	0	22.11	1	20.76	2
	1L	20325	24	22.56	0	21.91	1	20.81	2
		20175	24	22.59	0	21.55	1	20.77	2
		20025	24	22.72	0	22.09	1	20.71	2
	36H	20325	24	21.66	1	20.60	2	19.63	3
		20175	24	21.64	1	20.62	2	19.81	3
		20025	24	21.76	1	20.76	2	19.78	3
	36M	20325	24	21.66	1	20.59	2	19.71	3
		20175	24	21.70	1	20.62	2	19.77	3
		20025	24	21.73	1	20.76	2	19.81	3
	36L	20325	24	21.64	1	20.59	2	19.78	3
		20175	24	21.66	1	20.64	2	19.87	3
		20025	24	21.72	1	20.74	2	19.89	3
	75	20325	24	21.68	1	20.64	2	19.77	3
		20175	24	21.68	1	20.63	2	19.73	3
		20025	24	21.76	1	20.75	2	19.83	3
20MHz	1H	20300	24	22.51	0	21.99	1	20.83	2
		20175	24	22.51	0	21.90	1	20.73	2
		20050	24	22.61	0	22.10	1	20.72	2
	1M	20300	24	22.76	0	22.16	1	21.03	2
		20175	24	22.77	0	22.14	1	21.36	2
		20050	24	22.82	0	22.35	1	21.08	2
	1L	20300	24	22.50	0	21.93	1	21.05	2
		20175	24	22.60	0	22.01	1	21.15	2
		20050	24	22.65	0	22.17	1	21.15	2
	50H	20300	24	21.56	1	20.63	2	19.61	3
		20175	24	21.55	1	20.52	2	19.69	3
		20050	24	21.71	1	20.70	2	19.66	3
	50M	20300	24	21.63	1	20.64	2	19.68	3
		20175	24	21.65	1	20.64	2	19.85	3
		20050	24	21.69	1	20.74	2	19.96	3
	50L	20300	24	21.57	1	20.63	2	19.71	3
		20175	24	21.59	1	20.59	2	19.76	3
		20050	24	21.61	1	20.64	2	19.97	3
	100	20300	24	21.59	1	20.59	2	19.74	3
		20175	24	21.60	1	20.60	2	19.79	3
		20050	24	21.59	1	20.68	2	19.97	3

**Table 11-11 LTE850-FDD5 #1**

LTE850-FDD5 #1									
BandWidth	RB No./Start	Channel	Tune-up	Measured Power (dBm) & MPR					
				QPSK		16QAM			
				Measured Power	MPR	Measured Power	MPR		
1.4MHz	1H	20643	24	22.80	0	21.70	1	20.59	2
		20525	24	22.78	0	21.83	1	20.63	2
		20407	24	22.79	0	22.17	1	20.67	2
	1M	20643	24	22.84	0	21.83	1	20.48	2
		20525	24	22.95	0	22.00	1	20.59	2
		20407	24	22.93	0	22.25	1	20.71	2
	1L	20643	24	22.72	0	21.72	1	20.65	2
		20525	24	22.85	0	21.83	1	20.78	2
		20407	24	22.80	0	22.14	1	20.59	2
	3H	20643	24	22.83	0	21.95	1	20.53	2
		20525	24	22.84	0	21.86	1	20.76	2
		20407	24	22.86	0	22.04	1	20.73	2
	3M	20643	24	22.87	0	21.99	1	20.57	2
		20525	24	22.83	0	21.90	1	20.43	2
		20407	24	22.91	0	22.00	1	20.61	2
	3L	20643	24	22.83	0	21.98	1	20.48	2
		20525	24	22.82	0	21.82	1	20.55	2
		20407	24	22.84	0	22.04	1	20.59	2
	6	20643	24	21.87	1	21.04	2	19.63	3
		20525	24	21.84	1	21.03	2	19.50	3
		20407	24	21.87	1	20.81	2	19.58	3
3MHz	1H	20635	24	22.84	0	21.71	1	20.48	2
		20525	24	22.83	0	21.66	1	20.78	2
		20415	24	22.90	0	22.21	1	20.39	2
	1M	20635	24	22.88	0	21.87	1	20.65	2
		20525	24	22.95	0	21.78	1	20.79	2
		20415	24	22.98	0	22.29	1	20.50	2
	1L	20635	24	22.82	0	21.81	1	20.51	2
		20525	24	22.80	0	21.71	1	20.63	2
		20415	24	22.87	0	22.16	1	20.46	2
	8H	20635	24	21.81	1	20.90	2	19.42	3
		20525	24	21.80	1	20.95	2	19.44	3
		20415	24	21.85	1	20.95	2	19.66	3
	8M	20635	24	21.86	1	20.91	2	19.54	3
		20525	24	21.86	1	20.98	2	19.58	3
		20415	24	21.90	1	21.02	2	19.51	3
	8L	20635	24	21.83	1	20.87	2	19.46	3
		20525	24	21.83	1	20.96	2	19.60	3
		20415	24	21.86	1	20.97	2	19.55	3
	15	20635	24	21.82	1	20.80	2	19.42	3
		20525	24	21.81	1	20.87	2	19.47	3
		20415	24	21.81	1	20.87	2	19.43	3
5MHz	1H	20625	24	22.86	0	21.82	1	20.39	2
		20525	24	22.89	0	21.90	1	20.69	2
		20425	24	22.82	0	22.27	1	20.69	2
	1M	20625	24	22.98	0	22.00	1	20.43	2
		20525	24	23.05	0	22.07	1	20.57	2
		20425	24	22.97	0	22.44	1	20.78	2
	1L	20625	24	22.86	0	21.85	1	20.57	2
		20525	24	22.89	0	21.94	1	20.39	2
		20425	24	22.82	0	22.27	1	20.37	2
	12H	20625	24	21.75	1	20.82	2	19.34	3
		20525	24	21.79	1	20.87	2	19.39	3
		20425	24	21.83	1	20.98	2	19.56	3
	12M	20625	24	21.88	1	20.90	2	19.58	3
		20525	24	21.84	1	20.95	2	19.56	3
		20425	24	21.90	1	21.01	2	19.39	3
	12L	20625	24	21.84	1	20.92	2	19.50	3
		20525	24	21.82	1	20.94	2	19.45	3
		20425	24	21.83	1	20.96	2	19.47	3
	25	20625	24	21.81	1	20.79	2	19.56	3
		20525	24	21.79	1	20.88	2	19.47	3
		20425	24	21.84	1	20.94	2	19.57	3

10MHz	1H	20600	24	22.90	0	22.08	1	20.59	2
		20525	24	22.77	0	21.79	1	20.40	2
		20450	24	22.81	0	21.72	1	20.58	2
	1M	20600	24	22.87	0	22.12	1	20.76	2
		20525	24	22.86	0	21.83	1	20.64	2
		20450	24	22.86	0	21.74	1	20.46	2
	1L	20600	24	22.81	0	22.09	1	20.49	2
		20525	24	22.76	0	21.76	1	20.87	2
		20450	24	22.75	0	21.67	1	20.79	2
	25H	20600	24	21.72	1	20.81	2	19.42	3
		20525	24	21.78	1	20.91	2	19.42	3
		20450	24	21.82	1	20.86	2	19.39	3
	25M	20600	24	21.83	1	20.92	2	19.57	3
		20525	24	21.82	1	20.95	2	19.46	3
		20450	24	21.84	1	20.90	2	19.58	3
	25L	20600	24	21.83	1	20.91	2	19.50	3
		20525	24	21.79	1	20.92	2	19.51	3
		20450	24	21.85	1	20.93	2	19.49	3
	50	20600	24	21.79	1	20.84	2	19.46	3
		20525	24	21.80	1	20.89	2	19.54	3
		20450	24	21.81	1	20.84	2	19.43	3

**Table 11-12 LTE700-FDD12 #1**

LTE700-FDD12 #1									
BandWidth	RB No. Start	Channel	Tune-up	Measured Power (dBm) & MPR					
				QPSK		16QAM		64QAM	
				Measured Power	MPR	Measured Power	MPR	Measured Power	MPR
1.4MHz	1H	23173	24	22.70	0	21.79	1	20.61	2
		23095	24	22.78	0	21.91	1	20.43	2
		23017	24	22.84	0	22.21	1	20.67	2
	1M	23173	24	22.87	0	21.86	1	20.66	2
		23095	24	22.89	0	22.02	1	20.74	2
		23017	24	22.95	0	22.33	1	20.81	2
	1L	23173	24	22.66	0	21.77	1	20.55	2
		23095	24	22.77	0	21.88	1	20.62	2
		23017	24	22.82	0	22.17	1	20.67	2
	3H	23173	24	22.84	0	21.95	1	20.59	2
		23095	24	22.85	0	21.89	1	20.55	2
		23017	24	22.90	0	22.09	1	20.57	2
	3M	23173	24	22.90	0	22.03	1	20.47	2
		23095	24	22.85	0	21.90	1	20.67	2
		23017	24	22.94	0	22.07	1	20.46	2
	3L	23173	24	22.77	0	21.97	1	20.54	2
		23095	24	22.88	0	21.86	1	20.42	2
		23017	24	22.88	0	22.06	1	20.58	2
	6	23173	24	21.85	1	21.00	2	19.52	3
		23095	24	21.80	1	21.02	2	19.50	3
		23017	24	21.89	1	20.77	2	19.59	3
3MHz	1H	23165	24	22.75	0	21.80	1	20.64	2
		23095	24	22.83	0	21.75	1	20.65	2
		23025	24	22.91	0	22.22	1	20.79	2
	1M	23165	24	22.86	0	21.92	1	20.78	2
		23095	24	22.88	0	21.81	1	20.61	2
		23025	24	23.03	0	22.36	1	20.67	2
	1L	23165	24	22.77	0	21.83	1	20.45	2
		23095	24	22.79	0	21.76	1	20.75	2
		23025	24	22.91	0	22.18	1	20.89	2
	8H	23165	24	21.78	1	20.81	2	19.48	3
		23095	24	21.77	1	20.92	2	19.55	3
		23025	24	21.86	1	20.94	2	19.58	3
	8M	23165	24	21.84	1	20.88	2	19.44	3
		23095	24	21.84	1	20.95	2	19.63	3
		23025	24	21.88	1	21.03	2	19.59	3
	8L	23165	24	21.82	1	20.83	2	19.61	3
		23095	24	21.83	1	20.94	2	19.58	3
		23025	24	21.80	1	20.91	2	19.62	3
	15	23165	24	21.75	1	20.71	2	19.42	3
		23095	24	21.80	1	20.85	2	19.66	3
		23025	24	21.83	1	20.85	2	19.52	3

5M H z	1H	23155	24	22.87	0	21.90	1	20.30	2
		23095	24	22.88	0	22.00	1	20.60	2
		23035	24	22.82	0	22.34	1	20.74	2
	1M	23155	24	22.93	0	22.02	1	20.37	2
		23095	24	23.01	0	22.12	1	20.36	2
		23035	24	22.97	0	22.48	1	20.66	2
	1L	23155	24	22.87	0	21.97	1	20.44	2
		23095	24	22.90	0	21.95	1	20.57	2
		23035	24	22.83	0	22.34	1	20.64	2
	12H	23155	24	21.77	1	20.82	2	19.53	3
		23095	24	21.83	1	20.91	2	19.39	3
		23035	24	21.78	1	20.94	2	19.50	3
	12M	23155	24	21.84	1	20.88	2	19.36	3
		23095	24	21.85	1	20.93	2	19.53	3
		23035	24	21.86	1	21.00	2	19.40	3
	12L	23155	24	21.81	1	20.84	2	19.42	3
		23095	24	21.86	1	20.92	2	19.66	3
		23035	24	21.77	1	20.93	2	19.41	3
	25	23155	24	21.78	1	20.76	2	19.43	3
		23095	24	21.86	1	20.89	2	19.54	3
		23035	24	21.75	1	20.87	2	19.52	3
10M H z	1H	23130	24	22.85	0	21.72	1	20.72	2
		23095	24	22.86	0	22.20	1	20.85	2
		23060	24	22.82	0	21.88	1	20.49	2
	1M	23130	24	22.91	0	21.88	1	20.60	2
		23095	24	22.91	0	22.26	1	20.62	2
		23060	24	22.85	0	21.92	1	20.69	2
	1L	23130	24	22.77	0	21.70	1	20.53	2
		23095	24	22.76	0	22.13	1	20.70	2
		23060	24	22.77	0	21.85	1	20.73	2
	25H	23130	24	21.86	1	20.88	2	19.52	3
		23095	24	21.93	1	20.97	2	19.57	3
		23060	24	21.72	1	20.84	2	19.41	3
	25M	23130	24	21.90	1	20.95	2	19.65	3
		23095	24	21.87	1	20.94	2	19.55	3
		23060	24	21.85	1	20.93	2	19.62	3
	25L	23130	24	21.79	1	20.83	2	19.56	3
		23095	24	21.96	1	21.01	2	19.68	3
		23060	24	21.76	1	20.88	2	19.38	3
	50	23130	24	21.88	1	20.87	2	19.57	3
		23095	24	21.95	1	21.01	2	19.60	3
		23060	24	21.80	1	20.83	2	19.41	3

**Table 11-13 LTE750-FDD13 #1**

LTE 750-FDD13 #1				Measured Power (dBm) & MPR					
BandWidth	RB No. Start	Channel	Tune-up	QPSK		16QAM		64QAM	
				Measured Power	MPR	Measured Power	MPR	Measured Power	MPR
5MHz	1H	23255	24	22.84	0	21.93	1	20.25	2
		23230	24	22.85	0	22.00	1	20.47	2
		23205	24	22.83	0	22.24	1	20.51	2
	1M	23255	24	22.92	0	22.04	1	20.68	2
		23230	24	23.01	0	22.09	1	20.53	2
		23205	24	22.96	0	22.37	1	20.59	2
	1L	23255	24	22.82	0	21.88	1	20.57	2
		23230	24	22.89	0	21.89	1	20.28	2
		23205	24	22.80	0	22.25	1	20.46	2
	12H	23255	24	21.78	1	20.86	2	19.26	3
		23230	24	21.81	1	20.90	2	19.35	3
		23205	24	21.77	1	20.97	2	19.37	3
	12M	23255	24	21.86	1	20.91	2	19.40	3
		23230	24	21.83	1	20.93	2	19.28	3
		23205	24	21.85	1	21.02	2	19.33	3
	12L	23255	24	21.75	1	20.85	2	19.29	3
		23230	24	21.77	1	20.86	2	19.33	3
		23205	24	21.73	1	20.89	2	19.35	3
	25	23255	24	21.77	1	20.80	2	19.27	3
		23230	24	21.83	1	20.85	2	19.23	3
		23205	24	21.80	1	20.93	2	19.28	3
10MHz	1H	23230	24	22.81	0	21.72	1	20.31	2
	1M	23230	24	22.86	0	21.78	1	20.38	2
	1L	23230	24	22.75	0	21.68	1	20.43	2
	25H	23230	24	21.83	1	20.94	2	19.29	3
	25M	23230	24	21.86	1	20.94	2	19.37	3
	25L	23230	24	21.81	1	20.88	2	19.27	3
	50	23230	24	21.86	1	20.90	2	19.35	3

Table 11-14 LTE1900-FDD25 #1

LTE1900-FDD25 #1				Measured Power (dBm) & MPR					
BandWidth	RB No./Start	Channel	Tune-up	QPSK		16QAM		64QAM	
				Measured Power	MPR	Measured Power	MPR	Measured Power	MPR
1.4MHz	1H	26683	24	22.90	0	21.88	1	20.76	2
		26365	24	22.91	0	21.95	1	20.49	2
		26047	24	22.84	0	22.14	1	20.54	2
	1M	26683	24	23.06	0	21.95	1	20.70	2
		26365	24	23.08	0	22.17	1	20.54	2
		26047	24	23.01	0	22.29	1	20.31	2
	1L	26683	24	22.91	0	21.92	1	20.73	2
		26365	24	22.93	0	21.92	1	20.52	2
		26047	24	22.88	0	22.16	1	20.14	2
	3H	26683	24	23.05	0	22.14	1	20.51	2
		26365	24	23.00	0	21.98	1	20.57	2
		26047	24	22.96	0	22.04	1	20.49	2
3MHz	3M	26683	24	23.01	0	22.16	1	20.58	2
		26365	24	22.99	0	22.00	1	20.53	2
		26047	24	22.92	0	22.04	1	20.38	2
	3L	26683	24	23.05	0	22.16	1	20.64	2
		26365	24	22.96	0	21.98	1	20.51	2
		26047	24	22.91	0	22.04	1	20.38	2
	6	26683	24	21.98	1	21.19	2	19.52	3
		26365	24	22.01	1	21.13	2	19.60	3
		26047	24	21.93	1	20.82	2	19.25	3
5MHz	1H	26675	24	22.95	0	21.85	1	20.64	2
		26365	24	22.99	0	21.79	1	20.66	2
		26055	24	22.96	0	22.21	1	20.59	2
	1M	26675	24	23.08	0	22.08	1	20.69	2
		26365	24	23.02	0	21.92	1	20.56	2
		26055	24	23.01	0	22.29	1	20.69	2
	1L	26675	24	23.00	0	22.02	1	20.62	2
		26365	24	22.94	0	21.84	1	20.58	2
		26055	24	22.90	0	22.18	1	20.51	2
	8H	26675	24	21.98	1	21.07	2	19.53	3
		26365	24	21.94	1	21.02	2	19.78	3
		26055	24	21.87	1	20.96	2	19.79	3
	8M	26675	24	22.03	1	21.10	2	19.56	3
		26365	24	22.00	1	21.07	2	19.70	3
		26055	24	21.93	1	20.99	2	19.65	3
	8L	26675	24	21.99	1	21.08	2	19.39	3
		26365	24	21.95	1	21.03	2	19.59	3
		26055	24	21.87	1	20.97	2	19.49	3
	15	26675	24	22.01	1	20.97	2	19.48	3
		26365	24	21.91	1	20.93	2	19.58	3
		26055	24	21.87	1	20.89	2	19.50	3
10MHz	1H	26665	24	22.98	0	21.94	1	20.51	2
		26365	24	23.00	0	22.08	1	20.65	2
		26065	24	22.89	0	22.35	1	20.59	2
	1M	26665	24	23.14	0	22.18	1	20.34	2
		26365	24	23.18	0	22.21	1	20.51	2
		26065	24	23.04	0	22.49	1	20.39	2
	1L	26665	24	23.02	0	22.05	1	20.53	2
		26365	24	23.00	0	22.04	1	20.35	2
		26065	24	22.86	0	22.29	1	20.47	2
	12H	26665	24	22.03	1	21.10	2	19.59	3
		26365	24	21.91	1	20.95	2	19.33	3
		26065	24	21.89	1	20.97	2	19.41	3
	12M	26665	24	22.07	1	21.13	2	19.44	3
		26365	24	21.99	1	21.02	2	19.45	3
		26065	24	21.91	1	21.00	2	19.50	3
	12L	26665	24	21.99	1	21.09	2	19.60	3
		26365	24	21.96	1	21.00	2	19.39	3
		26065	24	21.89	1	20.96	2	19.44	3
	25	26665	24	21.99	1	20.99	2	19.52	3
		26365	24	21.96	1	20.93	2	19.37	3
		26065	24	21.88	1	20.91	2	19.48	3

10MHz	1H	26640	24	22.95	0	21.87	1	20.56	2
		26365	24	22.94	0	21.85	1	20.74	2
		26090	24	22.90	0	22.24	1	20.66	2
	1M	26640	24	23.04	0	22.02	1	20.57	2
		26365	24	23.01	0	21.91	1	20.46	2
		26090	24	23.08	0	22.31	1	20.50	2
	1L	26640	24	22.95	0	21.88	1	20.60	2
		26365	24	22.93	0	21.80	1	20.69	2
		26090	24	22.91	0	22.17	1	20.63	2
	25H	26640	24	22.09	1	21.19	2	19.59	3
		26365	24	21.89	1	20.93	2	19.36	3
		26090	24	21.91	1	20.94	2	19.48	3
	25M	26640	24	22.06	1	21.23	2	19.58	3
		26365	24	21.97	1	20.98	2	19.53	3
		26090	24	21.89	1	20.96	2	19.56	3
	25L	26640	24	22.19	1	21.28	2	19.79	3
		26365	24	22.01	1	21.01	2	19.48	3
		26090	24	21.93	1	20.95	2	19.59	3
	50	26640	24	22.14	1	21.15	2	19.65	3
		26365	24	21.95	1	20.97	2	19.42	3
		26090	24	21.92	1	20.92	2	19.51	3
15MHz	1H	26615	24	22.99	0	22.19	1	20.64	2
		26365	24	22.91	0	21.82	1	20.38	2
		26115	24	22.94	0	22.23	1	20.53	2
	1M	26615	24	23.07	0	22.29	1	20.58	2
		26365	24	22.96	0	21.84	1	20.57	2
		26115	24	22.94	0	22.24	1	20.60	2
	1L	26615	24	23.02	0	22.30	1	20.55	2
		26365	24	22.92	0	21.83	1	20.75	2
		26115	24	22.93	0	22.17	1	20.63	2
	36H	26615	24	22.08	1	21.03	2	19.58	3
		26365	24	21.95	1	20.93	2	19.29	3
		26115	24	21.97	1	21.00	2	19.41	3
	36M	26615	24	22.12	1	21.06	2	19.62	3
		26365	24	22.06	1	21.03	2	19.51	3
		26115	24	21.96	1	20.99	2	19.59	3
	36L	26615	24	22.08	1	21.02	2	19.51	3
		26365	24	22.01	1	21.02	2	19.40	3
		26115	24	22.00	1	20.99	2	19.48	3
	75	26615	24	22.10	1	21.04	2	19.56	3
		26365	24	21.99	1	20.94	2	19.37	3
		26115	24	21.99	1	21.00	2	19.49	3
20MHz	1H	26590	24	22.92	0	22.39	1	20.82	2
		26365	24	22.89	0	22.36	1	20.70	2
		26140	24	22.87	0	22.26	1	20.81	2
	1M	26590	24	23.14	0	22.41	1	20.85	2
		26365	24	23.10	0	22.46	1	20.59	2
		26140	24	22.98	0	22.40	1	20.68	2
	1L	26590	24	22.90	0	22.47	1	20.51	2
		26365	24	22.92	0	22.34	1	20.56	2
		26140	24	22.88	0	22.15	1	20.55	2
	50H	26590	24	21.89	1	20.94	2	19.35	3
		26365	24	21.84	1	20.86	2	19.22	3
		26140	24	21.95	1	20.94	2	19.31	3
	50M	26590	24	22.00	1	21.04	2	19.41	3
		26365	24	22.01	1	21.00	2	19.47	3
		26140	24	21.93	1	20.95	2	19.45	3
	50L	26590	24	21.90	1	20.96	2	19.35	3
		26365	24	21.96	1	20.96	2	19.35	3
		26140	24	21.92	1	20.90	2	19.38	3
	100	26590	24	21.84	1	20.93	2	19.28	3
		26365	24	21.89	1	20.90	2	19.18	3
		26140	24	21.92	1	20.97	2	19.27	3

**Table 11-15 LTE850-FDD26 #1**

LTE850-FDD26 #1									
BandW idth	RB No./Start	Channel	Tune-up	Measured Power (dBm) & MPR					
				QPSK		16QAM			
				Measured Power	MPR	Measured Power	MPR		
1.4M Hz	1H	27033	24	22.83	0	21.74	1	20.51	2
		26865	24	22.83	0	22.16	1	20.34	2
		26697	24	22.82	0	21.79	1	20.48	2
	1M	27033	24	22.97	0	21.91	1	20.86	2
		26865	24	22.97	0	22.26	1	20.56	2
		26697	24	22.99	0	21.91	1	20.74	2
	1L	27033	24	22.82	0	21.80	1	20.63	2
		26865	24	22.88	0	22.17	1	20.48	2
		26697	24	22.84	0	21.81	1	20.59	2
	3H	27033	24	22.92	0	22.00	1	20.67	2
		26865	24	22.88	0	22.05	1	20.63	2
		26697	24	22.88	0	22.04	1	20.60	2
	3M	27033	24	22.91	0	22.04	1	20.60	2
		26865	24	22.94	0	22.06	1	20.19	2
		26697	24	22.91	0	22.07	1	20.35	2
	3L	27033	24	22.88	0	22.00	1	20.75	2
		26865	24	22.90	0	22.03	1	20.69	2
		26697	24	22.85	0	22.06	1	20.71	2
	6	27033	24	21.93	1	21.07	2	19.47	3
		26865	24	21.86	1	20.83	2	19.45	3
		26697	24	21.86	1	21.04	2	19.53	3
3M Hz	1H	27025	24	22.92	0	22.15	1	20.48	2
		26865	24	22.92	0	21.82	1	20.71	2
		26705	24	22.94	0	21.82	1	20.68	2
	1M	27025	24	23.03	0	22.34	1	20.53	2
		26865	24	23.03	0	22.00	1	20.54	2
		26705	24	23.01	0	22.00	1	20.59	2
	1L	27025	24	22.93	0	22.23	1	20.41	2
		26865	24	22.88	0	21.90	1	20.74	2
		26705	24	22.88	0	21.92	1	20.68	2
	8H	27025	24	21.94	1	21.00	2	19.57	3
		26865	24	21.89	1	20.95	2	19.49	3
		26705	24	21.86	1	20.93	2	19.47	3
	8M	27025	24	21.96	1	21.06	2	19.51	3
		26865	24	21.94	1	20.96	2	19.52	3
		26705	24	21.96	1	20.99	2	19.61	3
	8L	27025	24	21.95	1	21.06	2	19.61	3
		26865	24	21.91	1	20.97	2	19.45	3
		26705	24	21.96	1	20.94	2	19.53	3
	15	27025	24	21.92	1	20.96	2	19.55	3
		26865	24	21.89	1	20.88	2	19.42	3
		26705	24	21.89	1	20.85	2	19.50	3
5M Hz	1H	27015	24	22.99	0	21.95	1	20.42	2
		26865	24	22.98	0	22.02	1	20.89	2
		26715	24	22.92	0	22.40	1	20.60	2
	1M	27015	24	23.11	0	22.11	1	20.67	2
		26865	24	23.15	0	22.19	1	20.43	2
		26715	24	23.07	0	22.42	1	20.58	2
	1L	27015	24	22.96	0	21.95	1	20.45	2
		26865	24	23.01	0	22.02	1	20.69	2
		26715	24	22.88	0	22.33	1	20.54	2
	12H	27015	24	21.90	1	20.94	2	19.46	3
		26865	24	21.88	1	20.98	2	19.47	3
		26715	24	21.92	1	21.04	2	19.49	3
	12M	27015	24	21.99	1	21.01	2	19.60	3
		26865	24	21.97	1	21.03	2	19.49	3
		26715	24	21.97	1	21.10	2	19.53	3
	12L	27015	24	22.00	1	21.03	2	19.58	3
		26865	24	21.92	1	21.00	2	19.51	3
		26715	24	21.88	1	21.02	2	19.63	3
	25	27015	24	21.94	1	20.92	2	19.47	3
		26865	24	21.92	1	20.98	2	19.56	3
		26715	24	21.91	1	21.00	2	19.50	3

		26990	24	22.97	0	21.88	1	20.75	2
		26865	24	22.95	0	21.82	1	20.77	2
		26750	24	23.02	0	22.31	1	20.86	2
10M Hz	1H	26990	24	22.96	0	21.97	1	20.81	2
		26865	24	23.07	0	21.91	1	20.65	2
		26750	24	23.05	0	22.33	1	20.70	2
	1L	26990	24	22.90	0	21.87	1	20.69	2
		26865	24	22.90	0	21.75	1	20.42	2
		26750	24	22.96	0	22.21	1	20.59	2
	25H	26990	24	21.87	1	21.04	2	19.54	3
		26865	24	21.93	1	20.99	2	19.45	3
		26750	24	21.98	1	21.04	2	19.56	3
	25M	26990	24	21.98	1	21.09	2	19.58	3
		26865	24	21.99	1	21.03	2	19.53	3
		26750	24	21.99	1	21.04	2	19.50	3
	25L	26990	24	21.99	1	21.13	2	19.69	3
		26865	24	21.99	1	21.08	2	19.60	3
		26750	24	21.94	1	21.02	2	19.61	3
	50	26990	24	21.93	1	21.00	2	19.51	3
		26865	24	21.99	1	20.98	2	19.55	3
		26750	24	21.96	1	21.01	2	19.48	3
15M Hz	1H	26965	24	23.09	0	22.27	1	20.54	2
		26865	24	23.03	0	22.27	1	20.63	2
		26775	24	22.98	0	21.87	1	20.82	2
	1M	26965	24	23.04	0	22.28	1	20.68	2
		26865	24	23.05	0	22.29	1	20.64	2
		26775	24	22.93	0	21.88	1	20.48	2
	1L	26965	24	22.96	0	22.21	1	20.67	2
		26865	24	22.96	0	22.30	1	20.65	2
		26775	24	22.93	0	21.81	1	20.75	2
	36H	26965	24	22.04	1	21.00	2	19.46	3
		26865	24	22.06	1	20.99	2	19.51	3
		26775	24	22.03	1	21.03	2	19.51	3
	36M	26965	24	22.12	1	21.12	2	19.55	3
		26865	24	22.05	1	21.00	2	19.57	3
		26775	24	22.03	1	21.03	2	19.51	3
	36L	26965	24	22.05	1	21.09	2	19.78	3
		26865	24	22.05	1	21.00	2	19.52	3
		26775	24	22.03	1	21.02	2	19.61	3
75	75	26965	24	22.07	1	21.06	2	19.56	3
		26865	24	22.05	1	21.04	2	19.49	3
		26775	24	22.03	1	21.04	2	19.58	3

**Table 11-16 LTE2500-TDD41 #1 PC3 AP ON**

LTE2500-TDD41 #1 PC3 AP ON				Measured Power (dBm) & MPR					
BandWidth	RB No./Start	Channel	Tune-up	QPSK		16QAM		64QAM	
				Measured Power	MPR	Measured Power	MPR	Measured Power	MPR
5MHz	1H	41565	22.50	22.12	0	21.08	1	19.96	2
		41093	22.50	22.18	0	21.18	1	19.87	2
	1M	40620	22.50	22.09	0	20.95	1	19.93	2
		40148	22.50	22.09	0	21.00	1	19.87	2
		39675	22.50	22.25	0	21.26	1	20.07	2
	1L	41565	22.50	22.01	0	20.98	1	19.97	2
		41093	22.50	22.06	0	21.06	1	19.93	2
		40620	22.50	22.02	0	20.85	1	19.90	2
		40148	22.50	21.99	0	20.92	1	19.89	2
		39675	22.50	22.20	0	21.19	1	20.10	2
	12H	41565	22.50	22.13	0	21.10	1	20.07	2
		41093	22.50	22.15	0	21.17	1	19.98	2
		40620	22.50	22.11	0	20.94	1	20.00	2
		40148	22.50	22.08	0	20.99	1	19.93	2
		39675	22.50	22.21	0	21.22	1	20.07	2
	12M	41565	22.50	21.07	1	19.98	2	19.42	3
		41093	22.50	21.04	1	20.08	2	19.23	3
		40620	22.50	20.99	1	19.97	2	19.40	3
		40148	22.50	21.06	1	19.94	2	19.27	3
		39675	22.50	21.13	1	20.15	2	19.42	3
	12L	41565	22.50	21.11	1	20.05	2	19.38	3
		41093	22.50	21.08	1	20.10	2	19.26	3
		40620	22.50	21.04	1	20.03	2	19.41	3
		40148	22.50	21.11	1	19.99	2	19.21	3
		39675	22.50	21.16	1	20.19	2	19.43	3
	25	41565	22.50	21.06	1	19.99	2	19.45	3
		41093	22.50	21.03	1	20.03	2	19.30	3
		40620	22.50	20.99	1	19.96	2	19.36	3
		40148	22.50	21.02	1	19.93	2	19.25	3
		39675	22.50	21.10	1	20.13	2	19.45	3
10MHz	1H	41540	22.50	22.18	0	21.22	1	19.99	2
		41080	22.50	22.13	0	21.10	1	19.91	2
		40620	22.50	22.11	0	21.00	1	20.03	2
		40160	22.50	22.12	0	21.19	1	19.92	2
		39700	22.50	22.35	0	21.15	1	20.07	2
	1M	41540	22.50	22.30	0	21.48	1	19.91	2
		41080	22.50	22.25	0	21.31	1	19.84	2
		40620	22.50	22.28	0	21.26	1	19.90	2
		40160	22.50	22.31	0	21.46	1	19.87	2
		39700	22.50	22.32	0	21.40	1	19.95	2
	1L	41540	22.50	22.15	0	21.21	1	20.01	2
		41080	22.50	22.10	0	21.06	1	19.95	2
		40620	22.50	22.12	0	20.99	1	20.03	2
		40160	22.50	22.10	0	21.18	1	19.94	2
		39700	22.50	22.15	0	21.13	1	20.08	2
	25H	41540	22.50	21.08	1	20.08	2	19.41	3
		41080	22.50	21.09	1	20.06	2	19.31	3
		40620	22.50	21.03	1	19.97	2	19.49	3
		40160	22.50	21.04	1	20.02	2	19.45	3
		39700	22.50	21.07	1	20.19	2	19.46	3
	25M	41540	22.50	21.07	1	20.06	2	19.46	3
		41080	22.50	21.03	1	20.02	2	19.32	3
		40620	22.50	21.01	1	19.95	2	19.43	3
		40160	22.50	21.02	1	20.07	2	19.33	3
		39700	22.50	21.12	1	20.12	2	19.50	3
	25L	41540	22.50	21.11	1	20.13	2	19.45	3
		41080	22.50	21.07	1	20.05	2	19.35	3
		40620	22.50	21.01	1	20.02	2	19.42	3
		40160	22.50	21.02	1	20.04	2	19.28	3

		39700	22.50	21.10	1	20.10	2	19.39	3
50	1H	41540	22.50	21.10	1	20.09	2	19.34	3
		41080	22.50	21.05	1	20.07	2	19.29	3
		40620	22.50	21.01	1	19.96	2	19.37	3
		40160	22.50	21.01	1	20.05	2	19.25	3
		39700	22.50	21.18	1	20.17	2	19.43	3
		41515	22.50	22.05	0	21.06	1	19.96	2
15MHz	1M	41068	22.50	22.02	0	21.13	1	19.87	2
		40620	22.50	22.05	0	20.98	1	19.87	2
		40173	22.50	22.00	0	21.01	1	19.85	2
		39725	22.50	22.13	0	21.21	1	20.05	2
		41515	22.50	22.04	0	21.07	1	19.94	2
	1L	41068	22.50	22.07	0	21.14	1	19.85	2
		40620	22.50	22.10	0	21.00	1	19.96	2
		40173	22.50	22.07	0	21.08	1	19.86	2
		39725	22.50	22.16	0	21.27	1	20.07	2
		41515	22.50	22.07	0	21.08	1	20.03	2
	36H	41068	22.50	22.06	0	21.10	1	19.92	2
		40620	22.50	22.08	0	20.98	1	20.01	2
		40173	22.50	22.04	0	21.04	1	19.91	2
		39725	22.50	22.13	0	21.21	1	20.06	2
		41515	22.50	21.12	1	20.01	2	19.21	3
	36M	41068	22.50	21.13	1	20.08	2	19.26	3
		40620	22.50	21.03	1	19.97	2	19.28	3
		40173	22.50	21.06	1	20.00	2	19.21	3
		39725	22.50	21.22	1	20.11	2	19.36	3
		41515	22.50	21.14	1	20.03	2	19.26	3
	36L	41068	22.50	21.11	1	20.04	2	19.18	3
		40620	22.50	21.04	1	19.97	2	19.25	3
		40173	22.50	21.07	1	20.01	2	19.29	3
		39725	22.50	21.15	1	20.10	2	19.39	3
		41515	22.50	21.09	1	19.98	2	19.47	3
	75	41068	22.50	21.10	1	20.06	2	19.19	3
		40620	22.50	21.05	1	19.97	2	19.31	3
		40173	22.50	21.06	1	19.99	2	19.22	3
		39725	22.50	21.17	1	20.10	2	19.30	3
		41515	22.50	21.08	1	20.07	2	19.37	3
20MHz	1H	41068	22.50	21.12	1	20.08	2	19.25	3
		40620	22.50	21.01	1	19.99	2	19.28	3
		40185	22.50	21.06	1	20.00	2	19.21	3
		39750	22.50	21.15	1	20.09	2	19.31	3
		41490	22.50	22.13	0	21.10	1	19.91	2
	1M	41055	22.50	22.15	0	21.01	1	19.81	2
		40620	22.50	22.17	0	21.23	1	19.91	2
		40185	22.50	22.11	0	21.06	1	19.87	2
		39750	22.50	22.23	0	21.09	1	19.98	2
		41490	22.50	22.21	0	21.12	1	20.05	2
	1L	41055	22.50	22.24	0	21.08	1	19.98	2
		40620	22.50	22.21	0	21.24	1	19.87	2
		40185	22.50	22.17	0	21.10	1	20.02	2
		39750	22.50	22.32	0	21.16	1	20.16	2
		41490	22.50	22.07	0	21.08	1	19.99	2
	50H	41055	22.50	22.20	0	21.06	1	19.97	2
		40620	22.50	22.18	0	21.19	1	20.05	2
		40185	22.50	22.09	0	21.04	1	19.85	2
		39750	22.50	22.27	0	21.06	1	20.06	2
		41490	22.50	21.08	1	20.00	2	19.26	3
	50M	41055	22.50	21.09	1	20.09	2	19.21	3
		40620	22.50	21.04	1	20.07	2	19.27	3
		40185	22.50	20.99	1	19.97	2	19.09	3
		39750	22.50	21.23	1	20.18	2	19.47	3
		41490	22.50	21.15	1	20.11	2	19.36	3
	50L	41055	22.50	21.09	1	20.10	2	19.26	3
		40620	22.50	21.06	1	20.12	2	19.29	3
		40185	22.50	21.07	1	20.07	2	19.21	3
		39750	22.50	21.23	1	20.19	2	19.46	3
		41490	22.50	21.06	1	20.00	2	19.42	3
	100	41055	22.50	21.09	1	20.07	2	19.34	3
		40620	22.50	21.07	1	20.09	2	19.40	3
		40185	22.50	21.06	1	20.02	2	19.18	3
		39750	22.50	21.14	1	20.08	2	19.23	3
		41490	22.50	21.07	1	20.07	2	19.34	3
		41055	22.50	21.09	1	20.10	2	19.35	3
		40620	22.50	21.08	1	20.07	2	19.39	3
		40185	22.50	21.03	1	20.00	2	19.18	3
		39750	22.50	21.21	1	20.13	2	19.38	3