

# Test Report

FCC ID: 2AM87-C86

Date of issue: Mar. 30, 2020

Report number:	MTi20031118-5E1
Sample description:	CAR FM TRANSMITTER
Model(s):	MNCA100, FMBTIS, C86
Applicant:	INTRO UNION ELECTRONICS CO., LIMITED
Address:	6F, F BUILDING, EAST AREA NO.8, SHANGXUE TECH-CITY, BANTIAN, LONGGANG, SHENZHEN.
Date of test:	Mar. 12, 2020 – Mar. 30, 2020

Shenzhen Microtest Co., Ltd.  
<http://www.mtitest.com>



## Table of Contents

<b>1</b>	<b>GENERAL DESCRIPTION</b>	<b>4</b>
1.1	DESCRIPTIONS OF EUT	4
1.2	199 CHANNELS ARE PROVIDED TO FM CHANNEL LIST	4
1.3	FREQUENCY CHANNEL UNDER TEST	4
1.4	ANCILLARY EQUIPMENT LIST	4
1.5	DESCRIPTION OF SUPPORT UNITS	4
<b>2</b>	<b>SUMMARY OF TEST RESULTS</b>	<b>6</b>
<b>3</b>	<b>TEST FACILITIES AND ACCREDITATIONS</b>	<b>7</b>
3.1	TEST LABORATORY	7
3.2	ENVIRONMENTAL CONDITIONS	7
3.3	MEASUREMENT UNCERTAINTY	7
3.4	TEST SOFTWARE	7
<b>4</b>	<b>EQUIPMENT LIST</b>	<b>8</b>
<b>5</b>	<b>TEST RESULT</b>	<b>9</b>
5.1	ANTENNA REQUIREMENT	9
5.1.1	Standard requirement	9
5.1.2	EUT antenna description	9
5.2	AC POWER LINE CONDUCTED EMISSION	10
5.2.1	Limit	10
5.2.2	Test method	10
5.2.3	Test Result	10
5.3	FIELD STRENGTH OF FUNDAMENTAL AND HARMONIC EMISSIONS	11
5.3.1	Limits	11
5.3.2	Test Method	11
5.3.3	Test Result	12
5.4	OPERATING FREQUENCY& OCCUPIED BANDWIDTH	13
5.4.1	Limits	13
5.4.2	Test method	13
5.4.3	Test result	13
5.5	RADIATED EMISSION	14
5.5.1	Limit	14
5.5.2	Test method	14
5.5.3	Test Result	14
	<b>PHOTOGRAPHS OF THE TEST SETUP</b>	<b>19</b>
	<b>PHOTOGRAPHS OF THE EUT</b>	<b>20</b>



# Test Result Certification

Applicant's name: INTRO UNION ELECTRONICS CO., LIMITED

Address: 6F, F BUILDING, EAST AREA NO.8, SHANGXUE TECH-CITY, BANTIAN, LONGGANG, SHENZHEN.

Manufacture's name: INTRO UNION ELECTRONICS CO., LIMITED

Address: 6F, F BUILDING, EAST AREA NO.8, SHANGXUE TECH-CITY, BANTIAN, LONGGANG, SHENZHEN.

Product name: CAR FM TRANSMITTER

Trademark: N/A

Model name: MNCA100, FMBTIS, C86

Standards: FCC Part 15.239

Test procedure: ANSI C63.10-2013  
DA 00-705


This device described above has been tested by Shenzhen Microtest Co., Ltd. and the test results show that the equipment under test (EUT) compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

Tested by: 

Danny Xu Mar. 30, 2020

Reviewed by: 

Leo Su Mar. 30, 2020

Approved by: 

Tom Xue Mar. 30, 2020

## 1 General description

### 1.1 Descriptions of EUT

Product name:	CAR FM TRANSMITTER
Model name:	MNCA100
Series model:	FMBTIS, C86
Difference of series model:	All the models are of the same circuit and RF module, except the model No..
Tx/Rx frequency range:	88.1 MHz to 107.9 MHz
Modulation type:	FM
Power source:	DC 12V from battery
Adapter information:	N/A
Antenna designation:	PCB antenna (Antenna Gain: 0dBi)
Hardware version:	V1.0
Software version:	V1.0

### 1.2 199 channels are provided to FM

Channel List					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	88.1	100	98.0	198	107.8
2	88.2	101	98.1	199	107.9
k	$88.1+0.1(k-1)$	--	--		

### 1.3 Frequency Channel Under Test

Channel	Frequency
Low	88.1MHz
Middle	98.1MHz
High	107.9MHz

### 1.4 Ancillary equipment list

Equipment	Model	S/N	Manufacturer
/	/	/	/

### 1.5 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test



configuration during the tests.

Item	Equipment	Brand	Model/Type No.	Series No.	Note
/	/	/	/	/	
/	/	/	/	/	

Note:

- (1)The support equipment was authorized by Declaration of Confirmation.
- (2)For detachable type I/O cable should be specified the length in cm in 『Length』 column.

## 2 Summary of Test Results

Test procedures according to the technical standards:

Item	FCC Part No.	Description of Test	Result	Remark
1	15.203	Antenna requirement	Pass	
2	15.207	AC power line conducted emission	N/A	
3	15.239 (b)	Field strength of fundamental and harmonic emissions	Pass	
4	15.209	Radiated emission	Pass	
5	15.239 (a)	Operating frequency	Pass	
6	15.239 (a)	Occupied Bandwidth	Pass	

The meaning of symbols: "N/A" – Not Applicable

### 3 Test Facilities and Accreditations

#### 3.1 Test laboratory

Test Laboratory	Shenzhen Microtest Co., Ltd
Location	No.102A & 302A, East Block, Hengfang Industrial Park, Xingye Road, Xixiang, Bao'an District, Shenzhen, Guangdong, China
FCC Registration No.:	448573

#### 3.2 Environmental conditions

Temperature:	15°C~35°C
Humidity	20%~75%
Atmospheric pressure	98kPa~101kPa

#### 3.3 Measurement uncertainty

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %

RF frequency	$1 \times 10^{-7}$
RF power, conducted	$\pm 1.38\text{dB}$
Conducted emission(150kHz~30MHz)	$\pm 0.21\text{dB}$
Radiated emission(30MHz~1GHz)	$\pm 4.68\text{dB}$
Radiated emission (above 1GHz)	$\pm 4.89\text{dB}$
Temperature	$\pm 0.5^\circ\text{C}$
Humidity	$\pm 2 \%$

#### 3.4 Test software

Software Name	Manufacturer	Model	Version
RF Test System	Shenzhen JS tonskend co.,ltd	JS1120-3	2.5.77.0418

#### 4 Equipment list

Equipment No.	Equipment Name	Manufacturer	Model	Serial No.	Calibration date	Due date
MTI-E004	EMI Test Receiver	Rohde&schwarz	ESPI7	100314	2019/10/09	2020/10/08
MTI-E006	TRILOG Broadband Antenna	schwarzbeck	VULB 9163	9163-872	2019/10/15	2020/10/14
MTI-E014	amplifier	Hewlett-Packard	8447D	3113A06150	2019/10/09	2020/10/08
MTI-E036	Single path vehicle AMN(LISN)	Schwarzbeck	NNBM 8124	01175	2019/10/09	2020/10/08
MTI-E038	Low noise active vertical monopole antenna	Schwarzbeck	VAMP 9243	#565	2019/10/16	2020/10/15
MTI-E039	Biconical antenna	Schwarzbeck	BBA 9106	#164	2019/10/15	2020/10/14
MTI-E041	MXG Vector Signal Generator	Agilent	N5182A	MY49060455	2019/04/16	2020/04/15
MTI-E042	ESG Series Analog signal generator	Agilent	E4421B	GB40051240	2019/05/21	2020/05/20
MTI-E044	Thermometer clock humidity monitor	-	HTC-1	/	2019/04/17	2020/04/16
MTI-E062	Log Periodic Antenna	Schwarzbeck	VUSLP 9111B	#312	2018/04/11	2020/04/10
MTI-E063	Log Periodic Dipole Array Antenna	ETS-LINDGREN	3148B	00224524	2018/04/11	2020/04/10
MTI-E065	Amplifier	EMtrace	RP06A	00117	2019/04/29	2020/04/28
MTI-E066	Comprehensive test instrument	Rohde&schwarz	CMW500	149155	2019/04/16	2020/04/15
MTI-E071	PXA Signal Analyzer	Agilent	N9030A	MY51350296	2019/10/25	2020/10/24
MTI-E076	EMI Test Receiver	Rohde&schwarz	ESIB26	100273	2019/04/16	2020/04/15
MTI-E078	Synthesized Sweeper	Agilent	83752A	3610A01957	2019/04/16	2020/04/15
MTI-E079	DC Power Supply	Agilent	E3632A	MY40027695	2019/04/16	2020/04/15
MTI-E093	Artificial mains network	3ctest	LISN J50	ES3911805	2019/04/16	2020/04/15
MTI-E096	Power amplifier	Space-Dtronics	EWLNA0118G-P40	1852001	2019/04/29	2020/04/28
MTI-E097	Current Probe	SOLAR ELECTRONICS CO.	9207-1	220095-1	2019/04/17	2020/04/16
MTI-E098	Loop Sensor	SOLAR ELECTRONICS CO.	7334-1	220095-2	2019/04/21	2020/04/20

Note: the calibration interval of the above test instruments is 12 or 24 months and the calibrations are traceable to international system unit (SI).



## **5 Test Result**

### **5.1 Antenna requirement**

#### **5.1.1 Standard requirement**

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device

#### **5.1.2 EUT antenna description**

The EUT antenna is PCB antenna (0dBi). It comply with the standard requirement. In case of replacement of broken antenna the same antenna type must be used.



**5.2 AC power line conducted emission**

**5.2.1 Limit**

Frequency (MHz)	Limit	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

Note: Decreases with the logarithm of the frequency from 0.15MHz to 0.5MHz.

**5.2.2 Test method**

1. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/50uH of coupling impedance for the measuring instrument.
2. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
3. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
4. LISN is at least 80 cm from nearest part of EUT chassis.
5. The resolution bandwidth of EMI test receiver is set at 9kHz.

**5.2.3 Test Result**

Note: the device is battery powered, so this item is not available.

### 5.3 Field strength of fundamental and harmonic emissions

#### 5.3.1 Limits

§15.239 (b): The field strength of any emissions within the permitted 200 kHz band shall not exceed 250 microvolts/meter at 3 meters. The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply.

#### 5.3.2 Test Method

1. The EUT is placed on a turntable, which is 0.8m above ground plane for test frequency range below 1GHz, and 1.5m above ground plane for test frequency range above 1GHz.

2. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.

3. Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for  $f \geq 1\text{GHz}$

RBW = 100 kHz for  $f < 1\text{GHz}$

VBW  $\geq$  RBW

Sweep = Auto

Detector function = Peak

Trace = max hold

4. Follow the guidelines in ANSI C63.4-2014 with respect to maximizing the emission by rotating the EUT, adjusting the measurement antenna height and polarization, etc. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, submit this data. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.

5. The peak level, once corrected, must comply with the limit specified in Section 15.209. Set the spectrum to

RBW = 1MHz

VBW = 10Hz

Detector = PK for AV value, while maintaining all of the other instrument settings



**5.3.3 Test Result**

Field Strength of Fundamental Emissions and Field strength of spurious emissions Value					
Operating Frequency (MHz)	Field Strength (dBuV/m)	Detector	Limit @3m (dBuV/m)	Margin (dB)	Antenna
88.1	48.15	QP	67.96	19.81	Vertical
	38.37	Average	47.96	9.59	Horizontal
98.1	48.91	QP	67.96	19.05	Vertical
	39.46	Average	47.96	8.50	Horizontal
107.9	47.36	QP	67.96	20.60	Vertical
	38.42	Average	47.96	9.54	Horizontal

## 5.4 Operating frequency & Occupied Bandwidth

### 5.4.1 Limits

**§15.239 (a): Emissions from the intentional radiator shall be confined within a band 200 kHz wide centered on the operating frequency. The 200 kHz band shall lie wholly within the frequency range of 88-108 MHz.**

### 5.4.2 Test method

Use the following spectrum analyzer settings:

Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel

RBW  $\geq 1\%$  of the 20 dB bandwidth

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 20 dB bandwidth and 99% occupied bandwidth of the emission.

### 5.4.3 Test result

Permitted range of operating frequencies				
$F_L$ (KHz) (MHz)	$F_H$ (MHz)	Limit (MHz)		Result
88.0747	107.9264	$F_L \geq 88$	$F_H \leq 108$	Pass

Frequency (MHz)	20dBm emission bandwidth (KHz)	Limit (KHz)
88.1	50.59	200
98.1	52.35	200
107.9	52.81	200

## 5.5 Radiated emission

### 5.5.1 Limit

Emissions radiated outside of the specified frequency bands, except for harmonic emissions, (b) shall be attenuated by at least 50 dB below the level of the fundamental emissions or to the general field strength limits listed in RSS-Gen, whichever is less stringent.

Frequency (MHz)	Field strength $\mu\text{V}/\text{m}$	Field strength $\text{dB}\mu\text{V}/\text{m}$	Detector	Measurement distance
30-88	100	40	QP	3m
88-216	150	43.5	QP	
216-960	200	46	QP	
960-1000	500	54	QP	
Above 1000	500	54	AV	
Above 1000	5000	74	PK	

### 5.5.2 Test method

1. The EUT is placed on a turntable, which is 0.8m above ground plane for test frequency range below 1GHz, and 1.5m above ground plane for test frequency range above 1GHz.

2. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.

3. Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for  $f \geq 1\text{GHz}$

100 kHz for  $f < 1\text{GHz}$ , VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

4. Follow the guidelines in ANSI C63.4-2014 with respect to maximizing the emission by rotating the EUT, adjusting the measurement antenna height and polarization, etc. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, submit this data. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.

5. The peak level, once corrected, must comply with the limit specified in Section 15.209. Set the RBW = 1MHz, VBW = 10Hz, Detector = PK for AV value, while maintaining all of the other instrument settings.

### 5.5.3 Test Result

Remark:


If the PK measured values lower than average mode limit, the EUT shall be deemed to meet average limits and then no additional average mode measurement performed.

## Radiated emission

Between 30MHz – 1GHz

Note: All the modulation modes have been tested, and the worst result was report as below:


EUT:	CAR FM TRANSMITTER	Model Name:	MNCA100
Pressure:	1010 hPa	Phase:	H
Test Mode :	TX (98.1MHz)	Test Voltage :	DC 12V from battery

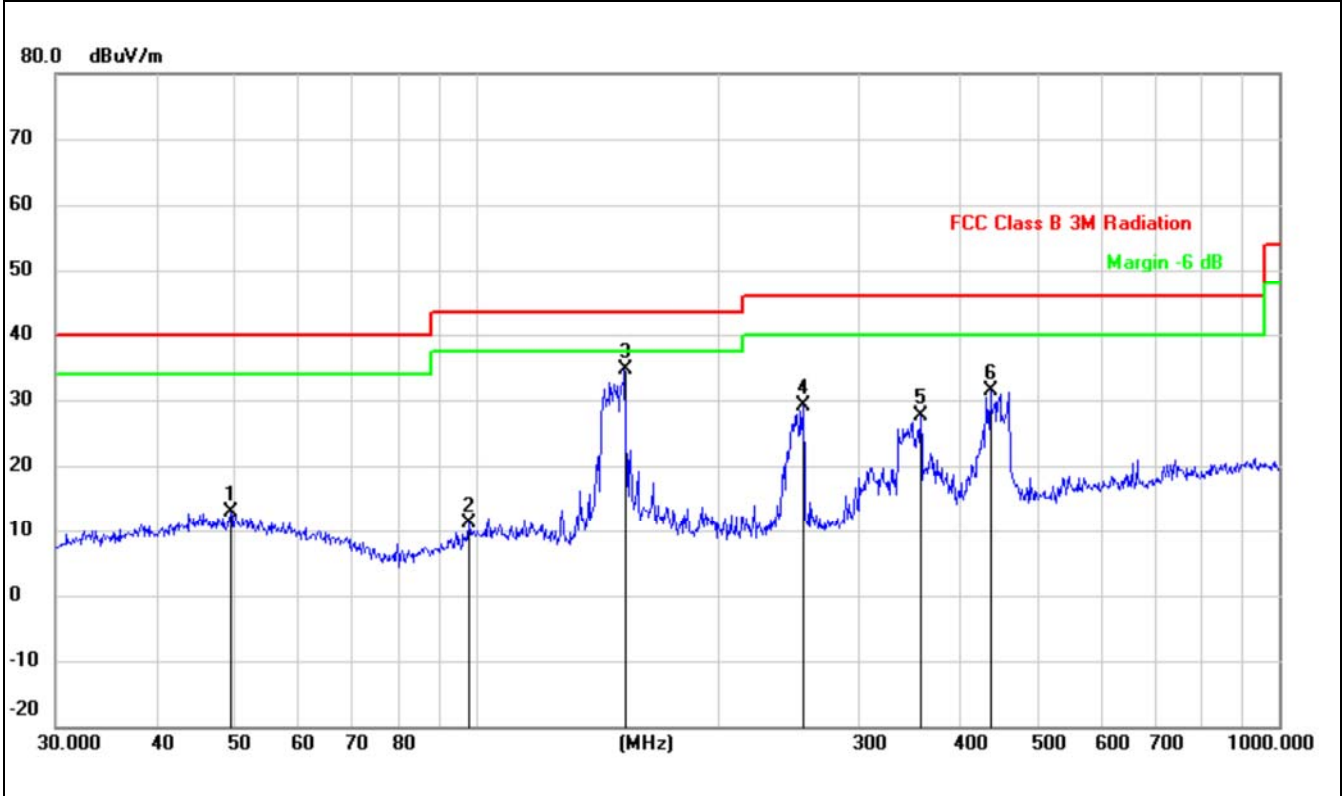

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dBuV/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		49.5328	25.84	-12.98	12.86	40.00	-27.14	QP
2		98.1000	26.20	-15.07	11.13	43.50	-32.37	QP
3	*	153.2004	52.04	-17.46	34.58	43.50	-8.92	QP
4		255.6231	42.11	-13.00	29.11	46.00	-16.89	QP
5		357.9287	38.69	-11.04	27.65	46.00	-18.35	QP
6		437.1199	41.93	-10.43	31.50	46.00	-14.50	QP



EUT:	CAR FM TRANSMITTER	Model Name:	MNCA100
Pressure:	1010 hPa	Phase:	V
Test Mode:	TX (98.1MHz)	Test Voltage:	DC 12V from battery

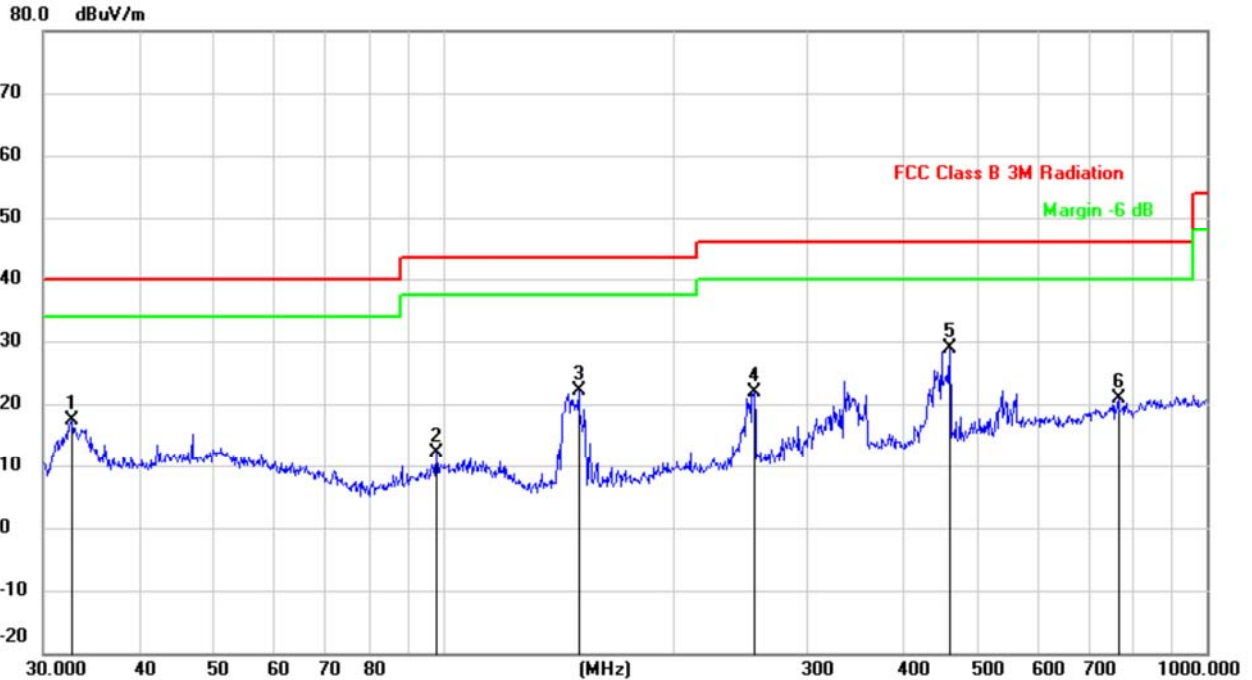


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dBuV/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		32.7486	32.70	-15.38	17.32	40.00	-22.68	QP
2		98.1000	27.29	-15.07	12.22	43.50	-31.28	QP
3		150.5378	39.72	-17.49	22.23	43.50	-21.27	QP
4		255.6231	34.85	-13.00	21.85	46.00	-24.15	QP
5	*	460.7271	39.52	-10.75	28.77	46.00	-17.23	QP
6		766.0571	28.24	-7.36	20.88	46.00	-25.12	QP



**ABOVE 1GHz**


EUT:	CAR FM TRANSMITTER	Model Name:	MNCA100
Pressure:	1010 hPa	Phase:	H
Test Mode:	TX (98.1MHz)	Test Voltage:	DC 12V from battery

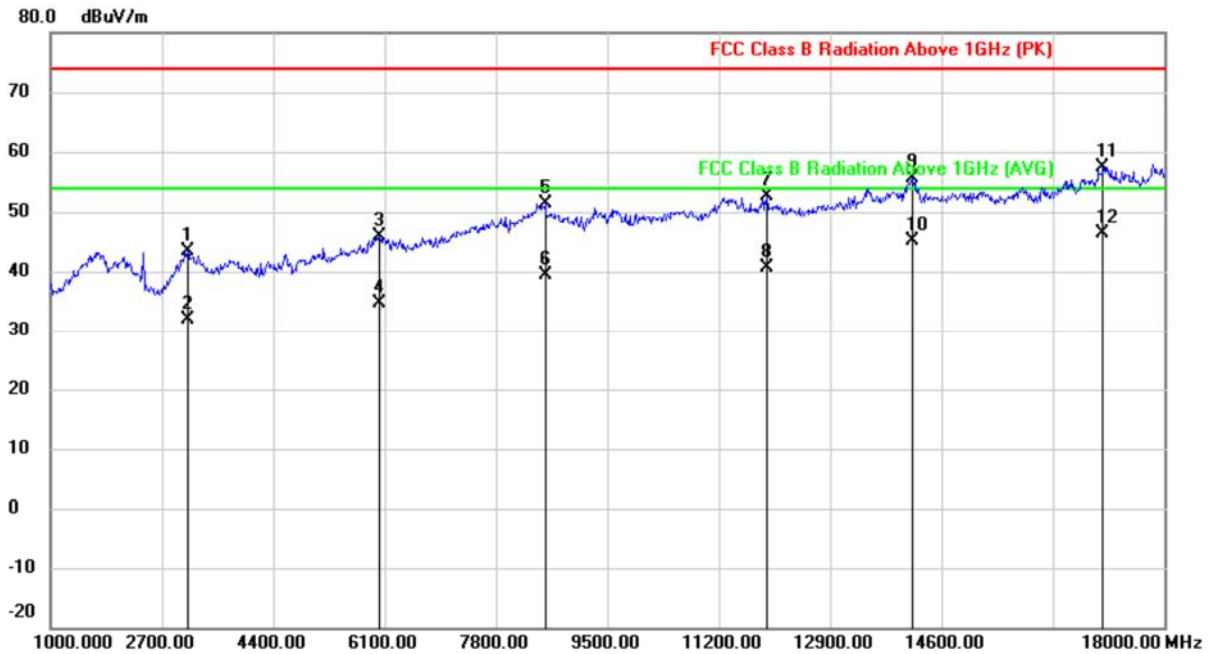

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dBuV/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		3091.000	50.98	-7.65	43.33	74.00	-30.67	peak
2		3091.000	39.53	-7.65	31.88	54.00	-22.12	AVG
3		6015.000	45.41	0.36	45.77	74.00	-28.23	peak
4		6015.000	34.25	0.36	34.61	54.00	-19.39	AVG
5		8548.000	45.46	5.93	51.39	74.00	-22.61	peak
6		8548.000	33.56	5.93	39.49	54.00	-14.51	AVG
7		11931.000	45.01	7.55	52.56	74.00	-21.44	peak
8		11931.000	33.00	7.55	40.55	54.00	-13.45	AVG
9		14158.000	47.88	7.76	55.64	74.00	-18.36	peak
10		14158.000	37.25	7.76	45.01	54.00	-8.99	AVG
11		17065.000	48.91	8.49	57.40	74.00	-16.60	peak
12	*	17065.000	37.88	8.49	46.37	54.00	-7.63	AVG



EUT:	CAR FM TRANSMITTER	Model Name:	MNCA100
Pressure:	1010 hPa	Phase:	V
Test Mode:	TX (98.1MHz)	Test Voltage:	DC 12V from battery

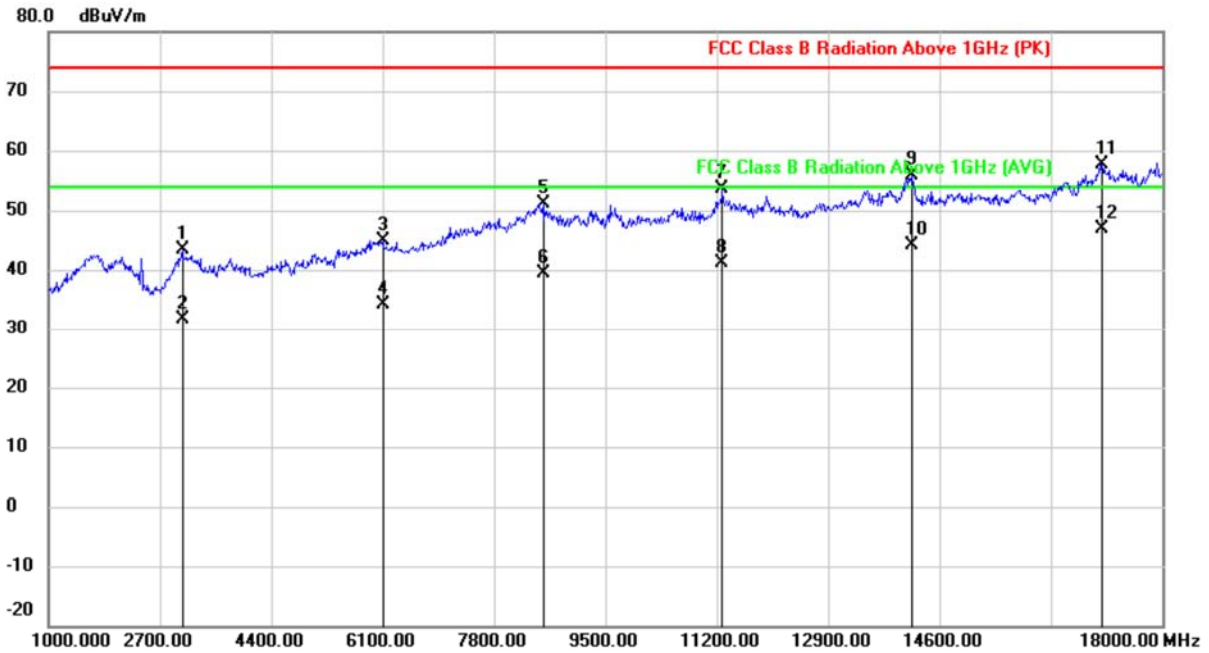


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dBuV/m	Measurement dBuV/m	Limit dBuV/m	Over dB	Detector
1		3040.000	51.03	-7.66	43.37	74.00	-30.63	peak
2		3040.000	39.30	-7.66	31.64	54.00	-22.36	AVG
3		6100.000	44.54	0.38	44.92	74.00	-29.08	peak
4		6100.000	33.65	0.38	34.03	54.00	-19.97	AVG
5		8548.000	45.19	5.93	51.12	74.00	-22.88	peak
6		8548.000	33.41	5.93	39.34	54.00	-14.66	AVG
7		11285.000	46.73	7.02	53.75	74.00	-20.25	peak
8		11285.000	34.06	7.02	41.08	54.00	-12.92	AVG
9		14175.000	48.22	7.77	55.99	74.00	-18.01	peak
10		14175.000	36.40	7.77	44.17	54.00	-9.83	AVG
11		17082.000	49.17	8.50	57.67	74.00	-16.33	peak
12	*	17082.000	38.31	8.50	46.81	54.00	-7.19	AVG



## PHOTOGRAPHS OF THE TEST SETUP

Radiated emission

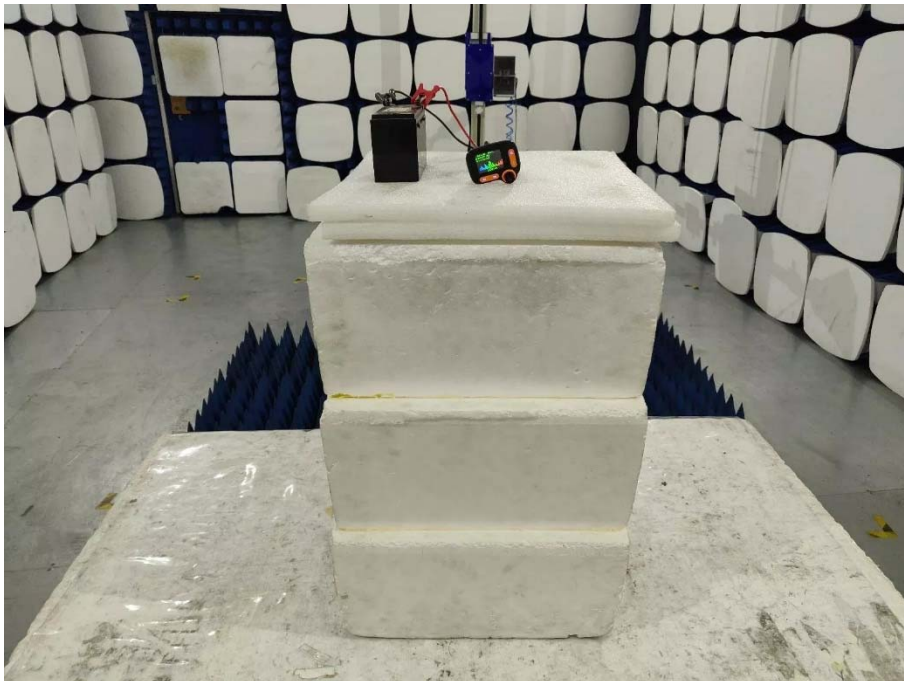

## **PHOTOGRAPHS OF THE EUT**

See the APPENDIX 1: EUT PHOTO in the report No.: MTi20031118-5E1-1.

**----END OF REPORT----**