
FCC Test Report

Report No.: AGC07266170701FE06

FCC ID : 2AM87-HY82

APPLICATION PURPOSE : Original Equipment

PRODUCT DESIGNATION : BLUETOOTH FM TRANSMITTER

BRAND NAME : N/A

MODEL NAME : HY82, BT08, HY82S, BT08S, HY88

CLIENT : INTRO UNION ELECTRONICS CO, LIMITED

DATE OF ISSUE : July 10, 2017

STANDARD(S) : FCC Part 15.239

REPORT VERSION : V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd



CAUTION:

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	July 10, 2017	Valid	Original Report

TABLE OF CONTENTS

1. VERIFICATION OF CONFORMITY 4

2. GENERAL INFORMATION..... 5

 2.1. PRODUCT DESCRIPTION 5

3. MEASUREMENT UNCERTAINTY..... 6

4. DESCRIPTION OF TEST MODES..... 6

5. SYSTEM TEST CONFIGURATION 6

 5.1. EQUIPMENT USED IN EUT SYSTEM..... 6

 5.2. SUMMARY OF TEST RESULTS 6

6. TEST FACILITY..... 7

7. RADIATED EMISSION..... 8

 7.1. MEASUREMENT PROCEDURE..... 8

 7.2. TEST SETUP 9

 7.3. TEST RESULT FOR FIELD STRENGTH OF FUNDAMENTAL..... 10

 8.4. TEST RESULT FOR FIELD STRENGTH OF BAND EDGE EMISSION..... 10

 7.5. TEST RESULT FOR SPURIOUS EMISSION 11

8. BANDWIDTH..... 13

 8.1. MEASUREMENT PROCEDURE..... 13

 8.2. TEST SETUP 13

 8.3. TEST RESULT 14

APPENDIX A: PHOTOGRAPHS OF TEST SETUP..... 16

APPENDIX B: PHOTOGRAPHS OF EUT 17


1. VERIFICATION OF CONFORMITY

Applicant	INTRO UNION ELECTRONICS CO, LIMITED
Address	6F, F BUILDING, EAST AREA NO.8, SHANGXUE TECH-CITY, BANTIAN, LONGGANG, SHENZHEN, CHINA
Manufacturer	INTRO UNION ELECTRONICS CO, LIMITED
Address	6F, F BUILDING, EAST AREA NO.8, SHANGXUE TECH-CITY, BANTIAN, LONGGANG, SHENZHEN, CHINA
Product Designation	BLUETOOTH FM TRANSMITTER
Brand Name	N/A
Test Model	HY82
Series Model	BT08, HY82S, BT08S, HY88
Model Difference	All the same except for the model name and appearance.
Date of test	July 08, 2017 to July 10, 2017
Deviation	None
Condition of Test Sample	Normal
Report Template	AGCRT-US-BR/RF (2013-03-01)

We hereby certify that:

The above equipment was tested by Dongguan Precise Testing Service Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC part 15.239.

Tested by




Max Zhang(Zhang Yi) July 10, 2017

Reviewed by



Bart Xie(Xie Xiaobin)) July 10, 2017

Approved by

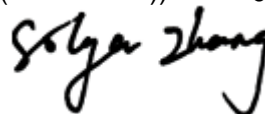

Solger Zhang(Zhang Hongyi)
Authorized Officer July 10, 2017

2. GENERAL INFORMATION

2.1. PRODUCT DESCRIPTION

A major technical description of EUT is described as following

Operation Frequency	88.1MHz-107.9MHz
Field Strength(3m)	44.85dBuV/m(AV)@3m
Modulation	FM
Number of channels	199(Channel spacing 100kHz)
Hardware Version	V1.0
Software Version	V1.0
Antenna Designation	Integrated Antenna (Met 15.203 Antenna requirement)
Power Supply	DC 12V/24V

NOTE: 1. About the EUT, please refer to User's Manual.

3. MEASUREMENT UNCERTAINTY

Conducted measurement: +/- 3.18dB

Radiated measurement: +/- 3.91dB

4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION
1	Transmitting mode(Low channel)
2	Transmitting mode(Middle channel)
3	Transmitting mode(High channel)
Note: 1. For Radiated Emission, 3axis were chosen for testing for each applicable mode. 2. All the requirements have been tested by modulating the transmitter with a 2.5 kHz tone at a fixed level which set to the manufacturer's maximum rated input to the modulator. 3. Only the result of the worst case was recorded in the report, if no other cases.	

5. SYSTEM TEST CONFIGURATION

5.1. EQUIPMENT USED IN EUT SYSTEM

Item	Equipment	Model No.	ID or Specification	Remark
1	BLUETOOTH FM TRANSMITTER	HY82	2AM87-HY82	EUT
2	Car battery	N/A	N/A	Support

5.2. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
15.239	Field Strength of Fundamental and Spurious Emission	Compliant
15.215	Bandwidth	Compliant
15.209	Line Conducted Emission	Compliant

6. TEST FACILITY

Site	Dongguan Precise Testing Service Co., Ltd.
Location	Building D, Baoding Technology Park, Guangming Road2, Dongcheng District, Dongguan, Guangdong, China.
FCC Registration No.	371540
Description	The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.4:2014.

ALL TEST EQUIPMENT LIST

Radiated Emission Test Site					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI Test Receiver	Rohde & Schwarz	ESCI	101417	July 2, 2017	July 1, 2018
Trilog Broadband Antenna (25M-1GHz)	SCHWARZBECK	VULB9160	9160-3355	July 2, 2017	July 1, 2018
Signal Amplifier	SCHWARZBECK	BBV 9475	9745-0013	July 2, 2017	July 1, 2018
RF Cable	SCHWARZBECK	AK9515E	96221	July 2, 2017	July 1, 2018
3m Anechoic Chamber	CHENGYU	966	PTS-001	June 2, 2017	June 1, 2018
MULTI-DEVICE Positioning Controller	Max-Full	MF-7802	MF780208339	N/A	N/A
Active loop antenna (9K-30MHz)	Schwarzbeck	FMZB1519	1519-038	June 2, 2017	June 1, 2018
Spectrum analyzer	Agilent	E4407B	MY46185649	June 2, 2017	June 1, 2018
Power Sensor	Agilent	U2021XA	MY55050474	June 2, 2017	June 1, 2018
Horn Antenna (1G-18GHz)	SCHWARZBECK	BBHA9120D	9120D-1246	June 2, 2017	June 1, 2018
Horn Ant (18G-40GHz)	Schwarzbeck	BBHA 9170	9170-181	June 2, 2017	June 1, 2018

7. RADIATED EMISSION

7.1. MEASUREMENT PROCEDURE


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground and opposite the horn antenna. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions below 1GHz, use 120KHz RBW and VBW \geq 3RBW for QP reading.
7. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High - Low scan is not required in this case.
8. Only the worst case is reported.

The following table is the setting of spectrum analyzer and receiver.


Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RBW 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RBW 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RBW 120KHz for QP

7.2. TEST SETUP

Radiated Emission Test-Setup Frequency Below 30MHz

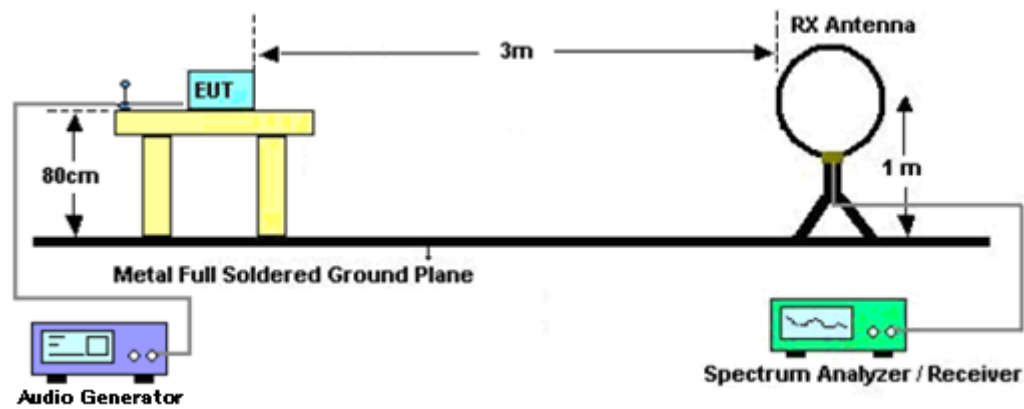

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

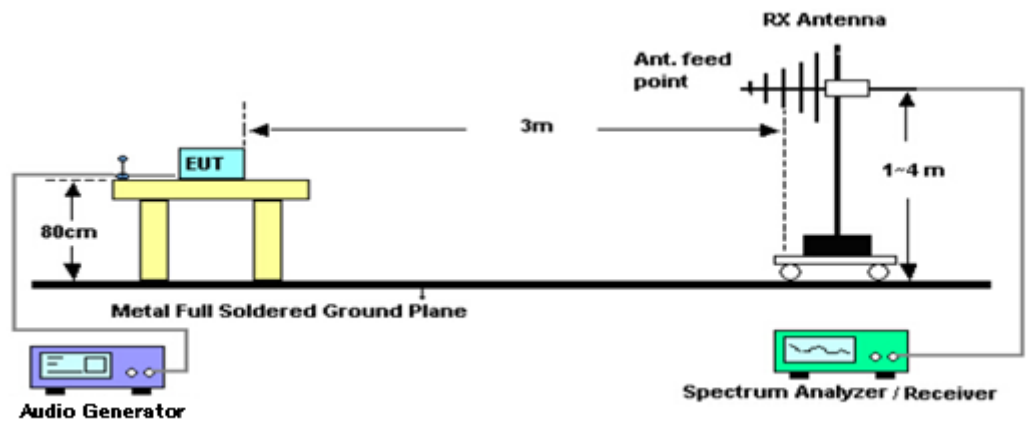

7.3. TEST RESULT FOR FIELD STRENGTH OF FUNDAMENTAL

Frequency MHz	Polarization	Level dB(uV/m) PK	Limit dB(uV/m) PK	Margin dB	Pass/Fail	Detector
88.100	H	46.42	67.96	21.54	Pass	PK
88.100	V	44.12	67.96	23.84	Pass	PK
98.000	H	45.98	67.96	21.98	Pass	PK
98.000	V	43.85	67.96	24.11	Pass	PK
107.900	H	46.24	67.96	21.72	Pass	PK
107.900	V	43.72	67.96	24.24	Pass	PK
Frequency MHz	Polarization	Level dB(uV/m) AV	Limit dB(uV/m) AV	Margin dB	Pass/Fail	Detector
88.100	H	44.85	47.96	3.11	Pass	AV
88.100	V	43.12	47.96	4.84	Pass	AV
88.300	H	44.78	47.96	3.18	Pass	AV
88.300	V	43.02	47.96	4.94	Pass	AV
88.700	H	44.35	47.96	3.61	Pass	AV
88.700	V	42.72	47.96	5.24	Pass	AV

8.4. TEST RESULT FOR FIELD STRENGTH OF BAND EDGE EMISSION

Frequency MHz	Polarization	Level dB(uV/m) QP	Limit dB(uV/m) QP	Margin dB	Pass/Fail	Detector
88.000	H	36.68	40.00	3.32	Pass	QP
88.000	V	35.75	40.00	4.25	Pass	QP
108.000	H	33.98	43.50	9.52	Pass	QP
108.000	V	32.71	43.50	10.79	Pass	QP


Note: The above two frequencies are the worst case for the band edge emission test.

7.5. TEST RESULT FOR SPURIOUS EMISSION

RADIATED EMISSION BELOW 30MHz

No emission found between lowest internal used/generated frequencies to 30MHz.


RADIATED EMISSION BELOW 1GHZ-Horizontal

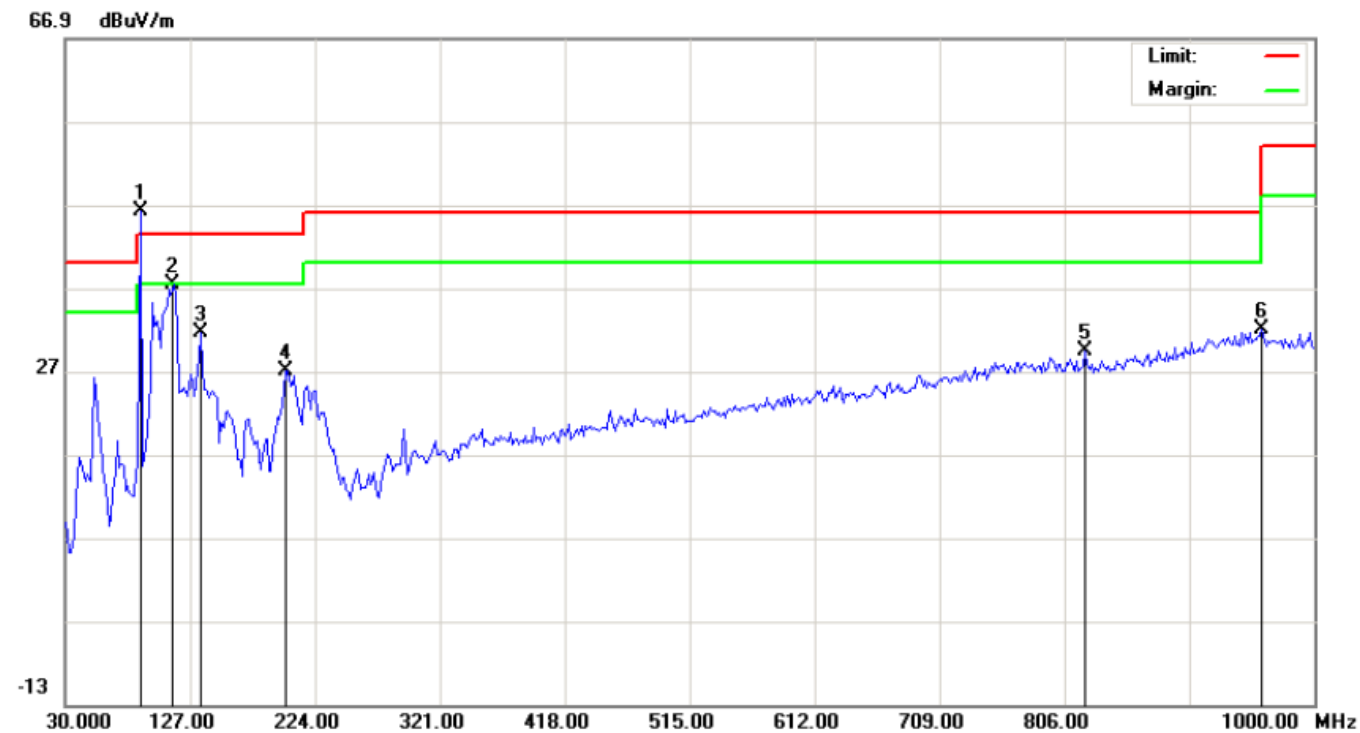

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	88.1000	45.63	0.50	46.13			peak			
2		114.0666	30.16	7.23	37.39	43.50	-6.11	peak			
3		135.0833	18.80	12.90	31.70	43.50	-11.80	peak			
4		201.3667	15.19	11.86	27.05	43.50	-16.45	peak			
5		822.1666	2.07	27.32	29.39	46.00	-16.61	peak			
6		959.5833	2.09	29.91	32.00	46.00	-14.00	peak			

RESULT: PASS

RADIATED EMISSION BELOW 1GHZ-Vertical

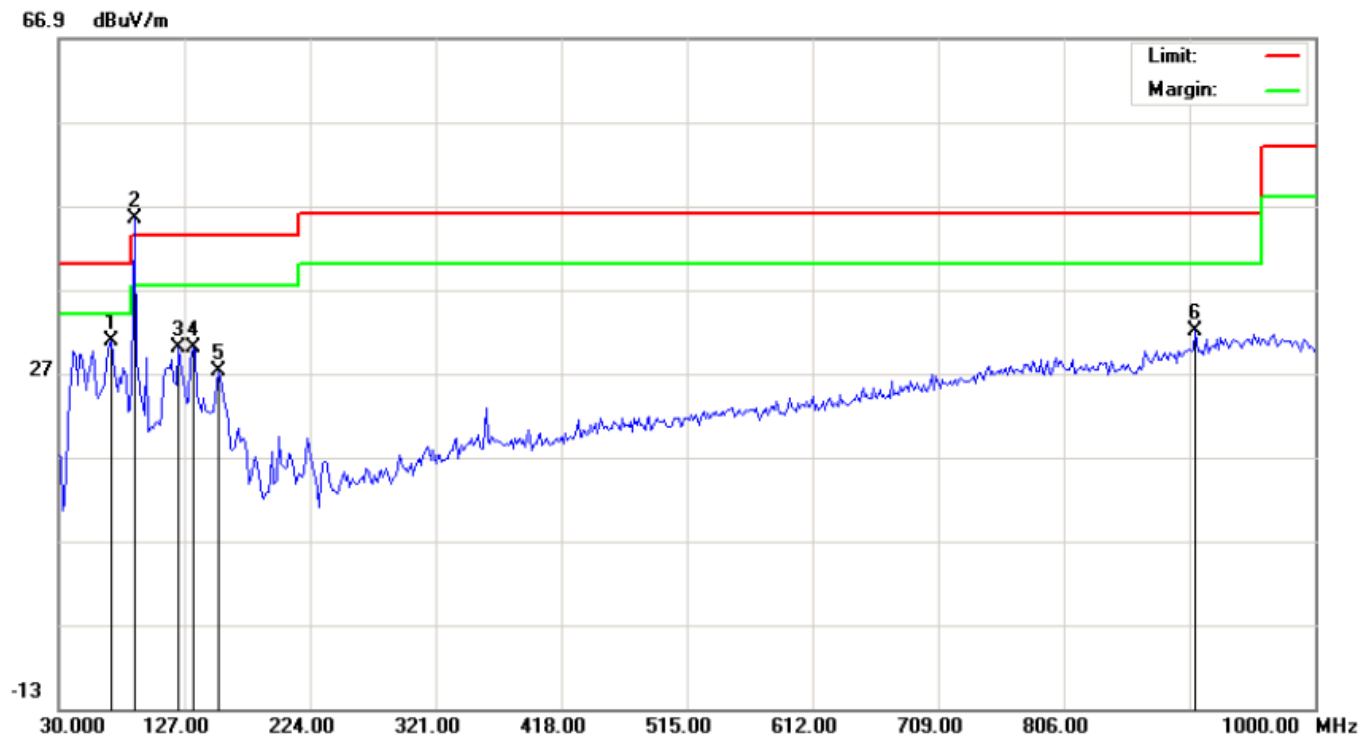

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		70.4167	26.68	4.16	30.84	40.00	-9.16	peak			
2	*	88.1000	40.62	4.74	45.36			peak			
3		122.1500	22.28	7.76	30.04	43.50	-13.46	peak			
4		133.4667	17.54	12.48	30.02	43.50	-13.48	peak			
5		152.8667	11.99	15.28	27.27	43.50	-16.23	peak			
6		907.8500	3.25	28.83	32.08	46.00	-13.92	peak			

RESULT: PASS

Note:


- Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Measurement-Limit.
- The “Factor” value can be calculated automatically by software of measurement system.
- All test modes had been tested. The Low channel is the worst case and recorded in the report.

8. BANDWIDTH

8.1. MEASUREMENT PROCEDURE

1. Set the parameters of SPA as below:
Centre frequency = Operation Frequency
RBW=1KHz
VBW=3KHz
Span: 500kHz
Sweep time: Auto
2. Set the EUT to continue transmitting mode. Allow the trace to stabilize. Use the “N dB down” function of SPA to define the bandwidth.
3. Record the plots and Reported.


8.2. TEST SETUP

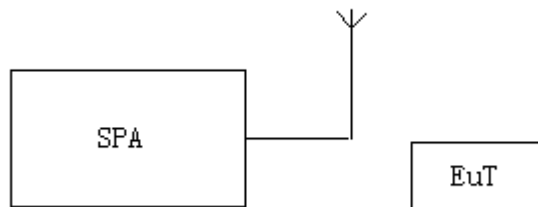


8.3. TEST RESULT

Channel	Channel Frequency(MHz)	-20dB bandwidth (kHz)	Limit(kHz)
Low	88.1	172.0	200
Middle	98.0	171.9	200
High	107.9	171.9	200


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

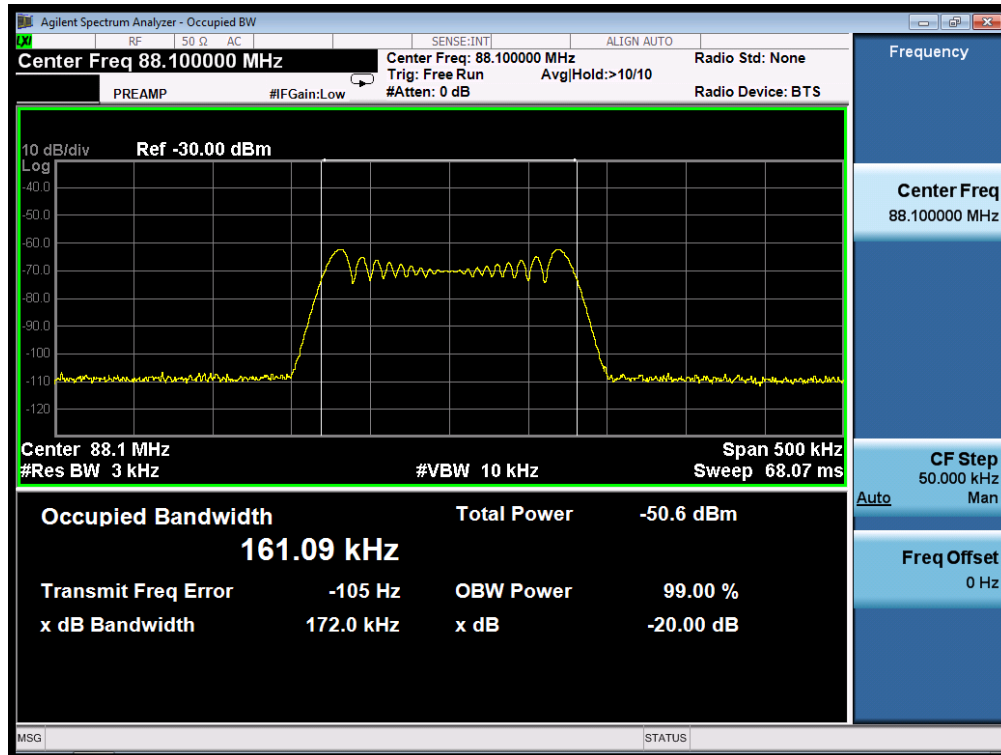


TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

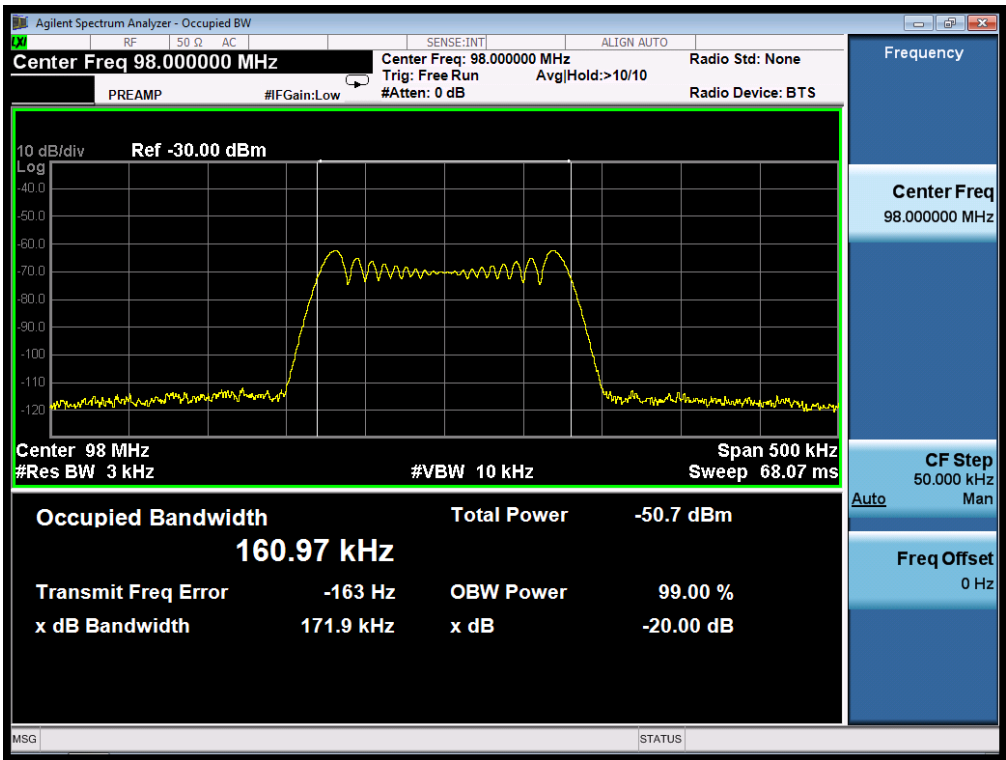

TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

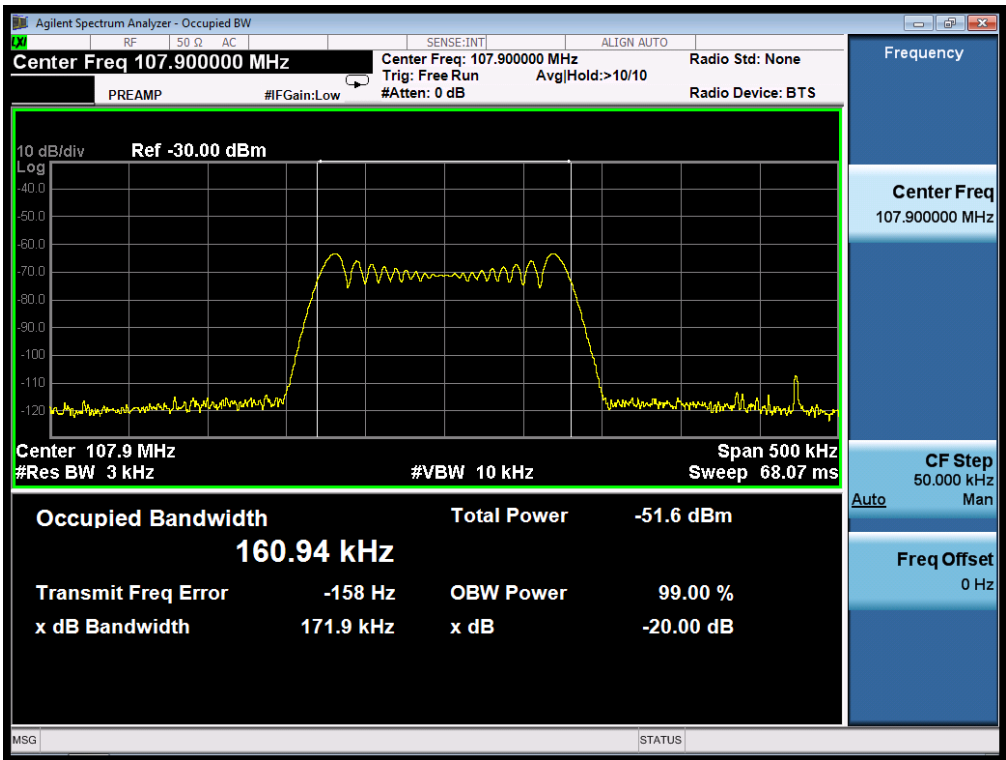

APPENDIX A: PHOTOGRAPHS OF TEST SETUP
RADIATED EMISSION TEST SETUP BELOW 1G

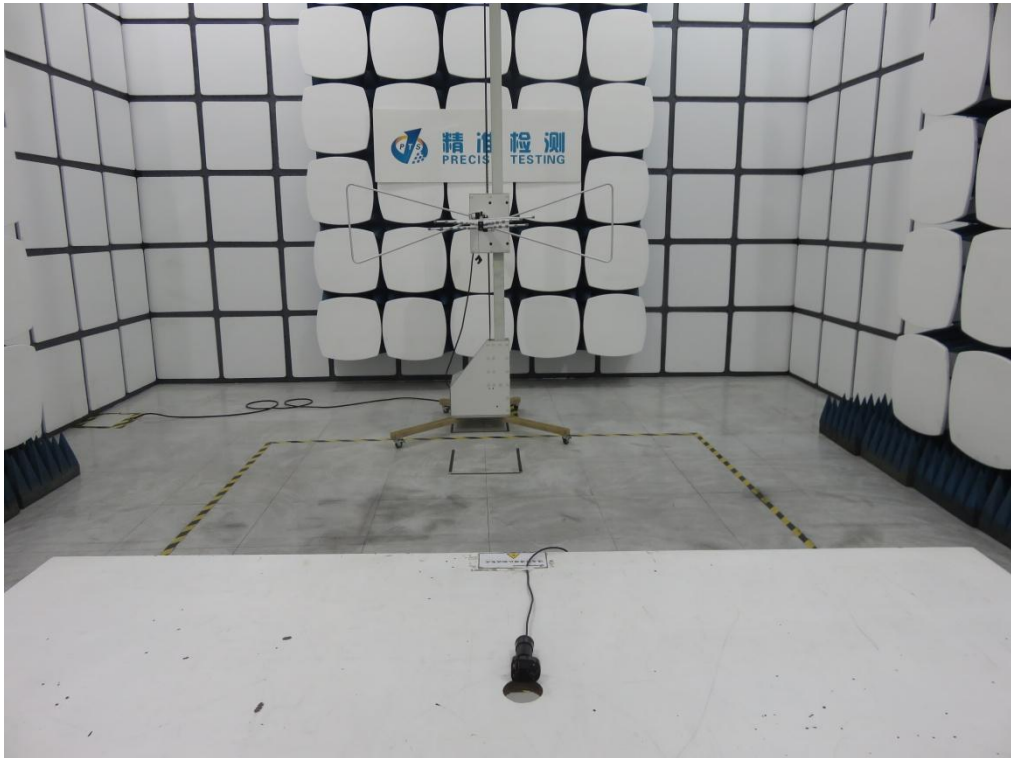

APPENDIX B: PHOTOGRAPHS OF EUT

TOP VIEW OF EUT



BOTTOM VIEW OF EUT



FRONT VIEW OF EUT



BACK VIEW OF EUT



LEFT VIEW OF EUT




RIGHT VIEW OF EUT




OPEN VIEW OF EUT




INTERNAL VIEW OF EUT-1

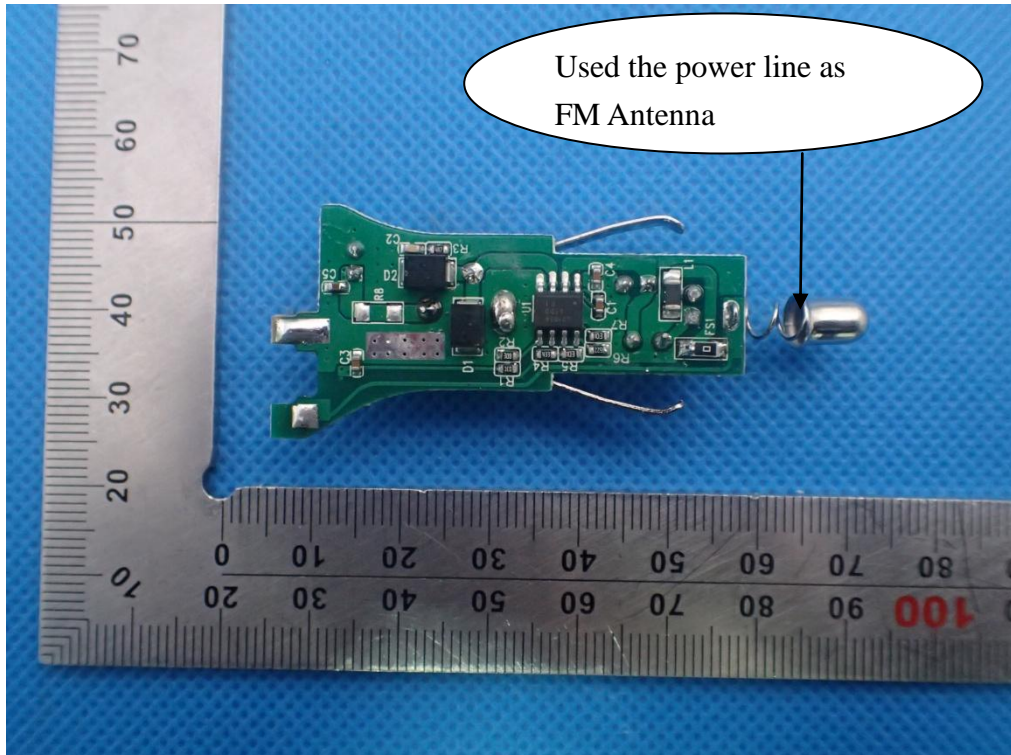


INTERNAL VIEW OF EUT-2

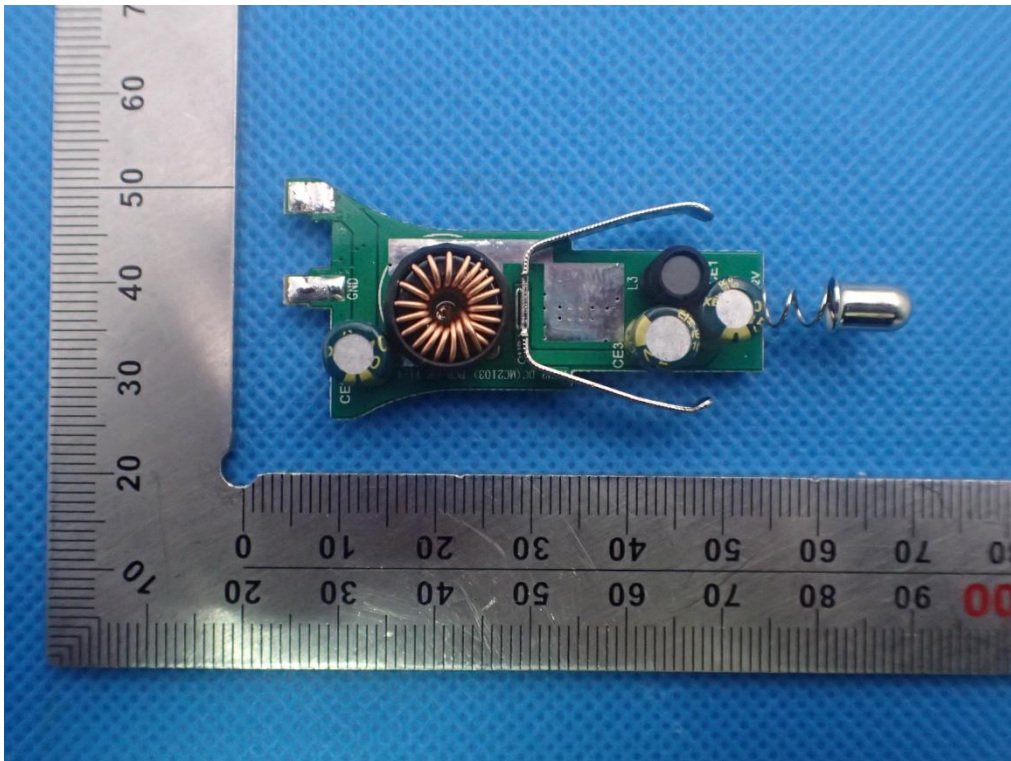


INTERNAL VIEW OF EUT-3

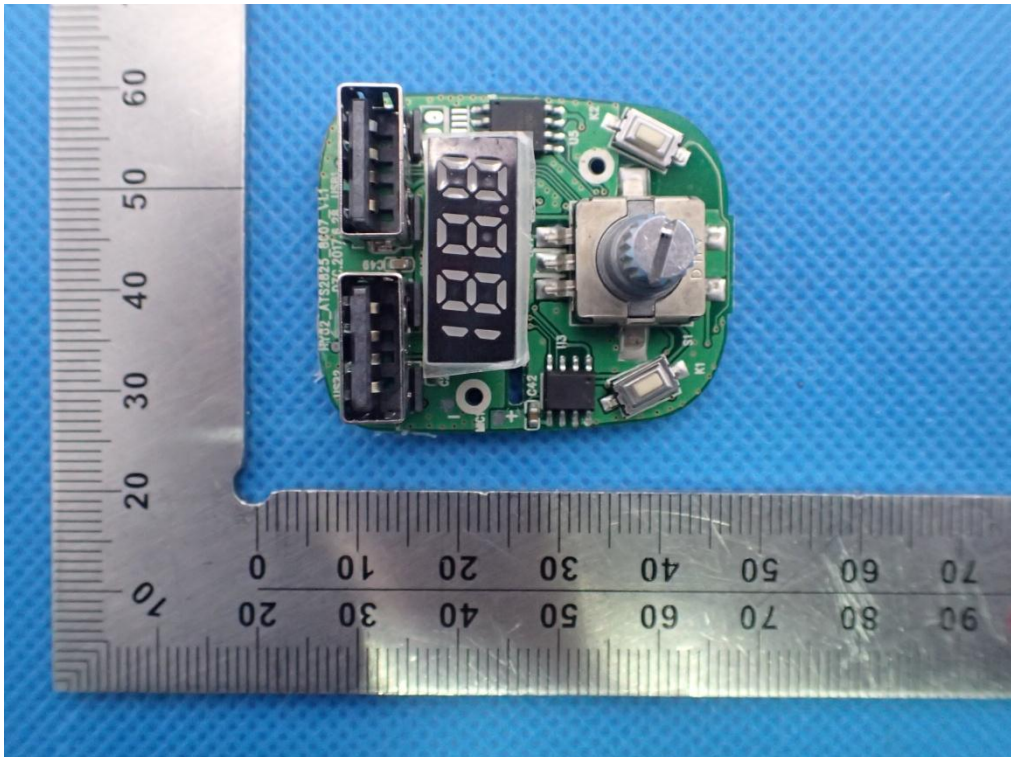

INTERNAL VIEW OF EUT-4

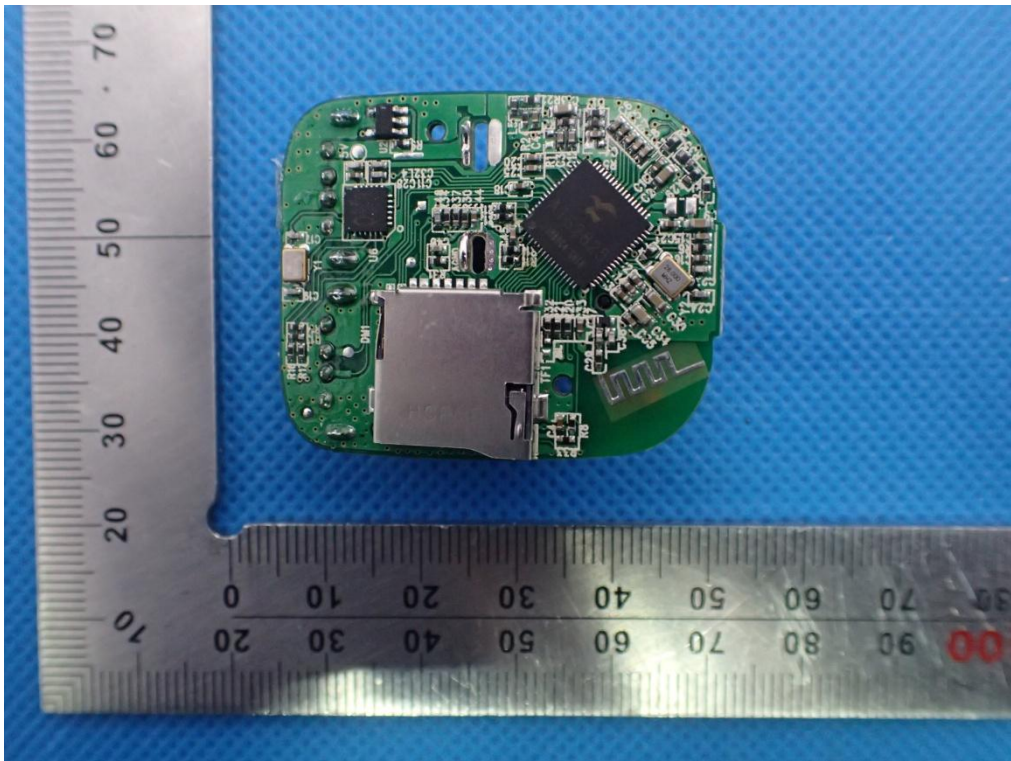

INTERNAL VIEW OF EUT-5

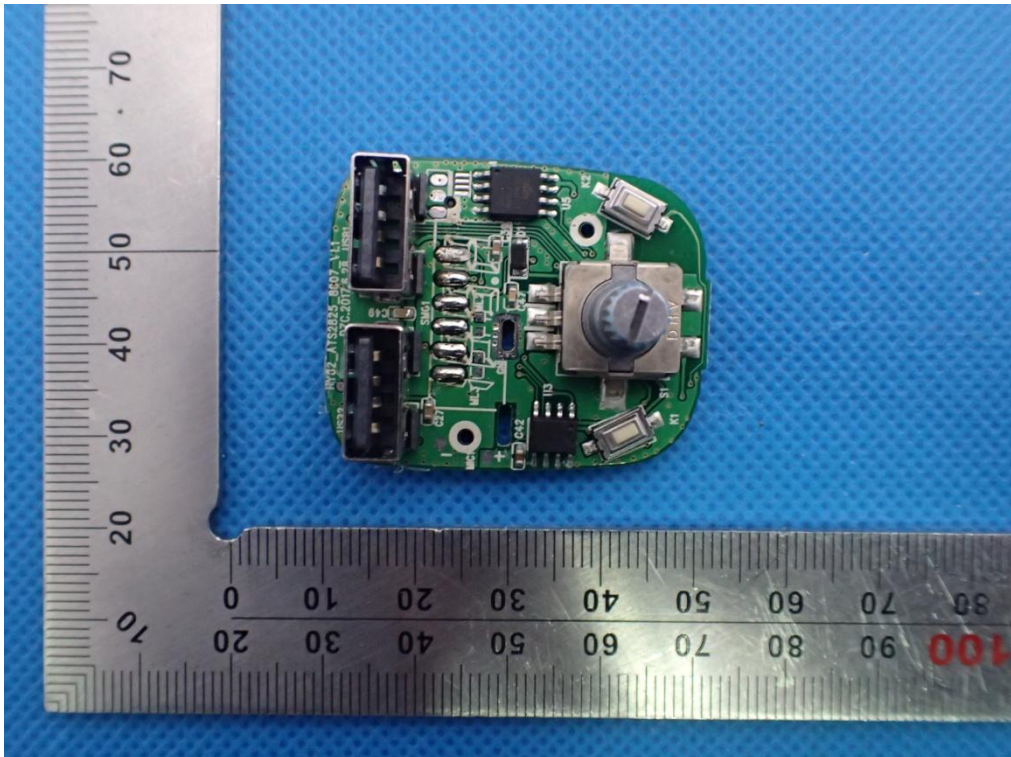

----END OF REPORT----