

# FCC Radio Test Report

## FCC ID:2AM8GCHAMELEON5RV2

### Original Grant

**Report No.** : TBR-C-202202-0108-147  
**Applicant** : Guangzhou Lie Dun Electronics Technology CO., Ltd  
**Equipment Under Test (EUT)**  
**EUT Name** : RUGGEDIZED HAND-HELD DEVICE  
**Model No.** : CHAMELEON 5R V2 DUAL  
**Series Model No.** : CHAMELEON 5R V2 SINGLE  
**Brand Name** : CHAMELEON  
**Sample ID** : 202202\_0108-01-3 & 202202\_0108-01-4  
**Receipt Date** : 2022-07-13  
**Test Date** : 2022-07-13 to 2022-09-29  
**Issue Date** : 2022-12-28  
**Standards** : FCC Part 15, Subpart C 15.225  
**Test Method** : ANSI C63.10: 2013  
**Conclusions** : **PASS**

In the configuration tested, the EUT complied with the standards specified above,

**Test/Witness Engineer** : *Camille Li*

**Engineer Supervisor** : *Ivan Su*

**Engineer Manager** : *Ray Lai*



This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in the report.



---

---

## Contents

<b>CONTENTS</b> .....	<b>2</b>
<b>1. GENERAL INFORMATION ABOUT EUT</b> .....	<b>5</b>
1.1 Client Information.....	5
1.2 General Description of EUT (Equipment Under Test) .....	5
1.3 Block Diagram Showing the Configuration of System Tested.....	6
1.4 Description of Support Units .....	6
1.5 Description of Test Mode.....	7
1.6 Description of Test Software Setting .....	8
1.7 Measurement Uncertainty .....	8
1.8 Test Facility.....	9
<b>2. TEST SUMMARY</b> .....	<b>10</b>
<b>3. TEST SOFTWARE</b> .....	<b>10</b>
<b>4. TEST EQUIPMENT</b> .....	<b>11</b>
<b>5. CONDUCTED EMISSION TEST</b> .....	<b>12</b>
5.1 Test Standard and Limit.....	12
5.2 Test Setup.....	12
5.3 Test Procedure.....	13
5.4 Deviation From Test Standard.....	13
5.5 EUT Operating Mode .....	13
5.6 Test Data.....	13
<b>6. RADIATED EMISSION TEST</b> .....	<b>14</b>
6.1 Test Standard and Limit.....	14
6.2 Test Setup.....	14
6.3 Test Procedure.....	15
6.4 Deviation From Test Standard.....	15
6.5 EUT Operating Condition .....	15
6.6 Test Data.....	15
<b>7. ELECTRIC FIELD STRENGTH OF FUNDAMENTAL AND OUTSIDE THE ALLOCATED BANDS</b> .....	<b>16</b>
7.1 Test Standard and Limit.....	16
7.2 Test Setup.....	17
7.3 Test Procedure.....	17
7.4 Deviation From Test Standard.....	17
7.5 EUT Operating Condition .....	17
7.6 Test Data.....	17
<b>8. OCCUPIED BANDWIDTH TEST</b> .....	<b>18</b>
8.1 Test Standard and Limit.....	18
8.2 Test Setup.....	18
8.3 Test Procedure.....	18



---

8.4 Deviation From Test Standard.....	18
8.5 EUT Operating Condition .....	18
8.6 Test Data.....	18
<b>9. FUNDAMENTAL FREQUENCY TOLERANCE.....</b>	<b>19</b>
9.1 Test Standard and Limit.....	19
9.2 Test Setup.....	19
9.3 Test Procedure.....	19
9.4 Deviation From Test Standard.....	19
9.5 EUT Operating Condition .....	19
9.6 Test Data.....	19
<b>ATTACHMENT A-- CONDUCTED EMISSION TEST DATA .....</b>	<b>20</b>
<b>ATTACHMENT B-- RADIATED EMISSION TEST DATA .....</b>	<b>22</b>
<b>ATTACHMENT C--ELECTRIC FIELD STRENGTH OF FUNDAMENTAL AND OUTSIDE THE ALLOCATED BANDS.....</b>	<b>26</b>
<b>ATTACHMENT D-- BANDWIDTH TEST DATA.....</b>	<b>36</b>
<b>ATTACHMENT E--FUNDAMENTAL FREQUENCY TOLERANCE.....</b>	<b>37</b>







# 1. General Information about EUT

## 1.1 Client Information

<b>Applicant</b>	:	Guangzhou Lie Dun Electronics Technology CO., Ltd
<b>Address</b>	:	No.4 plant of No.43 South International Trade Avenue, Hualong Town, Panyu District, Guangzhou, Guangdong, China
<b>Manufacturer</b>	:	Guangzhou Lie Dun Electronics Technology CO., Ltd
<b>Address</b>	:	No.4 plant of No.43 South International Trade Avenue, Hualong Town, Panyu District, Guangzhou, Guangdong, China

## 1.2 General Description of EUT (Equipment Under Test)


<b>EUT Name</b>	:	RUGGEDIZED HAND-HELD DEVICE	
<b>Models No.</b>	:	CHAMELEON 5R V2 DUAL, CHAMELEON 5R V2 SINGLE	
<b>Model Difference</b>	:	All these models are identical in the same PCB, layout and electrical circuit, the only difference is size and finger print module.	
<b>Product Description</b>	:	Operation Frequency:	NFC: 13.56MHz
	:	Antenna:	0dBi FPC Antenna
<b>Power Rating</b>	:	For adapter: (Model:MX15W-0502000UX) Input: AC 100V-240V, 50/60Hz 0.3A Output: DC 5V <sup>+</sup> , 2000mA DC 3.85V by 7100mAh Li-ion battery	
<b>Software Version</b>	:	----	
<b>Hardware Version</b>	:	QH6601_MB_V1.1	
<b>Remark</b>	:	The antenna gain and adapter provided by the applicant, the verified for the RF conduction test provided by TOBY test lab.	

**Note:**

- (1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.



### 1.3 Block Diagram Showing the Configuration of System Tested Charging + TX Mode

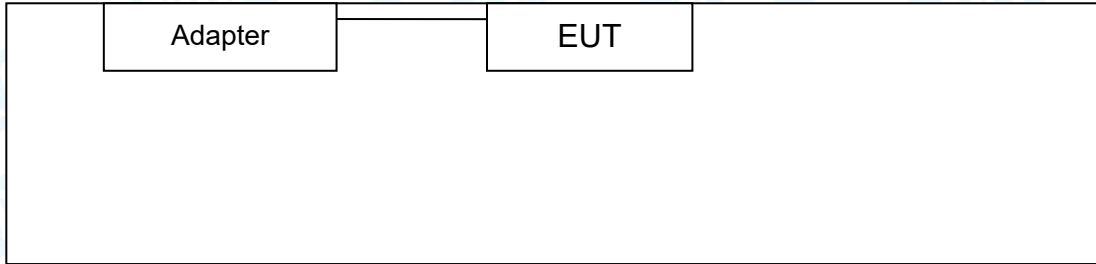

### 1.4 Description of Support Units

The EUT has been test as an independent unit.



### 1.5 Description of Test Mode

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned follow was evaluated respectively.

For Conducted Test	
Final Test Mode	Description
Mode 1	Charging + TX Mode
For Radiated Test	
Final Test Mode	Description
Mode 2	Charging + TX Mode
<b>Remark :</b>	
For the Conducted Emission and Radiated Emission test used the Sample ID: 202202_0108-01-4.	
For the OBW test used the Sample ID: 2202202_0108-01-3.	

**Note:**

- (1) For all test, we have verified the construction and function in typical operation. And all the test modes were carried out with the EUT in transmitting operation in maximum power with all kinds of data rate.  
 According to ANSI C63.10 standards, the measurements are performed at the highest, middle, lowest available channels, and the worst case data rate as follows:  
 TX Mode: Transmitting mode.
- (2) During the testing procedure, the continuously transmitting with the maximum power mode was programmed by the customer.
- (3) The EUT is considered a portable unit; in normal use it was positioned on X-plane. The worst case was found positioned on X-plane. Therefore only the test data of this X-plane was used for radiated emission measurement test.



## 1.6 Description of Test Software Setting

During testing channel & Power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of RF setting.

<b>Test Software Version</b>	<b>N/A</b>
Frequency	13.56 MHz
NFC	DEF

## 1.7 Measurement Uncertainty

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %.

Test Item	Parameters	Expanded Uncertainty ( $U_{Lab}$ )
Conducted Emission	Level Accuracy: 9kHz~150kHz 150kHz to 30MHz	$\pm 3.50$ dB $\pm 3.10$ dB
Radiated Emission	Level Accuracy: 9kHz to 30 MHz	$\pm 4.60$ dB
Radiated Emission	Level Accuracy: 30MHz to 1000 MHz	$\pm 4.50$ dB
Radiated Emission	Level Accuracy: Above 1000MHz	$\pm 4.20$ dB



## 1.8 Test Facility

The testing report were performed by the Shenzhen Toby Technology Co., Ltd., in their facilities located at 1/F., Building 6, Rundongsheng Industrial Zone, Longzhu, Xixiang, Bao'an District, Shenzhen, Guangdong, China. At the time of testing, the following bodies accredited the Laboratory:

### **CNAS (L5813)**

The Laboratory has been accredited by CNAS to ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories for the competence in the field of testing. And the Registration No.: CNAS L5813.

### **A2LA Certificate No.: 4750.01**

The laboratory has been accredited by American Association for Laboratory Accreditation(A2LA) to ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories for the technical competence in the field of Electrical Testing. And the A2LA Certificate No.: 4750.01.FCC Accredited Test Site Number: 854351. Designation Number: CN1223.

### **IC Registration No.: (11950A)**

The Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing. The site registration: Site# 11950A. CAB identifier: CN0056.



## 2. Test Summary

FCC Part 15 Subpart C(15.225)/RSS 210 Issue 9			
Standard Section	Test Item	Judgment	Remark
FCC			
15.207(a)	Conducted Emission	PASS	N/A
15.209(a)&15.225	Radiated emissions	PASS	N/A
15.225(a)	Fundamental field strength limit	PASS	N/A
15.225(e)	Fundamental frequency tolerance	PASS	N/A
15.225	Band edge compliance	PASS	N/A
15.215(c)	Occupied bandwidth	PASS	N/A

**Note:** N/A is an abbreviation for Not Applicable.

## 3. Test Software

Test Item	Test Software	Manufacturer	Version No.
Conducted Emission	EZ-EMC	EZ	CDI-03A2
Radiation Emission	EZ-EMC	EZ	FA-03A2RE
RF Conducted Measurement	MTS-8310	MWRFtest	V2.0.0.0



## 4. Test Equipment

Radiation Emission Test					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Due Date
Spectrum Analyzer	Agilent	E4407B	MY45106456	Jun. 23, 2022	Jun. 22, 2023
EMI Test Receiver	Rohde & Schwarz	ESPI	100010/007	Jun. 23, 2022	Jun. 22, 2023
Spectrum Analyzer	Rohde & Schwarz	FSV40-N	102197	Jun. 23, 2022	Jun. 22, 2023
Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	144382	Jun. 23, 2022	Jun. 22, 2023
Universal Radio Communication Tester	Rohde&Schwarz	CMU200	103903	Jun. 23, 2022	Jun. 22, 2023
Bilog Antenna	ETS-LINDGREN	3142E	00117537	Feb. 27, 2022	Feb.26, 2024
Horn Antenna	ETS-LINDGREN	3117	00143207	Feb. 26, 2022	Feb.25, 2024
Horn Antenna	ETS-LINDGREN	BBHA 9170	BBHA9170582	Feb. 26, 2022	Feb.25, 2024
Loop Antenna	SCHWARZBECK	FMZB 1519 B	1519B-059	Feb. 26, 2022	Feb.25, 2024
Pre-amplifier	Sonoma	310N	185903	Feb. 26, 2022	Feb.25, 2023
Pre-amplifier	HP	8449B	3008A00849	Feb. 26, 2022	Feb.25, 2023
Pre-amplifier	SKET	LNPA_1840G-50	SK201904032	Feb. 26, 2022	Feb.25, 2023
Cable	HUBER+SUHNER	100	SUCOFLEX	Feb. 26, 2022	Feb.25, 2023
Positioning Controller	ETS-LINDGREN	2090	N/A	N/A	N/A
Antenna Conducted Emission					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Due Date
Spectrum Analyzer	Agilent	E4407B	MY45106456	Jun. 23, 2022	Jun. 22, 2023
Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	144382	Jun. 23, 2022	Jun. 22, 2023
Universal Radio Communication Tester	Rohde&Schwarz	CMU200	103903	Jun. 23, 2022	Jun. 22, 2023
Spectrum Analyzer	Rohde & Schwarz	ESPI	100010/007	Jun. 23, 2022	Jun. 22, 2023
MXA Signal Analyzer	Agilent	N9020A	MY49100060	Sep. 01, 2022	Aug. 31, 2023
Vector Signal Generator	Agilent	N5182A	MY50141294	Sep. 01, 2022	Aug. 31, 2023
Analog Signal Generator	Agilent	N5181A	MY50141953	Sep. 01, 2022	Aug. 31, 2023
RF Power Sensor	DARE!! Instruments	RadiPowerRPR3006W	17100015SNO26	Sep. 01, 2022	Aug. 31, 2023
	DARE!! Instruments	RadiPowerRPR3006W	17100015SNO29	Sep. 01, 2022	Aug. 31, 2023
	DARE!! Instruments	RadiPowerRPR3006W	17100015SNO31	Sep. 01, 2022	Aug. 31, 2023
	DARE!! Instruments	RadiPowerRPR3006W	17100015SNO33	Sep. 01, 2022	Aug. 31, 2023
Temperature and Humidity Chamber	ZhengHang	ZH-QTH-1500	ZH2107264	Jun. 22, 2022	Jun. 21, 2023



## 5. Conducted Emission Test

### 5.1 Test Standard and Limit

5.1.1 Test Standard  
FCC Part 15.207

5.1.2 Test Limit


**Conducted Emission Test Limit**

Frequency	Maximum RF Line Voltage (dB $\mu$ V)	
	Quasi-peak Level	Average Level
150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
500kHz~5MHz	56	46
5MHz~30MHz	60	50

Notes:

- (1) \*Decreasing linearly with logarithm of the frequency.
- (2) The lower limit shall apply at the transition frequencies.
- (3) The limit decrease in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

### 5.2 Test Setup

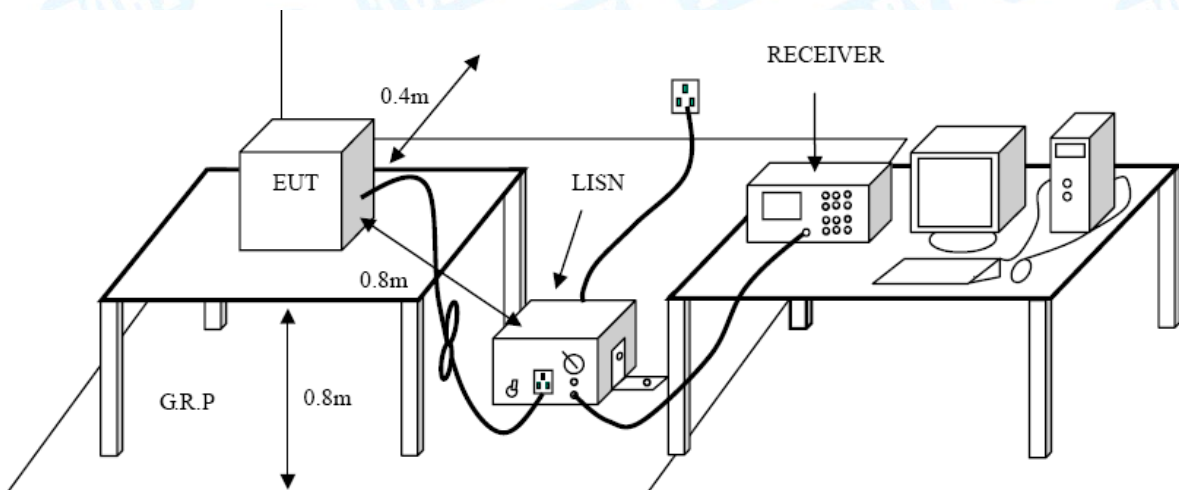



### 5.3 Test Procedure

The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/50uH of coupling impedance for the measuring instrument.

Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.

I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.

LISN at least 80 cm from nearest part of EUT chassis.

The bandwidth of EMI test receiver is set at 9 kHz, and the test frequency band is from 0.15MHz to 30MHz.

### 5.4 Deviation From Test Standard

No deviation

### 5.5 EUT Operating Mode

Please refer to the description of test mode.

### 5.6 Test Data

Please refer to the Attachment A.



## 6. Radiated Emission Test

### 6.1 Test Standard and Limit

#### 6.1.1 Test Standard


FCC Part 15.209(a)&15.225

#### 6.1.2 Test Limit

#### Radiated Emission Limits (30MHz~1000MHz)

Frequency Range (MHz)	E-field Strength Limit @ 3m (mV/m)	E-field Strength Limit @ 3m (dB $\mu$ V/m)	E-field Strength Limit @ 10m (dB $\mu$ V/m)
30-88	100	40	30
88-216	150	43.5	33.5
216-960	200	46	36
960-1000	500	54	44

### 5.2 Test Setup

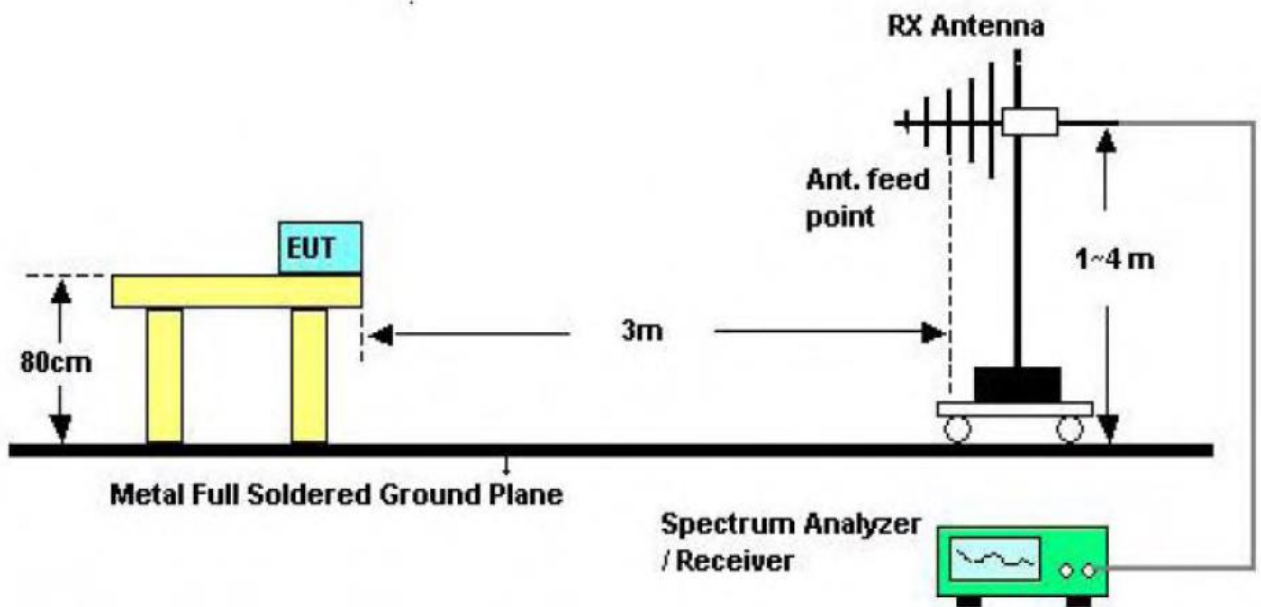

Below 1000MHz Test Setup



### 6.3 Test Procedure

- (1) The measuring distance of 3m shall be used for measurements at frequency up to 1GHz and above 1 GHz. The EUT was placed on a rotating 0.8m high above ground, the table was rotated 360 degrees to determine the position of the highest radiation.
- (2) The Test antenna shall vary between 1m and 4m, Both Horizontal and Vertical antenna are set to make measurement.
- (3) The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- (4) If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit Bellow 1 GHz, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed. But the Peak Value and average value both need to comply with applicable limit above 1 GHz.
- (5) Testing frequency range below 1GHz the measuring instrument use VBW=120 kHz with Quasi-peak detection.
- (6) For the actual test configuration, please see the test setup photo.

### 6.4 Deviation From Test Standard

No deviation

### 6.5 EUT Operating Condition

The Equipment Under Test was set to Continual Transmitting in maximum power.

### 6.6 Test Data

Please refer to the Attachment B.



## 7. Electric Field Strength of Fundamental and Outside the Allocated bands

### 7.1 Test Standard and Limit

- 7.1.1 Test Standard
  - FCC Part 15.225(a)
  - FCC Part 15.225

#### 7.1.2 Test Limit

#### Electric Field Strength of Fundamental

Frequency Range (MHz)	E-field Strength Limit @ 30m (μV/m)	E-field Strength Limit @ 3m (dBμV/m)
0.009-0.490	2400/F(kHz)	129-94
0.490-1.705	24000/F(kHz)	74-63
1.705-30	30	70

Note: Where the limits have been defined at one distance, and a signal level measured at another, the limits have been extrapolated using the following formula:  
 Extrapolation(dB) =  $40\log_{10}(\text{Measurement Distance}/\text{Specification Distance})$


#### Outside the Allocated bands

Frequency Range (MHz)	E-field Strength Limit @ 30 m (μV/m)	E-field Strength Limit @ 3 m (dBμV/m)
13.560 ± 0.007	+15,848	124
13.410 to 13.553 13.567 to 13.710	+334	90
13.110 to 13.410 13.710 to 14.010	+106	81

Note: Where the limits have been defined at one distance, and a signal level measured at another, the limits have been extrapolated using the following formula:  
 Extrapolation(dB) =  $40\log_{10}(\text{Measurement Distance}/\text{Specification Distance})$



## 7.2 Test Setup

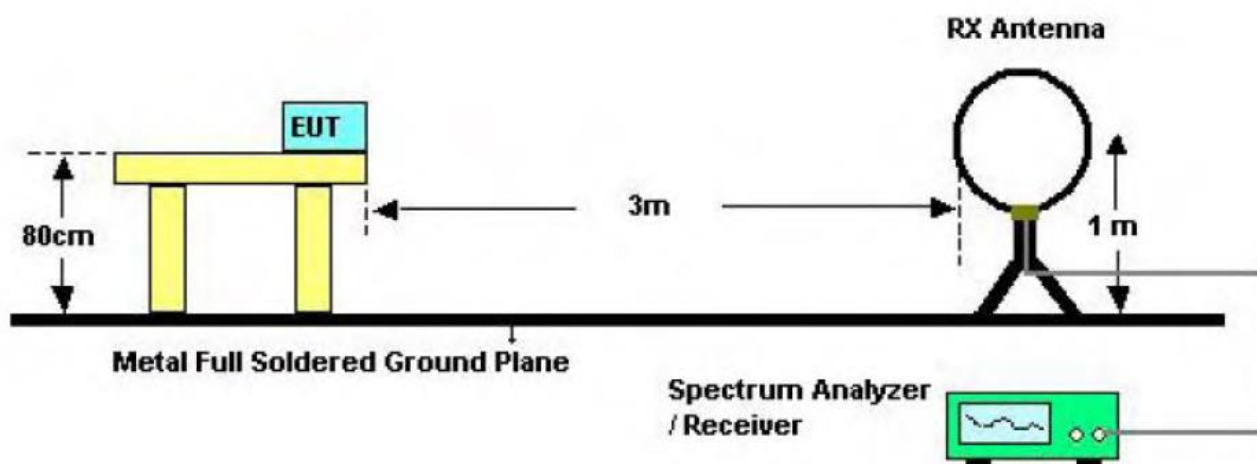

## 7.3 Test Procedure

The transmitter carrier output levels (E-Field) from the EUT are measured in a semi-anechoic chamber. The EUT is placed on a non-conductive stand of 80cm high, and at a measurement distance of 3m from the receiving antenna. The center of the receiving loop antenna is 1.0 meter above the ground. The E-field is measured with a shielded loop antenna connected to a measurement receiver. Detected E-field was maximized by rotating the EUT through 360° and adjusting the receiving antenna polarizations. The maximization processes were repeated with the EUT positioned respectively in its three orthogonal axes. The measurements were performed with the peak detector and if required, the quasi-peak detector.

## 7.4 Deviation From Test Standard

No deviation

## 7.5 EUT Operating Condition

The measurement of EUT is carried out under the transmit state of NFC.

## 7.6 Test Data

Please refer to the Attachment C.




## 8. Occupied Bandwidth Test

### 8.1 Test Standard and Limit

#### 8.1.1 Test Standard

FCC Part 15.215 (c)

### 8.2 Test Setup

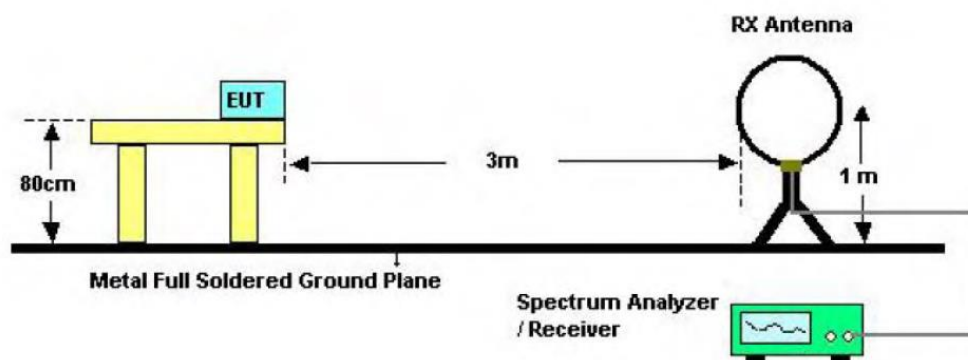

### 8.3 Test Procedure

The EUT is turned ON and connected to measurement instrument; the center frequency of the spectrum analyzer is set to the fundamental frequency. The captured power is measured and recorded; the measurement is repeated until all frequencies required were complete.

1. RBW used in the range of 1% to 5% of the anticipated emission bandwidth
2. Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
3. Detector = Peak.
4. Trace mode = Max Hold.
5. Sweep = Auto couple.
6. Allow the trace to stabilize.
7. OBW 99% function of spectrum analyzer used

### 8.4 Deviation From Test Standard

No deviation

### 8.5 EUT Operating Condition

The measurement of EUT is carried out under the transmit state of NFC.

### 8.6 Test Data

Please refer to the Attachment D.



## 9. Fundamental Frequency Tolerance

### 9.1 Test Standard and Limit


#### 9.1.1 Test Standard

FCC Part 15.225 (e)

#### 9.1.2 Test Limit

The frequency tolerance of the carrier signal shall be maintained within  $\pm 0.01\%$  of the operating frequency.

### 9.2 Test Setup

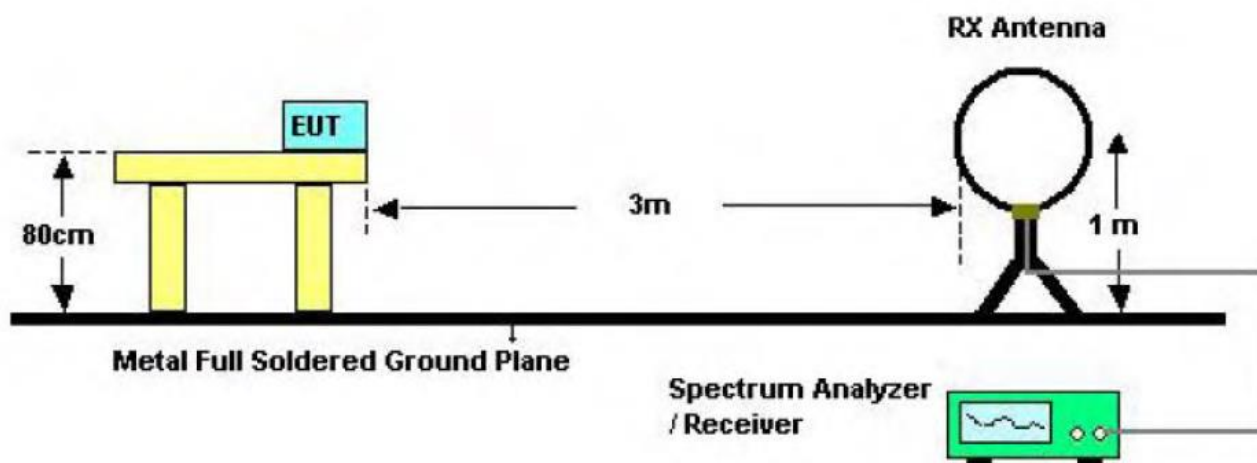

### 9.3 Test Procedure

The transmitter output signal was picked up by coil antenna connected to the frequency counter. The center frequency was measured with 30Hz RBW and 1kHz span. During the test, the EUT was placed in a thermal chamber until thermal balance and lasting appropriate time.

### 9.4 Deviation From Test Standard

No deviation

### 9.5 EUT Operating Condition

The EUT was set to continuously transmitting in the max power during the test.

### 9.6 Test Data

Please refer to the Attachment E.



## Attachment A-- Conducted Emission Test Data

Temperature:	24.3°C	Relative Humidity:	43%
Test Voltage:	AC 120V/60 Hz		
Terminal:	Line		
Test Mode:	TX Mode		
Remark:	Only worst case is reported.		




No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	0.1780	37.17	11.04	48.21	64.57	-16.36	QP
2	0.1780	18.05	11.04	29.09	54.57	-25.48	AVG
3 *	0.4620	32.34	10.93	43.27	56.66	-13.39	QP
4	0.4620	13.30	10.93	24.23	46.66	-22.43	AVG
5	1.2340	31.86	10.64	42.50	56.00	-13.50	QP
6	1.2340	10.53	10.64	21.17	46.00	-24.83	AVG
7	1.8500	30.48	10.53	41.01	56.00	-14.99	QP
8	1.8500	7.46	10.53	17.99	46.00	-28.01	AVG
9	4.7699	24.95	10.04	34.99	56.00	-21.01	QP
10	4.7699	4.01	10.04	14.05	46.00	-31.95	AVG
11	8.7939	21.86	10.10	31.96	60.00	-28.04	QP
12	8.7939	1.99	10.10	12.09	50.00	-37.91	AVG

**Remark:**

1. Corr. Factor (dB) = LISN Factor (dB) + Cable Loss (dB)
2. Margin (dB) = QuasiPeak/Average (dBuV) - Limit (dBuV)



<b>Temperature:</b>	24.3°C	<b>Relative Humidity:</b>	43%
<b>Test Voltage:</b>	AC 120V/60 Hz		
<b>Terminal:</b>	Neutral		
<b>Test Mode:</b>	TX Mode		
<b>Remark:</b>	Only worst case is reported.		

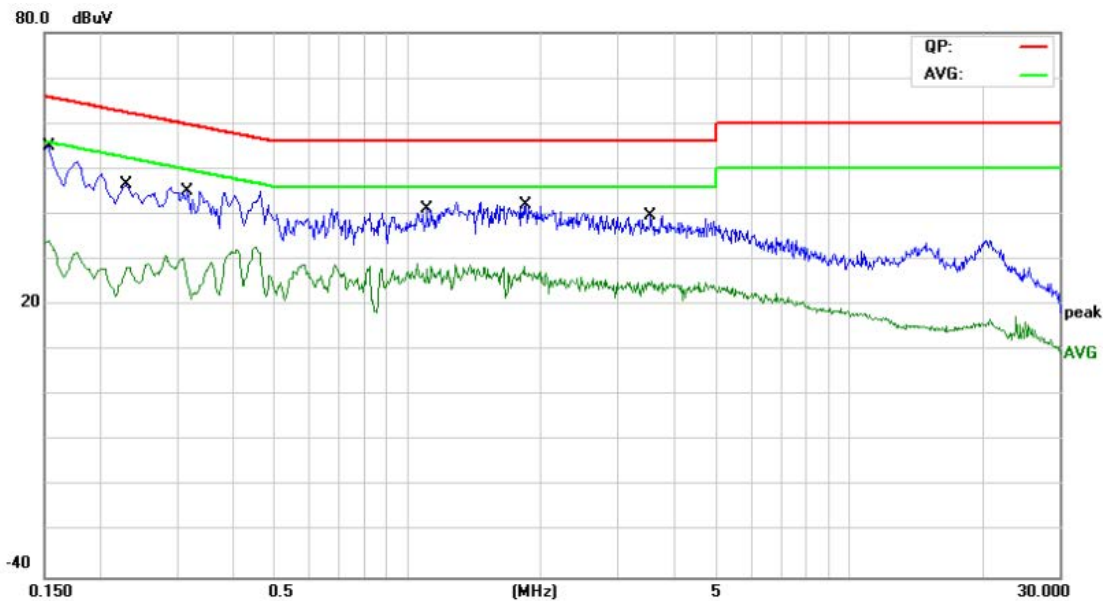

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	*	0.1539	43.89	11.10	54.99	65.78	-10.79	QP
2		0.1539	23.17	11.10	34.27	55.78	-21.51	AVG
3		0.2300	35.66	10.96	46.62	62.45	-15.83	QP
4		0.2300	17.31	10.96	28.27	52.45	-24.18	AVG
5		0.3180	34.31	10.87	45.18	59.76	-14.58	QP
6		0.3180	13.72	10.87	24.59	49.76	-25.17	AVG
7		1.1060	30.39	10.66	41.05	56.00	-14.95	QP
8		1.1060	17.37	10.66	28.03	46.00	-17.97	AVG
9		1.8580	31.52	10.52	42.04	56.00	-13.96	QP
10		1.8580	16.67	10.52	27.19	46.00	-18.81	AVG
11		3.5580	29.62	10.13	39.75	56.00	-16.25	QP
12		3.5580	14.31	10.13	24.44	46.00	-21.56	AVG

**Remark:**


1. Corr. Factor (dB) = LISN Factor (dB) + Cable Loss (dB)
2. Margin (dB) = QuasiPeak/Average (dBuV) - Limit (dBuV)



## Attachment B-- Radiated Emission Test Data

30MHz~1GHz

Temperature:	24.3°C	Relative Humidity:	45%
Test Voltage:	AC 120/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX Mode (SINGLE)		
Remark:	Only worst case is reported.		

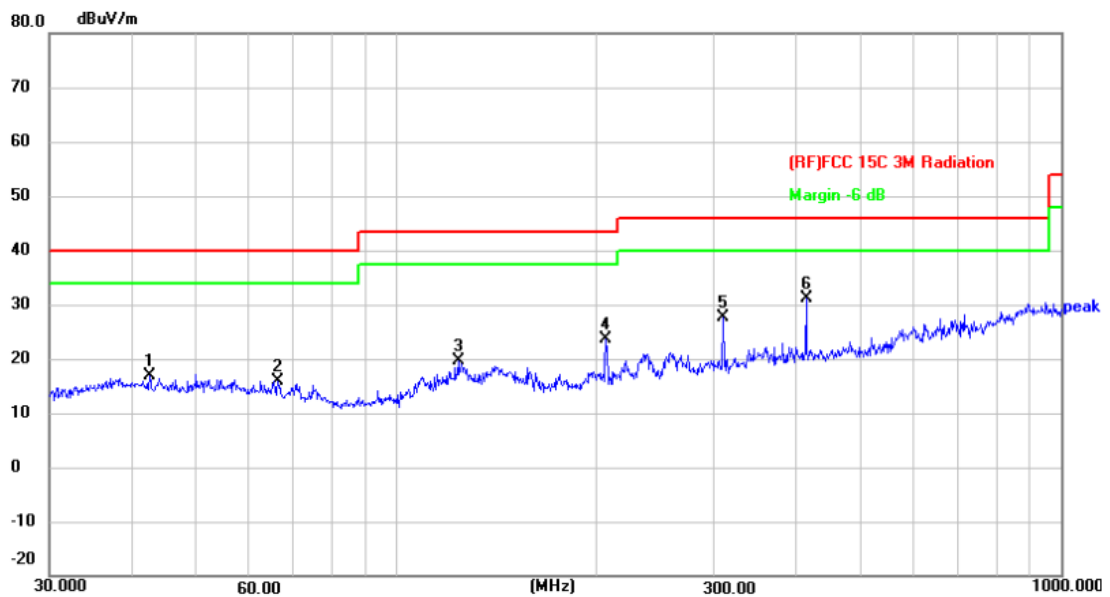

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	42.4508	39.87	-22.92	16.95	40.00	-23.05	peak
2	66.2661	40.04	-24.04	16.00	40.00	-24.00	peak
3	123.6984	42.73	-23.06	19.67	43.50	-23.83	peak
4	206.3975	47.55	-23.88	23.67	43.50	-19.83	peak
5	309.9977	48.15	-20.55	27.60	46.00	-18.40	peak
6 *	413.2706	49.25	-18.09	31.16	46.00	-14.84	peak


\*:Maximum data    x:Over limit    !:over margin

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = QuasiPeak (dBuV/m)-Limit QPK(dBuV/m)



Temperature:	24.3°C	Relative Humidity:	45%
Test Voltage:	AC 120/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX Mode (SINGLE)		
Remark:	Only worst case is reported.		

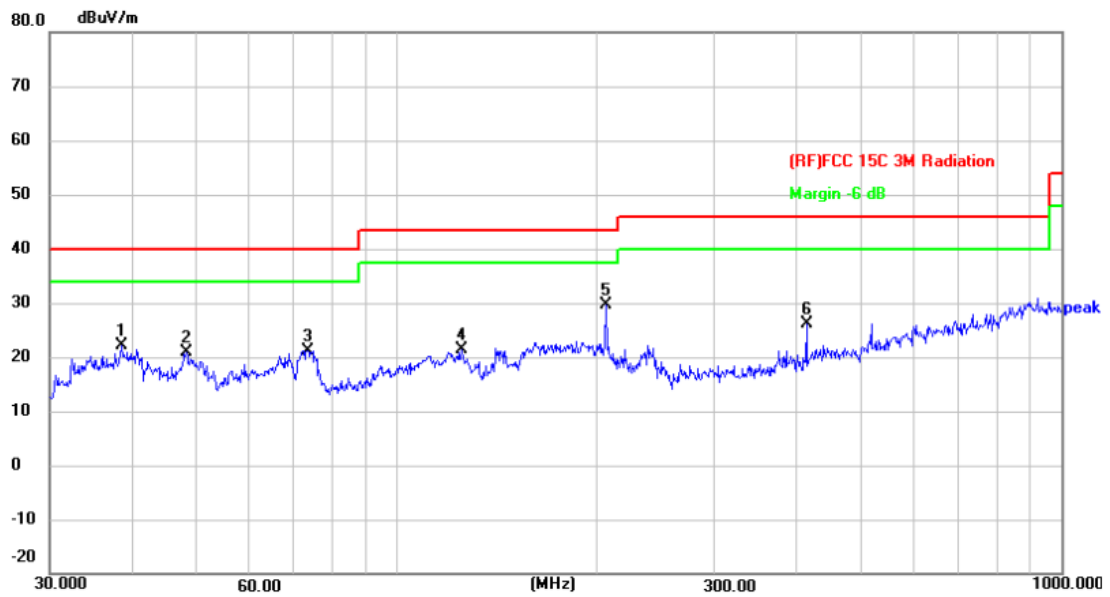

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	38.4809	45.18	-23.05	22.13	40.00	-17.87	peak
2	48.1625	43.51	-22.63	20.88	40.00	-19.12	peak
3	73.3593	46.32	-25.12	21.20	40.00	-18.80	peak
4	125.0065	44.37	-22.97	21.40	43.50	-22.10	peak
5 *	206.3975	53.48	-23.88	29.60	43.50	-13.90	peak
6	413.2706	44.26	-18.09	26.17	46.00	-19.83	peak


\*:Maximum data    x:Over limit    !:over margin

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = QuasiPeak (dBμV/m)-Limit QPK(dBμV/m)



<b>Temperature:</b>	24.3°C	<b>Relative Humidity:</b>	45%
<b>Test Voltage:</b>	AC 120/60Hz		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX Mode (DUAL)		
<b>Remark:</b>	Only worst case is reported.		

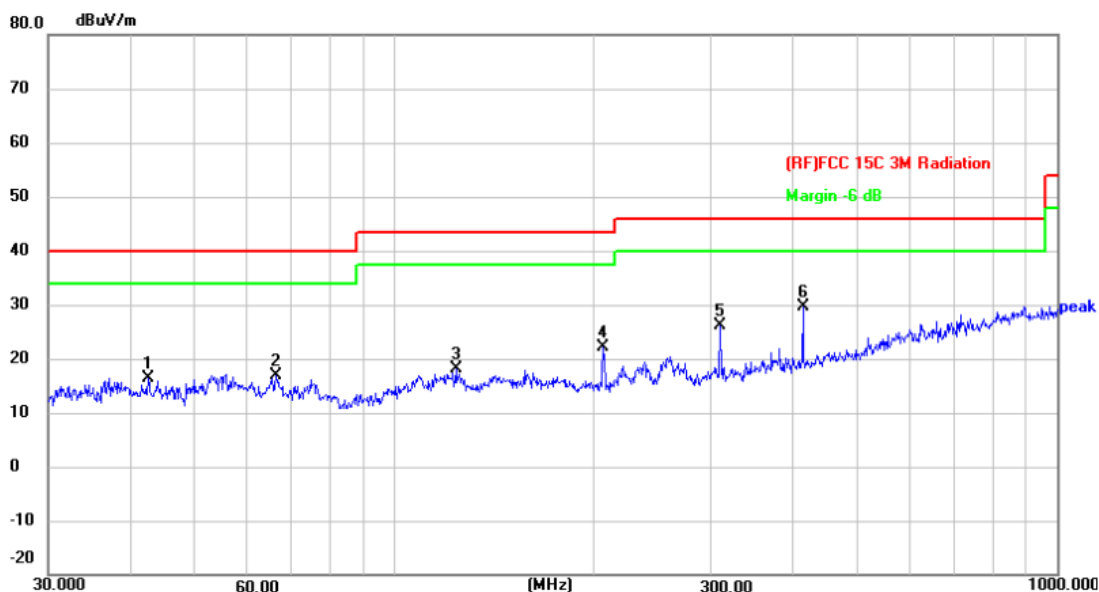

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	42.4508	39.37	-22.92	16.45	40.00	-23.55	peak
2	66.2661	41.04	-24.04	17.00	40.00	-23.00	peak
3	123.6984	41.23	-23.06	18.17	43.50	-25.33	peak
4	206.3975	46.05	-23.88	22.17	43.50	-21.33	peak
5	309.9977	46.65	-20.55	26.10	46.00	-19.90	peak
6 *	413.2706	47.75	-18.09	29.66	46.00	-16.34	peak


\*:Maximum data    x:Over limit    !:over margin

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = QuasiPeak (dBμV/m)-Limit QPK(dBμV/m)



Temperature:	24.3°C	Relative Humidity:	45%
Test Voltage:	AC 120/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX Mode (DUAL)		
Remark:	Only worst case is reported.		

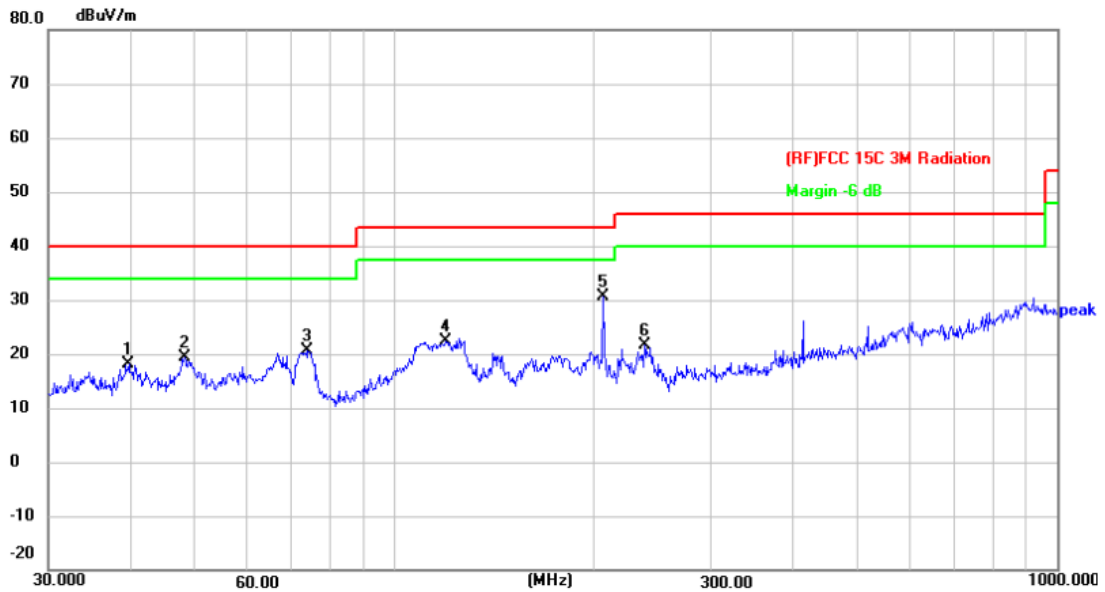

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	39.7146	41.25	-23.04	18.21	40.00	-21.79	peak
2	48.1625	42.01	-22.63	19.38	40.00	-20.62	peak
3	73.8756	45.84	-25.25	20.59	40.00	-19.41	peak
4	119.4360	45.83	-23.33	22.50	43.50	-21.00	peak
5 *	206.3975	54.48	-23.88	30.60	43.50	-12.90	peak
6	238.3101	44.35	-22.62	21.73	46.00	-24.27	peak

\*:Maximum data    x:Over limit    !:over margin

**Remark:**


1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = QuasiPeak (dBμV/m)-Limit QPK(dBμV/m)



# Attachment C--Electric Field Strength of Fundamental and Outside the Allocated bands

## (1) Electric Field Strength of Fundamental

Temperature:	23.9°C	Relative Humidity:	44%
Test Voltage:	DC 3.85V		
Ant. Pol.	Ant. 0°		
Test Mode:	TX Mode (SINGLE)		
Remark:	N/A		

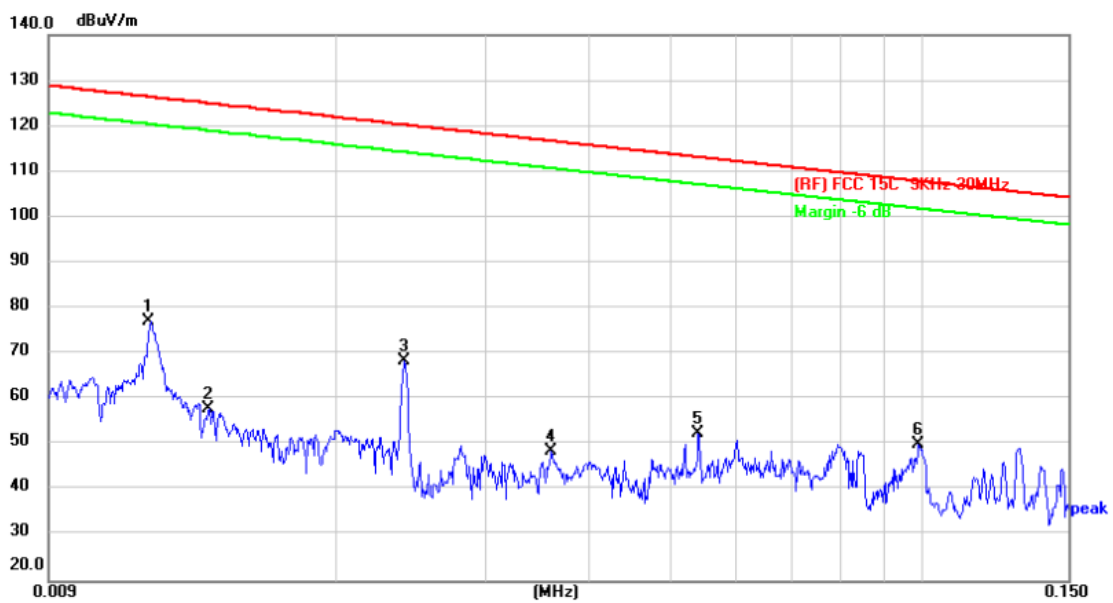


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1	*	0.0119	56.52	20.49	77.01	126.3	-49.36	peak
2		0.0140	37.54	20.48	58.02	124.9	-66.94	peak
3		0.0240	47.95	20.43	68.38	120.2	-51.88	peak
4		0.0359	28.38	20.34	48.72	116.7	-68.04	peak
5		0.0539	32.35	20.28	52.63	113.2	-60.59	peak
6		0.0990	29.21	20.85	50.06	107.9	-57.87	peak

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = QuasiPeak (dBμV/m)-Limit QPK(dBμV/m)



Temperature:	23.9°C	Relative Humidity:	44%
Test Voltage:	DC 3.85V		
Ant. Pol.	Ant. 0°		
Test Mode:	TX Mode (SINGLE)		
Remark:	N/A		

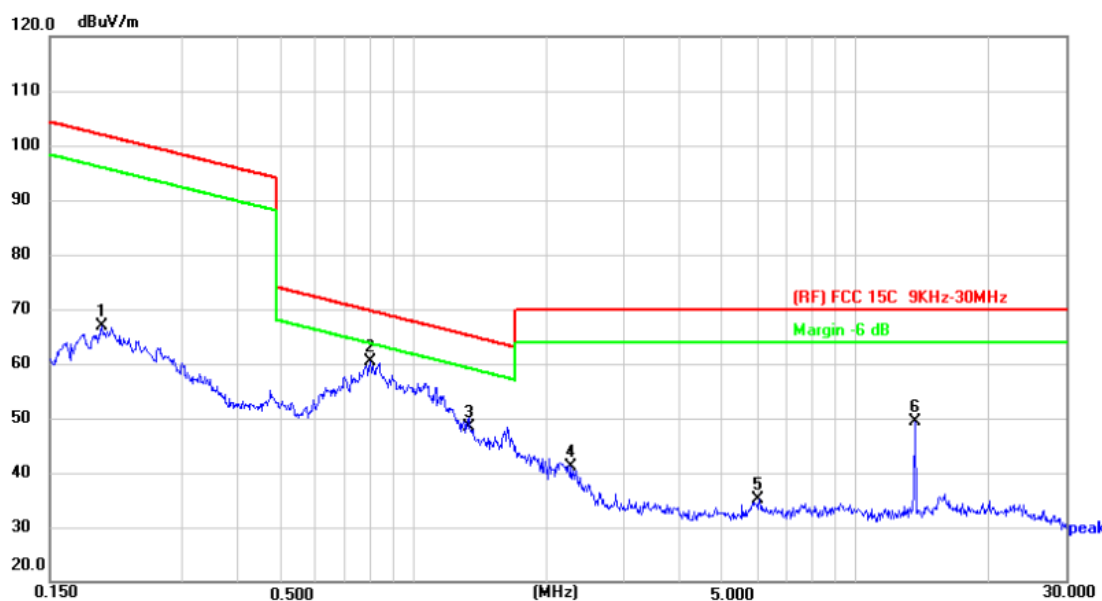


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		0.1965	43.94	22.82	66.76	101.9	-35.20	peak
2	*	0.7960	39.69	20.75	60.44	69.72	-9.28	peak
3		1.3379	27.82	20.55	48.37	65.14	-16.77	peak
4		2.2726	20.73	20.39	41.12	70.00	-28.88	peak
5		6.0562	14.45	20.60	35.05	70.00	-34.95	peak
6		13.6227	29.31	20.10	49.41	70.00	-20.59	peak

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = QuasiPeak (dBμV/m)-Limit QPK(dBμV/m)



Temperature:	23.9°C	Relative Humidity:	44%
Test Voltage:	DC 3.85V		
Ant. Pol.	Ant. 90°		
Test Mode:	TX Mode (SINGLE)		
Remark:	N/A		

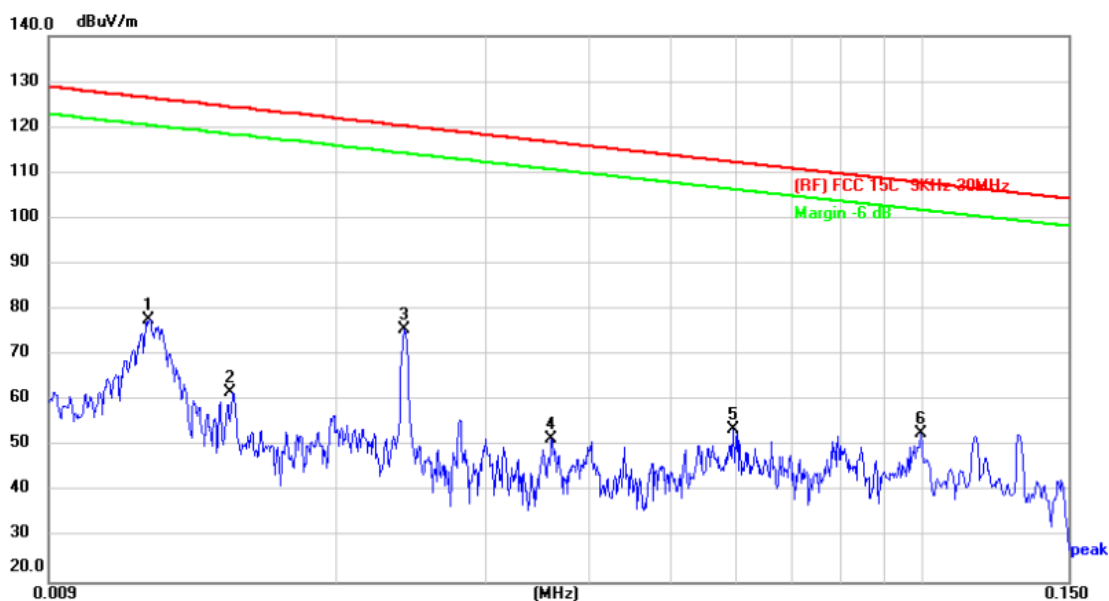


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		0.0119	57.39	20.49	77.88	126.3	-48.49	peak
2		0.0149	41.22	20.48	61.70	124.4	-62.71	peak
3	*	0.0240	55.09	20.43	75.52	120.2	-44.74	peak
4		0.0359	31.25	20.34	51.59	116.7	-65.17	peak
5		0.0594	33.48	20.39	53.87	112.3	-58.50	peak
6		0.0996	31.92	20.85	52.77	107.8	-55.10	peak

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = QuasiPeak (dBμV/m)-Limit QPK(dBμV/m)

Temperature:	23.9°C	Relative Humidity:	44%
Test Voltage:	DC 3.85V		
Ant. Pol.	Ant. 90°		
Test Mode:	TX Mode (SINGLE)		
Remark:	N/A		

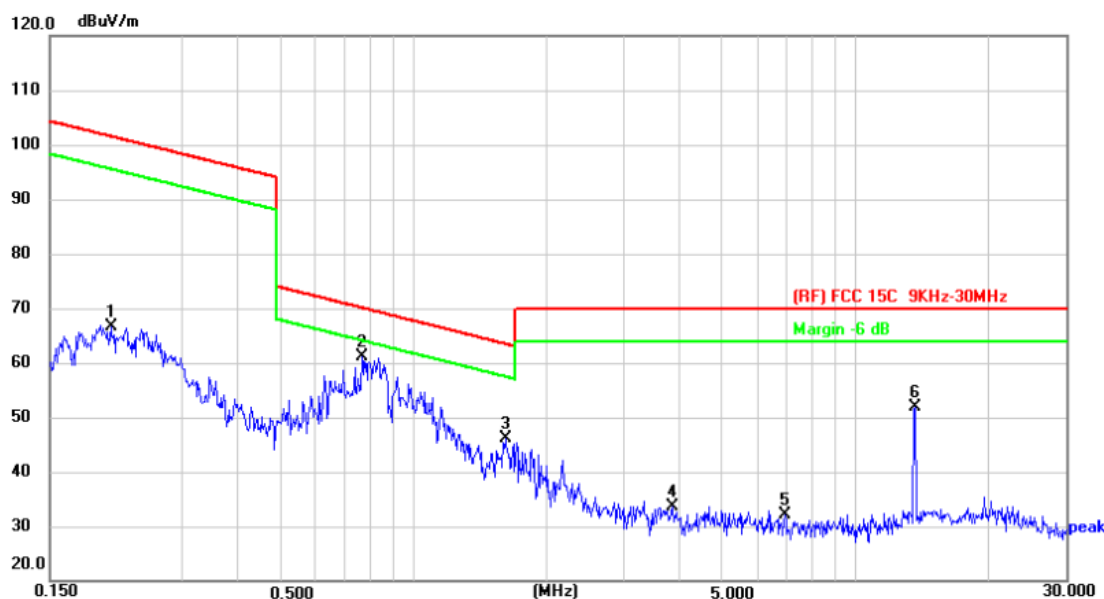


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		0.2061	43.98	22.66	66.64	101.5	-34.90	peak
2	*	0.7630	40.30	20.80	61.10	70.09	-8.99	peak
3		1.6105	25.66	20.50	46.16	63.50	-17.34	peak
4		3.8400	13.33	20.34	33.67	70.00	-36.33	peak
5		6.9141	11.34	20.71	32.05	70.00	-37.95	peak
6		13.6227	31.83	20.10	51.93	70.00	-18.07	peak

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = QuasiPeak (dBμV/m)-Limit QPK(dBμV/m)



Temperature:	23.9°C	Relative Humidity:	44%
Test Voltage:	DC 3.85V		
Ant. Pol.	Ant. 0°		
Test Mode:	TX Mode (DUAL)		
Remark:	N/A		

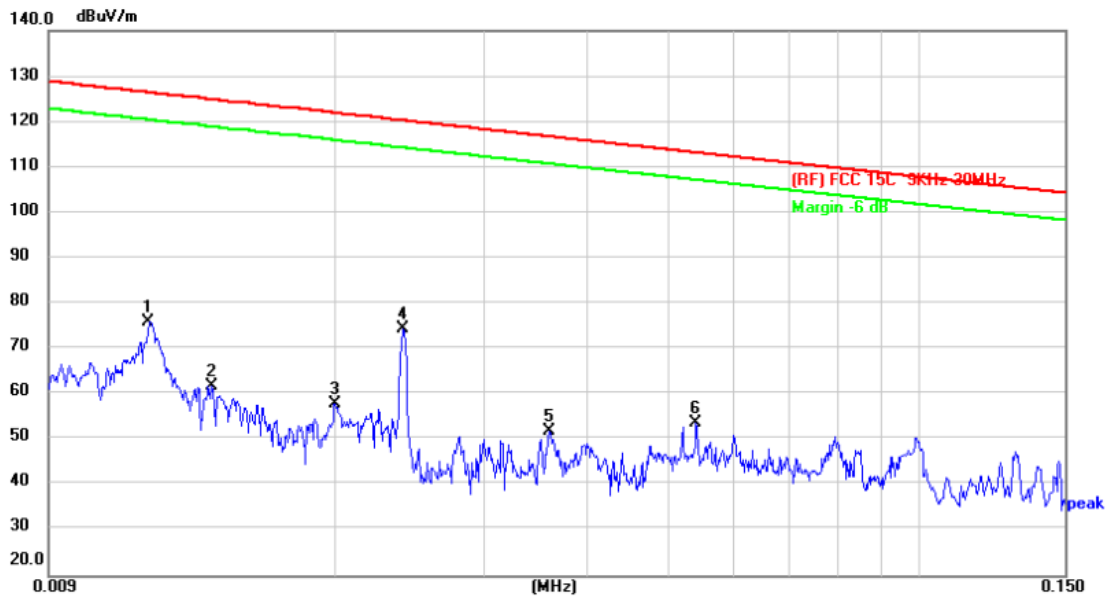


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		0.0119	55.56	20.49	76.05	126.3	-50.32	peak
2		0.0142	41.46	20.48	61.94	124.8	-62.89	peak
3		0.0200	37.61	20.45	58.06	121.8	-63.79	peak
4	*	0.0240	53.95	20.43	74.38	120.2	-45.88	peak
5		0.0359	31.68	20.34	52.02	116.7	-64.74	peak
6		0.0539	33.35	20.28	53.63	113.2	-59.59	peak

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = QuasiPeak (dBμV/m)-Limit QPK(dBμV/m)

Temperature:	23.9°C	Relative Humidity:	44%
Test Voltage:	DC 3.85V		
Ant. Pol.	Ant. 0°		
Test Mode:	TX Mode (DUAL)		
Remark:	N/A		

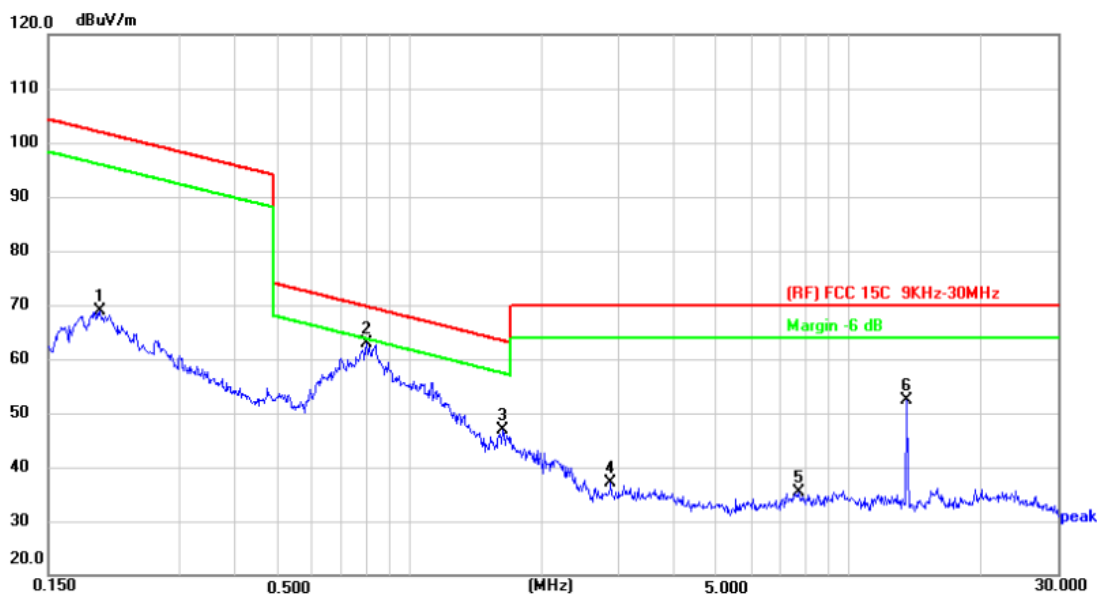


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		0.1965	45.94	22.82	68.76	101.9	-33.20	peak
2	*	0.7960	42.19	20.75	62.94	69.72	-6.78	peak
3		1.6271	26.34	20.50	46.84	63.41	-16.57	peak
4		2.8692	16.86	20.30	37.16	70.00	-32.84	peak
5		7.6870	14.60	20.68	35.28	70.00	-34.72	peak
6		13.5509	32.31	20.10	52.41	70.00	-17.59	peak

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = QuasiPeak (dBμV/m)-Limit QPK(dBμV/m)



Temperature:	23.9°C	Relative Humidity:	44%
Test Voltage:	DC 3.85V		
Ant. Pol.	Ant. 90°		
Test Mode:	TX Mode (DUAL)		
Remark:	N/A		

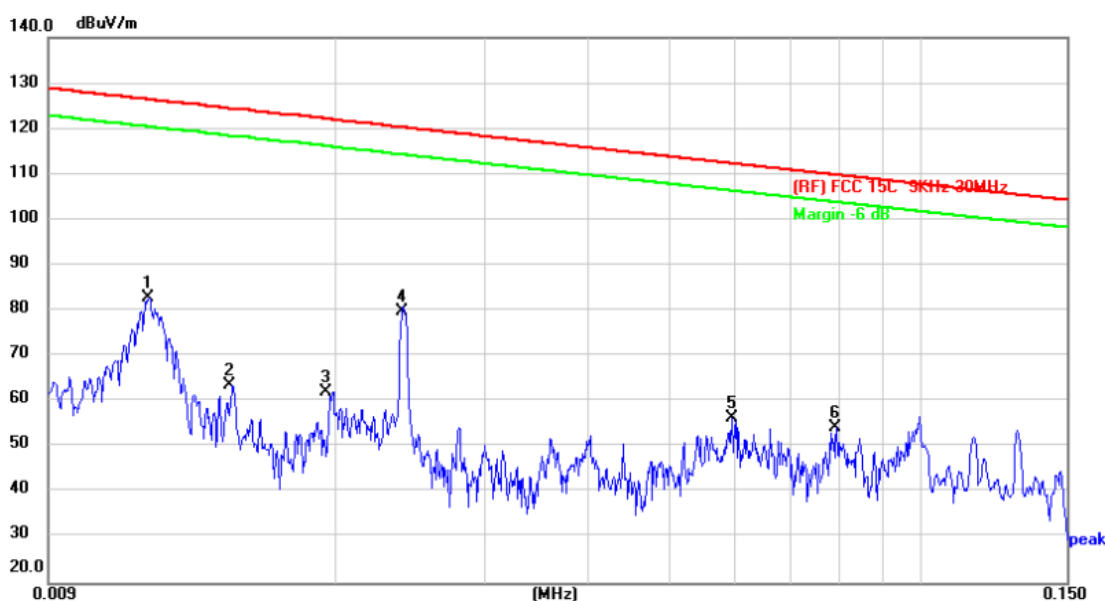


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		0.0119	62.39	20.49	82.88	126.3	-43.49	peak
2		0.0149	43.22	20.48	63.70	124.4	-60.71	peak
3		0.0194	41.80	20.45	62.25	122.1	-59.87	peak
4	*	0.0239	59.39	20.43	79.82	120.3	-40.48	peak
5		0.0594	35.98	20.39	56.37	112.3	-56.00	peak
6		0.0792	33.67	20.69	54.36	109.8	-55.51	peak

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = QuasiPeak (dBμV/m)-Limit QPK(dBμV/m)

Temperature:	23.9°C	Relative Humidity:	44%
Test Voltage:	DC 3.85V		
Ant. Pol.	Ant. 90°		
Test Mode:	TX Mode (DUAL)		
Remark:	N/A		

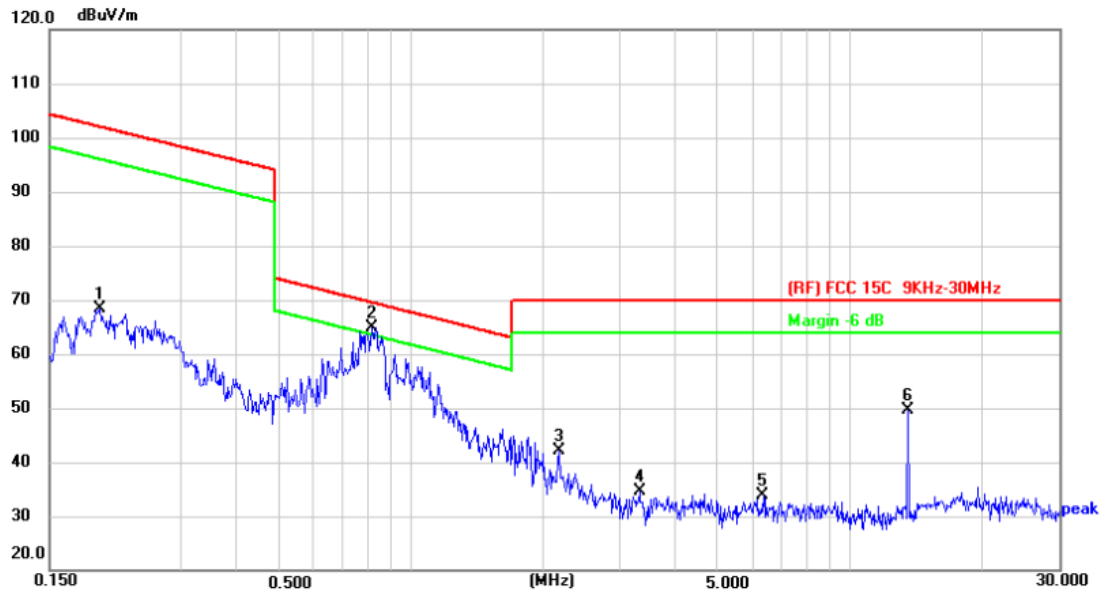

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		0.1955	45.52	22.85	68.37	102.0	-33.63	peak
2	*	0.8131	44.25	20.74	64.99	69.53	-4.54	peak
3		2.1667	21.83	20.41	42.24	70.00	-27.76	peak
4		3.3105	14.30	20.30	34.60	70.00	-35.40	peak
5		6.3520	13.20	20.64	33.84	70.00	-36.16	peak
6		13.5509	29.60	20.10	49.70	70.00	-20.30	peak


**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = QuasiPeak (dBμV/m)-Limit QPK(dBμV/m)



**(2) Test Fundamental and Outside the Allocated bands**

Temperature:	23.9°C	Relative Humidity:	44%
Test Voltage:	DC 3.85V		
Test Mode:	TX Mode (SINGLE)		
Remark:	N/A		

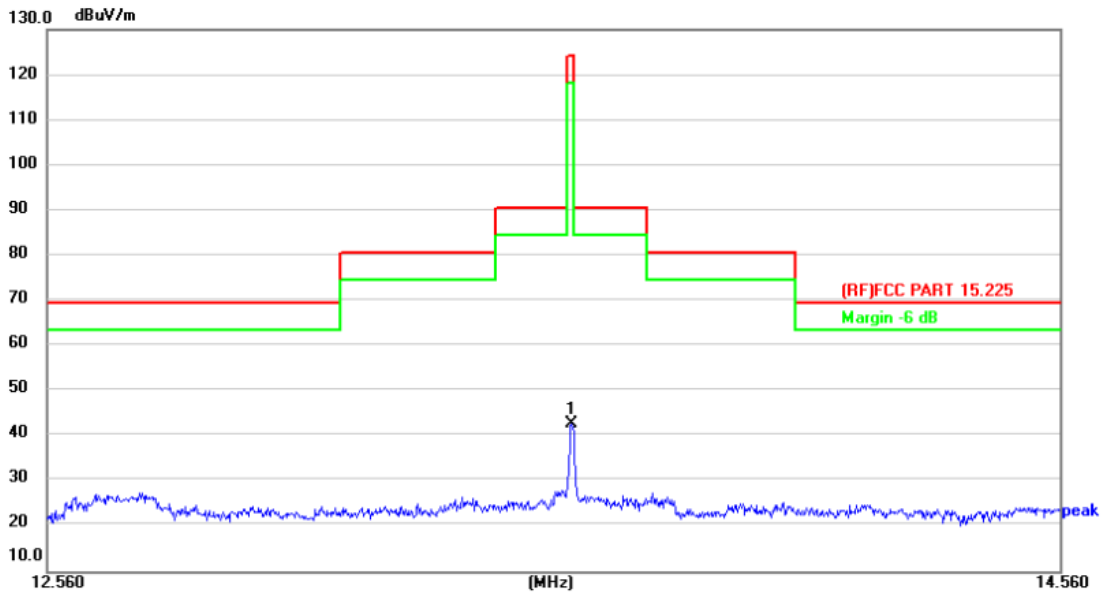


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1	*	13.5600	22.71	20.10	42.81	124.0	-81.19	peak

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dBµV/m) = Corr. (dB/m) + Read Level (dBµV)
3. Margin (dB) = QuasiPeak (dBµV/m) - Limit QPK (dBµV/m)

Temperature:	23.9°C	Relative Humidity:	44%
Test Voltage:	DC 3.85V		
Test Mode:	TX Mode ((DUAL))		
Remark:	N/A		

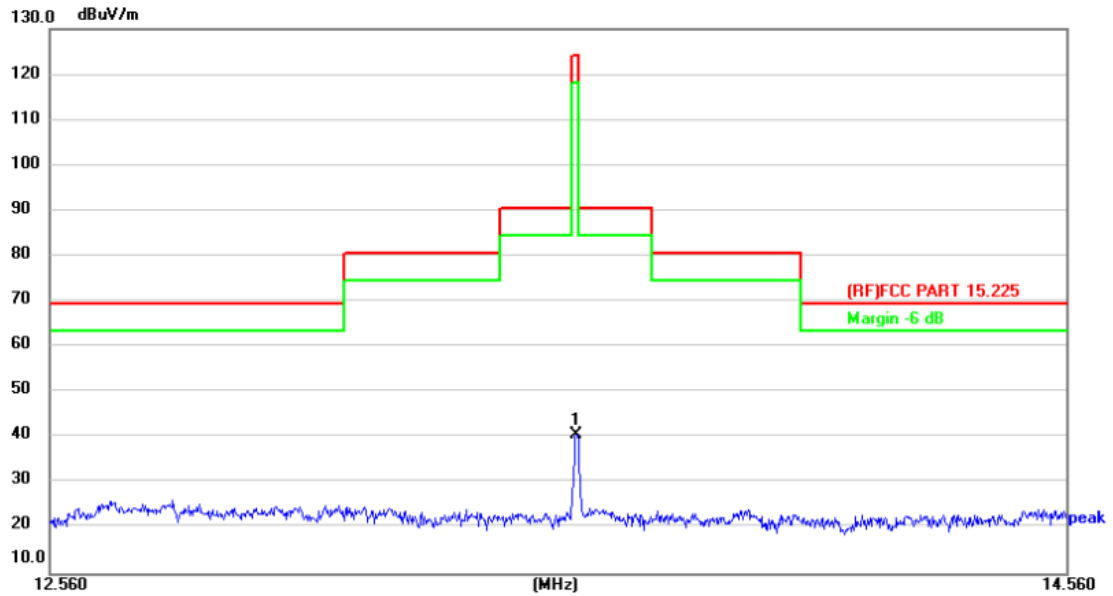


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1	*	13.5600	20.71	20.10	40.81	124.0	-83.19	peak

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = QuasiPeak (dBμV/m)-Limit QPK(dBμV/m)



## Attachment D-- Bandwidth Test Data

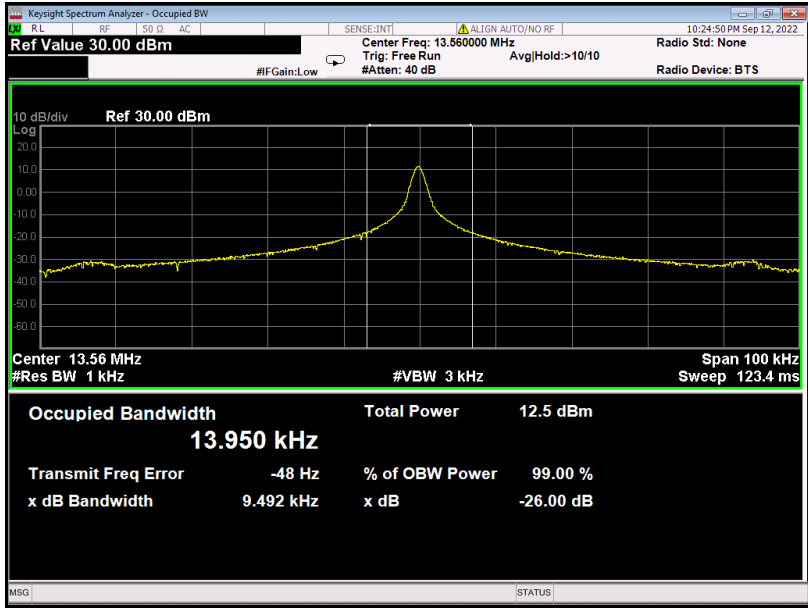Temperature:	25 °C	Relative Humidity:	55%																
Test Voltage:	DC 3.85V																		
Test Mode:	TX Mode																		
Channel Frequency(MHz)		99% Bandwidth(KHz)																	
13.56		13.950																	
<b>13.56 MHz</b>																			
																			
<table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td colspan="2">12.5 dBm</td> </tr> <tr> <td><b>13.950 kHz</b></td> <td></td> <td colspan="2"></td> </tr> <tr> <td>Transmit Freq Error</td> <td>-48 Hz</td> <td>% of OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>9.492 kHz</td> <td>x dB</td> <td>-26.00 dB</td> </tr> </table>				Occupied Bandwidth	Total Power	12.5 dBm		<b>13.950 kHz</b>				Transmit Freq Error	-48 Hz	% of OBW Power	99.00 %	x dB Bandwidth	9.492 kHz	x dB	-26.00 dB
Occupied Bandwidth	Total Power	12.5 dBm																	
<b>13.950 kHz</b>																			
Transmit Freq Error	-48 Hz	% of OBW Power	99.00 %																
x dB Bandwidth	9.492 kHz	x dB	-26.00 dB																

## Attachment E--Fundamental Frequency Tolerance

Frequency Stability Versus Temperature			
Temperature(°C)	Power Supply(V)	Measured Frequency	Frequency Drift
		(MHz)	%
50	DC 3.85V	13.560230	0.0000170
40		13.560126	0.0000093
30		13.560156	0.0000115
20		13.560458	0.0000338
10		13.560493	0.0000364
0		13.560467	0.0000344
-10		13.560438	0.0000323
-20		13.560432	0.0000319
Frequency Stability Versus Temperature			
Temperature(°C)	Power Supply(V)	Measured Frequency	Frequency Drift
		(MHz)	%
20	DC 3.5	13.560438	0.0000323
	DC 3.85	13.560411	0.0000303
	DC 4.4	13.560425	0.0000313

-----END OF REPORT-----