



# TEST REPORT

No. I23N02005-009-SAR

For

**Schok LLC.**

**Smartphone**

**Model Name: SV67332**

With

**Hardware Version: Q6703\_V1.0**

**Software Version: SV67Q\_01.01.04**

**FCC ID: 2AM9L-SV67Q**

**Issued Date: 2024-02-05**

**Designation Number: CN1210**

**Note:**

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of SAICT.

**Test Laboratory:**

**SAICT, Shenzhen Academy of Information and Communications Technology**

Building G, Shenzhen International Innovation Center, No.1006 Shennan Road, Futian District, Shenzhen, Guangdong, P. R. China 518000.

Tel:+86(0)755-33322000, Fax:+86(0)755-33322001

Email: yewu@caict.ac.cn. www.saict.ac.cn



## **REPORT HISTORY**

<b>Report Number</b>	<b>Revision</b>	<b>Description</b>	<b>Issue Date</b>
I23N02005-009-SAR	Rev.0	1st edition	2024-02-05



## CONTENTS

<b>1. Summary of Test Report.....</b>	<b>5</b>
1.1. Test Items.....	5
1.2. Test Standards.....	5
1.3. Test Result.....	5
1.4. Testing Location.....	5
1.5. Project Data.....	5
1.6. Signature.....	5
<b>2. Statement of Compliance.....</b>	<b>6</b>
<b>3. Client Information .....</b>	<b>8</b>
3.1. Applicant Information .....	8
3.2. Manufacturer Information.....	8
<b>4. Equipment under Test (EUT) and Ancillary Equipment (AE).....</b>	<b>9</b>
4.1. About EUT.....	9
4.2. Internal Identification of EUT used during the test .....	10
4.3. Internal Identification of AE used during the test.....	10
4.4. General Description .....	10
<b>5. Test Methodology.....</b>	<b>11</b>
5.1. Applicable Limit Regulations .....	11
5.2. Applicable Measurement Standards.....	11
<b>6. Specific Absorption Rate (SAR) .....</b>	<b>12</b>
6.1. Introduction .....	12
6.2. SAR Definition .....	12
<b>7. Tissue Simulating Liquids.....</b>	<b>13</b>
7.1. Targets for tissue simulating liquid.....	13
7.2. Dielectric Performance.....	13
<b>8. System Verification .....</b>	<b>15</b>
8.1. System Setup.....	15
8.2. System Verification .....	16
<b>9. Measurement Procedures .....</b>	<b>17</b>
9.1. Tests to be performed .....	17
9.2. General Measurement Procedure .....	19
9.3. WCDMA Measurement Procedures for SAR .....	20
9.4. SAR Measurement for LTE .....	21
9.5. LTE (TDD) Considerations .....	22
9.6. Bluetooth & WLAN Measurement Procedures for SAR.....	23
9.7. Power Drift .....	23



**10. Conducted Output Power.....24**

10.1. WCDMA Measurement result.....25

10.2. LTE Measurement result.....28

10.3. Bluetooth and WLAN Measurement result.....40

**11. Simultaneous TX SAR Considerations .....45**

11.1. Introduction.....45

11.2. Transmit Antenna Separation Distances .....45

11.3. SAR Measurement Positions.....46

11.4. Evaluation of Simultaneous .....46

**12. Summary of Test Results .....47**

12.1. Testing Environment .....47

12.2. Test Results.....48

**13. SAR Measurement Variability .....56**

**14. Measurement Uncertainty .....57**

14.1. Measurement Uncertainty for Normal SAR Tests (300MHz~3GHz).....57

14.2. Measurement Uncertainty for Normal SAR Tests (3GHz~6GHz).....58

**15. Main Test Instruments .....59**

**ANNEX A: Graph Results .....60**

**ANNEX B: System Verification Results .....91**

**ANNEX C: SAR Measurement Setup.....103**

**ANNEX D: Position of the wireless device in relation to the phantom .....109**

**ANNEX E: Equivalent Media Recipes.....112**

**ANNEX F: System Validation .....113**

**ANNEX G: DAE Calibration Certificate .....114**

**ANNEX H: Probe Calibration Certificate.....119**

**ANNEX I: Dipole Calibration Certificate.....141**

**ANNEX J: Extended Calibration SAR Dipole .....187**

## 1. Summary of Test Report

### 1.1. Test Items

Description: Smartphone  
Model Name: SV67332  
Applicant's Name: Schok LLC.  
Manufacturer's Name: Great Talent Technology Limited

### 1.2. Test Standards

ANSI C95.1:1992, IEEE 1528:2013

### 1.3. Test Result

Pass. Please refer to "12. Summary of Test Results"

### 1.4. Testing Location


Address: Building G, Shenzhen International Innovation Center, No.1006 Shennan Road, Futian District, Shenzhen, Guangdong, P. R. China

### 1.5. Project Data

Testing Start Date: 2023-12-13


Testing End Date: 2024-02-02

### 1.6. Signature

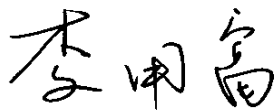


---

Li Yongfu  
(Prepared this test report)



---

Liu Jian  
(Reviewed this test report)



---

Cao Junfei  
(Approved this test report)

## 2. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for Schok LLC. Smartphone SV67332 are as follows:

**Table 2.1: Highest Reported SAR (1g)**

Equipment Class	Frequency Bands	1g SAR (W/kg)		
		Head (Separation 0mm)	Hotspot (Separation 10mm)	Body-worn (Separation 15mm)
PCE	WCDMA Band 2	0.13	<b>1.14</b>	0.37
PCE	WCDMA Band 4	0.17	0.90	0.66
PCE	WCDMA Band 5	0.22	0.35	0.35 <sup>(1)</sup>
PCE	LTE Band 12	0.22	0.26	0.26 <sup>(1)</sup>
PCE	LTE Band 13	0.30	0.38	0.38 <sup>(1)</sup>
PCE	LTE Band 25/2	0.13	1.10	0.45
PCE	LTE Band 26/5	<b>0.41</b>	0.46	0.46 <sup>(1)</sup>
PCE	LTE Band 41	0.24	0.90	0.53
PCE	LTE Band 66/4	0.15	0.89	<b>0.75</b>
PCE	LTE Band 71	0.20	0.17	0.17 <sup>(1)</sup>
DSS	Bluetooth	0.15	0.06	0.06 <sup>(1)</sup>
DTS	WLAN 2.4GHz	0.06	0.06	0.06 <sup>(1)</sup>
NII	WLAN 5GHz	0.32	1.13	0.74

Note1: SAR result at 10mm is used for conservative evaluation.

**Table 2.2: Highest Reported SAR (10g)**

Equipment Class	Frequency Bands	Extremity 10g SAR (W/Kg) (Separation 0mm)
PCE	WCDMA Band 4	3.17
PCE	LTE Band 25/2	3.13
PCE	LTE Band 41	0.85
PCE	LTE Band 66/4	<b>3.96</b>
NII	WLAN 5GHz	2.27

The SAR values found for the Mobile Phone are below the maximum recommended levels of 1.6 W/Kg as averaged over any 1g tissue according to the ANSI C95.1:1992.

The measurement together with the test system set-up is described in annex C of this test report. A detailed description of the equipment under test can be found in chapter 4 of this test report.

The highest reported SAR value is obtained at the case of **(Table 2.1&2.2)**, Head value is **0.41 W/kg (1g)**, Hotspot value is **1.14 W/kg (1g)**, Body-worn value is **0.75 W/kg (1g)** and Extremity value is **3.96 W/kg (10g)**.

**Table 2.3: Maximum Simultaneous Transmission SAR**

/	Position	Sum (W/kg)
Highest reported SAR value for Head	Left Cheek (LTE Band 26 + WLAN 5GHz)	<b>0.61</b>
Highest reported SAR value for Hotspot	Rear Side (WCDMA Band 2 + WLAN 5GHz)	<b>1.24</b>
Highest reported SAR value for Body-worn	Rear Side (LTE Band 66/4 + WLAN 5GHz)	<b>0.96</b>
Highest reported SAR value for Extremity	Rear Side (LTE Band 66/4 + WLAN 5GHz)	<b>3.99</b>

Note: the test positions of above tables are for the worse case that has been evaluated.

According to the above tables, the highest sum of reported SAR values is **1.24 W/kg (1g)** and **3.99 W/kg (10g)**.

The detail for simultaneous transmission consideration is described in chapter 11.



### 3. Client Information

#### 3.1. Applicant Information

Company Name:	Schok LLC.
Address:	5850 Town and Country Blvd, Suite 203   Frisco, TX 75034
City:	Frisco
Country:	USA
Telephone:	+1847-809-3294

#### 3.2. Manufacturer Information

Company Name:	Great Talent Technology Limited
Address:	35F, HBC HuiLong Center Building-II Minzhi Street, Longhua, Shenzhen, P.R. China
City:	Shenzhen
Country:	China
Telephone:	(86) 0755-86638990



## 4. Equipment under Test (EUT) and Ancillary Equipment (AE)

### 4.1. About EUT

Description:	Smartphone
Model Name:	SV67332
Condition of EUT as received:	No obvious damage in appearance
Frequency Bands:	WCDMA Band 2/4/5, LTE Band 2/4/5/12/13/25/26/41/66/71, Bluetooth, WLAN 2.4GHz/5GHz
Tested Tx Frequency:	1850 – 1910MHz (WCDMA Band 2)
	1710 – 1755MHz (WCDMA Band 4)
	824 – 849MHz (WCDMA Band 5)
	1850 – 1910MHz (LTE Band 2)
	1710 – 1755MHz (LTE Band 4)
	824 – 849MHz (LTE Band 5)
	699 – 716MHz (LTE Band 12)
	777 – 787MHz (LTE Band 13)
	1850 – 1915MHz (LTE Band 25)
	814 – 849MHz (LTE Band 26)
	2496 – 2680MHz (LTE Band 41)
	1710 – 1780MHz (LTE Band 66)
	663 – 698MHz (LTE Band 71)
	2402 – 2480MHz (Bluetooth)
	2412 – 2462MHz (WLAN 2.4GHz)
5150 – 5850MHz (WLAN 5GHz)	
Test device Production information:	Production unit
Device type:	Portable device
Antenna type:	Integrated antenna
Hotspot mode:	Support
Product Dimensions:	Long 171.93mm; Wide 78.74mm; Overall Diagonal 181.79mm
<b>Remark:</b> This device WLAN 5GHz U-NII-2A and U-NII-2C don't support hotspot operation.	

#### 4.2. Internal Identification of EUT used during the test

EUT ID*	IMEI	HW Version	SW Version	Receipt Date
UT05aa	359341730782351	Q6703_V1.0	SV67Q_01.01.04	2023-12-06
UT06aa	359341730782393	Q6703_V1.0	SV67Q_01.01.04	2023-12-06
UT07aa	358036140000060	Q6703_V1.0	SV67Q_01.01.04	2023-12-13
UT08aa	358036140000078	Q6703_V1.0	SV67Q_01.01.04	2023-12-13
UT12aa	358036140000128	Q6703_V1.0	SV67Q_01.01.04	2023-12-13
UT13aa	358036140002058	Q6703_V1.0	SV67Q_01.01.04	2024-01-26
UT14aa	358036140002132	Q6703_V1.0	SV67Q_01.01.04	2024-01-26

\*EUT ID: is used to identify the test sample in the lab internally.

**Note:** It is performed to test SAR with the UT07aa & UT08aa & UT12aa & UT13aa & UT14aa, and conducted power with the UT05aa & UT06aa.

#### 4.3. Internal Identification of AE used during the test

AE ID*	Description	Model	Manufacturer
AE1	Battery	SB500Q	Shenbird New Energy (Huizhou) Co., Ltd.

\*AE ID: is used to identify the test sample in the lab internally.

#### 4.4. General Description

According to “Declaration of changes” provided by applicant, the table below shows the difference between configuration1 and configuration2:

Configuration Differences	Configuration1	Configuration2
LCD	/	add supplier zhongxian
SPK	/	add supplier sichuan ruisheng
Cam	/	add supplier weixun
Vibrator	/	add supplier jinxin
Memory	LPDDR4	LPDDR3
Charge circuit changes	Qualcomm	Big moment

We'll perform the SAR measurement with Configuration1 and Spot check test with Configuration2.

## 5. Test Methodology

### 5.1. Applicable Limit Regulations

**ANSI C95.1:1992** IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.

It specifies the maximum exposure limit of **1.6 W/kg** as averaged over any 1 gram of tissue for portable devices being used within 20 cm of the user in the uncontrolled environment.

### 5.2. Applicable Measurement Standards

**IEEE 1528:2013** Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Experimental Techniques.

**KDB 447498 D01 General RF Exposure Guidance v06** RF Exposure Procedures and Equipment Authorization Policies for Mobile and Portable Devices

**KDB 648474 D04 Handset SAR v01r03** SAR Evaluation Considerations for Wireless Handsets.

**KDB 941225 D01 SAR test for 3G devices v03r01** SAR Measurement Procedures for 3G Devices

**KDB 941225 D05 SAR for LTE Devices v02r05** SAR Evaluation Considerations for LTE Devices

**KDB 941225 D06 Hot Spot SAR v02r01** SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities

**KDB 248227 D01 802.11 Wi-Fi SAR v02r02** SAR Guidance for IEEE 802.11 (Wi-Fi) Transmitters.

**KDB 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04** SAR Measurement Requirements for 100 MHz to 6 GHz

**KDB 865664 D02 RF Exposure Reporting v01r02** RF Exposure Compliance Reporting and Documentation Considerations

**TCB workshop April 2019; RF Exposure Procedures (Tissue Simulating Liquids)**

## 6. Specific Absorption Rate (SAR)

### 6.1. Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

### 6.2. SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy ( $dW$ ) absorbed by (dissipated in) an incremental mass ( $dm$ ) contained in a volume element ( $dv$ ) of a given density ( $\rho$ ). The equation description is as below:

$$SAR = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$SAR = c \left( \frac{\delta T}{\delta t} \right)$$

Where:  $C$  is the specific heat capacity,  $\delta T$  is the temperature rise and  $\delta t$  is the exposure duration, or related to the electrical field in the tissue by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where:  $\sigma$  is the conductivity of the tissue,  $\rho$  is the mass density of tissue and  $E$  is the RMS electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

## 7. Tissue Simulating Liquids

### 7.1. Targets for tissue simulating liquid

**Table 7.1: Targets for tissue simulating liquid**


Frequency (MHz)	Liquid Type	Conductivity ( $\sigma$ )	$\pm 5\%$ Range	Permittivity ( $\epsilon$ )	$\pm 5\%$ Range
750	Head	0.89	0.85~0.93	41.9	39.8~44.0
835	Head	0.90	0.86~0.95	41.5	39.4~43.6
1750	Head	1.37	1.30~1.44	40.1	38.1~42.1
1900	Head	1.40	1.33~1.47	40.0	38.0~42.0
2450	Head	1.80	1.71~1.89	39.2	37.2~41.2
2550	Head	1.91	1.81~2.01	39.1	37.1~41.0
5250	Head	4.71	4.47~4.95	35.9	34.1~37.7
5600	Head	5.07	4.82~5.32	35.5	33.8~37.3
5750	Head	5.22	4.96~5.48	35.4	33.6~37.1

### 7.2. Dielectric Performance


**Table 7.2: Dielectric Performance of Tissue Simulating Liquid**

Measurement Date (yyyy-mm-dd)	Frequency (MHz)	Type	Conductivity $\sigma$ (S/m)	Drift (%)	Permittivity $\epsilon$	Drift (%)
2023-12-13	750	Head	0.897	0.79	41.21	-1.65
2023-12-14	835	Head	0.914	1.56	40.72	-1.88
2023-12-16	835	Head	0.925	2.78	41.09	-0.99
2023-12-18	1750	Head	1.384	1.02	39.26	-2.09
2023-12-29	1750	Head	1.366	-0.29	40.58	1.20
2023-12-17	1900	Head	1.417	1.21	39.45	-1.37
2023-12-30	1900	Head	1.391	-0.64	40.47	1.18
2023-12-25	2450	Head	1.845	2.50	38.11	-2.78
2024-01-03	2550	Head	1.939	1.52	38.55	-1.41
2024-02-02	5250	Head	4.616	-2.00	36.40	1.39
2024-02-02	5600	Head	5.008	-1.22	36.14	1.80
2024-02-02	5750	Head	5.323	1.97	34.53	-2.46

Note: The liquid temperature is 22.0°C.

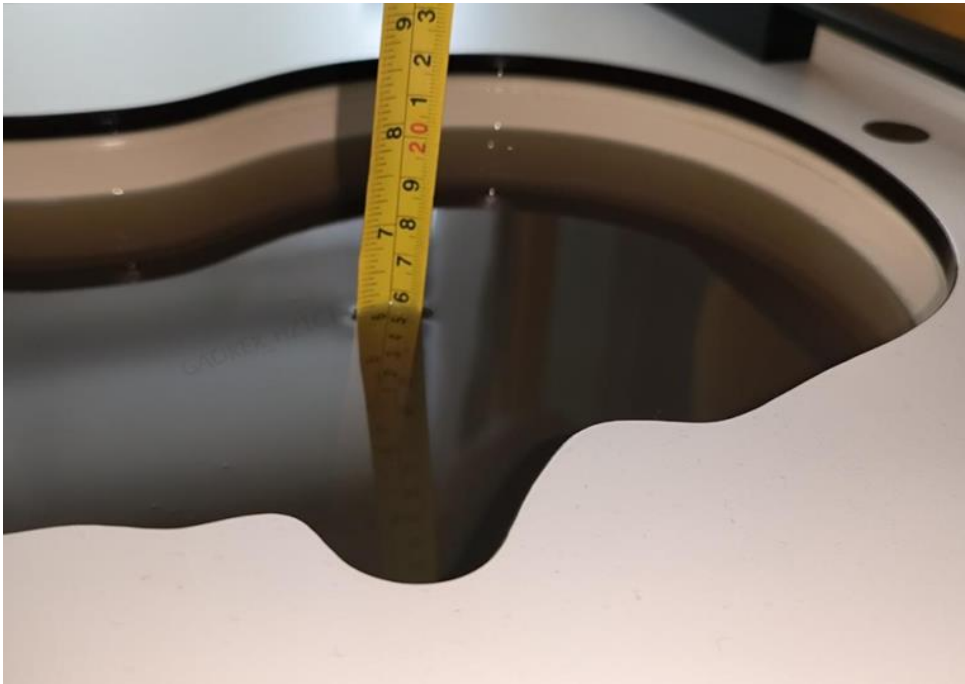

**Picture 7.1 Liquid depth in the Head Phantom (0.7GHz - 6.5GHz)**

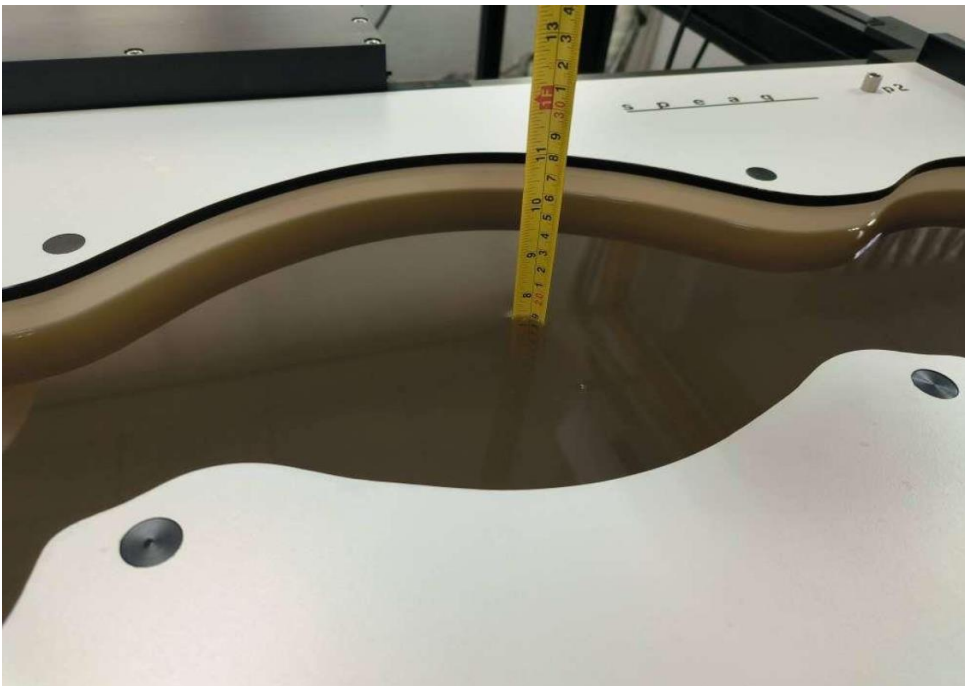


**Picture 7.2 Liquid depth in the Flat Phantom (0.7GHz - 6.5GHz)**

## 8. System Verification

### 8.1. System Setup


In the simplified setup for system evaluation, the DUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

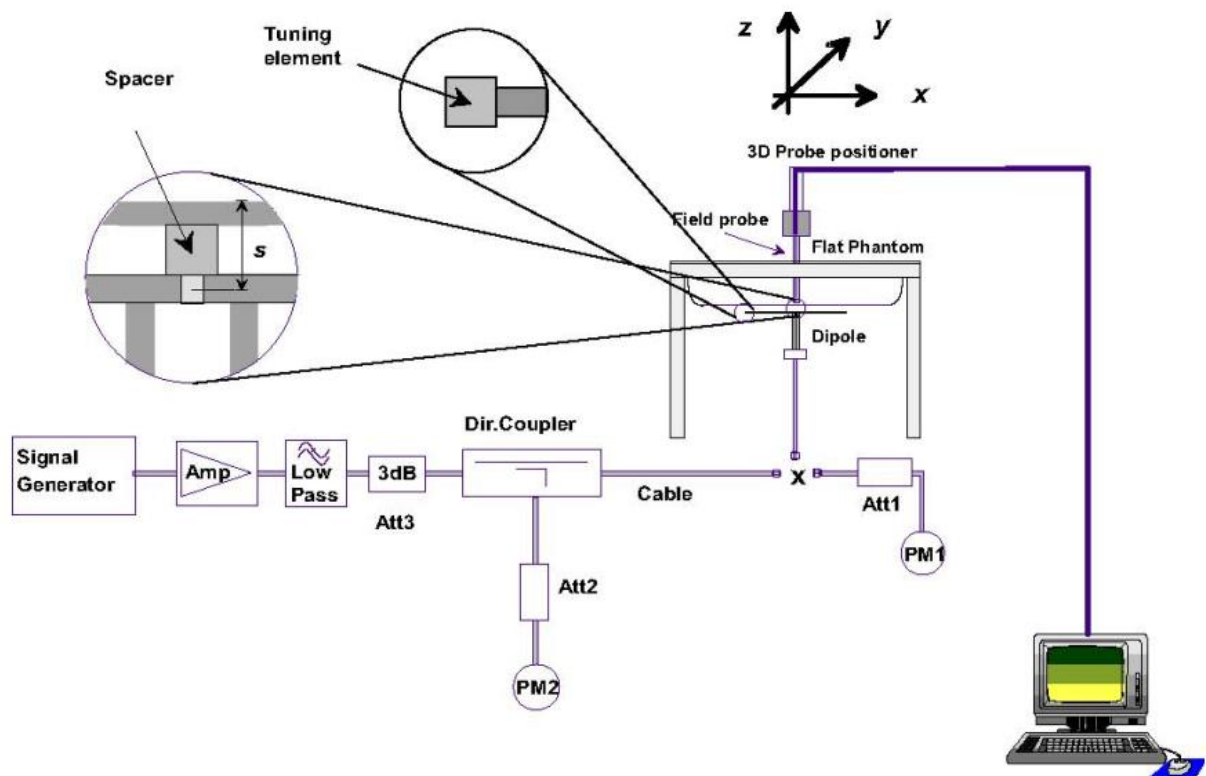

Picture 8.1 System Setup for System Evaluation

For the dipole below 3GHz, the output power on dipole port must be calibrated to 24 dBm (250mW) before dipole is connected.

For the dipole above 3GHz, the output power on dipole port must be calibrated to 20 dBm (100mW) before dipole is connected.

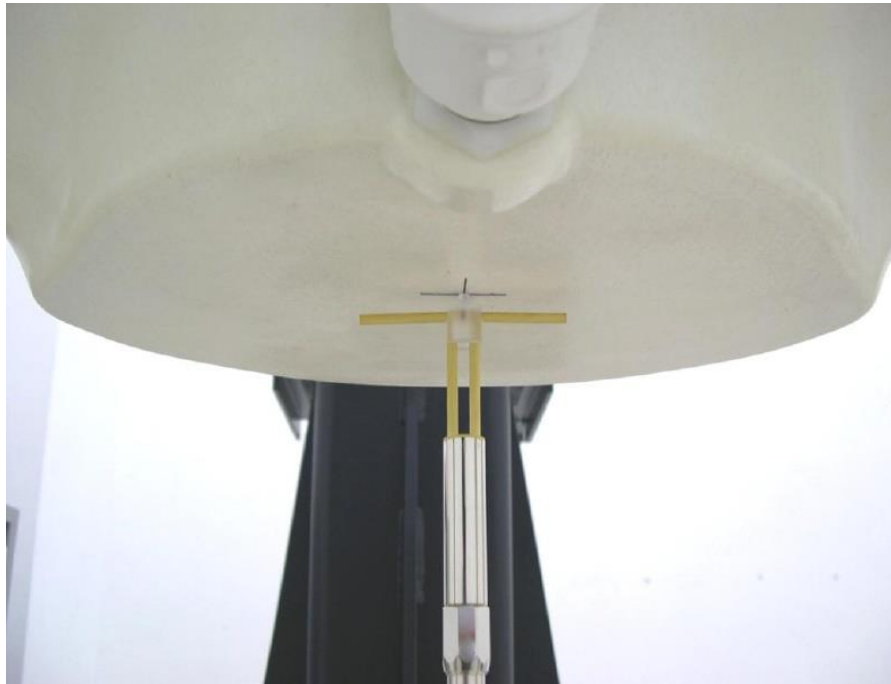

Picture 8.2 Photo of Dipole Setup

## 8.2. System Verification

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device.

Table 9.1: System Verification of Head

Measurement Date	Frequency (MHz)	Target value (W/kg)		Measured value (W/kg)				Deviation (%)	
				/		Normalize to 1W			
		1 g	10 g	1 g	10 g	1 g	10 g	1 g	10 g
2023-12-13	750	8.48	5.62	2.18	1.42	8.72	5.68	2.83	1.07
2023-12-14	835	9.64	6.29	2.45	1.59	9.80	6.36	1.66	1.11
2023-12-16	835	9.64	6.29	2.49	1.61	9.96	6.44	3.32	2.38
2023-12-18	1750	36.30	19.60	9.37	4.95	37.48	19.80	3.25	1.02
2023-12-29	1750	36.30	19.60	8.80	4.82	35.20	19.28	-3.03	-1.63
2023-12-17	1900	40.20	20.50	10.3	5.21	41.20	20.84	2.49	1.66
2023-12-30	1900	40.20	20.50	9.85	5.05	39.40	20.20	-1.99	-1.46
2023-12-25	2450	53.20	24.20	13.7	6.13	54.80	24.52	3.01	1.32
2024-01-03	2550	55.90	25.20	14.4	6.46	57.60	25.84	3.04	2.54
2024-02-02	5250	79.70	22.80	7.70	2.25	77.00	22.50	-3.39	-1.32
2024-02-02	5600	82.60	23.60	8.06	2.32	80.60	23.20	-2.42	-1.69
2024-02-02	5750	78.50	22.10	8.14	2.26	81.40	22.60	3.69	2.26



## 9. Measurement Procedures

### 9.1. Tests to be performed

In order to determine the highest value of the peak spatial-average SAR of a handset, all device positions, configurations and operational modes shall be tested for each frequency band according to steps 1 to 3 below. A flowchart of the test process is shown in picture 9.1.


**Step 1:** The tests described in 9.2 shall be performed at the channel that is closest to the center of the transmit frequency band ( $f_c$ ) for:

- a) all device positions (cheek and tilt, for both left and right sides of the SAM phantom, as described in annex D),
- b) all configurations for each device position in a), e.g., antenna extended and retracted, and
- c) all operational modes, e.g., analogue and digital, for each device position in a) and configuration in b) in each frequency band.

If more than three frequencies need to be tested according to 11.1 (i.e.,  $N_c > 3$ ), then all frequencies, configurations and modes shall be tested for all of the above test conditions.

**Step 2:** For the condition providing highest peak spatial-average SAR determined in Step 1, perform all tests described in 9.2 at all other test frequencies, i.e., lowest and highest frequencies. In addition, for all other conditions (device position, configuration and operational mode) where the peak spatial-average SAR value determined in Step 1 is within 3 dB of the applicable SAR limit, it is recommended that all other test frequencies shall be tested as well.

**Step 3:** Examine all data to determine the highest value of the peak spatial-average SAR found in Steps 1 to 2.

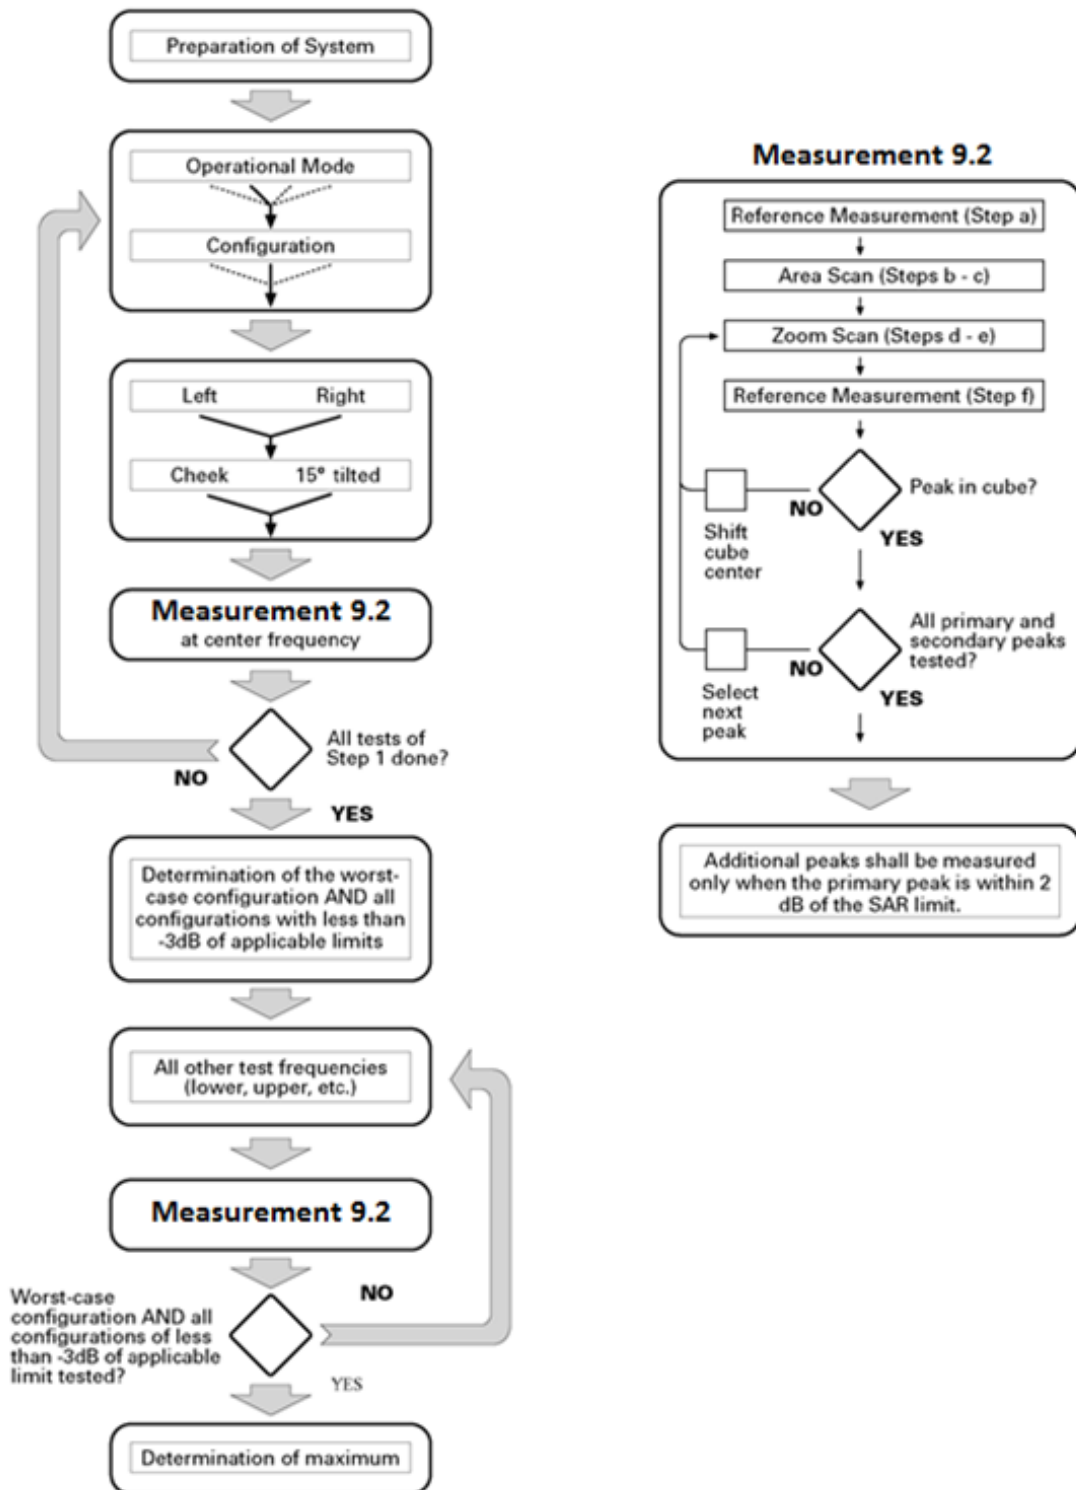

Picture 9.1 Block diagram of the tests to be performed

## 9.2. General Measurement Procedure

The area and zoom scan resolutions specified in the table below must be applied to the SAR measurements and fully documented in SAR reports to qualify for TCB approval. Probe boundary effect error compensation is required for measurements with the probe tip closer than half a probe tip diameter to the phantom surface. Both the probe tip diameter and sensor offset distance must satisfy measurement protocols; to ensure probe boundary effect errors are minimized and the higher fields closest to the phantom surface can be correctly measured and extrapolated to the phantom surface for computing 1-g SAR. Tolerances of the post-processing algorithms must be verified by the test laboratory for the scan resolutions used in the SAR measurements, according to the reference distribution functions specified in IEEE Std 1528-2013. The results should be documented as part of the system validation records and may be requested to support test results when all the measurement parameters in the following table are not satisfied.

		$\leq 3$ GHz	$> 3$ GHz	
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface		$5 \pm 1$ mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm	
Maximum probe angle from probe axis to phantom surface normal at the measurement location		$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$	
Maximum area scan spatial resolution: $\Delta x_{Area}$ , $\Delta y_{Area}$		$\leq 2$ GHz: $\leq 15$ mm 2 – 3 GHz: $\leq 12$ mm	3 – 4 GHz: $\leq 12$ mm 4 – 6 GHz: $\leq 10$ mm	
		When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.		
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}$ , $\Delta y_{Zoom}$		$\leq 2$ GHz: $\leq 8$ mm 2 – 3 GHz: $\leq 5$ mm*	3 – 4 GHz: $\leq 5$ mm* 4 – 6 GHz: $\leq 4$ mm*	
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	$\leq 5$ mm	3 – 4 GHz: $\leq 4$ mm 4 – 5 GHz: $\leq 3$ mm 5 – 6 GHz: $\leq 2$ mm	
	graded grid	$\Delta z_{Zoom}(1)$ : between 1 <sup>st</sup> two points closest to phantom surface	$\leq 4$ mm	3 – 4 GHz: $\leq 3$ mm 4 – 5 GHz: $\leq 2.5$ mm 5 – 6 GHz: $\leq 2$ mm
		$\Delta z_{Zoom}(n>1)$ : between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z	$\geq 30$ mm	3 – 4 GHz: $\geq 28$ mm 4 – 5 GHz: $\geq 25$ mm 5 – 6 GHz: $\geq 22$ mm	
<p>Note: <math>\delta</math> is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.</p> <p>* When zoom scan is required and the <i>reported</i> SAR from the area scan based 1-g SAR estimation procedures of KDB 447498 is <math>\leq 1.4</math> W/kg, <math>\leq 8</math> mm, <math>\leq 7</math> mm and <math>\leq 5</math> mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.</p>				

### 9.3. WCDMA Measurement Procedures for SAR

The following procedures are applicable to WCDMA handsets operating under 3GPP Release99, Release 5 and Release 6. The default test configuration is to measure SAR with an established radio link between the DUT and a communication test set using a 12.2kbps RMC (reference measurement channel) configured in Test Loop Mode 1. SAR is selectively confirmed for other physical channel configurations (DPCCH & DPDCH<sub>n</sub>), HSDPA and HSPA (HSUPA/HSDPA) modes according to output power, exposure conditions and device operating capabilities. Both uplink and downlink should be configured with the same RMC or AMR, when required. SAR for Release 5 HSDPA and Release 6 HSPA are measured using the applicable FRC (fixed reference channel) and E-DCH reference channel configurations. Maximum output power is verified according to applicable versions of 3GPP TS 34.121 and SAR must be measured according to these maximum output conditions. When Maximum Power Reduction (MPR) is not implemented according to Cubic Metric (CM) requirements for Release 6 HSPA, the following procedures do not apply.

#### For Release 5 HSDPA Data Devices:

Sub-test	$\beta_c$	$\beta_d$	$\beta_d$ (SF)	$\beta_c / \beta_d$	$\beta_{hs}$	CM/dB
1	2/15	15/15	64	2/15	4/15	0.0
2	12/15	15/15	64	12/15	24/25	1.0
3	15/15	8/15	64	15/8	30/15	1.5
4	15/15	4/15	64	15/4	30/15	1.5

#### For Release 6 HSPA Data Devices

Sub-test	$\beta_c$	$\beta_d$	$\beta_d$ (SF)	$\beta_c / \beta_d$	$\beta_{hs}$	$\beta_{ec}$	$\beta_{ed}$	$\beta_{ed}$ (SF)	$\beta_{ed}$ (codes)	CM (dB)	MPR (dB)	AG Index	E-TFCI
1	11/15	15/15	64	11/15	22/15	209/225	1039/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	12/15	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}:47/1$ 5 $\beta_{ed2}:47/15$	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	4/15	56/75	4	1	3.0	2.0	17	71
5	15/15	15/15	64	15/15	24/15	30/15	134/15	4	1	1.0	0.0	21	81

#### 9.4. SAR Measurement for LTE

SAR tests for LTE are performed with a base station simulator, Anristu MT8820C. Closed loop power control was used so the UE transmits with maximum output power during SAR testing. All powers were measured with the Anristu MT8820C. It is performed for conducted power and SAR based on the KDB941225 D05.

SAR is evaluated separately according to the following procedures for the different test positions in each exposure condition – head, body, body-worn accessories and other use conditions. The procedures in the following subsections are applied separately to test each LTE frequency band.

1) QPSK with 1 RB allocation

Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is  $\leq 0.8$  W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. When the reported SAR of a required test channel is  $> 1.45$  W/kg, SAR is required for all three RB offset configurations for that required test channel.

2) QPSK with 50% RB allocation

The procedures required for 1 RB allocation in 1) are applied to measure the SAR for QPSK with 50% RB allocation.

3) QPSK with 100% RB allocation


For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100% RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation in 1) and 2) are  $\leq 0.8$  W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is  $> 1.45$  W/kg, the remaining required test channels must also be tested.

### 9.5. LTE (TDD) Considerations

According to KDB 941225 D05 SAR for LTE Devices, for Time-Division Duplex (TDD) systems, SAR must be tested using a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by the defined 3GPP LTE TDD configurations.

SAR was tested with the highest transmission duty factor (63.33%) using Uplink-downlink configuration 0 and Special subframe configuration 7.

LTE TDD Band supports 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations and Table 4.2-1 for Special subframe configurations.

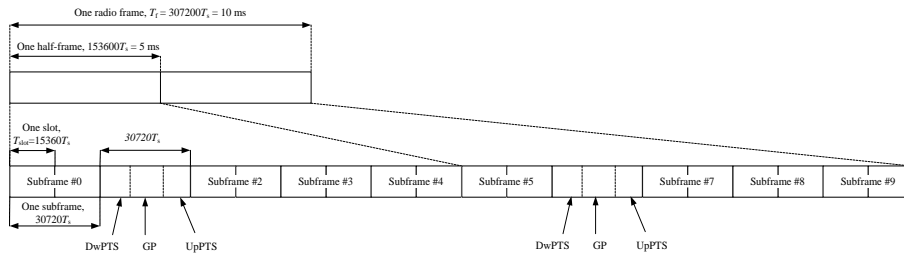

Frame structure type 2

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$			$7680 \cdot T_s$		
5	$6592 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$20480 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$		
8	$24144 \cdot T_s$			-		
9	$13168 \cdot T_s$			-		

Configuration of special subframe (lengths of DwPTS/GP/UpPTS)

Uplink-Downlink Configuration	Downlink-to-Uplink Switch-point Periodicity	Subframe Number										Calculated Duty Cycle (%)
		0	1	2	3	4	5	6	7	8	9	
0	5 ms	D	S	U	U	U	D	S	U	U	U	63.33
1	5 ms	D	S	U	U	D	D	S	U	U	D	43.33
2	5 ms	D	S	U	D	D	D	S	U	D	D	23.33
3	10 ms	D	S	U	U	U	D	D	D	D	D	31.67
4	10 ms	D	S	U	U	D	D	D	D	D	D	21.67
5	10 ms	D	S	U	D	D	D	D	D	D	D	11.67
6	5 ms	D	S	U	U	U	D	S	U	U	D	53.33

Calculated Duty Cycle

Calculated Duty Cycle = Extended cyclic prefix in uplink x (Ts) x # of S + # of U

Example for Calculated Duty Cycle for Uplink-Downlink Configuration 0:

Calculated Duty Cycle =  $5120 \times [1/(15000 \times 2048)] \times 2 + 6 \text{ ms} = 63.33\%$

Where:

$T_s = 1/(15000 \times 2048)$  seconds

## 9.6. Bluetooth & WLAN Measurement Procedures for SAR

Normal network operating configurations are not suitable for measuring the SAR of 802.11 transmitters in general. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure that the results are consistent and reliable.

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in a test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters. The test frequencies should correspond to actual channel frequencies defined for domestic use. SAR for devices with switched diversity should be measured with only one antenna transmitting at a time during each SAR measurement, according to a fixed modulation and data rate. The same data pattern should be used for all measurements.

## 9.7. Power Drift

To control the output power stability during the SAR test, DASY5 system calculates the power drift by measuring the E-field at the same location at the beginning and at the end of the measurement for each test position. These drift values can be found in Section 14 labeled as: (Power Drift [dB]). This ensures that the power drift during one measurement is within 5%.

## 10. Conducted Output Power

Summary of power level – WWAN antenna

WWAN	Receiver on (Head)	Receiver off + Hotspot on (Hotspot)	Receiver off + Hotspot off (Body-Worn / Extremity)
	<b>Power Level A1</b>	<b>Power Level B1</b>	<b>Power Level C1</b>

Summary of power level – Bluetooth/WLAN antenna

Bluetooth/WLAN stand-alone	Receiver on (Head)	Receiver off + Hotspot on (Hotspot)	Receiver off + Hotspot off (Body-Worn / Extremity)
	<b>Power Level D1</b>	<b>Power Level E1</b>	<b>Power Level F1</b>
Bluetooth/WLAN + WWAN	Receiver on (Head)	Receiver off + Hotspot on (Hotspot)	Receiver off + Hotspot off (Body-Worn / Extremity)
	<b>Power Level D2</b>	<b>Power Level E2</b>	<b>Power Level F2</b>



### 10.1. WCDMA Measurement result

Table 10.1: The conducted power measurement results WCDMA

#### WCDMA Band 2 Power Level A1

Item	Band	WCDMA Band 2 Result (dBm)			
	ARFCN	Tune up	Ch.9538 (1907.6MHz)	Ch.9400 (1880MHz)	Ch.9262 (1852.4MHz)
WCDMA	12.2kbps RMC	<b>22.5</b>	<b>21.80</b>	<b>22.00</b>	<b>22.00</b>
HSUPA	1	<b>21.0</b>	20.00	20.10	20.10
	2	<b>21.0</b>	20.10	20.20	20.20
	3	<b>21.0</b>	19.80	20.00	20.00
	4	<b>20.0</b>	19.10	19.20	19.20
	5	<b>21.5</b>	20.70	20.90	20.80
HSDPA	1	<b>21.5</b>	20.80	21.00	20.90
	2	<b>21.5</b>	20.90	21.10	21.10
	3	<b>21.0</b>	20.40	20.50	20.50
	4	<b>21.0</b>	20.40	20.50	20.50
DC-HSDPA	1	<b>21.5</b>	20.90	20.90	20.90
	2	<b>21.5</b>	20.90	21.10	21.00
	3	<b>21.0</b>	20.30	20.50	20.40
	4	<b>21.0</b>	20.40	20.40	20.40

#### WCDMA Band 2 Power Level B1/C1

Item	Band	WCDMA Band 2 Result (dBm)			
	ARFCN	Tune up	Ch.9538 (1907.6MHz)	Ch.9400 (1880MHz)	Ch.9262 (1852.4MHz)
WCDMA	12.2kbps RMC	<b>20.5</b>	<b>20.10</b>	<b>20.00</b>	<b>19.90</b>
HSUPA	1	<b>19.0</b>	18.20	18.30	18.20
	2	<b>19.0</b>	18.30	18.40	18.40
	3	<b>19.0</b>	18.20	18.20	18.20
	4	<b>18.0</b>	17.10	17.20	17.20
	5	<b>19.5</b>	19.10	19.10	19.10
HSDPA	1	<b>19.5</b>	19.10	19.10	19.10
	2	<b>19.5</b>	19.20	19.20	19.20
	3	<b>19.0</b>	18.70	18.70	18.80
	4	<b>19.0</b>	18.70	18.70	18.70
DC-HSDPA	1	<b>19.5</b>	19.00	19.10	19.10
	2	<b>19.5</b>	18.90	19.10	19.10
	3	<b>19.0</b>	18.60	18.70	18.80
	4	<b>19.0</b>	18.40	18.50	18.70

**WCDMA Band 4 Power Level A1/C1**

Item	Band	WCDMA Band 4 Result (dBm)			
	ARFCN	Tune up	Ch.1513 (1752.6MHz)	Ch.1413 (1732.6MHz)	Ch.1312 (1712.4MHz)
WCDMA	12.2kbps RMC	<b>22.5</b>	<b>21.70</b>	<b>21.30</b>	<b>21.80</b>
HSUPA	1	<b>21.0</b>	19.80	19.40	19.90
	2	<b>21.0</b>	19.90	19.50	20.00
	3	<b>21.0</b>	19.80	19.30	19.80
	4	<b>20.0</b>	18.70	18.30	18.80
	5	<b>21.5</b>	20.60	20.30	20.70
HSDPA	1	<b>21.5</b>	20.70	20.30	20.80
	2	<b>21.5</b>	20.70	20.40	20.80
	3	<b>21.0</b>	20.40	20.00	20.50
	4	<b>21.0</b>	20.40	19.90	20.40
DC-HSDPA	1	<b>21.5</b>	20.70	20.60	20.80
	2	<b>21.5</b>	20.70	20.50	20.70
	3	<b>21.0</b>	20.40	20.30	20.50
	4	<b>21.0</b>	20.30	20.20	20.30

**WCDMA Band 4 Power Level B1**

Item	Band	WCDMA Band 4 Result (dBm)			
	ARFCN	Tune up	Ch.1513 (1752.6MHz)	Ch.1413 (1732.6MHz)	Ch.1312 (1712.4MHz)
WCDMA	12.2kbps RMC	<b>20.5</b>	<b>20.00</b>	<b>19.90</b>	<b>19.90</b>
HSUPA	1	<b>19.0</b>	18.10	18.00	18.00
	2	<b>19.0</b>	18.20	18.10	18.10
	3	<b>19.0</b>	18.20	18.10	18.10
	4	<b>18.0</b>	17.00	16.90	16.90
	5	<b>19.5</b>	19.00	19.00	19.00
HSDPA	1	<b>19.5</b>	19.00	19.00	19.00
	2	<b>19.5</b>	19.10	19.10	19.10
	3	<b>19.0</b>	18.60	18.50	18.60
	4	<b>19.0</b>	18.60	18.50	18.60
DC-HSDPA	1	<b>19.5</b>	18.80	19.00	18.90
	2	<b>19.5</b>	18.90	19.10	19.00
	3	<b>19.0</b>	18.50	18.50	18.60
	4	<b>19.0</b>	18.40	18.50	18.50

**WCDMA Band 5 Power Level A1/B1/C1**

Item	Band	WCDMA Band 5 Result (dBm)			
	ARFCN	Tune up	Ch.4233 (846.6MHz)	Ch.4183 (836.6MHz)	Ch.4132 (826.4MHz)
WCDMA	12.2kbps RMC	<b>22.5</b>	<b>21.50</b>	<b>21.50</b>	<b>21.40</b>
HSUPA	1	<b>21.0</b>	19.60	19.60	19.50
	2	<b>21.0</b>	19.70	19.70	19.60
	3	<b>21.0</b>	19.50	19.50	19.40
	4	<b>20.0</b>	18.60	18.60	18.40
	5	<b>21.5</b>	20.50	20.50	20.40
HSDPA	1	<b>21.5</b>	20.60	20.60	20.50
	2	<b>21.5</b>	20.70	20.70	20.50
	3	<b>21.0</b>	20.10	20.10	20.00
	4	<b>21.0</b>	20.10	20.10	20.00
DC- HSDPA	1	<b>21.5</b>	20.50	20.60	20.40
	2	<b>21.5</b>	20.50	20.70	20.30
	3	<b>21.0</b>	20.00	20.20	20.00
	4	<b>21.0</b>	20.10	20.00	20.00

## 10.2. LTE Measurement result

According to April 2015 TCB workshop, SAR Test exclusion can be applied for testing overlapping LTE Bands as follows:

- a) The maximum out power, including tolerance, for the smaller band must be  $\leq$  the larger band to qualify for SAR test exclusion.
- b) The channel bandwidth and other operating parameters for the smaller band must be fully supported by the larger band.

LTE Band 2 (1850 - 1910MHz) is covered by LTE Band 25 (1850 - 1915MHz)

LTE Band 4 (1710 - 1755MHz) is covered by LTE Band 66 (1710 - 1780MHz)

LTE Band 5 (824 - 849MHz) is covered by LTE Band 26 (814 - 849MHz)

**Table 10.2: The conducted Power for LTE**  
**LTE Band 12 Power Level A1/B1/C1**

Bandwidth	Number of RBs	Frequency	QPSK	16QAM	64QAM	QPSK Tune-up	16QAM Tune-up	64QAM Tune-up			
1.4MHz	1RB-High (5)	715.3	22.91	21.55	20.90	24.0	23.0	22.0			
		707.5	22.79	21.95	21.13						
		699.7	22.82	21.56	21.32						
	1RB-Middle (3)	715.3	22.98	21.84	21.28						
		707.5	22.89	22.06	20.90						
		699.7	22.76	21.70	21.37						
	1RB-Low (0)	715.3	22.85	21.78	20.99						
		707.5	22.86	22.14	21.11						
		699.7	22.72	21.48	21.14						
	3RB-High (3)	715.3	22.96	21.96	20.89						
		707.5	22.81	21.83	20.99						
		699.7	22.73	21.67	20.87						
	3RB-Middle (1)	715.3	23.09	21.98	20.76						
		707.5	22.88	21.83	20.71						
		699.7	22.74	21.75	20.91						
	3RB-Low (0)	715.3	22.94	22.03	20.43						
		707.5	22.83	21.92	20.32						
		699.7	22.76	21.76	20.79						
6RB (0)	715.3	21.85	20.95	19.87	23.0	22.0	21.0				
	707.5	21.75	20.74	19.77							
	699.7	21.87	20.89	19.70							
3MHz	1RB-High (14)	714.5	22.81	21.69	20.85	24.0	23.0	22.0			
		707.5	22.82	22.03	20.87						
		700.5	22.66	21.85	20.74						
	1RB-Middle (7)	714.5	22.87	21.87	20.99						
		707.5	22.95	22.03	20.91						
		700.5	23.10	21.77	20.88						
	1RB-Low (0)	714.5	22.87	21.60	20.75						
		707.5	22.83	21.92	20.73						
		700.5	22.85	21.57	20.86						
	8RB-High (7)	714.5	21.82	21.14	19.93				23.0	22.0	21.0
		707.5	21.88	20.87	19.87						
		700.5	21.84	21.02	19.79						
	8RB-Middle (4)	714.5	21.95	20.96	19.86						
		707.5	21.93	20.81	19.87						
		700.5	21.85	21.05	19.81						
	8RB-Low (0)	714.5	21.93	20.82	19.91						
		707.5	21.87	20.83	19.85						
		700.5	21.87	21.06	19.76						
15RB (0)	714.5	21.84	20.83	19.90							
	707.5	21.85	20.89	19.89							
	700.5	21.85	20.79	19.89							
5MHz	1RB-High (24)	713.5	22.73	21.77	20.72	24.0	23.0	22.0			
		707.5	22.74	21.71	20.70						
		701.5	22.88	21.54	20.87						
	1RB-Middle (12)	713.5	22.89	22.30	21.16						
		707.5	22.82	21.64	21.20						
		701.5	22.97	21.67	21.11						
	1RB-Low (0)	713.5	22.68	21.65	20.67						
		707.5	22.67	21.56	20.77						
		701.5	22.61	21.58	20.73						
	12RB-High (13)	713.5	21.74	20.70	19.77				23.0	22.0	21.0
		707.5	21.82	20.83	19.76						
		701.5	21.84	20.80	19.57						
	12RB-Middle (6)	713.5	21.80	20.69	19.95						
		707.5	21.82	20.84	20.01						
		701.5	21.86	20.81	19.63						
	12RB-Low (0)	713.5	21.71	20.68	19.98						
		707.5	21.77	20.81	19.97						
		701.5	21.80	20.78	19.63						
25RB (0)	713.5	21.71	20.97	19.93							
	707.5	21.75	20.76	19.72							
	701.5	21.79	20.82	20.02							
10MHz	1RB-High (49)	711.0	22.78	21.88	20.76	24.0	23.0	22.0			
		707.5	22.80	21.75	20.77						
		704.0	22.79	21.82	20.84						
	1RB-Middle (24)	711.0	22.88	21.72	20.90						
		707.5	22.93	21.80	21.01						
		704.0	22.92	21.78	20.98						
	1RB-Low (0)	711.0	22.60	21.72	20.75						
		707.5	22.46	21.60	20.73						
		704.0	22.65	21.56	20.59						
	25RB-High (25)	711.0	21.81	20.71	19.91				23.0	22.0	21.0
		707.5	21.85	20.62	19.95						
		704.0	21.88	20.97	20.05						
	25RB-Middle (12)	711.0	21.89	20.86	20.07						
		707.5	21.84	20.65	19.96						
		704.0	21.81	20.97	20.04						
	25RB-Low (0)	711.0	21.82	20.79	20.04						
		707.5	21.84	20.65	19.65						
		704.0	21.78	20.84	19.89						
50RB (0)	711.0	21.86	20.94	19.85							
	707.5	21.86	20.85	19.94							
	704.0	21.88	20.96	19.83							

**LTE Band 13 Power Level A1/B1/C1**

Bandwidth	Number of RBs	Frequency	QPSK	16QAM	64QAM	QPSK Tune-up	16QAM Tune-up	64QAM Tune-up	
5MHz	1RB-High (24)	784.5	22.82	21.70	20.68	24.0	23.0	22.0	
		782.0	22.88	21.60	20.76				
		779.5	22.69	21.58	20.87				
	1RB-Middle (12)	784.5	23.07	22.04	21.23				
		782.0	22.93	21.84	21.02				
		779.5	22.93	21.82	20.83				
	1RB-Low (0)	784.5	22.76	21.53	20.82				
		782.0	22.72	21.94	20.75				
		779.5	22.77	21.75	21.00				
	12RB-High (13)	784.5	21.97	20.95	19.94	23.0	22.0	21.0	
		782.0	21.84	20.75	19.89				
		779.5	21.98	21.00	20.02				
		12RB-Middle (6)	784.5	21.80	20.91				19.96
			782.0	21.89	20.72				20.04
			779.5	21.99	21.05				19.92
		12RB-Low (0)	784.5	21.76	20.85				19.89
			782.0	21.87	20.70				20.01
			779.5	21.93	20.93				20.01
25RB (0)	784.5	21.84	21.07	19.94					
	782.0	21.86	20.70	19.96					
	779.5	21.94	21.00	20.00					
10MHz	1RB-High (49)	782.0	22.87	21.91	20.84	24.0	23.0	22.0	
	1RB-Middle (24)	782.0	22.94	21.94	20.98				
	1RB-Low (0)	782.0	22.87	21.98	21.09				
	25RB-High (25)	782.0	21.85	20.90	19.76	23.0	22.0	21.0	
	25RB-Middle (12)	782.0	21.84	21.01	19.92				
	25RB-Low (0)	782.0	21.87	20.95	19.95				
	50RB (0)	782.0	21.85	20.85	19.78				



LTE Band 25 Power Level A1

Bandwidth	Number of RBs	Frequency	QPSK	16QAM	64QAM	QPSK Tune-up	16QAM Tune-up	64QAM Tune-up
1.4MHz	1RB-High (5)	1914.3	21.96	21.10	20.63	23.5	22.5	21.5
		1882.5	21.95	21.07	19.75			
		1850.7	22.38	21.55	20.70			
	1RB-Middle (3)	1914.3	22.16	21.07	20.14			
		1882.5	21.99	21.18	20.03			
		1850.7	22.42	21.69	20.83			
	1RB-Low (0)	1914.3	22.06	20.95	20.55			
		1882.5	22.06	21.17	19.92			
		1850.7	22.35	21.74	20.70			
	3RB-High (3)	1914.3	22.12	20.89	19.99			
		1882.5	22.05	21.00	20.07			
		1850.7	22.37	21.04	20.35			
	3RB-Middle (1)	1914.3	22.10	21.27	20.09			
		1882.5	22.19	21.22	20.15			
		1850.7	22.38	21.23	20.44			
	3RB-Low (0)	1914.3	22.27	21.29	20.15			
		1882.5	22.02	21.06	20.18			
		1850.7	22.37	21.33	20.30			
	6RB (0)	1914.3	21.14	20.18	19.05			
		1882.5	21.24	20.21	19.04			
		1850.7	21.46	20.40	19.15			
3MHz	1RB-High (14)	1913.5	22.24	21.26	20.47	23.5	22.5	21.5
		1882.5	22.08	20.90	20.09			
		1851.5	22.06	21.00	20.28			
	1RB-Middle (7)	1913.5	22.20	21.24	20.26			
		1882.5	22.06	20.87	19.87			
		1851.5	22.25	21.56	20.67			
	1RB-Low (0)	1913.5	22.22	21.23	20.27			
		1882.5	22.12	20.91	20.18			
		1851.5	22.16	21.17	20.43			
	8RB-High (7)	1913.5	21.31	20.23	19.07			
		1882.5	21.19	20.00	18.92			
		1851.5	21.39	20.27	19.22			
	8RB-Middle (4)	1913.5	21.35	20.19	19.04			
		1882.5	21.14	20.14	19.04			
		1851.5	21.38	20.28	19.20			
	8RB-Low (0)	1913.5	21.28	20.22	19.03			
		1882.5	21.21	20.16	19.07			
		1851.5	21.32	20.31	19.25			
	15RB (0)	1913.5	21.22	20.27	19.27			
		1882.5	21.25	20.16	19.31			
		1851.5	21.43	20.19	19.53			
5MHz	1RB-High (24)	1912.5	21.95	21.10	19.73	23.5	22.5	21.5
		1882.5	21.91	20.92	19.98			
		1852.5	22.08	21.08	19.65			
	1RB-Middle (12)	1912.5	22.00	21.12	20.39			
		1882.5	22.21	20.85	20.21			
		1852.5	22.09	21.20	20.23			
	1RB-Low (0)	1912.5	22.00	20.85	20.19			
		1882.5	21.94	20.82	20.08			
		1852.5	22.33	21.20	20.20			
	12RB-High (13)	1912.5	21.23	20.22	19.48			
		1882.5	21.08	20.08	19.21			
		1852.5	21.25	20.39	19.19			
	12RB-Middle (6)	1912.5	21.18	20.24	19.28			
		1882.5	21.21	20.22	19.33			
		1852.5	21.25	20.30	19.24			
	12RB-Low (0)	1912.5	21.19	20.21	19.25			
		1882.5	21.19	20.19	19.20			
		1852.5	21.32	20.29	19.33			
	25RB (0)	1912.5	21.17	20.11	18.99			
		1882.5	21.15	20.16	19.29			
		1852.5	21.21	20.37	19.04			
10MHz	1RB-High (49)	1910.0	22.34	21.41	20.16	23.5	22.5	21.5
		1882.5	22.09	20.97	20.10			
		1855.0	22.18	21.19	20.31			
	1RB-Middle (24)	1910.0	22.23	21.16	20.39			
		1882.5	22.11	20.98	20.20			
		1855.0	22.31	21.12	20.33			
	1RB-Low (0)	1910.0	22.15	21.18	20.14			
		1882.5	22.35	21.29	20.24			
		1855.0	22.25	21.96	20.34			
	25RB-High (25)	1910.0	21.10	20.22	19.35			
		1882.5	21.03	20.16	19.18			
		1855.0	21.28	20.32	19.06			
	25RB-Middle (12)	1910.0	21.24	20.27	19.25			
		1882.5	21.26	20.30	19.41			
		1855.0	21.30	20.14	19.08			
	25RB-Low (0)	1910.0	21.27	20.23	19.21			
		1882.5	21.21	20.23	19.35			
		1855.0	21.25	20.20	19.13			
	50RB (0)	1910.0	21.23	20.28	19.16			
		1882.5	21.23	20.25	19.18			
		1855.0	21.28	20.24	19.45			
15MHz	1RB-High (74)	1907.5	22.15	21.12	20.27	23.5	22.5	21.5
		1882.5	21.79	20.94	20.10			
		1857.5	22.18	21.18	20.59			
	1RB-Middle (37)	1907.5	22.16	21.06	20.63			
		1882.5	22.21	20.96	20.43			
		1857.5	22.15	21.10	20.62			
	1RB-Low (0)	1907.5	21.98	20.98	20.14			
		1882.5	22.36	21.21	20.31			
		1857.5	22.45	21.38	20.44			
	36RB-High (38)	1907.5	21.26	20.07	19.41			
		1882.5	21.11	20.13	19.18			
		1857.5	21.31	20.24	19.21			
	36RB-Middle (19)	1907.5	21.19	20.23	19.38			
		1882.5	21.20	20.21	19.28			
		1857.5	21.32	20.38	19.44			
	36RB-Low (0)	1907.5	21.14	20.09	19.39			
		1882.5	21.24	20.15	19.35			
		1857.5	21.27	20.18	19.47			
	75RB (0)	1907.5	21.19	20.15	19.15			
		1882.5	21.21	20.23	19.07			
		1857.5	21.27	20.18	19.12			
20MHz	1RB-High (99)	1905.0	22.20	21.10	20.06	23.5	22.5	21.5
		1882.5	22.10	20.83	20.39			
		1860.0	21.92	20.97	20.42			
	1RB-Middle (50)	1905.0	22.05	20.95	20.63			
		1882.5	22.13	21.09	20.44			
		1860.0	22.32	21.35	20.76			
	1RB-Low (0)	1905.0	22.21	21.03	20.19			
		1882.5	22.43	21.14	20.40			
		1860.0	22.34	21.25	20.44			
	50RB-High (50)	1905.0	21.17	20.21	19.16			
		1882.5	21.11	20.14	19.00			
		1860.0	21.17	20.25	19.18			
	50RB-Middle (25)	1905.0	21.23	20.25	19.12			
		1882.5	21.22	20.27	19.16			
		1860.0	21.32	20.37	19.23			
	50RB-Low (0)	1905.0	21.11	20.22	19.08			
		1882.5	21.19	20.24	19.20			
		1860.0	21.31	20.23	19.22			
	100RB (0)	1905.0	21.25	20.15	19.28			
		1882.5	21.19	20.22	19.21			
		1860.0	21.32	20.24	19.22			



LTE Band 25 Power Level B1

Bandwidth	Number of RBs	Frequency	QPSK	16QAM	64QAM	QPSK Tune-up	16QAM Tune-up	64QAM Tune-up
1.4MHz	1RB-High (5)	1914.3	18.73	18.67	19.37	20.5	20.5	20.5
		1882.5	18.76	18.98	19.02			
		1850.7	19.13	19.02	19.06			
		1914.3	18.89	18.90	19.31			
		1882.5	18.92	18.97	19.30			
		1850.7	19.20	18.99	19.23			
	1RB-Middle (3)	1914.3	18.89	18.90	19.31			
		1882.5	18.92	18.97	19.30			
		1850.7	19.20	18.99	19.23			
		1914.3	18.89	18.90	19.31			
		1882.5	18.92	18.97	19.30			
		1850.7	19.20	18.99	19.23			
	1RB-Low (0)	1914.3	18.89	18.90	19.31			
		1882.5	18.83	18.98	19.40			
		1850.7	19.09	18.93	19.17			
		1914.3	19.01	19.28	18.61			
		1882.5	18.99	18.85	18.96			
		1850.7	19.05	19.12	18.98			
3RB-High (3)	1914.3	19.08	19.20	18.63				
	1882.5	19.01	18.99	19.20				
	1850.7	19.08	19.14	19.10				
	1914.3	18.89	19.15	19.58				
	1882.5	19.05	18.81	19.13				
	1850.7	19.11	19.14	19.04				
3RB-Middle (1)	1914.3	19.06	19.04	19.04				
	1882.5	19.06	18.70	18.82				
	1850.7	19.08	19.20	18.99				
	1913.5	19.02	18.86	18.59				
	1882.5	18.97	18.96	19.12				
	1851.5	18.85	18.90	19.08				
3MHz	1RB-High (14)	1913.5	18.78	18.91	19.16	20.5	20.5	20.5
		1882.5	19.05	18.77	19.13			
		1851.5	19.06	18.90	19.11			
		1913.5	18.75	18.89	19.12			
		1882.5	19.06	18.67	19.15			
		1851.5	19.01	19.07	19.10			
	1RB-Middle (7)	1913.5	19.18	19.29	18.97			
		1882.5	19.14	18.77	18.99			
		1851.5	19.03	18.96	19.01			
		1913.5	19.05	19.18	18.96			
		1882.5	19.02	18.86	19.15			
		1851.5	19.04	19.00	19.18			
	1RB-Low (0)	1913.5	19.08	19.20	18.97			
		1882.5	19.09	18.72	19.02			
		1851.5	19.13	19.06	19.17			
		1913.5	19.10	19.01	19.12			
		1882.5	19.01	19.09	19.11			
		1851.5	18.97	19.00	19.16			
5MHz	1RB-High (24)	1912.5	19.03	18.60	19.01	20.5	20.5	20.5
		1882.5	18.80	18.68	18.99			
		1852.5	18.69	18.73	18.99			
		1912.5	19.14	18.83	19.45			
		1882.5	19.09	18.85	19.52			
		1852.5	19.01	18.67	19.14			
	1RB-Middle (12)	1912.5	18.97	18.74	18.96			
		1882.5	19.07	18.62	19.00			
		1852.5	19.01	18.73	18.96			
		1912.5	19.05	18.92	18.96			
		1882.5	19.13	18.87	18.99			
		1852.5	19.03	19.02	19.10			
	12RB-High (13)	1912.5	19.10	18.86	19.02			
		1882.5	19.08	18.84	19.04			
		1852.5	19.11	19.11	19.16			
		1912.5	18.95	18.75	18.99			
		1882.5	19.07	18.83	19.09			
		1852.5	19.14	19.09	19.21			
12RB-Middle (6)	1912.5	18.99	18.98	19.02				
	1882.5	19.05	18.95	18.99				
	1852.5	19.03	19.12	18.82				
	1910.0	18.90	18.89	19.22				
	1882.5	19.12	19.29	19.21				
	1850.0	19.00	18.77	19.12				
10MHz	1RB-High (49)	1910.0	19.00	18.77	19.12	20.5	20.5	20.5
		1882.5	19.09	18.96	19.22			
		1850.0	19.18	18.74	19.12			
		1910.0	19.23	18.79	19.19			
		1882.5	18.93	18.62	19.28			
		1850.0	19.12	18.88	19.24			
	1RB-Middle (24)	1910.0	19.03	19.07	18.84			
		1882.5	19.01	19.17	19.02			
		1850.0	18.97	19.14	18.96			
		1910.0	19.05	19.92	19.25			
		1882.5	19.11	19.18	19.16			
		1850.0	19.05	19.12	18.94			
	25RB-High (25)	1910.0	19.08	19.10	18.94			
		1882.5	19.11	19.20	19.03			
		1850.0	19.06	19.12	18.89			
		1910.0	19.06	19.05	19.13			
		1882.5	19.03	19.16	19.09			
		1850.0	19.02	19.09	18.91			
15MHz	1RB-High (74)	1907.5	19.13	18.62	19.04	20.5	20.5	20.5
		1882.5	18.79	18.69	19.05			
		1857.5	19.05	18.77	18.92			
		1907.5	18.77	18.56	19.30			
		1882.5	18.99	18.64	19.15			
		1857.5	19.12	18.79	19.21			
	1RB-Middle (37)	1907.5	18.74	18.75	19.14			
		1882.5	19.10	18.72	19.15			
		1857.5	19.11	18.82	19.23			
		1907.5	18.90	18.99	19.13			
		1882.5	19.10	19.02	19.13			
		1857.5	19.08	19.22	19.25			
	1RB-Low (0)	1907.5	18.99	18.97	19.14			
		1882.5	19.08	19.00	18.93			
		1857.5	19.03	19.04	18.93			
		1907.5	19.02	19.00	19.22			
		1882.5	18.10	18.99	19.19			
		1857.5	19.06	18.99	19.15			
36RB-High (38)	1907.5	19.07	18.96	19.05				
	1882.5	19.10	19.04	19.03				
	1857.5	19.10	19.01	18.92				
	1905.0	19.01	19.22	19.07				
	1882.5	19.16	19.55	19.38				
	1860.0	19.21	19.11	19.78				
20MHz	1RB-Middle (50)	1905.0	18.95	19.37	19.48	20.5	20.5	20.5
		1882.5	19.10	19.37	19.46			
		1860.0	19.19	19.77	19.95			
		1905.0	19.09	19.11	19.36			
		1882.5	19.27	19.13	19.44			
		1860.0	19.23	19.22	19.49			
	1RB-Low (0)	1905.0	19.07	19.47	19.22			
		1882.5	19.06	19.41	19.27			
		1860.0	19.15	19.29	19.36			
		1905.0	18.15	19.51	19.23			
		1882.5	19.07	19.40	19.36			
		1860.0	19.18	19.37	19.47			
	50RB-High (50)	1905.0	19.08	19.35	19.36			
		1882.5	19.02	19.30	19.38			
		1860.0	19.12	19.44	19.38			
		1905.0	19.05	19.29	19.44			
		1882.5	19.03	19.28	19.32			
		1860.0	19.16	19.58	19.30			





LTE Band 25 Power Level C1

Bandwidth	Number of RBs	Frequency	QPSK	16QAM	64QAM	QPSK Tune-up	16QAM Tune-up	64QAM Tune-up
1.4MHz	1RB-High (5)	1914.3	19.97	20.30	20.70	21.5	21.5	21.5
		1882.5	20.04	20.45	20.20			
		1850.7	20.35	20.58	20.52			
		1914.3	20.22	20.34	20.32			
		1882.5	20.39	20.59	20.49			
		1850.7	20.34	20.67	20.36			
	1RB-Middle (3)	1914.3	20.20	20.13	20.50			
		1882.5	20.26	20.53	20.29			
		1850.7	20.33	20.70	20.57			
		1914.3	20.24	20.33	20.22			
		1882.5	20.48	20.45	20.46			
		1850.7	20.31	20.37	20.38			
	1RB-Low (0)	1914.3	20.19	20.45	20.23			
		1882.5	20.28	20.47	20.46			
		1850.7	20.33	20.50	20.55			
		1914.3	20.41	20.54	20.99			
		1882.5	20.37	20.39	19.90			
		1850.7	20.46	20.48	20.53			
	3RB-High (3)	1914.3	20.28	20.39	18.98			
		1882.5	20.33	20.27	19.19			
		1850.7	20.38	20.14	19.38			
		1913.5	20.25	20.13	20.48			
		1882.5	20.26	20.04	20.37			
		1851.5	20.29	20.26	20.29			
3MHz	1RB-Middle (7)	1913.5	20.22	20.16	20.62	21.5	21.5	21.5
		1882.5	20.11	20.07	19.95			
		1851.5	20.36	20.15	20.54			
		1913.5	19.99	20.04	20.36			
		1882.5	20.26	19.94	20.33			
		1851.5	20.37	20.45	20.36			
	8RB-High (7)	1913.5	20.42	20.58	19.19			
		1882.5	20.40	20.35	19.09			
		1851.5	20.38	20.09	19.06			
		1913.5	20.29	20.40	19.03			
		1882.5	20.30	20.32	19.12			
		1851.5	20.40	20.26	19.30			
8RB-Middle (4)	1913.5	20.40	20.55	19.10				
	1882.5	20.41	20.33	19.21				
	1851.5	20.46	20.12	19.30				
	1913.5	20.32	20.35	19.42				
	1882.5	20.42	20.37	19.50				
	1851.5	20.32	20.38	19.41				
5MHz	1RB-High (24)	1912.5	20.06	20.19	20.38	21.5	21.5	21.5
		1882.5	20.40	20.14	19.93			
		1852.5	20.20	20.06	20.32			
		1912.5	20.00	20.08	20.41			
		1882.5	20.37	20.11	20.61			
		1852.5	20.54	20.16	20.29			
	1RB-Middle (12)	1912.5	20.00	19.90	20.07			
		1882.5	19.93	20.03	20.24			
		1852.5	20.08	20.07	20.26			
		1912.5	20.31	20.18	19.34			
		1882.5	20.34	20.34	19.39			
		1852.5	20.36	20.29	19.42			
	12RB-High (13)	1912.5	20.36	20.14	19.33			
		1882.5	20.35	20.43	19.49			
		1852.5	20.42	20.37	19.39			
		1912.5	20.18	20.11	19.28			
		1882.5	20.30	20.36	19.45			
		1852.5	20.38	20.22	19.51			
	12RB-Middle (6)	1912.5	20.20	20.12	19.22			
		1882.5	20.41	20.44	19.43			
		1852.5	20.38	20.30	19.39			
		1910.0	20.28	20.35	20.46			
		1882.5	20.22	20.53	20.32			
		1855.0	20.65	20.31	20.42			
10MHz	1RB-High (49)	1910.0	20.30	20.13	20.38	21.5	21.5	21.5
		1882.5	20.52	20.24	20.39			
		1855.0	20.58	20.25	21.07			
		1910.0	20.17	20.07	20.31			
		1882.5	20.31	20.28	20.33			
		1855.0	20.41	20.27	20.44			
	1RB-Middle (24)	1910.0	20.25	20.32	19.16			
		1882.5	20.35	20.53	19.24			
		1855.0	20.35	20.43	19.30			
		1910.0	20.26	20.41	19.20			
		1882.5	20.35	20.57	19.25			
		1855.0	20.43	20.43	19.37			
25RB-High (25)	1910.0	20.31	20.43	19.29				
	1882.5	20.40	20.46	19.19				
	1855.0	20.41	20.43	19.29				
	1910.0	20.36	20.39	19.26				
	1882.5	20.34	20.44	19.34				
	1855.0	20.36	20.39	19.38				
15MHz	1RB-High (74)	1907.5	20.42	20.30	20.60	21.5	21.5	21.5
		1882.5	20.28	20.07	20.26			
		1857.5	20.47	20.22	20.75			
		1907.5	20.27	20.12	20.61			
		1882.5	20.33	20.55	20.66			
		1857.5	20.34	20.31	20.81			
	1RB-Middle (37)	1907.5	20.22	19.97	20.28			
		1882.5	20.40	20.22	20.38			
		1857.5	20.36	20.15	20.49			
		1907.5	20.26	20.16	19.14			
		1882.5	20.33	20.34	19.44			
		1857.5	20.47	20.43	19.51			
	1RB-Low (0)	1907.5	20.29	20.34	19.13			
		1882.5	20.41	20.31	19.25			
		1857.5	20.41	20.35	19.45			
		1907.5	20.25	20.32	19.41			
		1882.5	20.34	20.33	19.44			
		1857.5	20.37	20.27	19.28			
	36RB-High (38)	1907.5	20.28	20.42	19.23			
		1882.5	20.36	20.48	19.44			
		1857.5	20.42	20.31	19.26			
		1905.0	20.28	20.08	20.47			
		1882.5	20.53	20.18	20.71			
		1860.0	20.42	20.00	20.63			
20MHz	1RB-Middle (50)	1905.0	20.31	20.25	20.47	21.5	21.5	21.5
		1882.5	20.48	20.46	20.51			
		1860.0	20.35	20.54	20.94			
		1905.0	20.38	19.83	20.44			
		1882.5	20.36	20.25	20.45			
		1860.0	20.47	20.06	20.81			
	50RB-High (50)	1905.0	20.20	20.10	19.27			
		1882.5	20.26	20.29	19.24			
		1860.0	20.40	20.48	19.56			
		1905.0	20.25	20.36	19.29			
		1882.5	20.31	20.44	19.37			
		1860.0	20.51	20.40	19.52			
50RB-Middle (25)	1905.0	20.22	20.22	19.35				
	1905.0	20.22	20.22	19.35				
	1882.5	20.28	20.36	19.29				
	1860.0	20.31	20.23	19.38				
	1905.0	20.25	20.26	19.31				
	1882.5	20.30	20.33	19.28				
100RB (0)	1860.0	20.46	20.52	19.56				
	1882.5	20.46	20.52	19.56				
	1860.0	20.30	20.33	19.28				
	1882.5	20.30	20.33	19.28				
	1860.0	20.31	20.23	19.38				
	1905.0	20.25	20.26	19.31				



LTE Band 26 Power Level A1/B1/C1

Bandwidth	Number of RBs	Frequency	QPSK	16QAM	64QAM	QPSK Tune-up	16QAM Tune-up	64QAM Tune-up				
1.4MHz	1RB-High (5)	848.3	22.68	21.39	20.86	24.0	23.0	22.0				
		831.5	22.66	21.53	21.10							
		814.7	22.81	21.58	21.04							
	1RB-Middle (3)	848.3	22.90	21.72	20.73							
		831.5	22.75	21.91	21.10							
		814.7	22.90	21.78	21.21							
	1RB-Low (0)	848.3	22.70	21.82	20.64							
		831.5	22.73	21.66	20.83							
		814.7	22.90	21.80	21.01							
	3RB-High (3)	848.3	22.71	21.59	20.56							
		831.5	22.74	21.86	20.74							
		814.7	22.99	21.74	20.82							
	3RB-Middle (1)	848.3	22.70	21.66	20.75							
		831.5	23.04	21.93	20.69							
		814.7	23.05	21.87	20.89							
	3RB-Low (0)	848.3	22.74	21.59	20.74							
		831.5	22.85	21.95	20.86							
		814.7	22.88	21.82	20.74							
	6RB (0)	848.3	21.66	20.87	19.62							
		831.5	21.70	20.82	19.68							
		814.7	21.73	20.81	19.70							
	3MHz	1RB-High (14)	847.5	22.73	21.54				20.72	24.0	23.0	22.0
			831.5	22.69	21.52				20.82			
			815.5	22.77	21.50				20.70			
1RB-Middle (7)		847.5	22.74	21.74	21.10							
		831.5	22.89	21.72	21.18							
		815.5	22.89	21.66	21.21							
1RB-Low (0)		847.5	22.75	21.42	20.61							
		831.5	22.73	21.52	21.12							
		815.5	22.79	21.44	21.15							
8RB-High (7)		847.5	21.75	20.63	19.65							
		831.5	21.74	20.73	19.73							
		815.5	21.79	20.75	19.79							
8RB-Middle (4)		847.5	21.62	20.81	19.76							
		831.5	21.72	20.68	19.74							
		815.5	21.73	20.70	19.75							
8RB-Low (0)		847.5	21.78	20.85	19.74							
		831.5	21.66	20.75	19.82							
		815.5	21.74	20.73	19.88							
15RB (0)		847.5	21.68	20.55	19.67							
		831.5	21.74	20.85	19.70							
		815.5	21.76	20.72	19.87							
5MHz		1RB-High (24)	846.5	22.76	21.59	20.83	24.0	23.0	22.0			
			831.5	22.73	21.35	20.59						
			816.5	22.70	21.39	20.65						
	1RB-Middle (12)	846.5	22.91	21.53	20.95							
		831.5	22.88	21.67	20.89							
		816.5	22.97	21.75	21.02							
	1RB-Low (0)	846.5	22.55	21.61	20.89							
		831.5	22.63	21.66	20.82							
		816.5	22.91	21.57	20.58							
	12RB-High (13)	846.5	21.73	20.50	19.69							
		831.5	21.74	20.77	19.56							
		816.5	21.74	20.75	19.81							
	12RB-Middle (6)	846.5	21.73	20.86	19.78							
		831.5	21.74	20.76	19.65							
		816.5	21.77	20.71	19.88							
	12RB-Low (0)	846.5	21.65	20.84	19.78							
		831.5	21.71	20.74	19.68							
		816.5	21.74	20.66	19.92							
	25RB (0)	846.5	21.64	20.62	19.80							
		831.5	21.68	20.89	19.93							
		816.5	21.72	20.64	19.85							
	10MHz	1RB-High (49)	844.0	22.81	21.92	20.73				24.0	23.0	22.0
			831.5	22.89	21.87	20.81						
			819.0	22.68	21.82	20.73						
1RB-Middle (24)		844.0	22.77	21.66	20.70							
		831.5	22.82	21.70	21.35							
		819.0	22.79	21.69	20.97							
1RB-Low (0)		844.0	22.88	21.53	20.61							
		831.5	22.76	21.57	20.66							
		819.0	22.47	21.64	20.67							
25RB-High (25)		844.0	21.58	20.78	19.64							
		831.5	21.77	20.84	19.57							
		819.0	21.83	20.86	19.78							
25RB-Middle (12)		844.0	21.70	20.72	19.84							
		831.5	21.72	21.01	19.99							
		819.0	21.74	20.90	19.94							
25RB-Low (0)		844.0	21.73	20.85	19.81							
		831.5	21.74	21.01	19.79							
		819.0	21.73	20.88	19.57							
50RB (0)		844.0	21.72	20.68	19.81							
		831.5	21.72	20.75	19.80							
		819.0	21.74	20.56	19.74							
15MHz		1RB-High (74)	841.5	22.63	21.56	20.95	24.0	23.0	22.0			
			831.5	22.87	21.82	21.22						
			821.5	22.87	21.76	20.78						
	1RB-Middle (37)	841.5	22.89	21.45	21.08							
		831.5	22.92	21.72	21.11							
		821.5	22.90	21.77	21.13							
	1RB-Low (0)	841.5	22.88	21.63	20.73							
		831.5	22.77	21.72	20.58							
		821.5	22.72	21.55	21.11							
	36RB-High (38)	841.5	21.82	20.75	19.93							
		831.5	21.87	20.89	19.90							
		821.5	21.86	20.87	19.88							
	36RB-Middle (19)	841.5	21.81	20.77	19.93							
		831.5	21.79	20.79	19.93							
		821.5	21.80	20.81	20.04							
	36RB-Low (0)	841.5	21.78	20.73	19.93							
		831.5	21.73	20.71	19.92							
		821.5	21.73	20.69	19.89							
	75RB (0)	841.5	21.73	20.72	20.10							
		831.5	21.74	20.72	19.73							
		821.5	21.79	20.79	19.86							



LTE Band 41 Power Level A1/C1

Bandwidth	Number of RBs	Frequency	QPSK	16QAM	64QAM	QPSK Tune-up	16QAM Tune-up	64QAM Tune-up				
5MHz	1RB-High (24)	2697.5	22.49	21.57	20.12	23.5	22.5	21.5				
		2640.3	22.07	21.62	20.08							
		2593.0	22.39	21.57	20.11							
		2545.8	22.30	21.11	19.57							
	1RB-Middle (12)	2498.5	22.43	21.49	20.27							
		2687.5	22.43	21.52	20.69							
		2640.3	22.32	21.58	20.64							
		2593.0	22.67	21.06	20.72							
	1RB-Low (0)	2545.8	22.30	20.71	20.73							
		2498.5	22.59	21.66	20.36							
		2687.5	22.33	21.46	19.99							
		2640.3	22.13	21.55	19.97							
	12RB-High (13)	2593.0	22.41	20.90	19.92							
		2545.8	22.18	21.24	19.54							
		2498.5	22.34	21.60	20.18							
		2687.5	21.69	20.35	19.48							
	12RB-Middle (6)	2640.3	21.47	20.63	19.59							
		2593.0	21.47	20.48	19.67							
		2545.8	21.45	20.41	19.33							
		2498.5	21.61	20.62	19.40							
	12RB-Low (0)	2687.5	21.56	20.41	19.52							
		2640.3	21.55	20.62	19.58							
		2593.0	21.59	20.52	19.70							
		2545.8	21.47	20.33	19.44							
	25RB (0)	2498.5	21.64	20.62	19.42							
		2687.5	21.60	20.39	19.46							
		2640.3	21.51	20.61	19.58							
		2593.0	21.50	20.45	19.71							
	25RB (0)	2545.8	21.45	20.33	19.32							
		2498.5	21.58	20.68	19.51							
		2687.5	21.49	20.44	19.59							
		2640.3	21.45	20.58	19.86							
	25RB (0)	2593.0	21.50	20.40	19.92							
		2545.8	21.47	20.39	19.48							
		2498.5	21.61	20.65	19.65							
		2687.5	21.49	20.44	19.59							
	10MHz	1RB-High (49)	2685.0	22.47	21.68				20.59	23.5	22.5	21.5
			2638.0	22.28	21.61				20.53			
			2593.0	22.41	20.99				20.12			
			2547.0	22.40	21.00				19.92			
		1RB-Middle (24)	2501.0	22.40	21.53				20.23			
			2685.0	22.69	21.64				20.18			
			2638.0	22.38	21.56				20.17			
			2593.0	22.62	21.16				20.26			
		1RB-Low (0)	2547.0	22.47	21.13				19.97			
			2501.0	22.68	21.80				20.29			
			2685.0	22.55	21.69				20.09			
			2638.0	22.34	21.69				20.07			
25RB-High (25)		2593.0	22.47	21.07	20.10							
		2547.0	22.37	20.98	19.86							
		2501.0	22.38	21.68	20.07							
		2685.0	21.47	20.44	19.75							
25RB-Middle (12)		2638.0	21.45	20.66	19.79							
		2593.0	21.45	20.79	19.61							
		2547.0	21.49	20.45	19.41							
		2501.0	21.50	20.53	19.32							
25RB-Low (0)		2685.0	21.50	20.51	19.79							
		2638.0	21.50	20.64	19.81							
		2593.0	21.43	20.85	19.58							
		2547.0	21.51	20.45	19.43							
50RB (0)		2501.0	21.63	20.57	19.43							
		2685.0	21.56	20.47	19.75							
		2638.0	21.52	20.65	19.79							
		2593.0	21.45	20.79	19.61							
50RB (0)		2547.0	21.49	20.40	19.51							
		2501.0	21.67	20.51	19.42							
		2685.0	21.55	20.60	19.52							
		2638.0	21.53	20.68	19.50							
50RB (0)		2593.0	21.53	20.49	19.64							
		2547.0	21.51	20.47	19.50							
		2501.0	21.49	20.63	19.58							
		2687.5	21.49	20.44	19.59							
15MHz		1RB-High (74)	2682.5	22.51	21.69	20.11	23.5	22.5	21.5			
			2637.8	22.22	21.62	20.56						
			2593.0	22.34	21.17	20.46						
			2548.3	22.29	21.30	20.16						
		1RB-Middle (37)	2503.5	22.45	21.36	20.07						
			2682.5	22.34	21.59	20.08						
			2637.8	22.31	21.51	20.51						
			2593.0	22.38	21.31	20.03						
		1RB-Low (0)	2448.3	22.17	21.18	20.10						
			2503.5	22.26	21.56	19.67						
			2682.5	22.52	21.77	20.26						
			2637.8	22.31	21.59	20.45						
	36RB-High (38)	2593.0	22.43	21.06	20.02							
		2548.3	22.28	21.02	19.93							
		2503.5	22.39	21.67	19.94							
		2682.5	21.61	20.45	19.51							
	36RB-Middle (19)	2637.8	21.59	20.54	19.53							
		2593.0	21.60	20.50	19.72							
		2548.3	21.54	20.45	19.37							
		2503.5	21.55	20.46	19.60							
	36RB-Low (0)	2682.5	21.58	20.43	19.49							
		2637.8	21.52	20.51	19.61							
		2593.0	21.55	20.51	19.65							
		2548.3	21.52	20.39	19.29							
	75RB (0)	2503.5	21.49	20.46	19.54							
		2682.5	21.68	20.45	19.59							
		2637.8	21.49	20.49	19.57							
		2593.0	21.53	20.58	19.70							
	75RB (0)	2548.3	21.49	20.37	19.25							
		2503.5	21.51	20.47	19.57							
		2682.5	21.53	20.47	19.54							
		2637.8	21.53	20.72	19.41							
	75RB (0)	2593.0	21.56	20.59	19.67							
		2548.3	21.44	20.56	19.42							
		2503.5	21.49	20.72	19.65							
		2687.5	21.49	20.44	19.59							
	20MHz	1RB-High (99)	2680.0	22.24	21.13	20.38				23.5	22.5	21.5
			2636.5	22.24	21.12	20.40						
			2593.0	22.19	21.12	19.98						
			2549.5	22.28	21.55	19.93						
		1RB-Middle (50)	2506.0	22.19	21.58	19.98						
			2680.0	22.67	21.11	20.52						
			2636.5	22.25	21.21	20.58						
			2593.0	22.63	21.40	20.16						
		1RB-Low (0)	2549.5	22.64	21.55	19.96						
			2506.0	22.27	21.69	20.01						
			2680.0	22.50	21.37	20.55						
			2636.5	22.22	21.12	20.33						
50RB-High (50)		2593.0	22.18	21.34	20.20							
		2549.5	22.29	20.89	19.85							
		2506.0	22.24	21.13	19.96							
		2680.0	21.37	20.55	19.37							
50RB-Middle (25)		2636.5	21.36	20.50	19.54							
		2593.0	21.35	20.53	19.58							
		2549.5	21.40	20.43	19.33							
		2506.0	21.42	20.62	19.50							
50RB-Low (0)		2680.0	21.52	20.71	19.43							
		2636.5	21.36	20.57	19.53							
		2593.0	21.40	20.58	19.72							
		2549.5	21.40	20.58	19.40							
100RB (0)		2506.0	21.45	20.59	19.41							
		2680.0	21.63	20.83	19.55							
		2636.5	21.39	20.55	19.52							
		2593.0	21.42	20.60	19.73							
100RB (0)		2549.5	21.41	20.49	19.42							
		2506.0	21.49	20.52	19.46							
		2680.0	21.55	20.83	19.54							
		2636.5	21.39	20.40	19.46							
100RB (0)		2593.0	21.36	20.43	19.67							
		2549.5	21.44	20.52	19.55							
		2506.0	21.48	20.53	19.37							
		2687.5	21.49	20.44	19.59							



LTE Band 41 Power Level B1

Bandwidth	Number of RBs	Frequency	QPSK	16QAM	64QAM	QPSK Tune-up	16QAM Tune-up	64QAM Tune-up				
5MHz	1RB-High (24)	2687.5	20.26	20.27	19.76	21.5	21.5	21.5				
		2640.3	20.13	19.90	19.55							
		2593.0	19.97	20.10	20.01							
		2545.8	20.00	19.53	19.84							
	1RB-Middle (12)	2498.5	20.17	19.68	20.02							
		2687.5	20.41	20.27	20.17							
		2640.3	20.33	20.26	19.80							
		2593.0	20.28	20.27	20.53							
	1RB-Low (0)	2545.8	20.08	20.09	19.51							
		2498.5	20.44	20.16	20.15							
		2687.5	20.08	20.17	19.63							
		2640.3	20.07	19.82	19.52							
	12RB-High (13)	2593.0	20.11	20.18	20.02							
		2545.8	19.90	19.68	19.77							
		2498.5	20.18	19.58	19.69							
		2687.5	20.23	20.15	19.58							
	12RB-Middle (6)	2640.3	20.21	20.10	19.57							
		2593.0	20.16	20.11	19.65							
		2545.8	20.11	20.15	19.52							
		2498.5	20.17	20.23	19.71							
	12RB-Low (0)	2687.5	20.33	20.18	19.84							
		2640.3	20.28	20.16	19.61							
		2593.0	20.24	20.29	19.90							
		2545.8	20.14	20.19	19.62							
	25RB (0)	2498.5	20.20	20.25	19.68							
		2687.5	20.31	20.21	19.89							
		2640.3	20.26	20.08	19.52							
		2593.0	20.14	20.23	19.74							
	10MHz	1RB-High (49)	2685.0	20.19	20.08				19.77	21.5	21.5	21.5
			2638.0	20.29	20.12				20.08			
			2593.0	20.02	20.26				20.14			
			2547.0	20.16	19.79				19.66			
		1RB-Middle (24)	2501.0	20.31	20.45				19.78			
			2685.0	20.35	20.04				19.79			
			2638.0	20.31	20.01				19.78			
			2593.0	20.27	20.25				20.55			
1RB-Low (0)		2547.0	20.40	19.83	19.77							
		2501.0	20.42	20.37	19.80							
		2685.0	20.33	20.25	19.81							
		2638.0	20.12	20.02	19.67							
25RB-High (25)		2593.0	20.36	20.38	20.24							
		2547.0	20.21	19.76	19.71							
		2501.0	20.17	20.43	19.58							
		2685.0	20.34	20.31	19.89							
25RB-Middle (12)		2638.0	20.28	20.30	19.85							
		2593.0	20.11	20.14	19.64							
		2547.0	20.11	20.33	19.64							
		2501.0	20.44	20.46	20.11							
25RB-Low (0)		2685.0	20.33	20.31	19.98							
		2638.0	20.24	20.45	19.89							
		2593.0	20.20	20.23	19.63							
		2547.0	20.13	20.44	19.64							
50RB (0)		2501.0	20.26	20.33	19.69							
		2685.0	20.36	20.27	19.93							
		2638.0	20.25	20.47	19.82							
		2593.0	20.24	20.27	19.67							
15MHz		1RB-High (74)	2682.5	20.14	19.93	19.78	21.5	21.5	21.5			
			2637.8	20.15	19.89	19.97						
			2593.0	20.29	20.32	19.67						
			2548.3	20.01	19.67	19.54						
		1RB-Middle (37)	2503.5	20.20	19.83	20.15						
			2682.5	20.27	20.07	20.09						
			2637.8	20.16	19.71	19.91						
			2593.0	20.18	20.23	19.60						
	1RB-Low (0)	2448.3	20.13	19.58	19.55							
		2503.5	20.21	19.84	20.14							
		2682.5	20.30	20.10	20.14							
		2637.8	20.15	19.70	19.62							
	36RB-High (38)	2593.0	20.28	20.33	19.77							
		2548.3	20.10	19.55	19.83							
		2503.5	20.01	19.66	20.05							
		2682.5	20.36	20.38	19.84							
	36RB-Middle (19)	2637.8	20.16	20.17	19.70							
		2548.3	20.23	20.11	19.56							
		2503.5	20.33	20.24	19.76							
		2682.5	20.33	20.33	19.78							
	36RB-Low (0)	2637.8	20.24	20.08	19.71							
		2593.0	20.12	20.21	19.65							
		2548.3	20.20	20.08	19.51							
		2503.5	20.27	20.32	19.75							
	75RB (0)	2682.5	20.37	20.37	19.82							
		2637.8	20.27	20.11	19.77							
		2593.0	20.34	20.37	19.94							
		2548.3	20.09	19.84	19.49							
	20MHz	1RB-High (99)	2680.0	20.15	19.85	19.81				21.5	21.5	21.5
			2636.5	20.05	19.61	19.77						
			2593.0	20.12	20.20	19.62						
			2548.5	20.09	19.58	19.75						
		1RB-Middle (50)	2506.0	20.06	19.50	19.84						
			2680.0	20.65	20.15	19.81						
			2636.5	20.19	19.76	19.79						
			2593.0	20.19	20.28	19.67						
1RB-Low (0)		2548.5	20.42	19.63	19.64							
		2506.0	20.20	19.82	20.40							
		2680.0	20.34	20.00	19.71							
		2636.5	20.08	19.61	19.56							
50RB-High (50)		2593.0	20.11	20.20	19.58							
		2548.5	19.98	19.78	19.74							
		2506.0	19.96	19.63	19.80							
		2680.0	20.29	20.30	19.92							
50RB-Middle (25)		2636.5	20.25	20.09	19.66							
		2593.0	20.18	20.31	19.61							
		2548.5	20.07	20.03	19.55							
		2506.0	20.13	19.99	19.54							
50RB-Low (0)		2680.0	20.30	20.34	19.93							
		2636.5	20.18	20.13	19.60							
		2593.0	20.05	20.28	19.57							
		2548.5	20.11	19.99	19.51							
100RB (0)		2506.0	20.20	20.20	19.67							
		2680.0	20.32	20.29	19.93							
		2636.5	20.26	20.10	19.60							
		2593.0	20.27	20.41	19.71							



LTE Band 66 Power Level A1/C1

Bandwidth	Number of RBs	Frequency	QPSK	16QAM	64QAM	QPSK Tune-up	16QAM Tune-up	64QAM Tune-up			
1.4MHz	1RB-High (5)	1779.3	21.93	21.29	20.52	23.5	22.5	21.5			
		1745.0	22.35	21.59	20.32						
		1710.7	22.04	21.24	20.16						
		1779.3	22.04	21.42	20.28						
		1745.0	22.19	21.70	20.56						
		1710.7	22.17	21.28	20.21						
	1RB-Middle (3)	1779.3	22.33	21.34	20.19						
		1745.0	22.17	21.67	20.59						
		1710.7	22.06	21.17	20.53						
		1779.3	22.19	21.11	19.76						
		1745.0	22.16	21.42	20.27						
		1710.7	22.12	21.42	20.10						
	1RB-Low (0)	1779.3	22.27	21.17	19.89						
		1745.0	22.12	21.37	20.51						
		1710.7	22.22	21.37	20.45						
		1779.3	22.28	21.19	19.76						
		1745.0	22.19	21.35	20.36						
		1710.7	22.14	21.34	19.75						
3RB-High (3)	1779.3	21.29	20.33	19.23	22.5	21.5	20.5				
	1745.0	21.33	20.33	19.11							
	1710.7	21.14	20.09	18.93							
	1779.3	21.29	20.33	19.23							
	1745.0	21.33	20.33	19.11							
	1710.7	21.14	20.09	18.93							
3MHz	1RB-High (14)	1778.5	22.25	21.57	20.15	23.5	22.5	21.5			
		1745.0	22.22	21.07	20.33						
		1711.5	22.05	20.97	20.01						
		1778.5	22.29	21.01	20.23						
		1745.0	22.47	21.25	20.42						
		1711.5	22.01	21.06	20.19						
	1RB-Middle (7)	1778.5	22.24	21.32	20.35						
		1745.0	22.34	21.08	20.28						
		1711.5	22.18	21.04	20.16						
		1778.5	21.36	20.52	19.32						
		1745.0	21.40	20.45	19.11						
		1711.5	21.22	20.20	19.10						
	1RB-Low (0)	1778.5	21.26	20.55	19.30				22.5	21.5	20.5
		1745.0	21.30	20.36	19.08						
		1711.5	21.17	20.27	19.15						
		1778.5	21.28	20.58	19.36						
		1745.0	21.40	20.47	19.11						
		1711.5	21.16	20.21	19.12						
8RB-High (7)	1778.5	21.34	20.30	19.43	22.5	21.5	20.5				
	1745.0	21.25	20.28	19.49							
	1711.5	21.21	20.21	19.12							
	1778.5	21.34	20.30	19.43							
	1745.0	21.25	20.28	19.49							
	1711.5	21.21	20.21	19.12							
5MHz	1RB-High (24)	1777.5	22.05	21.01	20.02	23.5	22.5	21.5			
		1745.0	21.91	21.01	20.17						
		1712.5	21.97	20.89	19.99						
		1777.5	22.29	21.38	20.30						
		1745.0	22.20	21.14	20.68						
		1712.5	21.97	21.08	20.21						
	1RB-Middle (12)	1777.5	22.13	21.23	20.08				22.5	21.5	20.5
		1745.0	22.15	21.38	20.11						
		1712.5	21.90	21.02	20.01						
		1777.5	21.21	20.26	19.32						
		1745.0	21.22	20.37	19.23						
		1712.5	21.18	19.98	19.23						
	12RB-High (13)	1777.5	21.22	20.37	19.33				22.5	21.5	20.5
		1745.0	21.29	20.32	19.19						
		1712.5	21.20	20.09	19.26						
		1777.5	21.28	20.27	19.02						
		1745.0	21.33	20.16	19.10						
		1712.5	21.19	19.97	19.23						
12RB-Middle (6)	1777.5	21.22	20.15	19.48	22.5	21.5	20.5				
	1745.0	21.26	20.17	19.26							
	1712.5	21.18	20.32	19.25							
	1777.5	21.22	20.15	19.48							
	1745.0	21.26	20.17	19.26							
	1712.5	21.18	20.32	19.25							
10MHz	1RB-High (49)	1775.0	22.04	21.18	20.09	23.5	22.5	21.5			
		1745.0	22.21	21.21	20.36						
		1715.0	22.18	20.95	20.50						
		1775.0	22.30	21.31	20.36						
		1745.0	22.43	21.29	20.42						
		1715.0	22.10	21.01	20.88						
	1RB-Middle (24)	1775.0	22.02	21.20	20.07				22.5	21.5	20.5
		1745.0	22.12	21.19	20.35						
		1715.0	22.06	21.17	20.04						
		1775.0	21.21	20.31	19.41						
		1745.0	21.25	20.26	19.29						
		1715.0	21.11	20.23	19.26						
	25RB-High (25)	1775.0	21.24	20.28	19.48				22.5	21.5	20.5
		1745.0	21.31	20.60	19.37						
		1715.0	21.16	20.10	19.33						
		1775.0	21.27	20.32	19.10						
		1745.0	21.39	20.32	19.27						
		1715.0	21.18	20.15	19.07						
25RB-Middle (12)	1775.0	21.32	20.26	19.37	22.5	21.5	20.5				
	1745.0	21.33	20.39	19.23							
	1715.0	21.25	20.33	19.02							
	1775.0	21.32	20.26	19.37							
	1745.0	21.33	20.39	19.23							
	1715.0	21.25	20.33	19.02							
15MHz	1RB-High (74)	1772.5	22.23	21.10	20.33	23.5	22.5	21.5			
		1745.0	22.18	21.27	20.40						
		1717.5	22.07	21.03	20.48						
		1772.5	22.09	21.07	20.54						
		1745.0	22.17	21.33	20.48						
		1717.5	22.07	20.99	20.47						
	1RB-Middle (37)	1772.5	22.05	21.21	20.22				22.5	21.5	20.5
		1745.0	22.22	21.31	20.46						
		1717.5	22.13	20.96	20.24						
		1772.5	21.27	20.29	19.39						
		1745.0	21.26	20.28	19.30						
		1717.5	21.13	20.06	19.21						
	1RB-Low (0)	1772.5	21.29	20.41	19.41				22.5	21.5	20.5
		1745.0	21.33	20.34	19.44						
		1717.5	21.18	20.15	19.08						
		1772.5	21.25	20.19	19.10						
		1745.0	21.30	20.30	19.41						
		1717.5	21.23	20.02	19.04						
36RB-High (38)	1772.5	21.30	20.34	19.51	22.5	21.5	20.5				
	1745.0	21.30	20.22	19.28							
	1717.5	21.15	20.02	19.13							
	1772.5	21.30	20.34	19.51							
	1745.0	21.30	20.22	19.28							
	1717.5	21.15	20.02	19.13							
20MHz	1RB-High (99)	1770.0	22.16	20.86	20.59	23.5	22.5	21.5			
		1745.0	22.27	21.08	20.34						
		1720.0	21.92	20.90	20.37						
		1770.0	22.14	20.95	20.25						
		1745.0	22.27	21.49	20.77						
		1720.0	22.07	20.87	20.22						
	1RB-Middle (50)	1770.0	22.47	21.30	20.37				22.5	21.5	20.5
		1745.0	22.39	21.12	20.35						
		1720.0	22.08	21.02	20.19						
		1770.0	21.21	20.24	19.30						
		1745.0	21.28	20.11	19.19						
		1720.0	21.10	20.20	19.02						
	50RB-High (50)	1770.0	21.22	20.22	19.18				22.5	21.5	20.5
		1745.0	21.30	20.32	19.25						
		1720.0	21.14	20.14	19.05						
		1770.0	21.23	20.16	19.27						
		1745.0	21.38	20.38	19.30						
		1720.0	21.16	20.16	19.06						
50RB-Middle (25)	1770.0	21.16	20.16	19.06	22.5	21.5	20.5				
	1745.0	21.32	20.38	19.30							
	1720.0	21.16	20.16	19.06							
	1770.0	21.21	20.27	19.23							
	1745.0	21.32	20.31	19.37							
	1720.0	21.16	20.15	19.04							
100RB (0)	1770.0	21.32	20.31	19.37	22.5	21.5	20.5				
	1745.0	21.32	20.31	19.37							
	1720.0	21.16	20.15	19.04							
	1770.0	21.32	20.31	19.37							
	1745.0	21.32	20.31	19.37							
	1720.0	21.16	20.15	19.04							



LTE Band 66 Power Level B1

Bandwidth	Number of RBs	Frequency	QPSK	16QAM	64QAM	QPSK Tune-up	16QAM Tune-up	64QAM Tune-up
1.4MHz	1RB-High (5)	1779.3	19.37	19.77	19.92	20.5	20.5	20.5
		1745.0	19.65	19.49	20.06			
		1710.7	19.60	19.58	19.93			
	1RB-Middle (3)	1779.3	19.48	19.85	20.25			
		1745.0	19.73	19.67	20.18			
		1710.7	19.56	19.62	20.25			
	1RB-Low (0)	1779.3	19.59	19.82	20.42			
		1745.0	19.76	19.62	19.88			
		1710.7	19.61	19.66	19.94			
	3RB-High (3)	1779.3	19.61	19.73	19.73			
		1745.0	19.81	19.55	19.71			
		1710.7	19.61	19.57	19.56			
	3RB-Middle (1)	1779.3	19.61	19.83	19.76			
		1745.0	19.87	19.71	19.79			
		1710.7	19.55	19.58	19.68			
	3RB-Low (0)	1779.3	19.64	19.72	19.73			
		1745.0	19.78	19.62	19.72			
		1710.7	19.61	19.59	19.59			
6RB (0)	1779.3	19.65	19.65	19.38				
	1745.0	19.65	19.78	19.36				
	1710.7	19.71	19.80	19.42				
3MHz	1RB-High (14)	1778.5	19.66	19.70	19.99	20.5	20.5	20.5
		1745.0	19.76	19.74	19.64			
		1711.5	19.56	19.83	19.63			
	1RB-Middle (7)	1778.5	19.77	19.47	20.01			
		1745.0	19.94	19.44	19.81			
		1711.5	19.79	19.60	19.96			
	1RB-Low (0)	1778.5	19.64	19.43	19.66			
		1745.0	19.81	19.55	19.79			
		1711.5	19.66	19.50	19.68			
	8RB-High (7)	1778.5	19.67	19.77	19.27			
		1745.0	19.75	19.82	19.50			
		1711.5	19.71	19.69	19.41			
	8RB-Middle (4)	1778.5	19.61	19.71	19.23			
		1745.0	19.88	19.83	19.44			
		1711.5	19.69	19.66	19.46			
	8RB-Low (0)	1778.5	19.72	19.72	19.31			
		1745.0	19.83	19.84	19.45			
		1711.5	19.71	19.70	19.43			
15RB (0)	1778.5	19.73	19.39	19.80				
	1745.0	19.75	19.61	19.47				
	1711.5	19.71	19.75	19.69				
5MHz	1RB-High (24)	1777.5	19.48	19.49	19.51	20.5	20.5	20.5
		1745.0	19.63	19.57	19.41			
		1712.5	19.53	19.93	19.42			
	1RB-Middle (12)	1777.5	19.79	19.42	19.62			
		1745.0	19.68	19.51	19.82			
		1712.5	19.80	19.57	20.08			
	1RB-Low (0)	1777.5	19.31	19.26	19.45			
		1745.0	19.52	19.47	19.62			
		1712.5	19.49	19.19	19.61			
	12RB-High (13)	1777.5	19.65	19.57	19.80			
		1745.0	19.69	19.72	19.42			
		1712.5	19.66	19.71	19.27			
	12RB-Middle (6)	1777.5	19.76	19.70	19.82			
		1745.0	19.70	19.82	19.46			
		1712.5	19.74	19.69	19.30			
	12RB-Low (0)	1777.5	19.67	19.49	19.56			
		1745.0	19.66	19.74	19.50			
		1712.5	19.78	19.71	19.30			
25RB (0)	1777.5	19.68	19.53	19.47				
	1745.0	19.72	19.63	19.24				
	1712.5	19.68	19.83	19.52				
10MHz	1RB-High (49)	1775.0	19.29	19.22	19.43	20.5	20.5	20.5
		1745.0	19.70	19.53	19.62			
		1715.0	19.76	19.73	19.64			
	1RB-Middle (24)	1775.0	19.62	19.49	19.66			
		1745.0	19.79	19.54	19.83			
		1715.0	19.74	19.58	20.30			
	1RB-Low (0)	1775.0	19.58	19.56	19.90			
		1745.0	19.60	19.69	19.84			
		1715.0	19.42	19.59	19.79			
	25RB-High (25)	1775.0	19.65	19.67	19.59			
		1745.0	19.70	19.71	19.26			
		1715.0	19.73	19.66	19.68			
	25RB-Middle (12)	1775.0	19.66	19.83	19.64			
		1745.0	19.77	19.74	19.38			
		1715.0	19.76	19.99	19.42			
	25RB-Low (0)	1775.0	19.73	19.68	19.44			
		1745.0	19.76	19.74	19.34			
		1715.0	19.70	19.62	19.37			
50RB (0)	1775.0	19.66	19.84	19.60				
	1745.0	19.74	19.84	19.51				
	1715.0	19.76	19.71	19.43				
15MHz	1RB-High (74)	1772.5	19.57	19.50	19.73	20.5	20.5	20.5
		1745.0	19.63	19.41	19.71			
		1717.5	19.62	19.23	19.88			
	1RB-Middle (37)	1772.5	19.66	19.57	19.99			
		1745.0	19.78	19.65	19.73			
		1717.5	19.82	19.44	20.08			
	1RB-Low (0)	1772.5	19.58	19.37	19.74			
		1745.0	19.77	19.69	19.78			
		1717.5	19.64	19.61	19.72			
	36RB-High (38)	1772.5	19.63	19.69	19.40			
		1745.0	19.66	19.77	19.57			
		1717.5	19.69	19.66	19.58			
	36RB-Middle (19)	1772.5	19.68	19.85	19.42			
		1745.0	19.74	19.74	19.55			
		1717.5	19.76	19.71	19.57			
	36RB-Low (0)	1772.5	19.66	19.59	19.33			
		1745.0	19.79	19.68	19.61			
		1717.5	19.70	19.65	19.55			
75RB (0)	1772.5	19.70	19.77	19.73				
	1745.0	19.72	19.71	19.62				
	1717.5	19.75	19.69	19.49				
20MHz	1RB-High (99)	1770.0	19.54	19.31	20.08	20.5	20.5	20.5
		1745.0	19.63	19.54	19.62			
		1720.0	19.64	19.47	19.77			
	1RB-Middle (50)	1770.0	19.60	19.44	19.74			
		1745.0	19.65	19.90	20.06			
		1720.0	19.59	19.89	20.20			
	1RB-Low (0)	1770.0	19.74	19.44	20.09			
		1745.0	19.67	19.58	19.83			
		1720.0	19.66	19.59	19.68			
	50RB-High (50)	1770.0	19.70	19.75	19.48			
		1745.0	19.71	19.61	19.40			
		1720.0	19.63	19.58	19.57			
	50RB-Middle (25)	1770.0	19.64	19.80	19.44			
		1745.0	19.73	19.80	19.50			
		1720.0	19.67	19.50	19.63			
	50RB-Low (0)	1770.0	19.72	19.73	19.40			
		1745.0	19.76	19.90	19.48			
		1720.0	19.70	19.76	19.46			
100RB (0)	1770.0	19.64	19.65	19.52				
	1745.0	19.73	19.79	19.67				
	1720.0	19.71	19.65	19.49				



LTE Band 71 Power Level A1/B1/C1

Bandwidth	Number of RBs	Frequency	QPSK	16QAM	64QAM	QPSK Tune-up	16QAM Tune-up	64QAM Tune-up				
5MHz	1RB-High (24)	695.5	22.60	21.34	20.55	24.0	23.0	22.0				
		680.5	22.50	21.50	20.56							
		665.5	22.49	21.55	20.61							
	1RB-Middle (12)	695.5	22.68	21.59	20.84							
		680.5	22.63	21.61	20.84							
		665.5	22.58	21.50	21.33							
	1RB-Low (0)	695.5	22.54	21.42	20.57							
		680.5	22.54	21.56	20.53							
		665.5	22.61	21.22	20.95							
	12RB-High (13)	695.5	21.67	20.54	19.47	23.0	22.0	21.0				
		680.5	21.75	20.52	19.61							
		665.5	21.63	20.58	20.04							
		12RB-Middle (6)	695.5	21.63	20.70				19.66			
			680.5	21.77	20.54				19.64			
			665.5	21.59	20.67				19.97			
		12RB-Low (0)	695.5	21.63	20.57				19.57			
			680.5	21.75	20.45				19.69			
			665.5	21.67	20.58				19.56			
	25RB (0)	695.5	21.60	20.42	19.56							
		680.5	21.73	20.57	19.69							
		665.5	21.71	20.63	19.54							
	10MHz	1RB-High (49)	693.0	22.58	21.47				20.64	24.0	23.0	22.0
			680.5	22.69	21.42				20.72			
			668.0	22.89	21.74				20.76			
1RB-Middle (24)		693.0	22.69	21.58	20.68							
		680.5	22.83	21.61	20.77							
		668.0	22.74	21.76	21.51							
1RB-Low (0)		693.0	22.63	21.56	20.55							
		680.5	22.71	21.56	20.78							
		668.0	22.72	21.61	20.60							
25RB-High (25)		693.0	21.65	20.80	19.66	23.0	22.0	21.0				
		680.5	21.70	20.67	19.54							
		668.0	21.77	20.76	19.65							
25RB-Middle (12)		693.0	21.66	20.67	19.90							
		680.5	21.71	20.77	19.59							
		668.0	21.82	20.75	19.96							
25RB-Low (0)		693.0	21.73	20.54	19.57							
		680.5	21.76	20.74	19.60							
		668.0	21.69	20.70	19.56							
50RB (0)		693.0	21.70	20.62	19.74							
		680.5	21.73	20.70	19.72							
		668.0	21.80	20.83	19.85							
15MHz		1RB-High (74)	690.5	22.46	21.61				21.36	24.0	23.0	22.0
			680.5	22.58	21.26				20.72			
			670.5	22.84	21.60				21.08			
	1RB-Middle (37)	690.5	22.78	21.43	20.66							
		680.5	22.80	21.65	20.94							
		670.5	22.66	21.48	21.14							
	1RB-Low (0)	690.5	22.55	21.61	20.56							
		680.5	22.48	21.64	20.78							
		670.5	22.54	21.72	21.16							
	36RB-High (38)	690.5	21.68	20.72	19.81	23.0	22.0	21.0				
		680.5	21.70	20.73	19.59							
		670.5	21.80	20.64	19.66							
		36RB-Middle (19)	690.5	21.72	20.66				19.92			
			680.5	21.75	20.68				19.73			
			670.5	21.78	20.73				19.83			
		36RB-Low (0)	690.5	21.66	20.61				19.76			
			680.5	21.69	20.70				19.66			
			670.5	21.63	20.51				19.76			
	75RB (0)	690.5	21.65	20.60	19.74							
		680.5	21.74	20.88	19.68							
		670.5	21.83	20.78	19.68							
	20MHz	1RB-High (99)	688.0	22.73	21.55				20.64	24.0	23.0	22.0
			683.0	22.80	21.33				20.87			
			673.0	22.68	21.60				20.69			
1RB-Middle (50)		688.0	22.77	21.72	20.69							
		683.0	22.85	21.43	20.92							
		673.0	22.89	21.80	21.23							
1RB-Low (0)		688.0	22.55	21.58	20.69							
		683.0	22.36	21.30	20.57							
		673.0	22.65	21.51	20.47							
50RB-High (50)		688.0	21.66	20.86	19.83	23.0	22.0	21.0				
		683.0	21.69	20.66	19.76							
		673.0	21.81	20.66	19.85							
50RB-Middle (25)		688.0	21.66	20.70	19.78							
		683.0	21.66	20.78	19.85							
		673.0	21.74	20.78	19.78							
50RB-Low (0)		688.0	21.66	20.56	19.63							
		683.0	21.75	20.78	19.82							
		673.0	21.70	20.73	19.79							
100RB (0)		688.0	21.66	20.67	19.84							
		683.0	21.74	20.78	19.81							
		673.0	21.84	20.85	19.98							

### 10.3. Bluetooth and WLAN Measurement result

**Table 10.3: The conducted Power measurement results for Bluetooth**

Averaged Power (dBm)				
Mode	Tune up	Ch.0 (2402MHz)	Ch.39 (2441MHz)	Ch.78 (2480MHz)
GFSK	<b>12.0</b>	<b>10.97</b>	10.53	10.53
EDR2M-4_DQPSK	<b>11.0</b>	10.09	9.78	9.76
EDR3M-8DPSK	<b>11.0</b>	10.33	9.94	9.90
/	/	Ch.0 (2402MHz)	Ch.19 (2440MHz)	Ch.39 (2480MHz)
BLE(1M)	<b>7.0</b>	5.39	5.79	5.74

**Table 10.4: The conducted Power measurement results for WLAN 2.4GHz**

Power Level D1/D2/E1/E2/F1/F2				
Averaged Power (dBm) Duty Cycle: <b>100%</b>				
Mode	Tune up	Ch.1 (2412MHz)	Ch.6 (2437MHz)	Ch.11 (2462MHz)
802.11b	<b>14.5</b>	13.16	<b>13.93</b>	12.13
802.11g	<b>12.5</b>	11.15	11.83	10.77
802.11n(20MHz)	<b>12.5</b>	11.16	11.81	10.84
/	/	Ch.3 (2422MHz)	Ch.6 (2437MHz)	Ch.9 (2452MHz)
802.11n(40MHz)	<b>12.5</b>	11.62	12.41	11.55



**Table 10.5: The conducted Power measurement results for WLAN 5GHz**

<b>Power Level D1/D2</b>								
Averaged Power (dBm) Duty Cycle: <b>100%</b>								
Mode	802.11a	802.11n -20MHz	802.11ac -20MHz	Mode	802.11n -40MHz	802.11ac -40MHz	Mode	802.11ac -80MHz
Channel	6Mbps	MCS0	MCS0	Channel	MCS0	MCS0	Channel	MCS0
<b>&lt;U-NII-1&gt;</b>								
<b>Tune up</b>	<b>14.0</b>	<b>13.5</b>	<b>13.5</b>	/	<b>13.5</b>	<b>13.5</b>	/	<b>13.5</b>
36(5180MHz)	12.73	12.44	12.22	38(5190MHz)	12.31	12.17	42(5210MHz)	12.25
40(5200MHz)	12.65	11.81	12.37	46(5230MHz)	12.55	12.28	/	/
44(5220MHz)	12.69	11.89	12.45	/	/	/	/	/
48(5240MHz)	12.89	11.94	12.29	/	/	/	/	/
<b>&lt;U-NII-2A&gt;</b>								
<b>Tune up</b>	<b>14.0</b>	<b>13.5</b>	<b>13.5</b>	/	<b>13.5</b>	<b>13.5</b>	/	<b>13.5</b>
52(5260MHz)	13.12	12.66	12.55	54(5270MHz)	12.77	12.30	58(5290MHz)	12.62
56(5280MHz)	13.28	12.94	12.90	62(5310MHz)	12.71	12.57	/	/
60(5300MHz)	13.45	13.31	13.22	/	/	/	/	/
64(5320MHz)	<b>13.73</b>	13.34	13.25	/	/	/	/	/
<b>&lt;U-NII-2C&gt;</b>								
<b>Tune up</b>	<b>14.5</b>	<b>14.0</b>	<b>14.0</b>	/	<b>14.0</b>	<b>14.0</b>	/	<b>14.0</b>
100(5500MHz)	13.27	12.88	12.88	102(5510MHz)	12.22	12.61	106(5530MHz)	12.36
116(5580MHz)	13.15	12.79	12.92	110(5550MHz)	12.36	12.40	122(5610MHz)	12.30
124(5620MHz)	13.33	12.85	12.75	126(5630MHz)	12.17	12.44	138(5690MHz)	12.18
132(5660MHz)	13.52	13.09	13.01	134(5670MHz)	12.50	12.68	/	/
140(5700MHz)	13.53	13.68	13.55	142(5710MHz)	12.91	12.29	/	/
144(5720MHz)	<b>13.55</b>	13.64	13.47	/	/	/	/	/
<b>&lt;U-NII-3&gt;</b>								
<b>Tune up</b>	<b>14.0</b>	<b>13.5</b>	<b>13.5</b>	/	<b>13.5</b>	<b>13.5</b>	/	<b>13.5</b>
149(5745MHz)	<b>13.07</b>	12.90	12.96	151(5755MHz)	12.63	12.48	155(5775MHz)	12.51
157(5785MHz)	12.19	11.61	12.22	159(5795MHz)	11.66	11.93	/	/
165(5825MHz)	11.05	11.52	11.57	/	/	/	/	/



Power Level E1								
Averaged Power (dBm) Duty Cycle: 100%								
Mode	802.11a	802.11n -20MHz	802.11ac -20MHz	Mode	802.11n -40MHz	802.11ac -40MHz	Mode	802.11ac -80MHz
Channel	6Mbps	MCS0	MCS0	Channel	MCS0	MCS0	Channel	MCS0
<b>&lt;U-NII-1&gt;</b>								
<b>Tune up</b>	<b>18.5</b>	<b>17.5</b>	<b>17.0</b>	/	<b>13.5</b>	<b>15.0</b>	/	<b>14.0</b>
36(5180MHz)	17.25	16.32	15.68	38(5190MHz)	12.31	13.54	42(5210MHz)	12.76
40(5200MHz)	17.34	16.27	15.76	46(5230MHz)	12.55	13.73	/	/
44(5220MHz)	17.32	16.38	15.83	/	/	/	/	/
48(5240MHz)	<b>17.51</b>	16.35	15.71	/	/	/	/	/
<b>&lt;U-NII-3&gt;</b>								
<b>Tune up</b>	<b>18.5</b>	<b>17.5</b>	<b>17.0</b>	/	<b>17.5</b>	<b>17.0</b>	/	<b>17.0</b>
149(5745MHz)	<b>17.85</b>	16.91	16.44	151(5755MHz)	16.52	15.97	155(5775MHz)	15.95
157(5785MHz)	16.59	15.40	15.72	159(5795MHz)	15.64	15.35	/	/
165(5825MHz)	15.84	15.32	14.71	/	/	/	/	/
<b>Power Level E2</b>								
Averaged Power (dBm) Duty Cycle: 100%								
Mode	802.11a	802.11n -20MHz	802.11ac -20MHz	Mode	802.11n -40MHz	802.11ac -40MHz	Mode	802.11ac -80MHz
Channel	6Mbps	MCS0	MCS0	Channel	MCS0	MCS0	Channel	MCS0
<b>&lt;U-NII-1&gt;</b>								
<b>Tune up</b>	<b>14.0</b>	<b>13.5</b>	<b>13.5</b>	/	<b>13.5</b>	<b>13.5</b>	/	<b>13.5</b>
36(5180MHz)	12.73	12.44	12.22	38(5190MHz)	12.31	12.17	42(5210MHz)	12.25
40(5200MHz)	12.65	11.81	12.37	46(5230MHz)	12.55	12.28	/	/
44(5220MHz)	12.69	11.89	12.45	/	/	/	/	/
48(5240MHz)	<b>12.89</b>	11.94	12.29	/	/	/	/	/
<b>&lt;U-NII-3&gt;</b>								
<b>Tune up</b>	<b>14.0</b>	<b>13.5</b>	<b>13.5</b>	/	<b>13.5</b>	<b>13.5</b>	/	<b>13.5</b>
149(5745MHz)	<b>13.07</b>	12.90	12.96	151(5755MHz)	12.63	12.48	155(5775MHz)	12.51
157(5785MHz)	12.19	11.61	12.22	159(5795MHz)	11.66	11.93	/	/
165(5825MHz)	11.05	11.52	11.57	/	/	/	/	/



Power Level F1								
Averaged Power (dBm) Duty Cycle: 100%								
Mode	802.11a	802.11n -20MHz	802.11ac -20MHz	Mode	802.11n -40MHz	802.11ac -40MHz	Mode	802.11ac -80MHz
Channel	6Mbps	MCS0	MCS0	Channel	MCS0	MCS0	Channel	MCS0
<b>&lt;U-NII-1&gt;</b>								
<b>Tune up</b>	<b>18.5</b>	<b>17.5</b>	<b>17.0</b>	/	<b>13.5</b>	<b>15.0</b>	/	<b>14.0</b>
36(5180MHz)	17.25	16.32	15.68	38(5190MHz)	12.31	13.54	42(5210MHz)	12.76
40(5200MHz)	17.34	16.27	15.76	46(5230MHz)	12.55	13.73	/	/
44(5220MHz)	17.32	16.38	15.83	/	/	/	/	/
48(5240MHz)	17.51	16.35	15.71	/	/	/	/	/
<b>&lt;U-NII-2A&gt;</b>								
<b>Tune up</b>	<b>18.5</b>	<b>17.5</b>	<b>17.0</b>	/	<b>14.5</b>	<b>16.0</b>	/	<b>15.0</b>
52(5260MHz)	17.74	16.58	16.04	54(5270MHz)	13.74	14.81	58(5290MHz)	14.05
56(5280MHz)	17.97	16.95	16.41	62(5310MHz)	13.66	15.15	/	/
60(5300MHz)	18.23	17.29	16.66	/	/	/	/	/
64(5320MHz)	<b>18.28</b>	17.35	16.74	/	/	/	/	/
<b>&lt;U-NII-2C&gt;</b>								
<b>Tune up</b>	<b>19.0</b>	<b>18.0</b>	<b>17.5</b>	/	<b>17.0</b>	<b>17.5</b>	/	<b>16.5</b>
100(5500MHz)	18.05	16.84	16.31	102(5510MHz)	15.18	16.03	106(5530MHz)	14.88
116(5580MHz)	17.87	16.76	16.38	110(5550MHz)	15.35	15.91	122(5610MHz)	14.72
124(5620MHz)	18.15	16.82	16.24	126(5630MHz)	15.12	15.86	138(5690MHz)	15.63
132(5660MHz)	18.37	17.04	16.45	134(5670MHz)	15.46	16.17	/	/
140(5700MHz)	18.53	17.71	17.09	142(5710MHz)	15.97	16.73	/	/
144(5720MHz)	<b>18.56</b>	17.66	17.03	/	/	/	/	/
<b>&lt;U-NII-3&gt;</b>								
<b>Tune up</b>	<b>18.5</b>	<b>17.5</b>	<b>17.0</b>	/	<b>17.5</b>	<b>17.0</b>	/	<b>17.0</b>
149(5745MHz)	<b>17.85</b>	16.91	16.44	151(5755MHz)	16.52	15.97	155(5775MHz)	15.95
157(5785MHz)	16.59	15.40	15.72	159(5795MHz)	15.64	15.35	/	/
165(5825MHz)	15.84	15.32	14.71	/	/	/	/	/




Power Level F2								
Averaged Power (dBm) Duty Cycle: 100%								
Mode	802.11a	802.11n -20MHz	802.11ac -20MHz	Mode	802.11n -40MHz	802.11ac -40MHz	Mode	802.11ac -80MHz
Channel	6Mbps	MCS0	MCS0	Channel	MCS0	MCS0	Channel	MCS0
<b>&lt;U-NII-1&gt;</b>								
<b>Tune up</b>	<b>13.0</b>	<b>12.5</b>	<b>12.5</b>	/	<b>12.5</b>	<b>12.5</b>	/	<b>12.5</b>
36(5180MHz)	11.81	11.36	11.19	38(5190MHz)	11.33	11.11	42(5210MHz)	11.32
40(5200MHz)	11.74	11.28	11.33	46(5230MHz)	11.58	11.27	/	/
44(5220MHz)	11.78	11.39	11.28	/	/	/	/	/
48(5240MHz)	11.83	11.45	11.22	/	/	/	/	/
<b>&lt;U-NII-2A&gt;</b>								
<b>Tune up</b>	<b>13.0</b>	<b>12.5</b>	<b>12.5</b>	/	<b>12.5</b>	<b>12.5</b>	/	<b>12.5</b>
52(5260MHz)	12.11	11.65	11.65	54(5270MHz)	11.77	11.35	58(5290MHz)	11.64
56(5280MHz)	12.35	12.02	11.94	62(5310MHz)	11.69	11.72	/	/
60(5300MHz)	12.68	12.31	12.22	/	/	/	/	/
64(5320MHz)	<b>12.74</b>	12.37	12.34	/	/	/	/	/
<b>&lt;U-NII-2C&gt;</b>								
<b>Tune up</b>	<b>13.5</b>	<b>13.0</b>	<b>13.0</b>	/	<b>13.0</b>	<b>13.0</b>	/	<b>13.0</b>
100(5500MHz)	12.22	11.88	11.84	102(5510MHz)	11.20	11.56	106(5530MHz)	11.39
116(5580MHz)	12.18	11.81	11.90	110(5550MHz)	11.41	11.49	122(5610MHz)	11.24
124(5620MHz)	12.06	11.85	11.77	126(5630MHz)	11.15	11.38	138(5690MHz)	12.18
132(5660MHz)	12.32	12.09	11.96	134(5670MHz)	11.40	11.61	/	/
140(5700MHz)	12.46	12.66	12.65	142(5710MHz)	12.02	12.25	/	/
144(5720MHz)	<b>12.50</b>	12.57	12.58	/	/	/	/	/
<b>&lt;U-NII-3&gt;</b>								
<b>Tune up</b>	<b>13.0</b>	<b>12.5</b>	<b>12.5</b>	/	<b>12.5</b>	<b>12.5</b>	/	<b>12.5</b>
149(5745MHz)	<b>12.04</b>	11.95	11.96	151(5755MHz)	11.58	11.50	155(5775MHz)	11.44
157(5785MHz)	11.30	10.47	11.29	159(5795MHz)	10.77	11.01	/	/
165(5825MHz)	9.71	10.40	10.24	/	/	/	/	/

## 11. Simultaneous TX SAR Considerations

### 11.1. Introduction

The following procedures adopted from “FCC SAR Considerations for Cell Phones with Multiple Transmitters” are applicable to handsets with built-in unlicensed transmitters such as 802.11 a/b/g and Bluetooth devices which may simultaneously transmit with the licensed transmitter. For this device, the Bluetooth and WLAN can transmit simultaneous with other transmitters.

### 11.2. Transmit Antenna Separation Distances

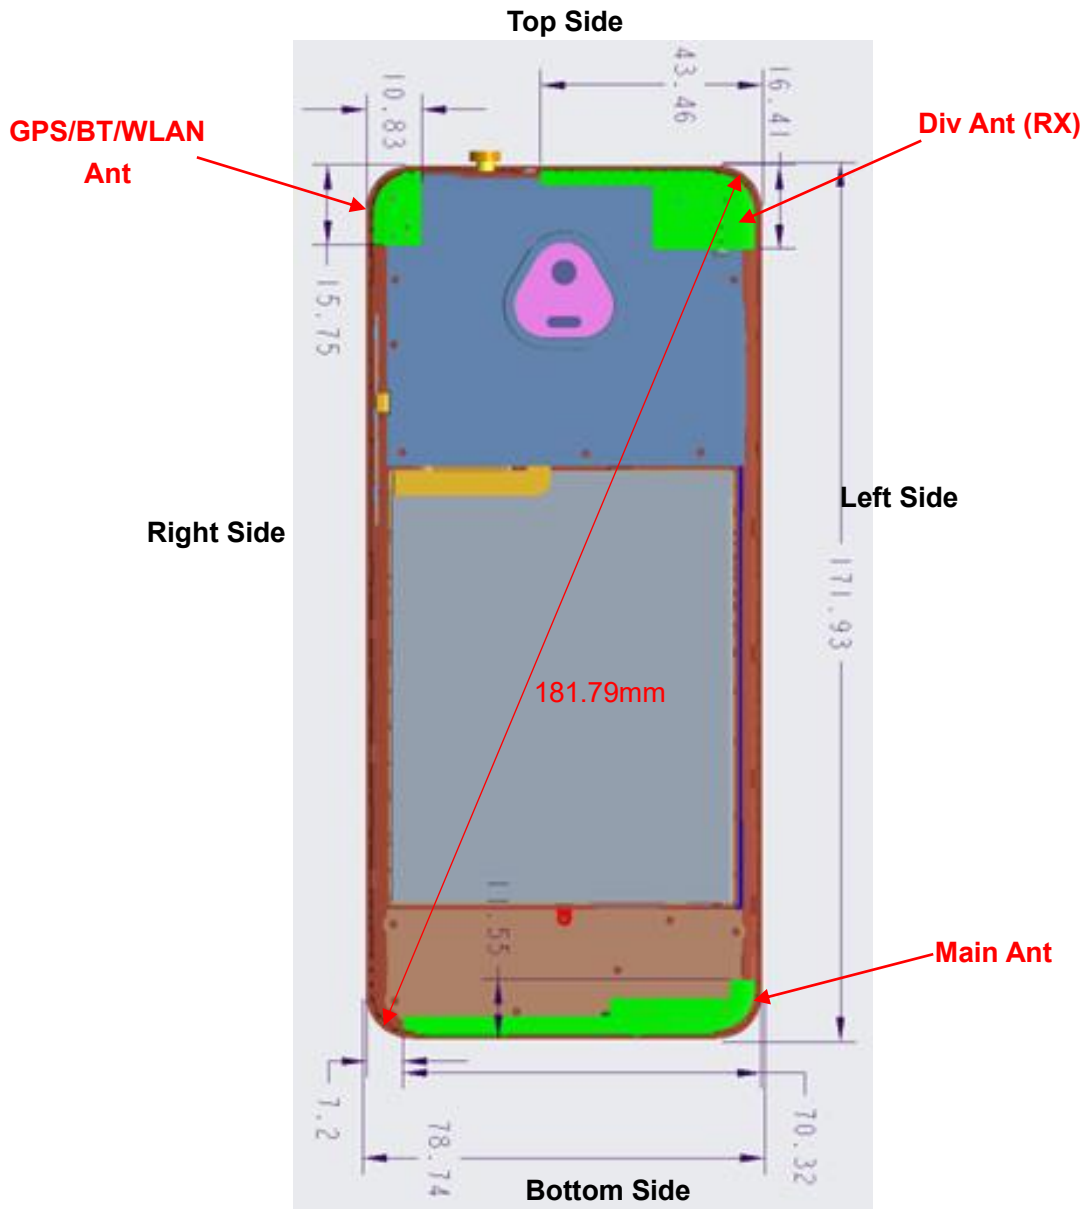

Picture 11.1 Antenna Locations (Back View)

### 11.3. SAR Measurement Positions

According to the KDB941225 D06 Hot Spot SAR, the edges with less than 25mm distance to the antennas need to be tested for SAR.

SAR measurement positions						
Antenna	Front Side	Rear Side	Left Side	Right Side	Top Side	Bottom Side
Main	Yes	Yes	Yes	Yes	Yes	No
BT/WLAN	Yes	Yes	Yes	Yes	No	Yes

### 11.4. Evaluation of Simultaneous

No.	Simultaneous Transmission Configuration
1	WWAN + WLAN 2.4GHz
2	WWAN + WLAN 5GHz
3	WWAN + Bluetooth

**Table 11.1: Maximum Simultaneous Transmission SAR**

/	Position	Sum (W/kg)
Highest reported SAR value for Head	Left Cheek (LTE Band 26 + WLAN 5GHz)	<b>0.61</b>
Highest reported SAR value for Hotspot	Rear Side (WCDMA Band 2 + WLAN 5GHz)	<b>1.24</b>
Highest reported SAR value for Body-worn	Rear Side (LTE Band 66/4 + WLAN 5GHz)	<b>0.96</b>
Highest reported SAR value for Extremity	Rear Side (LTE Band 66/4 + WLAN 5GHz)	<b>3.99</b>

Note: the test positions of above tables are for the worse case that has been evaluated.

#### Conclusion:

According to the above tables, the sum of reported SAR values is less than limit. So the simultaneous transmission SAR with volume scans is not required.

## 12. Summary of Test Results

According to the client's decision rule in the test registration form, which is "based on the measurement results as the basis of the conformity statement", the test conclusion of this report meets the limit requirements.

The calculated SAR is obtained by the following formula:

$$\text{Calculated SAR} = \text{Measured SAR} \times 10^{(P_{\text{Target}} - P_{\text{Measured}})/10}$$

Where  $P_{\text{Target}}$  is the power of manufacturing upper limit;

$P_{\text{Measured}}$  is the measured power in chapter 10.

### General Note:

1. Per KDB648474 D04v01r03, for smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm, when hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg, however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold.

a. WLAN5GHz U-NII-2A and U-NII-2C tested the product specific 10g SAR since it has no hotspot mode.

b. When 10-g product specific 10g SAR is considered, SAR thresholds is specified in the procedures for SAR test reduction and exclusion should be multiplied by 2.5.

2. C2: Configuration2

### Duty Cycle

Mode	Duty Cycle
WCDMA	1:1
FDD_LTE	1:1
TDD_LTE	1:1.58
Bluetooth	1:1
WLAN	1:1

### 12.1. Testing Environment

Temperature:	18°C~25°C
Relative humidity:	30%~70%
Ambient noise & Reflection:	< 0.012 W/kg

## 12.2. Test Results

**Table 13.1: WCDMA Band 2 SAR Values**

Power Level	RF Exposure Conditions	Frequency Band	Channel Number	Frequency (MHz)	Mode/RB	Test Position	Distance	Note	Figure No.	EUT Measured Power (dBm)	Tune up (dBm)	Measured SAR 1g (W/kg)	Calculated SAR 1g (W/kg)	Measured SAR 10g (W/kg)	Calculated SAR 10g (W/kg)	Power Drift
A1	Head	WCDMA Band 2	9400	1880.0	RMC	Left Cheek	0mm	\	\	22.00	22.50	0.095	<b>0.11</b>	0.055	<b>0.06</b>	0.03
A1	Head	WCDMA Band 2	9400	1880.0	RMC	Left Tilt	0mm	\	\	22.00	22.50	0.077	<b>0.09</b>	0.045	<b>0.05</b>	0.03
A1	Head	WCDMA Band 2	9400	1880.0	RMC	Right Cheek	0mm	\	<b>1</b>	22.00	22.50	<b>0.113</b>	<b>0.13</b>	0.072	<b>0.08</b>	0.08
A1	Head	WCDMA Band 2	9400	1880.0	RMC	Right Tilt	0mm	\	\	22.00	22.50	0.064	<b>0.07</b>	0.037	<b>0.04</b>	0.07
A1	Head	WCDMA Band 2	9400	1880.0	RMC	Right Cheek	0mm	C2	\	22.00	22.50	0.084	<b>0.09</b>	0.056	<b>0.06</b>	-0.04
B1	Hotspot	WCDMA Band 2	9400	1880.0	RMC	Front	10mm	\	\	20.00	20.50	0.289	<b>0.32</b>	0.163	<b>0.18</b>	0.10
B1	Hotspot	WCDMA Band 2	9400	1880.0	RMC	Rear	10mm	\	\	20.00	20.50	0.719	<b>0.81</b>	0.391	<b>0.44</b>	0.19
B1	Hotspot	WCDMA Band 2	9400	1880.0	RMC	Left	10mm	\	\	20.00	20.50	0.103	<b>0.12</b>	0.061	<b>0.07</b>	0.12
B1	Hotspot	WCDMA Band 2	9400	1880.0	RMC	Right	10mm	\	\	20.00	20.50	0.017	<b>0.02</b>	0.012	<b>0.01</b>	-0.07
B1	Hotspot	WCDMA Band 2	9400	1880.0	RMC	Bottom	10mm	\	\	20.00	20.50	0.957	<b>1.07</b>	0.482	<b>0.54</b>	-0.07
B1	Hotspot	WCDMA Band 2	9538	1907.6	RMC	Rear	10mm	\	\	20.10	20.50	0.705	<b>0.77</b>	0.387	<b>0.42</b>	0.06
B1	Hotspot	WCDMA Band 2	9262	1852.4	RMC	Rear	10mm	\	\	19.90	20.50	0.644	<b>0.74</b>	0.352	<b>0.40</b>	-0.05
B1	Hotspot	WCDMA Band 2	9538	1907.6	RMC	Bottom	10mm	\	<b>2</b>	20.10	20.50	<b>1.040</b>	<b>1.14</b>	0.554	<b>0.61</b>	-0.18
B1	Hotspot	WCDMA Band 2	9262	1852.4	RMC	Bottom	10mm	\	\	19.90	20.50	0.916	<b>1.05</b>	0.459	<b>0.53</b>	0.06
B1	Hotspot	WCDMA Band 2	9538	1907.6	RMC	Bottom	10mm	C2	\	20.10	20.50	1.020	<b>1.12</b>	0.521	<b>0.57</b>	-0.06
C1	Body-Worn	WCDMA Band 2	9400	1880.0	RMC	Front	15mm	\	\	20.00	20.50	0.150	<b>0.17</b>	0.084	<b>0.09</b>	-0.08
C1	Body-Worn	WCDMA Band 2	9400	1880.0	RMC	Rear	15mm	\	\	20.00	20.50	0.327	<b>0.37</b>	0.189	<b>0.21</b>	-0.02

**Table 13.2: WCDMA Band 4 SAR Values**

Power Level	RF Exposure Conditions	Frequency Band	Channel Number	Frequency (MHz)	Mode/RB	Test Position	Distance	Note	Figure No.	EUT Measured Power (dBm)	Tune up (dBm)	Measured SAR 1g (W/kg)	Calculated SAR 1g (W/kg)	Measured SAR 10g (W/kg)	Calculated SAR 10g (W/kg)	Power Drift
A1	Head	WCDMA Band 4	1413	1732.6	RMC	Left Cheek	0mm	\	\	21.30	22.50	0.097	<b>0.13</b>	0.058	<b>0.08</b>	0.09
A1	Head	WCDMA Band 4	1413	1732.6	RMC	Left Tilt	0mm	\	\	21.30	22.50	0.072	<b>0.09</b>	0.044	<b>0.06</b>	0.07
A1	Head	WCDMA Band 4	1413	1732.6	RMC	Right Cheek	0mm	\	<b>3</b>	21.30	22.50	<b>0.131</b>	<b>0.17</b>	0.085	<b>0.11</b>	0.02
A1	Head	WCDMA Band 4	1413	1732.6	RMC	Right Tilt	0mm	\	\	21.30	22.50	0.067	<b>0.09</b>	0.041	<b>0.05</b>	0.07
A1	Head	WCDMA Band 4	1413	1732.6	RMC	Right Cheek	0mm	C2	\	21.30	22.50	0.070	<b>0.09</b>	0.046	<b>0.06</b>	0.05
B1	Hotspot	WCDMA Band 4	1413	1732.6	RMC	Front	10mm	\	\	19.90	20.50	0.270	<b>0.31</b>	0.159	<b>0.18</b>	0.13
B1	Hotspot	WCDMA Band 4	1413	1732.6	RMC	Rear	10mm	\	\	19.90	20.50	0.625	<b>0.72</b>	0.346	<b>0.40</b>	0.03
B1	Hotspot	WCDMA Band 4	1413	1732.6	RMC	Left	10mm	\	\	19.90	20.50	0.114	<b>0.13</b>	0.069	<b>0.08</b>	-0.07
B1	Hotspot	WCDMA Band 4	1413	1732.6	RMC	Right	10mm	\	\	19.90	20.50	0.040	<b>0.05</b>	0.024	<b>0.03</b>	0.09
B1	Hotspot	WCDMA Band 4	1413	1732.6	RMC	Bottom	10mm	\	\	19.90	20.50	0.738	<b>0.85</b>	0.403	<b>0.46</b>	0.07
B1	Hotspot	WCDMA Band 4	1513	1752.6	RMC	Bottom	10mm	\	<b>4</b>	20.00	20.50	<b>0.804</b>	<b>0.90</b>	0.433	<b>0.49</b>	0.03
B1	Hotspot	WCDMA Band 4	1312	1712.4	RMC	Bottom	10mm	\	\	19.90	20.50	0.693	<b>0.80</b>	0.382	<b>0.44</b>	0.03
B1	Hotspot	WCDMA Band 4	1513	1752.6	RMC	Bottom	10mm	C2	\	20.00	20.50	0.735	<b>0.82</b>	0.399	<b>0.45</b>	-0.12
C1	Body-Worn	WCDMA Band 4	1413	1732.6	RMC	Front	15mm	\	\	21.30	22.50	0.217	<b>0.29</b>	0.128	<b>0.17</b>	0.03
C1	Body-Worn	WCDMA Band 4	1413	1732.6	RMC	Rear	15mm	\	\	21.30	22.50	0.503	<b>0.66</b>	0.295	<b>0.39</b>	0.10
C1	Extremity	WCDMA Band 4	1413	1732.6	RMC	Rear	0mm	\	\	21.30	22.50	5.130	<b>6.76</b>	2.280	<b>3.01</b>	-0.02
C1	Extremity	WCDMA Band 4	1513	1752.6	RMC	Rear	0mm	\	\	21.70	22.50	5.190	<b>6.24</b>	2.320	<b>2.79</b>	0.16
C1	Extremity	WCDMA Band 4	1312	1712.4	RMC	Rear	0mm	\	\	21.80	22.50	5.340	<b>6.27</b>	2.370	<b>2.78</b>	-0.13
C1	Extremity	WCDMA Band 4	1413	1732.6	RMC	Bottom	0mm	\	\	21.30	22.50	5.360	<b>7.07</b>	2.330	<b>3.07</b>	0.03
C1	Extremity	WCDMA Band 4	1513	1752.6	RMC	Bottom	0mm	\	<b>5</b>	21.70	22.50	6.080	<b>7.31</b>	2.640	<b>3.17</b>	0.05
C1	Extremity	WCDMA Band 4	1312	1712.4	RMC	Bottom	0mm	\	\	21.80	22.50	5.510	<b>6.47</b>	2.390	<b>2.81</b>	-0.16

**Table 13.3: WCDMA Band 5 SAR Values**

Power Level	RF Exposure Conditions	Frequency Band	Channel Number	Frequency (MHz)	Mode/RB	Test Position	Distance	Note	Figure No.	EUT Measured Power (dBm)	Tune up (dBm)	Measured SAR 1g (W/kg)	Calculated SAR 1g (W/kg)	Measured SAR 10g (W/kg)	Calculated SAR 10g (W/kg)	Power Drift
A1	Head	WCDMA Band 5	4183	836.6	RMC	Left Cheek	0mm	\	\	21.50	22.50	0.142	<b>0.18</b>	0.099	<b>0.12</b>	0.04
A1	Head	WCDMA Band 5	4183	836.6	RMC	Left Tilt	0mm	\	\	21.50	22.50	0.088	<b>0.11</b>	0.061	<b>0.08</b>	0.07
A1	Head	WCDMA Band 5	4183	836.6	RMC	Right Cheek	0mm	\	<b>6</b>	21.50	22.50	<b>0.174</b>	<b>0.22</b>	0.130	<b>0.16</b>	0.07
A1	Head	WCDMA Band 5	4183	836.6	RMC	Right Tilt	0mm	\	\	21.50	22.50	0.078	<b>0.10</b>	0.054	<b>0.07</b>	-0.06
A1	Head	WCDMA Band 5	4183	836.6	RMC	Right Cheek	0mm	C2	\	21.50	22.50	0.172	<b>0.22</b>	0.129	<b>0.16</b>	0.08
B1	Hotspot	WCDMA Band 5	4183	836.6	RMC	Front	10mm	\	\	21.50	22.50	0.226	<b>0.28</b>	0.143	<b>0.18</b>	0.03
B1	Hotspot	WCDMA Band 5	4183	836.6	RMC	Rear	10mm	\	<b>7</b>	21.50	22.50	<b>0.277</b>	<b>0.35</b>	0.164	<b>0.21</b>	-0.02
B1	Hotspot	WCDMA Band 5	4183	836.6	RMC	Left	10mm	\	\	21.50	22.50	0.125	<b>0.16</b>	0.083	<b>0.10</b>	-0.07
B1	Hotspot	WCDMA Band 5	4183	836.6	RMC	Right	10mm	\	\	21.50	22.50	0.206	<b>0.26</b>	0.140	<b>0.18</b>	-0.10
B1	Hotspot	WCDMA Band 5	4183	836.6	RMC	Bottom	10mm	\	\	21.50	22.50	0.255	<b>0.32</b>	0.147	<b>0.19</b>	-0.14
B1	Hotspot	WCDMA Band 5	4183	836.6	RMC	Rear	10mm	C2	\	21.50	22.50	0.233	<b>0.29</b>	0.179	<b>0.23</b>	0.12
C1	Body-Worn	WCDMA Band 5	4183	836.6	RMC	Front	10mm	\	\	21.50	22.50	0.226	<b>0.28</b>	0.143	<b>0.18</b>	0.03
C1	Body-Worn	WCDMA Band 5	4183	836.6	RMC	Rear	10mm	\	\	21.50	22.50	0.277	<b>0.35</b>	0.164	<b>0.21</b>	-0.02





**Table 13.4: LTE Band 12 SAR Values**

Power Level	RF Exposure Conditions	Frequency Band	Channel Number	Frequency (MHz)	Mode/RB	Test Position	Distance	Note	Figure No.	EUT Measured Power (dBm)	Tune up (dBm)	Measured SAR 1g (W/kg)	Calculated SAR 1g (W/kg)	Measured SAR 10g (W/kg)	Calculated SAR 10g (W/kg)	Power Drift
A1	Head	LTE Band 12	23095	707.5	1RB24	Left Cheek	0mm	\	\	22.93	24.00	0.141	0.18	0.112	0.14	-0.06
A1	Head	LTE Band 12	23130	711.0	25RB12	Left Cheek	0mm	\	\	21.89	23.00	0.093	0.12	0.068	0.09	-0.02
A1	Head	LTE Band 12	23095	707.5	1RB24	Left Tilt	0mm	\	\	22.93	24.00	0.051	0.06	0.037	0.05	0.03
A1	Head	LTE Band 12	23130	711.0	25RB12	Left Tilt	0mm	\	\	21.89	23.00	<0.01	<0.01	<0.01	<0.01	\
A1	Head	LTE Band 12	23095	707.5	1RB24	Right Cheek	0mm	\	8	22.93	24.00	0.171	0.22	0.134	0.17	0.01
A1	Head	LTE Band 12	23130	711.0	25RB12	Right Cheek	0mm	\	\	21.89	23.00	0.098	0.13	0.070	0.09	0.05
A1	Head	LTE Band 12	23095	707.5	1RB24	Right Tilt	0mm	\	\	22.93	24.00	0.049	0.06	0.038	0.05	0.02
A1	Head	LTE Band 12	23130	711.0	25RB12	Right Tilt	0mm	\	\	21.89	23.00	<0.01	<0.01	<0.01	<0.01	\
A1	Head	LTE Band 12	23095	707.5	1RB24	Right Cheek	0mm	C2	\	22.93	24.00	0.144	0.18	0.111	0.14	0.08
B1	Hotspot	LTE Band 12	23095	707.5	1RB24	Front	10mm	\	\	22.93	24.00	0.145	0.19	0.105	0.13	-0.05
B1	Hotspot	LTE Band 12	23130	711.0	25RB12	Front	10mm	\	\	21.89	23.00	0.126	0.16	0.092	0.12	-0.18
B1	Hotspot	LTE Band 12	23095	707.5	1RB24	Rear	10mm	\	9	22.93	24.00	0.201	0.26	0.135	0.17	-0.12
B1	Hotspot	LTE Band 12	23130	711.0	25RB12	Rear	10mm	\	\	21.89	23.00	0.186	0.24	0.136	0.18	0.18
B1	Hotspot	LTE Band 12	23095	707.5	1RB24	Left	10mm	\	\	22.93	24.00	0.111	0.14	0.076	0.10	-0.17
B1	Hotspot	LTE Band 12	23130	711.0	25RB12	Left	10mm	\	\	21.89	23.00	0.100	0.13	0.069	0.09	-0.09
B1	Hotspot	LTE Band 12	23095	707.5	1RB24	Right	10mm	\	\	22.93	24.00	0.186	0.24	0.124	0.16	-0.06
B1	Hotspot	LTE Band 12	23130	711.0	25RB12	Right	10mm	\	\	21.89	23.00	0.159	0.21	0.107	0.14	0.00
B1	Hotspot	LTE Band 12	23095	707.5	1RB24	Bottom	10mm	\	\	22.93	24.00	0.126	0.16	0.062	0.08	-0.18
B1	Hotspot	LTE Band 12	23130	711.0	25RB12	Bottom	10mm	\	\	21.89	23.00	0.085	0.11	0.046	0.06	0.13
B1	Hotspot	LTE Band 12	23095	707.5	1RB24	Rear	10mm	C2	\	22.93	24.00	0.180	0.23	0.120	0.15	-0.06
C1	Body-Worn	LTE Band 12	23095	707.5	1RB24	Front	10mm	\	\	22.93	24.00	0.145	0.19	0.105	0.13	-0.05
C1	Body-Worn	LTE Band 12	23130	711.0	25RB12	Front	10mm	\	\	21.89	23.00	0.126	0.16	0.092	0.12	-0.18
C1	Body-Worn	LTE Band 12	23095	707.5	1RB24	Rear	10mm	\	\	22.93	24.00	0.201	0.26	0.135	0.17	-0.12
C1	Body-Worn	LTE Band 12	23130	711.0	25RB12	Rear	10mm	\	\	21.89	23.00	0.186	0.24	0.136	0.18	0.18

**Table 13.5: LTE Band 13 SAR Values**

Power Level	RF Exposure Conditions	Frequency Band	Channel Number	Frequency (MHz)	Mode/RB	Test Position	Distance	Note	Figure No.	EUT Measured Power (dBm)	Tune up (dBm)	Measured SAR 1g (W/kg)	Calculated SAR 1g (W/kg)	Measured SAR 10g (W/kg)	Calculated SAR 10g (W/kg)	Power Drift
A1	Head	LTE Band 13	23230	782.0	1RB24	Left Cheek	0mm	\	\	22.94	24.00	0.169	0.22	0.122	0.16	-0.02
A1	Head	LTE Band 13	23230	782.0	25RB0	Left Cheek	0mm	\	\	21.87	23.00	0.131	0.17	0.096	0.12	0.11
A1	Head	LTE Band 13	23230	782.0	1RB24	Left Tilt	0mm	\	\	22.94	24.00	0.117	0.15	0.086	0.11	0.03
A1	Head	LTE Band 13	23230	782.0	25RB0	Left Tilt	0mm	\	\	21.87	23.00	0.097	0.13	0.070	0.09	0.07
A1	Head	LTE Band 13	23230	782.0	1RB24	Right Cheek	0mm	\	10	22.94	24.00	0.237	0.30	0.183	0.23	0.09
A1	Head	LTE Band 13	23230	782.0	25RB0	Right Cheek	0mm	\	\	21.87	23.00	0.163	0.21	0.116	0.15	-0.01
A1	Head	LTE Band 13	23230	782.0	1RB24	Right Tilt	0mm	\	\	22.94	24.00	0.108	0.14	0.079	0.10	0.06
A1	Head	LTE Band 13	23230	782.0	25RB0	Right Tilt	0mm	\	\	21.87	23.00	0.088	0.11	0.064	0.08	0.07
A1	Head	LTE Band 13	23230	782.0	1RB24	Right Cheek	0mm	C2	\	22.94	24.00	0.163	0.21	0.128	0.16	0.03
B1	Hotspot	LTE Band 13	23230	782.0	1RB24	Front	10mm	\	\	22.94	24.00	0.208	0.27	0.134	0.17	0.17
B1	Hotspot	LTE Band 13	23230	782.0	25RB0	Front	10mm	\	\	21.87	23.00	0.166	0.22	0.107	0.14	-0.06
B1	Hotspot	LTE Band 13	23230	782.0	1RB24	Rear	10mm	\	11	22.94	24.00	0.295	0.38	0.184	0.23	-0.09
B1	Hotspot	LTE Band 13	23230	782.0	25RB0	Rear	10mm	\	\	21.87	23.00	0.225	0.29	0.161	0.21	0.01
B1	Hotspot	LTE Band 13	23230	782.0	1RB24	Left	10mm	\	\	22.94	24.00	0.140	0.18	0.094	0.12	0.08
B1	Hotspot	LTE Band 13	23230	782.0	25RB0	Left	10mm	\	\	21.87	23.00	0.115	0.15	0.078	0.10	-0.01
B1	Hotspot	LTE Band 13	23230	782.0	1RB24	Right	10mm	\	\	22.94	24.00	0.237	0.30	0.159	0.20	-0.18
B1	Hotspot	LTE Band 13	23230	782.0	25RB0	Right	10mm	\	\	21.87	23.00	0.191	0.25	0.129	0.17	-0.02
B1	Hotspot	LTE Band 13	23230	782.0	1RB24	Bottom	10mm	\	\	22.94	24.00	0.229	0.29	0.114	0.15	-0.16
B1	Hotspot	LTE Band 13	23230	782.0	25RB0	Bottom	10mm	\	\	21.87	23.00	0.161	0.21	0.086	0.11	0.09
B1	Hotspot	LTE Band 13	23230	782.0	1RB24	Rear	10mm	C2	\	22.94	24.00	0.179	0.23	0.117	0.15	0.08
C1	Body-Worn	LTE Band 13	23230	782.0	1RB24	Front	10mm	\	\	22.94	24.00	0.208	0.27	0.134	0.17	0.17
C1	Body-Worn	LTE Band 13	23230	782.0	25RB0	Front	10mm	\	\	21.87	23.00	0.166	0.22	0.107	0.14	-0.06
C1	Body-Worn	LTE Band 13	23230	782.0	1RB24	Rear	10mm	\	\	22.94	24.00	0.295	0.38	0.184	0.23	-0.09
C1	Body-Worn	LTE Band 13	23230	782.0	25RB0	Rear	10mm	\	\	21.87	23.00	0.225	0.29	0.161	0.21	0.01

**Table 13.6: LTE Band 25 SAR Values**

Power Level	RF Exposure Conditions	Frequency Band	Channel Number	Frequency (MHz)	Mode/RB	Test Position	Distance	Note	Figure No.	EUT Measured Power (dBm)	Tune up (dBm)	Measured SAR 1g (W/kg)	Calculated SAR 1g (W/kg)	Measured SAR 10g (W/kg)	Calculated SAR 10g (W/kg)	Power Drift
A1	Head	LTE Band 25	26365	1882.5	1RB0	Left Cheek	0mm	\	12	22.43	23.50	0.100	0.13	0.064	0.08	0.02
A1	Head	LTE Band 25	26140	1860.0	50RB25	Left Cheek	0mm	\	\	21.32	22.50	0.069	0.09	0.044	0.06	0.06
A1	Head	LTE Band 25	26365	1882.5	1RB0	Left Tilt	0mm	\	\	22.43	23.50	0.072	0.09	0.046	0.06	-0.11
A1	Head	LTE Band 25	26140	1860.0	50RB25	Left Tilt	0mm	\	\	21.32	22.50	0.057	0.08	0.035	0.05	0.05
A1	Head	LTE Band 25	26365	1882.5	1RB0	Right Cheek	0mm	\	\	22.43	23.50	0.083	0.11	0.052	0.07	0.03
A1	Head	LTE Band 25	26140	1860.0	50RB25	Right Cheek	0mm	\	\	21.32	22.50	0.067	0.09	0.041	0.05	-0.02
A1	Head	LTE Band 25	26365	1882.5	1RB0	Right Tilt	0mm	\	\	22.43	23.50	0.058	0.07	0.034	0.04	0.05
A1	Head	LTE Band 25	26140	1860.0	50RB25	Right Tilt	0mm	\	\	21.32	22.50	0.042	0.05	0.026	0.03	-0.11
A1	Head	LTE Band 25	26365	1882.5	1RB0	Left Cheek	0mm	C2	\	22.43	23.50	0.091	0.12	0.064	0.08	0.04
B1	Hotspot	LTE Band 25	26365	1882.5	1RB0	Front	10mm	\	\	19.27	20.50	0.221	0.29	0.128	0.17	-0.05
B1	Hotspot	LTE Band 25	26140	1860.0	50RB25	Front	10mm	\	\	19.18	20.50	0.219	0.30	0.081	0.11	-0.17
B1	Hotspot	LTE Band 25	26365	1882.5	1RB0	Rear	10mm	\	\	19.27	20.50	0.507	0.67	0.280	0.37	0.07
B1	Hotspot	LTE Band 25	26140	1860.0	50RB25	Rear	10mm	\	\	19.18	20.50	0.495	0.67	0.176	0.24	0.14
B1	Hotspot	LTE Band 25	26365	1882.5	1RB0	Left	10mm	\	\	19.27	20.50	0.072	0.10	0.044	0.06	-0.16
B1	Hotspot	LTE Band 25	26140	1860.0	50RB25	Left	10mm	\	\	19.18	20.50	0.065	0.09	0.026	0.04	0.01
B1	Hotspot	LTE Band 25	26365	1882.5	1RB0	Right	10mm	\	\	19.27	20.50	0.038	0.05	0.024	0.03	0.03
B1	Hotspot	LTE Band 25	26140	1860.0	50RB25	Right	10mm	\	\	19.18	20.50	0.041	0.06	0.017	0.02	0.19
B1	Hotspot	LTE Band 25	26365	1882.5	1RB0	Bottom	10mm	\	\	19.27	20.50	0.688	0.91	0.369	0.49	-0.10
B1	Hotspot	LTE Band 25	26140	1860.0	50RB25	Bottom	10mm	\	\	19.18	20.50	0.700	0.95	0.241	0.33	0.04
B1	Hotspot	LTE Band 25	26590	1905.0	1RB0	Bottom	10mm	\	\	19.09	20.50	0.698	0.97	0.373	0.52	0.02
B1	Hotspot	LTE Band 25	26140	1860.0	1RB0	Bottom	10mm	\	\	19.23	20.50	0.679	0.91	0.361	0.48	0.04
B1	Hotspot	LTE Band 25	26590	1905.0	50RB25	Bottom	10mm	\	13	19.15	20.50	0.809	1.10	0.431	0.59	0.11
B1	Hotspot	LTE Band 25	26365	1882.5	50RB25	Bottom	10mm	\	\	19.07	20.50	0.763	1.06	0.260	0.36	-0.11
B1	Hotspot	LTE Band 25	26140	1860.0	100RB	Bottom	10mm	\	\	19.16	20.50	0.728	0.99	0.364	0.50	0.09
B1	Hotspot	LTE Band 25	26590	1905.0	50RB25	Bottom	10mm	C2	\	19.15	20.50	0.804	1.10	0.439	0.60	-0.05
C1	Body-Worn	LTE Band 25	26365	1882.5	1RB0	Front	15mm	\	\	20.56	21.50	0.184	0.23	0.105	0.13	0.05
C1	Body-Worn	LTE Band 25	26140	1860.0	50RB25	Front	15mm	\	\	20.51	21.50	0.143	0.18	0.088	0.11	0.12
C1	Body-Worn	LTE Band 25	26365	1882.5	1RB0	Rear	15mm	\	\	20.56	21.50	0.366	0.45	0.210	0.26	-0.05
C1	Body-Worn	LTE Band 25	26140	1860.0	50RB25	Rear	15mm	\	\	20.51	21.50	0.325	0.41	0.188	0.24	0.16
C1	Extremity	LTE Band 25	26365	1882.5	1RB0	Bottom	0mm	\	\	20.56	21.50	5.510	6.84	2.370	2.94	0.09
C1	Extremity	LTE Band 25	26590	1905.0	1RB0	Bottom	0mm	\	14	20.38	21.50	5.550	7.18	2.420	3.13	0.14
C1	Extremity	LTE Band 25	26140	1860.0	1RB0	Bottom	0mm	\	\	20.47	21.50	5.000	6.34	2.180	2.76	0.10
C1	Extremity	LTE Band 25	26140	1860.0	50RB25	Bottom	0mm	\	\	20.51	21.50	5.590	7.02	2.390	3.00	-0.15
C1	Extremity	LTE Band 25	26590	1905.0	50RB25	Bottom	0mm	\	\	20.25	21.50	5.410	7.21	2.350	3.13	-0.17
C1	Extremity	LTE Band 25	26365	1882.5	50RB25	Bottom	0mm	\	\	20.31	21.50	5.390	7.09	2.340	3.08	0.03
C1	Extremity	LTE Band 25	26140	1860.0	100RB	Bottom	0mm	\	\	20.46	21.50	5.330	6.77	2.280	2.90	-0.11

**Note:** SAR for LTE Band 2 is covered by LTE Band 25 due to similar frequency range, same maximum tune-up limit and same channel bandwidth.

**Table 13.7: LTE Band 26 SAR Values**

Power Level	RF Exposure Conditions	Frequency Band	Channel Number	Frequency (MHz)	Mode/RB	Test Position	Distance	Note	Figure No.	EUT Measured Power (dBm)	Tune up (dBm)	Measured SAR 1g (W/kg)	Calculated SAR 1g (W/kg)	Measured SAR 10g (W/kg)	Calculated SAR 10g (W/kg)	Power Drift
A1	Head	LTE Band 26	26865	831.5	1RB37	Left Cheek	0mm	\	\	22.92	24.00	0.225	0.29	0.164	0.21	-0.02
A1	Head	LTE Band 26	26865	831.5	36RB38	Left Cheek	0mm	\	\	21.87	23.00	0.172	0.22	0.126	0.16	0.05
A1	Head	LTE Band 26	26865	831.5	1RB37	Left Tilt	0mm	\	\	22.92	24.00	0.158	0.20	0.117	0.15	0.14
A1	Head	LTE Band 26	26865	831.5	36RB38	Left Tilt	0mm	\	\	21.87	23.00	0.127	0.16	0.094	0.12	0.06
A1	Head	LTE Band 26	26865	831.5	1RB37	Right Cheek	0mm	\	15	22.92	24.00	0.323	0.41	0.247	0.32	0.07
A1	Head	LTE Band 26	26865	831.5	36RB38	Right Cheek	0mm	\	\	21.87	23.00	0.230	0.30	0.163	0.21	0.01
A1	Head	LTE Band 26	26865	831.5	1RB37	Right Tilt	0mm	\	\	22.92	24.00	0.162	0.21	0.120	0.15	-0.02
A1	Head	LTE Band 26	26865	831.5	36RB38	Right Tilt	0mm	\	\	21.87	23.00	0.128	0.17	0.095	0.12	0.01
A1	Head	LTE Band 26	26865	831.5	1RB37	Right Cheek	0mm	C2	\	22.92	24.00	0.250	0.32	0.195	0.25	0.02
B1	Hotspot	LTE Band 26	26865	831.5	1RB37	Front	10mm	\	\	22.92	24.00	0.319	0.41	0.193	0.25	0.06
B1	Hotspot	LTE Band 26	26865	831.5	36RB38	Front	10mm	\	\	21.87	23.00	0.247	0.32	0.150	0.19	0.10
B1	Hotspot	LTE Band 26	26865	831.5	1RB37	Rear	10mm	\	16	22.92	24.00	0.358	0.46	0.218	0.28	-0.03
B1	Hotspot	LTE Band 26	26865	831.5	36RB38	Rear	10mm	\	\	21.87	23.00	0.265	0.34	0.161	0.21	0.17
B1	Hotspot	LTE Band 26	26865	831.5	1RB37	Left	10mm	\	\	22.92	24.00	0.124	0.16	0.083	0.11	-0.02
B1	Hotspot	LTE Band 26	26865	831.5	36RB38	Left	10mm	\	\	21.87	23.00	0.098	0.13	0.067	0.09	-0.10
B1	Hotspot	LTE Band 26	26865	831.5	1RB37	Right	10mm	\	\	22.92	24.00	0.326	0.42	0.216	0.28	0.08
B1	Hotspot	LTE Band 26	26865	831.5	36RB38	Right	10mm	\	\	21.87	23.00	0.250	0.32	0.167	0.22	0.11
B1	Hotspot	LTE Band 26	26865	831.5	1RB37	Bottom	10mm	\	\	22.92	24.00	0.325	0.42	0.165	0.21	0.08
B1	Hotspot	LTE Band 26	26865	831.5	36RB38	Bottom	10mm	\	\	21.87	23.00	0.246	0.32	0.126	0.16	0.06
B1	Hotspot	LTE Band 26	26865	831.5	1RB37	Rear	10mm	C2	\	22.92	24.00	0.235	0.30	0.148	0.19	-0.14
C1	Body-Worn	LTE Band 26	26865	831.5	1RB37	Front	10mm	\	\	22.92	24.00	0.319	0.41	0.193	0.25	0.06
C1	Body-Worn	LTE Band 26	26865	831.5	36RB38	Front	10mm	\	\	21.87	23.00	0.247	0.32	0.150	0.19	0.10
C1	Body-Worn	LTE Band 26	26865	831.5	1RB37	Rear	10mm	\	\	22.92	24.00	0.358	0.46	0.218	0.28	-0.03
C1	Body-Worn	LTE Band 26	26865	831.5	36RB38	Rear	10mm	\	\	21.87	23.00	0.265	0.34	0.161	0.21	0.17

**Note:** SAR for LTE Band 5 is covered by LTE Band 26 due to similar frequency range, same maximum tune-up limit and same channel bandwidth.

**Table 13.8: LTE Band 41 SAR Values**

Power Level	RF Exposure Conditions	Frequency Band	Channel Number	Frequency (MHz)	Mode/RB	Test Position	Distance	Note	Figure No.	EUT Measured Power (dBm)	Tune up (dBm)	Measured SAR 1g (W/kg)	Calculated SAR 1g (W/kg)	Measured SAR 10g (W/kg)	Calculated SAR 10g (W/kg)	Power Drift
A1	Head	LTE Band 41	41490	2680.0	1RB50	Left Cheek	0mm	\	17	22.67	23.50	0.196	0.24	0.102	0.12	0.06
A1	Head	LTE Band 41	41490	2680.0	50RB0	Left Cheek	0mm	\	\	21.63	22.50	0.161	0.20	0.086	0.10	-0.03
A1	Head	LTE Band 41	41490	2680.0	1RB50	Left Tilt	0mm	\	\	22.67	23.50	0.081	0.10	0.044	0.05	0.05
A1	Head	LTE Band 41	41490	2680.0	50RB0	Left Tilt	0mm	\	\	21.63	22.50	0.064	0.08	0.035	0.04	0.12
A1	Head	LTE Band 41	41490	2680.0	1RB50	Right Cheek	0mm	\	\	22.67	23.50	0.119	0.14	0.066	0.08	-0.02
A1	Head	LTE Band 41	41490	2680.0	50RB0	Right Cheek	0mm	\	\	21.63	22.50	0.102	0.12	0.058	0.07	0.11
A1	Head	LTE Band 41	41490	2680.0	1RB50	Right Tilt	0mm	\	\	22.67	23.50	0.111	0.13	0.056	0.07	0.03
A1	Head	LTE Band 41	41490	2680.0	50RB0	Right Tilt	0mm	\	\	21.63	22.50	0.099	0.12	0.051	0.06	0.05
A1	Head	LTE Band 41	41490	2680.0	1RB50	Left Cheek	0mm	C2	\	22.67	23.50	0.153	0.19	0.080	0.10	0.06
B1	Hotspot	LTE Band 41	41490	2680.0	1RB50	Front	10mm	\	\	20.65	21.50	0.163	0.20	0.081	0.10	-0.17
B1	Hotspot	LTE Band 41	41490	2680.0	50RB0	Front	10mm	\	\	20.32	21.50	0.165	0.22	0.083	0.11	-0.14
B1	Hotspot	LTE Band 41	41490	2680.0	1RB50	Rear	10mm	\	\	20.65	21.50	0.410	0.50	0.187	0.23	0.02
B1	Hotspot	LTE Band 41	41490	2680.0	50RB0	Rear	10mm	\	\	20.32	21.50	0.426	0.56	0.192	0.25	-0.19
B1	Hotspot	LTE Band 41	41490	2680.0	1RB50	Left	10mm	\	\	20.65	21.50	0.092	0.11	0.051	0.06	0.04
B1	Hotspot	LTE Band 41	41490	2680.0	50RB0	Left	10mm	\	\	20.32	21.50	0.098	0.13	0.053	0.07	0.03
B1	Hotspot	LTE Band 41	41490	2680.0	1RB50	Right	10mm	\	\	20.65	21.50	0.036	0.04	0.019	0.02	-0.07
B1	Hotspot	LTE Band 41	41490	2680.0	50RB0	Right	10mm	\	\	20.32	21.50	0.036	0.05	0.020	0.03	-0.16
B1	Hotspot	LTE Band 41	41490	2680.0	1RB50	Bottom	10mm	\	\	20.65	21.50	0.658	0.80	0.292	0.36	-0.15
B1	Hotspot	LTE Band 41	41490	2680.0	50RB0	Bottom	10mm	\	\	20.32	21.50	0.665	0.87	0.309	0.41	0.16
B1	Hotspot	LTE Band 41	41055	2636.5	1RB50	Bottom	10mm	\	\	20.19	21.50	0.612	0.83	0.273	0.37	0.07
B1	Hotspot	LTE Band 41	40620	2593.0	1RB50	Bottom	10mm	\	\	20.19	21.50	0.524	0.71	0.246	0.33	0.14
B1	Hotspot	LTE Band 41	40185	2549.5	1RB50	Bottom	10mm	\	\	20.42	21.50	0.653	0.84	0.295	0.38	0.03
B1	Hotspot	LTE Band 41	39750	2506.0	1RB50	Bottom	10mm	\	18	20.20	21.50	0.666	0.90	0.327	0.44	0.06
B1	Hotspot	LTE Band 41	41055	2636.5	50RB0	Bottom	10mm	\	\	20.26	21.50	0.613	0.82	0.272	0.36	0.16
B1	Hotspot	LTE Band 41	40620	2593.0	50RB0	Bottom	10mm	\	\	20.27	21.50	0.537	0.71	0.246	0.33	-0.17
B1	Hotspot	LTE Band 41	40185	2549.5	50RB0	Bottom	10mm	\	\	20.12	21.50	0.658	0.90	0.296	0.41	0.04
B1	Hotspot	LTE Band 41	39750	2506.0	50RB0	Bottom	10mm	\	\	20.24	21.50	0.640	0.86	0.301	0.40	0.15
B1	Hotspot	LTE Band 41	41490	2680.0	100RB	Bottom	10mm	\	\	20.34	21.50	0.662	0.86	0.289	0.38	0.07
B1	Hotspot	LTE Band 41	39750	2506.0	1RB50	Bottom	10mm	C2	\	20.20	21.50	0.602	0.81	0.296	0.40	0.01
C1	Body-Worn	LTE Band 41	41490	2680.0	1RB50	Front	15mm	\	\	22.67	23.50	0.144	0.17	0.074	0.09	-0.06
C1	Body-Worn	LTE Band 41	41490	2680.0	50RB0	Front	15mm	\	\	21.63	22.50	0.104	0.13	0.054	0.07	0.12
C1	Body-Worn	LTE Band 41	41490	2680.0	1RB50	Rear	15mm	\	\	22.67	23.50	0.434	0.53	0.209	0.25	-0.11
C1	Body-Worn	LTE Band 41	41490	2680.0	50RB0	Rear	15mm	\	\	21.63	22.50	0.346	0.42	0.166	0.20	-0.01
C1	Extremity	LTE Band 41	39750	2506.0	1RB50	Bottom	0mm	\	19	22.27	23.50	1.430	1.90	0.638	0.85	0.04



**Table 13.9: LTE Band 66 SAR Values**

Power Level	RF Exposure Conditions	Frequency Band	Channel Number	Frequency (MHz)	Mode/RB	Test Position	Distance	Note	Figure No.	EUT Measured Power (dBm)	Tune up (dBm)	Measured SAR 1g (W/kg)	Calculated SAR 1g (W/kg)	Measured SAR 10g (W/kg)	Calculated SAR 10g (W/kg)	Power Drift
A1	Head	LTE Band 66	132572	1770.0	1RB0	Left Cheek	0mm	\	\	22.47	23.50	0.099	<b>0.13</b>	0.061	<b>0.08</b>	-0.11
A1	Head	LTE Band 66	132322	1745.0	50RB0	Left Cheek	0mm	\	\	21.38	22.50	0.082	<b>0.11</b>	0.052	<b>0.07</b>	0.02
A1	Head	LTE Band 66	132572	1770.0	1RB0	Left Tilt	0mm	\	\	22.47	23.50	0.063	<b>0.08</b>	0.041	<b>0.05</b>	0.07
A1	Head	LTE Band 66	132322	1745.0	50RB0	Left Tilt	0mm	\	\	21.38	22.50	0.050	<b>0.07</b>	0.032	<b>0.04</b>	-0.01
A1	Head	LTE Band 66	132572	1770.0	1RB0	Right Cheek	0mm	\	<b>20</b>	22.47	23.50	<b>0.117</b>	<b>0.15</b>	0.077	<b>0.10</b>	0.08
A1	Head	LTE Band 66	132322	1745.0	50RB0	Right Cheek	0mm	\	\	21.38	22.50	0.101	<b>0.13</b>	0.062	<b>0.08</b>	0.03
A1	Head	LTE Band 66	132572	1770.0	1RB0	Right Tilt	0mm	\	\	22.47	23.50	0.055	<b>0.07</b>	0.034	<b>0.04</b>	0.05
A1	Head	LTE Band 66	132322	1745.0	50RB0	Right Tilt	0mm	\	\	21.38	22.50	0.042	<b>0.05</b>	0.027	<b>0.03</b>	0.02
A1	Head	LTE Band 66	132572	1770.0	1RB0	Right Cheek	0mm	C2	\	22.47	23.50	0.114	<b>0.14</b>	0.079	<b>0.10</b>	0.09
B1	Hotspot	LTE Band 66	132572	1770.0	1RB0	Front	10mm	\	\	19.74	20.50	0.235	<b>0.28</b>	0.129	<b>0.15</b>	-0.15
B1	Hotspot	LTE Band 66	132322	1745.0	50RB0	Front	10mm	\	\	19.76	20.50	0.272	<b>0.32</b>	0.160	<b>0.19</b>	0.01
B1	Hotspot	LTE Band 66	132572	1770.0	1RB0	Rear	10mm	\	\	19.74	20.50	0.610	<b>0.73</b>	0.333	<b>0.40</b>	0.13
B1	Hotspot	LTE Band 66	132322	1745.0	50RB0	Rear	10mm	\	\	19.76	20.50	0.592	<b>0.70</b>	0.324	<b>0.38</b>	0.19
B1	Hotspot	LTE Band 66	132572	1770.0	1RB0	Left	10mm	\	\	19.74	20.50	0.056	<b>0.07</b>	0.034	<b>0.04</b>	-0.02
B1	Hotspot	LTE Band 66	132322	1745.0	50RB0	Left	10mm	\	\	19.76	20.50	0.072	<b>0.09</b>	0.045	<b>0.05</b>	-0.03
B1	Hotspot	LTE Band 66	132572	1770.0	1RB0	Right	10mm	\	\	19.74	20.50	0.052	<b>0.06</b>	0.031	<b>0.04</b>	0.10
B1	Hotspot	LTE Band 66	132322	1745.0	50RB0	Right	10mm	\	\	19.76	20.50	0.060	<b>0.07</b>	0.037	<b>0.04</b>	0.01
B1	Hotspot	LTE Band 66	132572	1770.0	1RB0	Bottom	10mm	\	\	19.74	20.50	0.684	<b>0.81</b>	0.366	<b>0.44</b>	0.15
B1	Hotspot	LTE Band 66	132322	1745.0	50RB0	Bottom	10mm	\	\	19.76	20.50	0.711	<b>0.84</b>	0.383	<b>0.45</b>	0.04
B1	Hotspot	LTE Band 66	132322	1745.0	1RB0	Bottom	10mm	\	\	19.67	20.50	0.557	<b>0.67</b>	0.279	<b>0.34</b>	-0.06
B1	Hotspot	LTE Band 66	132072	1720.0	1RB0	Bottom	10mm	\	\	19.66	20.50	0.577	<b>0.70</b>	0.290	<b>0.35</b>	-0.08
B1	Hotspot	LTE Band 66	132572	1770.0	50RB0	Bottom	10mm	\	<b>21</b>	19.72	20.50	<b>0.744</b>	<b>0.89</b>	0.397	<b>0.48</b>	0.03
B1	Hotspot	LTE Band 66	132072	1720.0	50RB0	Bottom	10mm	\	\	19.70	20.50	0.679	<b>0.82</b>	0.343	<b>0.41</b>	0.13
B1	Hotspot	LTE Band 66	132322	1745.0	100RB	Bottom	10mm	\	\	19.71	20.50	0.711	<b>0.85</b>	0.360	<b>0.43</b>	0.18
B1	Hotspot	LTE Band 66	132572	1770.0	50RB0	Bottom	10mm	C2	\	19.72	20.50	0.667	<b>0.80</b>	0.359	<b>0.43</b>	-0.08
C1	Body-Worn	LTE Band 66	132572	1770.0	1RB0	Front	15mm	\	\	22.47	23.50	0.333	<b>0.42</b>	0.206	<b>0.26</b>	-0.18
C1	Body-Worn	LTE Band 66	132322	1745.0	50RB0	Front	15mm	\	\	21.38	22.50	0.265	<b>0.34</b>	0.164	<b>0.21</b>	0.02
C1	Body-Worn	LTE Band 66	132572	1770.0	1RB0	Rear	15mm	\	\	22.47	23.50	0.589	<b>0.75</b>	0.344	<b>0.44</b>	0.16
C1	Body-Worn	LTE Band 66	132322	1745.0	50RB0	Rear	15mm	\	\	21.38	22.50	0.567	<b>0.73</b>	0.333	<b>0.43</b>	-0.19
C1	Extremity	LTE Band 66	132572	1770.0	1RB0	Rear	0mm	\	\	22.47	23.50	5.160	<b>6.54</b>	2.620	<b>3.32</b>	0.13
C1	Extremity	LTE Band 66	132322	1745.0	1RB0	Rear	0mm	\	\	22.39	23.50	4.030	<b>5.20</b>	2.030	<b>2.62</b>	-0.15
C1	Extremity	LTE Band 66	132072	1720.0	1RB0	Rear	0mm	\	\	22.08	23.50	4.900	<b>6.80</b>	2.440	<b>3.38</b>	0.07
C1	Extremity	LTE Band 66	132322	1745.0	100RB	Rear	0mm	\	\	21.32	22.50	4.030	<b>5.29</b>	2.040	<b>2.68</b>	0.17
C1	Extremity	LTE Band 66	132572	1770.0	1RB0	Bottom	0mm	\	<b>22</b>	22.47	23.50	7.230	<b>9.17</b>	<b>3.120</b>	<b>3.96</b>	-0.12
C1	Extremity	LTE Band 66	132322	1745.0	1RB0	Bottom	0mm	\	\	22.39	23.50	6.570	<b>8.48</b>	2.830	<b>3.65</b>	0.17
C1	Extremity	LTE Band 66	132072	1720.0	1RB0	Bottom	0mm	\	\	22.08	23.50	6.380	<b>8.85</b>	2.760	<b>3.83</b>	0.11
C1	Extremity	LTE Band 66	132322	1745.0	50RB0	Bottom	0mm	\	\	21.38	22.50	5.320	<b>6.89</b>	2.290	<b>2.96</b>	-0.04
C1	Extremity	LTE Band 66	132572	1770.0	50RB0	Bottom	0mm	\	\	21.23	22.50	5.580	<b>7.48</b>	2.410	<b>3.23</b>	-0.03
C1	Extremity	LTE Band 66	132072	1720.0	50RB0	Bottom	0mm	\	\	21.16	22.50	5.010	<b>6.82</b>	2.160	<b>2.94</b>	-0.17
C1	Extremity	LTE Band 66	132322	1745.0	100RB	Bottom	0mm	\	\	21.32	22.50	4.720	<b>6.19</b>	2.070	<b>2.72</b>	-0.04

**Note:** SAR for LTE Band 4 is covered by LTE Band 66 due to similar frequency range, same maximum tune-up limit and same channel bandwidth.

**Table 13.10: LTE Band 71 SAR Values**

Power Level	RF Exposure Conditions	Frequency Band	Channel Number	Frequency (MHz)	Mode/RB	Test Position	Distance	Note	Figure No.	EUT Measured Power (dBm)	Tune up (dBm)	Measured SAR 1g (W/kg)	Calculated SAR 1g (W/kg)	Measured SAR 10g (W/kg)	Calculated SAR 10g (W/kg)	Power Drift
A1	Head	LTE Band 71	133222	673.0	1RB50	Left Cheek	0mm	\	\	22.89	24.00	0.109	<b>0.14</b>	0.080	<b>0.10</b>	-0.03
A1	Head	LTE Band 71	133222	673.0	50RB50	Left Cheek	0mm	\	\	21.81	23.00	0.091	<b>0.12</b>	0.066	<b>0.09</b>	0.05
A1	Head	LTE Band 71	133222	673.0	1RB50	Left Tilt	0mm	\	\	22.89	24.00	0.058	<b>0.08</b>	0.045	<b>0.06</b>	0.01
A1	Head	LTE Band 71	133222	673.0	50RB50	Left Tilt	0mm	\	\	21.81	23.00	0.052	<b>0.07</b>	0.037	<b>0.05</b>	0.12
A1	Head	LTE Band 71	133222	673.0	1RB50	Right Cheek	0mm	\	<b>23</b>	22.89	24.00	<b>0.154</b>	<b>0.20</b>	0.121	<b>0.16</b>	0.01
A1	Head	LTE Band 71	133222	673.0	50RB50	Right Cheek	0mm	\	\	21.81	23.00	0.095	<b>0.13</b>	0.069	<b>0.09</b>	-0.05
A1	Head	LTE Band 71	133222	673.0	1RB50	Right Tilt	0mm	\	\	22.89	24.00	0.061	<b>0.08</b>	0.044	<b>0.06</b>	0.03
A1	Head	LTE Band 71	133222	673.0	50RB50	Right Tilt	0mm	\	\	21.81	23.00	0.048	<b>0.06</b>	0.035	<b>0.05</b>	0.11
A1	Head	LTE Band 71	133222	673.0	1RB50	Right Cheek	0mm	C2	\	22.89	24.00	0.136	<b>0.18</b>	0.104	<b>0.13</b>	0.08
B1	Hotspot	LTE Band 71	133222	673.0	1RB50	Front	10mm	\	\	22.89	24.00	0.094	<b>0.12</b>	0.065	<b>0.08</b>	0.17
B1	Hotspot	LTE Band 71	133222	673.0	50RB50	Front	10mm	\	\	21.81	23.00	0.074	<b>0.10</b>	0.051	<b>0.07</b>	-0.06
B1	Hotspot	LTE Band 71	133222	673.0	1RB50	Rear	10mm	\	<b>24</b>	22.89	24.00	<b>0.133</b>	<b>0.17</b>	0.094	<b>0.12</b>	-0.02
B1	Hotspot	LTE Band 71	133222	673.0	50RB50	Rear	10mm	\	\	21.81	23.00	0.107	<b>0.14</b>	0.075	<b>0.10</b>	-0.07
B1	Hotspot	LTE Band 71	133222	673.0	1RB50	Left	10mm	\	\	22.89	24.00	0.087	<b>0.11</b>	0.057	<b>0.07</b>	0.19
B1	Hotspot	LTE Band 71	133222	673.0	50RB50	Left	10mm	\	\	21.81	23.00	0.074	<b>0.10</b>	0.047	<b>0.06</b>	-0.09
B1	Hotspot	LTE Band 71	133222	673.0	1RB50	Right	10mm	\	\	22.89	24.00	0.121	<b>0.16</b>	0.078	<b>0.10</b>	-0.05
B1	Hotspot	LTE Band 71	133222	673.0	50RB50	Right	10mm	\	\	21.81	23.00	0.098	<b>0.13</b>	0.064	<b>0.08</b>	-0.03
B1	Hotspot	LTE Band 71	133222	673.0	1RB50	Bottom	10mm	\	\	22.89	24.00	0.054	<b>0.07</b>	0.027	<b>0.03</b>	0.04
B1	Hotspot	LTE Band 71	133222	673.0	50RB50	Bottom	10mm	\	\	21.81	23.00	0.046	<b>0.06</b>	0.023	<b>0.03</b>	-0.02
B1	Hotspot	LTE Band 71	133222	673.0	1RB50	Rear	10mm	C2	\	22.89	24.00	0.132	<b>0.17</b>	0.092	<b>0.12</b>	0.14
C1	Body-Worn	LTE Band 71	133222	673.0	1RB50	Front	10mm	\	\	22.89	24.00	0.094	<b>0.12</b>	0.065	<b>0.08</b>	0.17
C1	Body-Worn	LTE Band 71	133222	673.0	50RB50	Front	10mm	\	\	21.81	23.00	0.074	<b>0.10</b>	0.051	<b>0.07</b>	-0.06
C1	Body-Worn	LTE Band 71	133222	673.0	1RB50	Rear	10mm	\	\	22.89	24.00	0.133	<b>0.17</b>	0.094	<b>0.12</b>	-0.02
C1	Body-Worn	LTE Band 71	133222	673.0	50RB50	Rear	10mm	\	\	21.81	23.00	0.107	<b>0.14</b>	0.075	<b>0.10</b>	-0.07

**Table 13.11: Bluetooth SAR Values**

Power Level	RF Exposure Conditions	Frequency Band	Channel Number	Frequency (MHz)	Mode/RB	Test Position	Distance	Note	Figure No.	EUT Measured Power (dBm)	Tune up (dBm)	Measured SAR 1g (W/kg)	Calculated SAR 1g (W/kg)	Measured SAR 10g (W/kg)	Calculated SAR 10g (W/kg)	Power Drift
D1/D2	Head	Bluetooth	0	2402.0	GFSK	Left Cheek	0mm	\	25	10.97	12.00	0.117	0.15	0.062	0.08	0.00
D1/D2	Head	Bluetooth	0	2402.0	GFSK	Left Tilt	0mm	\	\	10.97	12.00	0.057	0.07	0.031	0.04	0.07
D1/D2	Head	Bluetooth	0	2402.0	GFSK	Right Cheek	0mm	\	\	10.97	12.00	0.071	0.09	0.042	0.05	0.11
D1/D2	Head	Bluetooth	0	2402.0	GFSK	Right Tilt	0mm	\	\	10.97	12.00	0.059	0.08	0.033	0.04	0.04
D1/D2	Head	Bluetooth	0	2402.0	GFSK	Left Cheek	0mm	C2	\	10.97	12.00	0.105	0.13	0.061	0.08	-0.09
E1/E2	Hotspot	Bluetooth	0	2402.0	GFSK	Front	10mm	\	\	10.97	12.00	0.025	0.03	0.014	0.02	0.03
E1/E2	Hotspot	Bluetooth	0	2402.0	GFSK	Rear	10mm	\	26	10.97	12.00	0.049	0.06	0.026	0.03	0.07
E1/E2	Hotspot	Bluetooth	0	2402.0	GFSK	Left	10mm	\	\	10.97	12.00	0.005	0.01	0.003	0.00	0.03
E1/E2	Hotspot	Bluetooth	0	2402.0	GFSK	Right	10mm	\	\	10.97	12.00	0.004	0.01	0.002	0.00	-0.03
E1/E2	Hotspot	Bluetooth	0	2402.0	GFSK	Top	10mm	\	\	10.97	12.00	0.030	0.04	0.016	0.02	0.01
E1/E2	Hotspot	Bluetooth	0	2402.0	GFSK	Rear	10mm	C2	\	10.97	12.00	0.048	0.06	0.025	0.03	0.10
F1/F2	Body-Worn	Bluetooth	0	2402.0	GFSK	Front	10mm	\	\	10.97	12.00	0.025	0.03	0.014	0.02	0.03
F1/F2	Body-Worn	Bluetooth	0	2402.0	GFSK	Rear	10mm	\	\	10.97	12.00	0.049	0.06	0.026	0.03	0.07

**Table 13.12: WLAN 2.4GHz SAR Values**

Power Level	RF Exposure Conditions	Frequency Band	Channel Number	Frequency (MHz)	Mode/RB	Test Position	Distance	Note	Figure No.	EUT Measured Power (dBm)	Tune up (dBm)	Measured SAR 1g (W/kg)	Calculated SAR 1g (W/kg)	Measured SAR 10g (W/kg)	Calculated SAR 10g (W/kg)	Power Drift
D1/D2	Head	WLAN 2.4GHz	6	2437.0	802.11b	Left Cheek	0mm	\	27	13.93	14.50	0.049	0.06	0.024	0.03	-0.05
D1/D2	Head	WLAN 2.4GHz	6	2437.0	802.11b	Left Tilt	0mm	\	\	13.93	14.50	0.034	0.04	0.016	0.02	0.12
D1/D2	Head	WLAN 2.4GHz	6	2437.0	802.11b	Right Cheek	0mm	\	\	13.93	14.50	0.042	0.05	0.022	0.03	0.17
D1/D2	Head	WLAN 2.4GHz	6	2437.0	802.11b	Right Tilt	0mm	\	\	13.93	14.50	0.035	0.04	0.017	0.02	0.09
D1/D2	Head	WLAN 2.4GHz	6	2437.0	802.11b	Left Cheek	0mm	C2	\	13.93	14.50	0.040	0.05	0.020	0.02	0.12
E1/E2	Hotspot	WLAN 2.4GHz	6	2437.0	802.11b	Front	10mm	\	\	13.93	14.50	0.025	0.03	0.014	0.02	0.17
E1/E2	Hotspot	WLAN 2.4GHz	6	2437.0	802.11b	Rear	10mm	\	28	13.93	14.50	0.052	0.06	0.026	0.03	0.10
E1/E2	Hotspot	WLAN 2.4GHz	6	2437.0	802.11b	Left	10mm	\	\	13.93	14.50	<0.01	<0.01	<0.01	<0.01	0.02
E1/E2	Hotspot	WLAN 2.4GHz	6	2437.0	802.11b	Right	10mm	\	\	13.93	14.50	0.020	0.02	0.010	0.01	-0.17
E1/E2	Hotspot	WLAN 2.4GHz	6	2437.0	802.11b	Top	10mm	\	\	13.93	14.50	0.040	0.05	0.021	0.02	0.13
E1/E2	Hotspot	WLAN 2.4GHz	6	2437.0	802.11b	Rear	10mm	C2	\	13.93	14.50	0.035	0.04	0.017	0.02	0.06
F1/F2	Body-Worn	WLAN 2.4GHz	6	2437.0	802.11b	Front	10mm	\	\	13.93	14.50	0.025	0.03	0.014	0.02	0.17
F1/F2	Body-Worn	WLAN 2.4GHz	6	2437.0	802.11b	Rear	10mm	\	\	13.93	14.50	0.052	0.06	0.026	0.03	0.10

**Note:**

1. According to the KDB 248227 D01, SAR is measured for 2.4GHz 802.11b DSSS using the initial test position procedure.
2. For all positions/configurations tested using the initial test position and subsequent test positions, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.
3. SAR is not required for OFDM because the 802.11b adjusted SAR ≤ 1.2 W/kg.
4. According to the KDB 248227 D01, the reported SAR must be scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit.



Table 13.13: WLAN 5GHz SAR Values

Power Level	RF Exposure Conditions	Frequency Band	Channel Number	Frequency (MHz)	Modulation	Test Position	Distance	Note	Figure No.	EUT Measured Power (dBm)	Tune up (dBm)	Measured SAR (W/kg)	Calculated SAR (W/kg)	Measured SAR (W/kg)	Calculated SAR (W/kg)	Power Dn
D1D2	Head	U-NII-2A	64	5320.0	802.11a	Left Cheek	0mm	\ \ \	\ \ \	13.73	14.00	0.167	0.18	0.052	0.05	0.04
D1D2	Head	U-NII-2A	64	5320.0	802.11a	Left Tr	0mm	\ \ \	\ \ \	13.73	14.00	0.133	0.14	0.040	0.04	0.19
D1D2	Head	U-NII-2A	64	5320.0	802.11a	Right Cheek	0mm	\ \ \	\ \ \	13.73	14.00	0.060	0.06	0.019	0.02	0.15
D1D2	Head	U-NII-2A	64	5320.0	802.11a	Right Tr	0mm	\ \ \	\ \ \	13.73	14.00	0.075	0.08	0.027	0.02	0.09
D1D2	Head	U-NII-2C	144	5720.0	802.11a	Left Cheek	0mm	\ \ \	\ \ \	13.55	14.50	0.120	0.15	0.036	0.05	0.04
D1D2	Head	U-NII-2C	144	5720.0	802.11a	Left Tr	0mm	\ \ \	\ \ \	13.55	14.50	0.101	0.13	0.030	0.04	0.08
D1D2	Head	U-NII-2C	144	5720.0	802.11a	Right Cheek	0mm	\ \ \	\ \ \	13.55	14.50	0.064	0.08	0.018	0.02	0.15
D1D2	Head	U-NII-2C	144	5720.0	802.11a	Right Tr	0mm	\ \ \	\ \ \	13.55	14.50	0.063	0.08	0.020	0.02	0.18
D1D2	Head	U-NII-3	149	5745.0	802.11a	Left Cheek	0mm	\ \ \	\ \ \	13.07	14.00	0.089	0.11	0.025	0.03	0.06
D1D2	Head	U-NII-3	149	5745.0	802.11a	Left Tr	0mm	\ \ \	\ \ \	13.07	14.00	0.065	0.08	0.019	0.02	0.08
D1D2	Head	U-NII-3	149	5745.0	802.11a	Right Cheek	0mm	\ \ \	\ \ \	13.07	14.00	0.042	0.05	0.012	0.02	-0.17
D1D2	Head	U-NII-3	149	5745.0	802.11a	Right Tr	0mm	\ \ \	\ \ \	13.07	14.00	0.040	0.05	0.012	0.01	-0.10
D1D2	Head	U-NII-2A	64	5320.0	802.11a	Left Cheek	0mm	C2	\ \ \	13.73	14.00	0.175	0.19	0.056	0.06	0.16
D1D2	Head	U-NII-2A	64	5320.0	802.11a	Left Tr	0mm	C2	\ \ \	13.73	14.00	0.148	0.16	0.051	0.05	0.08
D1D2	Head	U-NII-2A	64	5320.0	802.11a	Right Cheek	0mm	C2	\ \ \	13.73	14.00	0.086	0.09	0.030	0.03	0.00
D1D2	Head	U-NII-2A	64	5320.0	802.11a	Right Tr	0mm	C2	\ \ \	13.73	14.00	0.100	0.11	0.035	0.04	-0.19
D1D2	Head	U-NII-2C	144	5720.0	802.11a	Left Cheek	0mm	C2	29	13.55	14.50	0.207	0.22	0.062	0.10	0.00
D1D2	Head	U-NII-2C	144	5720.0	802.11a	Left Tr	0mm	C2	\ \ \	13.55	14.50	0.178	0.22	0.059	0.07	0.09
D1D2	Head	U-NII-2C	144	5720.0	802.11a	Right Cheek	0mm	C2	\ \ \	13.55	14.50	0.115	0.14	0.037	0.05	0.19
D1D2	Head	U-NII-2C	144	5720.0	802.11a	Right Tr	0mm	C2	\ \ \	13.55	14.50	0.114	0.14	0.037	0.05	0.16
D1D2	Head	U-NII-3	149	5745.0	802.11a	Left Cheek	0mm	C2	\ \ \	13.07	14.00	0.207	0.26	0.063	0.08	-0.03
D1D2	Head	U-NII-3	149	5745.0	802.11a	Left Tr	0mm	C2	\ \ \	13.07	14.00	0.162	0.20	0.054	0.07	-0.07
D1D2	Head	U-NII-3	149	5745.0	802.11a	Right Cheek	0mm	C2	\ \ \	13.07	14.00	0.094	0.12	0.030	0.04	-0.12
D1D2	Head	U-NII-3	149	5745.0	802.11a	Right Tr	0mm	C2	\ \ \	13.07	14.00	0.069	0.07	0.019	0.02	-0.06
E1	Hotspot	U-NII-1	48	5240.0	802.11a	Front	10mm	\ \ \	\ \ \	17.51	18.50	0.057	0.07	0.022	0.03	-0.04
E1	Hotspot	U-NII-1	48	5240.0	802.11a	Rear	10mm	\ \ \	\ \ \	17.51	18.50	0.271	0.31	0.037	0.13	0.00
E1	Hotspot	U-NII-1	48	5240.0	802.11a	Left	10mm	\ \ \	\ \ \	17.51	18.50	0.069	0.08	0.018	0.02	-0.09
E1	Hotspot	U-NII-1	48	5240.0	802.11a	Right	10mm	\ \ \	\ \ \	17.51	18.50	0.129	0.16	0.053	0.07	0.06
E1	Hotspot	U-NII-1	48	5240.0	802.11a	Top	10mm	\ \ \	\ \ \	17.51	18.50	0.172	0.22	0.071	0.09	0.08
E1	Hotspot	U-NII-3	149	5745.0	802.11a	Front	10mm	\ \ \	\ \ \	17.85	18.50	0.135	0.17	0.017	0.03	-0.12
E1	Hotspot	U-NII-3	149	5745.0	802.11a	Rear	10mm	\ \ \	\ \ \	17.85	18.50	0.018	0.12	0.204	0.24	0.07
E1	Hotspot	U-NII-3	149	5745.0	802.11a	Left	10mm	\ \ \	\ \ \	17.85	18.50	0.123	0.14	0.039	0.05	0.04
E1	Hotspot	U-NII-3	149	5745.0	802.11a	Right	10mm	\ \ \	\ \ \	17.85	18.50	0.062	0.13	0.16	0.02	0.00
E1	Hotspot	U-NII-3	149	5745.0	802.11a	Top	10mm	\ \ \	\ \ \	17.85	18.50	0.174	0.20	0.045	0.05	0.10
E1	Hotspot	U-NII-1	48	5240.0	802.11a	Front	10mm	C2	\ \ \	17.51	18.50	0.103	0.13	0.039	0.05	-0.07
E1	Hotspot	U-NII-1	48	5240.0	802.11a	Rear	10mm	C2	\ \ \	17.51	18.50	0.311	0.36	0.108	0.14	0.09
E1	Hotspot	U-NII-1	48	5240.0	802.11a	Left	10mm	C2	\ \ \	17.51	18.50	0.068	0.08	0.021	0.03	-0.06
E1	Hotspot	U-NII-1	48	5240.0	802.11a	Right	10mm	C2	\ \ \	17.51	18.50	0.162	0.20	0.064	0.08	0.17
E1	Hotspot	U-NII-1	48	5240.0	802.11a	Top	10mm	C2	\ \ \	17.51	18.50	0.222	0.28	0.089	0.11	0.08
E1	Hotspot	U-NII-3	149	5745.0	802.11a	Front	10mm	C2	\ \ \	17.85	18.50	0.123	0.14	0.042	0.05	0.00
E1	Hotspot	U-NII-3	149	5745.0	802.11a	Rear	10mm	C2	30	17.85	18.50	0.070	0.13	0.324	0.38	0.09
E1	Hotspot	U-NII-3	149	5745.0	802.11a	Left	10mm	C2	\ \ \	17.85	18.50	0.076	0.09	0.023	0.03	0.11
E1	Hotspot	U-NII-3	149	5745.0	802.11a	Right	10mm	C2	\ \ \	17.85	18.50	0.271	0.31	0.112	0.15	0.16
E1	Hotspot	U-NII-3	149	5745.0	802.11a	Top	10mm	C2	\ \ \	17.85	18.50	0.331	0.38	0.140	0.16	-0.10
E1	Hotspot	U-NII-3	157	5785.0	802.11a	Rear	10mm	C2	\ \ \	16.59	18.50	0.702	1.09	0.234	0.36	0.08
E2	Hotspot	U-NII-1	48	5240.0	802.11a	Front	10mm	\ \ \	\ \ \	12.89	14.00	0.020	0.03	0.007	0.01	-0.01
E2	Hotspot	U-NII-1	48	5240.0	802.11a	Rear	10mm	\ \ \	\ \ \	12.89	14.00	0.110	0.14	0.037	0.05	-0.19
E2	Hotspot	U-NII-1	48	5240.0	802.11a	Left	10mm	\ \ \	\ \ \	12.89	14.00	0.024	0.03	0.006	0.01	-0.05
E2	Hotspot	U-NII-1	48	5240.0	802.11a	Right	10mm	\ \ \	\ \ \	12.89	14.00	0.046	0.06	0.018	0.02	0.12
E2	Hotspot	U-NII-1	48	5240.0	802.11a	Top	10mm	\ \ \	\ \ \	12.89	14.00	0.061	0.08	0.024	0.03	-0.10
E2	Hotspot	U-NII-3	149	5745.0	802.11a	Front	10mm	\ \ \	\ \ \	13.07	14.00	0.047	0.06	0.014	0.02	0.17
E2	Hotspot	U-NII-3	149	5745.0	802.11a	Rear	10mm	\ \ \	\ \ \	13.07	14.00	0.199	0.25	0.086	0.08	0.02
E2	Hotspot	U-NII-3	149	5745.0	802.11a	Left	10mm	\ \ \	\ \ \	13.07	14.00	0.049	0.06	0.018	0.02	0.15
E2	Hotspot	U-NII-3	149	5745.0	802.11a	Right	10mm	\ \ \	\ \ \	13.07	14.00	0.045	0.06	0.019	0.02	-0.12
E2	Hotspot	U-NII-3	149	5745.0	802.11a	Top	10mm	\ \ \	\ \ \	13.07	14.00	0.056	0.07	0.015	0.02	0.15
E2	Hotspot	U-NII-1	48	5240.0	802.11a	Front	10mm	C2	\ \ \	12.89	14.00	0.040	0.05	0.015	0.02	0.00
E2	Hotspot	U-NII-1	48	5240.0	802.11a	Rear	10mm	C2	\ \ \	12.89	14.00	0.120	0.15	0.040	0.05	0.13
E2	Hotspot	U-NII-1	48	5240.0	802.11a	Left	10mm	C2	\ \ \	12.89	14.00	0.026	0.03	0.008	0.01	0.01
E2	Hotspot	U-NII-1	48	5240.0	802.11a	Right	10mm	C2	\ \ \	12.89	14.00	0.063	0.08	0.024	0.03	0.16
E2	Hotspot	U-NII-1	48	5240.0	802.11a	Top	10mm	C2	\ \ \	12.89	14.00	0.068	0.11	0.033	0.04	0.05
E2	Hotspot	U-NII-3	149	5745.0	802.11a	Front	10mm	C2	\ \ \	13.07	14.00	0.044	0.05	0.016	0.02	-0.12
E2	Hotspot	U-NII-3	149	5745.0	802.11a	Rear	10mm	C2	\ \ \	13.07	14.00	0.344	0.43	0.111	0.14	0.19
E2	Hotspot	U-NII-3	149	5745.0	802.11a	Left	10mm	C2	\ \ \	13.07	14.00	0.207	0.26	0.08	0.09	0.19
E2	Hotspot	U-NII-3	149	5745.0	802.11a	Right	10mm	C2	\ \ \	13.07	14.00	0.096	0.12	0.038	0.05	0.09
E2	Hotspot	U-NII-3	149	5745.0	802.11a	Top	10mm	C2	\ \ \	13.07	14.00	0.117	0.14	0.048	0.06	-0.07
F1	Body/Wom	U-NII-2A	64	5320.0	802.11a	Front	15mm	\ \ \	\ \ \	18.28	18.50	0.090	0.09	0.018	0.02	0.06
F1	Body/Wom	U-NII-2A	64	5320.0	802.11a	Rear	15mm	\ \ \	\ \ \	18.28	18.50	0.310	0.33	0.122	0.13	-0.02
F1	Body/Wom	U-NII-2C	144	5720.0	802.11a	Front	15mm	\ \ \	\ \ \	18.56	19.00	0.069	0.08	0.024	0.03	0.15
F1	Body/Wom	U-NII-2C	144	5720.0	802.11a	Rear	15mm	\ \ \	\ \ \	18.56	19.00	0.407	0.45	0.137	0.15	-0.01
F1	Body/Wom	U-NII-3	149	5745.0	802.11a	Front	15mm	\ \ \	\ \ \	1						



2. For all positions/configurations tested using the initial test position and subsequent test positions, when the reported SAR is  $> 0.8$  W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel until the reported SAR is  $\leq 1.2$  W/kg or all required channels are tested.
3. WLAN5GHz U-NII-2A and U-NII-2C tested the product specific 10g SAR since it has no hotspot mode.
4. According to the KDB 248227 D01, the reported SAR must be scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit.

### 13. SAR Measurement Variability

SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media are required for SAR measurements in a frequency band, the variability measurement procedures should be applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium.

The following procedures are applied to determine if repeated measurements are required.

- 1) Repeated measurement is not required when the original highest measured SAR is  $< 0.80$  W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is  $\geq 0.80$  W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is  $> 1.20$  or when the original or repeated measurement is  $\geq 1.45$  W/kg ( $\sim 10\%$  from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is  $\geq 1.5$  W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ .

**Table 13.1: SAR Measurement Variability**

Frequency Band	Frequency		RF Exposure Conditions	Test Position	Original	1 <sup>st</sup> Repeated	Ratio	2 <sup>nd</sup> Repeated
	Ch.	MHz			SAR (W/kg)	SAR (W/kg)		SAR (W/kg)
WCDMA Band 2	9538	1907.6	Hotspot	Bottom	1.040	1.010	1.03	/
WCDMA Band 4	1513	1752.6	Hotspot	Bottom	0.804	0.785	1.02	/
WCDMA Band 4	1312	1712.4	Extremity	Rear	2.370	2.300	1.03	/
WCDMA Band 4	1513	1752.6	Extremity	Bottom	2.640	2.550	1.04	/
LTE Band 25	26590	1905.0	Hotspot	Bottom	0.809	0.802	1.01	/
LTE Band 25	26590	1905.0	Extremity	Bottom	2.420	2.290	1.06	/
LTE Band 66	132572	1770.0	Extremity	Rear	2.620	2.530	1.04	/
LTE Band 66	132572	1770.0	Extremity	Bottom	3.120	3.040	1.03	/
U-NII-3	149	5745.0	Hotspot	Rear	0.970	0.952	1.02	/
U-NII-2C	140	5700.0	Extremity	Rear	2.040	1.970	1.04	/



## 14. Measurement Uncertainty

### 14.1. Measurement Uncertainty for Normal SAR Tests (300MHz~3GHz)

No.	Error Description	Type	Uncertainty value	Probably Distribution	Div.	(Ci) 1g	(Ci) 10g	Std. Unc. (1g)	Std. Unc. (10g)	Degree of freedom
<b>Measurement system</b>										
1	Probe calibration	B	12.7	N	2	1	1	6.35	6.35	∞
2	Axial isotropy	B	4.7	R	√3	√0.5	√0.5	4.3	4.3	∞
3	Hemispherical isotropy	B	9.6	R	√3	1	1	4.8	4.8	∞
4	Boundary effect	B	1.1	R	√3	1	1	0.6	0.6	∞
5	Linearity	B	4.7	R	√3	1	1	2.7	2.7	∞
6	Detection limit	B	1.0	R	√3	1	1	0.6	0.6	∞
7	Modulation response	B	4.0	R	√3	1	1	2.3	2.3	∞
8	Readout electronics	B	1.0	N	1	1	1	1.0	1.0	∞
9	Response time	B	0.8	R	√3	1	1	0.5	0.5	∞
10	Integration time	B	1.7	R	√3	1	1	1.0	1.0	∞
11	RF ambient conditions-noise	B	3.0	R	√3	1	1	1.7	1.7	∞
12	RF ambient conditions-reflection	B	3.0	R	√3	1	1	1.7	1.7	∞
13	Probe positioned mech. restrictions	B	0.35	R	√3	1	1	0.2	0.2	∞
14	Probe positioning with respect to phantom shell	B	2.9	R	√3	1	1	1.7	1.7	∞
15	Post-processing	B	1.0	R	√3	1	1	0.6	0.6	∞
<b>Test sample related</b>										
16	Test sample positioning	A	3.3	N	1	1	1	3.3	3.3	5
17	Device holder uncertainty	A	3.4	N	1	1	1	3.4	3.4	5
18	Power scaling	B	0	R	√3	1	1	0	0	∞
19	Drift of output power	B	5.0	R	√3	1	1	2.9	2.9	∞
<b>Phantom and set-up</b>										
20	Phantom uncertainty	B	1.0	R	√3	1	1	0.6	0.6	∞
21	Algorithm for correcting SAR for deviations in permittivity and conductivity	B	1.9	N	1	1	0.84	1.9	1.6	∞
22	Liquid conductivity (target)	B	5.0	R	√3	0.64	0.43	1.8	1.2	∞
23	Liquid conductivity (meas.)	A	1.3	N	1	0.64	0.43	0.83	0.56	9
24	Liquid permittivity (target)	B	5.0	R	√3	0.6	0.49	1.7	1.4	∞
25	Liquid permittivity (meas.)	A	1.6	N	1	0.6	0.49	0.96	0.78	9
Combined standard uncertainty		$u_c = \sqrt{\sum_{i=1}^{23} c_i^2 u_i^2}$						11.6	11.4	95.5
Expanded uncertainty (Confidence interval of 95 %)		$u_e = 2u_c$						23.2	22.8	

**14.2. Measurement Uncertainty for Normal SAR Tests (3GHz~6GHz)**

No.	Error Description	Type	Uncertainty value	Probably Distribution	Div.	(Ci) 1g	(Ci) 10g	Std. Unc. (1g)	Std. Unc. (10g)	Degree of freedom
<b>Measurement system</b>										
1	Probe calibration	B	13.9	N	2	1	1	6.95	6.95	∞
2	Axial isotropy	B	4.7	R	√3	√0.5	√0.5	4.3	4.3	∞
3	Hemispherical isotropy	B	9.6	R	√3	1	1	4.8	4.8	∞
4	Boundary effect	B	1.1	R	√3	1	1	0.6	0.6	∞
5	Linearity	B	4.7	R	√3	1	1	2.7	2.7	∞
6	Detection limit	B	1.0	R	√3	1	1	0.6	0.6	∞
7	modulation response	B	4.0	R	√3	1	1	2.3	2.3	∞
8	Readout electronics	B	1.0	N	1	1	1	1.0	1.0	∞
9	Response time	B	0.0	R	√3	1	1	0.0	0.0	∞
10	Integration time	B	1.7	R	√3	1	1	1.0	1.0	∞
11	RF ambient conditions-noise	B	3.0	R	√3	1	1	1.7	1.7	∞
12	RF ambient conditions-reflection	B	3.0	R	√3	1	1	1.7	1.7	∞
13	Probe positioned mech. Restrictions	B	0.35	R	√3	1	1	0.2	0.2	∞
14	Probe positioning with respect to phantom shell	B	2.9	R	√3	1	1	1.7	1.7	∞
15	Post-processing	B	1.0	R	√3	1	1	0.6	0.6	∞
<b>Test sample related</b>										
16	Test sample positioning	A	3.3	N	1	1	1	3.3	3.3	5
17	Device holder uncertainty	A	3.4	N	1	1	1	3.4	3.4	5
18	Power scaling	B	0	R	√3	1	1	0	0	∞
19	Drift of output power	B	5.0	R	√3	1	1	2.9	2.9	∞
<b>Phantom and set-up</b>										
20	Phantom uncertainty	B	1.0	R	√3	1	1	0.6	0.6	∞
21	Algorithm for correcting SAR for deviations in permittivity and conductivity	B	1.9	N	1	1	0.84	1.9	1.6	∞
22	Liquid conductivity (target)	B	5.0	R	√3	0.64	0.43	1.8	1.2	∞
23	Liquid conductivity (meas.)	A	1.3	N	1	0.64	0.43	0.83	0.56	9
24	Liquid permittivity (target)	B	5.0	R	√3	0.6	0.49	1.7	1.4	∞
25	Liquid permittivity (meas.)	A	1.6	N	1	0.6	0.49	0.96	0.78	9
Combined standard uncertainty		$u_c = \sqrt{\sum_{i=1}^{22} c_i^2 u_i^2}$						11.9	11.8	95.5
Expanded uncertainty (Confidence interval of 95 %)		$u_e = 2u_c$						23.8	23.6	

## 15. Main Test Instruments

**Table 15.1: List of Main Instruments**

No.	Name	Type	Serial Number	Calibration Date	Valid Period
01	Network analyzer	E5071C	MY46103759	2023-11-13	One year
02	Dielectric probe	85070E	MY44300317	/	/
03	Power meter	E4418B	MY50000366	2023-12-10	One year
04	Power sensor	E9304A	MY50000188		One year
05	Power meter	NRP	102603	2022-12-29 & 2023-12-28	One year
06	Power sensor	NRP-Z51	102211		One year
07	Signal Generator	E8257D	MY47461211	2023-01-13 & 2024-01-12	One year
08	Amplifier	VTL5400	0404	/	/
09	DAE	DAE4	1790	2023-03-02	One year
10	E-field Probe	EX3DV4	7683	2023-02-16	One year
11	Dipole Validation Kit	D750V3	1163	2022-08-22	Three years
12	Dipole Validation Kit	D835V2	4d057	2021-10-18	Three years
13	Dipole Validation Kit	D1750V2	1152	2022-08-22	Three years
14	Dipole Validation Kit	D1900V2	5d088	2021-10-18	Three years
15	Dipole Validation Kit	D2450V2	873	2021-10-21	Three years
16	Dipole Validation Kit	D2550V2	1010	2021-05-21	Three years
17	Dipole Validation Kit	D5GHzV2	1238	2022-08-17	Three years
18	BTS	MT8820C	6201341853	2023-03-23	One year
19	BTS	CMW500	152499	2023-07-14	One year
20	Thermometer	51II	99250045	2023-11-22	One year
21	Software	DASY5	/	/	/

## ANNEX A: Graph Results

### WCDMA Band 2 Head

Date: 2023-12-17

Electronics: DAE4 Sn1790

Medium: Head 1900MHz

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.399$  S/m;  $\epsilon_r = 39.529$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Communication System: UID 0, WCDMA (0) Frequency: 1880 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7683 ConvF (8.55, 8.55, 8.55)

**Right Cheek Middle/Area Scan (61x81x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm

Maximum value of SAR (interpolated) = 0.154 W/kg

**Right Cheek Middle/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 2.000 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.170 W/kg

**SAR(1 g) = 0.113 W/kg; SAR(10 g) = 0.072 W/kg**

Maximum value of SAR (measured) = 0.143 W/kg

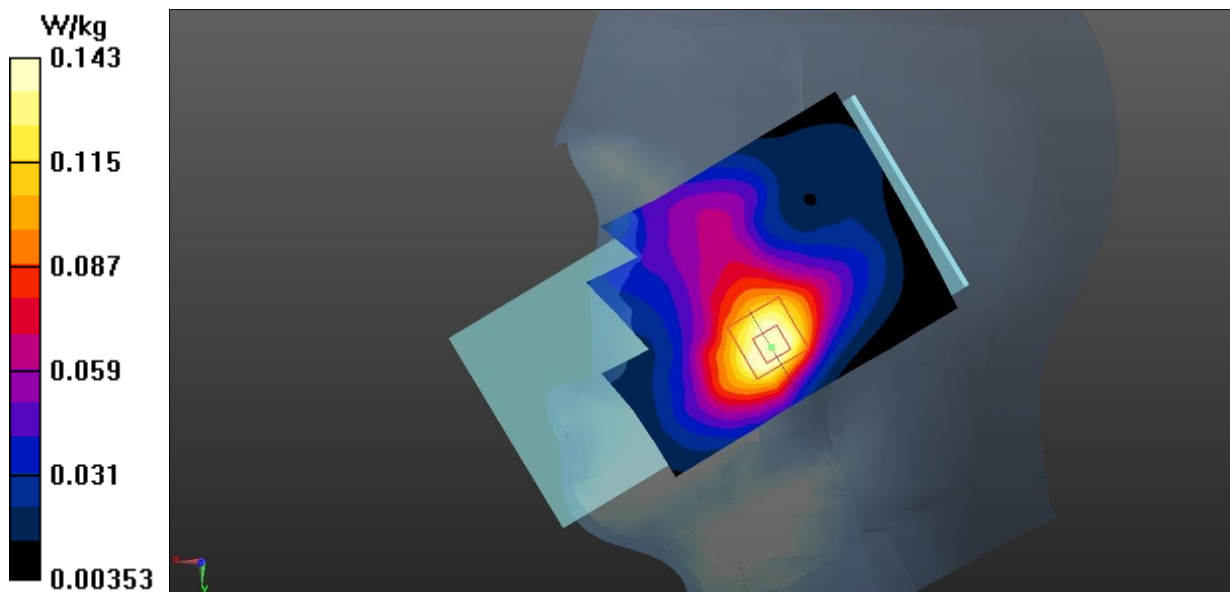


Fig.1 WCDMA Band 2 Head

**WCDMA Band 2 Body**

Date: 2023-12-30

Electronics: DAE4 Sn1790

Medium: Head 1900MHz

Medium parameters used:  $f = 1908$  MHz;  $\sigma = 1.398$  S/m;  $\epsilon_r = 40.442$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Communication System: UID 0, WCDMA (0) Frequency: 1907.6 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7683 ConvF (8.55, 8.55, 8.55)

**Bottom Side High/Area Scan (41x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.51 W/kg

**Bottom Side High/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.34 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 1.80 W/kg

**SAR(1 g) = 1.04 W/kg; SAR(10 g) = 0.554 W/kg**

Maximum value of SAR (measured) = 1.44 W/kg

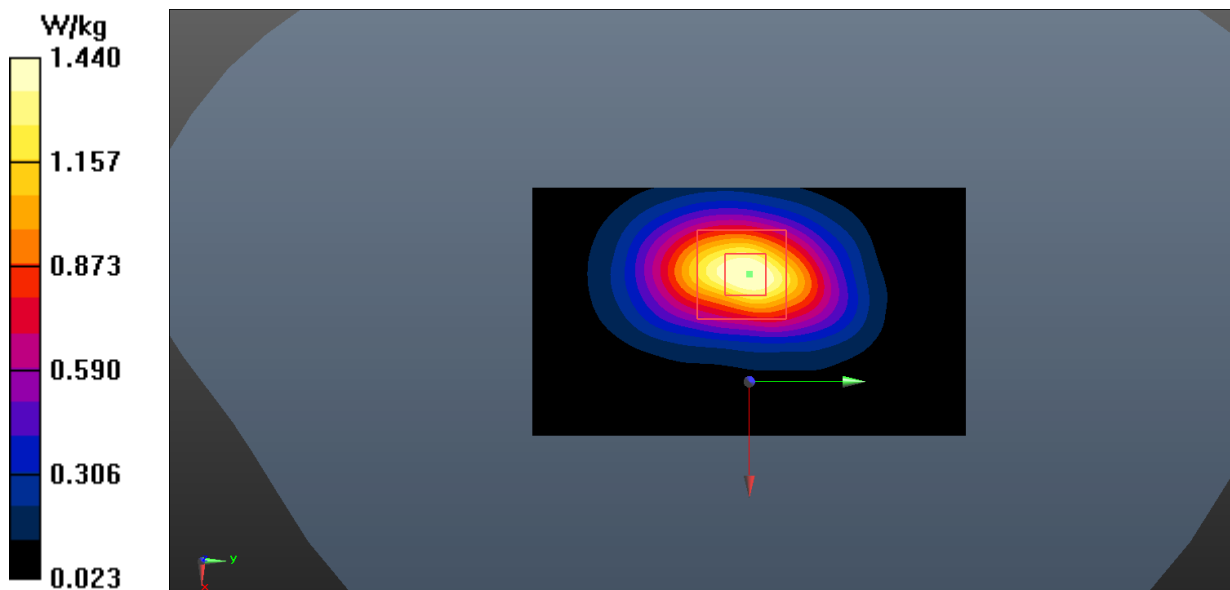


Fig.2 WCDMA Band 2 Body

**WCDMA Band 4 Head**

Date: 2023-12-18

Electronics: DAE4 Sn1790

Medium: Head 1750MHz

Medium parameters used (interpolated):  $f = 1732.6$  MHz;  $\sigma = 1.369$  S/m;  $\epsilon_r = 39.333$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Communication System: UID 0, WCDMA (0) Frequency: 1732.6 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7683 ConvF (8.81, 8.81, 8.81)

**Right Cheek Middle/Area Scan (61x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.166 W/kg

**Right Cheek Middle/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.596 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.190 W/kg

**SAR(1 g) = 0.131 W/kg; SAR(10 g) = 0.085 W/kg**

Maximum value of SAR (measured) = 0.163 W/kg

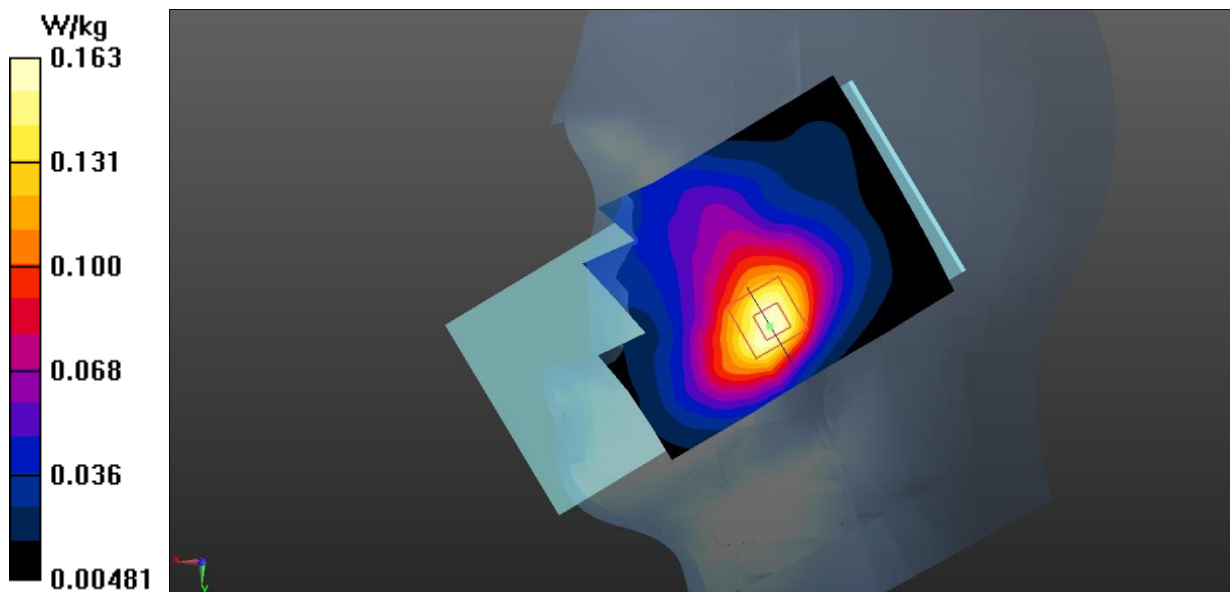


Fig.3 WCDMA Band 4 Head

**WCDMA Band 4 Body**

Date: 2023-12-29

Electronics: DAE4 Sn1790

Medium: Head 1750MHz

Medium parameters used (interpolated):  $f = 1752.6$  MHz;  $\sigma = 1.368$  S/m;  $\epsilon_r = 40.568$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Communication System: UID 0, WCDMA (0) Frequency: 1752.6 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7683 ConvF (8.81, 8.81, 8.81)

**Bottom Side High/Area Scan (41x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.08 W/kg

**Bottom Side High/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.62 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.38 W/kg

**SAR(1 g) = 0.804 W/kg; SAR(10 g) = 0.433 W/kg**

Maximum value of SAR (measured) = 1.13 W/kg

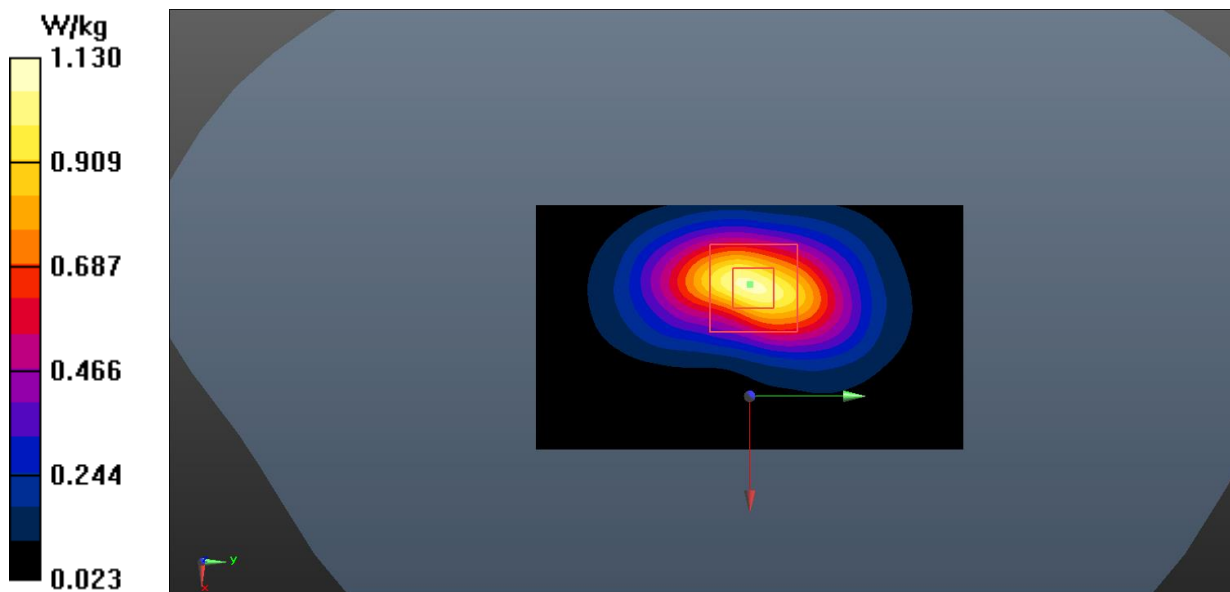


Fig.4 WCDMA Band 4 Body

**WCDMA Band 4 Extremity**

Date: 2023-12-29

Electronics: DAE4 Sn1790

Medium: Head 1750MHz

Medium parameters used (interpolated):  $f = 1752.6$  MHz;  $\sigma = 1.368$  S/m;  $\epsilon_r = 40.568$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Communication System: UID 0, WCDMA (0) Frequency: 1752.6 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7683 ConvF (8.81, 8.81, 8.81)

**Bottom Side High/Area Scan (41x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 8.92 W/kg

**Bottom Side High/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 31.32 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 13.5 W/kg

**SAR(1 g) = 6.08 W/kg; SAR(10 g) = 2.64 W/kg**

Maximum value of SAR (measured) = 9.66 W/kg

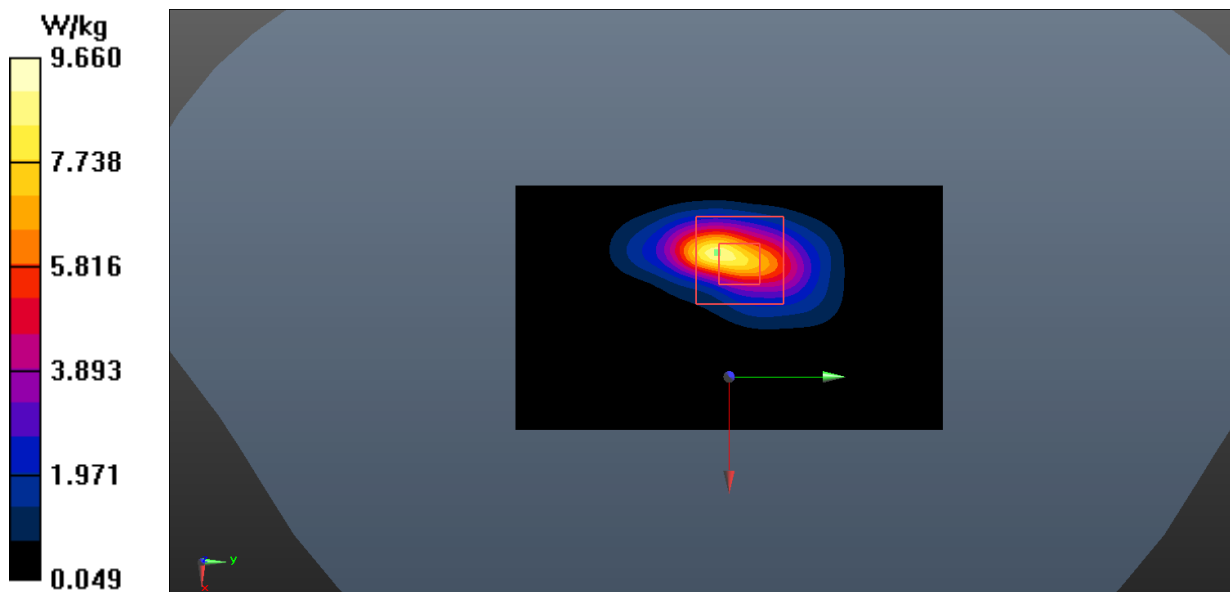


Fig.5 WCDMA Band 4 Extremity



**WCDMA Band 5 Head**

Date: 2023-12-14

Electronics: DAE4 Sn1790

Medium: Head 835MHz

Medium parameters used (interpolated):  $f = 836.6$  MHz;  $\sigma = 0.915$  S/m;  $\epsilon_r = 40.699$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Communication System: UID 0, WCDMA (0) Frequency: 836.6 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7683 ConvF (10.75, 10.75, 10.75)

**Right Cheek Middle/Area Scan (61x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.204 W/kg

**Right Cheek Middle/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.928 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.230 W/kg

**SAR(1 g) = 0.174 W/kg; SAR(10 g) = 0.130 W/kg**

Maximum value of SAR (measured) = 0.204 W/kg

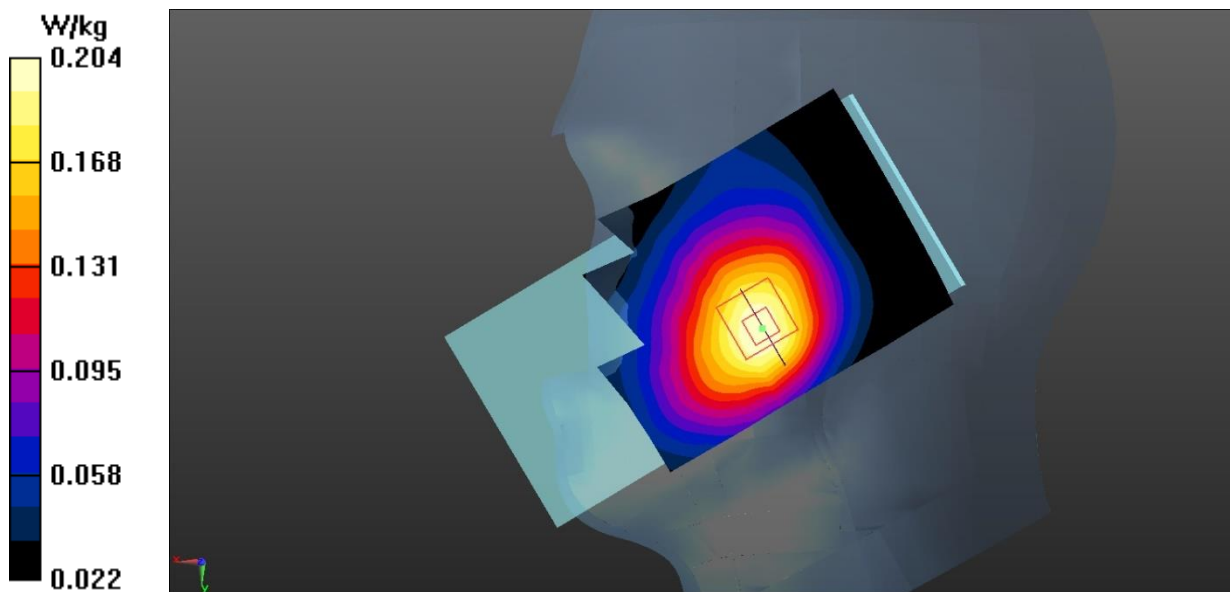


Fig.6 WCDMA Band 5 Head

**WCDMA Band 5 Body**

Date: 2023-12-14

Electronics: DAE4 Sn1790

Medium: Head 835MHz

Medium parameters used (interpolated):  $f = 836.6$  MHz;  $\sigma = 0.915$  S/m;  $\epsilon_r = 40.699$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Communication System: UID 0, WCDMA (0) Frequency: 836.6 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7683 ConvF (10.75, 10.75, 10.75)

**Rear Side Middle/Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.357 W/kg

**Rear Side Middle/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.91 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.476 W/kg

**SAR(1 g) = 0.277 W/kg; SAR(10 g) = 0.164 W/kg**

Maximum value of SAR (measured) = 0.365 W/kg

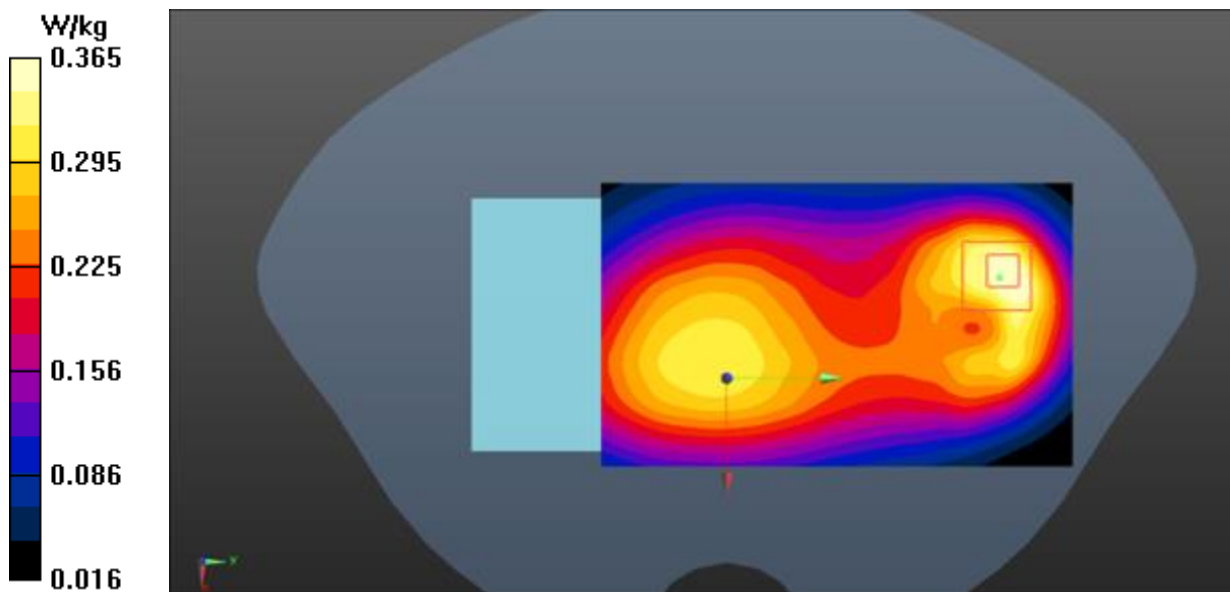


Fig.7 WCDMA Band 5 Body

**LTE Band 12 Head**

Date: 2023-12-13

Electronics: DAE4 Sn1790

Medium: Head 750MHz

Medium parameters used:  $f = 708 \text{ MHz}$ ;  $\sigma = 0.87 \text{ S/m}$ ;  $\epsilon_r = 41.715$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Communication System: UID 0, LTE\_FDD (0) Frequency: 707.5 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7683 ConvF (10.75, 10.75, 10.75)


**Right Cheek Middle 1RB24/Area Scan (61x81x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
Maximum value of SAR (interpolated) = 0.206 W/kg**Right Cheek Middle 1RB24/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$ 

Reference Value = 3.094 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.218 W/kg

**SAR(1 g) = 0.171 W/kg; SAR(10 g) = 0.134 W/kg**

Maximum value of SAR (measured) = 0.197 W/kg

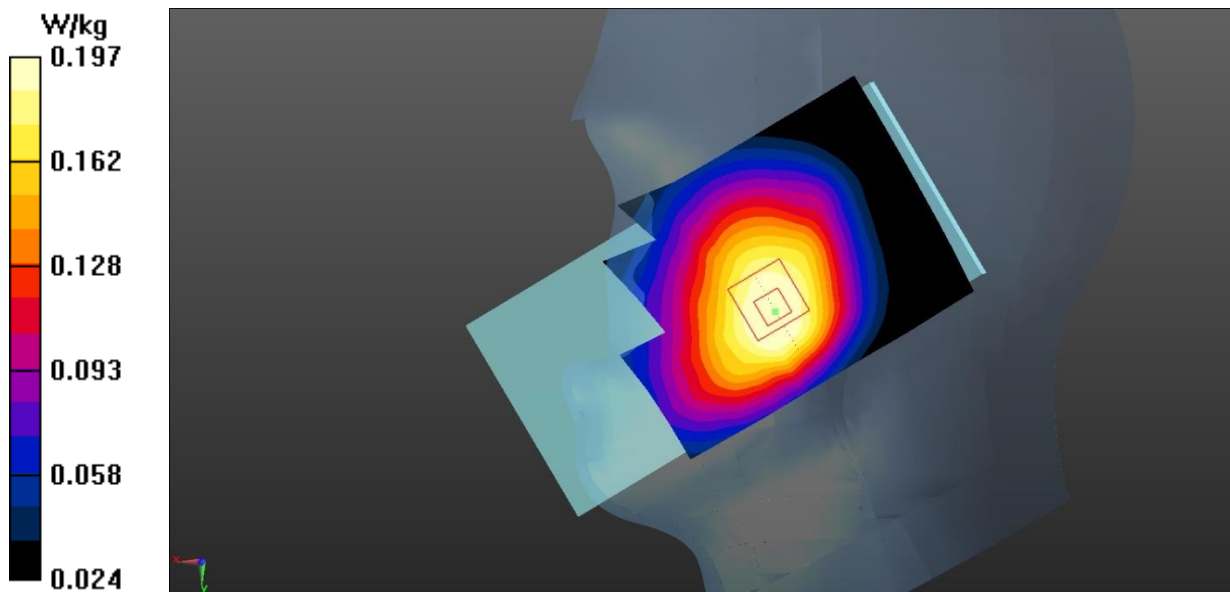**Fig.8 LTE Band 12 Head**

**LTE Band 12 Body**

Date: 2023-12-13

Electronics: DAE4 Sn1790

Medium: Head 750MHz

Medium parameters used:  $f = 708 \text{ MHz}$ ;  $\sigma = 0.87 \text{ S/m}$ ;  $\epsilon_r = 41.715$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Communication System: UID 0, LTE\_FDD (0) Frequency: 707.5 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7683 ConvF (10.75, 10.75, 10.75)


**Rear Side Middle 1RB24/Area Scan (61x101x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
Maximum value of SAR (interpolated) = 0.277 W/kg**Rear Side Middle 1RB24/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$ 

Reference Value = 12.75 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.327 W/kg

**SAR(1 g) = 0.201 W/kg; SAR(10 g) = 0.135 W/kg**

Maximum value of SAR (measured) = 0.257 W/kg

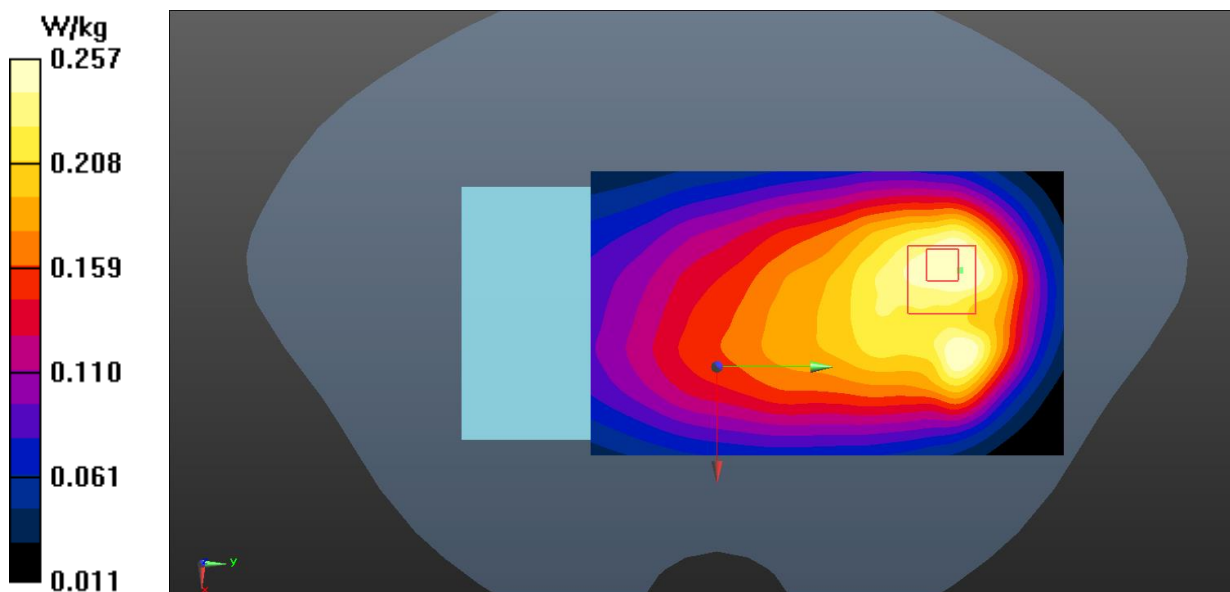**Fig.9 LTE Band 12 Body**

**LTE Band 13 Head**

Date: 2023-12-13

Electronics: DAE4 Sn1790

Medium: Head 750MHz

Medium parameters used:  $f = 782$  MHz;  $\sigma = 0.917$  S/m;  $\epsilon_r = 40.827$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Communication System: UID 0, LTE\_FDD (0) Frequency: 782 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7683 ConvF (10.75, 10.75, 10.75)

**Right Cheek Middle 1RB24/Area Scan (61x81x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm  
Maximum value of SAR (interpolated) = 0.263 W/kg**Right Cheek Middle 1RB24/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 4.326 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.301 W/kg

**SAR(1 g) = 0.237 W/kg; SAR(10 g) = 0.183 W/kg**

Maximum value of SAR (measured) = 0.273 W/kg

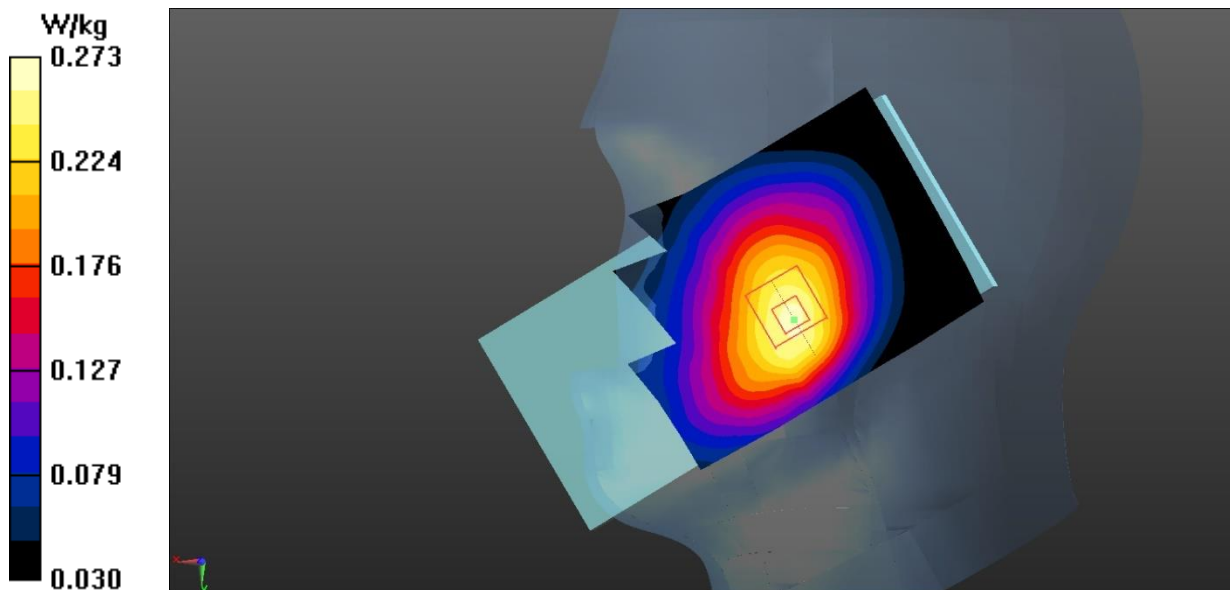


Fig.10 LTE Band 13 Head

**LTE Band 13 Body**

Date: 2023-12-13

Electronics: DAE4 Sn1790

Medium: Head 750MHz

Medium parameters used:  $f = 782$  MHz;  $\sigma = 0.917$  S/m;  $\epsilon_r = 40.827$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Communication System: UID 0, LTE\_FDD (0) Frequency: 782 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7683 ConvF (10.75, 10.75, 10.75)


**Rear Side Middle 1RB24/Area Scan (61x101x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm  
Maximum value of SAR (interpolated) = 0.407 W/kg**Rear Side Middle 1RB24/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 14.80 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.504 W/kg

**SAR(1 g) = 0.295 W/kg; SAR(10 g) = 0.184 W/kg**

Maximum value of SAR (measured) = 0.386 W/kg

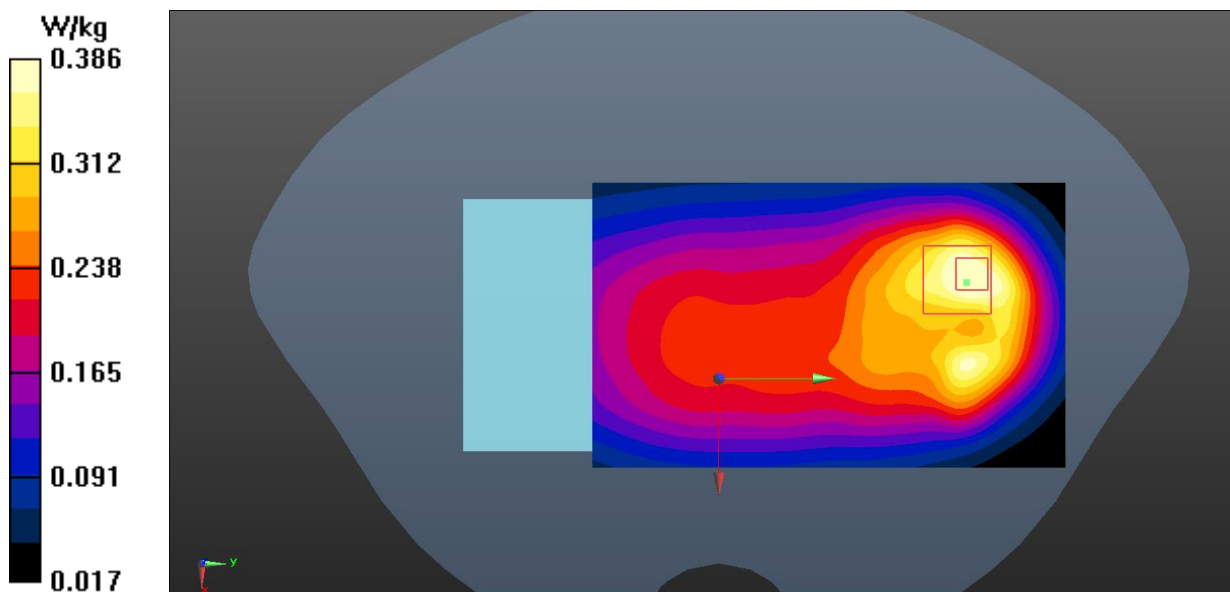**Fig.11 LTE Band 13 Body**

**LTE Band 25 Head**

Date: 2023-12-17

Electronics: DAE4 Sn1790

Medium: Head 1900MHz

Medium parameters used (interpolated):  $f = 1882.5$  MHz;  $\sigma = 1.402$  S/m;  $\epsilon_r = 39.519$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Communication System: UID 0, LTE\_FDD (0) Frequency: 1882.5 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7683 ConvF (8.55, 8.55, 8.55)

**Left Cheek Middle 1RB0/Area Scan (61x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.126 W/kg

**Left Cheek Middle 1RB0/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.535 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.155 W/kg

**SAR(1 g) = 0.100 W/kg; SAR(10 g) = 0.064 W/kg**

Maximum value of SAR (measured) = 0.126 W/kg

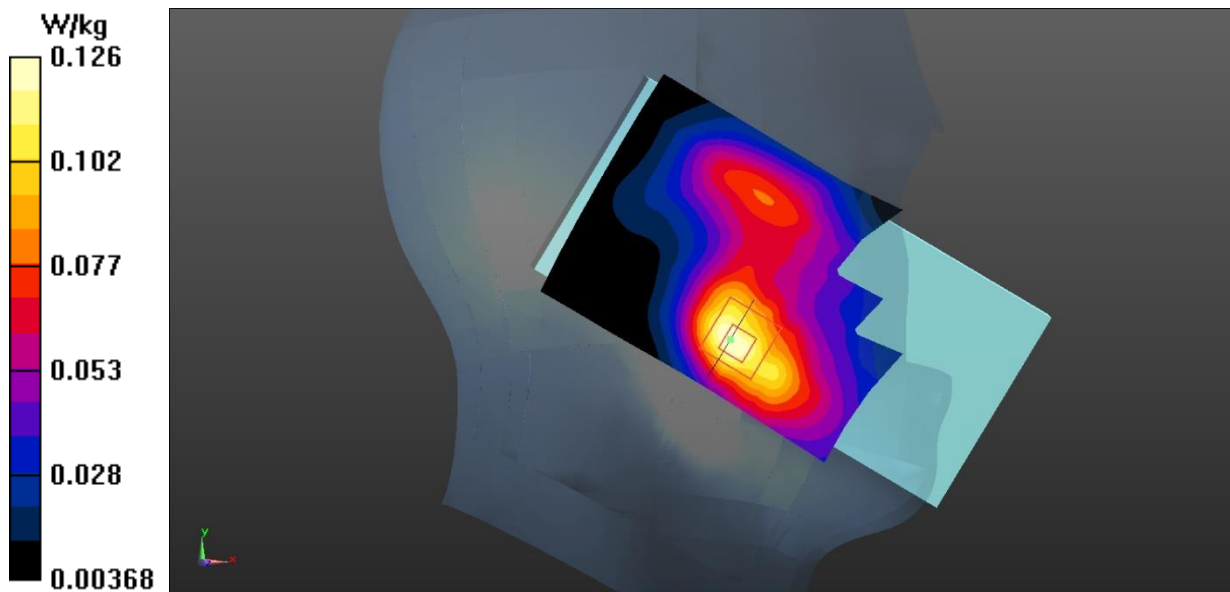


Fig.12 LTE Band 25 Head

**LTE Band 25 Body**

Date: 2023-12-30

Electronics: DAE4 Sn1790

Medium: Head 1900MHz

Medium parameters used (interpolated):  $f = 1905$  MHz;  $\sigma = 1.395$  S/m;  $\epsilon_r = 40.454$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Communication System: UID 0, LTE\_FDD (0) Frequency: 1905 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7683 ConvF (8.55, 8.55, 8.55)

**Bottom Side High 50RB25/Area Scan (51x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
 Maximum value of SAR (interpolated) = 1.15 W/kg


**Bottom Side High 50RB25/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.522 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 1.41 W/kg

**SAR(1 g) = 0.809 W/kg; SAR(10 g) = 0.431 W/kg**

Maximum value of SAR (measured) = 1.13 W/kg

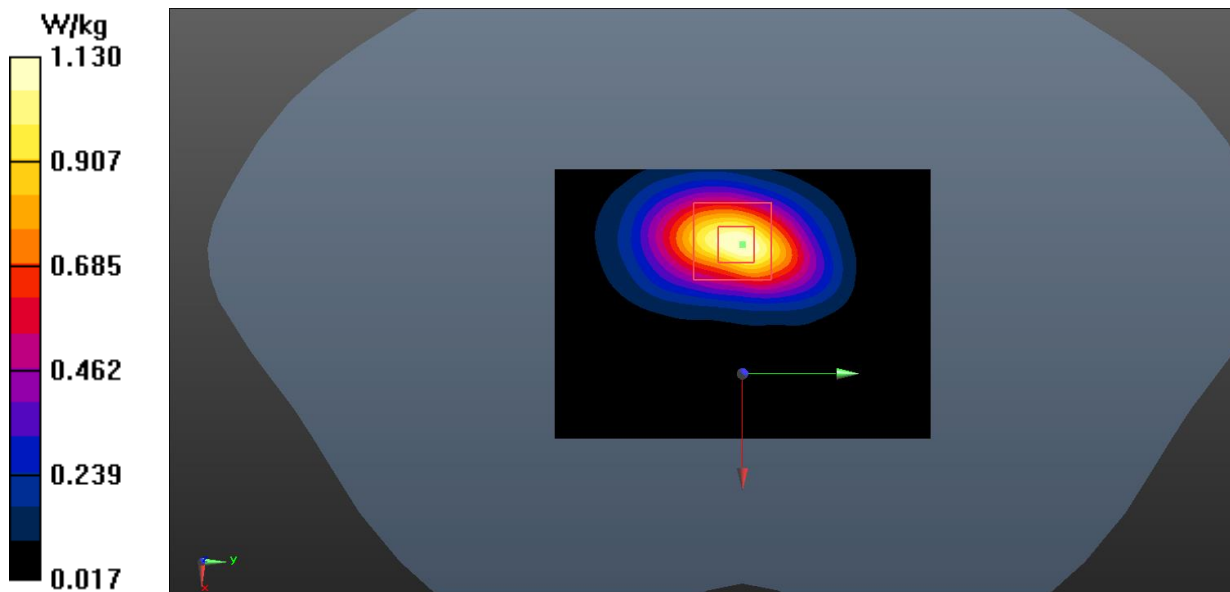

**Fig.13 LTE Band 25 Body**



**LTE Band 25 Extremity**

Date: 2023-12-30

Electronics: DAE4 Sn1790

Medium: Head 1900MHz

Medium parameters used (interpolated):  $f = 1905$  MHz;  $\sigma = 1.395$  S/m;  $\epsilon_r = 40.454$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Communication System: UID 0, LTE\_FDD (0) Frequency: 1905 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7683 ConvF (8.55, 8.55, 8.55)

**Bottom Side High 1RB0/Area Scan (41x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 8.75 W/kg


**Bottom Side High 1RB0/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 29.47 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 12.0 W/kg

**SAR(1 g) = 5.55 W/kg; SAR(10 g) = 2.42 W/kg**

Maximum value of SAR (measured) = 8.88 W/kg

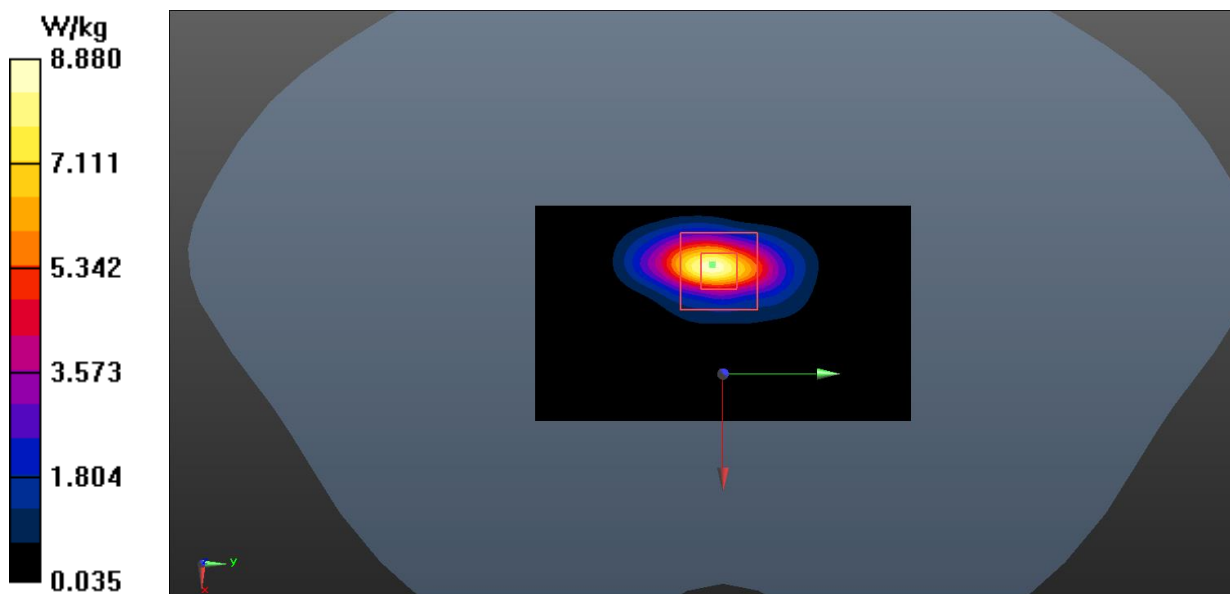

**Fig.14 LTE Band 25 Extremity**

**LTE Band 26 Head**

Date: 2023-12-16

Electronics: DAE4 Sn1790

Medium: Head 835MHz

Medium parameters used:  $f = 832$  MHz;  $\sigma = 0.922$  S/m;  $\epsilon_r = 41.128$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Communication System: UID 0, LTE\_FDD (0) Frequency: 831.5 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7683 ConvF (10.75, 10.75, 10.75)

**Right Cheek Middle 1RB37/Area Scan (61x81x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm  
Maximum value of SAR (interpolated) = 0.375 W/kg**Right Cheek Middle 1RB37/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 4.160 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.415 W/kg

**SAR(1 g) = 0.323 W/kg; SAR(10 g) = 0.247 W/kg**

Maximum value of SAR (measured) = 0.371 W/kg

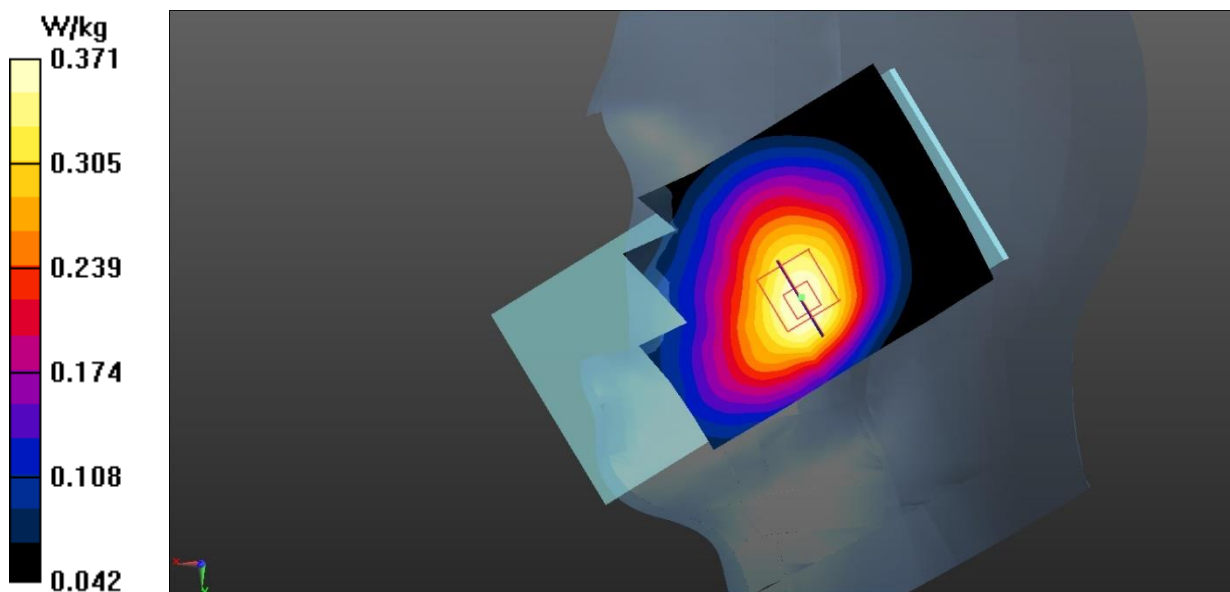


Fig.15 LTE Band 26 Head

**LTE Band 26 Body**

Date: 2023-12-16

Electronics: DAE4 Sn1790

Medium: Head 835MHz

Medium parameters used:  $f = 832$  MHz;  $\sigma = 0.922$  S/m;  $\epsilon_r = 41.128$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Communication System: UID 0, LTE\_FDD (0) Frequency: 831.5 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7683 ConvF (10.75, 10.75, 10.75)

**Rear Side Middle 1RB37/Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.509 W/kg**Rear Side Middle 1RB37/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.48 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.616 W/kg

**SAR(1 g) = 0.358 W/kg; SAR(10 g) = 0.218 W/kg**

Maximum value of SAR (measured) = 0.481 W/kg

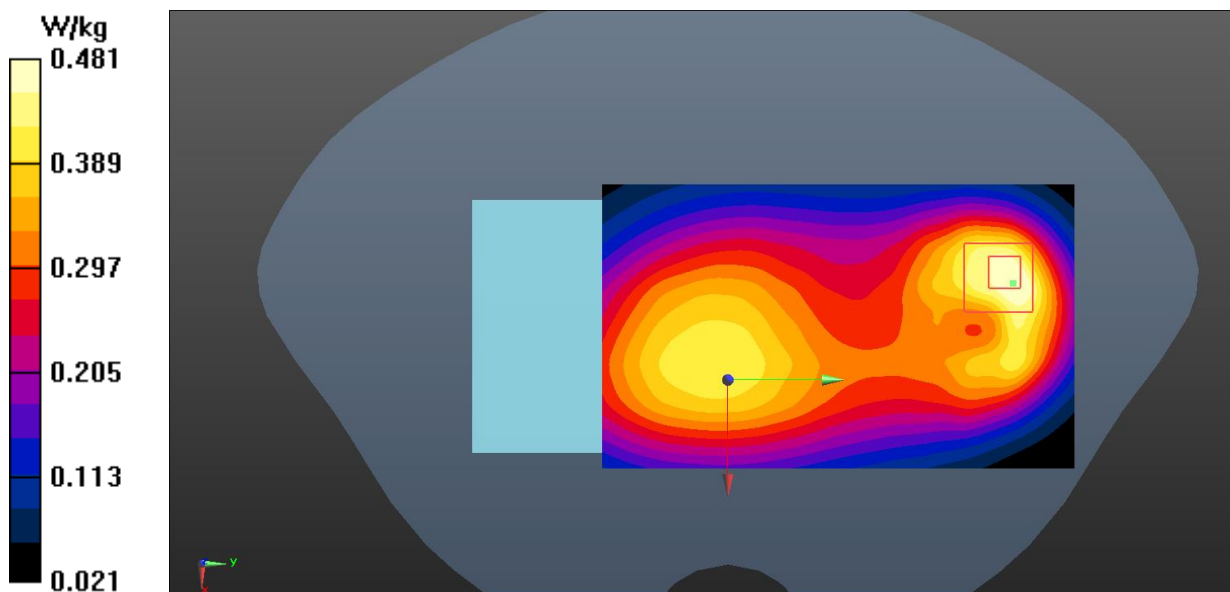


Fig.16 LTE Band 26 Body

**LTE Band 41 Head**

Date: 2024-01-03

Electronics: DAE4 Sn1790

Medium: Head 2550MHz

Medium parameters used:  $f = 2680$  MHz;  $\sigma = 2.092$  S/m;  $\epsilon_r = 38.124$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Communication System: UID 0, LTE\_TDD (0) Frequency: 2680 MHz Duty Cycle: 1:1.58

Probe: EX3DV4 - SN7683 ConvF (7.76, 7.76, 7.76)


**Left Cheek Middle 1RB50/Area Scan (91x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
Maximum value of SAR (interpolated) = 0.287 W/kg**Left Cheek Middle 1RB50/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.6810 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.359 W/kg

**SAR(1 g) = 0.196 W/kg; SAR(10 g) = 0.102 W/kg**

Maximum value of SAR (measured) = 0.279 W/kg

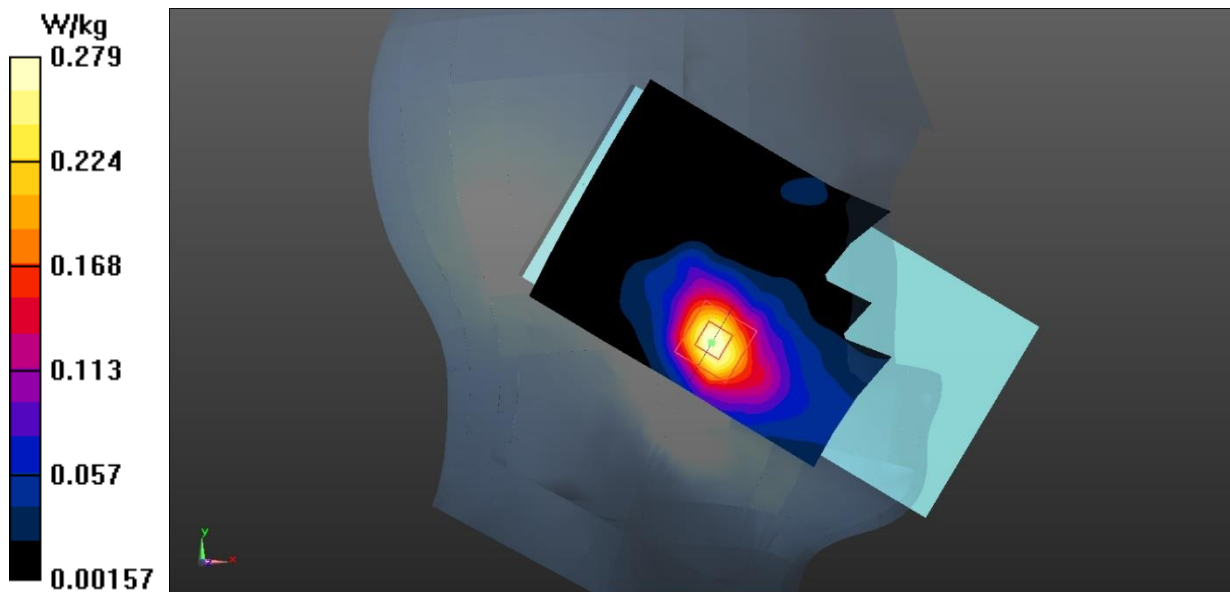**Fig.17 LTE Band 41 Head**

**LTE Band 41 Body**

Date: 2024-01-03

Electronics: DAE4 Sn1790

Medium: Head 2550MHz

Medium parameters used:  $f = 2506$  MHz;  $\sigma = 1.887$  S/m;  $\epsilon_r = 38.699$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Communication System: UID 0, LTE\_TDD (0) Frequency: 2506 MHz Duty Cycle: 1:1.58

Probe: EX3DV4 - SN7683 ConvF (8.02, 8.02, 8.02)

**Bottom Side Low 1RB50/Area Scan (81x111x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
Maximum value of SAR (interpolated) = 1.10 W/kg**Bottom Side Low 1RB50/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.660 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 1.28 W/kg

**SAR(1 g) = 0.666 W/kg; SAR(10 g) = 0.327 W/kg**

Maximum value of SAR (measured) = 0.973 W/kg

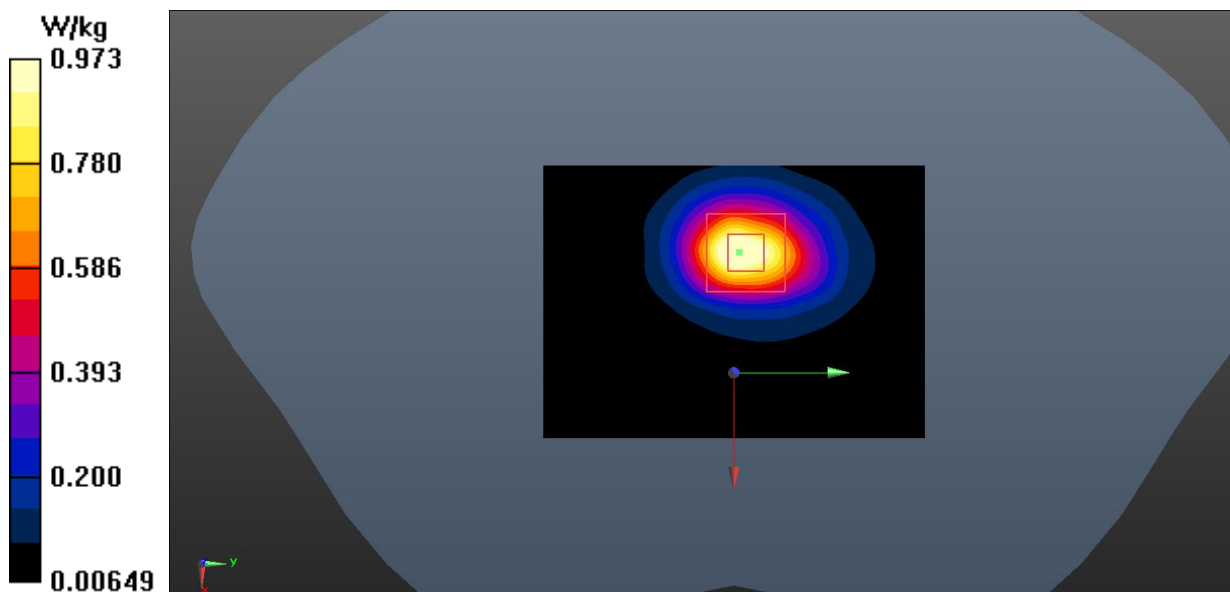


Fig.18 LTE Band 41 Body

**LTE Band 41 Extremity**

Date: 2024-01-03

Electronics: DAE4 Sn1790

Medium: Head 2550MHz

Medium parameters used:  $f = 2506$  MHz;  $\sigma = 1.887$  S/m;  $\epsilon_r = 38.699$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Communication System: UID 0, LTE\_TDD (0) Frequency: 2506 MHz Duty Cycle: 1:1.58

Probe: EX3DV4 - SN7683 ConvF (8.02, 8.02, 8.02)


**Bottom Side Low 1RB50/Area Scan (81x111x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
Maximum value of SAR (interpolated) = 2.41 W/kg**Bottom Side Low 1RB50/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 24.54 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 3.89 W/kg

**SAR(1 g) = 1.43 W/kg; SAR(10 g) = 0.638 W/kg**

Maximum value of SAR (measured) = 2.72 W/kg

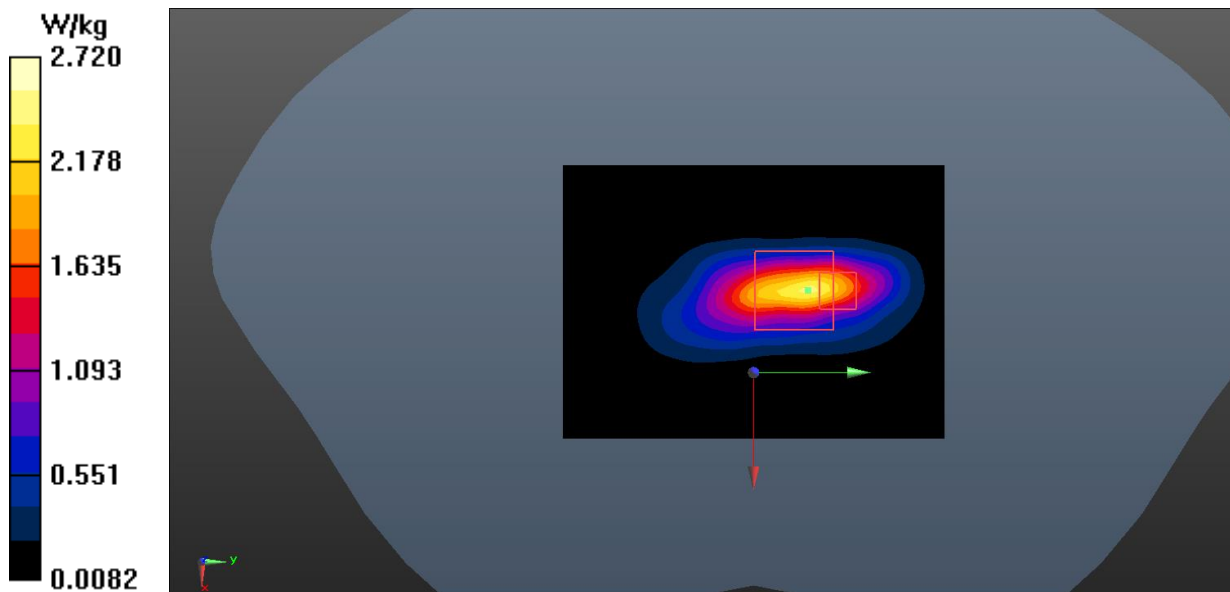**Fig.19 LTE Band 41 Extremity**

**LTE Band 66 Head**

Date: 2023-12-18

Electronics: DAE4 Sn1790

Medium: Head 1750MHz

Medium parameters used:  $f = 1770$  MHz;  $\sigma = 1.402$  S/m;  $\epsilon_r = 39.186$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Communication System: UID 0, LTE\_FDD (0) Frequency: 1770 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7683 ConvF (8.81, 8.81, 8.81)

**Right Cheek High 1RB0/Area Scan (61x81x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm  
Maximum value of SAR (interpolated) = 0.151 W/kg**Right Cheek High 1RB0/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 3.354 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.172 W/kg

**SAR(1 g) = 0.117 W/kg; SAR(10 g) = 0.077 W/kg**

Maximum value of SAR (measured) = 0.146 W/kg

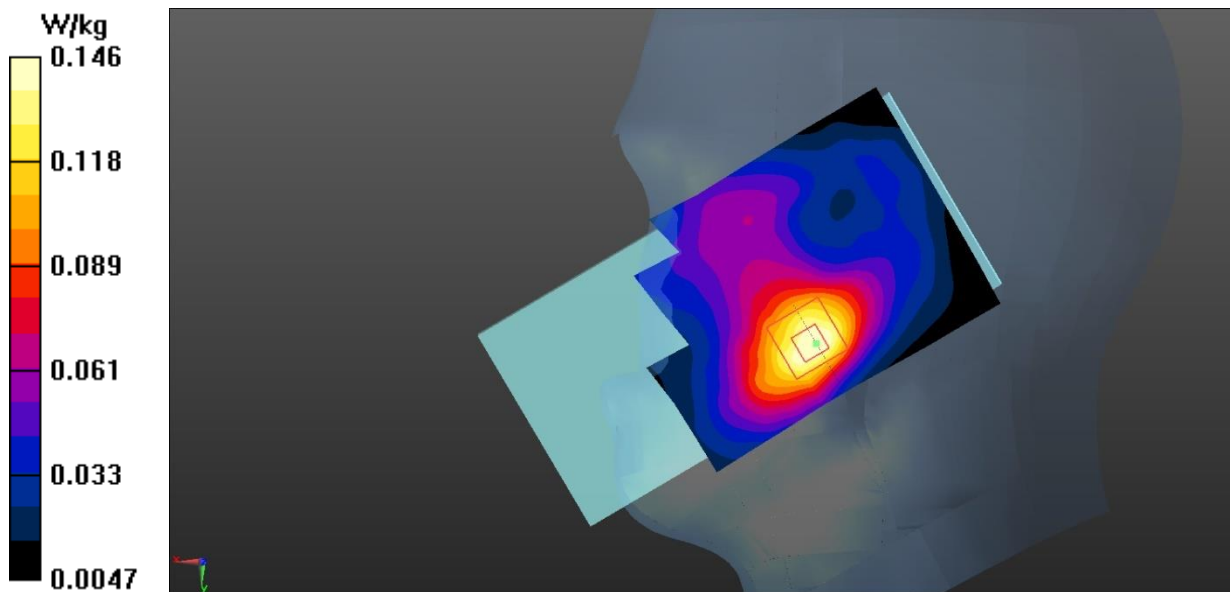


Fig.20 LTE Band 66 Head

**LTE Band 66 Body**

Date: 2023-12-29

Electronics: DAE4 Sn1790

Medium: Head 1750MHz

Medium parameters used:  $f = 1770$  MHz;  $\sigma = 1.384$  S/m;  $\epsilon_r = 40.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Communication System: UID 0, LTE\_FDD (0) Frequency: 1770 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7683 ConvF (8.81, 8.81, 8.81)


**Bottom Side High 50RB0/Area Scan (51x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 1.01 W/kg**Bottom Side High 50RB0/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.529 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.28 W/kg

**SAR(1 g) = 0.744 W/kg; SAR(10 g) = 0.397 W/kg**

Maximum value of SAR (measured) = 1.04 W/kg

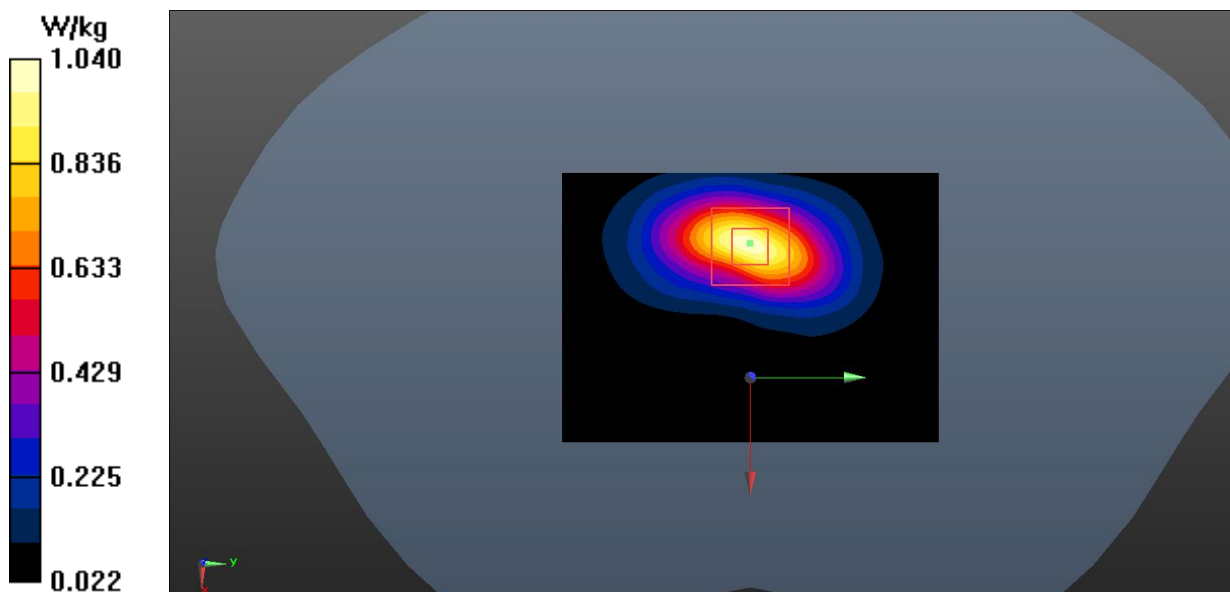**Fig.21 LTE Band 66 Body**



**LTE Band 66 Extremity**

Date: 2023-12-29

Electronics: DAE4 Sn1790

Medium: Head 1750MHz

Medium parameters used:  $f = 1770$  MHz;  $\sigma = 1.384$  S/m;  $\epsilon_r = 40.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Communication System: UID 0, LTE\_FDD (0) Frequency: 1770 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7683 ConvF (8.81, 8.81, 8.81)


**Bottom Side High 1RB0/Area Scan (51x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 10.4 W/kg**Bottom Side High 1RB0/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 47.54 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 15.8 W/kg

**SAR(1 g) = 7.23 W/kg; SAR(10 g) = 3.12 W/kg**

Maximum value of SAR (measured) = 11.8 W/kg

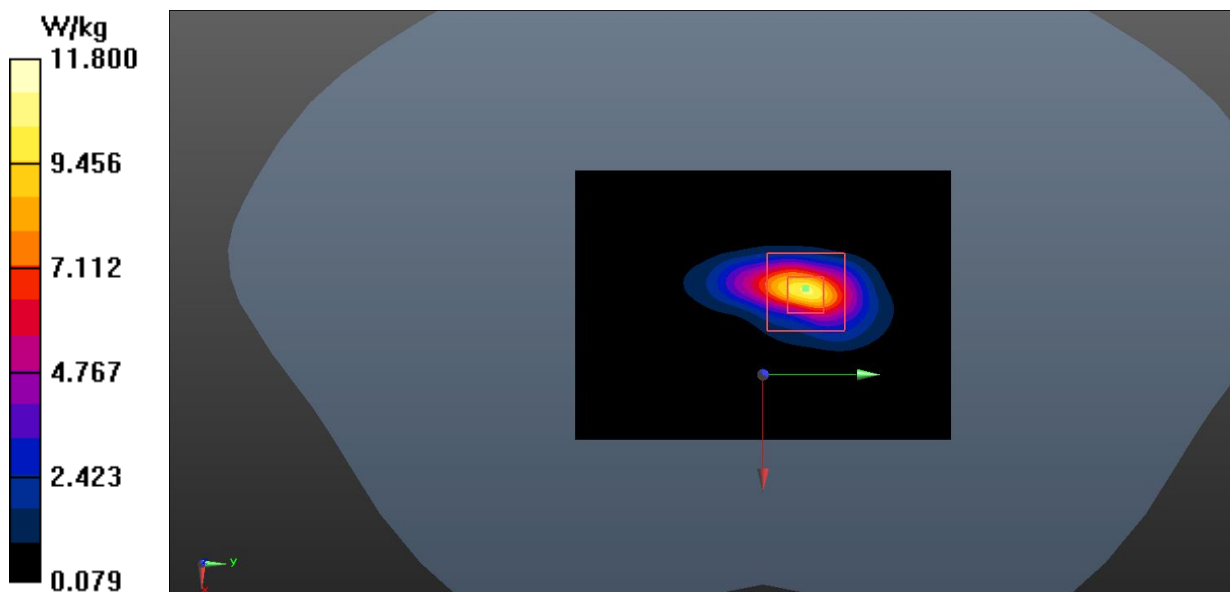**Fig.22 LTE Band 66 Extremity**

**LTE Band 71 Head**

Date: 2023-12-13

Electronics: DAE4 Sn1790

Medium: Head 750MHz

Medium parameters used (interpolated):  $f = 673$  MHz;  $\sigma = 0.853$  S/m;  $\epsilon_r = 42.135$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Communication System: UID 0, LTE\_FDD (0) Frequency: 673 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7683 ConvF (10.75, 10.75, 10.75)


**Right Cheek Middle 1RB50/Area Scan (61x81x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm  
Maximum value of SAR (interpolated) = 0.177 W/kg**Right Cheek Middle 1RB50/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 3.493 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.197 W/kg

**SAR(1 g) = 0.154 W/kg; SAR(10 g) = 0.121 W/kg**

Maximum value of SAR (measured) = 0.175 W/kg

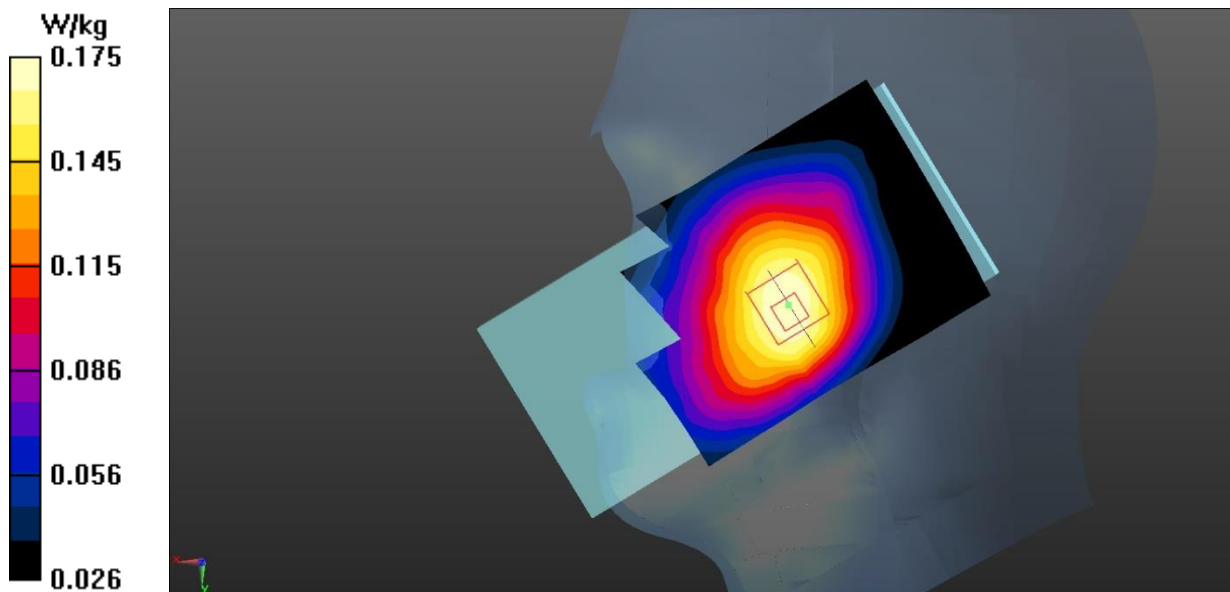**Fig.23 LTE Band 71 Head**

**LTE Band 71 Body**

Date: 2023-12-13

Electronics: DAE4 Sn1790

Medium: Head 750MHz

Medium parameters used (interpolated):  $f = 673$  MHz;  $\sigma = 0.853$  S/m;  $\epsilon_r = 42.135$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Communication System: UID 0, LTE\_FDD (0) Frequency: 673 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7683 ConvF (10.75, 10.75, 10.75)

**Rear Side Low 1RB50/Area Scan (61x111x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.190 W/kg


**Rear Side Low 1RB50/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.00 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.225 W/kg

**SAR(1 g) = 0.133 W/kg; SAR(10 g) = 0.094 W/kg**

Maximum value of SAR (measured) = 0.170 W/kg

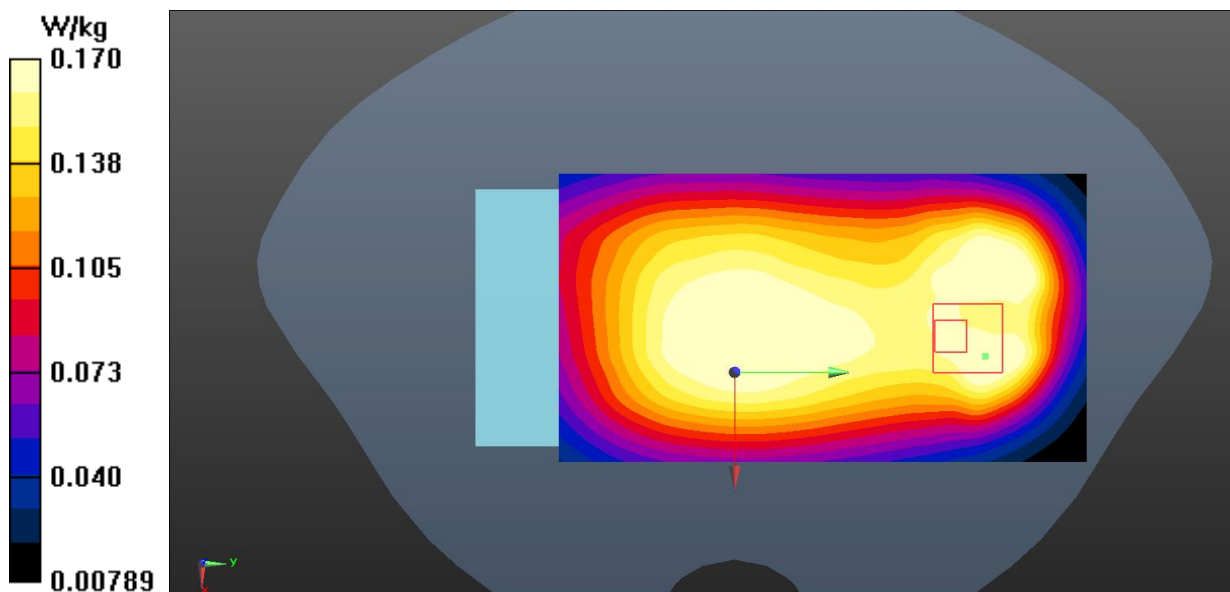**Fig.24 LTE Band 71 Body**

**Bluetooth Head**

Date: 2023-12-25

Electronics: DAE4 Sn1790

Medium: Head 2450MHz

Medium parameters used:  $f = 2402$  MHz;  $\sigma = 1.788$  S/m;  $\epsilon_r = 38.266$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Communication System: UID 0, BT (0) Frequency: 2402 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7683 ConvF (8.02, 8.02, 8.02)

**Left Cheek Ch.0/Area Scan (91x91x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.167 W/kg

**Left Cheek Ch.0/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.136 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.213 W/kg

**SAR(1 g) = 0.117 W/kg; SAR(10 g) = 0.062 W/kg**

Maximum value of SAR (measured) = 0.159 W/kg

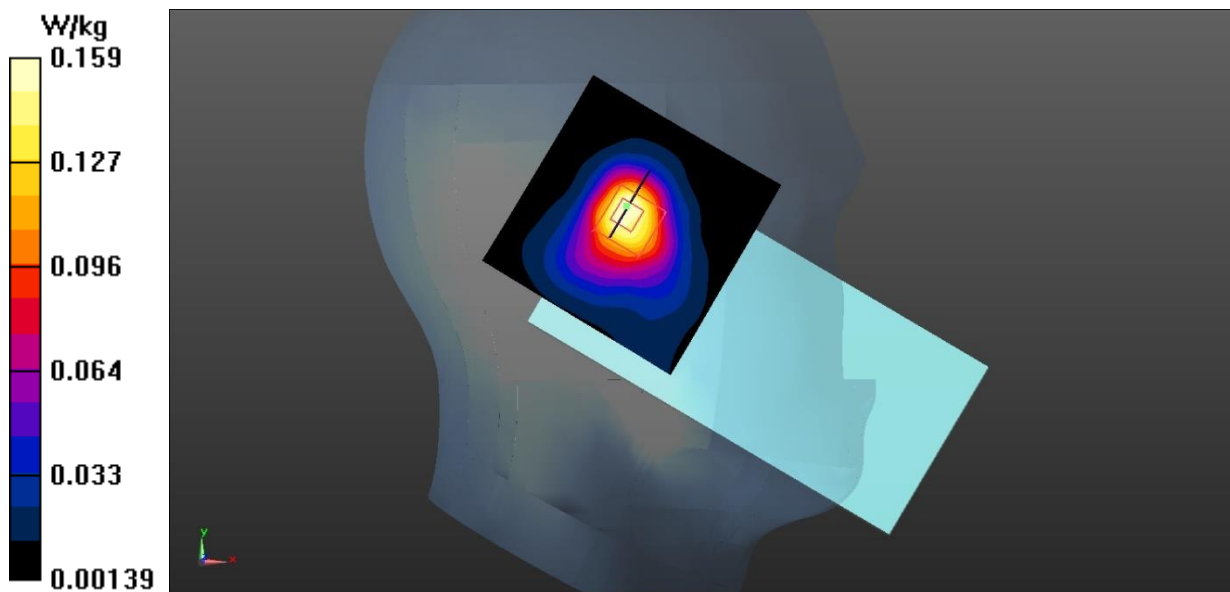


Fig.25 Bluetooth Head

**Bluetooth Body**

Date: 2023-12-25

Electronics: DAE4 Sn1790

Medium: Head 2450MHz

Medium parameters used:  $f = 2402$  MHz;  $\sigma = 1.788$  S/m;  $\epsilon_r = 38.266$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Communication System: UID 0, BT (0) Frequency: 2402 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7683 ConvF (8.02, 8.02, 8.02)

**Rear Side Ch.0/Area Scan (91x91x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.0705 W/kg

**Rear Side Ch.0/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.819 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.0960 W/kg

**SAR(1 g) = 0.049 W/kg; SAR(10 g) = 0.026 W/kg**

Maximum value of SAR (measured) = 0.0670 W/kg

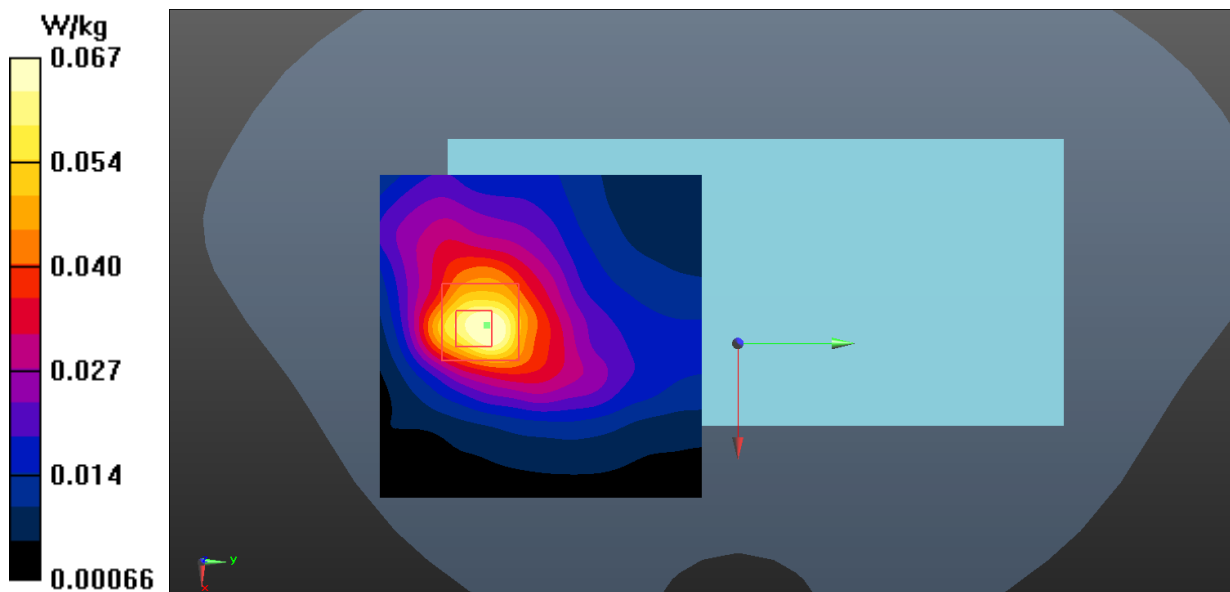


Fig.26 Bluetooth Body

**WLAN 2.4GHz Head**

Date: 2023-12-25

Electronics: DAE4 Sn1790

Medium: Head 2450MHz

Medium parameters used (interpolated):  $f = 2437$  MHz;  $\sigma = 1.83$  S/m;  $\epsilon_r = 38.152$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Communication System: UID 0, WLAN (0) Frequency: 2437 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7683 ConvF (8.02, 8.02, 8.02)

**Left Cheek Ch.6/Area Scan (91x91x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.0666 W/kg

**Left Cheek Ch.6/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.863 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.122 W/kg

**SAR(1 g) = 0.049 W/kg; SAR(10 g) = 0.024 W/kg**

Maximum value of SAR (measured) = 0.0707 W/kg

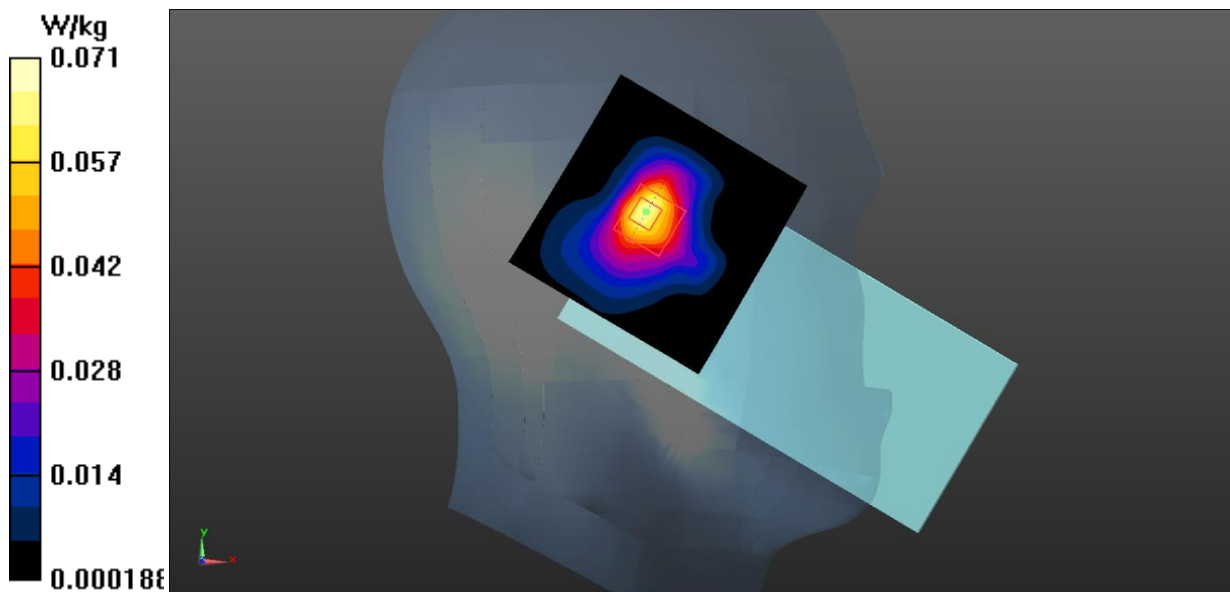


Fig.27 WLAN 2.4GHz Head

**WLAN 2.4GHz Body**

Date: 2023-12-25

Electronics: DAE4 Sn1790

Medium: Head 2450MHz

Medium parameters used (interpolated):  $f = 2437$  MHz;  $\sigma = 1.83$  S/m;  $\epsilon_r = 38.152$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Communication System: UID 0, WLAN (0) Frequency: 2437 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7683 ConvF (8.02, 8.02, 8.02)

**Rear Side Ch.6/Area Scan (91x91x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.0788 W/kg

**Rear Side Ch.6/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.688 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.111 W/kg

**SAR(1 g) = 0.052 W/kg; SAR(10 g) = 0.026 W/kg**

Maximum value of SAR (measured) = 0.0795 W/kg

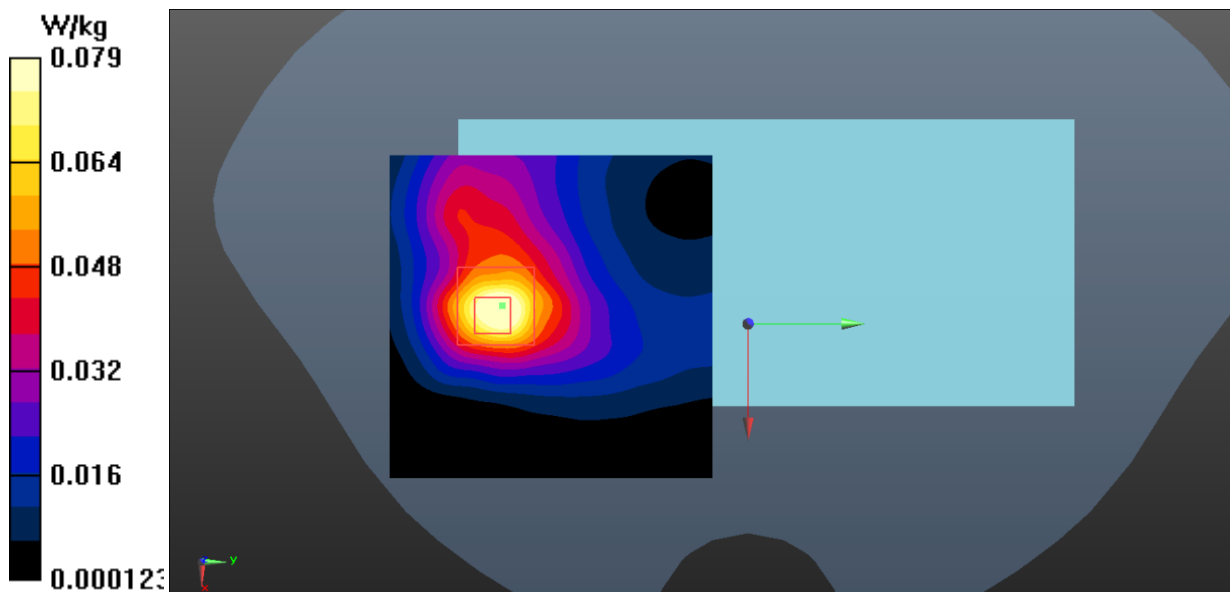


Fig.28 WLAN 2.4GHz Body

**WLAN 5GHz Head**

Date: 2024-02-02

Electronics: DAE4 Sn1790

Medium: Head 5750MHz

Medium parameters used:  $f = 5720$  MHz;  $\sigma = 5.283$  S/m;  $\epsilon_r = 34.605$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Communication System: UID 0, WLAN 5G (0) Frequency: 5720 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7683 ConvF (5.23, 5.23, 5.23)

**Left Cheek Ch.144/Area Scan (81x81x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.993 W/kg


**Left Cheek Ch.144/Zoom Scan (8x8x21)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 1.996 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 1.85 W/kg

**SAR(1 g) = 0.257 W/kg; SAR(10 g) = 0.082 W/kg**

Maximum value of SAR (measured) = 0.527 W/kg

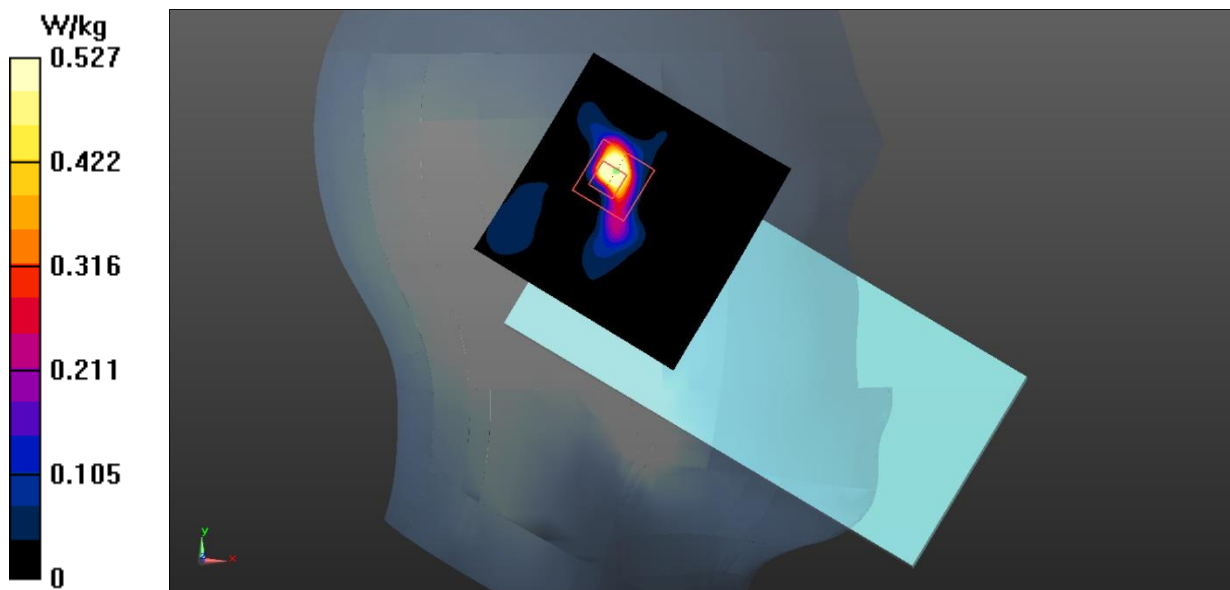**Fig.29 WLAN 5GHz Head**



**WLAN 5GHz Body**

Date: 2024-02-02

Electronics: DAE4 Sn1790

Medium: Head 5750MHz

Medium parameters used (interpolated):  $f = 5745$  MHz;  $\sigma = 5.316$  S/m;  $\epsilon_r = 34.538$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Communication System: UID 0, WLAN 5G (0) Frequency: 5745 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7683 ConvF (5.23, 5.23, 5.23)

**Rear Side Ch.149/Area Scan (91x91x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.44 W/kg

**Rear Side Ch.149/Zoom Scan (8x8x21)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 1.055 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 3.92 W/kg

**SAR(1 g) = 0.970 W/kg; SAR(10 g) = 0.324 W/kg**

Maximum value of SAR (measured) = 1.75 W/kg

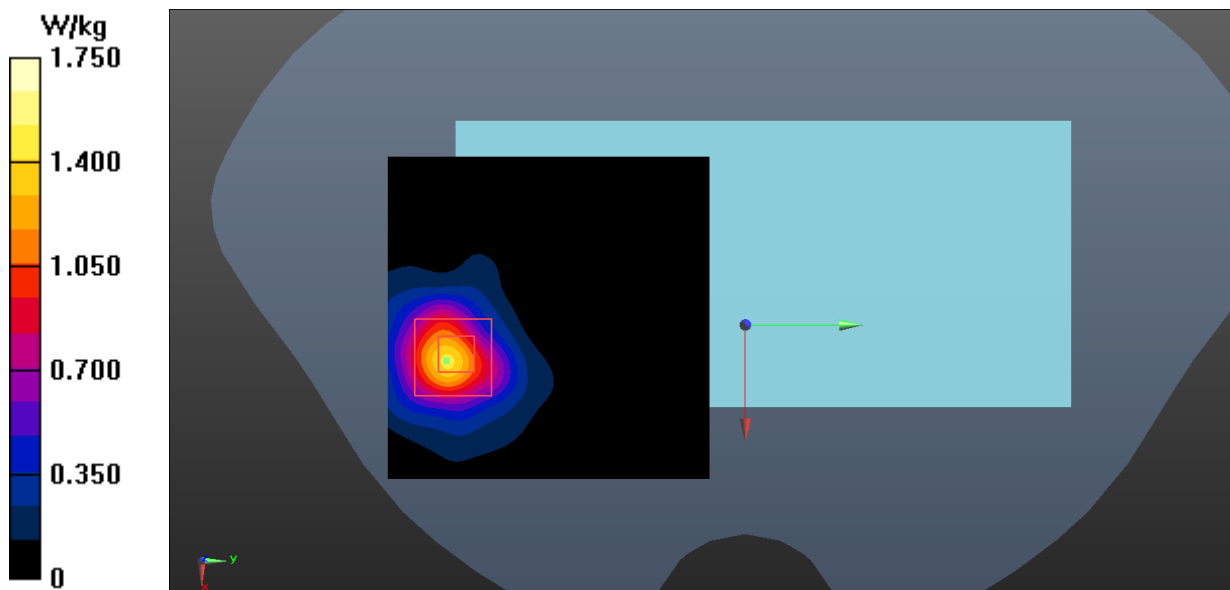


Fig.30 WLAN 5GHz Body

**WLAN 5GHz Extremity**

Date: 2024-02-02

Electronics: DAE4 Sn1790

Medium: Head 5750MHz

Medium parameters used:  $f = 5700 \text{ MHz}$ ;  $\sigma = 5.256 \text{ S/m}$ ;  $\epsilon_r = 34.66$ ;  $\rho = 1000 \text{ kg/m}^3$

Communication System: UID 0, WLAN 5G (0) Frequency: 5700 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7683 ConvF (5.13, 5.13, 5.13)

**Rear Side Ch.140/Area Scan (81x81x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 11.7 W/kg


**Rear Side Ch.140/Zoom Scan (8x8x21)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=1.4\text{mm}$

Reference Value = 0.1240 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 76.5 W/kg

**SAR(1 g) = 11.0 W/kg; SAR(10 g) = 2.04 W/kg**

Maximum value of SAR (measured) = 24.2 W/kg

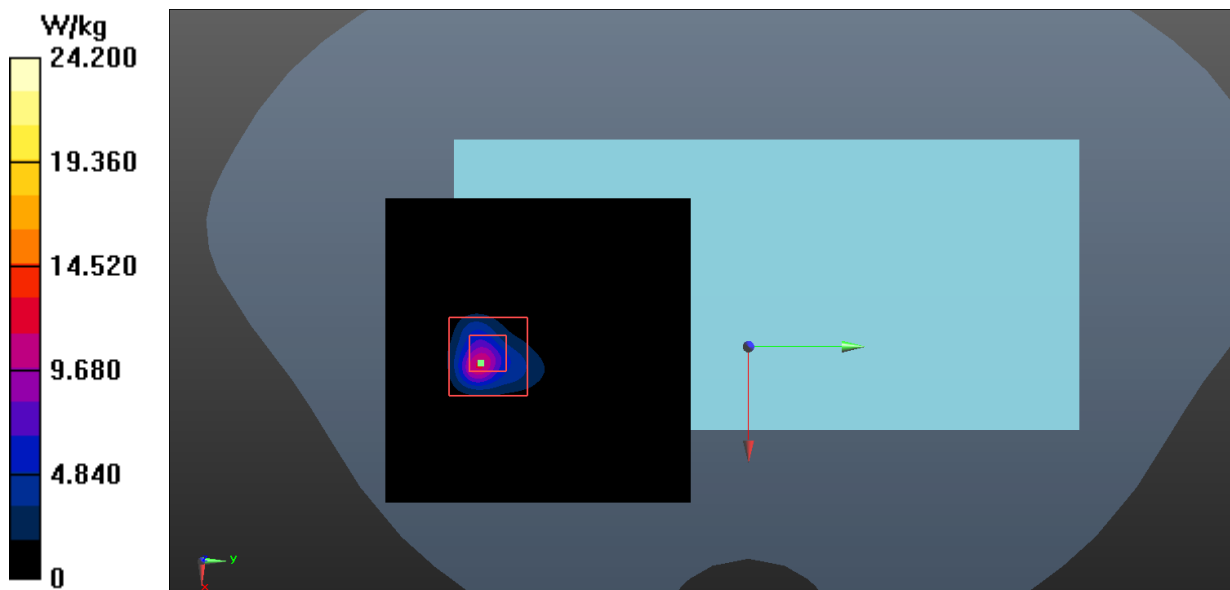

**Fig.31 WLAN 5GHz Extremity**

## ANNEX B: System Verification Results

### 750MHz

Date: 2023-12-13

Electronics: DAE4 Sn1790

Medium: Head 750MHz

Medium parameters used:  $f = 750 \text{ MHz}$ ;  $\sigma = 0.897 \text{ S/m}$ ;  $\epsilon_r = 41.211$ ;  $\rho = 1000 \text{ kg/m}^3$

Communication System: CW Frequency: 750 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7683 ConvF (10.75, 10.75, 10.75)

**System Validation/Area Scan (81x161x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$

Reference Value = 62.173 V/m; Power Drift = 0.09 dB

**SAR(1 g) = 2.15 W/kg; SAR(10 g) = 1.41 W/kg**

Maximum value of SAR (interpolated) = 2.81 W/kg


**System Validation/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 62.173 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 3.17 W/kg

**SAR(1 g) = 2.18 W/kg; SAR(10 g) = 1.42 W/kg**

Maximum value of SAR (measured) = 2.84 W/kg

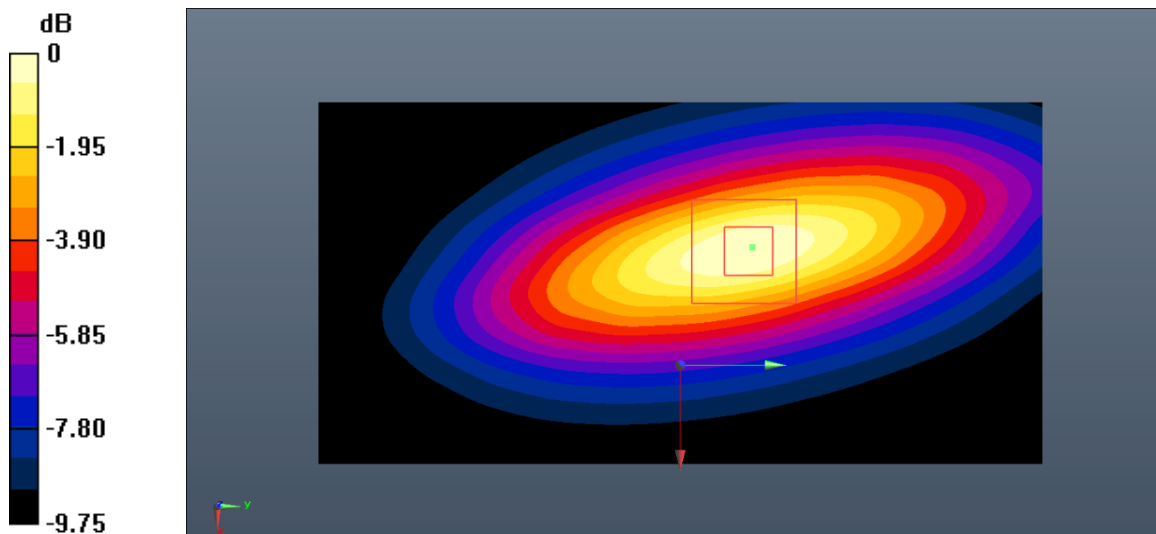

0 dB = 2.84 W/kg = 4.53 dB W/kg

**Fig.B.1. Validation 750MHz 250mW**

**835MHz**

Date: 2023-12-14

Electronics: DAE4 Sn1790

Medium: Head 835MHz

Medium parameters used:  $f = 835 \text{ MHz}$ ;  $\sigma = 0.914 \text{ S/m}$ ;  $\epsilon_r = 40.718$ ;  $\rho = 1000 \text{ kg/m}^3$

Communication System: CW Frequency: 835 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7683 ConvF (10.75, 10.75, 10.75)

**System Validation/Area Scan (91x161x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$

Reference Value = 63.484 V/m; Power Drift = 0.12 dB

**SAR(1 g) = 2.41 W/kg; SAR(10 g) = 1.57 W/kg**

Maximum value of SAR (interpolated) = 3.63 W/kg


**System Validation/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 63.484 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 4.28 W/kg

**SAR(1 g) = 2.45 W/kg; SAR(10 g) = 1.59 W/kg**

Maximum value of SAR (measured) = 3.66 W/kg

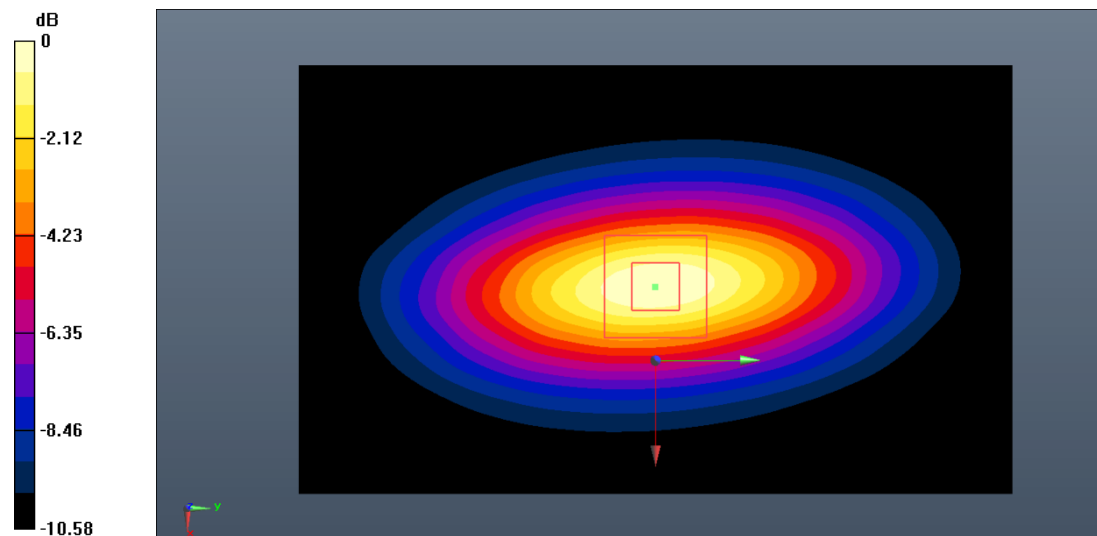

0 dB = 3.66 W/kg = 5.63 dB W/kg

**Fig.B.2. Validation 835MHz 250mW**

**835MHz**

Date: 2023-12-16

Electronics: DAE4 Sn1790

Medium: Head 835MHz

Medium parameters used:  $f = 835 \text{ MHz}$ ;  $\sigma = 0.925 \text{ S/m}$ ;  $\epsilon_r = 41.093$ ;  $\rho = 1000 \text{ kg/m}^3$

Communication System: CW Frequency: 835 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7683 ConvF (10.75, 10.75, 10.75)

**System Validation/Area Scan (91x161x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$

Reference Value = 66.342 V/m; Power Drift = 0.06 dB

**SAR(1 g) = 2.44 W/kg; SAR(10 g) = 1.58 W/kg**

Maximum value of SAR (interpolated) = 3.71 W/kg


**System Validation/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 66.342 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 4.54 W/kg

**SAR(1 g) = 2.49 W/kg; SAR(10 g) = 1.61 W/kg**

Maximum value of SAR (measured) = 3.73 W/kg

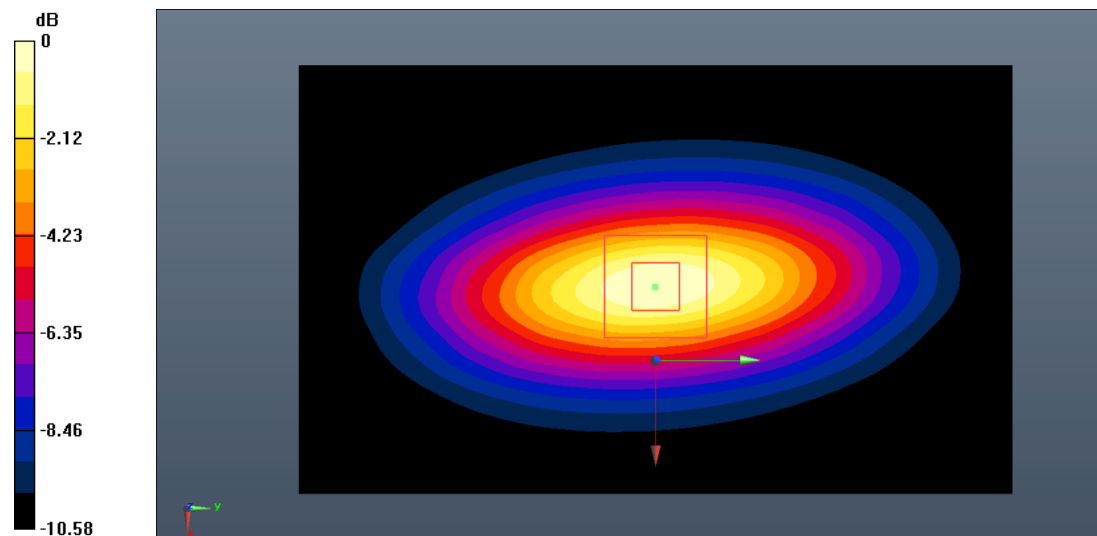

0 dB = 3.73 W/kg = 5.72 dB W/kg

**Fig.B.3. Validation 835MHz 250mW**

**1750MHz**

Date: 2023-12-18

Electronics: DAE4 Sn1790

Medium: Head 1750MHz

Medium parameters used:  $f = 1750$  MHz;  $\sigma = 1.384$  S/m;  $\epsilon_r = 39.264$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Communication System: CW Frequency: 1750 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7683 ConvF (8.81, 8.81, 8.81)

**System Validation/Area Scan (81x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Reference Value = 79.369 V/m; Power Drift = 0.04 dB

**SAR(1 g) = 9.20 W/kg; SAR(10 g) = 4.88 W/kg**

Maximum value of SAR (interpolated) = 11.2 W/kg


**System Validation/Zoom Scan (7x7x7)/Cube0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 79.369 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 21.8 W/kg

**SAR(1 g) = 9.37 W/kg; SAR(10 g) = 4.95 W/kg**

Maximum value of SAR (measured) = 11.5 W/kg

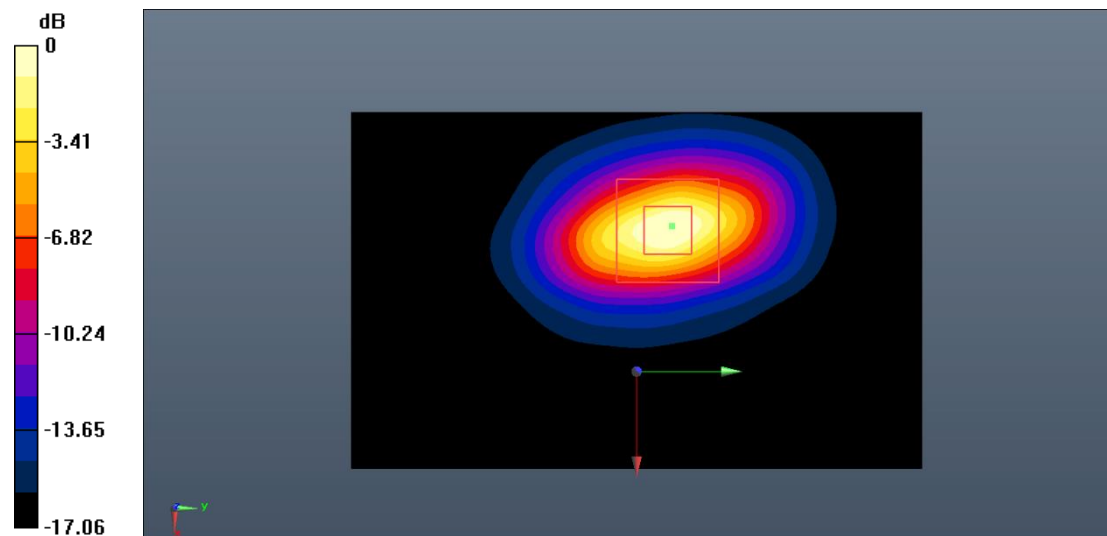

0 dB = 11.5 W/kg = 10.61 dB W/kg

**Fig.B.4. Validation 1750MHz 250mW**

**1750MHz**

Date: 2023-12-29

Electronics: DAE4 Sn1790

Medium: Head 1750MHz

Medium parameters used:  $f = 1750 \text{ MHz}$ ;  $\sigma = 1.366 \text{ S/m}$ ;  $\epsilon_r = 40.578$ ;  $\rho = 1000 \text{ kg/m}^3$

Communication System: CW Frequency: 1750 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7683 ConvF (8.81, 8.81, 8.81)

**System Validation/Area Scan (81x121x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$

Reference Value = 78.816 V/m; Power Drift = -0.07 dB

**SAR(1 g) = 8.95 W/kg; SAR(10 g) = 4.87 W/kg**

Maximum value of SAR (interpolated) = 11.0 W/kg


**System Validation/Zoom Scan (7x7x7)/Cube0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 78.816 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 20.4 W/kg

**SAR(1 g) = 8.80 W/kg; SAR(10 g) = 4.82 W/kg**

Maximum value of SAR (measured) = 10.7 W/kg

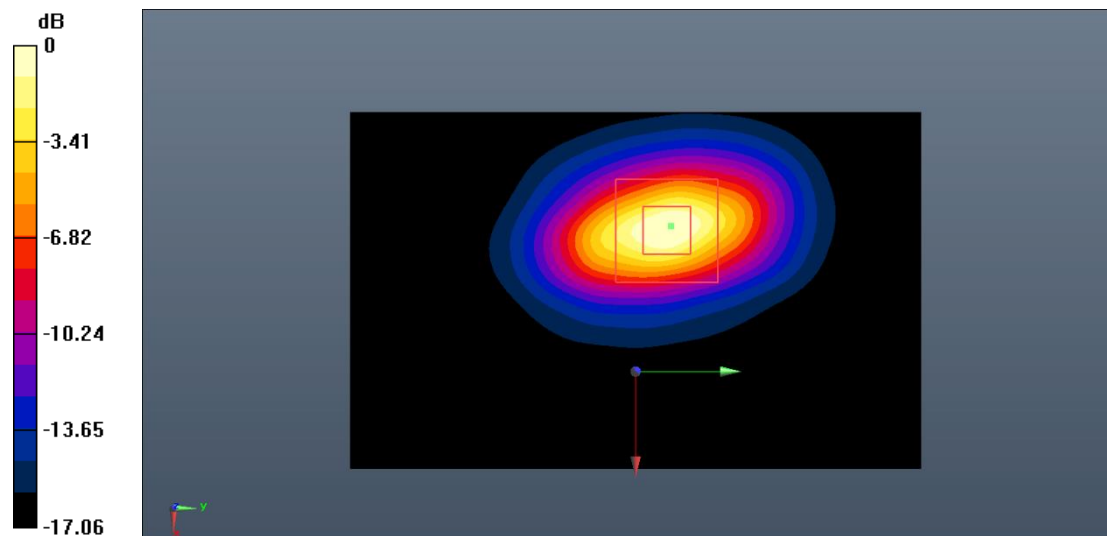

0 dB = 10.7 W/kg = 10.29 dB W/kg

**Fig.B.5. Validation 1750MHz 250mW**

**1900MHz**

Date: 2023-12-17

Electronics: DAE4 Sn1790

Medium: Head 1900MHz

Medium parameters used:  $f = 1900 \text{ MHz}$ ;  $\sigma = 1.417 \text{ S/m}$ ;  $\epsilon_r = 39.451$ ;  $\rho = 1000 \text{ kg/m}^3$

Communication System: CW Frequency: 1900 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7683 ConvF (8.55, 8.55, 8.55)

**System Validation/Area Scan (91x91x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$

Reference Value = 84.123 V/m; Power Drift = 0.05 dB

**SAR(1 g) = 10.0 W/kg; SAR(10 g) = 5.13 W/kg**

Maximum value of SAR (interpolated) = 12.1 W/kg


**System Validation/Zoom Scan (7x7x7)/Cube0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 84.123 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 26.5 W/kg

**SAR(1 g) = 10.3 W/kg; SAR(10 g) = 5.21 W/kg**

Maximum value of SAR (measured) = 12.3 W/kg

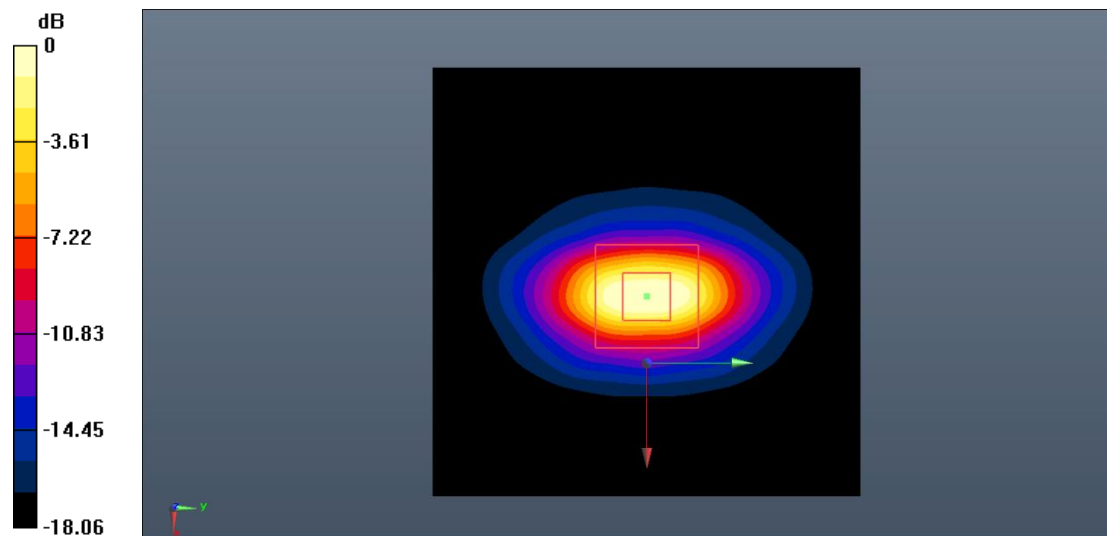

0 dB = 12.3 W/kg = 10.90 dB W/kg

**Fig.B.6. Validation 1900MHz 250mW**



**1900MHz**

Date: 2023-12-30

Electronics: DAE4 Sn1790

Medium: Head 1900MHz

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.391$  S/m;  $\epsilon_r = 40.473$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Communication System: CW Frequency: 1900 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7683 ConvF (8.55, 8.55, 8.55)

**System Validation/Area Scan (91x91x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Reference Value = 82.955 V/m; Power Drift = -0.10 dB

**SAR(1 g) = 9.96 W/kg; SAR(10 g) = 5.10 W/kg**

Maximum value of SAR (interpolated) = 11.9 W/kg


**System Validation/Zoom Scan (7x7x7)/Cube0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 82.955 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 24.7 W/kg

**SAR(1 g) = 9.85 W/kg; SAR(10 g) = 5.05 W/kg**

Maximum value of SAR (measured) = 11.7 W/kg

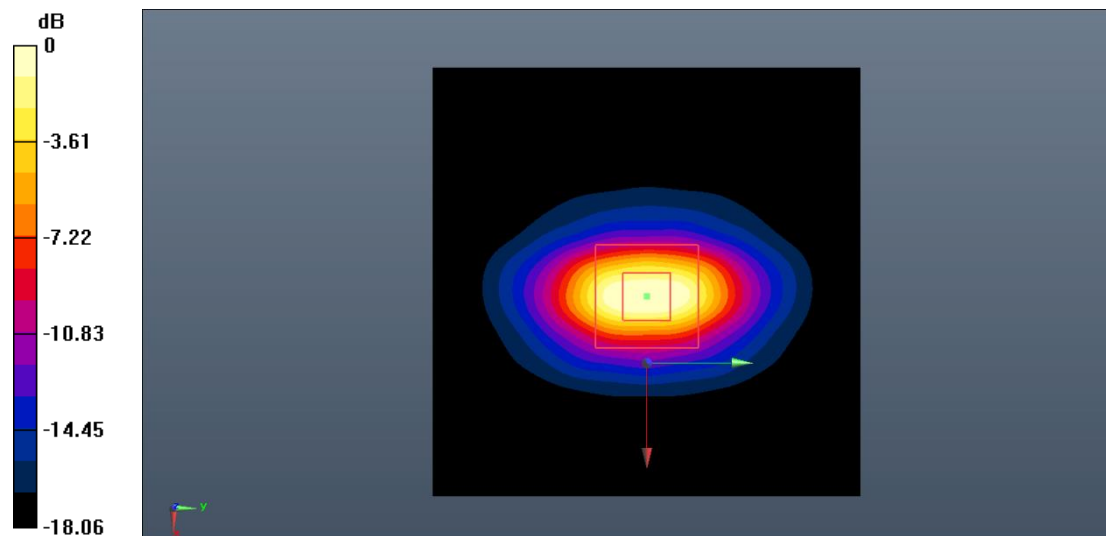

0 dB = 11.7 W/kg = 10.68 dB W/kg

**Fig.B.7. Validation 1900MHz 250mW**

**2450MHz**

Date: 2023-12-25

Electronics: DAE4 Sn1790

Medium: Head 2450MHz

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.845$  S/m;  $\epsilon_r = 38.109$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Communication System: CW Frequency: 2450 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7683 ConvF (8.02, 8.02, 8.02)

**System Validation/Area Scan (81x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Reference Value = 92.384 V/m; Power Drift = 0.10 dB

**SAR(1 g) = 13.5 W/kg; SAR(10 g) = 6.05 W/kg**

Maximum value of SAR (interpolated) = 15.6 W/kg


**System Validation/Zoom Scan (7x7x7)/Cube0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 92.384 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 31.5 W/kg

**SAR(1 g) = 13.7 W/kg; SAR(10 g) = 6.13 W/kg**

Maximum value of SAR (measured) = 15.8 W/kg

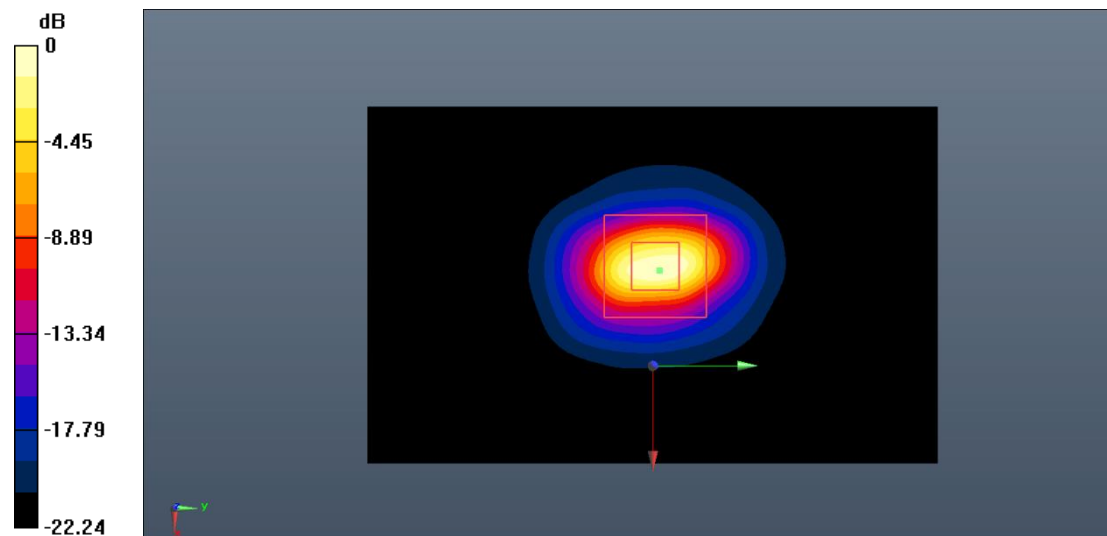

0 dB = 15.8 W/kg = 11.99 dB W/kg

**Fig.B.8. Validation 2450MHz 250mW**

**2550MHz**

Date: 2024-01-03

Electronics: DAE4 Sn1790

Medium: Head 2550MHz

Medium parameters used:  $f = 2550 \text{ MHz}$ ;  $\sigma = 1.939 \text{ S/m}$ ;  $\epsilon_r = 38.553$ ;  $\rho = 1000 \text{ kg/m}^3$

Communication System: CW Frequency: 2550 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7683 ConvF (8.02, 8.02, 8.02)

**System Validation/Area Scan (91x91x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$

Reference Value = 93.381 V/m; Power Drift = 0.03 dB

**SAR(1 g) = 14.2 W/kg; SAR(10 g) = 6.38 W/kg**

Maximum value of SAR (interpolated) = 16.2 W/kg


**System Validation/Zoom Scan (7x7x7)/Cube0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 93.381 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 33.4 W/kg

**SAR(1 g) = 14.4 W/kg; SAR(10 g) = 6.46 W/kg**

Maximum value of SAR (measured) = 16.5 W/kg

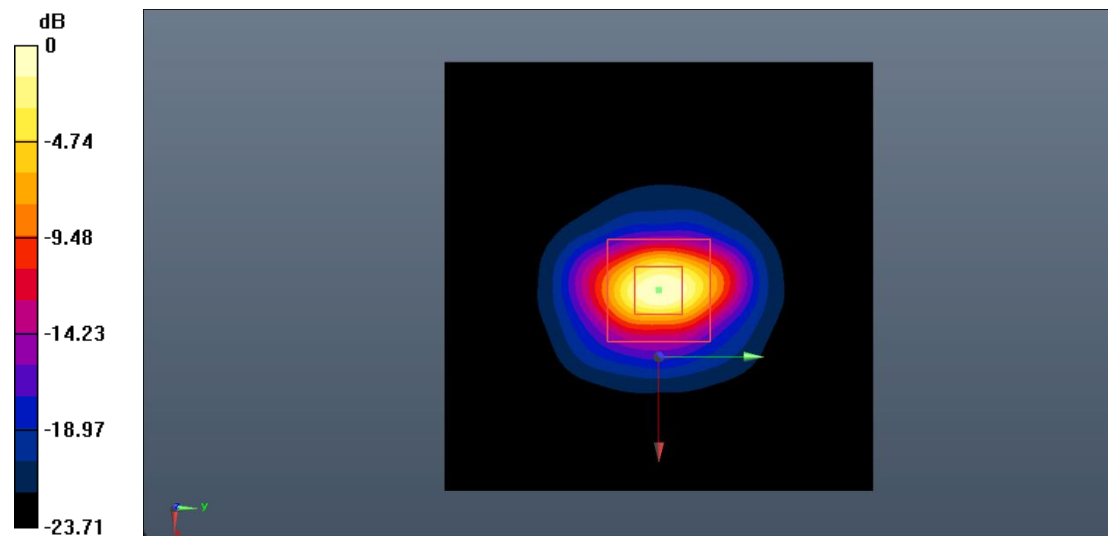

0 dB = 16.5 W/kg = 12.17 dB W/kg

**Fig.B.9. Validation 2550MHz 250mW**

**5250MHz**

Date: 2024-02-02

Electronics: DAE4 Sn1790

Medium: Head 5250MHz

Medium parameters used:  $f = 5250$  MHz;  $\sigma = 4.616$  S/m;  $\epsilon_r = 36.402$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Communication System: CW Frequency: 5250 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7683 ConvF (5.72, 5.72, 5.72)

**System Validation/Area Scan (61x91x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Reference Value = 64.845 V/m; Power Drift = -0.11 dB

**SAR(1 g) = 7.87 W/kg; SAR(10 g) = 2.29 W/kg**

Maximum value of SAR (interpolated) = 18.0 W/kg


**System Validation/Zoom Scan (8x8x21)/Cube0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 64.845 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 30.8 W/kg

**SAR(1 g) = 7.70 W/kg; SAR(10 g) = 2.25 W/kg**

Maximum value of SAR (measured) = 17.7 W/kg

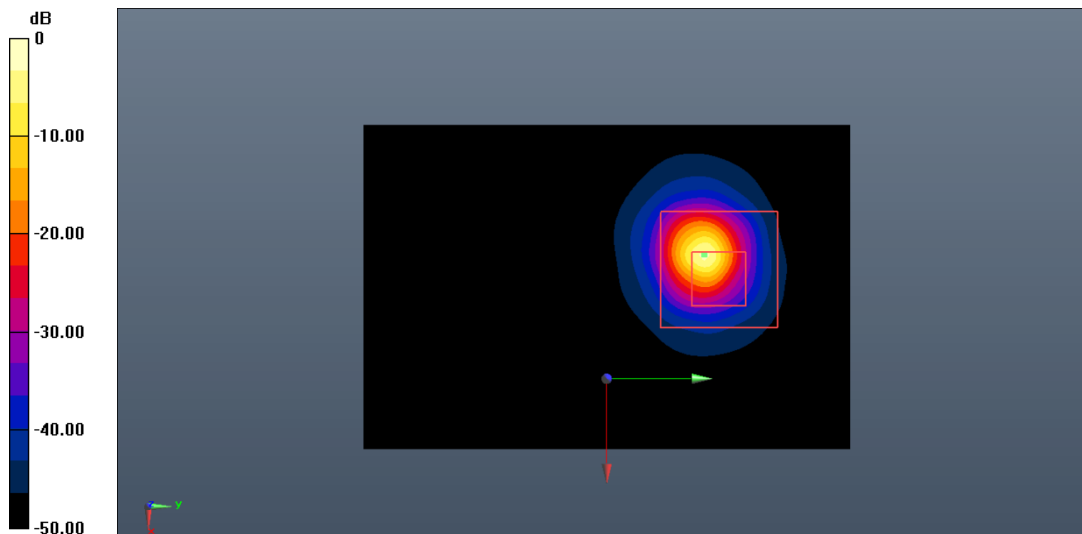

0 dB = 17.7 W/kg = 10.48 dB W/kg

**Fig.B.10. Validation 5250MHz 100mW**

**5600MHz**

Date: 2024-02-02

Electronics: DAE4 Sn1790

Medium: Head 5600MHz

Medium parameters used:  $f = 5600$  MHz;  $\sigma = 5.008$  S/m;  $\epsilon_r = 36.136$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Communication System: CW Frequency: 5600 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7683 ConvF (5.13, 5.13, 5.13)

**System Validation/Area Scan (61x91x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Reference Value = 68.713 V/m; Power Drift = -0.02 dB

**SAR(1 g) = 8.24 W/kg; SAR(10 g) = 2.38 W/kg**

Maximum value of SAR (interpolated) = 20.9 W/kg


**System Validation/Zoom Scan (8x8x21)/Cube0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 68.713 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 37.2 W/kg

**SAR(1 g) = 8.06 W/kg; SAR(10 g) = 2.32 W/kg**

Maximum value of SAR (measured) = 20.6 W/kg

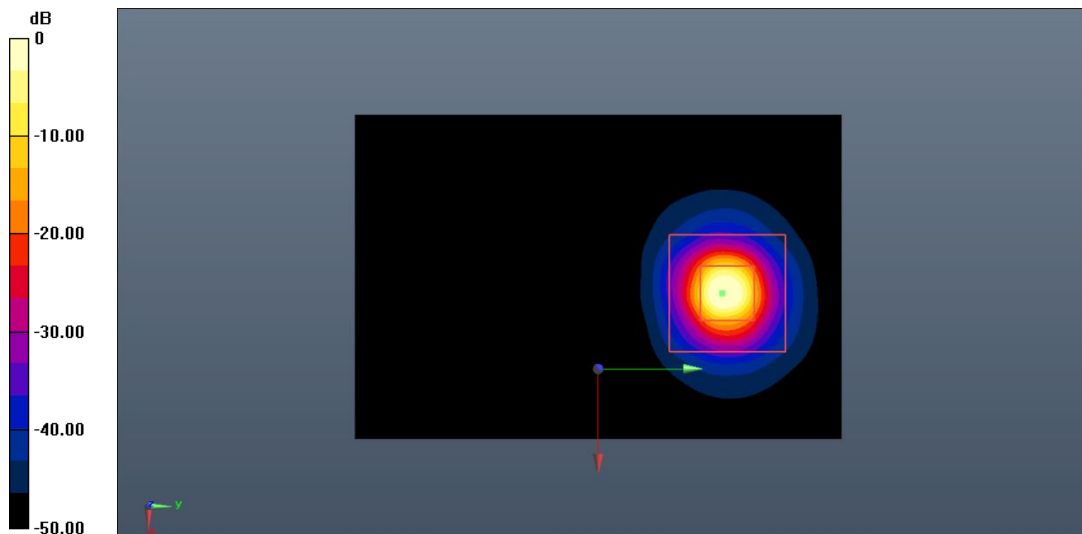

0 dB = 20.6 W/kg = 13.14 dB W/kg

**Fig.B.11. Validation 5600MHz 100mW**

**5750MHz**

Date: 2024-02-02

Electronics: DAE4 Sn1790

Medium: Head 5750MHz

Medium parameters used:  $f = 5750$  MHz;  $\sigma = 5.323$  S/m;  $\epsilon_r = 34.525$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Communication System: CW Frequency: 5750 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7683 ConvF (5.23, 5.23, 5.23)

**System Validation/Area Scan (61x91x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Reference Value = 69.588 V/m; Power Drift = 0.12 dB

**SAR(1 g) = 8.00 W/kg; SAR(10 g) = 2.22 W/kg**

Maximum value of SAR (interpolated) = 19.8 W/kg


**System Validation/Zoom Scan (8x8x21)/Cube0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 69.588 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 35.6 W/kg

**SAR(1 g) = 8.14 W/kg; SAR(10 g) = 2.26 W/kg**

Maximum value of SAR (measured) = 20.2 W/kg

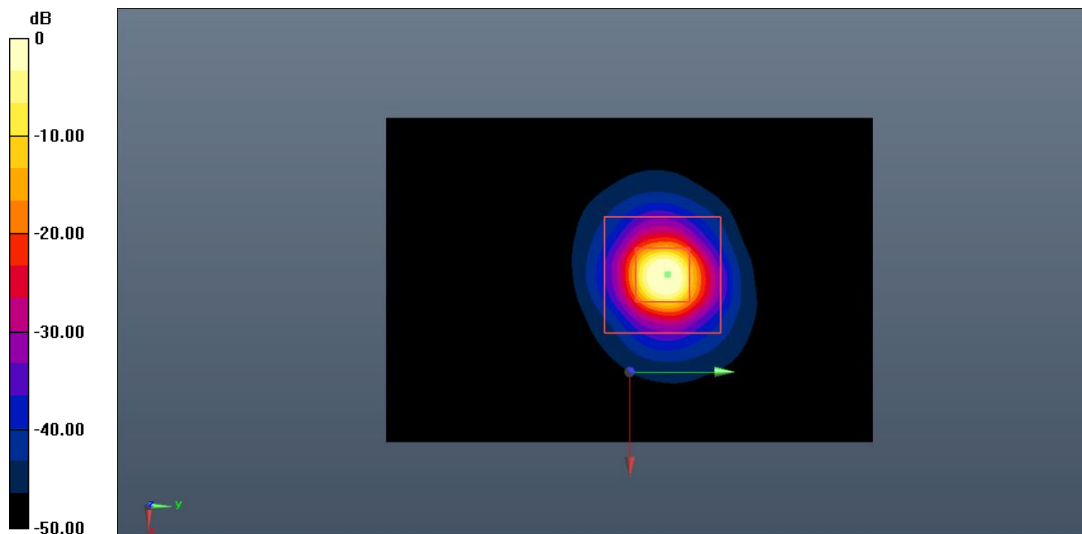


0 dB = 20.2 W/kg = 13.05 dB W/kg

**Fig.B.12. Validation 5750MHz 100mW**

## ANNEX C: SAR Measurement Setup

### C.1. Measurement Set-up

The DASY5 or DASY8 system for performing compliance tests is illustrated above graphically. This system consists of the following items:

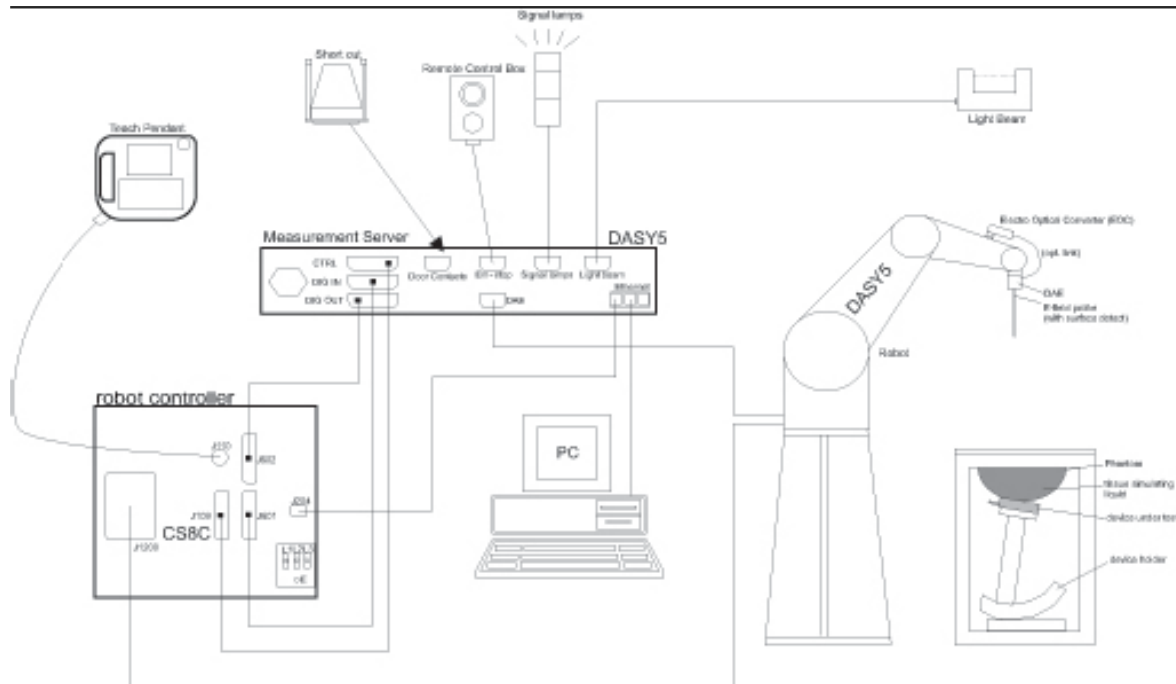

**Picture C.1: SAR Lab Test Measurement Set-up**

- A standard high precision 6-axis robot (Stäubli TX=RX family) with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP and the DASY5 OR DASY8 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as
- warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.


## C.2. DASY E-field Probe System

The SAR measurements were conducted with the dosimetric probe designed in the classical triangular configuration and optimized for dosimetric evaluation. The probe is constructed using the thick film technique; with printed resistive lines on ceramic substrates. The probe is equipped with an optical multifiber line ending at the front of the probe tip. It is connected to the EOC box on the robot arm and provides an automatic detection of the phantom surface. Half of the fibers are connected to a pulsed infrared transmitter, the other half to a synchronized receiver. As the probe approaches the surface, the reflection from the surface produces a coupling from the transmitting to the receiving fibers. This reflection increases first during the approach, reaches maximum and then decreases. If the probe is flatly touching the surface, the coupling is zero. The distance of the coupling maximum to the surface is independent of the surface reflectivity and largely independent of the surface to probe angle. The DASY5 OR DASY8 software reads the reflection during a software approach and looks for the maximum using 2<sup>nd</sup> order curve fitting. The approach is stopped at reaching the maximum.

Probe Specifications:	
Model:	EX3DV4
Frequency Range:	10 MHz - 6.0 GHz
Calibration:	In head simulating tissue at Frequencies from 750 up to 5750 MHz
Linearity:	± 0.2 dB (30 MHz to 6 GHz)
Dynamic Range:	10 mW/kg - 100 W/kg
Probe Length:	337 mm
Probe Tip Length:	20 mm
Body Diameter:	12 mm
Tip Diameter:	2.5 mm
Tip-Center:	1 mm
Application:	SAR Dosimetry Testing / Compliance tests of mobile phones / Dosimetry in strong gradient fields



Picture C.2: Near-field Probe

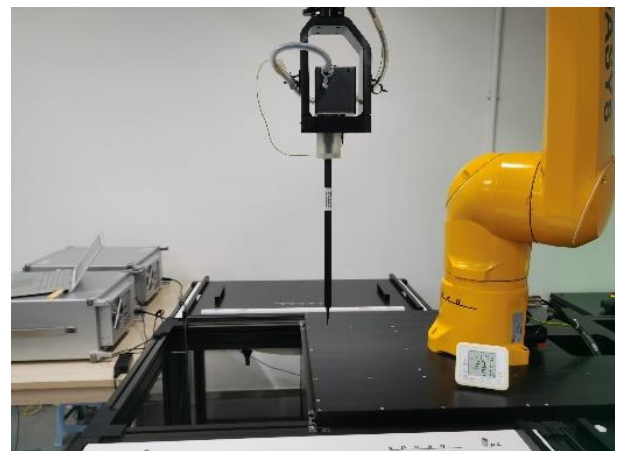

Picture C.3: E-field Probe



### C.3. E-field Probe Calibration

Each E-Probe/Probe Amplifier combination has unique calibration parameters. A TEM cell calibration procedure is conducted to determine the proper amplifier settings to enter in the probe parameters. The amplifier settings are determined for a given frequency by subjecting the probe to a known E-field density (1 mW/cm<sup>2</sup>) using an RF Signal generator, TEM cell, and RF Power Meter.

The free space E-field from amplified probe outputs is determined in a test chamber. This calibration can be performed in a TEM cell if the frequency is below 1 GHz and in a waveguide or other methodologies above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is then rotated 360 degrees until the three channels show the maximum reading. The power density readings equate to 1 mW/cm<sup>2</sup>.

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The E-field in the medium correlates with the temperature rise in the dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

$$SAR = C \frac{\Delta T}{\Delta t}$$

Where:

$\Delta t$  = Exposure time (30 seconds),

C = Heat capacity of tissue (brain or muscle),

$\Delta T$  = Temperature increase due to RF exposure.

$$SAR = \frac{|E|^2 \cdot \sigma}{\rho}$$

Where:

$\sigma$  = Simulated tissue conductivity,

$\rho$  = Tissue density (kg/m<sup>3</sup>).

## C.4. Other Test Equipment

### C.4.1. Data Acquisition Electronics (DAE)

The data acquisition electronics consist of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder with a control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information, as well as an optical uplink for commands and the clock.

The mechanical probe mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection.

The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Picture C.4: DAE


### C.4.2. Robot

The SPEAG DASY system uses the high precision robots (DASY5: RX90L) type from Stäubli SA (France). For the 6-axis controller system, the robot controller version from Stäubli is used. The Stäubli robot series have many features that are important for our application:

- High precision (repeatability 0.02mm)
- High reliability (industrial design)
- Low maintenance costs (virtually maintenance free due to direct drive gears; no belt drives)
- Jerk-free straight movements (brushless synchron motors; no stepper motors)
- Low ELF interference (motor control fields shielded via the closed metallic construction shields)



Picture C.5: DASY 5

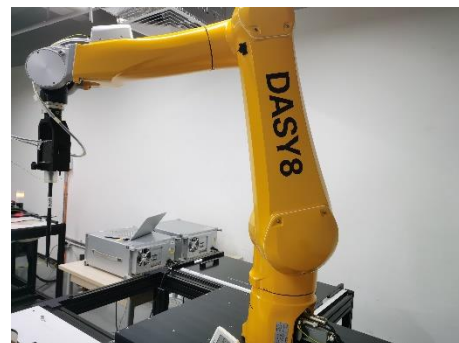

Picture C.6: DASY 8

#### C.4.3. Measurement Server

The Measurement server is based on a PC/104 CPU board with CPU (DASY5: 400 MHz, Intel Celeron), chipdisk (DASY5:128MB), RAM (DASY5:128MB). The necessary circuits for communication with the DAE electronic box, as well as the 16 bit AD converter system for optical detection and digital I/O interface are contained on the DASY I/O board, which is directly connected to the PC/104 bus of the CPU board.

The measurement server performs all real-time data evaluation of field measurements and surface detection, controls robot movements and handles safety operation. The PC operating system cannot interfere with these time critical processes. All connections are supervised by a watchdog, and disconnection of any of the cables to the measurement server will automatically disarm the robot and disable all program-controlled robot movements. Furthermore, the measurement server is equipped with an expansion port which is reserved for future applications. Please note that this expansion port does not have a standardized pinout, and therefore only devices provided by SPEAG can be connected. Devices from any other supplier could seriously damage the measurement server.



Picture C.7: Server for DASY 5



Picture C.8: Server for DASY 8

#### C.4.4. Device Holder for Phantom


The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5mm distance, a positioning uncertainty of  $\pm 0.5\text{mm}$  would produce a SAR uncertainty of  $\pm 20\%$ . Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions in which the devices must be measured are defined by the standards.

The DASY device holder is designed to cope with the different positions given in the standard. It has two scales for device rotation (with respect to the body axis) and device inclination (with respect to the line between the ear reference points). The rotation centers for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.

The DASY device holder is constructed of low-loss POM material having the following dielectric parameters: relative permittivity  $\epsilon = 3$  and loss tangent  $\delta = 0.02$ . The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.

<Laptop Extension Kit>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the Mounting Device in place of the phone positioner. The extension is fully compatible with the Twin-SAM and ELI phantoms.

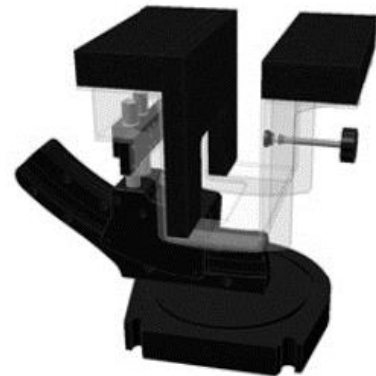**Picture C.9: Device Holder****Picture C.10: Laptop Extension Kit**

The SAM Twin Phantom V4.0 is constructed of a fiberglass shell integrated in a table. The shape of the shell is based on data from an anatomical study designed to represent the 90<sup>th</sup> percentile of the population. The phantom enables the dissymmetric evaluation of SAR for both left and right handed handset usage, as well as body-worn usage using the flat phantom region. Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot. The shell phantom has a 2mm shell thickness (except the ear region where shell thickness increases to 6 mm).


Shell Thickness:  $2 \pm 0.2$  mm  
Filling Volume: Approx. 25 liters  
Dimensions: 810 x 1000 x 500 mm (H x L x W)  
Available: Special

**Picture C.11: SAM Twin Phantom**

## ANNEX D: Position of the wireless device in relation to the phantom


### D.1. General considerations

This standard specifies two handset test positions against the head phantom – the “cheek” position and the “tilt” position.

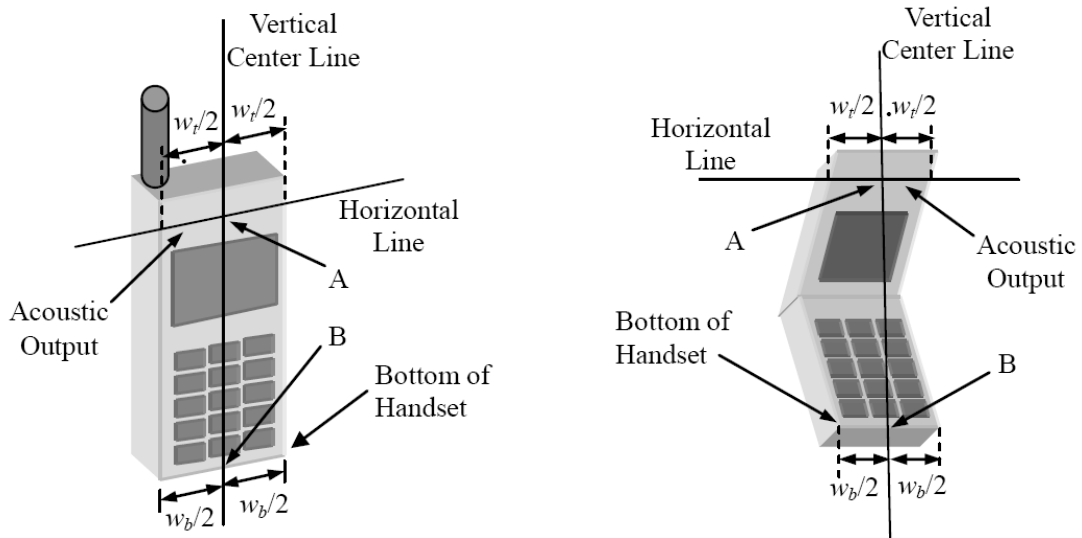


- $w_t$  Width of the handset at the level of the acoustic
- $w_b$  Width of the bottom of the handset
- A Midpoint of the width  $w_t$  of the handset at the level of the acoustic output
- B Midpoint of the width  $w_b$  of the bottom of the handset

Picture D.1-a Typical “fixed” case handset    Picture D.1-b Typical “clam-shell” case handset

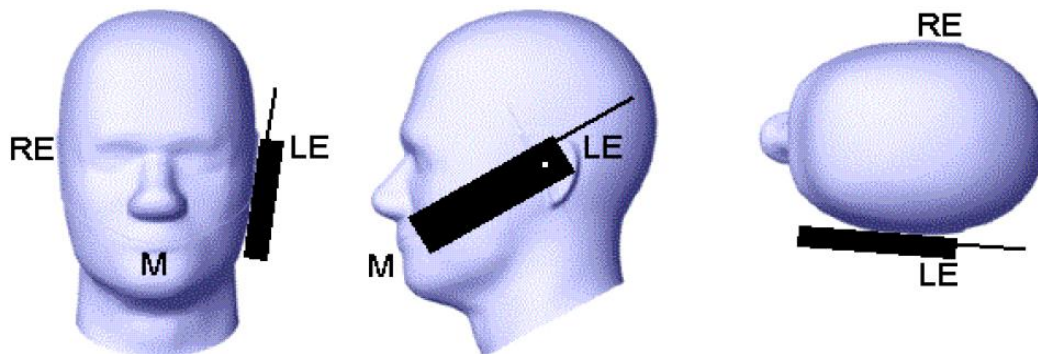


Picture D.2 Cheek position of the wireless device on the left side of SAM

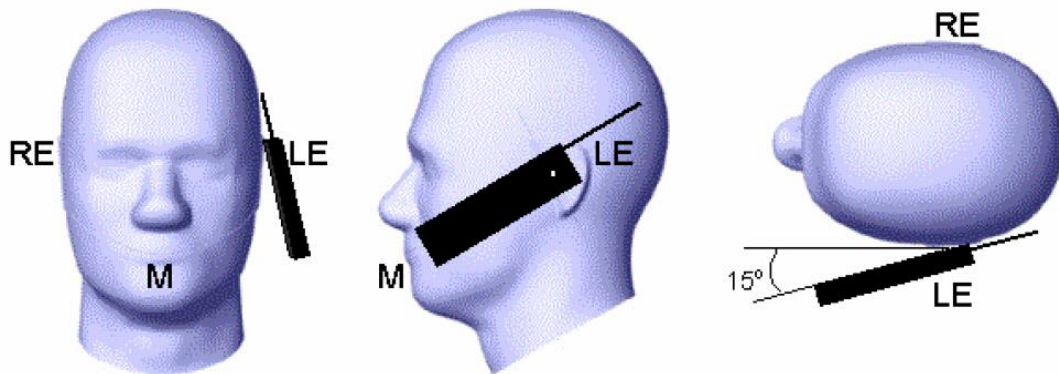

Picture D.3 Tilt position of the wireless device on the left side of SAM

## D.2. Body-worn device

A typical example of a body-worn device is a mobile phone, wireless enabled PDA or other battery operated wireless device with the ability to transmit while mounted on a person's body using a carry accessory approved by the wireless device manufacturer.

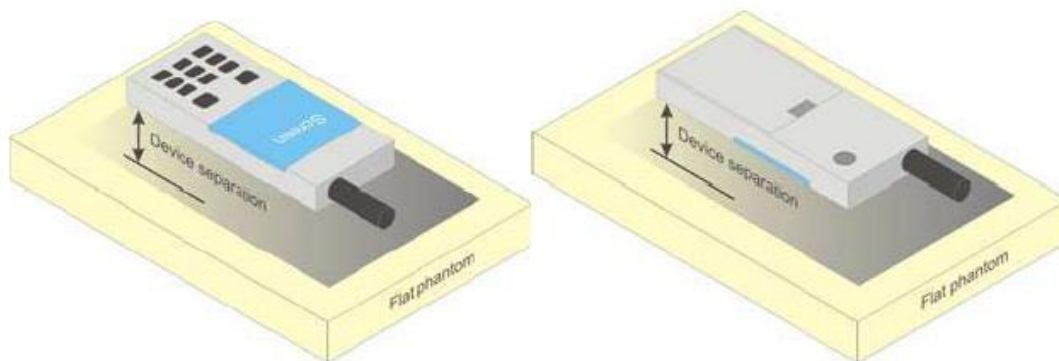


Picture D.4 Test positions for body-worn devices

## D.3. Desktop device


A typical example of a desktop device is a wireless enabled desktop computer placed on a table or desk when used.

The DUT shall be positioned at the distance and in the orientation to the phantom that corresponds to the intended use as specified by the manufacturer in the user instructions. For devices that employ an external antenna with variable positions, tests shall be performed for all antenna positions specified. Picture 8.5 show positions for desktop device SAR tests. If the intended use is not specified, the device shall be tested directly against the flat phantom.

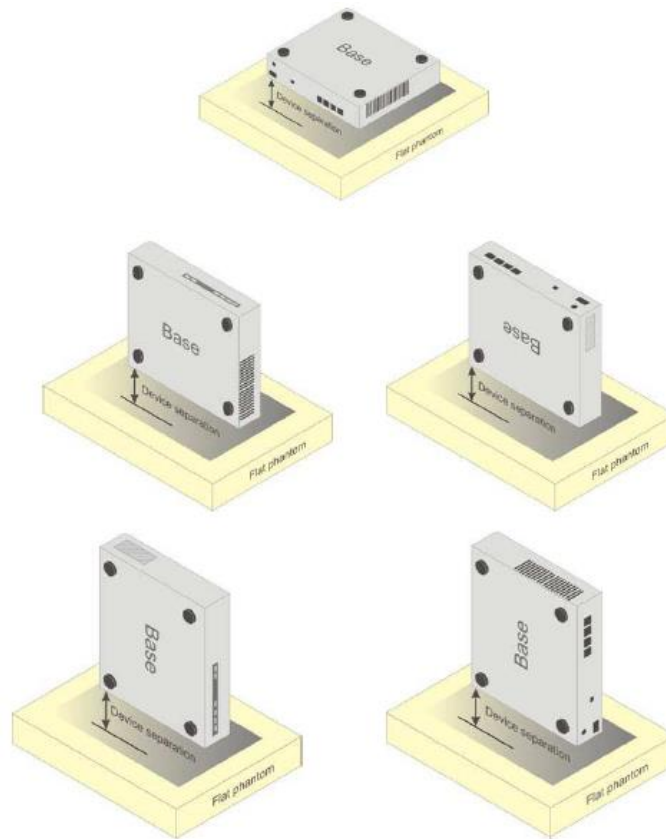

Picture D.5 Test positions for desktop devices

#### D.4. DUT Setup Photos

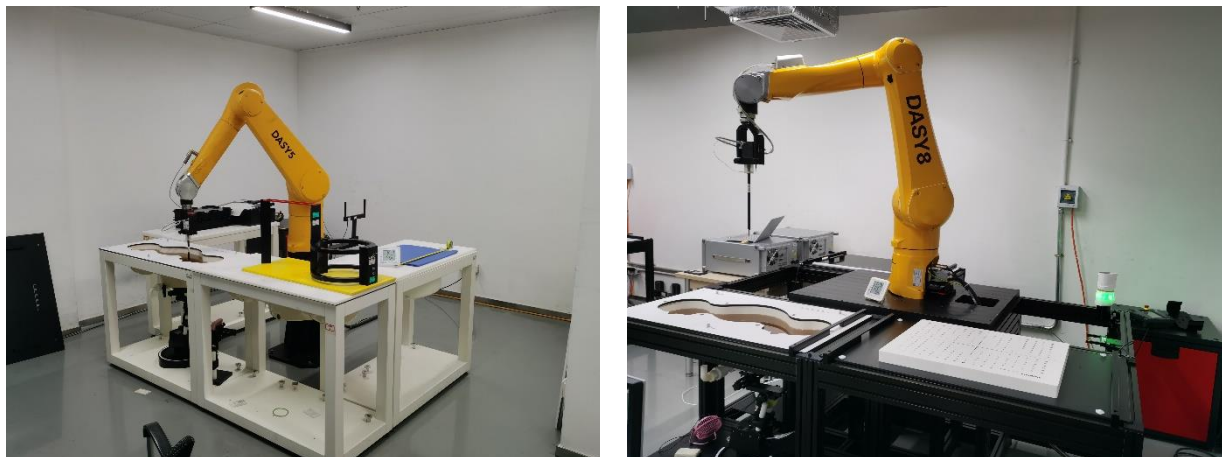

Picture D.6 Specific Absorption Rate Test Layout

## ANNEX E: Equivalent Media Recipes

The liquid used for the frequency range of 700-6000 MHz consisted of water, sugar, salt, preventol, glycol monobutyl and Cellulose. The liquid has been previously proven to be suited for worst-case. The Table E.1 shows the detail solution. It's satisfying the latest tissue dielectric parameters requirements proposed by the IEEE 1528 and IEC 62209.

**Table E.1: Composition of the Tissue Equivalent Matter**

Frequency (MHz)	835	1750	1900	2450	2600	5200	5800
Water	41.45	55.242	55.242	58.79	58.79	65.53	66.10
Sugar	56.0	/	/	/	/	/	/
Salt	1.45	0.306	0.306	0.06	0.06		
Preventol	0.1	/	/	/	/	17.24	16.95
Cellulose	1.0	/	/	/	/	17.24	16.95
Glycol Monobutyl	/	44.452	44.452	41.15	41.15	/	/
Diethylenglycol monohexylether	/	/	/	/	/	/	/
Triton X-100	/	/	/	/	/	/	/
Dielectric Parameters Target Value	$\epsilon=41.5$ $\sigma=0.90$	$\epsilon=40.08$ $\sigma=1.37$	$\epsilon=40.0$ $\sigma=1.40$	$\epsilon=39.20$ $\sigma=1.80$	$\epsilon=39.01$ $\sigma=1.96$	$\epsilon=35.99$ $\sigma=4.66$	$\epsilon=35.30$ $\sigma=5.27$

**Note: There is a little adjustment respectively for 750, 5300 and 5600, based on the recipe of closest frequency in table E.1**



## ANNEX F: System Validation

The SAR system must be validated against its performance specifications before it is deployed. When SAR probes, system components or software are changed, upgraded or recalibrated, these must be validated with the SAR system(s) that operates with such components.

**Table F.1: System Validation**

Probe SN.	Liquid name (MHz)	Validation date	Frequency point	CW Validation	Modulation Signal Validation		
					Modulation Type	Duty Factor	PAR
7683	Head 750	2023-02-20	750MHz	Pass	N/A	N/A	N/A
7683	Head 835	2023-02-20	835MHz	Pass	GMSK	Pass	N/A
7683	Head 1750	2023-02-20	1750MHz	Pass	N/A	N/A	N/A
7683	Head 1900	2023-02-20	1900MHz	Pass	GMSK	Pass	N/A
7683	Head 2450	2023-02-22	2450MHz	Pass	OFDM/TDD	Pass	Pass
7683	Head 2550	2023-02-20	2550MHz	Pass	TDD	Pass	N/A
7683	Head 3500	2023-02-21	3500MHz	Pass	TDD	Pass	N/A
7683	Head 3700	2023-02-21	3700MHz	Pass	TDD	Pass	N/A
7683	Head 3900	2023-02-21	3900MHz	Pass	TDD	Pass	N/A
7683	Head 5250	2023-02-22	5250MHz	Pass	OFDM	N/A	Pass
7683	Head 5600	2023-02-22	5600MHz	Pass	OFDM	N/A	Pass
7683	Head 5750	2023-02-22	5750MHz	Pass	OFDM	N/A	Pass

## ANNEX G: DAE Calibration Certificate

Calibration Laboratory of  
Schmid & Partner  
Engineering AG  
Zeughausstrasse 43, 8004 Zurich, Switzerland





S Schweizerischer Kalibrierdienst  
C Service suisse d'étalonnage  
S Servizio svizzero di taratura  
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

Client SAICT-SZ

Certificate No: DAE4-1790\_Mar23

CALIBRATION CERTIFICATE			
Object	DAE4 - SD 000 D04 BP - SN: 1790		
Calibration procedure(s)	QA CAL-06.v30 Calibration procedure for the data acquisition electronics (DAE)		
Calibration date:	March 02, 2023		
<p>This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.</p> <p>All calibrations have been conducted in the closed laboratory facility: environment temperature <math>(22 \pm 3)^\circ\text{C}</math> and humidity <math>&lt; 70\%</math>.</p> <p>Calibration Equipment used (M&amp;TE critical for calibration)</p>			
Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Keithley Multimeter Type 2001	SN: 0810278	29-Aug-22 (No:34389)	Aug-23
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Auto DAE Calibration Unit	SE UWS 053 AA 1001	27-Jan-23 (in house check)	In house check: Jan-24
Calibrator Box V2.1	SE UMS 006 AA 1002	27-Jan-23 (in house check)	In house check: Jan-24
Calibrated by:	Name Eric Hainfeld	Function Laboratory Technician	Signature 
Approved by:	Sven Kühn	Technical Manager	
			Issued: March 2, 2023
This calibration certificate shall not be reproduced except in full without written approval of the laboratory.			

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

### Glossary

DAE data acquisition electronics  
Connector angle information used in DASY system to align probe sensor X to the robot coordinate system.

### Methods Applied and Interpretation of Parameters

- *DC Voltage Measurement:* Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
- *Connector angle:* The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The following parameters as documented in the Appendix contain technical information as a result from the performance test and require no uncertainty.
  - *DC Voltage Measurement Linearity:* Verification of the Linearity at +10% and -10% of the nominal calibration voltage. Influence of offset voltage is included in this measurement.
  - *Common mode sensitivity:* Influence of a positive or negative common mode voltage on the differential measurement.
  - *Channel separation:* Influence of a voltage on the neighbor channels not subject to an input voltage.
  - *AD Converter Values with inputs shorted:* Values on the internal AD converter corresponding to zero input voltage
  - *Input Offset Measurement:* Output voltage and statistical results over a large number of zero voltage measurements.
  - *Input Offset Current:* Typical value for information; Maximum channel input offset current, not considering the input resistance.
  - *Input resistance:* Typical value for information; DAE input resistance at the connector, during internal auto-zeroing and during measurement.
  - *Low Battery Alarm Voltage:* Typical value for information. Below this voltage, a battery alarm signal is generated.
  - *Power consumption:* Typical value for information. Supply currents in various operating modes.

**DC Voltage Measurement**

A/D - Converter Resolution nominal

High Range: 1LSB = 6.1μV ; full range = -100...+300 mV

Low Range: 1LSB = 61nV ; full range = -1.....+3mV

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Calibration Factors	X	Y	Z
High Range	404.604 ± 0.02% (k=2)	404.331 ± 0.02% (k=2)	404.468 ± 0.02% (k=2)
Low Range	4.00255 ± 1.50% (k=2)	3.99549 ± 1.50% (k=2)	3.98581 ± 1.50% (k=2)

**Connector Angle**

Connector Angle to be used in DASY system	306.0 ° ± 1 °
---	---------------

**Appendix (Additional assessments outside the scope of SCS0108)**
**1. DC Voltage Linearity**

High Range	Reading ( $\mu\text{V}$ )	Difference ( $\mu\text{V}$ )	Error (%)
Channel X + Input	200033.74	-1.44	-0.00
Channel X + Input	20005.39	-0.74	-0.00
Channel X - Input	-20004.02	1.76	-0.01
Channel Y + Input	200038.50	3.58	0.00
Channel Y + Input	20002.97	-3.15	-0.02
Channel Y - Input	-20007.14	-1.18	0.01
Channel Z + Input	200034.20	-0.88	-0.00
Channel Z + Input	20004.41	-1.63	-0.01
Channel Z - Input	-20005.73	0.32	-0.00

Low Range	Reading ( $\mu\text{V}$ )	Difference ( $\mu\text{V}$ )	Error (%)
Channel X + Input	2001.40	-0.14	-0.01
Channel X + Input	200.82	-0.59	-0.29
Channel X - Input	-198.28	0.23	-0.12
Channel Y + Input	2001.39	-0.05	-0.00
Channel Y + Input	200.26	-1.03	-0.51
Channel Y - Input	-199.92	-1.28	0.65
Channel Z + Input	2001.20	-0.22	-0.01
Channel Z + Input	200.40	-0.89	-0.44
Channel Z - Input	-199.63	-1.02	0.51

**2. Common mode sensitivity**

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Common mode Input Voltage (mV)	High Range Average Reading ( $\mu\text{V}$ )	Low Range Average Reading ( $\mu\text{V}$ )
Channel X	200	-18.43	-19.65
	-200	19.32	18.11
Channel Y	200	-17.38	-18.13
	-200	16.56	16.01
Channel Z	200	-11.31	-11.64
	-200	10.03	9.99

**3. Channel separation**

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Input Voltage (mV)	Channel X ( $\mu\text{V}$ )	Channel Y ( $\mu\text{V}$ )	Channel Z ( $\mu\text{V}$ )
Channel X	200	-	0.84	-2.57
Channel Y	200	4.84	-	3.21
Channel Z	200	7.42	2.89	-

**4. AD-Converter Values with inputs shorted**

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	High Range (LSB)	Low Range (LSB)
Channel X	16203	15690
Channel Y	16275	16445
Channel Z	15950	16110

**5. Input Offset Measurement**

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Input 10MΩ

	Average (μV)	min. Offset (μV)	max. Offset (μV)	Std. Deviation (μV)
Channel X	0.10	-1.05	1.63	0.45
Channel Y	-0.42	-2.31	0.79	0.40
Channel Z	-0.67	-1.34	0.29	0.34

**6. Input Offset Current**

Nominal Input circuitry offset current on all channels: <25fA

**7. Input Resistance** (Typical values for information)

	Zeroing (kOhm)	Measuring (MOhm)
Channel X	200	200
Channel Y	200	200
Channel Z	200	200

**8. Low Battery Alarm Voltage** (Typical values for information)

Typical values	Alarm Level (VDC)
Supply (+ Vcc)	+7.9
Supply (- Vcc)	-7.6

**9. Power Consumption** (Typical values for information)

Typical values	Switched off (mA)	Stand by (mA)	Transmitting (mA)
Supply (+ Vcc)	+0.01	+6	+14
Supply (- Vcc)	-0.01	-8	-9

### ANNEX H: Probe Calibration Certificate






Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China  
 Tel: +86-10-62304633-2117  
 E-mail: cmf@caict.ac.cn http://www.caict.ac.cn



中国认可  
 国际互认  
 校准  
**CAICT**  
 CALIBRATION  
 CNAS L0570

Client **SAICT**

Certificate No: **Z23-60028**

CALIBRATION CERTIFICATE			
Object	EX3DV4 - SN : 7683		
Calibration Procedure(s)	FF-Z11-004-02 Calibration Procedures for Dosimetric E-field Probes		
Calibration date:	February 16, 2023.		
<p>This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.</p> <p>All calibrations have been conducted in the closed laboratory facility; environment temperature(22±3)°C and humidity&lt;70%.</p> <p>Calibration Equipment used (M&amp;TE critical for calibration)</p>			
Primary Standards	ID #	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration
Power Meter NRP2	101919	14-Jun-22(CTTL, No.J22X04181)	Jun-23
Power sensor NRP-Z91	101547	14-Jun-22(CTTL, No.J22X04181)	Jun-23
Power sensor NRP-Z91	101548	14-Jun-22(CTTL, No.J22X04181)	Jun-23
Reference 10dBAttenuator	18N50W-10dB	19-Jan-23(CTTL, No.J23X00212)	Jan-25
Reference 20dBAttenuator	18N50W-20dB	19-Jan-23(CTTL, No.J23X00211)	Jan-25
Reference Probe EX3DV4	SN 3846	20-May-22(SPEAG, No.EX3-3846_May22)	May-23
DAE4	SN 771	20-Jan-22(SPEAG, No.DAE4-771_Jan22)	Jan-23
DAE4	SN 1555	25-Aug-22(SPEAG, No.DAE4-1555_Aug22)	Aug-23
Secondary Standards	ID #	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration
SignalGenerator MG3700A	6201052605	14-Jun-22(CTTL, No.J22X04182)	Jun-23
Network Analyzer E5071C	MY46110673	10-Jan-23(CTTL, No.J23X00104)	Jan-24
	Name	Function	Signature
Calibrated by:	Yu Zongying	SAR Test Engineer	
Reviewed by:	Lin Hao	SAR Test Engineer	
Approved by:	Qi Dianyuan	SAR Project Leader	
Issued: February 21, 2023			
This calibration certificate shall not be reproduced except in full without written approval of the laboratory.			



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2117  
E-mail: emf@caict.ac.cn <http://www.caict.ac.cn>

**Glossary:**

TSL	tissue simulating liquid
NORM <sub>x,y,z</sub>	sensitivity in free space
ConvF	sensitivity in TSL / NORM <sub>x,y,z</sub>
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A,B,C,D	modulation dependent linearization parameters
Polarization $\Phi$	$\Phi$ rotation around probe axis
Polarization $\theta$	$\theta$ rotation around an axis that is in the plane normal to probe axis (at measurement center), $i$ $\theta=0$ is normal to probe axis

Connector Angle information used in DASY system to align probe sensor X to the robot coordinate system

**Calibration is Performed According to the Following Standards:**

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

**Methods Applied and Interpretation of Parameters:**

- NORM<sub>x,y,z</sub>:** Assessed for E-field polarization  $\theta=0$  ( $f \leq 900$  MHz in TEM-cell;  $f > 1800$  MHz: waveguide). NORM<sub>x,y,z</sub> are only intermediate values, i.e., the uncertainties of NORM<sub>x,y,z</sub> does not effect the  $E^2$ -field uncertainty inside TSL (see below ConvF).
- NORM( $f$ )<sub>x,y,z</sub> = NORM<sub>x,y,z</sub> \* frequency\_response** (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP<sub>x,y,z</sub>:** DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency nor media.
- PAR:** PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics.
- A<sub>x,y,z</sub>; B<sub>x,y,z</sub>; C<sub>x,y,z</sub>; VR<sub>x,y,z</sub>; A,B,C** are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters:** Assessed in flat phantom using E-field (or Temperature Transfer Standard for  $f \leq 800$  MHz) and inside waveguide using analytical field distributions based on power measurements for  $f > 800$  MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty valued are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM<sub>x,y,z</sub> \* ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from  $\pm 50$  MHz to  $\pm 100$  MHz.
- Spherical isotropy (3D deviation from isotropy):** in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset:** The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle:** The angle is assessed using the information gained by determining the NORM<sub>x</sub> (no uncertainty required).



**DASY/EASY – Parameters of Probe: EX3DV4 – SN: 7683**

**Basic Calibration Parameters**

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm( $\mu\text{V}/(\text{V}/\text{m})^2$ ) <sup>A</sup>	0.63	0.63	0.62	±10.0%
DCP(mV) <sup>B</sup>	103.7	104.8	104.6	

**Calibration Results for Modulation Response**

UID	Communication System Name		A dB	B dB· $\mu\text{V}$	C	D dB	VR mV	Max Dev.	Max Unc <sup>E</sup> (k=2)
0	CW	X	0.0	0.0	1.0	0.00	207.3	±2.1%	±4.7%
		Y	0.0	0.0	1.0		206.5		
		Z	0.0	0.0	1.0		208.9		
10352-AAA	Pulse Waveform (200Hz, 10%)	X	1.41	60.00	5.76	10.00	60	±2.1%	±9.6%
		Y	1.40	60.00	5.71		60		
		Z	1.40	60.00	5.74		60		
10353-AAA	Pulse Waveform (200Hz, 20%)	X	6.00	68.00	7.00	6.99	80	±2.7%	±9.6%
		Y	6.00	68.00	7.00		80		
		Z	0.80	60.00	4.57		80		
10354-AAA	Pulse Waveform (200Hz, 40%)	X	0.17	139.32	0.54	3.98	95	±2.3%	±9.6%
		Y	0.18	142.45	0.34		95		
		Z	0.39	152.48	0.68		95		
10355-AAA	Pulse Waveform (200Hz, 60%)	X	8.34	159.94	4.53	2.22	120	±1.3%	±9.6%
		Y	6.71	159.96	17.92		120		
		Z	9.39	159.08	22.96		120		
10387-AAA	QPSK Waveform, 1 MHz	X	0.54	62.14	10.35	1.00	150	±4.5%	±9.6%
		Y	0.69	64.27	11.73		150		
		Z	0.65	64.12	11.72		150		
10388-AAA	QPSK Waveform, 10 MHz	X	1.29	64.42	12.76	0.00	150	±1.5%	±9.6%
		Y	1.44	65.67	13.79		150		
		Z	1.42	65.70	13.74		150		
10396-AAA	64-QAM Waveform, 100 kHz	X	1.75	65.11	16.63	3.01	150	±1.1%	±9.6%
		Y	1.85	66.39	17.86		150		
		Z	1.81	65.99	17.68		150		
10414-AAA	WLAN CCDF, 64-QAM, 40MHz	X	3.99	66.17	15.25	0.00	150	±4.7%	±9.6%
		Y	4.14	66.41	15.55		150		
		Z	4.12	66.53	15.58		150		

Note: For details on UID parameters see Appendix

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution Corresponds to a coverage probability of approximately 95%.

<sup>A</sup> The uncertainties of Norm X, Y, Z do not affect the E<sup>2</sup>-field uncertainty inside TSL (see Page 5).

<sup>B</sup> Numerical linearization parameter; uncertainty not required.

<sup>E</sup> Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

## DASY/EASY – Parameters of Probe: EX3DV4 – SN: 7683

### Sensor Model Parameters

	C1 fF	C2 fF	$\alpha$ V <sup>-1</sup>	T1 ms.V <sup>-2</sup>	T2 ms.V <sup>-1</sup>	T3 ms	T4 V <sup>-2</sup>	T5 V <sup>-1</sup>	T6
X	11.17	81.84	33.99	2.45	0.00	4.90	0.33	0.00	1.01
Y	12.84	94.42	34.34	2.69	0.00	4.90	0.30	0.00	1.02
Z	12.01	88.21	34.28	3.18	0.00	4.90	0.21	0.00	1.02

### Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	156.2
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disable
Probe Overall Length	337mm
Probe Body Diameter	10mm
Tip Length	9mm
Tip Diameter	2.5mm
Probe Tip to Sensor X Calibration Point	1mm
Probe Tip to Sensor Y Calibration Point	1mm
Probe Tip to Sensor Z Calibration Point	1mm
Recommended Measurement Distance from Surface	1.4mm

## DASY/EASY – Parameters of Probe: EX3DV4 – SN:7683

### Calibration Parameter Determined in Head Tissue Simulating Media


f [MHz] <sup>C</sup>	Relative Permittivity <sup>F</sup>	Conductivity (S/m) <sup>F</sup>	ConvF X	ConvF Y	ConvF Z	Alpha <sup>G</sup>	Depth <sup>G</sup> (mm)	Unct. (k=2)
750	41.9	0.89	10.75	10.75	10.75	0.11	1.60	± 12.7%
900	41.5	0.97	10.28	10.28	10.28	0.17	1.26	± 12.7%
1640	40.3	1.29	9.01	9.01	9.01	0.19	1.12	± 12.7%
1750	40.1	1.37	8.81	8.81	8.81	0.18	1.18	± 12.7%
1900	40.0	1.40	8.55	8.55	8.55	0.24	1.02	± 12.7%
2100	39.8	1.49	8.65	8.65	8.65	0.21	1.08	± 12.7%
2300	39.5	1.67	8.30	8.30	8.30	0.66	0.67	± 12.7%
2450	39.2	1.80	8.02	8.02	8.02	0.66	0.68	± 12.7%
2600	39.0	1.96	7.76	7.76	7.76	0.55	0.75	± 12.7%
3300	38.2	2.71	7.49	7.49	7.49	0.30	1.03	± 13.9%
3500	37.9	2.91	7.34	7.34	7.34	0.31	1.04	± 13.9%
3700	37.7	3.12	7.09	7.09	7.09	0.30	1.06	± 13.9%
3900	37.5	3.32	6.95	6.95	6.95	0.30	1.45	± 13.9%
4100	37.2	3.53	6.91	6.91	6.91	0.30	1.40	± 13.9%
4400	36.9	3.84	6.74	6.74	6.74	0.30	1.50	± 13.9%
4600	36.7	4.04	6.66	6.66	6.66	0.40	1.33	± 13.9%
4800	36.4	4.25	6.58	6.58	6.58	0.40	1.38	± 13.9%
4950	36.3	4.40	6.36	6.36	6.36	0.40	1.35	± 13.9%
5250	35.9	4.71	5.72	5.72	5.72	0.45	1.32	± 13.9%
5600	35.5	5.07	5.13	5.13	5.13	0.40	1.60	± 13.9%
5750	35.4	5.22	5.23	5.23	5.23	0.45	1.40	± 13.9%

<sup>C</sup> Frequency validity above 300 MHz of ±100MHz only applies for DASY v4.4 and higher (Page 2), else it is restricted to ±50MHz. The uncertainty is the RSS of ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

<sup>F</sup> At frequency up to 6 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ±10% if liquid compensation formula is applied to measured SAR values. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

<sup>G</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for the frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

### Frequency Response of E-Field (TEM-Cell: ifi110 EXX, Waveguide: R22)



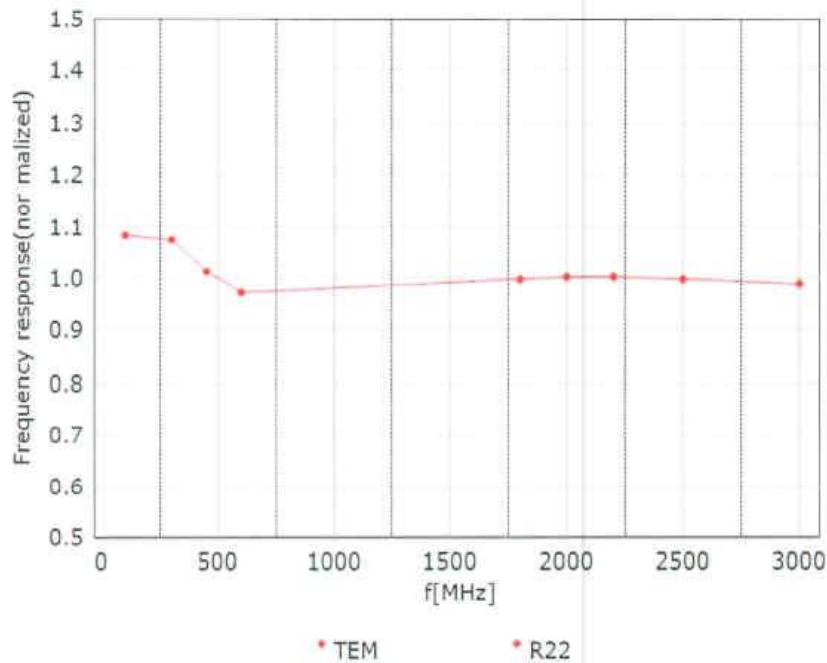


Uncertainty of Frequency Response of E-field:  $\pm 7.4\%$  ( $k=2$ )

### Receiving Pattern ( $\Phi$ ), $\theta=0^\circ$



**f=600 MHz, TEM**

**f=1800 MHz, R22**

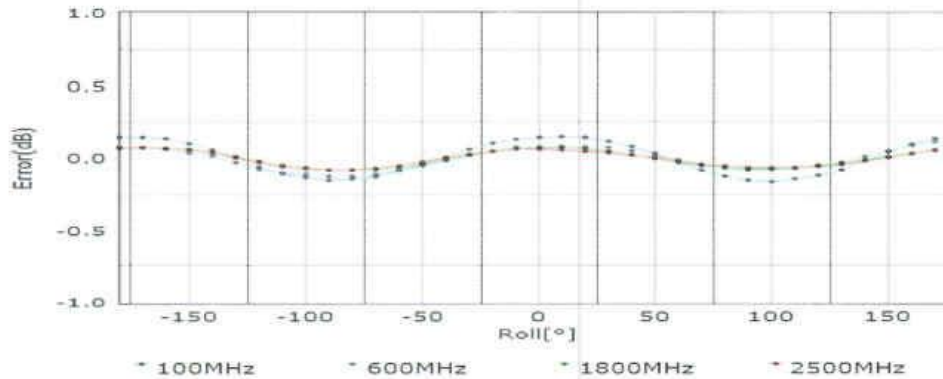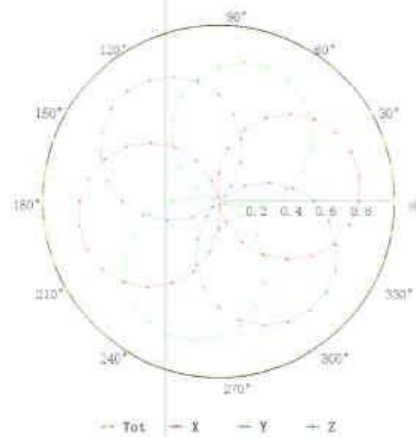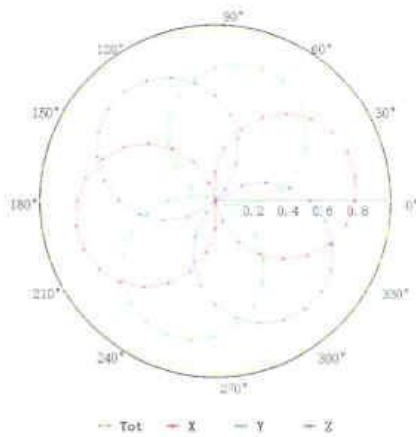

Uncertainty of Axial Isotropy Assessment:  $\pm 1.2\%$  ( $k=2$ )

### Dynamic Range f(SAR<sub>head</sub>) (TEM cell, f = 900 MHz)

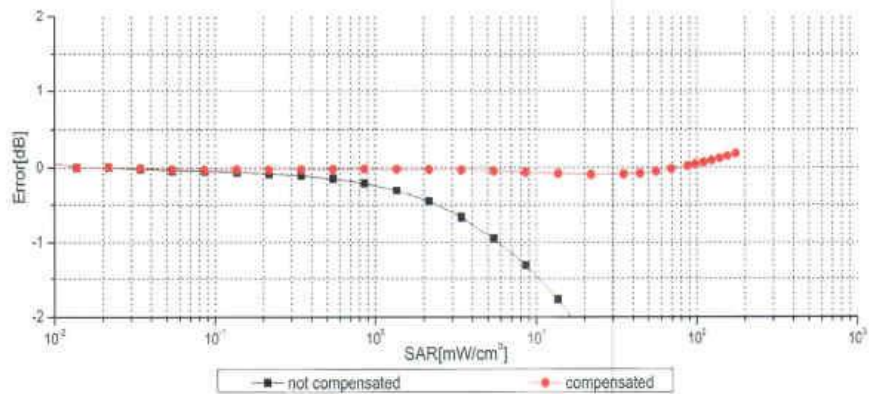
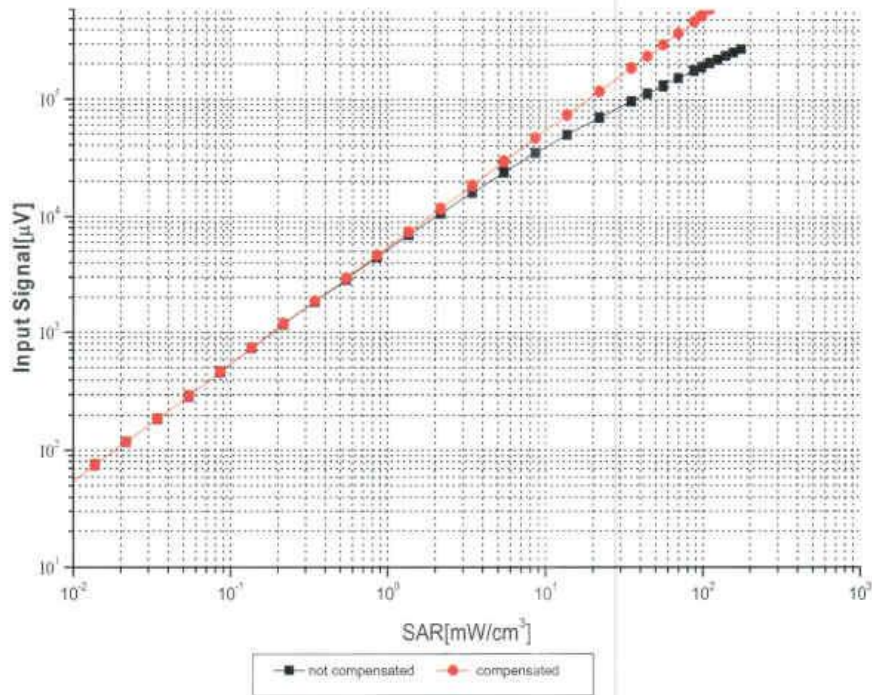


Uncertainty of Linearity Assessment: ±0.9% (k=2)


### Conversion Factor Assessment

f=750 MHz,WGLS R9(H\_convF)

f=1750 MHz,WGLS R22(H\_convF)

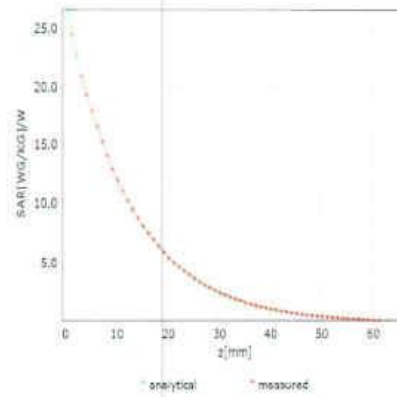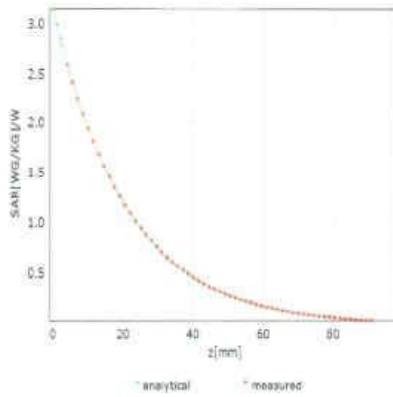

### Deviation from Isotropy in Liquid

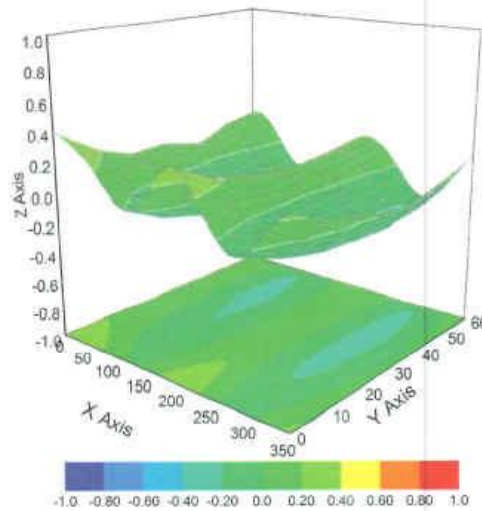

Uncertainty of Spherical Isotropy Assessment:  $\pm 3.2\%$  ( $k=2$ )



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China  
 Tel: +86-10-62304633-2117  
 E-mail: emf@caict.ac.cn http://www.caict.ac.cn

**Appendix: Modulation Calibration Parameters**

UID	Rev	Communication System Name	Group	PAR (dB)	UncE (k=2)
0		CW	CW	0.00	± 4.7 %
10010	CAA	SAR Validation (Square, 100ms, 10ms)	Test	10.00	± 9.6 %
10011	CAB	UMTS-FDD (WCDMA)	WCDMA	2.91	± 9.6 %
10012	CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps)	WLAN	1.87	± 9.6 %
10013	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps)	WLAN	9.46	± 9.6 %
10021	DAC	GSM-FDD (TDMA, GMSK)	GSM	9.39	± 9.6 %
10023	DAC	GPRS-FDD (TDMA, GMSK, TN 0)	GSM	9.57	± 9.6 %
10024	DAC	GPRS-FDD (TDMA, GMSK, TN 0-1)	GSM	6.56	± 9.6 %
10025	DAC	EDGE-FDD (TDMA, 8PSK, TN 0)	GSM	12.62	± 9.6 %
10026	DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1)	GSM	9.55	± 9.6 %
10027	DAC	GPRS-FDD (TDMA, GMSK, TN 0-1-2)	GSM	4.80	± 9.6 %
10028	DAC	GPRS-FDD (TDMA, GMSK, TN 0-1-2-3)	GSM	3.55	± 9.6 %
10029	DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1-2)	GSM	7.78	± 9.6 %
10030	CAA	IEEE 802.15.1 Bluetooth (GFSK, DH1)	Bluetooth	5.30	± 9.6 %
10031	CAA	IEEE 802.15.1 Bluetooth (GFSK, DH3)	Bluetooth	1.87	± 9.6 %
10032	CAA	IEEE 802.15.1 Bluetooth (GFSK, DH5)	Bluetooth	1.16	± 9.6 %
10033	CAA	IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH1)	Bluetooth	7.74	± 9.6 %
10034	CAA	IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH3)	Bluetooth	4.53	± 9.6 %
10035	CAA	IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH5)	Bluetooth	3.83	± 9.6 %
10036	CAA	IEEE 802.15.1 Bluetooth (8-DPSK, DH1)	Bluetooth	8.01	± 9.6 %
10037	CAA	IEEE 802.15.1 Bluetooth (8-DPSK, DH3)	Bluetooth	4.77	± 9.6 %
10038	CAA	IEEE 802.15.1 Bluetooth (8-DPSK, DH5)	Bluetooth	4.10	± 9.6 %
10039	CAB	CDMA2000 (1xRTT, RC1)	CDMA2000	4.57	± 9.6 %
10042	CAB	IS-54 / IS-136 FDD (TDMA/FDM, PI/4-DQPSK, Halfrate)	AMPS	7.78	± 9.6 %
10044	CAA	IS-91/EIA/TIA-553 FDD (FDMA, FM)	AMPS	0.00	± 9.6 %
10048	CAA	DECT (TDD, TDMA/FDM, GFSK, Full Slot, 24)	DECT	13.80	± 9.6 %
10049	CAA	DECT (TDD, TDMA/FDM, GFSK, Double Slot, 12)	DECT	10.79	± 9.6 %
10056	CAA	UMTS-TDD (TD-SCDMA, 1.28 Mcps)	TD-SCDMA	11.01	± 9.6 %
10058	DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1-2-3)	GSM	6.52	± 9.6 %
10059	CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps)	WLAN	2.12	± 9.6 %
10060	CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps)	WLAN	2.83	± 9.6 %
10061	CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps)	WLAN	3.60	± 9.6 %
10062	CAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps)	WLAN	8.68	± 9.6 %
10063	CAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps)	WLAN	8.63	± 9.6 %
10064	CAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps)	WLAN	9.09	± 9.6 %
10065	CAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps)	WLAN	9.00	± 9.6 %
10066	CAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps)	WLAN	9.38	± 9.6 %
10067	CAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps)	WLAN	10.12	± 9.6 %
10068	CAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps)	WLAN	10.24	± 9.6 %
10069	CAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps)	WLAN	10.56	± 9.6 %
10071	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 9 Mbps)	WLAN	9.83	± 9.6 %
10072	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 12 Mbps)	WLAN	9.62	± 9.6 %
10073	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 18 Mbps)	WLAN	9.94	± 9.6 %
10074	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 24 Mbps)	WLAN	10.30	± 9.6 %
10075	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 36 Mbps)	WLAN	10.77	± 9.6 %
10076	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 48 Mbps)	WLAN	10.94	± 9.6 %
10077	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 54 Mbps)	WLAN	11.00	± 9.6 %
10081	CAB	CDMA2000 (1xRTT, RC3)	CDMA2000	3.97	± 9.6 %
10082	CAB	IS-54 / IS-136 FDD (TDMA/FDM, PI/4-DQPSK, Fullrate)	AMPS	4.77	± 9.6 %
10090	DAC	GPRS-FDD (TDMA, GMSK, TN 0-4)	GSM	6.56	± 9.6 %
10097	CAC	UMTS-FDD (HSDPA)	WCDMA	3.98	± 9.6 %
10098	DAC	UMTS-FDD (HSUPA, Subtest 2)	WCDMA	3.98	± 9.6 %
10099	CAC	EDGE-FDD (TDMA, 8PSK, TN 0-4)	GSM	9.55	± 9.6 %
10100	CAC	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, QPSK)	LTE-FDD	5.67	± 9.6 %
10101	CAB	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM)	LTE-FDD	6.42	± 9.6 %



10102	CAB	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM)	LTE-FDD	6.60	± 9.6 %
10103	DAC	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK)	LTE-TDD	9.29	± 9.6 %
10104	CAE	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM)	LTE-TDD	9.97	± 9.6 %
10105	CAE	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM)	LTE-TDD	10.01	± 9.6 %
10108	CAE	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	LTE-FDD	5.80	± 9.6 %
10109	CAG	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM)	LTE-FDD	6.43	± 9.6 %
10110	CAG	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, QPSK)	LTE-FDD	5.75	± 9.6 %
10111	CAG	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM)	LTE-FDD	6.44	± 9.6 %
10112	CAG	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM)	LTE-FDD	6.59	± 9.6 %
10113	CAG	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM)	LTE-FDD	6.62	± 9.6 %
10114	CAG	IEEE 802.11n (HT Greenfield, 13.5 Mbps, BPSK)	WLAN	8.10	± 9.6 %
10115	CAG	IEEE 802.11n (HT Greenfield, 81 Mbps, 16-QAM)	WLAN	8.46	± 9.6 %
10116	CAG	IEEE 802.11n (HT Greenfield, 135 Mbps, 64-QAM)	WLAN	8.15	± 9.6 %
10117	CAG	IEEE 802.11n (HT Mixed, 13.5 Mbps, BPSK)	WLAN	8.07	± 9.6 %
10118	CAD	IEEE 802.11n (HT Mixed, 81 Mbps, 16-QAM)	WLAN	8.59	± 9.6 %
10119	CAD	IEEE 802.11n (HT Mixed, 135 Mbps, 64-QAM)	WLAN	8.13	± 9.6 %
10140	CAD	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM)	LTE-FDD	6.49	± 9.6 %
10141	CAD	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM)	LTE-FDD	6.53	± 9.6 %
10142	CAD	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, QPSK)	LTE-FDD	5.73	± 9.6 %
10143	CAD	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM)	LTE-FDD	6.35	± 9.6 %
10144	CAC	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM)	LTE-FDD	6.65	± 9.6 %
10145	CAC	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK)	LTE-FDD	5.76	± 9.6 %
10146	CAC	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM)	LTE-FDD	6.41	± 9.6 %
10147	CAC	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM)	LTE-FDD	6.72	± 9.6 %
10149	CAE	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM)	LTE-FDD	6.42	± 9.6 %
10150	CAE	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM)	LTE-FDD	6.60	± 9.6 %
10151	CAE	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-TDD	9.28	± 9.6 %
10152	CAE	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM)	LTE-TDD	9.92	± 9.6 %
10153	CAE	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM)	LTE-TDD	10.05	± 9.6 %
10154	CAF	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	LTE-FDD	5.75	± 9.6 %
10155	CAF	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM)	LTE-FDD	6.43	± 9.6 %
10156	CAF	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, QPSK)	LTE-FDD	5.79	± 9.6 %
10157	CAE	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM)	LTE-FDD	6.49	± 9.6 %
10158	CAE	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM)	LTE-FDD	6.62	± 9.6 %
10159	CAG	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM)	LTE-FDD	6.56	± 9.6 %
10160	CAG	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, QPSK)	LTE-FDD	5.82	± 9.6 %
10161	CAG	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM)	LTE-FDD	6.43	± 9.6 %
10162	CAG	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM)	LTE-FDD	6.58	± 9.6 %
10166	CAG	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK)	LTE-FDD	5.46	± 9.6 %
10167	CAG	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM)	LTE-FDD	6.21	± 9.6 %
10168	CAG	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM)	LTE-FDD	6.79	± 9.6 %
10169	CAG	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	LTE-FDD	5.73	± 9.6 %
10170	CAG	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)	LTE-FDD	6.52	± 9.6 %
10171	CAE	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM)	LTE-FDD	6.49	± 9.6 %
10172	CAE	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	LTE-TDD	9.21	± 9.6 %
10173	CAE	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)	LTE-TDD	9.48	± 9.6 %
10174	CAF	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM)	LTE-TDD	10.25	± 9.6 %
10175	CAF	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	LTE-FDD	5.72	± 9.6 %
10176	CAF	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM)	LTE-FDD	6.52	± 9.6 %
10177	CAE	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, QPSK)	LTE-FDD	5.73	± 9.6 %
10178	CAE	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM)	LTE-FDD	6.52	± 9.6 %
10179	AAE	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM)	LTE-FDD	6.50	± 9.6 %
10180	CAG	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM)	LTE-FDD	6.50	± 9.6 %
10181	CAG	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK)	LTE-FDD	5.72	± 9.6 %
10182	CAG	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM)	LTE-FDD	6.52	± 9.6 %
10183	CAG	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM)	LTE-FDD	6.50	± 9.6 %
10184	CAG	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, QPSK)	LTE-FDD	5.73	± 9.6 %
10185	CAI	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM)	LTE-FDD	6.51	± 9.6 %
10186	CAG	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)	LTE-FDD	6.50	± 9.6 %




Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2117  
E-mail: emf@caict.ac.cn http://www.caict.ac.cn

Table with 6 columns: ID, Code, Standard, Modulation, Test Method, and Result. It lists various LTE and UMTS test cases with their respective configurations and measured values.



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China  
 Tel: +86-10-62304633-2117  
 E-mail: emf@caict.ac.cn http://www.caict.ac.cn

10269	CAB	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM)	LTE-TDD	10.13	± 9.6 %
10270	CAB	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK)	LTE-TDD	9.58	± 9.6 %
10274	CAB	UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.10)	WCDMA	4.87	± 9.6 %
10275	CAD	UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.4)	WCDMA	3.96	± 9.6 %
10277	CAD	PHS (QPSK)	PHS	11.81	± 9.6 %
10278	CAD	PHS (QPSK, BW 884MHz, Rolloff 0.5)	PHS	11.81	± 9.6 %
10279	CAG	PHS (QPSK, BW 884MHz, Rolloff 0.38)	PHS	12.18	± 9.6 %
10290	CAG	CDMA2000, RC1, SO55, Full Rate	CDMA2000	3.91	± 9.6 %
10291	CAG	CDMA2000, RC3, SO55, Full Rate	CDMA2000	3.46	± 9.6 %
10292	CAG	CDMA2000, RC3, SO32, Full Rate	CDMA2000	3.39	± 9.6 %
10293	CAG	CDMA2000, RC3, SO3, Full Rate	CDMA2000	3.50	± 9.6 %
10295	CAG	CDMA2000, RC1, SO3, 1/8th Rate 25 fr.	CDMA2000	12.49	± 9.6 %
10297	CAF	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-FDD	5.81	± 9.6 %
10298	CAF	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, QPSK)	LTE-FDD	5.72	± 9.6 %
10299	CAF	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM)	LTE-FDD	6.39	± 9.6 %
10300	CAC	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM)	LTE-FDD	6.60	± 9.6 %
10301	CAC	IEEE 802.16e WIMAX (29:18, 5ms, 10MHz, QPSK, PUSC)	WIMAX	12.03	± 9.6 %
10302	CAB	IEEE 802.16e WIMAX (29:18, 5ms, 10MHz, QPSK, PUSC, 3CTRL)	WIMAX	12.57	± 9.6 %
10303	CAB	IEEE 802.16e WIMAX (31:15, 5ms, 10MHz, 64QAM, PUSC)	WIMAX	12.52	± 9.6 %
10304	CAA	IEEE 802.16e WIMAX (29:18, 5ms, 10MHz, 64QAM, PUSC)	WIMAX	11.86	± 9.6 %
10305	CAA	IEEE 802.16e WIMAX (31:15, 10ms, 10MHz, 64QAM, PUSC)	WIMAX	15.24	± 9.6 %
10306	CAA	IEEE 802.16e WIMAX (29:18, 10ms, 10MHz, 64QAM, PUSC)	WIMAX	14.67	± 9.6 %
10307	AAB	IEEE 802.16e WIMAX (29:18, 10ms, 10MHz, QPSK, PUSC)	WIMAX	14.49	± 9.6 %
10308	AAB	IEEE 802.16e WIMAX (29:18, 10ms, 10MHz, 16QAM, PUSC)	WIMAX	14.46	± 9.6 %
10309	AAB	IEEE 802.16e WIMAX (29:18, 10ms, 10MHz, 16QAM, AMC 2x3)	WIMAX	14.58	± 9.6 %
10310	AAB	IEEE 802.16e WIMAX (29:18, 10ms, 10MHz, QPSK, AMC 2x3)	WIMAX	14.57	± 9.6 %
10311	AAB	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, QPSK)	LTE-FDD	6.06	± 9.6 %
10313	AAD	IDEN 1:3	IDEN	10.51	± 9.6 %
10314	AAD	IDEN 1:6	IDEN	13.48	± 9.6 %
10315	AAD	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 96pc dc)	WLAN	1.71	± 9.6 %
10316	AAD	IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 96pc dc)	WLAN	8.36	± 9.6 %
10317	AAA	IEEE 802.11a WiFi 5 GHz (OFDM, 6 Mbps, 96pc dc)	WLAN	8.36	± 9.6 %
10352	AAA	Pulse Waveform (200Hz, 10%)	Generic	10.00	± 9.6 %
10353	AAA	Pulse Waveform (200Hz, 20%)	Generic	6.99	± 9.6 %
10354	AAA	Pulse Waveform (200Hz, 40%)	Generic	3.98	± 9.6 %
10355	AAA	Pulse Waveform (200Hz, 60%)	Generic	2.22	± 9.6 %
10356	AAA	Pulse Waveform (200Hz, 80%)	Generic	0.97	± 9.6 %
10387	AAA	QPSK Waveform, 1 MHz	Generic	5.10	± 9.6 %
10388	AAA	QPSK Waveform, 10 MHz	Generic	5.22	± 9.6 %
10396	AAA	64-QAM Waveform, 100 kHz	Generic	6.27	± 9.6 %
10399	AAA	64-QAM Waveform, 40 MHz	Generic	6.27	± 9.6 %
10400	AAD	IEEE 802.11ac WiFi (20MHz, 64-QAM, 99pc dc)	WLAN	8.37	± 9.6 %
10401	AAA	IEEE 802.11ac WiFi (40MHz, 64-QAM, 99pc dc)	WLAN	8.60	± 9.6 %
10402	AAA	IEEE 802.11ac WiFi (80MHz, 64-QAM, 99pc dc)	WLAN	8.53	± 9.6 %
10403	AAB	CDMA2000 (1xEV-DO, Rev. 0)	CDMA2000	3.76	± 9.6 %
10404	AAB	CDMA2000 (1xEV-DO, Rev. A)	CDMA2000	3.77	± 9.6 %
10406	AAD	CDMA2000, RC3, SO32, SCH0, Full Rate	CDMA2000	5.22	± 9.6 %
10410	AAA	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Sub=2,3,4,7,8,9)	LTE-TDD	7.82	± 9.6 %
10414	AAA	WLAN CCDF, 64-QAM, 40MHz	Generic	8.54	± 9.6 %
10415	AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc dc)	WLAN	1.54	± 9.6 %
10416	AAA	IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 99pc dc)	WLAN	8.23	± 9.6 %
10417	AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps, 99pc dc)	WLAN	8.23	± 9.6 %
10418	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc, Long)	WLAN	8.14	± 9.6 %
10419	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc, Short)	WLAN	8.19	± 9.6 %
10422	AAA	IEEE 802.11n (HT Greenfield, 7.2 Mbps, BPSK)	WLAN	8.32	± 9.6 %
10423	AAA	IEEE 802.11n (HT Greenfield, 43.3 Mbps, 16-QAM)	WLAN	8.47	± 9.6 %
10424	AAE	IEEE 802.11n (HT Greenfield, 72.2 Mbps, 64-QAM)	WLAN	8.40	± 9.6 %
10425	AAE	IEEE 802.11n (HT Greenfield, 15 Mbps, BPSK)	WLAN	8.41	± 9.6 %
10426	AAE	IEEE 802.11n (HT Greenfield, 90 Mbps, 16-QAM)	WLAN	8.45	± 9.6 %



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China  
 Tel: +86-10-62304633-2117  
 E-mail: emfi@caict.ac.cn http://www.caict.ac.cn

10427	AAB	IEEE 802.11n (HT Greenfield, 150 Mbps, 64-QAM)	WLAN	8.41	± 9.6 %
10430	AAB	LTE-FDD (OFDMA, 5 MHz, E-TM 3.1)	LTE-FDD	8.28	± 9.6 %
10431	AAC	LTE-FDD (OFDMA, 10 MHz, E-TM 3.1)	LTE-FDD	8.38	± 9.6 %
10432	AAB	LTE-FDD (OFDMA, 15 MHz, E-TM 3.1)	LTE-FDD	8.34	± 9.6 %
10433	AAC	LTE-FDD (OFDMA, 20 MHz, E-TM 3.1)	LTE-FDD	8.34	± 9.6 %
10434	AAG	W-CDMA (BS Test Model 1, 64 DPCH)	WCDMA	8.60	± 9.6 %
10435	AAA	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Sub)	LTE-TDD	7.82	± 9.6 %
10447	AAA	LTE-FDD (OFDMA, 5 MHz, E-TM 3.1, Clipping 44%)	LTE-FDD	7.56	± 9.6 %
10448	AAA	LTE-FDD (OFDMA, 10 MHz, E-TM 3.1, Clipping 44%)	LTE-FDD	7.53	± 9.6 %
10449	AAC	LTE-FDD (OFDMA, 15 MHz, E-TM 3.1, Clipping 44%)	LTE-FDD	7.51	± 9.6 %
10450	AAA	LTE-FDD (OFDMA, 20 MHz, E-TM 3.1, Clipping 44%)	LTE-FDD	7.48	± 9.6 %
10451	AAA	W-CDMA (BS Test Model 1, 64 DPCH, Clipping 44%)	WCDMA	7.59	± 9.6 %
10453	AAC	Validation (Square, 10ms, 1ms)	Test	10.00	± 9.6 %
10456	AAC	IEEE 802.11ac WiFi (160MHz, 64-QAM, 99pc dc)	WLAN	8.63	± 9.6 %
10457	AAC	UMTS-FDD (DC-HSDPA)	WCDMA	6.62	± 9.6 %
10458	AAC	CDMA2000 (1xEV-DO, Rev. B, 2 carriers)	CDMA2000	6.55	± 9.6 %
10459	AAC	CDMA2000 (1xEV-DO, Rev. B, 3 carriers)	CDMA2000	8.25	± 9.6 %
10460	AAC	UMTS-FDD (WCDMA, AMR)	WCDMA	2.39	± 9.6 %
10461	AAC	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK, UL Sub)	LTE-TDD	7.82	± 9.6 %
10462	AAC	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM, UL Sub)	LTE-TDD	8.30	± 9.6 %
10463	AAD	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM, UL Sub)	LTE-TDD	8.56	± 9.6 %
10464	AAD	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK, UL Sub)	LTE-TDD	7.82	± 9.6 %
10465	AAC	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM, UL Sub)	LTE-TDD	8.32	± 9.6 %
10466	AAC	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM, UL Sub)	LTE-TDD	8.57	± 9.6 %
10467	AAA	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL Sub)	LTE-TDD	7.82	± 9.6 %
10468	AAF	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM, UL Sub)	LTE-TDD	8.32	± 9.6 %
10469	AAD	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM, UL Sub)	LTE-TDD	8.56	± 9.6 %
10470	AAD	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Sub)	LTE-TDD	7.82	± 9.6 %
10471	AAC	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM, UL Sub)	LTE-TDD	8.32	± 9.6 %
10472	AAC	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM, UL Sub)	LTE-TDD	8.57	± 9.6 %
10473	AAA	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK, UL Sub)	LTE-TDD	7.82	± 9.6 %
10474	AAC	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM, UL Sub)	LTE-TDD	8.32	± 9.6 %
10475	AAD	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM, UL Sub)	LTE-TDD	8.57	± 9.6 %
10477	AAC	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM, UL Sub)	LTE-TDD	8.32	± 9.6 %
10478	AAC	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM, UL Sub)	LTE-TDD	8.57	± 9.6 %
10479	AAC	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK, UL Sub)	LTE-TDD	7.74	± 9.6 %
10480	AAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM, UL Sub)	LTE-TDD	8.18	± 9.6 %
10481	AAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM, UL Sub)	LTE-TDD	8.45	± 9.6 %
10482	AAA	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK, UL Sub)	LTE-TDD	7.71	± 9.6 %
10483	AAA	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM, UL Sub)	LTE-TDD	8.39	± 9.6 %
10484	AAB	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM, UL Sub)	LTE-TDD	8.47	± 9.6 %
10485	AAB	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK, UL Sub)	LTE-TDD	7.59	± 9.6 %
10486	AAB	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM, UL Sub)	LTE-TDD	8.38	± 9.6 %
10487	AAC	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM, UL Sub)	LTE-TDD	8.60	± 9.6 %
10488	AAC	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK, UL Sub)	LTE-TDD	7.70	± 9.6 %
10489	AAC	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM, UL Sub)	LTE-TDD	8.31	± 9.6 %
10490	AAF	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM, UL Sub)	LTE-TDD	8.54	± 9.6 %
10491	AAF	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK, UL Sub)	LTE-TDD	7.74	± 9.6 %
10492	AAF	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM, UL Sub)	LTE-TDD	8.41	± 9.6 %
10493	AAF	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM, UL Sub)	LTE-TDD	8.55	± 9.6 %
10494	AAF	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK, UL Sub)	LTE-TDD	7.74	± 9.6 %
10495	AAF	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM, UL Sub)	LTE-TDD	8.37	± 9.6 %
10496	AAE	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM, UL Sub)	LTE-TDD	8.54	± 9.6 %
10497	AAE	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK, UL Sub)	LTE-TDD	7.67	± 9.6 %
10498	AAE	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM, UL Sub)	LTE-TDD	8.40	± 9.6 %
10499	AAC	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM, UL Sub)	LTE-TDD	8.68	± 9.6 %
10500	AAF	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK, UL Sub)	LTE-TDD	7.67	± 9.6 %
10501	AAF	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM, UL Sub)	LTE-TDD	8.44	± 9.6 %
10502	AAB	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM, UL Sub)	LTE-TDD	8.52	± 9.6 %



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2117  
E-mail: emf@caict.ac.cn http://www.caict.ac.cn

10503	AAB	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK, UL Sub)	LTE-TDD	7.72	± 9.6 %
10504	AAB	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM, UL Sub)	LTE-TDD	8.31	± 9.6 %
10505	AAC	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM, UL Sub)	LTE-TDD	8.54	± 9.6 %
10506	AAC	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK, UL Sub)	LTE-TDD	7.74	± 9.6 %
10507	AAC	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM, UL Sub)	LTE-TDD	8.36	± 9.6 %
10508	AAF	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM, UL Sub)	LTE-TDD	8.55	± 9.6 %
10509	AAF	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK, UL Sub)	LTE-TDD	7.99	± 9.6 %
10510	AAF	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM, UL Sub)	LTE-TDD	8.49	± 9.6 %
10511	AAF	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM, UL Sub)	LTE-TDD	8.51	± 9.6 %
10512	AAF	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK, UL Sub)	LTE-TDD	7.74	± 9.6 %
10513	AAF	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM, UL Sub)	LTE-TDD	8.42	± 9.6 %
10514	AAE	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM, UL Sub)	LTE-TDD	8.45	± 9.6 %
10515	AAE	IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps, 99pc dc)	WLAN	1.58	± 9.6 %
10516	AAE	IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps, 99pc dc)	WLAN	1.57	± 9.6 %
10517	AAF	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps, 99pc dc)	WLAN	1.58	± 9.6 %
10518	AAF	IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps, 99pc dc)	WLAN	8.23	± 9.6 %
10519	AAF	IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps, 99pc dc)	WLAN	8.39	± 9.6 %
10520	AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps, 99pc dc)	WLAN	8.12	± 9.6 %
10521	AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps, 99pc dc)	WLAN	7.97	± 9.6 %
10522	AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps, 99pc dc)	WLAN	8.45	± 9.6 %
10523	AAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps, 99pc dc)	WLAN	8.08	± 9.6 %
10524	AAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps, 99pc dc)	WLAN	8.27	± 9.6 %
10525	AAC	IEEE 802.11ac WiFi (20MHz, MCS0, 99pc dc)	WLAN	8.36	± 9.6 %
10526	AAF	IEEE 802.11ac WiFi (20MHz, MCS1, 99pc dc)	WLAN	8.42	± 9.6 %
10527	AAF	IEEE 802.11ac WiFi (20MHz, MCS2, 99pc dc)	WLAN	8.21	± 9.6 %
10528	AAF	IEEE 802.11ac WiFi (20MHz, MCS3, 99pc dc)	WLAN	8.36	± 9.6 %
10529	AAF	IEEE 802.11ac WiFi (20MHz, MCS4, 99pc dc)	WLAN	8.36	± 9.6 %
10531	AAF	IEEE 802.11ac WiFi (20MHz, MCS6, 99pc dc)	WLAN	8.43	± 9.6 %
10532	AAF	IEEE 802.11ac WiFi (20MHz, MCS7, 99pc dc)	WLAN	8.29	± 9.6 %
10533	AAE	IEEE 802.11ac WiFi (20MHz, MCS8, 99pc dc)	WLAN	8.38	± 9.6 %
10534	AAE	IEEE 802.11ac WiFi (40MHz, MCS0, 99pc dc)	WLAN	8.45	± 9.6 %
10535	AAE	IEEE 802.11ac WiFi (40MHz, MCS1, 99pc dc)	WLAN	8.45	± 9.6 %
10536	AAF	IEEE 802.11ac WiFi (40MHz, MCS2, 99pc dc)	WLAN	8.32	± 9.6 %
10537	AAF	IEEE 802.11ac WiFi (40MHz, MCS3, 99pc dc)	WLAN	8.44	± 9.6 %
10538	AAF	IEEE 802.11ac WiFi (40MHz, MCS4, 99pc dc)	WLAN	8.54	± 9.6 %
10540	AAA	IEEE 802.11ac WiFi (40MHz, MCS6, 99pc dc)	WLAN	8.39	± 9.6 %
10541	AAA	IEEE 802.11ac WiFi (40MHz, MCS7, 99pc dc)	WLAN	8.46	± 9.6 %
10542	AAA	IEEE 802.11ac WiFi (40MHz, MCS8, 99pc dc)	WLAN	8.65	± 9.6 %
10543	AAC	IEEE 802.11ac WiFi (40MHz, MCS9, 99pc dc)	WLAN	8.65	± 9.6 %
10544	AAC	IEEE 802.11ac WiFi (80MHz, MCS0, 99pc dc)	WLAN	8.47	± 9.6 %
10545	AAC	IEEE 802.11ac WiFi (80MHz, MCS1, 99pc dc)	WLAN	8.55	± 9.6 %
10546	AAC	IEEE 802.11ac WiFi (80MHz, MCS2, 99pc dc)	WLAN	8.35	± 9.6 %
10547	AAC	IEEE 802.11ac WiFi (80MHz, MCS3, 99pc dc)	WLAN	8.49	± 9.6 %
10548	AAC	IEEE 802.11ac WiFi (80MHz, MCS4, 99pc dc)	WLAN	8.37	± 9.6 %
10550	AAC	IEEE 802.11ac WiFi (80MHz, MCS6, 99pc dc)	WLAN	8.38	± 9.6 %
10551	AAC	IEEE 802.11ac WiFi (80MHz, MCS7, 99pc dc)	WLAN	8.50	± 9.6 %
10552	AAC	IEEE 802.11ac WiFi (80MHz, MCS8, 99pc dc)	WLAN	8.42	± 9.6 %
10553	AAC	IEEE 802.11ac WiFi (80MHz, MCS9, 99pc dc)	WLAN	8.45	± 9.6 %
10554	AAC	IEEE 802.11ac WiFi (160MHz, MCS0, 99pc dc)	WLAN	8.48	± 9.6 %
10555	AAC	IEEE 802.11ac WiFi (160MHz, MCS1, 99pc dc)	WLAN	8.47	± 9.6 %
10556	AAC	IEEE 802.11ac WiFi (160MHz, MCS2, 99pc dc)	WLAN	8.50	± 9.6 %
10557	AAC	IEEE 802.11ac WiFi (160MHz, MCS3, 99pc dc)	WLAN	8.52	± 9.6 %
10558	AAC	IEEE 802.11ac WiFi (160MHz, MCS4, 99pc dc)	WLAN	8.61	± 9.6 %
10560	AAC	IEEE 802.11ac WiFi (160MHz, MCS6, 99pc dc)	WLAN	8.73	± 9.6 %
10561	AAC	IEEE 802.11ac WiFi (160MHz, MCS7, 99pc dc)	WLAN	8.56	± 9.6 %
10562	AAC	IEEE 802.11ac WiFi (160MHz, MCS8, 99pc dc)	WLAN	8.69	± 9.6 %
10563	AAC	IEEE 802.11ac WiFi (160MHz, MCS9, 99pc dc)	WLAN	8.77	± 9.6 %
10564	AAC	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 9 Mbps, 99pc dc)	WLAN	8.25	± 9.6 %
10565	AAC	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 12 Mbps, 99pc dc)	WLAN	8.45	± 9.6 %