

FCC Test Report (WLAN)

Report No.: RF170816E06F

FCC ID: 2AMAF-DPE109A104A

Test Model: DPE109A

Series Model: DPE104A

Received Date: Feb. 06, 2015

Test Date: Feb. 06 to Oct. 05, 2015; May 16, 2018

Issued Date: Aug. 31, 2018

Applicant: TAIJET BOINTEC CORPORATION LIMITED

Address: 4F., No.114, Zhouzi St., Neihu Dist., Taipei City 114, Taiwan (R.O.C.)

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Hsin Chu Laboratory

Lab Address: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan R.O.C.

Test Location (1): E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan R.O.C.

Test Location (2): No. 49, Ln. 206, Wende Rd., Shangshan Tsuen, Chiung Lin Hsiang, Hsin
Chu Hsien 307, Taiwan R.O.C.

FCC Registration / 723255 / TW2022 for Test Location (1)
Designation Number: 736135 / TW0004 for Test Location (2)



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Modification Record	6
3 General Information	7
3.1 General Description of EUT (WLAN)	7
3.2 Description of Test Modes	11
3.2.1 Test Mode Applicability and Tested Channel Detail	12
3.3 Duty Cycle of Test Signal	14
3.4 Description of Support Units	15
3.4.1 Configuration of System under Test	15
3.5 General Description of Applied Standards	16
4 Test Types and Results	17
4.1 Unwabted Emission and Bandedge Measurement (Radiated Versus Conducted)	17
4.1.1 Limits of Unwabted Emission and Bandedge Measurement	17
4.1.2 Test Instruments	18
4.1.3 Test Procedures	20
4.1.4 Deviation from Test Standard	22
4.1.5 Test Setup	22
4.1.6 EUT Operating Conditions	23
4.1.7 Test Results (Radiated Measurement)	24
4.1.8 Test Results (Conducted Measurement)	46
4.2 Conducted Emission Measurement	108
4.2.1 Limits of Conducted Emission Measurement	108
4.2.2 Test Instruments	108
4.2.3 Test Procedures	109
4.2.4 Deviation from Test Standard	109
4.2.5 Test Setup	109
4.2.6 EUT Operating Conditions	109
4.2.7 Test Results	110
4.3 6dB Bandwidth Measurement	112
4.3.1 Limits of 6dB Bandwidth Measurement	112
4.3.2 Test Setup	112
4.3.3 Test Instruments	112
4.3.4 Test Procedure	112
4.3.5 Deviation from Test Standard	112
4.3.6 EUT Operating Conditions	112
4.3.7 Test Result	113
4.4 Conducted Output Power Measurement	115
4.4.1 Limits of Conducted Output Power Measurement	115
4.4.2 Test Setup	115
4.4.3 Test Instruments	115
4.4.4 Test Procedures	115
4.4.5 Deviation from Test Standard	115
4.4.6 EUT Operating Conditions	115
4.4.7 Test Results	116
4.5 Power Spectral Density Measurement	119
4.5.1 Limits of Power Spectral Density Measurement	119
4.5.2 Test Setup	119
4.5.3 Test Instruments	119
4.5.4 Test Procedure	119
4.5.5 Deviation from Test Standard	119

4.5.6	EUT Operating Condition	119
4.5.7	Test Results	120
4.6	Conducted Out of Band Emission Measurement	123
4.6.1	Limits of Conducted Out of Band Emission Measurement.....	123
4.6.2	Test Setup.....	123
4.6.3	Test Instruments	123
4.6.4	Test Procedure	123
4.6.5	Deviation from Test Standard	123
4.6.6	EUT Operating Condition	123
4.6.7	Test Results	123
5	Pictures of Test Arrangements.....	140
6	Appendix A – Radiated Emission Measurement	141
6.1	Limits of Radiated Emission Measurement.....	141
6.2	Test Instruments.....	142
6.3	Test Procedures	144
6.4	Deviation from Test Standard	145
6.5	Test Setup	145
6.6	EUT Operating Conditions	145
6.7	Test Results (PIFA Antenna)	146
6.8	Test Results (Dipole Antenna).....	147
7	Appendix B – Information on the Testing Laboratories.....	148

Release Control Record

Issue No.	Description	Date Issued
RF170816E06F	Original release.	July 27, 2018

1 Certificate of Conformity

Product: 802.11 abgn/AC+BT4.2, 2T2R, mini PCIe Card

Brand: BOINTEC

Test Model: DPE109A

Series Model: DPE104A

Sample Status: ENGINEERING SAMPLE

Applicant: TAIJET BOINTEC CORPORATION LIMITED

Test Date: Feb. 06 to Oct. 05, 2015; May 16, 2018

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.247)
ANSI C63.10: 2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

:
Prepared by Phoenix Huang, **Date:** July 27, 2018
Phoenix Huang / Specialist
Approved by : May Chen, **Date:** July 27, 2018
May Chen / Manager

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.247)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -16.14dB at 1.96875MHz.
15.205 / 15.209 / 15.247(d)	Radiated Emissions and Band Edge Measurement	PASS	Meet the requirement of limit. Minimum passing margin is -1.4dB at 2483.5MHz.
15.247(d)	Antenna Port Emission	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Antenna connector is IPEX, SMA RP Plug and I-PEX MH4 not a standard connector.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Conducted Emissions at mains ports	150kHz ~ 30MHz	2.86 dB
Radiated Emissions up to 1 GHz	30MHz ~ 1GHz	5.43 dB
Radiated Emissions above 1 GHz	1GHz ~ 6GHz	3.65 dB
	6GHz ~ 18GHz	3.88 dB
	18GHz ~ 40GHz	4.11 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT (WLAN)

Product	802.11 abgn/AC+BT4.2, 2T2R, mini PCIe Card
Brand	BOINTEC
Test Model	DPE109A
Series Model	DPE104A
Status of EUT	ENGINEERING SAMPLE
Power Supply Rating	3.3Vdc from host equipment
Modulation Type	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM 256QAM for OFDM in 11ac mode and VHT (20/40) mode in 2.4GHz
Modulation Technology	DSSS, OFDM
Transfer Rate	802.11b: up to 11Mbps 802.11a/g: up to 54Mbps 802.11n : up to 300Mbps 802.11ac: up to 866.7Mbps
Operating Frequency	2.4GHz: 2.412 ~ 2.472GHz 5GHz: 5.18 ~ 5.24GHz, 5.26 ~ 5.32GHz, 5.50 ~ 5.72GHz, 5.745 ~ 5.825GHz
Number of Channel	2.4GHz: 802.11b, 802.11g, 802.11n (HT20): 13 802.11n (HT40): 9 5GHz: 802.11a, 802.11n (HT20), 802.11ac (VHT20): 25 802.11n (HT40), 802.11ac (VHT40): 12 802.11ac (VHT80): 6
Output Power	2.4GHz: 509.97mW 5GHz: 5.18 ~ 5.24GHz: 114.377mW 5.26 ~ 5.32GHz: 113.137mW 5.50 ~ 5.72GHz: 104.278mW 5.745 ~ 5.825GHz: 157.439mW
Antenna Type	Refer to Note
Antenna Connector	Refer to Note
Accessory Device	NA
Data Cable Supplied	NA

Note:

1. There are Bluetooth technology and WLAN technology used for the EUT.
2. The EUT has two model names which are identical to each other in all aspects except for the following table:

Model No.	Description
DPE109A	Just for marketing purpose
DPE104A	

Note: From the above models, model: DPE109A was selected as representative model for the test and its data was recorded in this report.

3. The EUT incorporates a MIMO function.

2.4GHz Band			
MODULATION MODE	DATA RATE (MCS)	TX & RX CONFIGURATION	
802.11b	1 ~ 11Mbps	2TX	2RX
802.11g	6 ~ 54Mbps	2TX	2RX
802.11n (HT20)	MCS 0~7	2TX	2RX
	MCS 8~15	2TX	2RX
802.11n (HT40)	MCS 0~7	2TX	2RX
	MCS 8~15	2TX	2RX
VHT20	MCS 0~8 Nss=1	2TX	2RX
	MCS 0~8 Nss=2	2TX	2RX
VHT40	MCS 0~9 Nss=1	2TX	2RX
	MCS 0~9 Nss=2	2TX	2RX

5GHz Band			
MODULATION MODE	DATA RATE (MCS)	TX & RX CONFIGURATION	
802.11a	6 ~ 54Mbps	2TX	2RX
802.11n (HT20)	MCS 0~7	2TX	2RX
	MCS 8~15	2TX	2RX
802.11n (HT40)	MCS 0~7	2TX	2RX
	MCS 8~15	2TX	2RX
802.11ac (VHT20)	MCS 0~8 Nss=1	2TX	2RX
	MCS 0~8 Nss=2	2TX	2RX
802.11ac (VHT40)	MCS 0~9 Nss=1	2TX	2RX
	MCS 0~9 Nss=2	2TX	2RX
802.11ac (VHT80)	MCS 0~9 Nss=1	2TX	2RX
	MCS 0~9 Nss=2	2TX	2RX

Note: The modulation and bandwidth are similar for 802.11n mode for 20MHz (40MHz) and 802.11ac mode for 20MHz (40MHz), therefore investigated worst case to representative mode in test report. (Final test mode refer section 3.2.1)

4. The antenna gain was declared by client; please refer to the following table:

Antenna Set 1									
Transmitter Circuit	Brand	Model	Ant. Type	2.4GHz Gain with cable loss (dBi)	5GHz Gain with cable loss (dBi)	2.4GHz Cable Loss (dBi)	5G Cable Loss (dBi)	Connector Type	Cable Length (mm)
Chain (0)	WNC	81-EBJ15.005	PIFA	3.00	Band 1&2: 2.56	1.15	Band 1&2: 1.70	IPEX	300
					Band 3: 4.76		Band 3: 1.74		
					Band 4: 4.76		Band 4: 1.79		
Chain (1)	WNC	81-EBJ15.005	PIFA	3.62	Band 1&2: 3.08	1.15	Band 1&2: 1.70	IPEX	300
					Band 3: 3.31		Band 3: 1.74		
					Band 4: 2.42		Band 4: 1.79		

Antenna Set 2									
Transmitter Circuit	Brand	Model	Ant. Type	2.4GHz Gain with cable loss (dBi)	5GHz Gain with cable loss (dBi)	2.4GHz Cable Loss (dBi)	5G Cable Loss (dBi)	Ant. Connector Type	Cable Length (mm)
Chain (0)	INPAQ	DAM-I6-H-DB-800-10-17	Dipole	1.13	Band 1&2: 1.33	2.0±0.5	4.0±0.5	SMA RP Plug	900
					Band 3: -0.63				
					Band 4: -0.97				
Chain (1)	INPAQ	DAM-I6-H-DB-800-10-17	Dipole	1.29	Band 1&2: 1.94	2.0±0.5	4.0±0.5	SMA RP Plug	900
					Band 3: -0.49				
					Band 4: -0.93				

*The RF cable is use with antenna set 2

Cable Spec.					
Brand	Model	2.4GHz cable loss (dBi)	5GHz cable loss (dBi)	Cable Length (mm)	Cable Connector Type
INPAQ	14012-00040100	-0.35	-0.39	42	IPEX to SMA RP Plug

Antenna Set 3							
Transmitter Circuit	Brand	Model	Ant. Type	2.4GHz Gain with cable loss (dBi)	5GHz Gain with cable loss (dBi)	Connector Type	Cable Length (mm)
Chain (0)	Molex	479504012	Dipole	2.13	2.81	I-PEX MH4	300
Chain (1)	Molex	479504012	Dipole	2.13	2.81	I-PEX MH4	300

Antenna Set 4						
Transmitter Circuit	Brand	Model	Ant. Type	2.4GHz Gain with cable loss (dBi)	5GHz Gain with cable loss (dBi)	Ant. Connector Type
Chain (0)	BOINTEC	TWRN-9161202-101	Dipole	2.0	2.0	RP SMA
Chain (1)	BOINTEC	TWRN-9161202-101	Dipole	2.0	2.0	RP SMA

*The RF cable is use with antenna set 4

Cable Spec.					
Brand	Model	2.4GHz cable loss (dBi)	5GHz cable loss (dBi)	Cable Length (mm)	Cable Connector Type
Bointec	TWRB-003EQ01-210	0.27	0.21	210	IPEX to RP SMA

Antenna Set 5						
Transmitter Circuit	Brand	Model	Ant. Type	2.4GHz Gain with cable loss (dBi)	5GHz Gain with cable loss (dBi)	Ant. Connector Type
Chain (0)	BOINTEC	TWRN-9161201-102	Dipole	3.17	2.61	RP SMA
Chain (1)	BOINTEC	TWRN-9161201-102	Dipole	3.17	2.61	RP SMA

*The RF cable is use with antenna set 5

Cable Spec.					
Brand	Model	2.4GHz cable loss (dBi)	5GHz cable loss (dBi)	Cable Length (mm)	Cable Connector Type
Bointec	TWRB-003EQ01-300	0.3	0.24	300	IPEX to RP SMA

Note:

1. Above antenna gains of antenna are Total (H+V).
2. For Testing, we select the highest gain on each frequency band for calculation and testing. (except for Radiated emission test)
3. The Bluetooth technology will fix transmission on Chain (0)
5. For Testing, we select the highest gain on each frequency band for calculation and testing and the detail information as below:

Transmitter Circuit	Brand	Model	Ant. Type	2.4GHz Gain with cable loss (dBi)	5GHz Gain with cable loss (dBi)	2.4GHz Cable Loss (dBi)	5G Cable Loss (dBi)
Chain (0)+(1)	WNC	81-EBJ15.005	PIFA	3.62	Band 1&2: 3.08	1.15	Band 1&2: 1.70
					Band 3: 4.76		Band 3: 1.74
					Band 4: 4.76		Band 4: 1.79

6. For radiated emission test, PIFA antenna (Antenna Set 1) and Dipole (Antenna Set 5) was selected as representative adapter for the test and its data was recorded in this report.
7. The EUT was pre-tested under the following modes:

Test Mode	Guard Interval
Mode A	400ns GI
Mode B	800ns GI

From the above modes, the worst case was found in **Mode B**. Therefore only the test data of the mode was recorded in this report.

8. WLAN/BT coexistence mode:

◆ 2x2 WLAN + BT:

- 5GHz 802.11a/an (or 11ac) transmit concurrent with BT.
- 2.4GHz: timely shared coexistence.

9. The emission (conducted & radiated emission) of the simultaneous operation (WiFi <5GHz> & Bluetooth) have been evaluated and no non-compliance found. The detail combinations of transmitters / frequencies / modes as below table

Mode	Available Channel	Tested Channel	Modulation Technology
5 GHz (802.11ac (VHT40))	38 to 159	159	OFDM
+ Bluetooth (EDR)	0 to 78	0	GFSK

10. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 Description of Test Modes

13 channels are provided for 802.11b, 802.11g and 802.11n (HT20), VHT20:

Channel	Frequency	Channel	Frequency
1	2412MHz	8	2447MHz
2	2417MHz	9	2452MHz
3	2422MHz	10	2457MHz
4	2427MHz	11	2462MHz
5	2432MHz	12	2467MHz
6	2437MHz	13	2472MHz
7	2442MHz		

9 channels are provided for 802.11n (HT40), VHT40:

Channel	Frequency	Channel	Frequency
3	2422MHz	8	2447MHz
4	2427MHz	9	2452MHz
5	2432MHz	10	2457MHz
6	2437MHz	11	2462MHz
7	2442MHz		

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	UE $\geq$ 1G	UE<1G	PLC	APCM	
-	√	√	√	√	-

Where **UE $\geq$ 1G:** Unwanted Emission above 1GHz
PLC: Power Line Conducted Emission
UE < 1G: Unwanted Emission below 1GHz
APCM: Antenna Port Conducted Measurement

Unwabted Emission Test (Above 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 13	1, 6, 11, 12, 13	DSSS	1	1
802.11g	1 to 13	1, 6, 11, 12, 13	OFDM	6	6
VHT20	1 to 13	1, 6, 11, 12, 13	OFDM	6.5	6.5
VHT40	3 to 11	3, 6, 9, 10, 11	OFDM	13.5	13.5

Unwabted Emission Test (Below 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11g	1 to 13	6	OFDM	6	6.5

Power Line Conducted Emission Test:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11g	1 to 13	6	OFDM	6	6.5

Antenna Port Conducted Measurement:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 13	1, 6, 11, 12, 13	DSSS	1	1
802.11g	1 to 13	1, 6, 11, 12, 13	OFDM	6	6
VHT20	1 to 13	1, 6, 11, 12, 13	OFDM	6.5	6.5
VHT40	3 to 11	3, 6, 9, 10, 11	OFDM	13.5	13.5

Test Condition:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER (System)	TESTED BY
UE≥1G	22deg. C, 67%RH	120Vac, 60Hz	Robert Cheng
	23deg. C, 67%RH	120Vac, 60Hz	Robert Cheng
	22deg. C, 66%RH	120Vac, 60Hz	Weiwei Lo
UE<1G	24deg. C, 68%RH	120Vac, 60Hz	Tim Ho
PLC	20deg. C, 60%RH	120Vac, 60Hz	Barry Lee
APCM	15deg. C, 57%RH	120Vac, 60Hz	Anderson Chen

3.3 Duty Cycle of Test Signal

If duty cycle of test signal is $\geq 98\%$, duty factor is not required.


If duty cycle of test signal is $< 98\%$, duty factor shall be considered.

802.11b: Duty cycle = 127.82 ms/128.59 ms = 0.994

802.11g: Duty cycle = 21.45 ms/21.587 ms = 0.994

VHT20: Duty cycle = 19.787 ms/20.012 ms = 0.989

VHT40: Duty cycle = 9.5 ms/9.725 ms = 0.977, Duty factor = $10 \cdot \log(1/0.977) = 0.1$

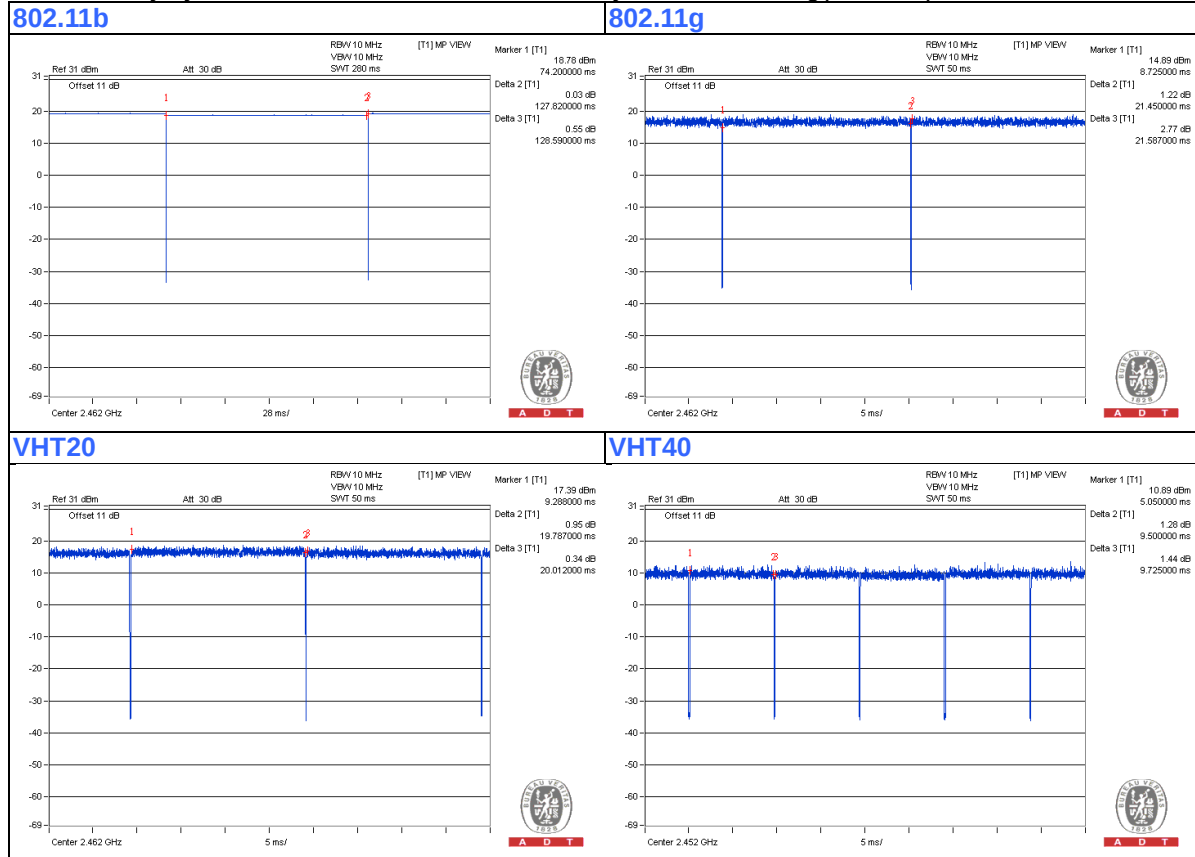


3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Laptop	DELL	E5430	4YV4VY1	FCC DoC	Provided by Lab
B.	PCI-E Test tool	Qualcomm Atheros	NA	NA	NA	Supplied by Client

Note: All power cords of the above support units are non-shielded (1.8m).

3.4.1 Configuration of System under Test



3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.247)

KDB 558074 D01 DTS Meas Guidance v04

KDB 662911 D01 Multiple Transmitter Output v02r01

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

4 Test Types and Results

4.1 Unwanted Emission and Bandedge Measurement (Radiated Versus Conducted)

4.1.1 Limits of Unwanted Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

Note:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.1.2 Test Instruments

For Above 1GHz:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
MXE EMI Receiver Agilent	N9038A	MY51210105	July 21, 2014	July 20, 2015
Horn_Antenna AISI	AIH.8018	0000320091110	Aug. 27, 2014	Aug. 26, 2015
Pre-Amplifier Agilent	8449B	3008A02578	June 24, 2014	June 23, 2015
RF Cable	NA	131205 131214 SNMY23684/4	Jan. 16, 2015	Jan. 15, 2016
Spectrum Analyzer R&S	FSV40	100964	July 05, 2014	July 04, 2015
Pre-Amplifier EMCI	EMC184045	980143	Jan. 16, 2015	Jan. 15, 2016
Horn_Antenna SCHWARZBECK	BBHA 9170	9170-424	Aug. 26, 2014	Aug. 25, 2015
RF Cable	NA	RF104-121 RF104-204	Dec. 11, 2014	Dec. 10, 2015
Antenna Tower & Turn Table CT	NA	NA	NA	NA
SPECTRUM ANALYZER R&S	FSP 40	100060	May 08, 2014	May 07, 2015
Power Meter Anritsu	ML2495A	1014008	Apr. 30, 2014	Apr. 29, 2015
Power Sensor Anritsu	MA2411B	0917122	Apr. 30, 2014	Apr. 29, 2015

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in 966 Chamber No. G.
- 3 The CANADA Site Registration No. is IC 7450H-2.
4. Tested Date: Feb. 06 to 11, 2015

For Below 1GHz:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
MXE EMI Receiver Agilent	N9038A	MY50010156	Aug. 11, 2014	Aug. 10, 2015
Pre-Amplifier ^(*) EMCI	EMC001340	980142	Jan. 13, 2014	Jan. 12, 2016
Loop Antenna ^(*) Electro-Metrics	EM-6879	264	Dec. 16, 2014	Dec. 15, 2016
RF Cable	NA	LOOPCAB-001 LOOPCAB-002	Jan. 18, 2015	Jan. 17, 2016
Pre-Amplifier Mini-Circuits	ZFL-1000VH2 B	AMP-ZFL-04	Nov. 12, 2014	Nov. 11, 2015
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-361	Feb. 27, 2014	Feb. 26, 2015
RF Cable	NA	CHHCAB_001	Oct. 05, 2014	Oct. 04, 2015
Software	ADT_Radiated _V8.7.07	NA	NA	NA
Antenna Tower & Turn Table CT	NA	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. *The calibration interval of the above test instruments is 24 months and the calibrations are traceable to NML/ROC and NIST/USA.
3. The test was performed in 966 Chamber No. H.
4. The CANADA Site Registration No. is IC 7450H-3.
5. Loop antenna was used for all emissions below 30 MHz.
6. Tested Date: Feb. 09, 2015

4.1.3 Test Procedures

Following FCC KDB 558074 D01 DTS Meas. Guidance:

Radiated versus Conducted Measurements.

The unwanted emission limits in both the restricted and non-restricted bands are based on antenna-port conducted measurements in conjunction with cabinet emissions tests are permitted to demonstrate compliance.

The following steps was performed:

- a. Cabinet emissions measurements. Radiated measurement was performed to ensure that cabinet emissions are below the emission limits. For the cabinet-emission measurements the antenna was replaced by a termination matching the nominal impedance of the antenna.
- b. Conducted tests was performed using equipment that matches the nominal impedance of the antenna assembly used with the EUT
- c. EIRP calculation. A value representative of an upper bound on out-of-band antenna gain (in dBi) shall be added to the measured antenna-port conducted emission power to compute EIRP within the specified measurement bandwidth. (For emissions in the restricted bands, additional calculations are required to convert EIRP to field strength at the specified distance.) The upper bound on antenna gain for a device with a single RF output shall be selected as the maximum in-band gain of the antenna across all operating bands or 2 dBi, whichever is greater
- d. EIRP adjustments for multiple outputs. (Follow the procedures specified in FCC KDB Publication 662911)

e. For all of Radiation emission test

For Radiated emission below 30MHz

- e-1.1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- e-1.2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- e-1.3. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- e-1.4. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e-1.5. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

Note:

- 1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.
- 2. KDB 414788 OATS and Chamber Correlation Justification
 - Based on FCC 15.31(f)(2) : measurements may be performed at a distance closer than that specified in the regulations; however, an attempts should be made to avoid making measurements in the near field.
 - OATs and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

For Radiated emission above 30MHz

- e-2.1. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- e-2.2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- e-2.3. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e-2.4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e-2.5. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- e-2.6. The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:

- 1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
- 2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
- 3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz (Duty cycle $\geq$ 98%) for Average detection (AV) at frequency above 1GHz.
- 4. All modes of operation were investigated and the worst-case emissions are reported.


4.1.4 Deviation from Test Standard

No deviation.


4.1.5 Test Setup

For Radiated configuration:


For Radiated emission below 30MHz

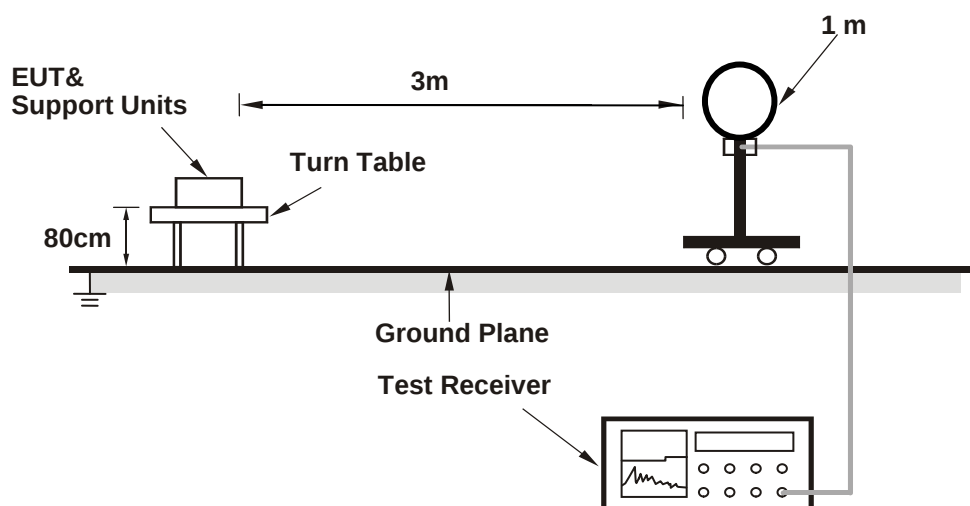


For Radiated emission 30MHz to 1GHz

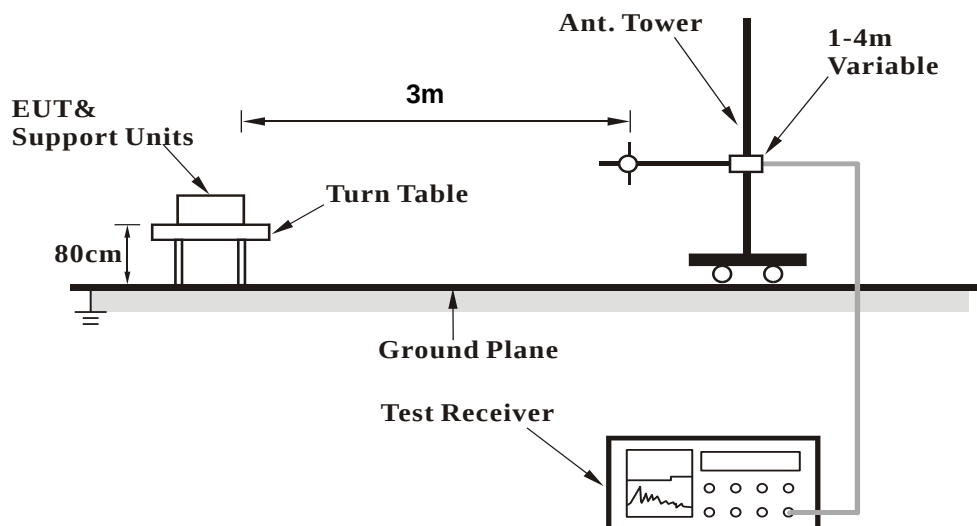

For Radiated emission above 1GHz

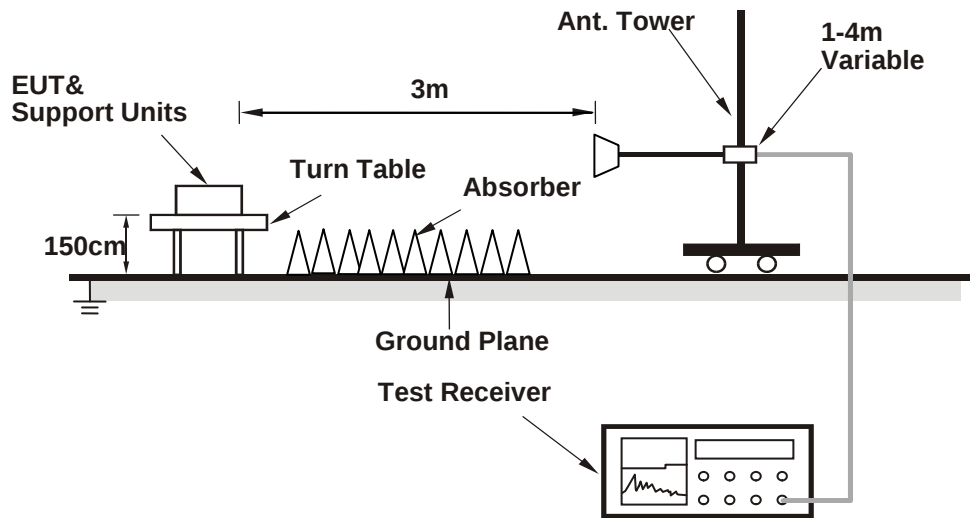

For Conducted configuration:



For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

- Connected the EUT with the Laptop which is placed on on the testing table.
- Controlling software (QRCT Version 3.0 33.0) has been activated to set the EUT on specific status.

4.1.7 Test Results (Radiated Measurement)

Radiated versus Conducted Measurement	
☐ Conducted measurement	☒ Radiated measurement
<u>For Radiated measurement:</u> The level of unwanted emissions was measured when radiated by the cabinet or structure of the equipment with the antenna connector(s) terminated by a specified load (cabinet radiation) <u>For Conducted measurement:</u> The level of unwanted emissions was measured as their power in a specified load (conducted spurious emissions).	

Radiated test was done with 50ohm terminator on antenna port

Above 1GHz Data

802.11b

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4824.00	53.3 PK	74.0	-20.7	1.55 H	56	47.59	5.71
2	4824.00	49.4 AV	54.0	-4.6	1.55 H	56	43.69	5.71
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4824.00	53.2 PK	74.0	-20.8	1.57 V	53	47.49	5.71
2	4824.00	49.1 AV	54.0	-4.9	1.57 V	53	43.39	5.71

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4874.00	54.1 PK	74.0	-19.9	1.65 H	56	48.20	5.90
2	4874.00	50.5 AV	54.0	-3.5	1.65 H	56	44.60	5.90
3	7311.00	53.8 PK	74.0	-20.2	1.00 H	226	40.63	13.17
4	7311.00	40.8 AV	54.0	-13.2	1.00 H	226	27.63	13.17
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4874.00	54.5 PK	74.0	-19.5	1.72 V	54	48.60	5.90
2	4874.00	50.3 AV	54.0	-3.7	1.72 V	54	44.40	5.90
3	7311.00	54.1 PK	74.0	-19.9	1.07 V	262	40.93	13.17
4	7311.00	41.2 AV	54.0	-12.8	1.07 V	262	28.03	13.17

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4924.00	55.8 PK	74.0	-18.2	1.55 H	65	49.69	6.11
2	4924.00	51.0 AV	54.0	-3.0	1.55 H	65	44.89	6.11
3	7386.00	54.2 PK	74.0	-19.8	1.00 H	241	41.02	13.18
4	7386.00	41.2 AV	54.0	-12.8	1.00 H	241	28.02	13.18
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4924.00	54.1 PK	74.0	-19.9	1.48 V	65	47.99	6.11
2	4924.00	50.1 AV	54.0	-3.9	1.48 V	65	43.99	6.11
3	7386.00	54.4 PK	74.0	-19.6	1.00 V	265	41.22	13.18
4	7386.00	41.3 AV	54.0	-12.7	1.00 V	265	28.12	13.18

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

CHANNEL	TX Channel 12	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4934.00	55.0 PK	74.0	-19.0	1.50 H	57	48.85	6.15
2	4934.00	50.5 AV	54.0	-3.5	1.50 H	57	44.35	6.15
3	7401.00	54.7 PK	74.0	-19.3	1.02 H	233	41.53	13.17
4	7401.00	41.6 AV	54.0	-12.4	1.02 H	233	28.43	13.17
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4934.00	54.3 PK	74.0	-19.7	1.47 V	60	48.15	6.15
2	4934.00	50.4 AV	54.0	-3.6	1.47 V	60	44.25	6.15
3	7401.00	54.4 PK	74.0	-19.6	1.02 V	272	41.23	13.17
4	7401.00	41.3 AV	54.0	-12.7	1.02 V	272	28.13	13.17

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

CHANNEL	TX Channel 13	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4944.00	56.0 PK	74.0	-18.0	1.52 H	66	49.81	6.19
2	4944.00	51.0 AV	54.0	-3.0	1.52 H	66	44.81	6.19
3	7416.00	54.6 PK	74.0	-19.4	1.00 H	243	41.45	13.15
4	7416.00	41.5 AV	54.0	-12.5	1.00 H	243	28.35	13.15
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4944.00	54.2 PK	74.0	-19.8	1.48 V	66	48.01	6.19
2	4944.00	50.5 AV	54.0	-3.5	1.48 V	66	44.31	6.19
3	7416.00	55.2 PK	74.0	-18.8	1.00 V	272	42.05	13.15
4	7416.00	41.8 AV	54.0	-12.2	1.00 V	272	28.65	13.15

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

802.11g

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4824.00	48.6 PK	74.0	-25.4	1.55 H	59	42.89	5.71
2	4824.00	34.9 AV	54.0	-19.1	1.55 H	59	29.19	5.71
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4824.00	48.3 PK	74.0	-25.7	1.49 V	55	42.59	5.71
2	4824.00	35.1 AV	54.0	-18.9	1.49 V	55	29.39	5.71

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4874.00	51.7 PK	74.0	-22.3	1.55 H	60	45.80	5.90
2	4874.00	38.4 AV	54.0	-15.6	1.55 H	60	32.50	5.90
3	7311.00	54.2 PK	74.0	-19.8	1.02 H	227	41.03	13.17
4	7311.00	40.9 AV	54.0	-13.1	1.02 H	227	27.73	13.17
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4874.00	51.6 PK	74.0	-22.4	1.48 V	65	45.70	5.90
2	4874.00	38.1 AV	54.0	-15.9	1.48 V	65	32.20	5.90
3	7311.00	53.9 PK	74.0	-20.1	1.00 V	252	40.73	13.17
4	7311.00	41.1 AV	54.0	-12.9	1.00 V	252	27.93	13.17

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4924.00	48.4 PK	74.0	-25.6	1.56 H	60	42.29	6.11
2	4924.00	34.9 AV	54.0	-19.1	1.56 H	60	28.79	6.11
3	7386.00	54.4 PK	74.0	-19.6	1.00 H	222	41.22	13.18
4	7386.00	41.2 AV	54.0	-12.8	1.00 H	222	28.02	13.18

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4924.00	48.5 PK	74.0	-25.5	1.43 V	59	42.39	6.11
2	4924.00	35.1 AV	54.0	-18.9	1.43 V	59	28.99	6.11
3	7386.00	53.6 PK	74.0	-20.4	1.00 V	244	40.42	13.18
4	7386.00	41.1 AV	54.0	-12.9	1.00 V	244	27.92	13.18

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

CHANNEL	TX Channel 12	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4934.00	48.0 PK	74.0	-26.0	1.60 H	64	41.85	6.15
2	4934.00	34.7 AV	54.0	-19.3	1.60 H	64	28.55	6.15
3	7401.00	54.5 PK	74.0	-19.5	1.04 H	216	41.33	13.17
4	7401.00	41.6 AV	54.0	-12.4	1.04 H	216	28.43	13.17
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4934.00	48.0 PK	74.0	-26.0	1.45 V	56	41.85	6.15
2	4934.00	34.6 AV	54.0	-19.4	1.45 V	56	28.45	6.15
3	7401.00	53.3 PK	74.0	-20.7	1.00 V	230	40.13	13.17
4	7401.00	41.1 AV	54.0	-12.9	1.00 V	230	27.93	13.17

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

CHANNEL	TX Channel 13	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4944.00	48.4 PK	74.0	-25.6	1.58 H	67	42.21	6.19
2	4944.00	35.1 AV	54.0	-18.9	1.58 H	67	28.91	6.19
3	7416.00	54.4 PK	74.0	-19.6	1.05 H	223	41.25	13.15
4	7416.00	41.1 AV	54.0	-12.9	1.05 H	223	27.95	13.15
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4944.00	48.9 PK	74.0	-25.1	1.47 V	66	42.71	6.19
2	4944.00	35.5 AV	54.0	-18.5	1.47 V	66	29.31	6.19
3	7416.00	53.8 PK	74.0	-20.2	1.00 V	231	40.65	13.15
4	7416.00	41.1 AV	54.0	-12.9	1.00 V	231	27.95	13.15

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

VHT20

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4824.00	48.2 PK	74.0	-25.8	1.60 H	51	42.49	5.71
2	4824.00	34.8 AV	54.0	-19.2	1.60 H	51	29.09	5.71
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4824.00	48.4 PK	74.0	-25.6	1.53 V	65	42.69	5.71
2	4824.00	35.0 AV	54.0	-19.0	1.53 V	65	29.29	5.71

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4874.00	51.6 PK	74.0	-22.4	1.56 H	74	45.70	5.90
2	4874.00	38.4 AV	54.0	-15.6	1.56 H	74	32.50	5.90
3	7311.00	53.7 PK	74.0	-20.3	1.00 H	218	40.53	13.17
4	7311.00	40.5 AV	54.0	-13.5	1.00 H	218	27.33	13.17
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4874.00	51.4 PK	74.0	-22.6	1.48 V	50	45.50	5.90
2	4874.00	37.9 AV	54.0	-16.1	1.48 V	50	32.00	5.90
3	7311.00	54.0 PK	74.0	-20.0	1.00 V	239	40.83	13.17
4	7311.00	41.1 AV	54.0	-12.9	1.00 V	239	27.93	13.17

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4924.00	48.7 PK	74.0	-25.3	1.57 H	75	42.59	6.11
2	4924.00	35.2 AV	54.0	-18.8	1.57 H	75	29.09	6.11
3	7386.00	54.6 PK	74.0	-19.4	1.06 H	236	41.42	13.18
4	7386.00	41.3 AV	54.0	-12.7	1.06 H	236	28.12	13.18
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4924.00	48.9 PK	74.0	-25.1	1.49 V	53	42.79	6.11
2	4924.00	35.2 AV	54.0	-18.8	1.49 V	53	29.09	6.11
3	7386.00	53.6 PK	74.0	-20.4	1.04 V	237	40.42	13.18
4	7386.00	40.8 AV	54.0	-13.2	1.04 V	237	27.62	13.18

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

CHANNEL	TX Channel 12	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4934.00	48.6 PK	74.0	-25.4	1.53 H	87	42.45	6.15
2	4934.00	35.3 AV	54.0	-18.7	1.53 H	87	29.15	6.15
3	7401.00	54.0 PK	74.0	-20.0	1.05 H	224	40.83	13.17
4	7401.00	41.0 AV	54.0	-13.0	1.05 H	224	27.83	13.17
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4934.00	49.4 PK	74.0	-24.6	1.46 V	59	43.25	6.15
2	4934.00	35.5 AV	54.0	-18.5	1.46 V	59	29.35	6.15
3	7401.00	53.3 PK	74.0	-20.7	1.07 V	251	40.13	13.17
4	7401.00	40.5 AV	54.0	-13.5	1.07 V	251	27.33	13.17

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

CHANNEL	TX Channel 13	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4944.00	49.2 PK	74.0	-24.8	1.58 H	59	43.01	6.19
2	4944.00	35.5 AV	54.0	-18.5	1.58 H	59	29.31	6.19
3	7416.00	54.0 PK	74.0	-20.0	1.10 H	248	40.85	13.15
4	7416.00	41.0 AV	54.0	-13.0	1.10 H	248	27.85	13.15
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4944.00	49.5 PK	74.0	-24.5	1.52 V	43	43.31	6.19
2	4944.00	35.6 AV	54.0	-18.4	1.52 V	43	29.41	6.19
3	7416.00	53.3 PK	74.0	-20.7	1.04 V	232	40.15	13.15
4	7416.00	40.6 AV	54.0	-13.4	1.04 V	232	27.45	13.15

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

VHT40

CHANNEL	TX Channel 3	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4844.00	48.8 PK	74.0	-25.2	1.56 H	72	43.02	5.78
2	4844.00	35.2 AV	54.0	-18.8	1.56 H	72	29.42	5.78
3	7266.00	54.8 PK	74.0	-19.2	1.07 H	208	41.60	13.20
4	7266.00	41.5 AV	54.0	-12.5	1.07 H	208	28.30	13.20
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4844.00	48.4 PK	74.0	-25.6	1.42 V	72	42.62	5.78
2	4844.00	34.9 AV	54.0	-19.1	1.42 V	72	29.12	5.78
3	7266.00	53.7 PK	74.0	-20.3	1.02 V	259	40.50	13.20
4	7266.00	41.0 AV	54.0	-13.0	1.02 V	259	27.80	13.20

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4874.00	48.7 PK	74.0	-25.3	1.53 H	55	42.80	5.90
2	4874.00	35.2 AV	54.0	-18.8	1.53 H	55	29.30	5.90
3	7311.00	54.7 PK	74.0	-19.3	1.00 H	212	41.53	13.17
4	7311.00	41.6 AV	54.0	-12.4	1.00 H	212	28.43	13.17
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4874.00	48.7 PK	74.0	-25.3	1.47 V	49	42.80	5.90
2	4874.00	35.4 AV	54.0	-18.6	1.47 V	49	29.50	5.90
3	7311.00	53.4 PK	74.0	-20.6	1.05 V	255	40.23	13.17
4	7311.00	41.0 AV	54.0	-13.0	1.05 V	255	27.83	13.17

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

CHANNEL	TX Channel 9	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4904.00	48.5 PK	74.0	-25.5	1.53 H	64	42.48	6.02
2	4904.00	35.3 AV	54.0	-18.7	1.53 H	64	29.28	6.02
3	7356.00	54.9 PK	74.0	-19.1	1.09 H	238	41.72	13.18
4	7356.00	41.5 AV	54.0	-12.5	1.09 H	238	28.32	13.18
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4904.00	47.9 PK	74.0	-26.1	1.44 V	59	41.88	6.02
2	4904.00	34.6 AV	54.0	-19.4	1.44 V	59	28.58	6.02
3	7356.00	54.0 PK	74.0	-20.0	1.01 V	248	40.82	13.18
4	7356.00	41.4 AV	54.0	-12.6	1.01 V	248	28.22	13.18

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

CHANNEL	TX Channel 10	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4914.00	48.8 PK	74.0	-25.2	1.53 H	60	42.73	6.07
2	4914.00	35.7 AV	54.0	-18.3	1.53 H	60	29.63	6.07
3	7371.00	54.8 PK	74.0	-19.2	1.11 H	251	41.63	13.17
4	7371.00	41.7 AV	54.0	-12.3	1.11 H	251	28.53	13.17

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4914.00	47.5 PK	74.0	-26.5	1.46 V	65	41.43	6.07
2	4914.00	34.4 AV	54.0	-19.6	1.46 V	65	28.33	6.07
3	7371.00	53.5 PK	74.0	-20.5	1.00 V	247	40.33	13.17
4	7371.00	40.9 AV	54.0	-13.1	1.00 V	247	27.73	13.17

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4924.00	48.8 PK	74.0	-25.2	1.50 H	58	42.69	6.11
2	4924.00	35.3 AV	54.0	-18.7	1.50 H	58	29.19	6.11
3	7386.00	54.6 PK	74.0	-19.4	1.07 H	227	41.42	13.18
4	7386.00	41.1 AV	54.0	-12.9	1.07 H	227	27.92	13.18
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4924.00	48.6 PK	74.0	-25.4	1.40 V	59	42.49	6.11
2	4924.00	35.1 AV	54.0	-18.9	1.40 V	59	28.99	6.11
3	7386.00	53.9 PK	74.0	-20.1	1.00 V	233	40.72	13.18
4	7386.00	41.4 AV	54.0	-12.6	1.00 V	233	28.22	13.18

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

Below 1GHz Data:
802.11g

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	Below 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	165.99	39.3 QP	43.5	-4.2	2.00 H	228	52.48	-13.22
2	247.69	39.3 QP	46.0	-6.7	1.00 H	284	53.32	-14.06
3	282.39	42.5 QP	46.0	-3.5	1.00 H	292	55.06	-12.60
4	432.02	39.3 QP	46.0	-6.7	2.00 H	217	47.78	-8.50
5	698.38	38.9 QP	46.0	-7.1	1.00 H	236	42.24	-3.33
6	898.01	41.8 QP	46.0	-4.2	1.00 H	162	41.69	0.14
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	122.78	38.4 QP	43.5	-5.1	2.00 V	293	53.14	-14.73
2	299.76	35.1 QP	46.0	-10.9	1.00 V	306	47.20	-12.09
3	499.53	41.5 QP	46.0	-4.5	1.50 V	199	48.74	-7.20
4	599.44	35.8 QP	46.0	-10.2	1.50 V	302	40.54	-4.72
5	697.07	35.6 QP	46.0	-10.4	2.00 V	306	38.92	-3.36
6	902.66	40.1 QP	46.0	-6.0	2.00 V	309	39.83	0.22

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

4.1.8 Test Results (Conducted Measurement)

Radiated versus Conducted Measurement	
☒ Conducted measurement	☐ Radiated measurement
<u>For Radiated measurement:</u> The level of unwanted emissions was measured when radiated by the cabinet or structure of the equipment with the antenna connector(s) terminated by a specified load (cabinet radiation) <u>For Conducted measurement:</u> The level of unwanted emissions was measured as their power in a specified load (conducted spurious emissions).	

Conducted Measurement Factor
a. The composite gain will be used when signal support the correlated signal. (Composite gain = $3.62\text{dBi} + 10\log(2) = 6.63\text{dBi}$) b. For the out of band spurious the gain for the specific band may have been used rather than the highest gain across all bands. c. For the band edge the gain for the specific band may have been used. d. In restricted bands below 1000 MHz, add upper bound on ground plane reflection: For $f = 30 - 1000$ MHz, add 4.7 dB. Note: The conducted emission test was considered some factor to compute test result.

Above 1GHz Data
802.11b - Channel 1

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	1609.375 PK	52.1	74	-21.9	-53.29	-52.36	6.63	-43.16
2	1606.25 AV	41.81	54	-12.19	-63.15	-63.04	6.63	-53.45
3	4825 PK	54.49	74	-19.51	-50.83	-50.03	6.63	-40.77
4	4821.875 AV	45.4	54	-8.6	-61.48	-58.15	6.63	-49.86

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

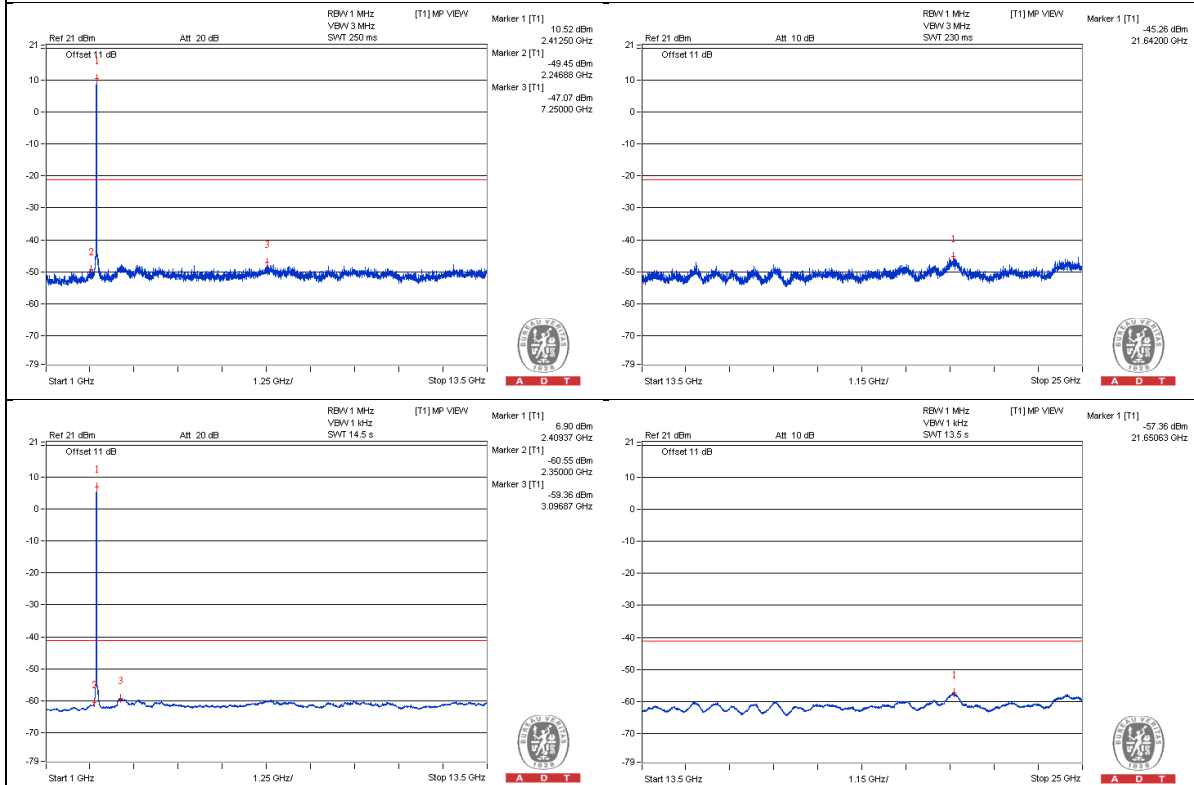

Chain 1

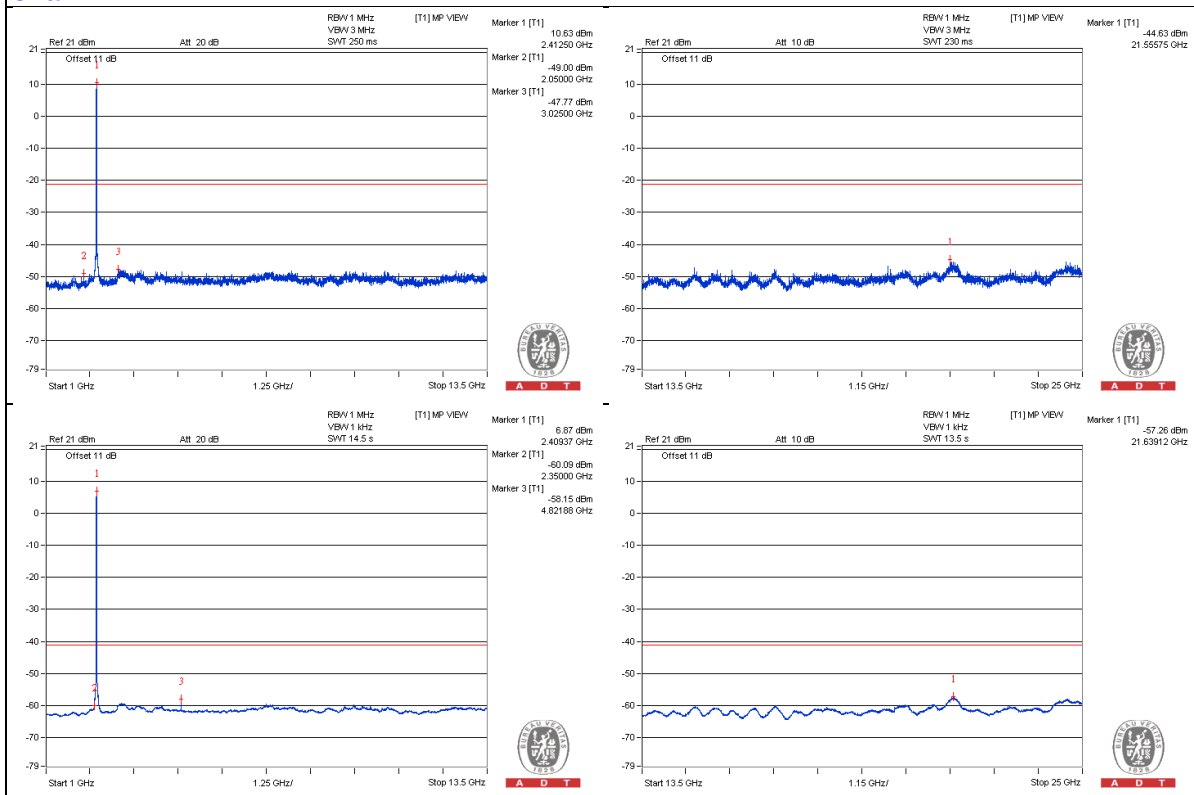

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2387.1875 PK	62.53	74	-11.47	-43.36	-41.56	6.63	-32.73
2	2389.99 AV	49.58	54	-4.42	-56.25	-54.55	6.63	-45.68
3	2484.4675 PK	56.56	74	-17.44	-48.92	-47.83	6.63	-38.7
4	2483.66 AV	43.81	54	-10.19	-61.22	-60.97	6.63	-51.45

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

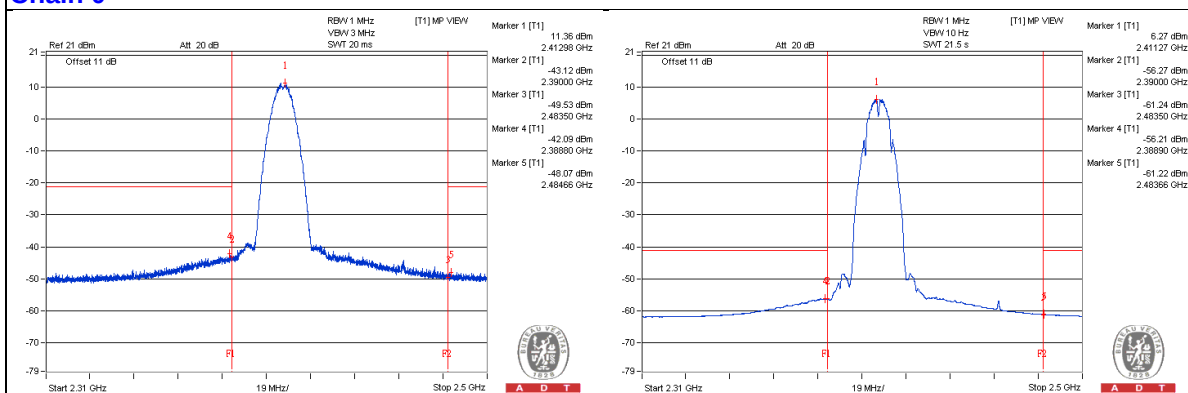

Chain 1

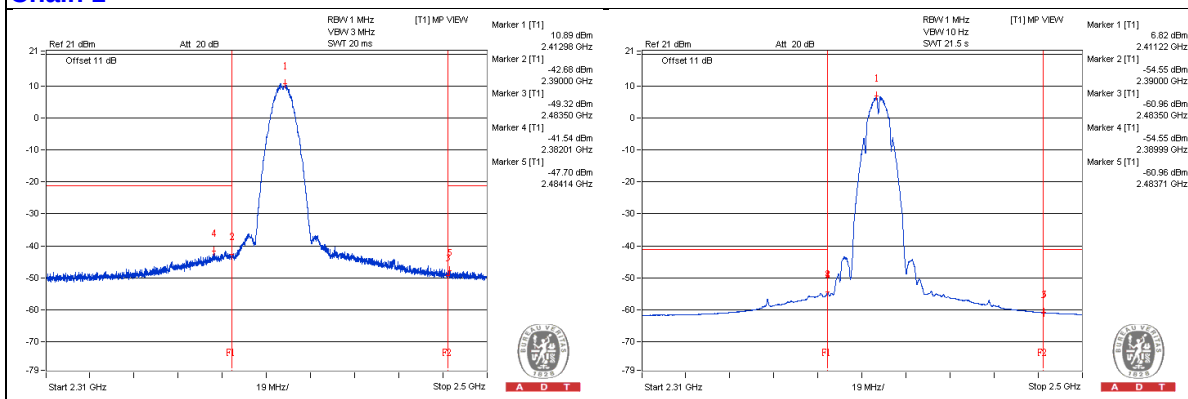

802.11b - Channel 6

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	1625 PK	51.37	74	-22.63	-53.19	-53.9	6.63	-43.89
2	1625 AV	41.91	54	-12.09	-63.05	-62.94	6.63	-53.35
3	4875 PK	54.65	74	-19.35	-50.41	-50.1	6.63	-40.61
4	4871.875 AV	45.77	54	-8.23	-61.73	-57.52	6.63	-49.49
5	7312.5 PK	56.07	74	-17.93	-48.87	-48.8	6.63	-39.19
6	7312.5 AV	45.17	54	-8.83	-60.32	-59.21	6.63	-50.09

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

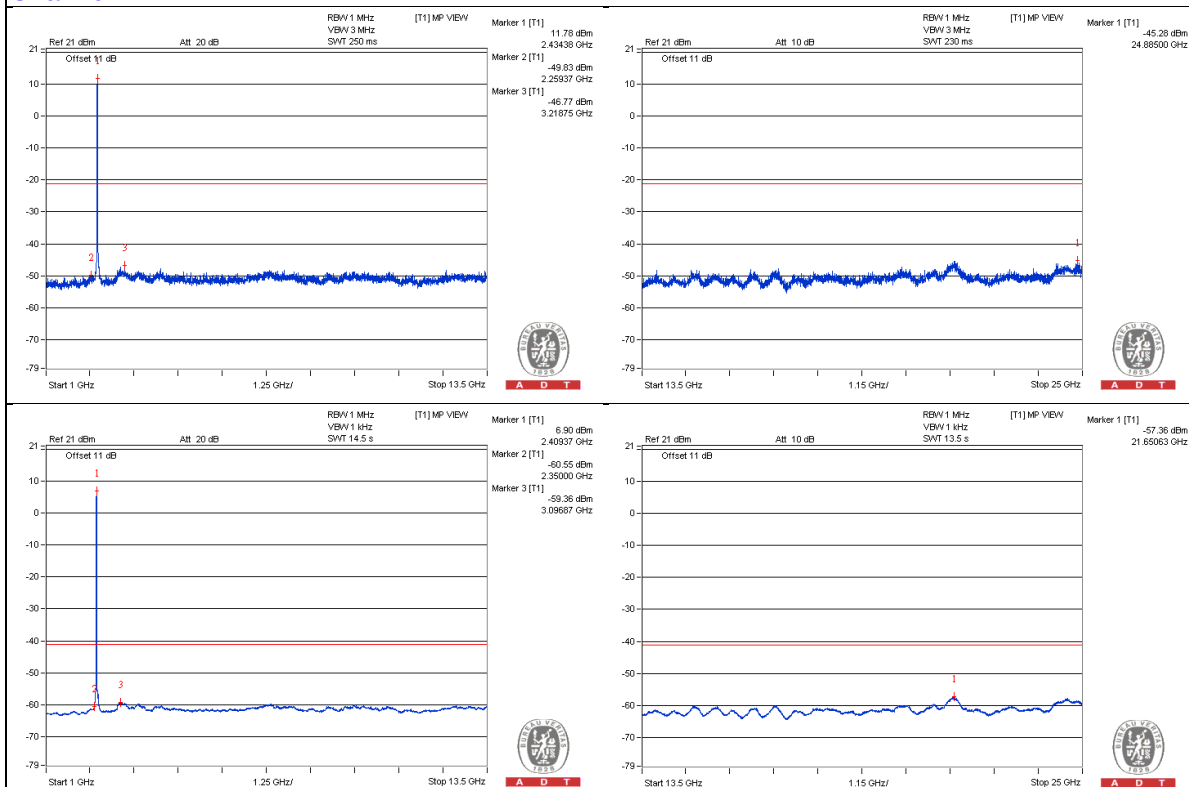

Chain 1

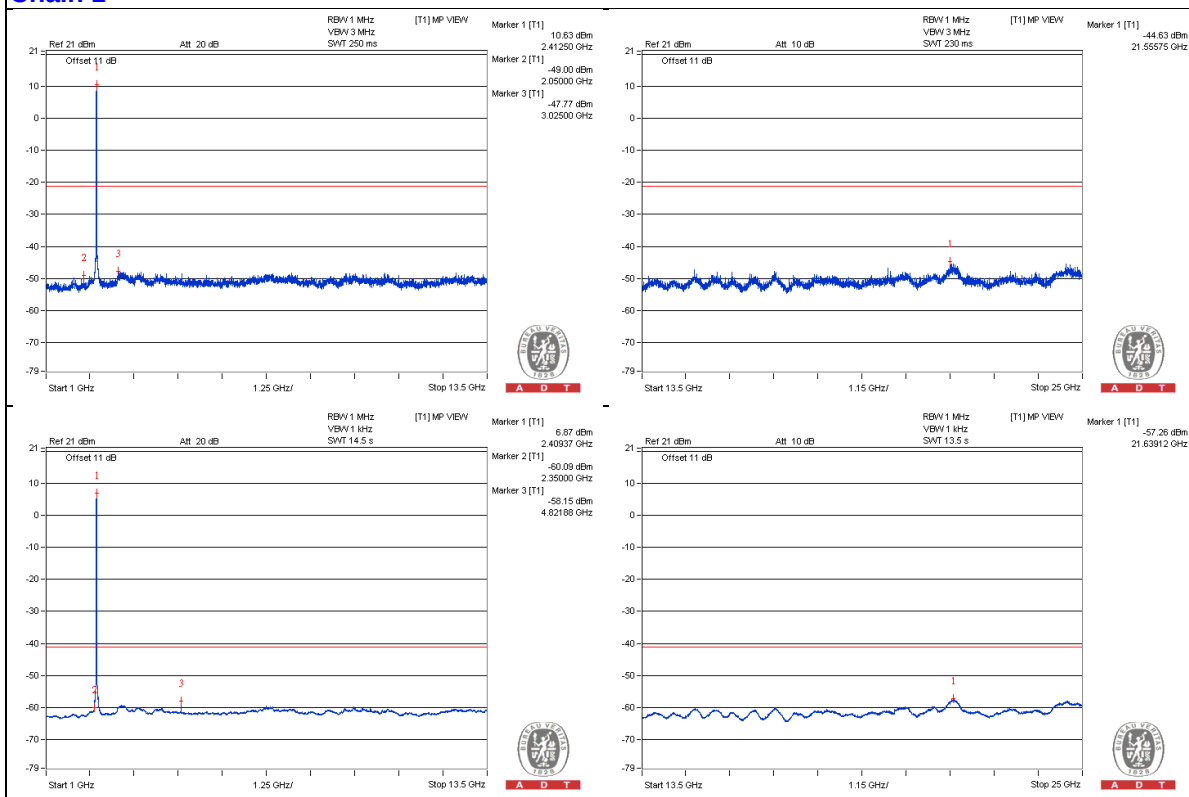

Bandedge table


No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2388.945 PK	58.69	74	-15.31	-46.98	-45.55	6.63	-36.57
2	2388.8975 AV	46.73	54	-7.27	-59.84	-56.96	6.63	-48.53
3	2483.9925 PK	58.57	74	-15.43	-46.96	-45.78	6.63	-36.69
4	2484.895 AV	46.47	54	-7.53	-59.47	-57.59	6.63	-48.79

Note :


Emission Level (dBUV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

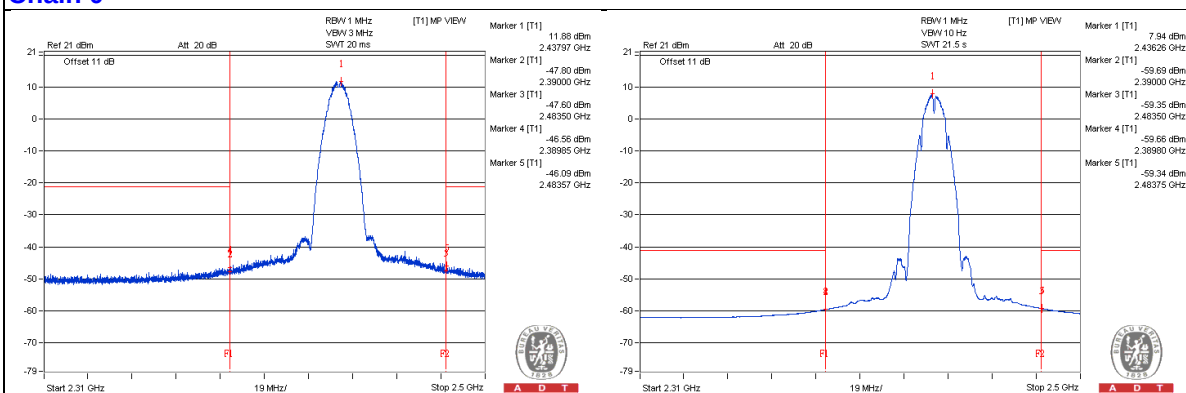

Chain 1

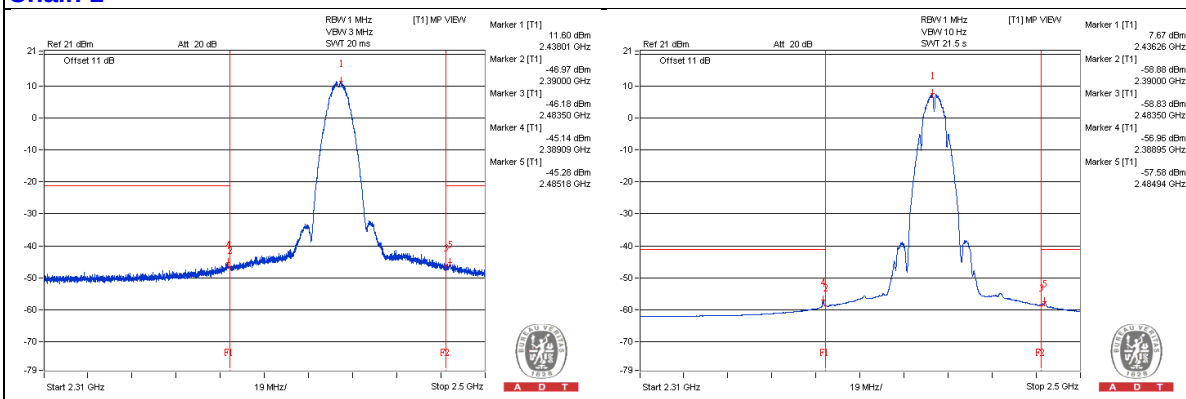

802.11b - Channel 11

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	4925 PK	53.89	74	-20.11	-51.37	-50.67	6.63	-41.37
2	4921.875 AV	45.07	54	-8.93	-61.64	-58.55	6.63	-50.19
3	7384.375 PK	56.07	74	-17.93	-49.23	-48.47	6.63	-39.19
4	7387.5 AV	44.75	54	-9.25	-60.29	-60.01	6.63	-50.51

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

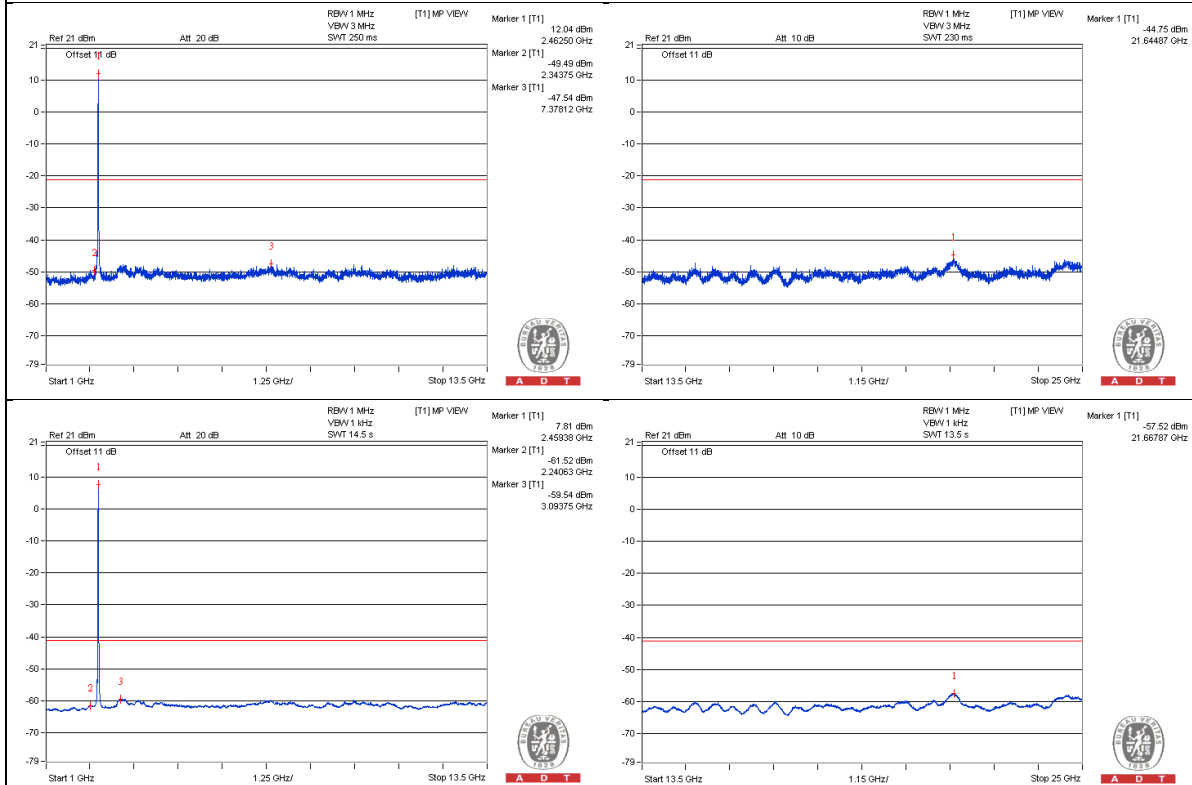

Chain 1

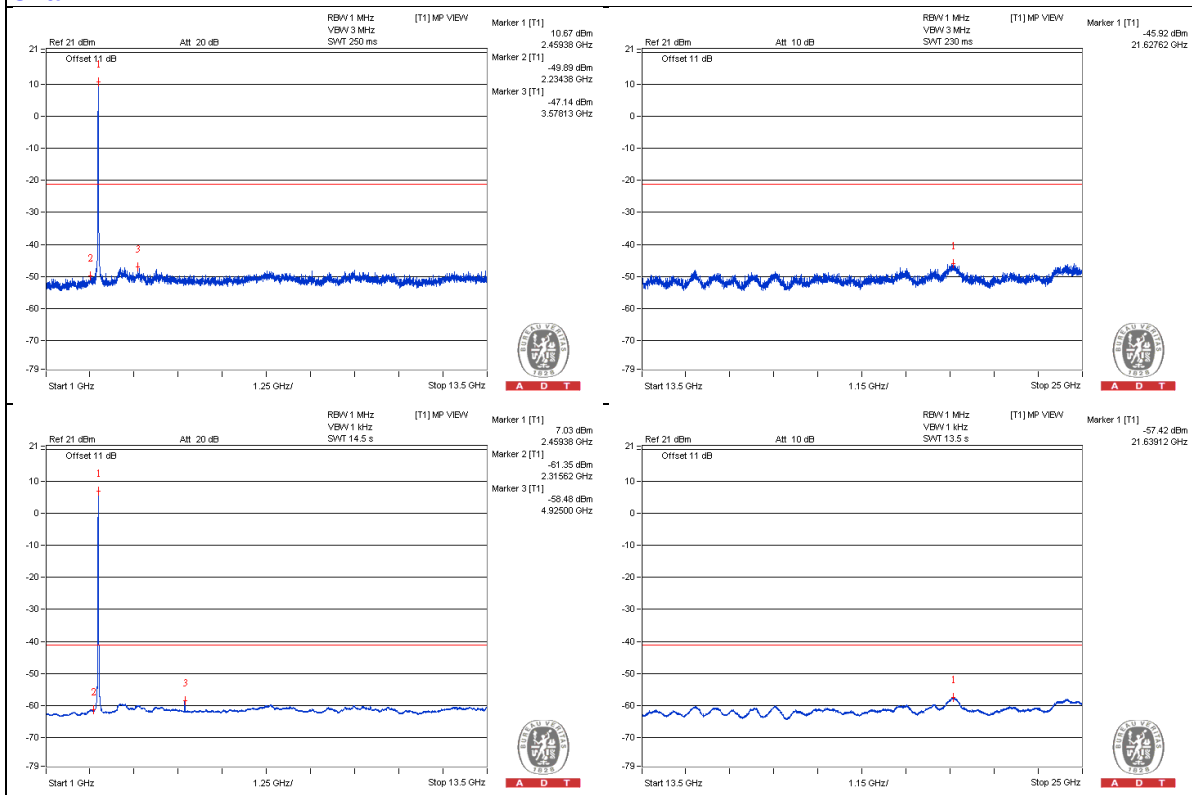

Bandedge table


No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2387.9 PK	56.57	74	-17.43	-48.71	-47.99	6.63	-38.69
2	2389.23 AV	43.53	54	-10.47	-61.48	-61.27	6.63	-51.73
3	2483.8025 PK	61.99	74	-12.01	-43.69	-42.25	6.63	-33.27
4	2483.5175 AV	49.5	54	-4.5	-55.78	-55.05	6.63	-45.76

Note :


Emission Level (dBUV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

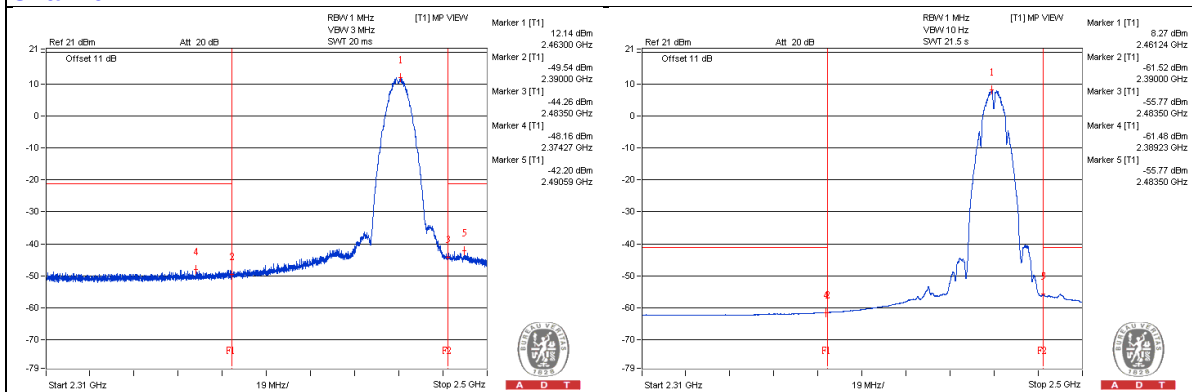

Chain 1

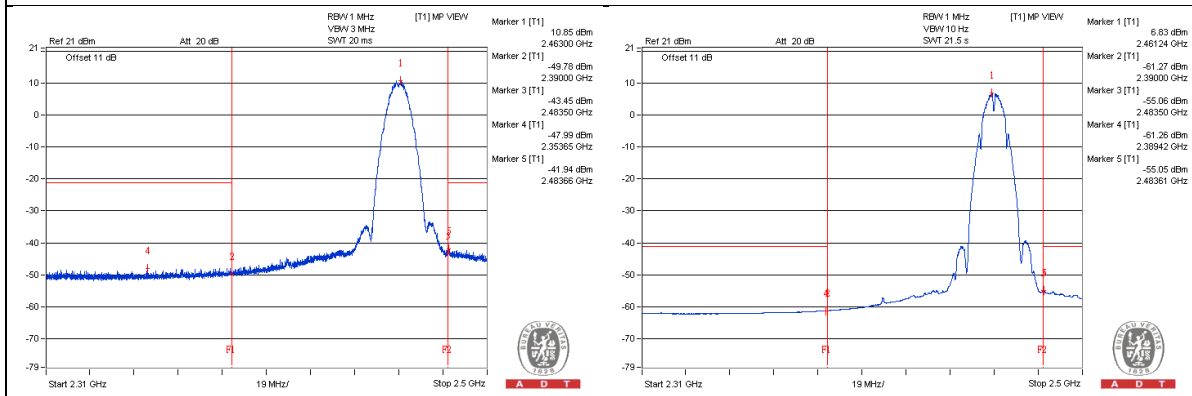

802.11b - Channel 12

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	4934.375 PK	53.6	74	-20.4	-52.08	-50.64	6.63	-41.66
2	4934.375 AV	44.13	54	-9.87	-62.55	-59.51	6.63	-51.13
3	7400 PK	54.8	74	-19.2	-49.82	-50.41	6.63	-40.46
4	7400 AV	43.98	54	-10.02	-61.02	-60.83	6.63	-51.28

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

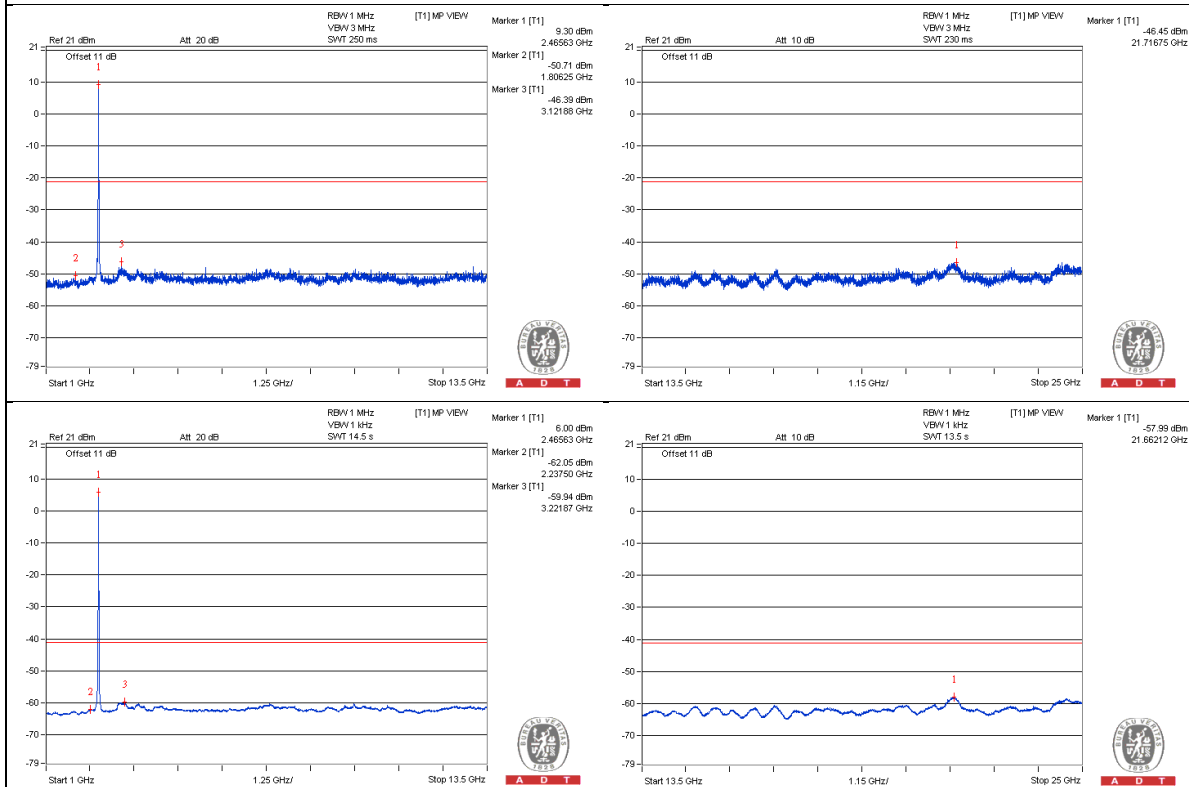

Chain 1

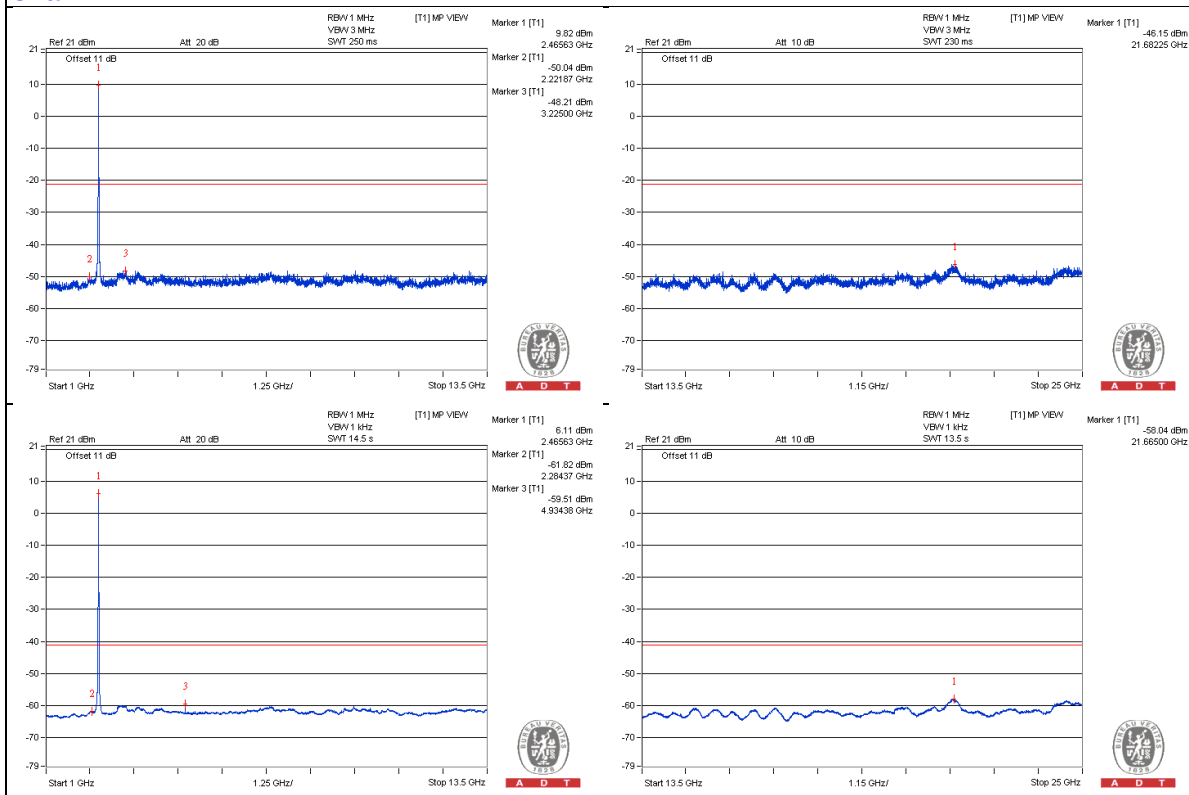

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2372.32 PK	55.85	74	-18.15	-50.22	-48.13	6.63	-39.41
2	2389.99 AV	43	54	-11	-62.08	-61.72	6.63	-52.26
3	2483.5175 PK	63.12	74	-10.88	-42.51	-41.16	6.63	-32.14
4	2483.5175 AV	50.92	54	-3.08	-55.48	-52.86	6.63	-44.34

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

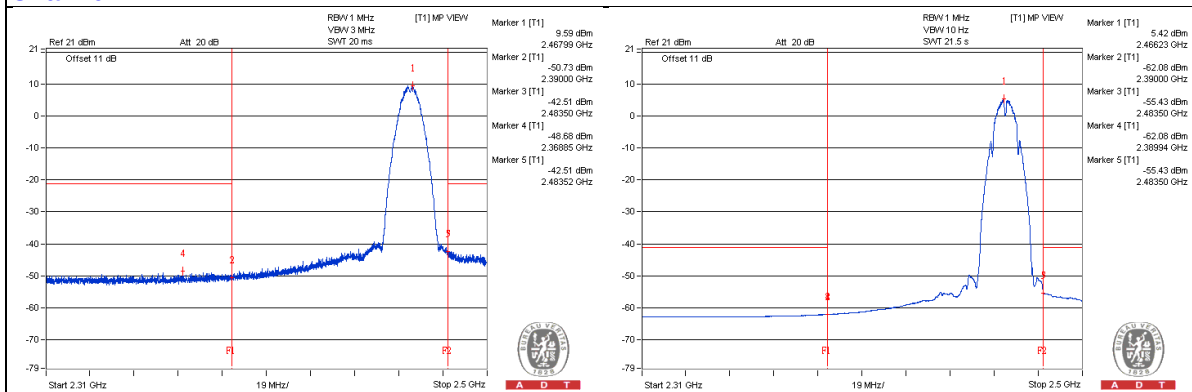

Chain 1

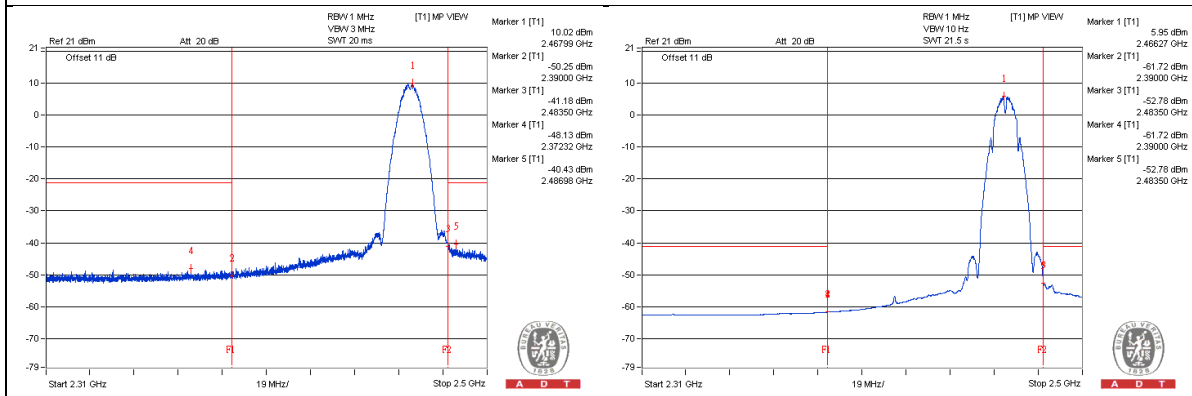

802.11b - Channel 13

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	4943.75 PK	52.73	74	-21.27	-52.14	-52.2	6.63	-42.53
2	4943.75 AV	42.35	54	-11.65	-62.5	-62.61	6.63	-52.91
3	7412.5 PK	55.38	74	-18.62	-49.21	-49.86	6.63	-39.88
4	7418.75 AV	44.13	54	-9.87	-60.75	-60.8	6.63	-51.13

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

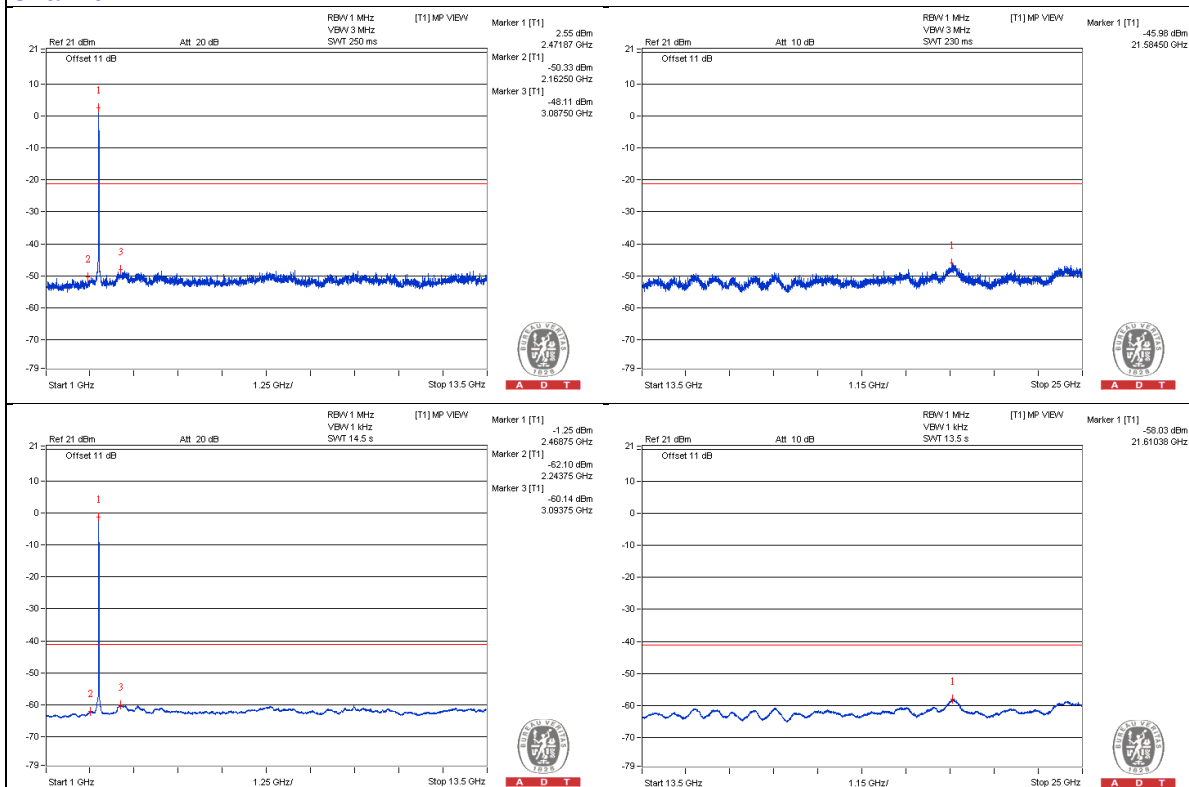

Chain 1

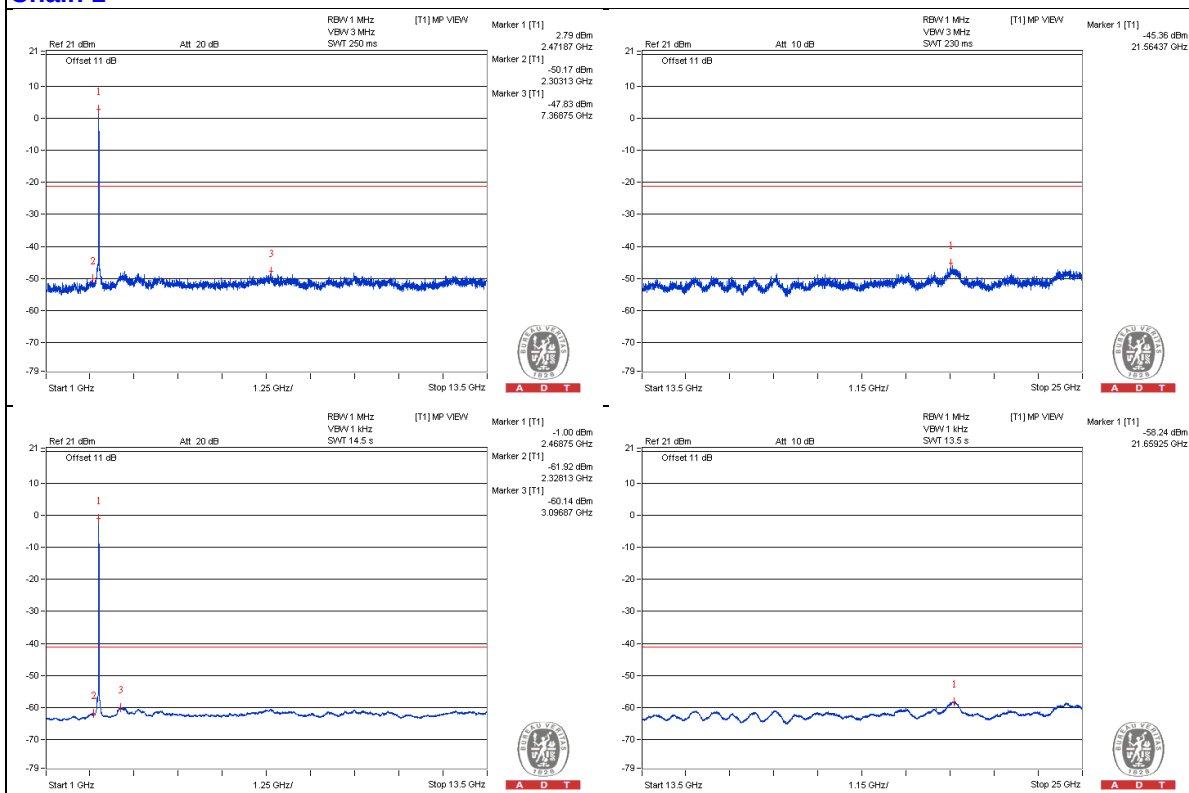

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2381.0125 PK	55.66	74	-18.34	-49.89	-48.68	6.63	-39.6
2	2389.895 AV	42.66	54	-11.34	-62.4	-62.08	6.63	-52.6
3	2483.5175 PK	62.79	74	-11.21	-43.46	-41.08	6.63	-32.47
4	2483.5175 AV	51.81	54	-2.19	-52.83	-53.37	6.63	-43.45

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

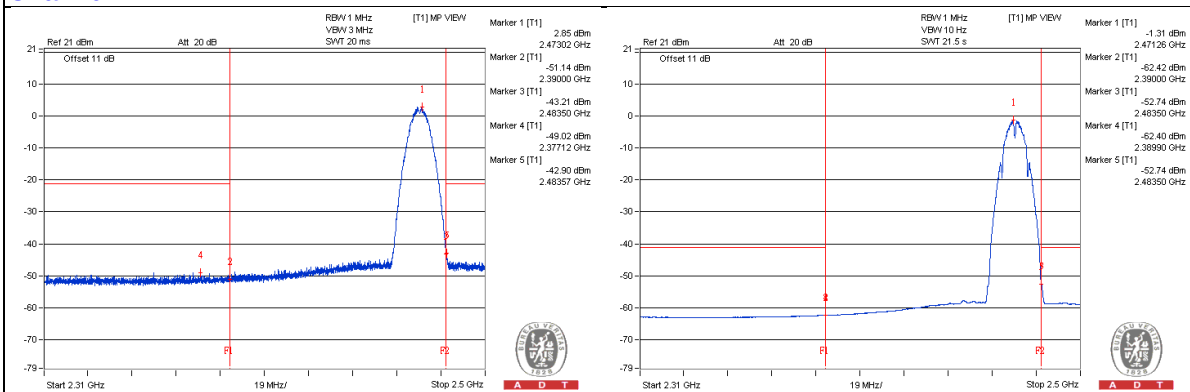

Chain 1

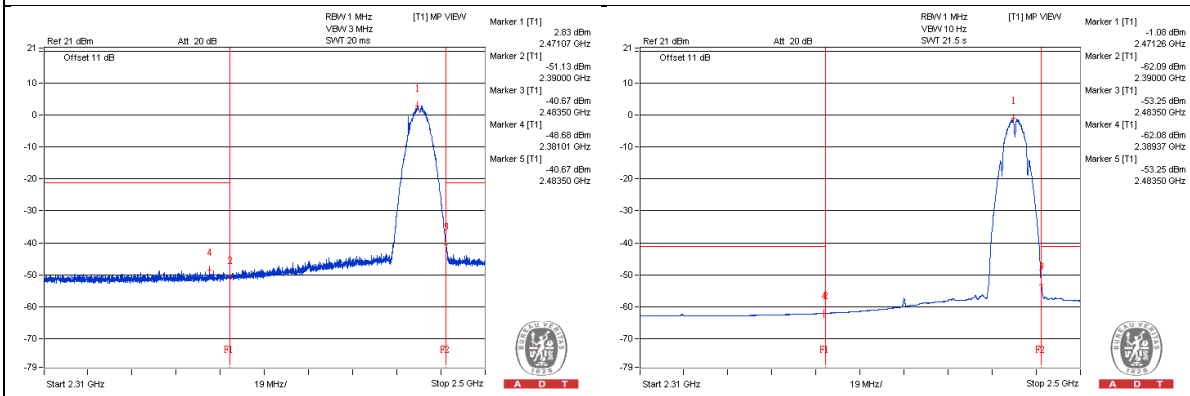

802.11g - Channel 1

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	1609.375 PK	52.91	74	-21.09	-52.21	-51.79	6.63	-42.35
2	1609.375 AV	41.85	54	-12.15	-63.05	-63.05	6.63	-53.41
3	4828.125 PK	54.38	74	-19.62	-50.76	-50.3	6.63	-40.88
4	4828.125 AV	43.36	54	-10.64	-61.41	-61.68	6.63	-51.9

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

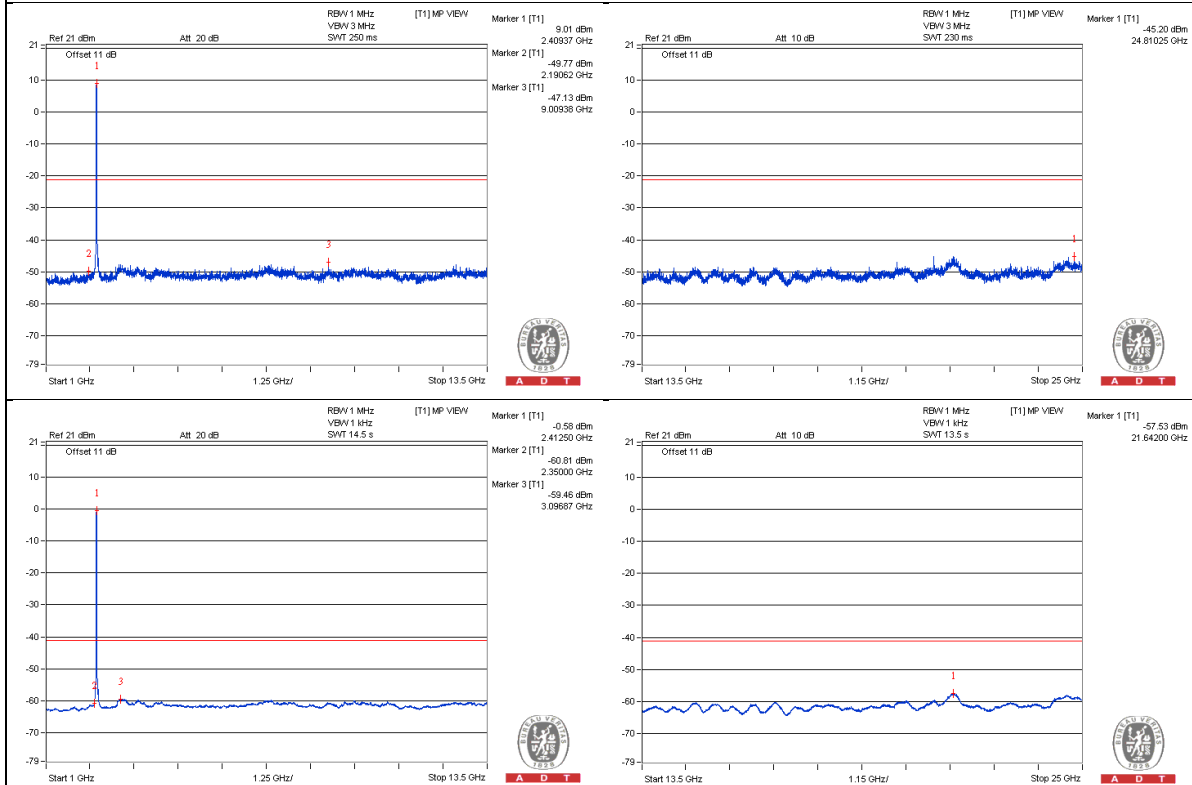

Chain 1

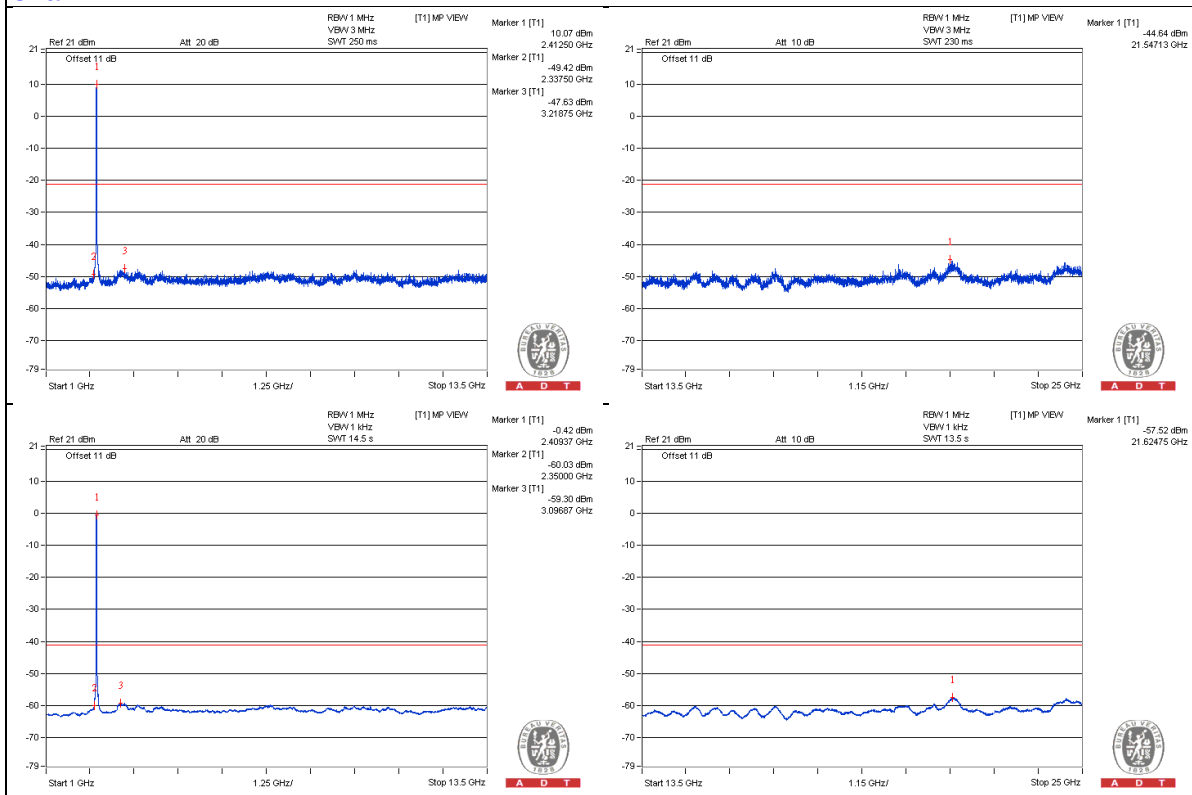

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2389.705 PK	65.5	74	-8.5	-40.2	-38.73	6.63	-29.76
2	2389.99 AV	51.08	54	-2.92	-54.37	-53.33	6.63	-44.18
3	2491.4975 PK	56.55	74	-17.45	-48.37	-48.33	6.63	-38.71
4	2483.5175 AV	43.75	54	-10.25	-61.37	-60.94	6.63	-51.51

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

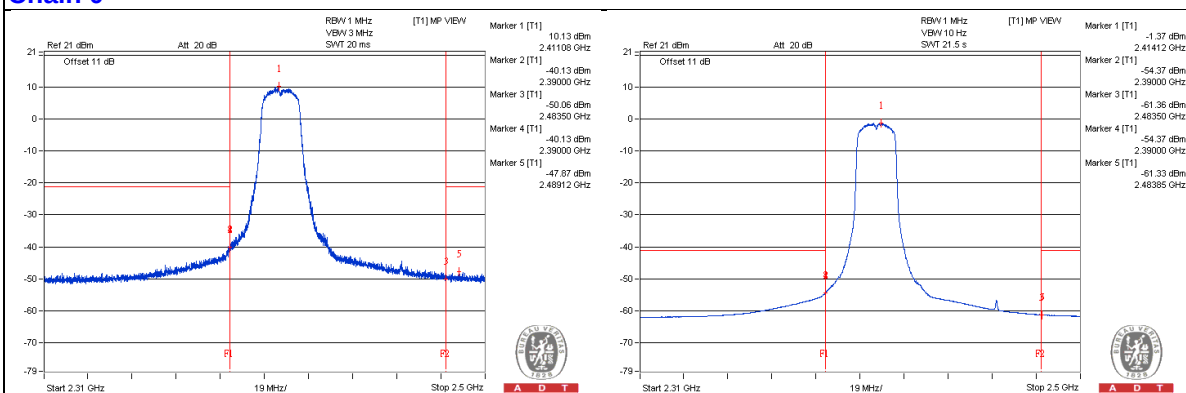

Chain 1

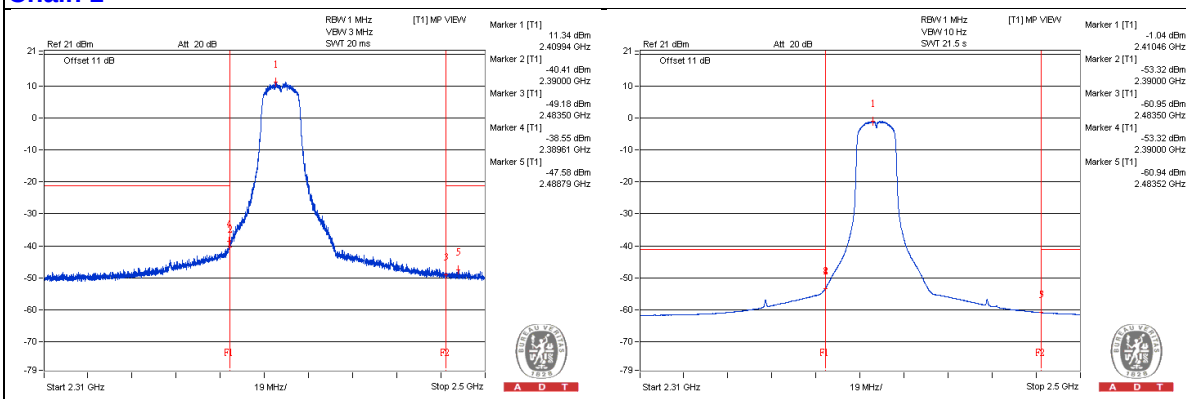

802.11g - Channel 6

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	1625 PK	51.75	74	-22.25	-53.08	-53.23	6.63	-43.51
2	1625 AV	41.85	54	-12.15	-63.04	-63.06	6.63	-53.41
3	4871.875 PK	54.29	74	-19.71	-50.18	-51.08	6.63	-40.97
4	4871.875 AV	43.45	54	-10.55	-61.64	-61.26	6.63	-51.81
5	7315.625 PK	55.77	74	-18.23	-49.16	-49.11	6.63	-39.49
6	7315.625 AV	44.87	54	-9.13	-60.31	-59.77	6.63	-50.39

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

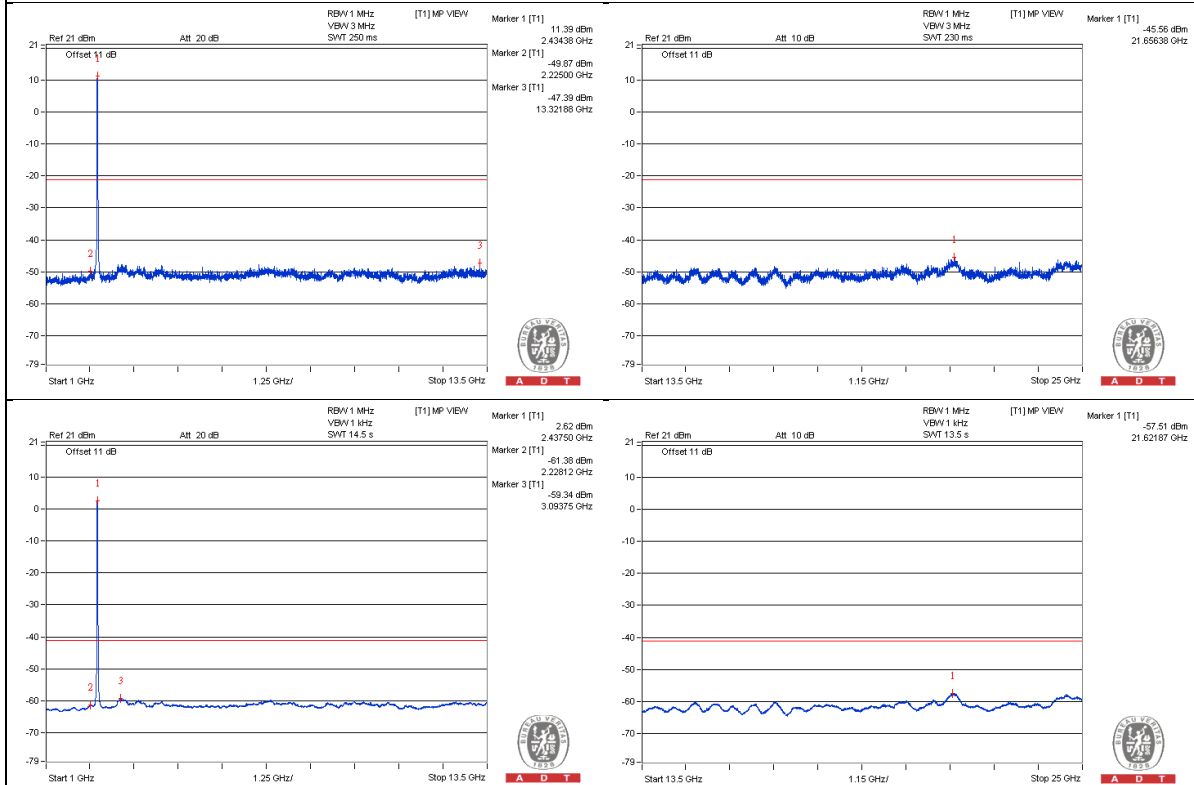

Chain 1

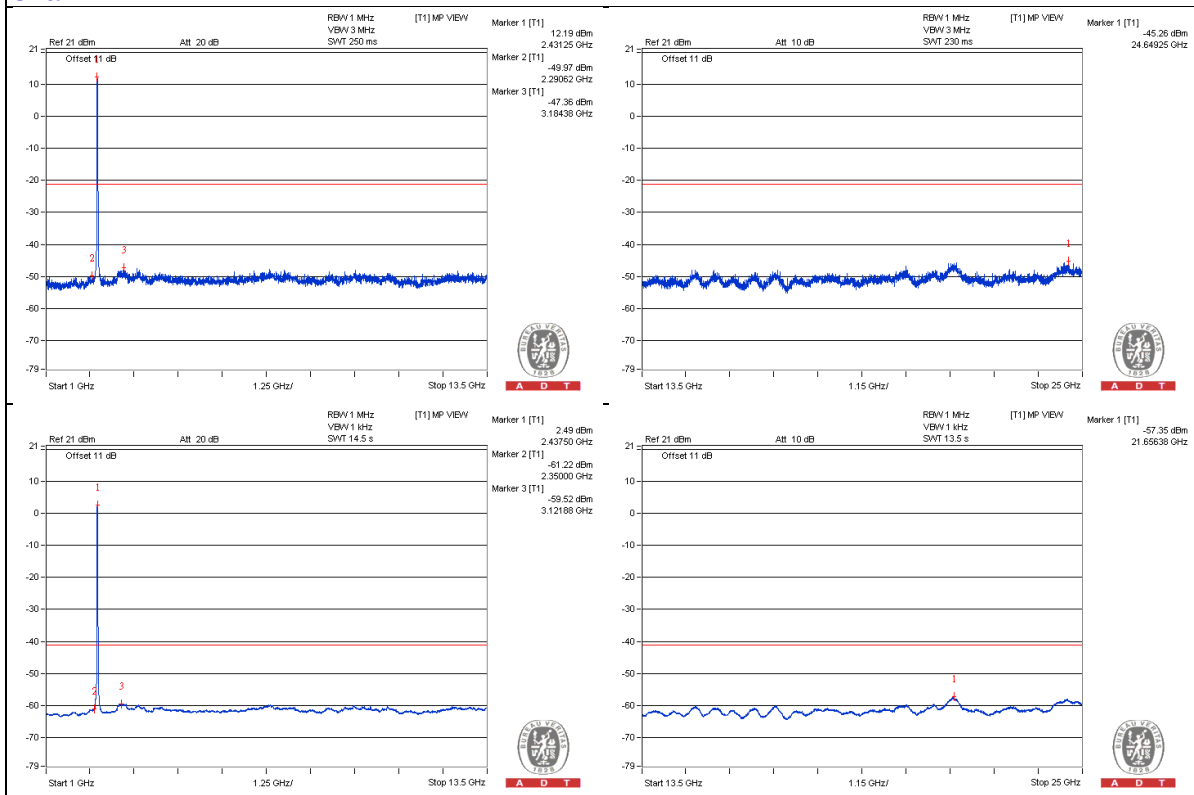

Bandedge table


No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2389.99 PK	58.97	74	-15.03	-47.28	-44.9	6.63	-36.29
2	2388.9925 AV	46.87	54	-7.13	-59.57	-56.9	6.63	-48.39
3	2484.705 PK	59.19	74	-14.81	-45.74	-45.68	6.63	-36.07
4	2484.99 AV	46.83	54	-7.17	-59.33	-57.09	6.63	-48.43

Note :


Emission Level (dBUV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

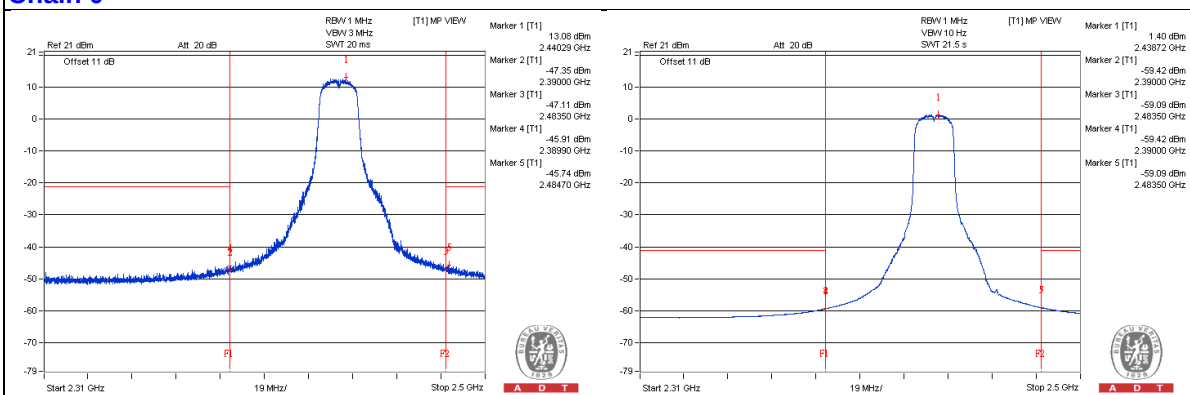

Chain 1

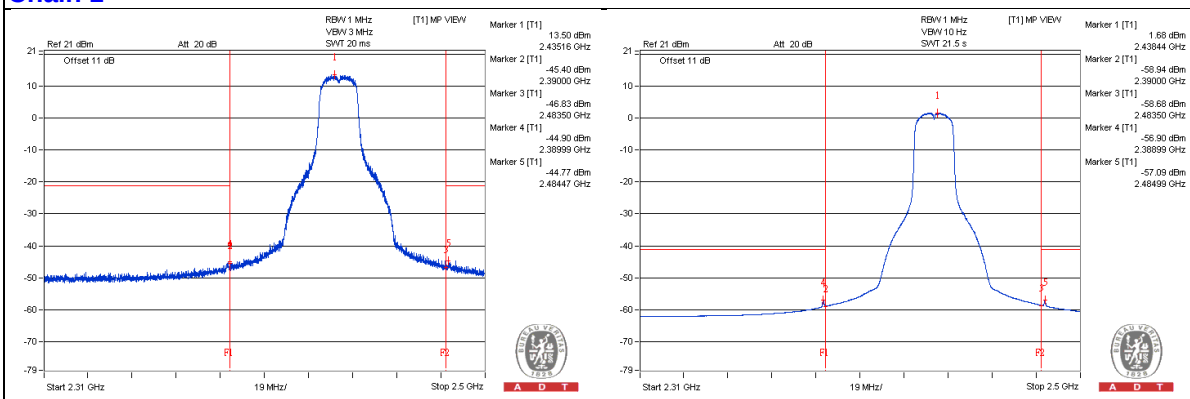

802.11g - Channel 11

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	4925 PK	52.83	74	-21.17	-51.96	-52.19	6.63	-42.43
2	4925 AV	43	54	-11	-62.08	-61.73	6.63	-52.26
3	7384.375 PK	56.01	74	-17.99	-49.04	-48.74	6.63	-39.25
4	7381.25 AV	44.76	54	-9.24	-60.24	-60.04	6.63	-50.5

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

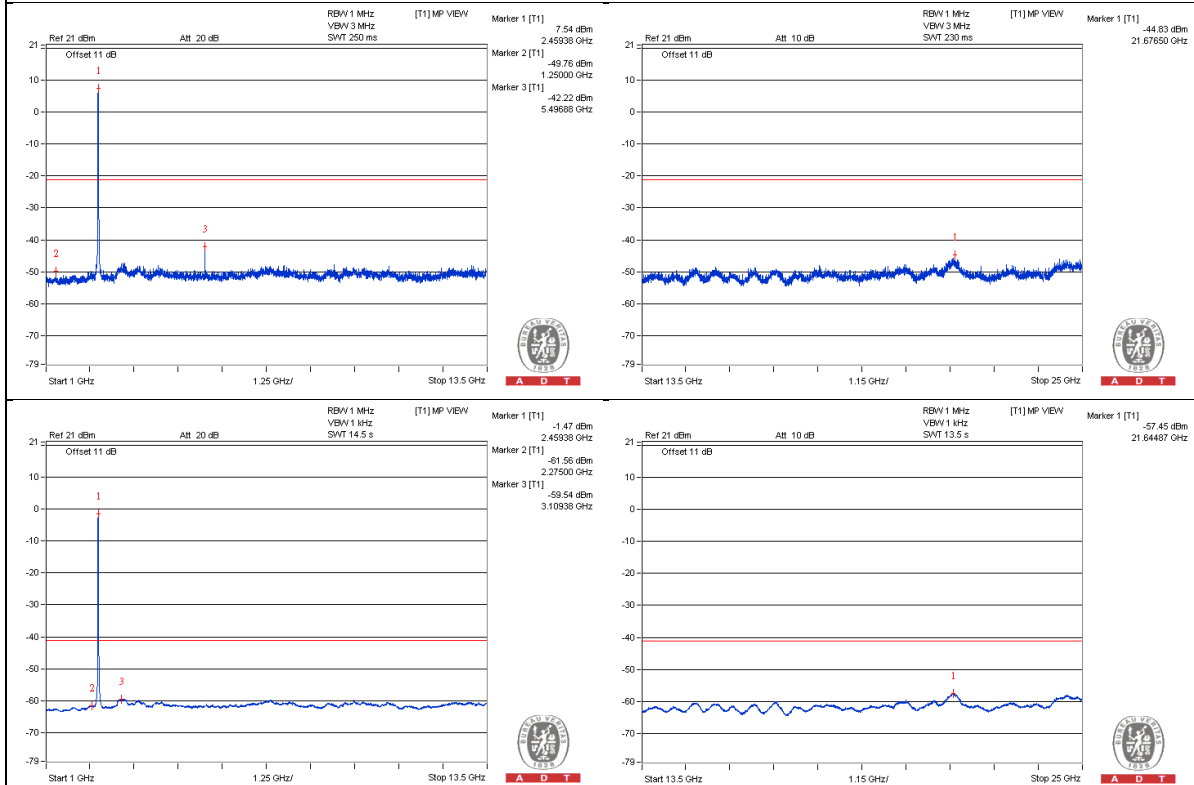

Chain 1

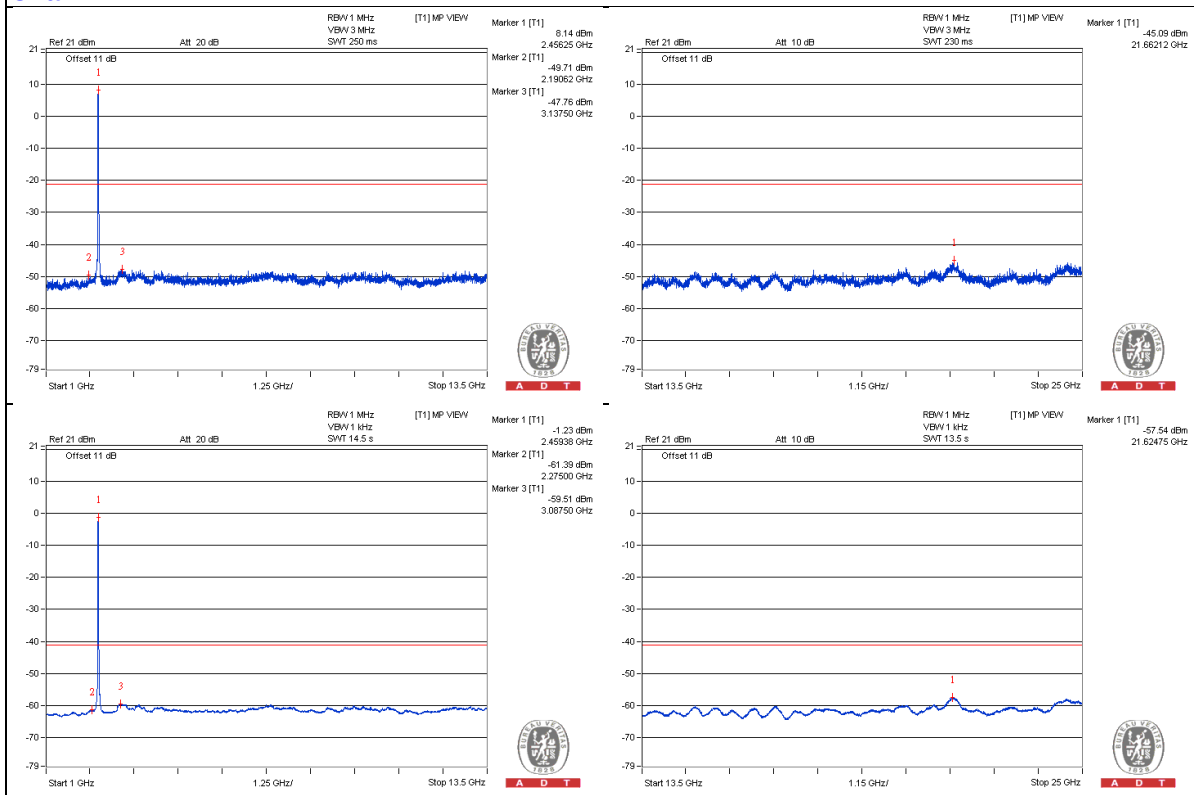

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2387.1875 PK	56.72	74	-17.28	-47.08	-49.67	6.63	-38.54
2	2389.99 AV	43.57	54	-10.43	-61.51	-61.16	6.63	-51.69
3	2483.5175 PK	65.53	74	-8.47	-41.56	-37.92	6.63	-29.73
4	2483.5175 AV	51.3	54	-2.7	-54.98	-52.56	6.63	-43.96

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

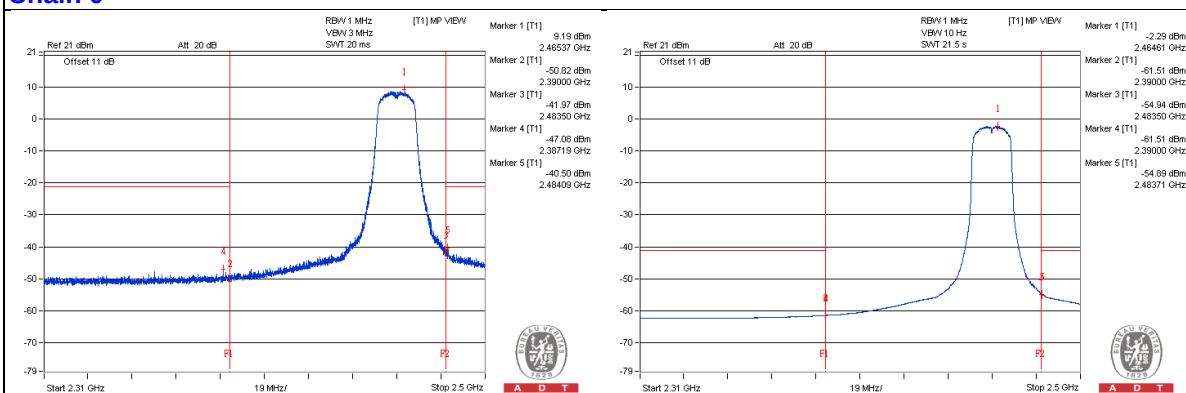

Chain 1

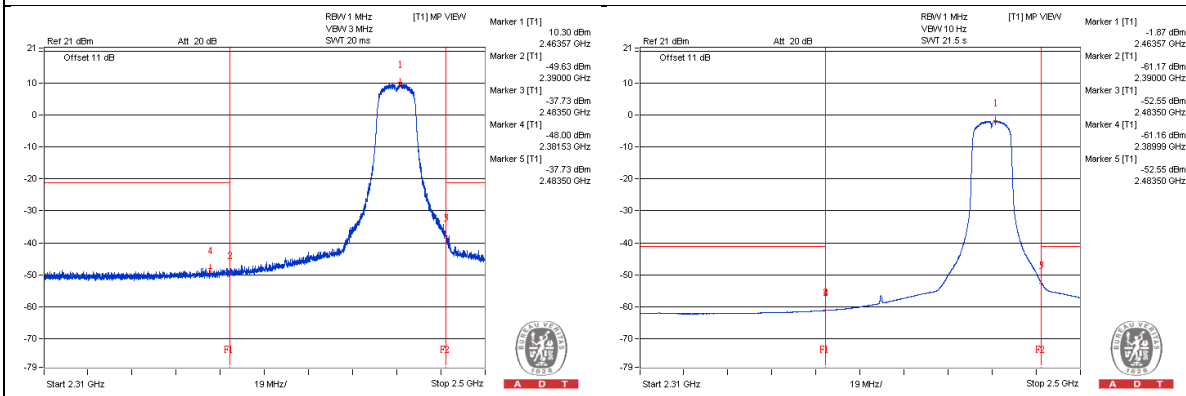

802.11g - Channel 12

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	4931.25 PK	53.55	74	-20.45	-51.02	-51.71	6.63	-41.71
2	4934.375 AV	42.38	54	-11.62	-62.64	-62.41	6.63	-52.88
3	7400 PK	54.6	74	-19.4	-50.63	-50	6.63	-40.66
4	7400 AV	43.85	54	-10.15	-61.14	-60.97	6.63	-51.41

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

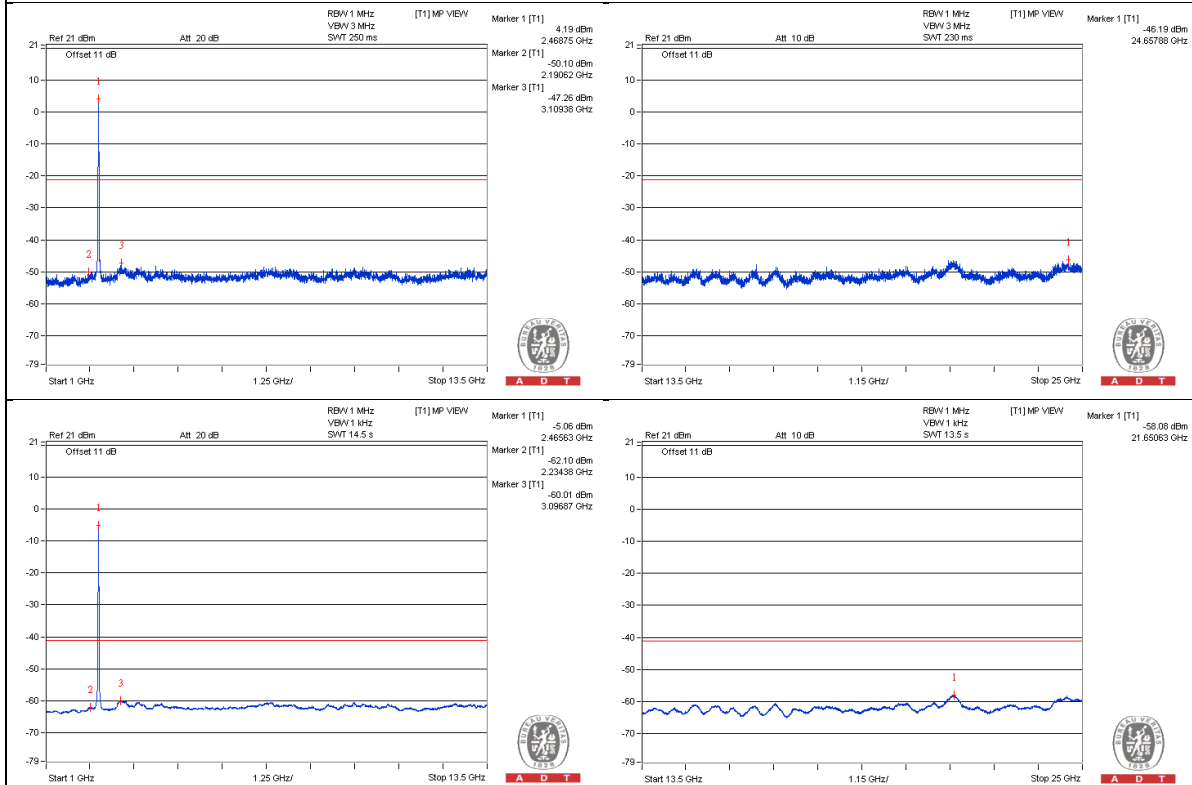

Chain 1

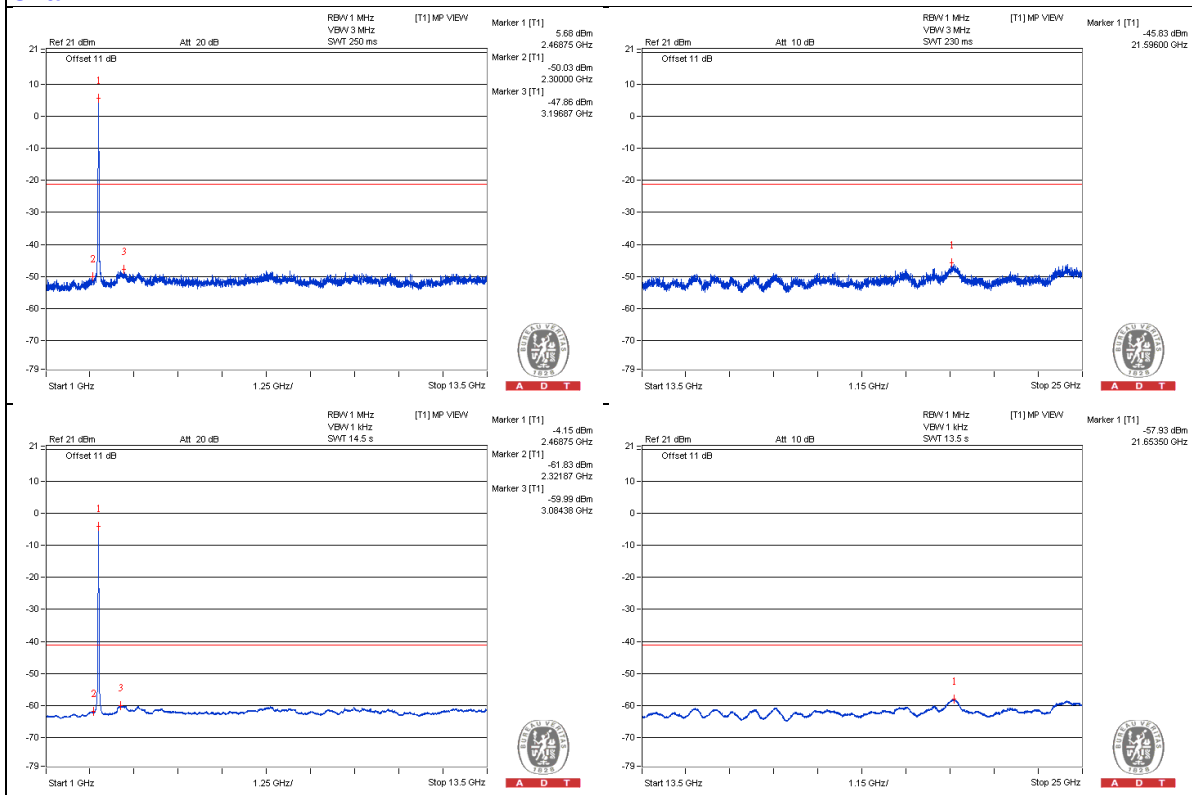

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2389.0875 PK	55.66	74	-18.34	-50.05	-48.56	6.63	-39.6
2	2389.8475 AV	42.97	54	-11.03	-62.18	-61.7	6.63	-52.29
3	2483.6125 PK	64.88	74	-9.12	-43.1	-38.23	6.63	-30.38
4	2483.5175 AV	51.65	54	-2.35	-54.97	-52.02	6.63	-43.61

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

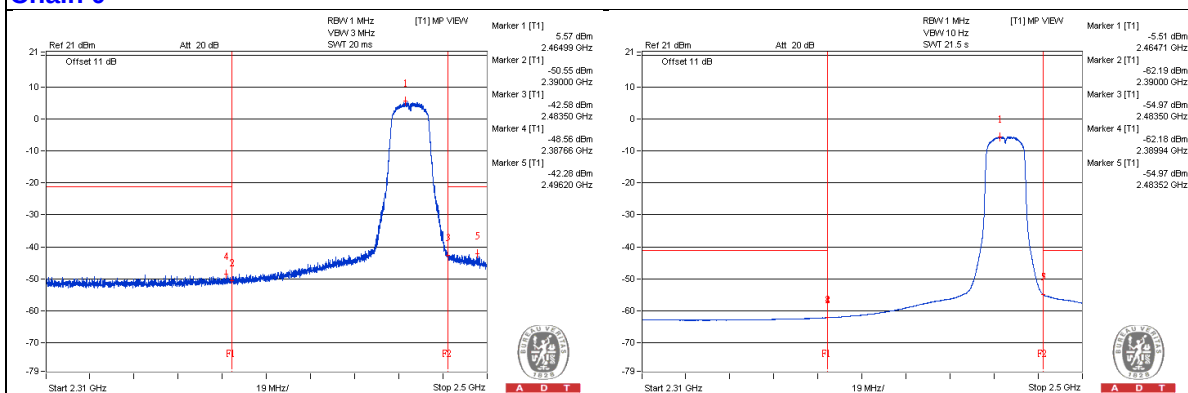

Chain 1

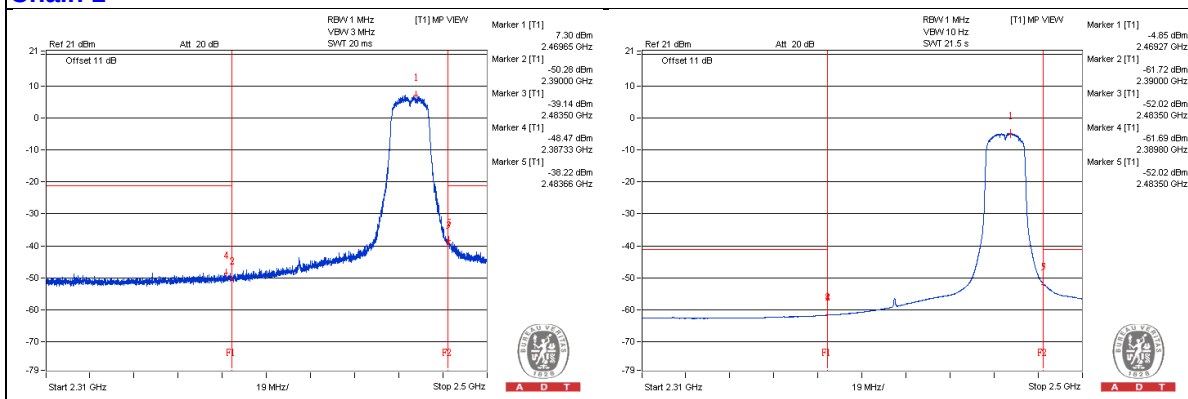

802.11g - Channel 13

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	4946.875 PK	52.52	74	-21.48	-52.39	-52.37	6.63	-42.74
2	4940.625 AV	42.42	54	-11.58	-62.43	-62.54	6.63	-52.84
3	7415.625 PK	55.1	74	-18.9	-49.81	-49.79	6.63	-40.16
4	7415.625 AV	44.1	54	-9.9	-60.65	-60.96	6.63	-51.16

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

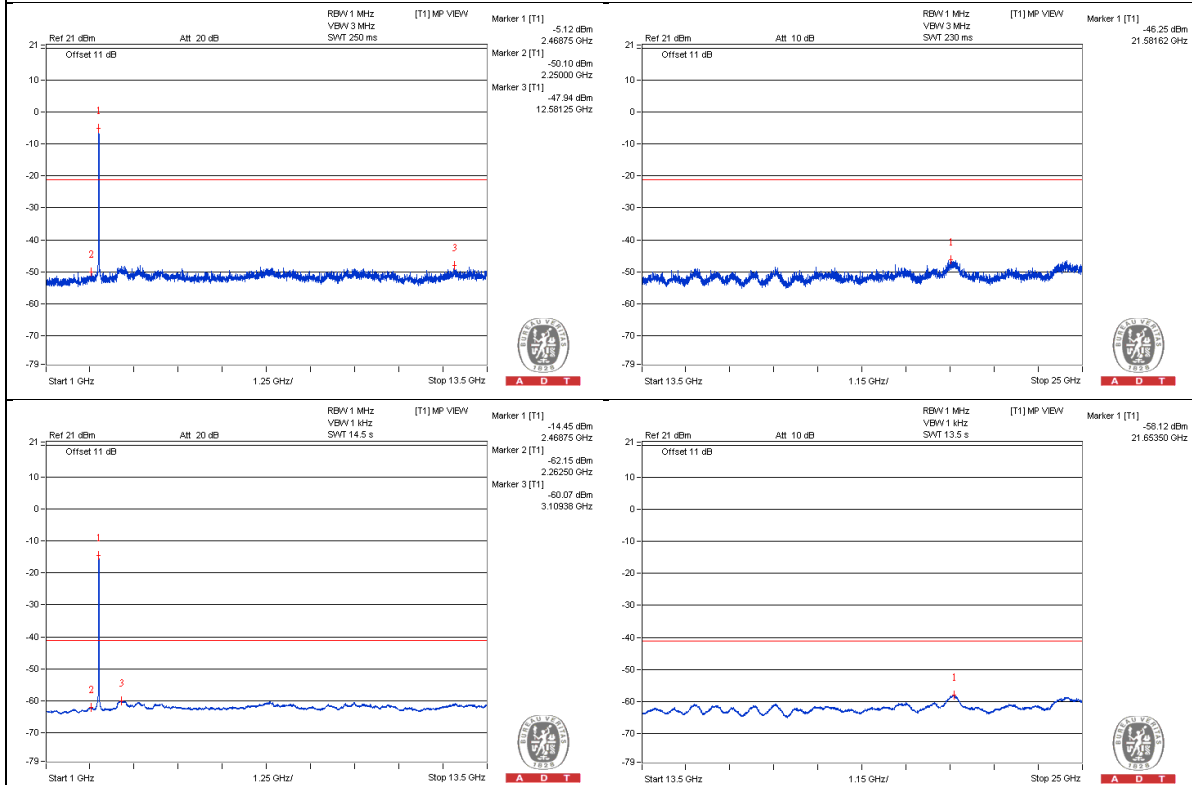

Chain 1

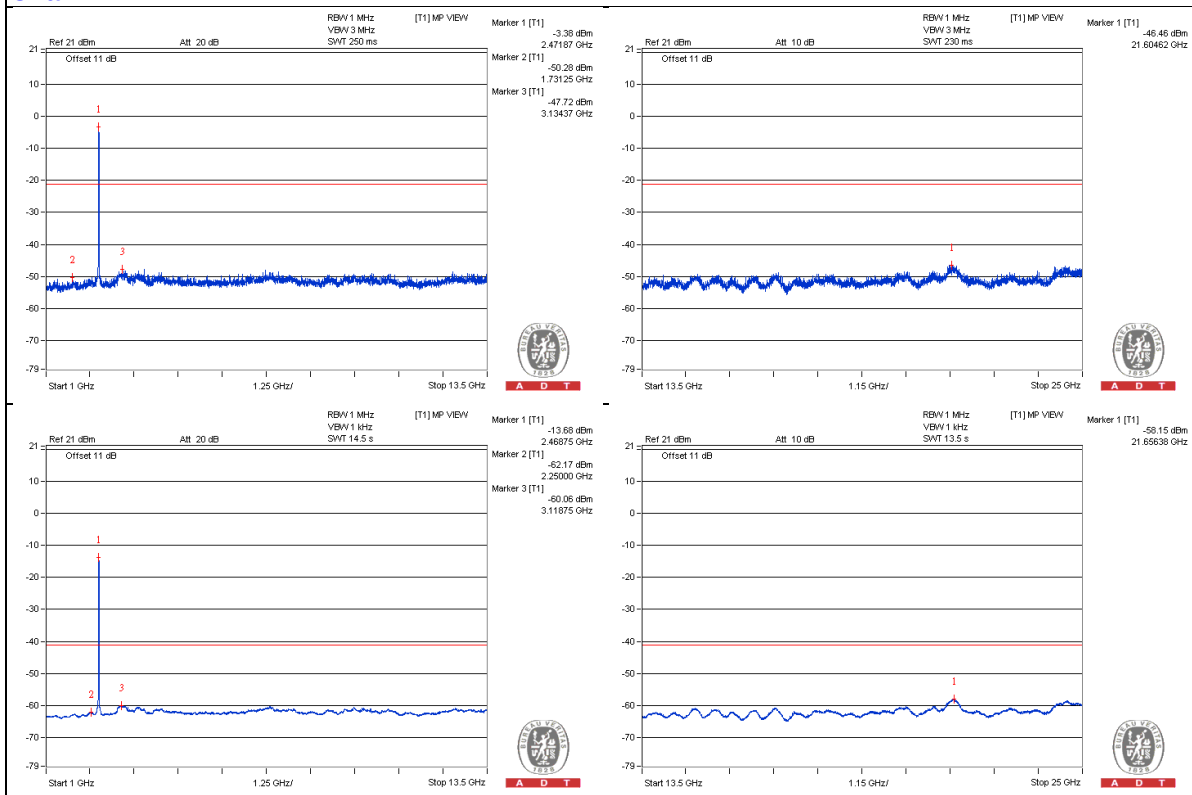

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2387.4725 PK	54.57	74	-19.43	-50.66	-50.02	6.63	-40.69
2	2389.5625 AV	41.89	54	-12.11	-62.92	-63.11	6.63	-53.37
3	2483.5175 PK	69.05	74	-4.95	-35.35	-36.42	6.63	-26.21
4	2483.5175 AV	51.94	54	-2.06	-53.37	-52.59	6.63	-43.32

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

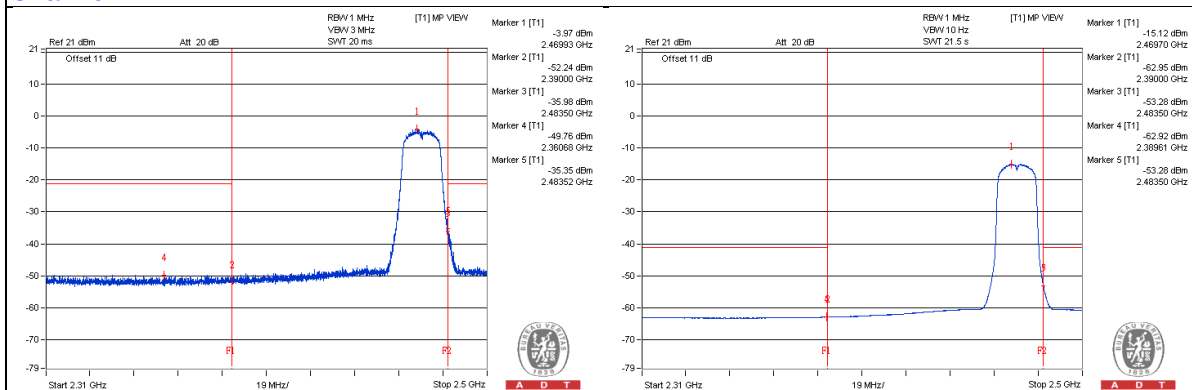

Chain 1

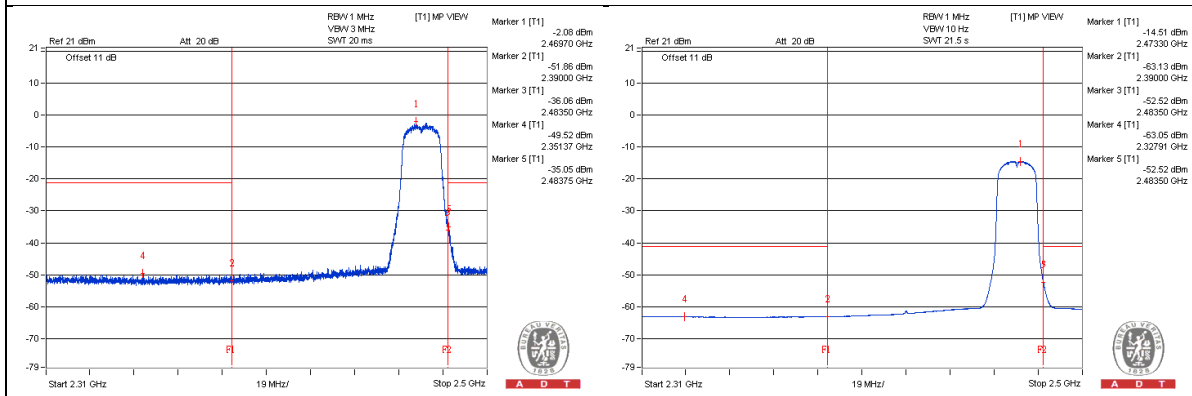

VHT20 - Channel 1

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	1609.375 PK	51.58	74	-22.42	-53.19	-53.45	6.63	-43.68
2	1606.25 AV	41.76	54	-12.24	-63.16	-63.12	6.63	-53.5
3	4821.875 PK	54.56	74	-19.44	-49.95	-50.77	6.63	-40.7
4	4821.875 AV	43.47	54	-10.53	-61.61	-61.26	6.63	-51.79

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

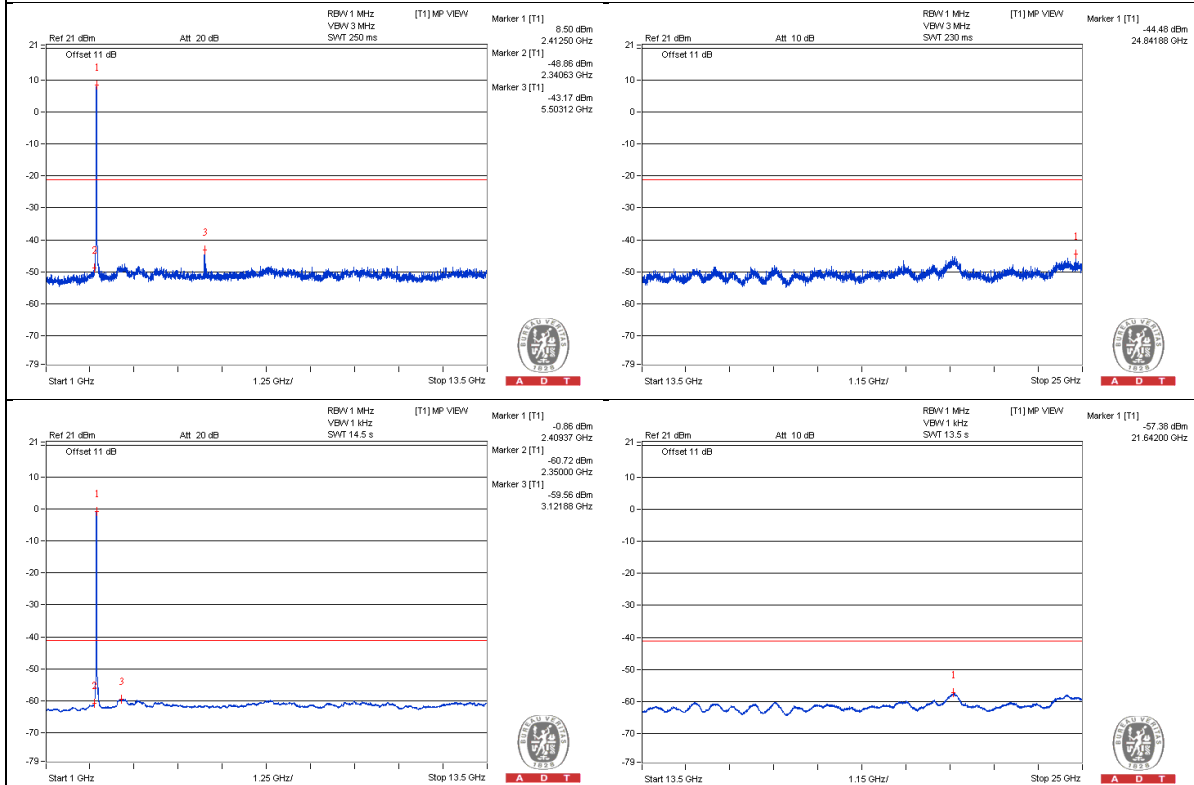

Chain 1

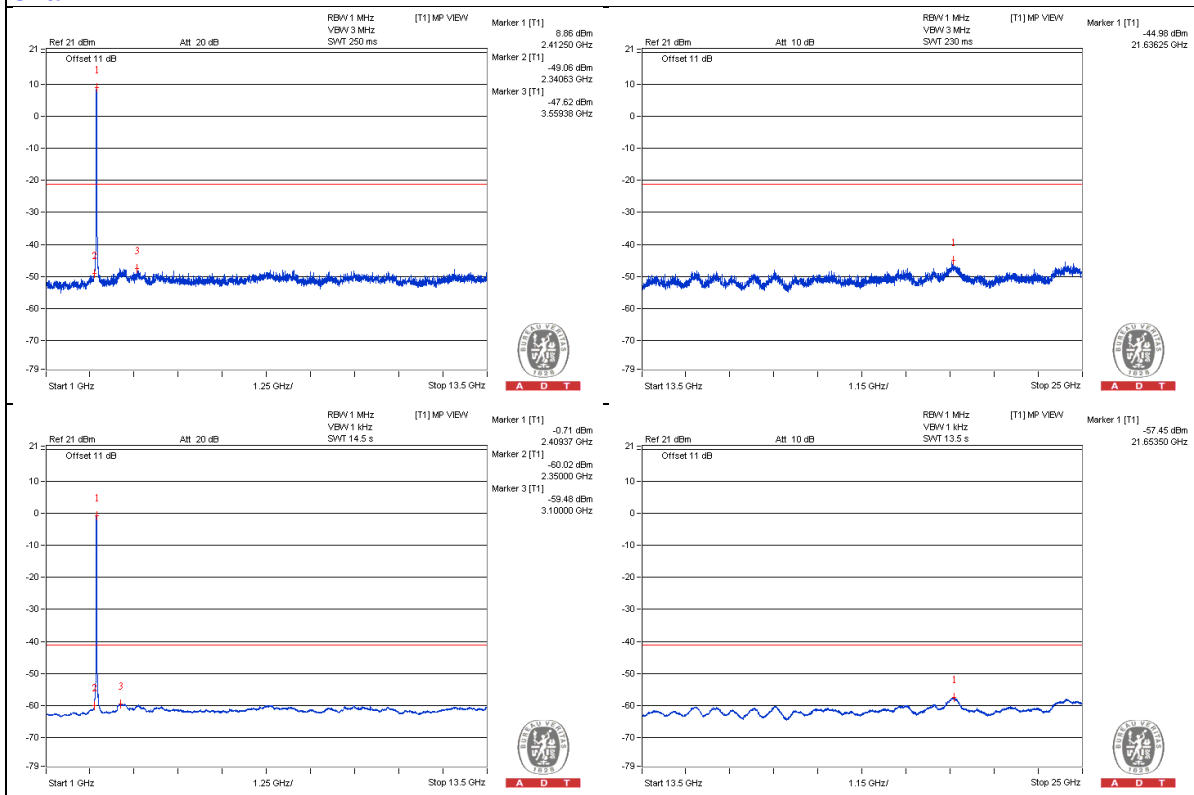

Bandedge table


No.	Frequency (MHz)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2389.61 PK	66.35	74	-7.65	-38.96	-38.17	6.63	-28.91
2	2389.99 AV	51.83	54	-2.17	-53.71	-52.52	6.63	-43.43
3	2485.56 PK	56.91	74	-17.09	-47.41	-48.65	6.63	-38.35
4	2483.5175 AV	43.81	54	-10.19	-61.28	-60.91	6.63	-51.45

Note :


Emission Level (dBUV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

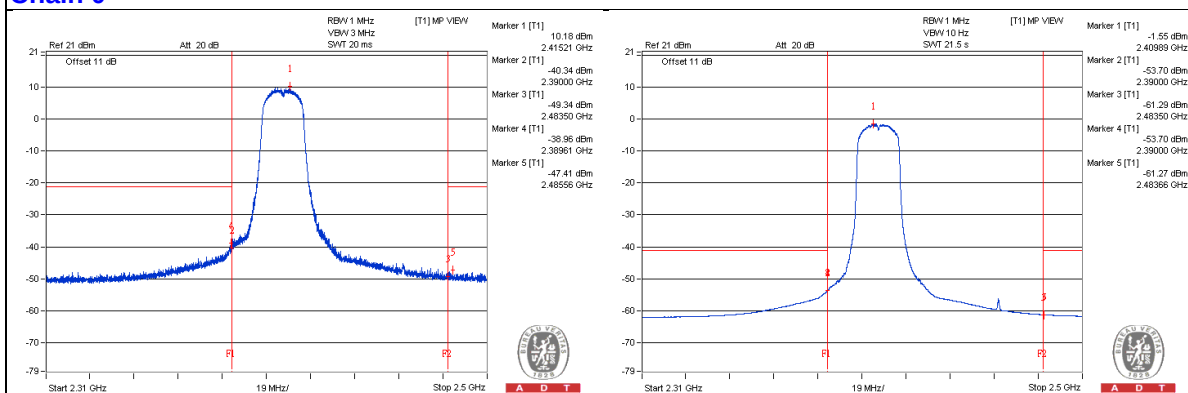

Chain 1

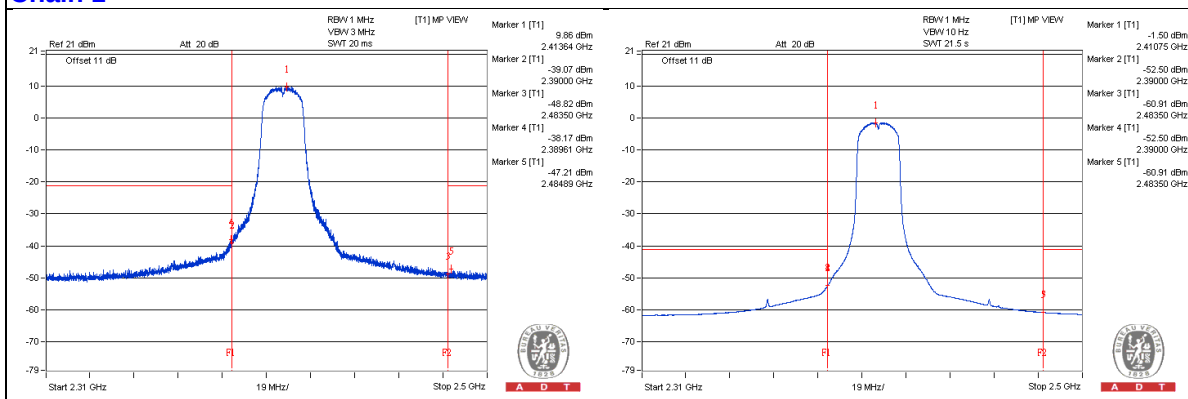

VHT20 - Channel 6

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	1625 PK	52.09	74	-21.91	-53.74	-52.05	6.63	-43.17
2	1625 AV	41.89	54	-12.11	-63.02	-63	6.63	-53.37
3	4875 PK	53.36	74	-20.64	-51.74	-51.34	6.63	-41.9
4	4875 AV	43.24	54	-10.76	-61.75	-61.58	6.63	-52.02
5	7312.5 PK	55.69	74	-18.31	-49.49	-48.95	6.63	-39.57
6	7315.625 AV	44.97	54	-9.03	-60.26	-59.62	6.63	-50.29

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

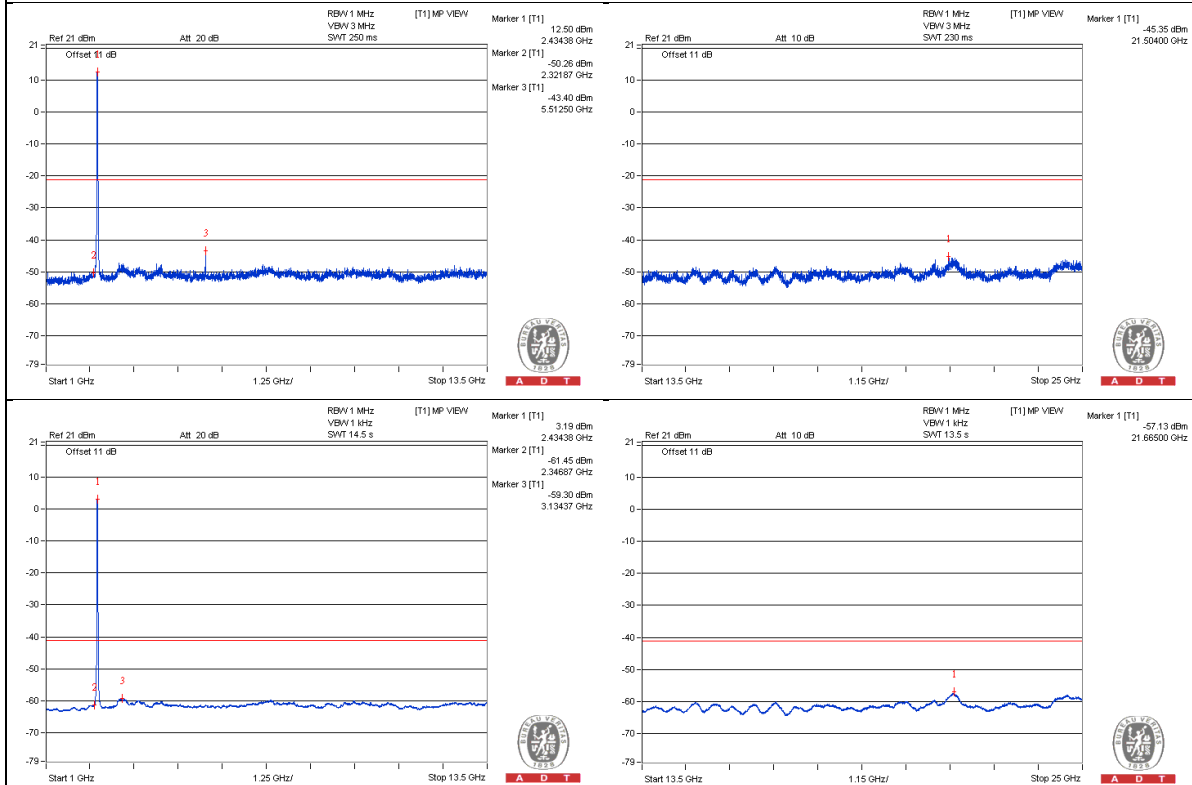

Chain 1

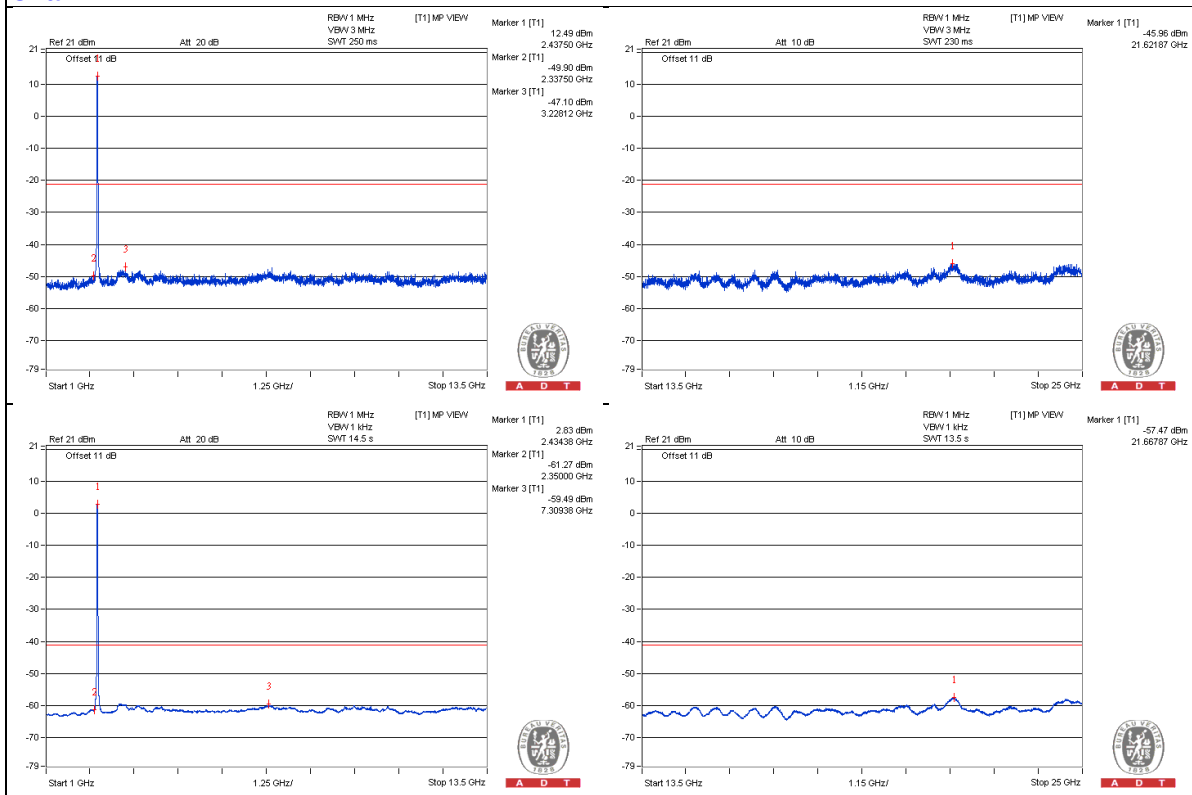

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2389.135 PK	59.18	74	-14.82	-46.04	-45.43	6.63	-36.08
2	2388.945 AV	46.89	54	-7.11	-59.3	-57.01	6.63	-48.37
3	2485.1325 PK	59.5	74	-14.5	-45.45	-45.36	6.63	-35.76
4	2484.99 AV	46.84	54	-7.16	-59.15	-57.19	6.63	-48.42

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

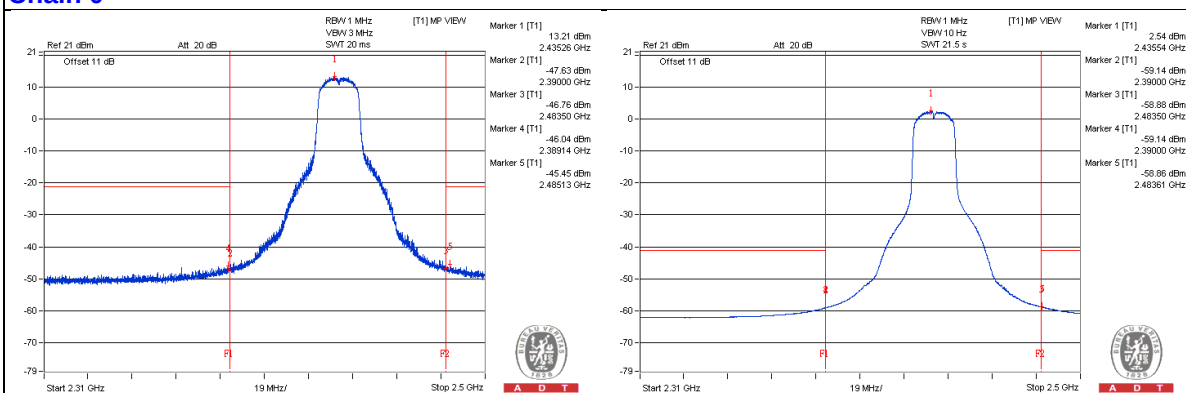

Chain 1

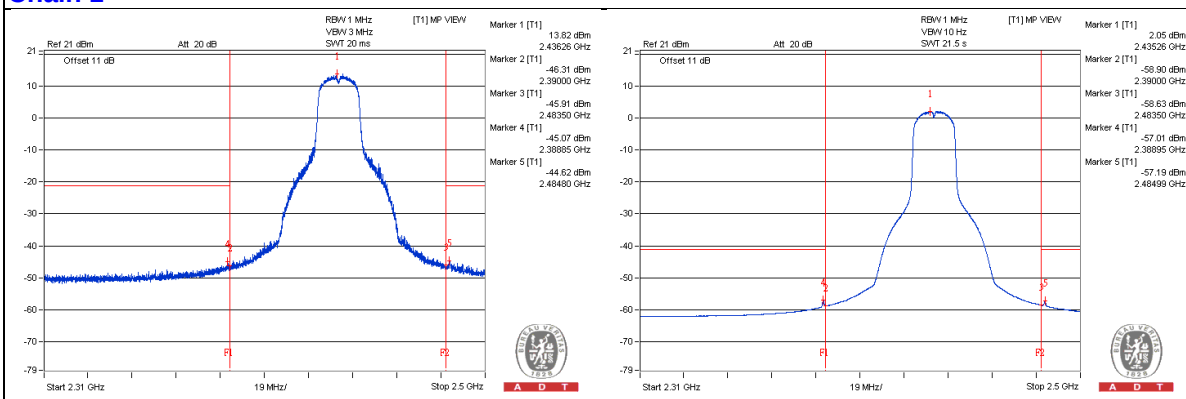

VHT20 - Channel 11

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	4928.125 PK	53.16	74	-20.84	-51.59	-51.9	6.63	-42.1
2	4925 AV	42.86	54	-11.14	-62.09	-61.99	6.63	-52.4
3	7384.375 PK	55.47	74	-18.53	-49.46	-49.41	6.63	-39.79
4	7384.375 AV	44.63	54	-9.37	-60.18	-60.37	6.63	-50.63

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

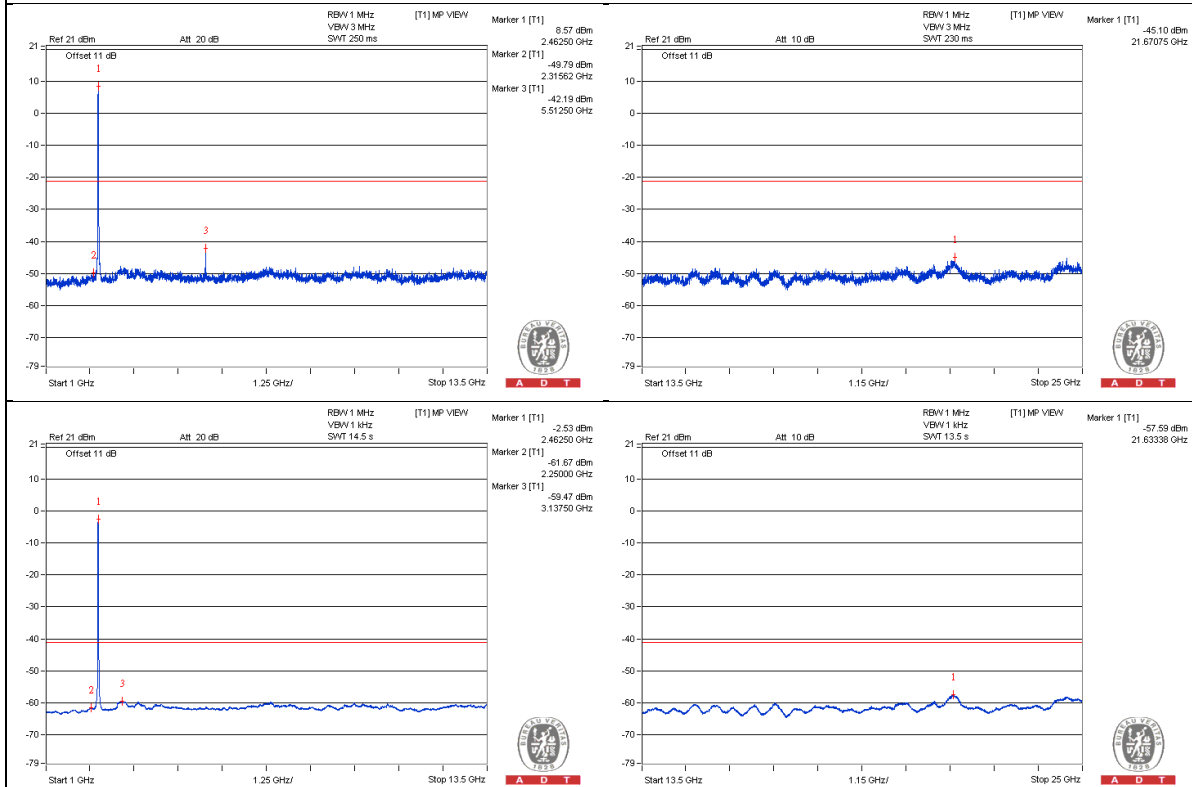

Chain 1

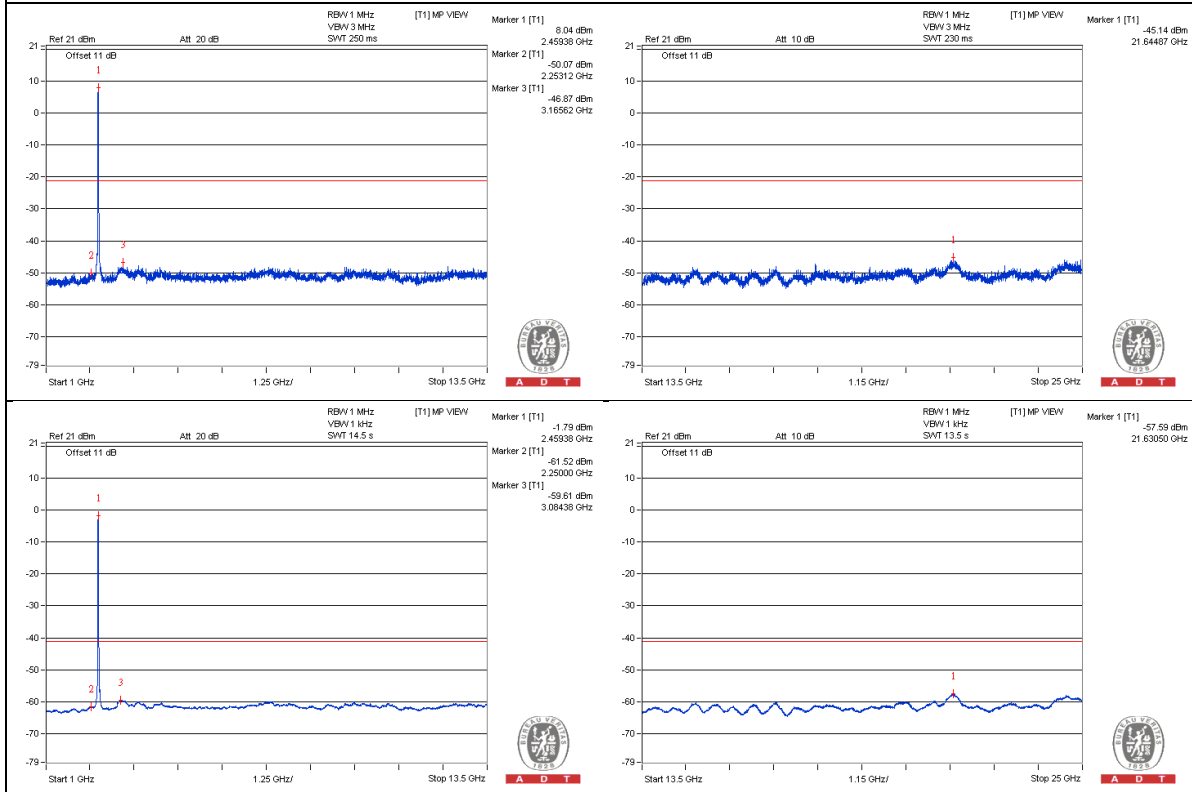

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2313.6575 PK	56.09	74	-17.91	-48.97	-48.65	6.63	-39.17
2	2389.7525 AV	43.51	54	-10.49	-61.59	-61.2	6.63	-51.75
3	2483.66 PK	65.54	74	-8.46	-42.56	-37.54	6.63	-29.72
4	2483.5175 AV	51.82	54	-2.18	-54.46	-52.04	6.63	-43.44

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

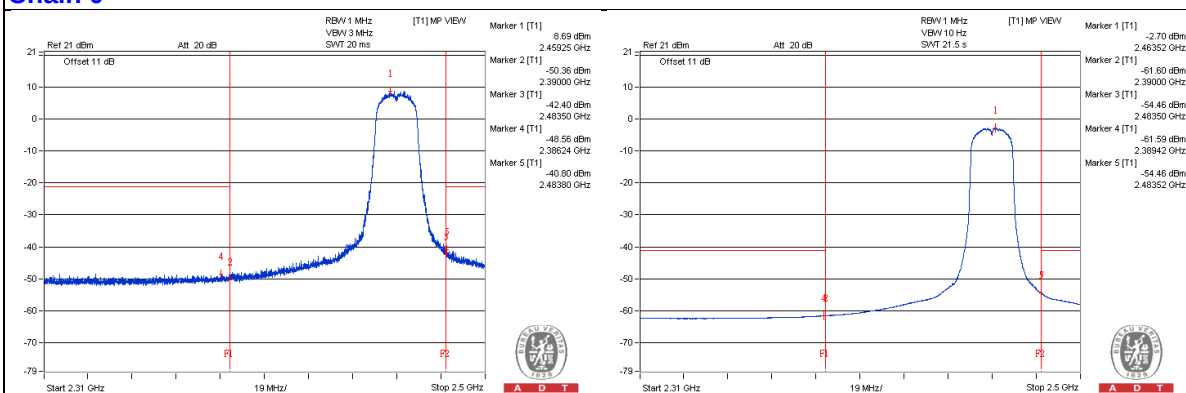

Chain 1

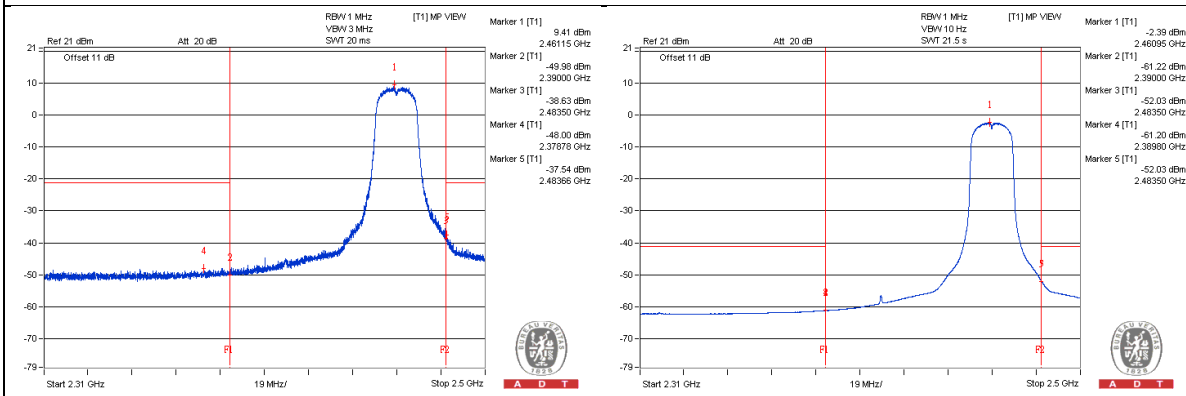

VHT20 - Channel 12

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	4937.5 PK	53.06	74	-20.94	-51.84	-51.85	6.63	-42.2
2	4931.25 AV	42.88	54	-11.12	-62.3	-61.76	6.63	-52.38
3	7400 PK	55.44	74	-18.56	-49.18	-49.77	6.63	-39.82
4	7403.125 AV	44.23	54	-9.77	-60.65	-60.69	6.63	-51.03

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

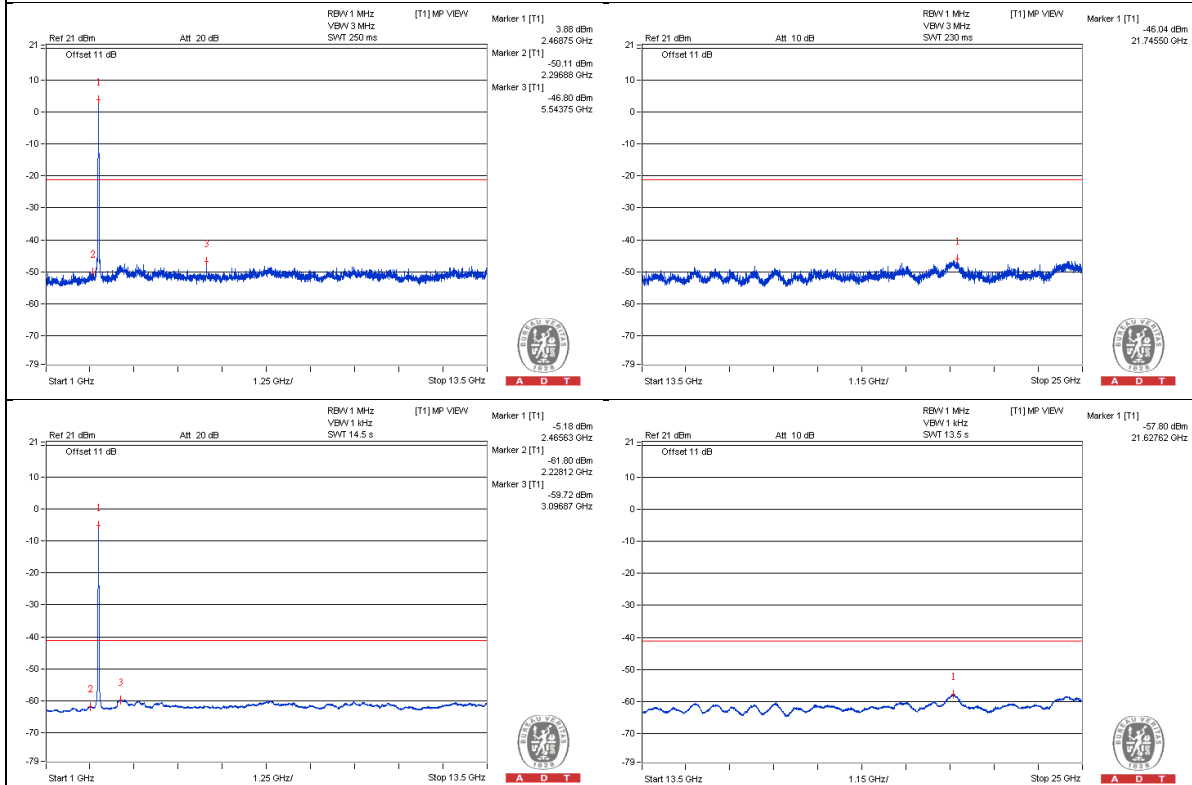

Chain 1

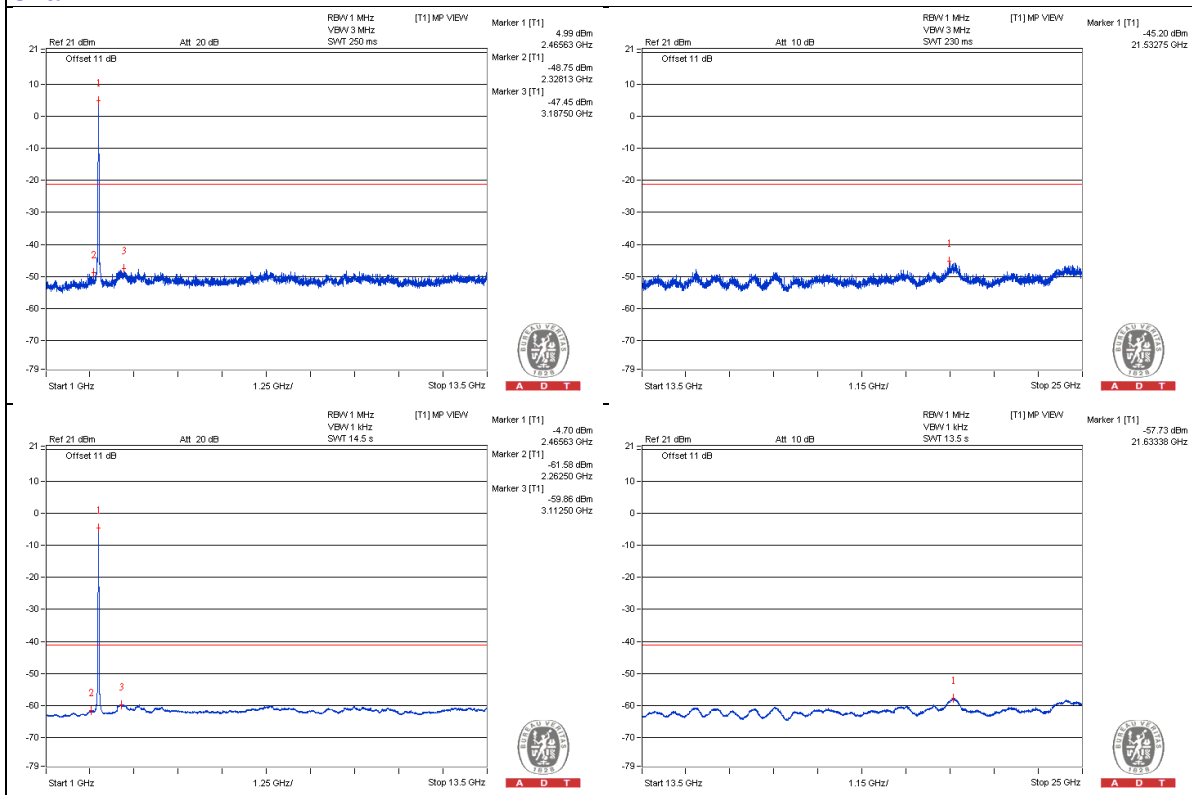

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2388.8025 PK	55.91	74	-18.09	-49.26	-48.74	6.63	-39.35
2	2389.325 AV	43.14	54	-10.86	-61.94	-61.58	6.63	-52.12
3	2484.705 PK	64.66	74	-9.34	-42.48	-38.77	6.63	-30.6
4	2483.5175 AV	51.46	54	-2.54	-54.89	-52.36	6.63	-43.8

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

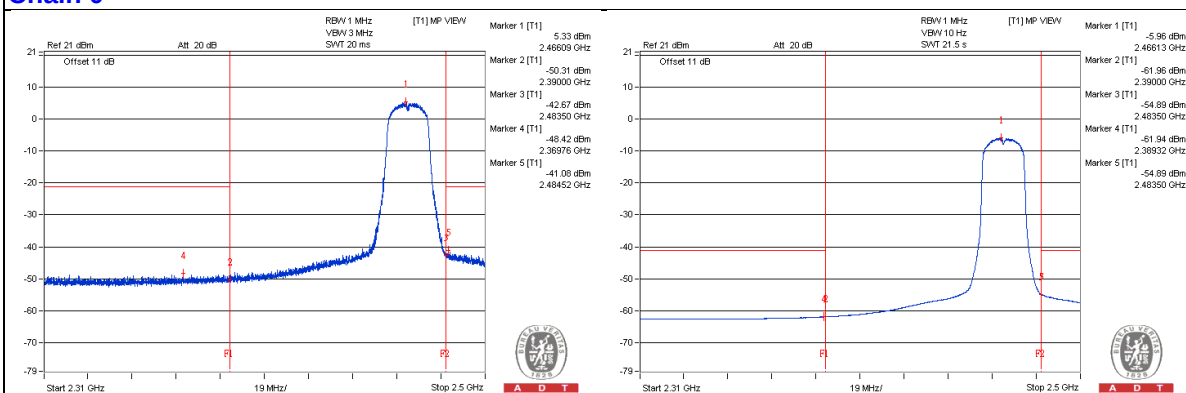

Chain 1

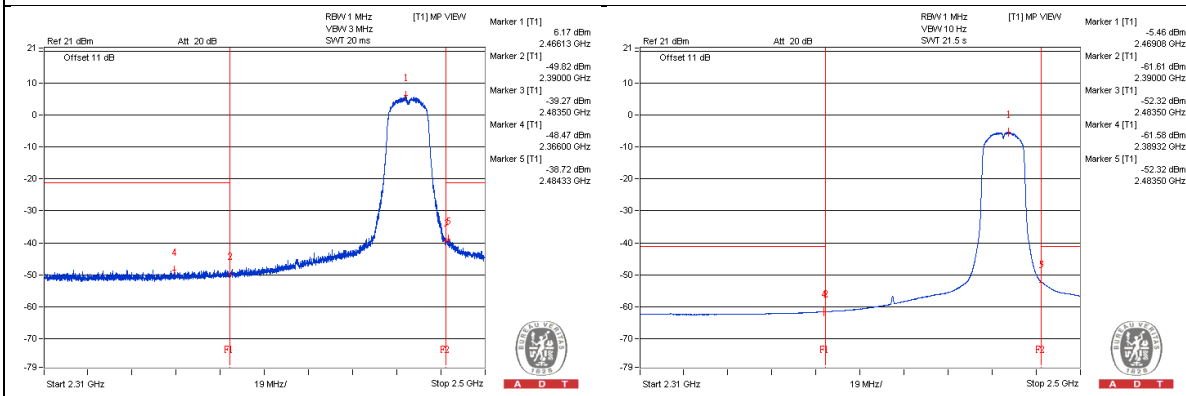

VHT20 - Channel 13

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	4943.75 PK	53.44	74	-20.56	-51.69	-51.24	6.63	-41.82
2	4940.625 AV	42.73	54	-11.27	-62.22	-62.13	6.63	-52.53
3	7415.625 PK	55.1	74	-18.9	-50.35	-49.31	6.63	-40.16
4	7418.75 AV	44.6	54	-9.4	-60.28	-60.33	6.63	-50.66

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

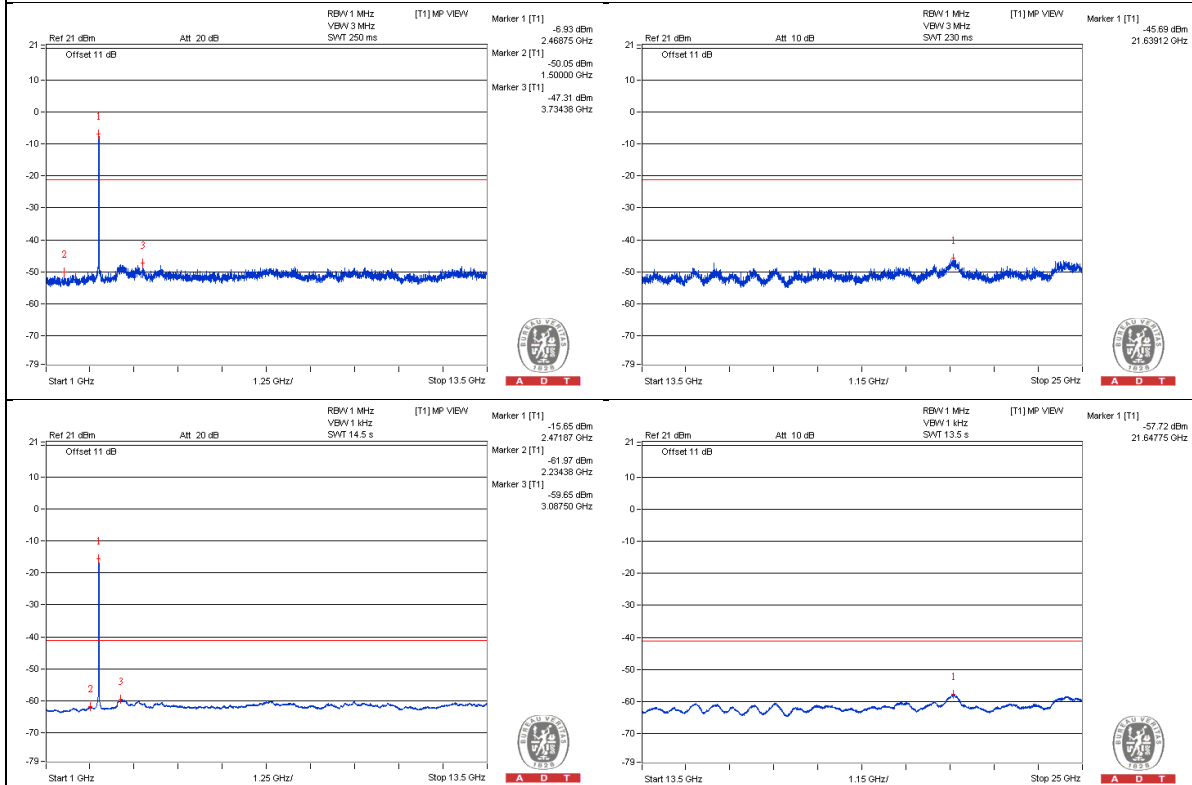

Chain 1

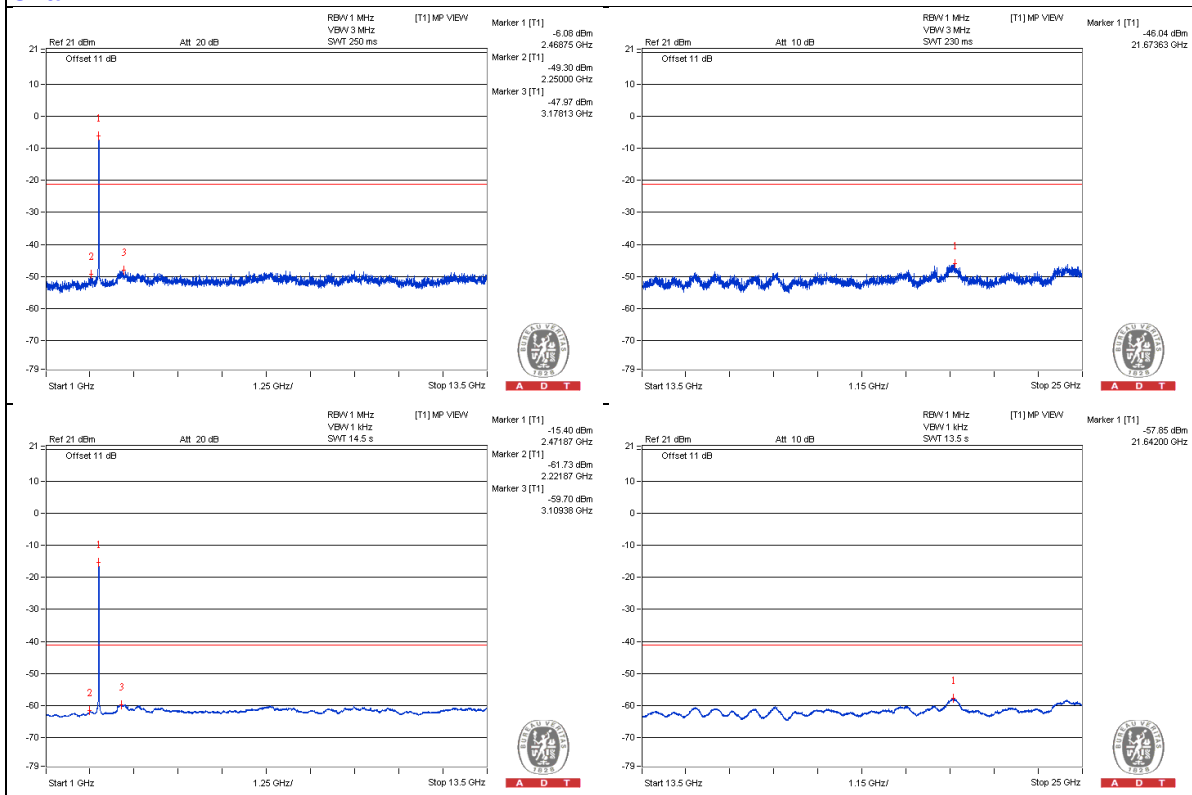

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2375.55 PK	54.65	74	-19.35	-50.03	-50.48	6.63	-40.61
2	2388.66 AV	42.13	54	-11.87	-62.7	-62.85	6.63	-53.13
3	2483.565 PK	68.03	74	-5.97	-36.75	-36.99	6.63	-27.23
4	2483.5175 AV	51.75	54	-2.25	-53.41	-52.9	6.63	-43.51

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

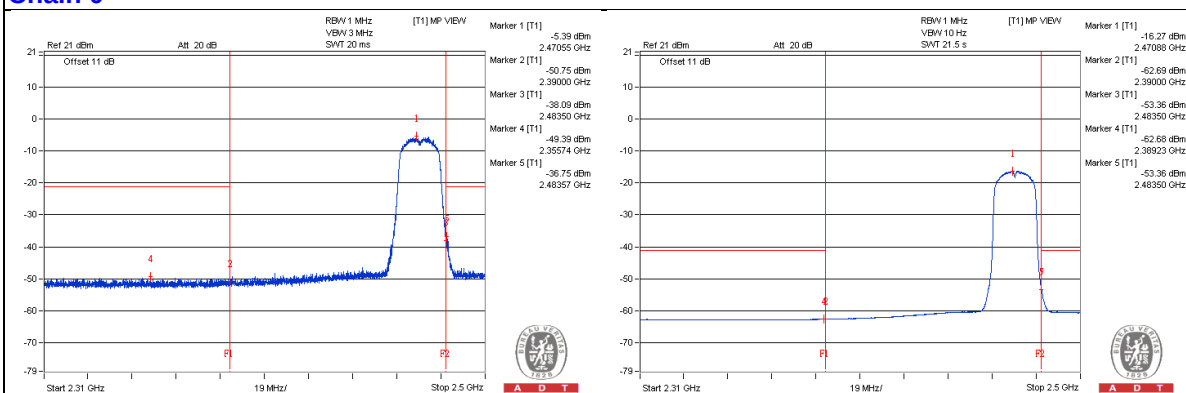

Chain 1

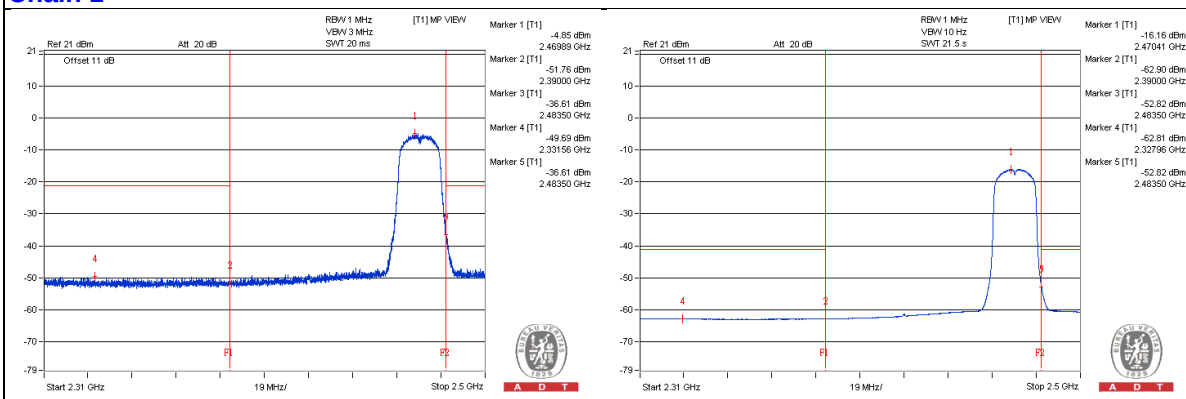

VHT40 - Channel 3

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	1615.625 PK	51.72	74	-22.28	-54.11	-52.41	6.63	-43.54
2	1615.625 AV	41.75	54	-12.25	-63.12	-63.18	6.63	-53.51
3	4840.625 PK	53.56	74	-20.44	-51.43	-51.25	6.63	-41.7
4	4840.625 AV	43.17	54	-10.83	-61.84	-61.63	6.63	-52.09
5	7268.75 PK	55.53	74	-18.47	-48.77	-50.06	6.63	-39.73
6	7265.625 AV	44.59	54	-9.41	-60.29	-60.33	6.63	-50.67

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

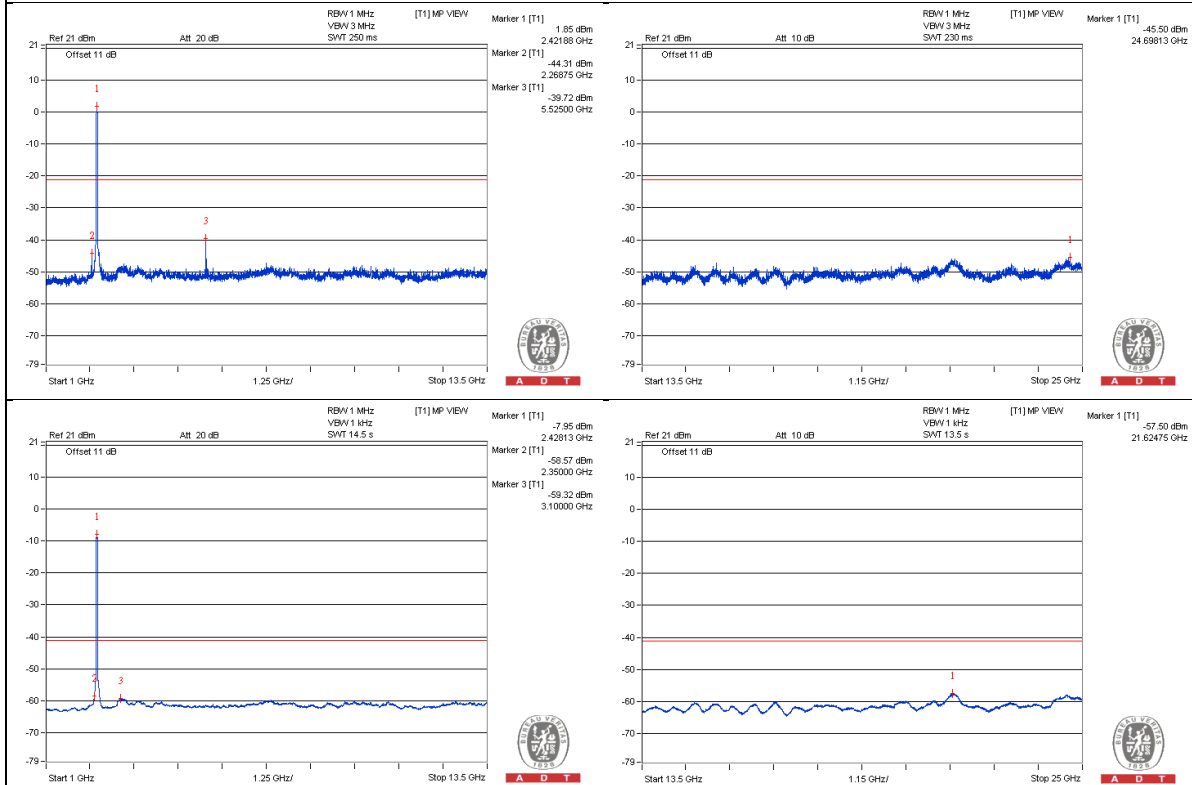

Chain 1

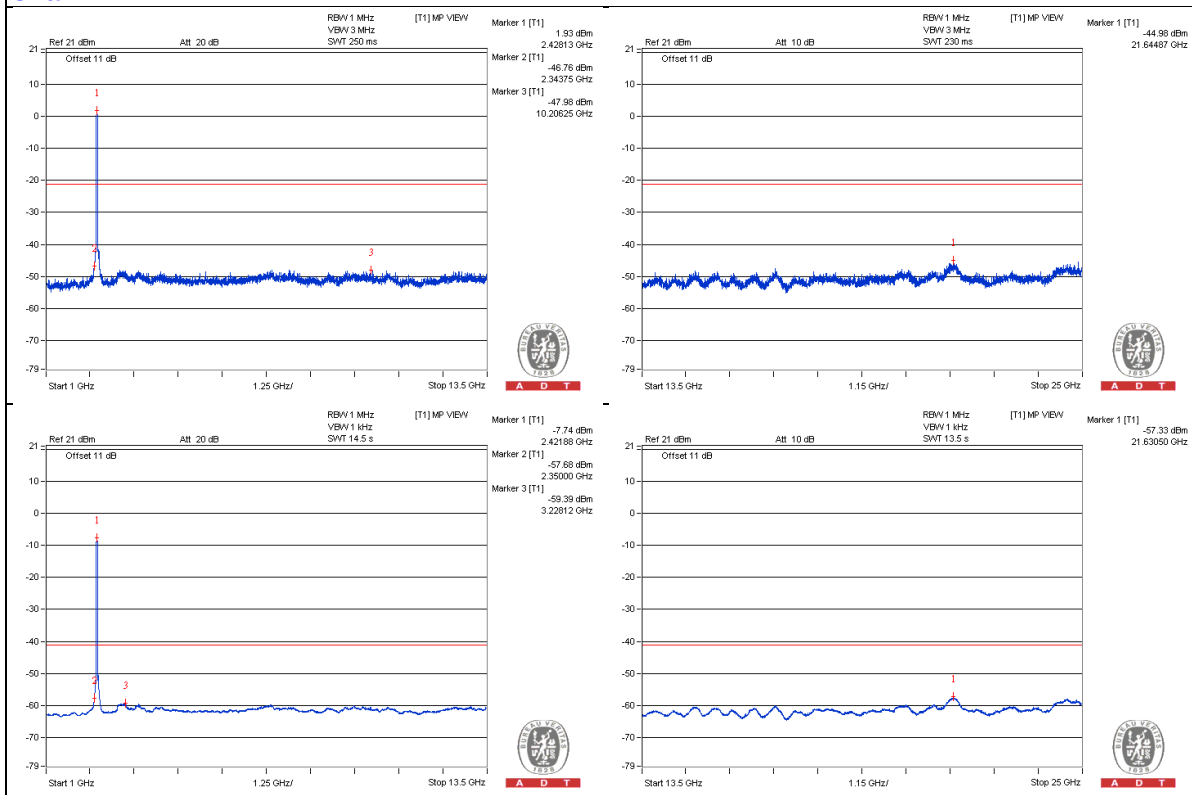

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2388.2325 PK	69.3	74	-4.7	-33.13	-41.87	6.63	-25.96
2	2389.9425 AV	51.38	54	-2.62	-53.79	-53.27	6.63	-43.88
3	2486.1775 PK	63.28	74	-10.72	-39.85	-44.64	6.63	-31.98
4	2483.6125 AV	48.03	54	-5.97	-57.34	-56.45	6.63	-47.23

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

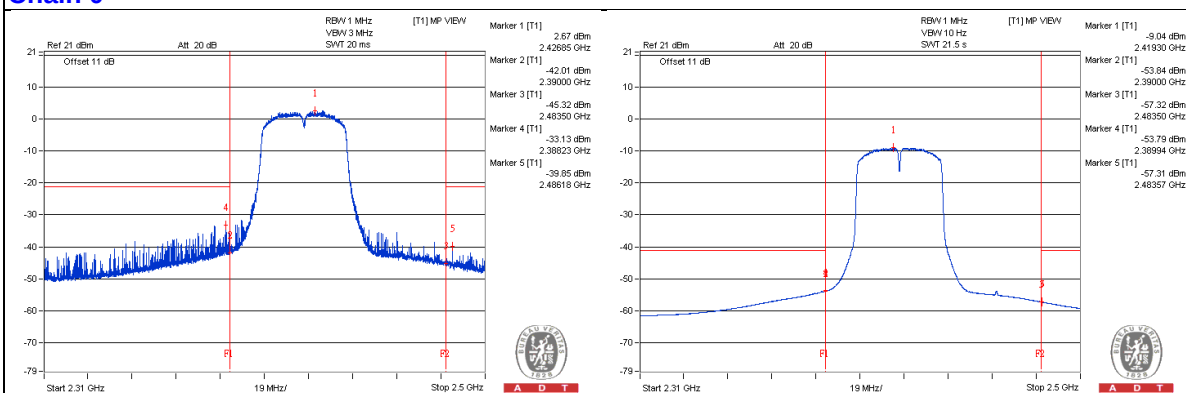

Chain 1

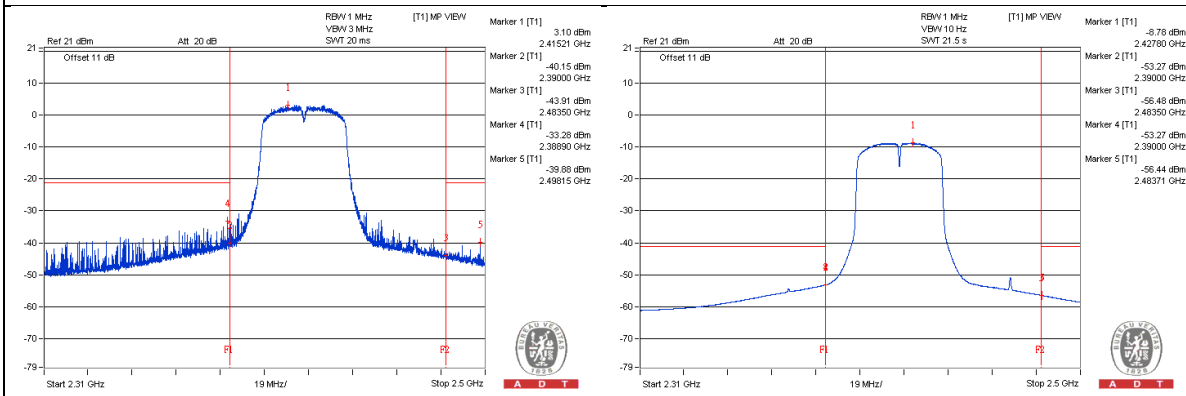

VHT40 - Channel 6

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	1625 PK	51.08	74	-22.92	-54.29	-53.39	6.63	-44.18
2	1625 AV	41.78	54	-12.22	-63.05	-63.2	6.63	-53.48
3	4871.875 PK	54.19	74	-19.81	-50.54	-50.88	6.63	-41.07
4	4871.875 AV	43.09	54	-10.91	-61.89	-61.74	6.63	-52.17
5	7312.5 PK	55.18	74	-18.82	-49.48	-49.97	6.63	-40.08
6	7312.5 AV	44.51	54	-9.49	-60.39	-60.4	6.63	-50.75

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

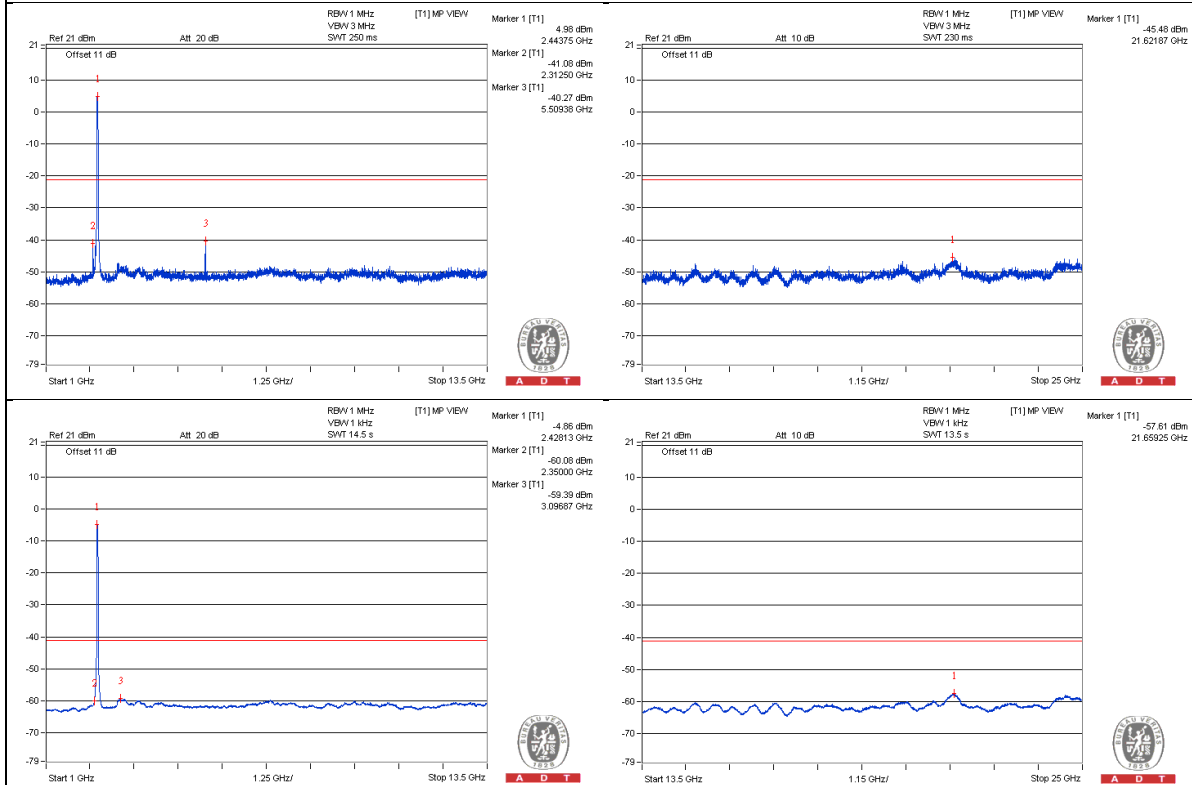

Chain 1

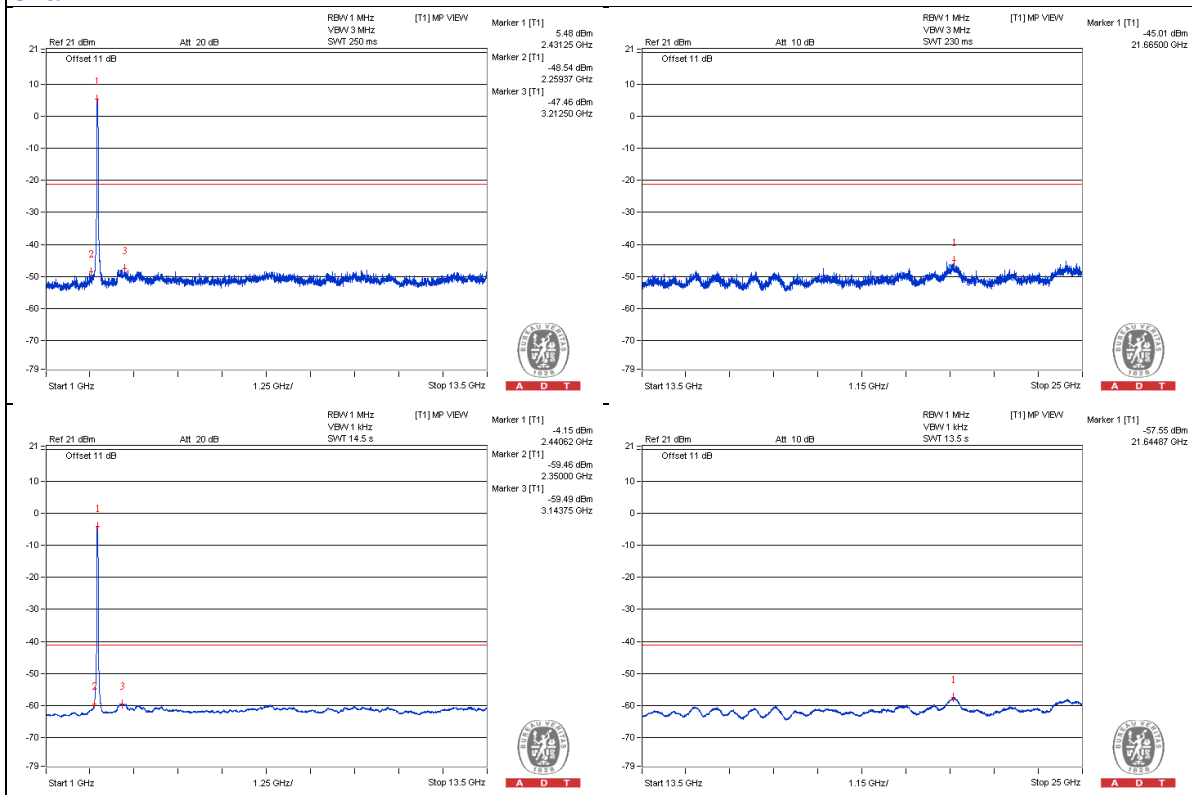

Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2389.515 PK	71.7	74	-2.3	-31.69	-35.54	6.63	-23.56
2	2389.99 AV	52.17	54	-1.83	-53.8	-51.87	6.63	-43.09
3	2483.755 PK	69.84	74	-4.16	-37.75	-33.41	6.63	-25.42
4	2483.5175 AV	54.13	54	* 0.13	-51.41	-50.21	6.63	-41.13


Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8


d = measurement distance in 3 meters.

* The unwanted emission was verified and the test result was passed by radiated measurement.
(Please refer APPENDIX A)

Chain 0

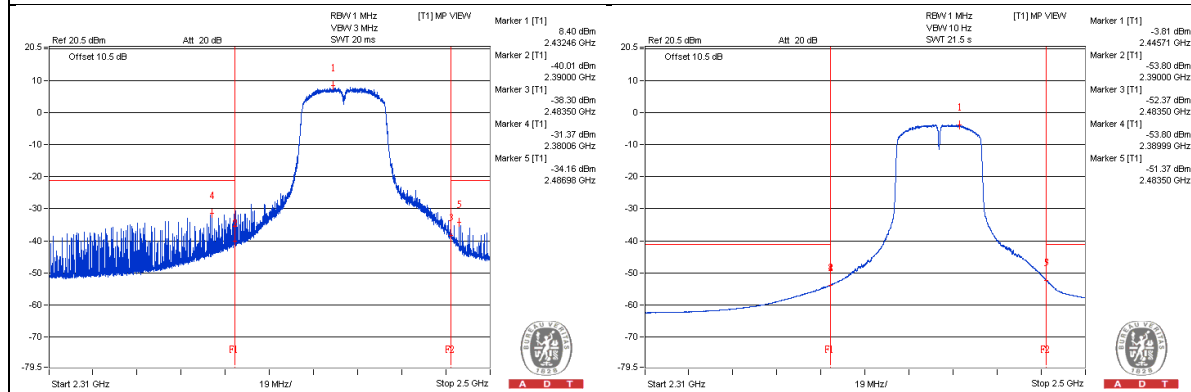

Chain 1

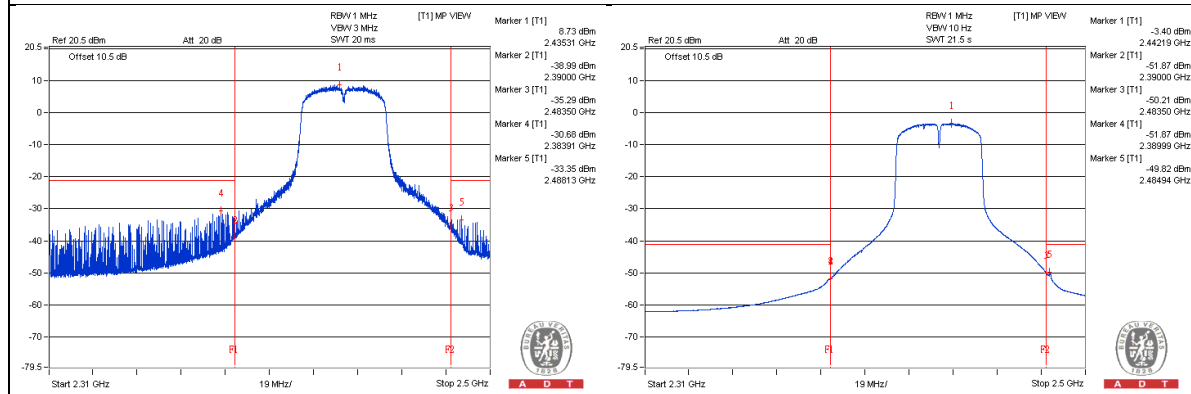

VHT40 - Channel 9

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	4906.25 PK	53.83	74	-20.17	-50.47	-51.77	6.63	-41.43
2	4903.125 AV	42.91	54	-11.09	-61.94	-62.04	6.63	-52.35
3	7353.125 PK	55.96	74	-18.04	-49.15	-48.74	6.63	-39.3
4	7359.375 AV	45.03	54	-8.97	-59.69	-60.05	6.63	-50.23

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

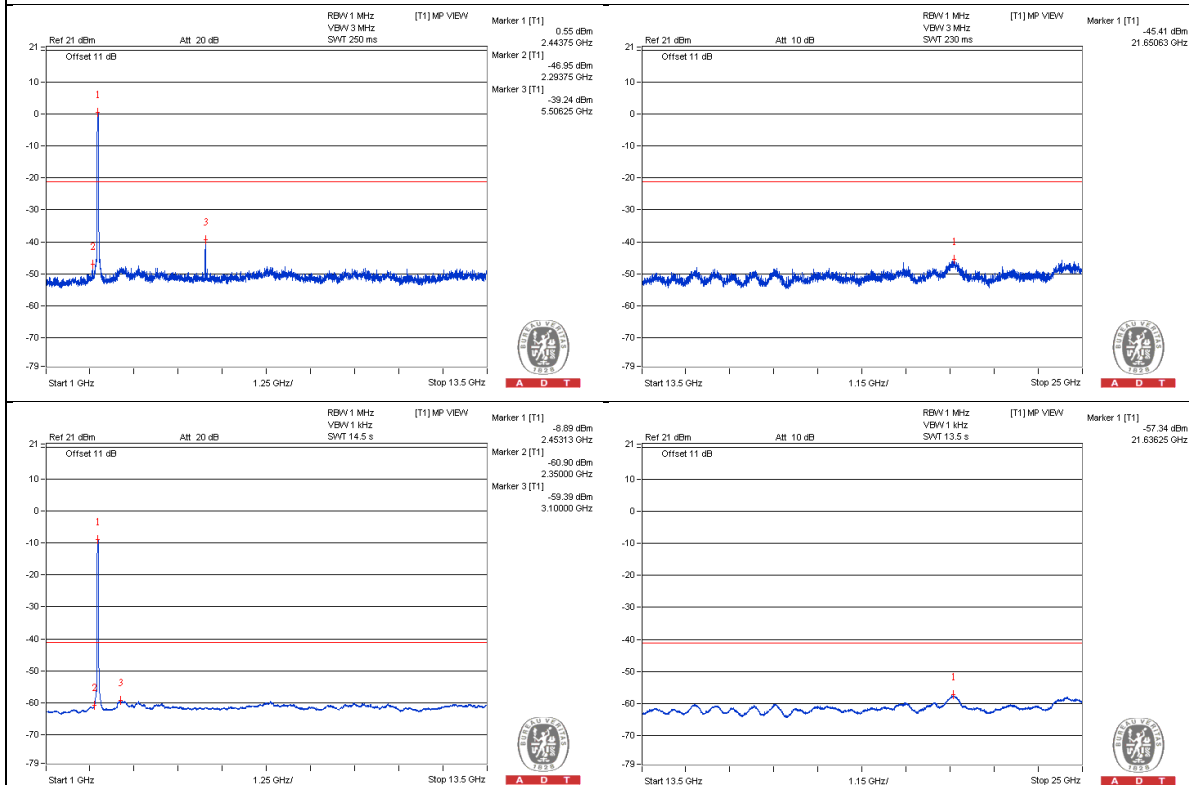

Chain 1

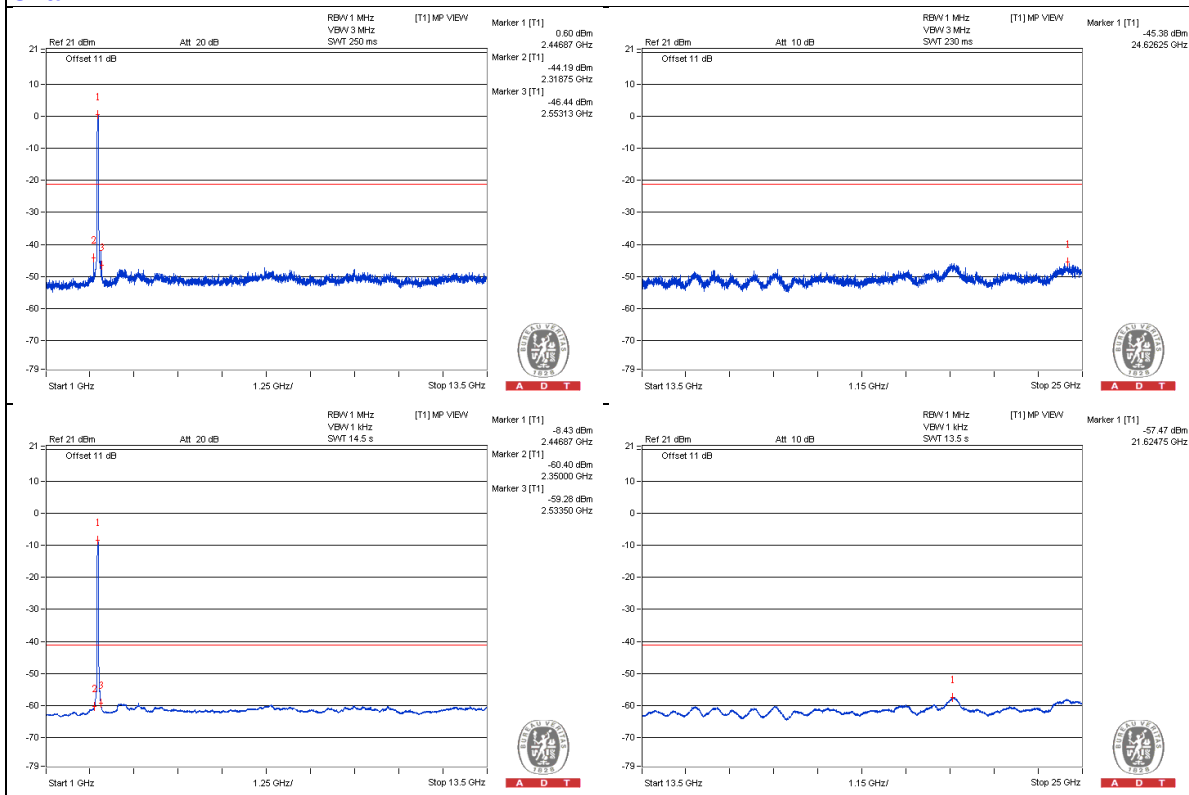

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2384.8125 PK	63.78	74	-10.22	-46.9	-38.73	6.63	-31.48
2	2389.9425 AV	46.37	54	-7.63	-58.79	-58.29	6.63	-48.89
3	2484.7525 PK	66.67	74	-7.33	-44.1	-35.82	6.63	-28.59
4	2483.6125 AV	49.28	54	-4.72	-56.24	-55.08	6.63	-45.98

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

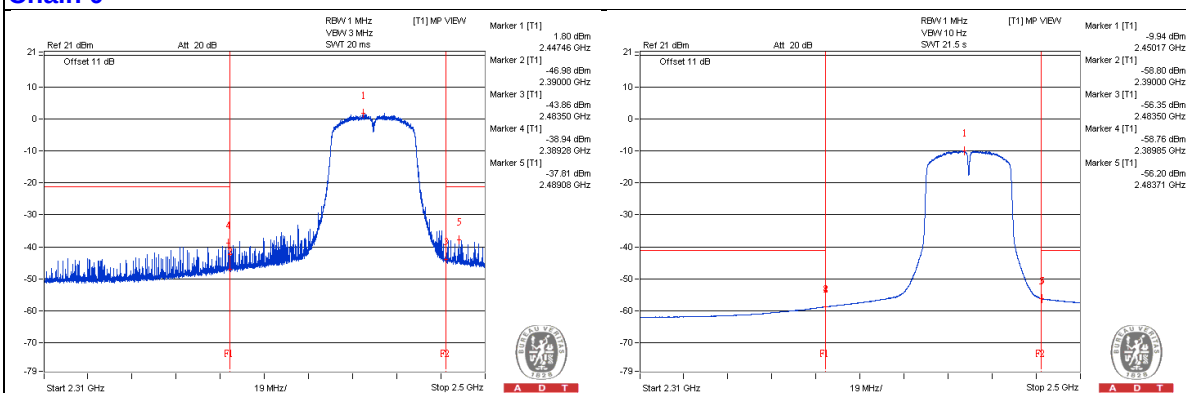

Chain 1

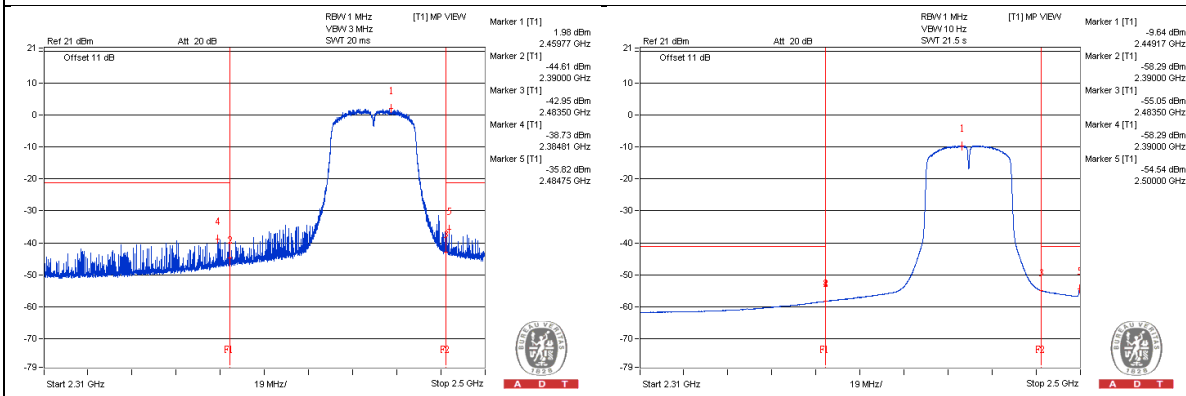

VHT40 - Channel 10

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	4918.75 PK	53	74	-21	-52.34	-51.5	6.63	-42.26
2	4915.625 AV	42.79	54	-11.21	-62.06	-62.16	6.63	-52.47
3	7368.75 PK	55.4	74	-18.6	-49.01	-50.06	6.63	-39.86
4	7371.875 AV	44.59	54	-9.41	-60.26	-60.36	6.63	-50.67

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

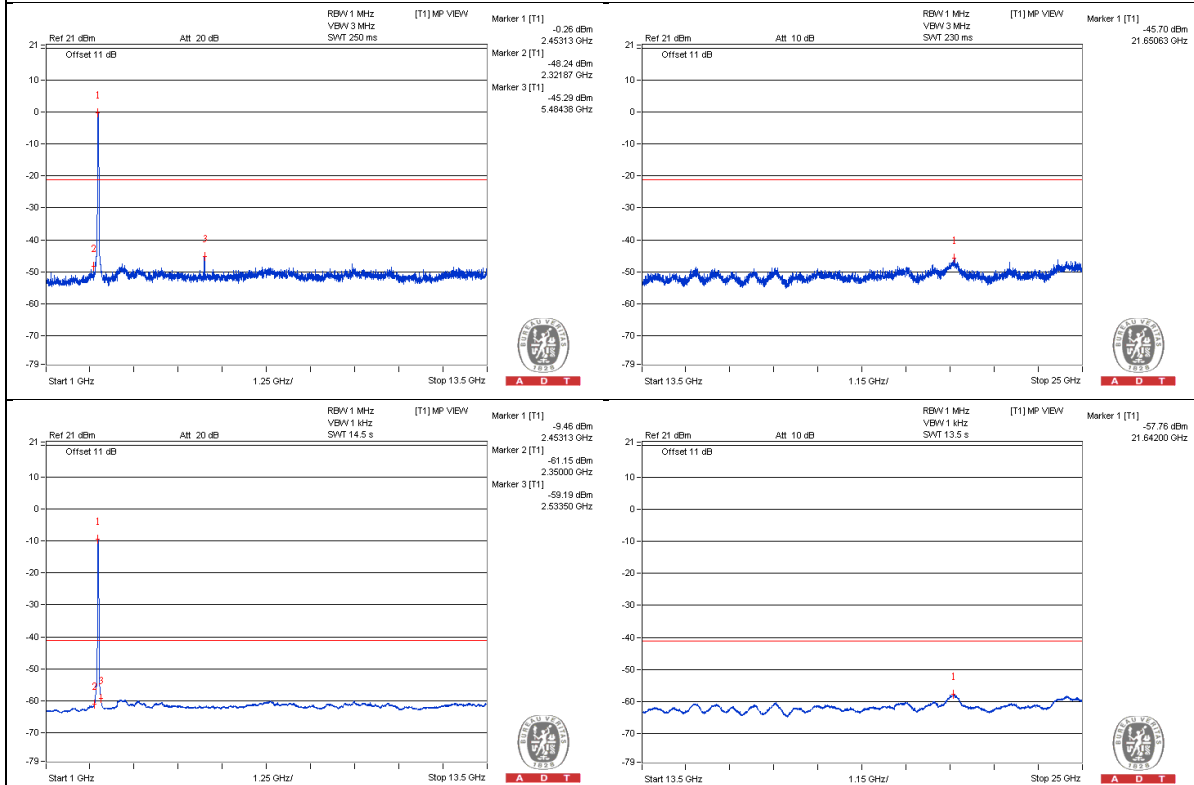

Chain 1

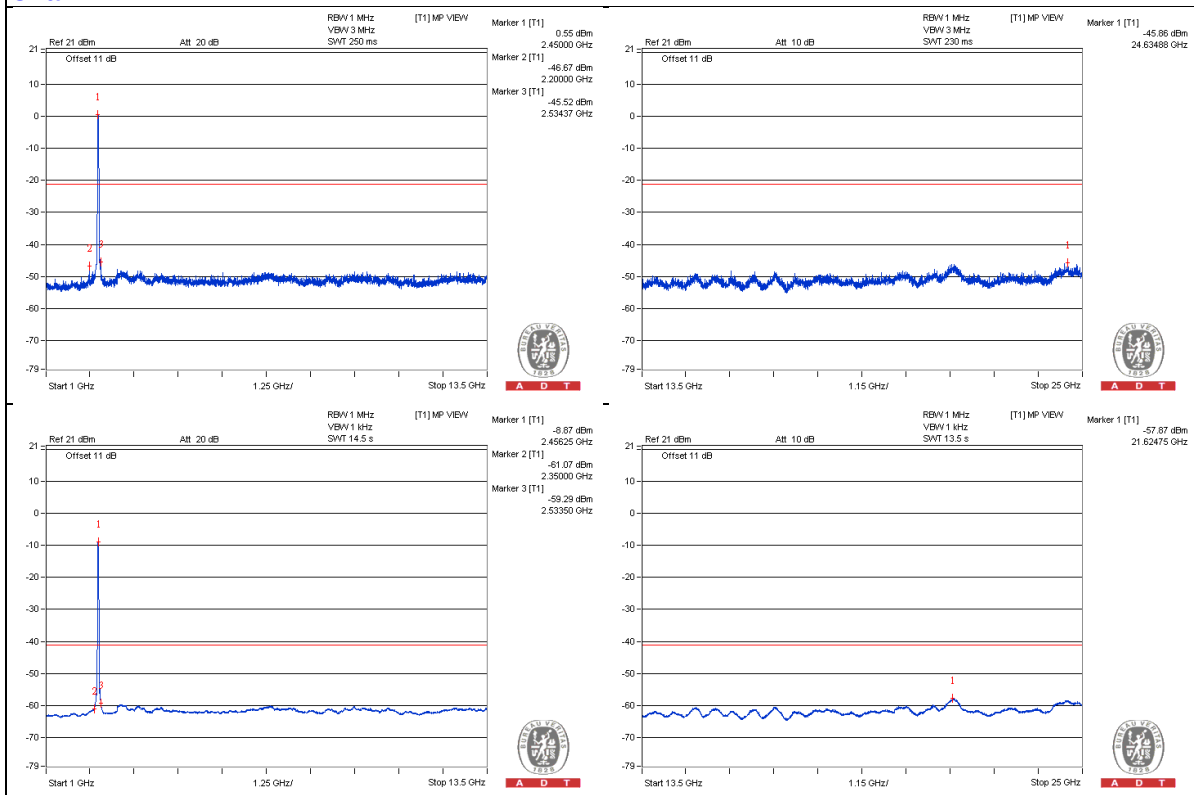

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2383.435 PK	63.89	74	-10.11	-38.87	-45.43	6.63	-31.37
2	2389.9425 AV	46.09	54	-7.91	-58.59	-59.04	6.63	-49.17
3	2484.2775 PK	70.07	74	-3.93	-32.6	-39.68	6.63	-25.19
4	2483.5175 AV	52.22	54	-1.78	-53.16	-52.24	6.63	-43.04

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

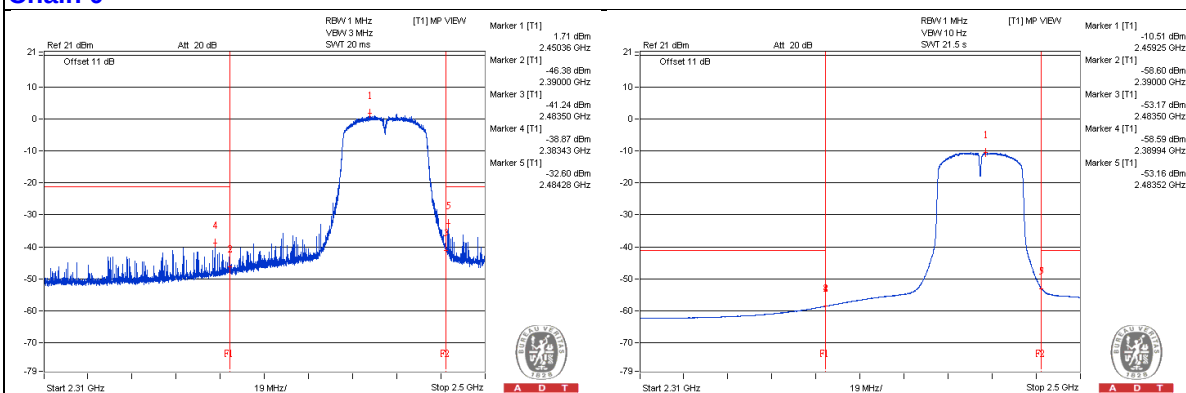

Chain 1

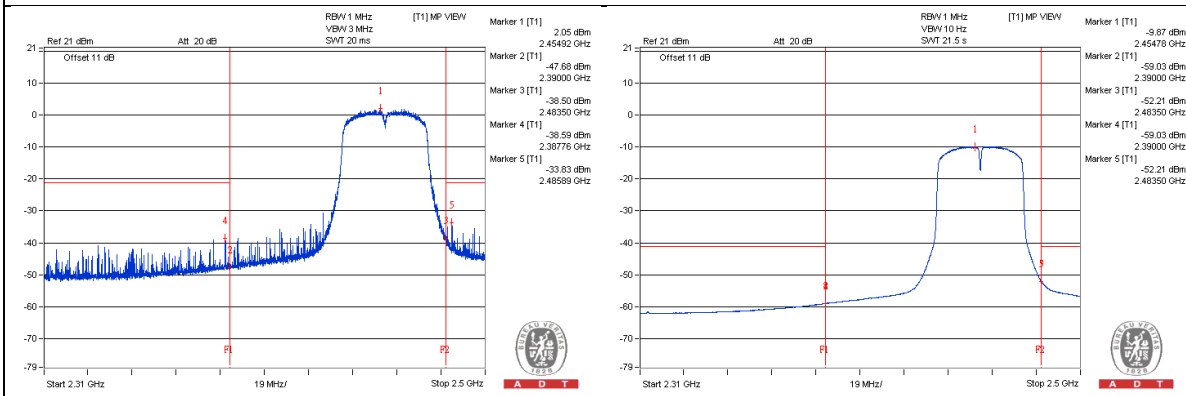

VHT40 - Channel 11

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	4921.875 PK	53.82	74	-20.18	-50.97	-51.19	6.63	-41.44
2	4928.125 AV	42.8	54	-11.2	-61.98	-62.23	6.63	-52.46
3	7381.25 PK	56.24	74	-17.76	-49.59	-47.89	6.63	-39.02
4	7384.375 AV	44.46	54	-9.54	-60.39	-60.5	6.63	-50.8

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

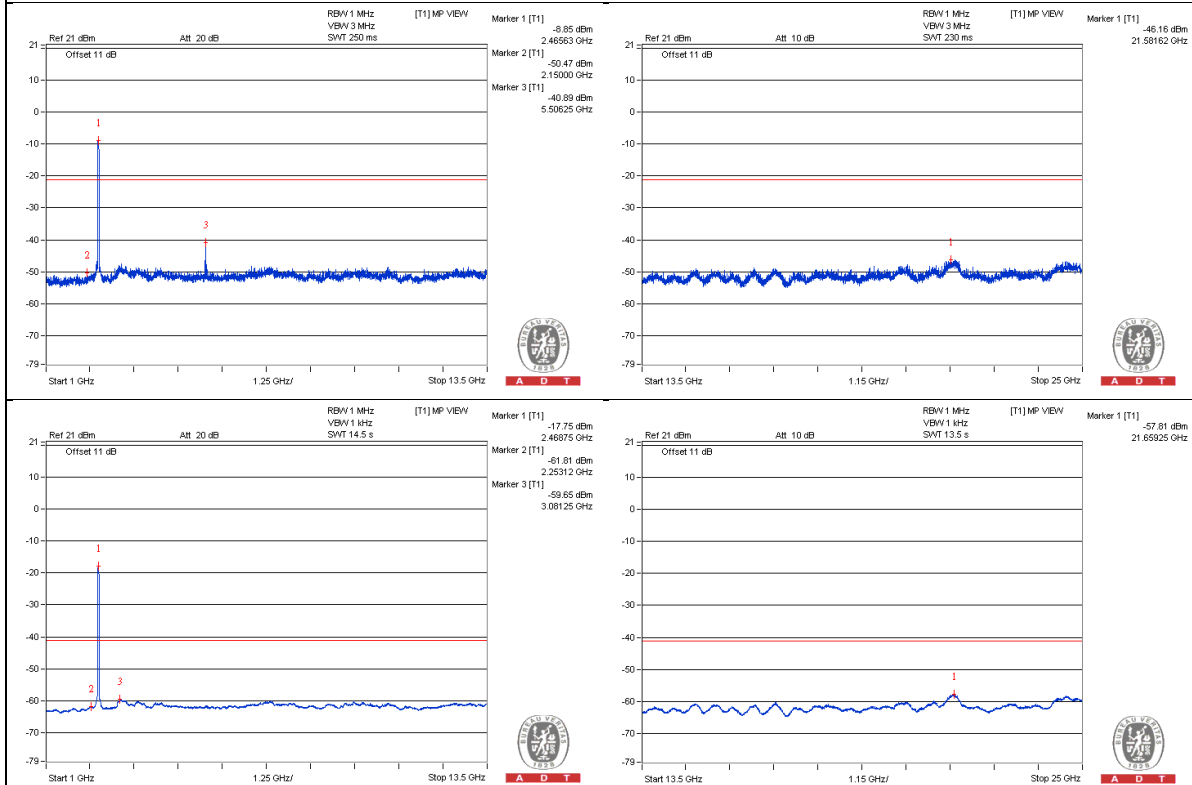

Chain 1

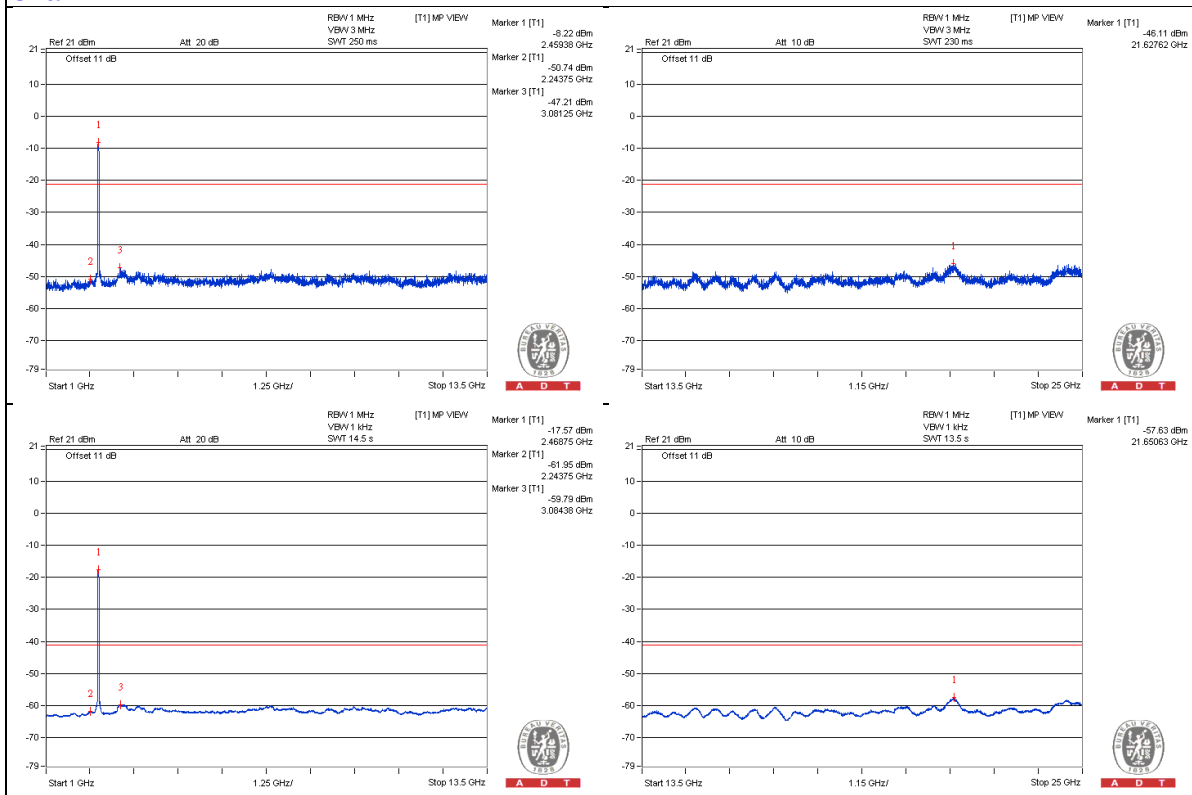

Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	2376.9275 PK	56.33	74	-17.67	-50.81	-47.1	6.63	-38.93
2	2389.895 AV	43.18	54	-10.82	-61.51	-61.94	6.63	-52.08
3	2483.7075 PK	68.48	74	-5.52	-35.77	-37.19	6.63	-26.78
4	2483.5175 AV	52.27	54	-1.73	-52.95	-52.33	6.63	-42.99

Note :


Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

Chain 0

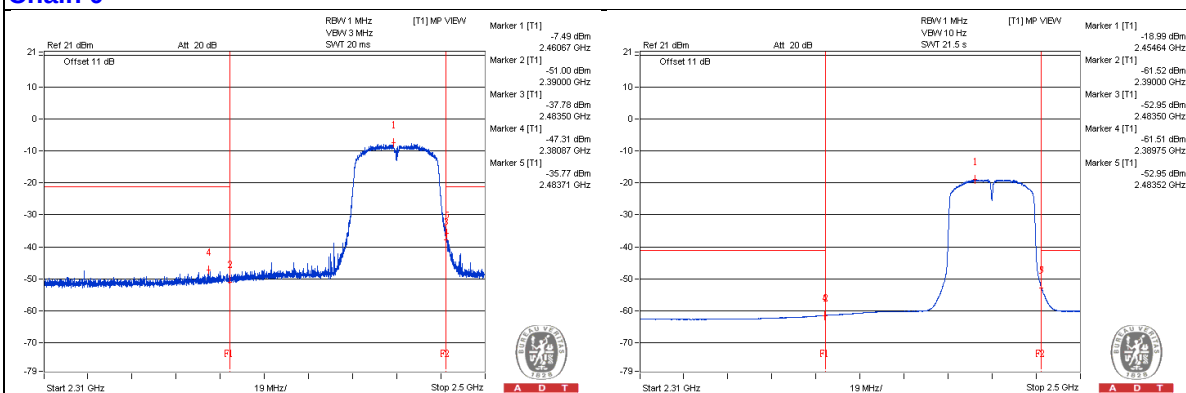

Chain 1

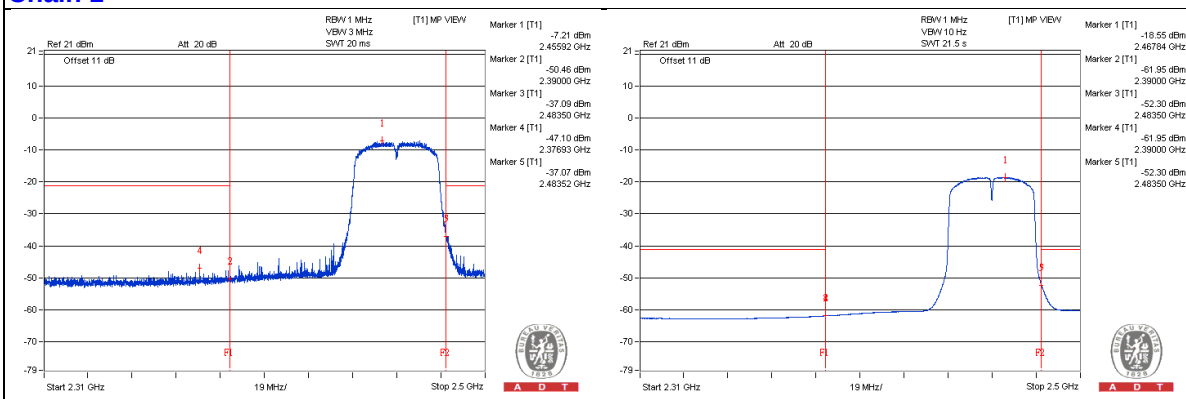

Below 1GHz Data

802.11g - Channel 6


Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	64.92	32.88	40	-7.12	-71.54	-72.56	6.63	-62.38
2	120.695	33.39	43.5	-10.11	-71.13	-71.93	6.63	-61.87
3	316.15	33.19	46	-12.81	-71.16	-72.35	6.63	-62.07
4	511.12	33.57	46	-12.43	-70.46	-72.41	6.63	-61.69
5	613.455	33.63	46	-12.37	-71.09	-71.45	6.63	-61.63
6	936.2225	33.7	46	-12.3	-71.55	-70.88	6.63	-61.56

Note :

Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8

d = measurement distance in 3 meters.

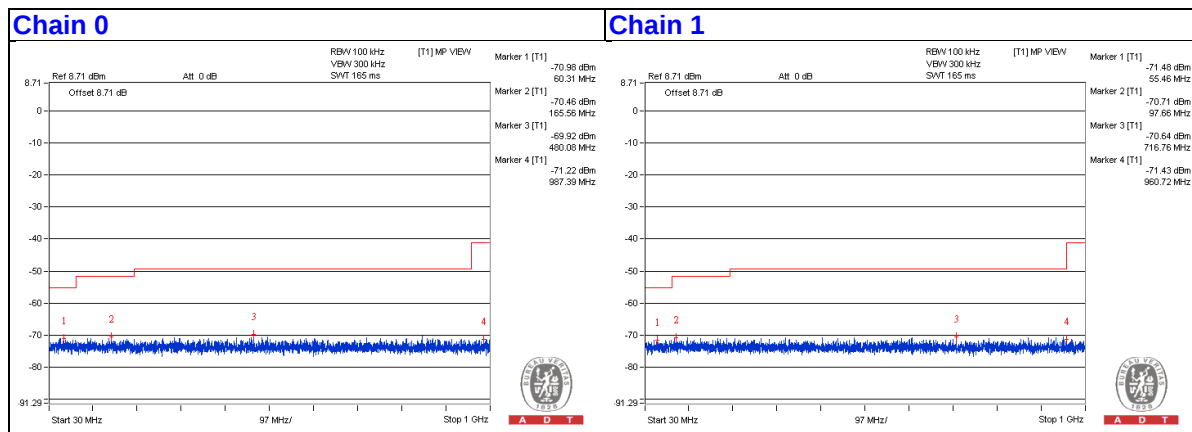

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESCS 30	100375	Apr. 29, 2014	Apr. 28, 2015
Line-Impedance Stabilization Network (for EUT) SCHWARZBECK	NSLK-8127	8127-522	Sep. 15, 2014	Sep. 14, 2015
Line-Impedance Stabilization Network (for Peripheral) ROHDE & SCHWARZ	ENV216	100071	Nov. 10, 2014	Nov. 09, 2015
RF Cable (JYEBAO)	5DFB	COCCAB-001	Mar. 10, 2014	Mar. 09, 2015
50 ohms Terminator	N/A	EMC-03	Sep. 22, 2014	Sep. 21, 2015
50 ohms Terminator	N/A	EMC-02	Sep. 30, 2014	Sep. 29, 2015
Software ADT	BV ADT_Cond_V7.3.7. 3	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. C.
3. The VCCI Con C Registration No. is C-3611.
4. Tested Date: Feb. 11, 2015

4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

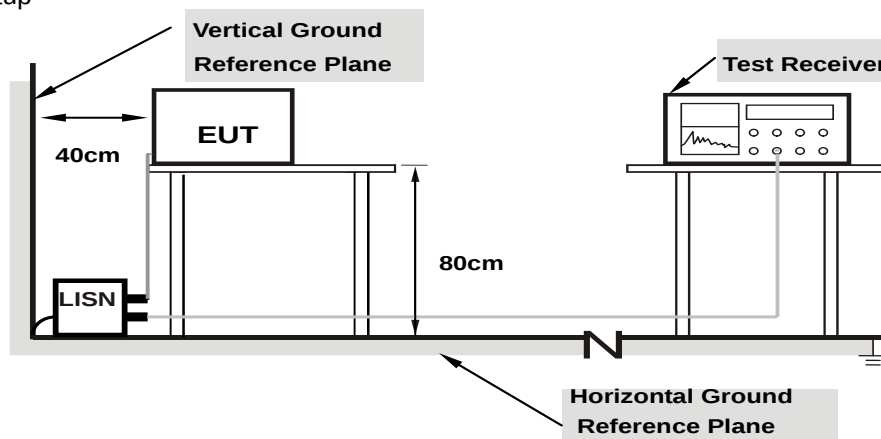

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Conditions

Same as 4.1.6.


4.2.7 Test Results

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.23594	0.07	43.46	35.02	43.53	35.09	62.24	52.24	-18.70	-17.14
2	0.32188	0.08	38.62	29.00	38.70	29.08	59.66	49.66	-20.96	-20.58
3	0.71250	0.11	36.92	29.08	37.03	29.19	56.00	46.00	-18.97	-16.81
4	2.32422	0.19	34.28	26.76	34.47	26.95	56.00	46.00	-21.53	-19.05
5	3.12500	0.22	32.46	24.14	32.68	24.36	56.00	46.00	-23.32	-21.64
6	15.73047	0.60	28.96	20.38	29.56	20.98	60.00	50.00	-30.44	-29.02

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

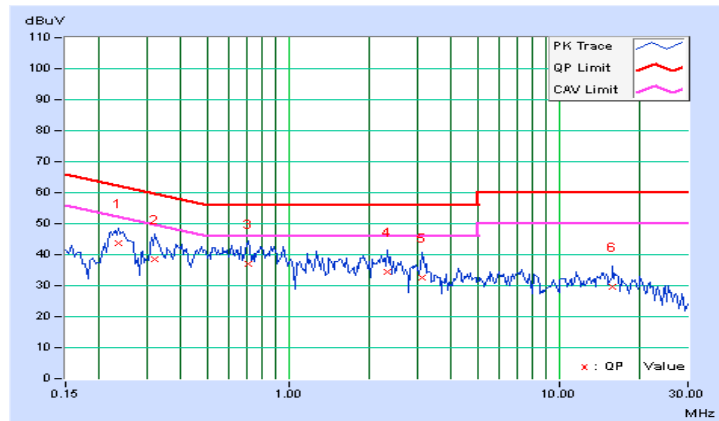


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBUV)		Emission Level (dBUV)		Limit (dBUV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.22812	0.06	41.12	31.54	41.18	31.60	62.52	52.52	-21.33	-20.91
2	0.47813	0.10	37.96	28.78	38.06	28.88	56.37	46.37	-18.32	-17.50
3	0.87266	0.12	34.76	27.54	34.88	27.66	56.00	46.00	-21.12	-18.34
4	1.96875	0.18	35.34	29.68	35.52	29.86	56.00	46.00	-20.48	-16.14
5	2.86719	0.21	34.34	26.00	34.55	26.21	56.00	46.00	-21.45	-19.79
6	11.18359	0.50	27.70	18.96	28.20	19.46	60.00	50.00	-31.80	-30.54

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

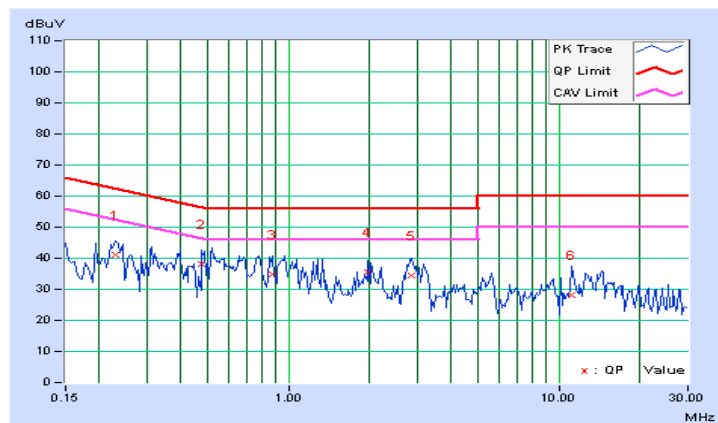


4.3 6dB Bandwidth Measurement

4.3.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 Test Setup



4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedure

- Set resolution bandwidth (RBW) = 100kHz
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.3.5 Deviation from Test Standard

No deviation.

4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.

4.3.7 Test Result

802.11b

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
1	2412	8.06	8.10	0.5	Pass
6	2437	8.06	8.09	0.5	Pass
11	2462	8.03	8.11	0.5	Pass
12	2467	8.07	8.08	0.5	Pass
13	2472	8.11	8.08	0.5	Pass

802.11g

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
1	2412	15.32	15.38	0.5	Pass
6	2437	15.71	15.49	0.5	Pass
11	2462	15.81	15.49	0.5	Pass
12	2467	15.72	15.32	0.5	Pass
13	2472	16.07	15.80	0.5	Pass

VHT20


Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
1	2412	15.13	16.26	0.5	Pass
6	2437	15.69	15.11	0.5	Pass
11	2462	15.14	15.69	0.5	Pass
12	2467	15.73	15.16	0.5	Pass
13	2472	16.34	15.48	0.5	Pass

VHT40


Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
3	2422	32.72	34.00	0.5	Pass
6	2437	35.16	32.66	0.5	Pass
9	2452	33.80	33.81	0.5	Pass
10	2457	35.12	35.27	0.5	Pass
11	2462	34.15	33.95	0.5	Pass

Spectrum Plot of Worst Value


802.11b_Chain 0 / CH11

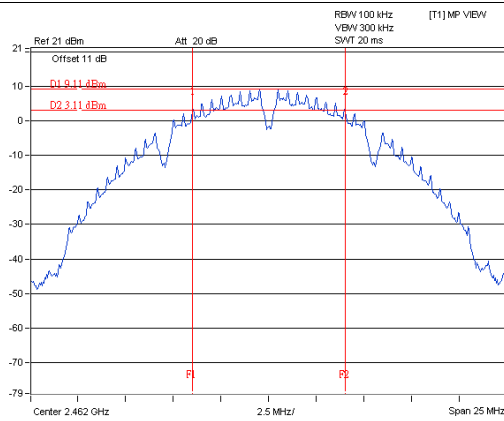


802.11g_Chain 0 / CH1

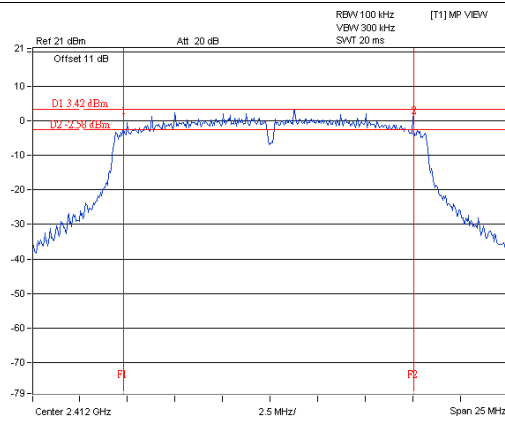

VHT20_Chain 1 / CH6

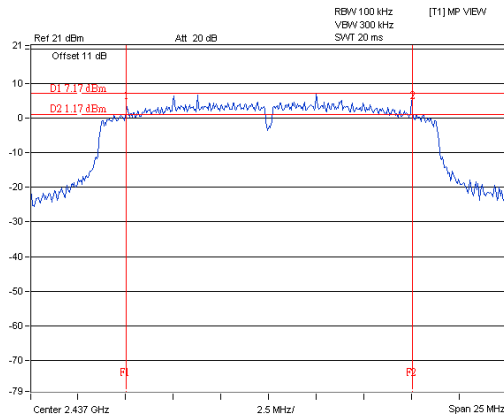

VHT40_Chain 1 / CH6

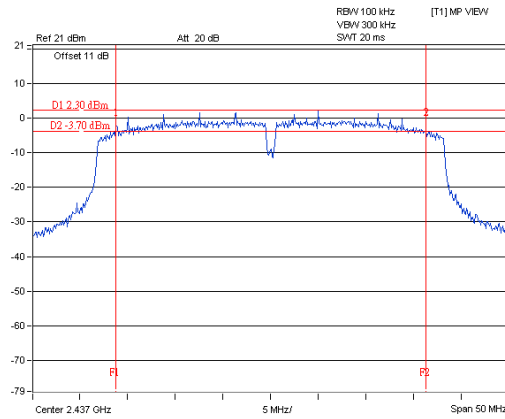

4.4 Conducted Output Power Measurement

4.4.1 Limits of Conducted Output Power Measurement

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

Per KDB 662911 D01 Multiple Transmitter Output Method of conducted output power measurement on IEEE 802.11 devices,


Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT} ;

Array Gain = $5 \log(N_{ANT}/N_{SS})$ dB or 3 dB, whichever is less for 20-MHz channel widths with $N_{ANT} \geq 5$.

For power measurements on all other devices: Array Gain = $10 \log(N_{ANT}/N_{SS})$ dB.

4.4.2 Test Setup



4.4.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.4.4 Test Procedures

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.

Average power sensor was used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

4.4.5 Deviation from Test Standard

No deviation.

4.4.6 EUT Operating Conditions

Same as Item 4.3.6.

4.4.7 Test Results

FOR PEAK POWER

802.11b

Chan.	Chan. Freq. (MHz)	Peak Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	20.81	20.65	236.649	23.74	29.37	Pass
6	2437	21.15	21.56	273.536	24.37	29.37	Pass
11	2462	21.36	20.65	252.918	24.03	29.37	Pass
12	2467	20.05	19.72	194.914	22.90	29.37	Pass
13	2472	13.20	12.99	40.8	16.11	29.37	Pass

Note: Directional gain = $3.62\text{dBi} + 10\log(2) = 6.63\text{dBi} > 6\text{dBi}$, therefore the limit needs to reduce, so the power limit shall be reduced to $30-(6.63-6) = 29.37\text{dBm}$.

802.11g

Chan.	Chan. Freq. (MHz)	Peak Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	21.85	22.07	314.174	24.97	29.37	Pass
6	2437	24.10	24.03	509.97	27.08	29.37	Pass
11	2462	21.07	21.36	264.711	24.23	29.37	Pass
12	2467	18.23	18.28	133.825	21.27	29.37	Pass
13	2472	8.69	8.63	14.691	11.67	29.37	Pass

Note: Directional gain = $3.62\text{dBi} + 10\log(2) = 6.63\text{dBi} > 6\text{dBi}$, therefore the limit needs to reduce, so the power limit shall be reduced to $30-(6.63-6) = 29.37\text{dBm}$.

VHT20

Chan.	Chan. Freq. (MHz)	Peak Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	21.58	21.65	290.098	24.63	29.37	Pass
6	2437	23.74	24.27	503.893	27.02	29.37	Pass
11	2462	21.24	21.35	269.503	24.31	29.37	Pass
12	2467	17.76	18.02	123.091	20.90	29.37	Pass
13	2472	7.21	7.61	11.028	10.42	29.37	Pass

Note: Directional gain = $3.62\text{dBi} + 10\log(2) = 6.63\text{dBi} > 6\text{dBi}$, therefore the limit needs to reduce, so the power limit shall be reduced to $30-(6.63-6) = 29.37\text{dBm}$.

VHT40

Chan.	Chan. Freq. (MHz)	Peak Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
3	2422	18.19	18.14	131.08	21.18	29.37	Pass
6	2437	23.08	23.41	422.516	26.26	29.37	Pass
9	2452	17.17	17.39	106.947	20.29	29.37	Pass
10	2457	17.59	17.78	117.391	20.70	29.37	Pass
11	2462	8.97	9.08	15.98	12.04	29.37	Pass

Note: Directional gain = $3.62\text{dBi} + 10\log(2) = 6.63\text{dBi} > 6\text{dBi}$, therefore the limit needs to reduce, so the power limit shall be reduced to $30-(6.63-6) = 29.37\text{dBm}$.

FOR AVERAGE POWER

802.11b

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)
		Chain 0	Chain 1		
1	2412	18.35	18.22	134.765	21.30
6	2437	18.57	18.95	150.469	21.77
11	2462	18.83	18.13	141.397	21.50
12	2467	17.45	17.23	108.435	20.35
13	2472	10.62	10.32	22.300	13.48

802.11g

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)
		Chain 0	Chain 1		
1	2412	15.23	15.69	70.411	18.48
6	2437	18.74	18.57	146.762	21.67
11	2462	14.55	14.64	57.617	17.61
12	2467	11.63	11.85	29.866	14.75
13	2472	2.07	2.04	3.211	5.07

VHT20

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)
		Chain 0	Chain 1		
1	2412	15.17	15.47	68.122	18.33
6	2437	18.58	19.12	153.769	21.87
11	2462	14.64	14.79	59.237	17.73
12	2467	11.67	11.72	29.548	14.71
13	2472	0.96	0.94	2.489	3.96

VHT40


Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)
		Chain 0	Chain 1		
3	2422	11.14	11.46	26.998	14.31
6	2437	16.79	17.21	100.355	20.02
9	2452	10.37	10.56	22.265	13.48
10	2457	10.80	10.76	23.935	13.79
11	2462	1.99	2.04	3.181	5.03

4.5 Power Spectral Density Measurement

4.5.1 Limits of Power Spectral Density Measurement

The Maximum of Power Spectral Density Measurement is 8dBm in any 3 kHz.

4.5.2 Test Setup



4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.5.4 Test Procedure

- Set analyzer center frequency to DTS channel center frequency.
- Set the span to 1.5 times the DTS bandwidth.
- Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set the VBW $\geq 3 \times \text{RBW}$.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level within the RBW.

4.5.5 Deviation from Test Standard

No deviation.

4.5.6 EUT Operating Condition

Same as Item 4.3.6

4.5.7 Test Results

802.11b

TX chain	Channel	Freq. (MHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass /Fail
0	1	2412	-5.47	3.01	-2.46	7.37	Pass
	6	2437	-4.83	3.01	-1.82	7.37	Pass
	11	2462	-5.77	3.01	-2.76	7.37	Pass
	12	2467	-7.22	3.01	-4.21	7.37	Pass
	13	2472	-14.03	3.01	-11.02	7.37	Pass
1	1	2412	-6.18	3.01	-3.17	7.37	Pass
	6	2437	-4.51	3.01	-1.50	7.37	Pass
	11	2462	-5.90	3.01	-2.89	7.37	Pass
	12	2467	-5.66	3.01	-2.65	7.37	Pass
	13	2472	-13.20	3.01	-10.19	7.37	Pass

Note: Directional gain = $3.62\text{dBi} + 10\log(2) = 6.63\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $8-(6.63-6) = 7.37\text{dBm}$.

802.11g

TX chain	Channel	Freq. (MHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass /Fail
0	1	2412	-11.27	3.01	-8.26	7.37	Pass
	6	2437	-7.75	3.01	-4.74	7.37	Pass
	11	2462	-12.47	3.01	-9.46	7.37	Pass
	12	2467	-15.45	3.01	-12.44	7.37	Pass
	13	2472	-24.94	3.01	-21.93	7.37	Pass
1	1	2412	-10.55	3.01	-7.54	7.37	Pass
	6	2437	-8.04	3.01	-5.03	7.37	Pass
	11	2462	-11.59	3.01	-8.58	7.37	Pass
	12	2467	-15.45	3.01	-12.44	7.37	Pass
	13	2472	-24.49	3.01	-21.48	7.37	Pass

Note: Directional gain = $3.62\text{dBi} + 10\log(2) = 6.63\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $8-(6.63-6) = 7.37\text{dBm}$.

VHT20

TX chain	Channel	Freq. (MHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass /Fail
0	1	2412	-12.05	3.01	-9.04	7.37	Pass
	6	2437	-7.76	3.01	-4.75	7.37	Pass
	11	2462	-12.77	3.01	-9.76	7.37	Pass
	12	2467	-15.29	3.01	-12.28	7.37	Pass
	13	2472	-26.17	3.01	-23.16	7.37	Pass
1	1	2412	-11.68	3.01	-8.67	7.37	Pass
	6	2437	-8.21	3.01	-5.20	7.37	Pass
	11	2462	-11.64	3.01	-8.63	7.37	Pass
	12	2467	-14.91	3.01	-11.90	7.37	Pass
	13	2472	-26.55	3.01	-23.54	7.37	Pass

Note: Directional gain = 3.62dBi + 10log(2) = 6.63dBi > 6dBi , so the power density limit shall be reduced to 8-(6.63-6) = 7.37dBm.


VHT40

TX chain	Channel	Freq. (MHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass /Fail
0	3	2422	-18.04	3.01	-15.03	7.37	Pass
	6	2437	-11.54	3.01	-8.53	7.37	Pass
	9	2452	-19.53	3.01	-16.52	7.37	Pass
	10	2457	-19.19	3.01	-16.18	7.37	Pass
	11	2462	-27.88	3.01	-24.87	7.37	Pass
1	3	2422	-17.84	3.01	-14.83	7.37	Pass
	6	2437	-11.78	3.01	-8.77	7.37	Pass
	9	2452	-18.70	3.01	-15.69	7.37	Pass
	10	2457	-19.13	3.01	-16.12	7.37	Pass
	11	2462	-27.75	3.01	-24.74	7.37	Pass


Note: Directional gain = 3.62dBi + 10log(2) = 6.63dBi > 6dBi , so the power density limit shall be reduced to 8-(6.63-6) = 7.37dBm.

Spectrum Plot of Worst Value


802.11b_Chain 1 / CH6

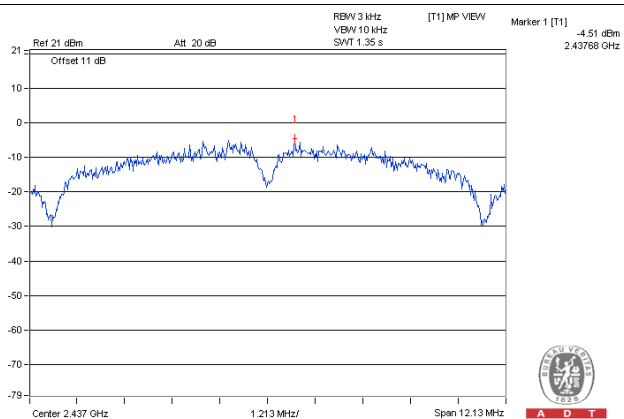


802.11g_Chain 0 / CH6

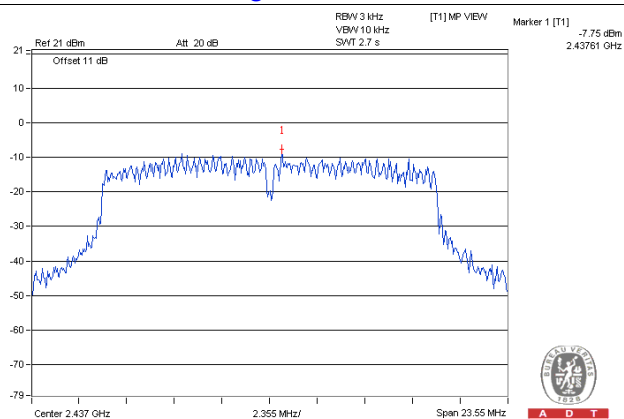

VHT20_Chain 0 / CH6

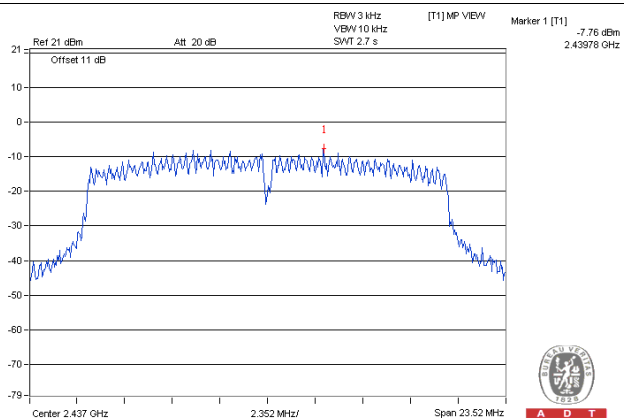

VHT40_Chain 0 / CH6

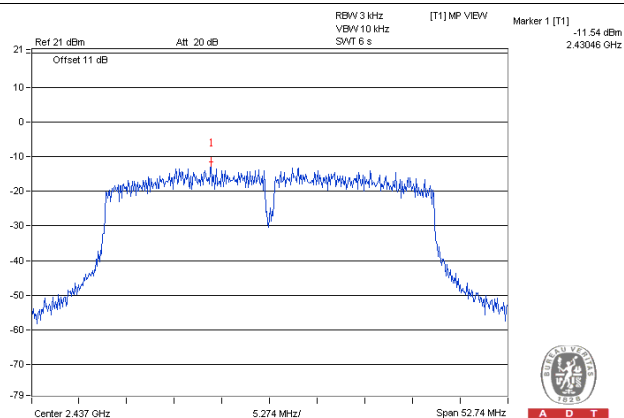


4.6 Conducted Out of Band Emission Measurement

4.6.1 Limits of Conducted Out of Band Emission Measurement

Below 20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 Test Setup



4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.6.4 Test Procedure

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

4.6.5 Deviation from Test Standard

No deviation.

4.6.6 EUT Operating Condition


Same as Item 4.3.6

4.6.7 Test Results


The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.

802.11b Chain 0


CH 1

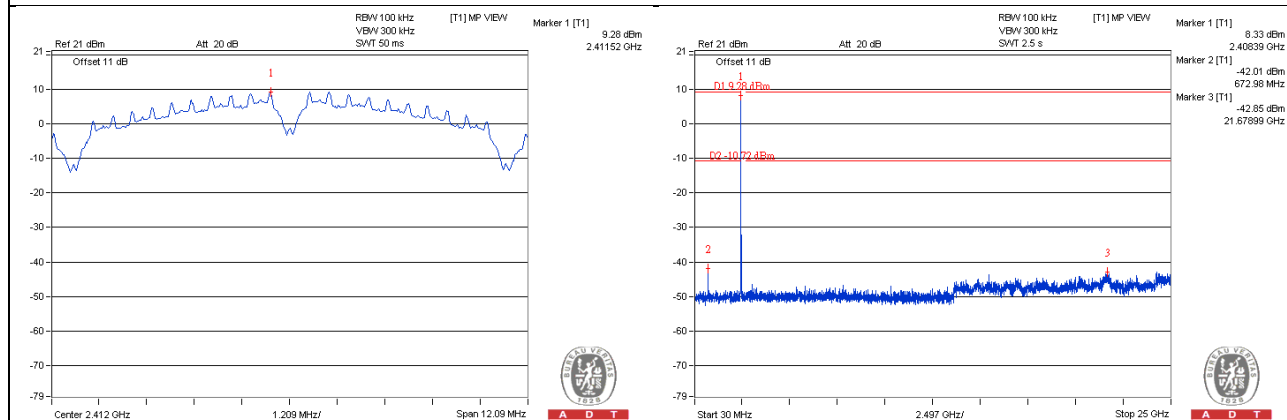


CH 6

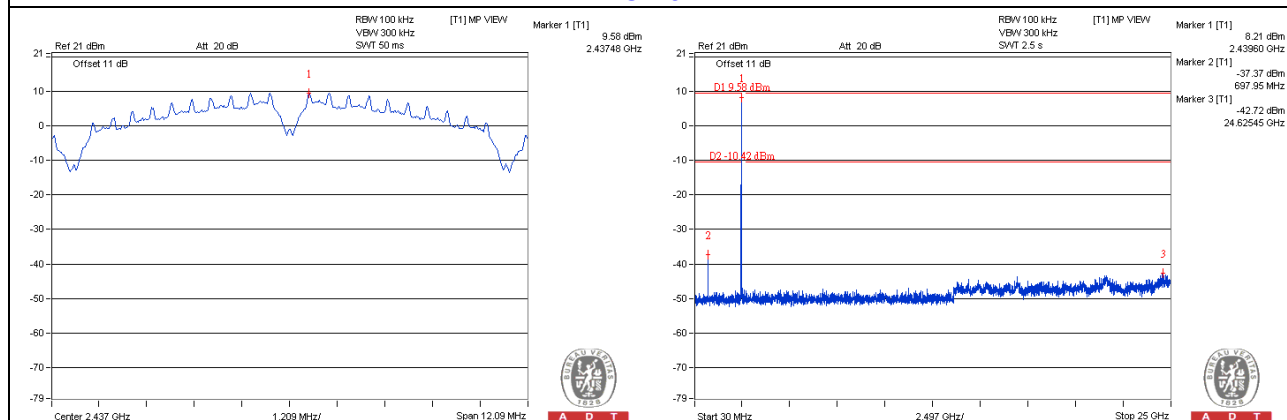


CH 11

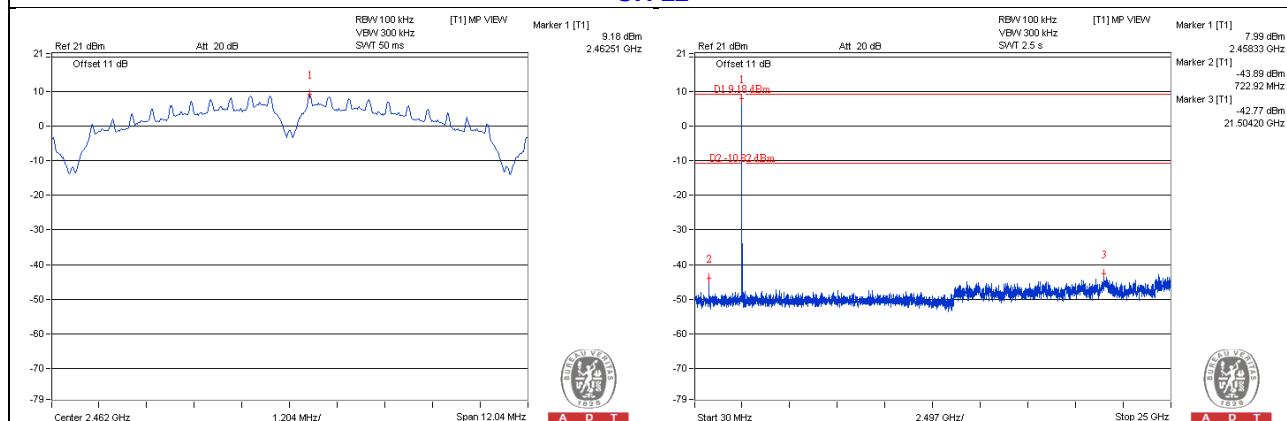


CH 1 Band edge

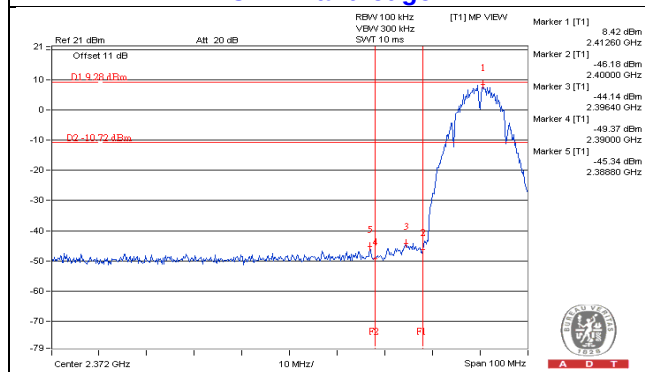


CH 11 Band edge

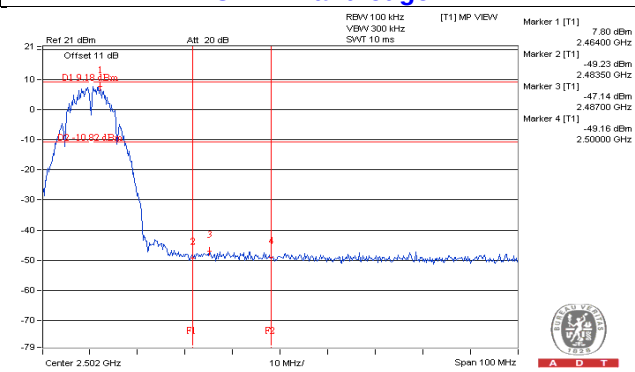

CH 12

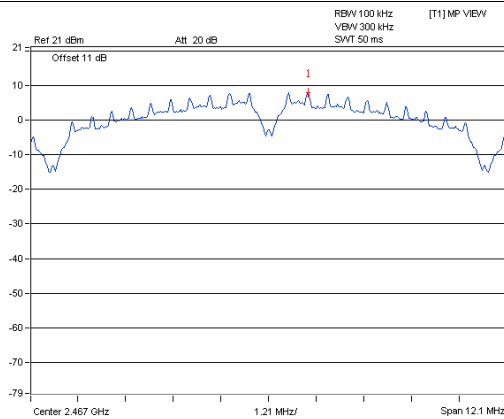


A D T

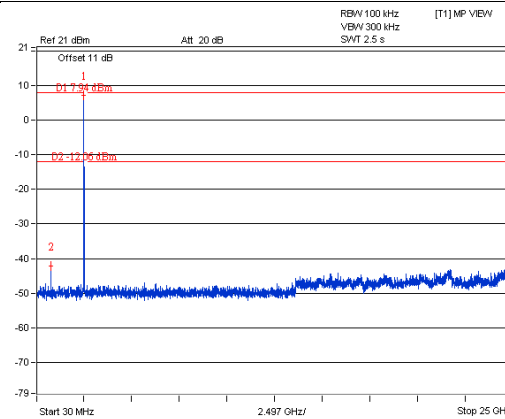


A D T

CH 13

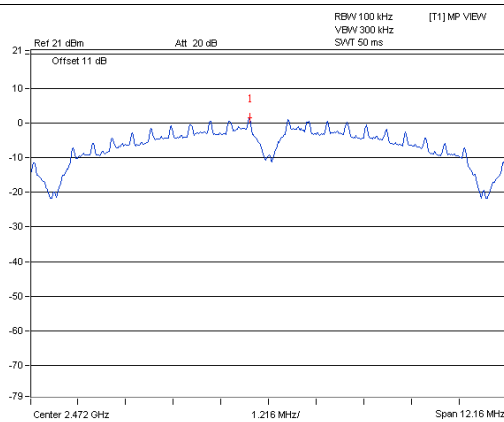


A D T

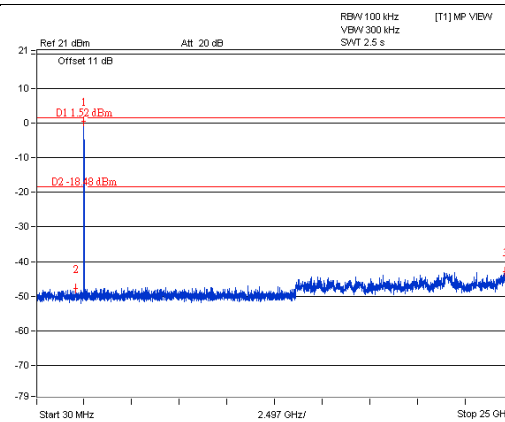


A D T

CH 12 Band edge

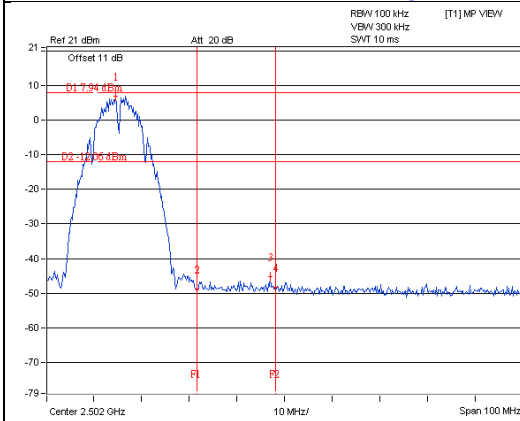

A D T


CH 13 Band edge

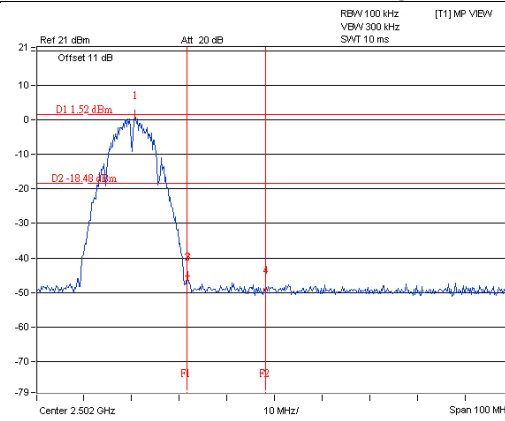


A D T

Chain 1


CH 1

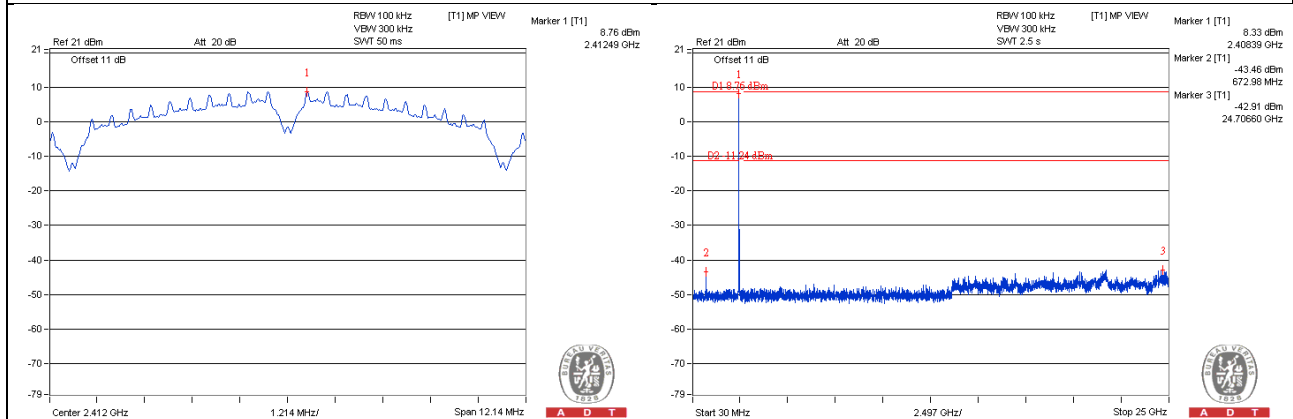


CH 6

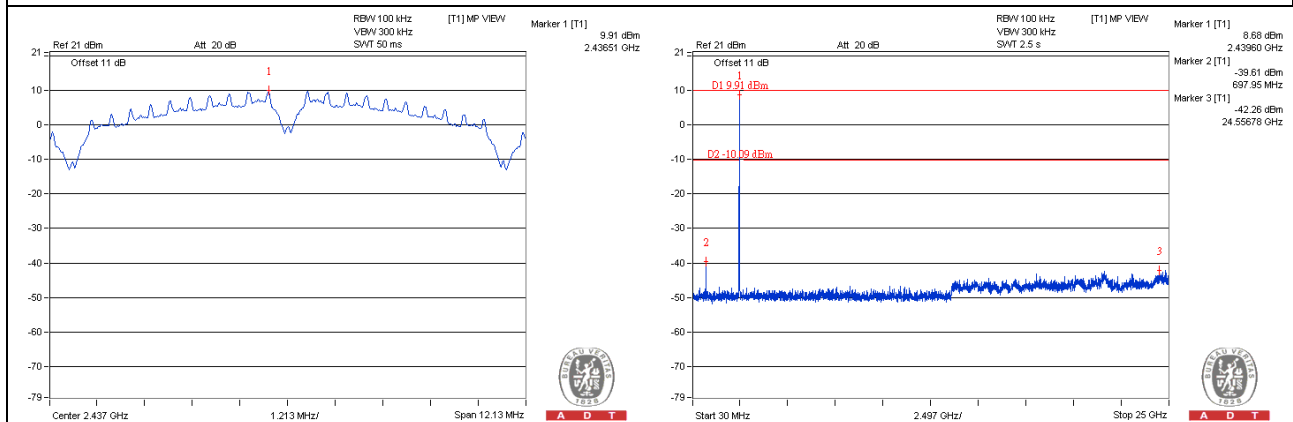


CH 11

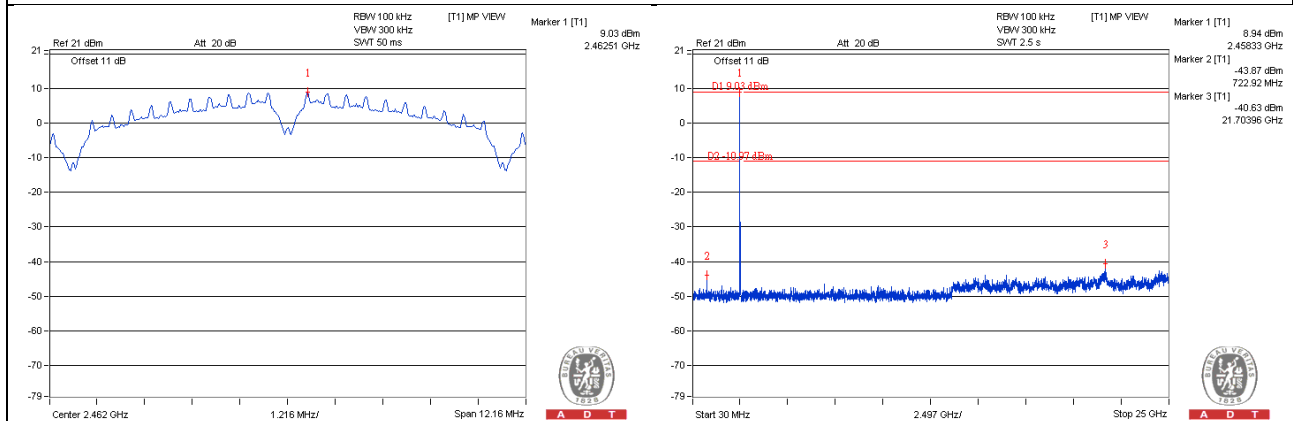


CH 1 Band edge

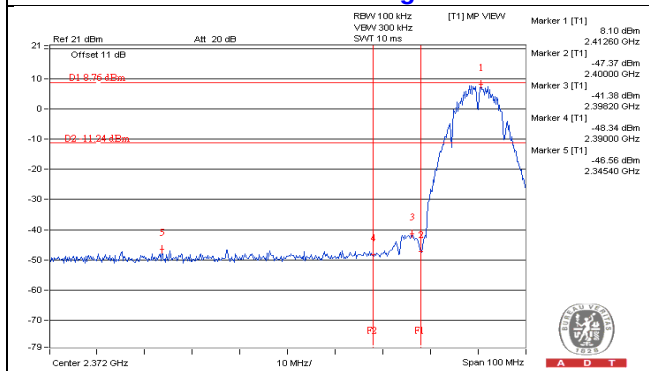


CH 11 Band edge

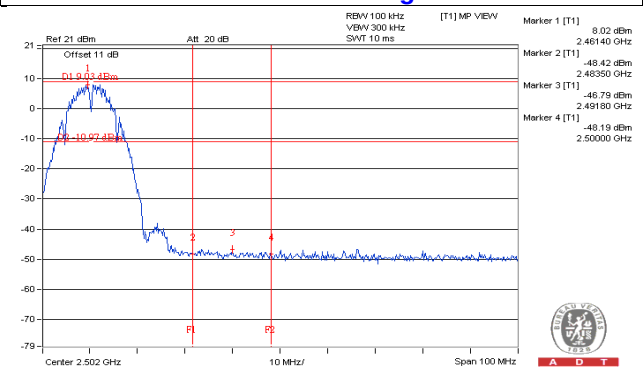

CH 12

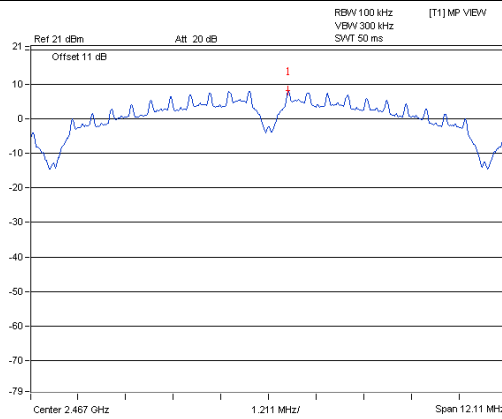


A D T

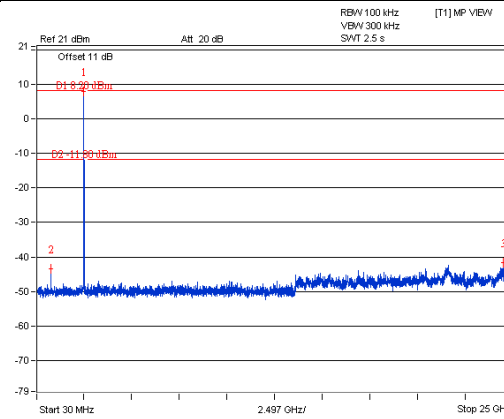


A D T

CH 13

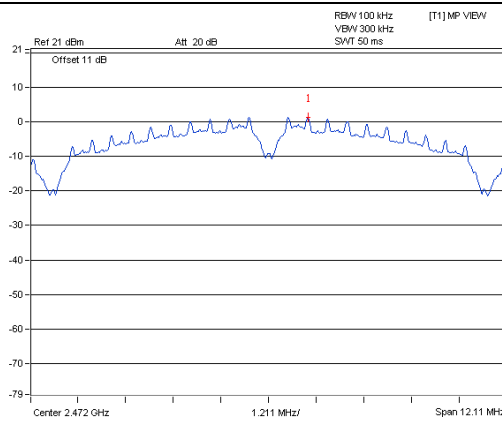


A D T

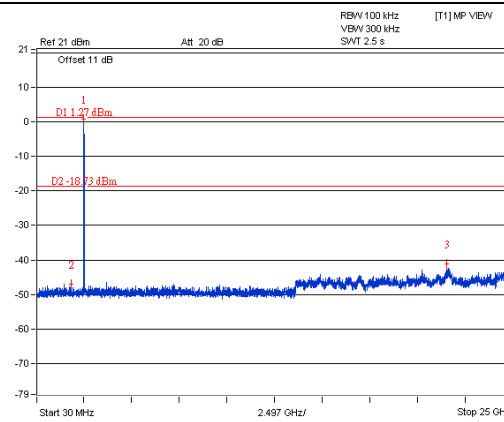


A D T

CH 12 Band edge

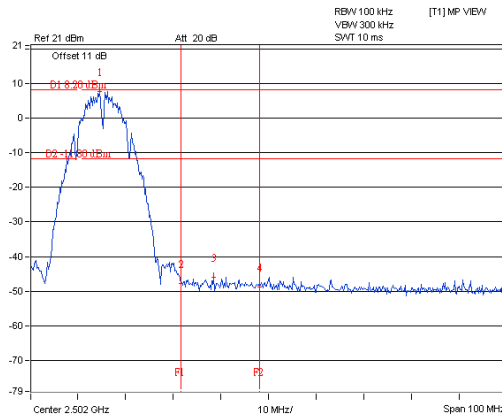

A D T


CH 13 Band edge

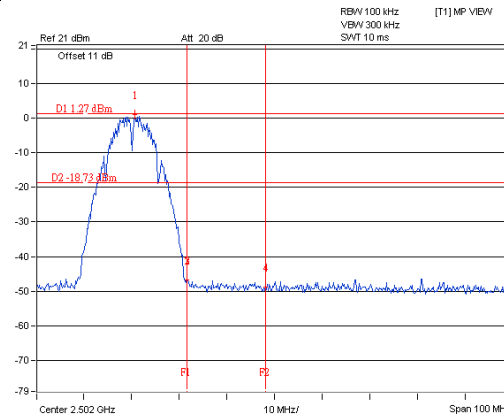


A D T

802.11g Chain 0


CH 1

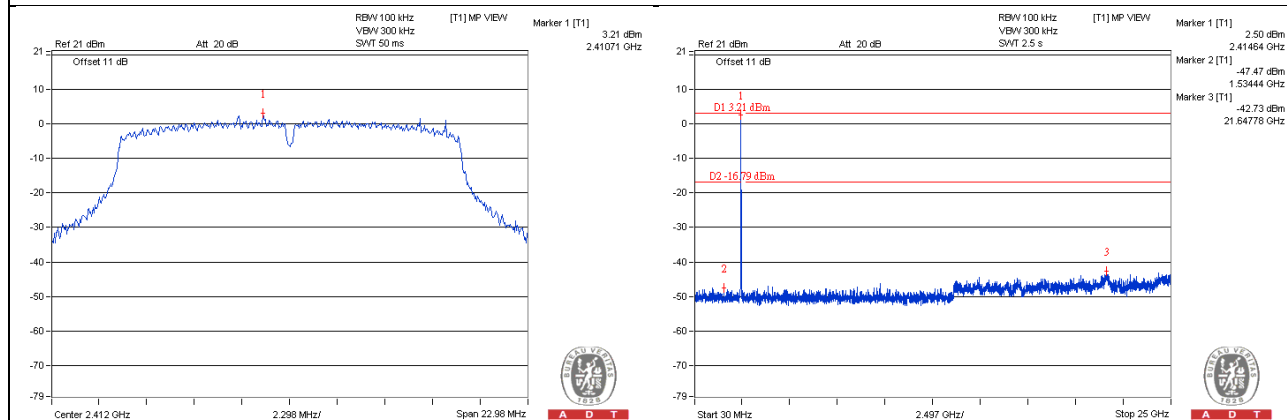


CH 6

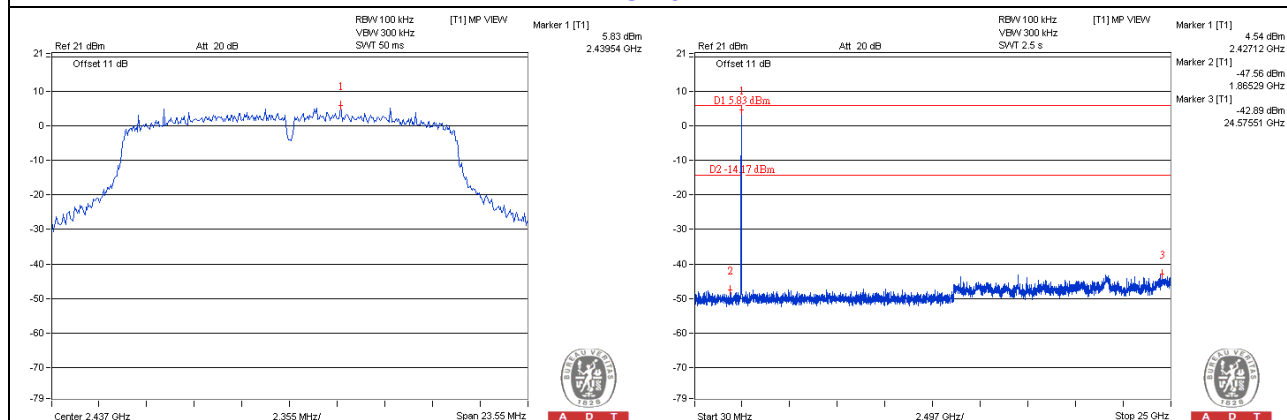


CH 11

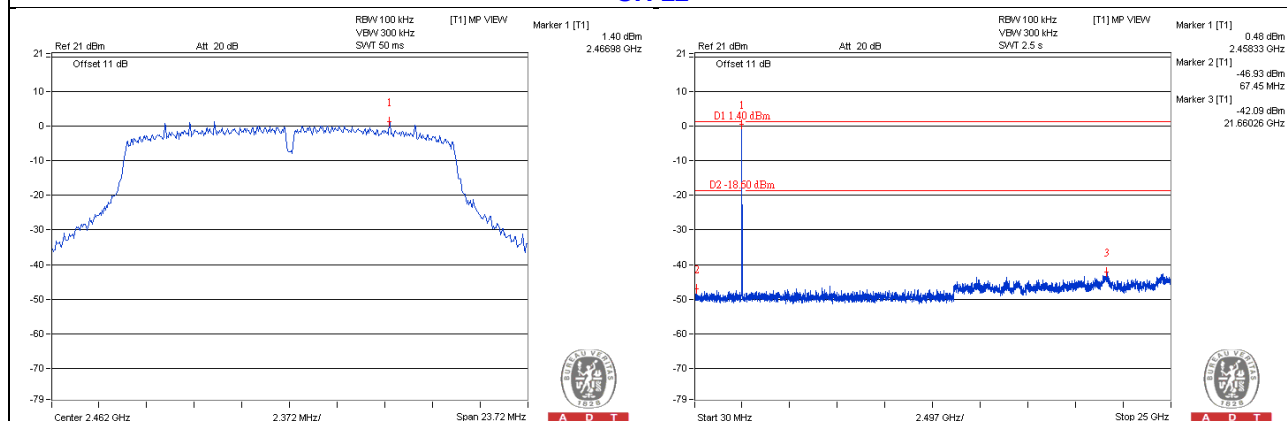


CH 1 Band edge

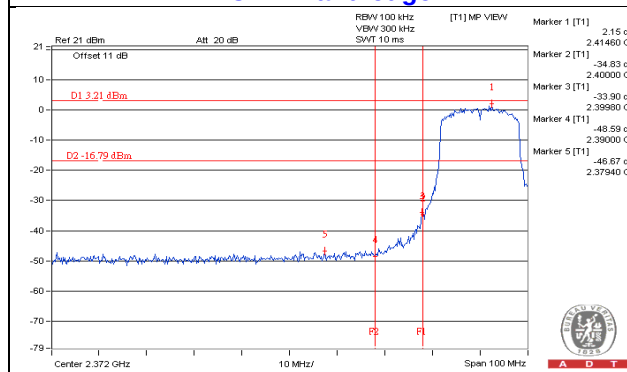


CH 11 Band edge

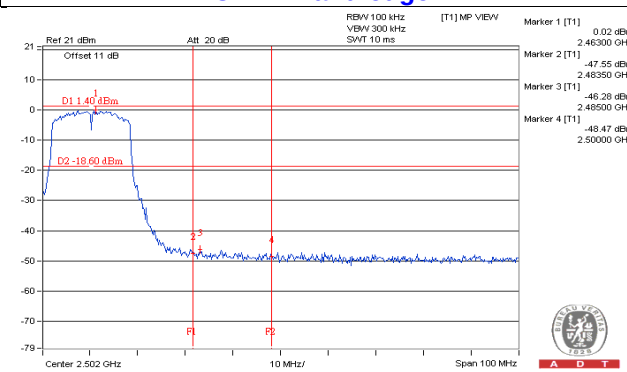

CH 12

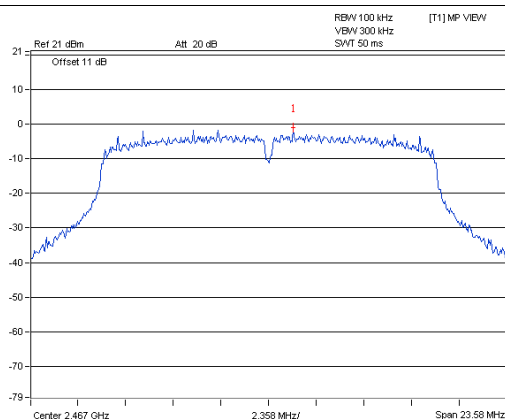


A D T

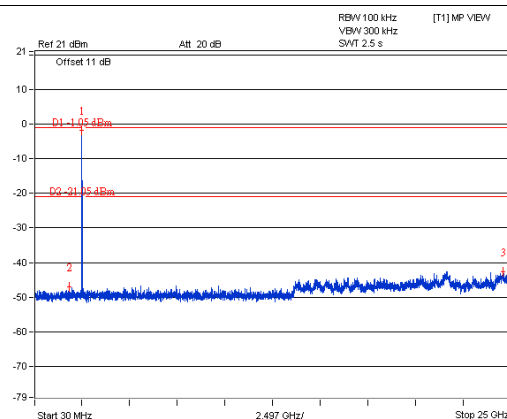


A D T

CH 13

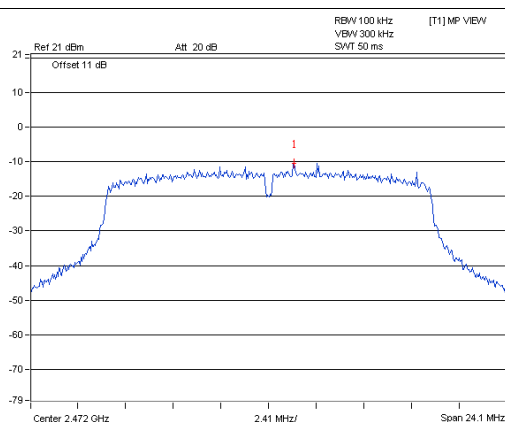


A D T

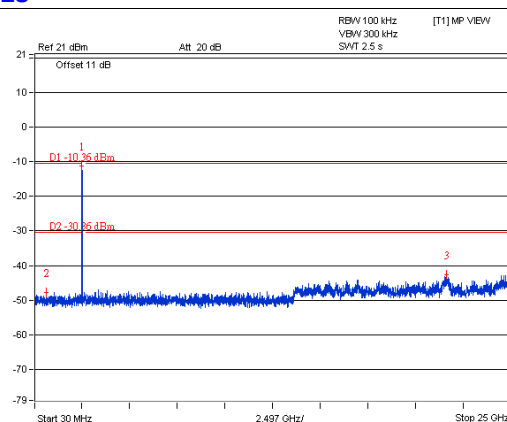


A D T

CH 12 Band edge

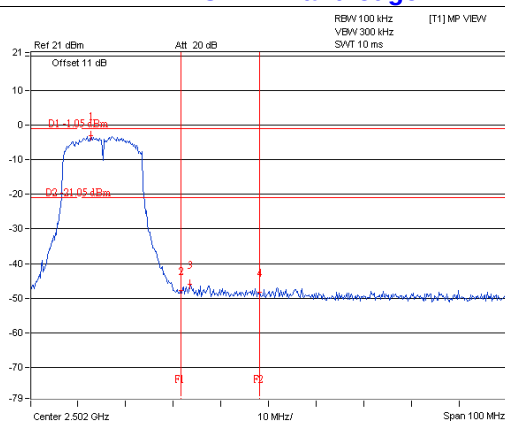

A D T



CH 13 Band edge

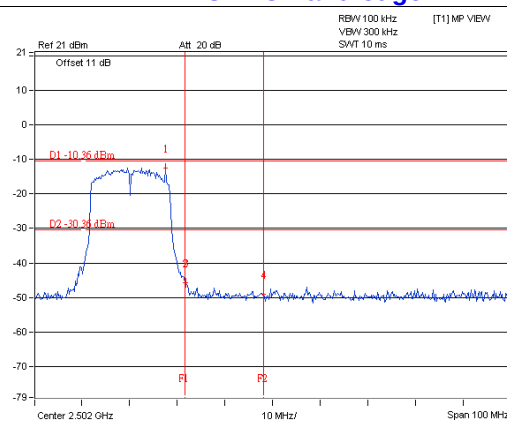



A D T

Chain 1



CH 1

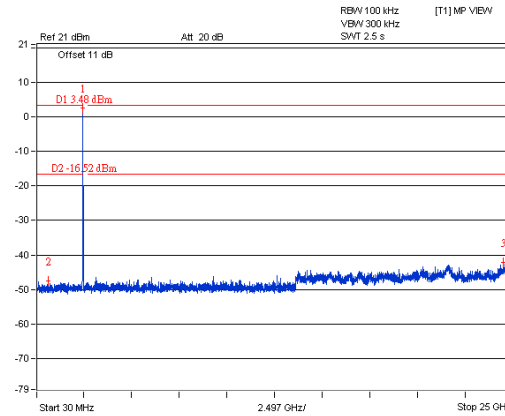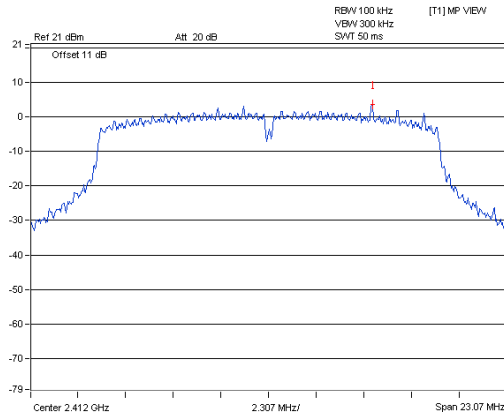


CH 6

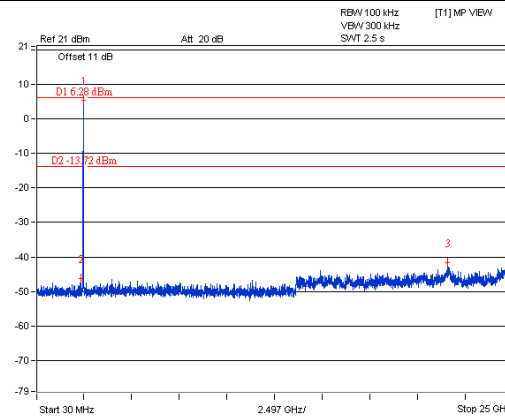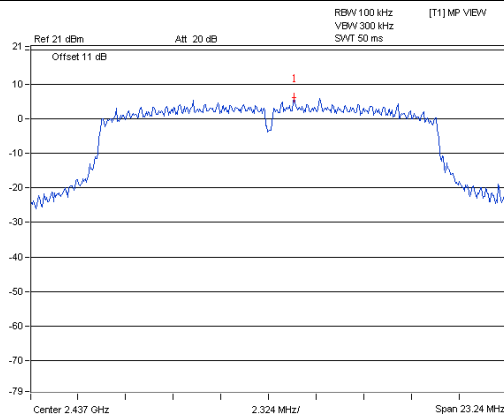


CH 11

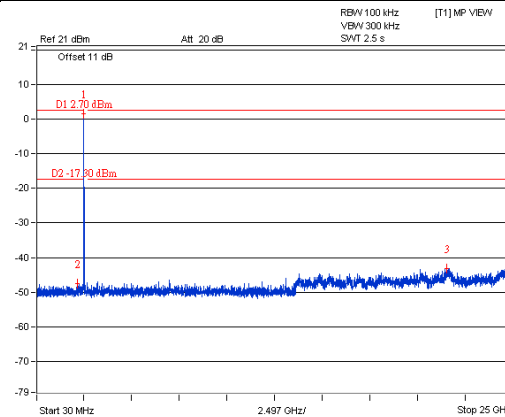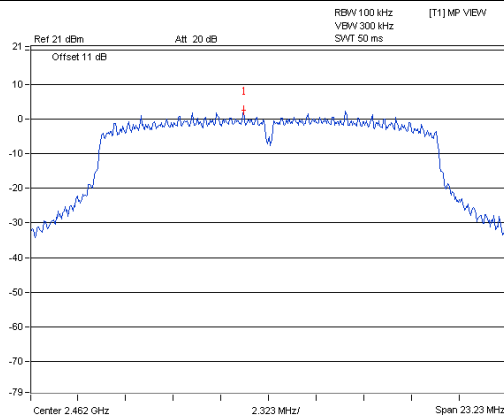


CH 1 Band edge

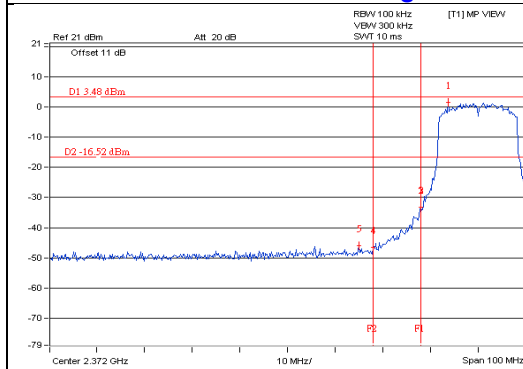


CH 11 Band edge

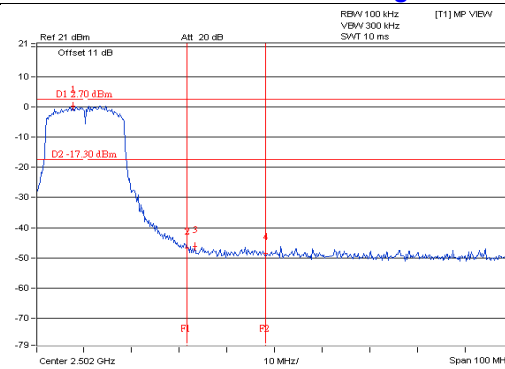

CH 12

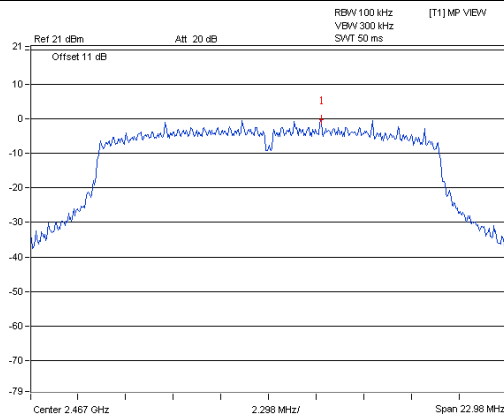


A D T

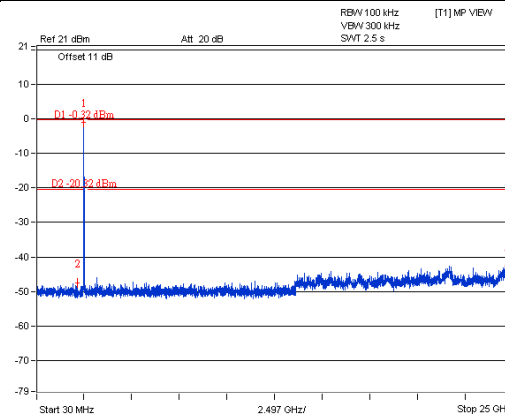


A D T

CH 13

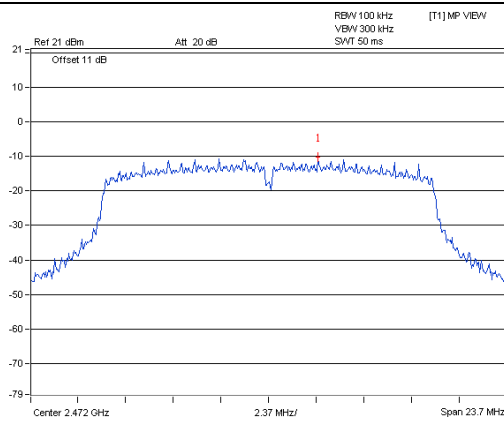


A D T

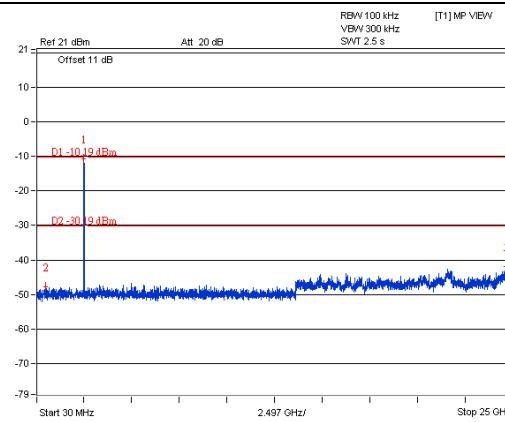


A D T

CH 12 Band edge

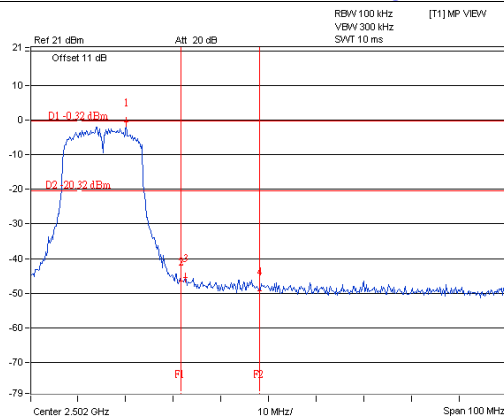

A D T


CH 13 Band edge

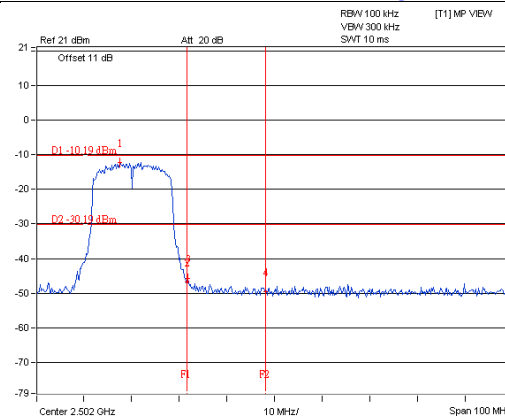


A D T

VHT20 Chain 0

CH 1

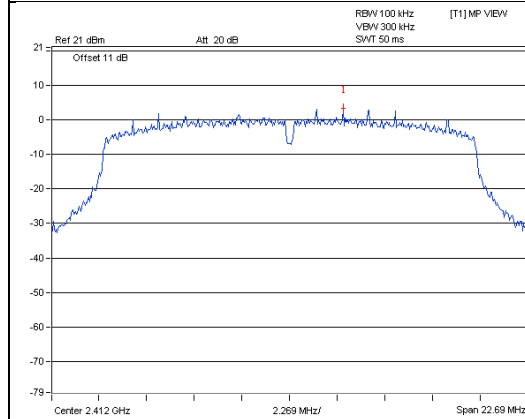


A D T

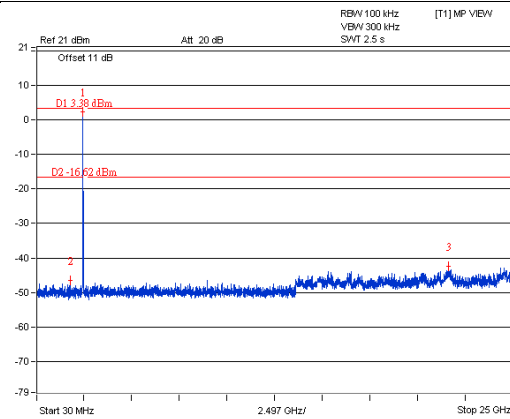


A D T

CH 6

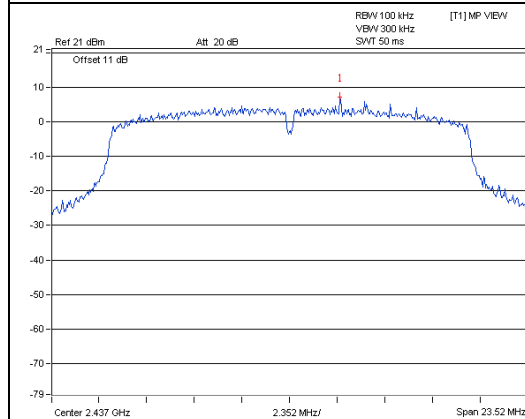


A D T

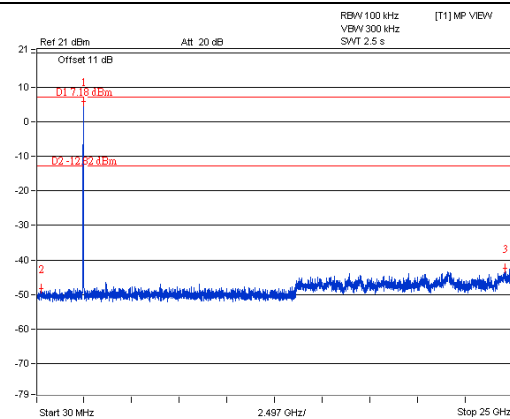


A D T

CH 11

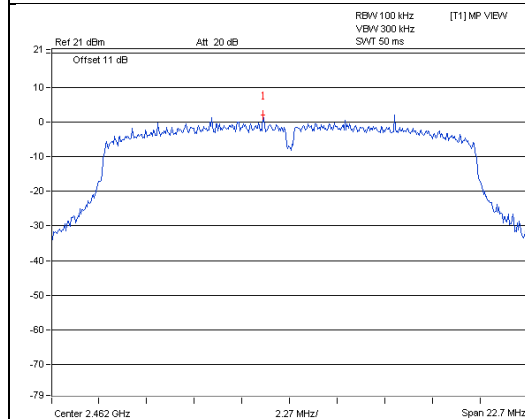


A D T

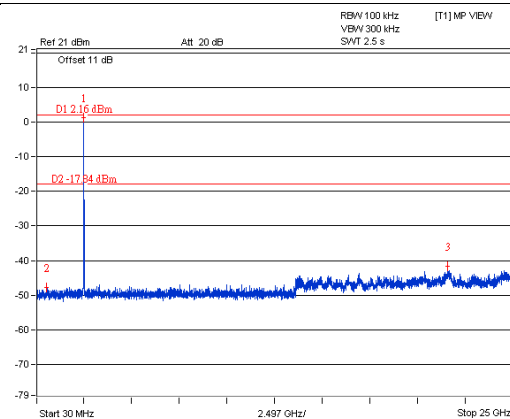


A D T

CH 1 Band edge

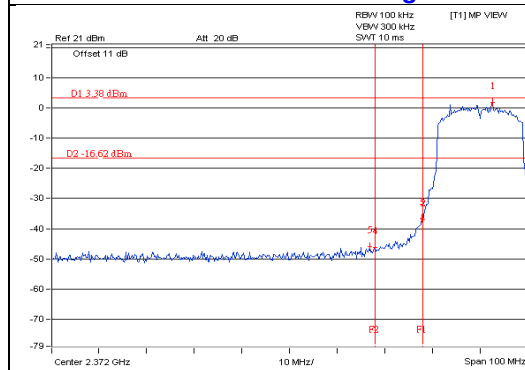


A D T

CH 11 Band edge

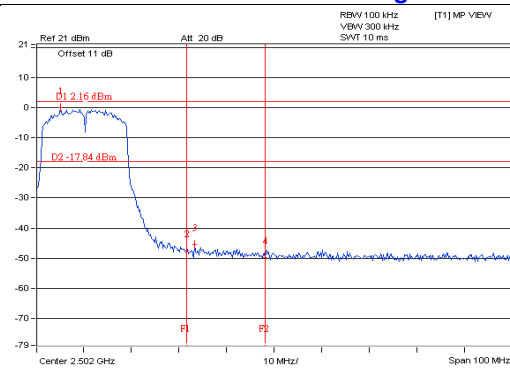


A D T

CH 12

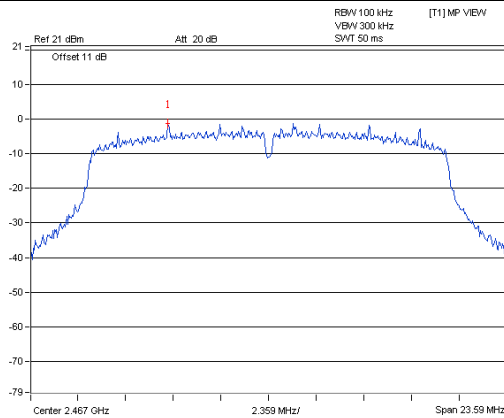


A D T

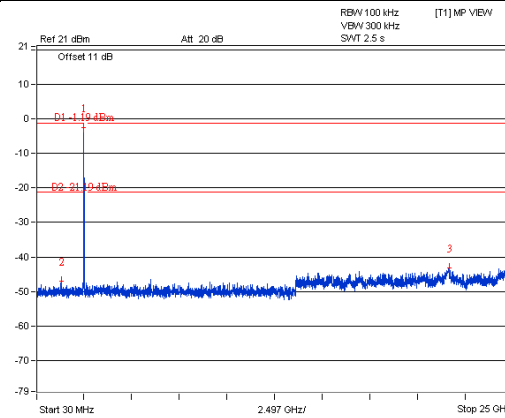


A D T

CH 13

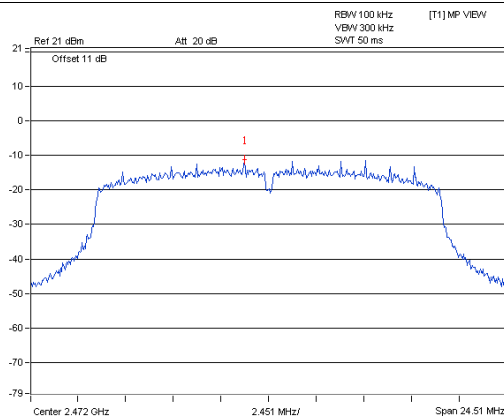


A D T

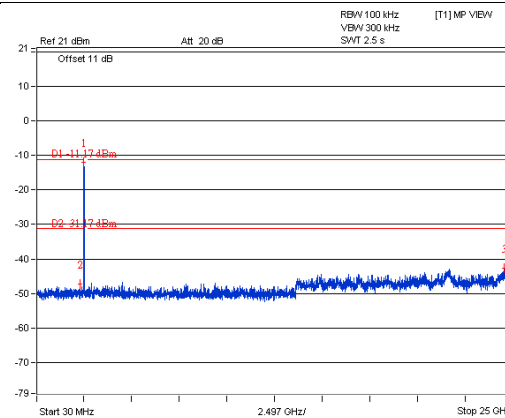


A D T

CH 12 Band edge

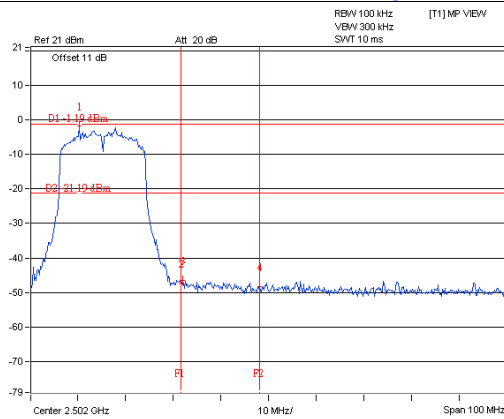

A D T



CH 13 Band edge

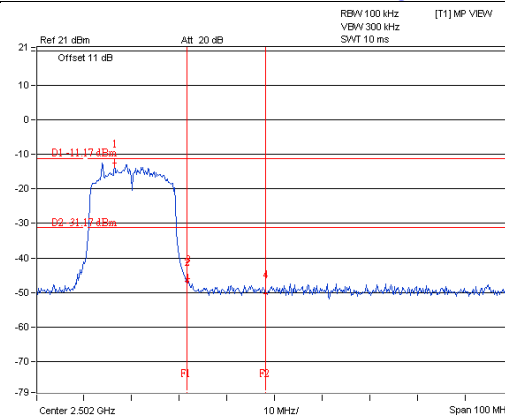



A D T

Chain 1



CH 1

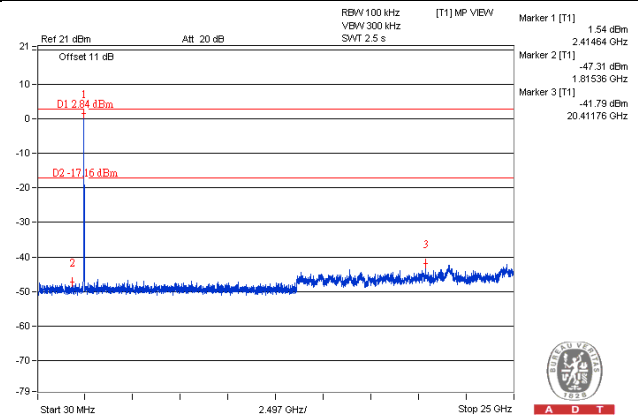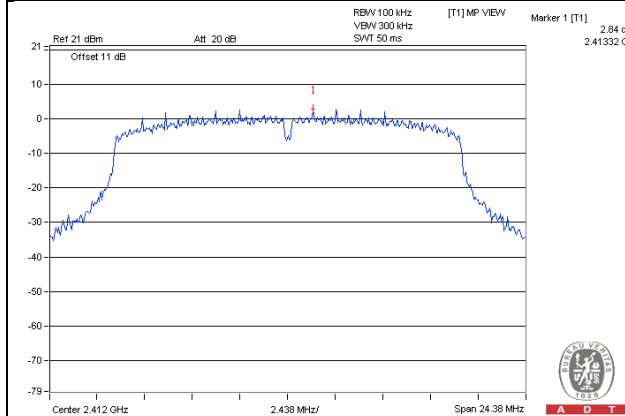


CH 6

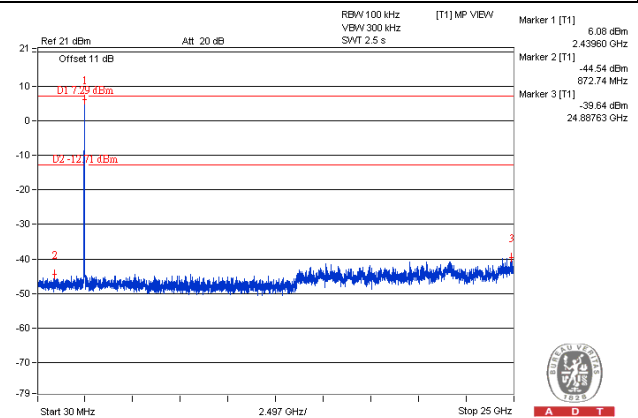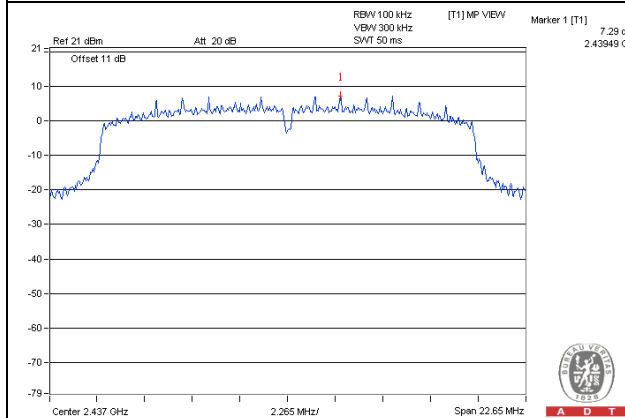


CH 11

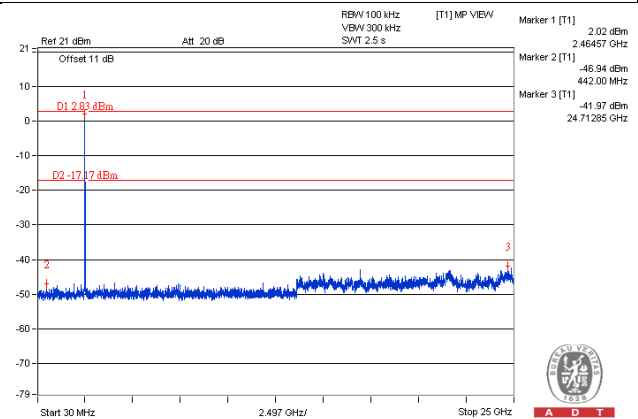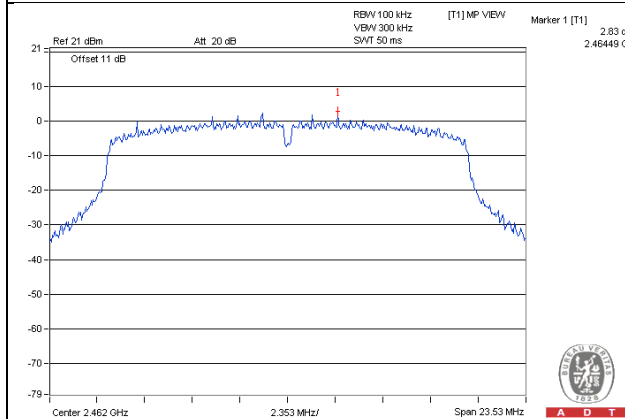



CH 1 Band edge

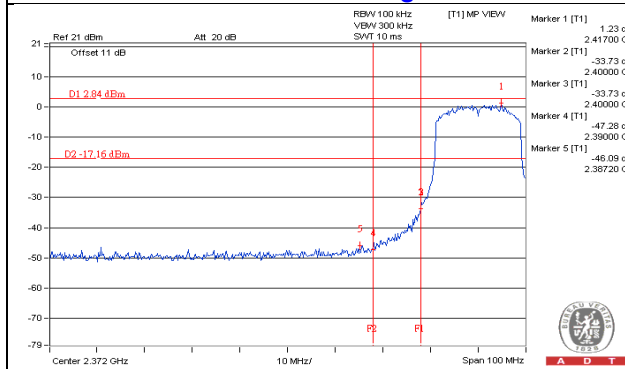



CH 11 Band edge

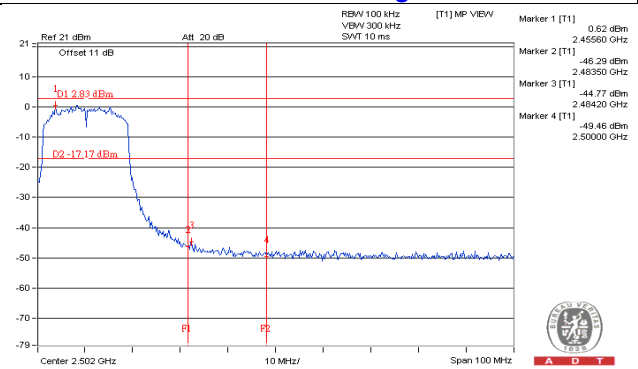


CH 12

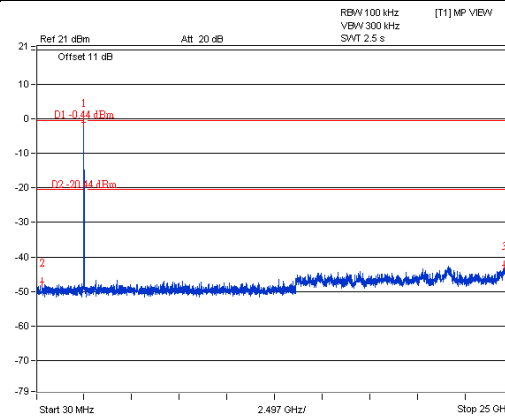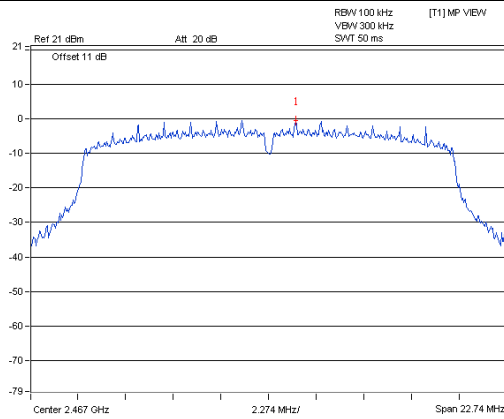


CH 13

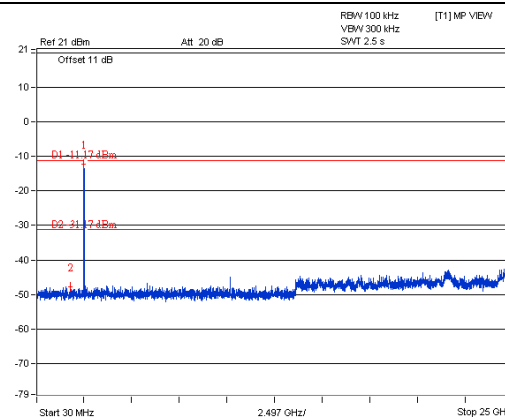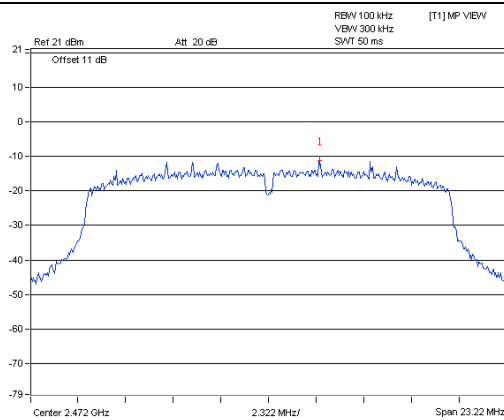

CH 12 Band edge

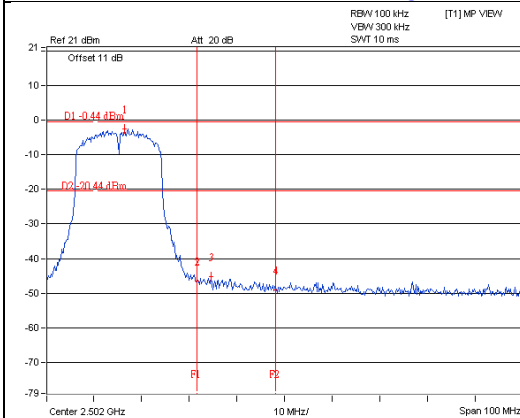


CH 13 Band edge

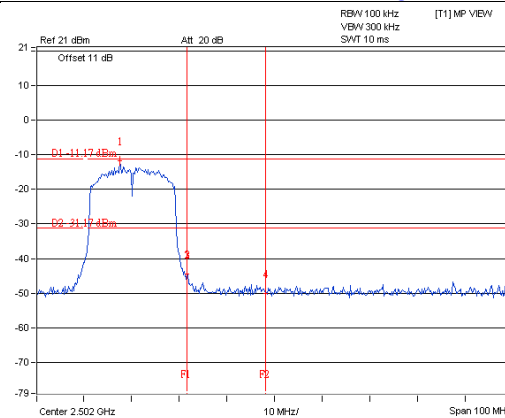


VHT40 Chain 0

CH 3

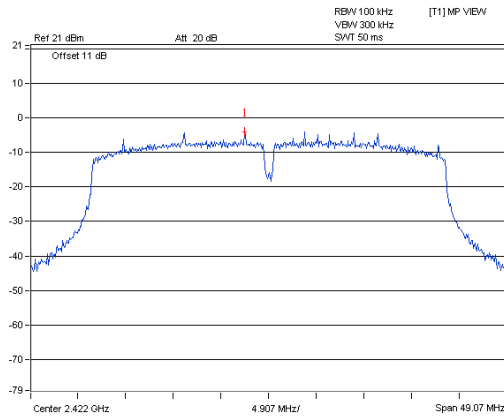


A D T

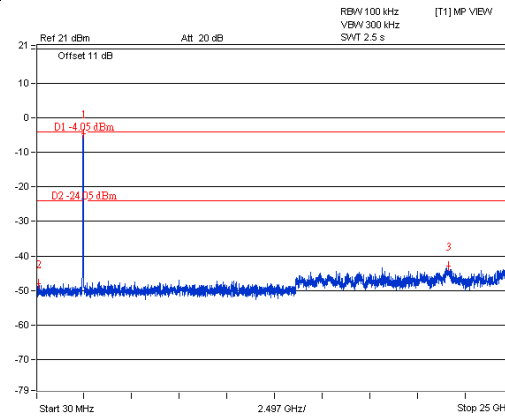


A D T

CH 6

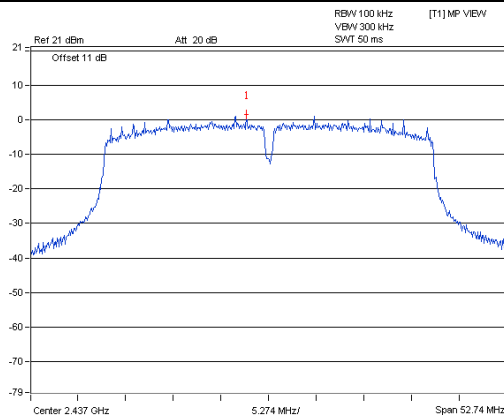


A D T

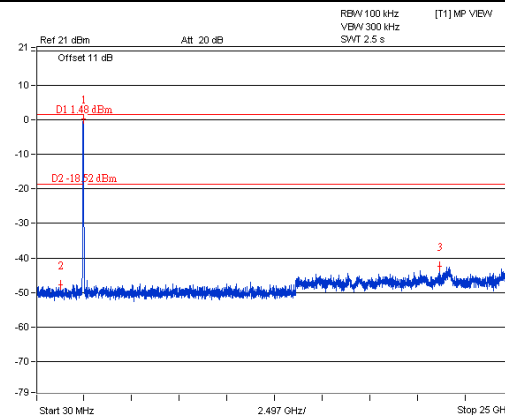


A D T

CH 9

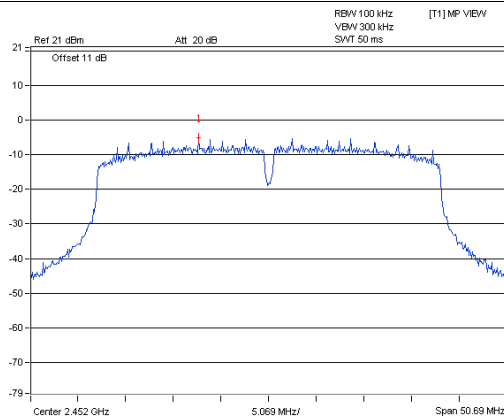


A D T

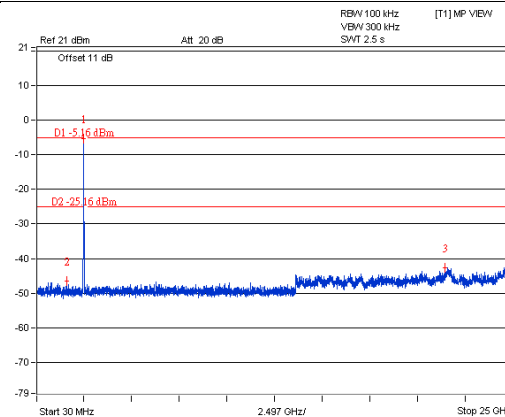


A D T

CH 3 Band edge

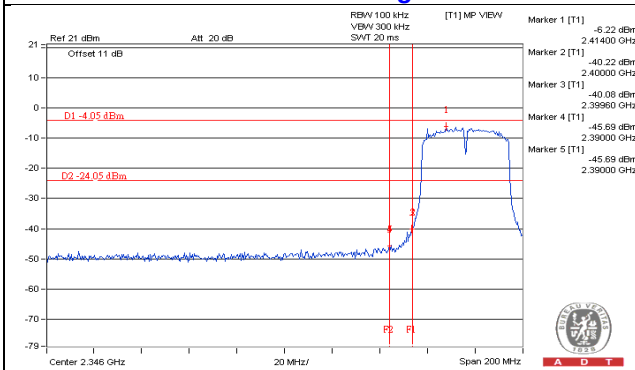


A D T

CH 9 Band edge

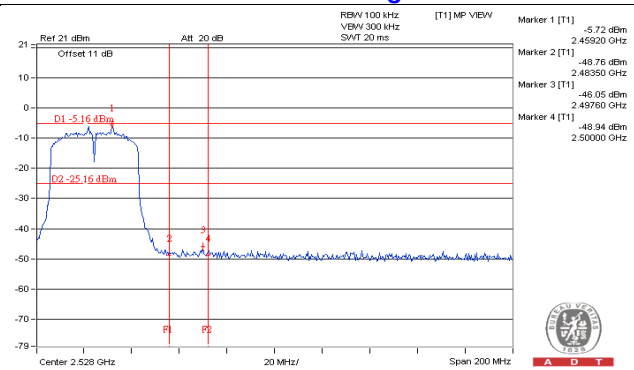


A D T

CH 10

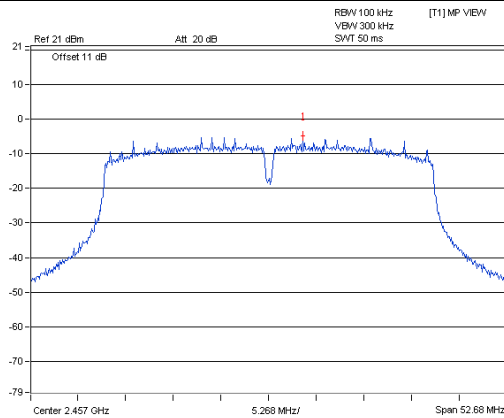


A D T

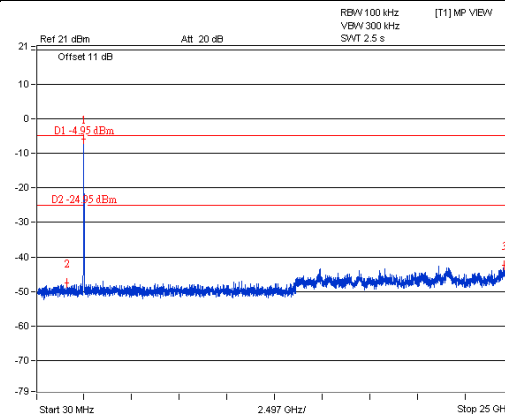


A D T

CH 11

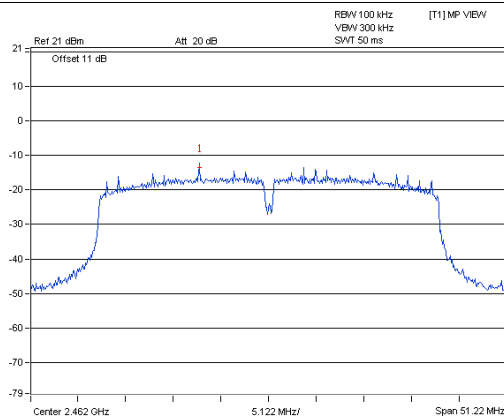


A D T

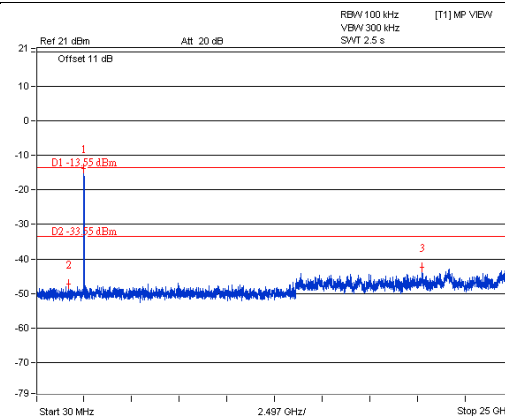


A D T

CH 10 Band edge

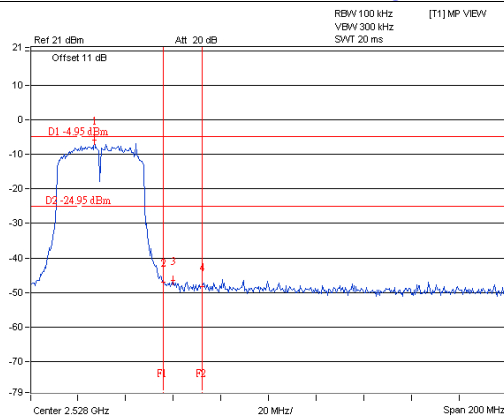

A D T



CH 11 Band edge

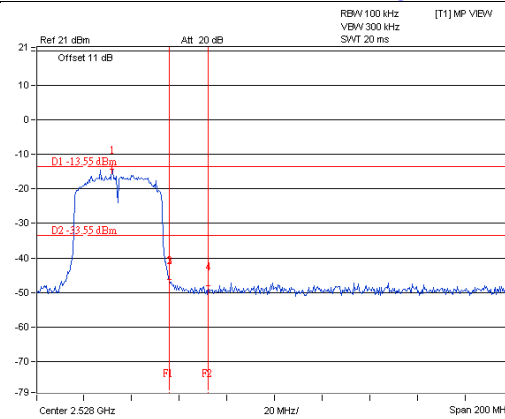



A D T

Chain 1



CH 3

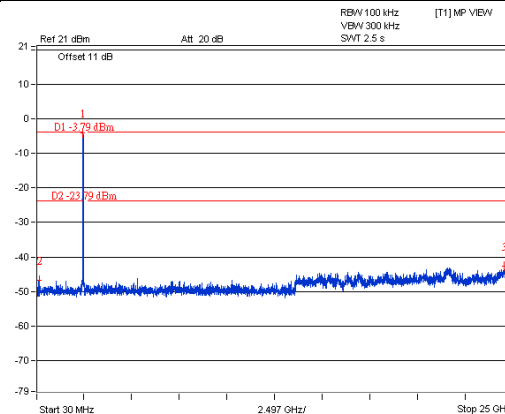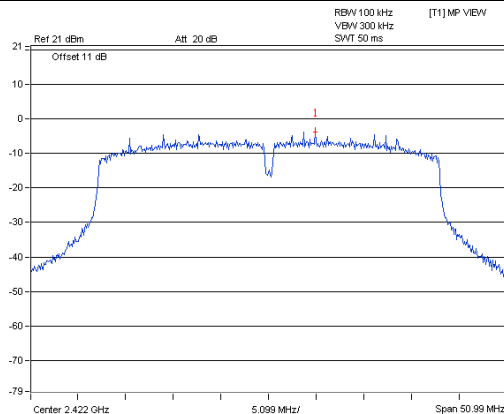


CH 6

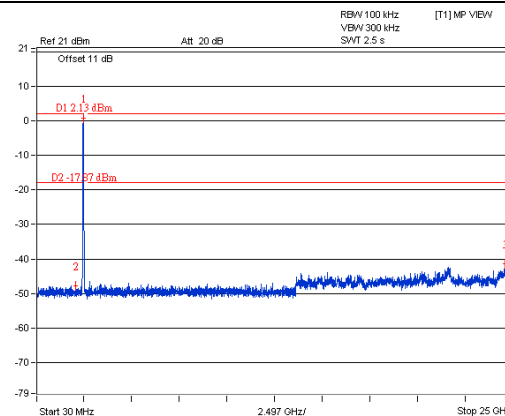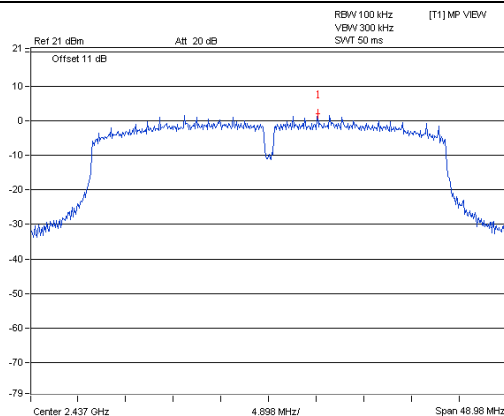


CH 9

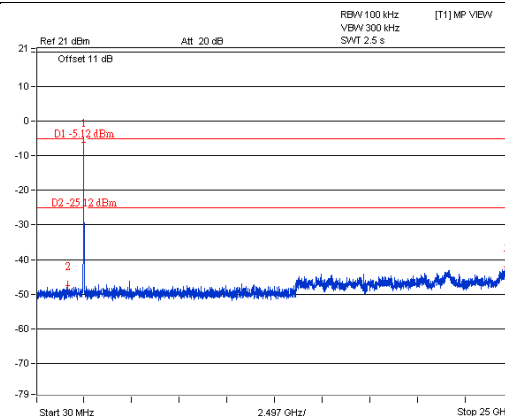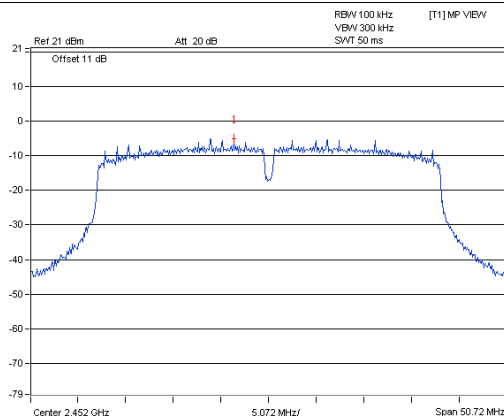



CH 3 Band edge

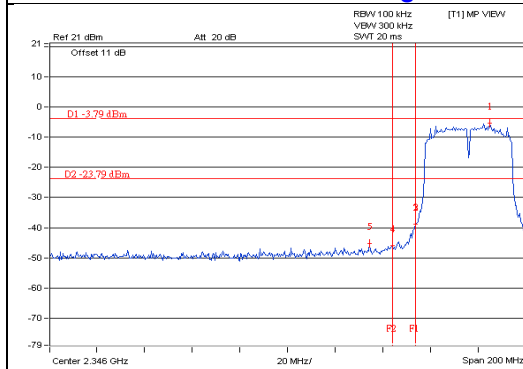



CH 9 Band edge

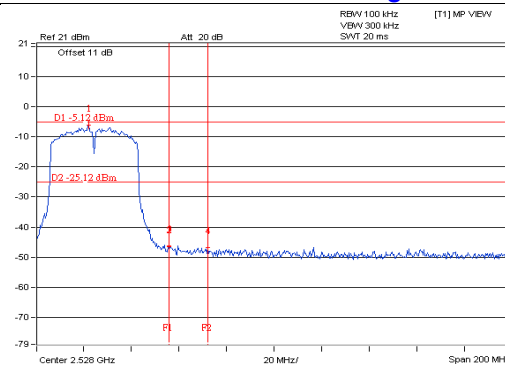


CH 10

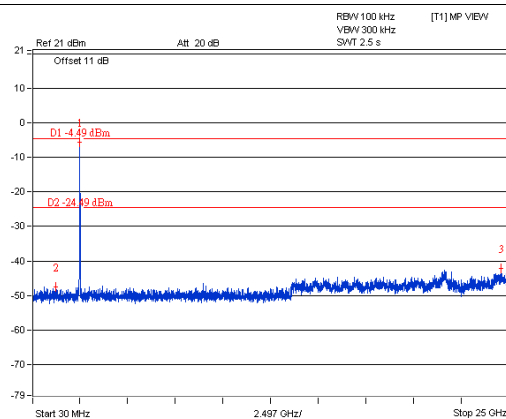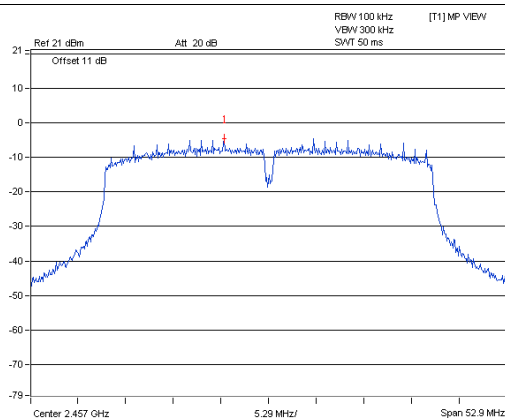


CH 11

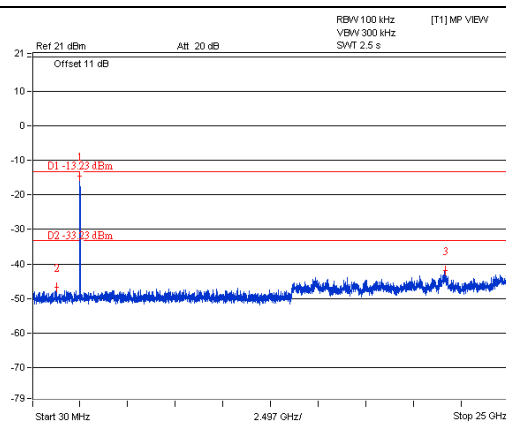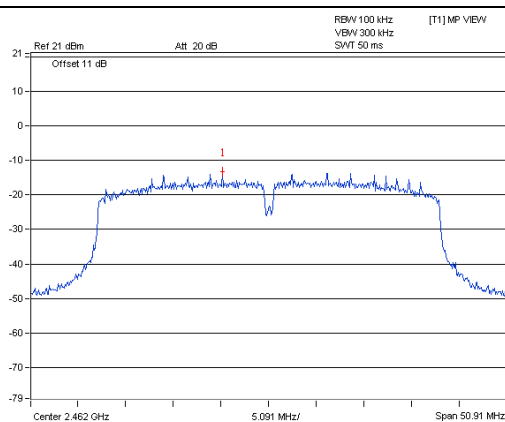

CH 10 Band edge

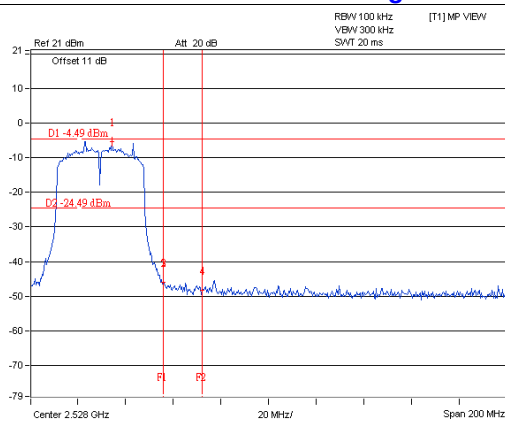

CH 11 Band edge

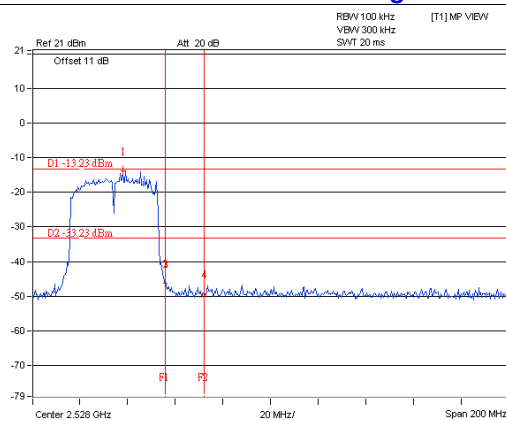

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

6 Appendix A – Radiated Emission Measurement

6.1 Limits of Radiated Emission Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

Note:

4. The lower limit shall apply at the transition frequencies.
5. Emission level (dBuV/m) = 20 log Emission level (uV/m).
6. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

6.2 Test Instruments

For PIFA Antenna:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
MXE EMI Receiver Agilent	N9038A	MY51210105	July 21, 2014	July 20, 2015
Horn_Antenna AISI	AIH.8018	0000320091110	Aug. 27, 2014	Aug. 26, 2015
Pre-Amplifier Agilent	8449B	3008A02578	June 24, 2014	June 23, 2015
RF Cable	NA	131205 131214 SNMY23684/4	Jan. 16, 2015	Jan. 15, 2016
Spectrum Analyzer R&S	FSV40	100964	July 05, 2014	July 04, 2015
Pre-Amplifier EMCI	EMC184045	980143	Jan. 16, 2015	Jan. 15, 2016
Horn_Antenna SCHWARZBECK	BBHA 9170	9170-424	Aug. 26, 2014	Aug. 25, 2015
RF Cable	NA	RF104-121 RF104-204	Dec. 11, 2014	Dec. 10, 2015
Antenna Tower & Turn Table CT	NA	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in 966 Chamber No. G.
- 3 The CANADA Site Registration No. is IC 7450H-2.
4. Tested Date: Feb. 06, 2015

For Dipole Antenna:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver Keysight	N9038A	MY54450088	July 08, 2017	July 07, 2018
Horn_Antenna SCHWARZBECK	BBHA 9120D	9120D-783	Dec. 12, 2017	Dec. 11, 2018
Pre-Amplifier EMCI	EMC12630SE	980385	Jan. 29, 2018	Jan. 28, 2019
RF Cable	EMC104-SM- SM-1200 EMC104-SM- SM-2000 EMC104-SM- SM-5000	160923 150318 150321	Jan. 29, 2018	Jan. 28, 2019
Pre-Amplifier EMCI	EMC184045S E	980387	Jan. 29, 2018	Jan. 28, 2019
Horn_Antenna SCHWARZBECK	BBHA 9170	BBHA9170608	Dec. 14, 2017	Dec. 13, 2018
RF Cable	EMC102-KM- KM-1200	160925	Jan. 29, 2018	Jan. 28, 2019
Software	ADT_Radiated _V8.7.08	NA	NA	NA
Antenna Tower & Turn Table Max-Full	MF-7802	MF780208410	NA	NA
Boresight Antenna Fixture	FBA-01	FBA-SIP02	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in 966 Chamber No. 4.
3. The CANADA Site Registration No. is 20331-2
4. Tested Date: May 16, 2018

6.3 Test Procedures

- a. The EUT was placed on the top of a rotating table 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.


Note:

1. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
3. All modes of operation were investigated and the worst-case emissions are reported.

6.4 Deviation from Test Standard

No deviation.

6.5 Test Setup

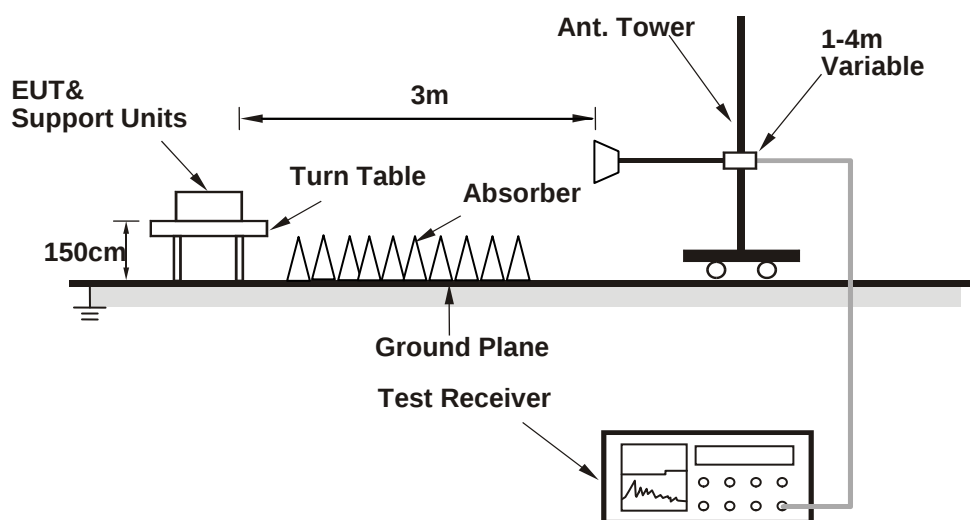

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.6 EUT Operating Conditions

Same as 4.1.6.

6.7 Test Results (PIFA Antenna)

The EUT's antenna had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **Z-plane**.

VHT40

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2485.00	65.3 PK	74.0	-8.7	1.06 H	205	67.32	-2.02
2	2485.00	46.2 AV	54.0	-7.8	1.06 H	205	48.22	-2.02
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2485.00	66.9 PK	74.0	-7.1	1.06 V	301	68.92	-2.02
2	2485.00	47.3 AV	54.0	-6.7	1.06 V	301	49.32	-2.02

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value

6.8 Test Results (Dipole Antenna)

VHT40

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2483.50	57.2 PK	74.0	-16.8	1.51 H	75	59.6	-2.4
2	2483.50	45.1 AV	54.0	-8.9	1.51 H	75	47.5	-2.4
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2483.50	72.6 PK	74.0	-1.4	1.70 V	274	75.0	-2.4
2	2483.50	52.6 AV	54.0	-1.4	1.70 V	274	55.0	-2.4

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value

7 Appendix B – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linkou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---