



TESTING LABORATORY
CERTIFICATE #4820.01



FCC PART 15.247

RSS-GEN, ISSUE 5, MARCH 2019 AMENDMENT 1

RSS-247, ISSUE 2, FEBRUARY 2017

TEST REPORT

For

IQAir AG

Blumenfeldstrasse 10, Goldach, Switzerland

**FCC ID: 2AMBQ-AVO09
IC: 22813-AVO09**

Report Type: Original Report	Product Name: Model: AirVisual Outdoor
Report Number: <u>RBJ201116050-00</u>	
Report Date: <u>2020-12-04</u>	
Reviewed By: <u>Ivan Cao</u> <i>Ivan Cao</i>	
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Dongguan) No.12, Pulong East 1 st Road, Tangxia Town, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
DECLARATIONS.....	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EQUIPMENT MODIFICATIONS	6
EUT EXERCISE SOFTWARE	6
EQUIPMENT MODIFICATIONS	9
LOCAL SUPPORT EQUIPMENT LIST AND DETAILS	9
BLOCK DIAGRAM OF TEST SETUP	9
SUMMARY OF TEST RESULTS.....	11
FCC §15.247 (i) & §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE).....	12
APPLICABLE STANDARD	12
RSS-102 § 2.5.2 - EXEMPTION LIMITS FOR ROUTINE EVALUATION – RF EXPOSURE EVALUATION	13
APPLICABLE STANDARD	13
FCC §15.203& RSS-GEN CLAUSE 6.8 - ANTENNA REQUIREMENT	14
APPLICABLE STANDARD	14
ANTENNA INFORMATION AND CONNECTOR CONSTRUCTION.....	14
FCC §15.207 (a) & RSS-GEN CLAUSE 8.8– AC LINE CONDUCTED EMISSIONS.....	15
APPLICABLE STANDARD	15
EUT SETUP	15
EMI TEST RECEIVER SETUP.....	15
TEST PROCEDURE	15
CORRECTED AMPLITUDE & MARGIN CALCULATION	16
TEST EQUIPMENT LIST AND DETAILS.....	16
TEST DATA	17
FCC §15.209, §15.205, §15.247(d) & RSS-247 CLAUSE 5.5, RSS-GEN CLAUSE 8.10- SPURIOUS EMISSIONS.....	21
APPLICABLE STANDARD	21
EUT SETUP	21
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	22
TEST PROCEDURE	22
CORRECTED AMPLITUDE & MARGIN CALCULATION	22
TEST EQUIPMENT LIST AND DETAILS.....	23
TEST DATA	23
FCC §15.247(a) (2) & RSS-247 CLAUSE 5.2 a) &RSS-GEN CLAUSE 6.7–6 dB EMISSION BANDWIDTH AND 99% OCCUPIED BANDWIDTH.....	34
APPLICABLE STANDARD	34
TEST PROCEDURE	35

TEST EQUIPMENT LIST AND DETAILS.....	35
TEST DATA	36
FCC §15.247(b) (3)& RSS-247 CLAUSE 5.4 d) - MAXIMUM PEAK CONDUCTED OUTPUT POWER	49
APPLICABLE STANDARD	49
TEST PROCEDURE	49
TEST EQUIPMENT LIST AND DETAILS.....	49
TEST DATA	50
FCC §15.247(d)& RSS-247 CLAUSE 5.5 – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE.....	51
APPLICABLE STANDARD	51
TEST PROCEDURE	51
TEST EQUIPMENT LIST AND DETAILS.....	51
TEST DATA	52
FCC §15.247(e) & RSS-247 CLAUSE 5.2 b - POWER SPECTRAL DENSITY	57
APPLICABLE STANDARD	57
TEST PROCEDURE	57
TEST EQUIPMENT LIST AND DETAILS.....	57
TEST DATA	58

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Manufacture name:	IQAir AG
EUT Name:	Model: AirVisual Outdoor
EUT Model:	Type: 09
Operation Frequency:	2412-2462 MHz(802.11b/g/n ht20), 2422-2452 MHz(802.11n ht40)
Maximum Peak Output Power (Conducted):	23.37 dBm
Modulation Type:	DSSS, OFDM
Antenna GainΔ :	2.0dBi
Rated Input Voltage:	DC 5.2V from USB Adapter or DC 48V from POE Adapter
USB Adapter Information	Manufacturer: SHENZHEN SHI YING YUAN ELECTRONICS CO LTD
	Model: ICP20-052-2400B
	Input: AC 100-240 V, 50/60 Hz 0.6A
	Output: DC 5.2 V, 2.4A 12.48W
PoE Adapter Information	Manufacturer: Beijing Creative Lianjie Network Technology Co., Ltd
	Model: PT-PSE10GF-US
	Input: AC 100-240 V, 50/60 Hz 0.5A
	Output: DC 48 V, 320mA
Serial Number:	RBJ201116050-RF -S1
EUT Received Date:	2020.11.18
EUT Received Status:	Good

Objective

This report is prepared on behalf of ***IQAir AG*** in accordance with Part 2, Subpart J, Part 15, Subparts A and C of the Federal Communications Commission's rules and RSS-247, Issue 2, February 2017, RSS-Gen, Issue 5, March 2019 Amendment 1 of the Innovation, Science and Economic Development Canada.

The tests were performed in order to determine the EUT compliance with FCC Rules Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules and RSS-247, Issue 2, February 2017, RSS-Gen, Issue 5, March 2019 Amendment 1 of the Innovation, Science and Economic Development Canada.

Related Submittal(s)/Grant(s)

No related submittal(s)/grant(s)

Test Methodology

All measurements detailed in this test report were performed in accordance with ANSI C63.10-2013 "American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices" and KDB 558074 D01 15.247 Meas Guidance v05r02. And RSS-247, Issue 2, February 2017, RSS-Gen, Issue 5, March 2019 Amendment 1 of the Innovation, Science and Economic Development Canada.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

Measurement Uncertainty

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Power Spectral Density, conducted	±0.61 dB
Unwanted Emissions, radiated	30M~200MHz: 4.55 dB, 200M~1GHz: 5.92 dB, 1G~6GHz: 4.98 dB, 6G~18GHz: 5.89 dB, 18G~26.5G: 5.47 dB, 26.5G~40G: 5.63 dB
Unwanted Emissions, conducted	±1.5 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	3.12 dB (150 kHz to 30 MHz)

Note: Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.12, Pulong East 1st Road, Tangxia Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 897218, the FCC Designation No. : CN1220.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0022.

Declarations

BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “ Δ ”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in Engineering Mode, which was provided by the manufacturer.

For 2.4GHz band, total 11 channels are provided:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437	/	/

802.11b, 802.11g, and 802.11n ht20 modes were test with channel 1,6,11.
802.11n ht40 was test with channel 3,6,9.

The worst-case data rates are determined to be as follows for each mode based upon investigations by measuring the average power and PSD across all data rates, bandwidths, and modulations.

Equipment Modifications

No modification was made to the EUT tested.

EUT Exercise Software


Software "adb" was used during test, which was provided by manufacturer, the maximum power was configured as below[△] :

Mode	Channel	Frequency (MHz)	Data rate (Mbps)	Power level Setting
802.11 b	Low	2412	1	default
	Middle	2437	1	default
	High	2462	1	default
802.11 g	Low	2412	6	default
	Middle	2437	6	default
	High	2462	6	default
802.11n ht20	Low	2412	6.5	default
	Middle	2437	6.5	default
	High	2462	6.5	default
802.11n ht40	Low	2422	6.5	default
	Middle	2437	6.5	default
	High	2452	6.5	default

The duty cycle as below:


Test mode	T _{on} (ms)	T _{on+off} (ms)	Duty Cycle (%)
802.11b	9.24	20.34	45.43
802.11g	1.96	19.78	9.91
802.11n ht20	0.7	20.2	3.47
802.11n ht40	0.56	20.16	2.78

802.11b

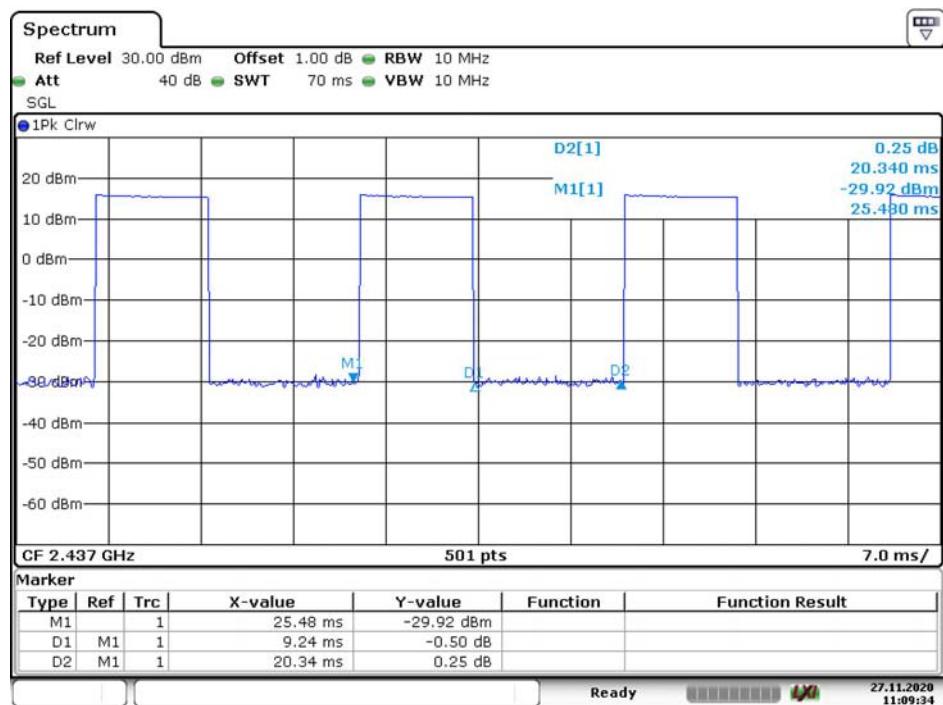


Date: 27.NOV.2020 11:09:35

802.11g

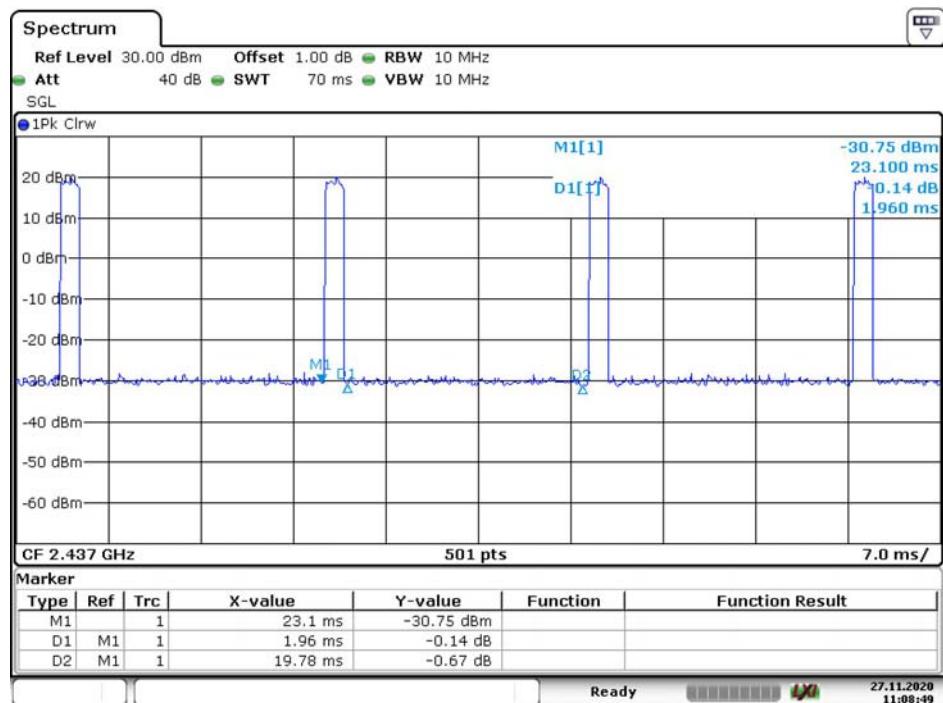


Date: 27.NOV.2020 11:08:49

802.11n ht20

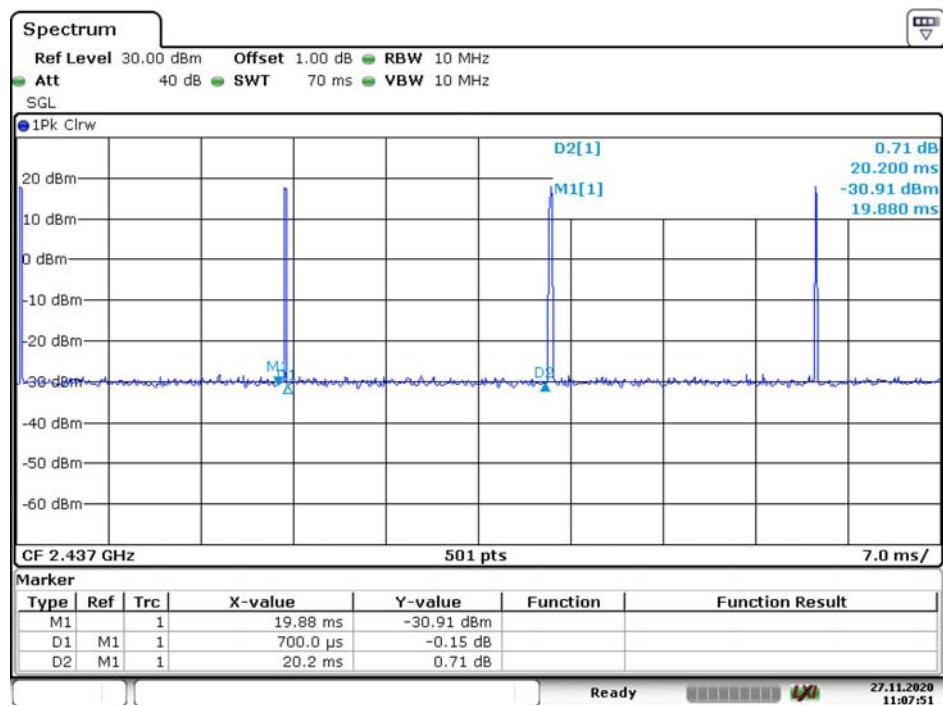

Date: 27.NOV.2020 11:07:52

802.11n ht40

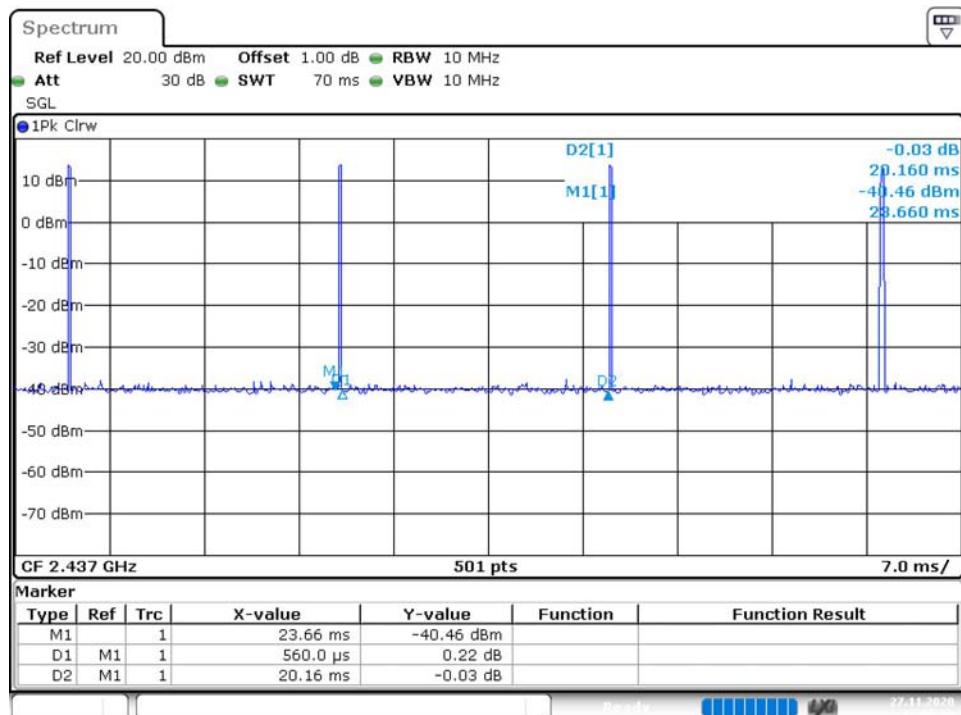

Date: 27.NOV.2020 11:05:13

Equipment Modifications

No modification was made to the EUT.

Local Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
DELL	Laptop	PP11L	QDS-BRCM1017

Support Cable List and Details


Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
DC Cable	No	No	1.2	Adapter	EUT
RJ45 Cable	No	No	1.0	PoE Adapter	EUT
RJ45 Cable	No	No	10	PoE Adapter	Laptop

Block Diagram of Test Setup

USB Adapter mode:

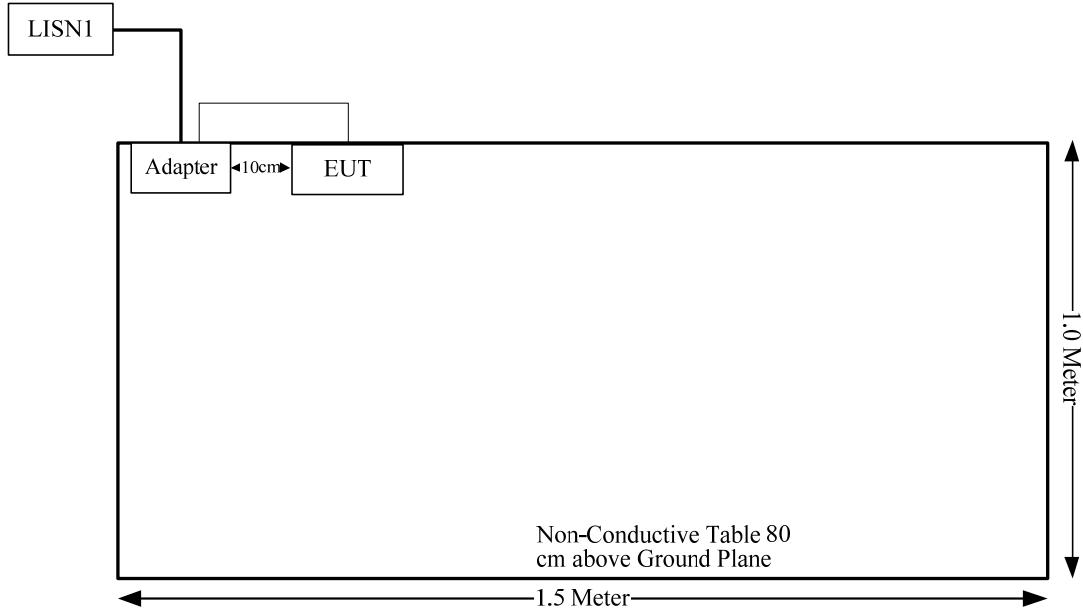

PoE Adapter mode:

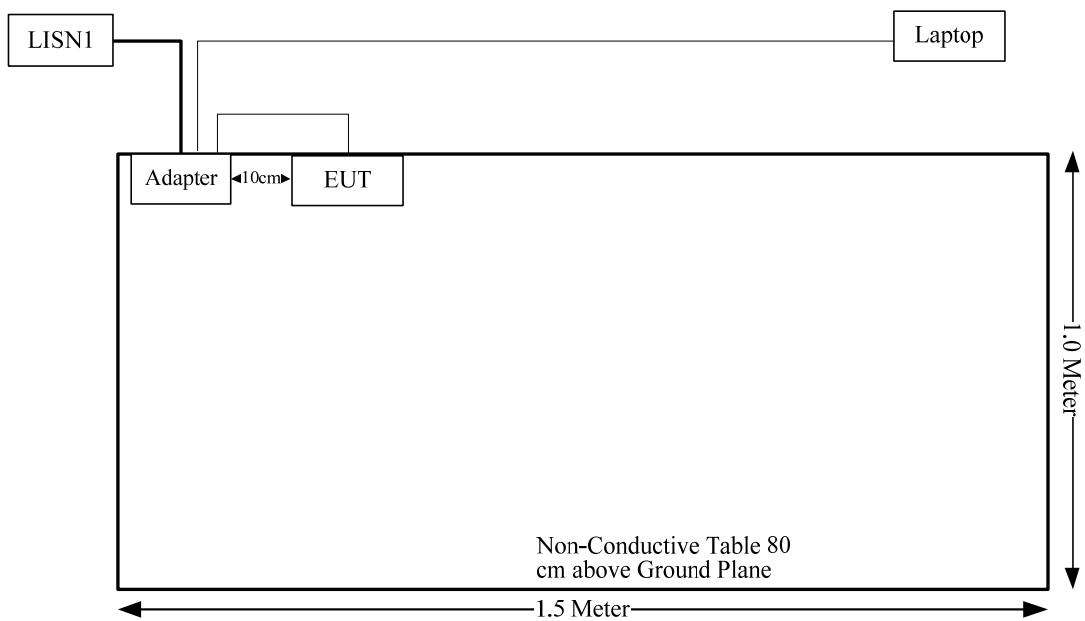

SUMMARY OF TEST RESULTS

Rules	Description of Test	Result
FCC §15.247 (i) & §1.1310 & §2.1091	Maximum Permissible Exposure (MPE)	Compliance
RSS-102 Clause 2.5.2	Exemption Limit For Routine Evaluation-RF Evaluation	Compliance
FCC§15.203, RSS-Gen Clause 6.8	Antenna Requirement	Compliance
FCC§15.207 (a), RSS-Gen Clause 8.8	AC Line Conducted Emissions	Compliance
FCC§15.205, §15.209, FCC §15.247(d), RSS-247 Clause 5.5 RSS-Gen Clause 8.10	Spurious Emissions	Compliance
FCC§15.247 (a)(2), RSS-247 Clause 5.2 a) RSS-Gen Clause 6.7	6 dB Bandwidth	Compliance
FCC§15.247(b)(3), RSS-247 Clause 5.4 d)	Maximum Conducted Output Power	Compliance
FCC§15.247(d), RSS-247 Clause5.5	100 kHz Bandwidth of Frequency Band Edge	Compliance
FCC§15.247(e), RSS-247 Clause5.2 b)	Power Spectral Density	Compliance

FCC §15.247 (i) & §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart 15.247(i) and subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30
30–300	27.5	0.073	0.2	30
300–1500	/	/	f/1500	30
1500–100,000	/	/	1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

Calculation formula:

Prediction of power density at the distance of the applicable MPE limit

$S = PG/4\pi R^2$ = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

Calculated Data:

Frequency (MHz)	Antenna Gain		Conducted output power including Tune-up Tolerance		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
	(dBi)	(numeric)	(dBm)	(mW)			
2412-2462	2	1.58	24	251.19	20.00	0.079	1.0

Result: The device meet FCC MPE at 20 cm distance

RSS-102 § 2.5.2 - EXEMPTION LIMITS FOR ROUTINE EVALUATION – RF EXPOSURE EVALUATION

Applicable Standard

According to RSS-102 § (2.5.2):

RF exposure evaluation is required if the separation distance between the user and/or bystander and the device's radiating element is greater than 20 cm, except when the device operates as follows:

- below 20 MHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than 1 W (adjusted for tune-up tolerance);
- at or above 20 MHz and below 48 MHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than $4.49/f^{0.5}$ W (adjusted for tune-up tolerance), where f is in MHz;
- at or above 48 MHz and below 300 MHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than 0.6 W (adjusted for tune-up tolerance);
- at or above 300 MHz and below 6 GHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than $1.31 \times 10^{-2} f^{0.6834}$ W (adjusted for tune-up tolerance), where f is in MHz;
- at or above 6 GHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than 5 W (adjusted for tune-up tolerance).

In these cases, the information contained in the RF exposure technical brief may be limited to information that demonstrates how the e.i.r.p. was derived.

Calculated Data:

Frequency (MHz)	Antenna Gain	Conducted output power including Tune- up Tolerance	EIRP		Exemption limits (mW)
			(dBi)	(dBm)	
2412-2462	2	24		26	398
					2684

So the device is compliance exemption from Routine Evaluation Limits –RF exposure Evaluation.

Result: Compliance

FCC §15.203& RSS-GEN CLAUSE 6.8 - ANTENNA REQUIREMENT

Applicable Standard

According to FCC§ 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.
- c. Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

According to RSS-Gen §6.8, The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).

When measurements at the antenna port are used to determine the RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna's manufacturer. The test report shall state the RF power, output power setting and spurious emission measurements with each antenna type that is used with the transmitter being tested.

For licence-exempt equipment with detachable antennas, the user manual shall also contain the following notice in a conspicuous location:

This radio transmitter [enter the device's ISED certification number] has been approved by Innovation, Science and Economic Development Canada to operate with the antenna types listed below, with the maximum permissible gain indicated. Antenna types not included in this list that have a gain greater than the maximum gain indicated for any type listed are strictly prohibited for use with this device.

Immediately following the above notice, the manufacturer shall provide a list of all antenna types which can be used with the transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna type.

Antenna Information And Connector Construction

The EUT has one internal antenna arrangement, fulfill the requirement of this section. Please refer to below information and the EUT photos:

Antenna Type	input impedance (Ohm)	Antenna Gain /Frequency Range
FPC	50	2.0 dBi/2.4~2.5GHz


Result: Compliance.

FCC §15.207 (a) & RSS-GEN CLAUSE 8.8– AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207(a), RSS-Gen§8.8.

EUT Setup

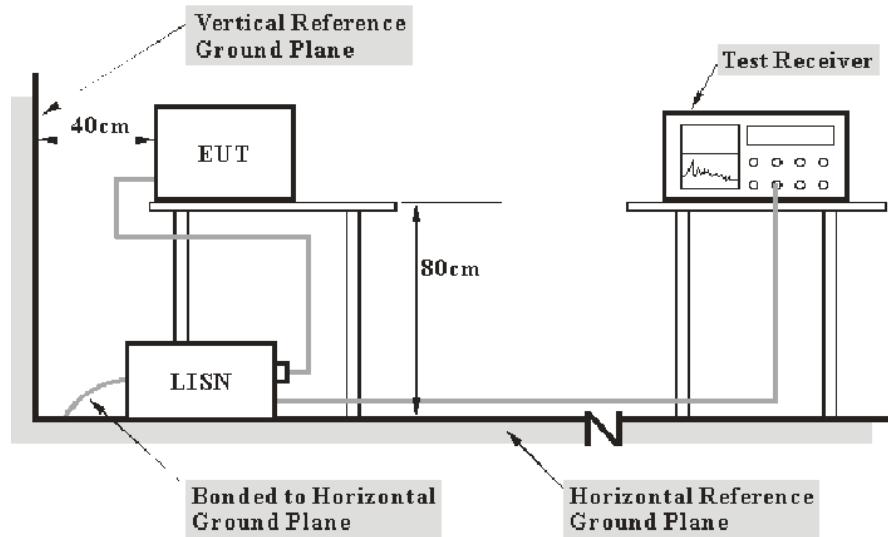

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 and the RSS-Gen limits.

The spacing between the peripherals was 10 cm.

The EUT was connected to the main lisen with a 120 V/60 Hz AC power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the EUT was connected to the first LISN.

The frequency and amplitude of the six highest ac power-line conducted emissions relative to the limit, measured over all the current-carrying conductors of the EUT power cords, and the operating frequency or frequency to which the EUT is tuned (if appropriate), should be reported, unless such emissions are more than 20 dB below the limit. AC power-line conducted emissions measurements are to be separately carried out only on each of the phase ("hot") line(s) and (if used) on the neutral line(s), but not on the ground [protective earth] line(s). If less than six emission frequencies are within 20 dB of the limit, then the noise level of the measuring instrument at representative frequencies should be reported. The specific conductor of the power-line cord for each of the reported emissions should be identified. Measure the six highest emissions with respect to the limit on each current-carrying conductor of each power cord associated with the EUT (but not the power cords of associated or peripheral equipment that are part of the test configuration). Then, report the six highest emissions with respect to the limit from among all the measurements identifying the frequency and specific current-carrying conductor identified with the emission. The six highest emissions should be reported for each of the current-carrying conductors, or the six highest emissions may be reported over all the current-carrying conductors.

Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

$$C_f = A_C + VDF$$

Herein,

V_C (cord. Reading): corrected voltage amplitude

V_R : reading voltage amplitude

A_C : attenuation caused by cable loss

VDF: voltage division factor of AMN

C_f : Correction Factor

The "Margin" column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	LISN	ENV 216	101614	2020-09-12	2021-09-12
R&S	EMI Test Receiver	ESCI	101121	2020-07-07	2021-07-07
MICRO-COAX	Coaxial Cable	C-NJNJ-50	C-0200-01	2020-09-05	2021-09-05
R&S	Test Software	EMC32	Version 9.10.00	N/A	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).


Test Data

Environmental Conditions

Temperature:	20.6°C
Relative Humidity:	49 %
ATM Pressure:	101.9kPa
Test by:	Barry Yang
Test Date:	2020-12-01


Test Mode:Transmitting(DC Adapter Power mode)

AC120 V, 60 Hz, Line:

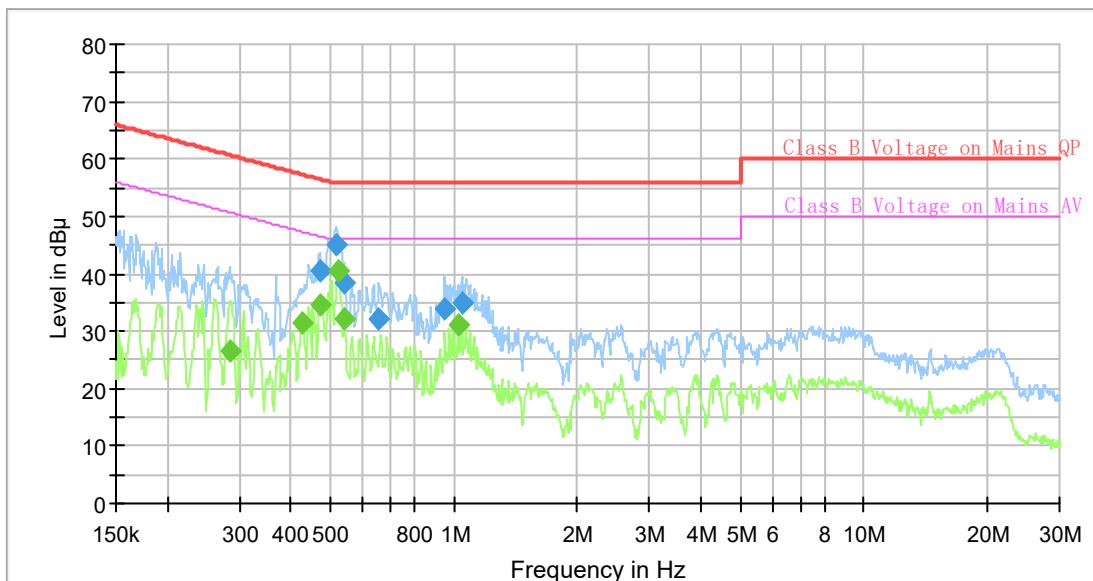


Final Result

Frequency (MHz)	QuasiPeak (dB μV)	Average (dB μV)	Limit (dB μV)	Margin (dB)	Bandwidth (kHz)	Line	Corr. (dB)
0.285439	---	26.68	50.66	23.98	9.000	L1	9.6
0.425401	---	31.36	47.34	15.98	9.000	L1	9.6
0.470023	40.53	---	56.51	15.98	9.000	L1	9.6
0.474735	---	34.73	46.43	11.70	9.000	L1	9.6
0.514172	45.17	---	56.00	10.83	9.000	L1	9.6
0.521923	---	40.56	46.00	5.44	9.000	L1	9.6
0.537778	38.31	---	56.00	17.69	9.000	L1	9.6
0.540467	---	32.08	46.00	13.92	9.000	L1	9.6
0.656516	32.30	---	56.00	23.70	9.000	L1	9.6
0.949586	33.78	---	56.00	22.22	9.000	L1	9.7
1.023352	---	30.92	46.00	15.08	9.000	L1	9.7
1.049193	34.80	---	56.00	21.20	9.000	L1	9.7

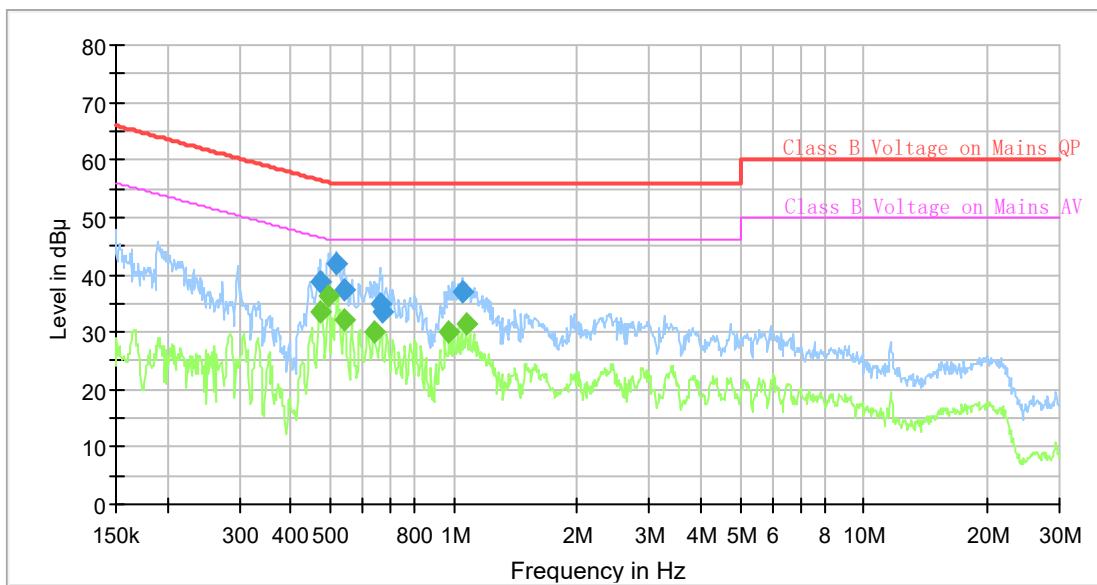AC120 V, 60 Hz, Neutral:**Final_Result**


Frequency (MHz)	QuasiPeak (dB μ V)	Average (dB μ V)	Limit (dB μ V)	Margin (dB)	Bandwidth (kHz)	Line	Corr. (dB)
0.472373	38.93	---	56.47	17.54	9.000	N	9.6
0.474735	---	33.49	46.43	12.94	9.000	N	9.6
0.496531	---	36.27	46.06	9.79	9.000	N	9.6
0.519327	42.03	---	56.00	13.97	9.000	N	9.6
0.537778	37.24	---	56.00	18.76	9.000	N	9.6
0.540467	---	32.11	46.00	13.89	9.000	N	9.6
0.637161	---	30.10	46.00	15.90	9.000	N	9.6
0.659799	35.10	---	56.00	20.90	9.000	N	9.6
0.666413	33.57	---	56.00	22.43	9.000	N	9.6
0.973564	---	30.01	46.00	15.99	9.000	N	9.6
1.049193	37.04	---	56.00	18.96	9.000	N	9.6
1.070335	---	31.27	46.00	14.73	9.000	N	9.6

Test Mode: Transmitting (PoE Adapter Power mode)
 AC120 V, 60 Hz, Line:

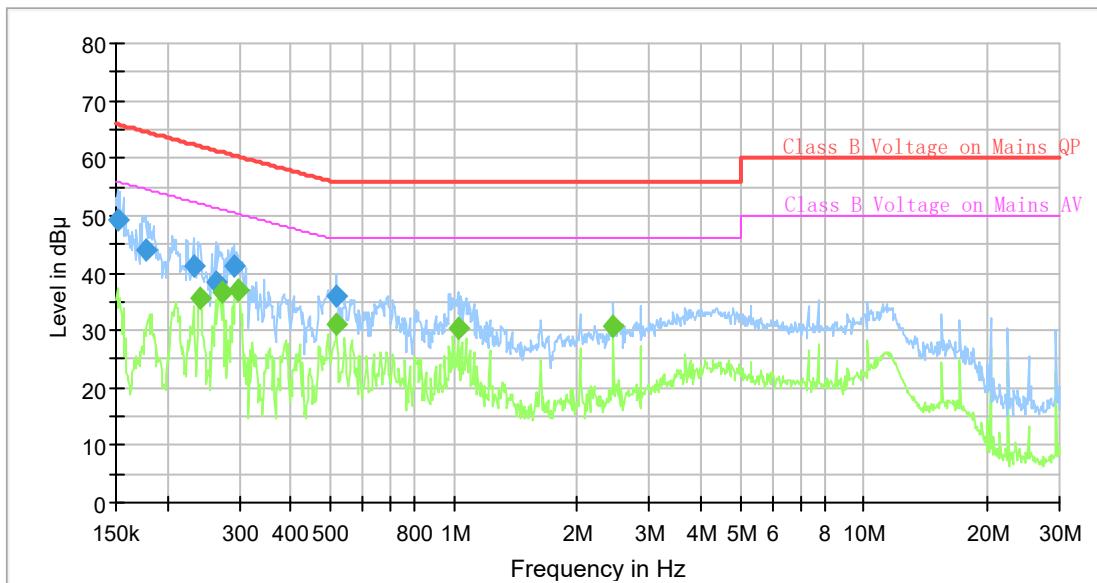

Final_Result



Frequency (MHz)	QuasiPeak (dB μV)	Average (dB μV)	Limit (dB μV)	Margin (dB)	Bandwidth (kHz)	Line	Corr. (dB)
0.151504	49.30	---	65.92	16.62	9.000	L1	9.6
0.176836	43.89	---	64.63	20.74	9.000	L1	9.6
0.231493	41.24	---	62.40	21.16	9.000	L1	9.6
0.239718	---	35.50	52.11	16.61	9.000	L1	9.6
0.262235	38.60	---	61.36	22.76	9.000	L1	9.6
0.272910	---	36.65	51.03	14.38	9.000	L1	9.6
0.289742	41.07	---	60.53	19.46	9.000	L1	9.6
0.297058	---	36.99	50.32	13.33	9.000	L1	9.6
0.516743	---	30.93	46.00	15.07	9.000	L1	9.6
0.516743	36.06	---	56.00	19.94	9.000	L1	9.6
1.023352	---	30.26	46.00	15.74	9.000	L1	9.7
2.449547	---	30.61	46.00	15.39	9.000	L1	9.7

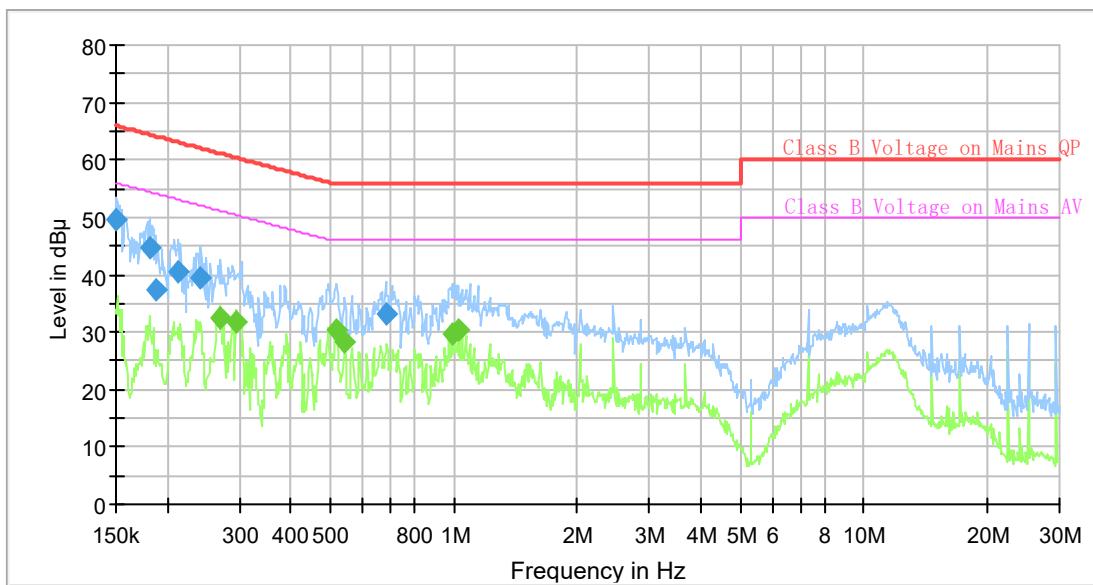AC120 V, 60 Hz, Neutral:**Final_Result**

Frequency (MHz)	QuasiPeak (dB μ V)	Average (dB μ V)	Limit (dB μ V)	Margin (dB)	Bandwidth (kHz)	Line	Corr. (dB)
0.150750	49.74	---	65.96	16.22	9.000	N	9.6
0.181302	44.57	---	64.43	19.86	9.000	N	9.6
0.187743	37.31	---	64.14	26.83	9.000	N	9.6
0.212675	40.37	---	63.10	22.73	9.000	N	9.6
0.240917	39.58	---	62.06	22.48	9.000	N	9.6
0.270201	---	32.48	51.11	18.63	9.000	N	9.6
0.295580	---	31.80	50.37	18.57	9.000	N	9.6
0.516743	---	30.56	46.00	15.44	9.000	N	9.6
0.540467	---	28.21	46.00	17.79	9.000	N	9.6
0.683241	33.33	---	56.00	22.67	9.000	N	9.6
0.998148	---	29.85	46.00	16.15	9.000	N	9.6
1.023352	---	30.34	46.00	15.66	9.000	N	9.6

**FCC §15.209, §15.205, §15.247(d) & RSS-247 CLAUSE 5.5, RSS-GEN
CLAUSE 8.10- SPURIOUS EMISSIONS****Applicable Standard**

FCC §15.247 (d); §15.209; §15.205, RSS-247 §5.5, RSS-GEN §8.10.

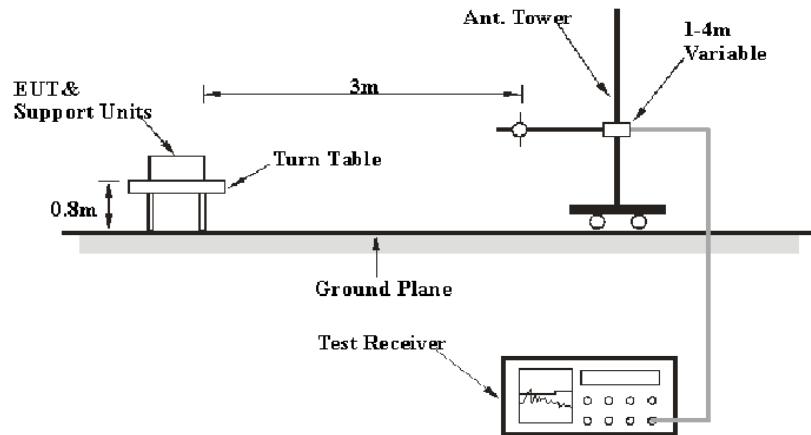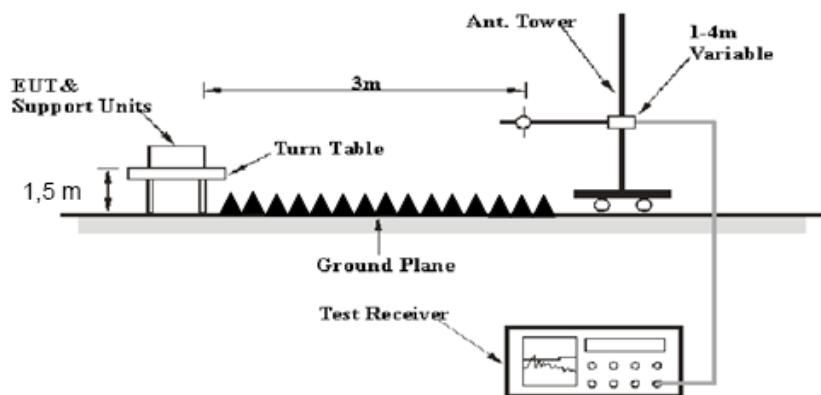EUT Setup**Below 1GHz:****Above 1GHz:**

The radiated emission tests were performed in the 3 meters chamber test site A for the range 30MHz to 1GHz and the 3 meters chamber B test site for above 1GHz, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247, the RSS-247 §5.5,RSS-Gen §8.10 limits.

The spacing between the peripherals was 10 cm.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

30MHz-1000MHz:

Measurement	RBW	Video B/W	IF B/W
QP	120 kHz	300 kHz	120kHz

1GHz- 25GHz:

Measurement	Duty cycle	RBW	Video B/W
PK	Any	1MHz	3 MHz
	>98%	1MHz	10 Hz
Ave.	<98%	1MHz	1/T

Note: T is minimum transmission duration

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiation Below 1GHz					
Sunol Sciences	Antenna	JB3	A060611-1	2020-11-10	2023-11-10
R&S	EMI Test Receiver	ESR3	102453	2020-09-12	2021-09-12
Unknown	Coaxial Cable	C-NJNJ-50	C-0075-01	2020-09-05	2021-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-01	2020-09-05	2021-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-1400-01	2020-05-06	2021-05-06
HP	Amplifier	8447D	2727A05902	2020-09-05	2021-09-05
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A
Radiation Above 1GHz					
ETS-Lindgren	Horn Antenna	3115	000 527 35	2018-10-12	2021-10-12
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-01 1304	2017-12-06	2020-12-05
Agilent	Spectrum Analyzer	E4440A	SG43360054	2020-07-07	2021-07-07
Unknown	Coaxial Cable	C-SJSJ-50	C-0800-01	2020-09-05	2021-09-05
Unknown	Coaxial Cable	C-2.4J2.4J-50	C-0700-02	2020-06-27	2021-06-27
Mini-Circuit	Amplifier	ZVA-213-S+	54201245	2020-09-05	2021-09-05
Quinstar	Amplifier	QLW-18405536-JO	15964001001	2020-06-27	2021-06-27
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A
E-Microwave	Band-stop Filters	OBSF-2400-2483.5-S	OE01601525	2020-06-16	2021-06-16
Micro-tronics	High Pass Filter	HPM50111	S/N-G217	2020-06-16	2021-06-16

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Test Items	Radiation Below 1GHz	Radiation Above 1GHz
Temperature:	25.2°C	25.8 °C
Relative Humidity:	45%	50 %
ATM Pressure:	100.8 kPa	101.4kPa
Tester:	Jalon Liu	Lee Li
Test Date:	2020-11-26	2020-11-25


Test Mode: Transmitting

Test Result: Compliance. Please refer to the following table and plots.

1) 30MHz-1GHz(802.11b middle channel was the worst)


PoE Adapter Mode

Horizontal:

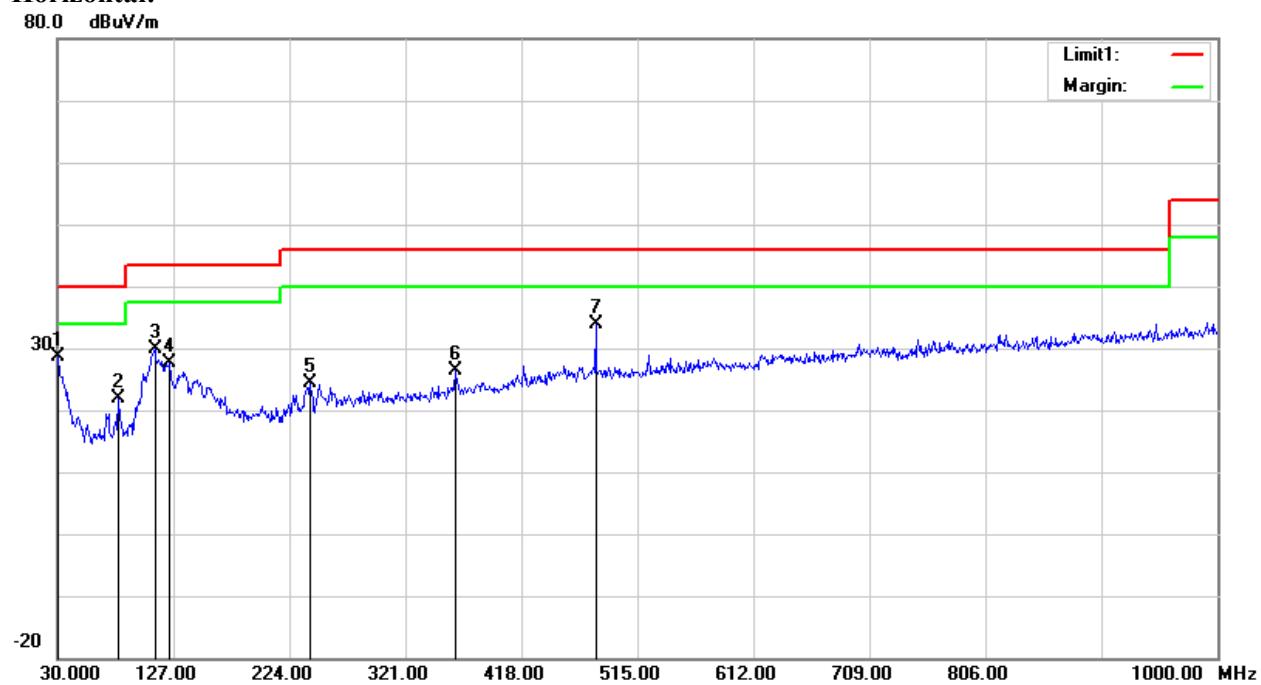

Frequency (MHz)	Receiver Reading (dBuV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
30.9700	27.82	peak	0.74	28.56	40.00	11.44
80.4400	33.26	peak	-11.45	21.81	40.00	18.19
111.4800	36.05	peak	-6.22	29.83	43.50	13.67
124.0900	32.29	peak	-4.75	27.54	43.50	15.96
241.4600	30.21	peak	-5.94	24.27	46.00	21.73
362.7100	29.07	peak	-2.75	26.32	46.00	19.68
480.0800	34.14	peak	-0.35	33.79	46.00	12.21

Vertical:

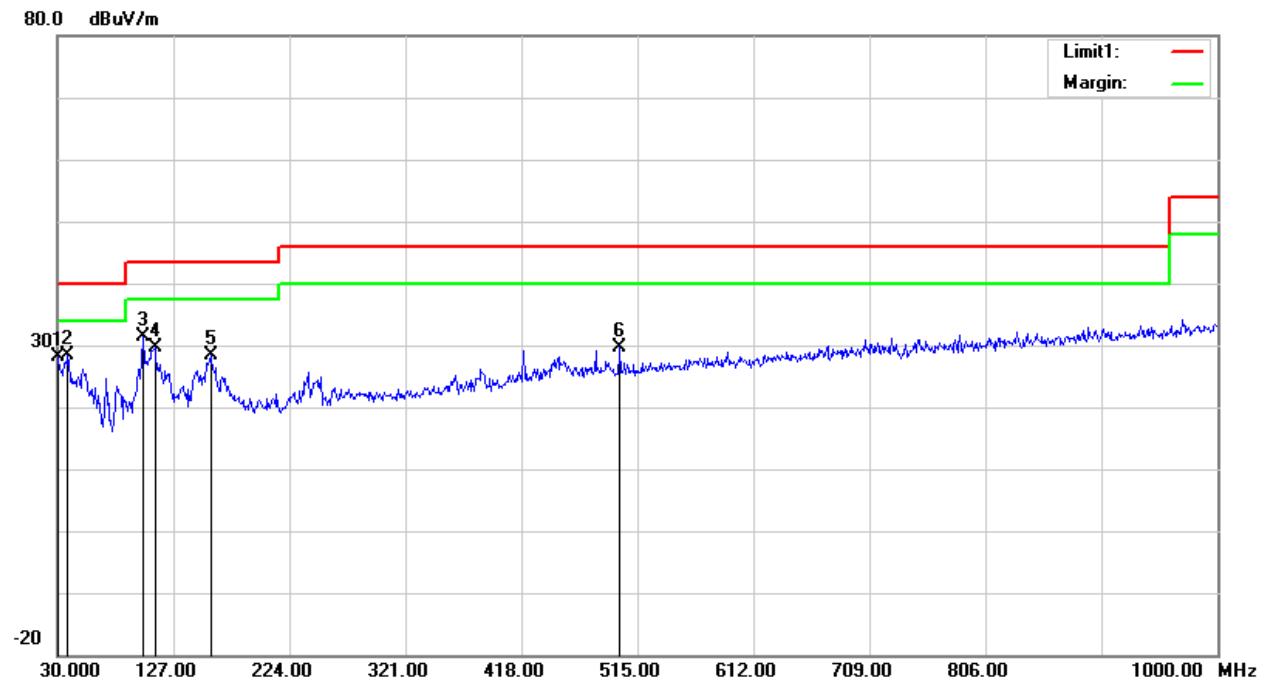


Frequency (MHz)	Receiver Reading (dBuV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
30.9700	27.41	peak	0.74	28.15	40.00	11.85
38.7300	33.47	peak	-5.13	28.34	40.00	11.66
101.7800	39.79	peak	-8.51	31.28	43.50	12.22
111.4800	35.91	peak	-6.22	29.69	43.50	13.81
158.0400	34.35	peak	-5.93	28.42	43.50	15.08
500.4500	30.02	peak	-0.39	29.63	46.00	16.37

2) 30MHz-1GHz(802.11b middle channel was the worst)

DC Adapter Power mode

Horizontal:


80.0 dBuV/m

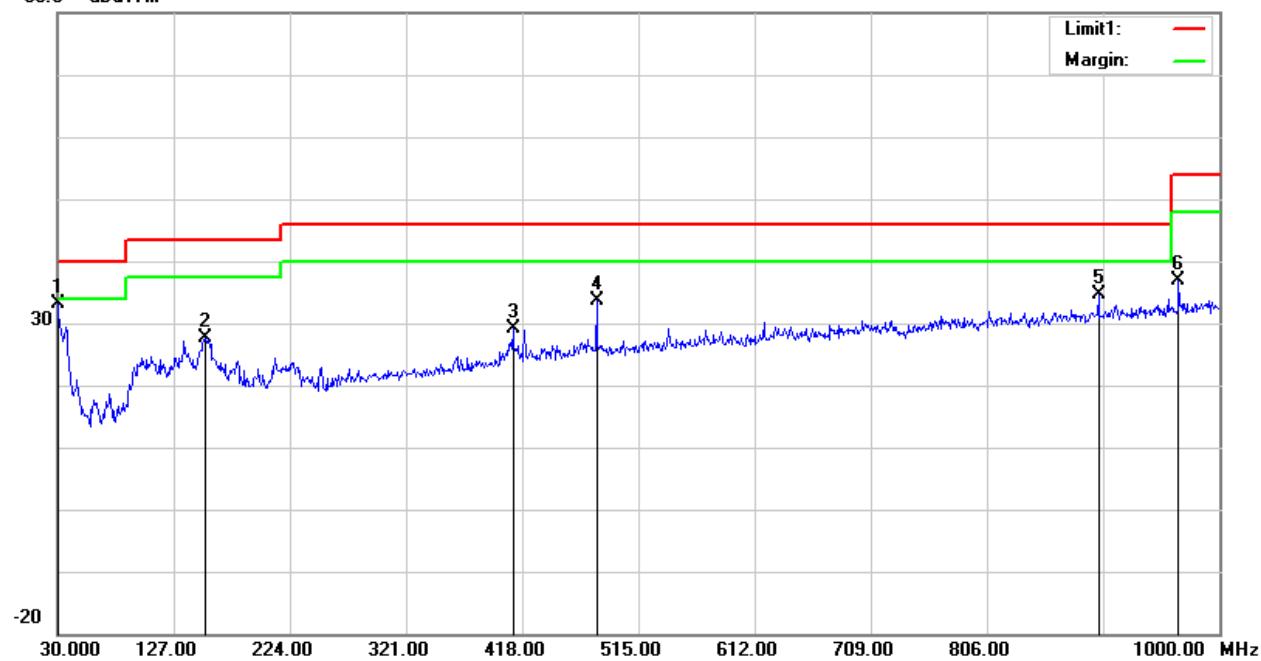

Frequency (MHz)	Receiver Reading (dBuV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
30.0000	31.56	peak	1.46	33.02	40.00	6.98
153.1900	33.89	peak	-6.14	27.75	43.50	15.75
418.0000	31.10	peak	-1.88	29.22	46.00	16.78
480.0800	34.06	peak	-0.35	33.71	46.00	12.29
899.1200	35.41	peak	-0.75	34.66	46.00	11.34
966.0500	36.78	peak	0.11	36.89	54.00	17.11
30.0000	31.56	peak	1.46	33.02	40.00	6.98

Vertical:

80.0 dBuV/m

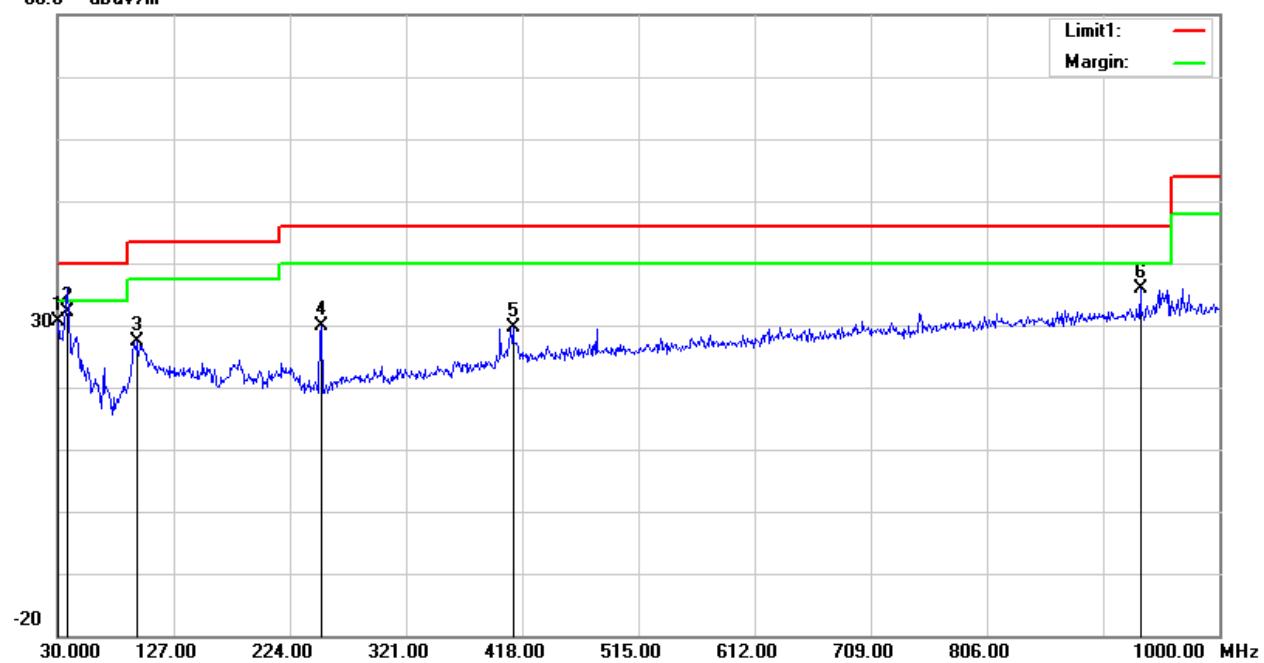

Frequency (MHz)	Receiver Reading (dBuV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
30.9700	29.90	peak	0.74	30.64	40.00	9.36
37.7600	36.50	peak	-4.42	32.08	40.00	7.92
95.9600	37.63	peak	-10.19	27.44	43.50	16.06
250.1900	35.76	peak	-5.99	29.77	46.00	16.23
410.2400	31.52	peak	-1.88	29.64	46.00	16.36
934.0400	36.09	peak	-0.19	35.90	46.00	10.10

**2) 1-25GHz:
802.11b Mode:**

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector	Polar (H/V)	Factor (dB/m)					
Low Channel: 2412 MHz									
2412.00	71.62	PK	H	28.12	1.81	0.00	101.55	N/A	N/A
2412.00	68.16	AV	H	28.12	1.81	0.00	98.09	N/A	N/A
2412.00	66.41	PK	V	28.12	1.81	0.00	96.34	N/A	N/A
2412.00	57.59	AV	V	28.12	1.81	0.00	87.52	N/A	N/A
2390.00	26.87	PK	H	28.08	1.80	0.00	56.75	74.00	17.25
2390.00	14.17	AV	H	28.08	1.80	0.00	44.05	54.00	9.95
4824.00	39.89	PK	H	32.95	3.19	25.62	50.41	74.00	23.59
4824.00	34.02	AV	H	32.95	3.19	25.62	44.54	54.00	9.46
7236.00	36.32	PK	H	35.81	4.77	25.64	51.26	74.00	22.74
7236.00	23.15	AV	H	35.81	4.77	25.64	38.09	54.00	15.91
Middle Channel: 2437 MHz									
2437.00	71.09	PK	H	28.17	1.82	0.00	101.08	N/A	N/A
2437.00	67.16	AV	H	28.17	1.82	0.00	97.15	N/A	N/A
2437.00	62.22	PK	V	28.17	1.82	0.00	92.21	N/A	N/A
2437.00	53.06	AV	V	28.17	1.82	0.00	83.05	N/A	N/A
4874.00	39.19	PK	H	33.05	3.26	25.65	49.85	74.00	24.15
4874.00	33.83	AV	H	33.05	3.26	25.65	44.49	54.00	9.51
7311.00	36.02	PK	H	36.01	4.64	25.71	50.96	74.00	23.04
7311.00	22.94	AV	H	36.01	4.64	25.71	37.88	54.00	16.12
High Channel: 2462 MHz									
2462.00	70.46	PK	H	28.22	1.83	0.00	100.51	N/A	N/A
2462.00	66.68	AV	H	28.22	1.83	0.00	96.73	N/A	N/A
2462.00	65.43	PK	V	28.22	1.83	0.00	95.48	N/A	N/A
2462.00	61.36	AV	V	28.22	1.83	0.00	91.41	N/A	N/A
2483.50	27.29	PK	H	28.27	1.84	0.00	57.40	74.00	16.60
2483.50	15.28	AV	H	28.27	1.84	0.00	45.39	54.00	8.61
4924.00	39.13	PK	H	33.15	3.27	25.65	49.90	74.00	24.10
4924.00	34.75	AV	H	33.15	3.27	25.65	45.52	54.00	8.48
7386.00	36.21	PK	H	36.20	4.51	25.79	51.13	74.00	22.87
7386.00	23.05	AV	H	36.20	4.51	25.79	37.97	54.00	16.03

802.11g Mode:

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector	Polar (H/V)	Factor (dB/m)					
Low Channel: 2412 MHz									
2412.00	73.61	PK	H	28.12	1.81	0.00	103.54	N/A	N/A
2412.00	64.91	AV	H	28.12	1.81	0.00	94.84	N/A	N/A
2412.00	69.02	PK	V	28.12	1.81	0.00	98.95	N/A	N/A
2412.00	60.06	AV	V	28.12	1.81	0.00	89.99	N/A	N/A
2390.00	37.91	PK	H	28.08	1.80	0.00	67.79	74.00	6.21
2390.00	20.04	AV	H	28.08	1.80	0.00	49.92	54.00	4.08
4824.00	40.83	PK	H	32.95	3.19	25.62	51.35	74.00	22.65
4824.00	28.07	AV	H	32.95	3.19	25.62	38.59	54.00	15.41
7236.00	37.11	PK	H	35.81	4.77	25.64	52.05	74.00	21.95
7236.00	23.91	AV	H	35.81	4.77	25.64	38.85	54.00	15.15
Middle Channel: 2437 MHz									
2437.00	71.16	PK	H	28.17	1.82	0.00	101.15	N/A	N/A
2437.00	61.66	AV	H	28.17	1.82	0.00	91.65	N/A	N/A
2437.00	62.94	PK	V	28.17	1.82	0.00	92.93	N/A	N/A
2437.00	53.68	AV	V	28.17	1.82	0.00	83.67	N/A	N/A
4874.00	39.85	PK	H	33.05	3.26	25.65	50.51	74.00	23.49
4874.00	26.00	AV	H	33.05	3.26	25.65	36.66	54.00	17.34
7311.00	36.75	PK	H	36.01	4.64	25.71	51.69	74.00	22.31
7311.00	23.70	AV	H	36.01	4.64	25.71	38.64	54.00	15.36
High Channel: 2462 MHz									
2462.00	71.45	PK	H	28.22	1.83	0.00	101.50	N/A	N/A
2462.00	62.35	AV	H	28.22	1.83	0.00	92.40	N/A	N/A
2462.00	67.12	PK	V	28.22	1.83	0.00	97.17	N/A	N/A
2462.00	56.28	AV	V	28.22	1.83	0.00	86.33	N/A	N/A
2483.50	38.04	PK	H	28.27	1.84	0.00	68.15	74.00	5.85
2483.50	17.75	AV	H	28.27	1.84	0.00	47.86	54.00	6.14
4924.00	39.43	PK	H	33.15	3.27	25.65	50.20	74.00	23.80
4924.00	26.15	AV	H	33.15	3.27	25.65	36.92	54.00	17.08
7386.00	36.84	PK	H	36.20	4.51	25.79	51.76	74.00	22.24
7386.00	23.75	AV	H	36.20	4.51	25.79	38.67	54.00	15.33

802.11 n ht20 mode:




Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector	Polar (H/V)	Factor (dB/m)					
Low Channel: 2412 MHz									
2412.00	72.88	PK	H	28.12	1.81	0.00	102.81	N/A	N/A
2412.00	69.32	AV	H	28.12	1.81	0.00	99.25	N/A	N/A
2412.00	66.99	PK	V	28.12	1.81	0.00	96.92	N/A	N/A
2412.00	63.66	AV	V	28.12	1.81	0.00	93.59	N/A	N/A
2390.00	26.92	PK	H	28.08	1.80	0.00	56.80	74.00	17.20
2390.00	14.94	AV	H	28.08	1.80	0.00	44.82	54.00	9.18
4824.00	39.50	PK	H	32.95	3.19	25.62	50.02	74.00	23.98
4824.00	32.42	AV	H	32.95	3.19	25.62	42.94	54.00	11.06
7236.00	36.25	PK	H	35.81	4.77	25.64	51.19	74.00	22.81
7236.00	23.94	AV	H	35.81	4.77	25.64	38.88	54.00	15.12
Middle Channel: 2437 MHz									
2437.00	69.32	PK	H	28.17	1.82	0.00	99.31	N/A	N/A
2437.00	65.36	AV	H	28.17	1.82	0.00	95.35	N/A	N/A
2437.00	68.36	PK	V	28.17	1.82	0.00	98.35	N/A	N/A
2437.00	64.86	AV	V	28.17	1.82	0.00	94.85	N/A	N/A
4874.00	39.32	PK	H	33.05	3.26	25.65	49.98	74.00	24.02
4874.00	32.21	AV	H	33.05	3.26	25.65	42.87	54.00	11.13
7311.00	36.72	PK	H	36.01	4.64	25.71	51.66	74.00	22.34
7311.00	23.99	AV	H	36.01	4.64	25.71	38.93	54.00	15.07
High Channel: 2462 MHz									
2462.00	70.36	PK	H	28.22	1.83	0.00	100.41	N/A	N/A
2462.00	66.66	AV	H	28.22	1.83	0.00	96.71	N/A	N/A
2462.00	64.19	PK	V	28.22	1.83	0.00	94.24	N/A	N/A
2462.00	59.99	AV	V	28.22	1.83	0.00	90.04	N/A	N/A
2483.50	27.35	PK	H	28.27	1.84	0.00	57.46	74.00	16.54
2483.50	15.30	AV	H	28.27	1.84	0.00	45.41	54.00	8.59
4924.00	38.95	PK	H	33.15	3.27	25.65	49.72	74.00	24.28
4924.00	25.95	AV	H	33.15	3.27	25.65	36.72	54.00	17.28
7386.00	37.63	PK	H	36.20	4.51	25.79	52.55	74.00	21.45
7386.00	24.39	AV	H	36.20	4.51	25.79	39.31	54.00	14.69

802.11n ht40 Mode:

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector	Polar (H/V)	Factor (dB/m)					
Low Channel: 2422 MHz									
2422.00	72.38	PK	H	28.14	1.81	0.00	102.33	N/A	N/A
2422.00	60.38	AV	H	28.14	1.81	0.00	90.33	N/A	N/A
2422.00	69.54	PK	V	28.14	1.81	0.00	99.49	N/A	N/A
2422.00	57.64	AV	V	28.14	1.81	0.00	87.59	N/A	N/A
2390.00	31.56	PK	H	28.08	1.80	0.00	61.44	74.00	12.56
2390.00	15.28	AV	H	28.08	1.80	0.00	45.16	54.00	8.84
4844.00	38.78	PK	H	32.99	3.22	25.63	49.36	74.00	24.64
4844.00	25.44	AV	H	32.99	3.22	25.63	36.02	54.00	17.98
7266.00	36.30	PK	H	35.89	4.72	25.67	51.24	74.00	22.76
7266.00	23.86	AV	H	35.89	4.72	25.67	38.80	54.00	15.20
Middle Channel: 2437 MHz									
2437.00	71.91	PK	H	28.17	1.82	0.00	101.90	N/A	N/A
2437.00	59.70	AV	H	28.17	1.82	0.00	89.69	N/A	N/A
2437.00	67.57	PK	V	28.17	1.82	0.00	97.56	N/A	N/A
2437.00	55.02	AV	V	28.17	1.82	0.00	85.01	N/A	N/A
4874.00	36.85	PK	H	33.05	3.26	25.65	47.51	74.00	26.49
4874.00	24.53	AV	H	33.05	3.26	25.65	35.19	54.00	18.81
7311.00	36.64	PK	H	36.01	4.64	25.71	51.58	74.00	22.42
7311.00	23.54	AV	H	36.01	4.64	25.71	38.48	54.00	15.52
High Channel: 2452 MHz									
2452.00	71.90	PK	H	28.20	1.83	0.00	101.93	N/A	N/A
2452.00	59.60	AV	H	28.20	1.83	0.00	89.63	N/A	N/A
2452.00	66.90	PK	V	28.20	1.83	0.00	96.93	N/A	N/A
2452.00	54.95	AV	V	28.20	1.83	0.00	84.98	N/A	N/A
2483.50	28.91	PK	H	28.27	1.84	0.00	59.02	74.00	14.98
2483.50	15.07	AV	H	28.27	1.84	0.00	45.18	54.00	8.82
4904.00	36.86	PK	H	33.11	3.30	25.67	47.60	74.00	26.40
4904.00	24.53	AV	H	33.11	3.30	25.67	35.27	54.00	18.73
7356.00	36.71	PK	H	36.13	4.56	25.76	51.64	74.00	22.36
7356.00	24.15	AV	H	36.13	4.56	25.76	39.08	54.00	14.92




Worst Test plots(802.11b High channel)**Horizontal:**

Fundamental Test with Band Rejection Filter

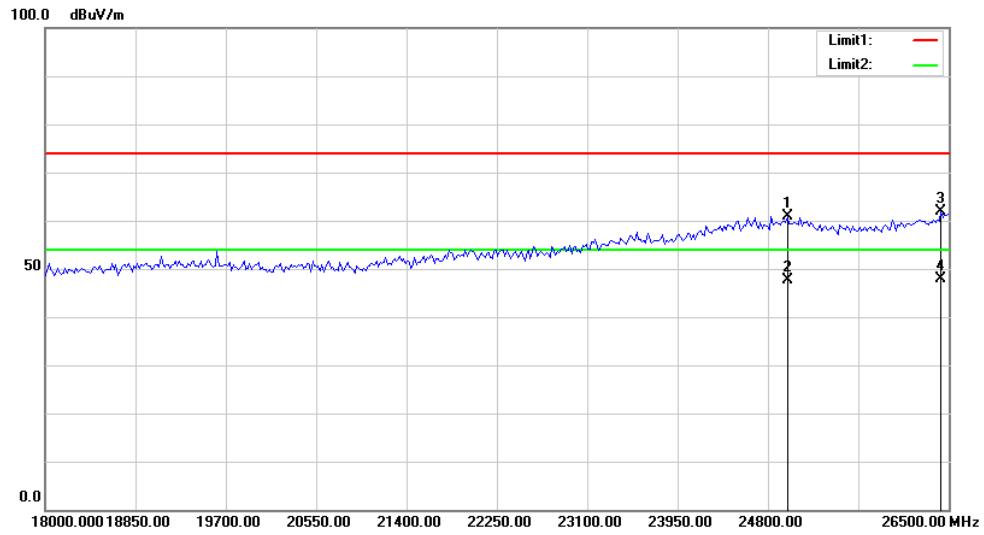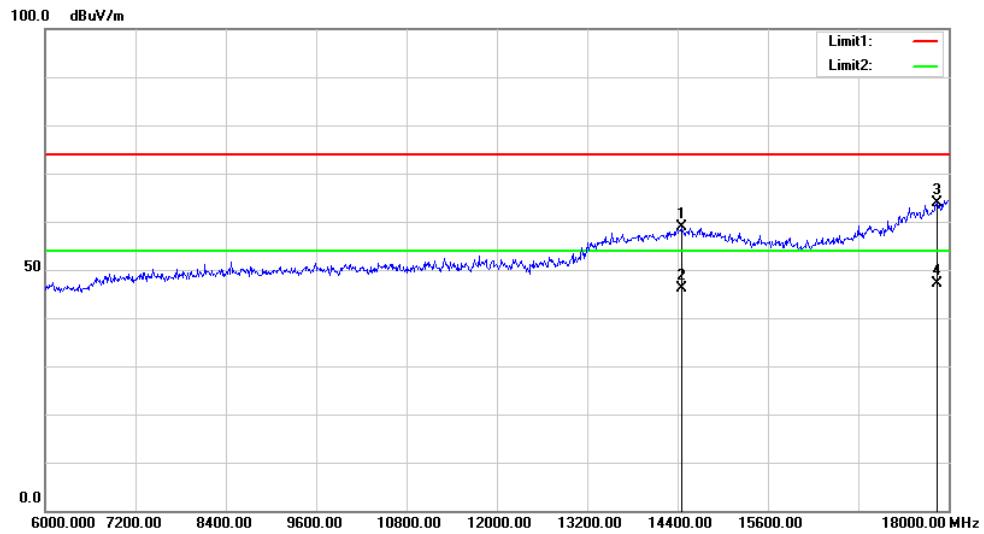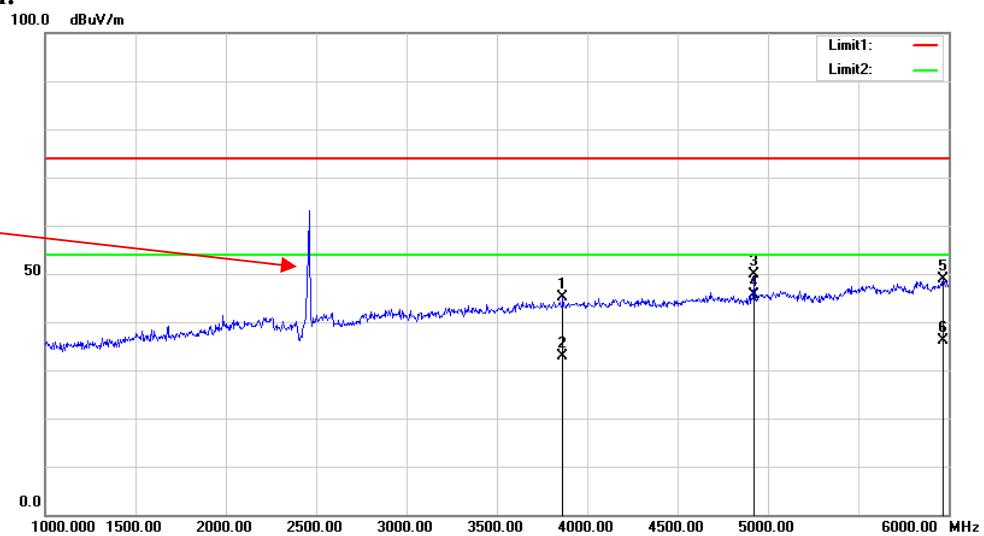

Vertical:

Fundamental Test with Band Rejection Filter

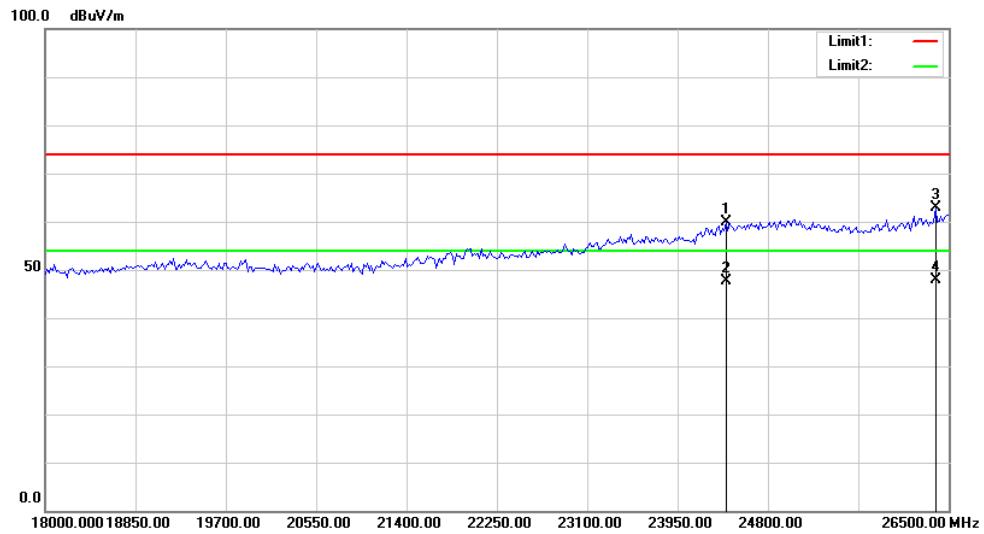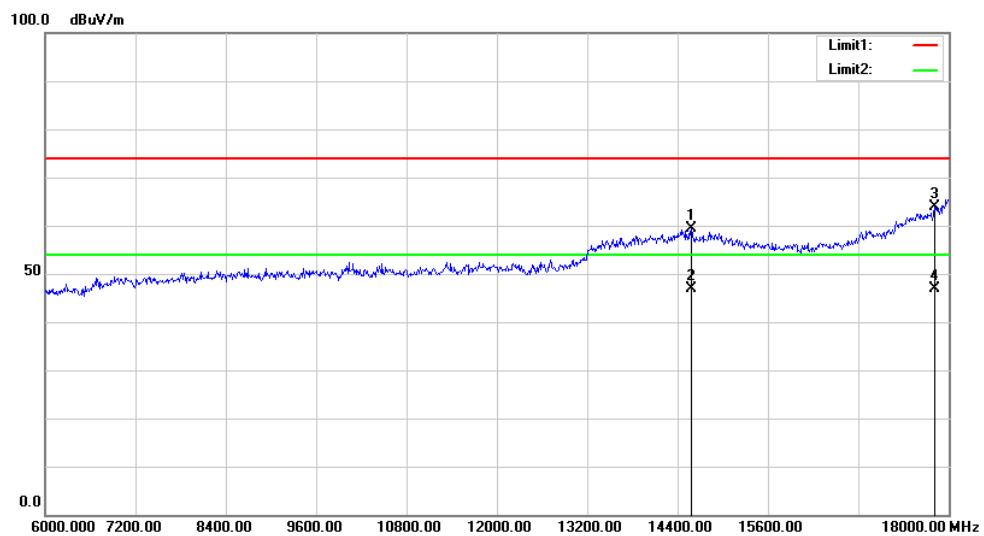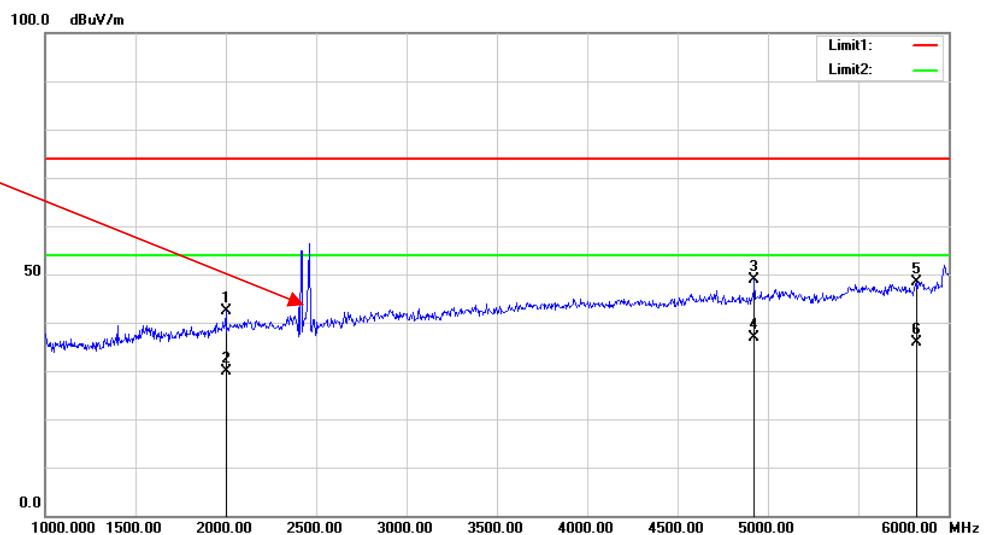

FCC §15.247(a) (2) & RSS-247 CLAUSE 5.2 a) &RSS-GEN CLAUSE 6.7–6 dB EMISSION BANDWIDTH AND 99% OCCUPIED BANDWIDTH**Applicable Standard**

According to FCC §15.247(a) (2)

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

According to RSS-247 §5.2 a)

The minimum 6 dB bandwidth shall be 500 kHz.

According to RSS-Gen §6.7

The occupied bandwidth or the “99% emission bandwidth” is defined as the frequency range between two points, one above and the other below the carrier frequency, within which 99% of the total transmitted power of the fundamental transmitted emission is contained. The occupied bandwidth shall be reported for all equipment in addition to the specified bandwidth required in the applicable RSSs.

In some cases, the “x dB bandwidth” is required, which is defined as the frequency range between two points, one at the lowest frequency below and one at the highest frequency above the carrier frequency, at which the maximum power level of the transmitted emission is attenuated x dB below the maximum in-band power level of the modulated signal, where the two points are on the outskirts of the in-band emission.

The following conditions shall be observed for measuring the occupied bandwidth and x dB bandwidth:

- The transmitter shall be operated at its maximum carrier power measured under normal test conditions.
- The span of the spectrum analyzer shall be set large enough to capture all products of the modulation process, including the emission skirts, around the carrier frequency, but small enough to avoid having other emissions (e.g. on adjacent channels) within the span.
- The detector of the spectrum analyzer shall be set to “Sample”. However, a peak, or peak hold, may be used in place of the sampling detector since this usually produces a wider bandwidth than the actual bandwidth (worst-case measurement). Use of a peak hold (or “Max Hold”) may be necessary to determine the occupied / x dB bandwidth if the device is not transmitting continuously.
- The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the actual occupied / x dB bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value. Video averaging is not permitted.

Note: It may be necessary to repeat the measurement a few times until the RBW and VBW are in compliance with the above requirement.

For the 99% emission bandwidth, the trace data points are recovered and directly summed in linear power level terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached, and that frequency recorded. The process is repeated for the highest frequency data points (starting at the highest frequency, at the right side of the span, and going down in frequency). This frequency is then recorded. The difference between the two recorded frequencies is the occupied bandwidth (or the 99% emission bandwidth).

Test Procedure


6dB bandwidth test:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

99% Occupied bandwidth test:

Use Occupied bandwidth test function, measure the 99% Occupied bandwidth.

Repeat above procedures until all frequencies measured were complete.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101474	2020-07-07	2021-07-07
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A


* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	25.8 °C
Relative Humidity:	39 %
ATM Pressure:	101.7Pa
Tester:	Billy Li
Test Date:	2020-11-27

*Test Mode: Transmitting**Test Result: Compliant. Please refer to the following table and plots.*

Test mode	Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (MHz)
802.11b	Low	2412	10.000	15.010	≥0.5
	Middle	2437	10.080	15.010	≥0.5
	High	2462	9.280	15.010	≥0.5
802.11g	Low	2412	16.160	17.086	≥0.5
	Middle	2437	16.240	17.006	≥0.5
	High	2462	16.000	17.086	≥0.5
802.11n ht20	Low	2412	16.880	17.804	≥0.5
	Middle	2437	16.880	17.804	≥0.5
	High	2462	17.680	17.804	≥0.5
802.11n ht40	Low	2422	35.200	37.525	≥0.5
	Middle	2437	35.680	37.525	≥0.5
	High	2452	35.840	37.525	≥0.5

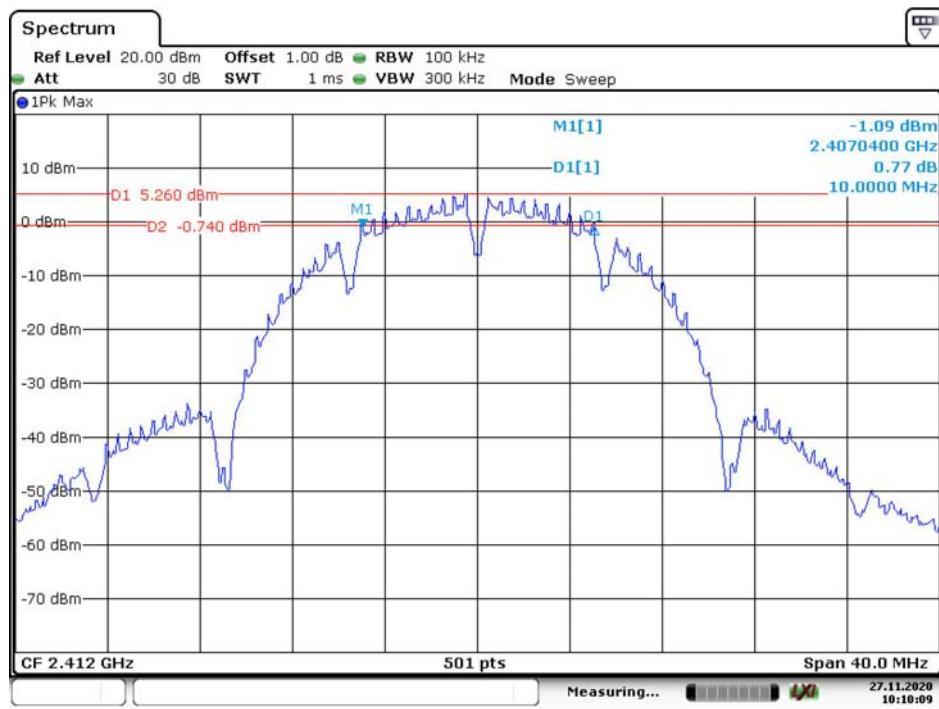
6dB bandwidth:**802.11b Low Channel**

Date: 27.NOV.2020 10:10:09

802.11b Middle Channel


Date: 27.NOV.2020 10:12:44

802.11b High Channel

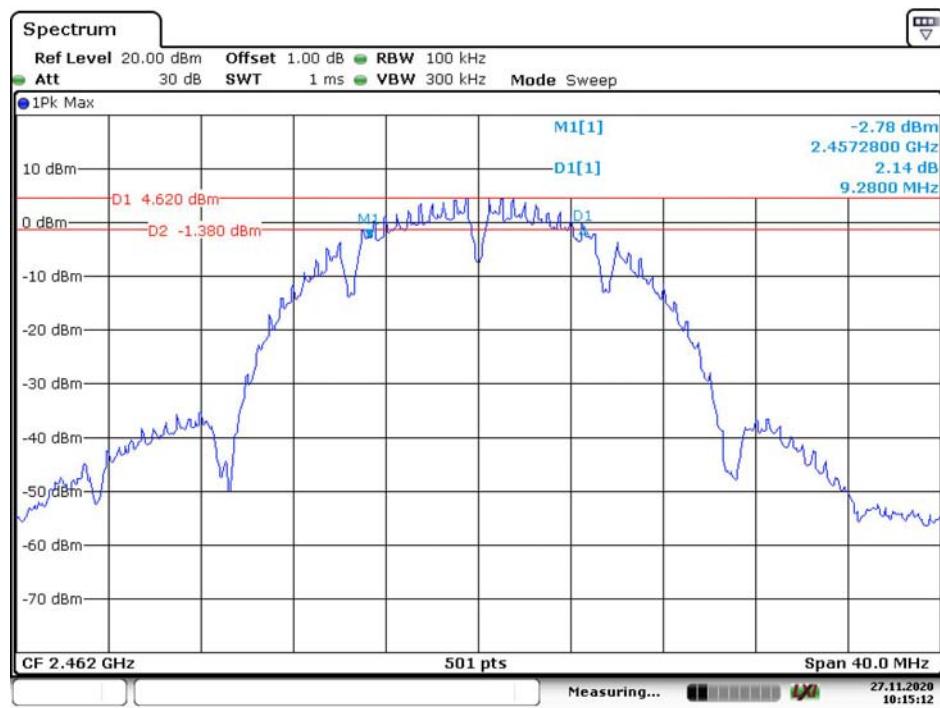


Date: 27.NOV.2020 10:15:12

802.11g Low Channel

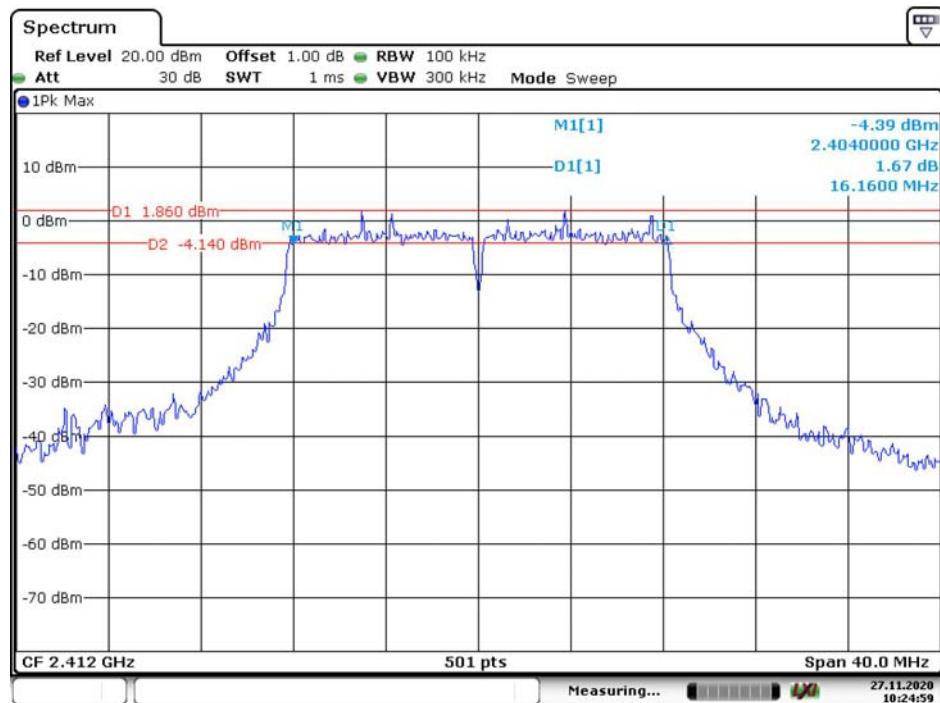


Date: 27.NOV.2020 10:25:00

802.11g Middle Channel

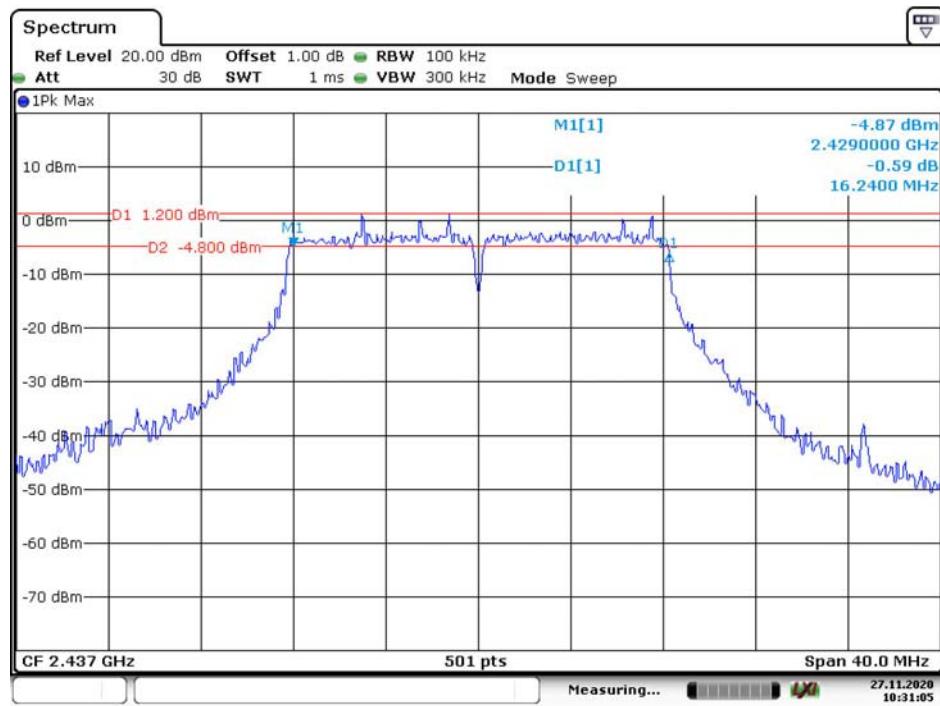


Date: 27.NOV.2020 10:31:05

802.11g High Channel

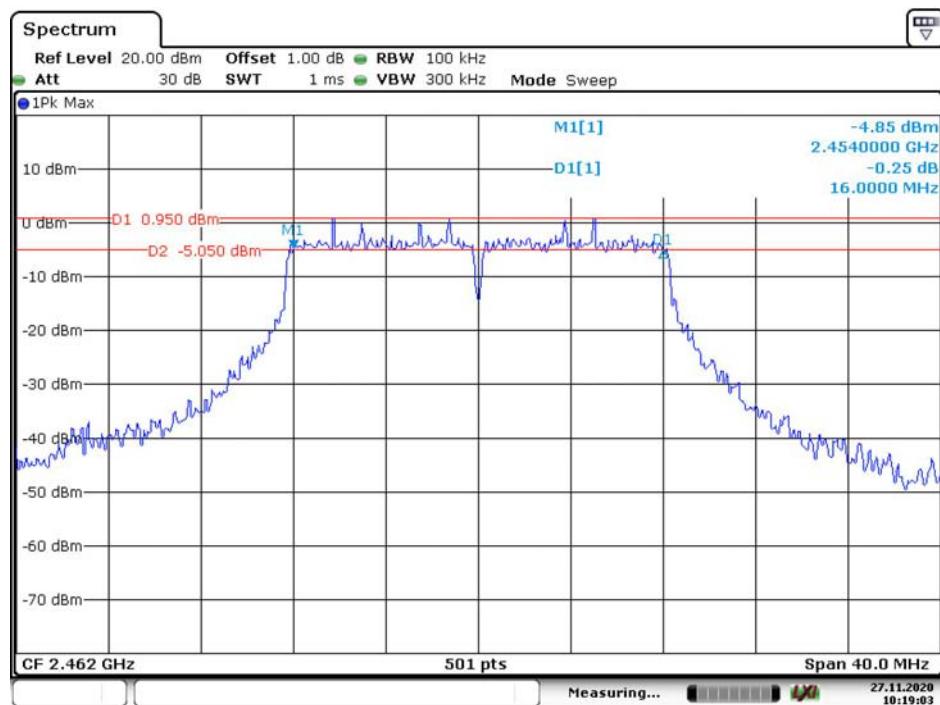


Date: 27.NOV.2020 10:19:04

802.11n ht20 Low Channel

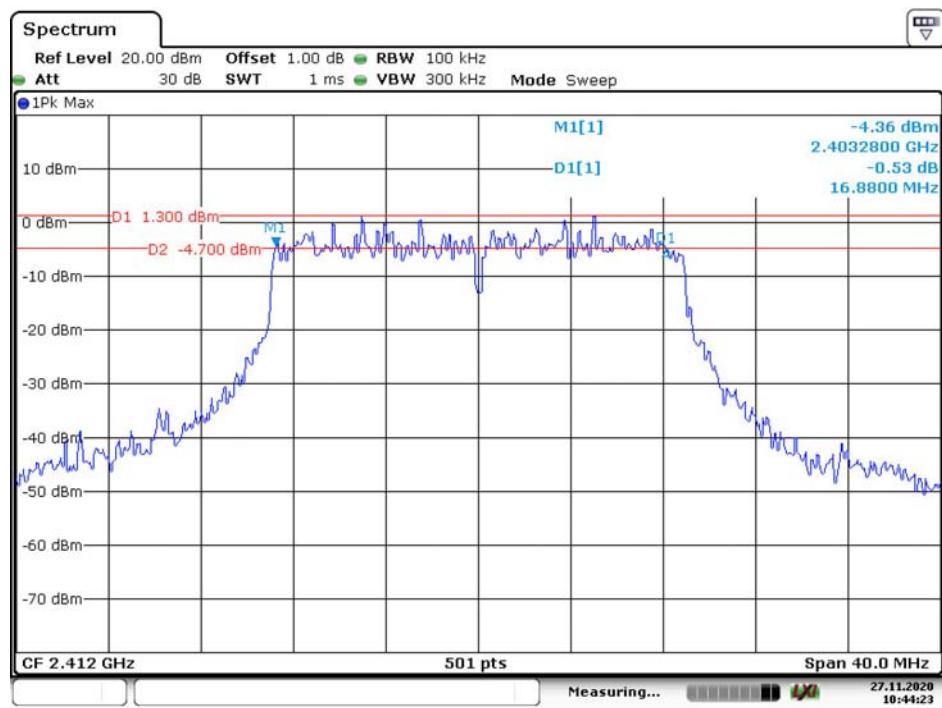


Date: 27.NOV.2020 10:44:24

802.11n ht20 Middle Channel

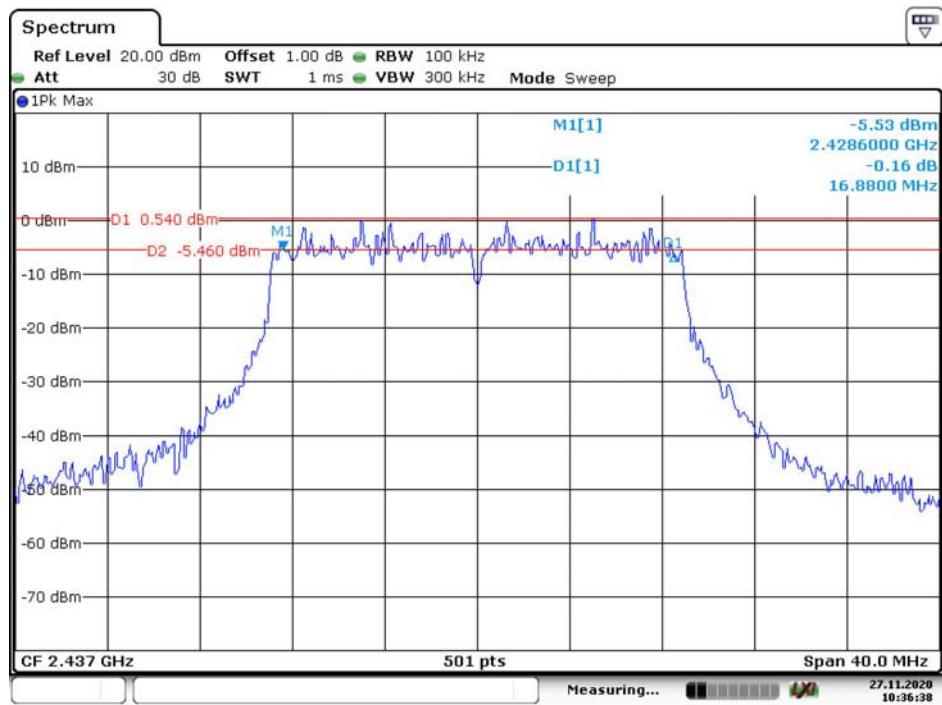


Date: 27.NOV.2020 10:36:39

802.11n ht20 High Channel

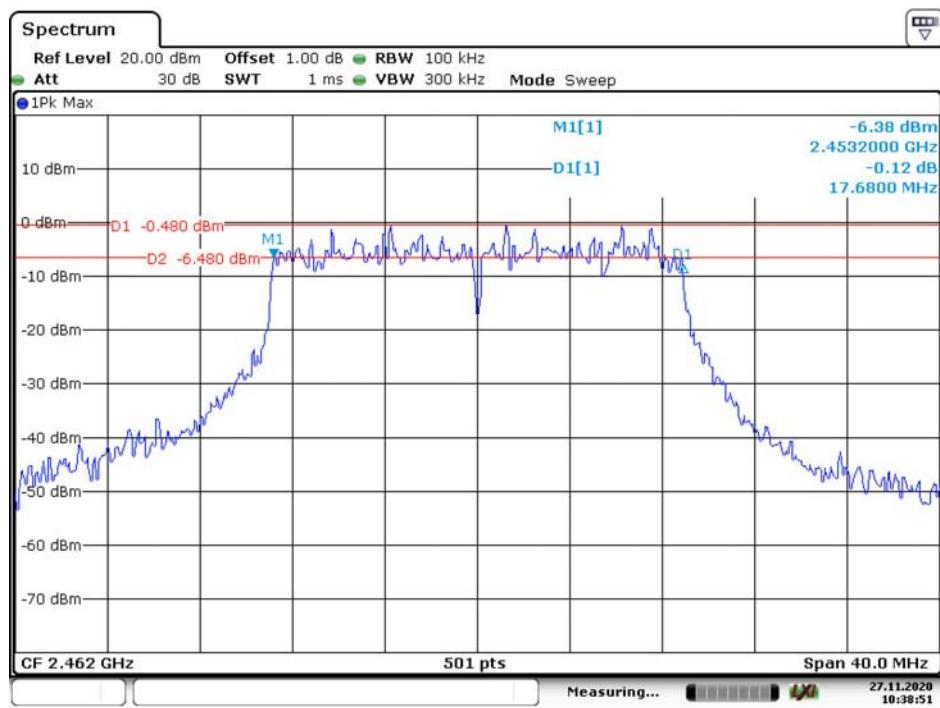


Date: 27.NOV.2020 10:38:52

802.11n ht40 Low Channel

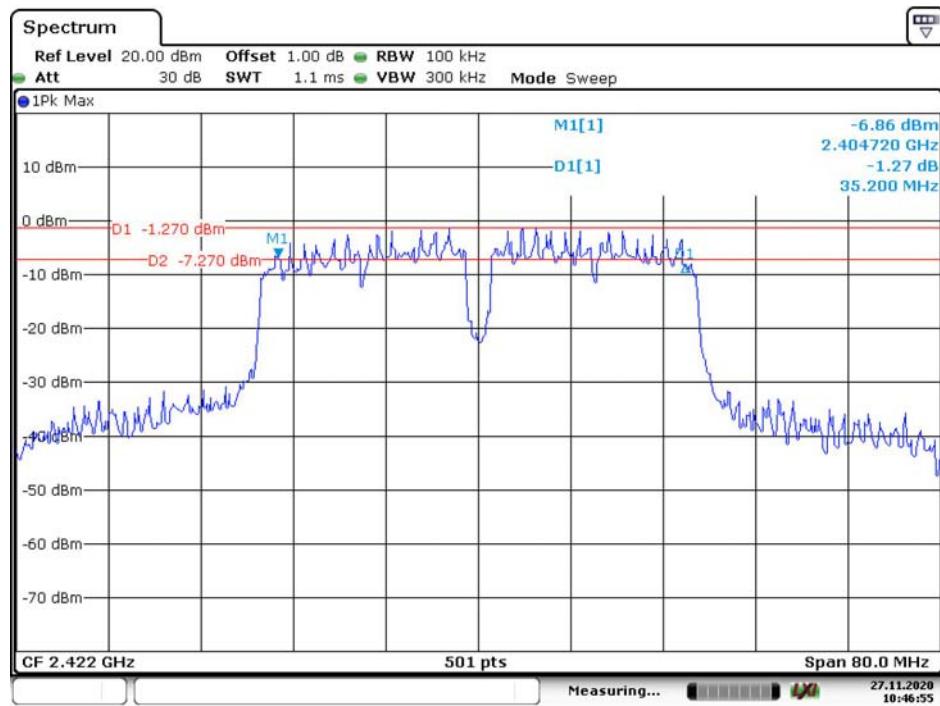


Date: 27.NOV.2020 10:46:55

802.11n ht40 Middle Channel

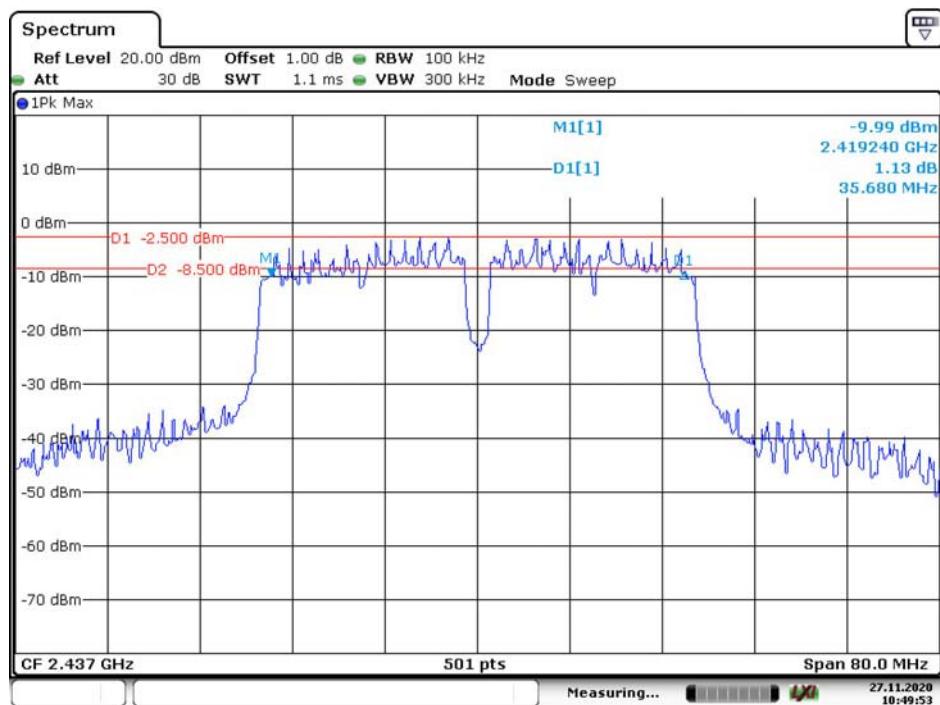


Date: 27.NOV.2020 10:49:54


802.11n ht40 High Channel

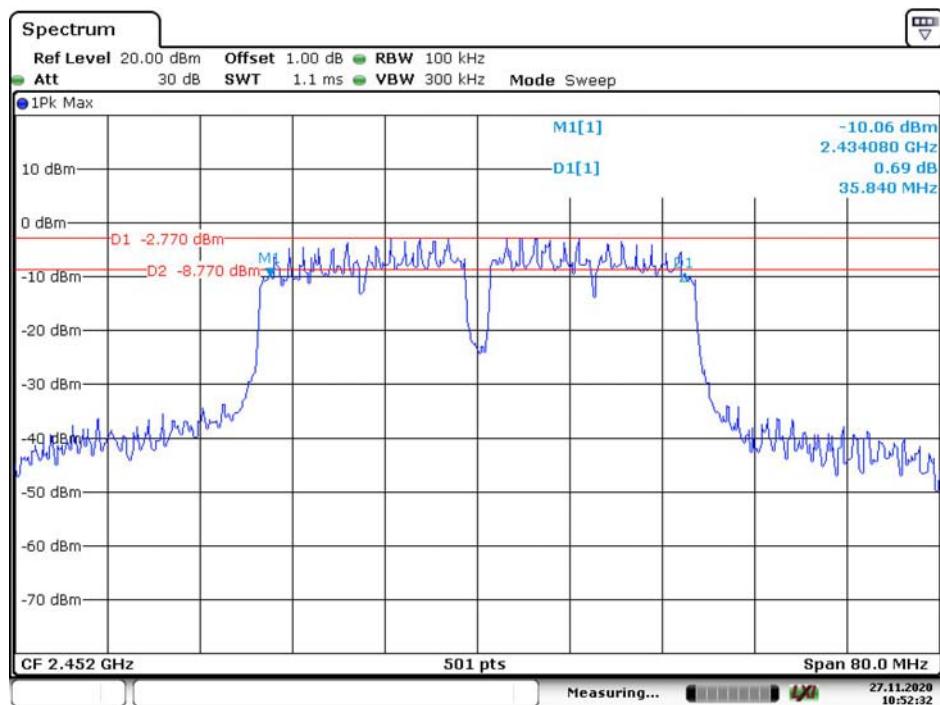

Date: 27.NOV.2020 10:52:33

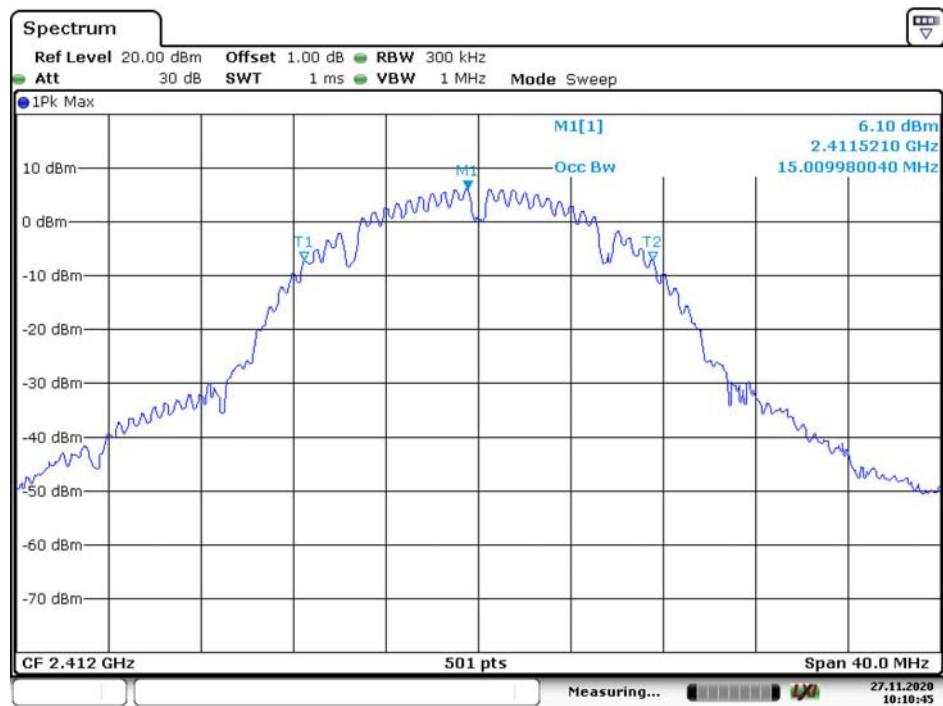
99% Occupied bandwidth:**802.11b Low Channel**

Date: 27.NOV.2020 10:10:45

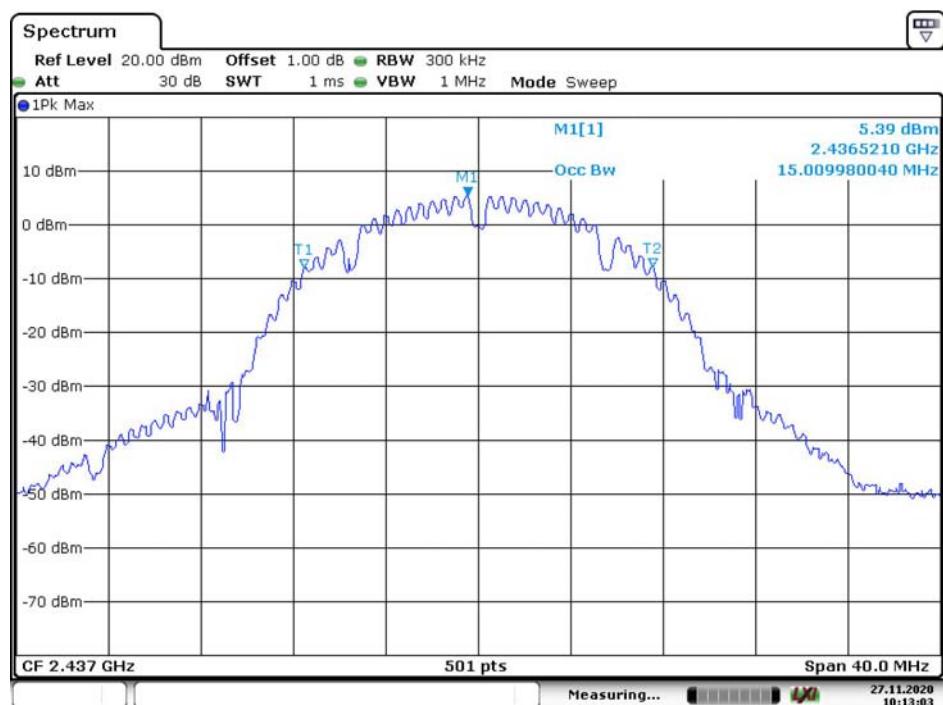802.11b Middle Channel


Date: 27.NOV.2020 10:13:04

802.11b High Channel

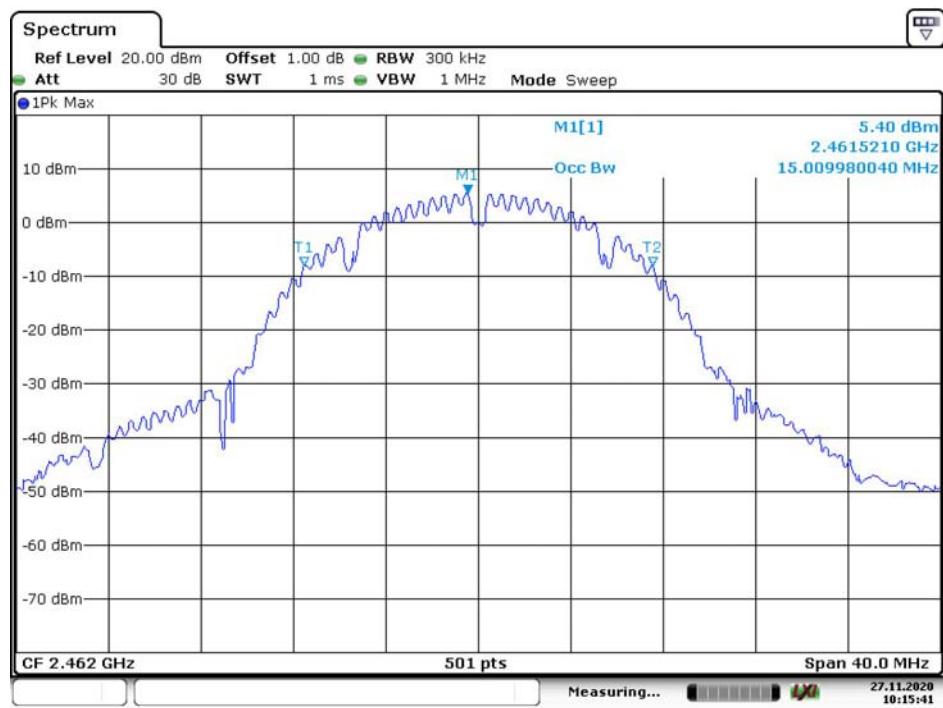


Date: 27.NOV.2020 10:15:42

802.11g Low Channel

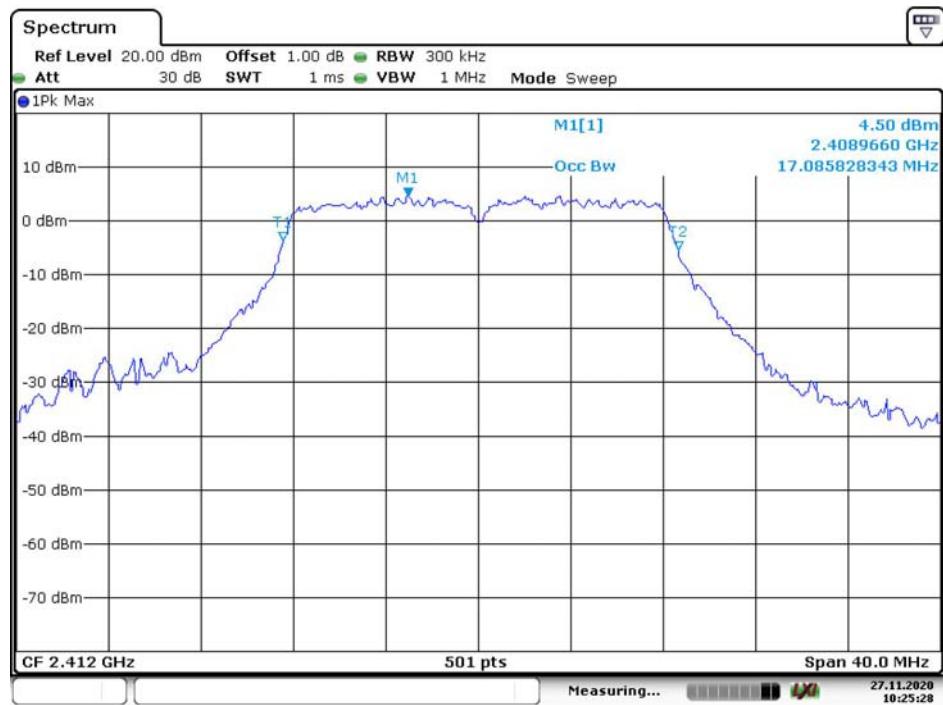

Date: 27.NOV.2020 10:25:29

802.11g Middle Channel

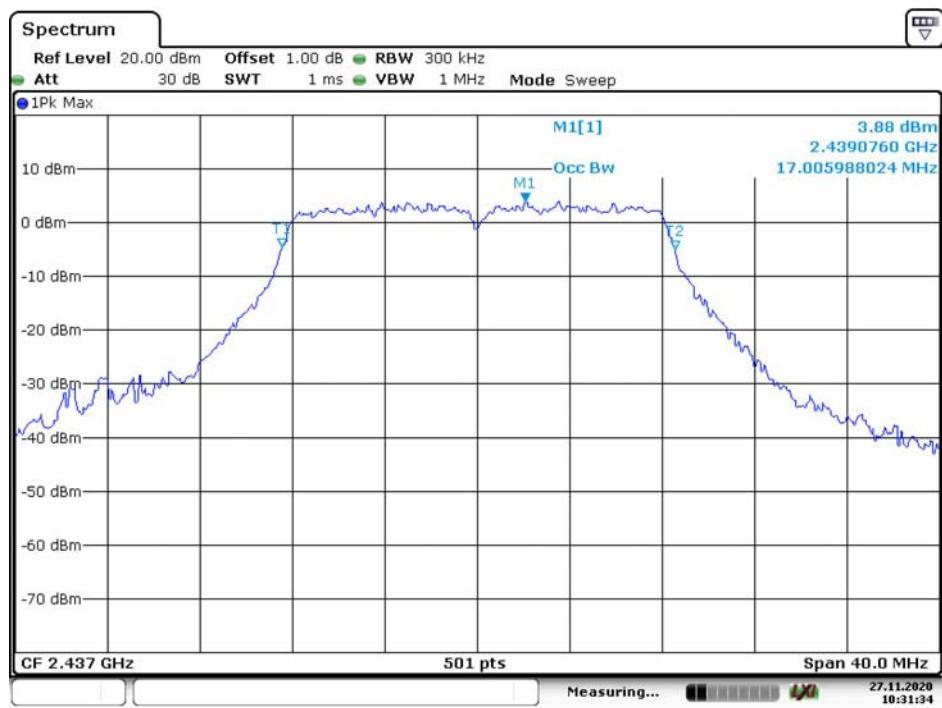

Date: 27.NOV.2020 10:31:34

802.11g High Channel




Date: 27.NOV.2020 10:19:33

802.11n ht20 Low Channel




Date: 27.NOV.2020 10:41:42

802.11n ht20 Middle Channel

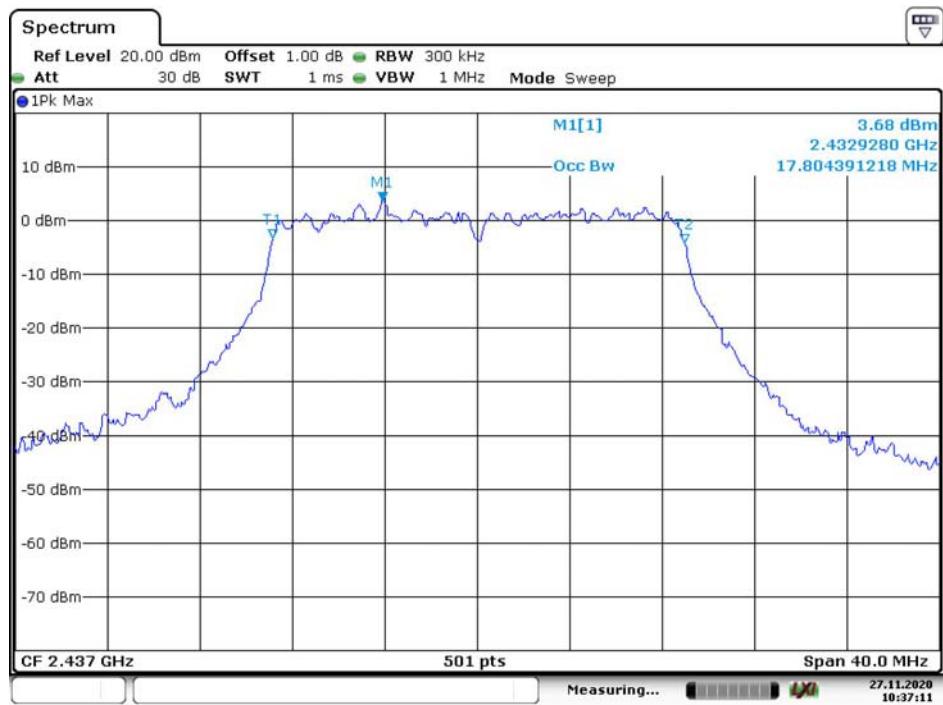


Date: 27.NOV.2020 10:37:11

802.11n ht20 High Channel

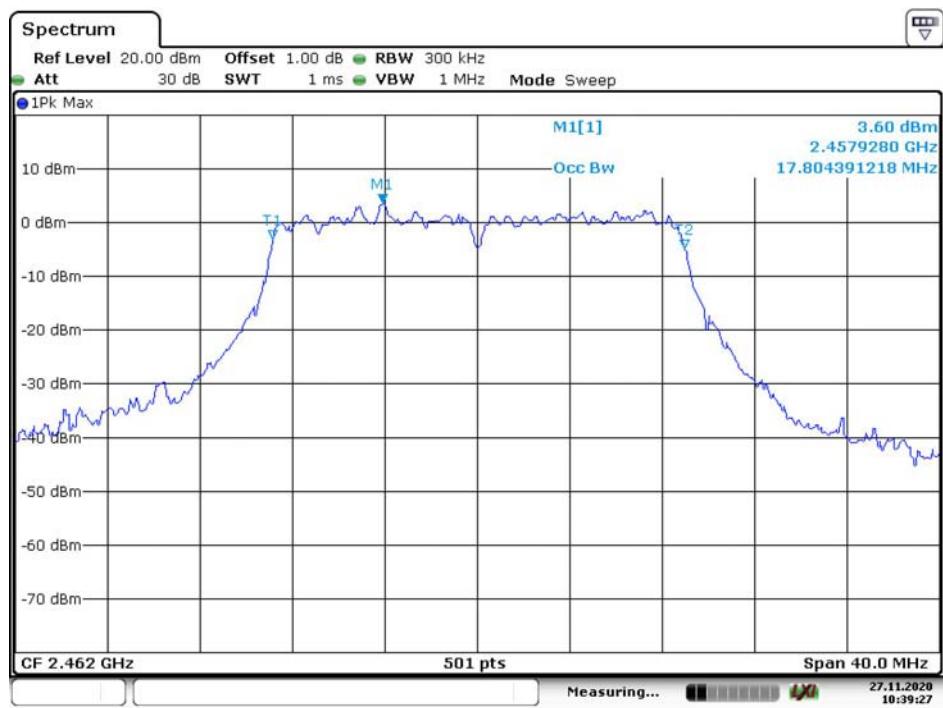

Date: 27.NOV.2020 10:39:27

802.11n ht40 Low Channel

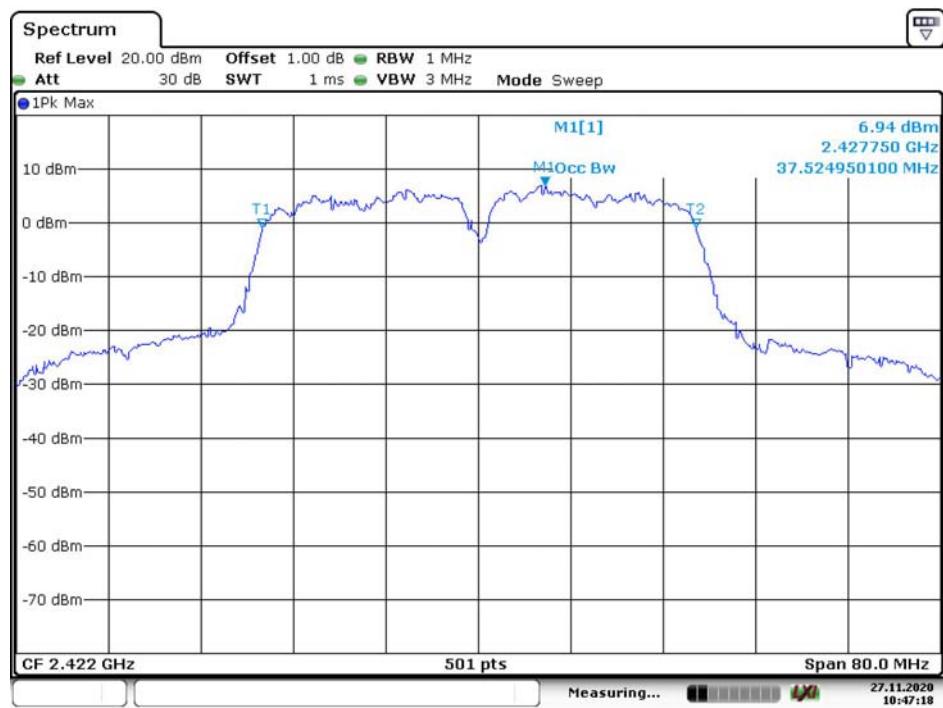

Date: 27.NOV.2020 10:47:19

802.11n ht40 Middle Channel



Date: 27.NOV.2020 10:50:17

802.11n ht40 High Channel



Date: 27.NOV.2020 10:52:56

FCC §15.247(b) (3)& RSS-247 CLAUSE 5.4 d) - MAXIMUM PEAK CONDUCTED OUTPUT POWER

Applicable Standard


According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

According to RSS-247§5.4 d) For DTSs employing digital modulation techniques operating in the bands 902-928 MHz and 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1W. Except as provided in Section 5.4(e), the e.i.r.p. shall not exceed 4 W.

As an alternative to a peak power measurement, compliance can be based on a measurement of the maximum conducted output power. The maximum conducted output power is the total transmit power delivered to all antennas and antenna elements, averaged across all symbols in the signalling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or transmitting at a reduced power level. If multiple modes of operation are implemented, the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to test equipment.
3. Add a correction factor to the display.
4. Set the power Meter to test Peak output power, record the result as peak power.
5. Set the power meter to test average output power, record the result as average power.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	USB Wideband Power Sensor	U2022XA	MY5417006	2020-09-12	2021-09-12
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A
E-Microwave	Coaxial Attenuators	EMCA10-5RN-6	OE01203239	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	25.8 °C
Relative Humidity:	39 %
ATM Pressure:	101.7Pa
Tester:	Billy Li
Test Date:	2020-11-27

Test Mode: Transmitting

Test Result: Compliance. Please refer to the following table.

Test mode	Test Frequency (MHz)	Max Peak Conducted Output Power (dBm)	Limit (dBm)
802.11b	2412	18.41	30
	2437	17.63	30
	2462	17.56	30
802.11g	2412	22.77	30
	2437	22.29	30
	2462	21.94	30
802.11n ht20	2412	22.71	30
	2437	22.17	30
	2462	22.51	30
802.11n ht40	2422	23.37	30
	2437	22.73	30
	2452	22.51	30

Note: The data above was tested in conducted mode, the antenna gain is 2.0 dBi, meet the EIPR requirement of RSS-247.

FCC §15.247(d)& RSS-247 CLAUSE 5.5 – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE

Applicable Standard

According to FCC§15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

According to RSS-247 Clause 5.5:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101474	2020-07-07	2021-07-07
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data


Environmental Conditions

Temperature:	25.8 °C
Relative Humidity:	39 %
ATM Pressure:	101.7Pa
Tester:	Billy Li
Test Date:	2020-11-27

Test mode: Transmitting


Test Result: Compliant. Please refer to following plots.

802.11b: Band Edge, Left Side

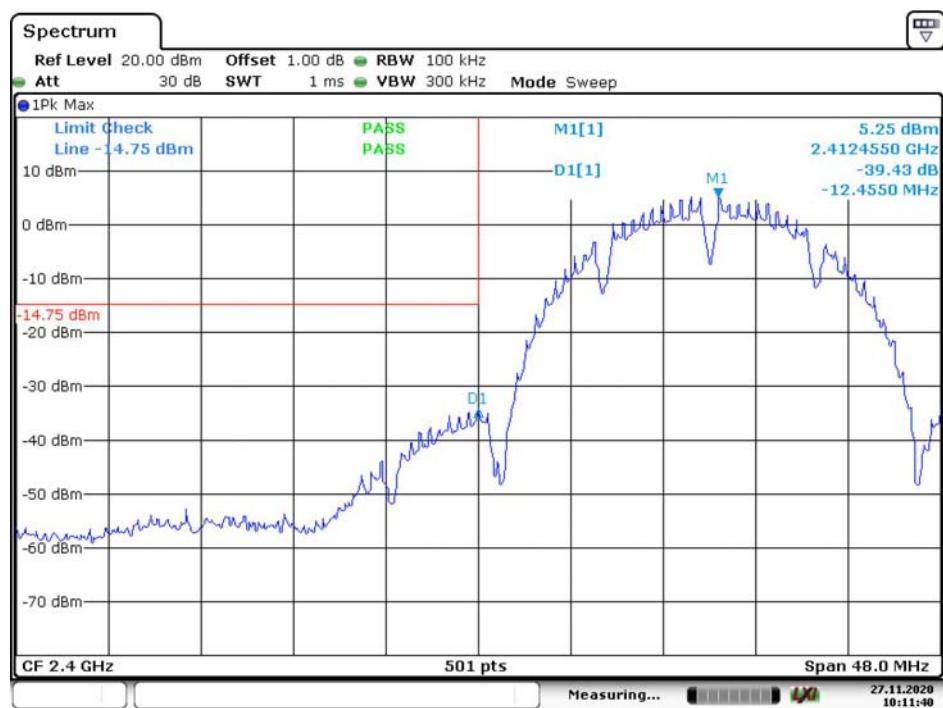


Date: 27.NOV.2020 10:11:40

802.11b: Band Edge, Right Side

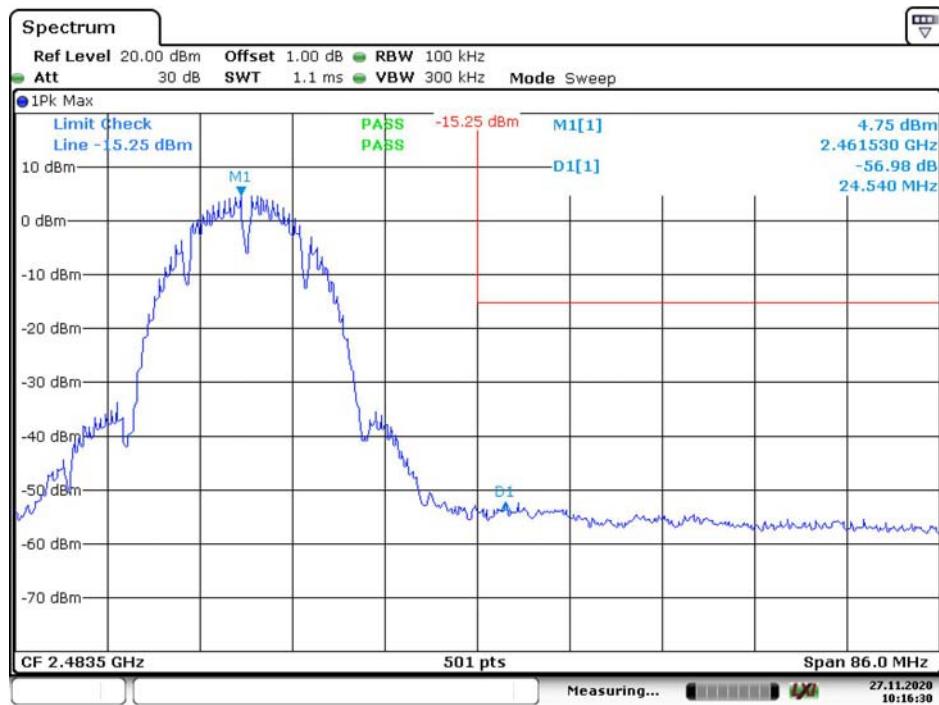


Date: 27.NOV.2020 10:16:30

802.11g: Band Edge, Left Side

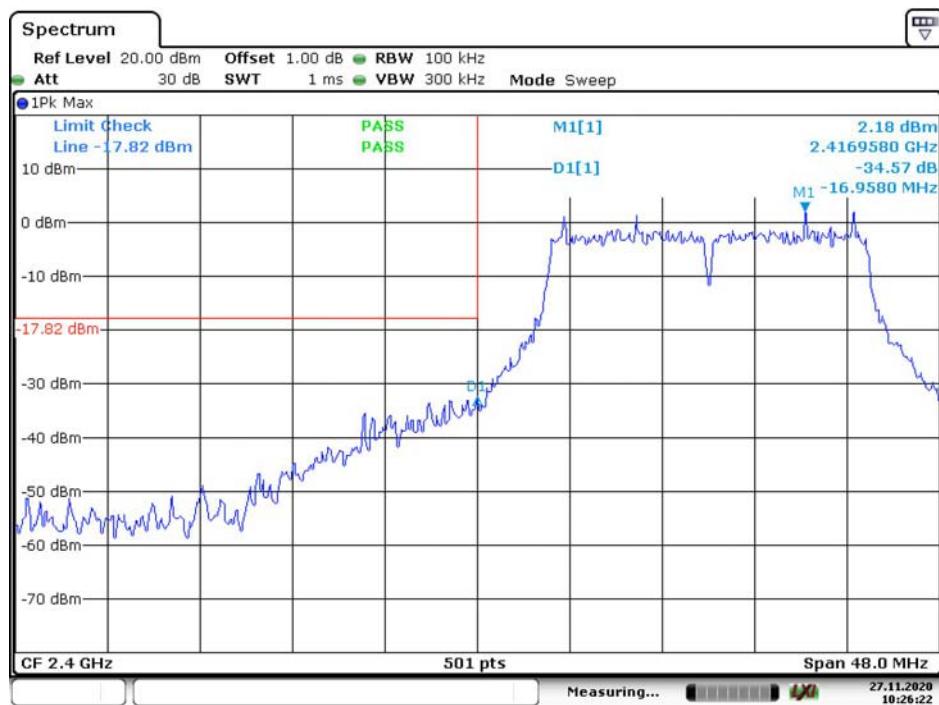


Date: 27.NOV.2020 10:26:23

802.11g: Band Edge, Right Side

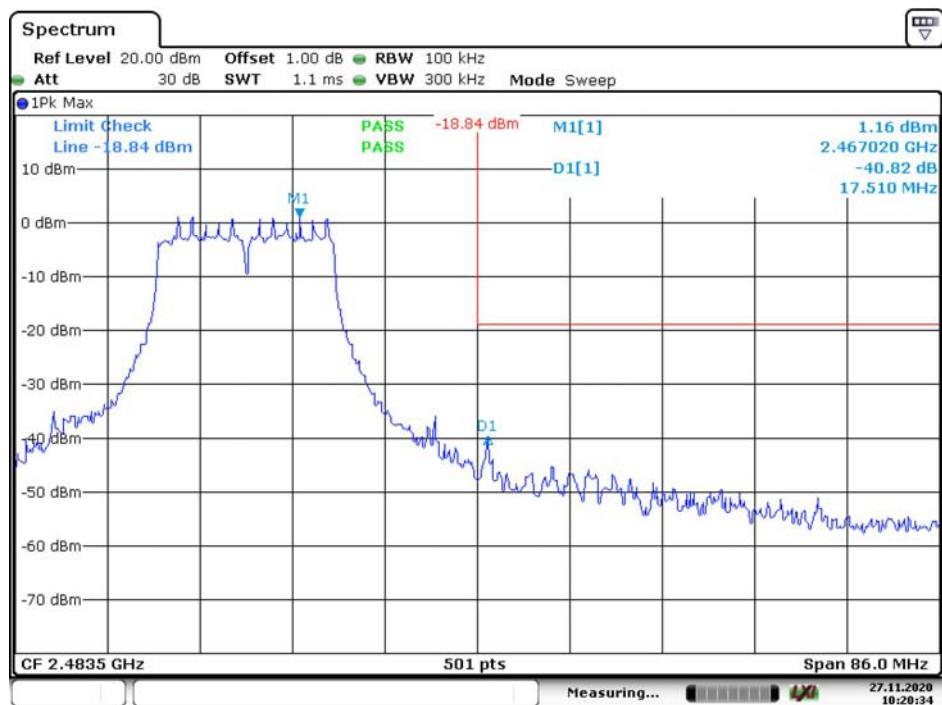


Date: 27.NOV.2020 10:20:34

802.11n ht20 Band Edge, Left Side

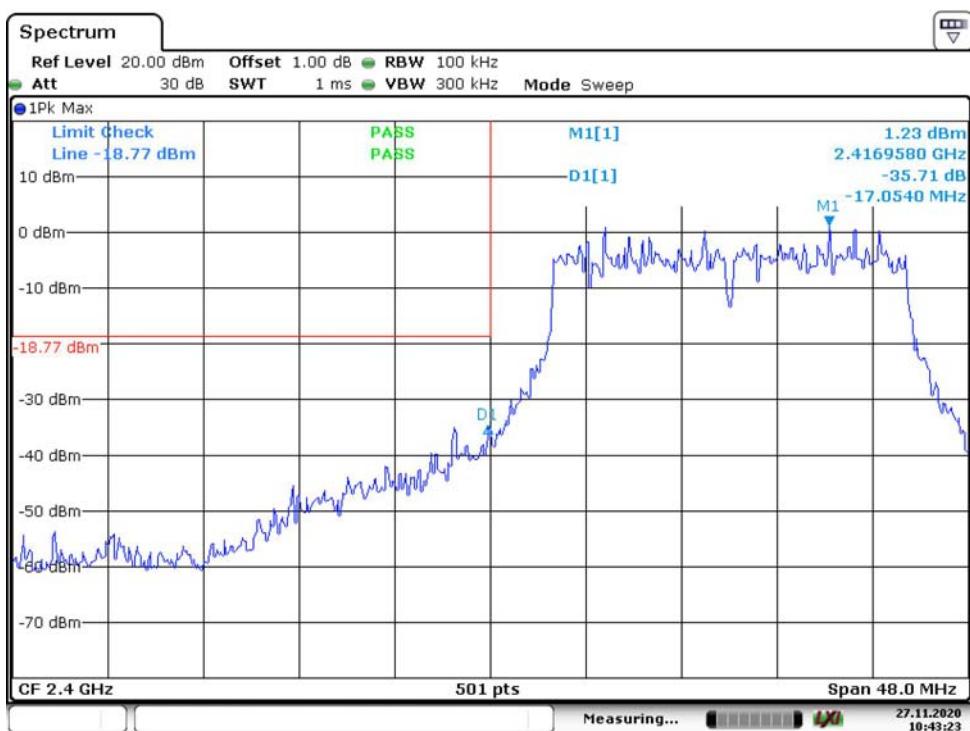


Date: 27.NOV.2020 10:43:24

802.11n ht20 Band Edge, Right Side

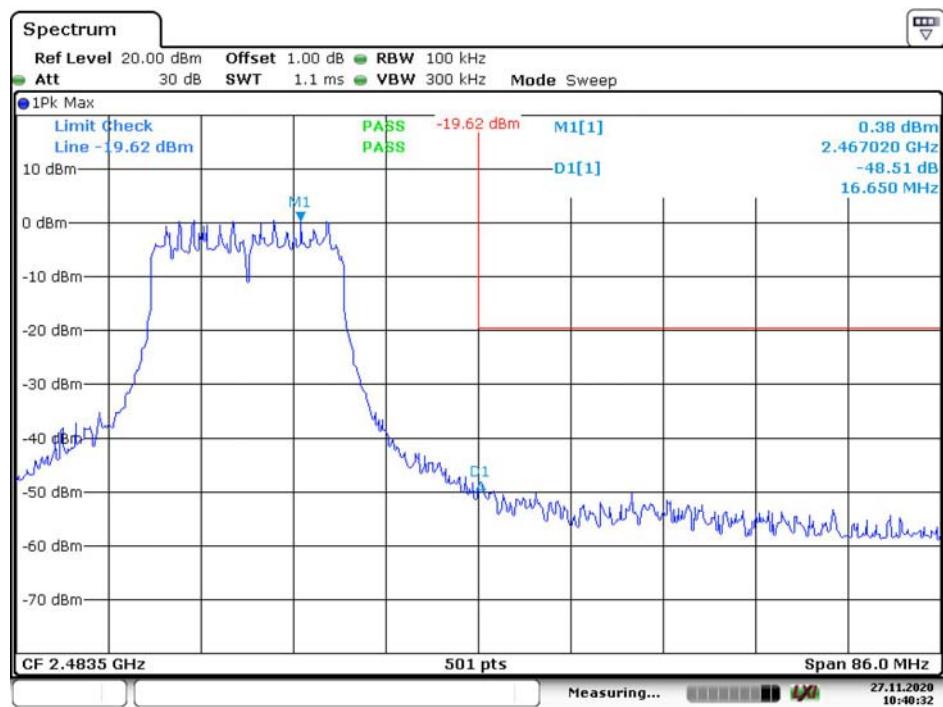


Date: 27.NOV.2020 10:40:33

802.11n ht40 Band Edge, Left Side

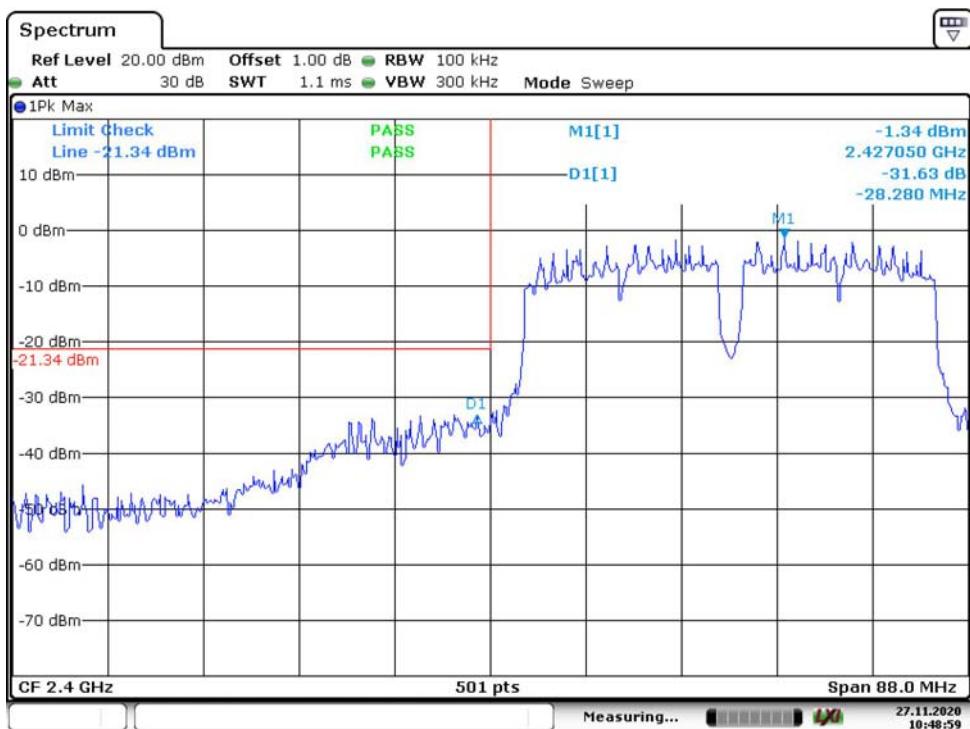

Date: 27.NOV.2020 10:49:00

802.11n ht40 Band Edge, Right Side

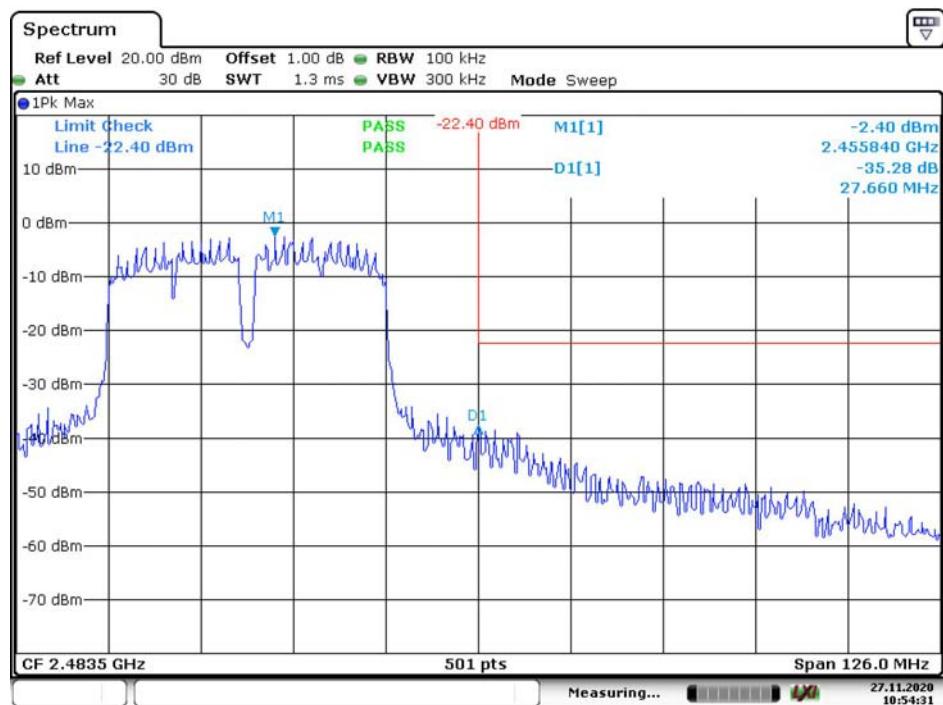

Date: 27.NOV.2020 10:54:31

FCC §15.247(e) & RSS-247 CLAUSE 5.2 b - POWER SPECTRAL DENSITY

Applicable Standard

According to FCC§15.247(e):For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

According to RSS-247 §5.2 b):

- b) The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of section 5.4(d), (i.e. the power spectral density shall be determined using the same method as is used to determine the conducted output power).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT was set without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set the RBW = 3 kHz, VBW = 10 kHz, Set the span to 1.5 times the DTS bandwidth.
4. Use the peak marker function to determine the maximum amplitude level.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101474	2020-07-07	2021-07-07
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions


Temperature:	25.8 °C
Relative Humidity:	39 %
ATM Pressure:	101.7Pa
Tester:	Billy Li
Test Date:	2020-11-27

Test Mode: Transmitting

Test Result: Compliance. Please refer to the following table and plots


Test mode	Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)
802.11b	Low	2412	-7.75	≤8
	Middle	2437	-8.42	≤8
	High	2462	-8.95	≤8
802.11g	Low	2412	-12.71	≤8
	Middle	2437	-13.66	≤8
	High	2462	-14.15	≤8
802.11n ht20	Low	2412	-13.03	≤8
	Middle	2437	-15.40	≤8
	High	2462	-13.69	≤8
802.11n ht40	Low	2422	-16.35	≤8
	Middle	2437	-16.14	≤8
	High	2452	-16.84	≤8

Power Spectral Density, 802.11b Low Channel

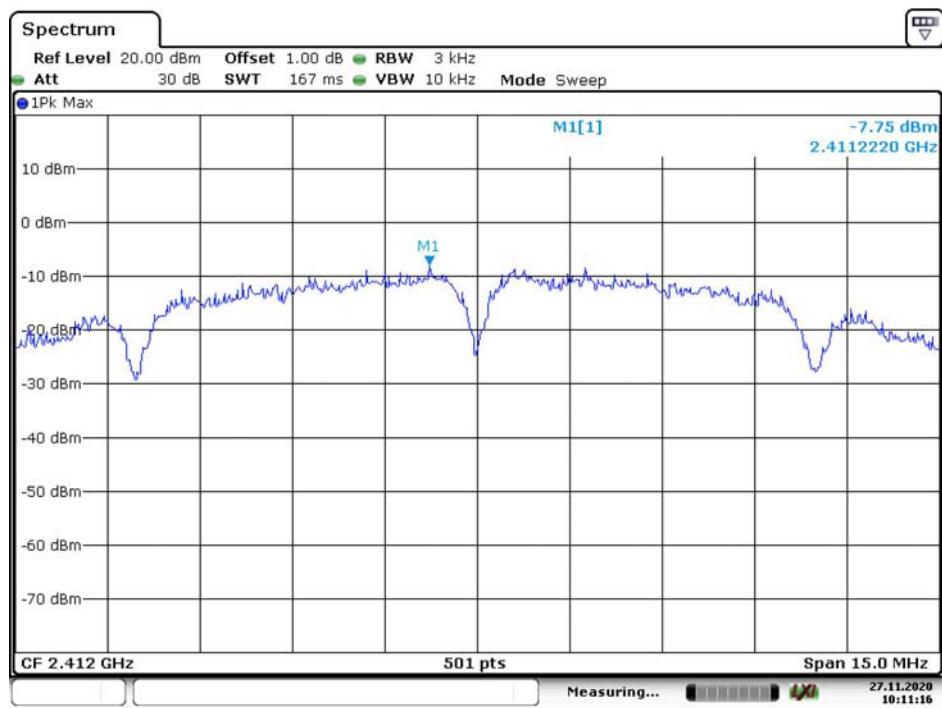


Date: 27.NOV.2020 10:11:17

Power Spectral Density, 802.11b Middle Channel

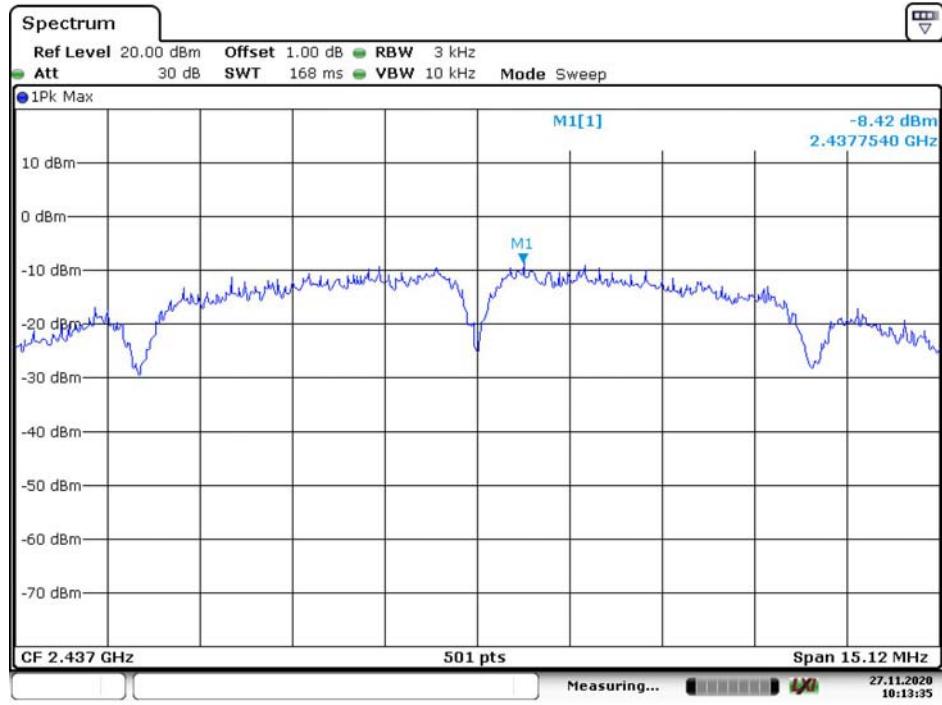


Date: 27.NOV.2020 10:13:35

Power Spectral Density, 802.11b High Channel

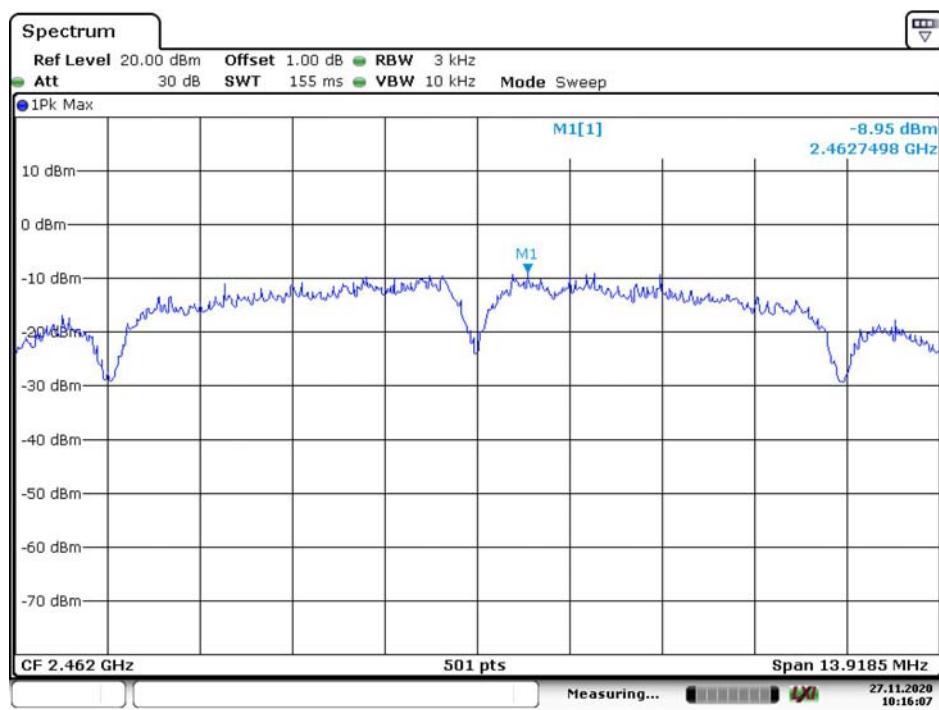


Date: 27.NOV.2020 10:16:07

Power Spectral Density, 802.11g Low Channel

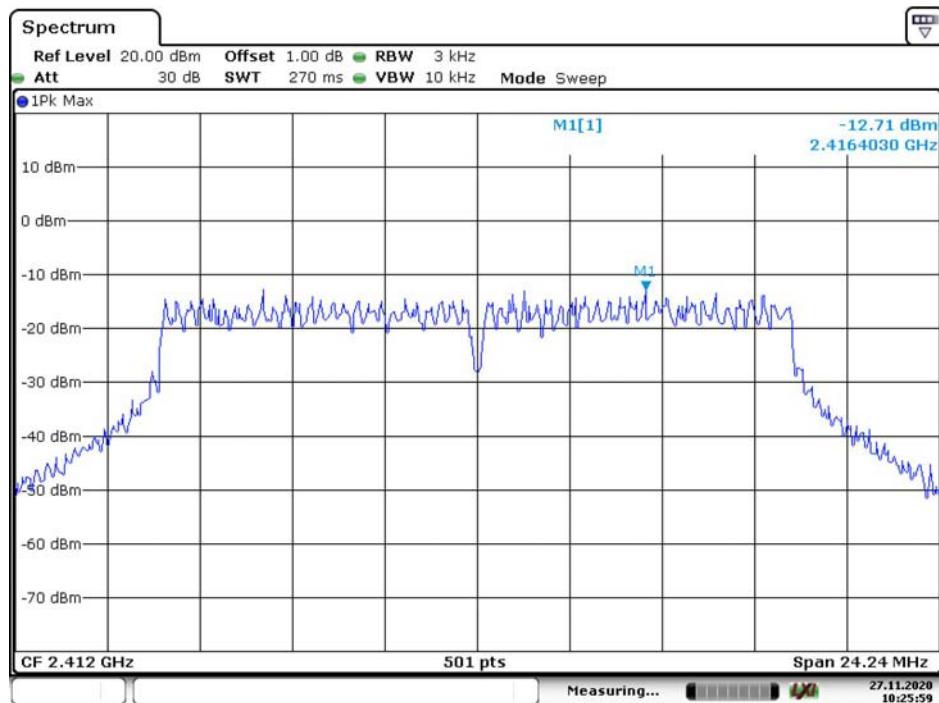


Date: 27.NOV.2020 10:25:59

Power Spectral Density, 802.11g Middle Channel

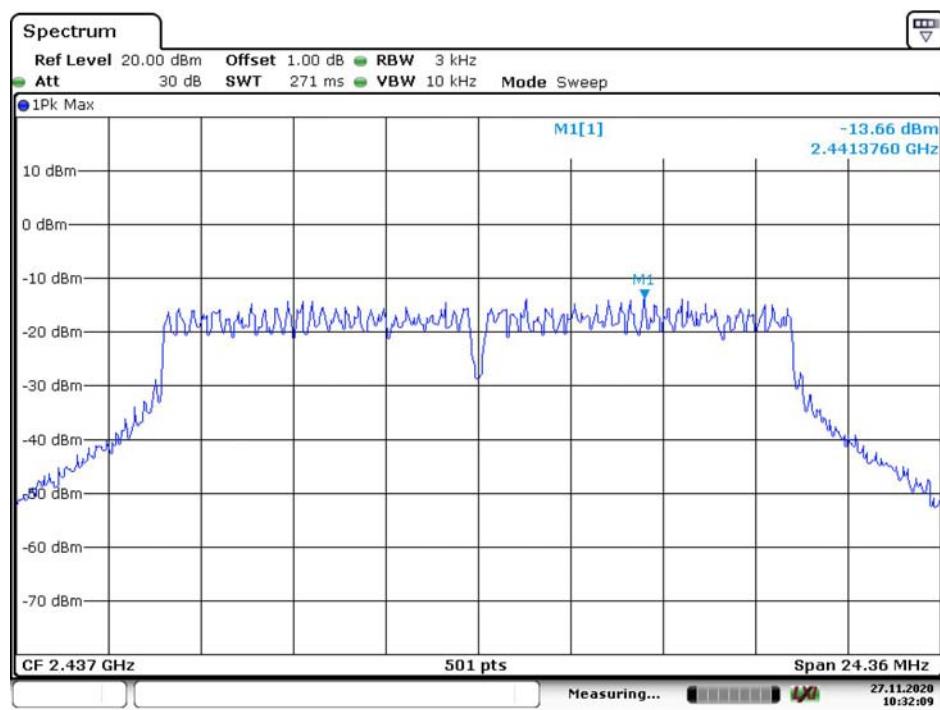


Date: 27.NOV.2020 10:32:09


Power Spectral Density, 802.11g High Channel

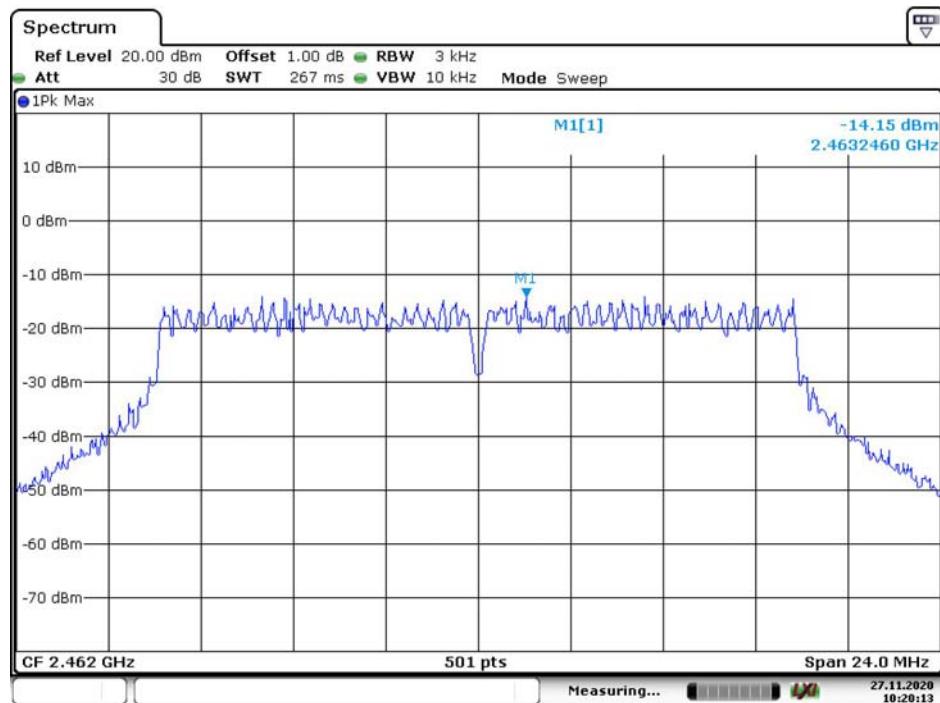

Date: 27.NOV.2020 10:20:14

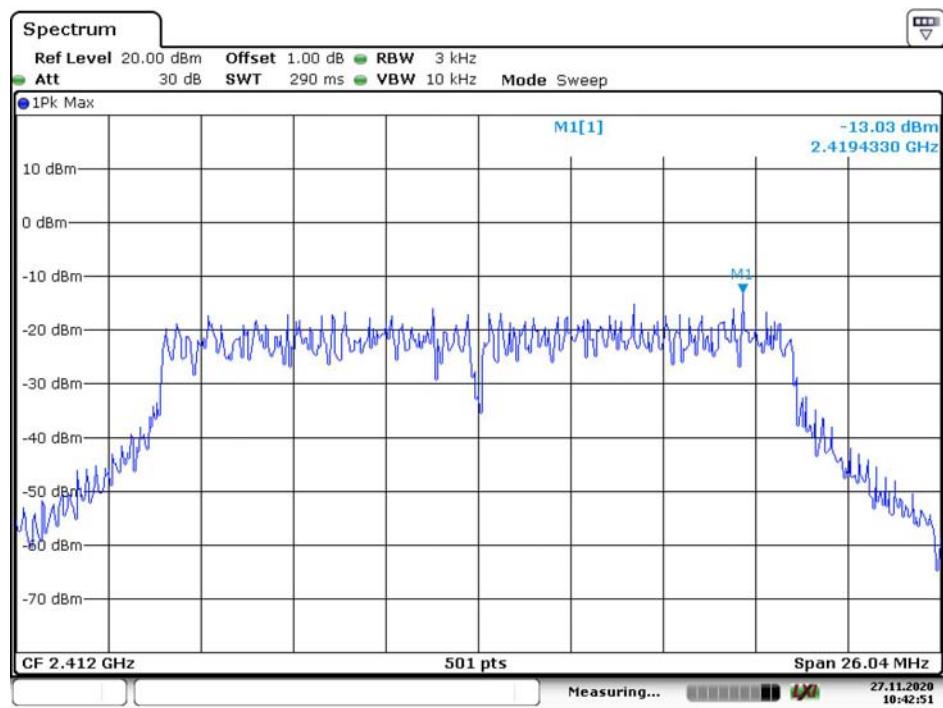
Power Spectral Density, 802.11n ht20 Low Channel

Date: 27.NOV.2020 10:42:52

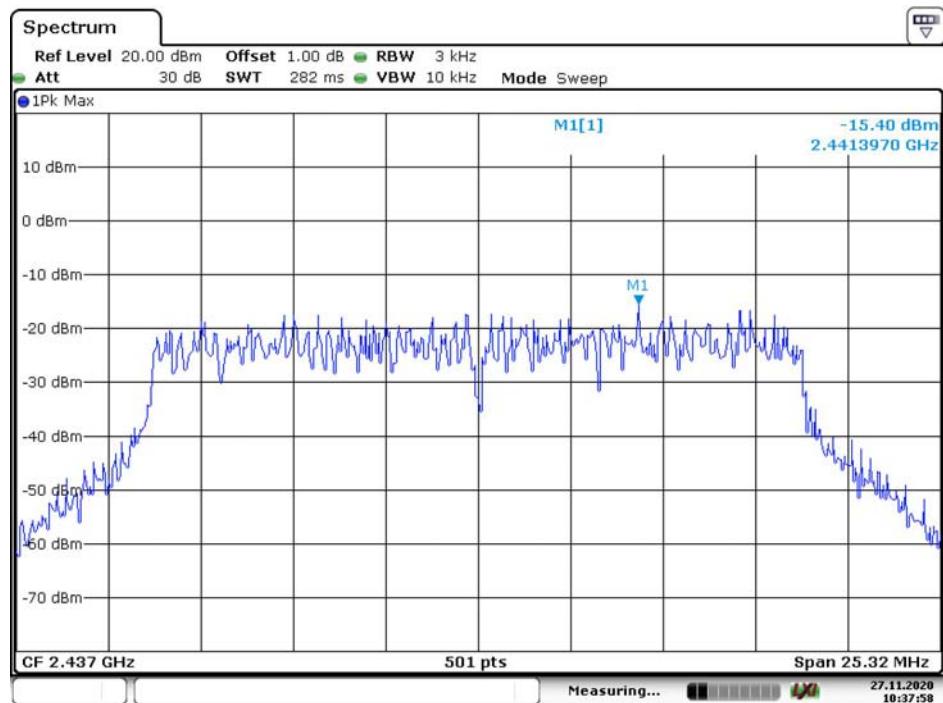Power Spectral Density, 802.11n ht20 Middle Channel


Date: 27.NOV.2020 10:37:58

Power Spectral Density, 802.11n ht20 High Channel

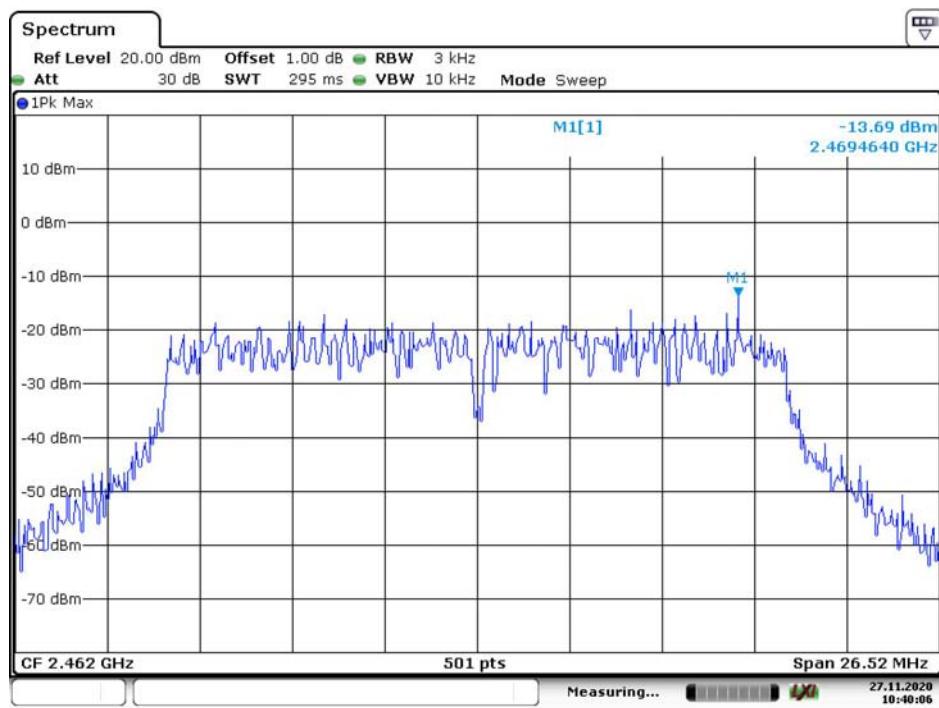


Date: 27.NOV.2020 10:40:06


Power Spectral Density, 802.11n ht40 Low Channel

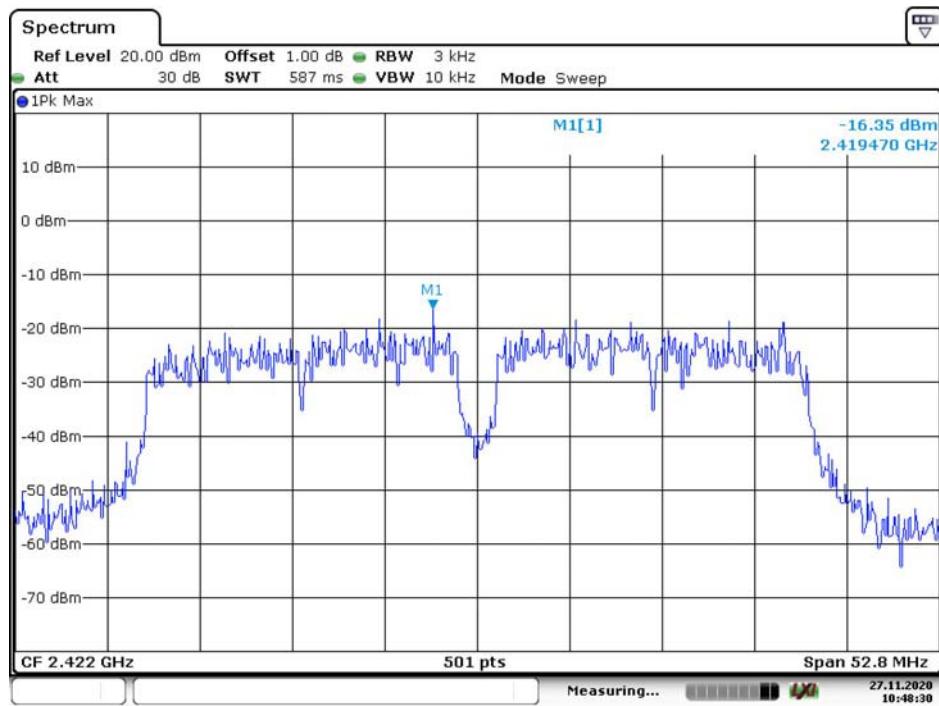

Date: 27.NOV.2020 10:48:30

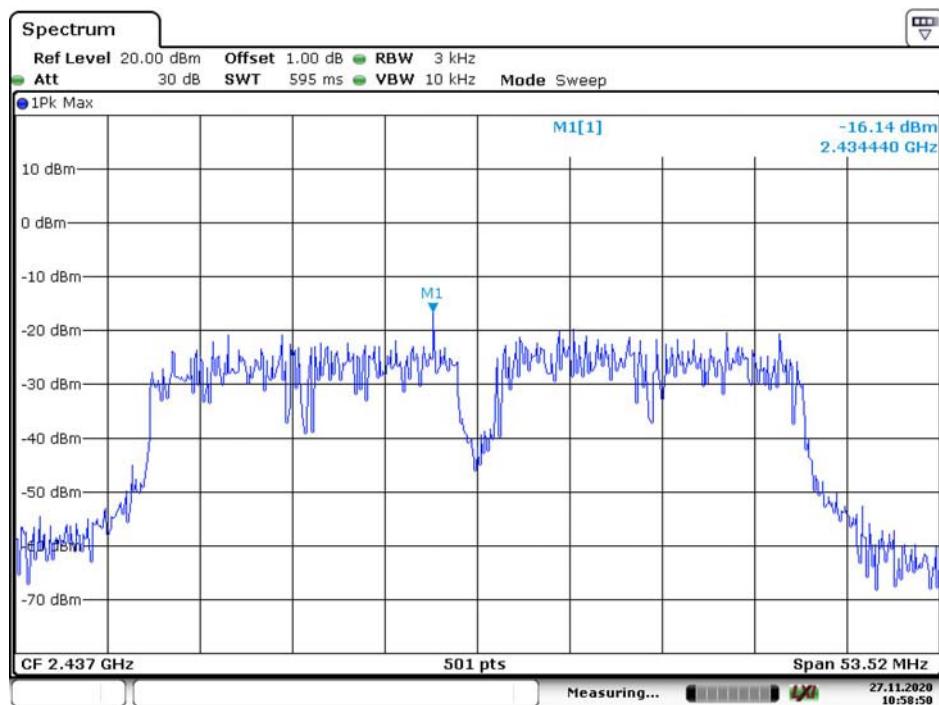Power Spectral Density, 802.11n ht40 Middle Channel

Date: 27.NOV.2020 10:58:51

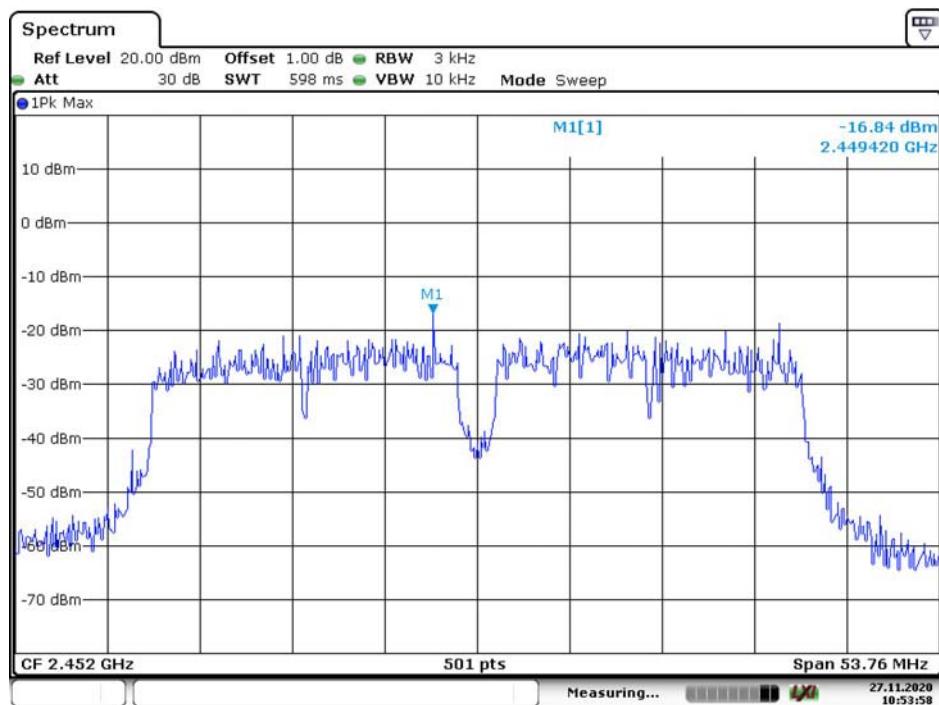Power Spectral Density, 802.11n ht40 High Channel

Date: 27.NOV.2020 10:53:59

******* END OF REPORT *******