中认信通
CHINA CERTIFICATION ICT CO., LTD (DONGGUAN)

ACCREDITED
TESTING LABORATORY
CERTIFICATE # 6356.01

TEST REPORT

Applicant: **Tersus GNSS lnc.**

Address: Rm 601, Bldg E2, No. 88, Jinjihu Ave, Suzhou, China

FCC ID: **2AMDJ-TC80**

Product Name: **Tersus TC80 Controller**

Standard(s): **47 CFR Part 2, 47 CFR Part 22, Subpart H**
47 CFR Part 24, Subpart E
47 CFR Part 27
ANSI C63.26-2015
KDB 971168 D01 Power Meas License Digital Systems v03r01

The above device has been tested and found compliant with the requirement of the relative standards by China Certification ICT Co., Ltd (Dongguan)

Report Number: **CR231062408-00F**

Date Of Issue: **2024/4/19**

Reviewed By: **Calvin Chen**

Calvin Chen

Title: RF Engineer

Approved By: **Sun Zhong**

Sun Zhong

Title: Manager

Test Laboratory: **China Certification ICT Co., Ltd (Dongguan)**
No. 113, Pingkang Road, Dalang Town, Dongguan,
Guangdong, China
Tel: +86-769-82016888

Test Facility

The Test site used by China Certification ICT Co., Ltd (Dongguan) to collect test data is located on the No. 113, Pingkang Road, Dalang Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 442868, the FCC Designation No. : CN1314.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0123.

Declarations

China Certification ICT Co., Ltd (Dongguan) is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol "▲". Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk "★".

CONTENTS

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
1.0	CR231062408-00F	Original Report	2024/4/19

1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test (EUT)

EUT Name:	Tersus TC80 Controller
EUT Model:	TC80
Operation Bands and modes:	GSM/GPRS/EDGE: 850/1900 WCDMA: Band 2/5 LTE: Band 2/5/7/38/41
Modulation Type:	GMSK,8PSK, BPSK, QPSK, 16QAM,64QAM
Rated Input Voltage:	DC 5V Charging from adapter or DC 3.85V from battery
Serial Number:	RE:2COS-1 RF: 2COS-2
EUT Received Date:	2023/10/26
EUT Received Status:	Good

Operation Voltage (V_{DC}) ▲:

Lowest:	3.4	Normal:	3.85	Highest:	4.4

Transmission Antenna Information▲:

Antenna Type	Operation Bands	Antenna Frequency Range (MHz)	Antenna Gain(G_T) (dBi)	L_C (dB)
PCB	GSM850	824-849	-3.5	0.1
	PCS1900	1850-1910	1.5	0.2
	WCDMA B2	1850-1910	1.5	0.2
	WCDMA B5	824-849	-3.5	0.1
	LTE B2	1850-1910	1.5	0.2
	LTE B5	824-849	-3.5	0.1
	LTE B7	2500-2570	0.5	0.4
	LTE B38	2570-2620	0.8	0.4
	LTE B41	2555-2655	0.8	0.4
Note: Lc= Signal Attenuation in the connecting cable between the transmitter and antenna, in dB.				

Accessory Information:

Accessory Description	Manufacturer	Model
Adapter	Guangdong Qingliu Electronlcs Co.,LTD	QL015-0503000U1

1.2 Description of Test Configuration

1.2.1 EUT Operation Condition:

EUT Operation Mode:	The system was configured for testing in each operation mode.
Equipment Modifications:	No
EUT Exercise Software:	No

The maximum power was configured per 3GPP Standard for each operation modes as below setting:

GSM/GPRS/EGPRS

Function: Menu select > GSM Mobile Station > GSM 850/1900
Press Connection control to choose the different menus
Press RESET > choose all the reset all settings
Connection Press Signal Off to turn off the signal and change settings
Network Support > GSM + GPRS or GSM + EGSM
Main Service > Packet Data
Service selection > Test Mode A – Auto Slot Config. off
MS Signal Press Slot Config Bottom on the right twice to select and change the number of time slots and power setting
> Slot configuration > Uplink/Gamma
> 33 dBm for GPRS 850
> 30 dBm for GPRS 1900
> 27 dBm for EGPRS 850
> 26 dBm for EGPRS 1900
BS Signal Enter the same channel number for TCH channel (test channel) and BCCH channel
Frequency Offset > + 0 Hz
Mode > BCCH and TCH

BCCH Level > -85 dBm (May need to adjust if link is not stable)
BCCH Channel > choose desire test channel [Enter the same channel number for TCH channel (test channel) and BCCH channel]

Channel Type > Off
P0 > 4 dB
Slot Config > Unchanged (if already set under MS signal)
TCH > choose desired test channel
Hopping > Off
Main Timeslot > 3
Network Coding Scheme > CS4 (GPRS) and MCS5 (EGPRS)

Bit Stream > 2E9-1 PSR Bit Stream
AF/RF Enter appropriate offsets for Ext. Att. Output and Ext. Att. Input
Connection Press Signal on to turn on the signal and change settings

WCDMA

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification.

	Mode	HSUPA	HSUPA	HSUPA	HSUPA	HSUPA
	Subset	1	2		4	5
WCDMA General Settings	Loopback Mode	Test Mode 1				
	Rel99 RMC	12.2kbps RMC				
	HSDPA FRC	H-Set1				
	HSUPA Test	HSUPA Loopback				
	Power Control Algorithm	Algorithm2				
	βc	11/15	6/15	15/15	2/15	15/15
	βd	15/15	15/15	9/15	15/ 5	0
	βec	209/225	12/15	30 15	2/15	5/15
	βc/ βd	11/15	6/15	15/9	2/15	-
	βhs	22/15	12/15	30/15	4/15	5/15
	CM(dB)	1.0	3.0	2.0	3.0	1.0
	PR(dB)	0	2	1	2	0
HSDPA Specific Settings	DACK	8				
	DNAK	8				
	DCQI	8				
	Ack-Nack repetition factor	3				
	CQI Feedback	4ms				
	CQI Repetition Factor	2				
	Ahs=βhs/ βc	30/15				
HSUPA Specific Settings	DE-DPCCH	6	8	8	5	7
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	21
	ETFCI	75	67	92	71	81
	Associated Max UL Data Rate k ps	242.1	174.9	482.8	205.8	308.9
	Reference E_FCl	E-TFCI 11 E E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27		E-TFCI 11 E-TFCI PO4 E-TFCI 92 E-TFCI PO 18	E-TFCI 11 E E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27	

LTE (FDD):

The following tests were conducted according to the test requirements in 3GPP TS36.101

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3

Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

The allowed A-MPR values specified below in Table 6.2.4.-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signaling Value of "NS_01".

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

Network Signalling value	Requirements (sub-clause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N_{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	NA
NS_03	6.6.2.2.1	2, 4,10, 23, 25, 35, 36	3	>5	≤ 1
			5	>6	≤ 1
			10	>6	≤ 1
			15	>8	≤ 1
			20	>10	≤ 1
NS_04	6.6.2.2.2	41	5	>6	≤ 1
			10, 15, 20	See Table 6.2.4-4	
NS_05	6.6.3.3.1	1	10,15,20	≥ 50	≤ 1
NS_06	6.6.2.2.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.6-1	n/a
NS_07	6.6.2.2.3 6.6.3.3.2	13	10	Table 6.2.4-2	Table 6.2.4-2
NS_08	6.6.3.3.3	19	10, 15	> 44	≤ 3
NS_09	6.6.3.3.4	21	10, 15	> 40	≤ 1
				> 55	≤ 2
NS_10		20	15, 20	Table 6.2.4-3	Table 6.2.4-3
NS_11	6.6.2.2.1	23[1]	1.4, 3, 5, 10	Table 6.2.4-5	Table 6.2.4-5
..					
NS_32	-	-	-	-	-

Note 1: Applies to the lower block of Band 23, i.e. a carrier placed in the 2000-2010 MHz region.

LTE(TDD):

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$			$7680 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
5	$6592 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$20480 \cdot T_s$		
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$		
8	$24144 \cdot T_s$			-	-	-
9	$13168 \cdot T_s$			-	-	-

Table 4.2-2: Uplink-downlink configurations.

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Calculated Duty Cycle

Uplink-Downlink Configuration	Downlink-to-Uplink Switch-point Periodicity	Subframe Number										Calculated Duty Cycle (%)
		0	1	2	3	4	5	6	7	8	9	
0	5 ms	D	S	U	U	U	D	S	U	U	U	63.33
1	5 ms	D	S	U	U	D	D	S	U	U	D	43.33
2	5 ms	D	S	U	D	D	D	S	U	D	D	23.33
3	10 ms	D	S	U	U	U	D	D	D	D	D	31.67
4	10 ms	D	S	U	U	D	D	D	D	D	D	21.67
5	10 ms	D	S	U	D	D	D	D	D	D	D	11.67
6	5 ms	D	S	U	U	U	D	S	U	U	D	53.33

Calculated Duty Cycle = Extended cyclic prefix in uplink x (T_s) x # of S + # of U

Example for Calculated Duty Cycle for Uplink-Downlink Configuration 0:
Calculated Duty Cycle = 5120 x [1/(15000 x 2048)] x 2 + 6 ms = 63.33%
where
T_s = 1/(15000 x 2048) seconds

1.2.2 Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
R&S	Wideband Radio Communication Tester	CMW500	143458
Unknown	ANT	Unknown	Unknown

1.2.3 Support Cable List and Details

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
Coaxial Cable	Yes	No	10	CMW500	ANT
USB Cable	No	No	0.8	EUT	Adapter

1.2.4 Block Diagram of Test Setup

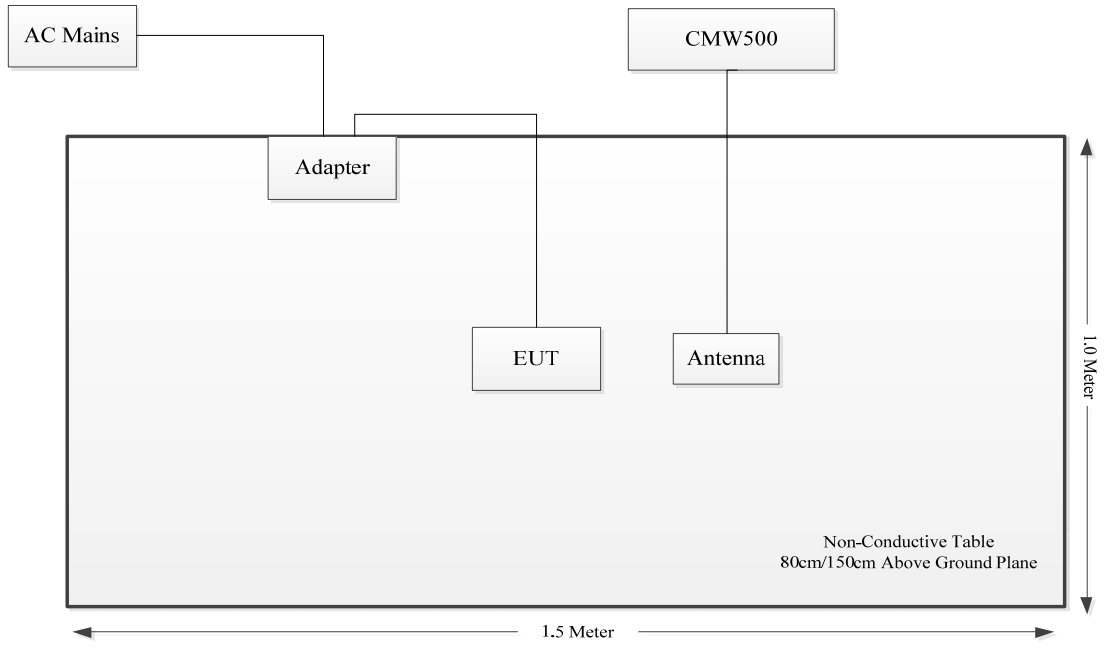

1.3 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Power Spectral Density, conducted	±0.61 dB
Unwanted Emissions, radiated	30M~200MHz: 4.15 dB,200M~1GHz: 5.61 dB,1G~6GHz: 5.14 dB, 6G~18GHz: 5.93 dB,18G~26.5G:5.47 dB,26.5G~40G:5.63 dB
Unwanted Emissions, conducted	±1.26 dB
Temperature	±1℃
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
RF Frequency	$\pm 0.082\times10^{-6}$

2. SUMMARY OF TEST RESULTS

Rules	Description of Test	Result
FCC§2.1046; § 22.913; § 24.232; §27.50	RF Output Power	Compliant
FCC§ 2.1047	Modulation Characteristics	Not Applicable
FCC§ 2.1049; § 22.905; § 22.917; § 24.238; §27.53	Occupied Bandwidth	Compliant
FCC§ 2.1051; § 22.917; § 24.238; §27.53	Spurious Emissions at Antenna Terminal	Compliant
FCC§ 22.917; § 24.238; §27.53	Out of band emission, Band Edge	Compliant
FCC§ 2.1055; § 22.355; § 24.235; §27.54	Frequency stability vs. temperature Frequency stability vs. voltage	Compliant
FCC§ 2.1053; § 22.917; § 24.238; §27.53	Field Strength of Spurious Radiation	Compliant

3. REQUIREMENTS AND TEST PROCEDURES

3.1 Applicable Standard For Part 22 Subpart H:

3.1.1 RF Output Power

FCC §22.913
(a)(5) The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7watts.

(d) *Power measurement.* Measurement of the ERP of Cellular base transmitters and repeaters must be made using an average power measurement technique. The peak-toaverage ratio (PAR) of the transmission must not exceed 13 dB. Power measurements for base transmitters and repeaters must be made in accordance with either of the following:
(1) A Commission-approved average power technique (*see* FCC Laboratory's Knowledge Database); or
(2) For purposes of this section, peak transmit power must be measured over an interval of continuous transmission using instrumentation calibrated in terms of an rmsequivalent voltage. The measurement results shall be properly adjusted for any instrument limitations, such as detector response times, limited resolution bandwidth capability when compared to the emission bandwidth, sensitivity, *etc.,* so as to obtain a true peak measurement for the emission in question over the full bandwidth of the channel.

3.1.2 Spurious Emissions

FCC §22.917

(a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log(P) dB.

(b) Measurement procedure. Compliance with these rules is based on the use of measurement instrumentation employing a reference bandwidth as follows:
(1) In the spectrum below 1 GHz, instrumentation should employ a reference bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy, provided that the measured power is integrated over the full required reference bandwidth (i.e., 100 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.
(2) In the spectrum above 1 GHz, instrumentation should employ a reference bandwidth of 1 MHz

3.1.3 Frequency stability

FCC §22.355

Except as otherwise provided in this part, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table C-1 of this section.

Table C-1 - Frequency Tolerance for Transmitters in the Public Mobile Services

Frequency range (MHz)	Base, fixed (ppm)	Mobile >3 watts (ppm)	Mobile ≤3 watts (ppm)
25 to 50	20	20	50
50 to 450	5	5	50
450 to 512	2.5	5	5
821 to 896	1.5	**2.5**	**2.5**
928 to 929	5	n/a	n/a
929 to 960	1.5	n/a	n/a
2110 to 2220	10	n/a	n/a

3.2 Applicable Standard For Part 24 Subpart E:

3.2.1 RF Output Power

FCC §24.232
(c)Mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

(d)Power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of § 24.51. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.2.2 Spurious Emissions

FCC §24.238

The rules in this section govern the spectral characteristics of emissions in the Broadband Personal Communications Service.

(a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log(P) dB.

(b) Measurement procedure. Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 1 MHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

(c) Alternative out of band emission limit. Licensees in this service may establish an alternative out of band emission limit to be used at specified band edge(s) in specified geographical areas, in lieu of that set forth in this section, pursuant to a private contractual arrangement of all affected licensees and applicants. In this event, each party to such contract shall maintain a copy of the contract in their station files and disclose it to prospective assignees or transferees and, upon request, to the FCC.

(d) Interference caused by out of band emissions. If any emission from a transmitter operating in this service results in interference to users of another radio service, the FCC may require a greater attenuation of that emission than specified in this section.

3.2.3 Frequency stability

FCC §24.235

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

3.3 Applicable Standard For Part 27:

3.3.1 RF Output Power

FCC §27.50

(a)(3) *Mobile and portable stations.*
(i) For mobile and portable stations transmitting in the 2305-2315 MHz band or the 2350-2360 MHz band, the average EIRP must not exceed 50 milliwatts within any 1 megahertz of authorized bandwidth, *except that* for mobile and portable stations compliant with 3GPP LTE standards or another advanced mobile broadband protocol that avoids concentrating energy at the edge of the operating band the average EIRP must not exceed 250 milliwatts within any 5 megahertz of authorized bandwidth but may exceed 50 milliwatts within any 1 megahertz of authorized bandwidth. For mobile and portable stations using time division duplexing (TDD) technology, the duty cycle must not exceed 38 percent in the 2305-2315 MHz and 2350-2360 MHz bands. Mobile and portable stations using FDD technology are restricted to transmitting in the 2305-2315 MHz band. Power averaging shall not include intervals in which the transmitter is off.
(ii) Mobile and portable stations are not permitted to transmit in the 2315-2320 MHz and 2345-2350 MHz bands.
(iii) *Automatic transmit power control.* Mobile and portable stations transmitting in the 2305-2315 MHz band or in the 2350-2360 MHz band must employ automatic transmit power control when operating so the stations operate with the minimum power necessary for successful communications.
(iv) *Prohibition on external vehicle-mounted antennas.* The use of external vehicle-mounted antennas for mobile and portable stations transmitting in the 2305-2315 MHz band or the 2350-2360 MHz band is prohibited.

(b)(10) Portable stations (hand-held devices) transmitting in the 746-757 MHz, 776-788 MHz, and 805-806 MHz bands are limited to 3 watts ERP.

(c)(10) Portable stations (hand-held devices) in the 600 MHz uplink band and the 698-746 MHz band, and fixed and mobile stations in the 600 MHz uplink band are limited to 3 watts ERP.

(d)(4) Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP. Fixed stations operating in the 1710-1755 MHz band are limited to a maximum antenna height of 10 meters above ground. Mobile and portable stations operating in these bands must employ a means for limiting power to the minimum necessary for successful communications.

(h) The following power limits shall apply in the BRS and EBS:
(2)Mobile and other user stations. Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.

(k) The following power requirements apply to stations transmitting in the 3450 – 3550 MHz band:
(3) Mobile devices are limited to 1Watt (30 dBm) EIRP. Mobile devices operating in these bands must employ a means for limiting power to the minimum necessary for successful communications.

3.3.2 Spurious Emissions

FCC §27.53

(a) For operations in the 2305-2320 MHz band and the 2345-2360 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power P (with averaging performed only during periods of transmission) within the licensed band(s) of operation, in watts, by the following amounts:
(4)For mobile and portable stations operating in the 2305-2315 MHz and 2350-2360 MHz bands:

(i) By a factor of not less than: 43 + 10 log (P) dB on all frequencies between 2305 and 2320 MHz and on all frequencies between 2345 and 2360 MHz that are outside the licensed band(s) of operation, not less than 55 + 10 log (P) dB on all frequencies between 2320 and 2324 MHz and on all frequencies between 2341 and 2345 MHz, not less than 61 + 10 log (P) dB on all frequencies between 2324 and 2328 MHz and on all frequencies between 2337 and 2341 MHz, and not less than 67 + 10 log (P) dB on all frequencies between 2328 and 2337 MHz;

(ii) By a factor of not less than 43 + 10 log (P) dB on all frequencies between 2300 and 2305 MHz, 55 + 10 log (P) dB on all frequencies between 2296 and 2300 MHz, 61 + 10 log (P) dB on all frequencies between 2292 and 2296 MHz, 67 + 10 log (P) dB on all frequencies between 2288 and 2292 MHz, and 70 + 10 log (P) dB below 2288 MHz;

(iii) By a factor of not less than 43 + 10 log (P) dB on all frequencies between 2360 and 2365 MHz, and not less than 70 + 10 log (P) dB above 2365 MHz.

(c)For operations in the 746-758 MHz band and the 776-788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

(1) On any frequency outside the 746-758 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least 43 + 10 log (P) dB;

(2) On any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least 43 + 10 log (P) dB;

(3) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than 76 + 10 log (P) dB in a 6.25 kHz band segment, for base and fixed stations;

(4) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than 65 + 10 log (P) dB in a 6.25 kHz band segment, for mobile and portable stations;

(5) Compliance with the provisions of paragraphs (c)(1) and (c)(2) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed;

(6) Compliance with the provisions of paragraphs (c)(3) and (c)(4) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.

(f) For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to – 70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and – 80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

(g) For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least 43 + 10 log (P) dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

(h) AWS emission limits

(1) ***General protection levels.*** Except as otherwise specified below, for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}$ (P) dB.

(n) 3.45 GHz Service. The following emission limits apply to stations transmitting in the 3450 – 3550 MHz band:

(2) For mobile operations in the 3450 – 3550 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed − 13 dBm/MHz. Compliance with this paragraph (n)(2) is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed, but limited to a maximum of 200 kHz. In the bands between 1 and 5 MHz removed from the licensee's frequency block, the minimum resolution bandwidth for the measurement shall be 500 kHz. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

(m)(4) For mobile digital stations, the attenuation factor shall be not less than 40 + 10 log (P) dB on all frequencies between the channel edge and 5 megahertz from the channel edge, 43 + 10 log (P) dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and 55 + 10 log (P) dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less that 43 + 10 log (P) dB on all frequencies between 2490.5 MHz and 2496 MHz and 55 + 10 log (P) dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

3.3.3 Frequency stability

FCC §27.54

The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

3.4 Test Method:

3.4.1 Transmitter output power, e.r.p. and e.i.r.p

According to CFR Part 2.1046, ANSI C63.26-2015 Section 5.2.5.5 and KDB 971168 D01 Power Meas License Digital Systems v03r01:

The relevant equation for determining the ERP or EIRP from the conducted RF output power measured using the guidance provided above is:

$$ERP \text{ or } EIRP = P_{Meas} + G_T - L_C$$

where:

ERP or EIRP = effective radiated power or equivalent isotropically radiated power, respectively (expressed in the same units as P_{Meas}, typically dBW or dBm);
P_{Meas} = measured transmitter output power or PSD, in dBm or dBW;
G_T = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);
L_C = signal attenuation in the connecting cable between the transmitter and antenna, in dB.

Test Setup Block:

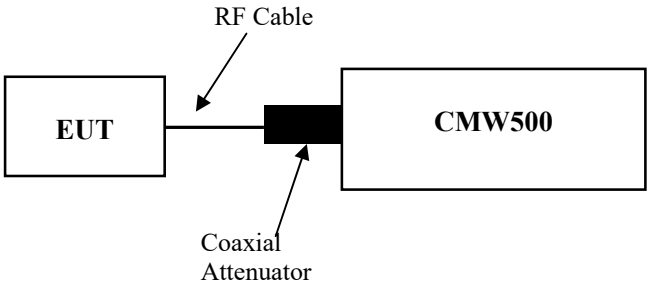

Note: The Insertion loss of the RF cable and coaxial Attenuator was offset into the Reading of CMW500.

3.4.2 Occupied Bandwidth

According to ANSI C63.26-2015 Section 5.4.4

The OBW is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission.

The following procedure shall be used for measuring (99%) power bandwidth:

a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be set wide enough to capture all modulation products including the emission skirts (typically a span of 1.5 × OBW is sufficient).

b) The nominal IF filter 3 dB bandwidth (RBW) shall be in the range of 1% to 5% of the anticipated OBW, and the VBW shall be set ≥ 3 × RBW.

c) Set the reference level of the instrument as required to prevent the signal amplitude from exceeding the maximum spectrum analyzer input mixer level for linear operation. See guidance provided in 4.2.3. NOTE—Step a), step b), and step c) may require iteration to adjust within the specified tolerances.

d) Set the detection mode to peak, and the trace mode to max-hold.

e) If the instrument does not have a 99% OBW function, recover the trace data points and sum directly in linear power terms. Place the recovered amplitude data points, beginning at the lowest frequency, in a running sum until 0.5% of the total is reached. Record that frequency as the lower OBW frequency. Repeat the process until 99.5% of the total is reached and record that frequency as the upper OBW frequency. The 99% power OBW can be determined by computing the difference these two frequencies.

f) The OBW shall be reported and plot(s) of the measuring instrument display shall be provided with the test report. The frequency and amplitude axis and scale shall be clearly labeled. Tabular data can be reported in addition to the plot(s).

Test Setup Block:

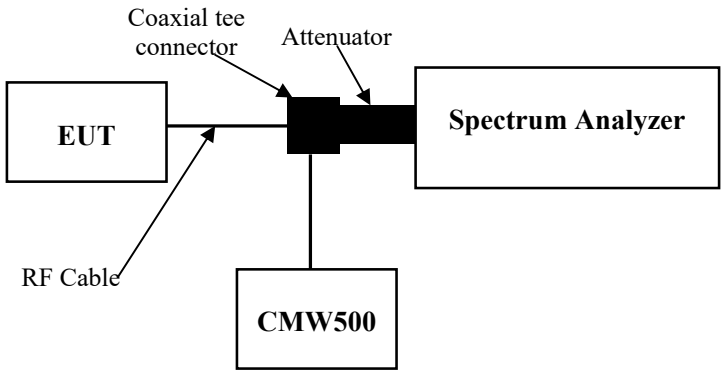

3.4.3 Transmitter unwanted emissions-at antenna terminals

According to ANSI C63.26-2015 Section 5.7.4, KDB 971168 D01 Power Meas License Digital Systems v03r01:

the applicable rule part specifies the reference bandwidth for measuring unwanted emission levels (typically, 100 kHz if the authorized frequency band/block is at or below 1 GHz and 1 MHz if the authorized frequency band/block is above 1 GHz),8 effectively depicting the unwanted emission limit in terms of a power spectral density. In those cases where no reference bandwidth is explicitly specified, the values in the preceding sentence should be used.

Test Setup Block:

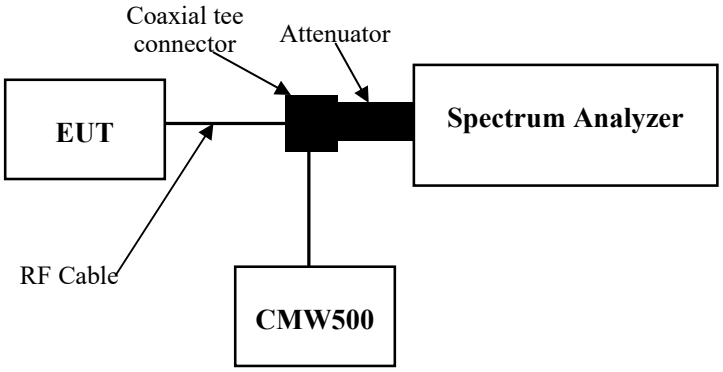

3.4.4 Transmitter unwanted emissions-Out of band emission

According to ANSI C63.26-2015 Section 5.7.3, KDB 971168 D01 Power Meas License Digital Systems v03r01:

Typically, a measurement (resolution) bandwidth smaller than the reference bandwidth is allowed for measurements within a specified frequency range at the edge of the authorized frequency block/band (e.g., within the first Y MHz outside of the authorized frequency band/block, where the value of Y is specified in the relevant rule part). Some FCC out-of-band emission rules permit the use of a narrower RBW (typically limited to a minimum RBW of 1 % of the OBW) for measuring the out-of-band emissions without a requirement to integrate the result over the full reference bandwidth. Beyond the specified frequency range in which this relaxation of the uniform reference bandwidth is permitted, it typically is also acceptable to use a narrower RBW (again limited to a minimum of 1 % of OBW) to increase accuracy, but the measurement result must subsequently be integrated over the full reference bandwidth.

Test Setup Block:

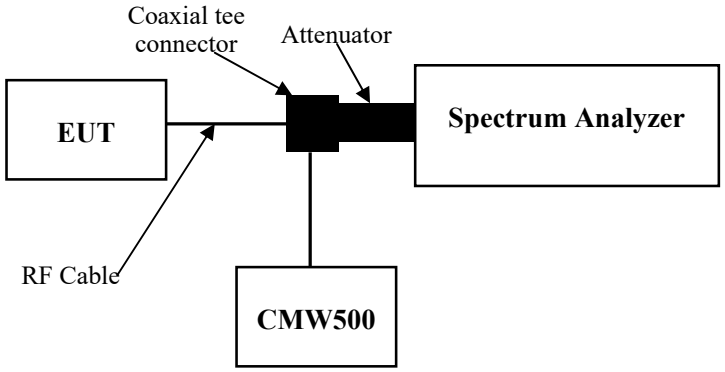

3.4.5 Frequency stability

According to ANSI C63.26-2015 Section 5.6, KDB 971168 D01 Power Meas License Digital Systems v03r01:

Frequency stability is a measure of the frequency drift due to temperature and supply voltage variations, with reference to the frequency measured at +20 °C and rated supply voltage.

The operating carrier frequency shall be set up in accordance with the manufacturer's published operation and instruction manual prior to the commencement of these tests. No adjustment of any frequency determining circuit element shall be made subsequent to this initial set-up. Frequency stability is tested:

a) At 10 °C intervals of temperatures between −30 °C and +50 °C at the manufacturer's rated supply voltage, and

b) At +20 °C temperature and ±15% supply voltage variations. If a product is specified to operate over a range of input voltage then the −15% variation is applied to the lowermost voltage and the +15% is applied to the uppermost voltage.

During the test all necessary settings, adjustments and control of the EUT have to be performed without disturbing the test environment, i.e., without opening the environmental chamber. The frequency stabilities can be maintained to a lesser temperature range provided that the transmitter is automatically inhibited from operating outside the lesser temperature range. For handheld equipment that is only capable of operating from internal batteries and the supply voltage cannot be varied, the frequency stability tests shall be performed at the nominal battery voltage and the battery end point voltage specified by the manufacturer. An external supply voltage can be used and set at the internal battery nominal voltage, and again at the battery operating end point voltage which shall be specified by the equipment manufacturer.

If an unmodulated carrier is not available, the mean frequency of a modulated carrier can be obtained by using a frequency counter with gating time set to an appropriately large multiple of bit periods (gating time depending on the required accuracy). Full details on the choice of values shall be included in the test report.

Test Setup Block:

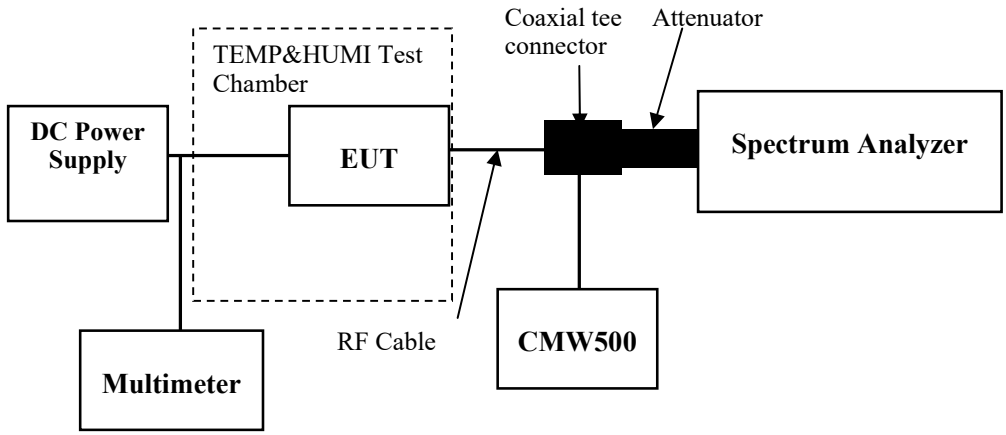

3.4.6 Transmitter unwanted emissions- Radiated Spurious emissions

According to ANSI C63.26-2015 Section 5.5.3:

Test setup:

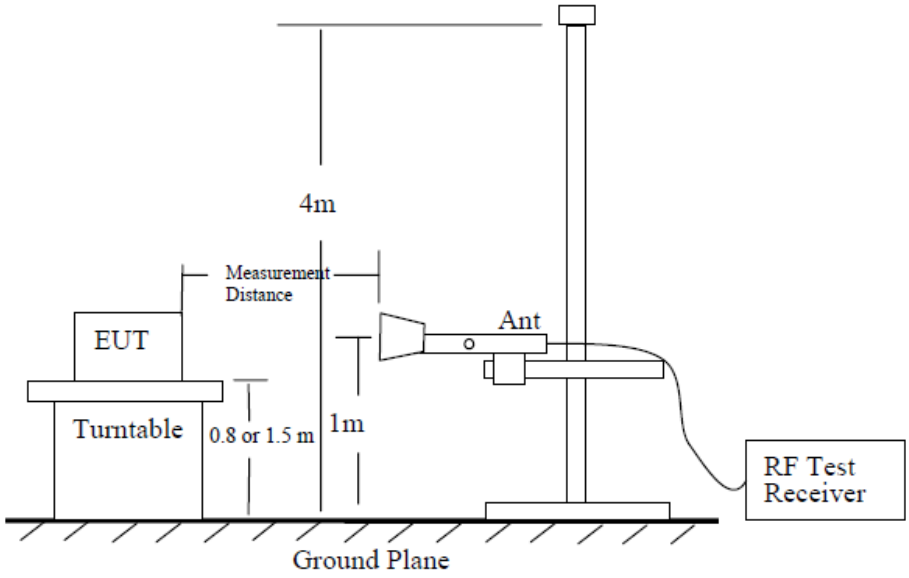

Figure 6—Test site-up for radiated ERP and/or EIRP measurements

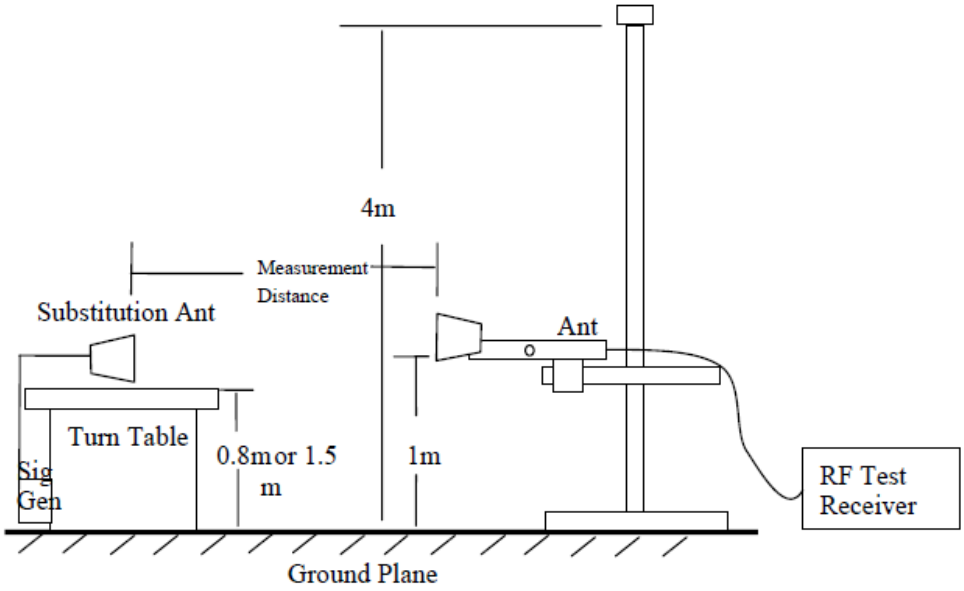

Figure 7—Substitution method set-up for radiated emission

Test Procedure:

a) Place the EUT in the center of the turntable. The EUT shall be configured to transmit into the standard non-radiating load (for measuring radiated spurious emissions), connected with cables of minimal length unless specified otherwise. If the EUT uses an adjustable antenna, the antenna shall be positioned to the length that produces the worst case emission at the fundamental operating frequency.

b) Each emission under consideration shall be evaluated:

1) Raise and lower the measurement antenna in accordance 5.5.2, as necessary to enable detection of the maximum emission amplitude relative to measurement antenna height.

2) Rotate the EUT through 360° to determine the maximum emission level relative to the axial position.

3) Return the turntable to the azimuth where the highest emission amplitude level was observed.

4) Vary the measurement antenna height again through 1 m to 4 m again to find the height associated with the maximum emission amplitude.

5) Record the measured emission amplitude level and frequency using the appropriate RBW.

c) Repeat step b) for each emission frequency with the measurement antenna oriented in both the horizontal and vertical polarizations to determine the orientation that gives the maximum emissions amplitude.

d) Set-up the substitution measurement with the reference point of the substitution antenna located as near as possible to where the center of the EUT radiating element was located during the initial EUT measurement.

e) Maintain the previous measurement instrument settings and test set-up, with the exception that the EUT is removed and replaced by the substitution antenna.

f) Connect a signal generator to the substitution antenna; locate the signal generator so as to minimize any potential influences on the measurement results. Set the signal generator to the frequency where emissions are detected, and set an output power level such that the radiated signal can be detected by the measurement instrument, with sufficient dynamic range relative to the noise floor.

g) For each emission that was detected and measured in the initial test [i.e., in step b) and step c)]:

1) Vary the measurement antenna height between 1 m to 4 m to maximize the received (measured) signal amplitude.

2) Adjust the signal generator output power level until the amplitude detected by the measurement instrument equals the amplitude level of the emission previously measured directly in step b) and step c).

3) Record the output power level of the signal generator when equivalence is achieved in step 2).

h) Repeat step e) through step g) with the measurement antenna oriented in the opposite polarization.

i) Calculate the emission power in dBm referenced to a half-wave dipole using the following equation:

$$Pe = Ps(dBm) - \text{cable loss (dB)} + \text{antenna gain (dBd)}$$

where

Pe = equivalent emission power in dBm
Ps = source (signal generator) power in dBm

NOTE—dBd refers to the measured antenna gain in decibels relative to a half-wave dipole.

j) Correct the antenna gain of the substitution antenna if necessary to reference the emission power to a half-wave dipole. When using measurement antennas with the gain specified in dBi, the equivalent dipole-referenced gain can be determined from: gain (dBd) = gain (dBi) − 2.15 dB. If necessary, the antenna gain can be calculated from calibrated antenna factor information

k) Provide the complete measurement results as a part of the test report.

4. Test DATA AND RESULTS

4.1 Antenna Port Test Data and Results for GSM 850 band:

Serial Number:	2COS-2	Test Date:	2023/11/27-2023/11/28
Test Site:	RF	Test Mode:	Transmitting
Tester:	Arthur Su	Test Result:	**Pass**

Environmental Conditions:					
Temperature: (℃)	24.2-26.3	Relative Humidity: (%)	42-60	ATM Pressure: (kPa)	101.3-102.2

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200256	2023/3/31	2024/3/30
zhuoxiang	Coaxial Cable	SMA-178	211002	Each time	N/A
YINSAIGE	Coaxial Cable	SS402	SJ0100002	Each time	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A
R&S	Wideband Radio Communication Tester	CMW500	143458	2023/3/31	2024/3/30
UNI-T	Multimeter	UT39A+	C210582554	2023/9/28	2024/9/27
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D0912386	N/A	N/A
Unknown	Coaxial tee connector	Unknown	2204004	Each time	N/A

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Frequency for Each Mode:

Operation Modes	Lowest Frequency (MHz)	Middle Frequency (MHz)	Highest Frequency (MHz)
GSM	824.2	836.6	848.8
GPRS	824.2	836.6	848.8
EDGE	824.2	836.6	848.8

Test Data:

RF Output Power					
Test Mode	Conducted Peak Output Power(dBm)			Maximum ERP (dBm)	ERP Limit (dBm)
	Lowest Channel	Middle Channel	Highest Channel		
GSM	32.89	**33.07**	33.06	27.32	38.45
GPRS 1 Slot	32.87	32.96	32.99	27.24	38.45
GPRS 2 Slots	32.01	32.07	32.09	26.34	38.45
GPRS 3 Slots	30.08	30.01	30.03	24.33	38.45
GPRS 4 Slots	28.77	28.79	28.81	23.06	38.45
EDGE 1 Slot	26.72	**26.73**	26.71	20.98	38.45
EDGE 2 Slots	25.67	25.69	25.68	19.94	38.45
EDGE 3 Slots	23.82	23.92	23.89	18.17	38.45
EDGE 4 Slots	22.64	22.68	22.72	16.97	38.45
Note: ERP= Conducted Power(dBm) - L_C(dB) + G_T(dBd) G_T(dBd)=G_T(dBi)-2.15					
				Result:	**Pass**

Occupied Bandwidth						
Operation Mode	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
	Low Channel	Middle channel	High Channel	Low Channel	Middle Channel	High Channel
GSM	0.24	0.24	0.24	0.271	0.262	0.271
EDGE	0.26	0.263	0.261	0.326	0.338	0.34
Note: The test plots please refer to the Plots of Occupied Bandwidth						

Spurious Emissions at Antenna Terminal	
Result:	**Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.**

Out of band emission, Band Edge	
Result:	**Pass, Please refer to the test plots of Out of band emission, Band Edge.**

Frequency Stability					
Test Modulation:	GMSK		Test Channel:	836.6	MHz
Test Item	Temperature (℃)	Voltage (V_{DC})	Frequency Error		Limit
			(Hz)	(ppm)	(ppm)
Frequency Stability vs. Temperature	-30	3.85	29	0.035	2.5
	-20	3.85	16	0.019	2.5
	-10	3.85	33	0.039	2.5
	0	3.85	11	0.013	2.5
	10	3.85	3	0.004	2.5
	20	3.85	30	0.036	2.5
	30	3.85	19	0.023	2.5
	40	3.85	38	0.045	2.5
	50	3.85	8	0.010	2.5
Frequency Stability vs. Voltage	20	3.4	12	0.014	2.5
	20	4.4	10	0.012	2.5
				Result:	**Pass**

Test Modulation:	8PSK		Test Channel:	836.6	MHz
Test Item	Temperature (℃)	Voltage (V_{DC})	Frequency Error		Limit
			(Hz)	(ppm)	(ppm)
Frequency Stability vs. Temperature	-30	3.85	10	0.012	2.5
	-20	3.85	23	0.027	2.5
	-10	3.85	14	0.017	2.5
	0	3.85	8	0.010	2.5
	10	3.85	7	0.008	2.5
	20	3.85	21	0.025	2.5
	30	3.85	16	0.019	2.5
	40	3.85	43	0.051	2.5
	50	3.85	42	0.050	2.5
Frequency Stability vs. Voltage	20	3.4	10	0.012	2.5
	20	4.4	15	0.018	2.5
				Result:	**Pass**

Test Plots (Note: The 14.5 dB is the Insertion loss of the RF cable, attenuator and coaxial tee connector, which was offset into the Spectrum Analyzer):

Occupied Bandwidth		
Channel	**GSM**	**EDGE**
Lowest	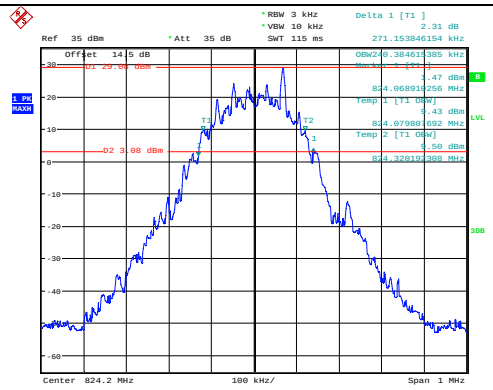	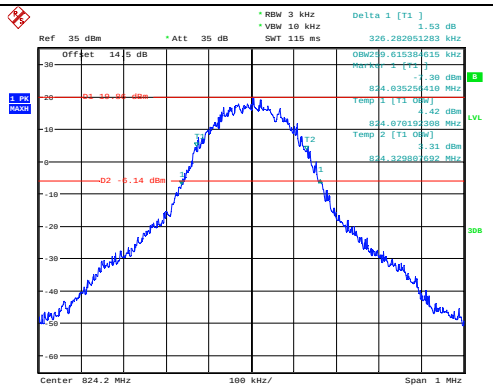
Middle	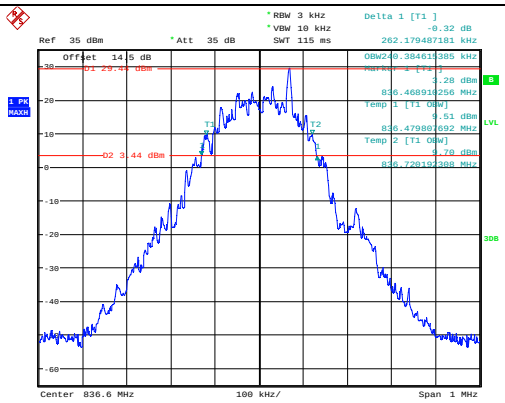	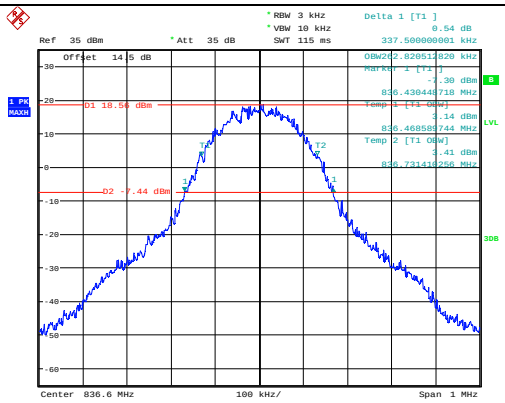
Highest	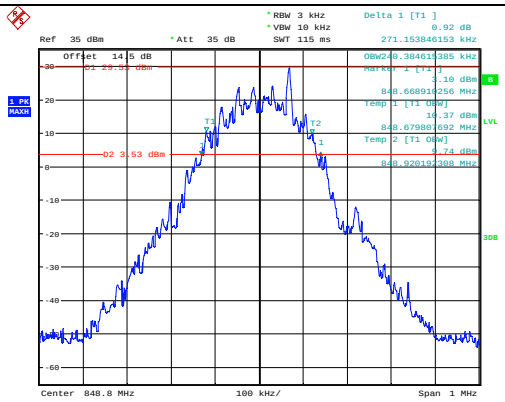	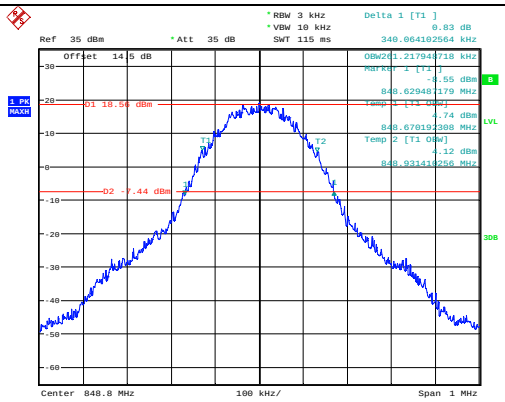

Spurious Emissions at Antenna Terminal

Channel	GSM	
Lowest	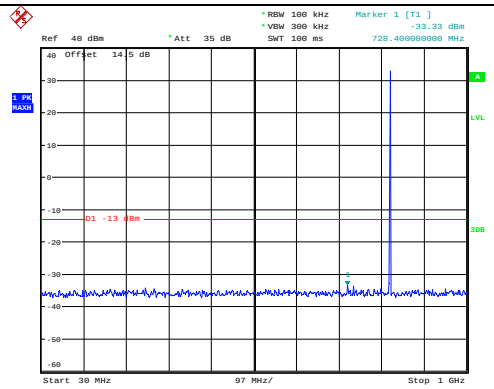 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 27.NOV.2023 23:07:07	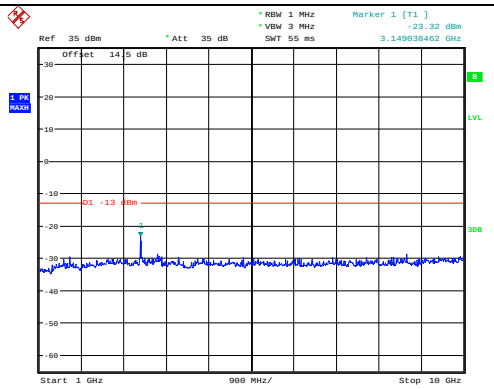 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 27.NOV.2023 23:07:29
Middle	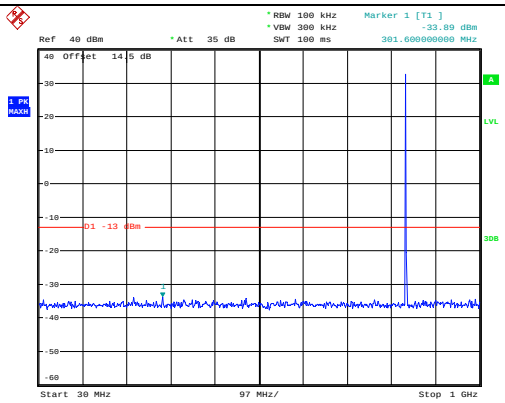 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 27.NOV.2023 23:08:04	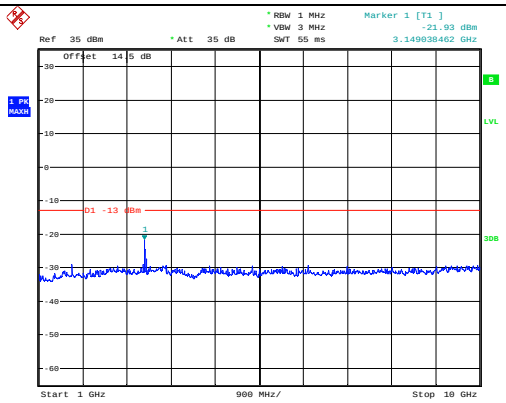 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 27.NOV.2023 23:08:27
Highest	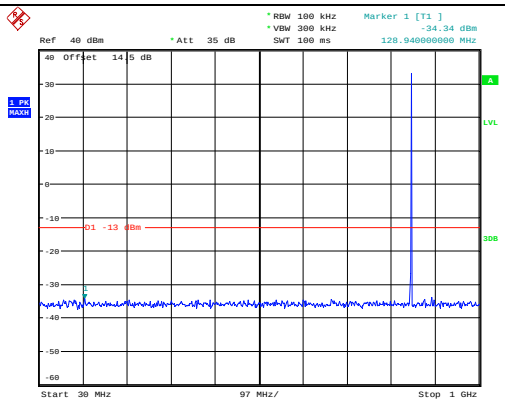 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 27.NOV.2023 23:09:17	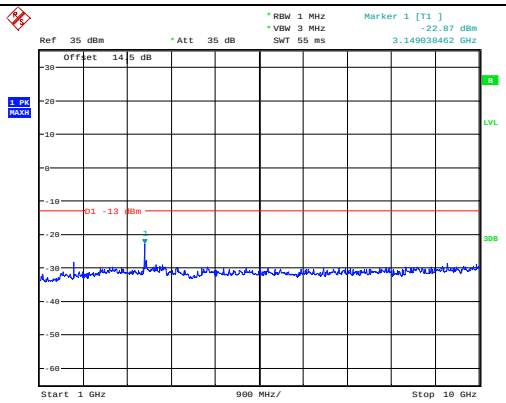 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 27.NOV.2023 23:09:38

Out of band emission, Band Edge		
Mode	Lowest	Highest
GSM	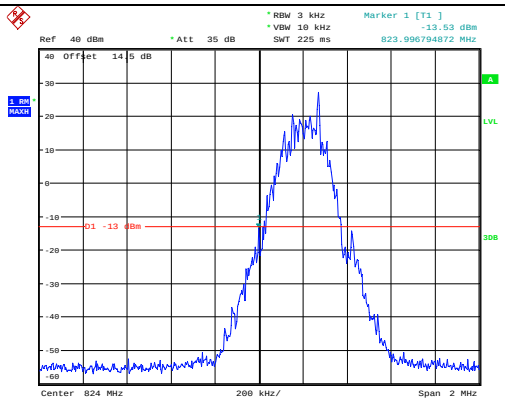 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 27.NOV.2023 23:16:21	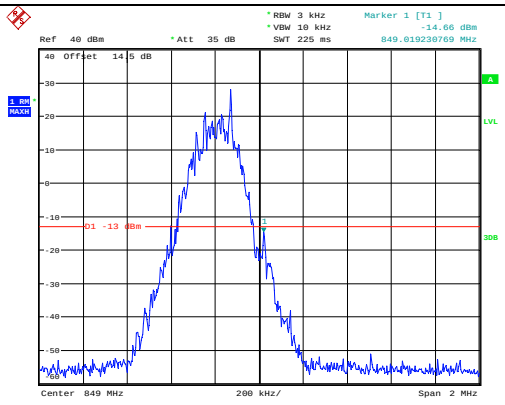 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 27.NOV.2023 23:21:51
EDGE	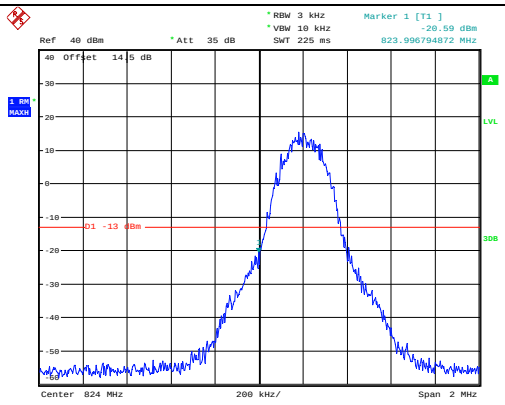 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 27.NOV.2023 23:58:28	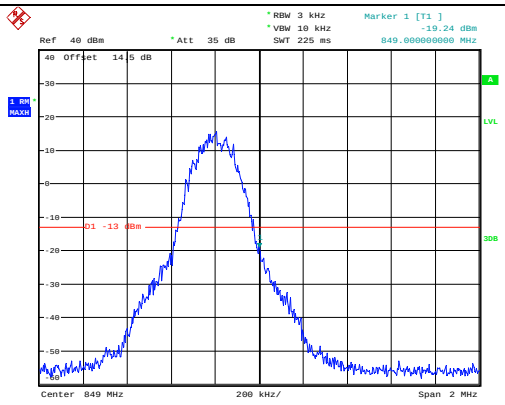 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 28.NOV.2023 00:04:31

4.2 Antenna Port Test Data and Results for GSM 1900 band:

Serial Number:	2COS-2	Test Date:	2023/11/27-2023/11/28
Test Site:	RF	Test Mode:	Transmitting
Tester:	Arthur Su	Test Result:	**Pass**

Environmental Conditions:					
Temperature: (℃)	24.2-26.3	Relative Humidity: (%)	42-60	ATM Pressure: (kPa)	101.3-102.2

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200256	2023/3/31	2024/3/30
zhuoxiang	Coaxial Cable	SMA-178	211002	Each time	N/A
YINSAIGE	Coaxial Cable	SS402	SJ0100002	Each time	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A
R&S	Wideband Radio Communication Tester	CMW500	143458	2023/3/31	2024/3/30
UNI-T	Multimeter	UT39A+	C210582554	2023/9/28	2024/9/27
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D0912386	N/A	N/A
Unknown	Coaxial tee connector	Unknown	2204004	Each time	N/A

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Frequency for Each Mode:

Operation Modes	Lowest Frequency (MHz)	Middle Frequency (MHz)	Highest Frequency (MHz)
GSM	1850.2	1880	1909.8
GPRS	1850.2	1880	1909.8
EDGE	1850.2	1880	1909.8

Test Data:

RF Output Power					
Test Mode	Conducted Peak Output Power(dBm)			Maximum EIRP (dBm)	EIRP Limit (dBm)
	Lowest Channel	Middle Channel	Highest Channel		
GSM	30.07	30.38	**30.52**	31.82	33
GPRS 1 Slot	30.11	30.32	30.51	31.81	33
GPRS 2 Slots	29.33	29.48	29.76	31.06	33
GPRS 3 Slots	27.46	27.61	27.79	29.09	33
GPRS 4 Slots	26.28	26.49	26.57	27.87	33
EDGE 1 Slot	28.19	28.23	**28.26**	29.56	33
EDGE 2 Slots	27.01	27.03	27.12	28.42	33
EDGE 3 Slots	24.95	24.89	24.93	26.25	33
EDGE 4 Slots	23.48	23.56	23.57	24.87	33
Note: EIRP=Conducted Power(dBm) - L_C(dB) + G_T(dBi)					
				Result:	**Pass**

Occupied Bandwidth						
Operation Mode	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
	Low Channel	Middle channel	High Channel	Low Channel	Middle Channel	High Channel
GSM	0.237	0.24	0.237	0.265	0.279	0.274
EDGE	0.26	0.256	0.255	0.335	0.329	0.326
Note: The test plots please refer to the Plots of Occupied Bandwidth						

Spurious Emissions at Antenna Terminal	
Result:	**Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.**

Out of band emission, Band Edge	
Result:	**Pass, Please refer to the test plots of Out of band emission, Band Edge.**

Frequency Stability						
Test Mode:	GMSK	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (℃)	Voltage (V_{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.85	1850.073	1850.000	1909.922	1910.000
	-20	3.85	1850.059	1850.000	1909.944	1910.000
	-10	3.85	1850.068	1850.000	1909.924	1910.000
	0	3.85	1850.068	1850.000	1909.932	1910.000
	10	3.85	1850.060	1850.000	1909.949	1910.000
	20	3.85	1850.083	1850.000	1909.920	1910.000
	30	3.85	1850.072	1850.000	1909.922	1910.000
	40	3.85	1850.081	1850.000	1909.941	1910.000
	50	3.85	1850.061	1850.000	1909.936	1910.000
Frequency Stability vs. Voltage	20	3.4	1850.081	1850.000	1909.947	1910.000
	20	4.4	1850.064	1850.000	1909.947	1910.000
					Result:	**Pass**

Test Mode:	8PSK	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (℃)	Voltage (V_{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.85	1850.052	1850.000	1909.951	1910.000
	-20	3.85	1850.053	1850.000	1909.947	1910.000
	-10	3.85	1850.053	1850.000	1909.941	1910.000
	0	3.85	1850.055	1850.000	1909.952	1910.000
	10	3.85	1850.051	1850.000	1909.928	1910.000
	20	3.85	1850.072	1850.000	1909.928	1910.000
	30	3.85	1850.046	1850.000	1909.933	1910.000
	40	3.85	1850.064	1850.000	1909.938	1910.000
	50	3.85	1850.051	1850.000	1909.952	1910.000
Frequency Stability vs. Voltage	20	3.4	1850.060	1850.000	1909.946	1910.000
	20	4.4	1850.058	1850.000	1909.930	1910.000
					Result:	**Pass**

Test Plots (Note: The 14.5 dB is the Insertion loss of the RF cable, attenuator and coaxial tee connector, which was offset into the Spectrum Analyzer):

Occupied Bandwidth		
Channel	**GSM**	**EDGE**
Lowest	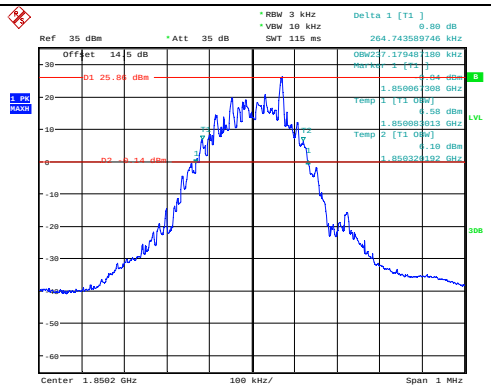	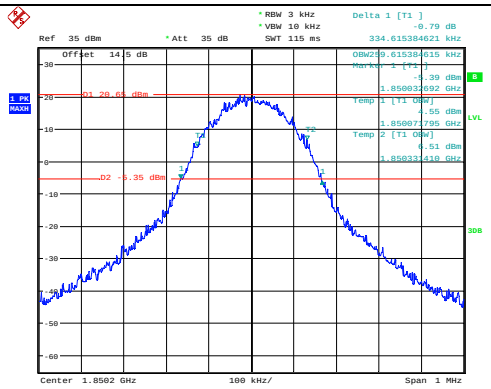
Middle	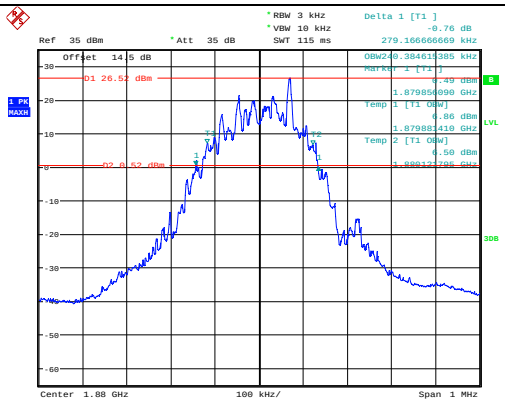	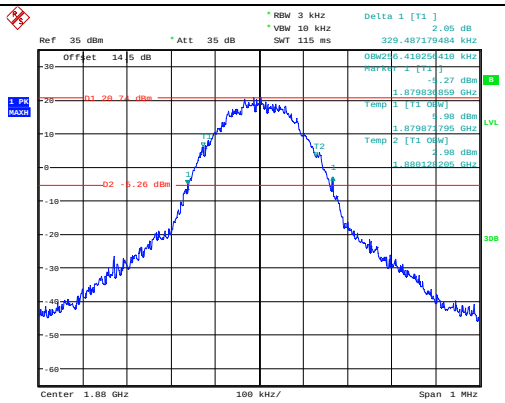
Highest	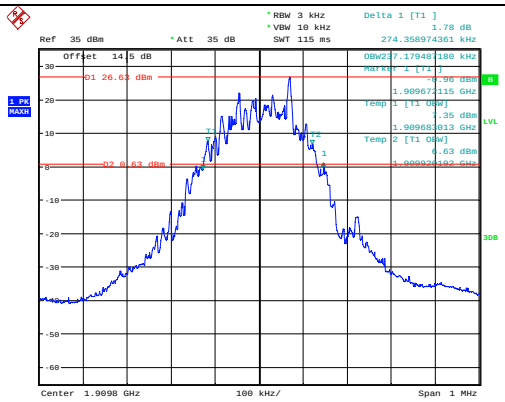	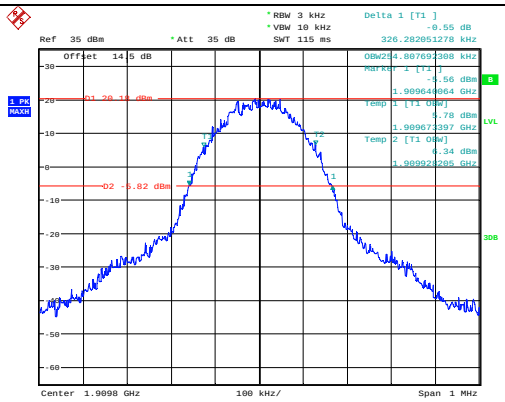

Spurious Emissions at Antenna Terminal

Channel	GSM	
Lowest	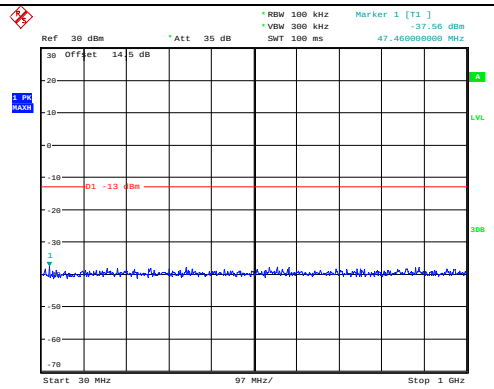 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 27.NOV.2023 23:03:18	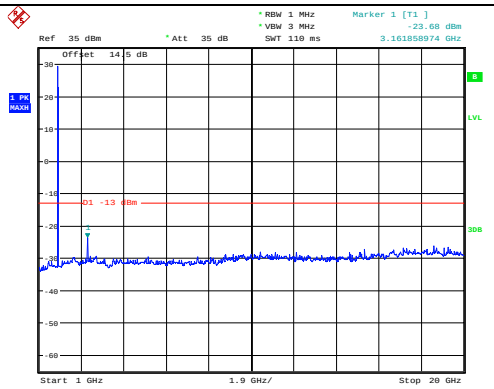 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 27.NOV.2023 23:03:42
Middle	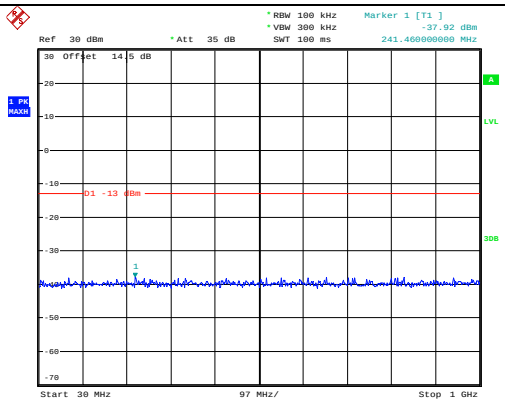 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 27.NOV.2023 23:04:19	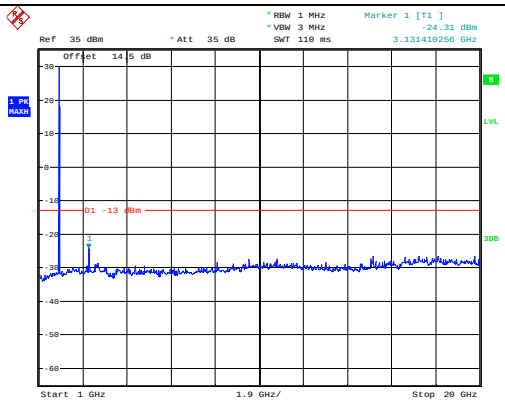 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 27.NOV.2023 23:04:50
Highest	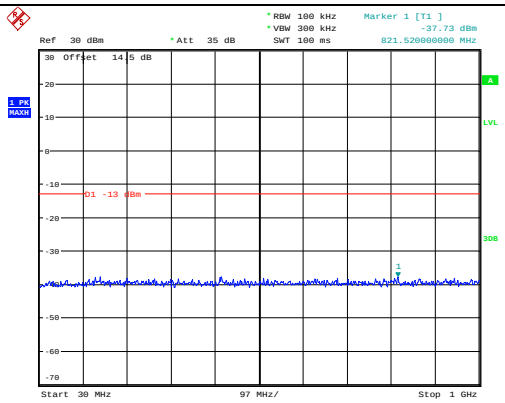 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 27.NOV.2023 23:05:31	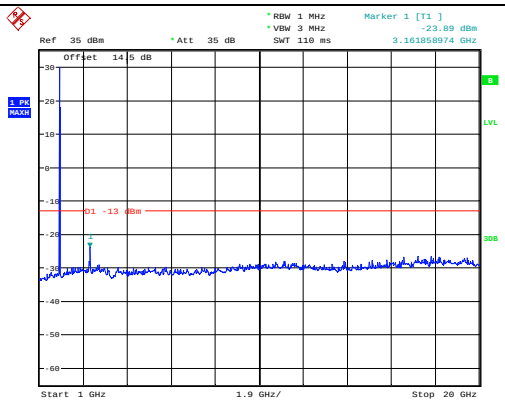 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 27.NOV.2023 23:05:53

Out of band emission, Band Edge		
Channel	Lowest	Highest
GSM	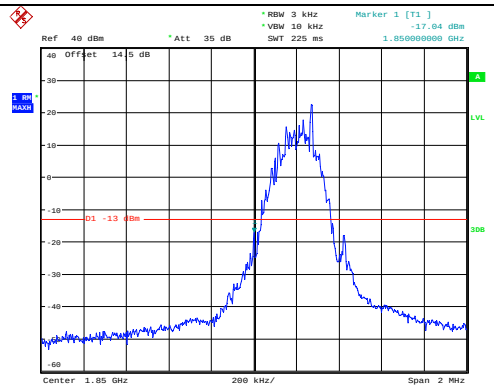 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 27.NOV.2023 23:25:35	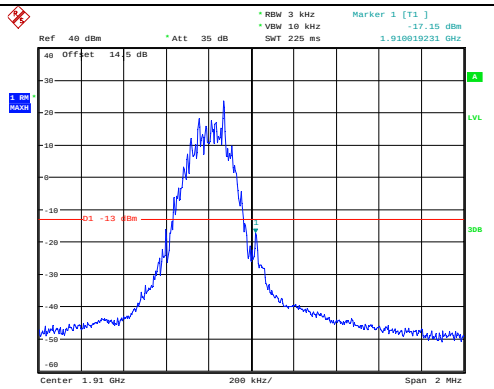 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 27.NOV.2023 23:29:57
EDGE	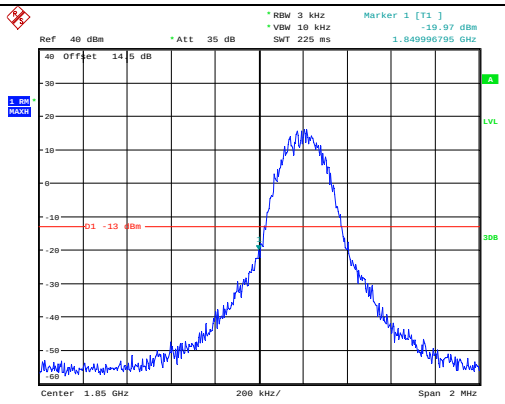 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 27.NOV.2023 23:48:03	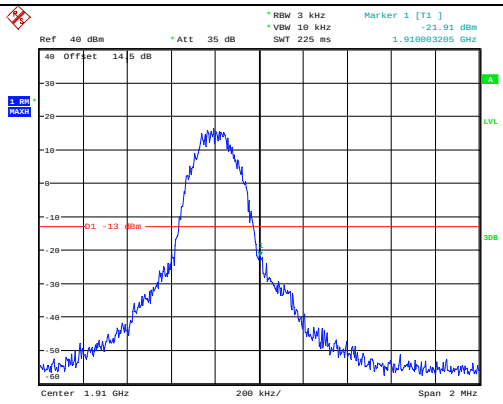 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 27.NOV.2023 23:55:45

4.3 Antenna Port Test Data and Results for WCDMA Band 2:

Serial Number:	2COS-2	Test Date:	2023/11/27-2023/11/28
Test Site:	RF	Test Mode:	Transmitting
Tester:	Arthur Su	Test Result:	**Pass**

Environmental Conditions:					
Temperature: (℃)	24.2-26.3	Relative Humidity: (%)	42-60	ATM Pressure: (kPa)	101.3-102.2

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200256	2023/3/31	2024/3/30
zhuoxiang	Coaxial Cable	SMA-178	211002	Each time	N/A
YINSAIGE	Coaxial Cable	SS402	SJ0100002	Each time	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A
R&S	Wideband Radio Communication Tester	CMW500	143458	2023/3/31	2024/3/30
UNI-T	Multimeter	UT39A+	C210582554	2023/9/28	2024/9/27
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D0912386	N/A	N/A
Unknown	Coaxial tee connector	Unknown	2204004	Each time	N/A

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Frequency for Each Mode:

Operation Modes	Lowest Frequency (MHz)	Middle Frequency (MHz)	Highest Frequency (MHz)
WCDMA	1852.4	1880	1907.6

Test Data:

RF Output Power					
Test Mode	Conducted Average Output Power(dBm)			Maximum EIRP (dBm)	EIRP Limit (dBm)
	Lowest Channel	Middle Channel	Highest Channel		
WCDMA R99	**23.53**	23.37	23.22	24.83	33
HSDPA Subtest 1	22.77	22.63	22.42	24.07	33
HSDPA Subtest 2	22.76	22.61	22.41	24.06	33
HSDPA Subtest 3	22.79	22.65	22.44	24.09	33
HSDPA Subtest 4	22.76	22.63	22.43	24.06	33
HSUPA Subtest 1	22.75	22.62	22.41	24.05	33
HSUPA Subtest 2	22.76	22.67	22.43	24.06	33
HSUPA Subtest 3	22.75	22.65	22.42	24.05	33
HSUPA Subtest 4	22.76	22.64	22.46	24.06	33
HSUPA Subtest 5	22.74	22.63	22.44	24.04	33
Note: EIRP=Conducted Power(dBm) - L_C(dB) + G_T(dBi)					
				Result:	**Pass**

Peak-to-average Ratio(PAR)				
Test Mode	Peak-to-average Ratio(dB)			Limit (dB)
	Lowest Channel	Middle Channel	Highest Channel	
WCDMA R99	3.01	3.04	3.11	13
HSDPA	4.17	4.07	3.94	13
HSUPA	4.52	3.94	4.29	13
			Result:	**Pass**

Occupied Bandwidth						
Operation Mode	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
	Low Channel	Middle channel	High Channel	Low Channel	Middle Channel	High Channel
WCDMA R99	4.183	4.183	4.167	4.705	4.728	4.712
HSDPA	4.351	4.351	4.207	7.46	7.091	4.74
HSUPA	4.351	4.399	4.183	7.212	7.163	4.74
Note: The test plots please refer to the Plots of Occupied Bandwidth						

Spurious Emissions at Antenna Terminal	
Result:	**Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.**

Out of band emission, Band Edge	
Result:	**Pass, Please refer to the test plots of Out of band emission, Band Edge.**

Frequency Stability						
Test Mode:	WCDMA R99	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (℃)	Voltage (V_{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.85	1850.296	1850.000	1909.700	1910.000
	-20	3.85	1850.292	1850.000	1909.693	1910.000
	-10	3.85	1850.315	1850.000	1909.695	1910.000
	0	3.85	1850.304	1850.000	1909.686	1910.000
	10	3.85	1850.298	1850.000	1909.699	1910.000
	20	3.85	1850.317	1850.000	1909.683	1910.000
	30	3.85	1850.296	1850.000	1909.698	1910.000
	40	3.85	1850.310	1850.000	1909.709	1910.000
	50	3.85	1850.307	1850.000	1909.711	1910.000
Frequency Stability vs. Voltage	20	3.4	1850.296	1850.000	1909.710	1910.000
	20	4.4	1850.316	1850.000	1909.710	1910.000
					Result:	**Pass**

Test Plots (Note: The 14.5 dB is the Insertion loss of the RF cable, attenuator and coaxial tee connector, which was offset into the Spectrum Analyzer):

Occupied Bandwidth		
Channel	WCDMA R99	HSDPA
Lowest	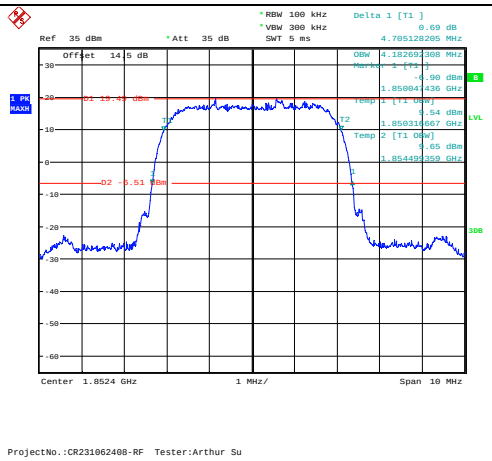	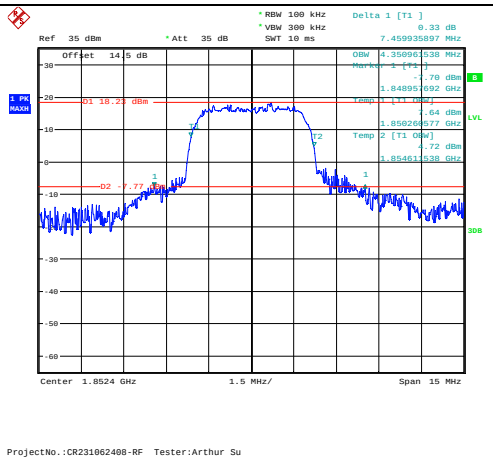
Middle	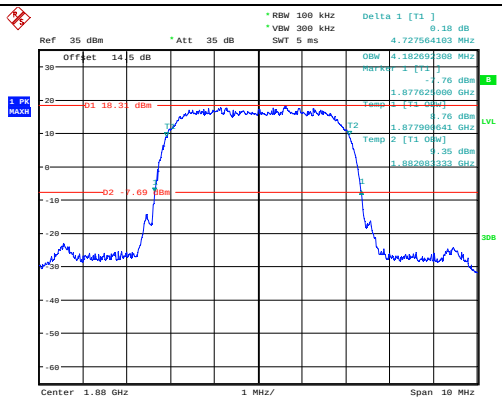	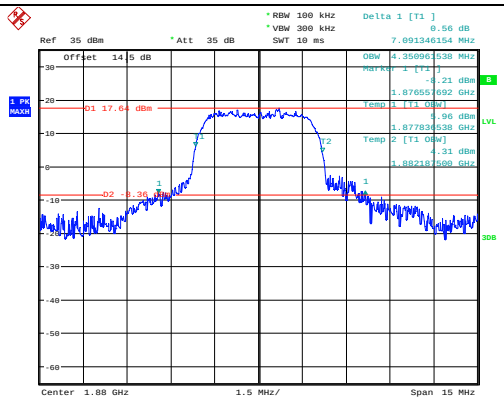
Highest	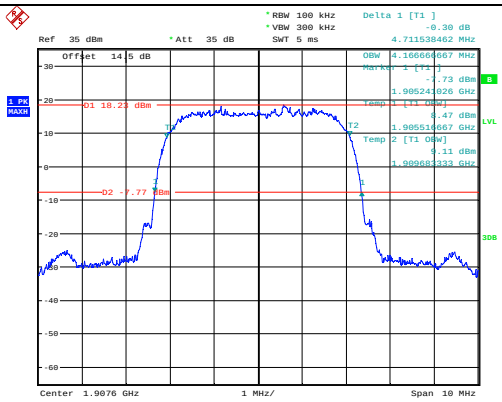	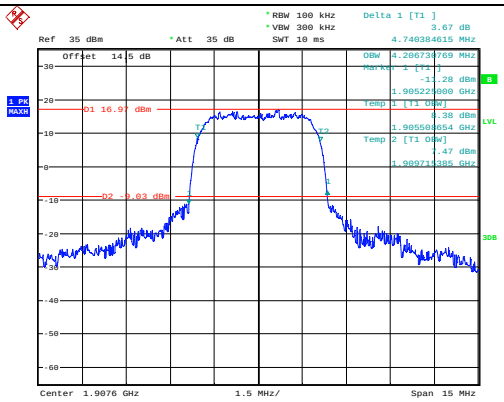

Occupied Bandwidth	
Channel	HSUPA
Lowest	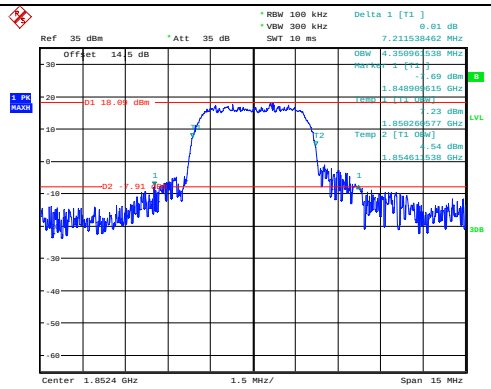 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 28.NOV.2023 00:52:35
Middle	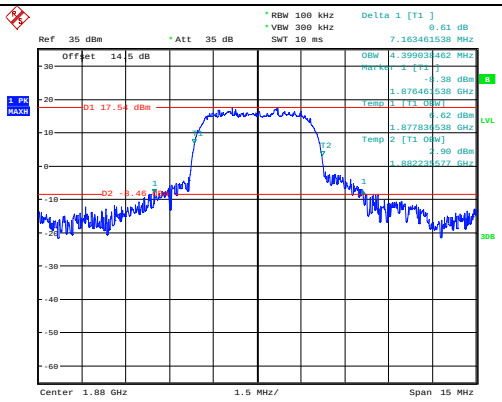 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 28.NOV.2023 00:50:34
Highest	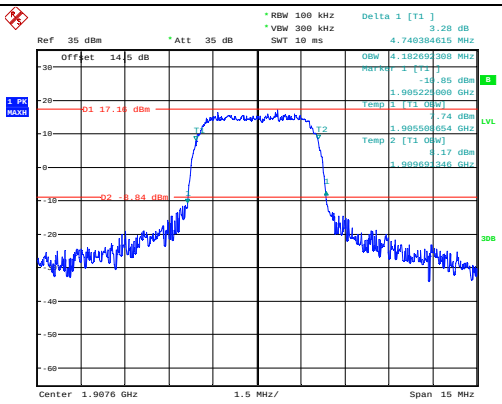 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 28.NOV.2023 00:48:07

Spurious Emissions at Antenna Terminal

Channel	WCDMA R99	
Lowest	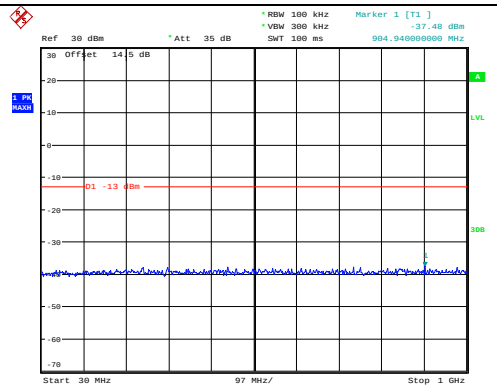 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 27.NOV.2023 22:53:20	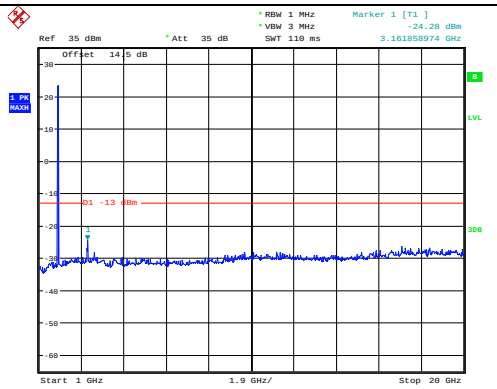 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 27.NOV.2023 22:53:42
Middle	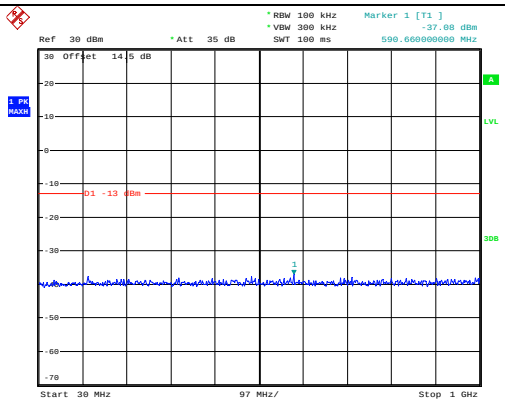 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 27.NOV.2023 22:54:21	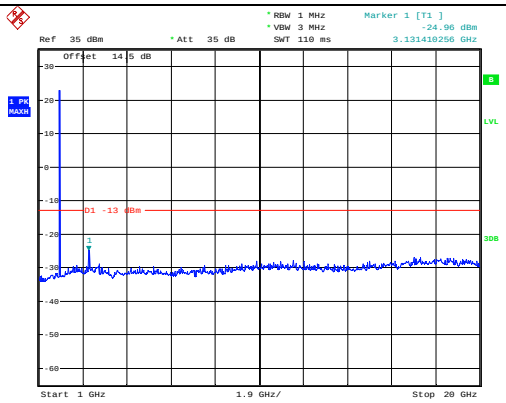 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 27.NOV.2023 22:54:40
Highest	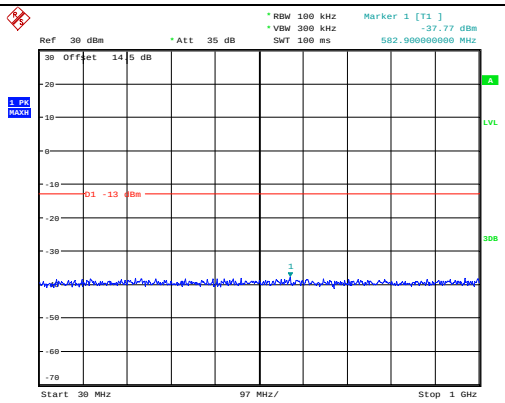 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 27.NOV.2023 22:55:40	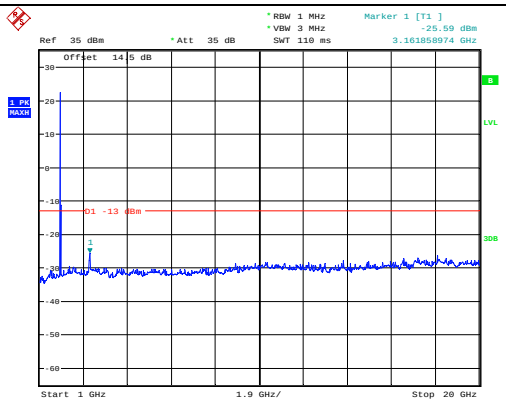 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 27.NOV.2023 22:55:58

Out of band emission, Band Edge		
Mode	**Lowest**	**Highest**
R99	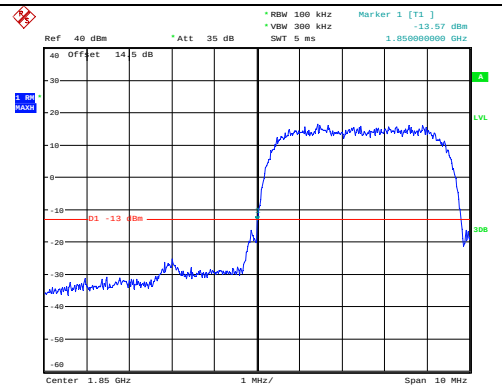 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 28.NOV.2023 00:10:15	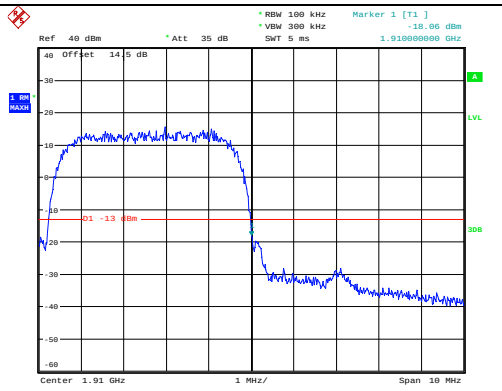 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 28.NOV.2023 00:15:36
HSUPA	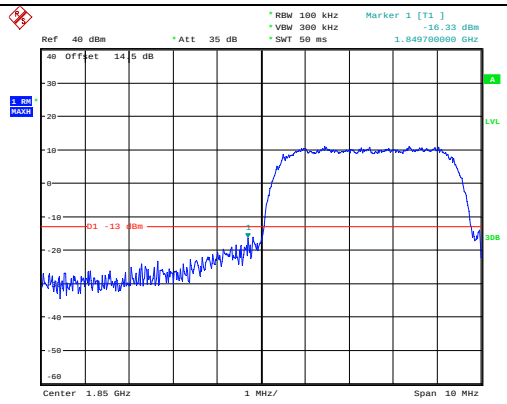 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 28.NOV.2023 00:53:37	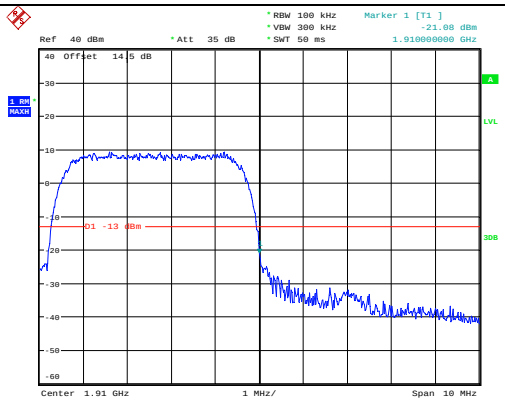 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 28.NOV.2023 00:48:20
HSDPA	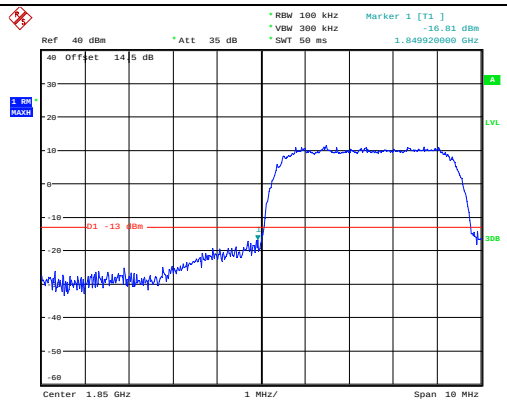 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 28.NOV.2023 00:39:42	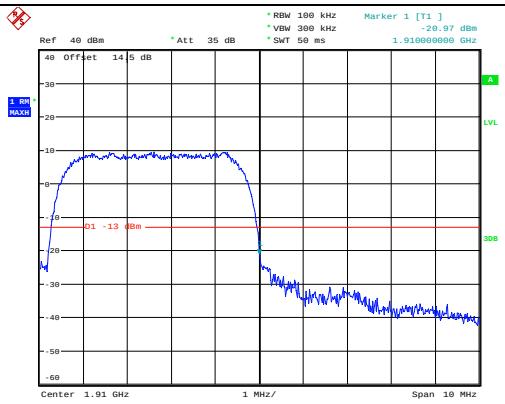 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 28.NOV.2023 00:45:24

4.4 Antenna Port Test Data and Results for WCDMA Band 5:

Serial Number:	2COS-2	Test Date:	2023/11/27-2023/11/28
Test Site:	RF	Test Mode:	Transmitting
Tester:	Arthur Su	Test Result:	**Pass**

Environmental Conditions:					
Temperature: (℃)	24.2-26.3	Relative Humidity: (%)	42-60	ATM Pressure: (kPa)	101.3-102.2

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200256	2023/3/31	2024/3/30
zhuoxiang	Coaxial Cable	SMA-178	211002	Each time	N/A
YINSAIGE	Coaxial Cable	SS402	SJ0100002	Each time	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A
R&S	Wideband Radio Communication Tester	CMW500	143458	2023/3/31	2024/3/30
UNI-T	Multimeter	UT39A+	C210582554	2023/9/28	2024/9/27
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D0912386	N/A	N/A
Unknown	Coaxial tee connector	Unknown	2204004	Each time	N/A

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Frequency:

Operation Modes	Lowest Frequency (MHz)	Middle Frequency (MHz)	Highest Frequency (MHz)
WCDMA Band 5	826.4	836.6	846.6

Test Data:

RF Output Power					
Test Mode	Conducted Average Output Power(dBm)			Maximum ERP (dBm)	ERP Limit (dBm)
	Lowest Channel	Middle Channel	Highest Channel		
WCDMA R99	23.04	23.07	**23.11**	17.36	38.45
HSDPA Subtest 1	22.17	22.21	22.24	16.49	38.45
HSDPA Subtest 2	22.22	22.19	22.23	16.48	38.45
HSDPA Subtest 3	22.23	22.22	22.26	16.51	38.45
HSDPA Subtest 4	22.24	22.21	22.25	16.5	38.45
HSUPA Subtest 1	22.21	22.26	22.27	16.52	38.45
HSUPA Subtest 2	22.14	22.24	22.25	16.5	38.45
HSUPA Subtest 3	22.23	22.19	22.26	16.51	38.45
HSUPA Subtest 4	22.26	22.21	22.23	16.51	38.45
HSUPA Subtest 5	22.24	22.23	22.25	16.5	38.45
Note: ERP= Conducted Power(dBm) - L_C(dB) + G_T(dBd) G_T(dBd)=G_T(dBi)-2.15					
				Result:	**Pass**

Peak-to-average Ratio(PAR)				
Test Mode	Peak-to-average Ratio(dB)			Limit (dB)
	Lowest Channel	Middle Channel	Highest Channel	
WCDMA R99	3.04	2.92	3.11	13
HSDPA	4.2	4.33	4.04	13
HSUPA	4.07	3.85	4.04	13
			Result:	**Pass**

Occupied Bandwidth						
Operation Mode	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
	Low Channel	Middle channel	High Channel	Low Channel	Middle Channel	High Channel
WCDMA R99	4.183	4.167	4.183	4.744	4.728	4.728
HSDPA	4.215	4.199	4.199	4.792	4.76	4.747
HSUPA	4.207	4.183	4.207	4.74	4.74	4.788
Note: The test plots please refer to the Plots of Occupied Bandwidth						

Spurious Emissions at Antenna Terminal	
Result:	**Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.**

Out of band emission, Band Edge	
Result:	**Pass, Please refer to the test plots of Out of band emission, Band Edge.**

Frequency Stability					
Test Modulation:	WCDMA R99		Test Channel:	836.6	MHz
Test Item	Temperature (℃)	Voltage (V_{DC})	Frequency Error		Limit
			(Hz)	(ppm)	(ppm)
Frequency Stability vs. Temperature	-30	3.85	4	0.005	2.5
	-20	3.85	13	0.016	2.5
	-10	3.85	41	0.049	2.5
	0	3.85	21	0.025	2.5
	10	3.85	2	0.002	2.5
	20	3.85	29	0.035	2.5
	30	3.85	7	0.008	2.5
	40	3.85	20	0.024	2.5
	50	3.85	3	0.004	2.5
Frequency Stability vs. Voltage	20	3.4	20	0.024	2.5
	20	4.4	19	0.023	2.5
				Result:	**Pass**

Test Plots(Note: The 14.5 dB is the Insertion loss of the RF cable, attenuator and coaxial tee connector, which was offset into the Spectrum Analyzer):

Occupied Bandwidth		
Channel	WCDMA R99	HSDPA
Lowest	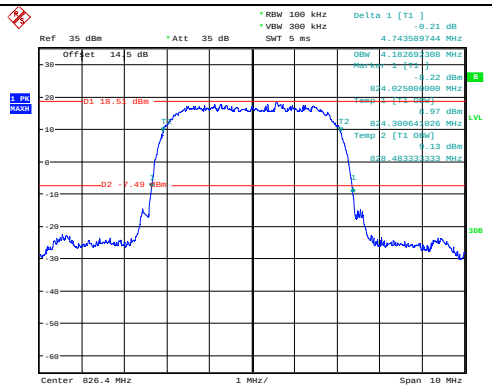	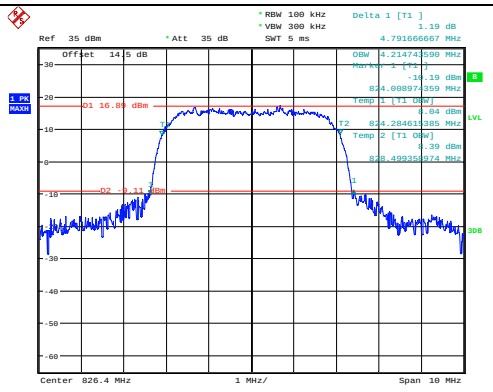
Middle	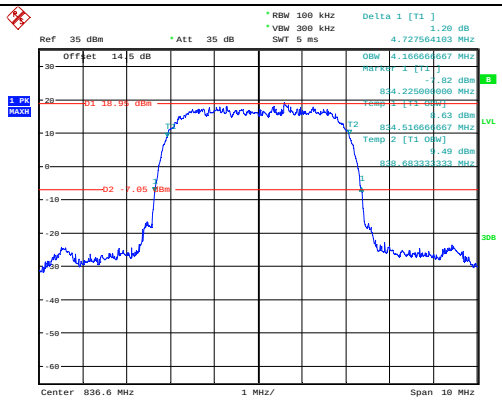	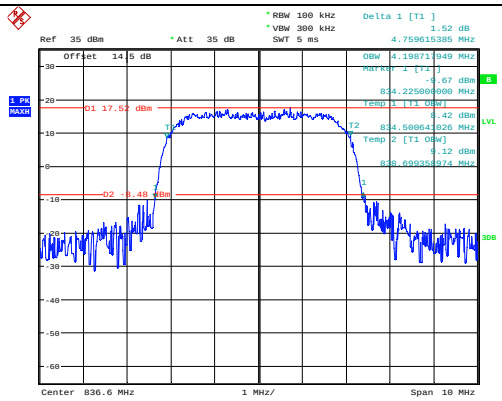
Highest	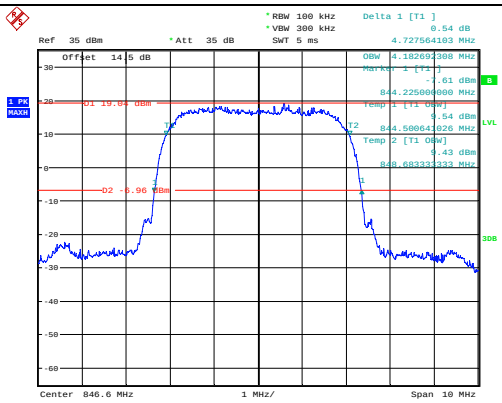	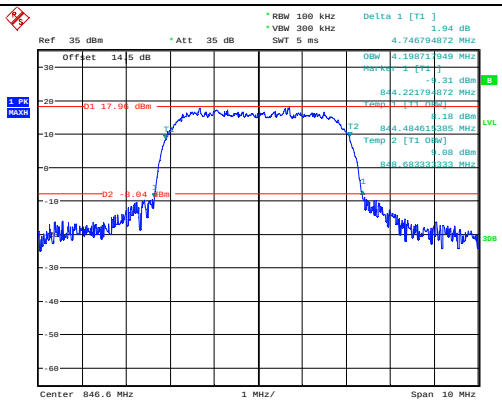

Occupied Bandwidth	
Channel	HSUPA
Lowest	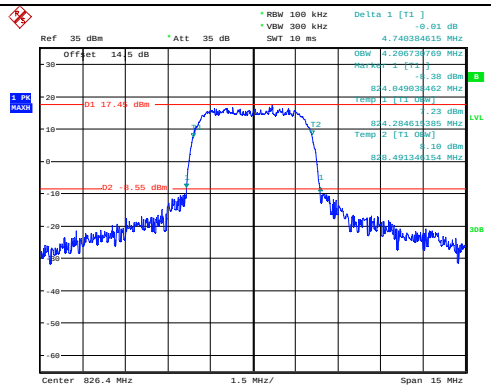 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 28.NOV.2023 00:56:04
Middle	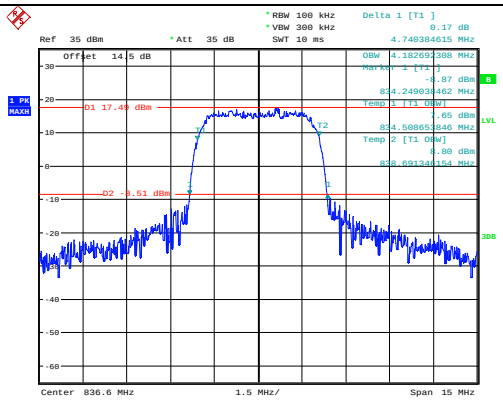 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 28.NOV.2023 00:58:08
Highest	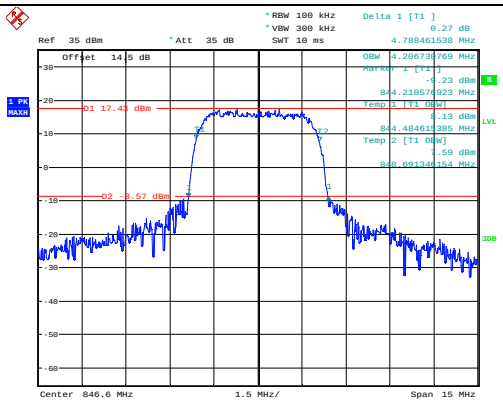 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 28.NOV.2023 00:59:42

Spurious Emissions at Antenna Terminal

Channel	WCDMA R99	
Lowest	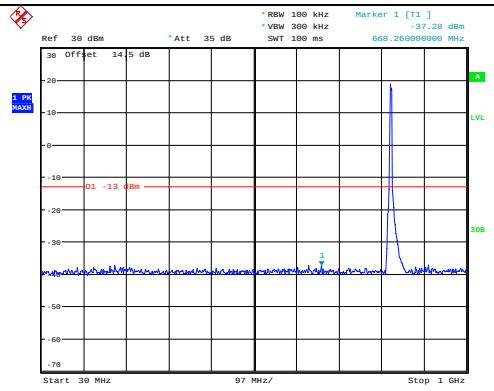 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 27.NOV.2023 22:57:44	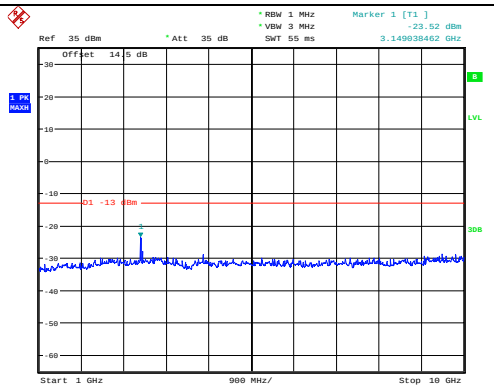 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 27.NOV.2023 22:58:06
Middle	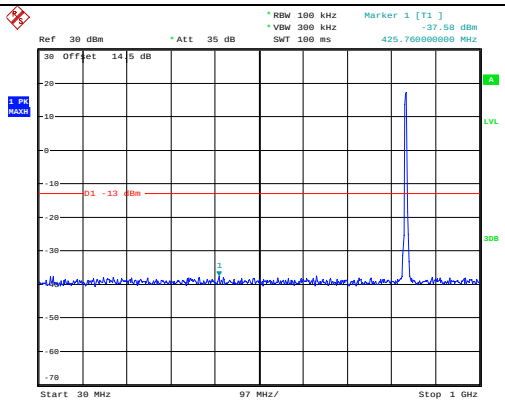 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 27.NOV.2023 22:59:05	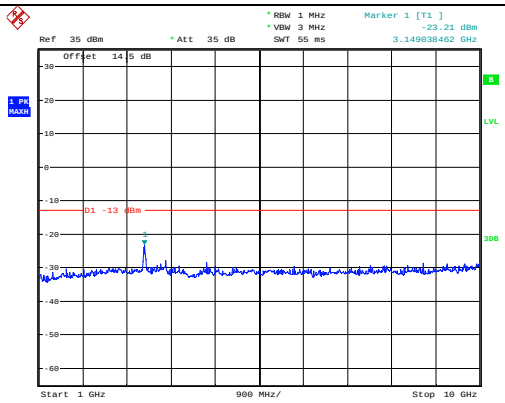 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 27.NOV.2023 22:59:26
Highest	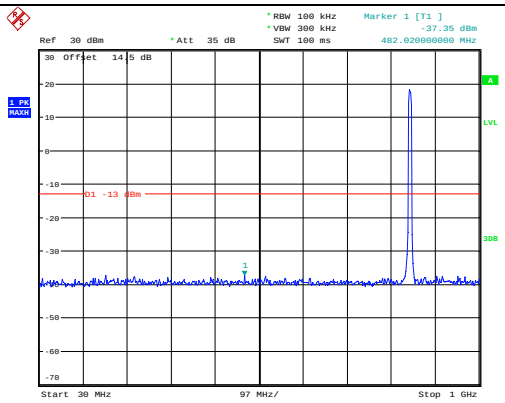 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 27.NOV.2023 23:00:26	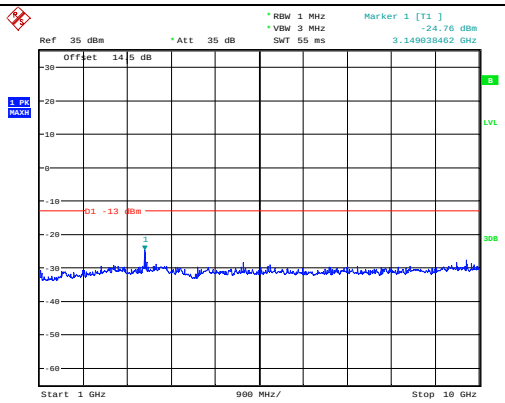 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 27.NOV.2023 23:00:54

Out of band emission, Band Edge		
Mode	**Lowest**	**Highest**
R99	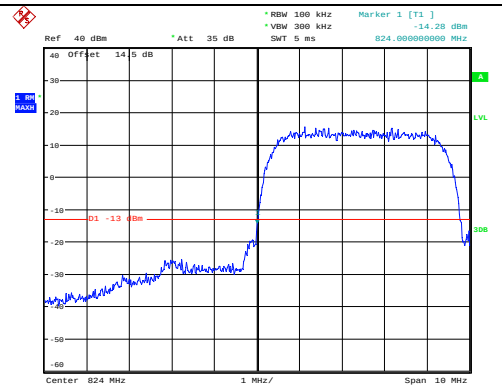	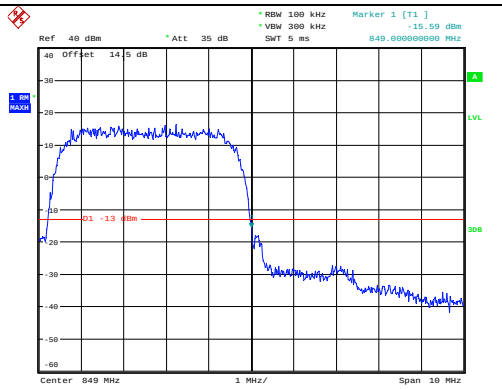
HSUPA	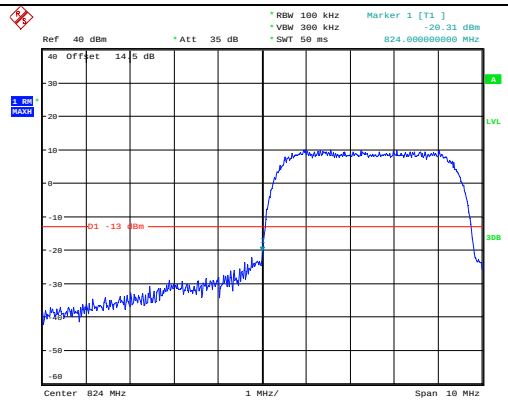	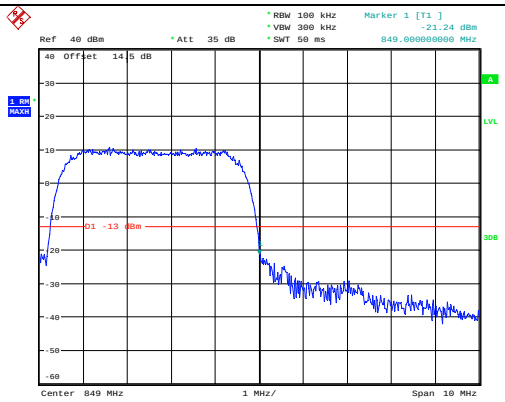
HSDPA	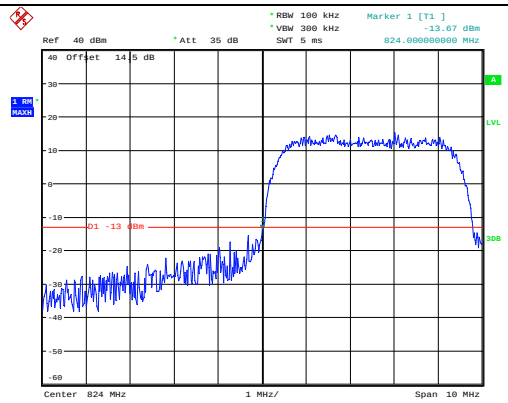	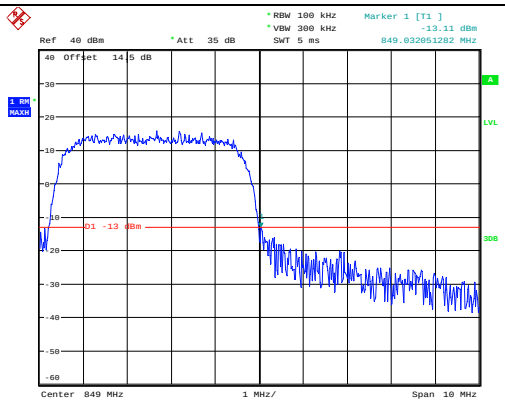

4.5 Antenna Port Test Data and Results for LTE Band 2

Serial Number:	2COS-2	Test Date:	2023/11/21-2024/1/19
Test Site:	RF	Test Mode:	Transmitting
Tester:	Arthur Su	Test Result:	**Pass**

Environmental Conditions:					
Temperature: (℃)	24.2-26.3	Relative Humidity: (%)	42-60	ATM Pressure: (kPa)	101.3-102.2

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200256	2023/3/31	2024/3/30
zhuoxiang	Coaxial Cable	SMA-178	211002	Each time	N/A
YINSAIGE	Coaxial Cable	SS402	SJ0100002	Each time	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A
R&S	Wideband Radio Communication Tester	CMW500	143458	2023/3/31	2024/3/30
UNI-T	Multimeter	UT39A+	C210582554	2023/9/28	2024/9/27
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D0912386	N/A	N/A
Unknown	Coaxial tee connector	Unknown	2204004	Each time	N/A

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Frequency for Each Mode:

Operation Bandwidth	Lowest Frequency (MHz)	Middle Frequency (MHz)	Highest Frequency (MHz)
1.4MHz	1850.7	1880	1909.3
3MHz	1851.5	1880	1908.5
5MHz	1852.5	1880	1907.5
10MHz	1855	1880	1905
15MHz	1857.5	1880	1902.5
20MHz	1860	1880	1900

Test Data:

RF Output Power						
Test Bandwidth & Modulation	Resource Block & RB offset	Conducted Average Output Power(dBm)			Maximum EIRP (dBm)	EIRP Limit (dBm)
		Lowest Channel	Middle Channel	Highest Channel		
1.4MHz QPSK	RB1#0	22.88	22.07	21.91	24.3	33
	RB1#3	**23.00**	22.22	22.27		
	RB1#5	22.85	22.05	21.88		
	RB3#0	22.98	22.19	21.99		
	RB3#3	22.97	22.18	22.00		
	RB6#0	21.91	21.12	20.99		
1.4MHz 16QAM	RB1#0	21.85	21.22	20.91	23.41	33
	RB1#3	21.99	21.40	21.08		
	RB1#5	21.84	21.20	20.90		
	RB3#0	22.10	21.13	21.02		
	RB3#3	**22.11**	21.14	21.03		
	RB6#0	20.97	20.25	19.97		
3MHz QPSK	RB1#0	**22.91**	22.35	22.26	24.21	33
	RB1#8	22.90	22.27	22.25		
	RB1#14	22.86	22.26	22.19		
	RB6#0	21.84	21.27	21.21		
	RB6#9	21.82	21.22	21.21		
	RB15#0	21.89	21.30	21.24		
3MHz 16QAM	RB1#0	**21.93**	21.85	21.38	23.23	33
	RB1#8	21.92	21.81	21.35		
	RB1#14	21.86	21.78	21.35		
	RB6#0	20.86	20.42	20.27		
	RB6#9	20.85	20.35	20.29		
	RB15#0	21.01	20.44	20.26		
5MHz QPSK	RB1#0	22.81	22.49	22.16	24.2	33
	RB1#13	**22.90**	22.53	22.22		
	RB1#24	22.77	22.45	22.06		
	RB15#0	21.89	21.54	21.24		
	RB15#10	21.94	21.53	21.18		
	RB25#0	21.89	21.51	21.17		
5MHz 16QAM	RB1#0	21.71	21.77	21.24	23.15	33
	RB1#13	21.78	**21.85**	21.29		
	RB1#24	21.68	21.74	20.99		
	RB15#0	20.99	20.60	20.41		
	RB15#10	21.05	20.59	20.33		
	RB25#0	21.05	20.61	20.39		
10MHz QPSK	RB1#0	22.91	22.60	21.79	24.28	33
	RB1#25	**22.98**	22.69	21.91		
	RB1#49	22.78	22.49	21.69		

	RB25#0	21.89	21.68	20.90		
	RB25#25	21.99	21.64	20.81		
	RB50#0	21.93	21.67	20.86		
10MHz 16QAM	RB1#0	22.42	21.74	20.78	23.77	33
	RB1#25	**22.47**	21.81	20.89		
	RB1#49	22.38	21.65	20.67		
	RB25#0	21.02	20.79	20.08		
	RB25#25	21.12	20.73	19.95		
	RB50#0	21.02	20.76	19.96		
15MHz QPSK	RB1#0	**22.83**	22.59	21.94	24.13	33
	RB1#38	22.77	22.50	21.86		
	RB1#74	22.66	22.33	21.71		
	RB36#0	21.90	21.72	21.00		
	RB36#39	21.96	21.59	20.92		
	RB75#0	21.91	21.65	20.98		
15MHz 16QAM	RB1#0	22.39	21.71	21.32	23.71	33
	RB1#38	**22.41**	21.68	21.23		
	RB1#74	22.21	21.51	21.08		
	RB36#0	20.95	20.74	20.04		
	RB36#39	20.97	20.62	19.89		
	RB75#0	20.94	20.69	20.00		
20MHz QPSK	RB1#0	22.69	22.48	22.27	24.22	33
	RB1#50	**22.92**	22.71	22.51		
	RB1#99	22.47	22.20	22.05		
	RB50#0	21.70	21.77	21.41		
	RB50#50	21.81	21.56	21.17		
	RB100#0	21.80	21.64	21.35		
20MHz 16QAM	RB1#0	22.22	21.79	21.48	23.77	33
	RB1#50	**22.47**	21.98	21.71		
	RB1#99	22.00	21.55	21.22		
	RB50#0	20.79	20.81	20.51		
	RB50#50	20.92	20.64	20.25		
	RB100#0	20.89	20.75	20.43		
Note: EIRP=Conducted Power(dBm) - L_C(dB) + G_T(dBi)						
					Result:	**Pass**

Peak-to-average Ratio(PAR)

Test Bandwidth & Modulation	Resource Block & RB offset	Peak-to-average Ratio(dB)			Limit (dB)
		Lowest Channel	Middle Channel	Highest Channel	
20MHz QPSK	RB1#0	5.62	5.37	4.55	13
	RB100#0	5.90	6.63	5.99	13
20MHz 16QAM	RB1#0	6.41	5.62	6.87	13
	RB100#0	6.98	6.44	8.23	13
				Result:	**Pass**

Occupied Bandwidth						
Operation Mode	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
	Low Channel	Middle channel	High Channel	Low Channel	Middle Channel	High Channel
1.4MHz QPSK	1.098	1.104	1.104	1.296	1.296	1.290
1.4MHz 16QAM	1.110	1.092	1.098	1.314	1.290	1.302
3MHz QPSK	2.687	2.687	2.687	2.868	2.880	2.892
3MHz 16QAM	2.676	2.687	2.687	2.880	2.880	2.868
5MHz QPSK	4.500	4.520	4.500	4.980	5.420	4.940
5MHz 16QAM	4.500	4.500	4.520	4.920	5.260	4.960
10MHz QPSK	9.000	8.960	8.960	9.680	10.200	9.600
10MHz 16QAM	8.960	8.960	8.960	9.480	9.680	9.680
15MHz QPSK	13.560	13.560	13.560	14.700	14.820	14.760
15MHz 16QAM	13.500	13.560	13.560	14.760	14.820	14.760
20MHz QPSK	18.000	18.000	18.000	19.200	19.440	19.280
20MHz 16QAM	17.920	18.080	17.920	19.200	23.840	19.200
Note: The test plots please refer to the Plots of Occupied Bandwidth						

Spurious Emissions at Antenna Terminal	
Result:	**Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.**

Out of band emission, Band Edge	
Result:	**Pass, Please refer to the test plots of Out of band emission, Band Edge.**

Frequency Stability

Test Mode:	20M QPSK	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (℃)	Voltage (V_{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.85	1851.029	1850.000	1908.976	1910.000
	-20	3.85	1851.027	1850.000	1908.971	1910.000
	-10	3.85	1851.017	1850.000	1908.970	1910.000
	0	3.85	1851.038	1850.000	1908.967	1910.000
	10	3.85	1851.030	1850.000	1908.984	1910.000
	20	3.85	1851.040	1850.000	1908.960	1910.000
	30	3.85	1851.022	1850.000	1908.978	1910.000
	40	3.85	1851.033	1850.000	1908.983	1910.000
	50	3.85	1851.035	1850.000	1908.974	1910.000
Frequency Stability vs. Voltage	20	3.4	1851.012	1850.000	1908.984	1910.000
	20	4.4	1851.015	1850.000	1908.987	1910.000
					Result:	**Pass**

Test Mode:	20M 16QAM	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (℃)	Voltage (V_{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.85	1851.120	1850.000	1908.971	1910.000
	-20	3.85	1851.108	1850.000	1908.983	1910.000
	-10	3.85	1851.111	1850.000	1908.985	1910.000
	0	3.85	1851.094	1850.000	1908.975	1910.000
	10	3.85	1851.105	1850.000	1908.972	1910.000
	20	3.85	1851.120	1850.000	1908.960	1910.000
	30	3.85	1851.091	1850.000	1908.971	1910.000
	40	3.85	1851.097	1850.000	1908.985	1910.000
	50	3.85	1851.118	1850.000	1908.982	1910.000
Frequency Stability vs. Voltage	20	3.4	1851.115	1850.000	1908.965	1910.000
	20	4.4	1851.104	1850.000	1908.966	1910.000
					Result:	**Pass**

Test Plots(Note: The 14.5 dB is the Insertion loss of the RF cable, attenuator and coaxial tee connector, which was offset into the Spectrum Analyzer):

Occupied Bandwidth		
Channel	1.4MHz Bandwidth QPSK	1.4MHz Bandwidth 16QAM
Lowest	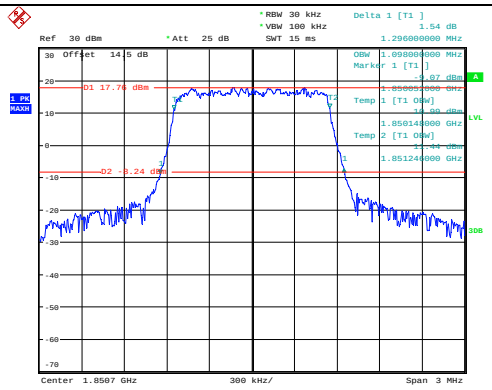	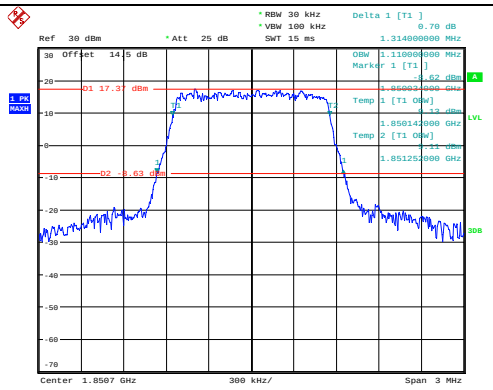
Middle	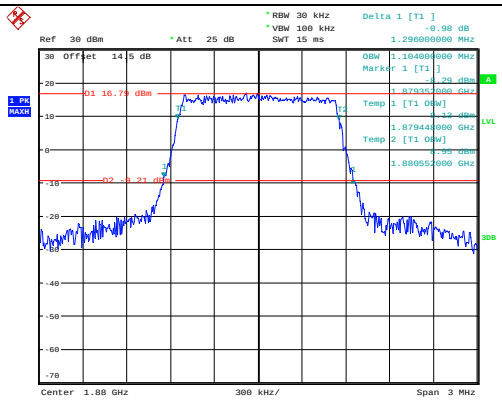	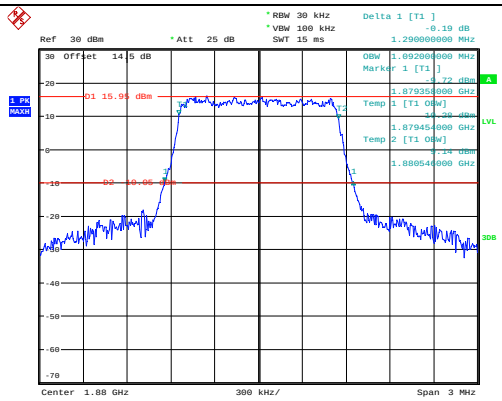
Highest	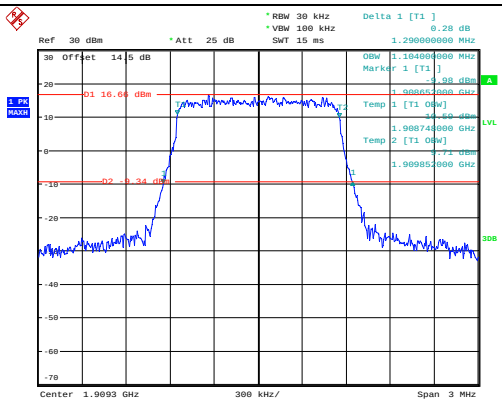	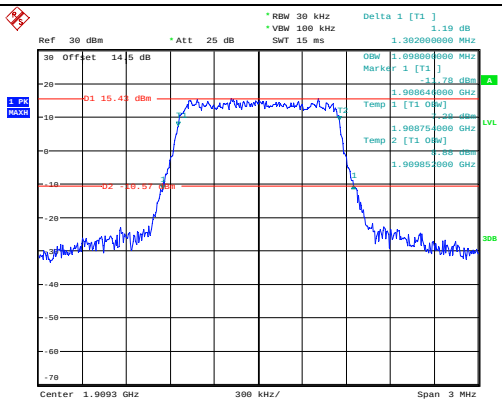

Occupied Bandwidth

Channel	3MHz Bandwidth QPSK	3MHz Bandwidth 16QAM
Lowest	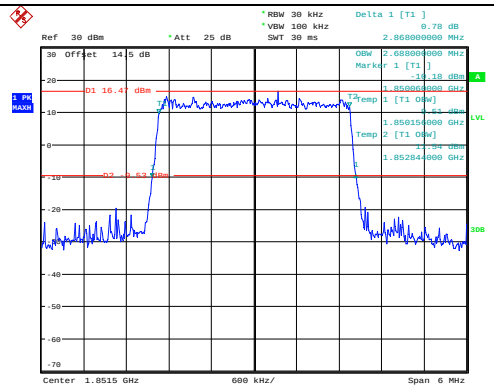	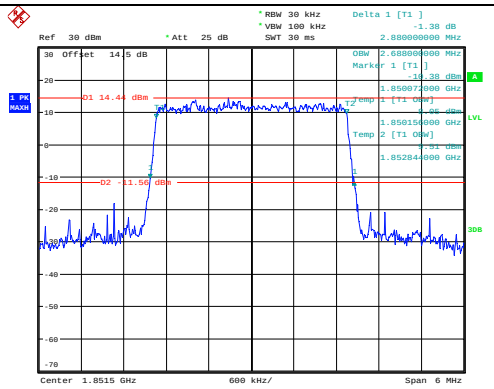
Middle	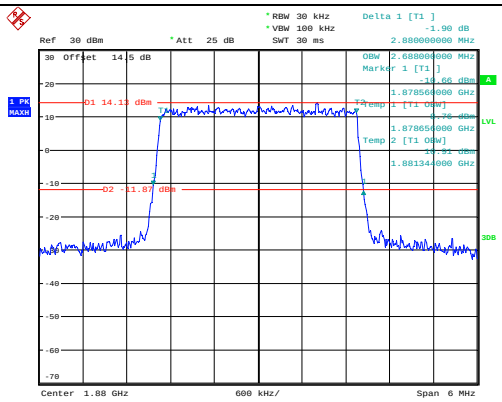	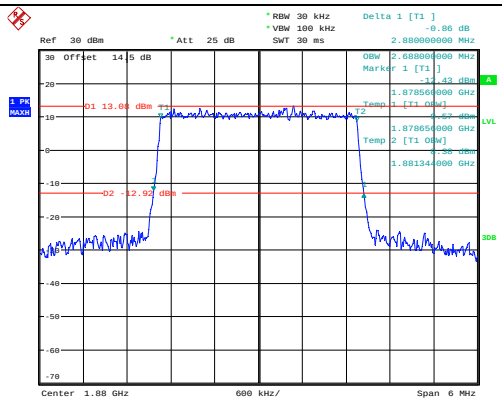
Highest	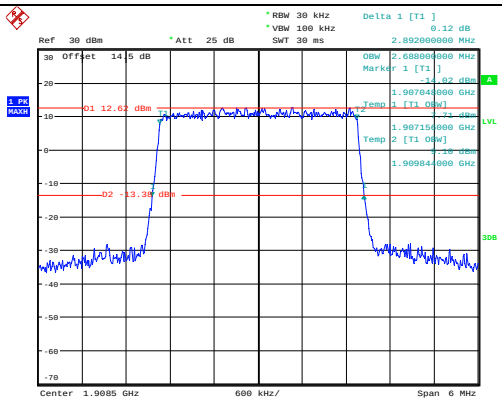	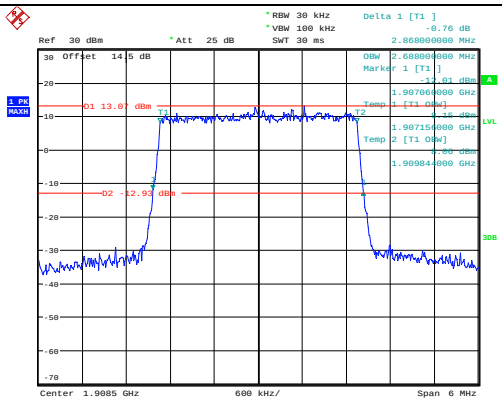

Occupied Bandwidth

Channel	5MHz Bandwidth QPSK	5MHz Bandwidth 16QAM
Lowest	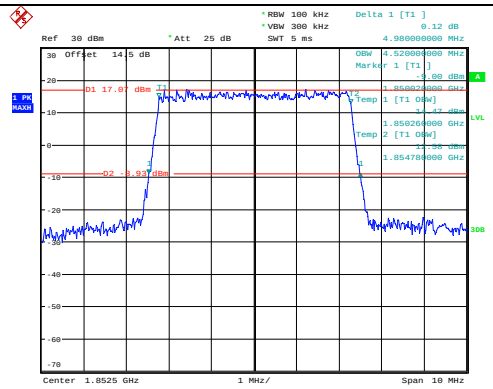 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 22.NOV.2023 21:07:48	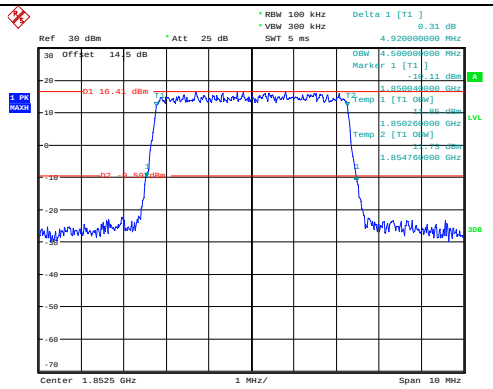 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 22.NOV.2023 21:08:13
Middle	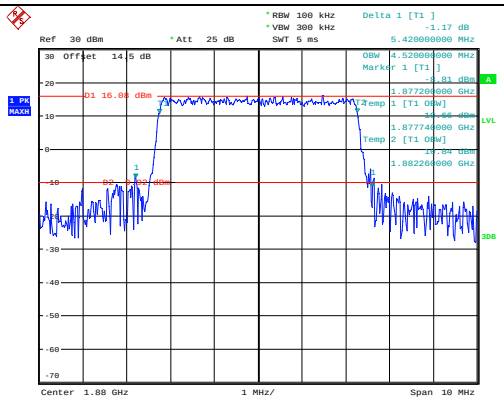 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 22.NOV.2023 21:08:44	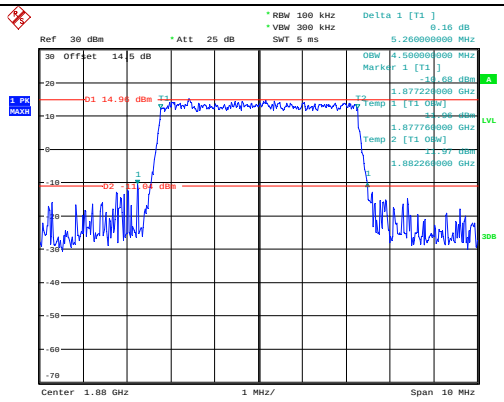 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 22.NOV.2023 21:09:07
Highest	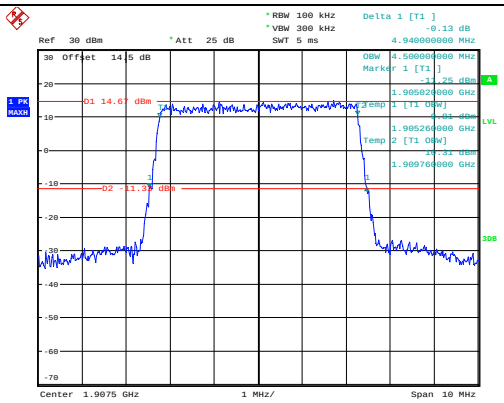 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 22.NOV.2023 21:09:28	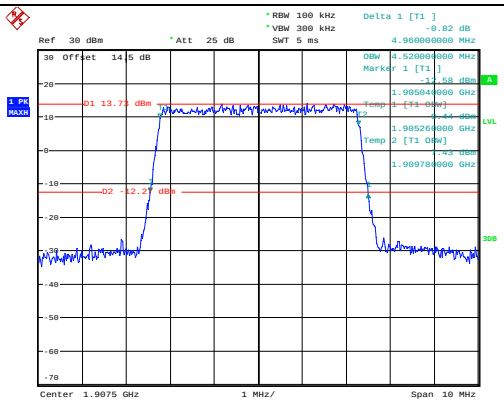 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 22.NOV.2023 21:09:52

Occupied Bandwidth

Channel	10MHz Bandwidth QPSK	10MHz Bandwidth 16QAM
Lowest	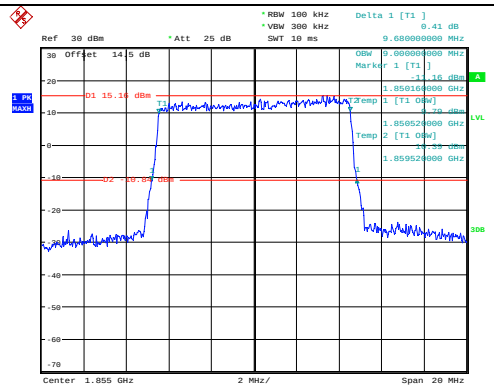 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 22.NOV.2023 21:18:20	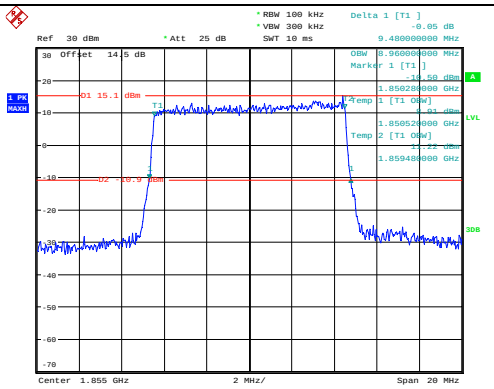 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 22.NOV.2023 21:18:39
Middle	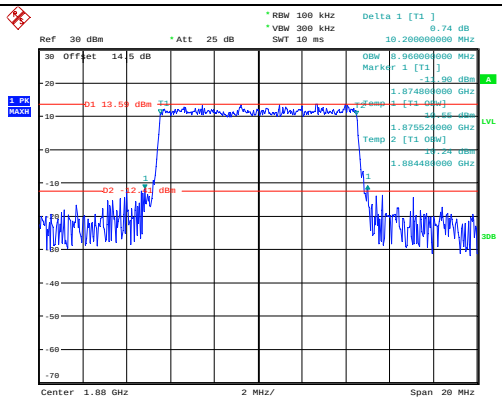 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 22.NOV.2023 21:19:03	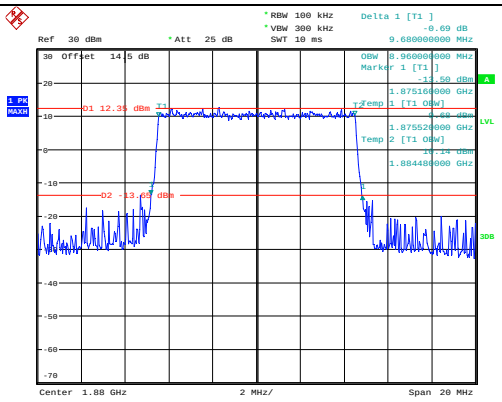 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 22.NOV.2023 21:19:29
Highest	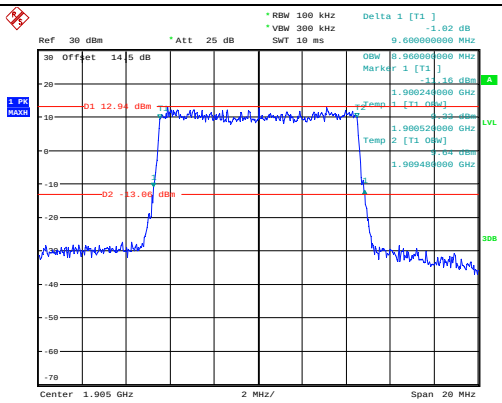 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 22.NOV.2023 21:19:50	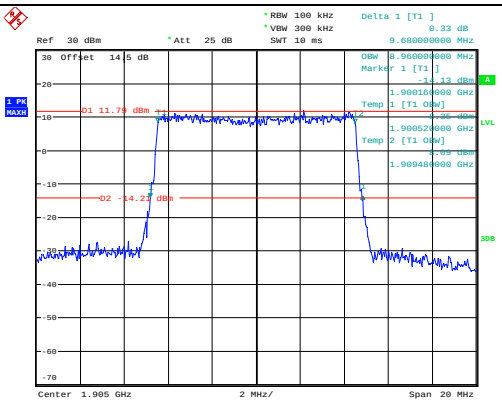 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 22.NOV.2023 21:20:09

Occupied Bandwidth

Channel	15MHz Bandwidth QPSK	15MHz Bandwidth 16QAM
Lowest	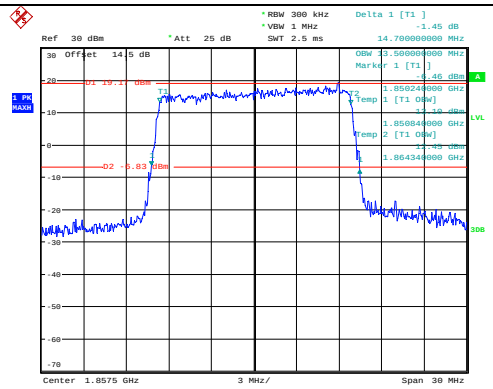 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 22.NOV.2023 21:33:23	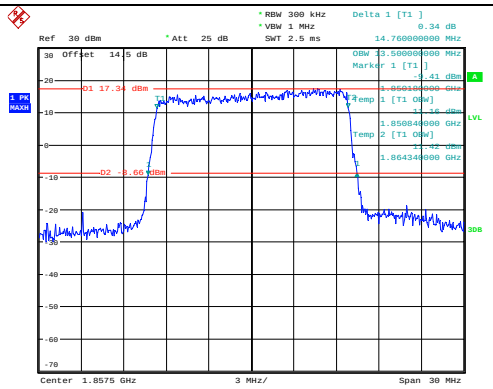 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 22.NOV.2023 21:33:46
Middle	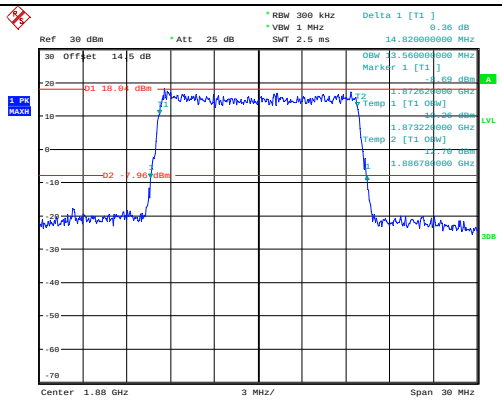 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 22.NOV.2023 21:34:07	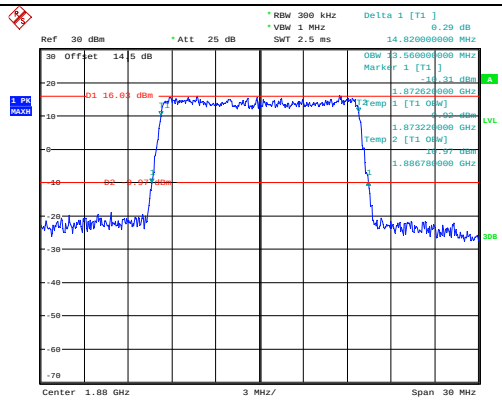 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 22.NOV.2023 21:34:28
Highest	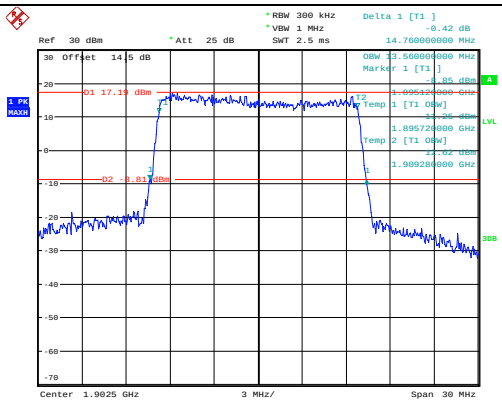 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 22.NOV.2023 21:34:53	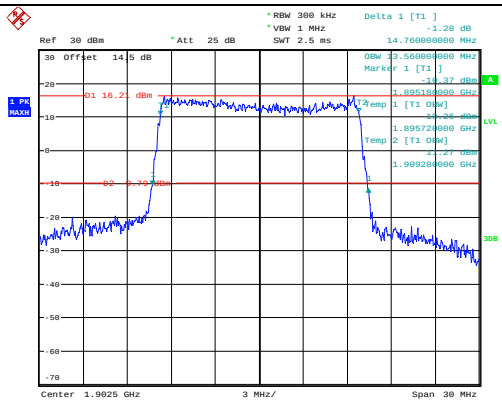 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 22.NOV.2023 21:35:13

Occupied Bandwidth

Channel	20MHz Bandwidth QPSK	20MHz Bandwidth 16QAM
Lowest	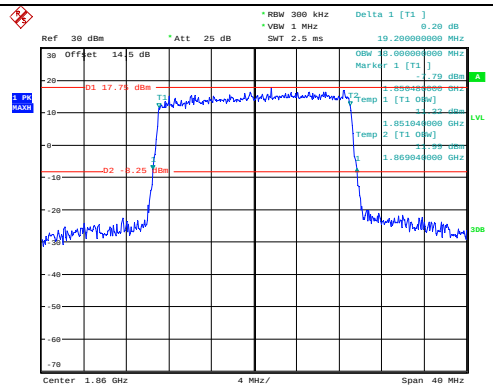 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 22.NOV.2023 21:36:23	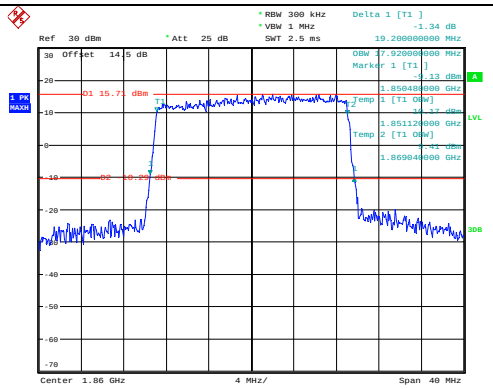 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 22.NOV.2023 21:36:48
Middle	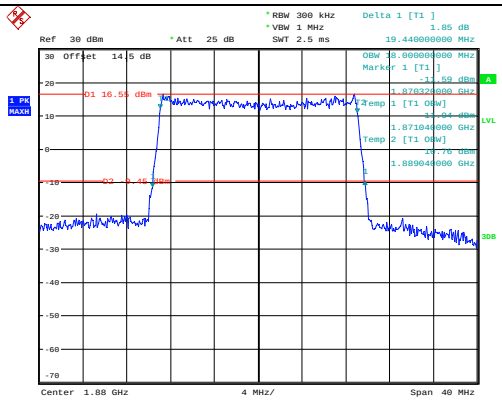 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 22.NOV.2023 21:37:10	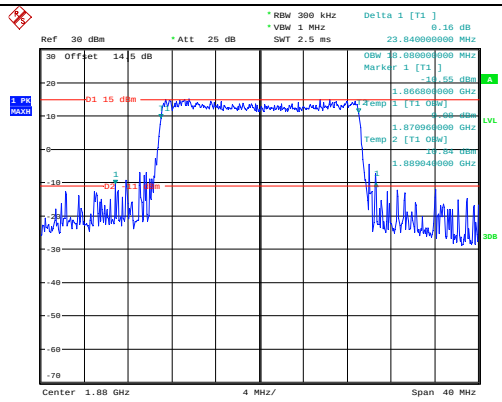 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 22.NOV.2023 21:37:36
Highest	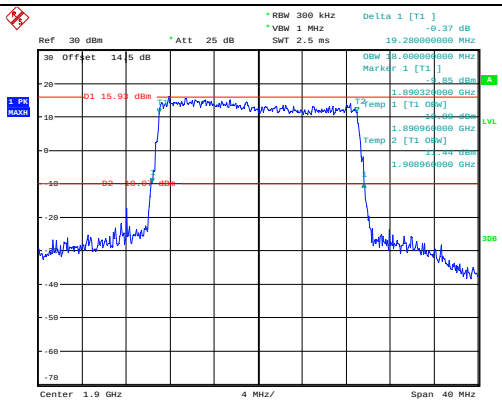 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 22.NOV.2023 21:37:58	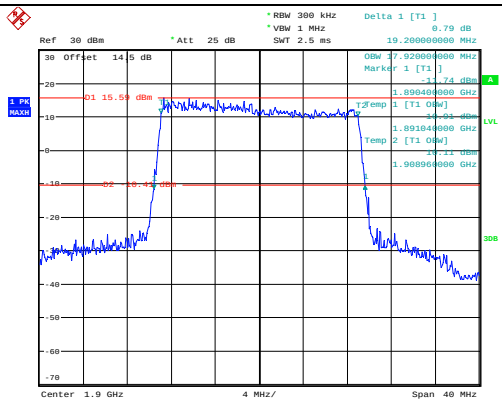 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 22.NOV.2023 21:38:18

1RB:

Spurious Emissions at Antenna Terminal		
Channel	**1.4MHz Bandwidth QPSK**	
Lowest	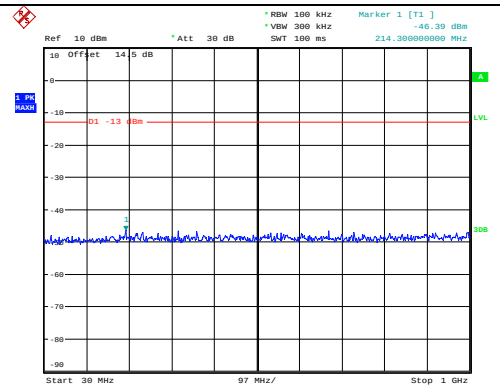 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 19:07:06	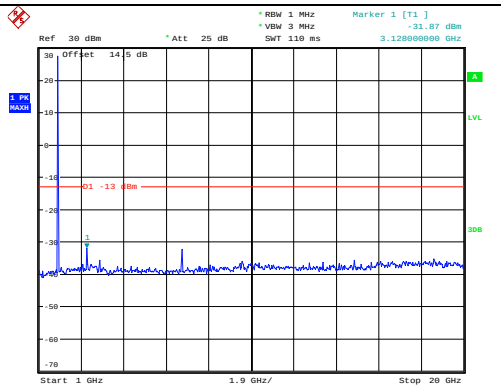 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 19:07:18
Middle	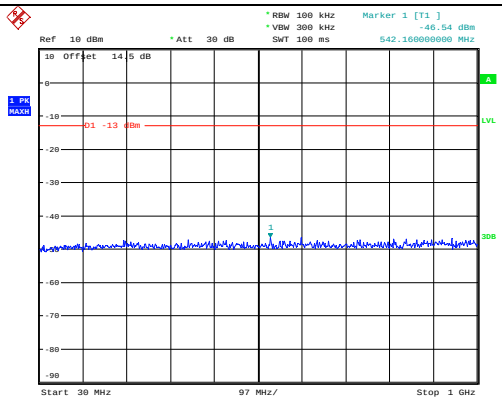 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 19:07:31	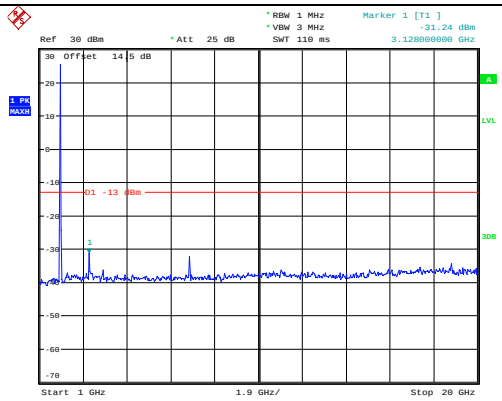 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 19:07:42
Highest	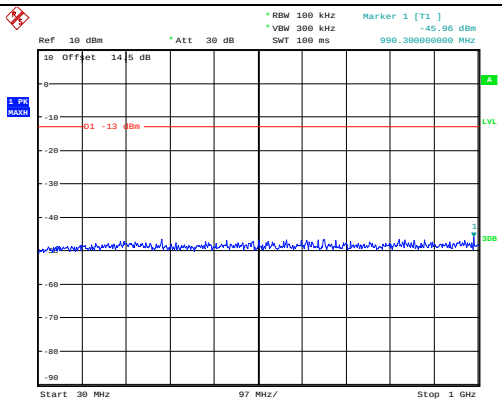 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 19:07:58	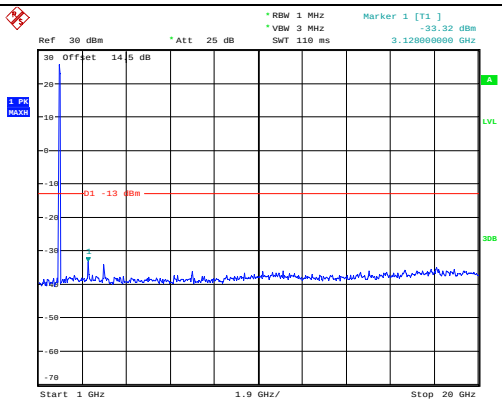 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 19:08:09

Spurious Emissions at Antenna Terminal		
Channel	**3MHz Bandwidth QPSK**	
Lowest	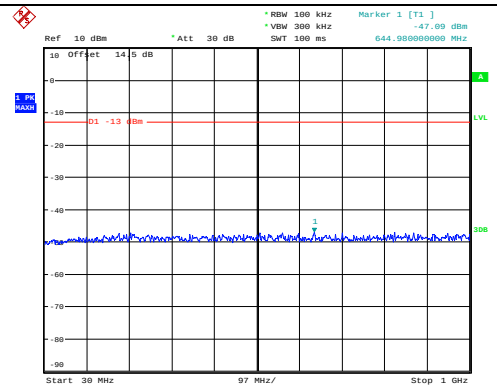 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 19:09:04	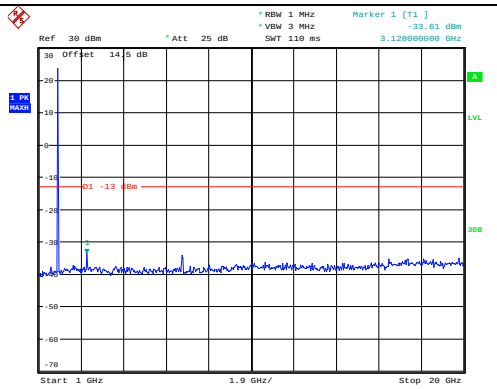 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 19:09:15
Middle	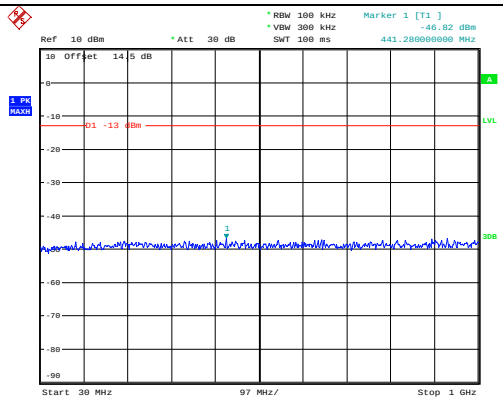 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 19:09:28	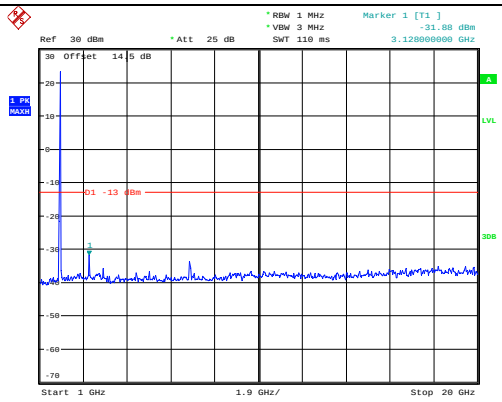 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 19:09:39
Highest	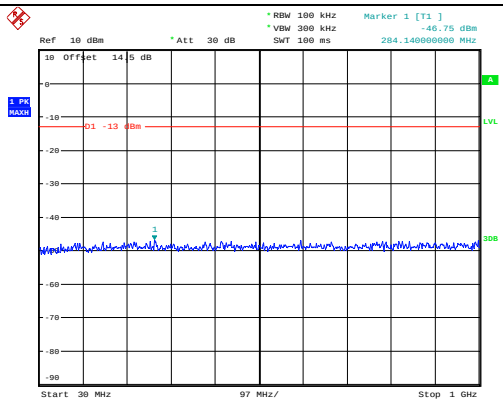 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 19:09:52	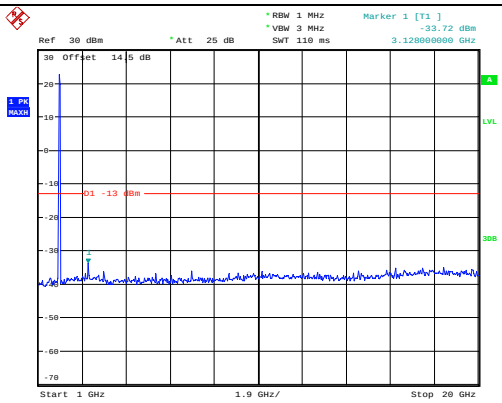 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 19:10:03

Spurious Emissions at Antenna Terminal		
Channel	**5MHz Bandwidth QPSK**	
Lowest	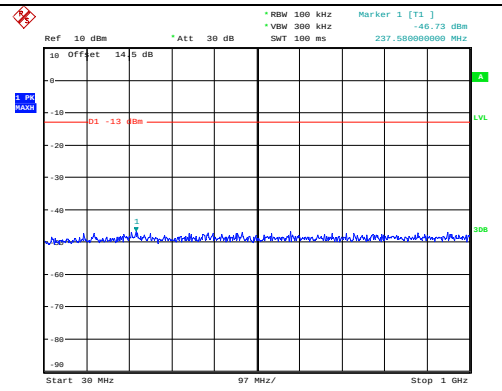 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 19:10:58	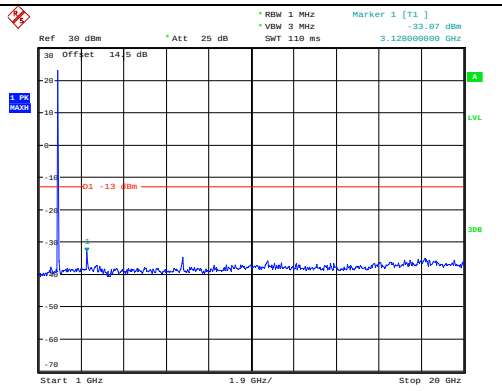 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 19:11:08
Middle	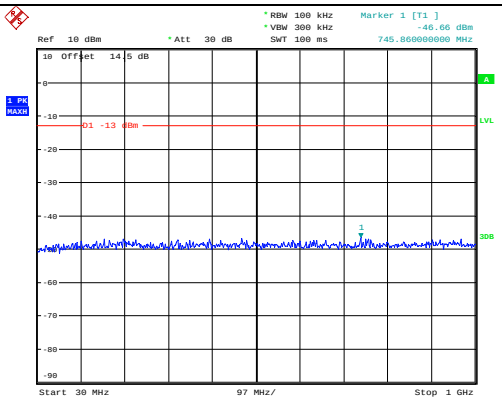 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 19:11:22	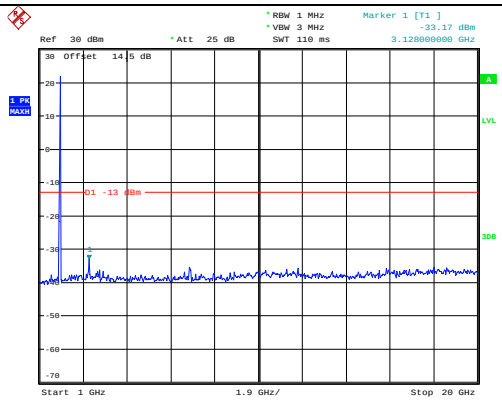 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 19:11:33
Highest	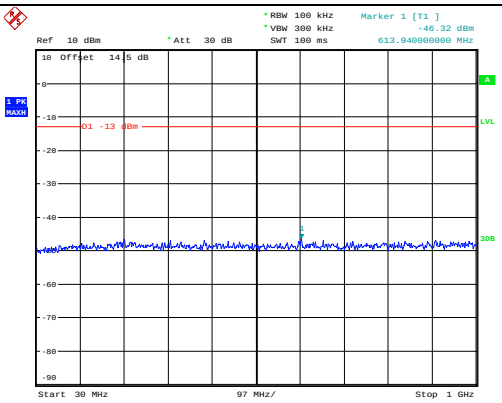 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 19:11:49	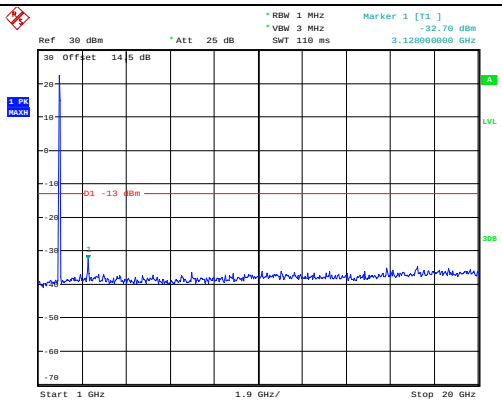 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 19:12:00

Spurious Emissions at Antenna Terminal		
Channel	**10MHz Bandwidth QPSK**	
Lowest	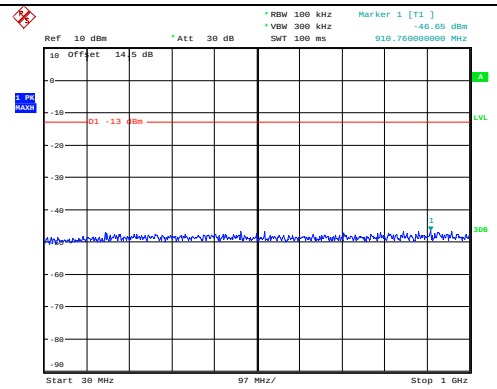 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 19:12:58	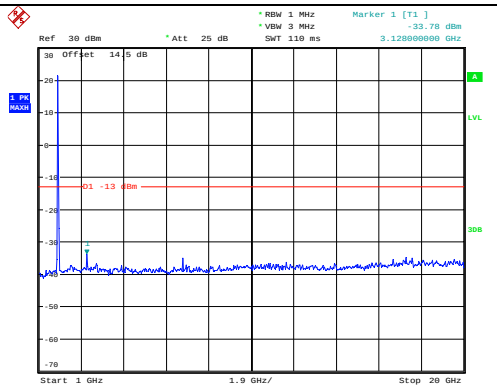 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 19:13:08
Middle	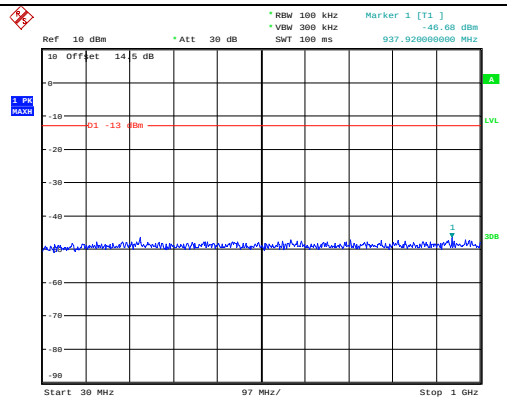 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 19:13:22	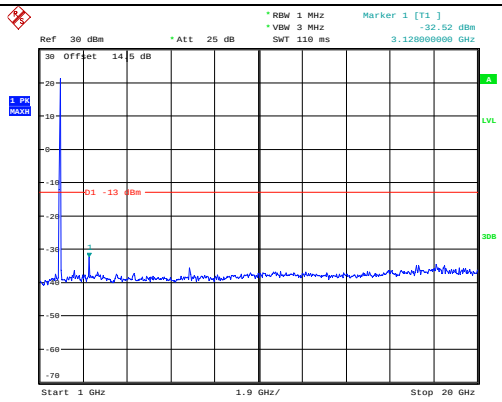 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 19:13:33
Highest	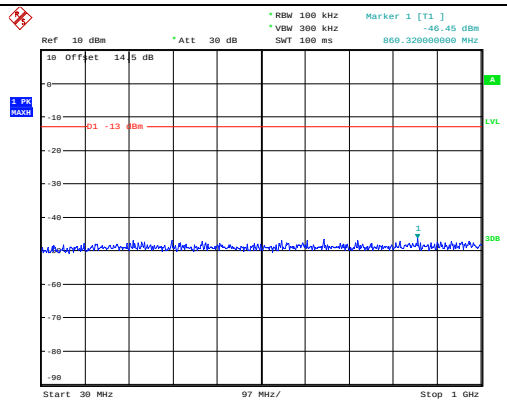 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 19:13:46	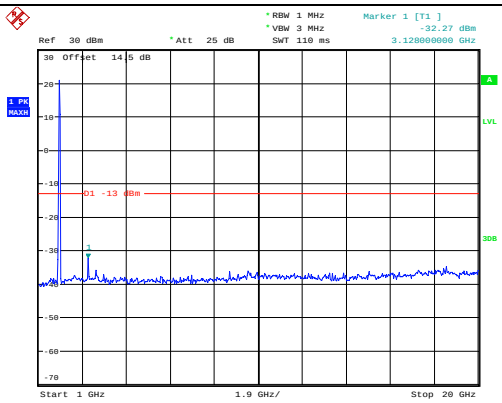 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 19:13:57

Spurious Emissions at Antenna Terminal		
Channel	**15MHz Bandwidth QPSK**	
Lowest	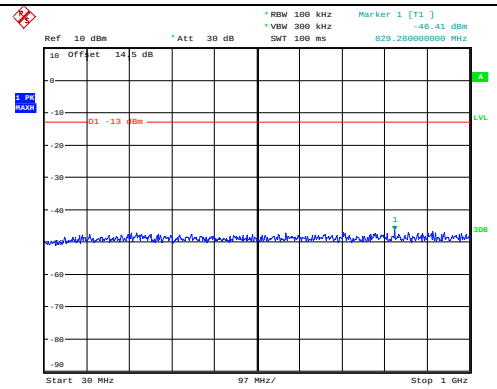 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 19:15:08	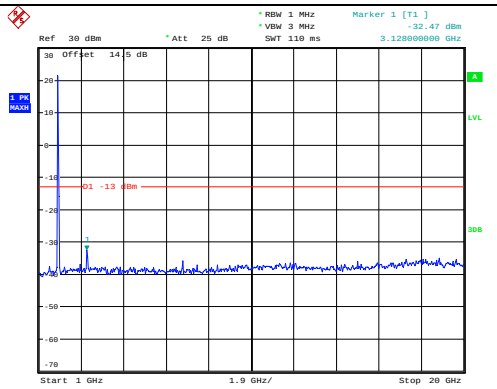 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 19:15:19
Middle	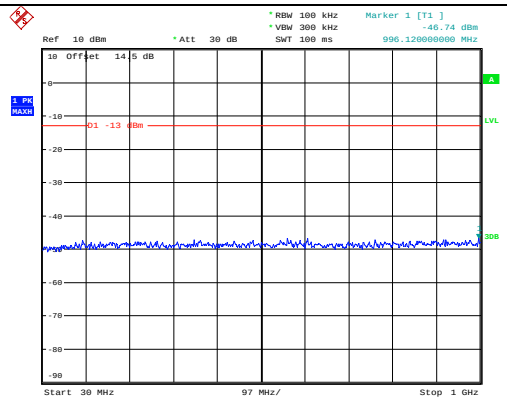 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 19:15:35	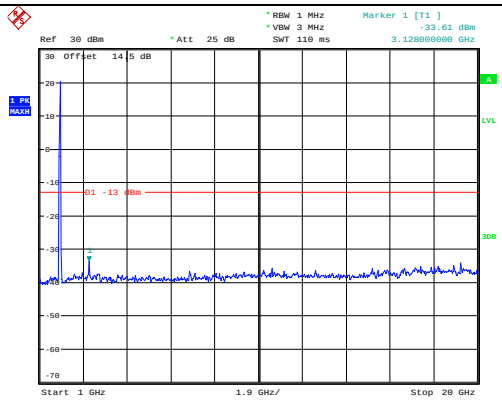 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 19:15:46
Highest	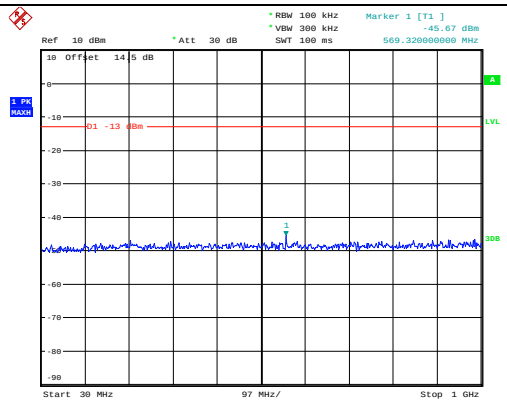 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 19:36:05	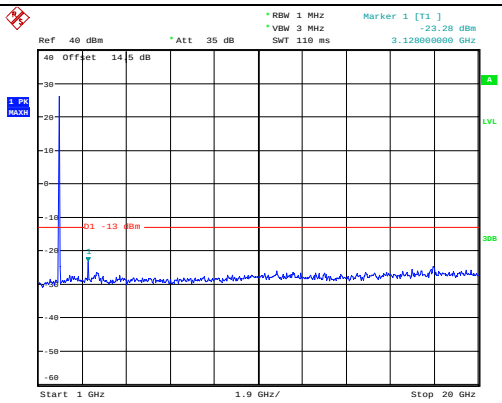 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 19:36:16

Spurious Emissions at Antenna Terminal		
Channel	**20MHz Bandwidth QPSK**	
Lowest	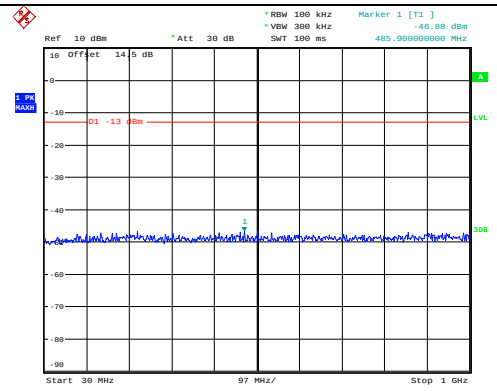 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 19:37:15	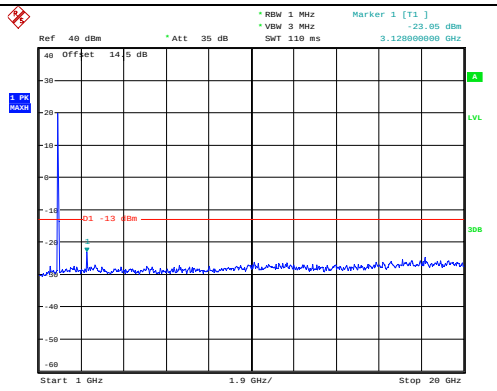 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 19:37:26
Middle	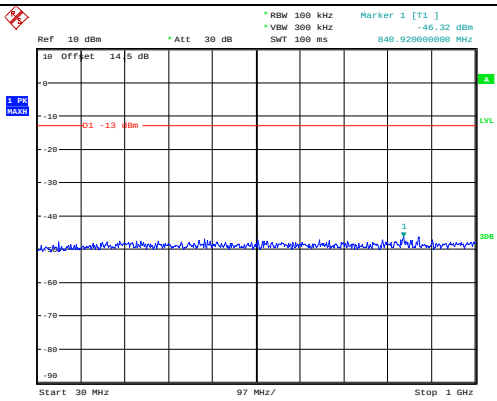 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 19:37:44	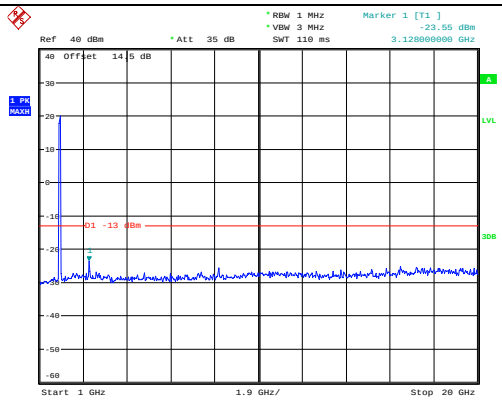 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 19:37:58
Highest	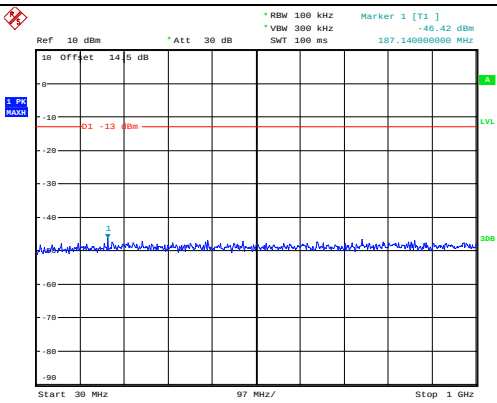 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 19:38:15	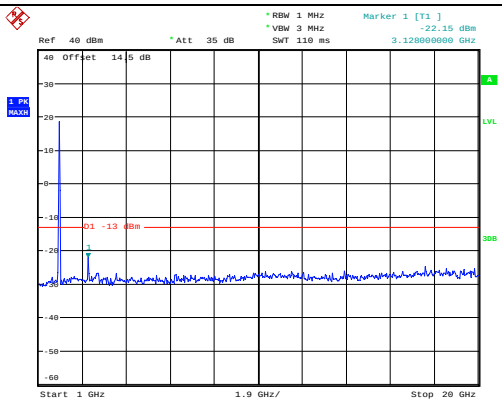 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 19:38:26

1RB:

Out of band emission, Band Edge		
Mode	**Lowest**	**Highest**
QPSK 1.4MHz	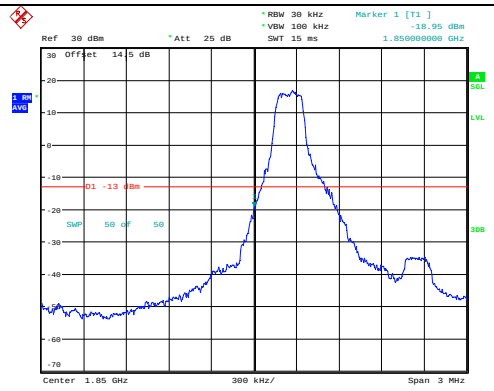	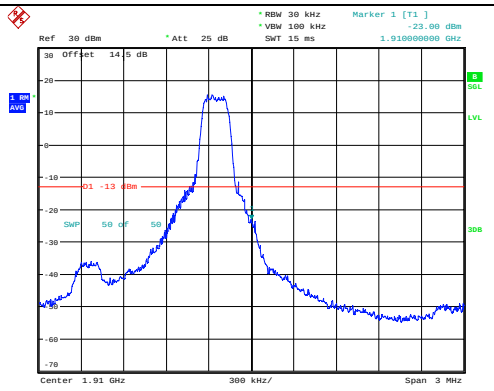
QPSK 3MHz	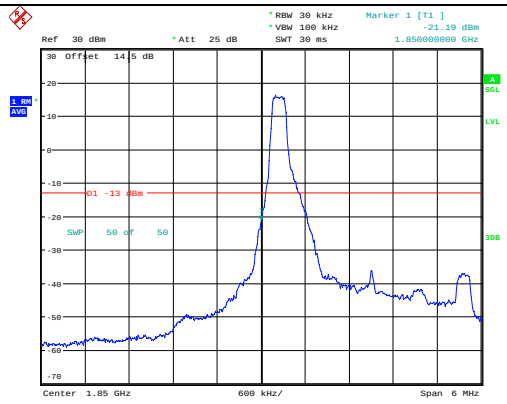	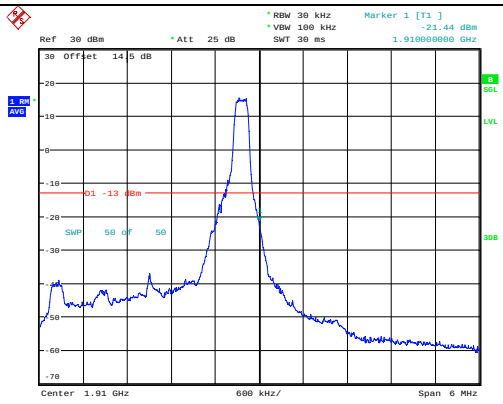
QPSK 5MHz	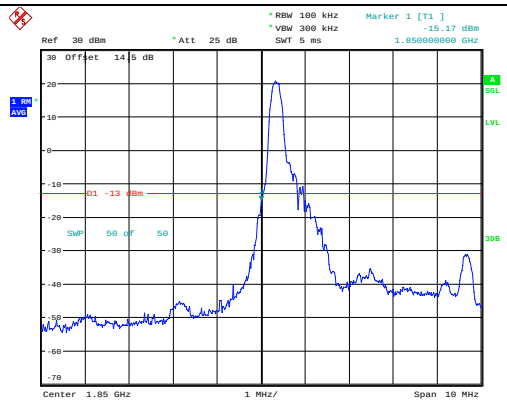	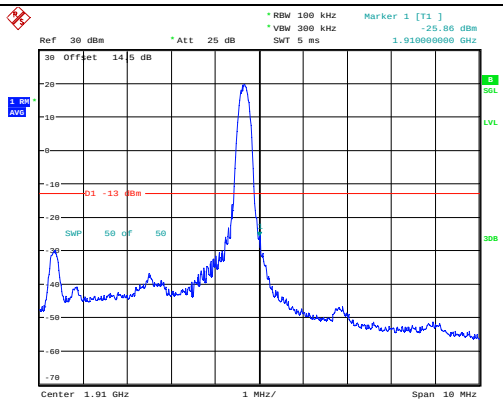

Out of band emission, Band Edge		
Mode	**Lowest**	**Highest**
QPSK 10MHz	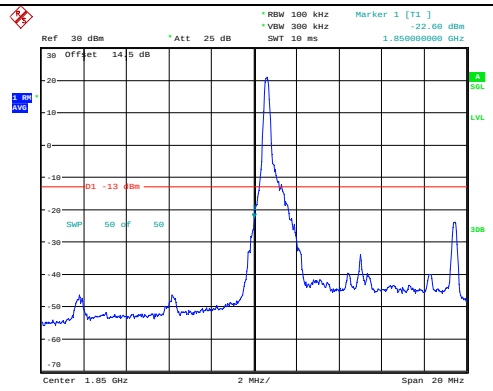 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 22:40:34	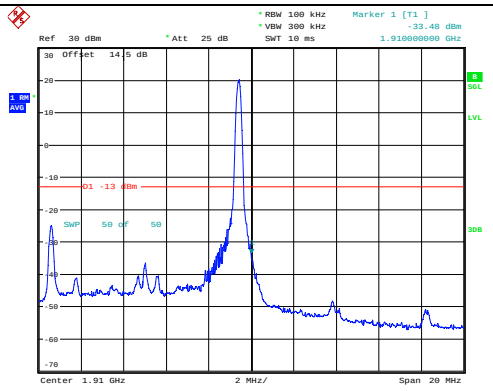 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 22:42:15
QPSK 15MHz	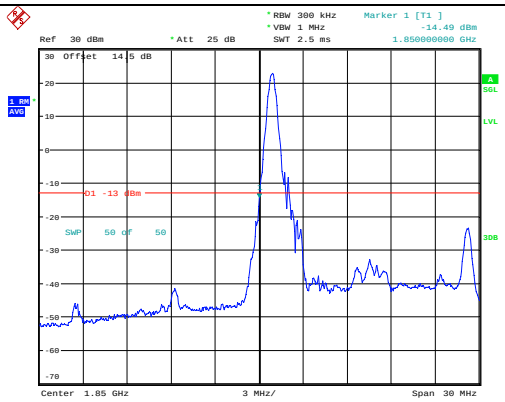 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 22:44:22	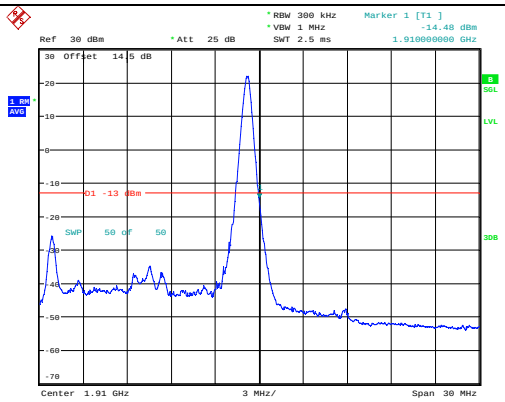 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 22:46:00
QPSK 20MHz	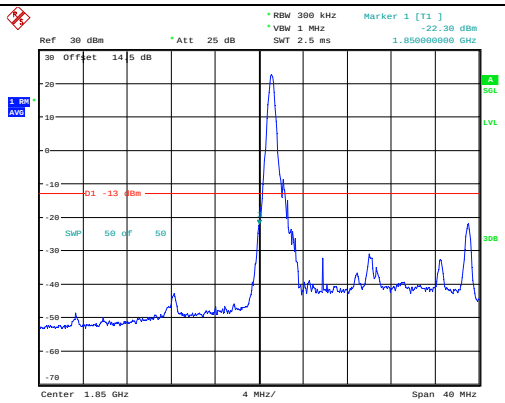 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 22:47:44	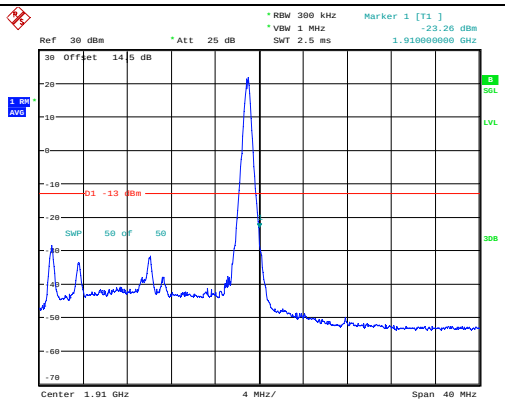 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 22:49:22

1RB:

Out of band emission, Band Edge		
Mode	**Lowest**	**Highest**
16QAM 1.4MHz	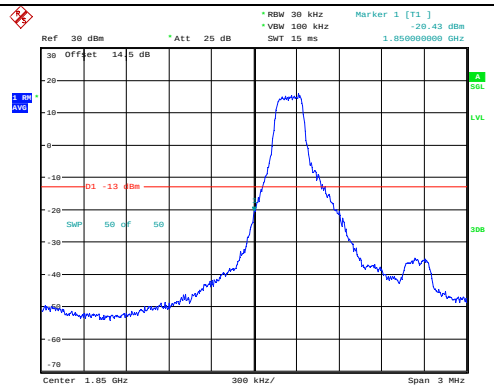	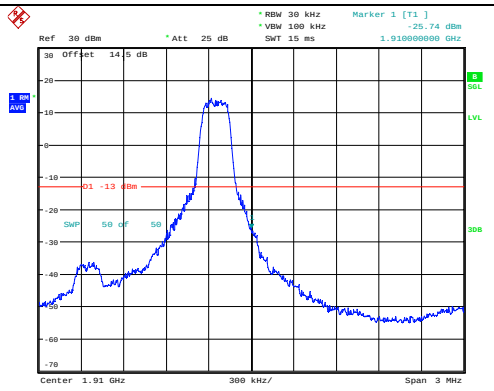
16QAM 3MHz	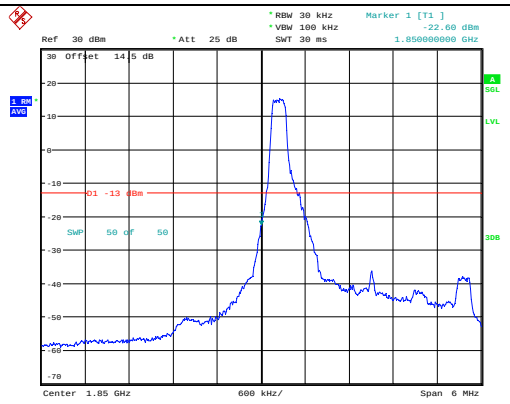	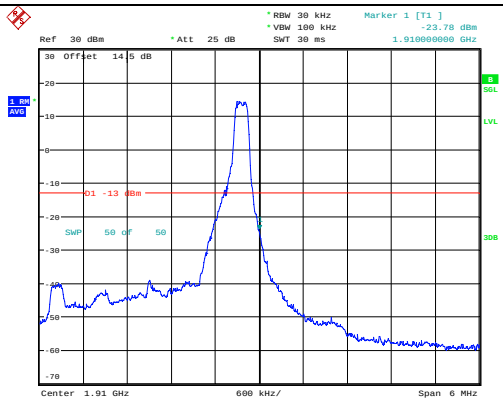
16QAM 5MHz	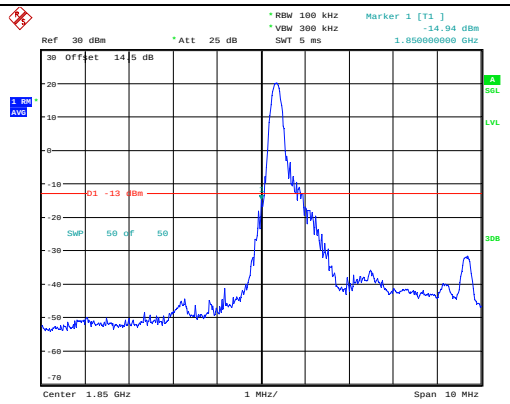	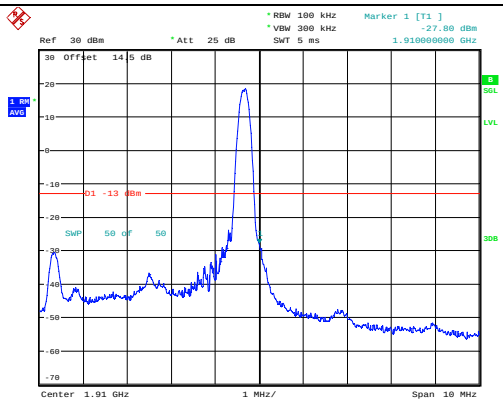

Out of band emission, Band Edge		
Mode	**Lowest**	**Highest**
16QAM 10MHz	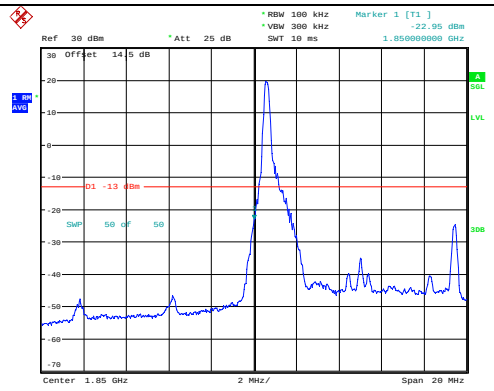 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 22:41:05	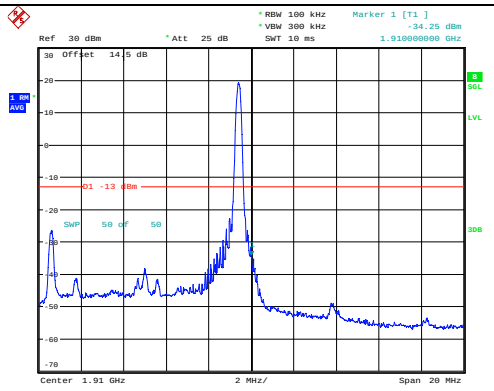 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 22:41:53
16QAM 15MHz	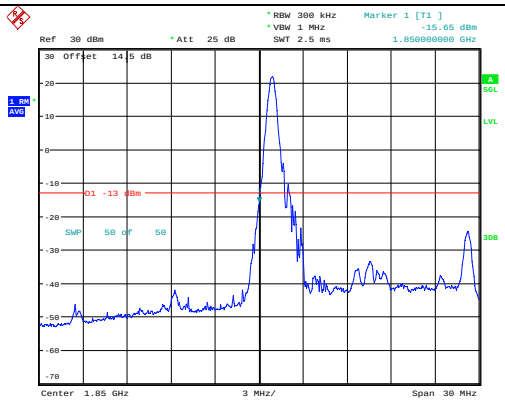 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 22:44:44	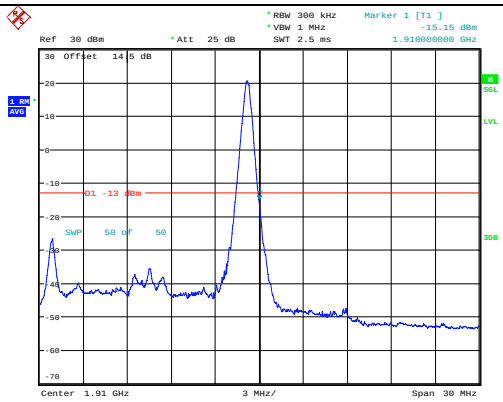 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 22:45:33
16QAM 20MHz	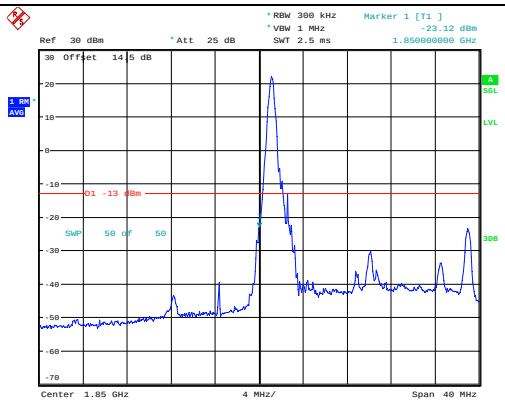 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 22:48:12	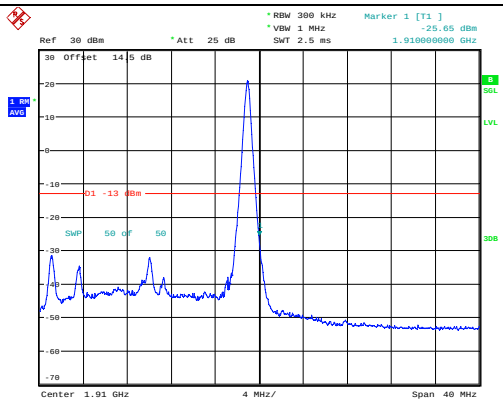 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 22:48:56

Full RB:

Out of band emission, Band Edge		
Mode	**Lowest**	**Highest**
QPSK 1.4MHz	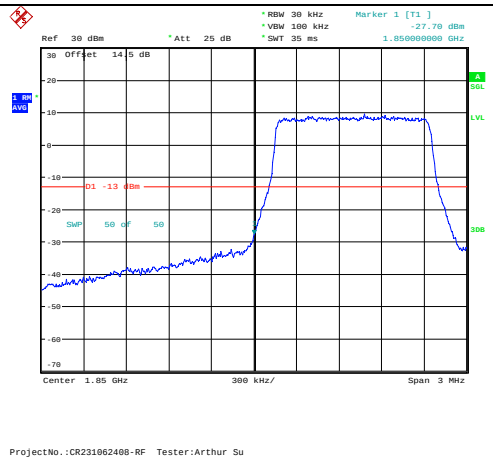	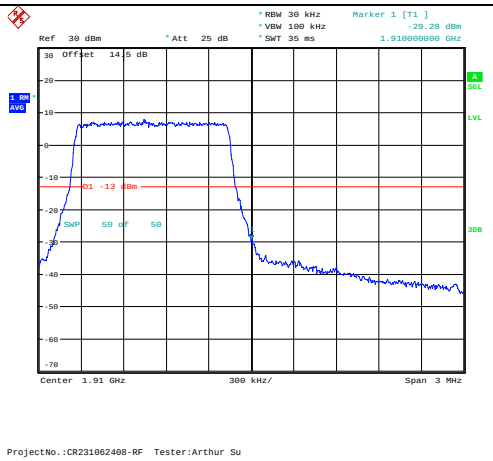
QPSK 3MHz	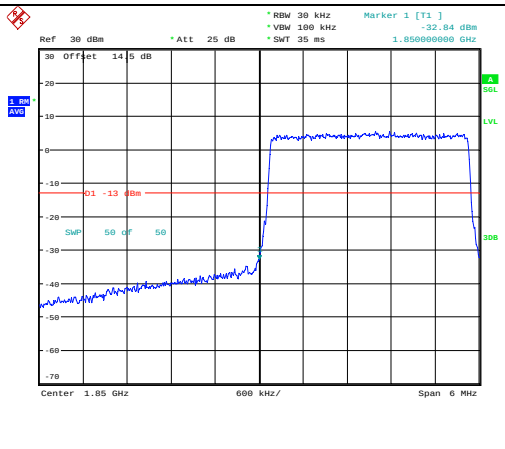	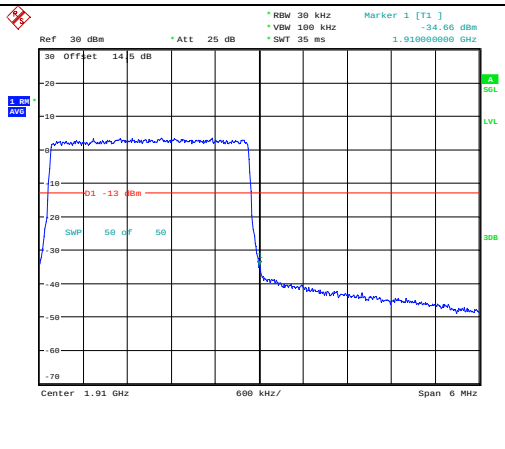
QPSK 5MHz	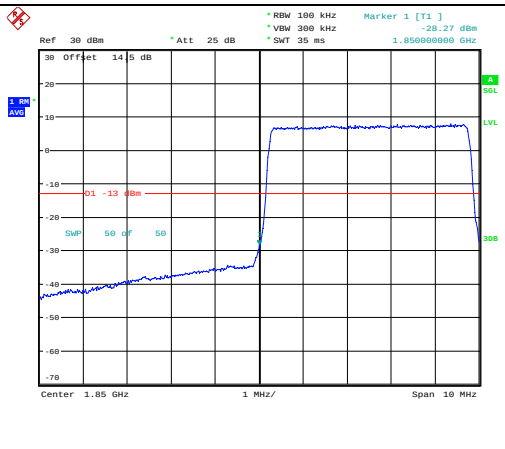	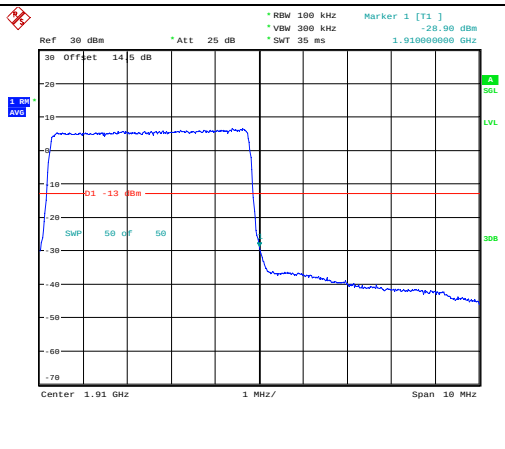

Out of band emission, Band Edge		
Mode	**Lowest**	**Highest**
QPSK 10MHz	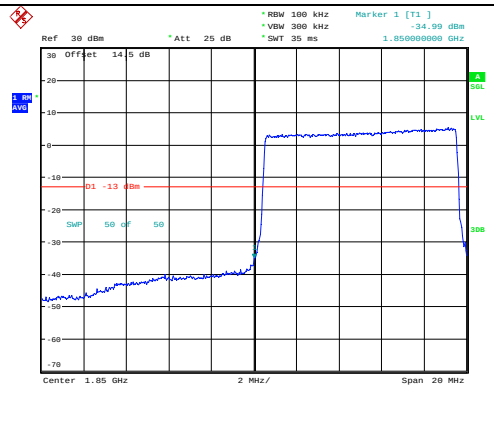	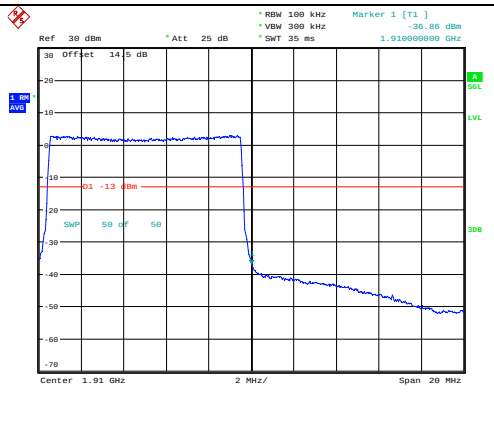
QPSK 15MHz	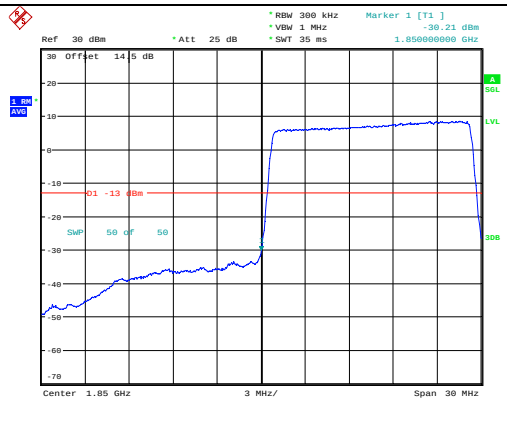	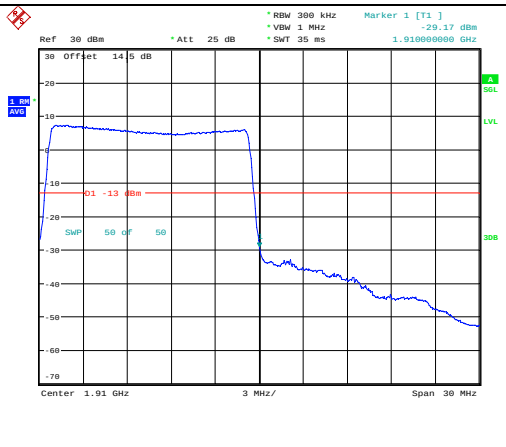
QPSK 20MHz	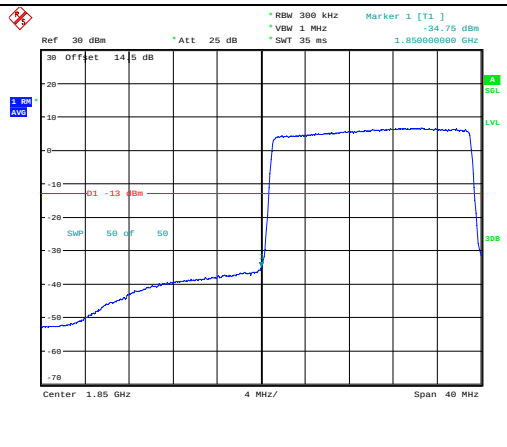	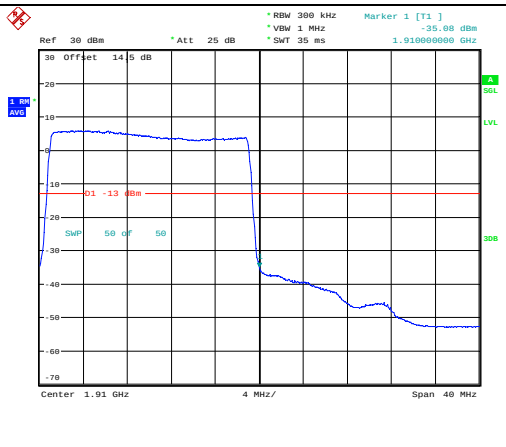

Full RB:

Out of band emission, Band Edge		
Mode	**Lowest**	**Highest**
16QAM 1.4MHz	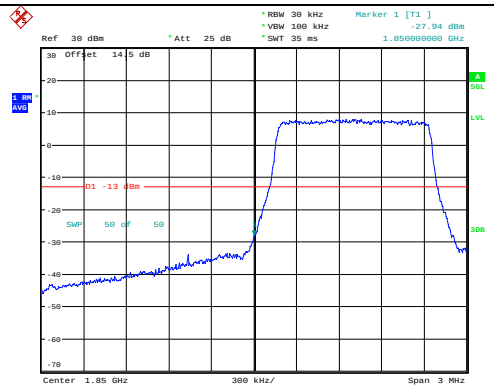 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 22.NOV.2023 23:48:47	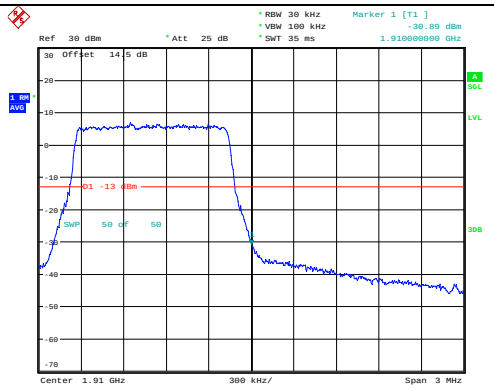 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 22.NOV.2023 23:49:08
16QAM 3MHz	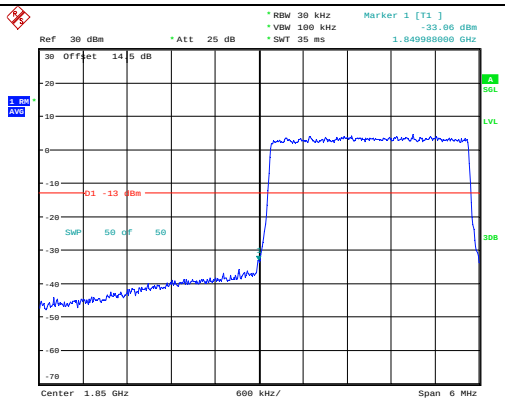 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 22.NOV.2023 23:50:00	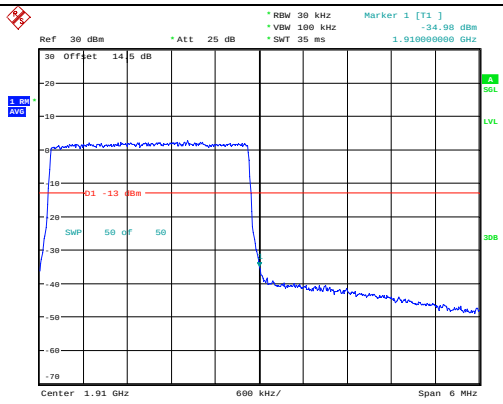 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 22.NOV.2023 23:50:22
16QAM 5MHz	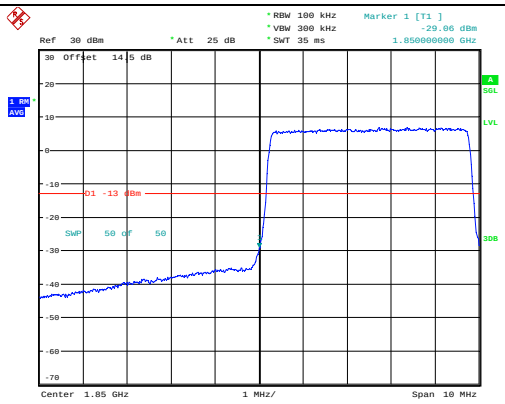 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 22.NOV.2023 23:51:14	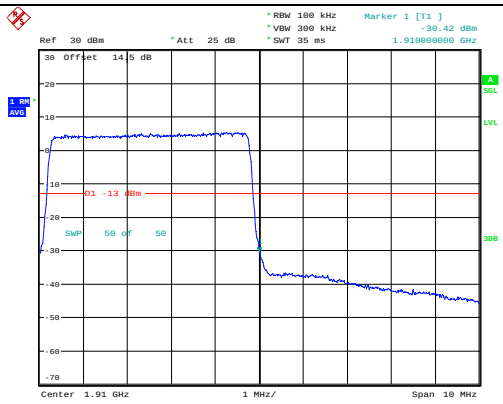 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 22.NOV.2023 23:51:38

Out of band emission, Band Edge		
Mode	**Lowest**	**Highest**
16QAM 10MHz	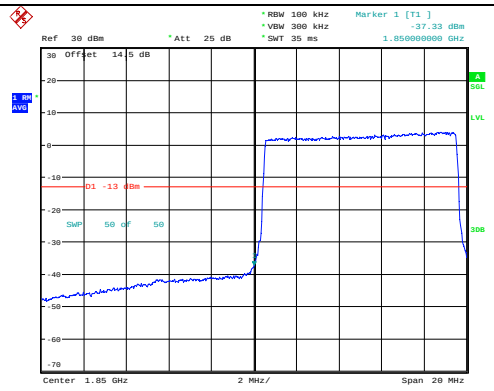 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 22.NOV.2023 23:55:24	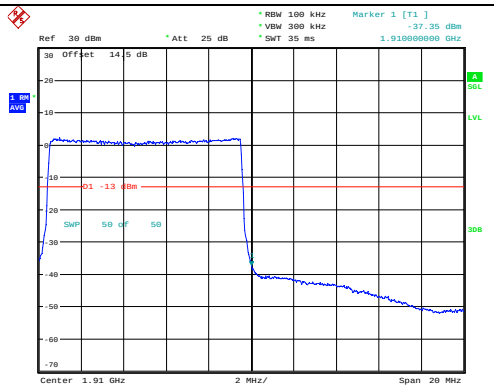 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 22.NOV.2023 23:55:48
16QAM 15MHz	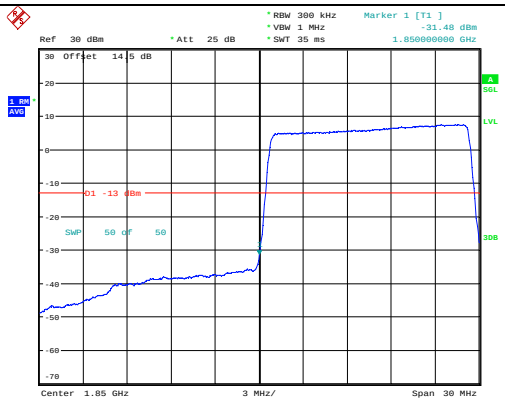 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 23.NOV.2023 00:04:10	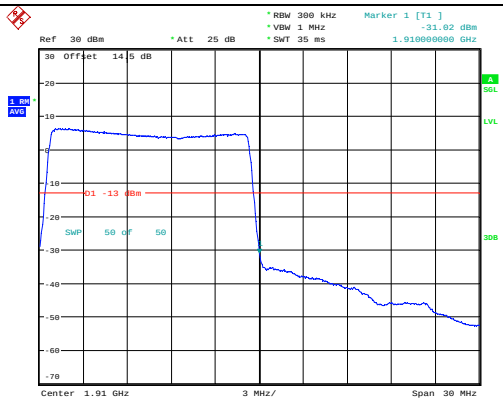 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 23.NOV.2023 00:04:28
16QAM 20MHz	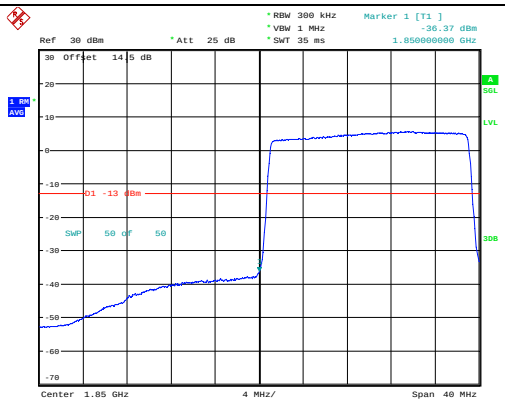 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 23.NOV.2023 00:05:26	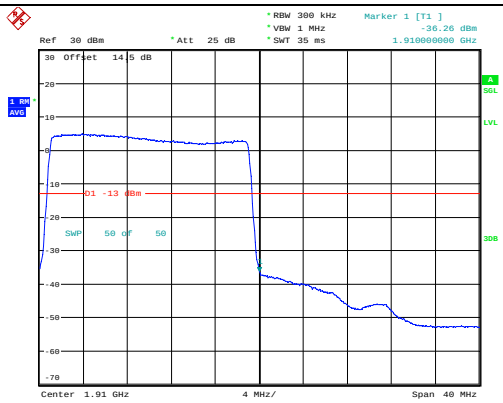 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 23.NOV.2023 00:05:45

4.6 Antenna Port Test Data and Results for LTE Band 5

Serial Number:	2COS-2	Test Date:	2023/11/21-2024/1/19
Test Site:	RF	Test Mode:	Transmitting
Tester:	Arthur Su	Test Result:	**Pass**

Environmental Conditions:					
Temperature: (℃)	24.2-26.3	Relative Humidity: (%)	42-60	ATM Pressure: (kPa)	101.3-102.2

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200256	2023/3/31	2024/3/30
zhuoxiang	Coaxial Cable	SMA-178	211002	Each time	N/A
YINSAIGE	Coaxial Cable	SS402	SJ0100002	Each time	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A
R&S	Wideband Radio Communication Tester	CMW500	143458	2023/3/31	2024/3/30
UNI-T	Multimeter	UT39A+	C210582554	2023/9/28	2024/9/27
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D0912386	N/A	N/A
Unknown	Coaxial tee connector	Unknown	2204004	Each time	N/A

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Frequency for Each Mode:

Operation Bandwidth	Lowest Frequency (MHz)	Middle Frequency (MHz)	Highest Frequency (MHz)
1.4MHz	824.7	836.5	848.3
3MHz	825.5	836.5	847.5
5MHz	826.5	836.5	846.5
10MHz	829	836.5	844

Test Data:

RF Output Power

Test Bandwidth & Modulation	Resource Block & RB offset	Conducted Average Output Power(dBm)			Maximum ERP (dBm)	ERP Limit (dBm)
		Lowest Channel	Middle Channel	Highest Channel		
1.4MHz QPSK	RB1#0	24.58	24.26	24.39	19	38.45
	RB1#3	**24.75**	24.48	24.54		
	RB1#5	24.58	24.29	24.40		
	RB3#0	24.67	24.36	24.48		
	RB3#3	24.64	24.34	24.47		
	RB6#0	23.68	23.36	23.47		
1.4MHz 16QAM	RB1#0	23.69	23.25	23.36	18.11	38.45
	RB1#3	**23.86**	23.46	23.59		
	RB1#5	23.68	23.29	23.39		
	RB3#0	23.56	23.40	23.64		
	RB3#3	23.59	23.38	23.65		
	RB6#0	22.70	22.36	22.51		
3MHz QPSK	RB1#0	**24.73**	24.59	24.34	18.98	38.45
	RB1#8	24.65	24.57	24.28		
	RB1#14	24.59	24.54	24.29		
	RB6#0	23.69	23.59	23.23		
	RB6#9	23.63	23.55	23.26		
	RB15#0	23.65	23.53	23.33		
3MHz 16QAM	RB1#0	**24.17**	23.72	23.31	18.42	38.45
	RB1#8	24.12	23.73	23.26		
	RB1#14	24.10	23.63	23.24		
	RB6#0	22.70	22.61	22.25		
	RB6#9	22.73	22.57	22.16		
	RB15#0	22.74	22.56	22.35		
5MHz QPSK	RB1#0	24.66	24.58	24.21	19.02	38.45
	RB1#13	**24.77**	24.66	24.34		
	RB1#24	24.59	24.50	24.22		
	RB15#0	23.68	23.61	23.39		
	RB15#10	23.68	23.60	23.30		
	RB25#0	23.66	23.56	23.29		
5MHz 16QAM	RB1#0	23.49	23.81	23.22	18.14	38.45
	RB1#13	23.56	**23.89**	23.36		
	RB1#24	23.47	23.69	23.25		
	RB15#0	22.79	22.62	22.44		
	RB15#10	22.75	22.60	22.33		
	RB25#0	22.75	22.62	22.36		
10MHz QPSK	RB1#0	24.75	24.70	24.59	19.1	38.45
	RB1#25	**24.85**	24.76	24.70		
	RB1#49	24.68	24.55	24.55		
	RB25#0	23.74	23.73	23.61		

	RB25#25	23.75	23.60	23.52		
	RB50#0	23.74	23.66	23.55		
10MHz 16QAM	RB1#0	24.14	23.83	23.54	18.65	38.45
	RB1#25	**24.40**	23.88	23.67		
	RB1#49	24.20	23.69	23.52		
	RB25#0	22.83	22.78	22.72		
	RB25#25	22.84	22.69	22.65		
	RB50#0	22.79	22.72	22.62		
Note: ERP= Conducted Power(dBm) - L_C(dB) + G_T(dBd) G_T(dBd)=G_T(dBi)-2.15						
					Result:	**Pass**

Peak-to-average Ratio(PAR)

Test Bandwidth & Modulation	Resource Block & RB offset	Peak-to-average Ratio(dB)			Limit (dB)
		Lowest Channel	Middle Channel	Highest Channel	
10MHz QPSK	RB1#0	6.58	4.97	4.90	13
	RB50#0	6.93	6.21	7.01	13
10MHz 16QAM	RB1#0	6.87	5.66	5.25	13
	RB50#0	6.72	7.50	6.62	13
				Result:	**Pass**

Occupied Bandwidth

Operation Mode	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
	Low Channel	Middle channel	High Channel	Low Channel	Middle Channel	High Channel
1.4MHz QPSK	1.098	1.110	1.098	1.308	1.326	1.314
1.4MHz 16QAM	1.098	1.104	1.104	1.296	1.296	1.314
3MHz QPSK	2.687	2.687	2.687	2.880	2.868	2.892
3MHz 16QAM	2.676	2.687	2.676	2.868	2.892	2.880
5MHz QPSK	4.520	4.520	4.520	4.940	4.940	4.880
5MHz 16QAM	4.520	4.540	4.520	4.960	4.940	4.980
10MHz QPSK	8.960	8.960	8.960	9.600	9.600	9.560
10MHz 16QAM	9.000	8.960	8.960	9.520	9.560	9.520
Note: The test plots please refer to the Plots of Occupied Bandwidth						

Spurious Emissions at Antenna Terminal	
Result:	**Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.**

Out of band emission, Band Edge	
Result:	**Pass, Please refer to the test plots of Out of band emission, Band Edge.**

Frequency Stability

Test Modulation:	10 MHz QPSK		Test Channel:	836.5	MHz
Test Item	Temperature (℃)	Voltage (V_{DC})	Frequency Error		Limit
			(Hz)	(ppm)	(ppm)
Frequency Stability vs. Temperature	-30	3.85	7	0.008	2.5
	-20	3.85	52	0.062	2.5
	-10	3.85	7	0.008	2.5
	0	3.85	12	0.014	2.5
	10	3.85	1	0.001	2.5
	20	3.85	17	0.020	2.5
	30	3.85	18	0.022	2.5
	40	3.85	10	0.012	2.5
	50	3.85	4	0.005	2.5
Frequency Stability vs. Voltage	20	3.4	4	0.005	2.5
	20	4.4	16	0.019	2.5
				Result:	**Pass**

Test Modulation:	10 MHz 16QAM		Test Channel:	836.5	MHz
Test Item	Temperature (℃)	Voltage (V_{DC})	Frequency Error		Limit
			(Hz)	(ppm)	(ppm)
Frequency Stability vs. Temperature	-30	3.85	12	0.014	2.5
	-20	3.85	8	0.010	2.5
	-10	3.85	27	0.032	2.5
	0	3.85	17	0.020	2.5
	10	3.85	2	0.002	2.5
	20	3.85	8	0.010	2.5
	30	3.85	10	0.012	2.5
	40	3.85	2	0.002	2.5
	50	3.85	19	0.023	2.5
Frequency Stability vs. Voltage	20	3.4	4	0.005	2.5
	20	4.4	32	0.038	2.5
				Result:	**Pass**

Test Plots(Note: The 14.5 dB is the Insertion loss of the RF cable, attenuator and coaxial tee connector, which was offset into the Spectrum Analyzer):

Occupied Bandwidth		
Channel	1.4MHz Bandwidth QPSK	1.4MHz Bandwidth 16QAM
Lowest	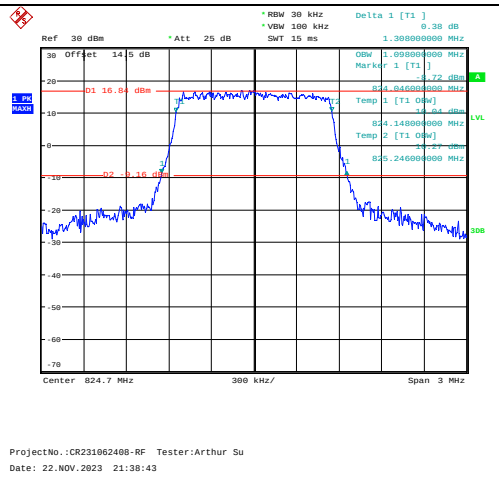	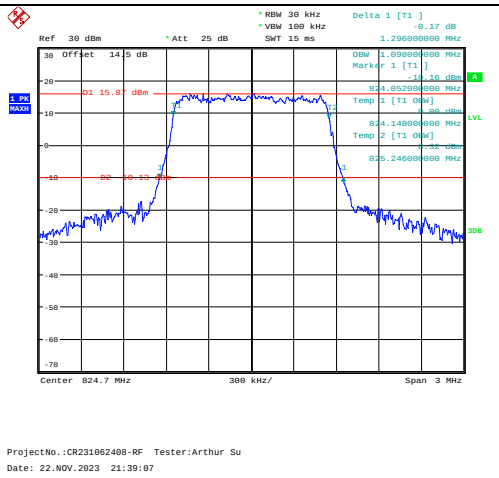
Middle	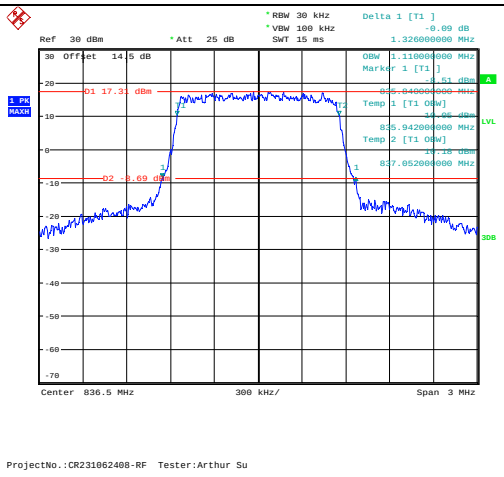	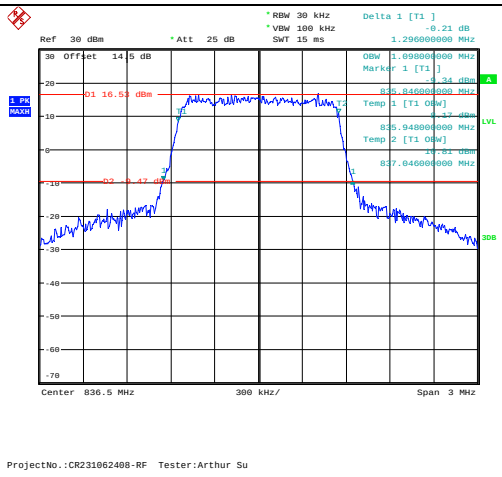
Highest	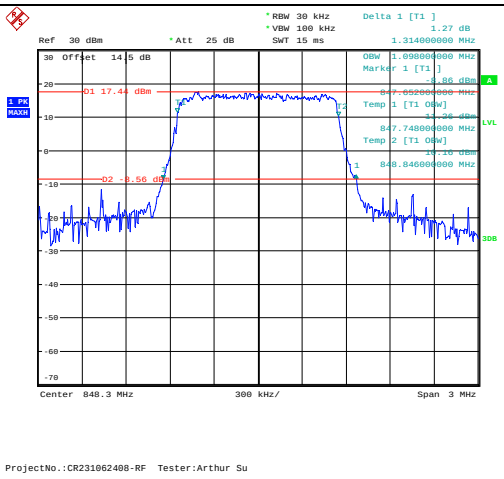	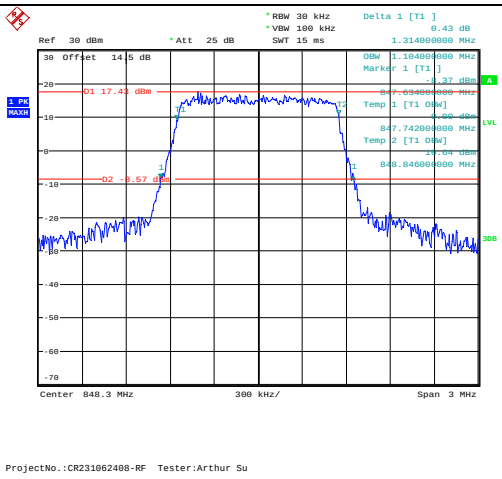

Occupied Bandwidth		
Channel	3MHz Bandwidth QPSK	3MHz Bandwidth 16QAM
Lowest	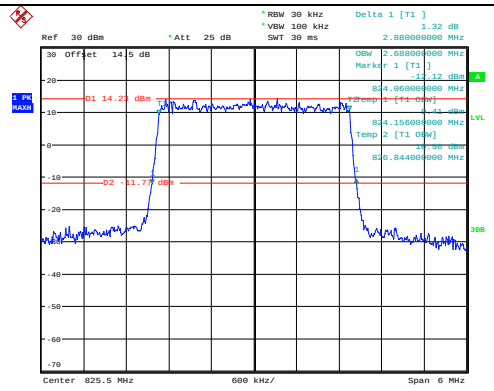	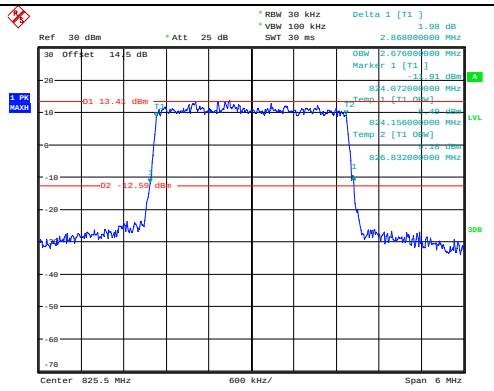
Middle	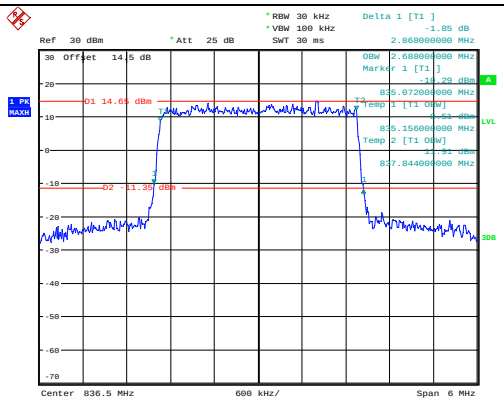	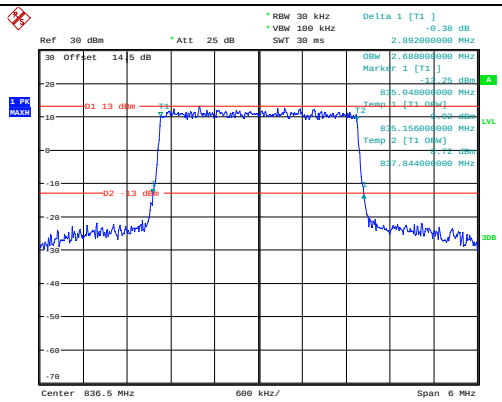
Highest	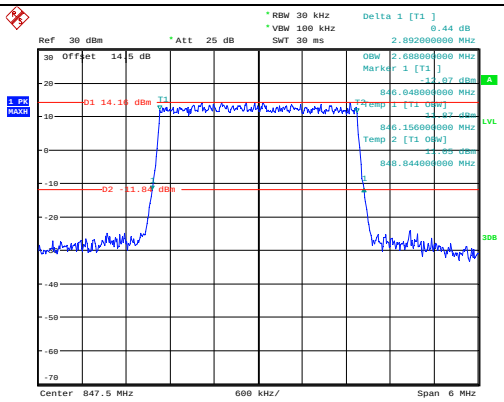	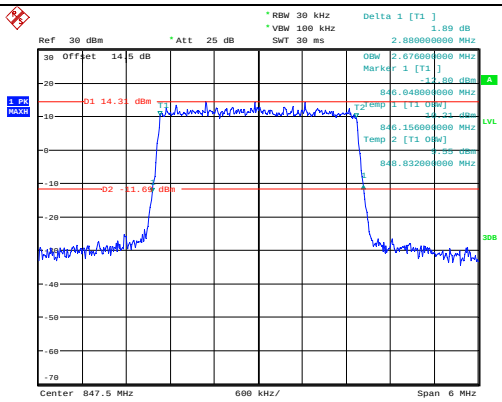

Occupied Bandwidth		
Channel	5MHz Bandwidth QPSK	5MHz Bandwidth 16QAM
Lowest	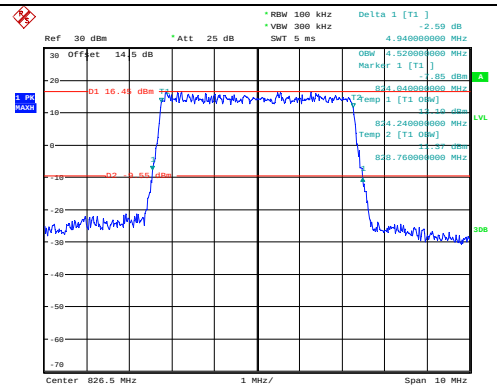 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 22.NOV.2023 21:48:35	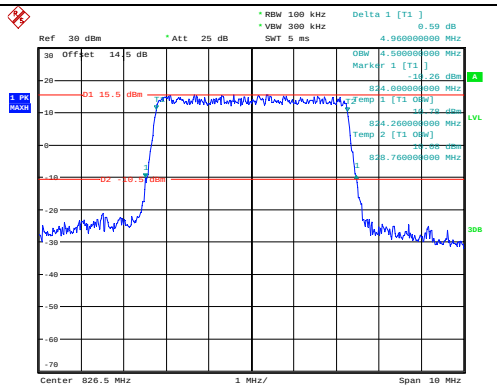 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 22.NOV.2023 21:48:58
Middle	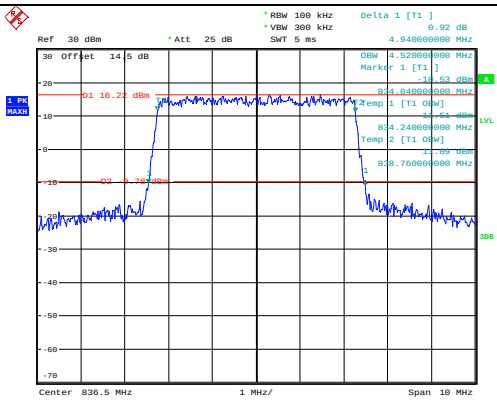 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 22.NOV.2023 21:49:25	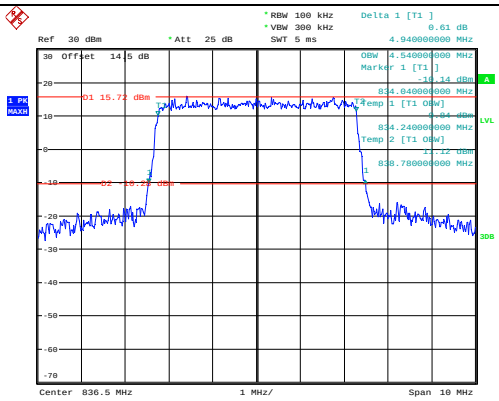 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 22.NOV.2023 21:49:47
Highest	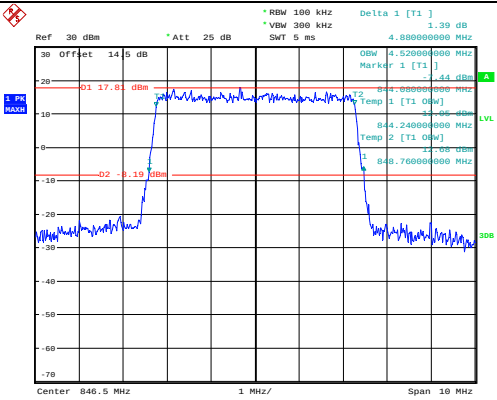 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 22.NOV.2023 21:50:08	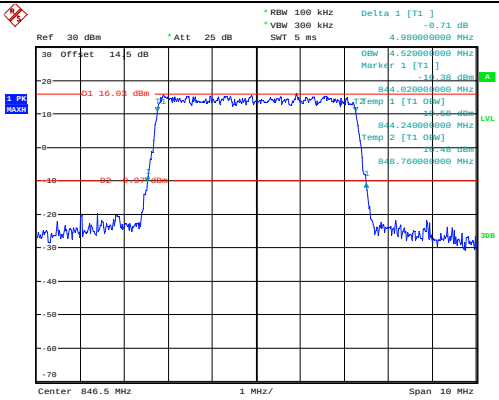 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 22.NOV.2023 21:50:34

Occupied Bandwidth

Channel	10MHz Bandwidth QPSK	10MHz Bandwidth 16QAM
Lowest	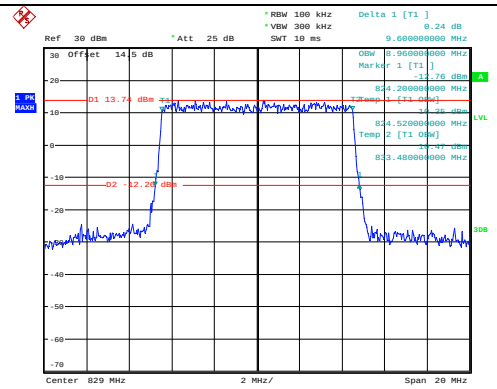 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 22.NOV.2023 21:51:26	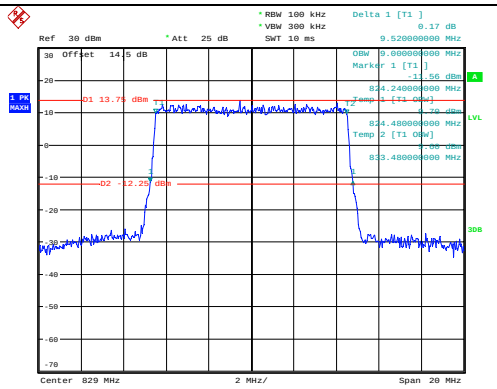 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 22.NOV.2023 21:51:49
Middle	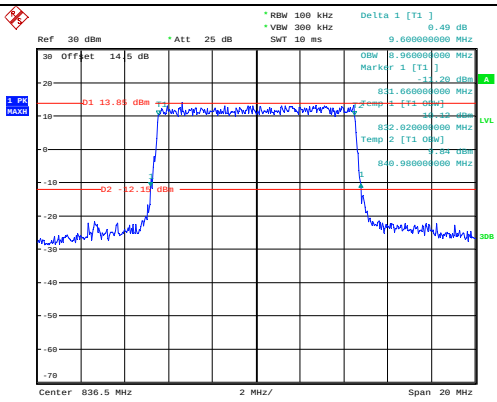 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 22.NOV.2023 21:52:09	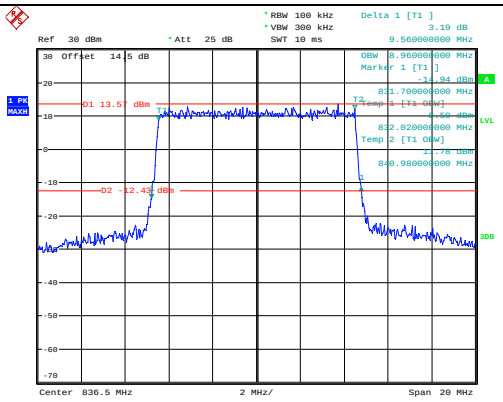 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 22.NOV.2023 21:52:28
Highest	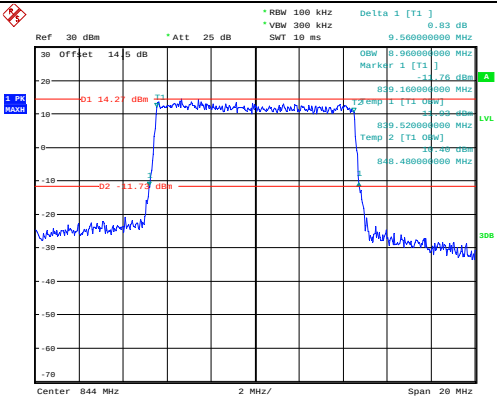 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 22.NOV.2023 21:52:52	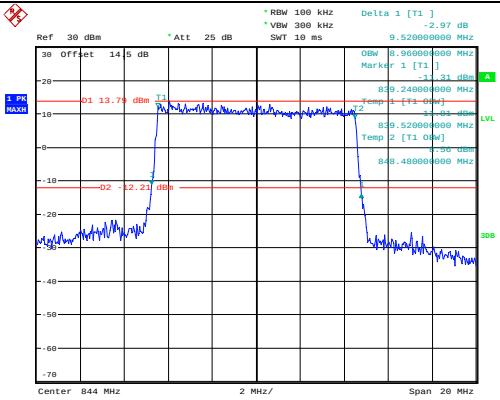 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 22.NOV.2023 21:53:11

1RB:

Spurious Emissions at Antenna Terminal		
Channel	**1.4MHz Bandwidth QPSK**	
Lowest	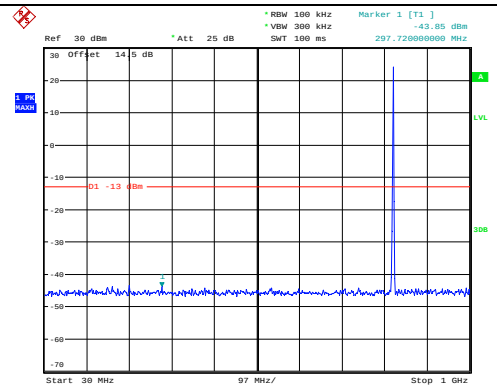 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 21:38:23	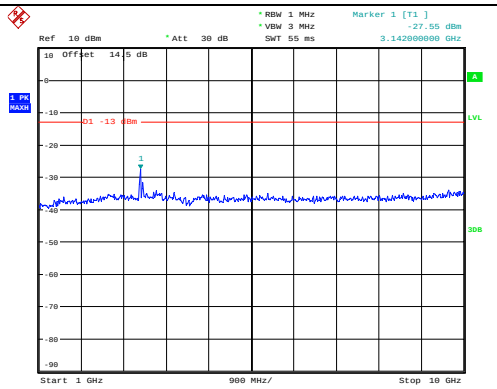 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 19:38:56
Middle	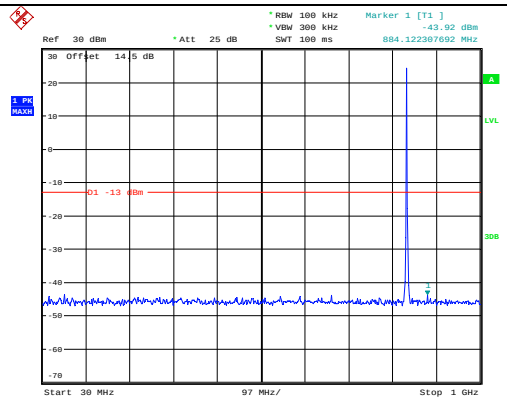 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 21:40:41	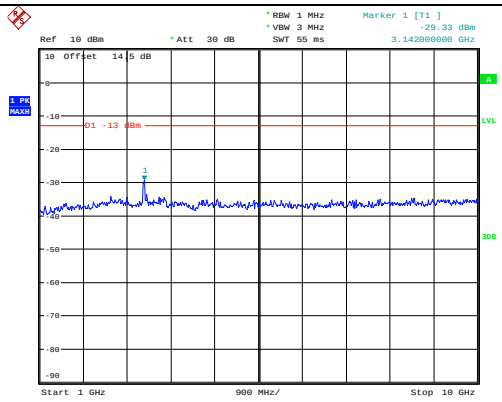 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 19:39:21
Highest	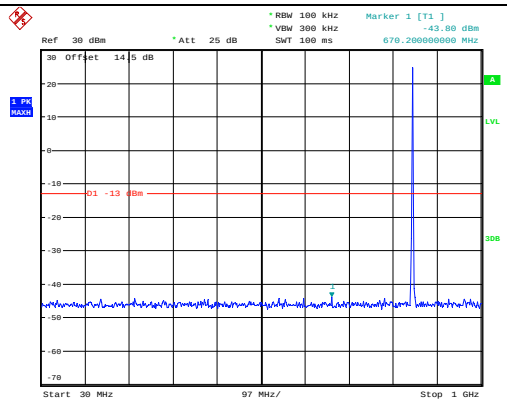 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 21:42:28	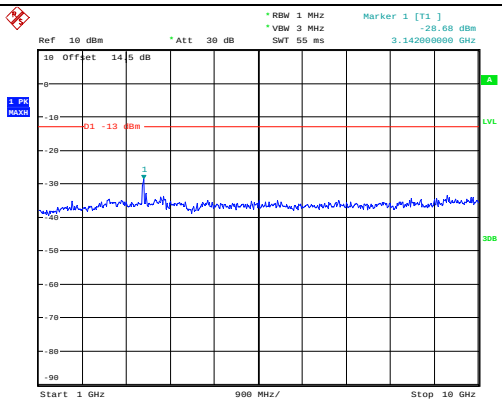 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 19:39:52

Spurious Emissions at Antenna Terminal		
Channel	**3MHz Bandwidth QPSK**	
Lowest	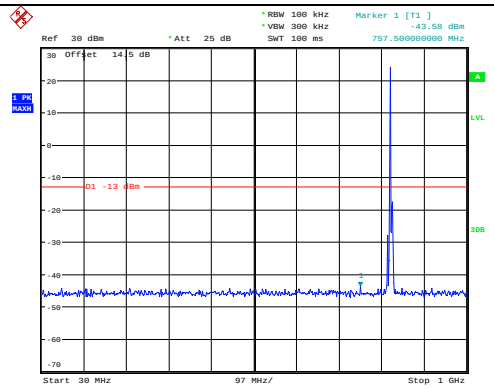 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 21:44:46	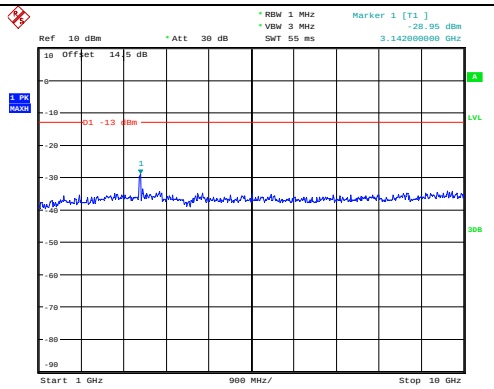 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 19:41:01
Middle	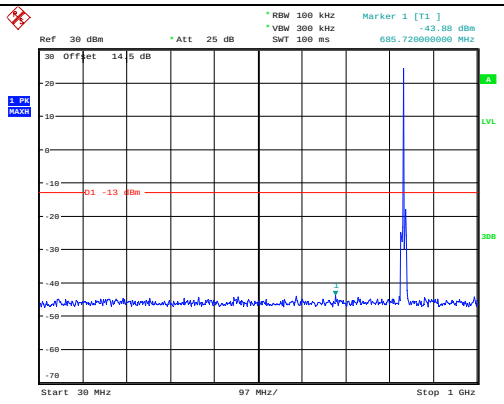 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 21:46:04	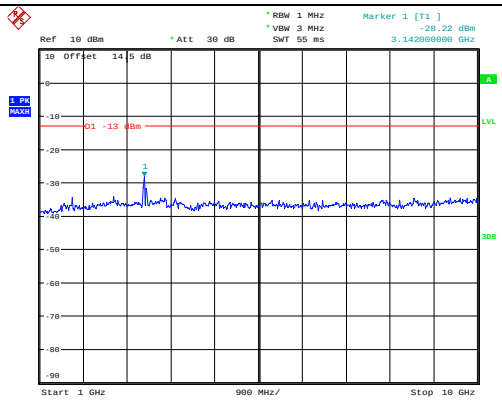 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 19:49:10
Highest	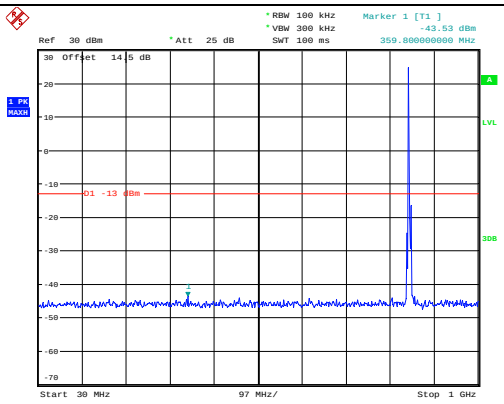 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 21:46:58	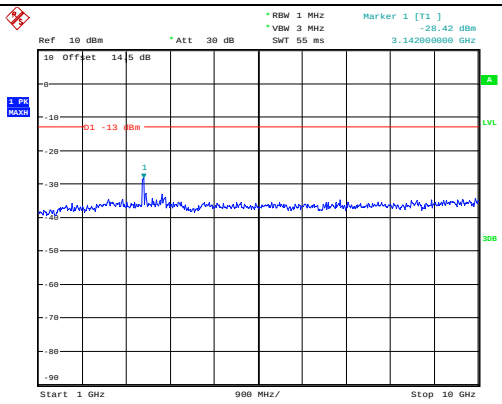 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 19:49:39

Spurious Emissions at Antenna Terminal		
Channel	**5MHz Bandwidth QPSK**	
Lowest	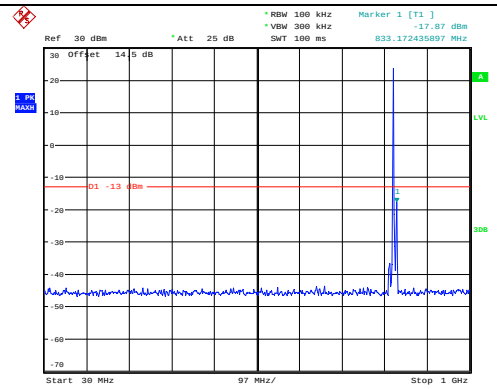 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 22:01:44	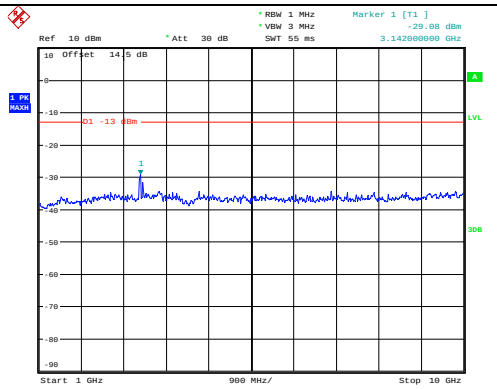 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 19:50:54
Middle	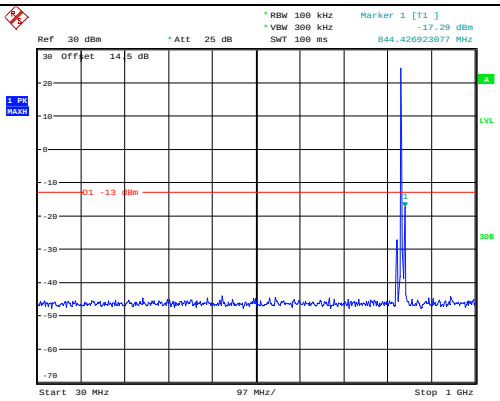 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 22:02:12	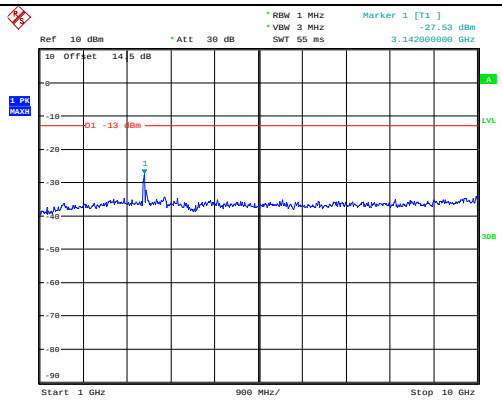 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 19:51:19
Highest	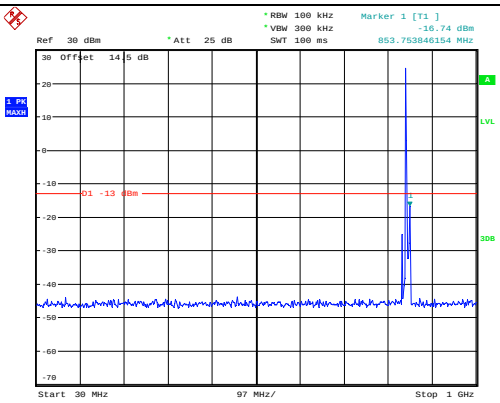 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 22:03:17	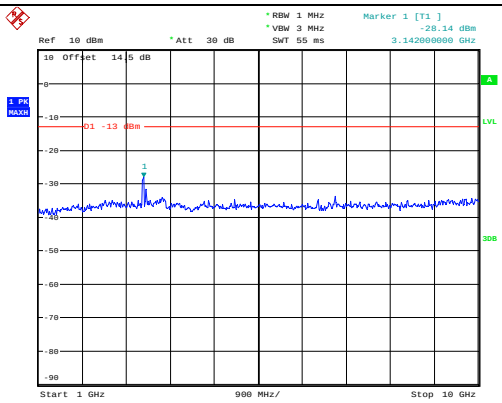 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 19:51:44

Spurious Emissions at Antenna Terminal		
Channel	**10MHz Bandwidth QPSK**	
Lowest	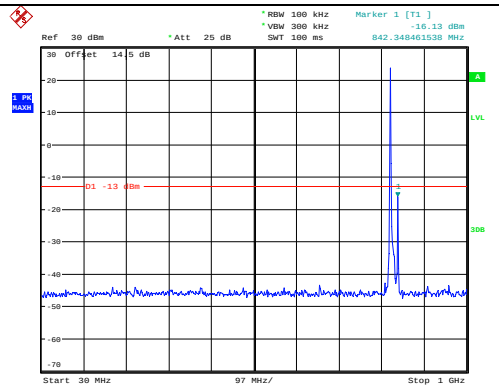 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 21:56:46	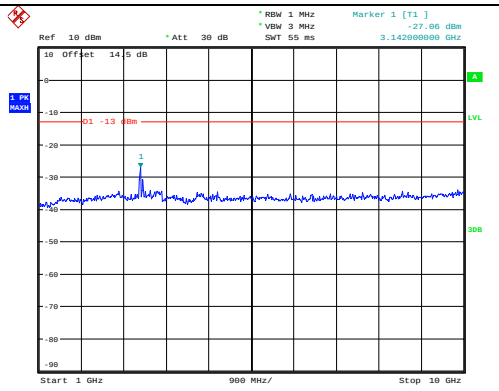 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 20:26:32
Middle	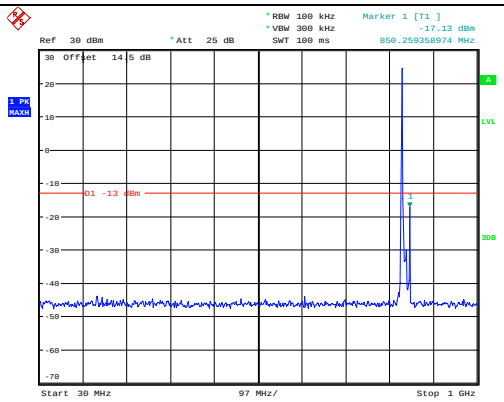 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 21:58:27	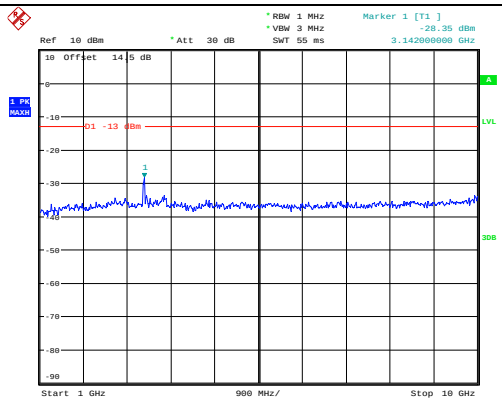 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 20:26:59
Highest	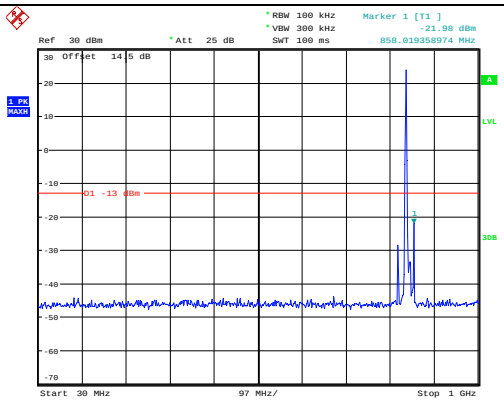 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 21:59:01	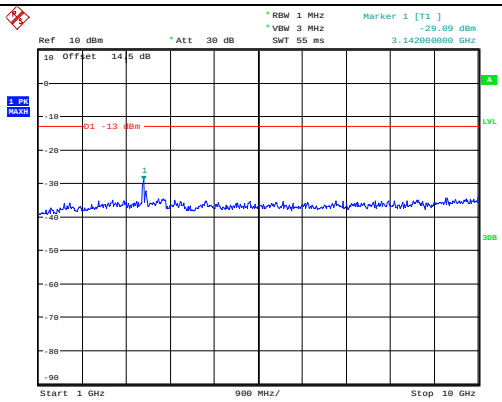 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 20:27:28

1RB:

Out of band emission, Band Edge		
Mode	**Lowest**	**Highest**
QPSK 1.4MHz	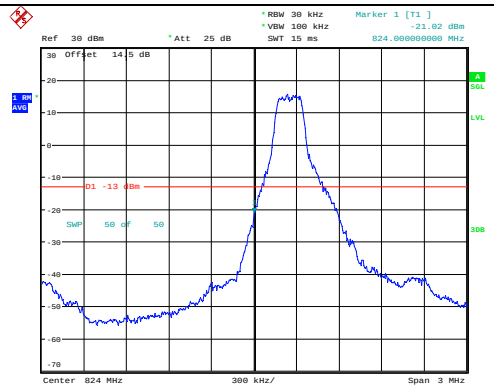 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 22:59:35	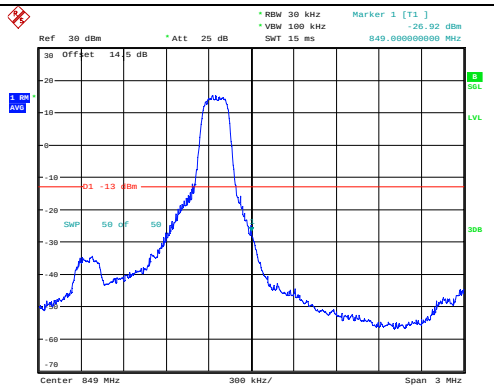 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 23:02:50
QPSK 3MHz	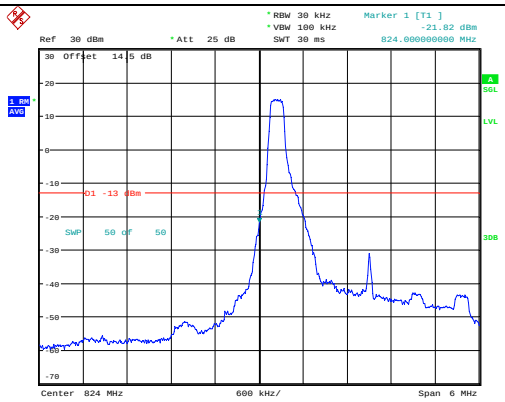 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 23:03:50	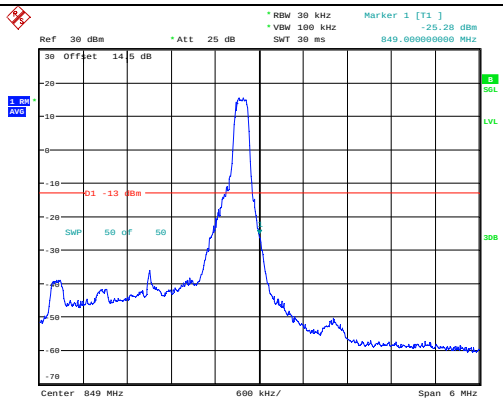 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 23:05:37
QPSK 5MHz	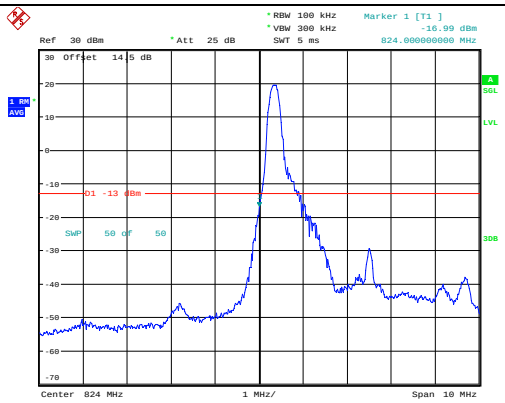 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 23:07:34	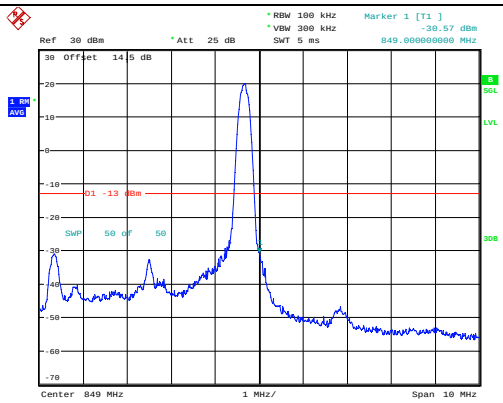 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 23:09:33

Out of band emission, Band Edge		
Mode	**Lowest**	**Highest**
QPSK 10MHz	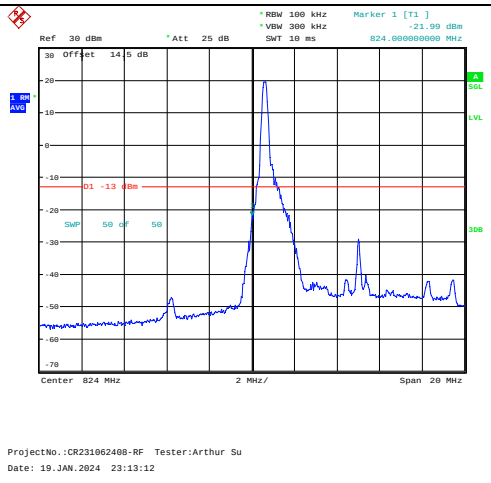	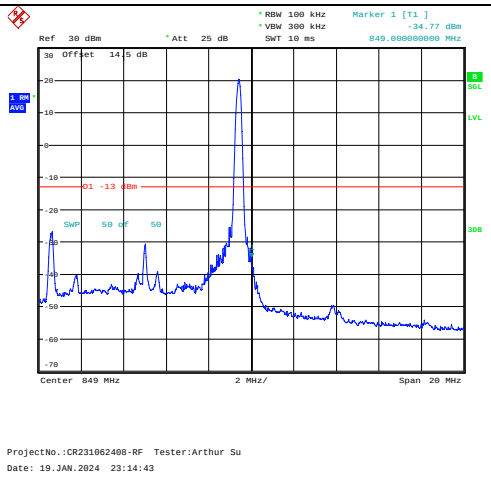

Out of band emission, Band Edge		
Mode	**Lowest**	**Highest**
16QAM 1.4MHz	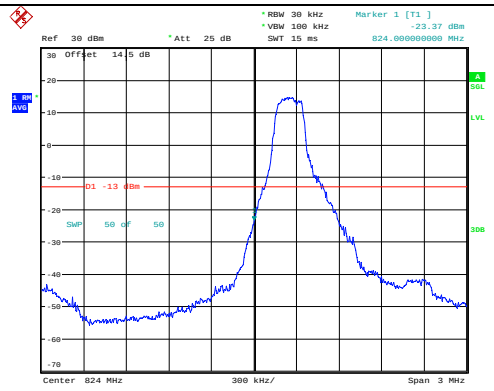 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 23:00:01	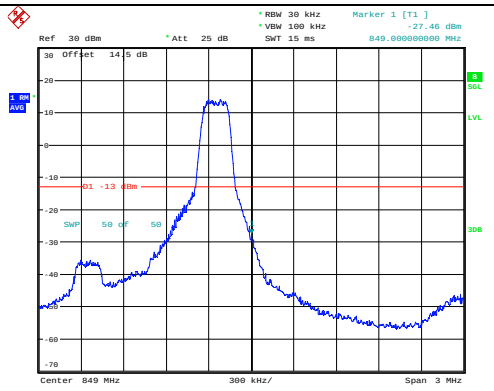 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 23:02:24
16QAM 3MHz	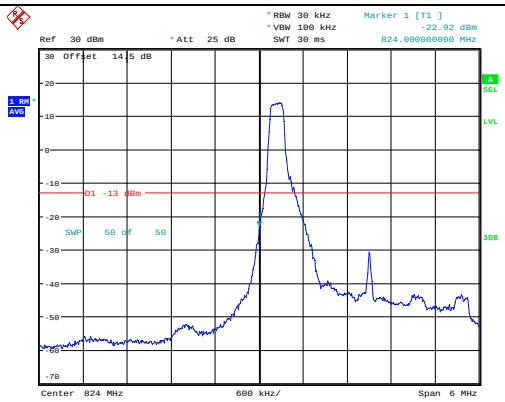 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 23:04:13	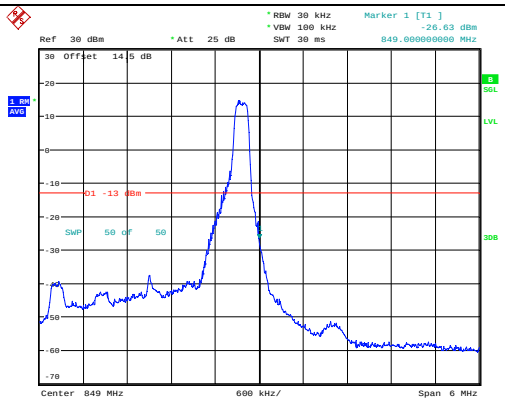 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 23:05:14
16QAM 5MHz	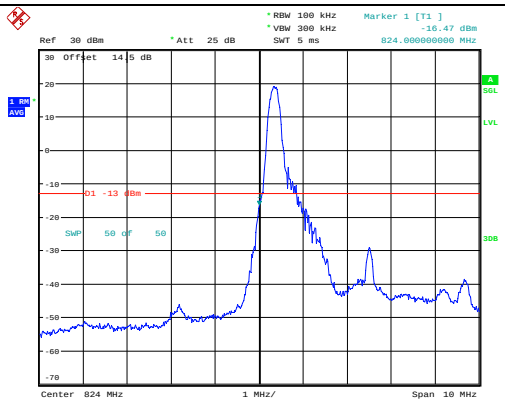 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 23:08:12	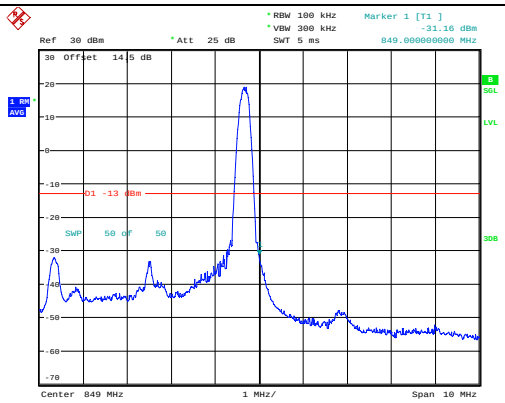 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 23:09:08

Out of band emission, Band Edge		
Mode	**Lowest**	**Highest**
16QAM 10MHz	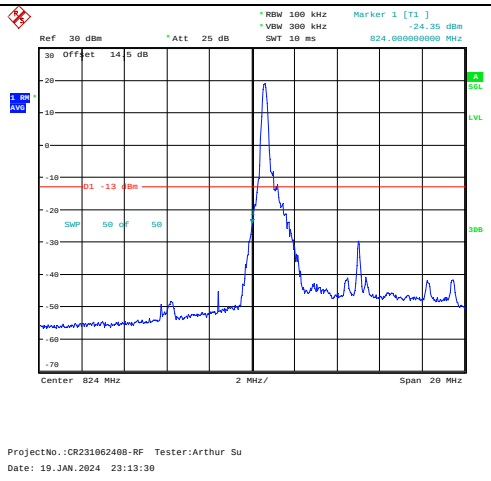	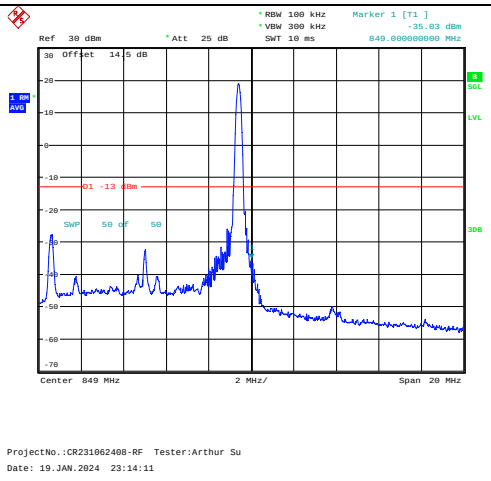

Full RB:

Out of band emission, Band Edge		
Mode	**Lowest**	**Highest**
QPSK 1.4MHz	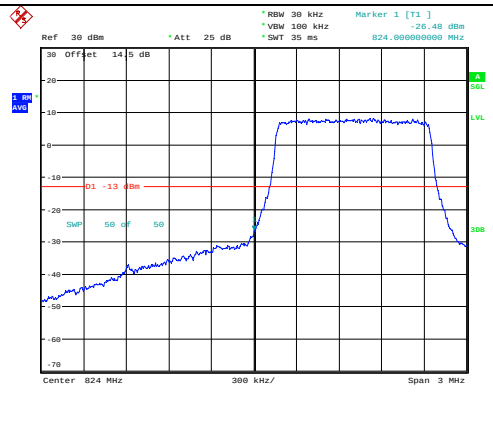	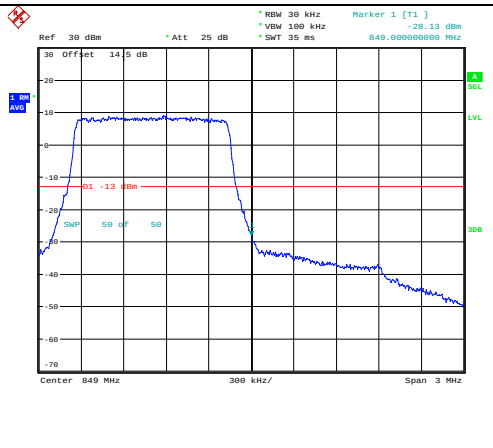
QPSK 3MHz	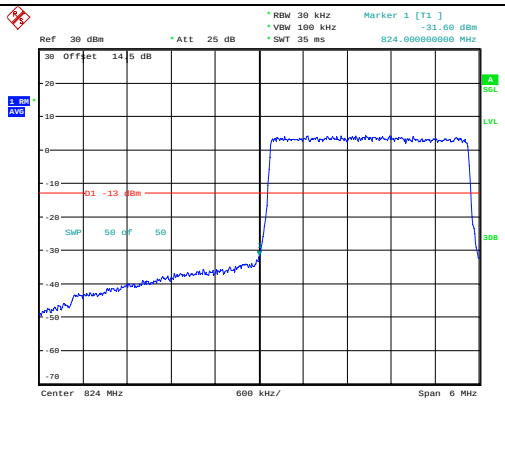	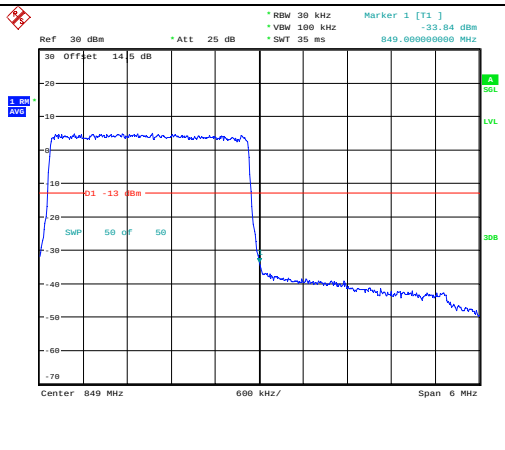
QPSK 5MHz	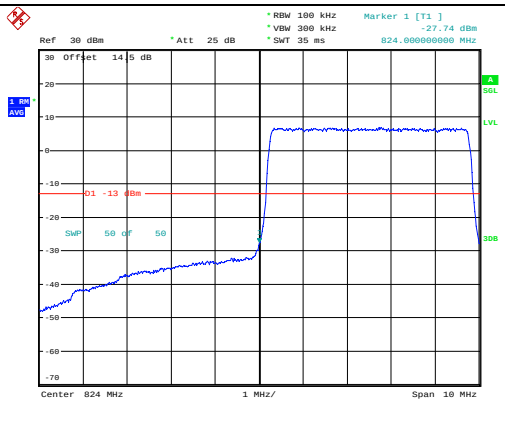	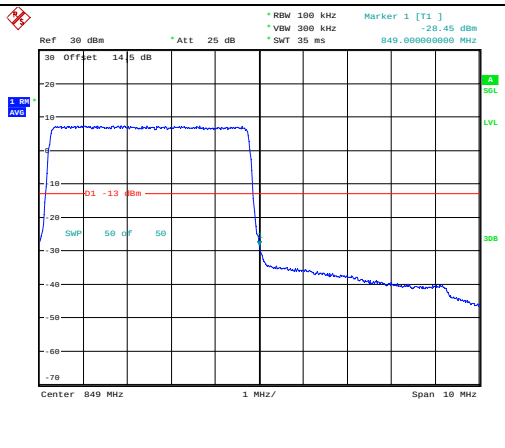

Out of band emission, Band Edge		
Mode	**Lowest**	**Highest**
QPSK 10MHz	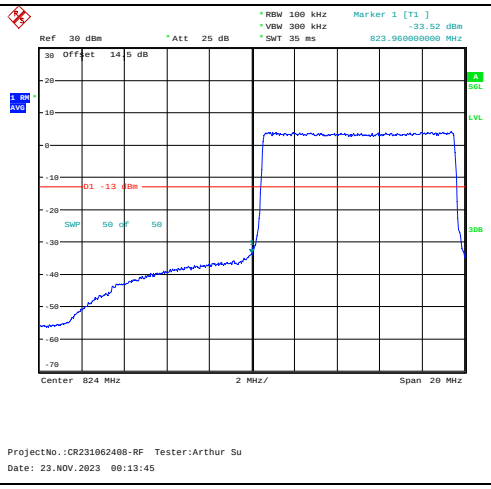	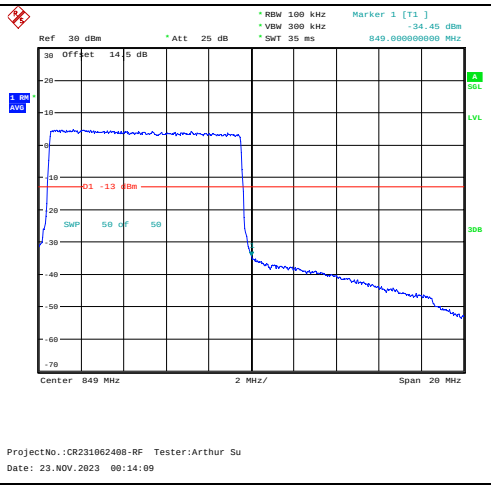

Full RB:

Out of band emission, Band Edge		
Mode	**Lowest**	**Highest**
16QAM 1.4MHz	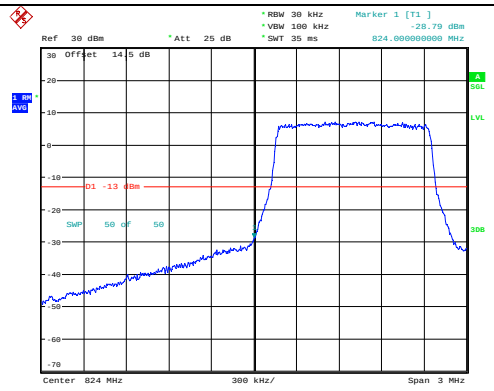 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 23.NOV.2023 00:06:09	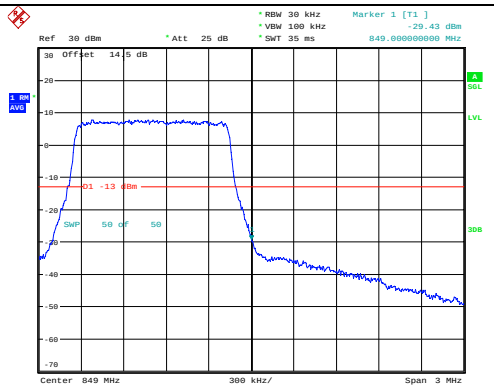 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 23.NOV.2023 00:06:28
16QAM 3MHz	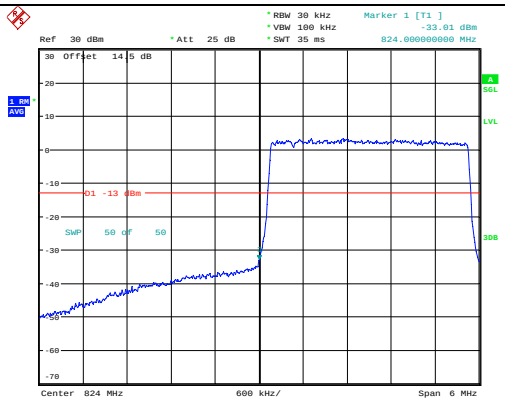 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 23.NOV.2023 00:07:20	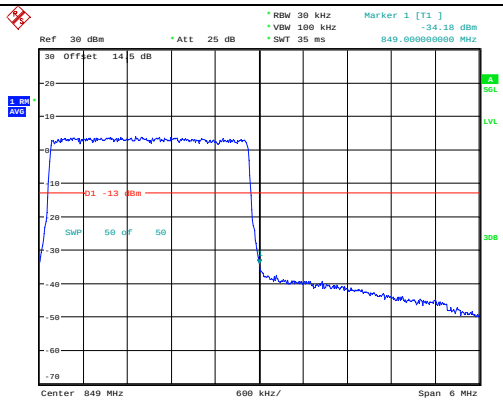 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 23.NOV.2023 00:07:42
16QAM 5MHz	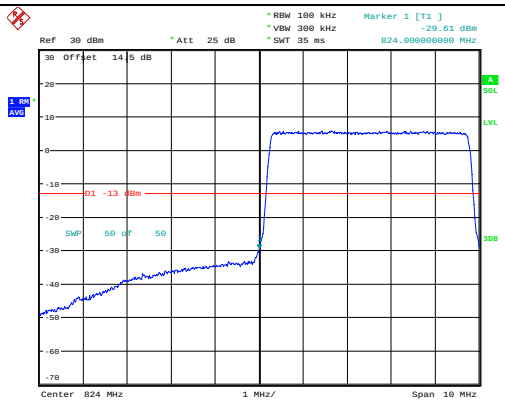 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 23.NOV.2023 00:08:34	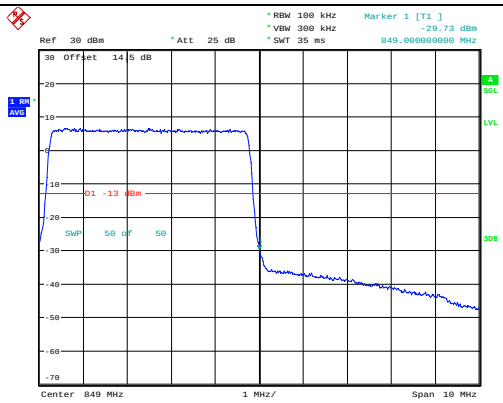 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 23.NOV.2023 00:08:56

Out of band emission, Band Edge		
Mode	**Lowest**	**Highest**
16QAM 10MHz	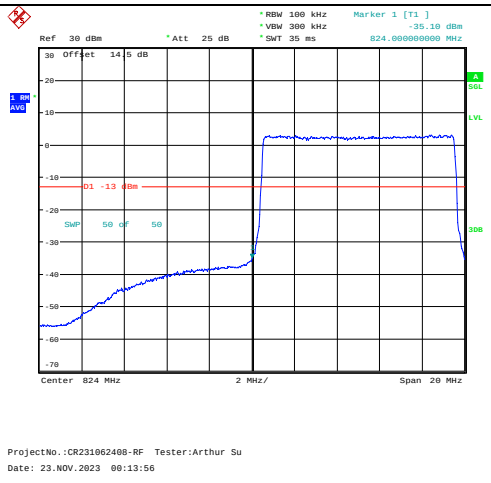	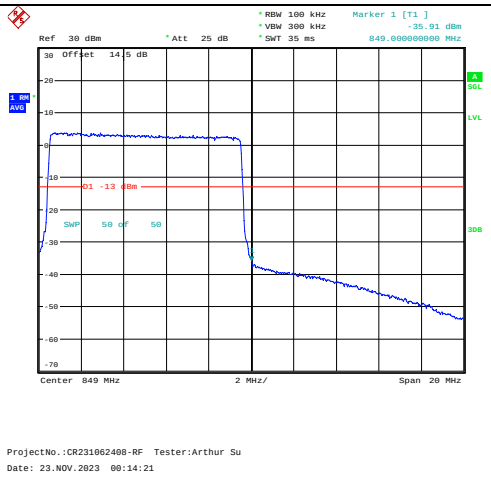

4.7 Antenna Port Test Data and Results for LTE Band 7

Serial Number:	2COS-2	Test Date:	2023/11/21-2024/1/19
Test Site:	RF	Test Mode:	Transmitting
Tester:	Arthur Su	Test Result:	**Pass**

Environmental Conditions:					
Temperature: (℃)	24.2-26.3	Relative Humidity: (%)	42-60	ATM Pressure: (kPa)	101.3-102.2

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200256	2023/3/31	2024/3/30
zhuoxiang	Coaxial Cable	SMA-178	211002	Each time	N/A
YINSAIGE	Coaxial Cable	SS402	SJ0100002	Each time	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A
R&S	Wideband Radio Communication Tester	CMW500	143458	2023/3/31	2024/3/30
UNI-T	Multimeter	UT39A+	C210582554	2023/9/28	2024/9/27
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D0912386	N/A	N/A
Unknown	Coaxial tee connector	Unknown	2204004	Each time	N/A

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Frequency For Each Mode:

Operation Bandwidth	Lowest Frequency (MHz)	Middle Frequency (MHz)	Highest Frequency (MHz)
5MHz	2502.5	2535	2567.5
10MHz	2505	2535	2565
15MHz	2507.5	2535	2562.5
20MHz	2510	2535	2560

Test Data:

RF Output Power

Test Bandwidth & Modulation	Resource Block & RB offset	Conducted Average Output Power(dBm)			Maximum EIRP (dBm)	EIRP Limit (dBm)
		Lowest Channel	Middle Channel	Highest Channel		
5MHz QPSK	RB1#0	19.32	19.45	18.87	19.62	33
	RB1#13	19.36	**19.52**	18.98		
	RB1#24	19.30	19.37	18.83		
	RB15#0	18.39	18.57	18.04		
	RB15#10	18.39	18.53	18.00		
	RB25#0	18.36	18.49	17.95		
5MHz 16QAM	RB1#0	18.56	18.54	17.73	18.75	33
	RB1#13	**18.65**	18.58	17.85		
	RB1#24	18.56	18.45	17.71		
	RB15#0	17.36	17.58	17.02		
	RB15#10	17.36	17.51	16.98		
	RB25#0	17.34	17.50	17.01		
10MHz QPSK	RB1#0	19.60	19.27	19.04	19.74	33
	RB1#25	**19.64**	19.29	19.08		
	RB1#49	19.51	19.12	18.87		
	RB25#0	18.60	18.24	17.93		
	RB25#25	18.60	18.21	17.91		
	RB50#0	18.60	18.23	17.86		
10MHz 16QAM	RB1#0	19.06	18.37	17.89	19.24	33
	RB1#25	**19.14**	18.42	17.96		
	RB1#49	19.00	18.27	17.81		
	RB25#0	17.60	17.26	16.90		
	RB25#25	17.63	17.20	16.92		
	RB50#0	17.54	17.23	16.89		
15MHz QPSK	RB1#0	19.52	19.32	18.87	19.63	33
	RB1#38	**19.53**	19.30	18.87		
	RB1#74	19.37	19.10	18.67		
	RB36#0	18.69	18.49	18.02		
	RB36#39	18.67	18.36	17.99		
	RB75#0	18.70	18.43	18.01		
15MHz 16QAM	RB1#0	18.99	18.45	18.12	19.15	33
	RB1#38	**19.05**	18.44	18.07		
	RB1#74	18.83	18.25	17.95		
	RB36#0	17.62	17.42	16.85		
	RB36#39	17.58	17.31	16.82		
	RB75#0	17.64	17.41	16.86		
20MHz QPSK	RB1#0	19.37	19.16	18.92	19.8	33
	RB1#50	**19.70**	19.42	19.22		
	RB1#99	19.20	18.91	18.71		
	RB50#0	18.54	18.32	18.08		

	RB50#50	18.51	18.19	18.01		
	RB100#0	18.53	18.29	18.08		
20MHz 16QAM	RB1#0	18.59	18.64	18.23	19.04	33
	RB1#50	18.85	**18.94**	18.46		
	RB1#99	18.38	18.50	17.97		
	RB50#0	17.52	17.30	17.07		
	RB50#50	17.51	17.24	16.93		
	RB100#0	17.54	17.28	17.04		
Note: EIRP=Conducted Power(dBm) - L_C(dB) + G_T(dBi)						
					Result:	**Pass**

Peak-to-average Ratio(PAR)

Test Bandwidth & Modulation	Resource Block & RB offset	Peak-to-average Ratio(dB)			Limit (dB)
		Lowest Channel	Middle Channel	Highest Channel	
20MHz QPSK	RB1#0	6.05	6.20	5.25	13
	RB100#0	6.37	6.89	6.39	13
20MHz 16QAM	RB1#0	5.56	7.34	6.05	13
	RB100#0	8.19	7.98	7.94	13
				Result:	**Pass**

Occupied Bandwidth

Operation Mode	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
	Low Channel	Middle channel	High Channel	Low Channel	Middle Channel	High Channel
5MHz QPSK	4.520	4.500	4.520	4.940	4.880	4.960
5MHz 16QAM	4.480	4.520	4.520	4.900	4.940	4.940
10MHz QPSK	8.960	8.960	8.960	9.640	9.600	9.560
10MHz 16QAM	8.960	8.960	8.960	9.640	9.480	9.560
15MHz QPSK	13.500	13.500	13.500	14.760	14.760	14.820
15MHz 16QAM	13.500	13.500	13.500	14.700	14.760	14.700
20MHz QPSK	18.000	18.000	18.000	19.440	19.280	19.360
20MHz 16QAM	18.000	18.000	18.000	19.280	19.280	19.200
Note: The test plots please refer to the Plots of Occupied Bandwidth						

Spurious Emissions at Antenna Terminal	
Result:	**Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.**

Out of band emission, Band Edge	
Result:	**Pass, Please refer to the test plots of Out of band emission, Band Edge.**

Frequency Stability						
Test Mode:	20M QPSK	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (℃)	Voltage (V_{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.85	2501.027	2500.00	2569.049	2570
	-20	3.85	2501.036	2500.00	2569.065	2570
	-10	3.85	2501.033	2500.00	2569.060	2570
	0	3.85	2501.038	2500.00	2569.067	2570
	10	3.85	2501.018	2500.00	2569.050	2570
	20	3.85	2501.040	2500.00	2569.040	2570
	30	3.85	2501.037	2500.00	2569.066	2570
	40	3.85	2501.019	2500.00	2569.056	2570
	50	3.85	2501.013	2500.00	2569.049	2570
Frequency Stability vs. Voltage	20	3.4	2501.022	2500.00	2569.062	2570
	20	4.4	2501.035	2500.00	2569.061	2570
					Result:	**Pass**

Test Mode:	20M 16QAM	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (℃)	Voltage (V_{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.85	2501.022	2500.00	2569.047	2570
	-20	3.85	2501.013	2500.00	2569.055	2570
	-10	3.85	2501.024	2500.00	2569.063	2570
	0	3.85	2501.029	2500.00	2569.040	2570
	10	3.85	2501.029	2500.00	2569.060	2570
	20	3.85	2501.040	2500.00	2569.040	2570
	30	3.85	2501.039	2500.00	2569.041	2570
	40	3.85	2501.037	2500.00	2569.050	2570
	50	3.85	2501.020	2500.00	2569.045	2570
Frequency Stability vs. Voltage	20	3.4	2501.017	2500.00	2569.051	2570
	20	4.4	2501.023	2500.00	2569.053	2570
					Result:	**Pass**

Test Plots(Note: The 14.5dB is the Insertion loss of the RF cable, attenuator and coaxial tee connector, which was offset into the Spectrum Analyzer)**:**

Occupied Bandwidth		
Channel	5MHz Bandwidth QPSK	5MHz Bandwidth 16QAM
Lowest	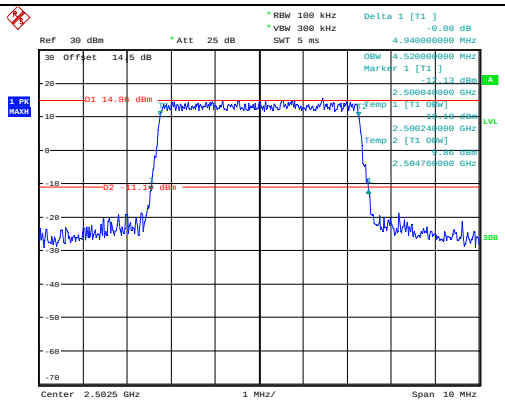	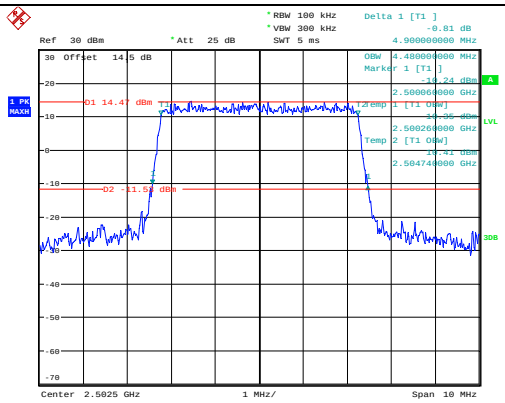
Middle	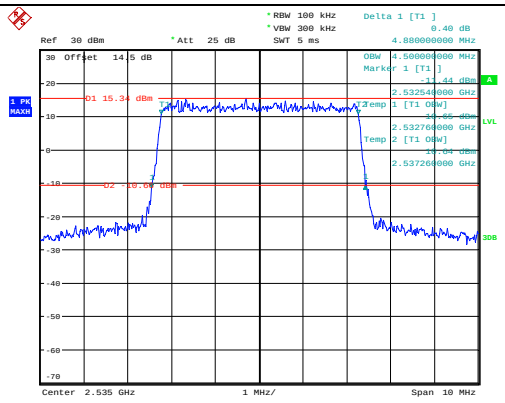	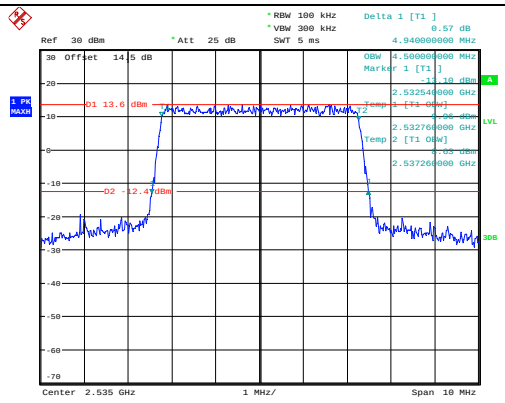
Highest	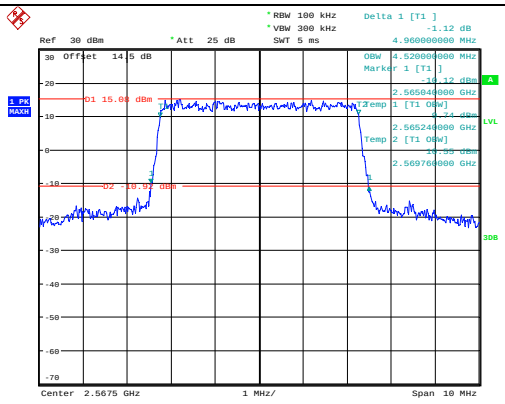	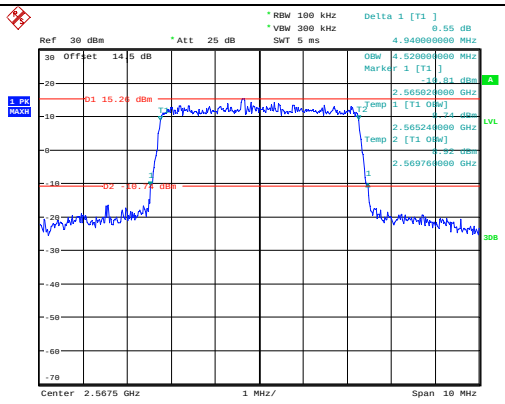

Occupied Bandwidth		
Channel	10MHz Bandwidth QPSK	10MHz Bandwidth 16QAM
Lowest	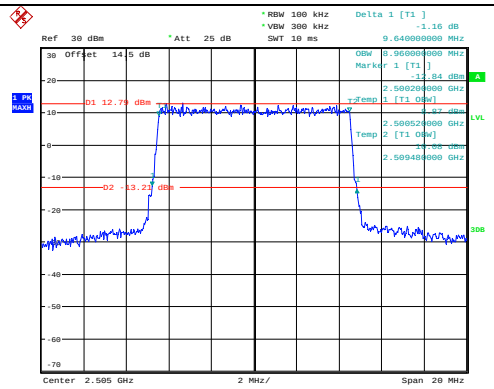 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 22.NOV.2023 22:05:42	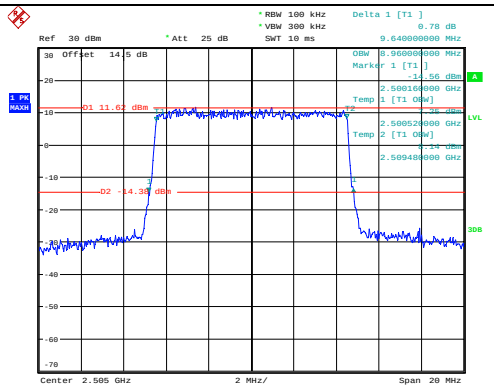 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 22.NOV.2023 22:06:02
Middle	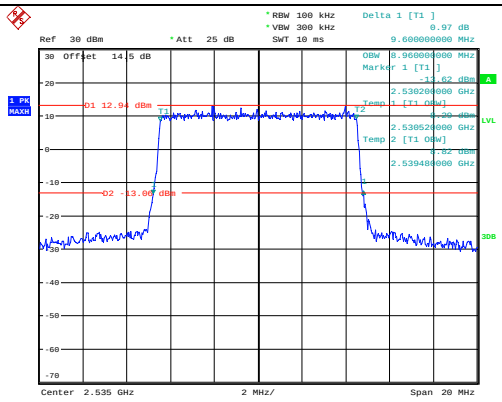 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 22.NOV.2023 22:06:23	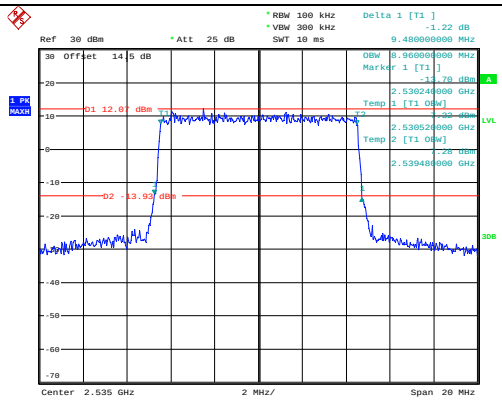 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 22.NOV.2023 22:06:43
Highest	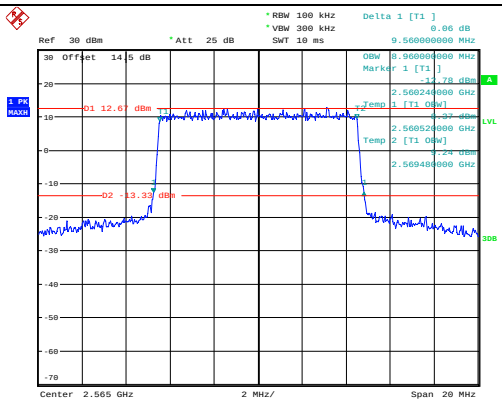 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 22.NOV.2023 22:07:07	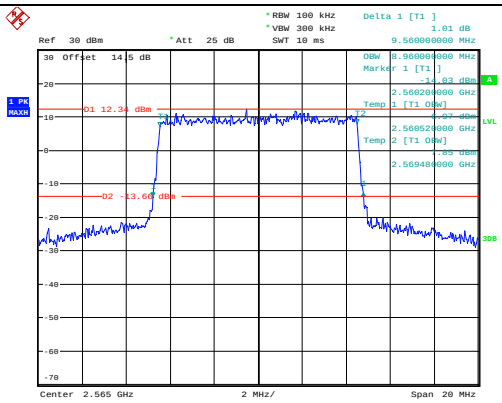 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 22.NOV.2023 22:07:26

Occupied Bandwidth

Channel	15MHz Bandwidth QPSK	15MHz Bandwidth 16QAM
Lowest	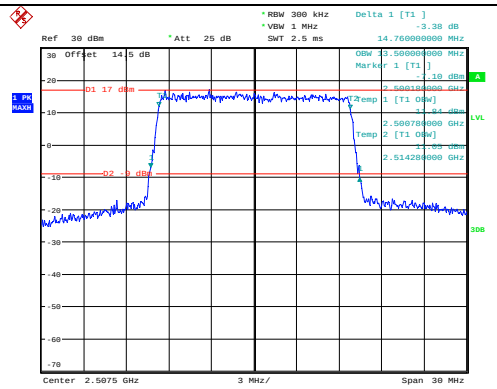 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 22.NOV.2023 22:10:32	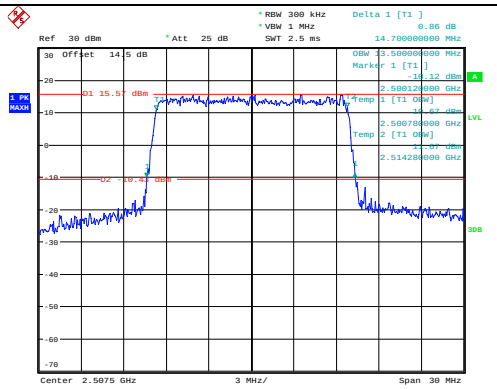 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 22.NOV.2023 22:10:52
Middle	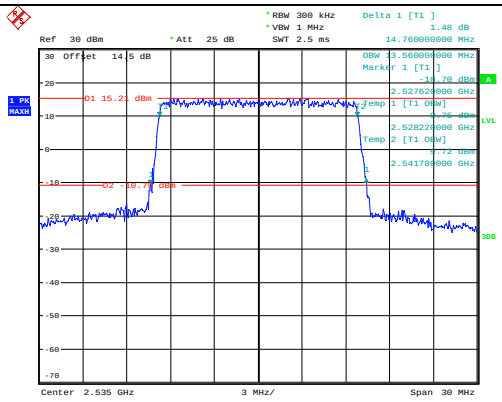 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 22.NOV.2023 22:11:10	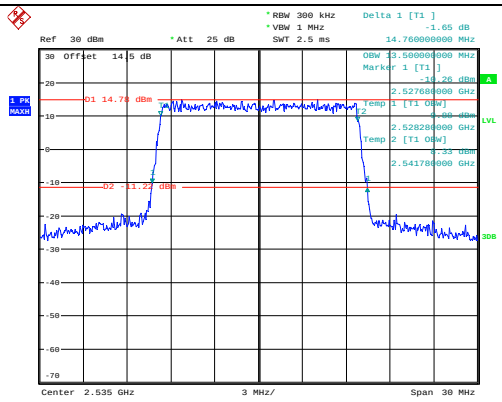 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 22.NOV.2023 22:11:29
Highest	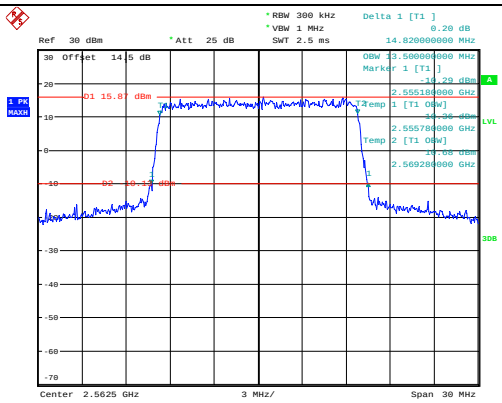 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 22.NOV.2023 22:11:50	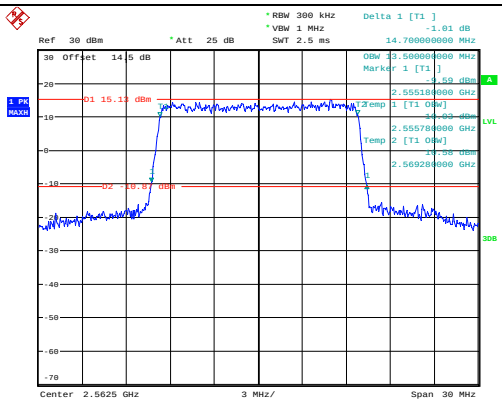 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 22.NOV.2023 22:12:13

Occupied Bandwidth

Channel	20MHz Bandwidth QPSK	20MHz Bandwidth 16QAM
Lowest	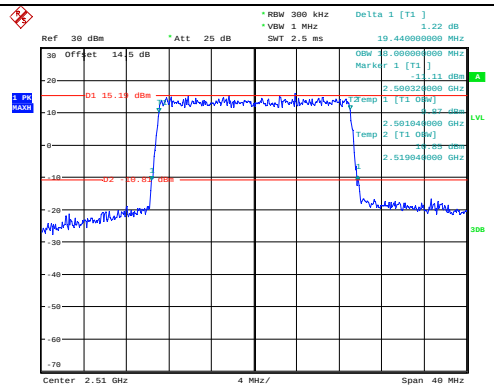 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 22.NOV.2023 22:13:39	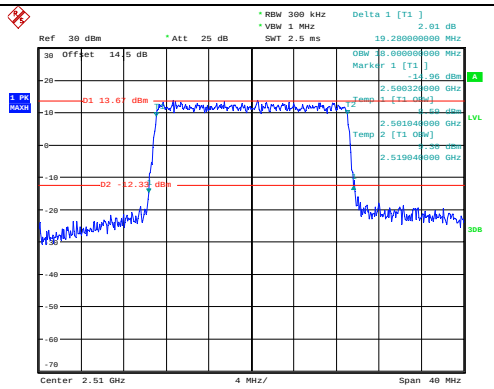 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 22.NOV.2023 22:13:56
Middle	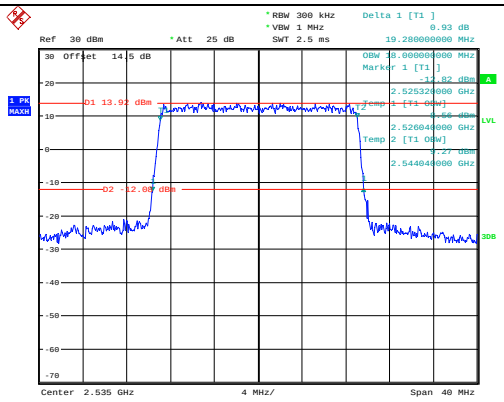 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 22.NOV.2023 22:14:17	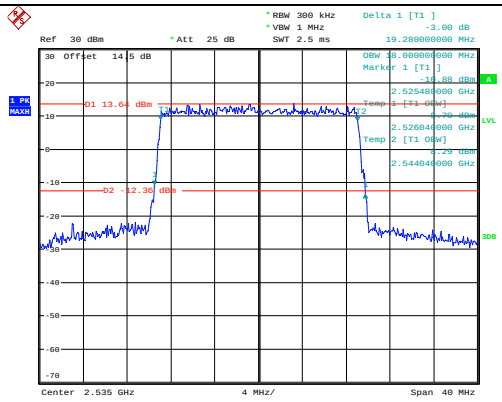 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 22.NOV.2023 22:14:37
Highest	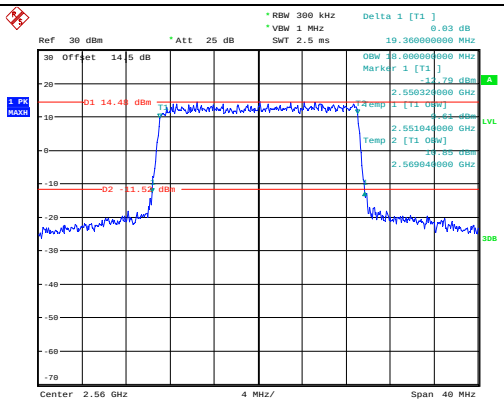 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 22.NOV.2023 22:14:58	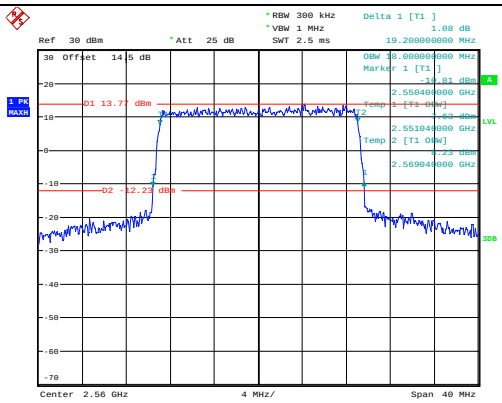 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 22.NOV.2023 22:15:18

1RB:

Spurious Emissions at Antenna Terminal		
Channel	**5MHz Bandwidth QPSK**	
Lowest	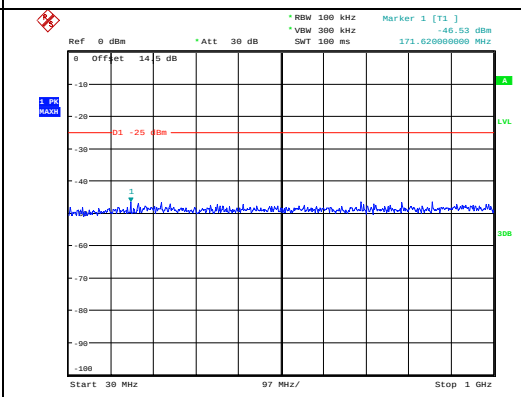	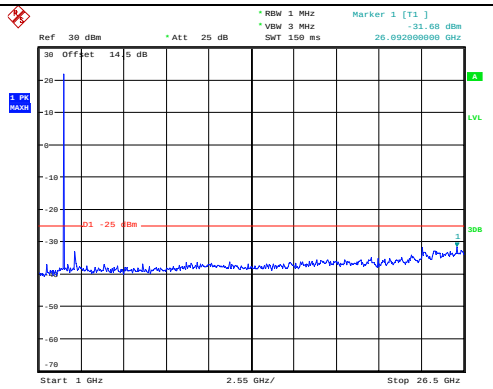
Middle	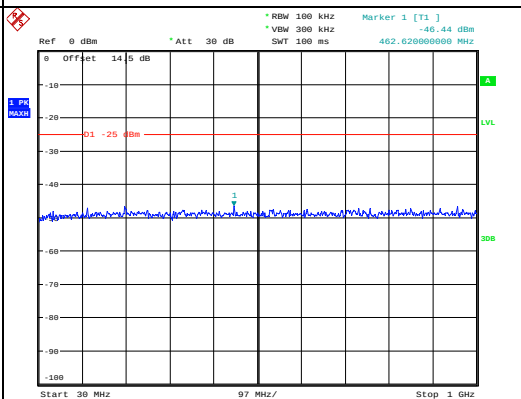	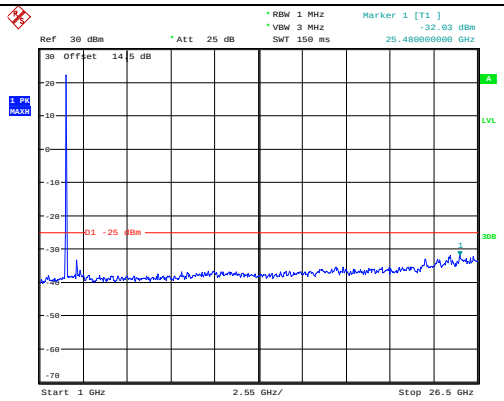
Highest	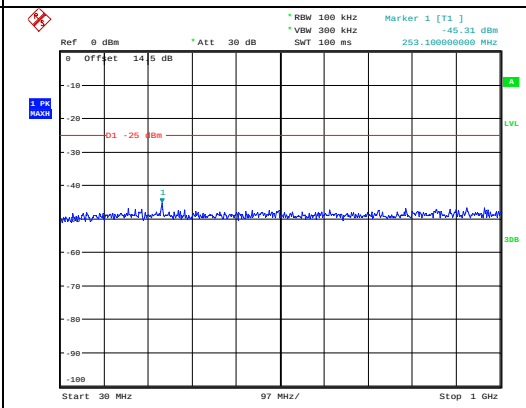	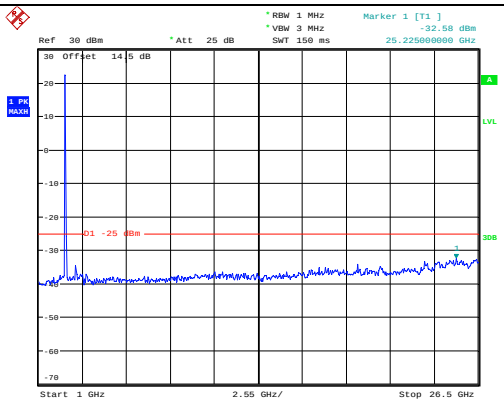

Spurious Emissions at Antenna Terminal		
Channel	**10MHz Bandwidth QPSK**	
Lowest	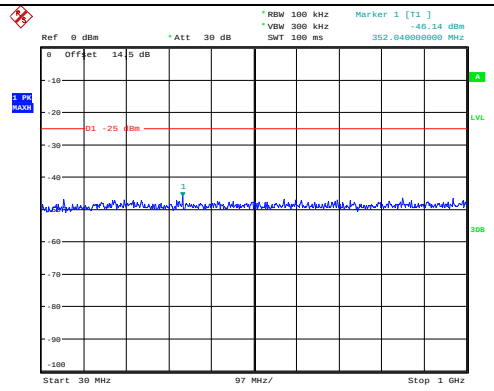 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 20:36:02	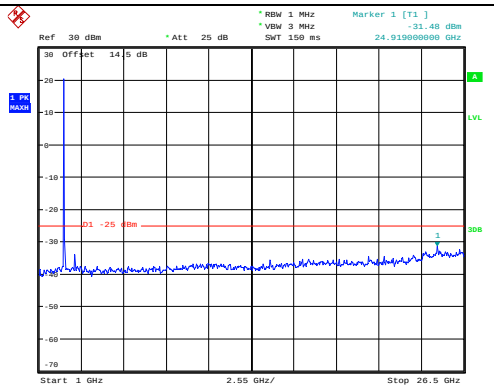 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 20:36:13
Middle	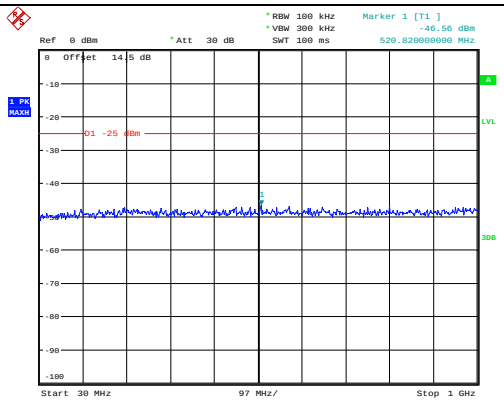 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 20:36:28	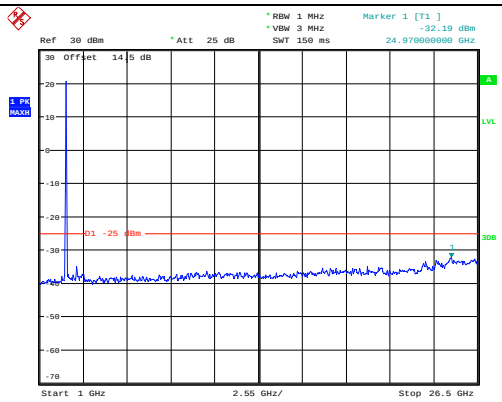 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 20:36:39
Highest	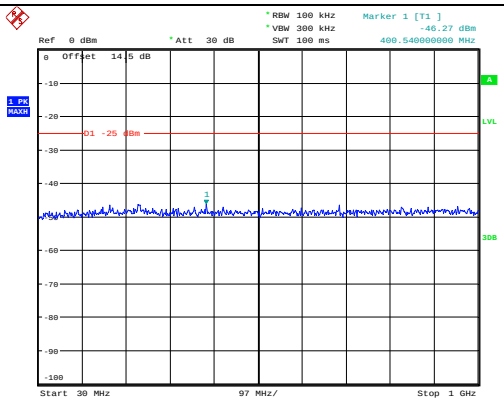 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 20:36:58	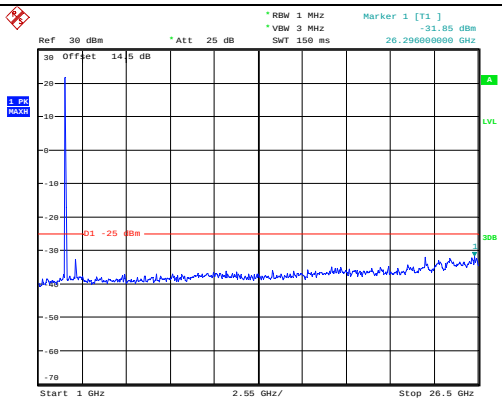 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 20:37:08

Spurious Emissions at Antenna Terminal

Channel	15MHz Bandwidth QPSK	
Lowest	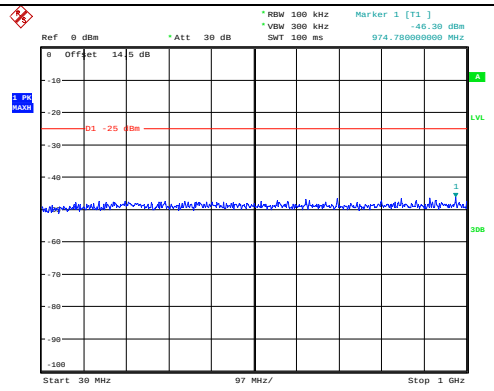 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 20:37:51	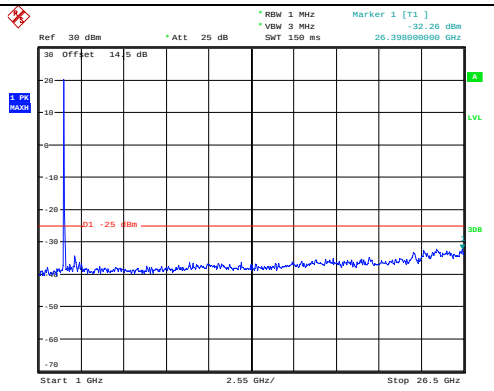 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 20:38:02
Middle	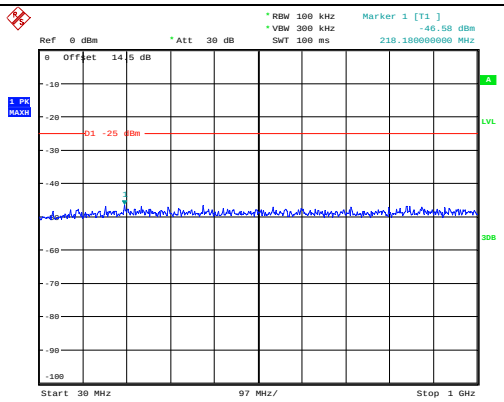 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 20:38:19	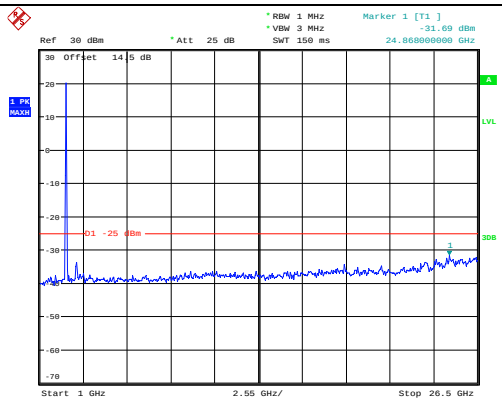 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 20:38:30
Highest	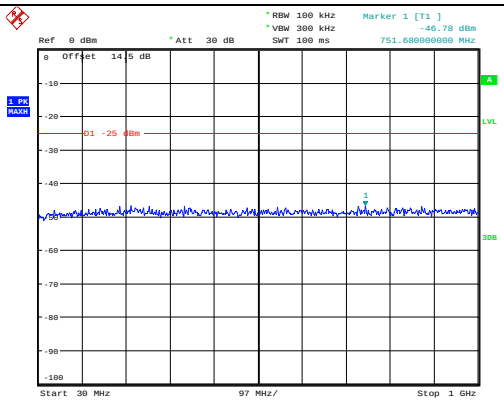 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 20:38:50	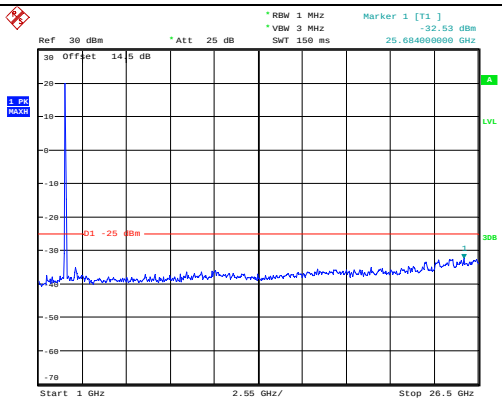 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 20:39:01

Spurious Emissions at Antenna Terminal		
Channel	**20MHz Bandwidth QPSK**	
Lowest	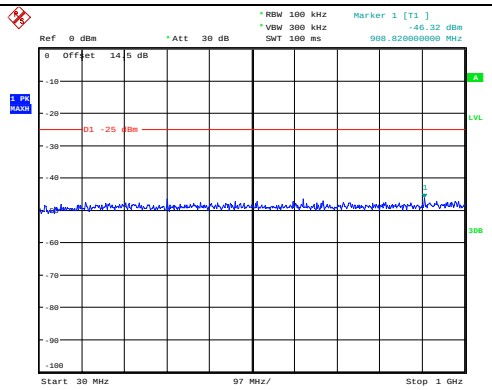 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 20:39:44	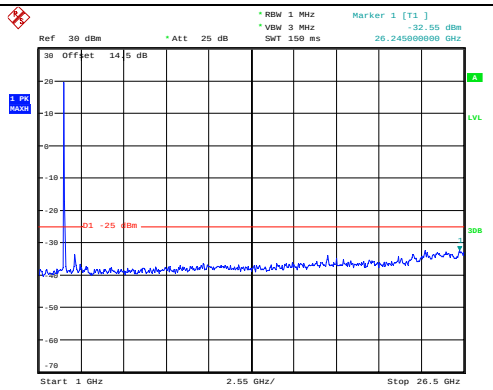 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 20:39:55
Middle	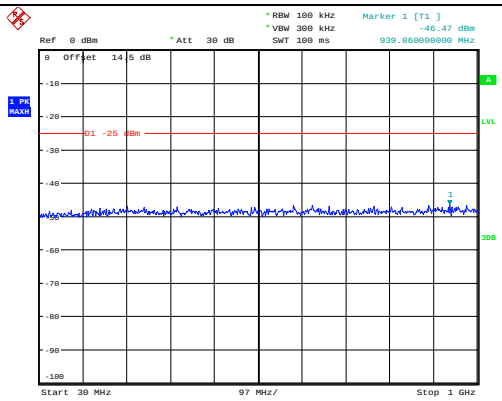 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 20:40:15	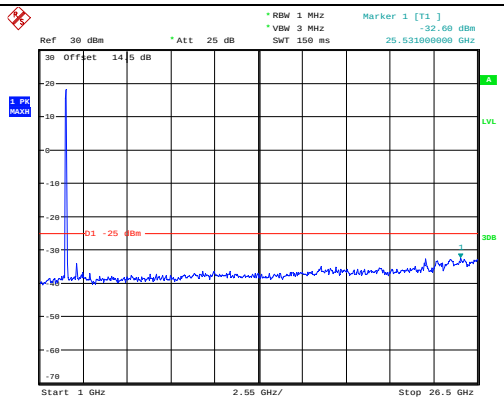 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 20:40:26
Highest	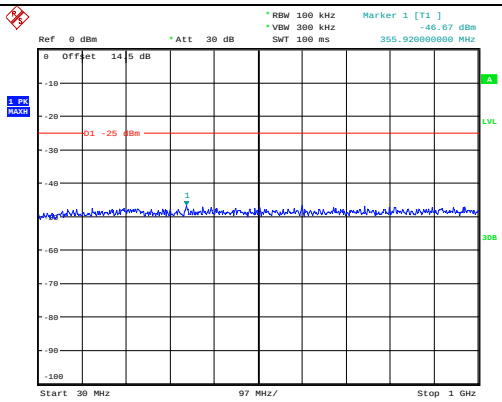 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 20:40:47	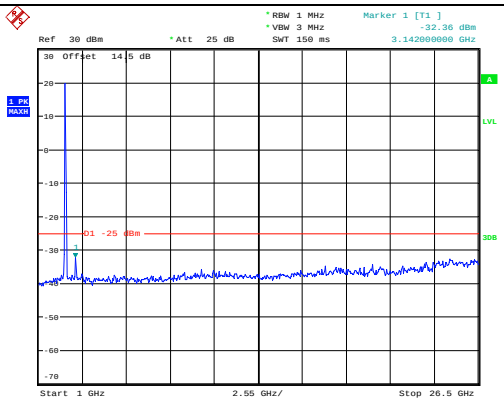 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 20:40:58

Full RB:

Out of band emission, Band Edge		
Mode	**Lowest**	**Highest**
QPSK 5MHz	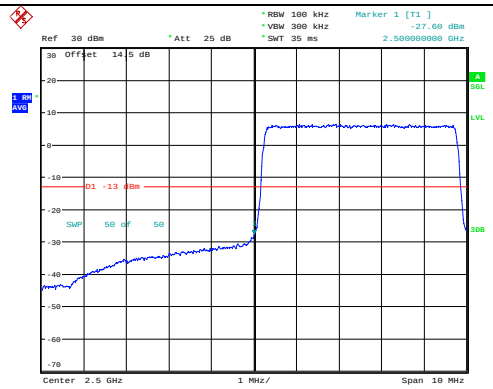	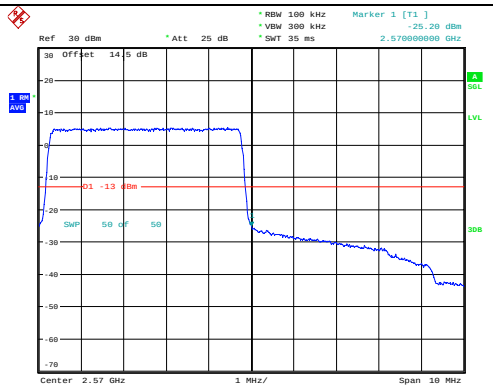
QPSK 10MHz	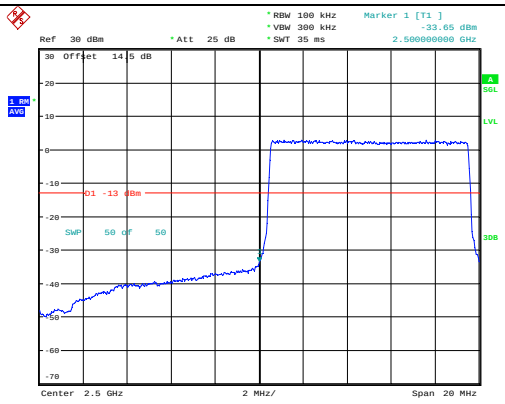	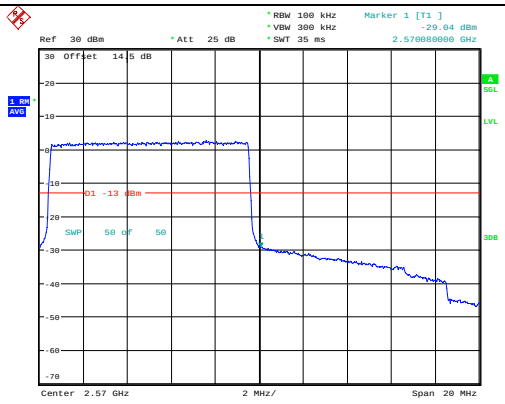
QPSK 15MHz	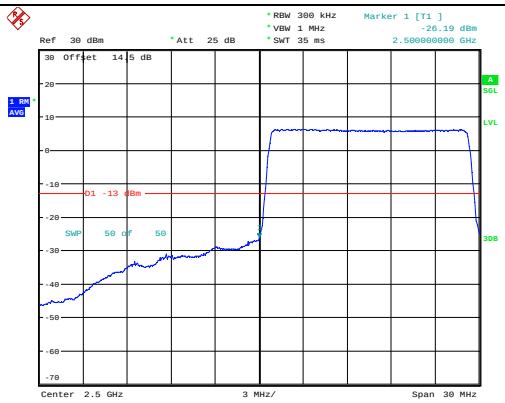	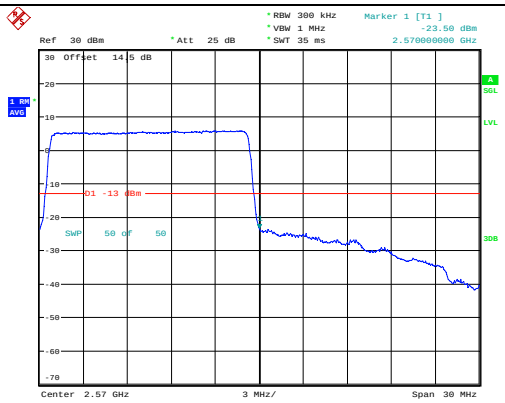

Out of band emission, Band Edge		
Mode	**Lowest**	**Highest**
QPSK 20MHz	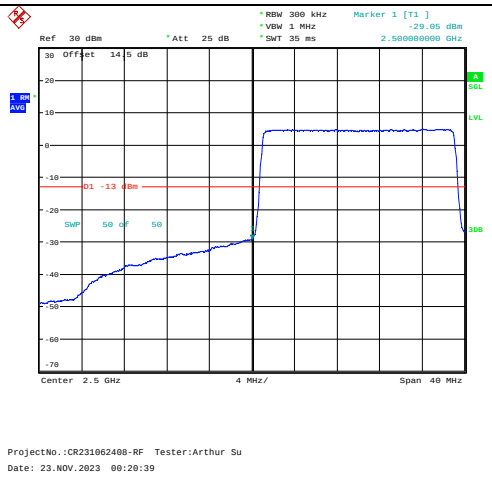	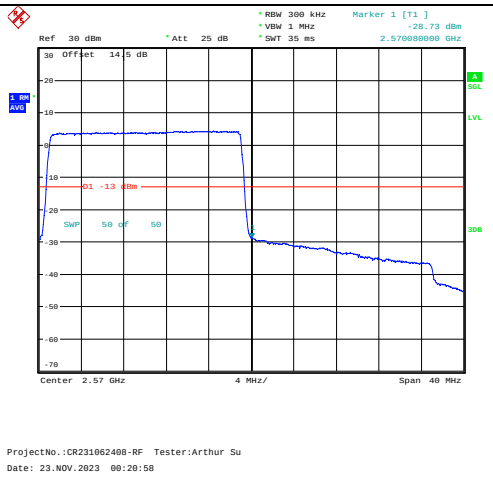

Full RB:

Out of band emission, Band Edge		
Mode	**Lowest**	**Highest**
16QAM 5MHz	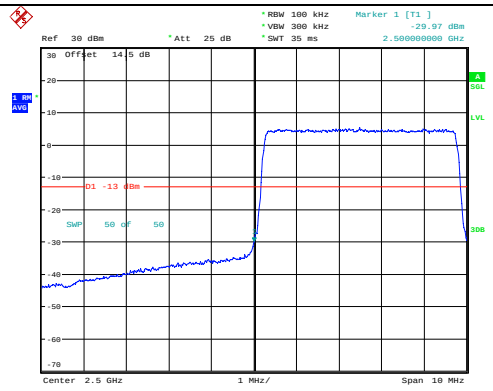 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 23.NOV.2023 00:14:46	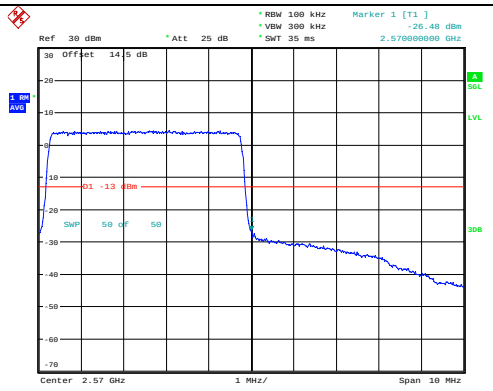 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 23.NOV.2023 00:15:07
16QAM 10MHz	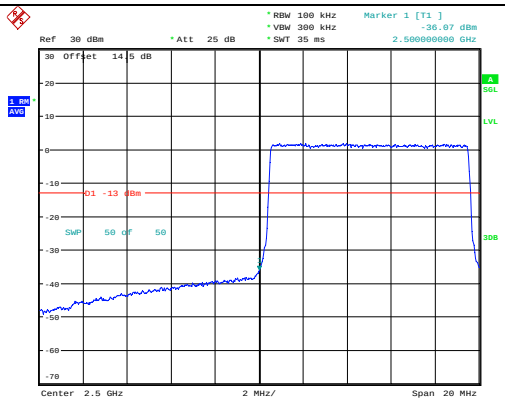 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 23.NOV.2023 00:18:17	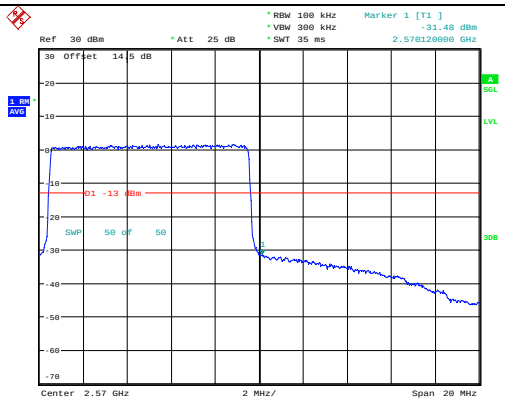 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 23.NOV.2023 00:18:41
16QAM 15MHz	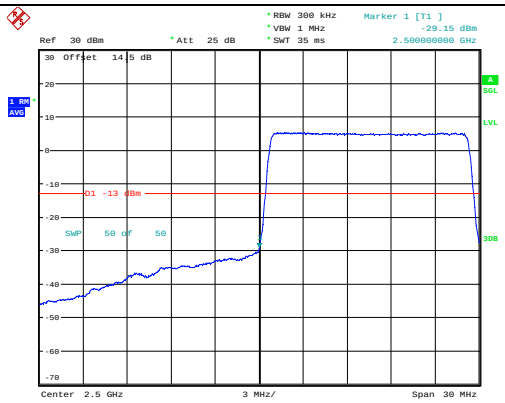 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 23.NOV.2023 00:19:46	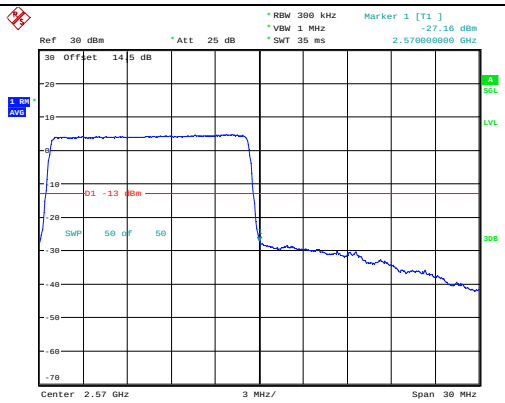 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 23.NOV.2023 00:20:05

Out of band emission, Band Edge		
Mode	**Lowest**	**Highest**
16QAM 20MHz	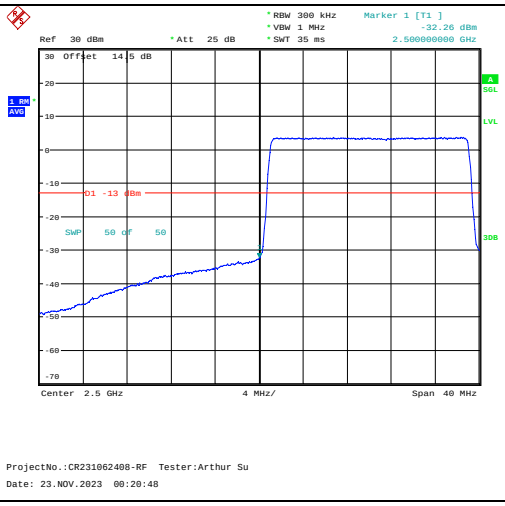	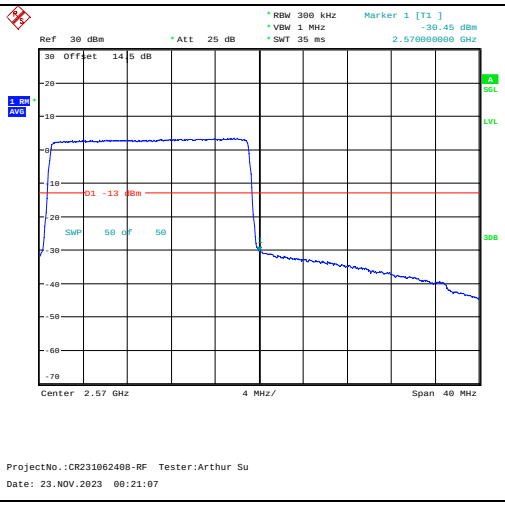

1RB:

Out of band emission, Band Edge		
Mode	**Lowest**	**Highest**
QPSK 5MHz	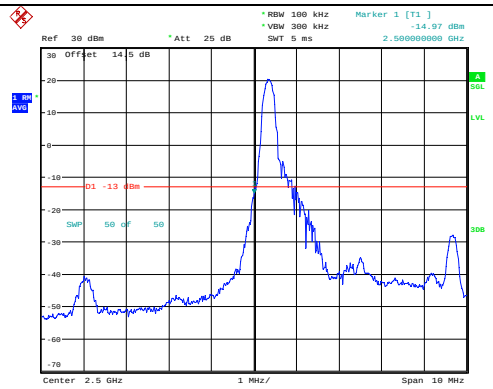 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 23:16:48	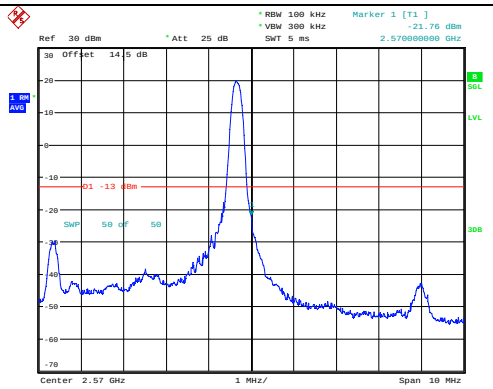 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 23:19:56
QPSK 10MHz	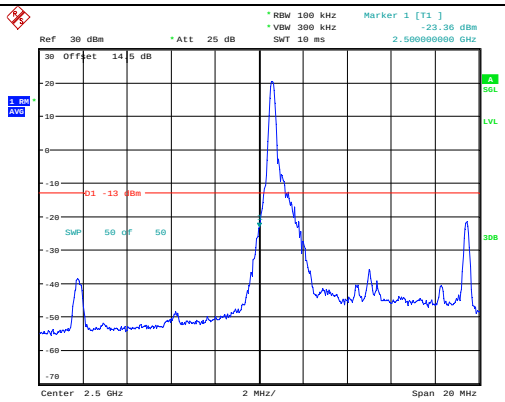 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 23:22:51	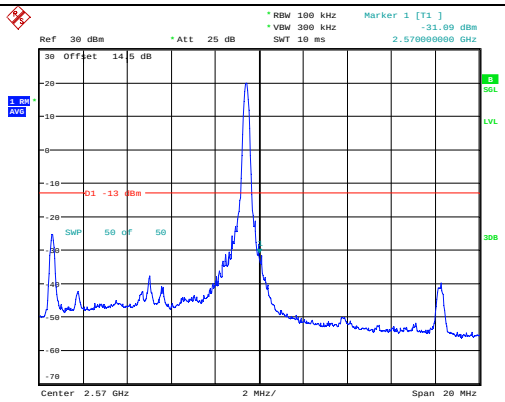 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 23:24:47
QPSK 15MHz	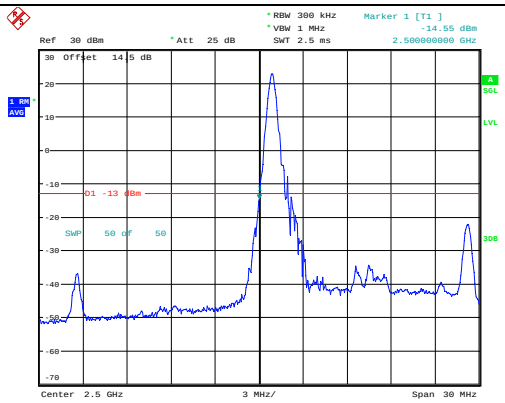 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 23:25:49	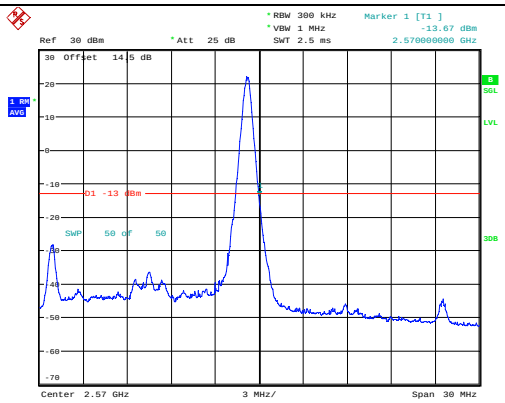 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 23:27:41

Out of band emission, Band Edge		
Mode	**Lowest**	**Highest**
QPSK 20MHz	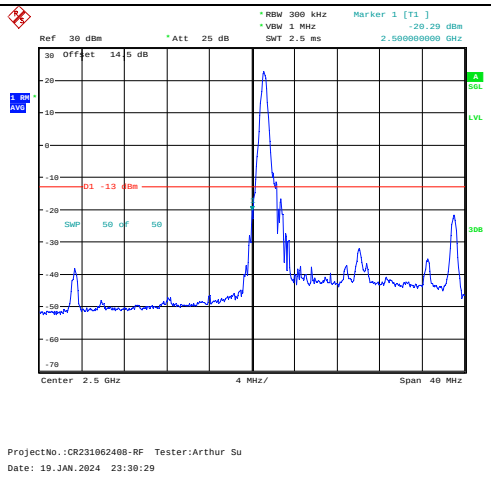	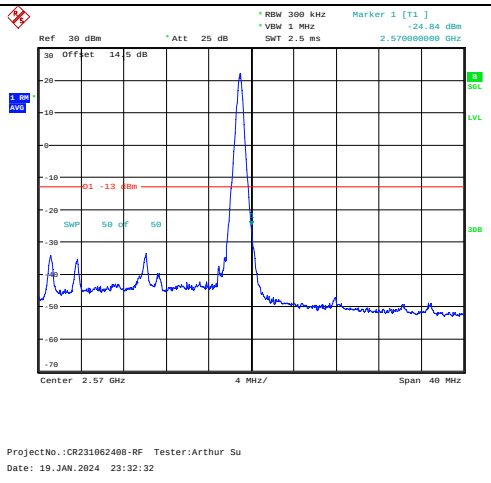

1RB:

Out of band emission, Band Edge		
Mode	**Lowest**	**Highest**
16QAM 5MHz	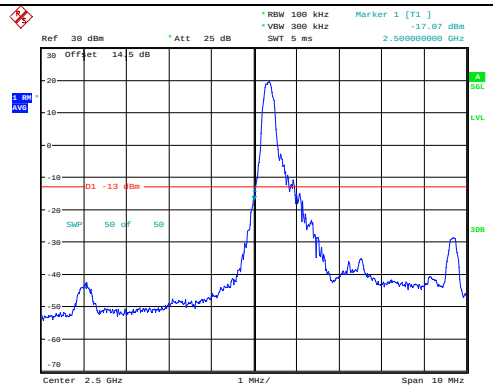 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 23:17:17	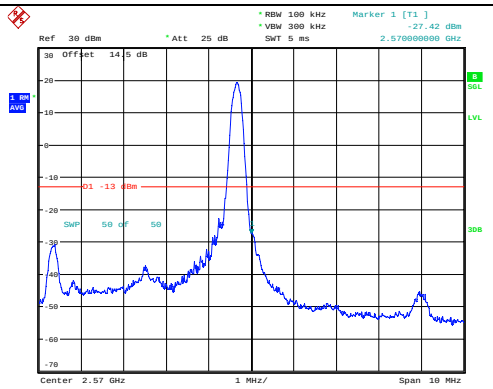 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 23:18:48
16QAM 10MHz	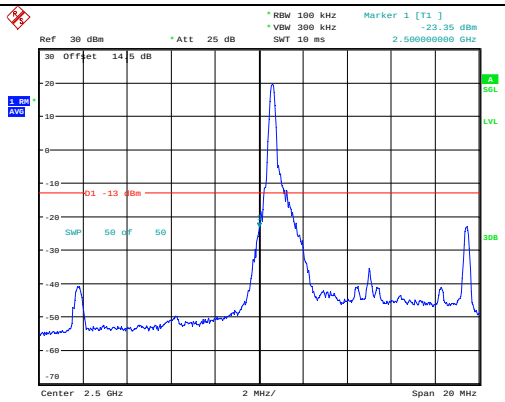 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 23:23:13	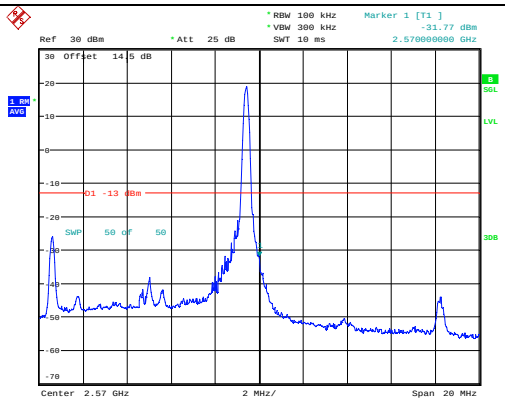 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 23:24:23
16QAM 15MHz	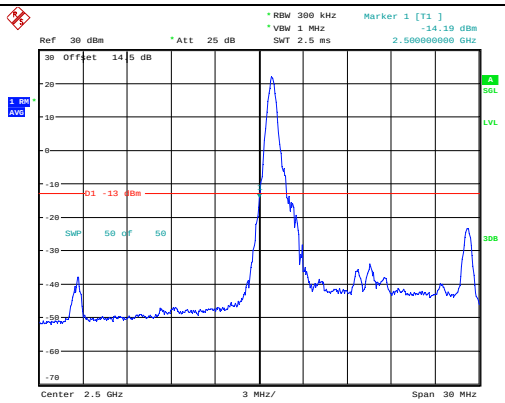 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 23:26:09	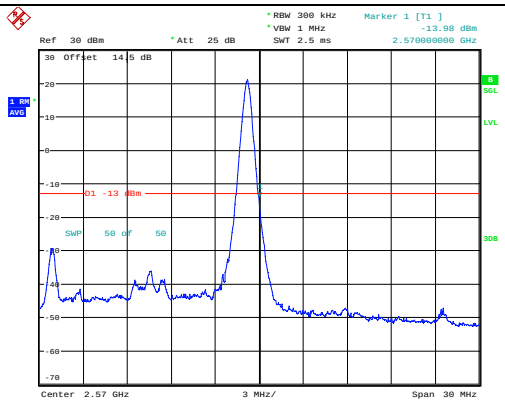 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 23:26:54

Out of band emission, Band Edge		
Mode	**Lowest**	**Highest**
16QAM 20MHz	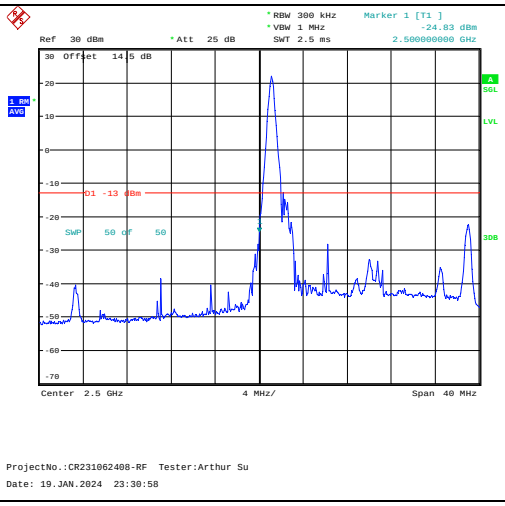	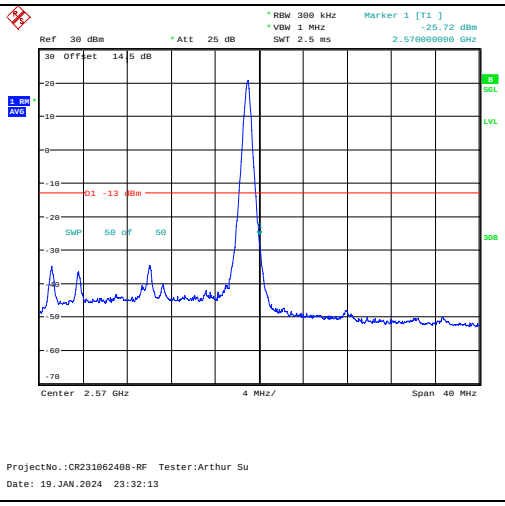

4.8 Antenna Port Test Data and Results for LTE Band 38

Serial Number:	2COS-2	Test Date:	2023/11/21-2024/1/23
Test Site:	RF	Test Mode:	Transmitting
Tester:	Arthur Su	Test Result:	**Pass**

Environmental Conditions:					
Temperature: (℃)	24.2-26.3	Relative Humidity: (%)	42-60	ATM Pressure: (kPa)	101.3-102.2

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200256	2023/3/31	2024/3/30
zhuoxiang	Coaxial Cable	SMA-178	211002	Each time	N/A
YINSAIGE	Coaxial Cable	SS402	SJ0100002	Each time	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A
R&S	Wideband Radio Communication Tester	CMW500	143458	2023/3/31	2024/3/30
UNI-T	Multimeter	UT39A+	C210582554	2023/9/28	2024/9/27
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D0912386	N/A	N/A
Unknown	Coaxial tee connector	Unknown	2204004	Each time	N/A

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Frequency For Each Mode:

Operation Bandwidth	Lowest Frequency (MHz)	Middle Frequency (MHz)	Highest Frequency (MHz)
5MHz	2572.5	2595	2617.5
10MHz	2575	2595	2615
15MHz	2577.5	2595	2612.5
20MHz	2580	2595	2610

Test Data:

RF Output Power						
Test Bandwidth & Modulation	Resource Block & RB offset	Conducted Average Output Power(dBm)			Maximum EIRP (dBm)	EIRP Limit (dBm)
		Lowest Channel	Middle Channel	Highest Channel		
5MHz QPSK	RB1#0	18.86	18.12	17.85	19.3	33
	RB1#13	**18.90**	18.18	17.95		
	RB1#24	18.78	18.08	17.86		
	RB15#0	17.88	17.21	16.94		
	RB15#10	17.84	17.20	16.94		
	RB25#0	17.86	17.24	16.96		
5MHz 16QAM	RB1#0	18.10	17.13	16.88	18.56	33
	RB1#13	**18.16**	17.21	16.99		
	RB1#24	18.02	17.08	16.88		
	RB15#0	16.91	16.15	15.95		
	RB15#10	16.88	16.10	15.91		
	RB25#0	16.83	16.19	15.97		
10MHz QPSK	RB1#0	19.35	18.83	18.83	19.94	33
	RB1#25	**19.54**	19.06	19.10		
	RB1#49	19.23	18.73	18.80		
	RB25#0	18.34	17.83	17.79		
	RB25#25	18.33	17.83	17.83		
	RB50#0	18.34	17.79	17.80		
10MHz 16QAM	RB1#0	18.58	17.72	17.86	19.12	33
	RB1#25	**18.72**	17.93	18.13		
	RB1#49	18.46	17.62	17.84		
	RB25#0	17.31	16.84	16.82		
	RB25#25	17.30	16.82	16.84		
	RB50#0	17.30	16.81	16.81		
15MHz QPSK	RB1#0	19.31	19.07	19.27	19.74	33
	RB1#38	19.29	19.09	**19.34**		
	RB1#74	19.13	18.89	19.20		
	RB36#0	18.42	18.13	18.42		
	RB36#39	18.35	18.14	18.41		
	RB75#0	18.37	18.18	18.44		
15MHz 16QAM	RB1#0	**18.51**	18.06	18.45	18.91	33
	RB1#38	18.47	18.01	18.50		
	RB1#74	18.29	17.82	18.37		
	RB36#0	17.35	17.10	17.39		
	RB36#39	17.27	17.01	17.39		
	RB75#0	17.30	17.10	17.36		
20MHz QPSK	RB1#0	19.20	18.33	18.50	19.91	33
	RB1#50	**19.51**	18.67	18.92		
	RB1#99	18.96	18.12	18.45		

	RB50#0	18.31	17.47	17.59		
	RB50#50	18.26	17.41	17.59		
	RB100#0	18.23	17.43	17.55		
20MHz 16QAM	RB1#0	18.25	17.25	17.69	18.96	33
	RB1#50	**18.56**	17.64	18.08		
	RB1#99	18.04	17.11	17.62		
	RB50#0	17.28	16.50	16.57		
	RB50#50	17.24	16.44	16.61		
	RB100#0	17.23	16.44	16.55		
Note: EIRP=Conducted Power(dBm) - L_C(dB) + G_T(dBi)						
					Result:	**Pass**

Peak-to-average Ratio(PAR)

Test Bandwidth & Modulation	Resource Block & RB offset	Peak-to-average Ratio(dB)			Limit (dB)
		Lowest Channel	Middle Channel	Highest Channel	
20MHz QPSK	RB1#0	5.24	6.39	4.60	13
	RB100#0	7.09	7.30	6.75	13
20MHz 16QAM	RB1#0	6.13	7.34	5.19	13
	RB100#0	6.85	7.18	6.37	13
				Result:	**Pass**

Occupied Bandwidth

Operation Mode	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
	Low Channel	Middle channel	High Channel	Low Channel	Middle Channel	High Channel
5MHz QPSK	4.500	4.500	4.520	5.080	4.940	4.920
5MHz 16QAM	4.520	4.500	4.520	4.940	5.020	4.980
10MHz QPSK	8.960	8.960	8.960	9.640	9.800	9.480
10MHz 16QAM	8.960	8.960	8.960	9.520	9.440	9.520
15MHz QPSK	13.500	13.500	13.560	14.820	14.940	15.000
15MHz 16QAM	13.500	13.560	13.500	15.660	15.180	16.080
20MHz QPSK	17.920	17.920	18.000	19.280	19.120	19.280
20MHz 16QAM	17.920	18.000	17.920	19.520	19.200	19.600
Note: The test plots please refer to the Plots of Occupied Bandwidth						

Spurious Emissions at Antenna Terminal	
Result:	**Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.**

Out of band emission, Band Edge	
Result:	**Pass, Please refer to the test plots of Out of band emission, Band Edge.**

Frequency Stability						
Test Mode:	20M QPSK	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (℃)	Voltage (V_{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.85	2571.023	2570.00	2619.051	2620
	-20	3.85	2571.025	2570.00	2619.050	2620
	-10	3.85	2571.025	2570.00	2619.056	2620
	0	3.85	2571.019	2570.00	2619.048	2620
	10	3.85	2571.025	2570.00	2619.057	2620
	20	3.85	2571.040	2570.00	2619.040	2620
	30	3.85	2571.014	2570.00	2619.054	2620
	40	3.85	2571.031	2570.00	2619.055	2620
	50	3.85	2571.034	2570.00	2619.053	2620
Frequency Stability vs. Voltage	20	3.4	2571.022	2570.00	2619.053	2620
	20	4.4	2571.039	2570.00	2619.060	2620
					Result:	**Pass**

Test Mode:	20M 16QAM	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (℃)	Voltage (V_{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.85	2571.029	2570.00	2618.967	2620
	-20	3.85	2571.014	2570.00	2618.975	2620
	-10	3.85	2571.032	2570.00	2618.971	2620
	0	3.85	2571.035	2570.00	2618.968	2620
	10	3.85	2571.029	2570.00	2618.985	2620
	20	3.85	2571.040	2570.00	2618.960	2620
	30	3.85	2571.014	2570.00	2618.977	2620
	40	3.85	2571.011	2570.00	2618.987	2620
	50	3.85	2571.035	2570.00	2618.964	2620
Frequency Stability vs. Voltage	20	3.4	2571.017	2570.00	2618.982	2620
	20	4.4	2571.029	2570.00	2618.979	2620
					Result:	**Pass**

Test Plots(Note: The 14.5dB is the Insertion loss of the RF cable, attenuator and coaxial tee connector, which was offset into the Spectrum Analyzer)**:**

Occupied Bandwidth		
Channel	5MHz Bandwidth QPSK	5MHz Bandwidth 16QAM
Lowest	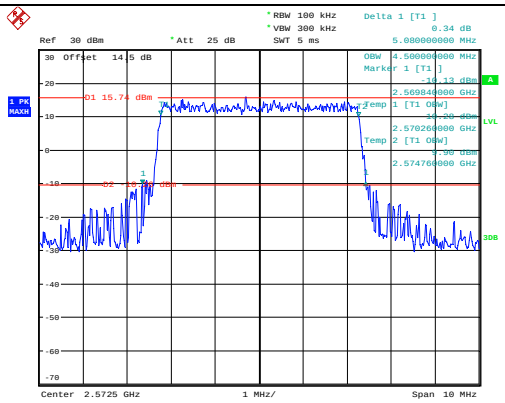 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 22.NOV.2023 22:16:21	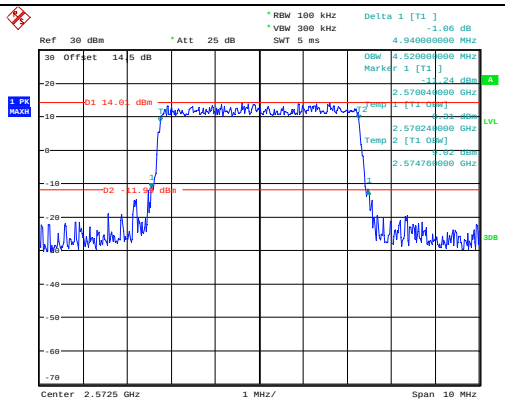 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 22.NOV.2023 22:16:44
Middle	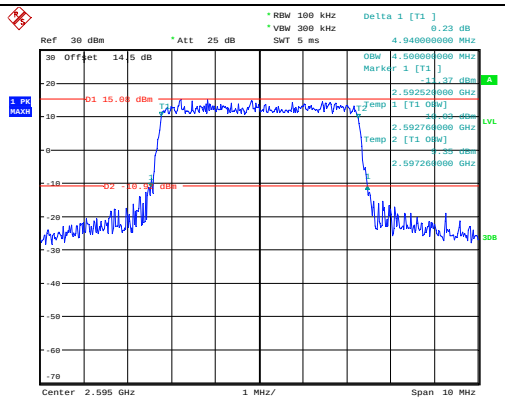 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 22.NOV.2023 22:17:11	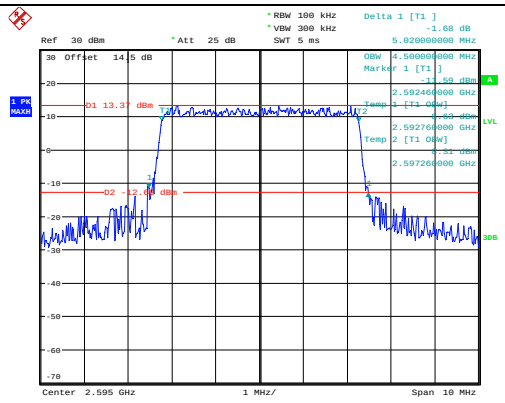 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 22.NOV.2023 22:17:37
Highest	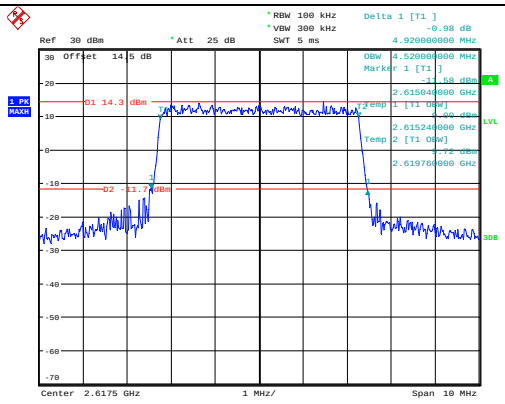 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 22.NOV.2023 22:18:01	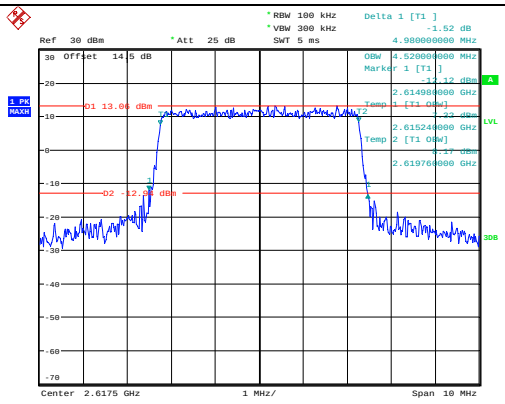 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 22.NOV.2023 22:18:28

Occupied Bandwidth

Channel	10MHz Bandwidth QPSK	10MHz Bandwidth 16QAM
Lowest	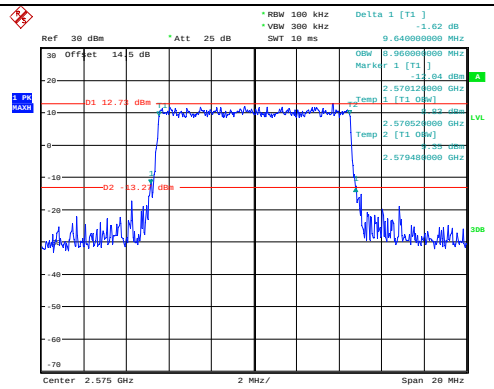 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 22.NOV.2023 22:19:26	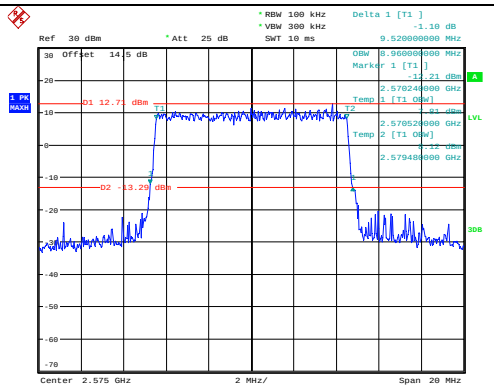 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 22.NOV.2023 22:19:49
Middle	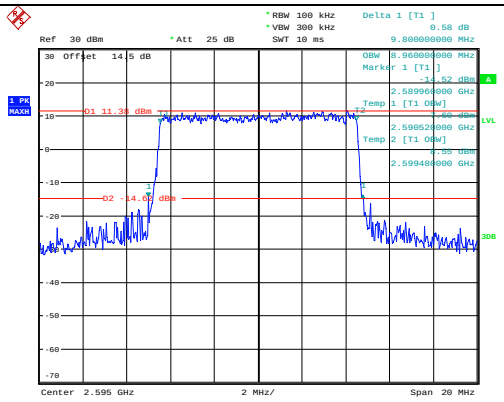 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 22.NOV.2023 22:20:13	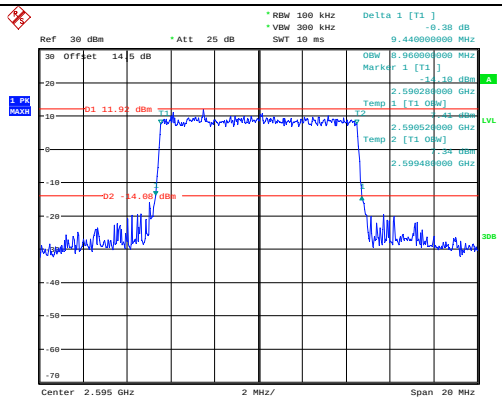 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 22.NOV.2023 22:20:36
Highest	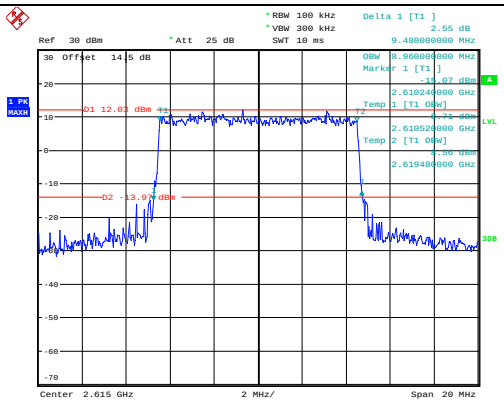 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 22.NOV.2023 22:21:00	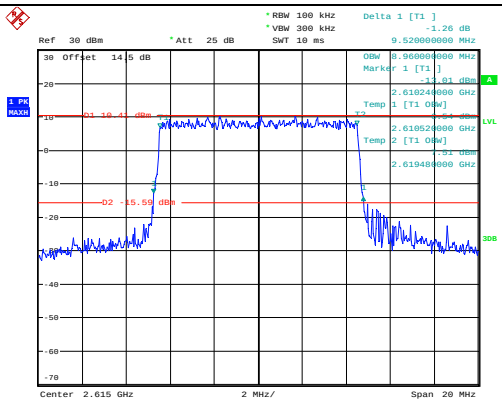 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 22.NOV.2023 22:21:19

Occupied Bandwidth

Channel	15MHz Bandwidth QPSK	15MHz Bandwidth 16QAM
Lowest	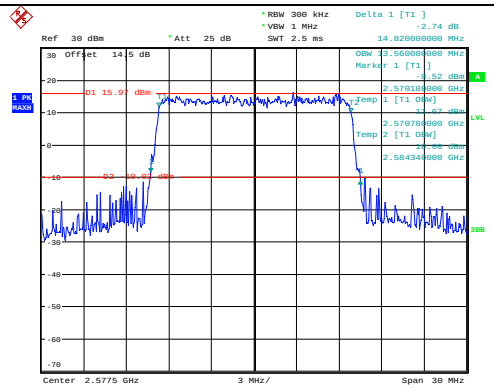 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 22.NOV.2023 22:22:17	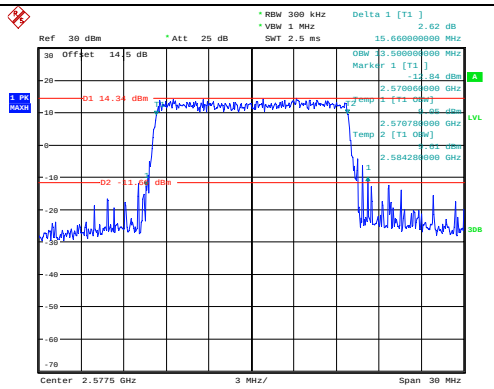 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 22.NOV.2023 22:22:37
Middle	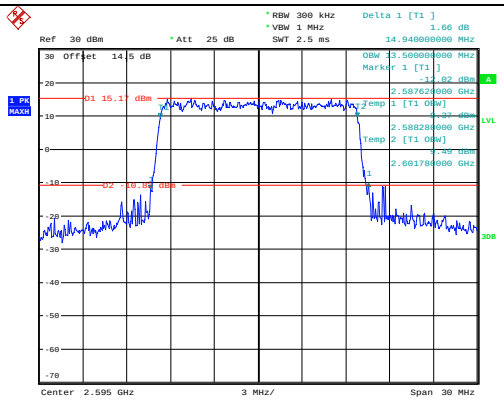 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 22.NOV.2023 22:23:01	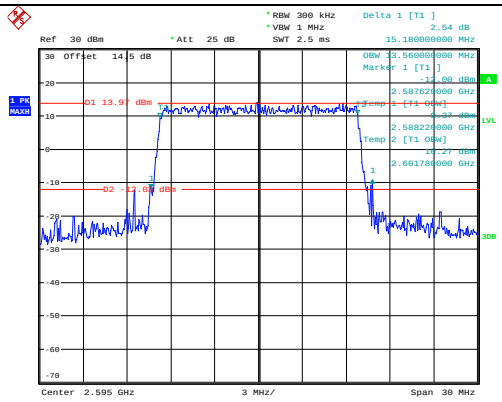 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 22.NOV.2023 22:23:21
Highest	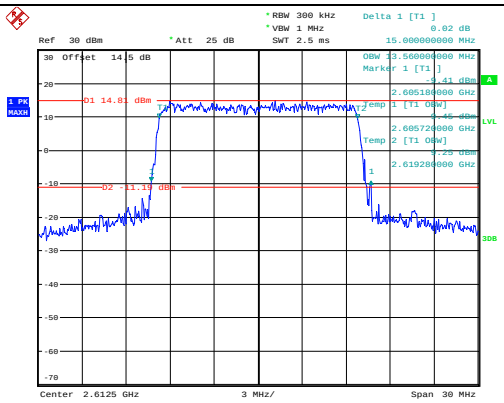 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 22.NOV.2023 22:23:45	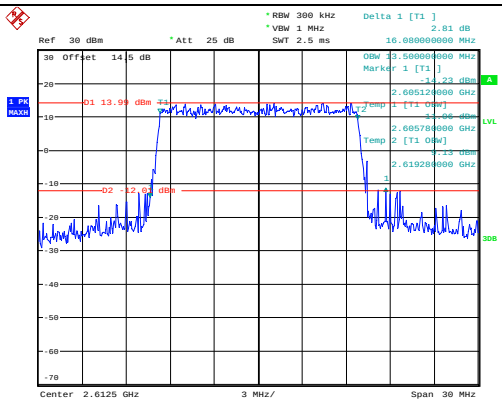 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 22.NOV.2023 22:24:08

Occupied Bandwidth

Channel	20MHz Bandwidth QPSK	20MHz Bandwidth 16QAM
Lowest	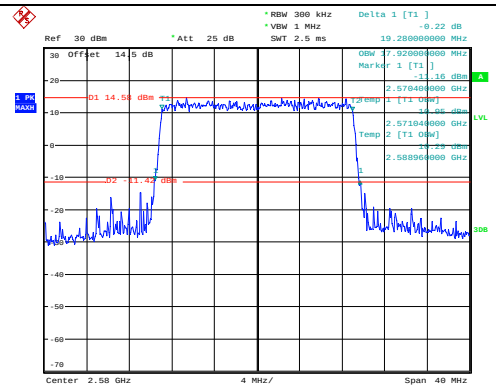 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 22.NOV.2023 22:33:52	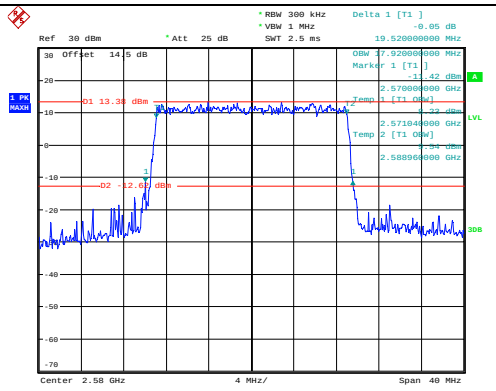 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 22.NOV.2023 22:34:13
Middle	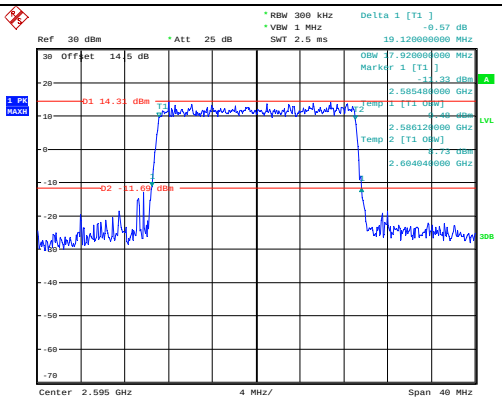 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 22.NOV.2023 22:34:34	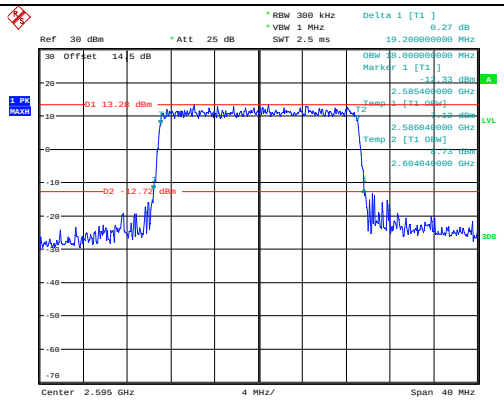 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 22.NOV.2023 22:35:04
Highest	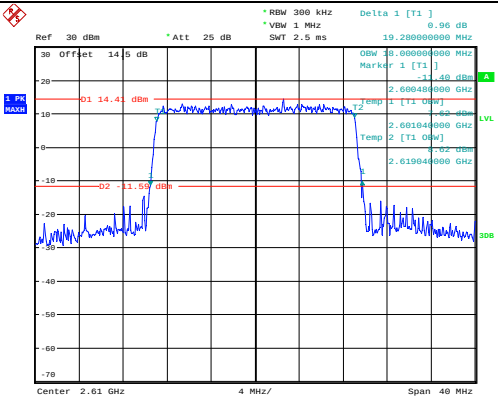 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 22.NOV.2023 22:35:28	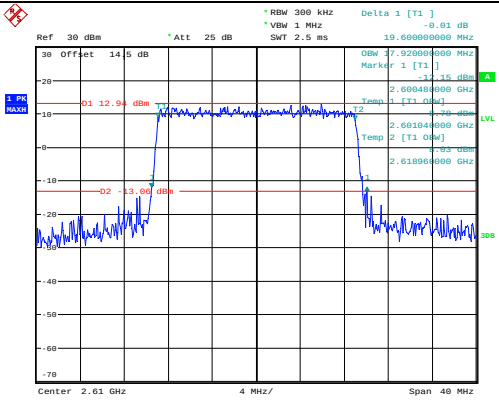 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 22.NOV.2023 22:35:52

Spurious Emissions at Antenna Terminal		
Channel	**5MHz Bandwidth QPSK**	
Lowest	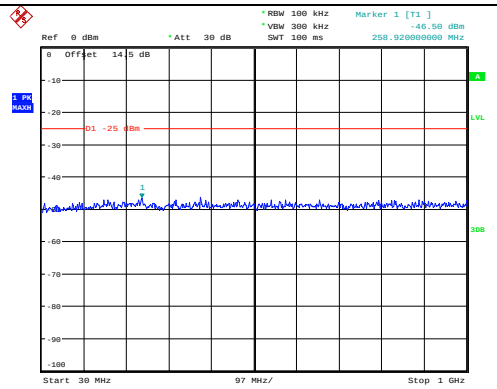 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 20:42:42	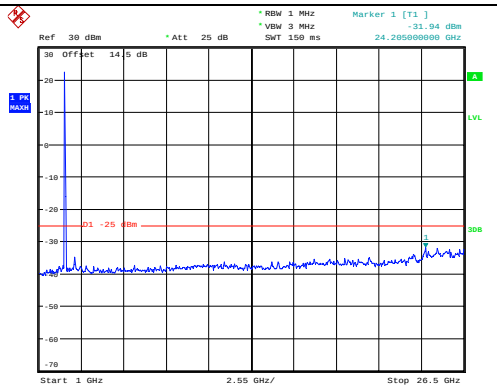 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 20:42:53
Middle	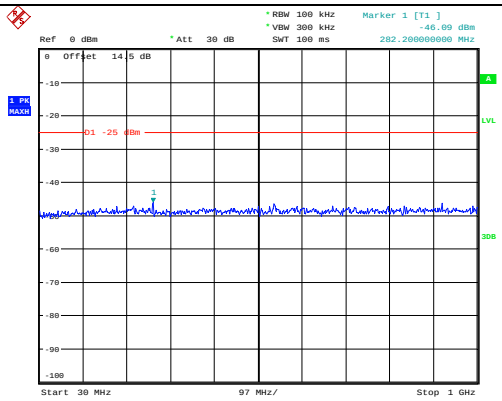 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 20:43:10	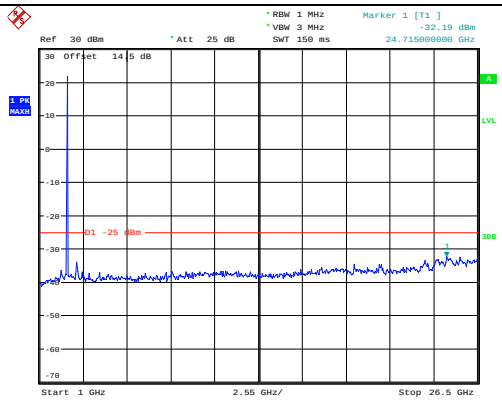 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 20:43:21
Highest	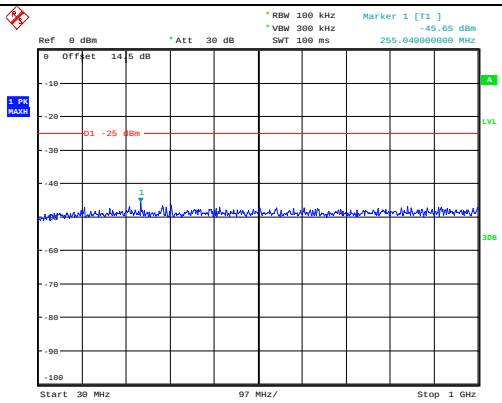 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 20:43:36	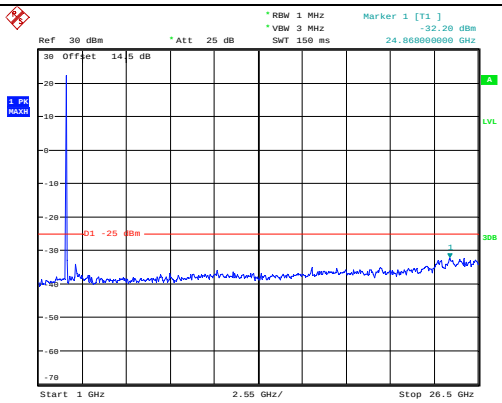 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 20:43:47

Spurious Emissions at Antenna Terminal		
Channel	**10MHz Bandwidth QPSK**	
Lowest	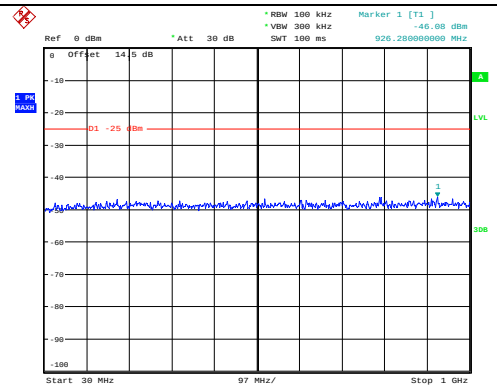 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 20:44:46	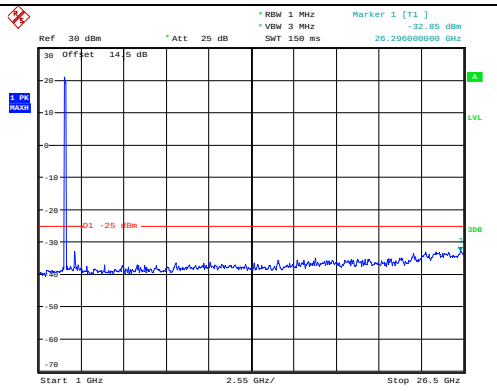 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 20:44:57
Middle	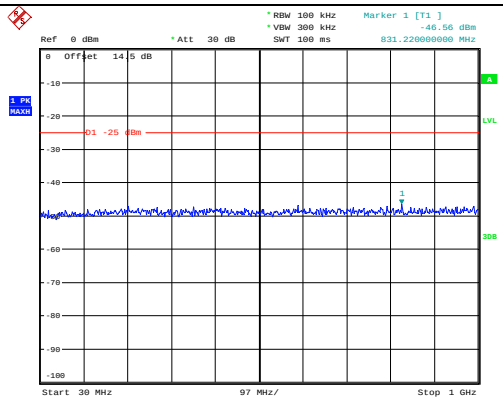 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 20:45:12	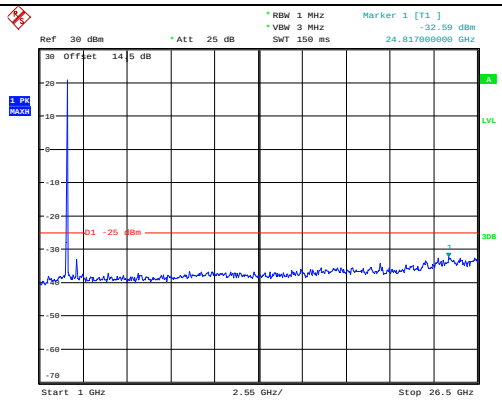 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 20:45:23
Highest	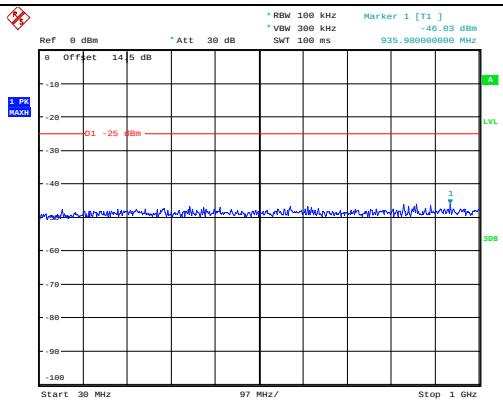 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 20:45:41	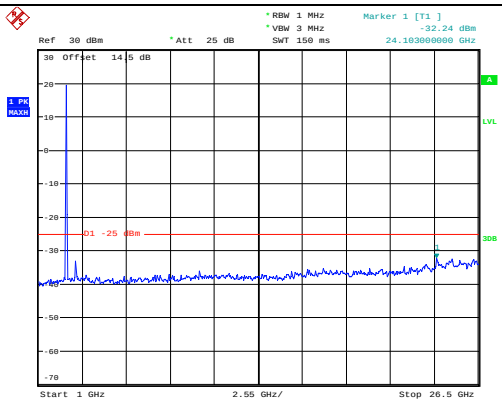 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 20:45:52

Spurious Emissions at Antenna Terminal		
Channel	**15MHz Bandwidth QPSK**	
Lowest	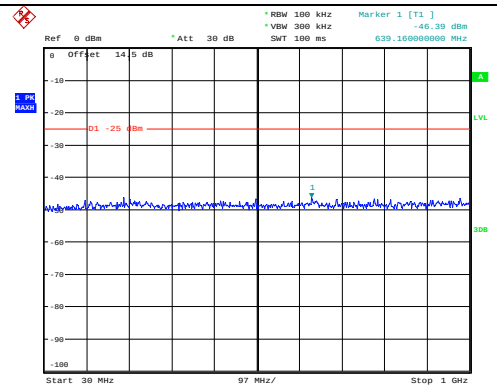 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 20:46:53	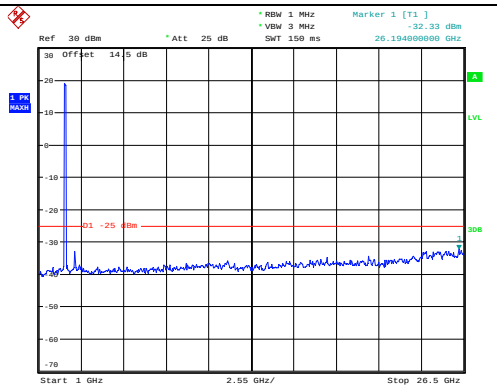 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 20:47:04
Middle	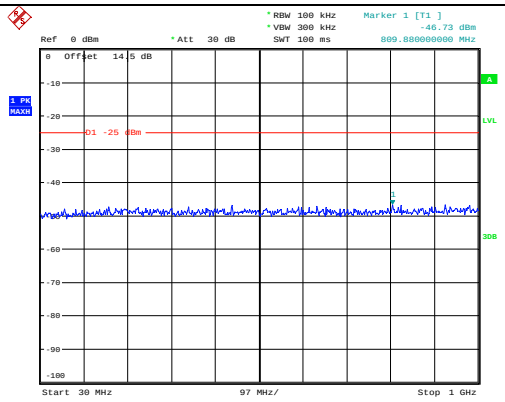 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 20:47:22	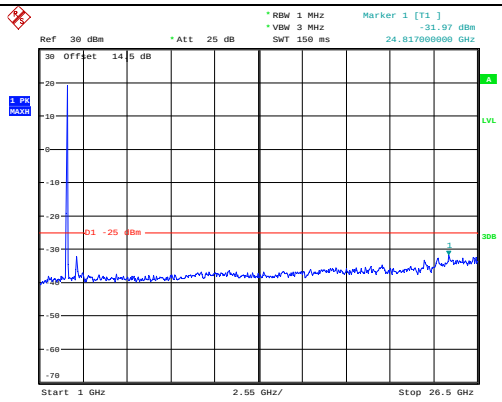 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 20:47:32
Highest	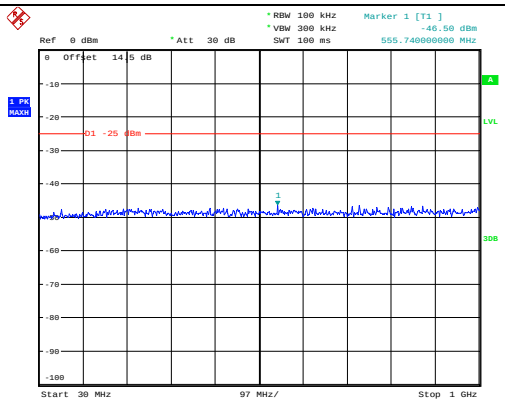 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 20:47:53	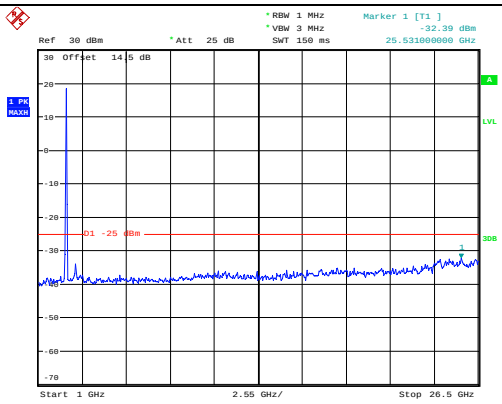 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 20:48:04

Spurious Emissions at Antenna Terminal		
Channel	**20MHz Bandwidth QPSK**	
Lowest	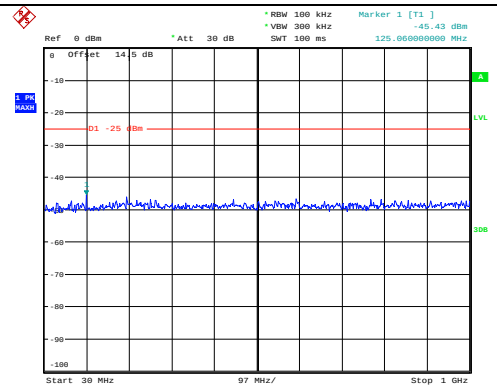 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 20:49:02	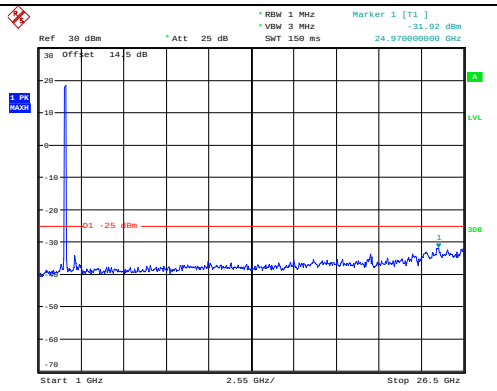 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 20:49:13
Middle	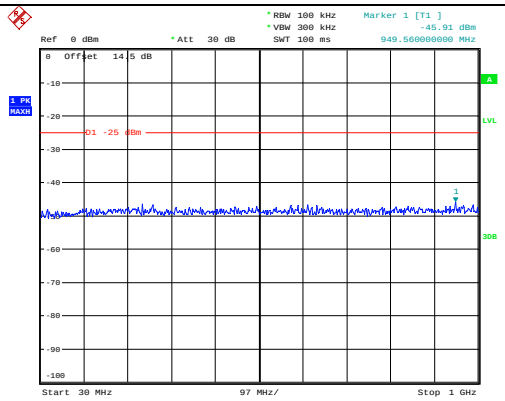 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 20:49:34	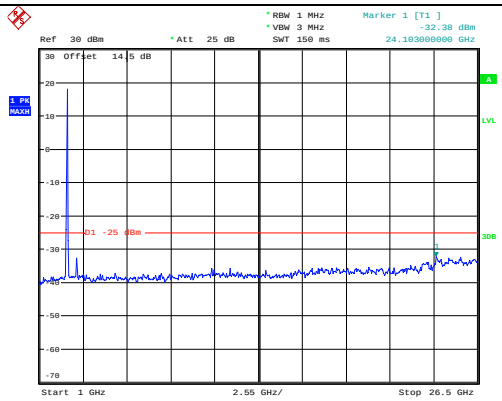 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 20:49:45
Highest	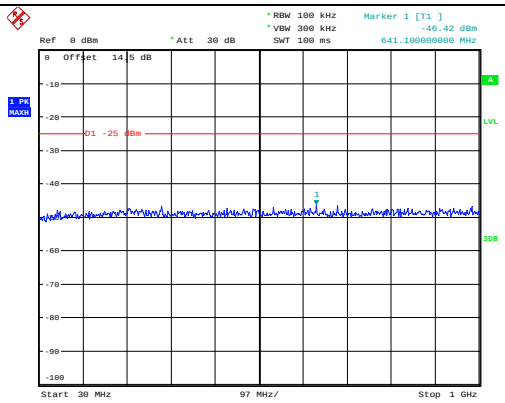 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 20:50:02	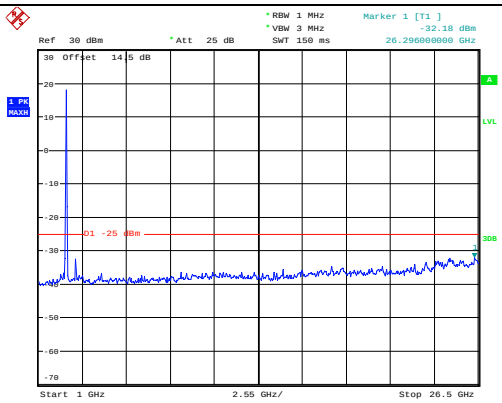 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 20:50:13

Full RB:

Out of band emission, Band Edge		
Mode	**Lowest**	**Highest**
QPSK 5MHz	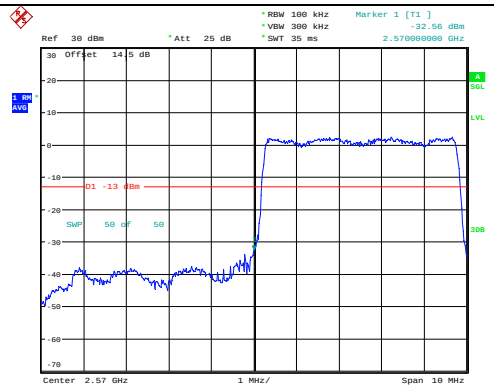	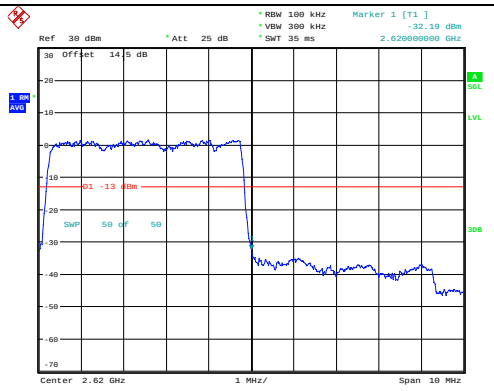
QPSK 10MHz	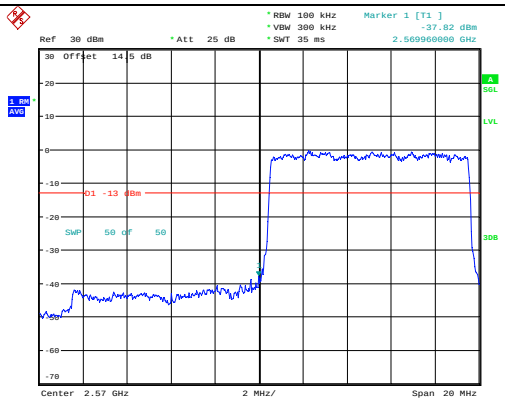	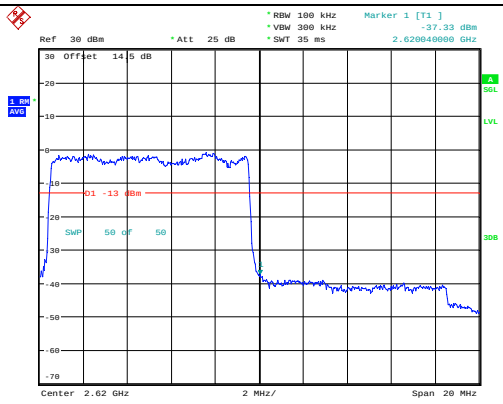
QPSK 15MHz	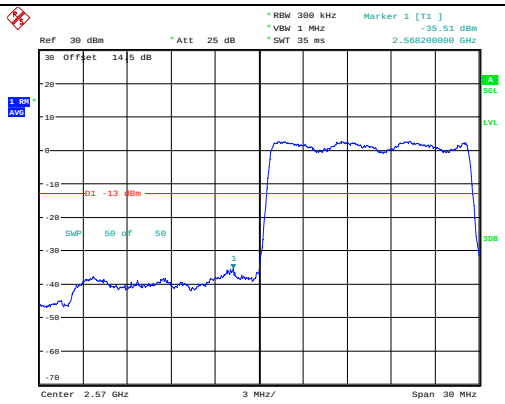	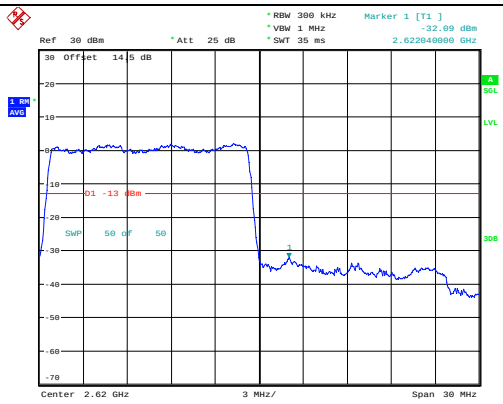

Out of band emission, Band Edge		
Mode	**Lowest**	**Highest**
QPSK 20MHz	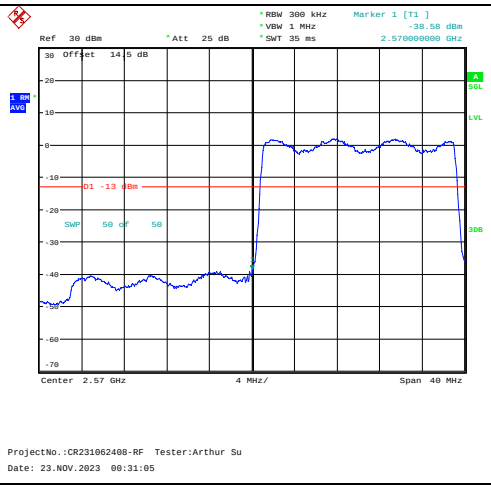	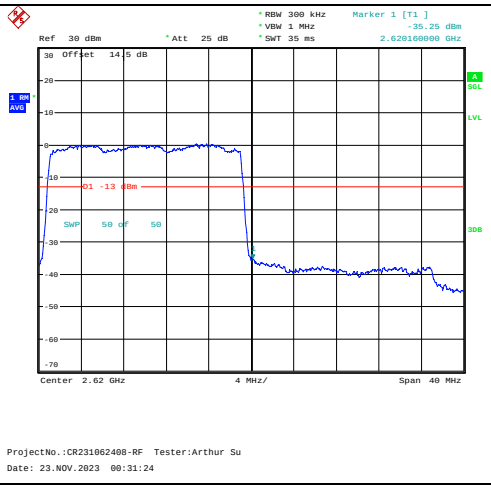

Full RB:

Out of band emission, Band Edge		
Mode	**Lowest**	**Highest**
16QAM 5MHz	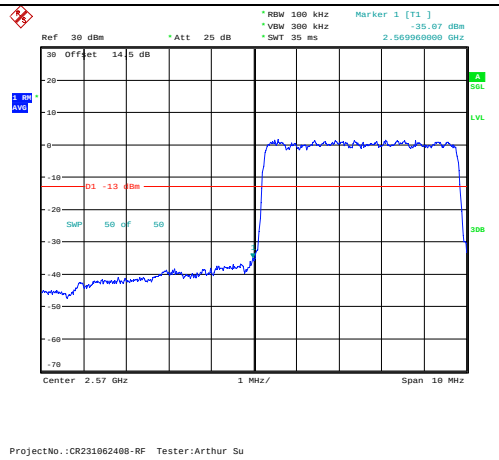	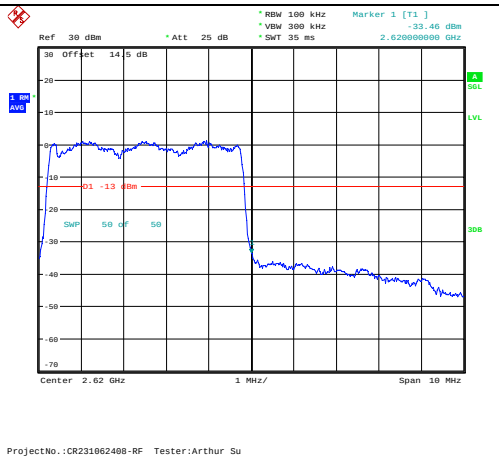
16QAM 10MHz	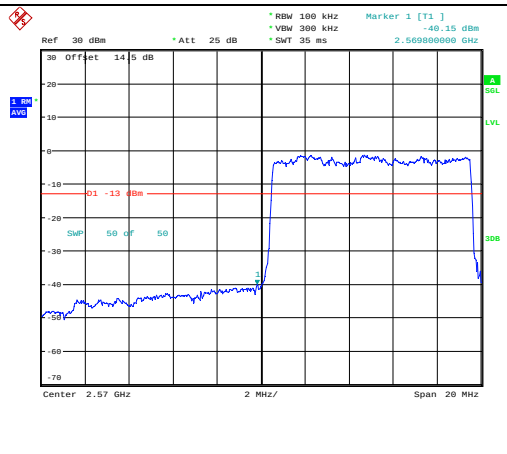	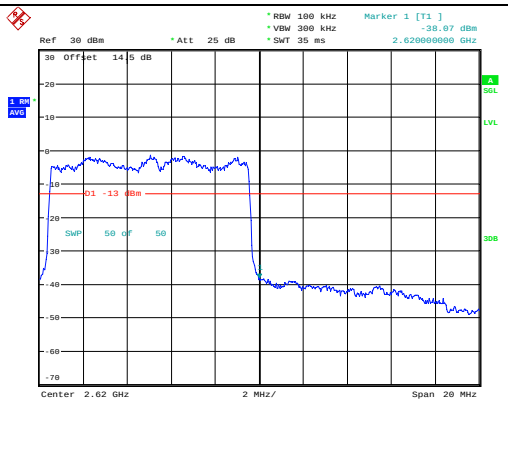
16QAM 15MHz	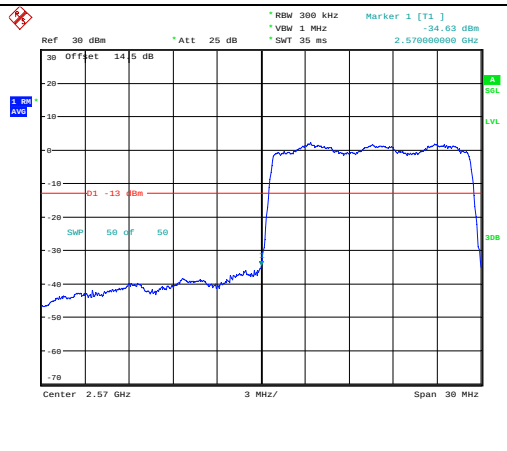	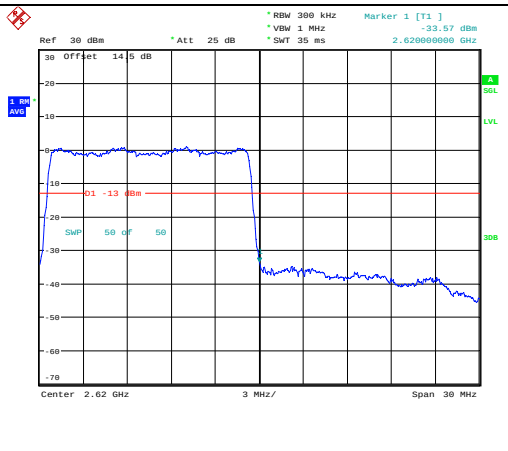

Out of band emission, Band Edge		
Mode	**Lowest**	**Highest**
16QAM 20MHz	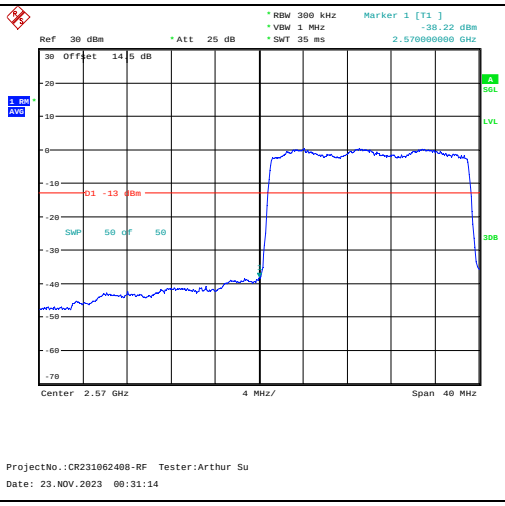	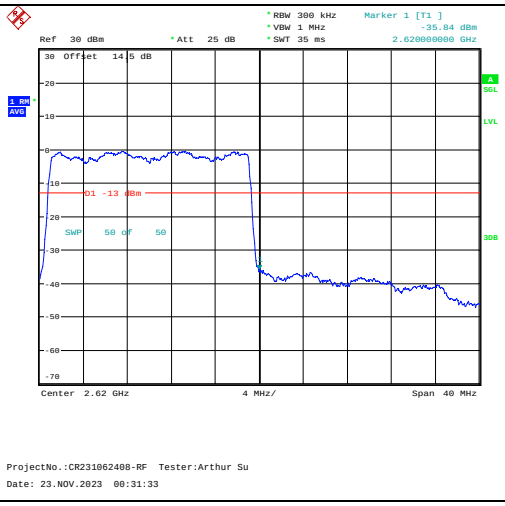

1RB:

Out of band emission, Band Edge		
Mode	**Lowest**	**Highest RB**
QPSK 5MHz	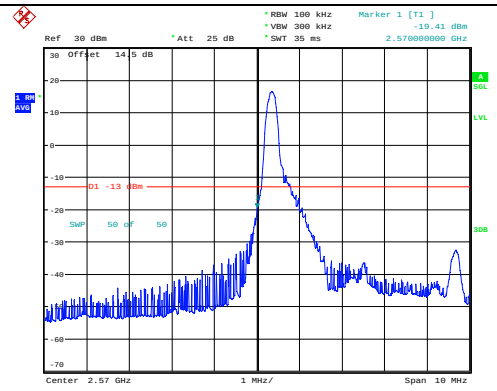	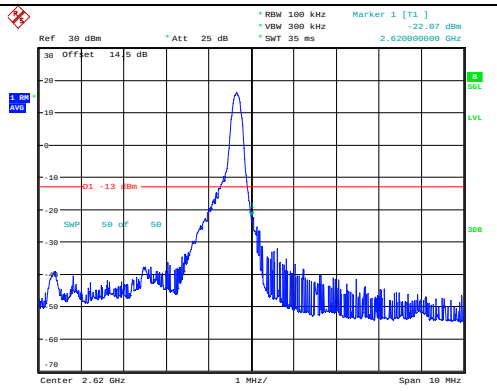
QPSK 10MHz	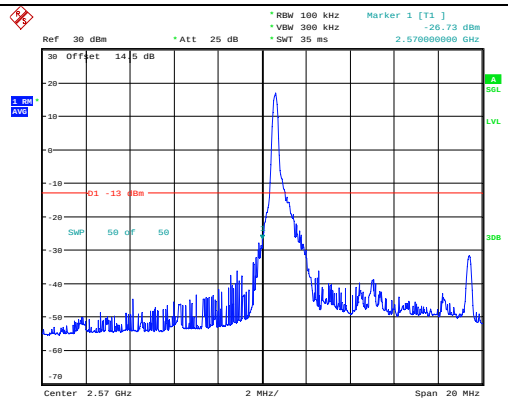	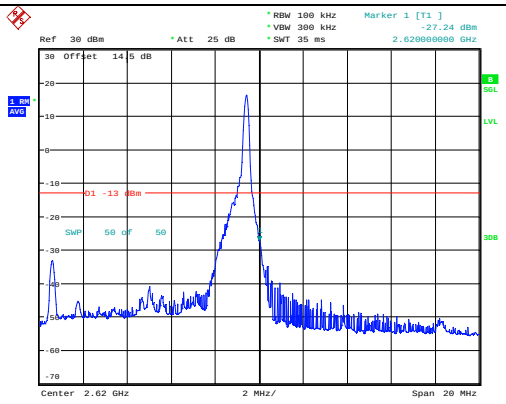
QPSK 15MHz	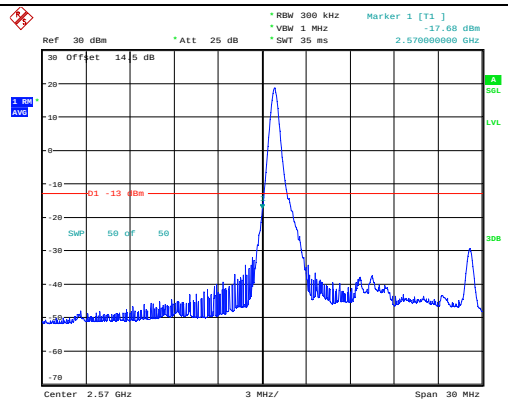	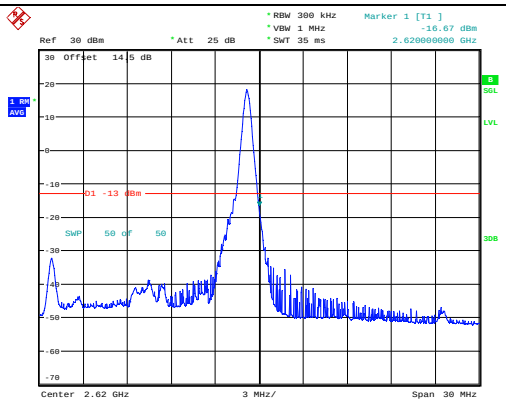

Out of band emission, Band Edge		
Mode	**Lowest**	**Highest**
QPSK 20MHz	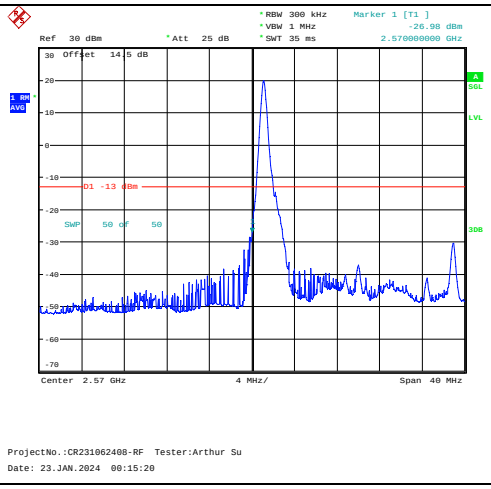	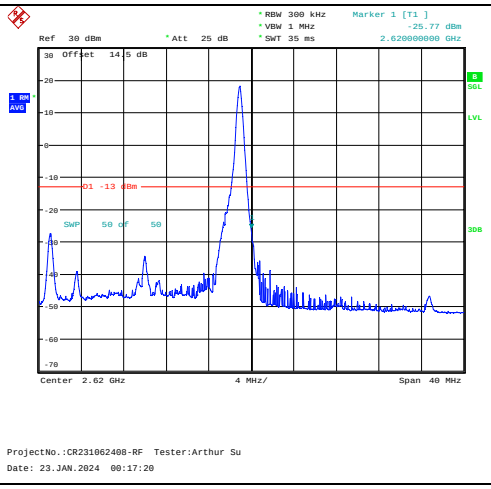

1RB:

Out of band emission, Band Edge		
Mode	**Lowest**	**Highest**
16QAM 5MHz	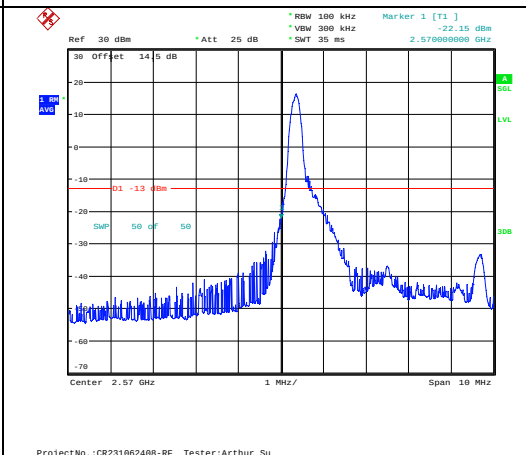	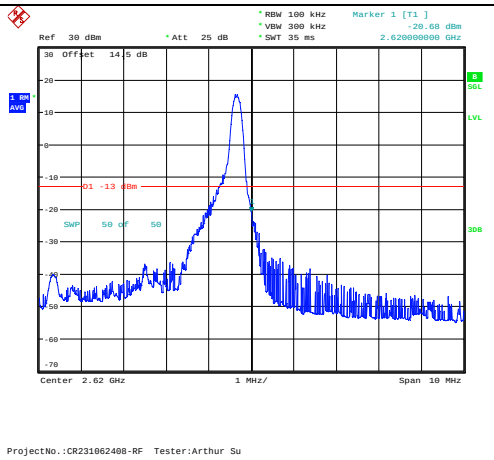
16QAM 10MHz	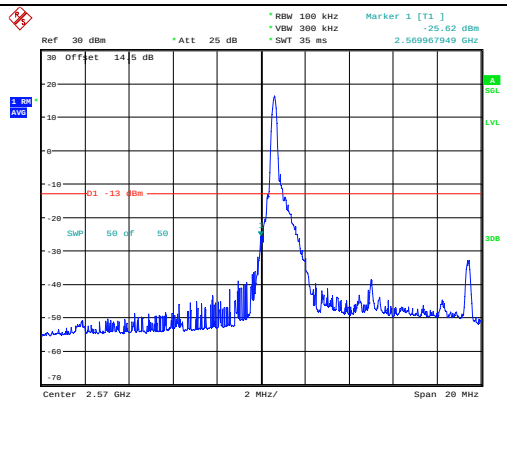	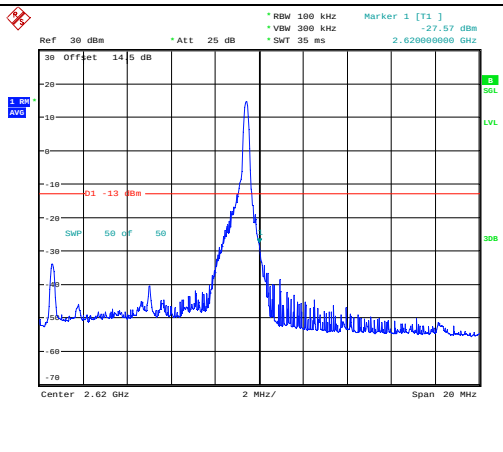
16QAM 15MHz	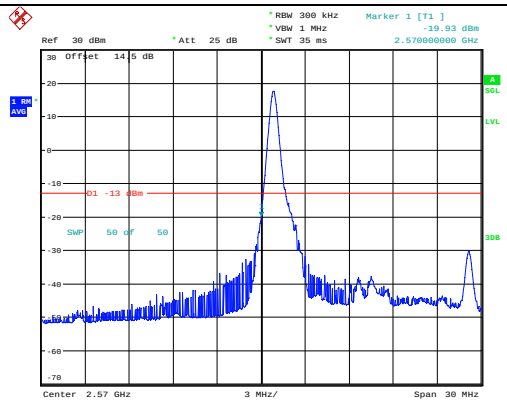	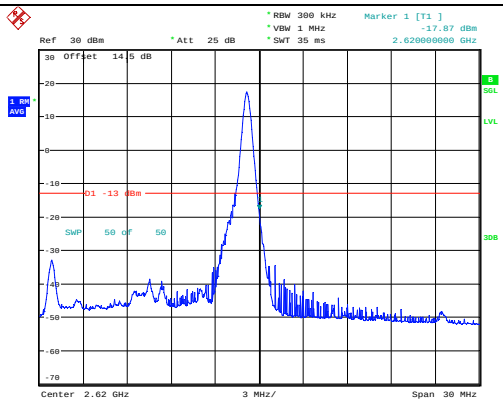

Out of band emission, Band Edge		
Mode	**Lowest**	**Highest**
16QAM 20MHz	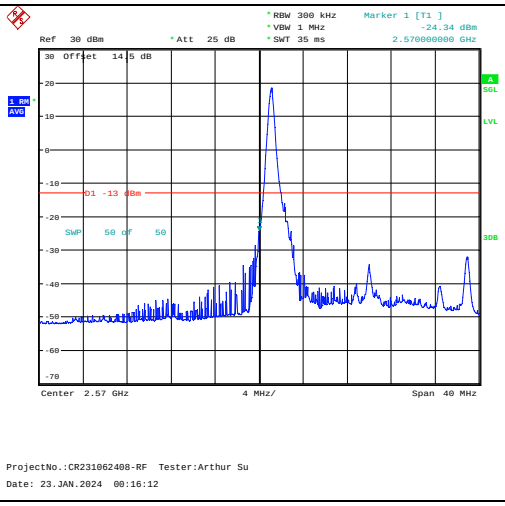	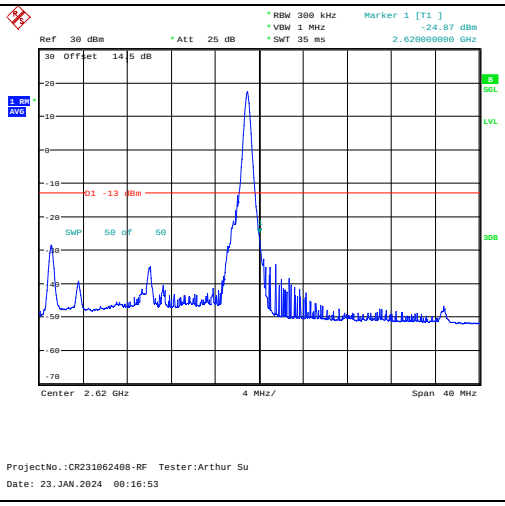

4.9 Antenna Port Test Data and Results for LTE Band 41

Serial Number:	2COS-2	Test Date:	2023/11/24-2024/2/4
Test Site:	RF	Test Mode:	Transmitting
Tester:	Arthur Su	Test Result:	**Pass**

Environmental Conditions:					
Temperature: (℃)	24.2-26.3	Relative Humidity: (%)	42-60	ATM Pressure: (kPa)	101.3-102.2

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200256	2023/3/31	2024/3/30
zhuoxiang	Coaxial Cable	SMA-178	211002	Each time	N/A
YINSAIGE	Coaxial Cable	SS402	SJ0100002	Each time	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A
R&S	Wideband Radio Communication Tester	CMW500	143458	2023/3/31	2024/3/30
UNI-T	Multimeter	UT39A+	C210582554	2023/9/28	2024/9/27
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D0912386	N/A	N/A
Unknown	Coaxial tee connector	Unknown	2204004	Each time	N/A

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Frequency for Each Mode:

Operation Bandwidth	Lowest Frequency (MHz)	Middle Frequency (MHz)	Highest Frequency (MHz)
5MHz	2557.5	2605	2652.5
10MHz	2560	2605	2650
15MHz	2562.5	2605	2647.5
20MHz	2565	2605	2645

Test Data:

RF Output Power

Test Bandwidth & Modulation	Resource Block & RB offset	Conducted Average Output Power(dBm)			Maximum EIRP (dBm)	EIRP Limit (dBm)
		Lowest Channel	Middle Channel	Highest Channel		
5MHz QPSK	RB1#0	**19.38**	18.43	18.44	19.78	33
	RB1#13	19.28	18.51	18.56		
	RB1#24	19.18	18.40	18.46		
	RB15#0	18.15	17.59	17.57		
	RB15#10	18.18	17.50	17.57		
	RB25#0	18.14	17.56	17.51		
5MHz 16QAM	RB1#0	**18.20**	17.48	17.49	18.6	33
	RB1#13	**18.20**	17.54	17.61		
	RB1#24	18.09	17.42	17.52		
	RB15#0	16.98	16.47	16.56		
	RB15#10	16.99	16.43	16.55		
	RB25#0	16.93	16.56	16.60		
10MHz QPSK	RB1#0	19.06	18.71	18.69	19.71	33
	RB1#25	**19.31**	18.97	18.97		
	RB1#49	18.98	18.67	18.70		
	RB25#0	18.08	17.73	17.82		
	RB25#25	18.03	17.68	17.82		
	RB50#0	18.06	17.72	17.78		
10MHz 16QAM	RB1#0	18.01	17.78	17.91	18.62	33
	RB1#25	**18.22**	18.02	18.17		
	RB1#49	17.91	17.70	17.92		
	RB25#0	17.12	16.73	16.79		
	RB25#25	17.08	16.71	16.80		
	RB50#0	16.99	16.71	16.77		
15MHz QPSK	RB1#0	**18.95**	18.52	18.50	19.35	33
	RB1#38	18.92	18.55	18.62		
	RB1#74	18.74	18.38	18.53		
	RB36#0	18.05	17.63	17.74		
	RB36#39	17.97	17.60	17.73		
	RB75#0	18.01	17.58	17.75		
15MHz 16QAM	RB1#0	**17.88**	17.67	17.71	18.28	33
	RB1#38	17.87	17.70	17.80		
	RB1#74	17.72	17.57	17.73		
	RB36#0	16.92	16.57	16.65		
	RB36#39	16.85	16.57	16.65		
	RB75#0	16.97	16.52	16.64		
20MHz QPSK	RB1#0	18.57	18.30	18.44	19.36	33
	RB1#50	**18.96**	18.67	18.94		
	RB1#99	18.36	18.16	18.52		
	RB50#0	17.73	17.38	17.74		

	RB50#50	17.66	17.36	17.67		
	RB100#0	17.70	17.38	17.72		
20MHz 16QAM	RB1#0	17.57	17.51	17.52	18.39	33
	RB1#50	17.93	17.89	**17.99**		
	RB1#99	17.38	17.40	17.57		
	RB50#0	16.80	16.41	16.74		
	RB50#50	16.72	16.40	16.68		
	RB100#0	16.74	16.35	16.71		
Note: EIRP=Conducted Power(dBm) - L_C(dB) + G_T(dBi)						
					Result:	**Pass**

Peak-to-average Ratio(PAR)

Test Bandwidth & Modulation	Resource Block & RB offset	Peak-to-average Ratio(dB)			Limit (dB)
		Lowest Channel	Middle Channel	Highest Channel	
20MHz QPSK	RB1#0	5.16	4.76	5.53	13
	RB100#0	6.05	7.16	5.72	13
20MHz 16QAM	RB1#0	7.08	5.80	5.36	13
	RB100#0	6.66	6.33	7.86	13
				Result:	**Pass**

Occupied Bandwidth

Operation Mode	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
	Low Channel	Middle channel	High Channel	Low Channel	Middle Channel	High Channel
5MHz QPSK	4.500	4.500	4.520	4.900	4.900	5.200
5MHz 16QAM	4.500	4.520	4.520	4.920	4.940	4.940
10MHz QPSK	8.960	8.960	8.960	9.600	9.520	10.040
10MHz 16QAM	8.960	8.960	8.960	9.440	10.320	9.560
15MHz QPSK	13.500	13.500	13.500	14.880	15.780	15.780
15MHz 16QAM	13.500	13.620	13.560	15.000	15.600	15.780
20MHz QPSK	18.000	18.000	17.920	19.120	19.760	19.200
20MHz 16QAM	17.920	18.000	17.920	19.840	19.200	19.200
Note: The test plots please refer to the Plots of Occupied Bandwidth						

Spurious Emissions at Antenna Terminal	
Result:	**Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.**

Out of band emission, Band Edge	
Result:	**Pass, Please refer to the test plots of Out of band emission, Band Edge.**

Frequency Stability

Test Mode:	20M QPSK	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (℃)	Voltage (V_{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.85	2556.038	2555.00	2653.983	2655
	-20	3.85	2556.019	2555.00	2653.972	2655
	-10	3.85	2556.036	2555.00	2653.977	2655
	0	3.85	2556.014	2555.00	2653.969	2655
	10	3.85	2556.014	2555.00	2653.983	2655
	20	3.85	2556.040	2555.00	2653.960	2655
	30	3.85	2556.015	2555.00	2653.988	2655
	40	3.85	2556.026	2555.00	2653.972	2655
	50	3.85	2556.037	2555.00	2653.982	2655
Frequency Stability vs. Voltage	20	3.4	2556.029	2555.00	2653.989	2655
	20	4.4	2556.025	2555.00	2653.975	2655
					Result:	**Pass**

Test Mode:	20M 16QAM	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (℃)	Voltage (V_{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.85	2556.015	2555.00	2653.962	2655
	-20	3.85	2556.035	2555.00	2653.976	2655
	-10	3.85	2556.040	2555.00	2653.972	2655
	0	3.85	2556.014	2555.00	2653.982	2655
	10	3.85	2556.012	2555.00	2653.971	2655
	20	3.85	2556.040	2555.00	2653.960	2655
	30	3.85	2556.013	2555.00	2653.985	2655
	40	3.85	2556.038	2555.00	2653.982	2655
	50	3.85	2556.011	2555.00	2653.971	2655
Frequency Stability vs. Voltage	20	3.4	2556.033	2555.00	2653.979	2655
	20	4.4	2556.020	2555.00	2653.967	2655
					Result:	**Pass**

Test Plots (Note: The 14.5 dB is the Insertion loss of the RF cable, attenuator and coaxial tee connector, which was offset into the Spectrum Analyzer):

Occupied Bandwidth

Channel	5MHz Bandwidth QPSK	5MHz Bandwidth 16QAM
Lowest	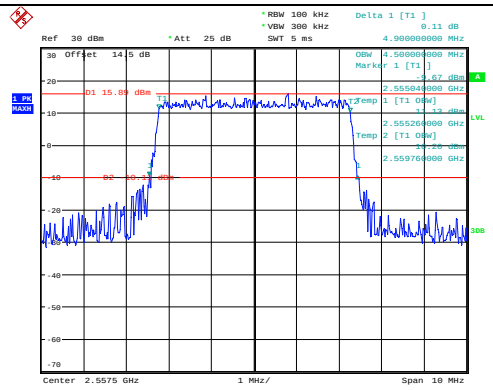	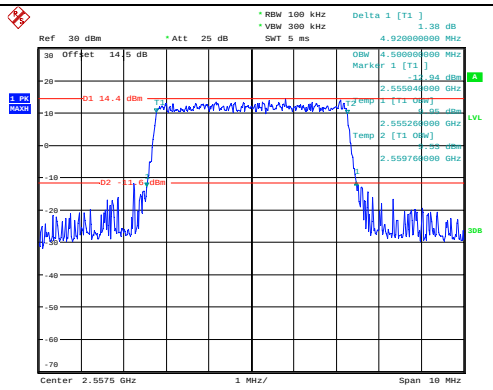
Middle	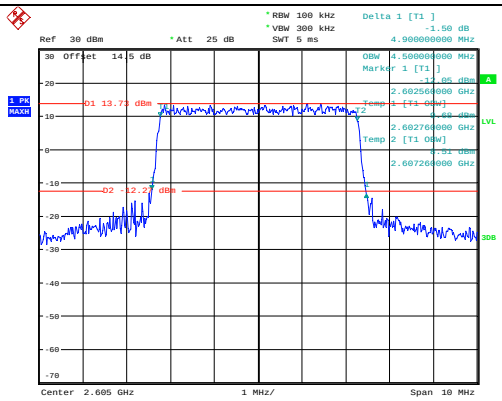	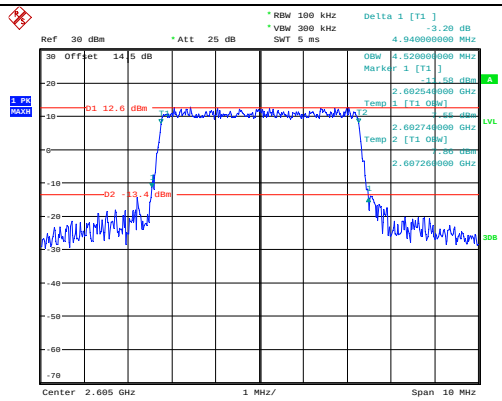
Highest	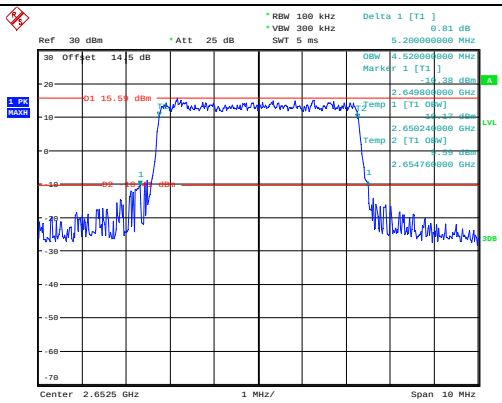	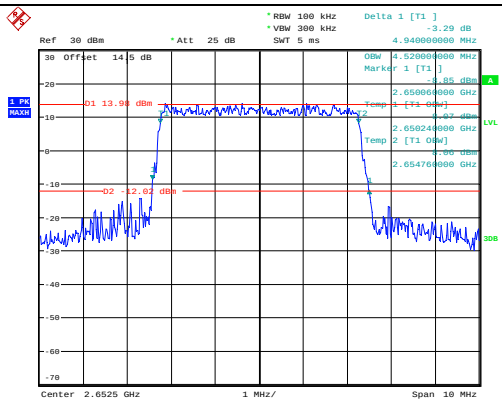

Occupied Bandwidth		
Channel	10MHz Bandwidth QPSK	10MHz Bandwidth 16QAM
Lowest	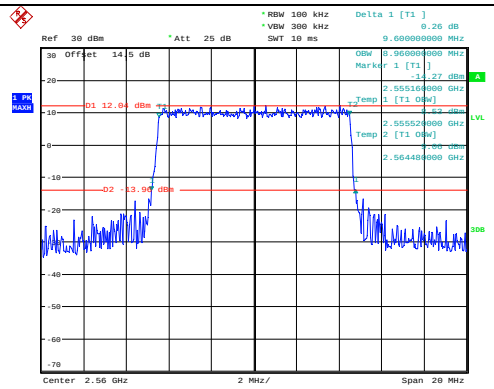 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 24.NOV.2023 19:24:24	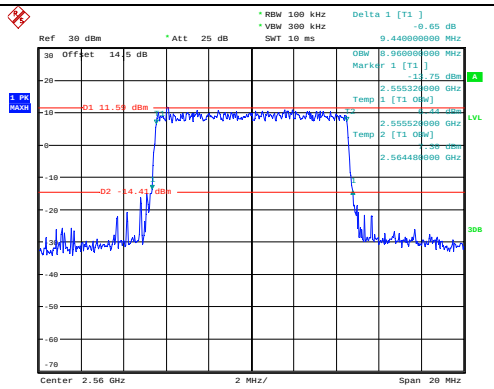 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 24.NOV.2023 19:24:47
Middle	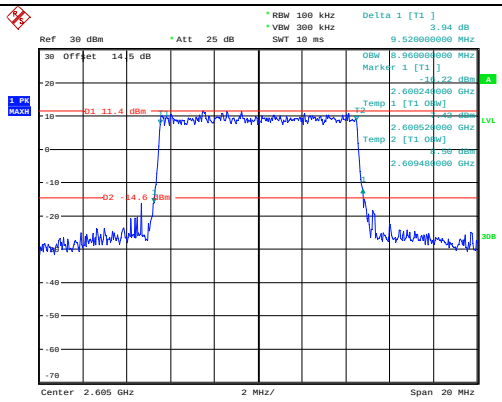 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 24.NOV.2023 19:25:11	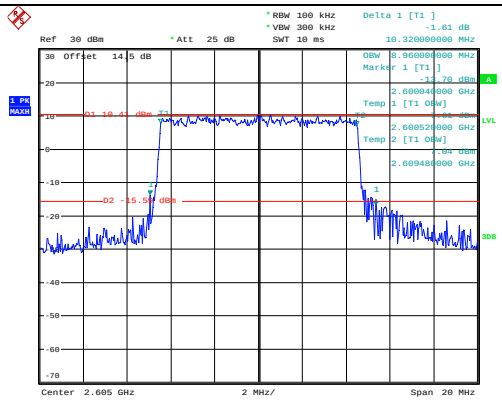 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 24.NOV.2023 19:25:43
Highest	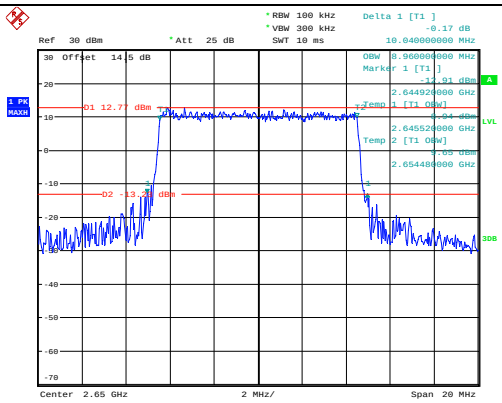 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 24.NOV.2023 19:26:14	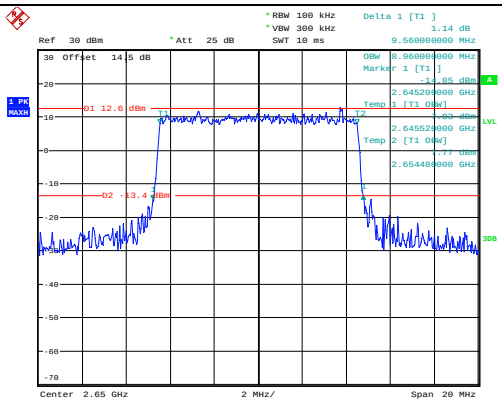 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 24.NOV.2023 19:26:39

Occupied Bandwidth

Channel	15MHz Bandwidth QPSK	15MHz Bandwidth 16QAM
Lowest	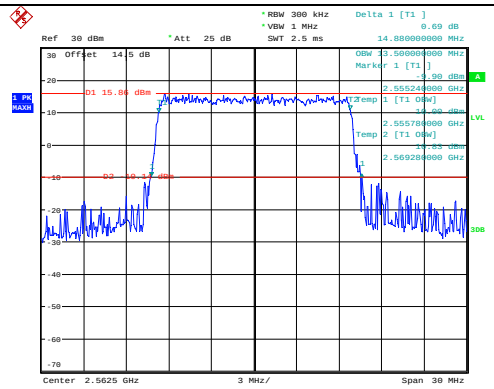 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 24.NOV.2023 19:27:11	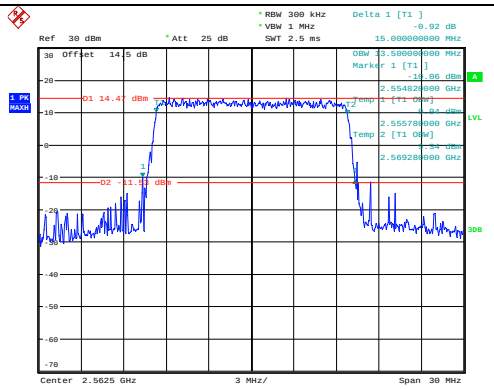 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 24.NOV.2023 19:27:38
Middle	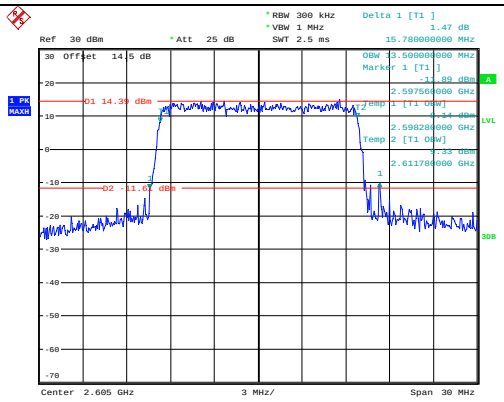 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 24.NOV.2023 19:28:02	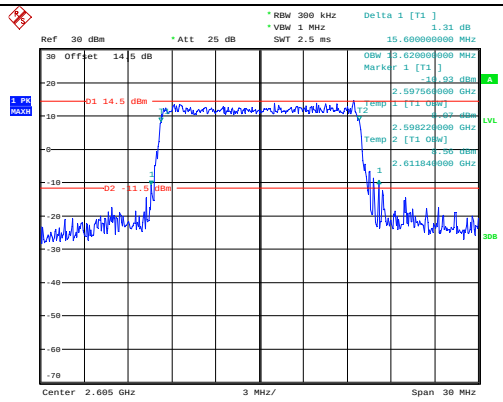 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 24.NOV.2023 19:28:28
Highest	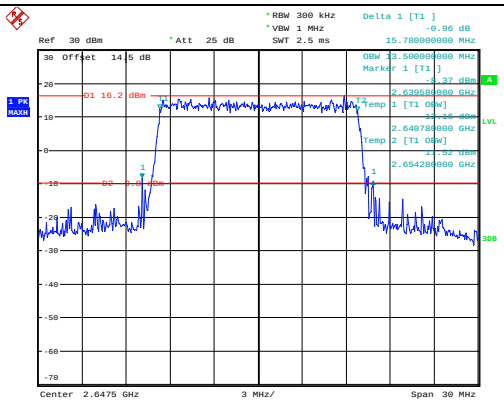 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 24.NOV.2023 19:28:52	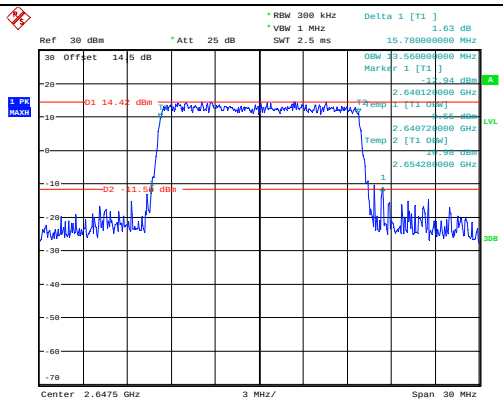 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 24.NOV.2023 19:29:22

Occupied Bandwidth

Channel	20MHz Bandwidth QPSK	20MHz Bandwidth 16QAM
Lowest	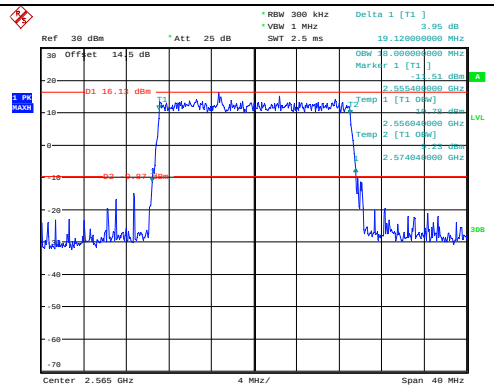 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 24.NOV.2023 19:29:44	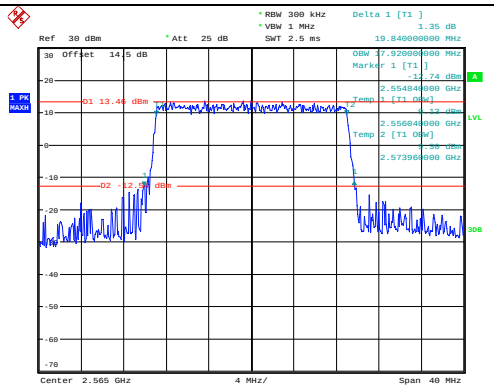 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 24.NOV.2023 19:30:14
Middle	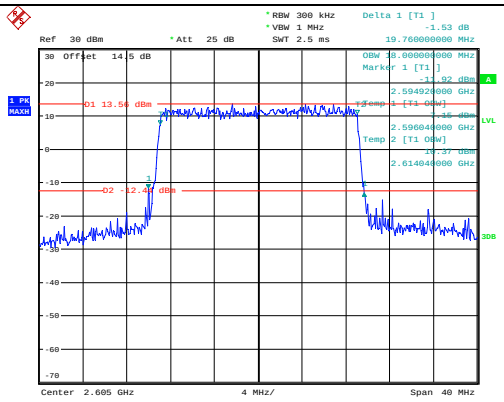 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 24.NOV.2023 19:30:38	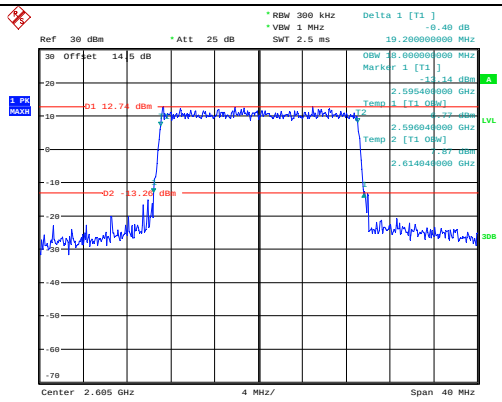 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 24.NOV.2023 19:31:01
Highest	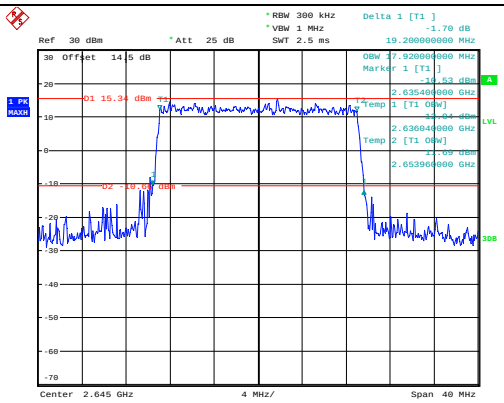 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 24.NOV.2023 19:31:29	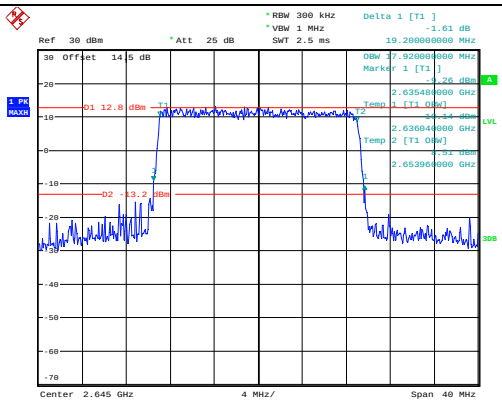 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 24.NOV.2023 19:31:49

1RB:

Spurious Emissions at Antenna Terminal		
Channel	**5MHz Bandwidth QPSK**	
Lowest	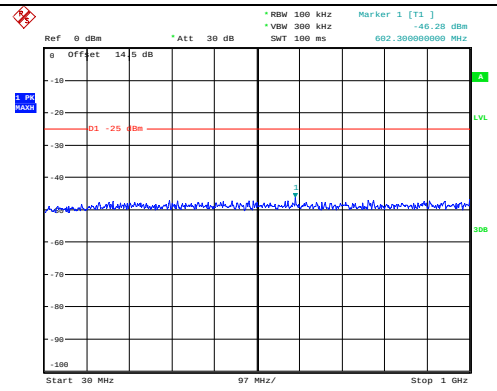	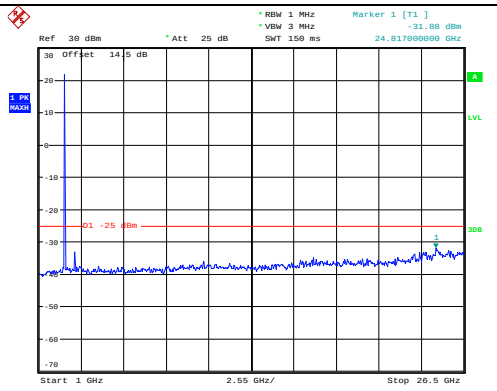
Middle	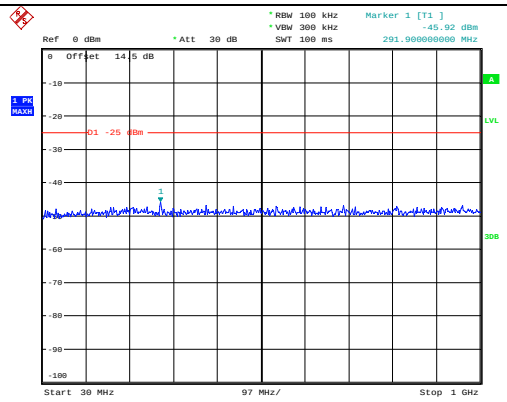	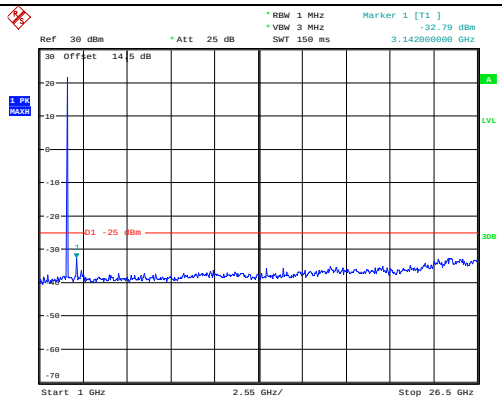
Highest	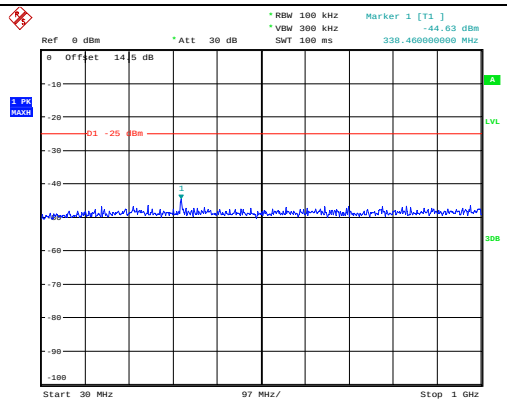	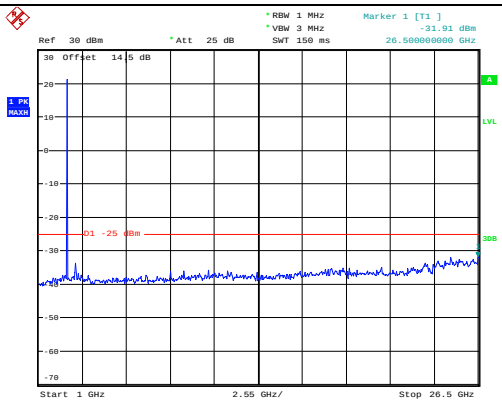

Spurious Emissions at Antenna Terminal		
Channel	**10MHz Bandwidth QPSK**	
Lowest	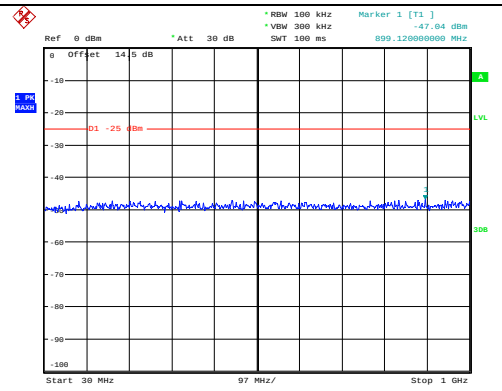 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 20:59:05	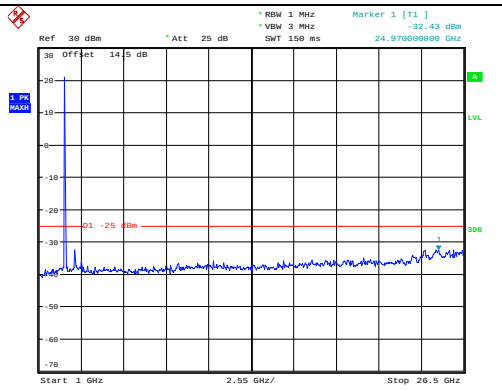 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 20:59:16
Middle	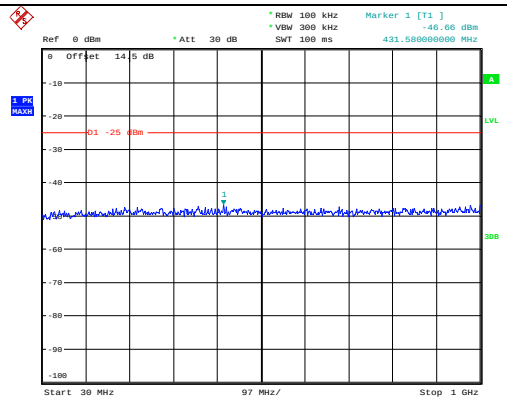 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 20:59:31	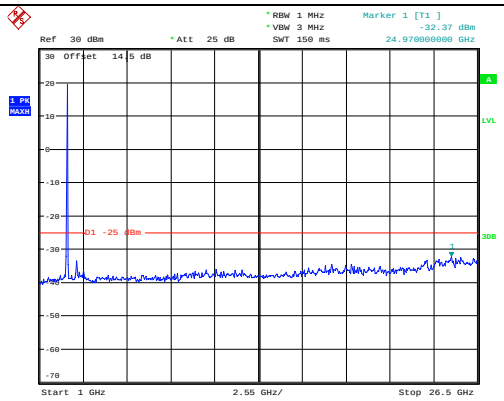 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 20:59:42
Highest	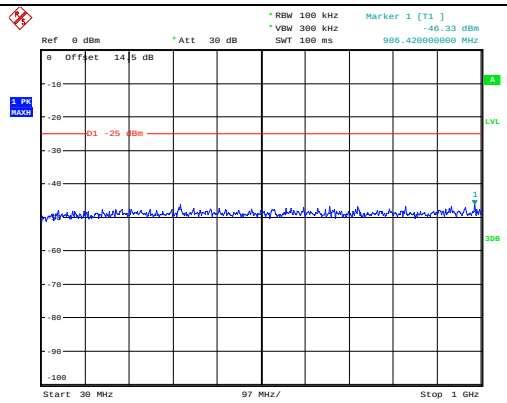 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 20:59:57	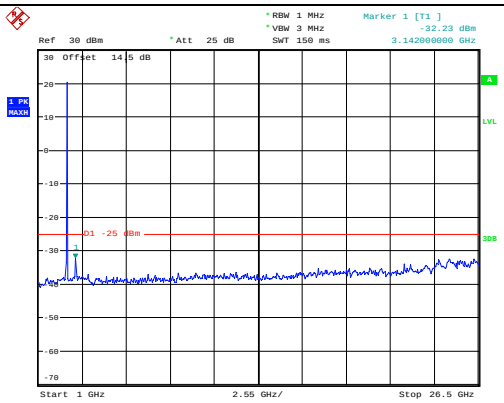 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 21:00:08

Spurious Emissions at Antenna Terminal		
Channel	**15MHz Bandwidth QPSK**	
Lowest	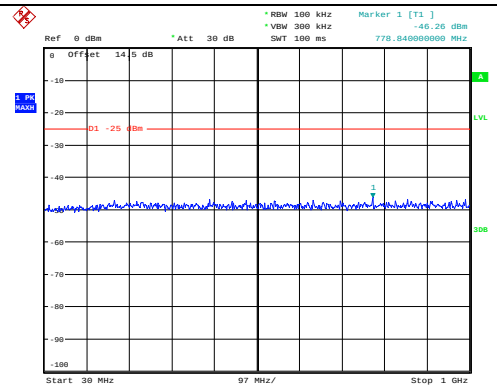 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 21:00:27	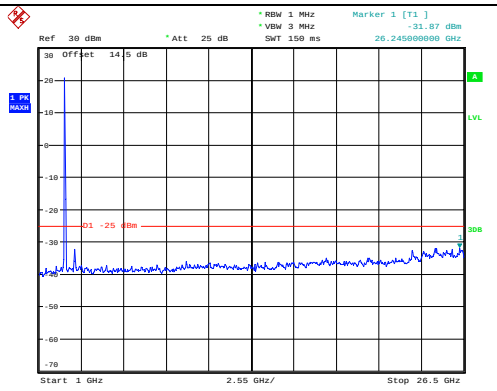 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 21:00:42
Middle	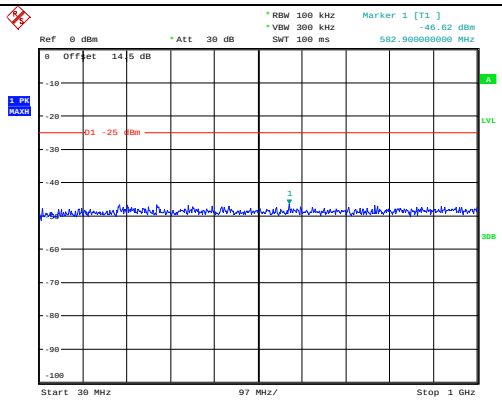 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 21:01:02	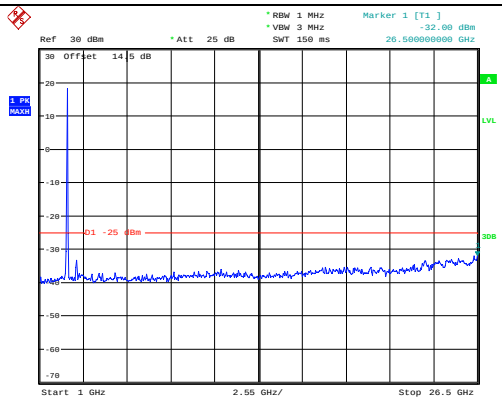 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 21:01:13
Highest	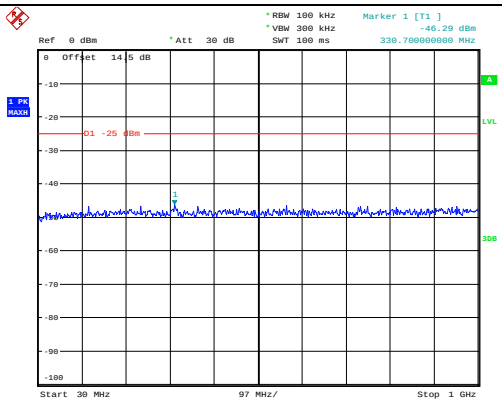 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 21:01:33	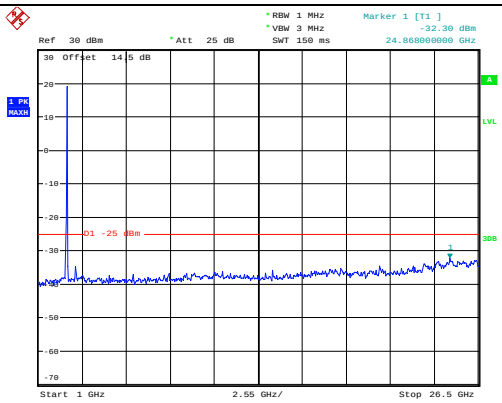 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 21:01:44

Spurious Emissions at Antenna Terminal		
Channel	**20MHz Bandwidth QPSK**	
Lowest	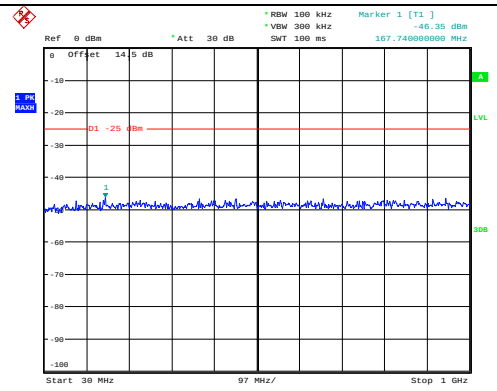 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 21:02:07	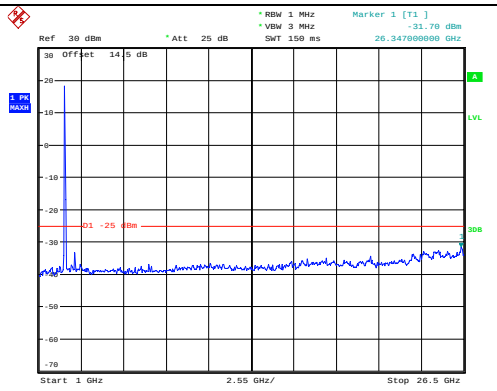 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 21:02:17
Middle	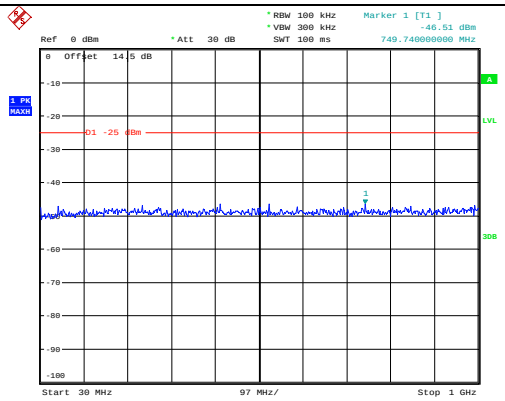 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 21:02:35	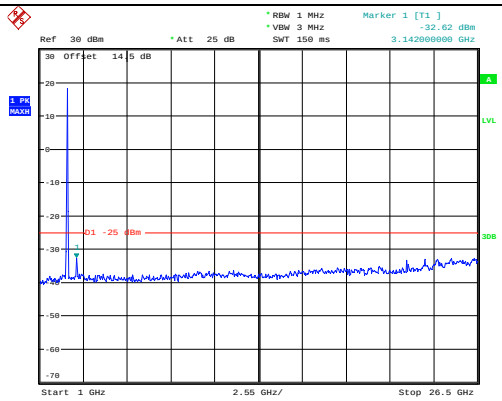 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 21:02:46
Highest	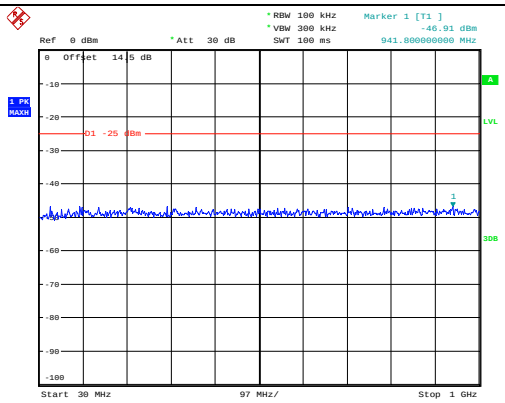 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 21:03:06	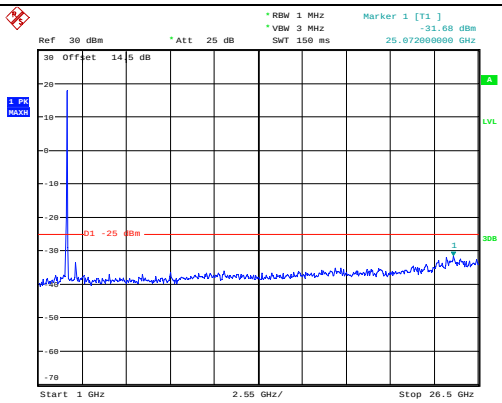 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 19.JAN.2024 21:03:17

Full RB

Out of band emission, Band Edge		
Mode	**Lowest**	**Highest**
QPSK 5MHz	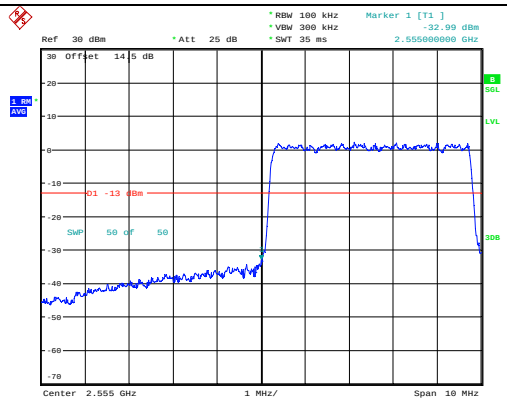 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 4.FEB.2024 23:24:29	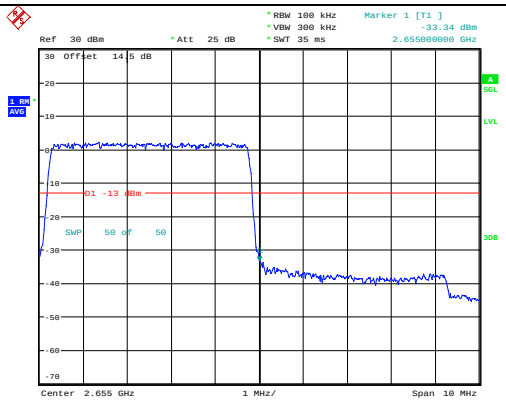 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 4.FEB.2024 23:27:09
QPSK 10MHz	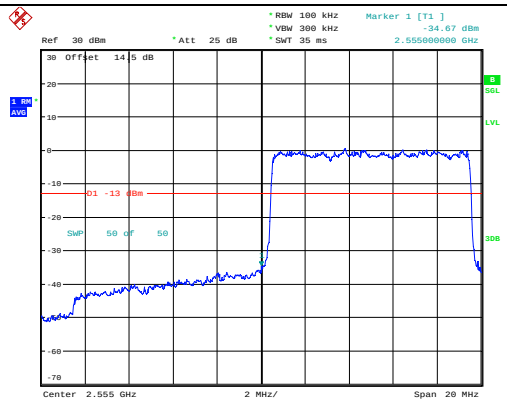 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 4.FEB.2024 23:30:19	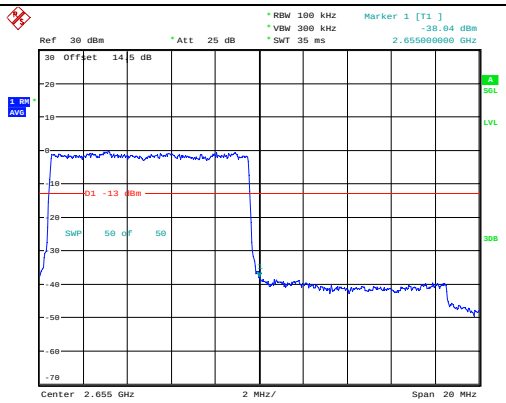 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 4.FEB.2024 23:34:13
QPSK 15MHz	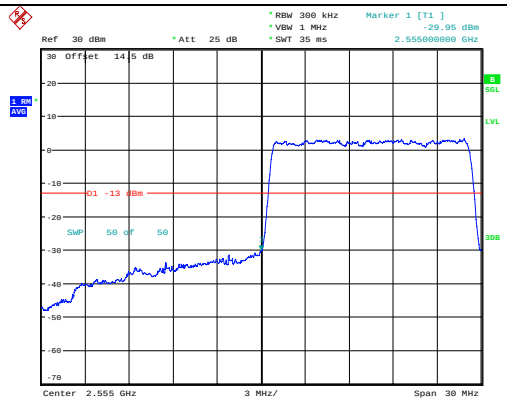 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 4.FEB.2024 23:37:37	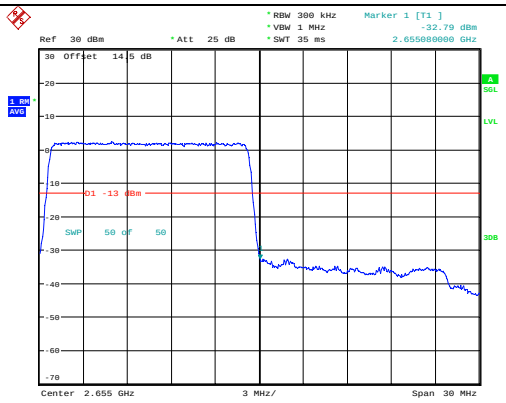 ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 4.FEB.2024 23:39:56

Out of band emission, Band Edge		
Mode	**Lowest**	**Highest**
QPSK 20MHz	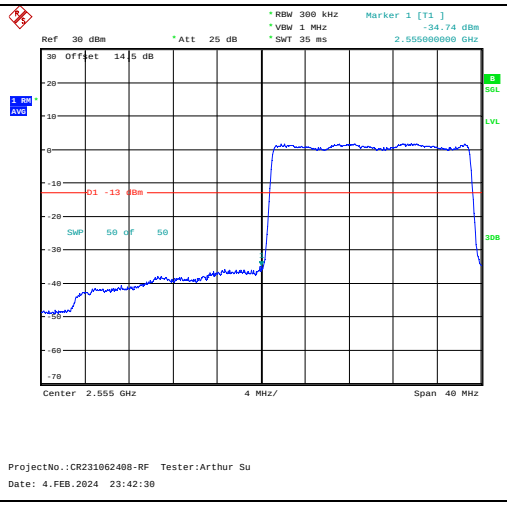	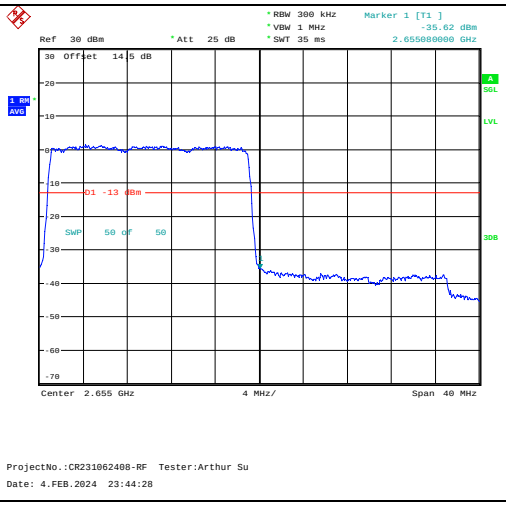

Full RB

Out of band emission, Band Edge		
Mode	**Lowest**	**Highest**
16QAM 5MHz	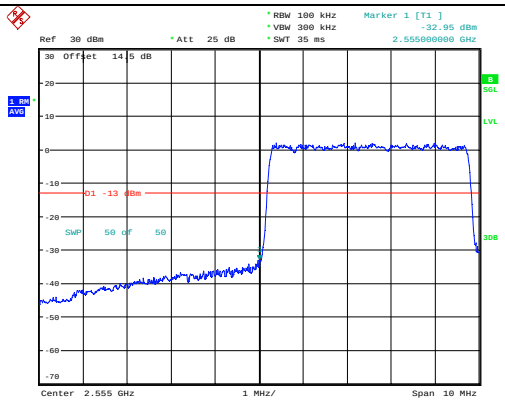	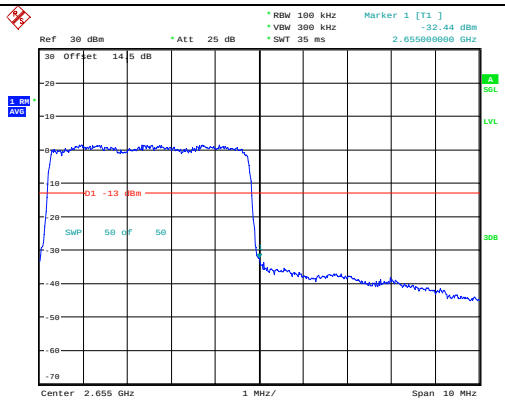
16QAM 10MHz	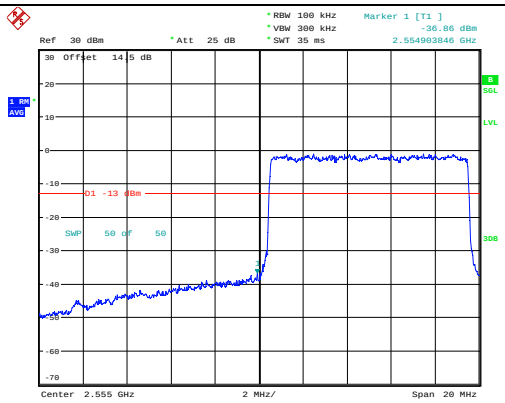	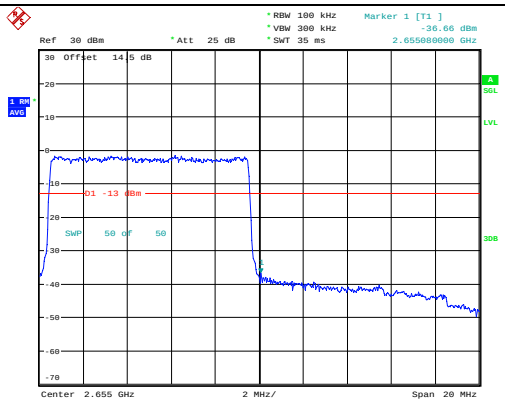
16QAM 15MHz	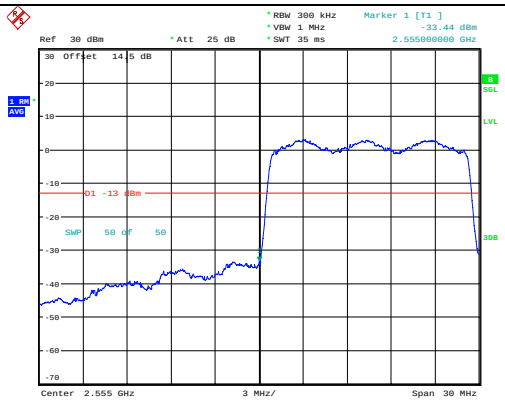	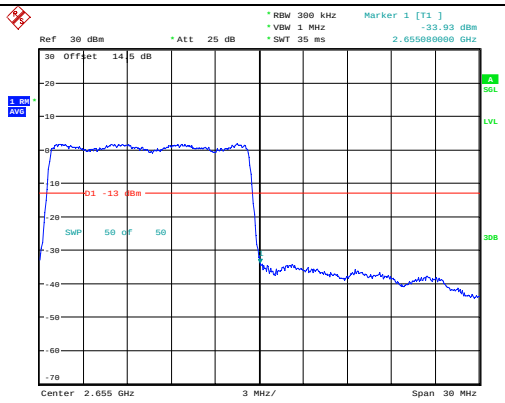

Out of band emission, Band Edge		
Mode	**Lowest**	**Highest**
16QAM 20MHz