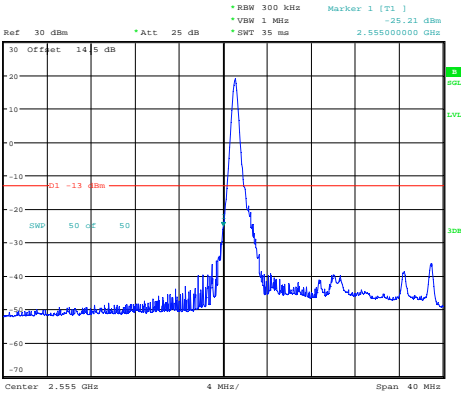
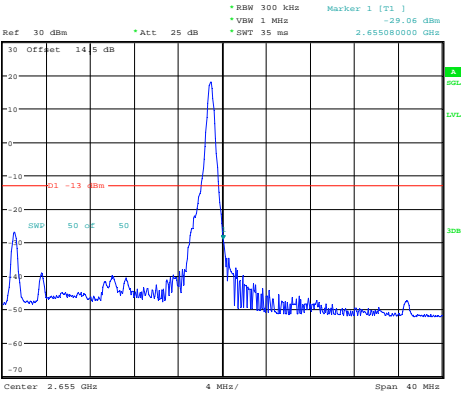


1RB:

Out of band emission, Band Edge

Mode	Lowest	Highest
QPSK 5MHz		
QPSK 10MHz		
QPSK 15MHz		

Out of band emission, Band Edge



Mode	Lowest	Highest
<p>QPSK 20MHz</p>	 <p>ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 4.FEB.2024 23:42:57</p>	 <p>ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 4.FEB.2024 23:44:51</p>

1RB:

Out of band emission, Band Edge

Mode	Lowest	Highest
16QAM 5MHz	<p>ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 4.FEB.2024 23:26:07</p>	<p>ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 4.FEB.2024 23:28:36</p>
16QAM 10MHz	<p>ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 4.FEB.2024 23:32:32</p>	<p>ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 4.FEB.2024 23:35:55</p>
16QAM 15MHz	<p>ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 4.FEB.2024 23:39:06</p>	<p>ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 4.FEB.2024 23:41:08</p>

Out of band emission, Band Edge

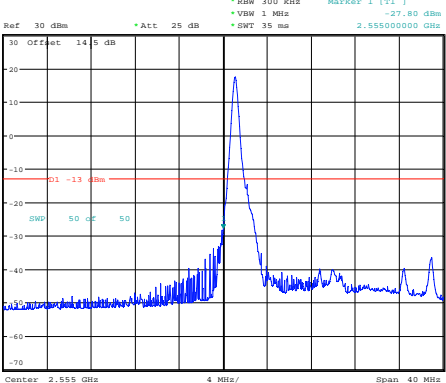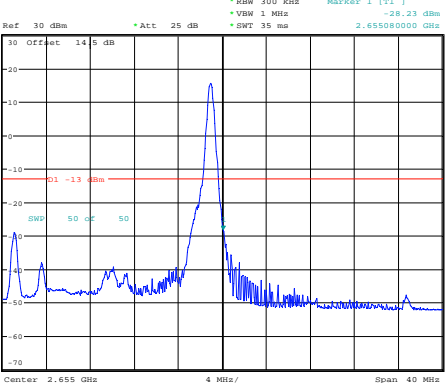Mode	Lowest	Highest
<p>16QAM 20MHz</p>	 <p>ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 4.FEB.2024 23:43:21</p>	 <p>ProjectNo.:CR231062408-RF Tester:Arthur Su Date: 4.FEB.2024 23:45:14</p>

4.10 Radiated Spurious Emissions

Serial Number:	2COS-1	Test Date:	Above 1GHz: 2023/12/12 Below 1GHz: 2024/3/18
Test Site:	966-2,966-1	Test Mode:	Transmitting
Tester:	Jeff Luo, Mack Huang	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.7-26.3	Relative Humidity: (%)	58-59	ATM Pressure: (kPa)	100.9
----------------------	-----------	---------------------------	-------	---------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Below 1GHz					
Sunol Sciences	Antenna	JB6	A082520-5	2023/12/1	2026/11/30
R&S	EMI Test Receiver	ESR3	102724	2023/3/31	2024/3/30
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0470-02	2023/7/16	2024/7/15
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0780-01	2023/7/16	2024/7/15
Sonoma	Amplifier	310N	186165	2023/7/16	2024/7/15
EMCO	Adjustable Dipole Antenna	3121C	9109-756	N/A	N/A
MICRO-COAX	Coaxial Cable	UFA210B-0-0720-300300	99G1448	2023/7/16	2024/7/15
Agilent	Signal Generator	E8247C	MY43321352	2023/11/17	2024/11/16
Above 1GHz					
AH	Double Ridge Guide Horn Antenna	SAS-571	1394	2023/2/22	2026/2/21
R&S	Spectrum Analyzer	FSV40	101591	2023/3/31	2024/3/30
MICRO-COAX	Coaxial Cable	UFA210A-1-1200-70U300	217423-008	2023/8/6	2024/8/5
MICRO-COAX	Coaxial Cable	UFA210A-1-2362-300300	235780-001	2023/8/6	2024/8/5
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2023/11/8	2024/11/7
AH	Double Ridge Guide Horn Antenna	SAS-571	1396	2021/10/18	2024/10/17
MICRO-COAX	Coaxial Cable	UFA210B-0-0720-300300	99G1448	2023/7/16	2024/7/15
Agilent	Signal Generator	E8247C	MY43321352	2023/11/17	2024/11/16
PASTERNAK	Horn Antenna	PE9852/2F-20	112002	2021/2/5	2024/2/4
PASTERNAK	Horn Antenna	PE9852/2F-20	112001	2021/2/5	2024/2/4
Quinstar	Preamplifier	QLW-18405536-JO	15964001005	2023/9/15	2024/9/14
PASTERNAK	Horn Antenna	PE9850/2F-20	072001	2021/2/5	2024/2/4
PASTERNAK	Horn Antenna	PE9850/2F-20	072002	2021/2/5	2024/2/4
MICRO-COAX	Coaxial Cable	UFB142A-1-2362-200200	235772-001	2023/8/6	2024/8/5

* **Statement of Traceability:** China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

Please refer to the below table and plots.

After pre-scan in the X, Y and Z axes of orientation, the worst case is below:

Cellular Band (30MHz-10GHz)

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
GSM 850 Frequency:824.2MHz								
329.03	H	45.06	-65.22	0.00	0.34	-65.56	-13.00	52.56
77.59	V	41.11	-66.03	-1.21	0.16	-67.40	-13.00	54.40
1648.400	H	36.78	-67.55	8.68	0.80	-59.67	-13.00	46.67
1648.400	V	36.10	-68.31	8.68	0.80	-60.43	-13.00	47.43
2472.600	H	35.44	-65.34	9.38	1.00	-56.96	-13.00	43.96
2472.600	V	35.21	-65.52	9.38	1.00	-57.14	-13.00	44.14
3296.800	H	34.36	-62.32	10.32	1.15	-53.15	-13.00	40.15
3296.800	V	35.61	-60.83	10.32	1.15	-51.66	-13.00	38.66
GSM 850 Frequency:836.6MHz								
334.16	H	46.23	-63.97	0.00	0.35	-64.32	-13.00	51.32
75.36	V	40.15	-65.66	-2.32	0.16	-68.14	-13.00	55.14
1673.200	H	35.79	-68.52	8.71	0.85	-60.66	-13.00	47.66
1673.200	V	35.24	-69.17	8.71	0.85	-61.31	-13.00	48.31
2509.800	H	34.66	-65.95	9.42	1.01	-57.54	-13.00	44.54
2509.800	V	35.94	-64.68	9.42	1.01	-56.27	-13.00	43.27
3346.400	H	35.13	-62.04	10.34	1.16	-52.86	-13.00	39.86
3346.400	V	34.57	-62.46	10.34	1.16	-53.28	-13.00	40.28
GSM 850 Frequency:848.8MHz								
333.89	H	44.32	-65.89	0.00	0.35	-66.24	-13.00	53.24
78.69	V	43.33	-64.47	-0.66	0.16	-65.29	-13.00	52.29
1697.600	H	36.94	-67.35	8.74	0.90	-59.51	-13.00	46.51
1697.600	V	35.12	-69.30	8.74	0.90	-61.46	-13.00	48.46
2546.400	H	35.24	-65.09	9.47	1.01	-56.63	-13.00	43.63
2546.400	V	34.98	-65.30	9.47	1.01	-56.84	-13.00	43.84
3395.200	H	35.13	-62.56	10.36	1.19	-53.39	-13.00	40.39
3395.200	V	35.02	-62.64	10.36	1.19	-53.47	-13.00	40.47

PCS Band (30MHz-20GHz)

Frequency (MHz)	Polar (H/V)	Receiver Reading (dB μ V)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
PCS 1900 Frequency:1850.2MHz								
157.89	H	35.91	-75.76	0.00	0.23	-75.99	-13.00	62.99
57.09	V	36.51	-68.11	-11.64	0.14	-79.89	-13.00	66.89
3700.400	H	35.44	-61.88	10.60	1.25	-52.53	-13.00	39.53
3700.400	V	36.01	-61.29	10.60	1.25	-51.94	-13.00	38.94
5550.600	H	35.87	-57.39	11.44	1.49	-47.44	-13.00	34.44
5550.600	V	35.42	-57.68	11.44	1.49	-47.73	-13.00	34.73
PCS 1900 Frequency:1880MHz								
159.65	H	32.87	-78.74	0.00	0.23	-78.97	-13.00	65.97
56.56	V	37.25	-67.12	-11.88	0.14	-79.14	-13.00	66.14
3760.000	H	34.87	-61.54	10.66	1.24	-52.12	-13.00	39.12
3760.000	V	35.14	-61.15	10.66	1.24	-51.73	-13.00	38.73
5640.000	H	35.03	-58.42	11.33	1.54	-48.63	-13.00	35.63
5640.000	V	36.11	-57.22	11.33	1.54	-47.43	-13.00	34.43
PCS 1900 Frequency:1909.8MHz								
160.82	H	34.73	-76.91	0.00	0.24	-77.15	-13.00	64.15
59.58	V	38.42	-67.39	-10.49	0.14	-78.02	-13.00	65.02
3819.600	H	35.10	-60.76	10.72	1.29	-51.33	-13.00	38.33
3819.600	V	34.87	-60.85	10.72	1.29	-51.42	-13.00	38.42
5729.400	H	35.69	-57.79	11.22	1.59	-48.16	-13.00	35.16
5729.400	V	35.01	-58.35	11.22	1.59	-48.72	-13.00	35.72

WCDMA Band 2(30MHz-20GHz):

Frequency (MHz)	Polar (H/V)	Receiver Reading (dB μ V)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
WCDMA Band II, Frequency:1852.4 MHz								
249.13	H	40.64	-71.28	0.00	0.30	-71.58	-13.00	58.58
242.25	V	41.62	-69.09	0.00	0.29	-69.38	-13.00	56.38
3704.800	H	35.44	-61.82	10.60	1.25	-52.47	-13.00	39.47
3704.800	V	35.69	-61.54	10.60	1.25	-52.19	-13.00	39.19
5557.200	H	34.84	-58.44	11.43	1.49	-48.50	-13.00	35.50
5557.200	V	35.13	-58.00	11.43	1.49	-48.06	-13.00	35.06
WCDMA Band II, Frequency:1880 MHz								
253.53	H	38.92	-72.90	0.00	0.30	-73.20	-13.00	60.20
246.53	V	40.54	-70.31	0.00	0.30	-70.61	-13.00	57.61
3760.000	H	36.01	-60.40	10.66	1.24	-50.98	-13.00	37.98
3760.000	V	35.84	-60.45	10.66	1.24	-51.03	-13.00	38.03
5640.000	H	35.61	-57.84	11.33	1.54	-48.05	-13.00	35.05
5640.000	V	34.94	-58.39	11.33	1.54	-48.60	-13.00	35.60
WCDMA Band II, Frequency:1907.6MHz								
237.21	H	40.20	-71.95	0.00	0.29	-72.24	-13.00	59.24
248.63	V	39.87	-71.05	0.00	0.30	-71.35	-13.00	58.35
3815.200	H	34.88	-60.97	10.72	1.29	-51.54	-13.00	38.54
3815.200	V	35.67	-60.02	10.72	1.29	-50.59	-13.00	37.59
5722.800	H	35.44	-58.05	11.23	1.58	-48.40	-13.00	35.40
5722.800	V	34.83	-58.52	11.23	1.58	-48.87	-13.00	35.87

WCDMA Band 5(30MHz-10GHz):

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
WCDMA Band 5 Frequency:826.4 MHz								
245.16	H	46.12	-65.88	0.00	0.30	-66.18	-13.00	53.18
83.98	V	37.98	-70.90	0.00	0.17	-71.07	-13.00	58.07
1652.800	H	35.78	-68.55	8.68	0.81	-60.68	-13.00	47.68
1652.800	V	36.01	-68.40	8.68	0.81	-60.53	-13.00	47.53
2479.200	H	35.52	-65.24	9.39	1.01	-56.86	-13.00	43.86
2479.200	V	34.78	-65.95	9.39	1.01	-57.57	-13.00	44.57
3305.600	H	34.63	-62.10	10.32	1.15	-52.93	-13.00	39.93
3305.600	V	35.11	-61.39	10.32	1.15	-52.22	-13.00	39.22
WCDMA Band 5 Frequency:836.6MHz								
246.87	H	45.85	-66.11	0.00	0.30	-66.41	-13.00	53.41
90.21	V	38.65	-70.63	0.00	0.18	-70.81	-13.00	57.81
1673.200	H	37.12	-67.19	8.71	0.85	-59.33	-13.00	46.33
1673.200	V	35.46	-68.95	8.71	0.85	-61.09	-13.00	48.09
2509.800	H	35.22	-65.39	9.42	1.01	-56.98	-13.00	43.98
2509.800	V	34.84	-65.78	9.42	1.01	-57.37	-13.00	44.37
3346.400	H	35.01	-62.16	10.34	1.16	-52.98	-13.00	39.98
3346.400	V	34.66	-62.37	10.34	1.16	-53.19	-13.00	40.19
WCDMA Band 5 Frequency:846.6MHz								
240.87	H	44.34	-67.74	0.00	0.29	-68.03	-13.00	55.03
91.35	V	39.54	-69.48	0.00	0.18	-69.66	-13.00	56.66
1693.200	H	36.87	-67.43	8.73	0.89	-59.59	-13.00	46.59
1693.200	V	35.98	-68.44	8.73	0.89	-60.60	-13.00	47.60
2539.800	H	35.41	-64.97	9.46	1.01	-56.52	-13.00	43.52
2539.800	V	34.89	-65.45	9.46	1.01	-57.00	-13.00	44.00
3386.400	H	35.22	-62.37	10.35	1.18	-53.20	-13.00	40.20
3386.400	V	35.06	-62.48	10.35	1.18	-53.31	-13.00	40.31

LTE Bands:

(The Worst modulation and bandwidth(1RB) was below)

LTE Band 2(30MHz-20GHz):

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
QPSK, 1.4MHz, Frequency:1850.7 MHz								
332.03	H	45.21	-65.03	0.00	0.34	-65.37	-13.00	52.37
78.50	V	39.96	-67.73	-0.75	0.16	-68.64	-13.00	55.64
3701.400	H	34.56	-62.75	10.60	1.25	-53.40	-13.00	40.40
3701.400	V	35.22	-62.07	10.60	1.25	-52.72	-13.00	39.72
5552.100	H	35.37	-57.90	11.44	1.49	-47.95	-13.00	34.95
5552.100	V	34.97	-58.13	11.44	1.49	-48.18	-13.00	35.18
QPSK, 1.4MHz, Frequency:1880 MHz								
337.90	H	43.42	-66.73	0.00	0.36	-67.09	-13.00	54.09
77.41	V	39.54	-67.49	-1.30	0.16	-68.95	-13.00	55.95
3760.000	H	36.62	-59.79	10.66	1.24	-50.37	-13.00	37.37
3760.000	V	35.55	-60.74	10.66	1.24	-51.32	-13.00	38.32
5640.000	H	35.13	-58.32	11.33	1.54	-48.53	-13.00	35.53
5640.000	V	36.07	-57.26	11.33	1.54	-47.47	-13.00	34.47
QPSK, 1.4MHz, Frequency:1909.3 MHz								
318.36	H	43.37	-67.07	0.00	0.34	-67.41	-13.00	54.41
76.87	V	39.25	-67.46	-1.57	0.16	-69.19	-13.00	56.19
3818.600	H	35.45	-60.41	10.72	1.29	-50.98	-13.00	37.98
3818.600	V	35.22	-60.49	10.72	1.29	-51.06	-13.00	38.06
5727.900	H	36.01	-57.47	11.23	1.59	-47.83	-13.00	34.83
5727.900	V	34.69	-58.67	11.23	1.59	-49.03	-13.00	36.03

LTE Band 5(30MHz-10GHz):

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
QPSK, 1.4MHz, Frequency: 824.7 MHz								
246.81	H	44.11	-67.85	0.00	0.30	-68.15	-13.00	55.15
83.91	V	42.97	-65.90	0.00	0.17	-66.07	-13.00	53.07
1649.400	H	40.00	-64.33	8.68	0.80	-56.45	-13.00	43.45
1649.400	V	40.46	-63.95	8.68	0.80	-56.07	-13.00	43.07
2474.100	H	35.11	-65.67	9.38	1.00	-57.29	-13.00	44.29
2474.100	V	35.20	-65.53	9.38	1.00	-57.15	-13.00	44.15
3298.800	H	34.66	-62.02	10.32	1.15	-52.85	-13.00	39.85
3298.800	V	34.88	-61.56	10.32	1.15	-52.39	-13.00	39.39
QPSK, 1.4MHz, Frequency: 836.5 MHz								
243.38	H	43.85	-68.18	0.00	0.30	-68.48	-13.00	55.48
78.50	V	39.62	-68.06	-0.75	0.16	-68.97	-13.00	55.97
1673.000	H	41.44	-62.87	8.71	0.85	-55.01	-13.00	42.01
1673.000	V	42.07	-62.34	8.71	0.85	-54.48	-13.00	41.48
2509.500	H	35.10	-65.51	9.42	1.01	-57.10	-13.00	44.10
2509.500	V	35.11	-65.51	9.42	1.01	-57.10	-13.00	44.10
3346.000	H	34.87	-62.29	10.34	1.16	-53.11	-13.00	40.11
3346.000	V	35.69	-61.33	10.34	1.16	-52.15	-13.00	39.15
QPSK, 1.4MHz, Frequency: 848.3 MHz								
241.68	H	43.36	-68.70	0.00	0.29	-68.99	-13.00	55.99
76.87	V	37.53	-69.18	-1.57	0.16	-70.91	-13.00	57.91
1696.600	H	41.67	-62.62	8.74	0.89	-54.77	-13.00	41.77
1696.600	V	42.49	-61.93	8.74	0.89	-54.08	-13.00	41.08
2544.900	H	35.47	-64.87	9.47	1.01	-56.41	-13.00	43.41
2544.900	V	35.22	-65.08	9.47	1.01	-56.62	-13.00	43.62
3393.200	H	34.69	-62.98	10.36	1.19	-53.81	-13.00	40.81
3393.200	V	34.98	-62.65	10.36	1.19	-53.48	-13.00	40.48

LTE Band 7(30MHz-26.5GHz):

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
5MHz QPSK , Frequency: 2502.5 MHz								
290.98	H	40.23	-70.70	0.00	0.33	-71.03	-25.00	46.03
298.27	V	41.91	-66.97	0.00	0.34	-67.31	-25.00	42.31
5005.000	H	34.97	-57.99	11.20	1.47	-48.26	-25.00	23.26
5005.000	V	35.10	-57.72	11.20	1.47	-47.99	-25.00	22.99
7507.500	H	34.63	-55.16	10.90	1.95	-46.21	-25.00	21.21
7507.500	V	34.96	-55.33	10.90	1.95	-46.38	-25.00	21.38
5MHz QPSK, Frequency: 2535 MHz								
288.95	H	40.31	-70.67	0.00	0.33	-71.00	-25.00	46.00
302.42	V	40.04	-68.71	0.00	0.34	-69.05	-25.00	44.05
5070.000	H	35.44	-57.75	11.24	1.47	-47.98	-25.00	22.98
5070.000	V	35.21	-57.88	11.24	1.47	-48.11	-25.00	23.11
7605.000	H	36.37	-53.10	10.88	2.01	-44.23	-25.00	19.23
7605.000	V	34.87	-55.32	10.88	2.01	-46.45	-25.00	21.45
5MHz QPSK, Frequency: 2567.5 MHz								
291.16	H	40.38	-70.55	0.00	0.33	-70.88	-25.00	45.88
305.67	V	40.23	-68.43	0.00	0.34	-68.77	-25.00	43.77
5135.000	H	35.55	-58.05	11.28	1.47	-48.24	-25.00	23.24
5135.000	V	35.74	-57.75	11.28	1.47	-47.94	-25.00	22.94
7702.500	H	34.63	-54.89	10.86	1.97	-46.00	-25.00	21.00
7702.500	V	35.18	-55.00	10.86	1.97	-46.11	-25.00	21.11

LTE Band 38 (30MHz-26.5GHz):

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
5MHz QPSK, Frequency:			2572.5	MHz				
82.45	H	38.01	-72.57	0.00	0.16	-72.73	-25.00	47.73
301.36	V	40.46	-68.31	0.00	0.34	-68.65	-25.00	43.65
5145.000	H	36.11	-57.57	11.29	1.44	-47.72	-25.00	22.72
5145.000	V	35.78	-57.79	11.29	1.44	-47.94	-25.00	22.94
7717.500	H	35.34	-54.17	10.86	1.99	-45.30	-25.00	20.30
7717.500	V	36.89	-53.24	10.86	1.99	-44.37	-25.00	19.37
5MHz QPSK, Frequency:			2595	MHz				
80.73	H	38.29	-71.73	0.00	0.16	-71.89	-25.00	46.89
304.54	V	39.63	-69.06	0.00	0.34	-69.40	-25.00	44.40
5190.000	H	36.83	-57.24	11.31	1.44	-47.37	-25.00	22.37
5190.000	V	35.44	-58.48	11.31	1.44	-48.61	-25.00	23.61
7785.000	H	35.77	-53.72	10.84	1.99	-44.87	-25.00	19.87
7785.000	V	36.28	-53.64	10.84	1.99	-44.79	-25.00	19.79
5MHz QPSK, Frequency:			2617.5	MHz				
83.32	H	38.60	-72.26	0.00	0.17	-72.43	-25.00	47.43
303.03	V	38.79	-69.94	0.00	0.34	-70.28	-25.00	45.28
5235.000	H	37.14	-56.76	11.34	1.46	-46.88	-25.00	21.88
5235.000	V	36.25	-57.46	11.34	1.46	-47.58	-25.00	22.58
7852.500	H	35.59	-53.60	10.83	2.03	-44.80	-25.00	19.80
7852.500	V	35.44	-54.14	10.83	2.03	-45.34	-25.00	20.34

LTE Band 41 (30MHz-27GHz):

Frequency (MHz)	Polar (H/V)	Receiver Reading (dB μ V)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
QPSK, 5MHz, Frequency: 2557.5 MHz								
158.08	H	37.52	-74.15	0.00	0.23	-74.38	-25.00	49.38
83.66	V	39.77	-69.08	0.00	0.17	-69.25	-25.00	44.25
5115.000	H	34.57	-58.86	11.27	1.51	-49.10	-25.00	24.10
5115.000	V	35.22	-58.11	11.27	1.51	-48.35	-25.00	23.35
7672.500	H	34.96	-54.55	10.87	2.03	-45.71	-25.00	20.71
7672.500	V	34.78	-55.41	10.87	2.03	-46.57	-25.00	21.57
QPSK, 5MHz, Frequency: 2605 MHz								
159.65	H	39.21	-72.40	0.00	0.23	-72.63	-25.00	47.63
81.94	V	38.29	-70.44	0.00	0.16	-70.60	-25.00	45.60
5210.000	H	35.67	-58.41	11.33	1.45	-48.53	-25.00	23.53
5210.000	V	35.23	-58.69	11.33	1.45	-48.81	-25.00	23.81
7815.000	H	34.81	-54.59	10.84	1.99	-45.74	-25.00	20.74
7815.000	V	35.14	-54.65	10.84	1.99	-45.80	-25.00	20.80
QPSK, 5MHz, Frequency: 2652.5 MHz								
161.28	H	39.49	-72.17	0.00	0.24	-72.41	-25.00	47.41
82.55	V	38.55	-70.22	0.00	0.17	-70.39	-25.00	45.39
5305.000	H	34.77	-58.67	11.38	1.46	-48.75	-25.00	23.75
5305.000	V	35.56	-57.62	11.38	1.46	-47.70	-25.00	22.70
7957.500	H	35.43	-52.99	10.81	2.09	-44.27	-25.00	19.27
7957.500	V	34.82	-54.05	10.81	2.09	-45.33	-25.00	20.33

Note:

- 1) The unit of Antenna Gain is dBd for frequency below 1GHz, and the unit of Antenna Gain is dBi for frequency above 1GHz.
- 2) Absolute Level = Substituted Level - Cable loss + Antenna Gain
- 3) Margin = Limit - Absolute Level

5. EUT PHOTOGRAPHS

Please refer to the attachment CR231062408-EXP EUT EXTERNAL PHOTOGRAPHS and CR231062408-INP EUT INTERNAL PHOTOGRAPHS

6. TEST SETUP PHOTOGRAPHS

Please refer to the attachment CR231062408-00F-TSP TEST SETUP PHOTOGRAPHS.

==== END OF REPORT =====