



# RF TEST REPORT

**Applicant**    Quectel Wireless Solutions Co., Ltd  
**FCC ID**        XMR2020BG95M2  
**Product**        LTE Cat M1 & Cat NB2 Module  
**Brand**            Quectel  
**Marketing**      Quectel BG95-M2  
**Model**            BG95-M2  
**Report No.**    R1907A0448-R6V2  
**Issue Date**    May 13, 2020

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 2 (2019)/ FCC CFR47 Part 27C (2019)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

*Performed by: Peng Tao*

*Approved by: Kai Xu*

---

## TA Technology (Shanghai) Co., Ltd.

*No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China*

*TEL: +86-021-50791141/2/3*

*FAX: +86-021-50791141/2/3-8000*



## TABLE OF CONTENT

1	Test Laboratory.....	4
1.1	Notes of the Test Report.....	4
1.2	Test facility.....	4
1.3	Testing Location.....	5
2	General Description of Equipment under Test.....	6
3	Applied Standards.....	8
4	Test Configuration.....	9
5	Test Case Results.....	10
5.1	RF Power Output.....	10
5.2	Effective Isotropic Radiated Power.....	13
5.3	Occupied Bandwidth.....	18
5.4	Band Edge Compliance.....	36
5.5	Peak-to-Average Power Ratio (PAPR).....	50
5.6	Frequency Stability.....	53
5.7	Spurious Emissions at Antenna Terminals.....	61
5.8	Radiates Spurious Emission.....	71
6	Main Test Instruments.....	86



## Summary of Measurement Results

Number	Test Case	Clause in FCC rules	Verdict
1	RF power output	2.1046	PASS
2	Effective Isotropic Radiated power	27.50(d)(4)/27.50(b)(10)/27.50(c)(10)	PASS
3	Occupied Bandwidth	2.1049	PASS
4	Band Edge Compliance	27.53(h)/27.53(g) /27.53(f) /27.53(c)	PASS
5	Peak-to-Average Power Ratio	27.50(d)/KDB971168 D01(5.7)	Refer to the Original
6	Frequency Stability	2.1055 / 27.54	Refer to the Original
7	Spurious Emissions at Antenna Terminals	2.1051 /27.53(h)/27.53(g) /27.53(f) /27.53(c)	Refer to the Original
8	Radiates Spurious Emission	2.1053 /27.53(h) /27.53(g) /27.53(f) /27.53(c)	Only tested the worst band(NB-IOT Band13) of Original
<p>Note: PASS: The EUT complies with the essential requirements in the standard.            FAIL: The EUT does not comply with the essential requirements in the standard.</p>			
Date of Testing:August 12, 2019~ September 5, 2019& December 25, 2019 ~ April 24, 2020			

**Note: This revised report (Report No.: R1907A0448-R6V2) supersedes and replaces the previously issued report (Report No.: R1907A0448-R6V1). Please discard or destroy the previously issued report and dispose of it accordingly.**

**BG95-M2 (Report No.: R1907A0448-R6V2) is a variant model of BG95-M3 (Report No.: R1907A0446-R6V1). Test values partial duplicated from original for variant. There is only tested RF power output, Effective Radiated Power, Occupied Bandwidth, Band Edge Compliance and Radiates Spurious Emission for variant in this report. For Radiates Spurious Emission, only the worst band(NB-IOT Band 13) of original is tested. The detailed product change description please refers to the Statement letter\_BG95-M3&BG95-M2.**



# 1 Test Laboratory

## 1.1 Notes of the Test Report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

## 1.2 Test facility

### **FCC (Designation number: CN1179, Test Firm Registration Number: 446626)**

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

### **A2LA(Certificate Number: 3857.01)**

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.



### 1.3 Testing Location

Company: TA Technology (Shanghai) Co., Ltd.  
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China  
City: Shanghai  
Post code: 201201  
Country: P. R. China  
Contact: Xu Kai  
Telephone: +86-021-50791141/2/3  
Fax: +86-021-50791141/2/3-8000  
Website: <http://www.ta-shanghai.com>  
E-mail: [xukai@ta-shanghai.com](mailto:xukai@ta-shanghai.com)

## 2 General Description of Equipment under Test

### Client Information

<b>Applicant</b>	Quectel Wireless Solutions Co., Ltd
<b>Applicant address</b>	Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai, China 200233
<b>Manufacturer</b>	Quectel Wireless Solutions Co., Ltd
<b>Manufacturer address</b>	Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai, China 200233

### General information

EUT Description	
Model	BG95-M2
IMEI	863859040012143
Hardware Version	R2.1
Software Version	BG95M2LAR02A04
Power Supply	External Power Supply
Antenna Type	The EUT don't have standard Antenna, The Antenna used for testing in this report is the after-market accessory (Dipole Antenna)
Antenna Gain	NB-IOT 4: 1.9dBi NB-IOT 12: 4dBi NB-IOT 13:4.5dBi NB-IOT 66: 2dBi NB-IOT 71: 3dBi NB-IOT 85:4dBi
Test Mode(s)	NB-IOT Band 4/12/13/66/71/85
Test Modulation	BPSK, QPSK
Category	NB2
Deployment	stand-alone
Sub-carrier spacing	3.75KHz, 15KHz
Ntones	single-tone, multi-tone
Maximum E.I.R.P.	NB-IOT 4: 22.09dBm
	NB-IOT 66: 22.07dBm
Maximum E.R.P.	NB-IOT 12: 22.51 dBm
	NB-IOT 13: 22.98dBm
	NB-IOT 71: 21.39dBm
	NB-IOT 85: 22.67dBm
Rated Power Supply Voltage:	3.3V
Extreme Voltage	Minimum: 2.6V Maximum: 4.8V



Extreme Temperature	Lowest: -40°C    Highest: +85°C		
Operating Frequency Range(s)	Mode	Tx (MHz)	Rx (MHz)
	NB-IOT Band 4	1710 ~1755	2110~2155
	NB-IOT Band 12	699 ~ 716	729 ~ 746
	NB-IOT Band 13	777 ~ 787	746 ~ 756
	NB-IOT Band 66	1710 ~ 1780	2110 ~ 2180
	NB-IOT Band 71	663 ~ 698	617 ~ 652
	NB-IOT Band 85	698 ~ 716	728 ~ 746
Note: 1. The information of the EUT is declared by the manufacturer.			



### 3 Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

#### Test standards

**FCC CFR47 Part 2 (2019)**

**FCC CFR47 Part 27C(2019)**

**ANSI C63.26 (2015)**

**KDB 971168 D01 Power Meas License Digital Systems v03r01**



## 4 Test Configuration

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes. EUT stand-up position (Z axis), lie-down position (X, Y axis). Receiver antenna polarization (horizontal and vertical), the worst emission was found in position (X axis, horizontal polarization) and the worst case was recorded.

All modes as Subcarrier Spacing, modulations, Channel were investigated. Subsequently, only the worst case emissions are reported.

The following testing in NB-IOT is set based on the maximum RF Output Power.

The following testing in different mode is set to detail in the following table:

Test modes are chosen to be reported as the worst case configuration below for NB-IOT Band 4/12/13/66/71/85:

Test items	Deployment mode	Subcarrier Spacing (kHz)		Modulation		Test Channel		
	Stand-alone	3.75	15	BPSK	QPSK	L	M	H
RF power output	O	O	O	O	O	O	O	O
Effectivelsotropic Radiated power	O	O	O	O	O	O	O	O
Occupied Bandwidth	O	O	O	O	O	O	O	O
Band Edge Compliance	O	O	O	O	O	O	-	O
Peak-to-Average Power Ratio	O	O	O	O	O	-	O	-
Frequency Stability	O	O	O	O	O	O	O	O
Conducted SpuriousEmissions	O	-	O	-	O	O	O	O
RadiatesSpuriousEmission	O	-	O	-	O	O	O	O
<p>Note</p> <p>1. The mark "O" means that this configuration is chosen for testing.</p> <p>2. The mark "-" means that this configuration is not testing.</p>								

## 5 Test Case Results

### 5.1 RF Power Output


#### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

#### Methods of Measurement

During the process of the testing, The EUT is controlled by the Base Station Simulator to ensure max power transmission and proper modulation.

#### Test Setup

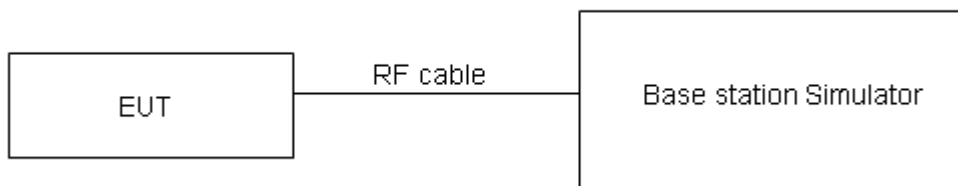

The loss between RF output port of the EUT and the input port of the tester has been taken into consideration.

#### Limits

No specific RF power output requirements in part 2.1046.

#### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2, U=0.4$  dB.

**Test Results****Variant**

Mode	Modulation	Sub-carrier spacing (KHz)	Ntones	Conducted Power (dBm) for low/mid/high channel		
				19952/1710.2	20175/1732.5	20398/1754.8
Band 4 Standalone	BPSK	3.75	1@0	20.19	20.18	20.19
			1@47	20.12	20.10	20.11
		15	1@0	20.15	20.15	20.16
			1@11	20.16	20.17	20.15
	QPSK	3.75	1@0	20.14	20.15	20.19
			1@47	20.11	20.11	20.15
		15	1@0	20.13	20.16	20.14
			1@11	20.16	20.17	20.16
		15	12@0	18.72	18.63	18.47
Mode	Modulation	Sub-carrier spacing (KHz)	Ntones	Conducted Power (dBm) for low/mid/high channel		
				23012/699.2	23095/707.5	23178/715.8
Band 12 Standalone	BPSK	3.75	1@0	20.34	20.43	20.44
			1@47	20.27	20.36	20.42
		15	1@0	20.40	20.62	20.64
			1@11	20.66	20.59	20.59
	QPSK	3.75	1@0	20.28	20.54	20.47
			1@47	20.55	20.34	20.58
		15	1@0	20.45	20.46	20.62
			1@11	20.61	20.47	20.65
		15	12@0	19.20	19.22	19.34
Mode	Modulation	Sub-carrier spacing (KHz)	Ntones	Conducted Power (dBm) for low/mid/high channel		
				23182/777.2	23230/782	23278/786.8
Band 13 Standalone	BPSK	3.75	1@0	20.51	20.47	20.45
			1@47	20.42	20.44	20.38
		15	1@0	20.58	20.56	20.35
			1@11	20.49	20.50	20.31
	QPSK	3.75	1@0	20.48	20.48	20.46
			1@47	20.53	20.50	20.36
		15	1@0	20.57	20.51	20.38
			1@11	20.48	20.55	20.46
		15	12@0	19.05	19.37	19.22
Mode	Modulation	Sub-carrier spacing (KHz)	Ntones	Conducted Power (dBm) for low/mid/high channel		
				131974/1710.2	132322/1745	132670/1779.8
Band 66 Standalone	BPSK	3.75	1@0	20.07	19.78	19.59
			1@47	19.97	19.79	19.62



Mode	Modulation	Sub-carrier spacing (KHz)	Ntones	Conducted Power (dBm) for low/mid/high channel			
				133124/663.2	133297/680.5	133470/697.8	
Band 71 Standalone	QPSK	15	1@0	20.05	19.81	19.84	
			1@11	19.98	19.86	19.75	
		3.75	1@0	20.03	19.74	19.64	
			1@47	19.97	19.79	19.60	
	15	1@0	20.02	19.99	19.87		
		1@11	20.06	19.94	19.79		
	15	12@0	18.21	18.30	17.98		
	Band 71 Standalone	BPSK	3.75	1@0	20.45	20.54	20.44
				1@47	20.47	20.43	20.48
			15	1@0	20.51	20.52	20.52
1@11				20.47	20.44	20.47	
QPSK		3.75	1@0	20.40	20.41	20.42	
			1@47	20.36	20.49	20.37	
		15	1@0	20.48	20.49	20.44	
			1@11	20.47	20.53	20.48	
15		12@0	18.72	18.76	18.65		
Band 85 Standalone		BPSK	3.75	1@0	20.64	20.62	20.82
	1@47			20.55	20.57	20.73	
	15		1@0	20.60	20.66	20.81	
			1@11	20.58	20.64	20.8	
	QPSK	3.75	1@0	20.62	20.61	20.77	
			1@47	20.58	20.55	20.79	
		15	1@0	20.69	20.65	20.79	
			1@11	20.58	20.63	20.81	
	15	12@0	19.34	19.32	19.51		

## 5.2 Effective Isotropic Radiated Power

### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

### Methods of Measurement

1. The testing follows FCC KDB 971168D01v03r01 Section 5.8 and ANSI C63.26 (2015).

a) Connect the equipment as illustrated. Mount the equipment with the manufacturer specified antenna in a vertical orientation on a manufacturer specified mounting surface located on a non-conducting rotating platform of a RF anechoic chamber (preferred) or a standard radiation site.

b) Key the transmitter, then rotate the EUT 360° azimuthally and record spectrum analyzer power level (LVL) measurements at angular increments that are sufficiently small to permit resolution of all peaks. If a standard radiation test site is used, raise and lower the test antenna to obtain a maximum reading at each angular increment. (Note: several batteries may be needed to offset the effect of battery voltage droop, which should not exceed 5% of the manufactured specified battery voltage during transmission).

c) Replace the transmitter under test with a vertically polarized half-wavedipole (or an antenna whose gain is known relative to an ideal half-wavedipole). The center of the antenna should be at the same location as the center of the antenna under test.

d) Connect the antenna to a signal generator with a known output power and record the path loss (in dB) as LOSS. If a standard radiation test site is used, raise and lower the test antenna to obtain a maximum reading.  $LOSS = \text{Generator Output Power (dBm)} - \text{Analyzer reading (dBm)}$

e) Determine the effective radiated output power at each angular position from the readings in steps b) and d) using the following equation:  $ERP \text{ (dBm)} = LVL \text{ (dBm)} + LOSS \text{ (dB)}$

f) The maximum ERP is the maximum value determined in the preceding step.

g) When calculating ERP, in addition to knowing the antenna radiation and matching characteristics, it is necessary to know the loss values of all elements (e.g. transmission line attenuation, mismatches, filters, combiners) interposed between the point where transmitter output power is measured, and the point where power is applied to the antenna. ERP can then be calculated as follows:


$$EIRP \text{ (dBm)} = \text{Output Power (dBm)} - \text{Losses (dB)} + \text{Antenna Gain (dBi)}$$

where: dBd refers to gain relative to an ideal dipole.

$$EIRP \text{ (dBm)} = ERP \text{ (dBm)} + 2.15 \text{ (dB.)}$$

The RB allocation refers to section 5.1, using the maximum output power configuration.

**Test setup**

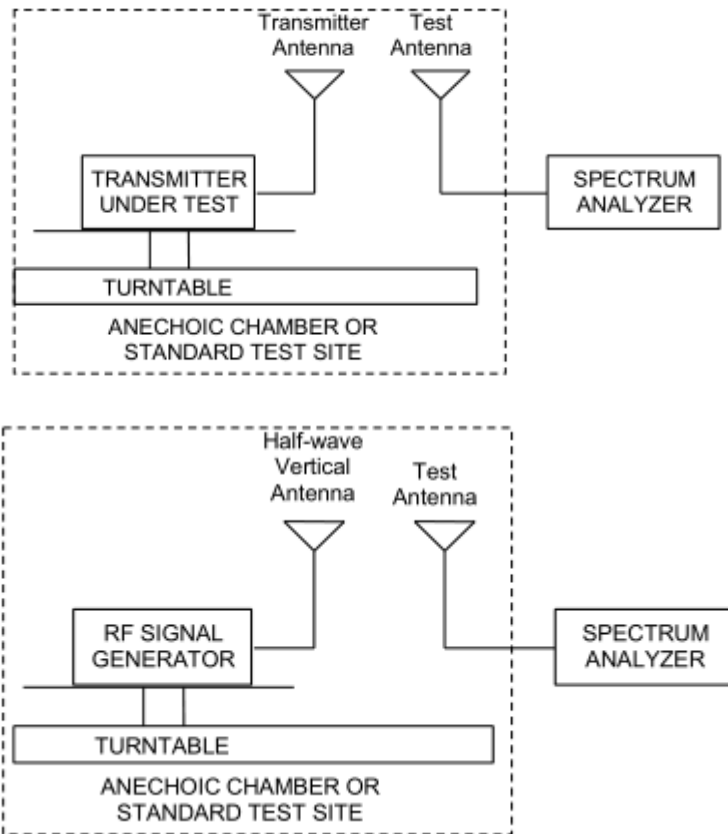

Note: Area side:2.4mX3.6m

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in stand-up position (Z axis) and the worst case was recorded.

**Limits**

Rule Part 27.50(b) (10) specifies that “Portable stations (hand-held devices) transmitting in the 746-757 MHz, 776-788 MHz, and 805-806 MHz bands are limited to 3 watts ERP”

Rule Part 27.50(c) (10) specifies that “Portable stations (hand-held devices) in the 600 MHz uplink band and the 698-746 MHz band, and fixed and mobile stations in the 600 MHz uplink band are limited to 3 watts ERP”

Rule Part 27.50(d) (4) specifies that “Fixed, mobile and portable (hand-held) stations operating in the 1710–1755 MHz band are limited to 1 watt EIRP”

Part 27.50(b)(10)Limit	$\leq 3 \text{ W}$ (34.77 dBm)
Part 27.50(c)(10)Limit	$\leq 3 \text{ W}$ (34.77 dBm)
Part 27.50(d)(4)Limit	$\leq 1 \text{ W}$ (30 dBm)

**Measurement Uncertainty**

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2, U = 1.19 \text{ dB}$

**Test Results**

The measurement is performed for both of horizontal and vertical antenna Polarization, and only the data of worst mode is recorded in this report.

**Variant**

Mode	Modulation	Sub-carrier spacing (KHz)	Ntones	EIRP(dBm)			Limit (dBm)	Conclusion
				19952/1710.2	20175/1732.5	20398/1754.8		
Band 4 Standalone	BPSK	3.75	1@0	22.09	22.08	22.09	30	Pass
			1@47	22.02	22.00	22.01	30	Pass
		15	1@0	22.05	22.05	22.06	30	Pass
			1@11	22.06	22.07	22.05	30	Pass
	QPSK	3.75	1@0	22.04	22.05	22.09	30	Pass
			1@47	22.01	22.01	22.05	30	Pass
		15	1@0	22.03	22.06	22.04	30	Pass
			1@11	22.06	22.07	22.06	30	Pass
		15	12@0	20.62	20.53	20.37	30	Pass
Mode	Modulation	Sub-carrier spacing (KHz)	Ntones	ERP(dBm)			Limit (dBm)	Conclusion
				23012/699.2	23095/707.5	23178/715.8		
Band 12 Standalone	BPSK	3.75	1@0	22.19	22.28	22.29	34.77	Pass
			1@47	22.12	22.21	22.27	34.77	Pass
		15	1@0	22.25	22.47	22.49	34.77	Pass
			1@11	22.51	22.44	22.44	34.77	Pass
	QPSK	3.75	1@0	22.13	22.39	22.32	34.77	Pass
			1@47	22.40	22.19	22.43	34.77	Pass
		15	1@0	22.30	22.31	22.47	34.77	Pass
			1@11	22.46	22.32	22.50	34.77	Pass
		15	12@0	21.05	21.07	21.19	34.77	Pass
Mode	Modulation	Sub-carrier spacing (KHz)	Ntones	ERP (dBm)			Limit (dBm)	Conclusion
				23182/777.2	23230/782	23278/786.8		
Band 13 Standalone	BPSK	3.75	1@0	22.86	22.82	22.80	34.77	Pass
			1@47	22.77	22.79	22.73	34.77	Pass
		15	1@0	22.93	22.91	22.70	34.77	Pass
			1@11	22.84	22.85	22.66	34.77	Pass
	QPSK	3.75	1@0	22.83	22.83	22.81	34.77	Pass
			1@47	22.88	22.85	22.71	34.77	Pass
		15	1@0	22.92	22.86	22.73	34.77	Pass
			1@11	22.83	22.90	22.81	34.77	Pass
		15	12@0	21.40	21.72	21.57	34.77	Pass
Mode	Modulation	Sub-carrier	Ntones	EIRP(dBm)			Limit	Conclusion





Mode	Modulation	Sub-carrier spacing (KHz)	Ntones	ERP(dBm)			Limit (dBm)	Conclusion	
				133124/663.2	133297/680.5	133470/697.8			
Band 66 Standalone	BPSK	3.75	1@0	22.07	21.78	21.59	30	Pass	
			1@47	21.97	21.79	21.62	30	Pass	
		15	1@0	22.05	21.81	21.84	30	Pass	
			1@11	21.98	21.86	21.75	30	Pass	
	QPSK	3.75	1@0	22.03	21.74	21.64	30	Pass	
			1@47	21.97	21.79	21.60	30	Pass	
		15	1@0	22.02	21.99	21.87	30	Pass	
			1@11	22.06	21.94	21.79	30	Pass	
			15	12@0	20.21	20.30	19.98	30	Pass
	Band 71 Standalone	BPSK	3.75	1@0	21.30	21.39	21.29	34.77	Pass
				1@47	21.32	21.28	21.33	34.77	Pass
			15	1@0	21.36	21.37	21.37	34.77	Pass
1@11				21.32	21.29	21.32	34.77	Pass	
QPSK		3.75	1@0	21.25	21.26	21.27	34.77	Pass	
			1@47	21.21	21.34	21.22	34.77	Pass	
		15	1@0	21.33	21.34	21.29	34.77	Pass	
			1@11	21.32	21.38	21.33	34.77	Pass	
			15	12@0	19.57	19.61	19.50	34.77	Pass
Band 85 Standalone		BPSK	3.75	1@0	22.49	22.47	22.67	34.77	Pass
				1@47	22.40	22.42	22.58	34.77	Pass
			15	1@0	22.45	22.51	22.66	34.77	Pass
	1@11			22.43	22.49	22.65	34.77	Pass	
	QPSK	3.75	1@0	22.47	22.46	22.62	34.77	Pass	
			1@47	22.43	22.40	22.64	34.77	Pass	
		15	1@0	22.54	22.50	22.64	34.77	Pass	
			1@11	22.43	22.48	22.66	34.77	Pass	
			15	12@0	21.19	21.17	21.36	34.77	Pass

Note:1. EIRP= E.R.P+2.15

### 5.3 Occupied Bandwidth

#### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa


#### Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The occupied bandwidth is measured using spectrum analyzer.

RBW is set to 2kHz,VBW is set to 6.2kHz for NB-IOT Band 4/12/13/66/71/85.

99% power and -26dBc occupied bandwidths are recorded. Spectrum analyzer plots are included on the following pages.

#### Test Setup

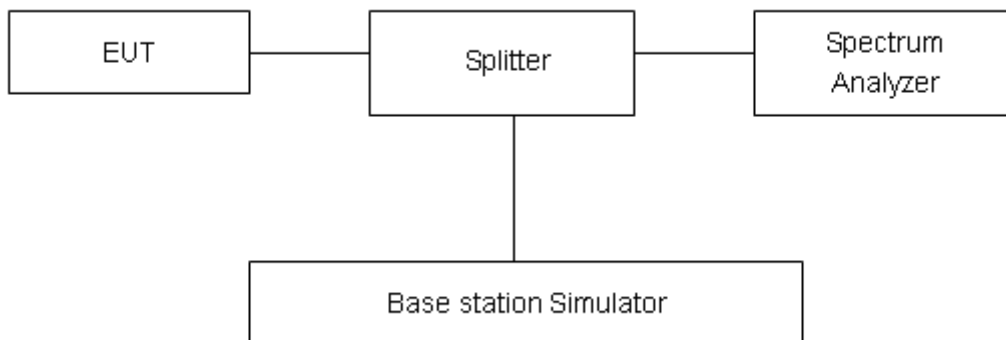

#### Limits

No specific occupied bandwidth requirements in part 2.1049.

#### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2, U=624\text{Hz}$ .



## Test Result

## Variant

Mode	Modulation	Sub-carrier spacing (KHz)	Ntones	Bandwidth(KHz) for low/mid/high channel					
				19952/1710.2		20175/1732.5		20398/1754.8	
				99% Power	-26dBc	99% Power	-26dBc	99% Power	-26dBc
Band 4 Standalone	BPSK	3.75	1@0	63.51	41.19	64.94	41.95	61.43	41.72
	QPSK	3.75	1@0	70.47	40.49	69.18	40.17	69.58	39.54
	BPSK	15	1@0	132.83	115.80	127.49	103.70	118.88	103.80
	QPSK	15	1@0	118.39	117.90	122.16	118.10	117.98	115.90
	QPSK	15	12@0	182.72	262.40	183.82	238.80	182.73	251.30

Mode	Modulation	Sub-carrier spacing (KHz)	Ntones	Bandwidth(KHz) for low/mid/high channel					
				23012/699.2		23095/707.5		23178/715.8	
				99% Power	-26dBc	99% Power	-26dBc	99% Power	-26dBc
Band 12 Standalone	BPSK	3.75	1@0	60.89	41.20	61.84	41.89	59.85	40.78
	QPSK	3.75	1@0	68.43	41.98	67.35	40.34	67.69	39.81
	BPSK	15	1@0	126.51	103.00	124.39	103.30	130.42	104.20
	QPSK	15	1@0	115.09	116.50	117.27	116.50	116.82	117.70
	QPSK	15	12@0	182.98	236.20	182.49	237.70	183.43	237.20

Mode	Modulation	Sub-carrier spacing (KHz)	Ntones	Bandwidth(KHz) for low/mid/high channel					
				23182/777.2		23230/782		23278/786.8	
				99% Power	-26dBc	99% Power	-26dBc	99% Power	-26dBc
Band 13 Standalone	BPSK	3.75	1@0	61.01	41.40	59.86	41.23	60.31	41.09
	QPSK	3.75	1@0	66.67	40.38	67.05	40.38	65.87	39.56
	BPSK	15	1@0	122.72	104.30	130.28	103.50	126.89	102.10
	QPSK	15	1@0	118.00	116.80	118.02	118.50	118.55	128.90
	QPSK	15	12@0	183.58	237.80	183.40	237.20	182.24	237.20

Mode	Modulation	Sub-carrier spacing (KHz)	Ntones	Bandwidth(KHz) for low/mid/high channel					
				131974/1710.2		132322/1745		132670/1779.8	
				99% Power	-26dBc	99% Power	-26dBc	99% Power	-26dBc
Band 66 Standalone	BPSK	3.75	1@0	63.55	41.72	64.62	42.08	63.99	39.48
	QPSK	3.75	1@0	68.66	41.17	69.82	43.48	70.00	41.72
	BPSK	15	1@0	122.52	101.40	121.52	104.60	125.86	112.80
	QPSK	15	1@0	120.70	116.50	115.92	102.90	117.54	117.10
	QPSK	15	12@0	183.39	251.10	182.98	256.70	182.50	241.40









Mode	Modulation	Sub-carrier spacing (KHz)	Ntones	Bandwidth(KHz) for low/mid/high channel					
				133124/663.2		133297/680.5		133470/697.8	
				99% Power	-26dBc	99% Power	-26dBc	99% Power	-26dBc
Band 71 Standalone	BPSK	3.75	1@0	60.36	40.83	59.06	41.36	58.14	40.93
	QPSK	3.75	1@0	67.00	40.14	68.74	39.98	68.34	42.65
	BPSK	15	1@0	126.18	103.10	125.63	118.60	129.53	120.60
	QPSK	15	1@0	116.39	103.40	130.24	117.80	116.24	113.90
	QPSK	15	12@0	184.33	246.60	183.53	252.00	182.65	241.10

Mode	Modulation	Sub-carrier spacing (KHz)	Ntones	Bandwidth(KHz) for low/mid/high channel					
				134004/698.2		134081/705.9		134180/715.8	
				99% Power	-26dBc	99% Power	-26dBc	99% Power	-26dBc
Band 85 Standalone	BPSK	3.75	1@0	58.33	41.42	58.11	41.56	58.22	41.21
	QPSK	3.75	1@0	66.01	39.73	65.70	40.27	66.18	39.84
	BPSK	15	1@0	124.96	113.70	128.88	112.80	121.08	112.30
	QPSK	15	1@0	120.53	118.30	119.08	117.70	119.15	117.10
	QPSK	15	12@0	183.50	231.20	183.79	239.40	182.40	248.80




Variant

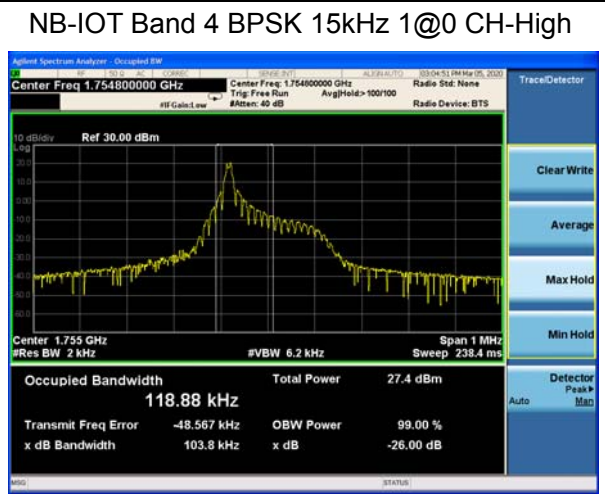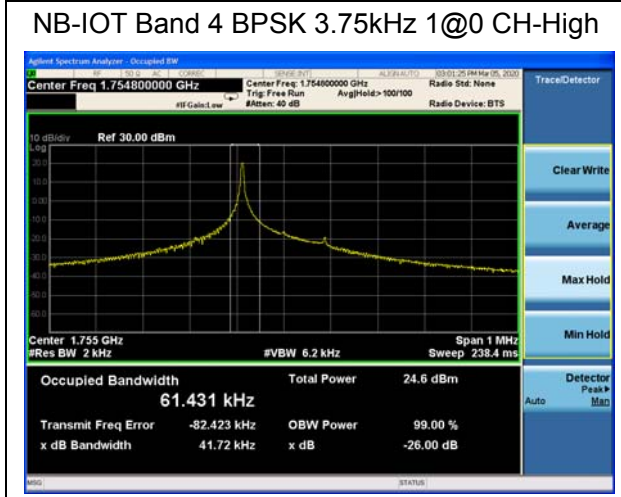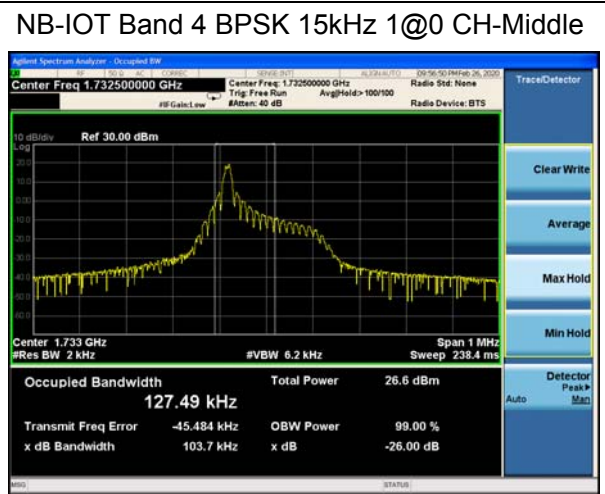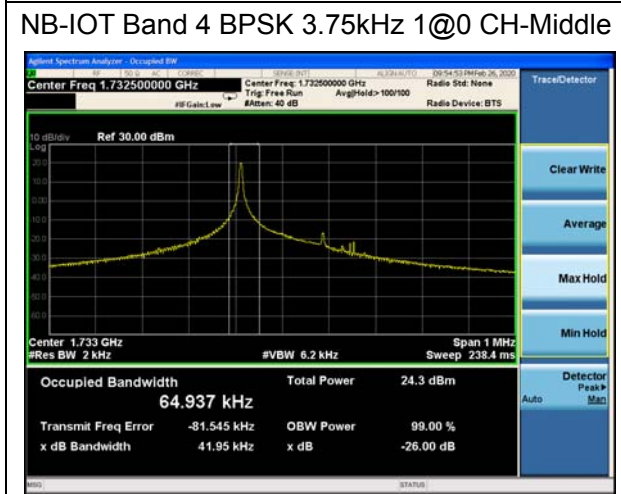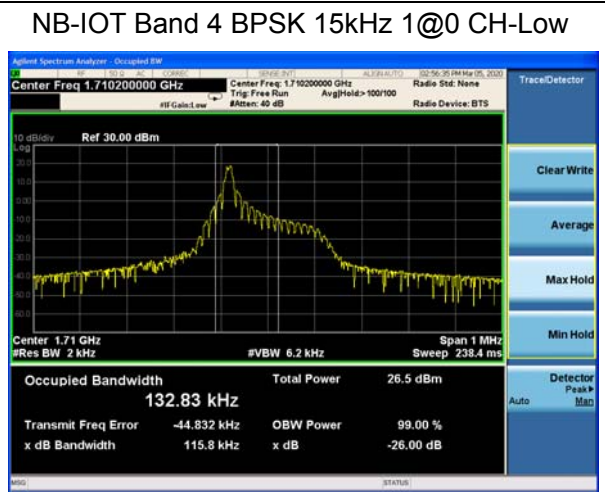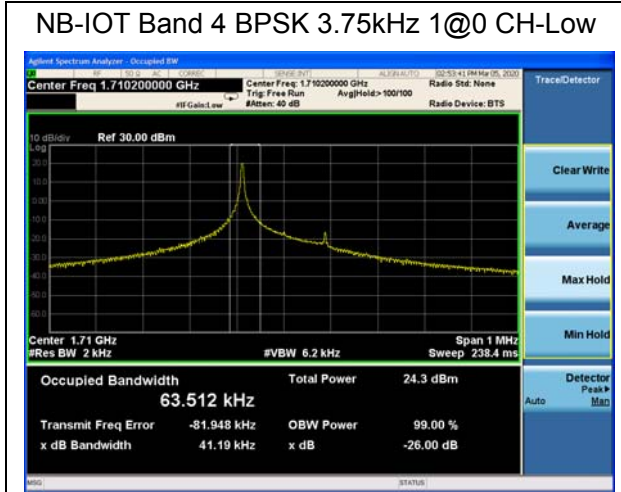





### NB-IOT Band 4 QPSK 3.75kHz 1@0 CH-Low

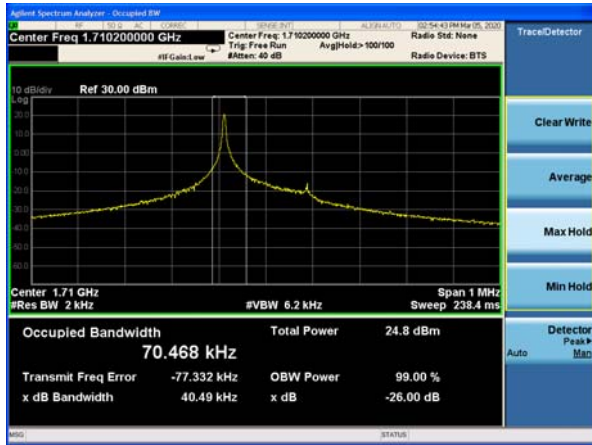


### NB-IOT Band 4 QPSK 15kHz 1@0 CH-Low

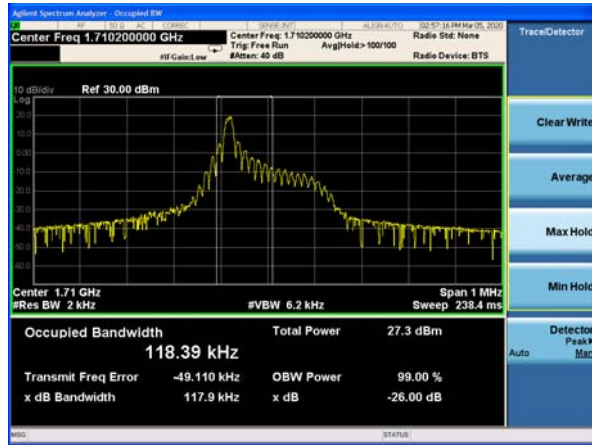


### NB-IOT Band 4 QPSK 3.75kHz 1@0 CH-Middle

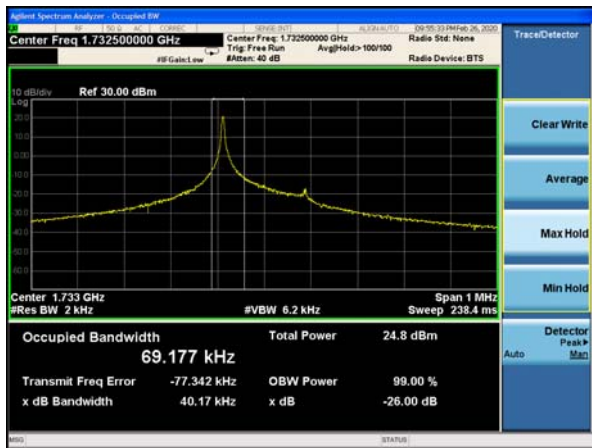

### NB-IOT Band 4 QPSK 15kHz 1@0 CH-Middle

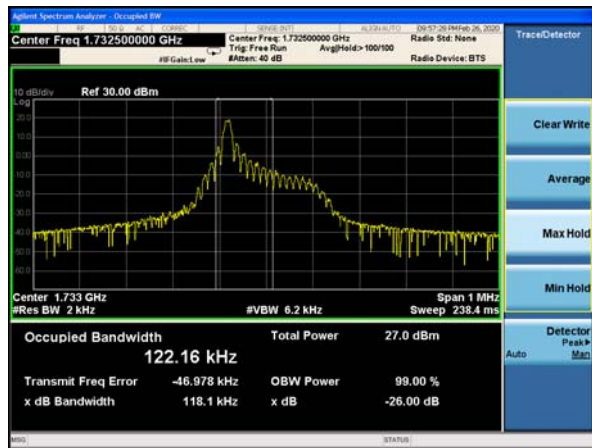

### NB-IOT Band 4 QPSK 3.75kHz 1@0 CH-High

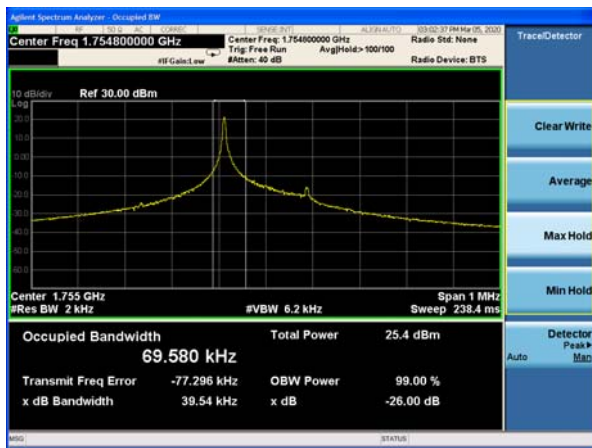


### NB-IOT Band 4 QPSK 15kHz 1@0 CH-High







NB-IOT Band 4 QPSK 15kHz 12@0 CH-Low

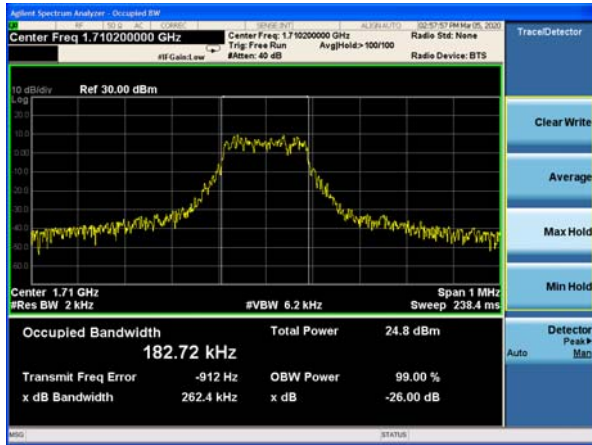


NB-IOT Band 12 BPSK 3.75kHz 1@0 CH-Low

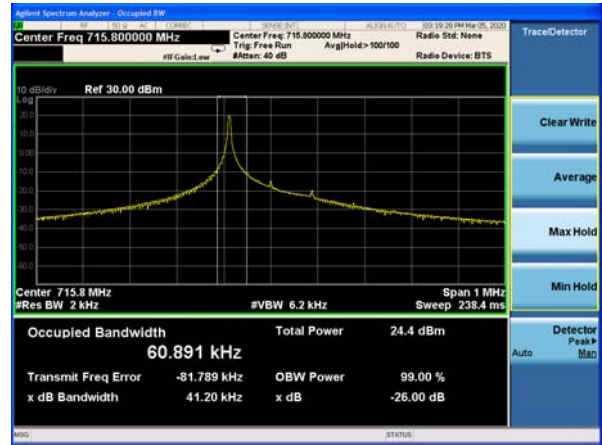


NB-IOT Band 4 QPSK 15kHz 12@0 CH-Middle

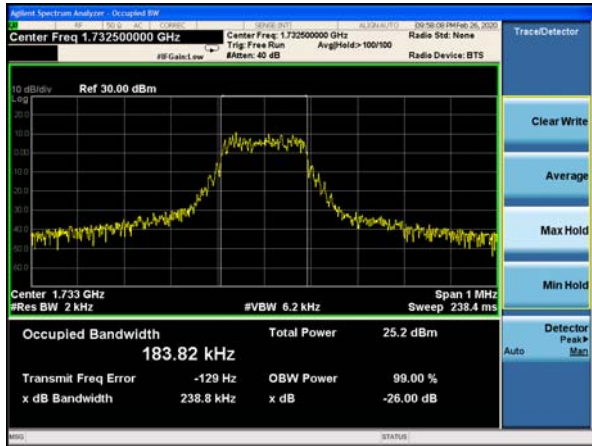


NB-IOT Band 12 BPSK 3.75kHz 1@0 CH-Middle

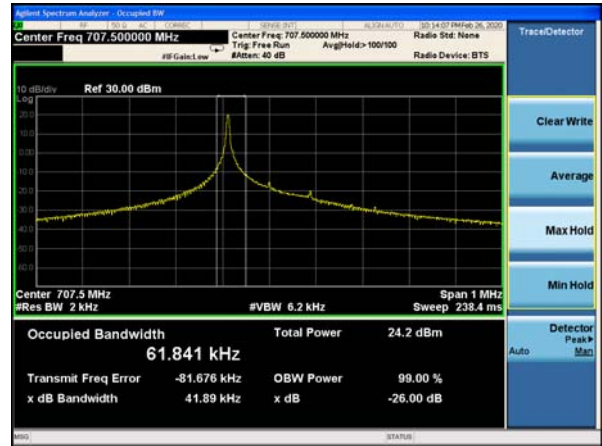

NB-IOT Band 4 QPSK 15kHz 12@0 CH-High

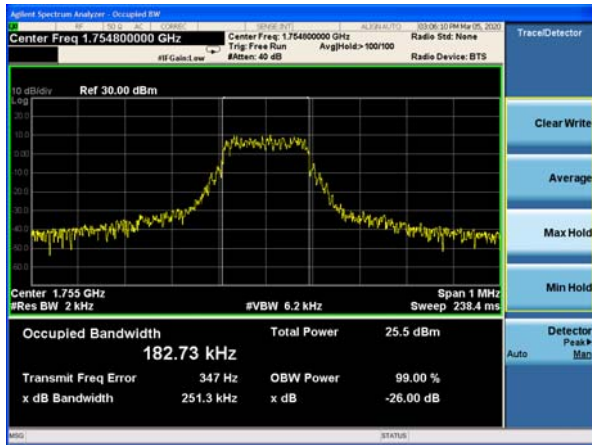

NB-IOT Band 12 BPSK 3.75kHz 1@0 CH-High

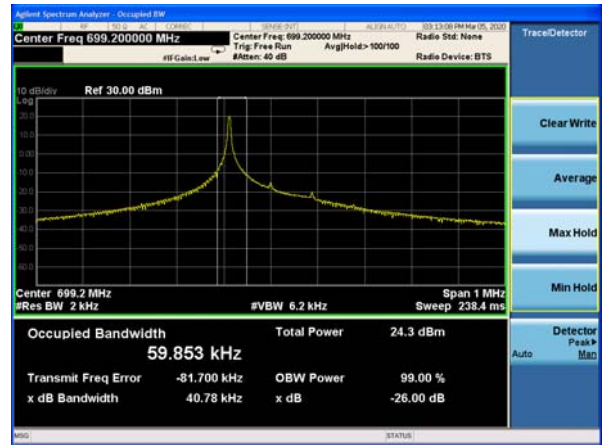





### NB-IOT Band 12 BPSK 15kHz 1@0 CH-Low




### NB-IOT Band 12 QPSK 3.75kHz 1@0 CH-Low

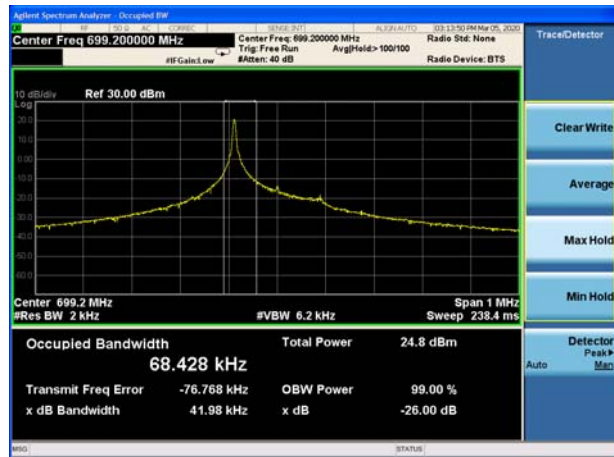

### NB-IOT Band 12 BPSK 15kHz 1@0 CH-Middle

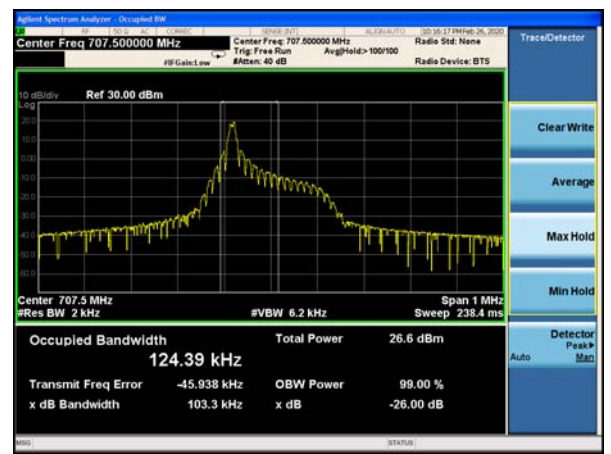


### NB-IOT Band 12 QPSK 3.75kHz 1@0 CH-Middle

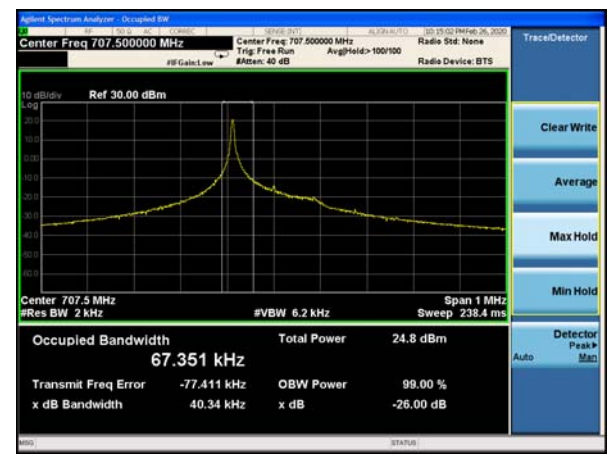

### NB-IOT Band 12 BPSK 15kHz 1@0 CH-High



### NB-IOT Band 12 QPSK 3.75kHz 1@0 CH-High

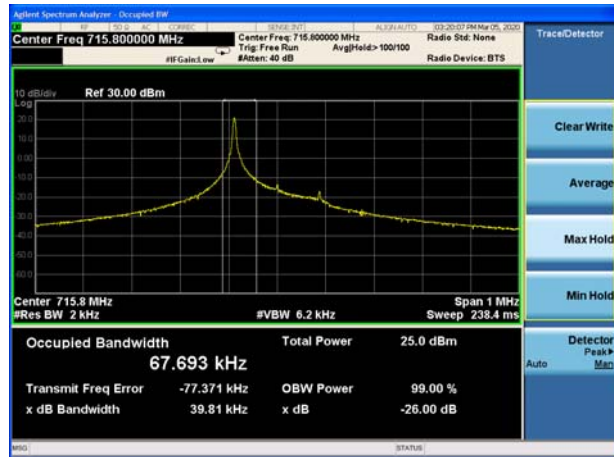






### NB-IOT Band 12 QPSK 15kHz 1@0 CH-Low




### NB-IOT Band 12 QPSK 15kHz 12@0 CH-Low

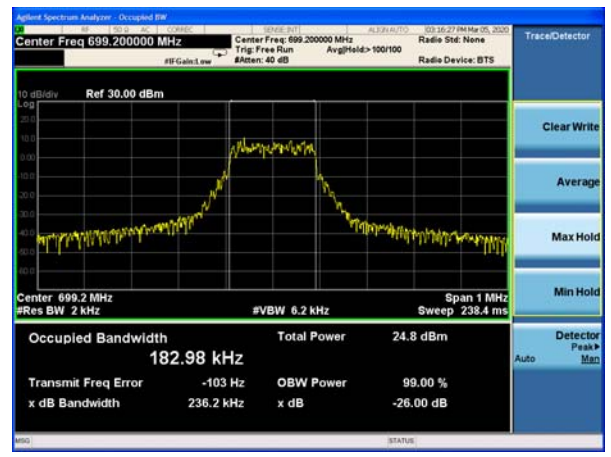

### NB-IOT Band 12 QPSK 15kHz 1@0 CH-Middle




### NB-IOT Band 12 QPSK 15kHz 12@0 CH-Middle





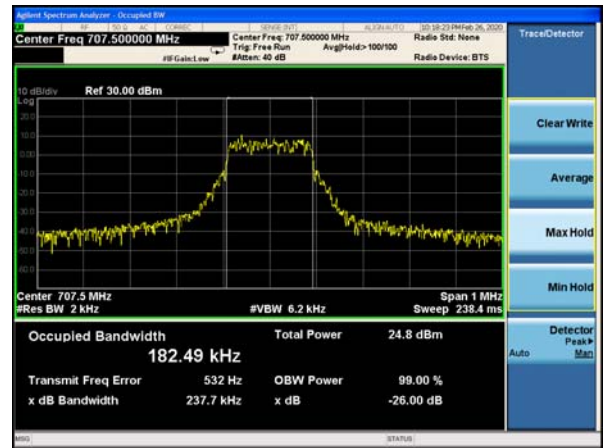








### NB-IOT Band 12 QPSK 15kHz 1@0 CH-High



### NB-IOT Band 12 QPSK 15kHz 12@0 CH-High

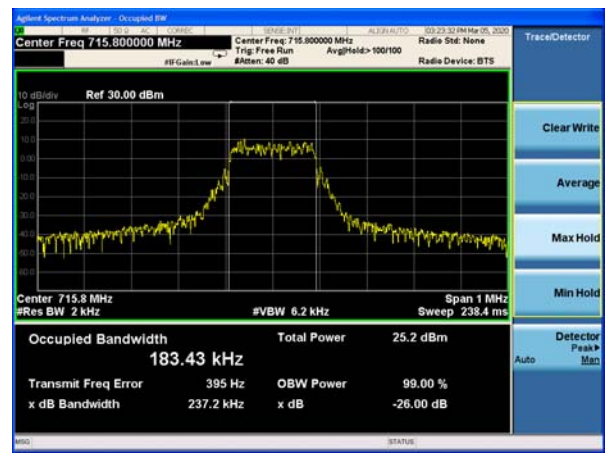


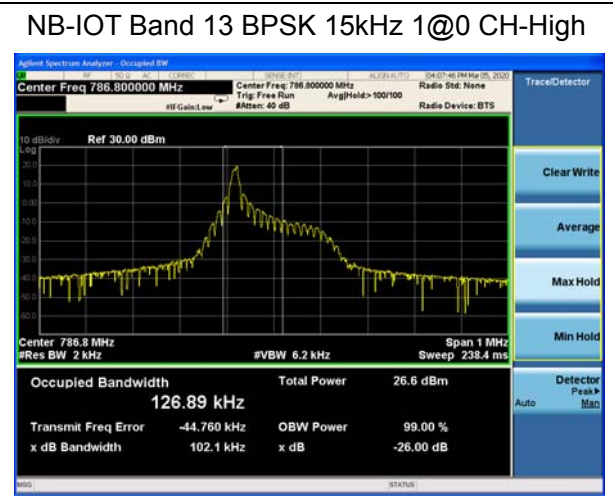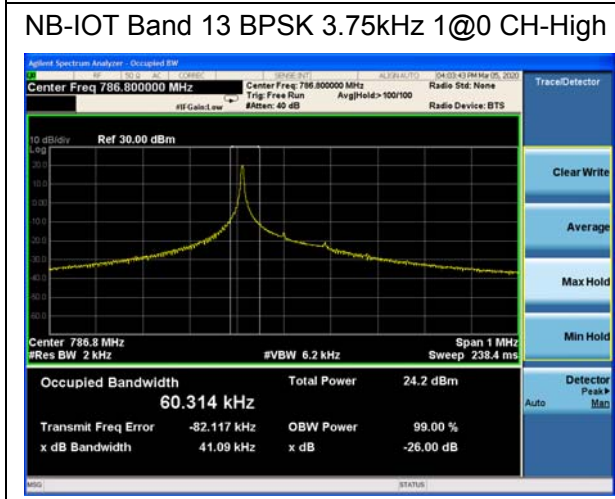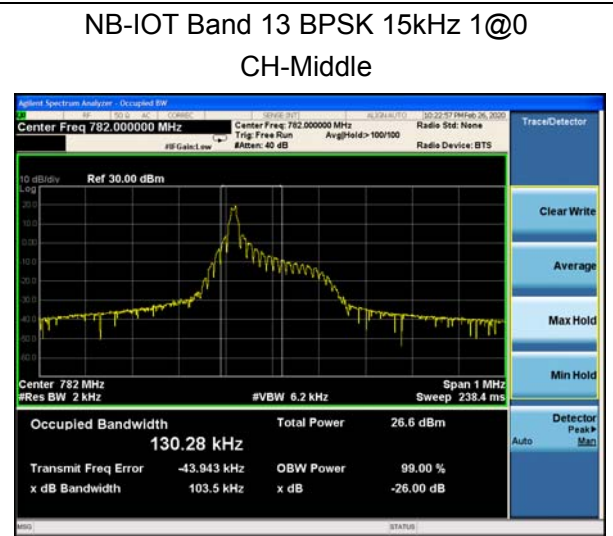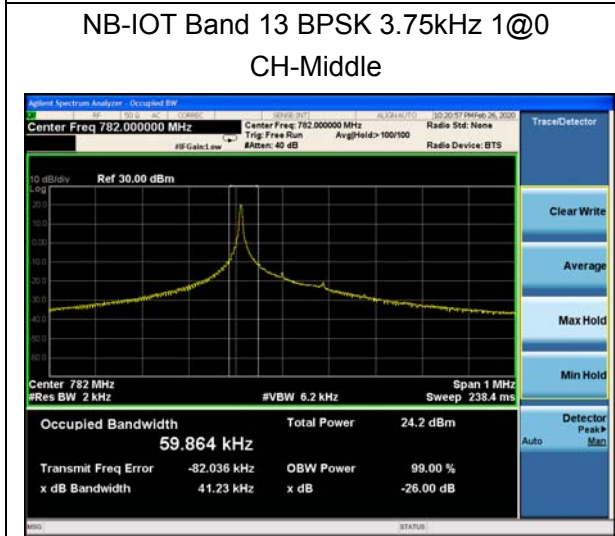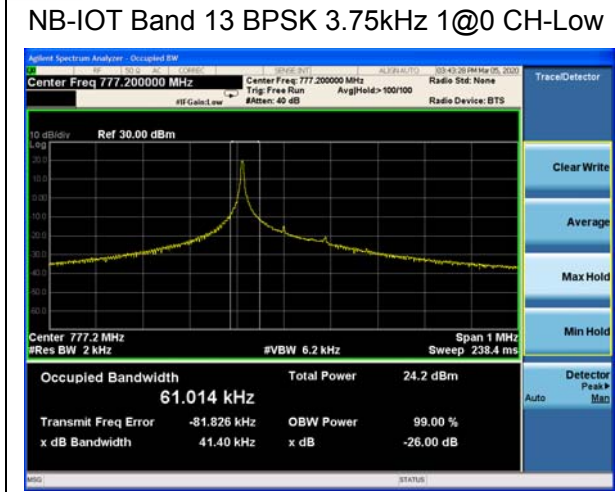

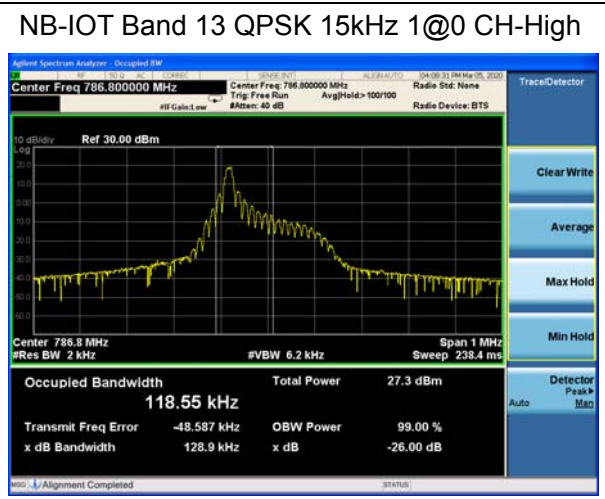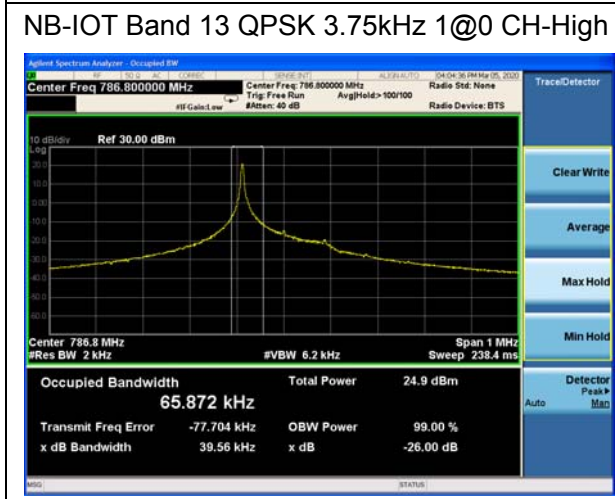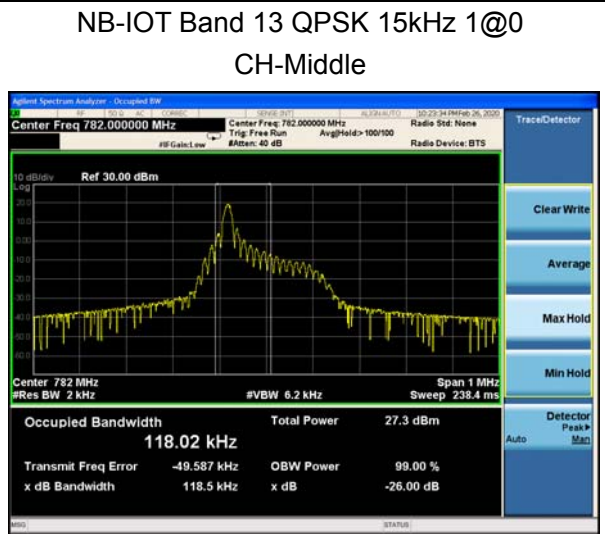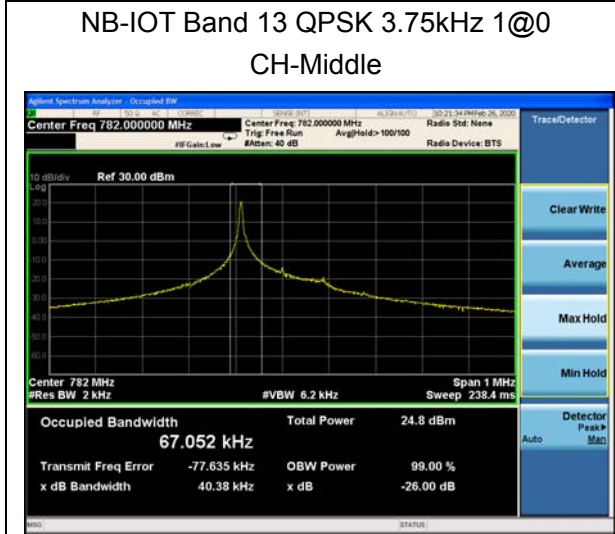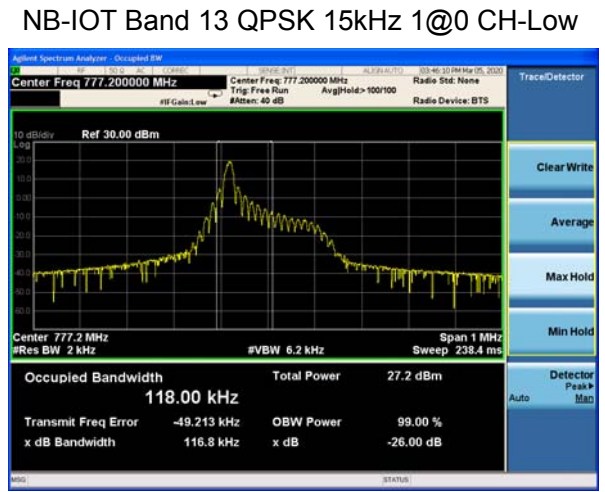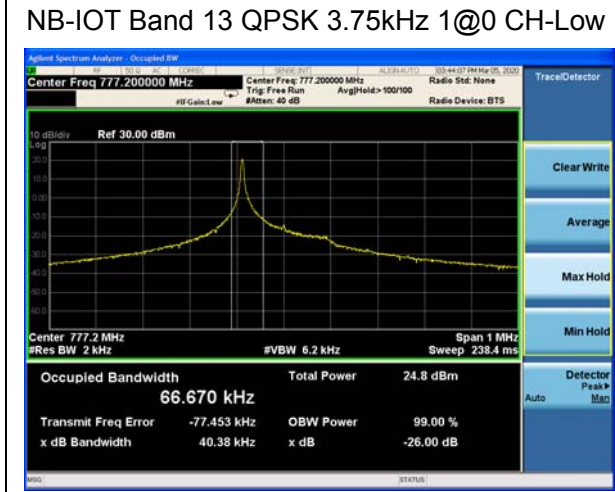





NB-IOT Band 13 QPSK 15kHz 12@0 CH-Low

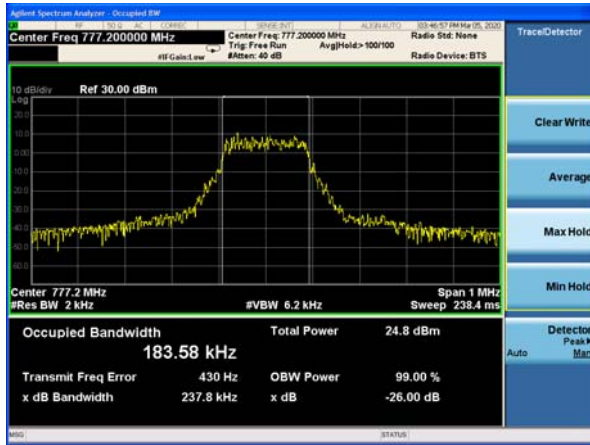


NB-IOT Band 66 BPSK 3.75kHz 1@0 CH-Low

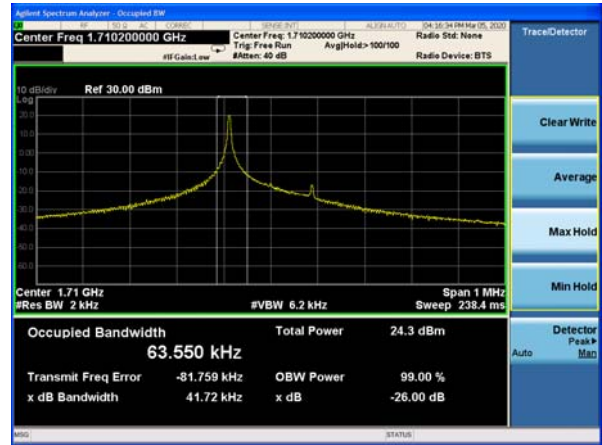


NB-IOT Band 13 QPSK 15kHz 12@0 CH-Middle

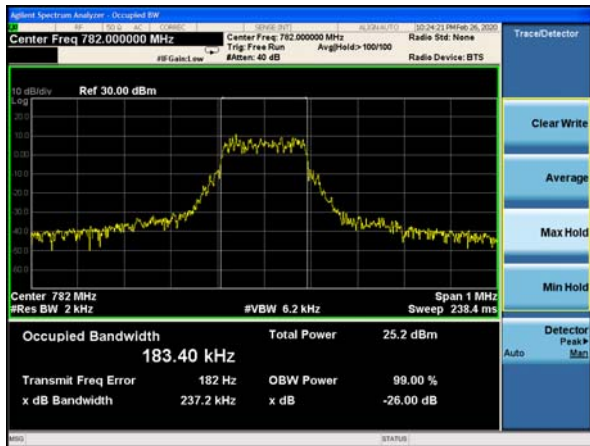


NB-IOT Band 66 BPSK 3.75kHz 1@0 CH-Middle

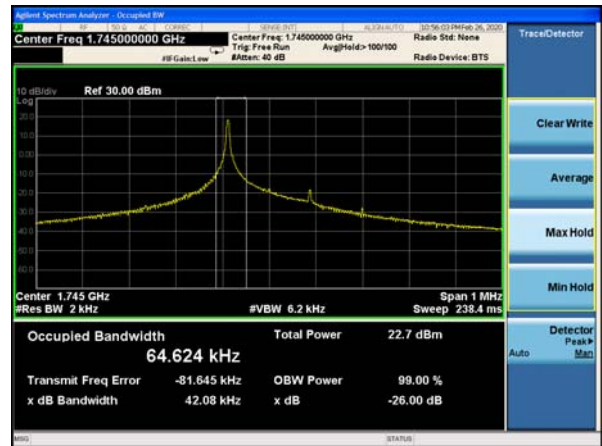

NB-IOT Band 13 QPSK 15kHz 12@0 CH-High

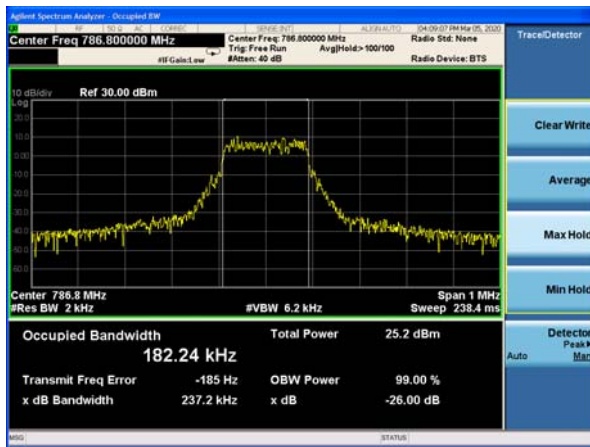

NB-IOT Band 66 BPSK 3.75kHz 1@0 CH-High

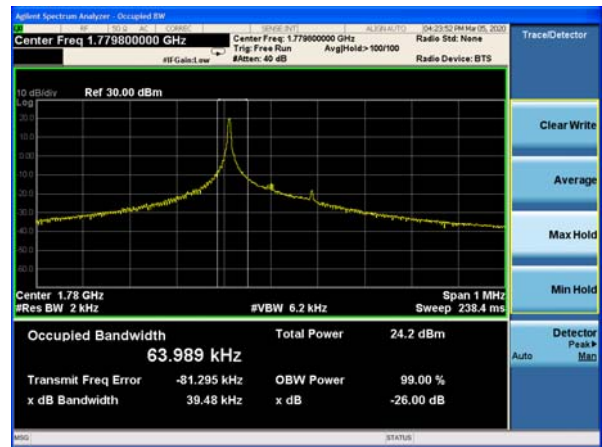





### NB-IOT Band 66 BPSK 15kHz 1@0 CH-Low




### NB-IOT Band 66 QPSK 3.75kHz 1@0 CH-Low

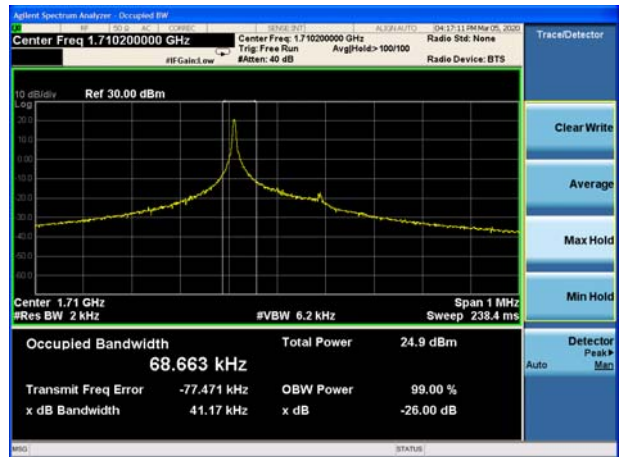

### NB-IOT Band 66 BPSK 15kHz 1@0 CH-Middle

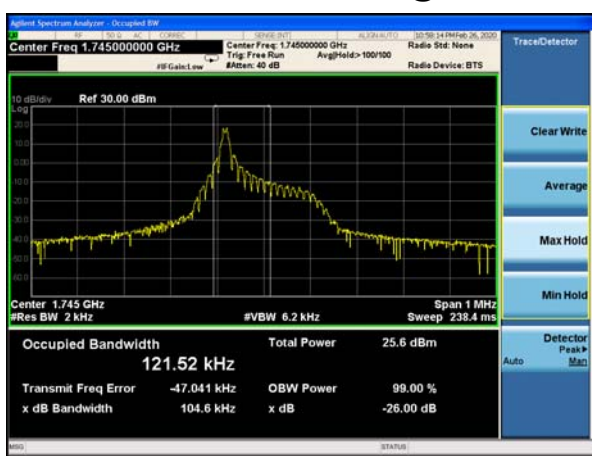


### NB-IOT Band 66 QPSK 3.75kHz 1@0 CH-Middle

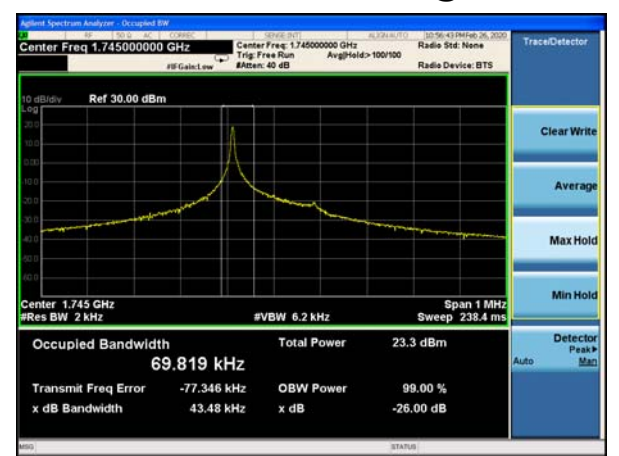

### NB-IOT Band 66 BPSK 15kHz 1@0 CH-High




### NB-IOT Band 66 QPSK 3.75kHz 1@0 CH-High

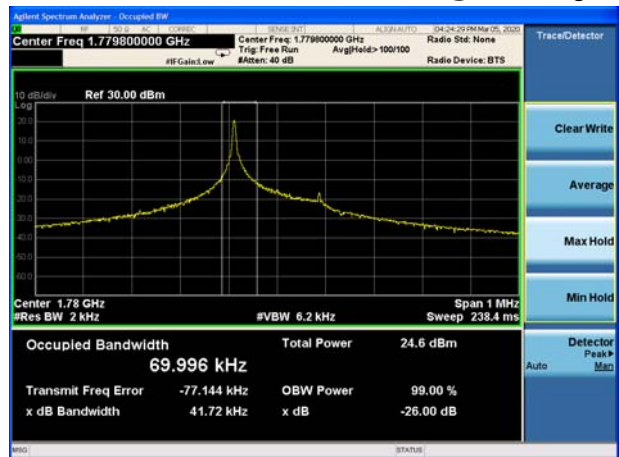





### NB-IOT Band 66 QPSK 15kHz 1@0 CH-Low

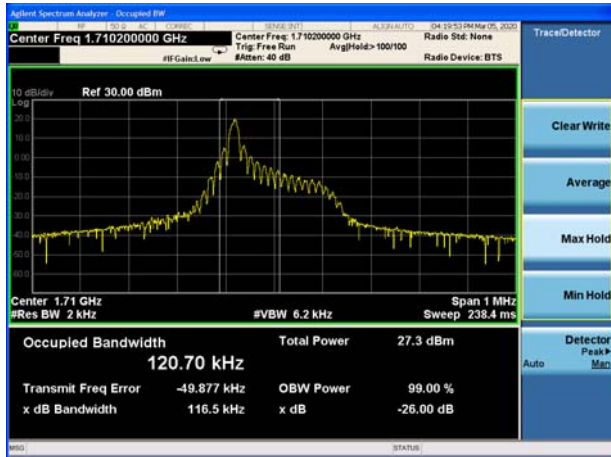


### NB-IOT Band 66 QPSK 15kHz 12@0 CH-Low

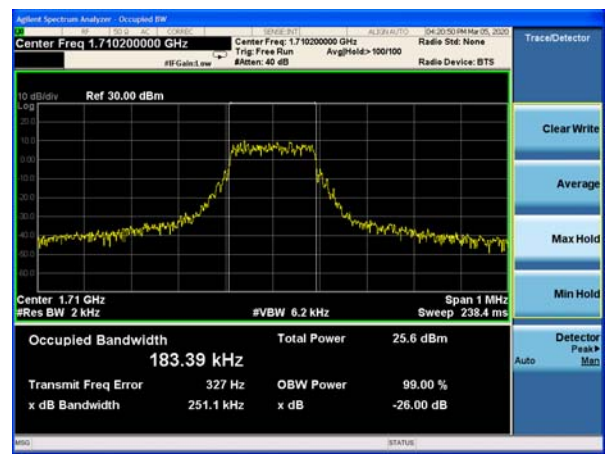

### NB-IOT Band 66 QPSK 15kHz 1@0 CH-Middle

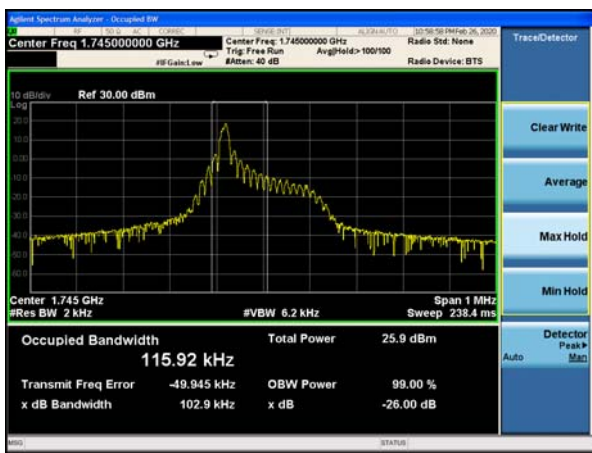


### NB-IOT Band 66 QPSK 15kHz 12@0 CH-Middle

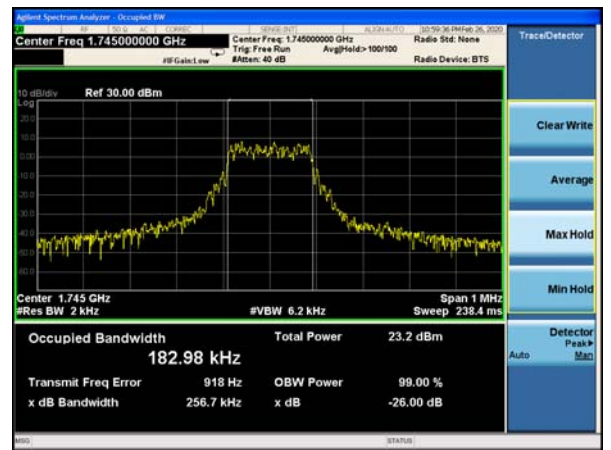

### NB-IOT Band 66 QPSK 15kHz 1@0 CH-High




### NB-IOT Band 66 QPSK 15kHz 12@0 CH-High

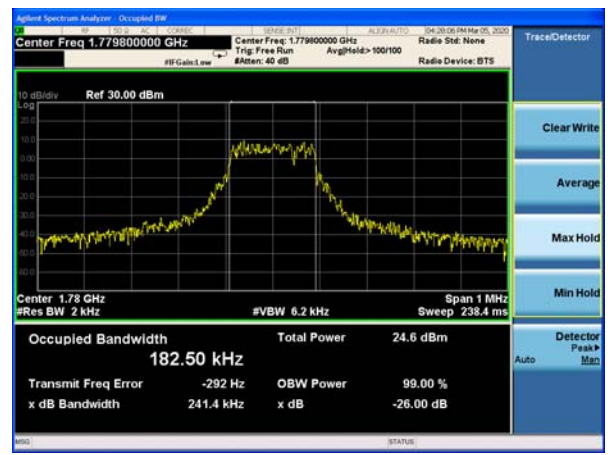




### NB-IOT Band 71 BPSK 3.75kHz 1@0 CH-Low

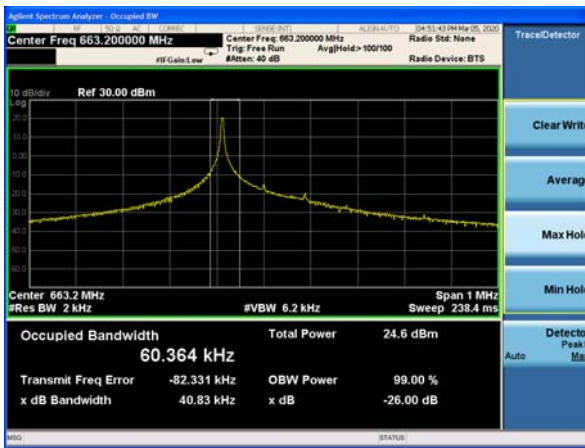


### NB-IOT Band 71 BPSK 15kHz 1@0 CH-Low




### NB-IOT Band 71 BPSK 3.75kHz 1@0 CH-Middle

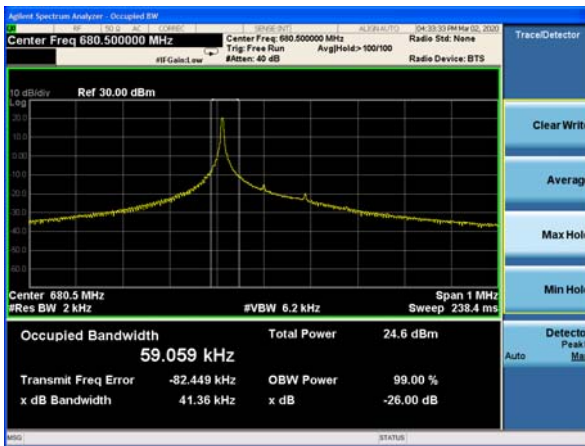


### NB-IOT Band 71 BPSK 15kHz 1@0 CH-Middle

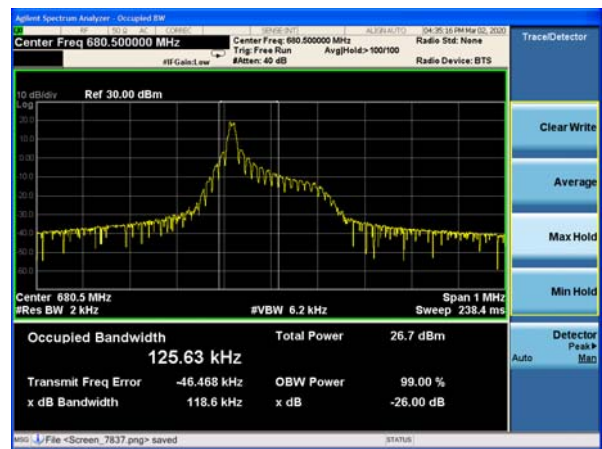

### NB-IOT Band 71 BPSK 3.75kHz 1@0 CH-High

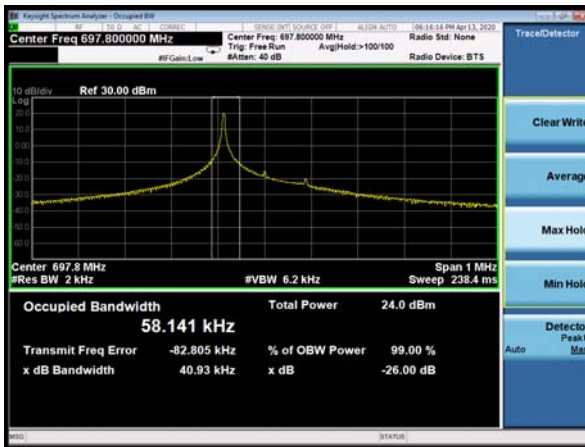

### NB-IOT Band 71 BPSK 15kHz 1@0 CH-High

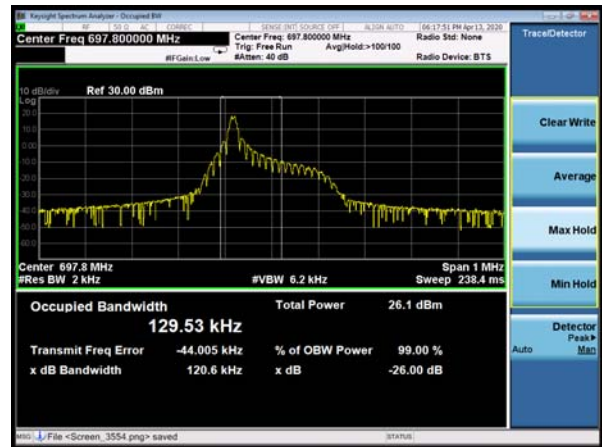




### NB-IOT Band 71 QPSK 3.75kHz 1@0 CH-Low




### NB-IOT Band 71 QPSK 15kHz 1@0 CH-Low



### NB-IOT Band 71 QPSK 3.75kHz 1@0 CH-Middle

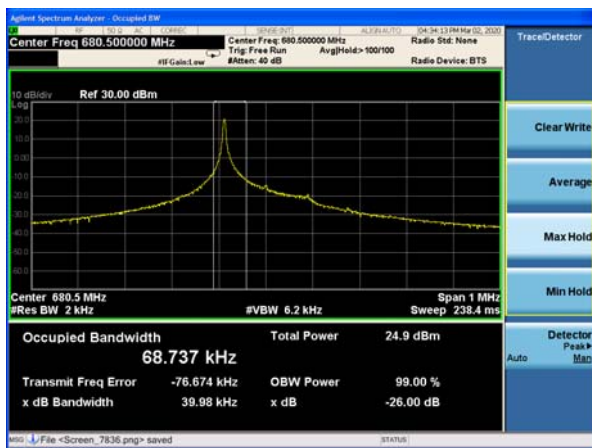

### NB-IOT Band 71 QPSK 15kHz 1@0 CH-Middle

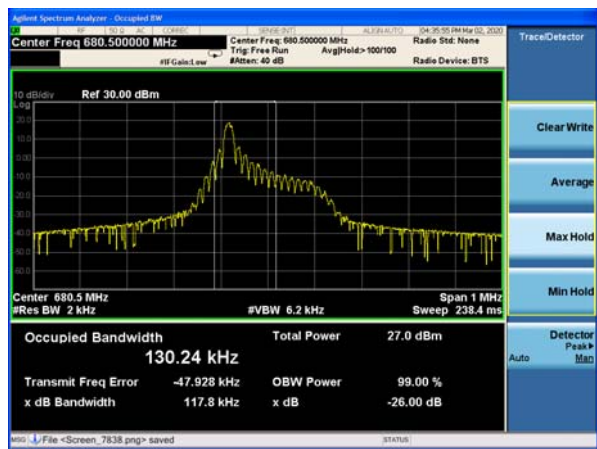

### NB-IOT Band 71 QPSK 3.75kHz 1@0 CH-High




### NB-IOT Band 71 QPSK 15kHz 1@0 CH-High









### NB-IOT Band 71 QPSK 15kHz 12@0 CH-Low

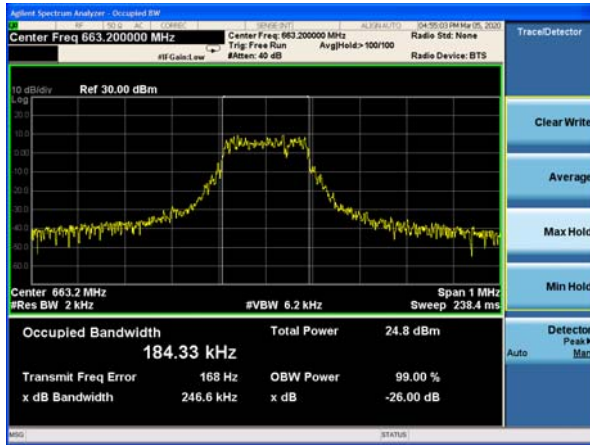


### NB-IOT Band 85 BPSK 3.75kHz 1@0 CH-Low

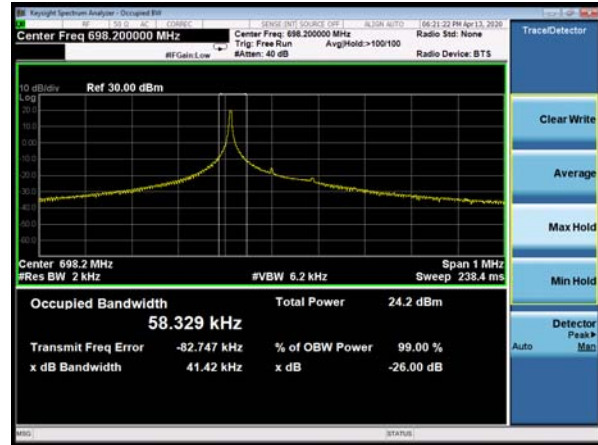

### NB-IOT Band 71 QPSK 15kHz 12@0 CH-Middle

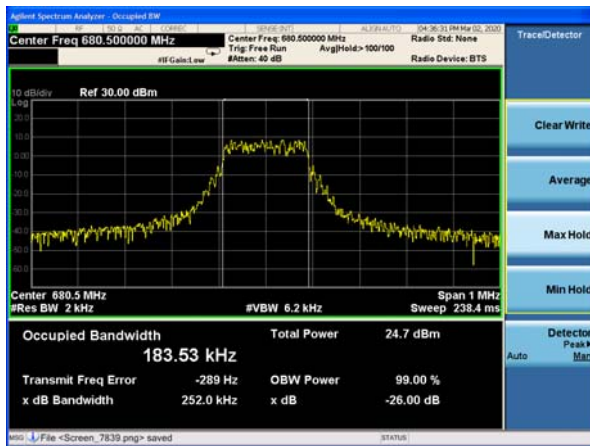


### NB-IOT Band 85 BPSK 3.75kHz 1@0 CH-Middle

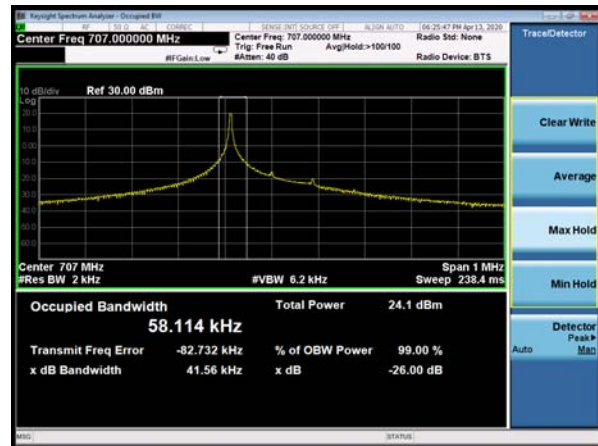

### NB-IOT Band 71 QPSK 15kHz 12@0 CH-High



### NB-IOT Band 85 BPSK 3.75kHz 1@0 CH-High

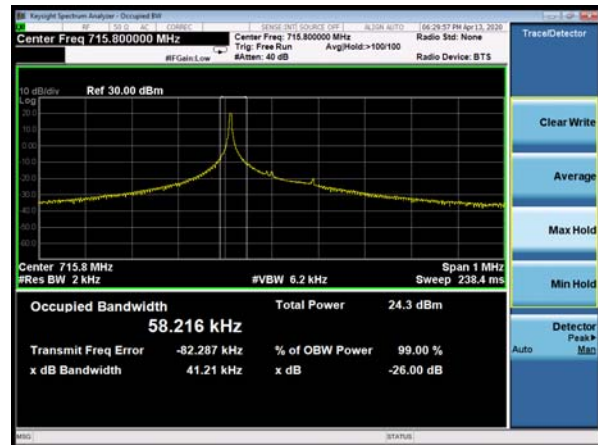


NB-IOT Band 85 BPSK 15kHz 1@0 CH-Low



NB-IOT Band 85 QPSK 3.75kHz 1@0 CH-Low




NB-IOT Band 85 BPSK 15kHz 1@0 CH-Middle

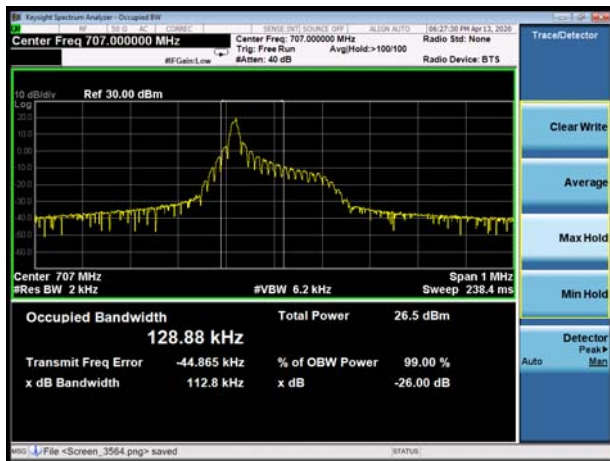

NB-IOT Band 85 QPSK 3.75kHz 1@0 CH-Middle



NB-IOT Band 85 BPSK 15kHz 1@0 CH-High

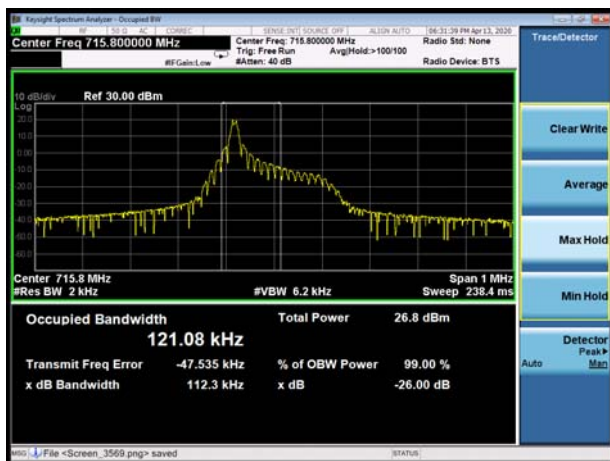

NB-IOT Band 85 QPSK 3.75kHz 1@0 CH-High



NB-IOT Band 85 QPSK 15kHz 1@0 CH-Low



NB-IOT Band 85 QPSK 15kHz 12@0 CH-Low



NB-IOT Band 85 QPSK 15kHz 1@0 CH-Middle




NB-IOT Band 85 QPSK 15kHz 12@0 CH-Middle



NB-IOT Band 85 QPSK 15kHz 1@0 CH-High



NB-IOT Band 85 QPSK 15kHz 12@0 CH-High

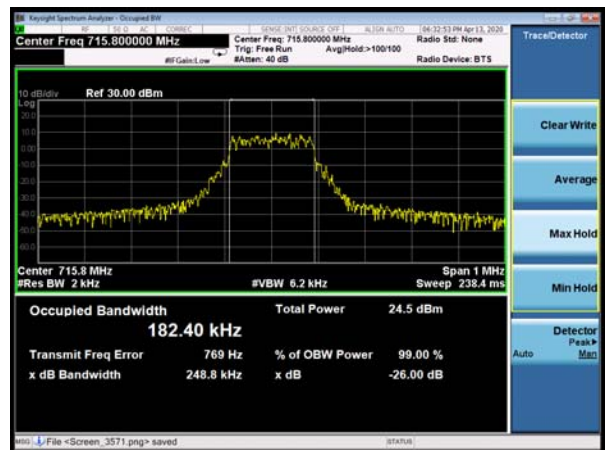

## 5.4 Band Edge Compliance

### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

### Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The band edge of the lowest and highest channels were measured.

The testing follows KDB 971168D01v03r01 Section 6.0

The EUT was connected to spectrum analyzer and system simulator via a power divider.

The band edges of low and high channels for the highest RF powers were measured.

RBW is set to  $\geq 1\%EBW$ , VBW is set to 3x RBW.


on spectrum analyzer.

Set spectrum analyzer with RMS detector.

The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

Checked that all the results comply with the emission limit line.

### Test Setup

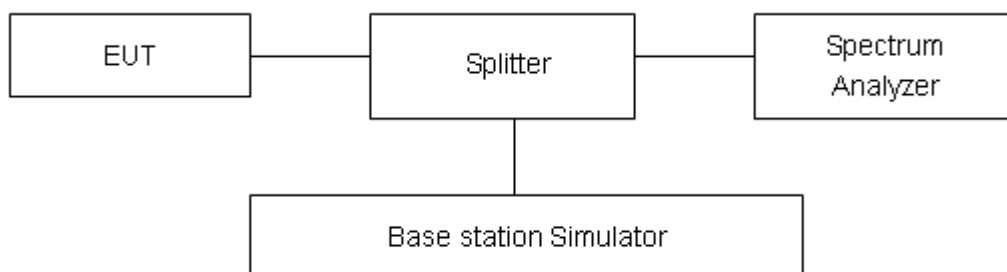

### Limits

Rule Part 27.53(h) specifies that “ for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least  $43 + 10 \log_{10} (P)$  dB”

Rule Part 27.53(g) For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least  $43 + 10 \log (P)$  dB. Compliance with this provision is based on the use of measurement instrumentation employing a



resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

Rule Part 27.53(f) For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to  $-70$  dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and  $-80$  dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

Rule Part 27.53 (c) For operations in the 746-758 MHz band and the 776-788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

- (1) On any frequency outside the 746-758 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least  $43 + 10 \log (P)$  dB;
- (2) On any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least  $43 + 10 \log (P)$  dB;
- (3) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than  $76 + 10 \log (P)$  dB in a 6.25 kHz band segment, for base and fixed stations;
- (4) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than  $65 + 10 \log (P)$  dB in a 6.25 kHz band segment, for mobile and portable stations;
- (5) Compliance with the provisions of paragraphs (c)(1) and (c)(2) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed;


### Measurement Uncertainty







The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ ,  $U=0.684$ dB.

### Test Result

All the test traces in the plots shows the test results clearly.

### Variant

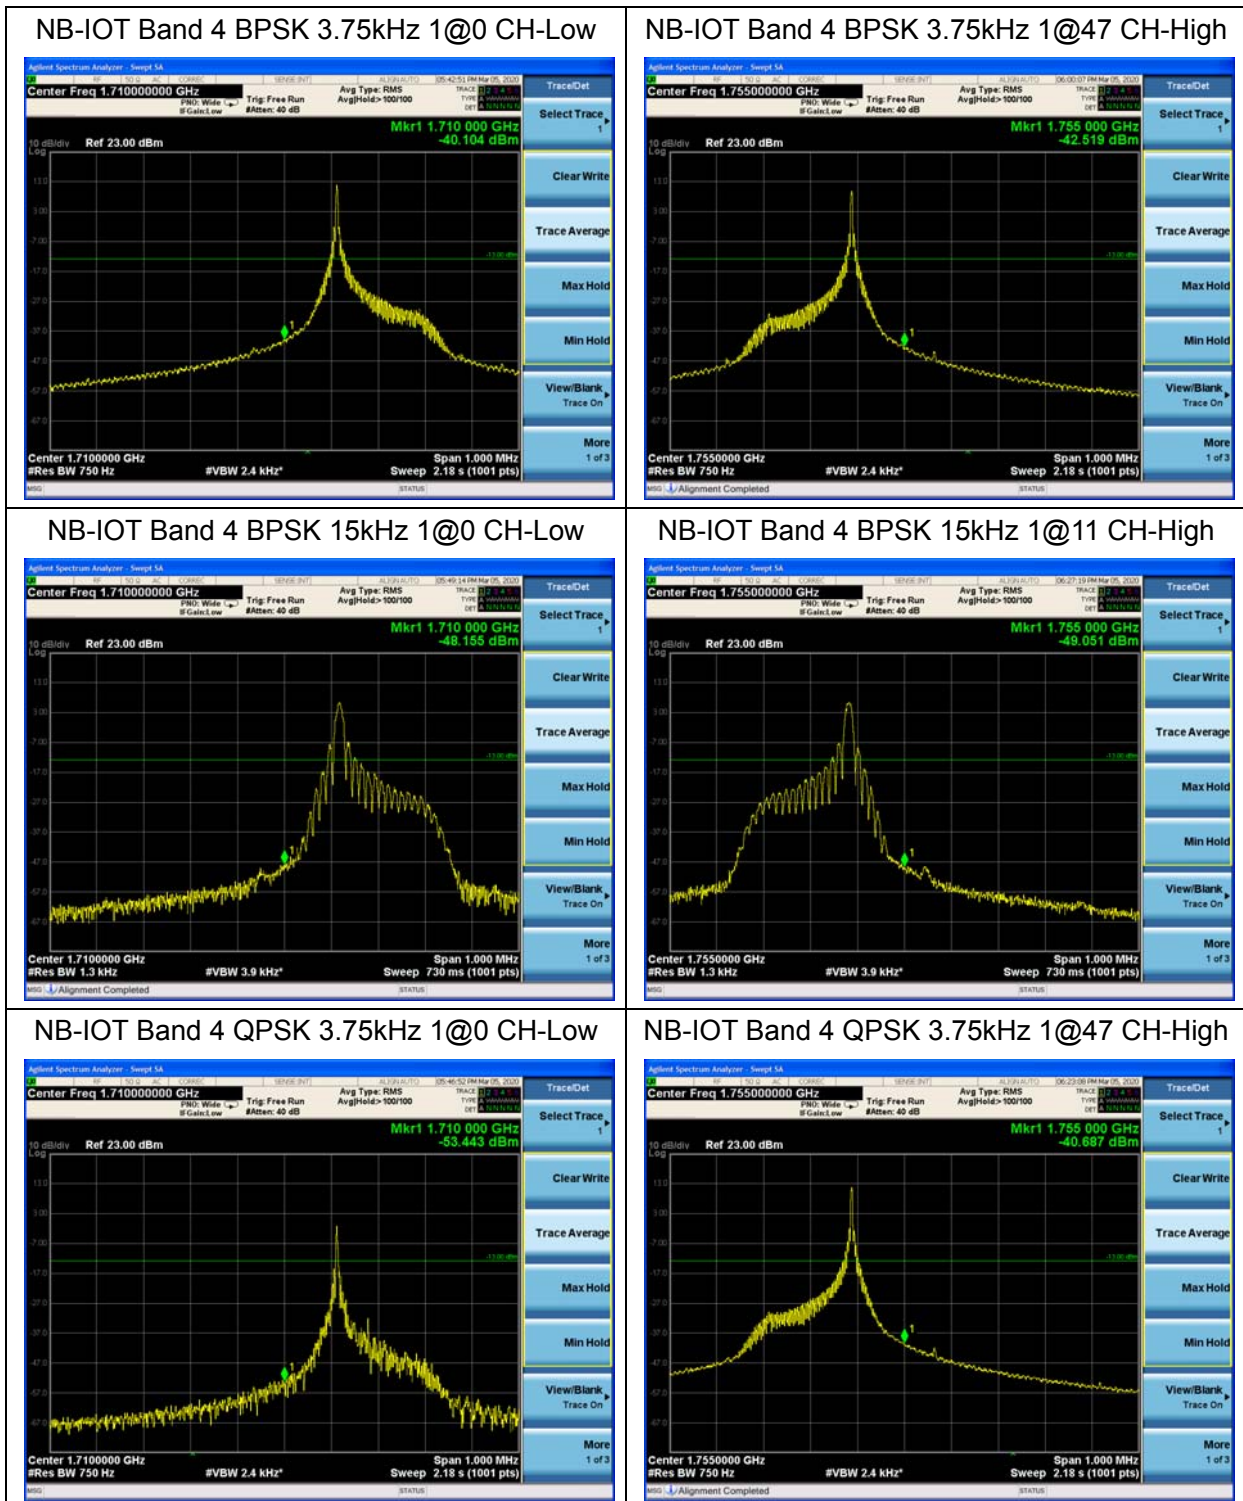

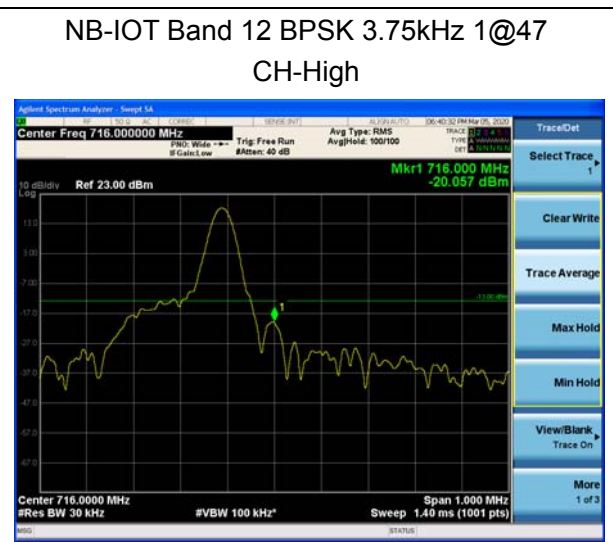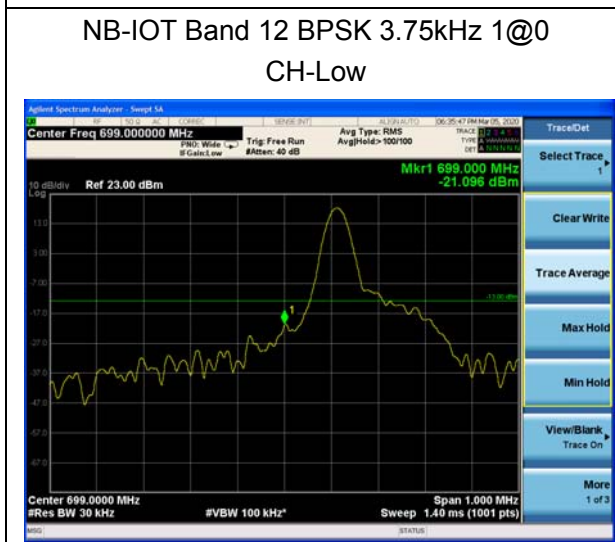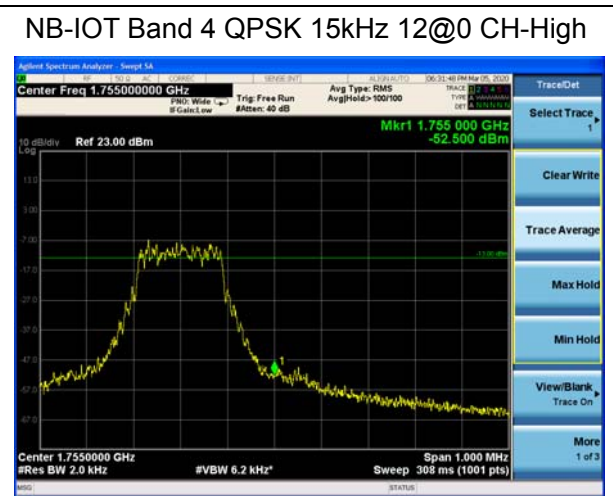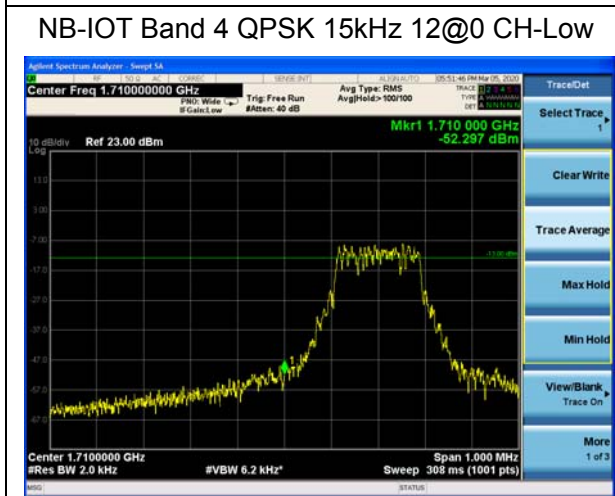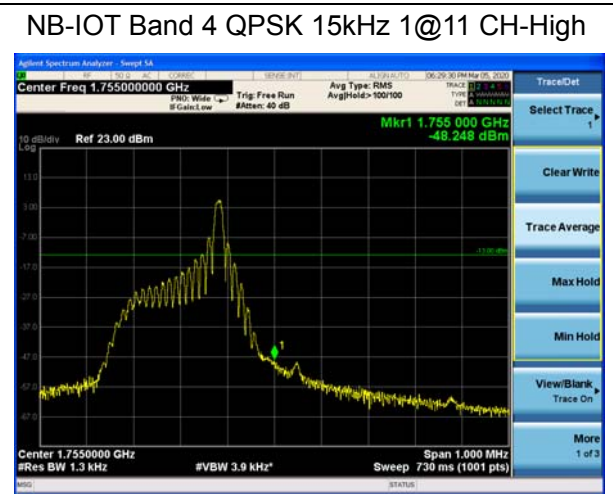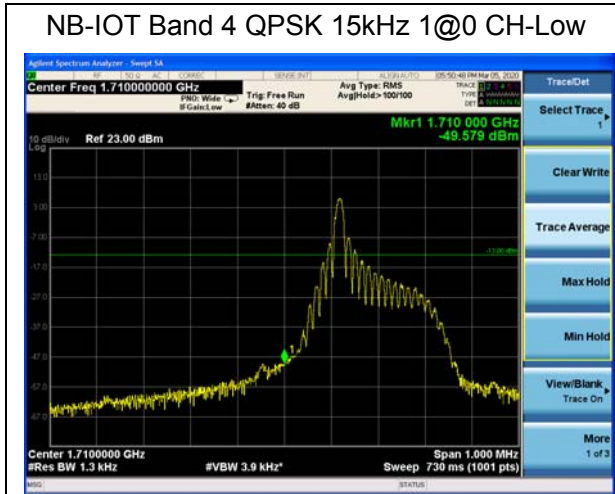



### NB-IOT Band 12 BPSK 15kHz 1@0 CH-Low



### NB-IOT Band 12 BPSK 15kHz 1@11 CH-High



### NB-IOT Band 12 QPSK 3.75kHz 1@0 CH-Low



### NB-IOT Band 12 QPSK 3.75kHz 1@47 CH-High









### NB-IOT Band 12 QPSK 15kHz 1@0 CH-Low















### NB-IOT Band 12 QPSK 15kHz 1@11 CH-High





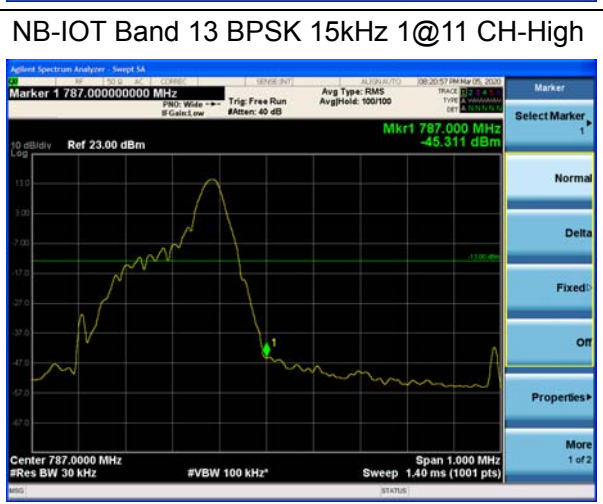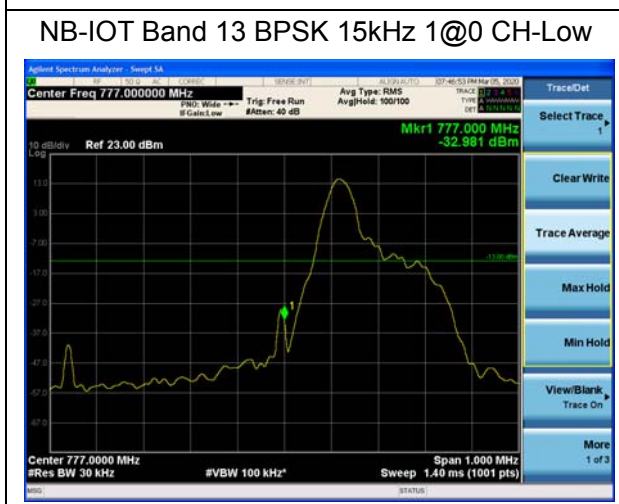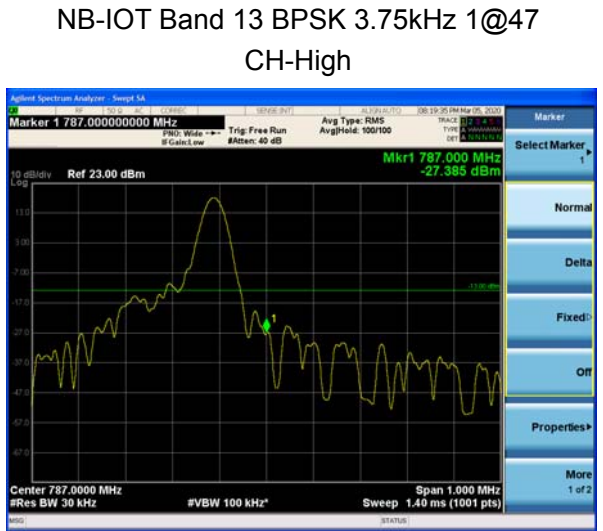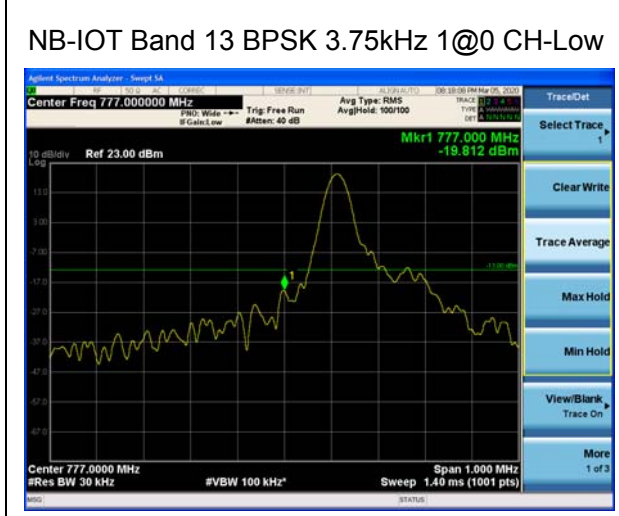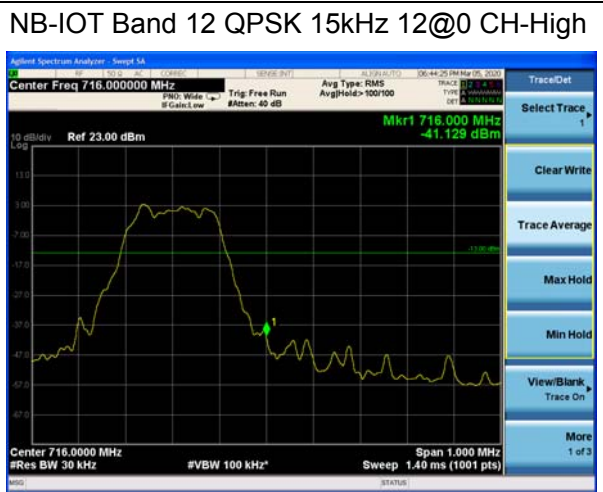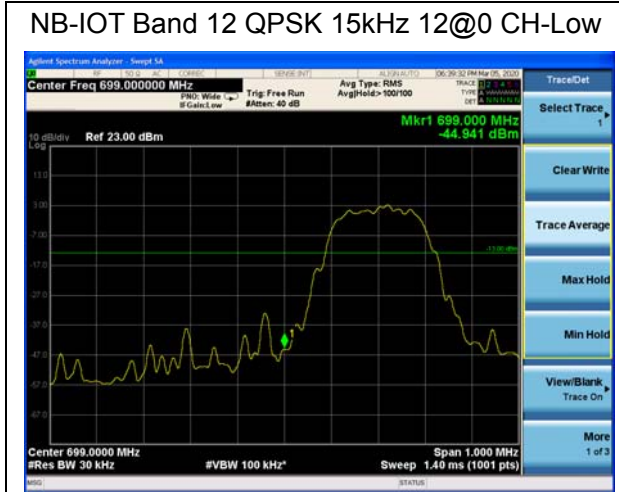


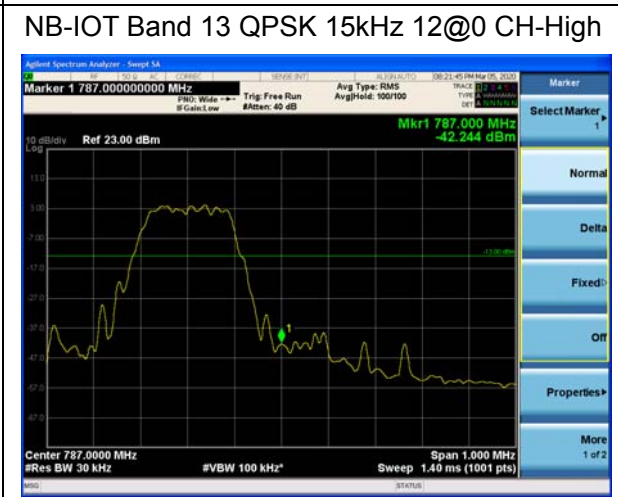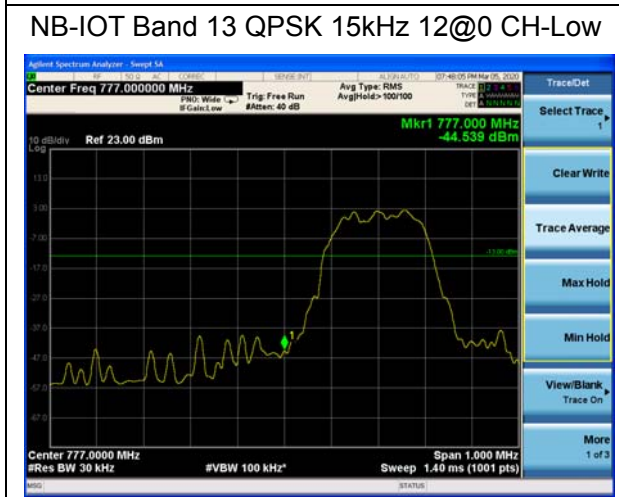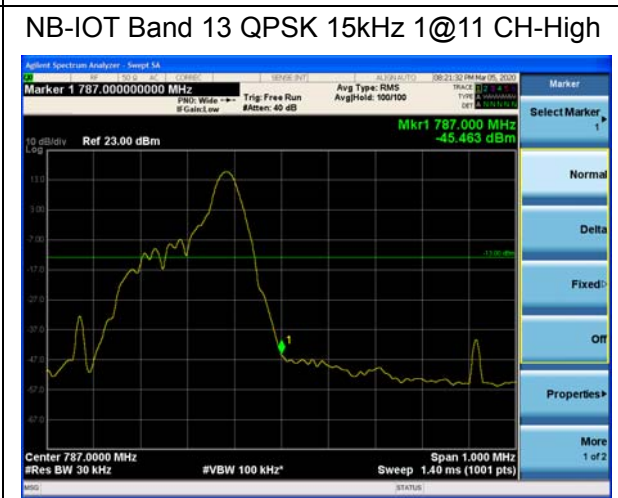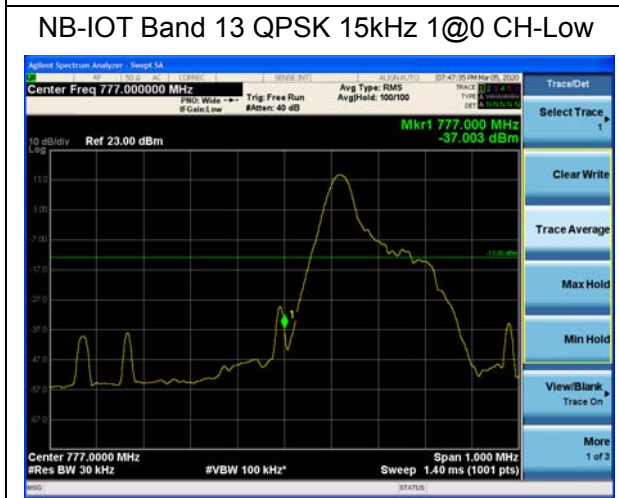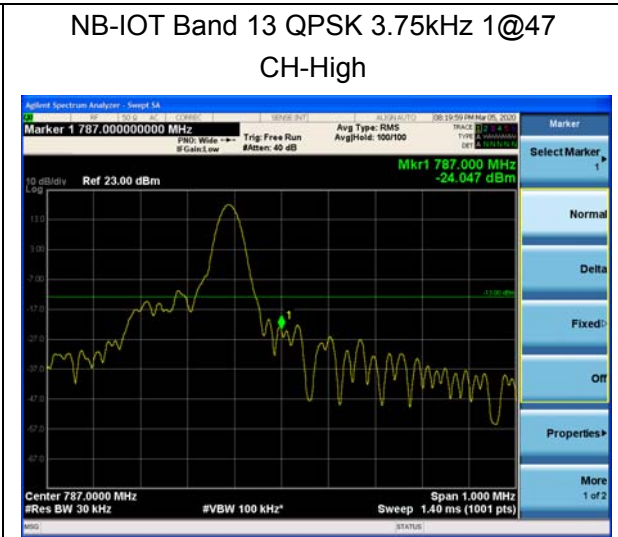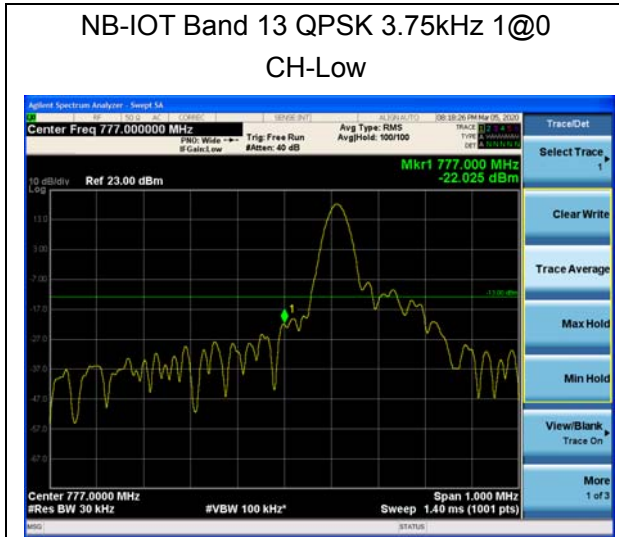

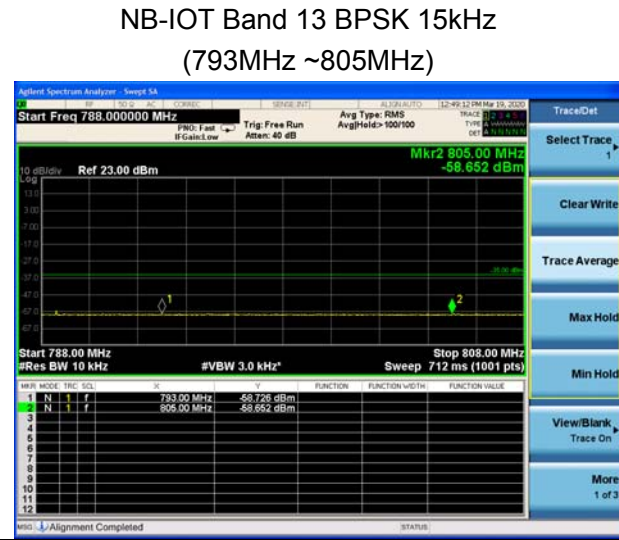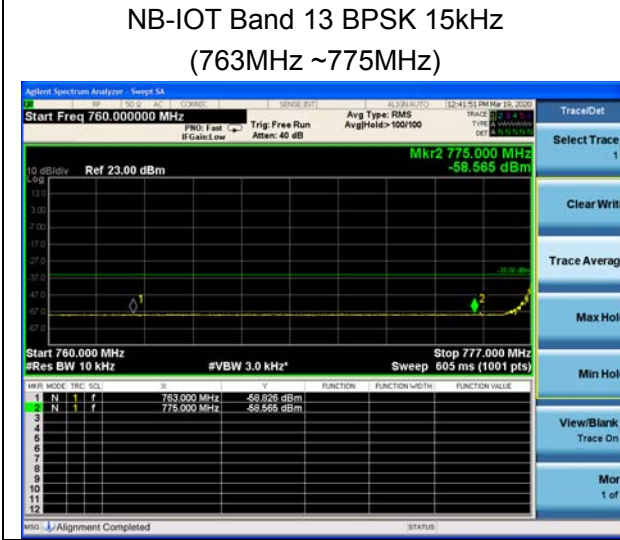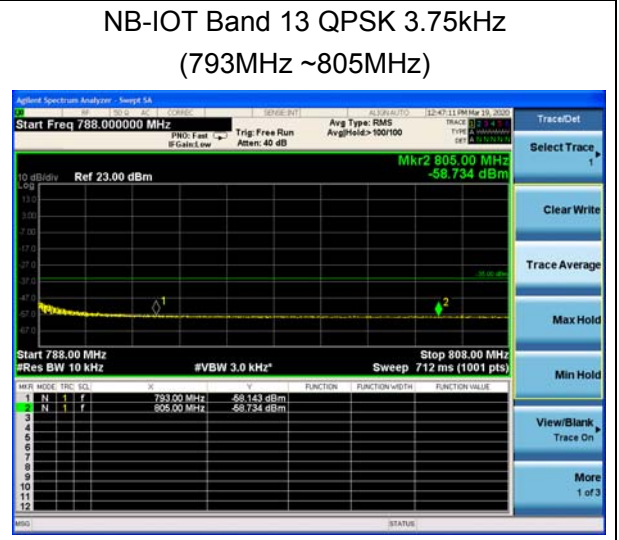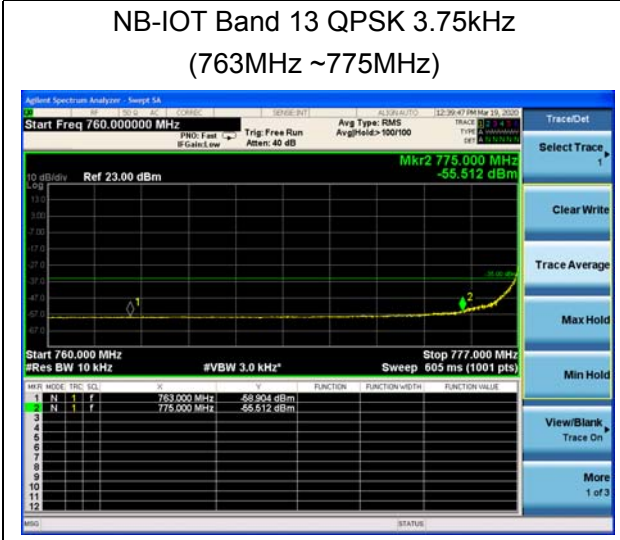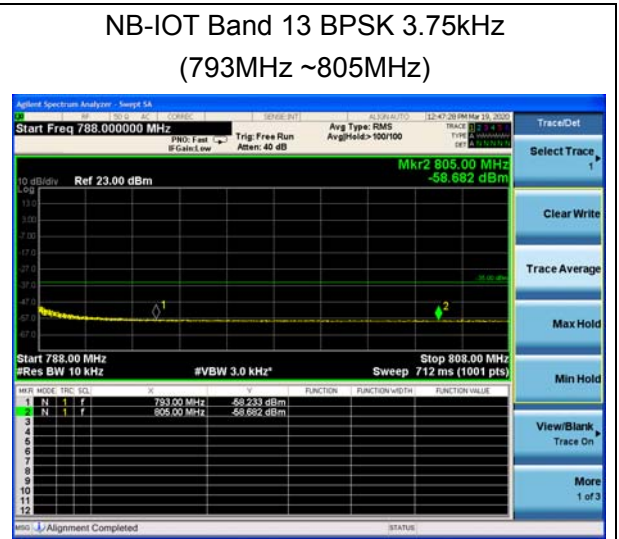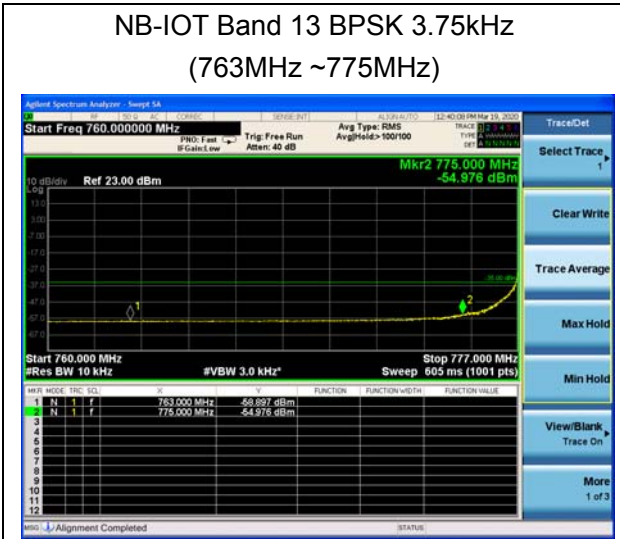




### NB-IOT Band 13 QPSK 15kHz (763MHz ~775MHz)

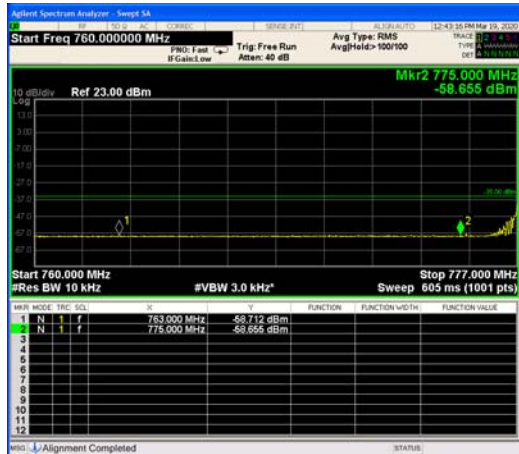

### NB-IOT Band 13 QPSK 15kHz (793MHz ~805MHz)




### NB-IOT Band 13 QPSK 15kHz 12@0 (763MHz ~775MHz)

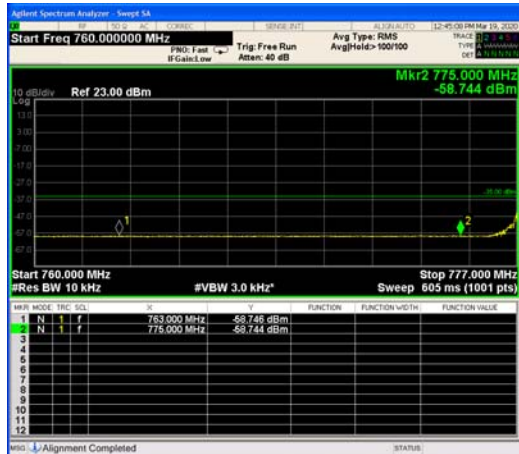


### NB-IOT Band 13 QPSK 15kHz 12@0 (793MHz ~805MHz)



### NB-IOT Band 66 BPSK 3.75kHz 1@0 CH-Low

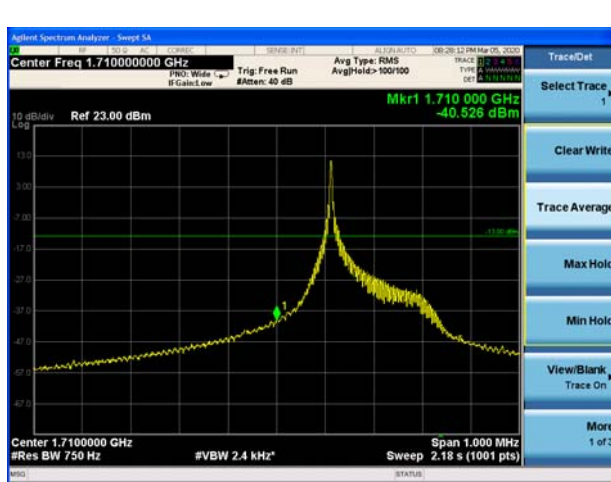


### NB-IOT Band 66 BPSK 3.75kHz 1@47 CH-High

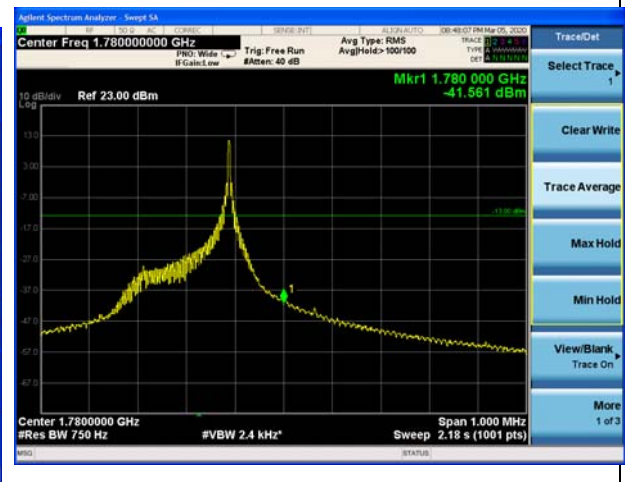





NB-IOT Band 66 BPSK 15kHz 1@0 CH-Low

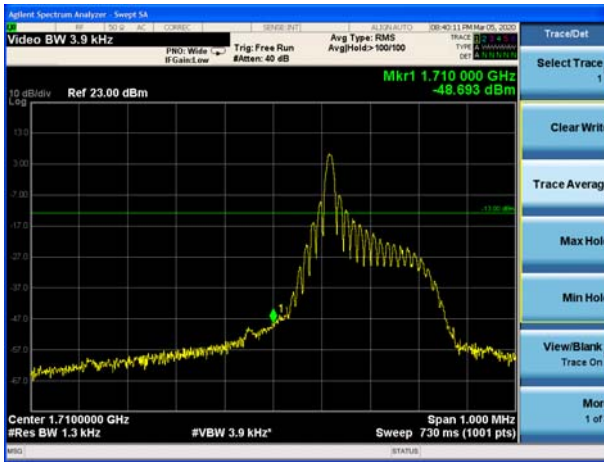


NB-IOT Band 66 BPSK 15kHz 1@11 CH-High

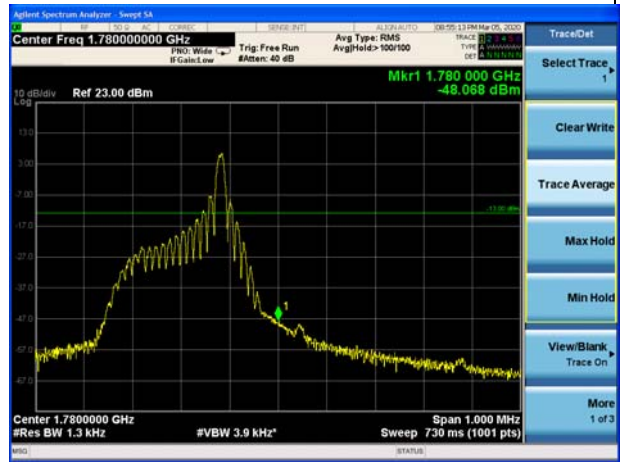


NB-IOT Band 66 QPSK 3.75kHz 1@0 CH-Low

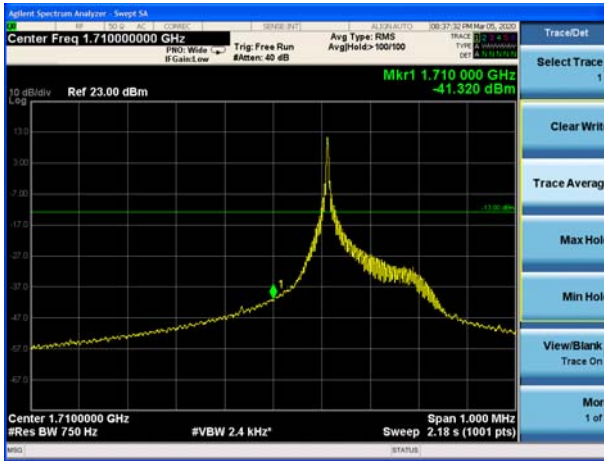


NB-IOT Band 66 QPSK 3.75kHz 1@47 CH-High

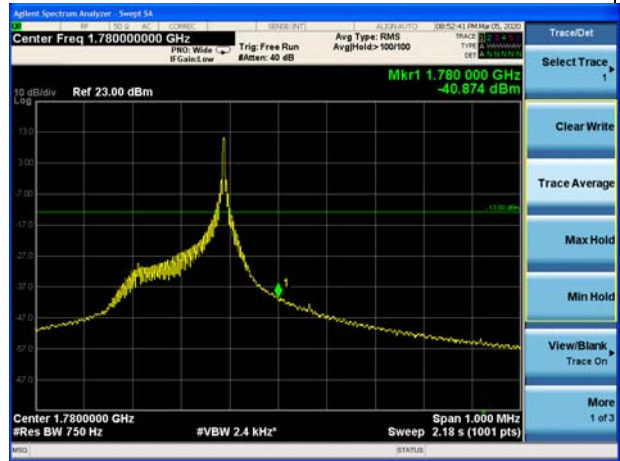

NB-IOT Band 66 QPSK 15kHz 1@0 CH-Low

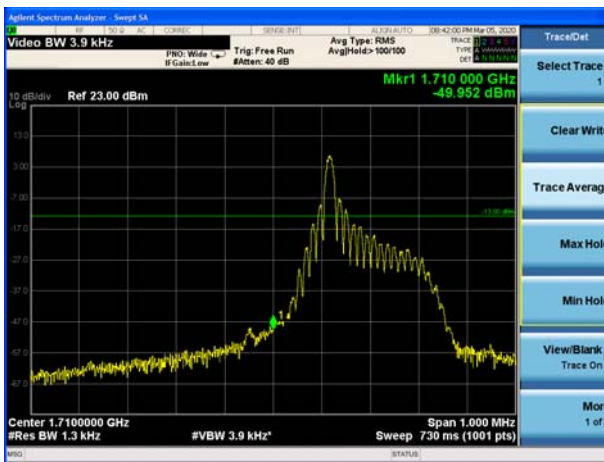


NB-IOT Band 66 QPSK 15kHz 1@11 CH-High

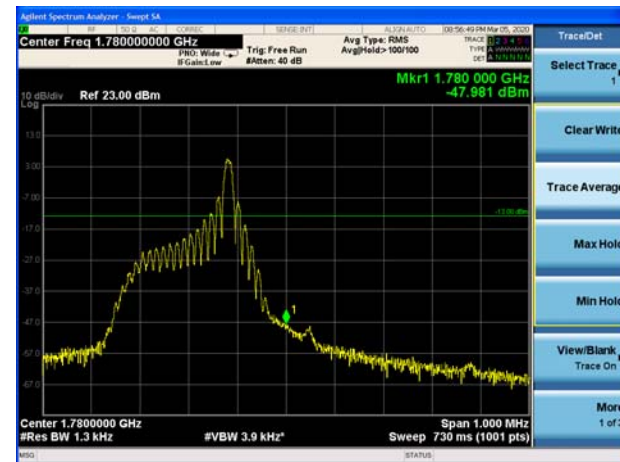




NB-IOT Band 66 QPSK 15kHz 12@0 CH-Low

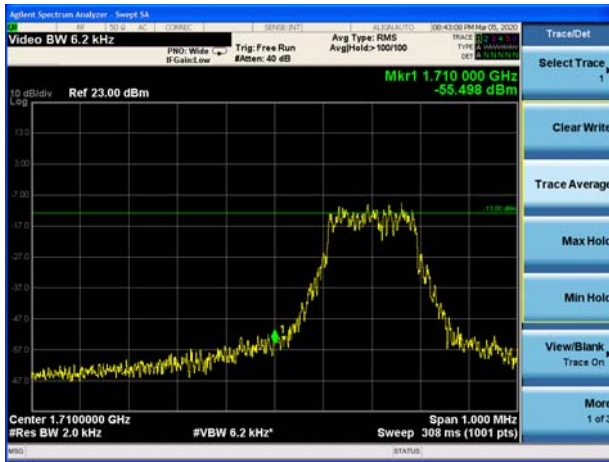

NB-IOT Band 66 QPSK 15kHz 12@0 CH-High

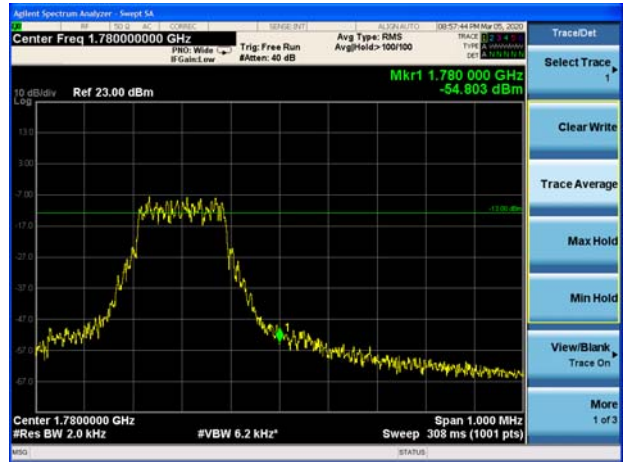

NB-IOT Band 71 BPSK 3.75kHz 1@0 CH-Low



NB-IOT Band 71 BPSK 3.75kHz 1@47 CH-High



NB-IOT Band 71 BPSK 15kHz 1@0 CH-Low



NB-IOT Band 71 BPSK 15kHz 1@11 CH-High





NB-IOT Band 71 QPSK 3.75kHz 1@0 CH-Low



NB-IOT Band 71 QPSK 3.75kHz 1@47 CH-High




NB-IOT Band 71 QPSK 15kHz 1@0 CH-Low



NB-IOT Band 71 QPSK 15kHz 1@11 CH-High








NB-IOT Band 71 QPSK 15kHz 12@0 CH-Low




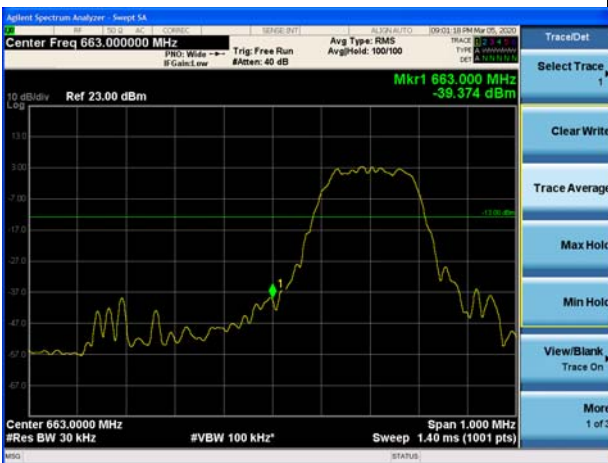


NB-IOT Band 71 QPSK 15kHz 12@0 CH-High



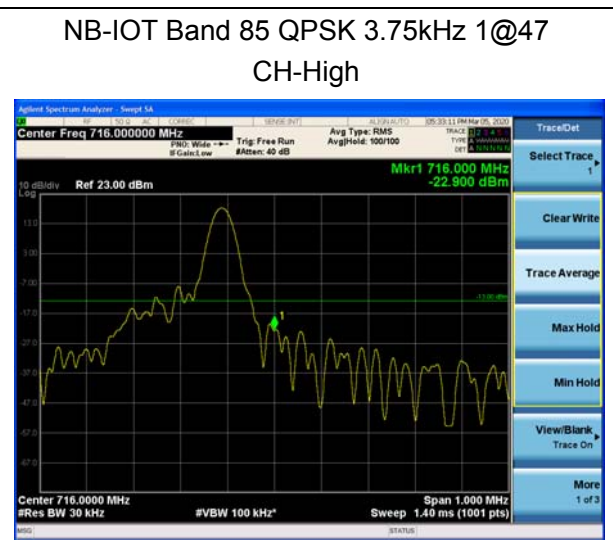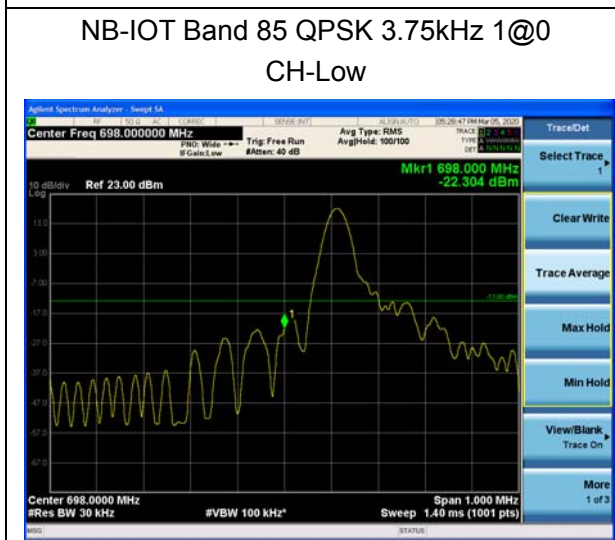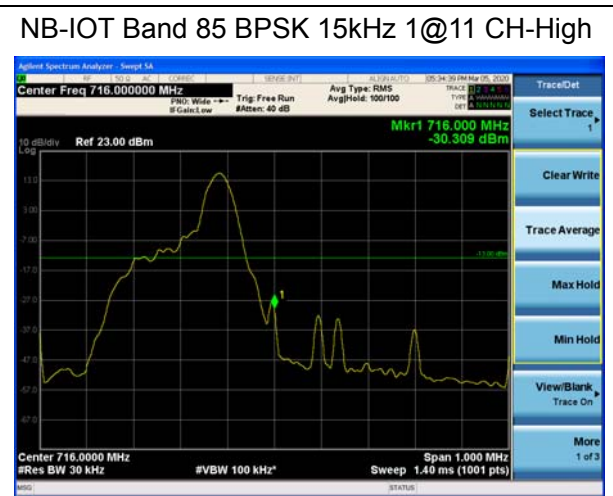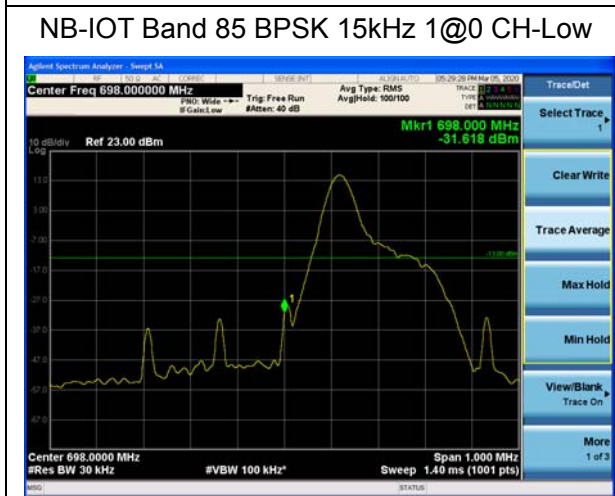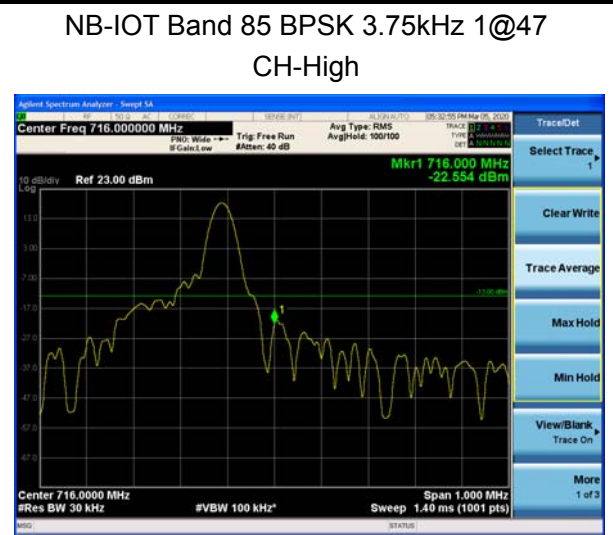



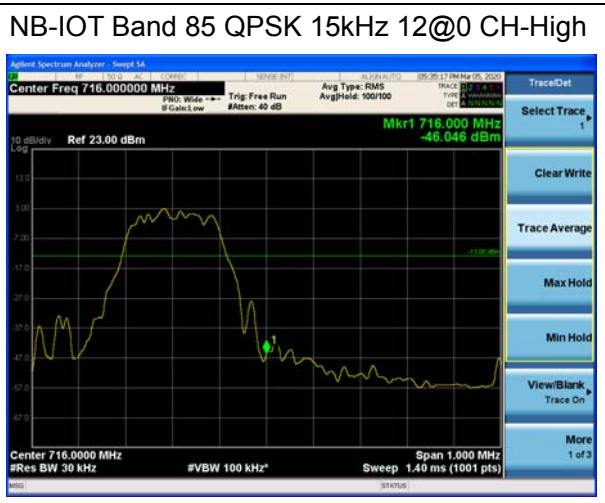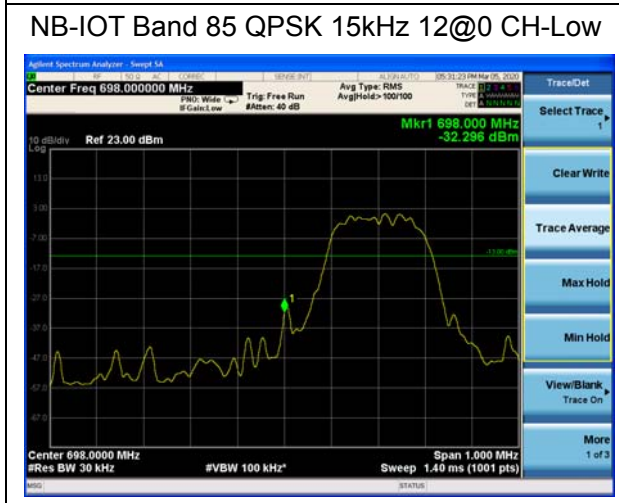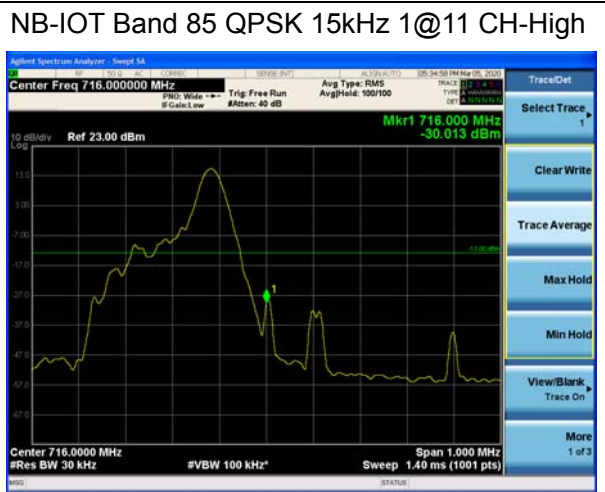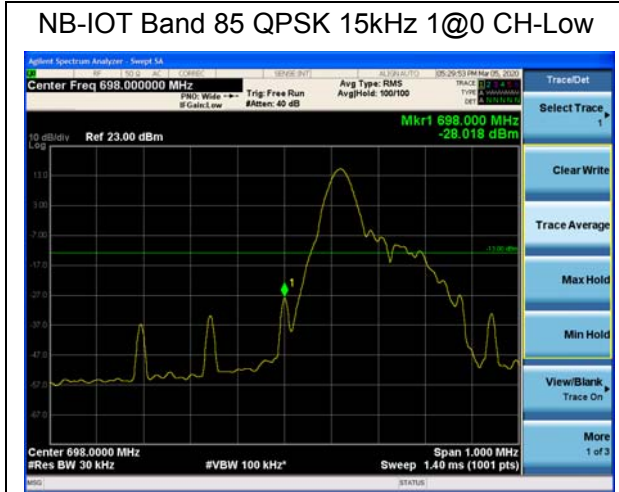

### 5.5 Peak-to-Average Power Ratio (PAPR)

#### Ambient condition


Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

#### Methods of Measurement

Measure the total peak power and record as PPk. And measure the total average power and record as PAvg. Both the peak and average power levels must be expressed in the same logarithmic units (e.g., dBm). Determine the PAPR from:

$$PAPR (dB) = PPk (dBm) - PAvg (dBm).$$

#### Test Setup

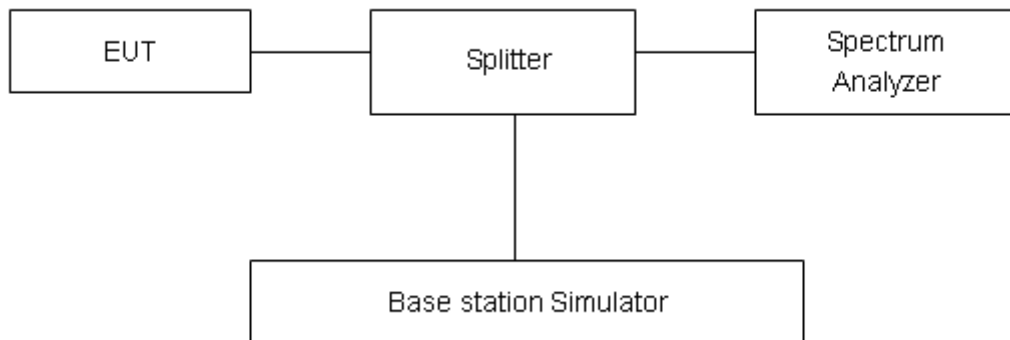

#### Limits

Rule Part 27.50(d)(5) Equipment employed must be authorized in accordance with the provisions of 24.51. Power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (d)(6) of this section. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

#### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor k = 2, U= 0.4 dB.