


**FCC Test Report**  
for  
**Senceive Ltd**  
**FlatMesh Gateway**  
**Model: FM3G-LTE**

**FCC ID: 2AMFBFM3GF**  
**IC ID: 24373-FM3GF**



Project Engineer: M. Musgrave

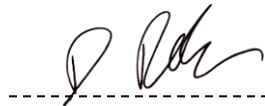

Approval Signatory

Approved signatories: D. Tiroke  A. R. Coombes

*The above named are authorised Eurofins Hursley signatories.*

**UKAS Accredited**  
**EU Notified Body, No 2635**  
**FCC Registered**  
**KC Lab ID: EU0184**

## Contents

<b>1.0</b>	<b>DECLARATION .....</b>	<b>3</b>
1.1	FCC CLASS A TEST REPORT .....	3
1.2	PRODUCT MODIFICATIONS .....	3
<b>2.0</b>	<b>EQUIPMENT &amp; TEST DETAILS .....</b>	<b>4</b>
2.1	GENERAL .....	4
2.2	EUT DESCRIPTION .....	5
2.3	EUT TEST EXERCISER .....	5
2.4	EUT SUPPORT EQUIPMENT .....	5
2.5	EUT TEST CONFIGURATION .....	6
2.6	ENVIRONMENTAL TEST CONDITIONS .....	7
2.7	EMC TEST EQUIPMENT .....	7
2.8	EMC TEST SOFTWARE .....	7
2.9	RADIATED EMISSIONS .....	8
<b>3.0</b>	<b>EMISSION RESULTS .....</b>	<b>9</b>
3.1	RADIATED EMISSIONS; BELOW 1.0 GHz .....	9
3.2	RADIATED EMISSIONS; BELOW 1.0 GHz (CONTINUED) .....	11
3.3	RADIATED EMISSIONS; BELOW 1.0 GHz (CONTINUED) .....	13
3.4	RADIATED EMISSIONS; BELOW 1.0 GHz (CONTINUED) .....	15
3.5	RADIATED EMISSIONS; 1 TO 10GHz .....	17
3.6	RADIATED EMISSIONS; 1 TO 10GHz (CONTINUED) .....	19
3.7	RADIATED EMISSIONS; 1 TO 10GHz (CONTINUED) .....	21
3.8	RADIATED EMISSIONS; 1 TO 10GHz (CONTINUED) .....	23
3.9	RADIATED EMISSIONS; 1 TO 10GHz (CONTINUED) .....	25
3.10	RADIATED EMISSIONS; 1 TO 18GHz .....	27
3.11	RADIATED EMISSIONS; 1 TO 18GHz (CONTINUED) .....	29
3.12	RADIATED EMISSIONS; 1 TO 18GHz (CONTINUED) .....	31
3.13	RADIATED EMISSIONS; 18 TO 25 GHz .....	33
3.14	RADIATED EMISSIONS; 18 TO 25 GHz (CONTINUED) .....	35
3.15	RADIATED EMISSIONS; 18 TO 25 GHz (CONTINUED) .....	37
3.16	RADIATED EMISSIONS; 18 TO 25 GHz (CONTINUED) .....	39
3.17	CONDUCTED EMISSIONS; BOTTOM CHANNEL .....	41
3.18	CONDUCTED EMISSIONS; MIDDLE CHANNEL .....	44
3.19	CONDUCTED EMISSIONS; TOP CHANNEL .....	47
<b>4.0</b>	<b>PHOTO LOG .....</b>	<b>50</b>
<b>5.0</b>	<b>MEASUREMENT UNCERTAINTIES .....</b>	<b>53</b>
<b>6.0</b>	<b>ANNEX – CONDUCTED EMISSIONS RESULTS .....</b>	<b>54</b>
6.1	DTS BANDWIDTH .....	54
6.2	MAXIMUM PEAK CONDUCTED OUTPUT POWER .....	56
6.3	MAXIMUM POWER SPECTRAL DENSITY .....	58
6.4	EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS .....	60
6.5	MAXIMUM EMISSIONS IN RESTRICTED BAND .....	62
6.6	CONDUCTED ANTENNA PORT .....	62
6.7	OCCUPIED BANDWIDTH .....	66
6.8	TEST EQUIPMENT .....	67

## 1.0 DECLARATION

### 1.1 FCC Class A Test Report

The Equipment Under Test (EUT), as described and reported within this document, complies with part 15.205, 15.209 and 15.247 of CFR 47 FCC rules in accordance with ANSI C63.4:2014 and ANSI C63.10:2013 measurement procedure referencing the following EMC tests:-

- RADIATED EMISSIONS - Airborne, from 30.0 MHz to 25.0 GHz
- CONDUCTED EMISSIONS - Power Line, from 0.15 MHz to 30.0 MHz

Note: The highest associated operating frequency on the system, as declared by the manufacturer is a clock rate of 2.4835 GHz.

This report relates to the sample tested and may not represent the entire population. It is valid only for the product identified, either in part or in full, to the relevant electromagnetic requirements necessary for compliance.

Eurofins Hursley is recognized by the Federal Communications Commissions (FCC) as an EMI laboratory, outside of the USA, for the measurement of radiated emissions at three.

### 1.2 Product Modifications

None to sample submitted.

## 2.0 EQUIPMENT & TEST DETAILS

### 2.1 General

<b>Product (EUT):</b>	FlatMesh Gateway Model: FM3G-LTE Serial number: 00452B
<b>Product mains rating:</b>	115V / 60Hz
<b>Product build level:</b>	Production sample
<b>Product manufacturer:</b>	Senceive Ltd
<b>Customer:</b>	Senceive Ltd 7b/7c Imperial Studios Imperial Road Fulham London SW6 2AG United kingdom
<b>Test commissioned by:</b>	Mr Charlie Blackham (Sulis Consultants)
<b>EMC Test lab reference:</b>	Eurofins Hursley Files: 2431 Sulis Consultants Test Plan: 2431 RF Test
<b>Date EUT received:</b>	7 <sup>th</sup> October 2020
<b>Test date(s):</b>	7 <sup>th</sup> to 16 <sup>th</sup> October 2020
<b>EMC measurement site:</b>	Eurofins Hursley Trafalgar House, Trafalgar Close, Chandlers Ford, Hampshire
<b>IC Canada ID:</b>	UK0005

## 2.2 EUT Description

The device operates inside the 2400 – 2483.5 MHz band with a single bandwidth and single modulation. The following test frequencies were used to cover the full band of operation of the device:

Test Channel	Centre Frequency (MHz)
Bottom channel	2405.0
Middle channel	2440.0
Top channel	2475.0


## 2.3 EUT Test Exerciser

Inbuilt test mode 100% duty cycle transmit

## 2.4 EUT Support Equipment

Description	Model	Serial Number
DC power supply	XP power p/n: AEL20US24C2	095111651448
Laptop PC	HP m/n: Folio 13	Sulis #1

## 2.5 EUT Test Configuration

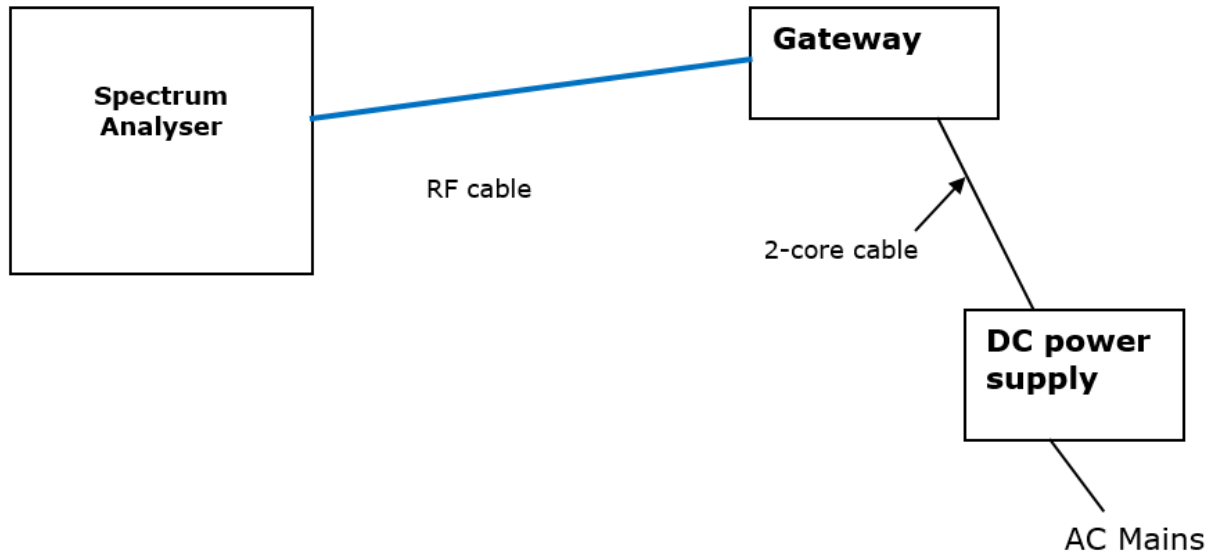

## 2.6 Environmental Test Conditions

Temperature	22° Celsius
Relative Humidity	58%
Atmospheric Pressure	1011.7 millibars

## 2.7 EMC Test Equipment

#ID	CP	Manufacturer	Type	Serial Nø	Description	Calibration due date
021	1	Rohde & Schwarz	ESIB	100192	Test receiver (40GHz)	12/08/2021
250	1	HP	8449B	3008A01077	Pre-amplifier (1.0-26.5GHz)	26/02/2021
446	1	0	Cable	0	BNC Cable	Internal
456	1	Rohde & Schwarz	ESCI7	1144573407	EMI Test Receiver	26/08/2021
516	1	Suhner	Cable	0	N type to sma cable for #250	23/09/2021
644	1	Intelliconnect	yellow H duty	15072	10m - 18GHz sma to N type H duty	30/10/2020
651	1	Rohde & Schwarz	ESIB 40 no.2	100262	40GHz receiver	27/11/2020
750	1	Global	CISPR16 chamber	1	11 x 7 x 6.2m	10/11/2020
761	3	Schwarzbeck	VULB9162	128	Trilog Broadband Antenna	02/03/2023
761a	3	Schwarzbeck	DGA 9552N	0	6dB attenuator for #761	02/03/2023
769	3	Schwarzbeck	BBHA 9120 C	631	2-18GHz Horn antenna (RE)	06/12/2020
776	2	IntelliConnect	C-NPS-2301-4M-NPS	I11816	4M N-TYPE 18GHz CABLE	25/04/2021
779	3	Steatite	QWH-SL-18-40-K-SG	17504	18-40GHz wideband horn antenna	11/05/2021

CP = Interval period [year] prescribed for external calibrations

Note: 'Calibration due date' means that the instrument is certified with a UKAS or traceable calibration certificate.  
'Internal' means internally calibrated using Eurofins Hursley procedures

## 2.8 EMC Test Software

The following table shows the current EMC test equipment software used by Eurofins Hursley:

ID	Manufacturer	Description
856	R&S	EMC32 Version 10.50.10
857	Gauss	TDMI 30 Version 5.00
858	Ametek	Compliance 5 Immunity Version 5.26.48
859	EMC Partner	HARCS Version 4.22
860	Frankonia	Hurbert IEC1000-4-6 Version 1.3.0
861	Schafner	Win 2110 Version 1.27.0.3
862	EMC Partner	TEMA3000 Version 4.4.2
863	EFH	ProfilaMil Version 2.8.1
864	AFJ	CL55C Version 1.00

## 2.9 Radiated Emissions

All measurements were made with the antenna port terminated as per ANSI C63.10 clause 11.12.2.7  
All tests were performed with the EUT positioned vertically as per user manual installation instructions.

### Initial Scan

Radiated profile scans were taken on eight azimuths between 30.0 MHz and 25.0 GHz in both the vertical and horizontal polarities of the antennae in a semi-anechoic chamber at 110V/60Hz. The resulting data obtained from these scans was used to determine subsequent measurement for final measurement evaluation.

### Final Measurements

The EUT was then measured at three metres in the chamber using the pre-scan results as a guide. Emissions from the EUT were maximised by revolving the system on the turntable and moving the antennae in height and azimuth. Cable and system component positions had been investigated for maximum emissions, and the system under test represented the worst-case configuration. The highest values obtained are presented in this report.



### 3.0 EMISSION RESULTS

#### 3.1 Radiated Emissions; below 1.0 GHz

Radiated emissions pre-scan profile measurements were taken at a distance of three metres on eight azimuths of the EUT in both horizontal and vertical antenna polarities in a semi-anechoic chamber for FCC measurements.

Using the pre-scan results as a guide, each emission from the EUT was maximised. Measurements were carried out a distance of three metres in a CISPR 16-1-4 compliant semi-anechoic chamber. Cable positions were then finally adjusted to produce the maximum emission levels. The EUT was tested in 3 axis and the worst-case results are shown below.

##### 3.1.1 Data; Bottom Channel

Emission frequency	Measured quasi-peak value	Class B specified quasi-peak limit	Pass Margin	Antenna polarity	Antenna height	Turntable azimuth	
MHz	dB $\mu$ V/m	dB $\mu$ V/m	dB	H/V	cm	deg	Status
38.295563	25.94	40.00	14.06	V	333.0	63.0	Pass
108.940921	26.38	43.50	17.12	V	116.0	10.0	Pass
127.095074	23.22	43.50	20.28	V	170.0	149.0	Pass

V = Vertical / H = Horizontal


The measurements reported are the highest emissions relative to the FCC Class B limits and take into account the antenna and cable loss factors. Measurements made according to the FCC test standard and Eurofins Hursley test procedure RAD-01.

TEST ENGINEER: Malcolm Musgrave

### 3.1.2 Profile; Bottom Channel

Maximum peak hold trace with quasi-peak values (◆)

Peak measurements are shown in red (\*)

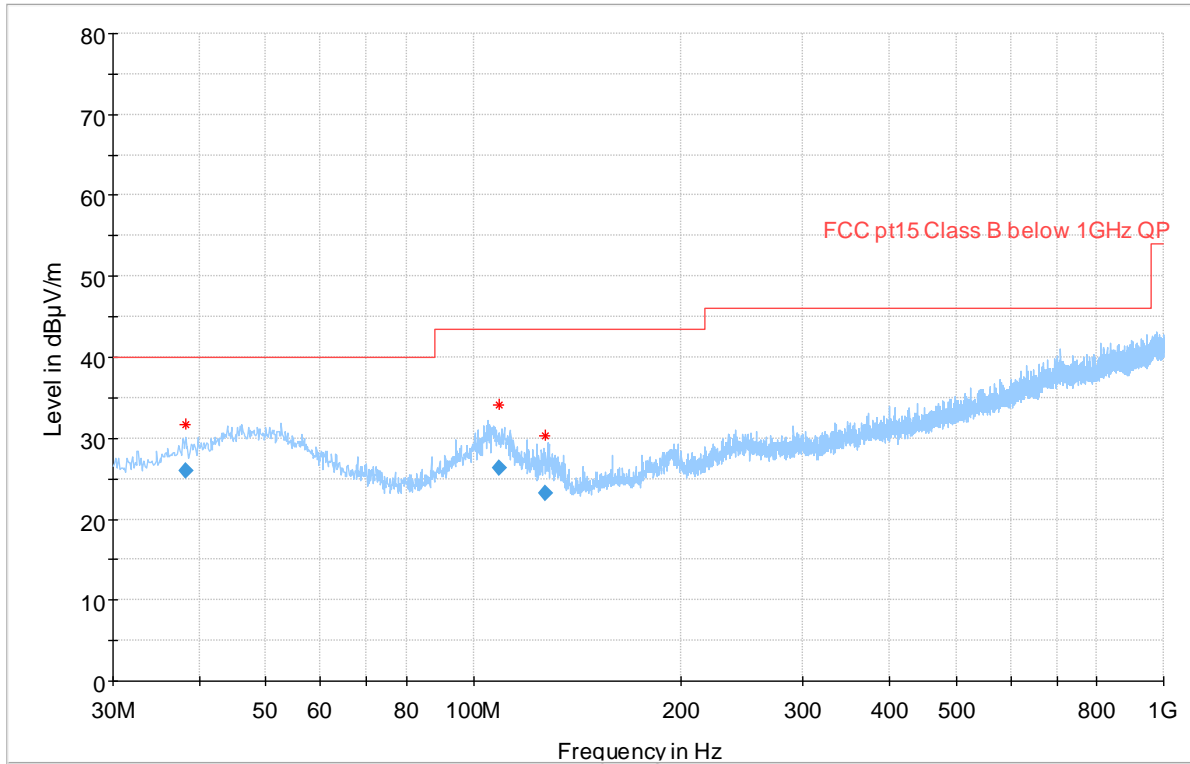

### 3.2 Radiated Emissions; below 1.0 GHz (continued)

#### 3.2.1 Data; Middle Channel

Emission frequency	Measured quasi-peak value	Class B specified quasi-peak limit	Pass Margin	Antenna polarity	Antenna height	Turntable azimuth	
MHz	dB $\mu$ V/m	dB $\mu$ V/m	dB	H/V	cm	deg	Status
106.783489	26.49	43.50	17.01	V	121.0	123.0	Pass
125.447734	23.21	43.50	20.29	V	143.0	297.0	Pass
242.837625	26.88	46.00	19.12	H	273.0	250.0	Pass

V = Vertical / H = Horizontal


The measurements reported are the highest emissions relative to the FCC Class A limits and take into account the antenna and cable loss factors. Measurements made according to the FCC test standard and Eurofins Hursley test procedure RAD-01.

TEST ENGINEER: Malcolm Musgrave

### 3.2.2 Profile; Middle Channel

Maximum peak hold trace with quasi-peak values (◆)

Peak measurements are shown in red (\*)

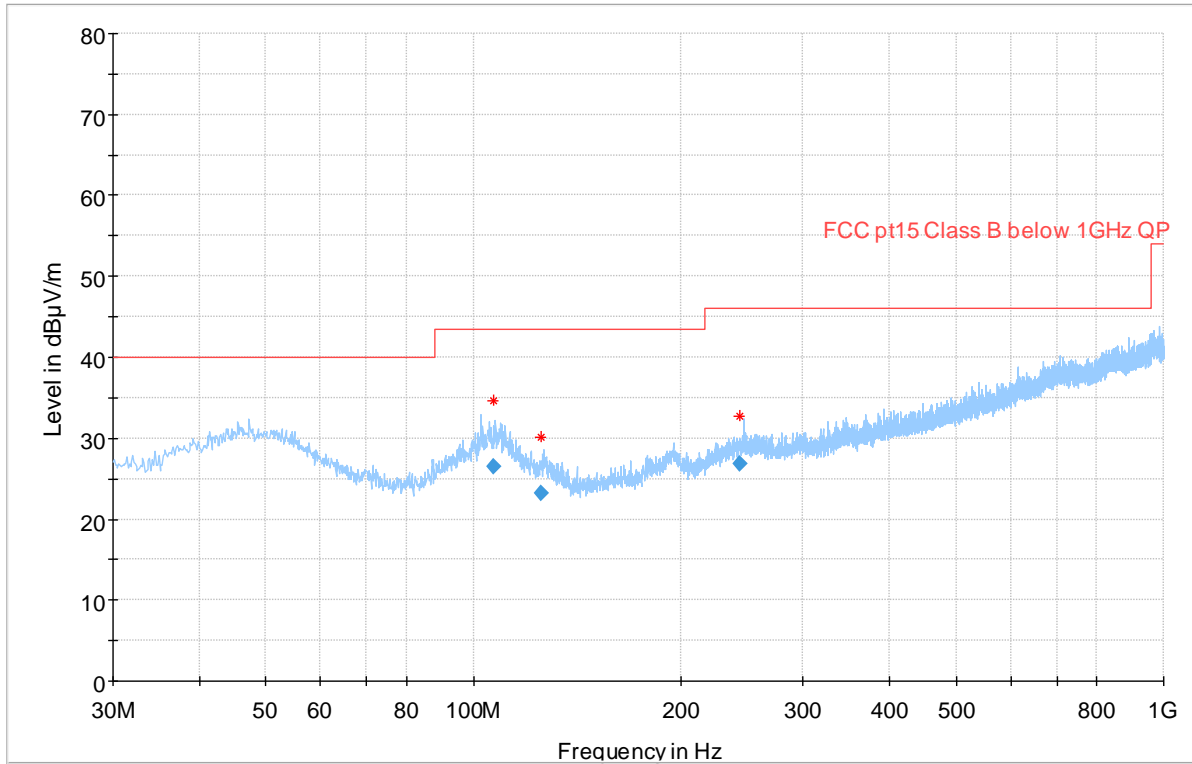

### 3.3 Radiated Emissions; below 1.0 GHz (continued)

#### 3.3.1 Data; Top Channel

Emission frequency	Measured quasi-peak value	Class B specified quasi-peak limit	Pass Margin	Antenna polarity	Antenna height	Turntable azimuth	
MHz	dB $\mu$ V/m	dB $\mu$ V/m	dB	H/V	cm	deg	Status
106.927471	26.29	43.50	17.21	V	133.0	317.0	Pass
995.900124	40.34	54.00	13.66	V	340.0	191.0	Pass

V = Vertical / H = Horizontal


The measurements reported are the highest emissions relative to the FCC Class B limits and take into account the antenna and cable loss factors. Measurements made according to the FCC test standard and Eurofins Hursley test procedure RAD-01.

TEST ENGINEER: Malcolm Musgrave

### 3.3.2 Profile; Top Channel

Maximum peak hold trace with quasi-peak values (◆)

Peak measurements are shown in red (\*)

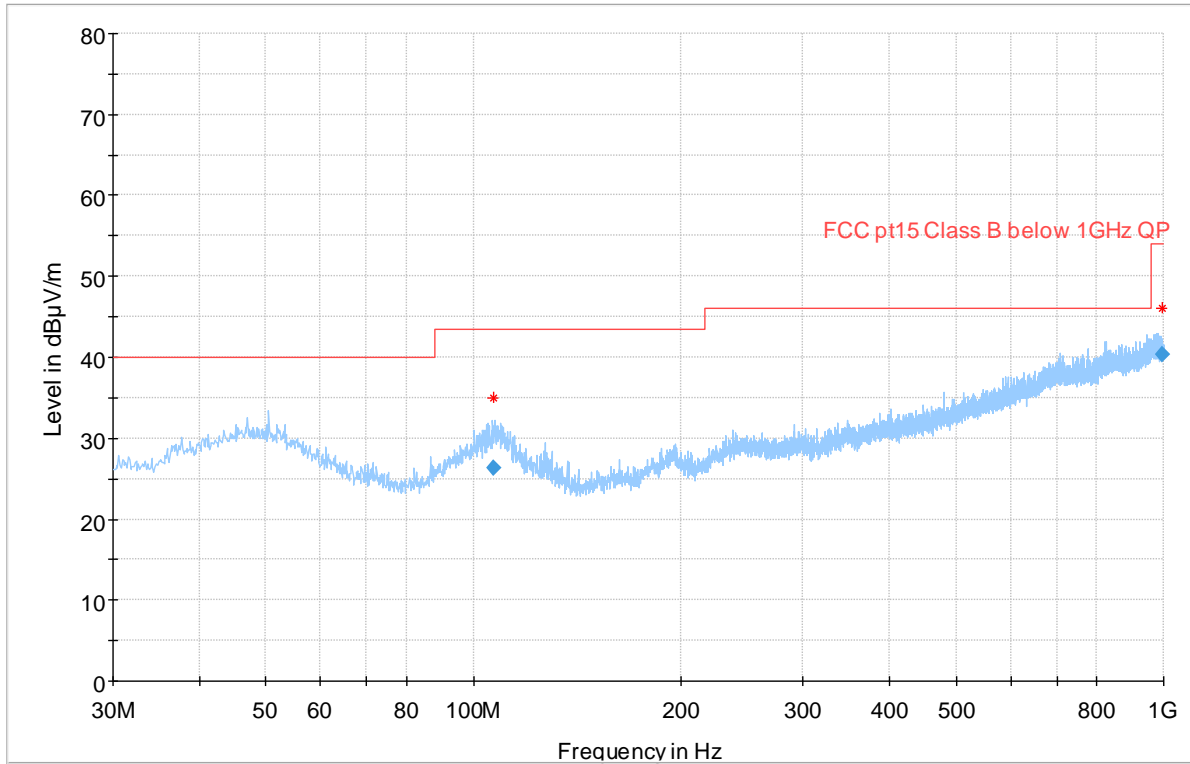

### 3.4 Radiated Emissions; below 1.0 GHz (continued)

#### 3.4.1 Data; Top Channel with Laptop

Emission frequency	Measured quasi-peak value	Class B specified quasi-peak limit	Pass Margin	Antenna polarity	Antenna height	Turntable azimuth	
MHz	dB $\mu$ V/m	dB $\mu$ V/m	dB	H/V	cm	deg	Status
255.168179	27.58	46.00	18.42	H	149.0	355.0	Pass
38.983988	26.56	---	---	V	132.0	103.0	Pass

V = Vertical / H = Horizontal


The measurements reported are the highest emissions relative to the FCC Class B limits and take into account the antenna and cable loss factors. Measurements made according to the FCC test standard and Eurofins Hursley test procedure RAD-01.

TEST ENGINEER: Malcolm Musgrave

### 3.4.2 Profile; Top Channel with Laptop

Maximum peak hold trace with quasi-peak values (◆)

Peak measurements are shown in red (\*)

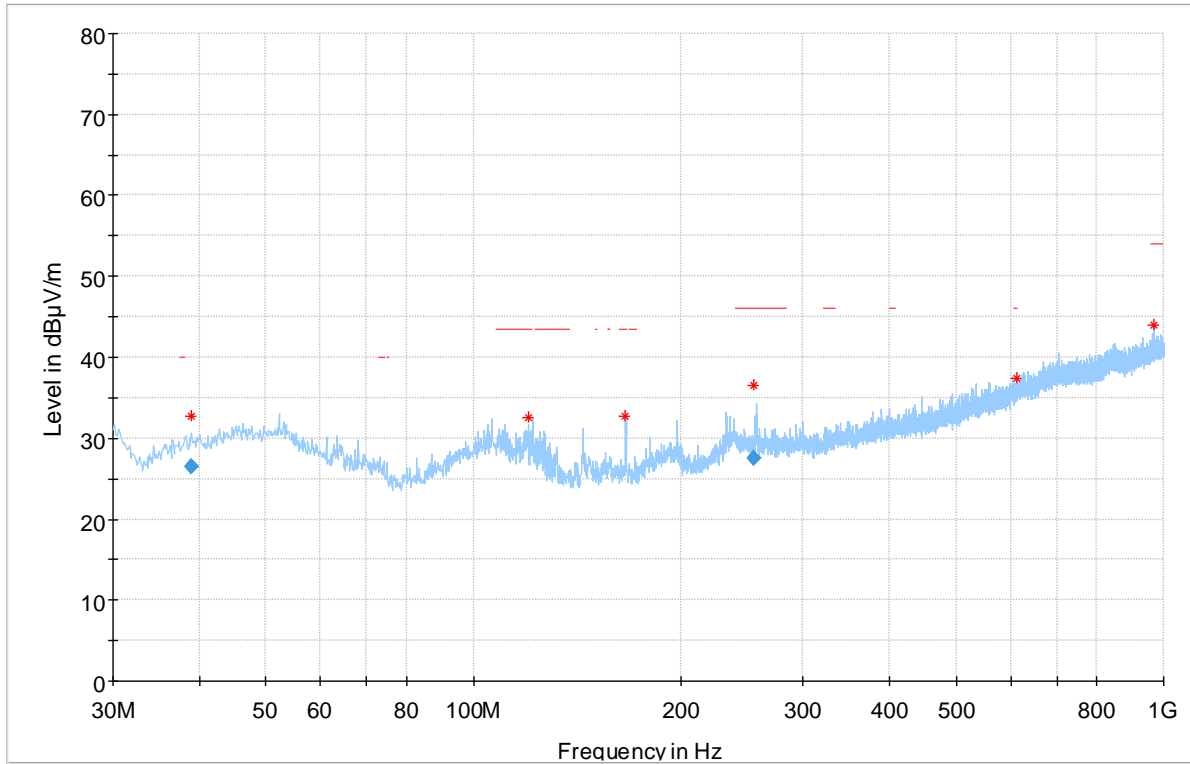



### 3.5 Radiated Emissions; 1 to 10GHz

Radiated emissions pre-scan profile measurements were taken at a distance of three metres on eight azimuths of the EUT in both horizontal and vertical antenna polarities in a semi-anechoic chamber for FCC measurements.

Using the pre-scan results as a guide, each emission from the EUT was maximised. Measurements were carried out a distance of three metres in a CISPR 16-1-4 compliant semi-anechoic chamber. Cable positions were then finally adjusted to produce the maximum emission levels. The EUT was tested in 3 axis and the worst-case results are recorded below.

#### 3.5.1 Data; Bottom Channel without Laptop

Frequency	Peak	CISPR Average	Limit	Margi n	Height	Pol	Azimuth	Corr.	Status
MHz	dB $\mu$ V/m	dB $\mu$ V/m	dB $\mu$ V/	dB	cm	H/V	Deg	dB/m	
2389.87875	---	26.57	54.00	27.43	218.0	H	208.0	-6.6	Pass
2390.49198	40.46	---	---	---	375.0	H	19.0	-6.6	Pass

V = Vertical / H = Horizontal

The measurements reported are the highest emissions relative to the FCC limits and take into account the antenna and cable loss factors. Measurements made according to the FCC test standard and Eurofins Hursley test procedure RHF-01.


TEST ENGINEER: Malcolm Musgrave

### 3.5.2 Profile; Bottom Channel without Laptop

Maximum peak hold trace with quasi-peak values (◆)

Peak measurements are shown in red (\*)

Average measurements are shown in green (◆)

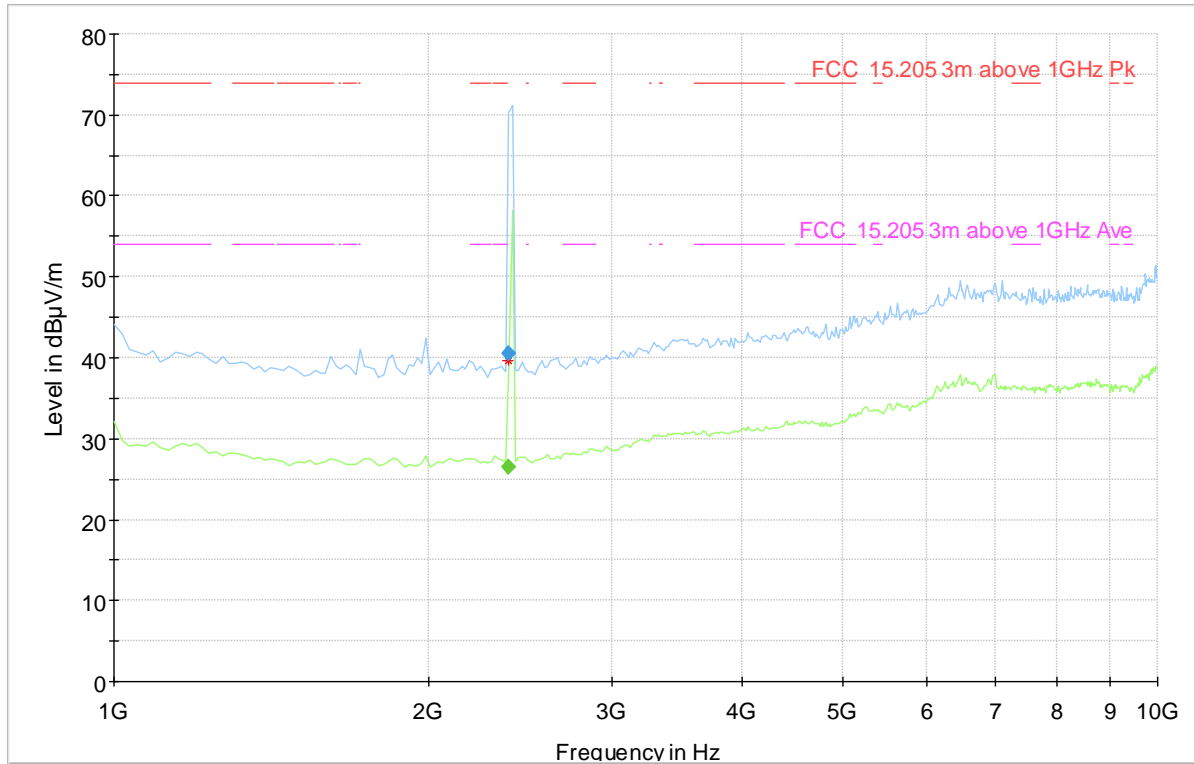

### 3.6 Radiated Emissions; 1 to 10GHz (Continued)

#### 3.6.1 Data; Middle Channel without Laptop

Frequency	Peak	CISPR Average	Limit	Margin	Height	Pol	Azimuth	Corr.	Status
MHz	dBµV/m	dBµV/m	dBµV/	dB	cm	H/V	Deg	dB/m	
No significant peaks found.									Pass

V = Vertical / H = Horizontal

The measurements reported are the highest emissions relative to the FCC limits and take into account the antenna and cable loss factors. Measurements made according to the FCC test standard and Eurofins Hursley test procedure RHF-01.


TEST ENGINEER: Malcolm Musgrave

### 3.6.2 Profile; Middle Channel without Laptop

Maximum peak hold trace with quasi-peak values (◆)

Peak measurements are shown in red (✱)

Average measurements are shown in green (◆)

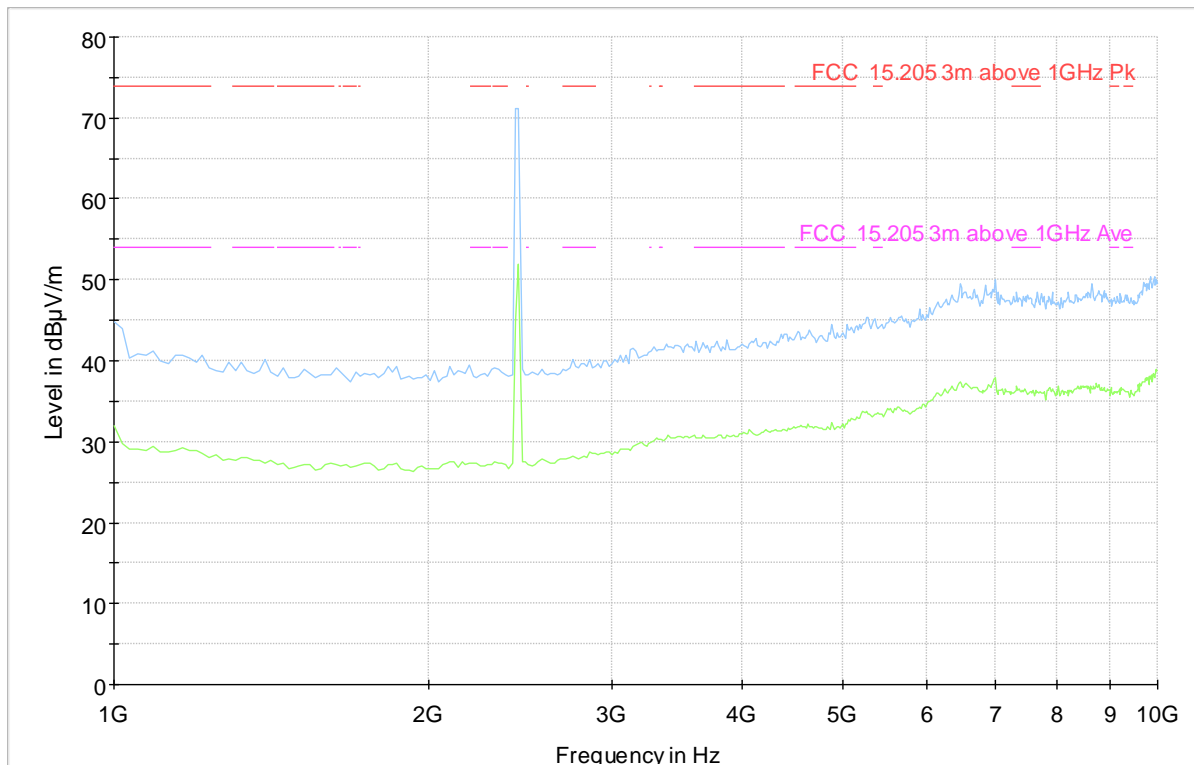

### 3.7 Radiated Emissions; 1 to 10GHz (Continued)

#### 3.7.1 Data; Top Channel without Laptop

Frequency	Peak	CISPR Average	Limit	Margin	Height	Pol	Azimuth	Corr.	Status
MHz	dB $\mu$ V/m	dB $\mu$ V/m	dB $\mu$ V/	dB	cm	H/V	Deg	dB/m	
2483.03406	---	39.05	---	---	185.0	H	229.0	-6.4	Pass
2483.07014	48.13	---	---	---	145.0	H	149.0	-6.4	Pass

V = Vertical / H = Horizontal

The measurements reported are the highest emissions relative to the FCC limits and take into account the antenna and cable loss factors. Measurements made according to the FCC test standard and Eurofins Hursley test procedure RHF-01.


TEST ENGINEER: Malcolm Musgrave

### 3.7.2 Profile; Top Channel without Laptop

Maximum peak hold trace with quasi-peak values (◆)

Peak measurements are shown in red (✱)

Average measurements are shown in green (◆)

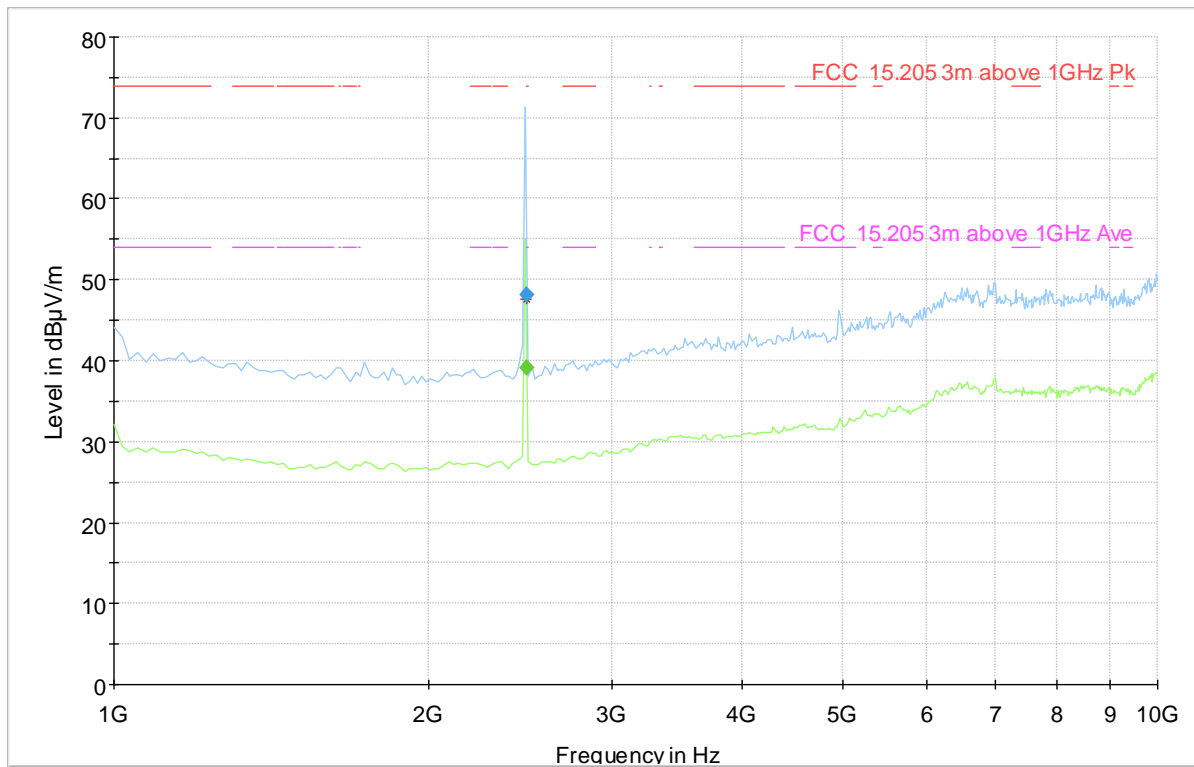

### 3.8 Radiated Emissions; 1 to 10GHz (Continued)

#### 3.8.1 Data; Bottom Channel with Laptop

Frequency	Peak	CISPR Average	Limit	Margin	Height	Pol	Azimuth	Corr.	Status
MHz	dB $\mu$ V/m	dB $\mu$ V/m	dB $\mu$ V/	dB	cm	H/V	Deg	dB/m	
2389.82064	42.57	---	74.00	31.43	248.0	H	14.0	-6.6	Pass
2389.87274	---	26.63	54.00	27.37	181.0	H	202.0	-6.6	Pass
7312.13927	---	35.88	54.00	18.12	283.0	H	346.0	3.5	Pass

V = Vertical / H = Horizontal

The measurements reported are the highest emissions relative to the FCC limits and take into account the antenna and cable loss factors. Measurements made according to the FCC test standard and Eurofins Hursley test procedure RHF-01.


TEST ENGINEER: Malcolm Musgrave

### 3.8.2 Profile; Bottom Channel with Laptop

Maximum peak hold trace with quasi-peak values (◆)

Peak measurements are shown in red (\*)

Average measurements are shown in green (◆)

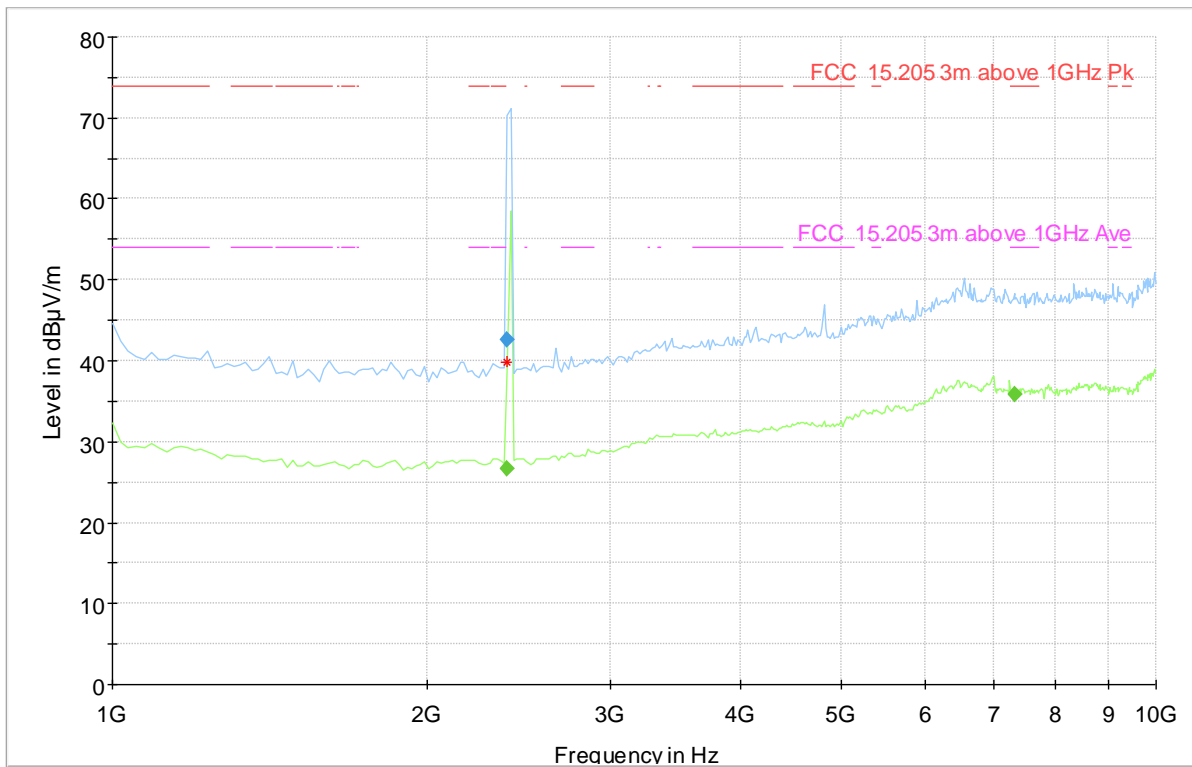



### 3.9 Radiated Emissions; 1 to 10GHz (Continued)

#### 3.9.1 Data; Top Channel with Laptop

Frequency	Peak	CISPR Average	Limit	Margin	Height	Pol	Azimuth	Corr.	Status
MHz	dB $\mu$ V/m	dB $\mu$ V/m	dB $\mu$ V/	dB	cm	H/V	Deg	dB/m	
2483.01002	---	39.43	---	---	185.0	H	224.0	-6.4	Pass
2483.01002	48.90	---	---	---	178.0	H	233.0	-6.4	Pass

V = Vertical / H = Horizontal

The measurements reported are the highest emissions relative to the FCC limits and take into account the antenna and cable loss factors. Measurements made according to the FCC test standard and Eurofins Hursley test procedure RHF-01.


TEST ENGINEER: Malcolm Musgrave

### 3.9.2 Profile; Top Channel with Laptop

Maximum peak hold trace with quasi-peak values (◆)

Peak measurements are shown in red (✱)

Average measurements are shown in green (◆)

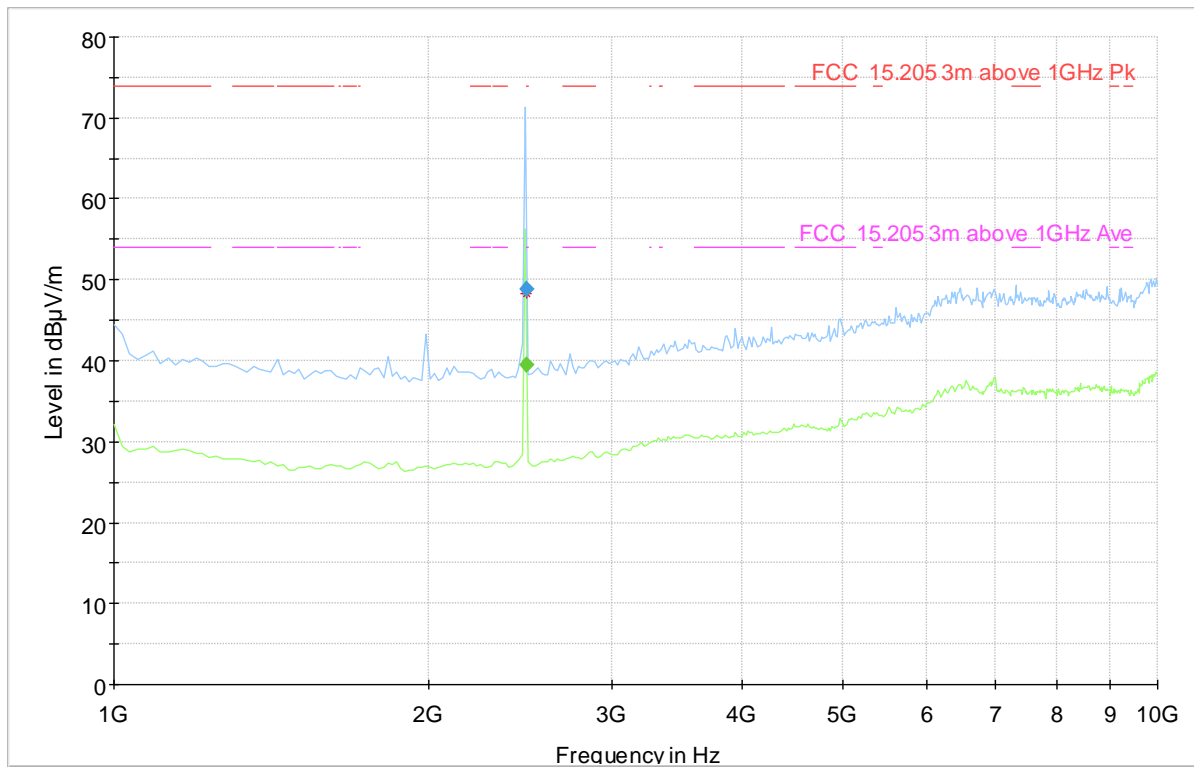

### 3.10 Radiated Emissions; 1 to 18GHz

Radiated emissions pre-scan profile measurements were taken at a distance of three metres on eight azimuths of the EUT in both horizontal and vertical antenna polarities in a semi anechoic chamber for FCC measurements.

Using the pre-scan results as a guide, each emission from the EUT was maximised. Measurements were carried out a distance of three metres in a CISPR 16-1-4 compliant semi anechoic chamber. Cable positions were then finally adjusted to produce the maximum emission levels. The worst-case results are recorded below.

#### 3.10.1 Data; Bottom Channel without Laptop

Frequency	Peak	CISPR Average	Limit	Margin	Height	Pol	Azimuth	Corr.	Status
MHz	dB $\mu$ V/m	dB $\mu$ V/m	dB $\mu$ V/	dB	cm	H/V	Deg	dB/m	
14488.9779	---	46.94	54.00	7.06	181.0	V	44.0	15.3	Pass
14488.9779	60.62	---	74.00	13.38	286.0	V	116.0	15.3	Pass
16172.3446	---	48.14	54.00	5.86	329.0	H	66.0	15.1	Pass
16172.3446	62.45	---	74.00	11.55	242.0	H	7.0	15.1	Pass

V = Vertical / H = Horizontal

The measurements reported are the highest emissions relative to the FCC limits and take into account the antenna and cable loss factors. Measurements made according to the FCC test standard and Eurofins Hursley test procedure RHF-01.


TEST ENGINEER: Malcolm Musgrave

### 3.10.2 Profile; Bottom Channel without Laptop

Maximum peak hold trace with quasi-peak values (◆)

Peak measurements are shown in red (✱)

Average measurements are shown in green (◆)

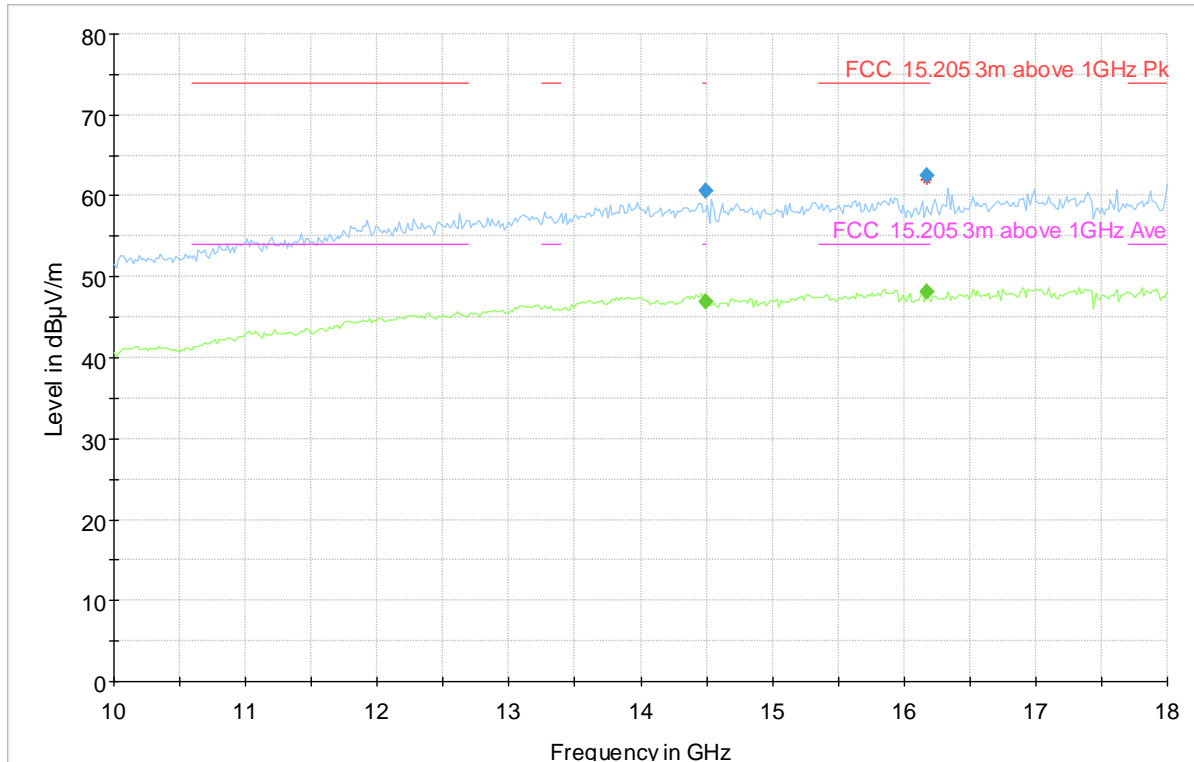

### 3.11 Radiated Emissions; 1 to 18GHz (continued)

#### 3.11.1 Data; Middle Channel without Laptop

Frequency	Peak	CISPR Average	Limit	Margin	Height	Pol	Azimuth	Corr.	Status
MHz	dB $\mu$ V/m	dB $\mu$ V/m	dB $\mu$ V/	dB	cm	H/V	Deg	dB/m	
14488.9779	---	46.94	54.00	7.06	368.0	H	330.0	15.3	Pass
14488.9779	60.75	---	74.00	13.25	194.0	V	257.0	15.3	Pass
17807.6152	---	49.23	54.00	4.77	149.0	H	22.0	17.1	Pass
17807.6152	63.16	---	74.00	10.84	282.0	V	304.0	17.1	Pass

V = Vertical / H = Horizontal

The measurements reported are the highest emissions relative to the FCC limits and take into account the antenna and cable loss factors. Measurements made according to the FCC test standard and Eurofins Hursley test procedure RHF-01.


TEST ENGINEER: Malcolm Musgrave

### 3.11.2 Profile; Middle Channel without Laptop

Maximum peak hold trace with quasi-peak values (◆)

Peak measurements are shown in red (✱)

Average measurements are shown in green (◆)

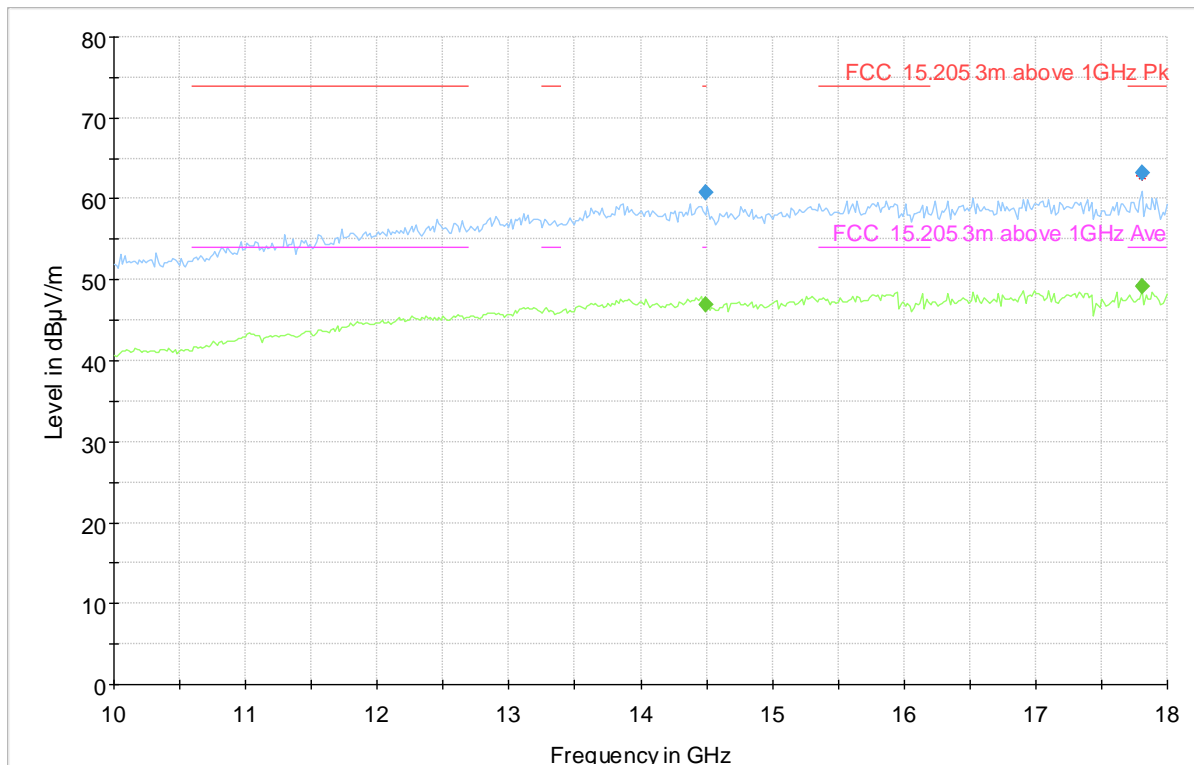

### 3.12 Radiated Emissions; 1 to 18GHz (continued)

#### 3.12.1 Data; Top Channel with Laptop

Frequency	Peak	CISPR Average	Limit	Margin	Height	Pol	Azimuth	Corr.	Status
MHz	dB $\mu$ V/m	dB $\mu$ V/m	dB $\mu$ V/	dB	cm	H/V	Deg	dB/m	
13270.5410	59.75	---	74.00	14.25	376.0	V	38.0	14.0	Pass
13286.5731	---	45.65	54.00	8.35	353.0	H	215.0	14.1	Pass
17807.6152	---	49.36	54.00	4.64	252.0	H	338.0	17.1	Pass
17807.6152	63.03	---	74.00	10.97	197.0	V	324.0	17.1	Pass

V = Vertical / H = Horizontal

The measurements reported are the highest emissions relative to the FCC limits and take into account the antenna and cable loss factors. Measurements made according to the FCC test standard and Eurofins Hursley test procedure RHF-01.


TEST ENGINEER: Malcolm Musgrave

### 3.12.2 Profile; Top Channel with Laptop

Maximum peak hold trace with quasi-peak values (◆)

Peak measurements are shown in red (✱)

Average measurements are shown in green (◆)

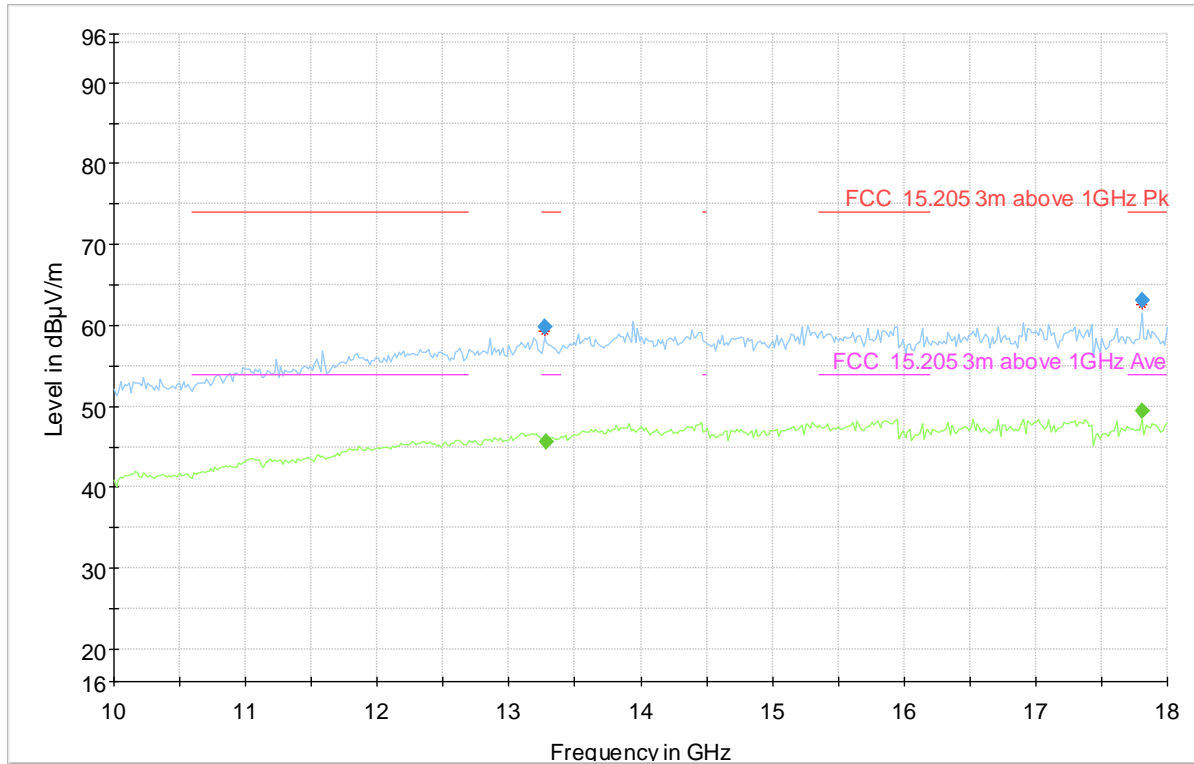



### 3.13 Radiated Emissions; 18 to 25 GHz

Radiated emissions pre-scan profile measurements were taken at a distance of three metres on eight azimuths of the EUT in both horizontal and vertical antenna polarities in a semi-anechoic chamber for FCC measurements.

Using the pre-scan results as a guide, each emission from the EUT was maximised. Measurements were carried out a distance of three metres in a CISPR 16-1-4 compliant semi-anechoic chamber. Cable positions were then finally adjusted to produce the maximum emission levels. The EUT was tested in 3 axis and the worst-case results are recorded below.

#### 3.13.1 Data; Bottom Channle no Laptop

Frequency	Peak	CISPR Average	Limit	Margin	Height	Pol	Azimuth	Corr.	Status
MHz	dBµV/	dBµV/m	dBµV/	dB	cm	H/V	Deg	dB/m	
No significant peaks found									Pass

V = Vertical / H = Horizontal


The measurements reported are the highest emissions relative to the FCC limits and take into account the antenna and cable loss factors. Measurements made according to the FCC test standard and Eurofins Hursley test procedure RHF-01.

TEST ENGINEER: Richard Pennell

### 3.13.2 Profile; Bottom Channle no Laptop

Max hold trace with peak values (▽)

Max hold trace with average values (▽)

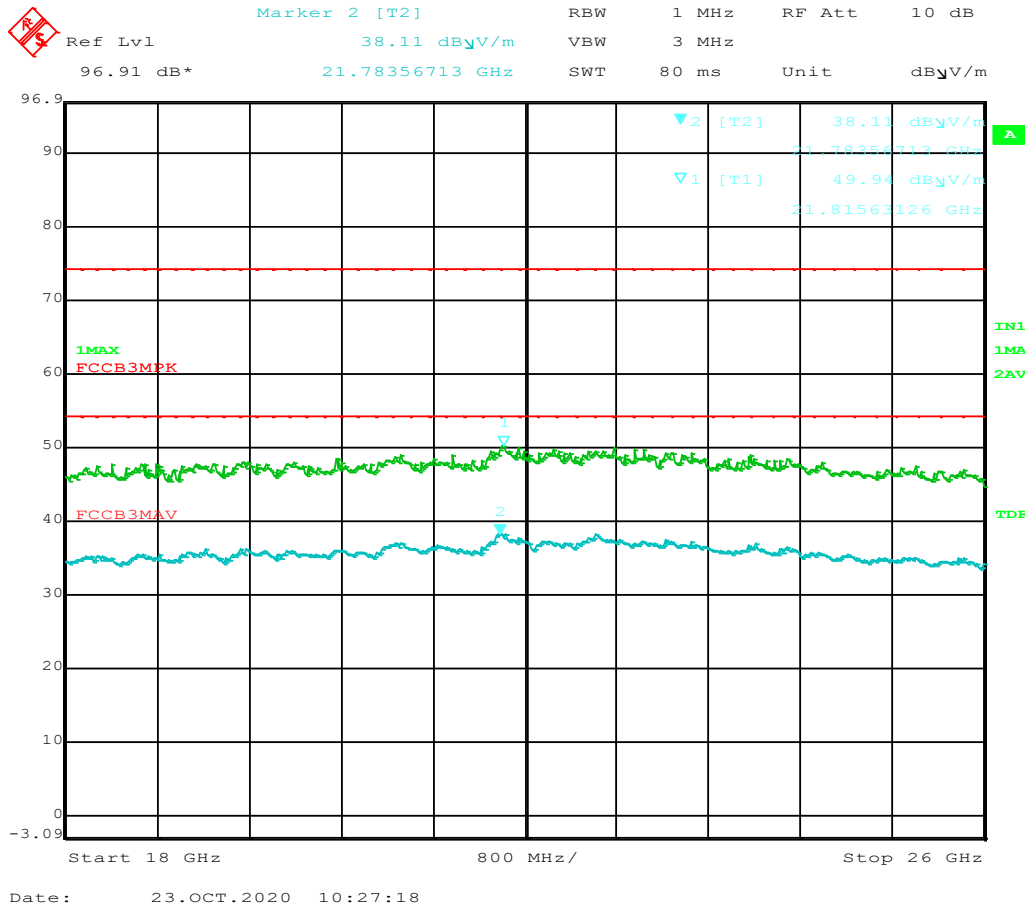

### 3.14 Radiated Emissions; 18 to 25 GHz (continued)

#### 3.14.1 Data; Middle Channel No Laptop

Frequency	Peak	CISPR Average	Limit	Margin	Height	Pol	Azimuth	Corr.	Status
MHz	dB $\mu$ V/	dB $\mu$ V/m	dB $\mu$ V/	dB	cm	H/V	Deg	dB/m	
No significant peaks found									Pass

V = Vertical / H = Horizontal


The measurements reported are the highest emissions relative to the FCC limits and take into account the antenna and cable loss factors. Measurements made according to the FCC test standard and Eurofins Hursley test procedure RHF-01.

TEST ENGINEER: Richard Pennell

### 3.14.2 Profile; Middle Channel No Laptop

Max hold trace with peak values (▽)

Max hold trace with average values (▽)

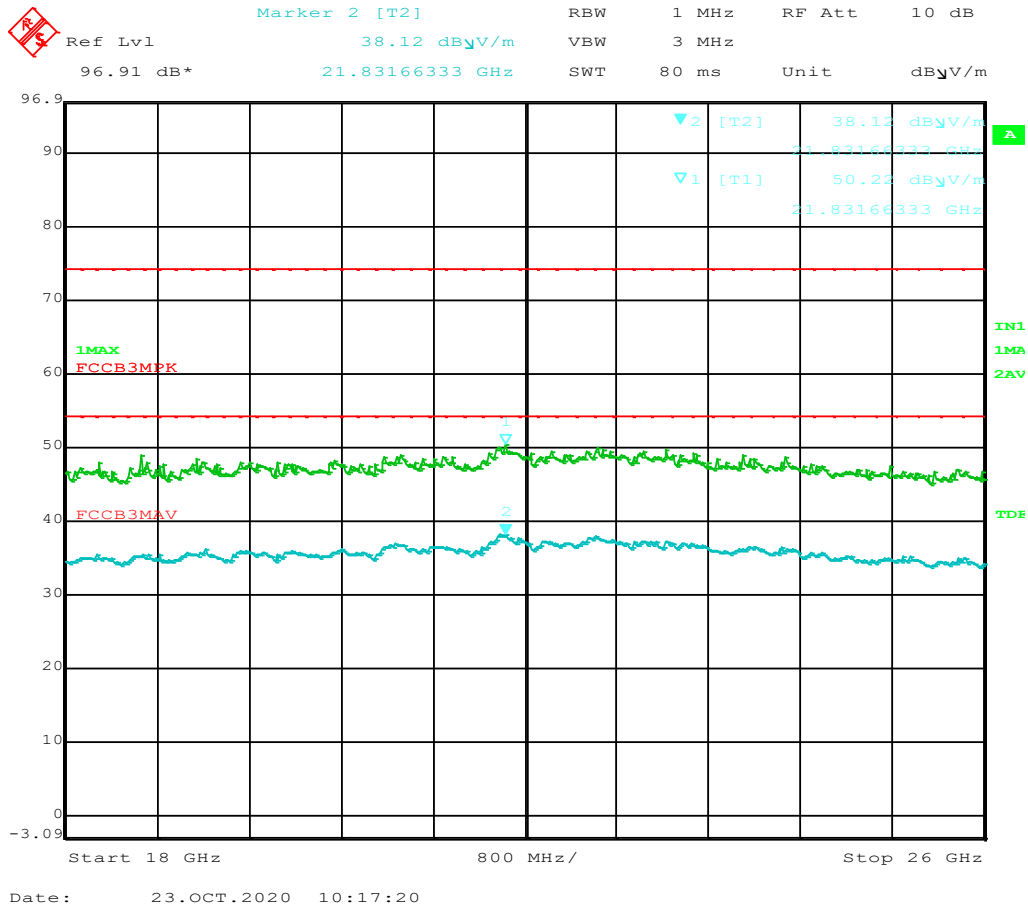

### 3.15 Radiated Emissions; 18 to 25 GHz (continued)

#### 3.15.1 Data; Middle Channel with Laptop

Frequency	Peak	CISPR Average	Limit	Margin	Height	Pol	Azimuth	Corr.	Status
MHz	dB $\mu$ V/	dB $\mu$ V/m	dB $\mu$ V/	dB	cm	H/V	Deg	dB/m	
No significant peaks found									Pass

V = Vertical / H = Horizontal


The measurements reported are the highest emissions relative to the FCC limits and take into account the antenna and cable loss factors. Measurements made according to the FCC test standard and Eurofins Hursley test procedure RHF-01.

TEST ENGINEER: Richard Pennell

### 3.15.2 Profile; Middle Channel with Laptop

Max hold trace with peak values (▽)

Max hold trace with average values (▽)

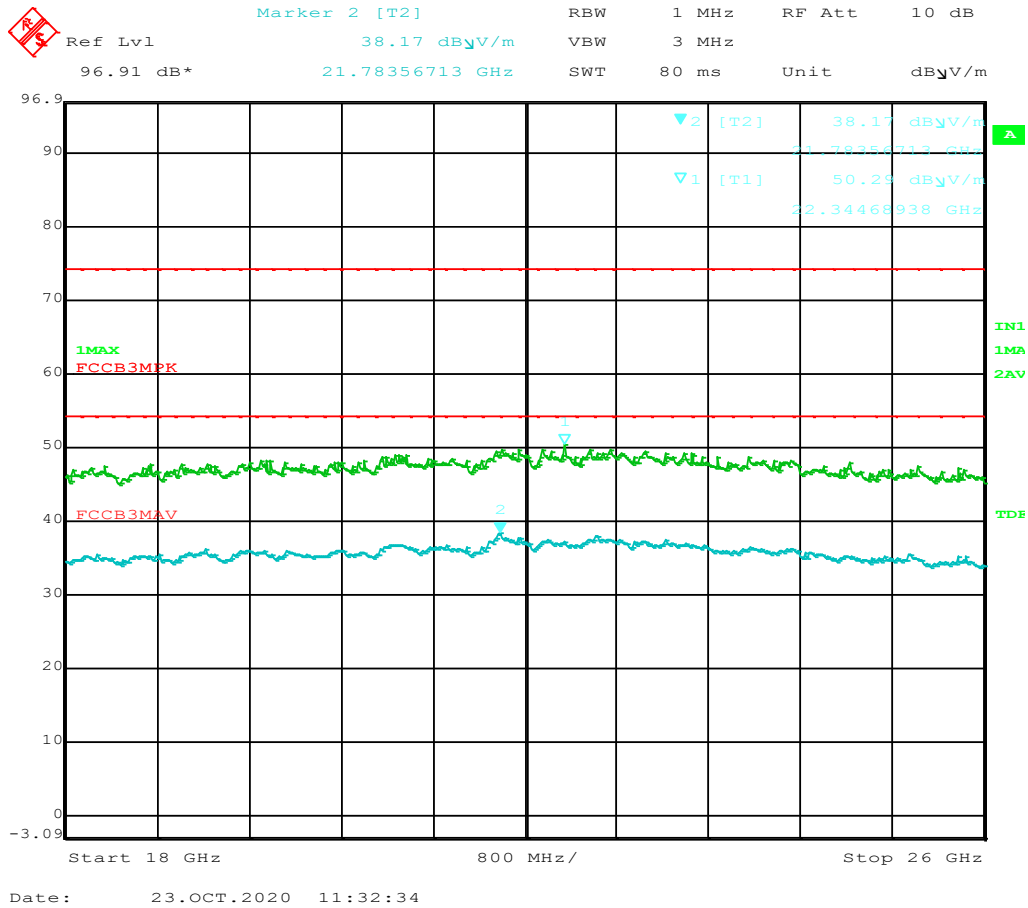

### 3.16 Radiated Emissions; 18 to 25 GHz (continued)

#### 3.16.1 Data; Top Channel no Laptop

Frequency	Peak	CISPR Average	Limit	Margin	Height	Pol	Azimuth	Corr.	Status
MHz	dB $\mu$ V/	dB $\mu$ V/m	dB $\mu$ V/	dB	cm	H/V	Deg	dB/m	
No significant peaks found									Pass

V = Vertical / H = Horizontal


The measurements reported are the highest emissions relative to the FCC limits and take into account the antenna and cable loss factors. Measurements made according to the FCC test standard and Eurofins Hursley test procedure RHF-01.

TEST ENGINEER: Richard Pennell

### 3.16.2 Profile; Data; Top Channel no Laptop

Max hold trace with peak values (▽)

Max hold trace with average values (▽)

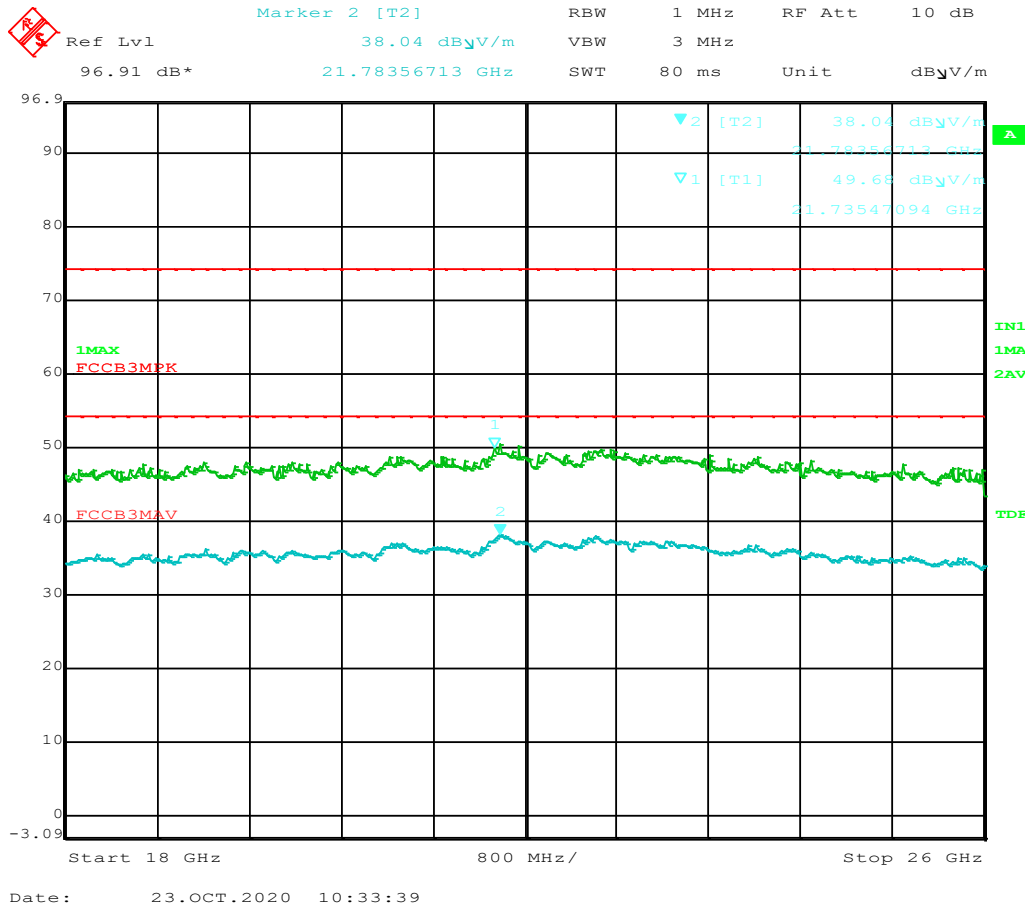



### 3.17 Conducted Emissions; Bottom Channel

A filtered supply was fed to the EUT via a 50Ω/50μH Artificial Mains Network (AMN). The AMN was bonded to a conductive ground plane. Line and neutral phases were measured separately.

An EMI receiver was set to scan between 0.15 MHz and 30.0 MHz with a 20s measurement time. A CISPR Average and Quasi-Peak trace was generated and compared to the CISPR 14 limits. Measurements made according to the CISPR 11 test standard and Eurofins Hursley test procedure CON-02.

The worst-case quasi-peak results the results are recorded below. EUT was tested at 110V / 60Hz.

#### 3.17.1 Data; Mains Neutral

Quasi-peak value (dBμV)				
Frequency	Measured	Limit	Margin	Status
183.582 kHz	43.33	64.32	20.99	Pass
10.064 MHz	27.90	60.00	32.10	Pass
12.500 MHz	28.80	60.00	31.20	Pass
17.736 MHz	35.47	60.00	24.53	Pass
22.275 MHz	39.29	60.00	20.71	Pass
29.924 MHz	40.79	60.00	19.21	Pass

Average value (dBμV)				
Frequency	Measured	Limit	Margin	Status
183.582 kHz	39.17	54.32	15.15	Pass
10.011 MHz	22.54	50.00	27.46	Pass
12.500 MHz	23.74	50.00	26.26	Pass
17.755 MHz	24.99	50.00	25.01	Pass
24.917 MHz	25.61	50.00	24.39	Pass
30.000 MHz	25.55	50.00	24.45	Pass


### 3.17.2 Data; Mains Line

Quasi-peak value (dB $\mu$ V)				
Frequency	Measured	Limit	Margin	Status
517.368 kHz	34.93	56.00	21.07	Pass
9.887 MHz	27.79	60.00	32.21	Pass
12.500 MHz	28.80	60.00	31.20	Pass
20.010 MHz	36.70	60.00	23.30	Pass
22.027 MHz	42.93	60.00	17.07	Pass
29.814 MHz	42.28	60.00	17.72	Pass


Average value (dB $\mu$ V)				
Frequency	Measured	Limit	Margin	Status
183.582 kHz	38.43	54.32	15.89	Pass
10.059 MHz	22.53	50.00	27.47	Pass
12.500 MHz	23.70	50.00	26.30	Pass
17.822 MHz	24.91	50.00	25.09	Pass
24.917 MHz	25.28	50.00	24.72	Pass
30.000 MHz	25.57	50.00	24.43	Pass

### 3.17.3 Profiles; Bottom Channel

Shown here is the mains-neutral plot.

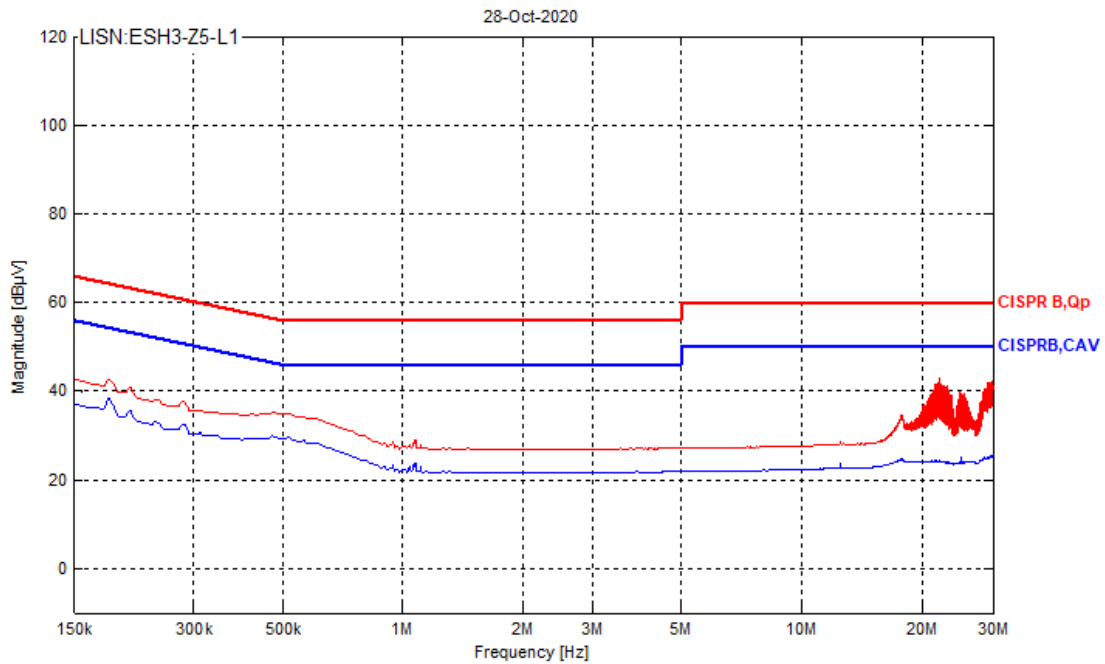

Shown here is the mains-line plot.

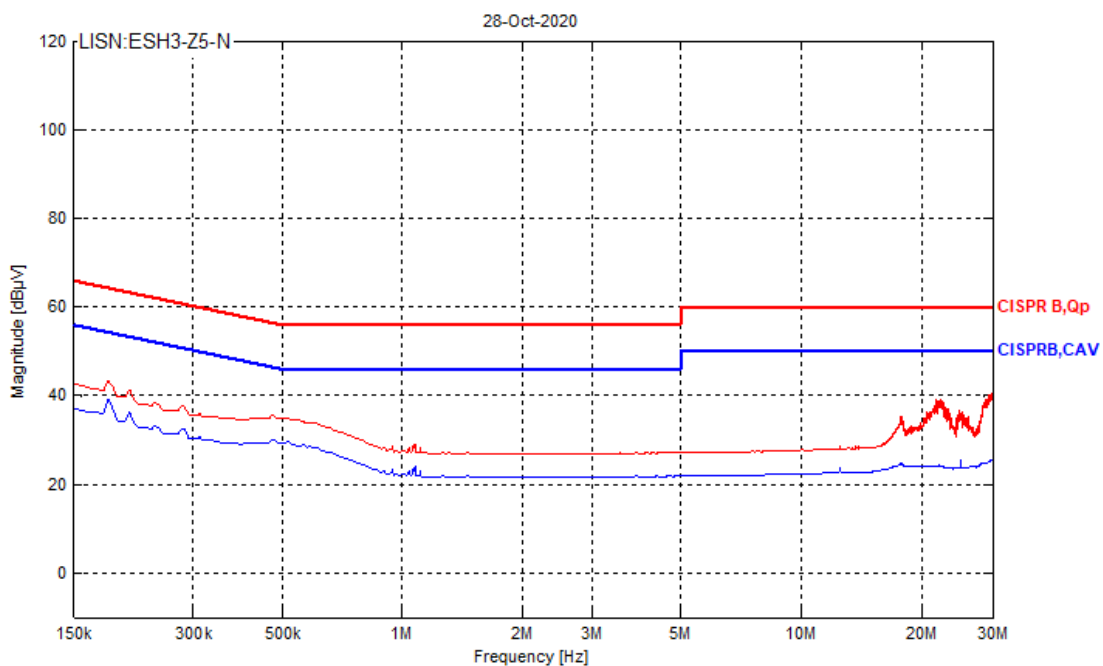

### 3.18 Conducted Emissions; Middle Channel

#### 3.18.1 Data; Mains Neutral

Quasi-peak value (dB $\mu$ V)				
Frequency	Measured	Limit	Margin	Status
474.453 kHz	35.33	56.44	21.11	Pass
8.838 MHz	29.53	60.00	30.47	Pass
13.292 MHz	37.76	60.00	22.24	Pass
17.593 MHz	30.28	60.00	29.72	Pass
24.002 MHz	32.87	60.00	27.13	Pass
29.967 MHz	36.76	60.00	23.24	Pass

Average value (dB $\mu$ V)				
Frequency	Measured	Limit	Margin	Status
183.582 kHz	39.11	54.32	15.22	Pass
8.280 MHz	23.11	50.00	26.89	Pass
12.500 MHz	25.48	50.00	24.52	Pass
16.334 MHz	23.57	50.00	26.43	Pass
24.002 MHz	27.77	50.00	22.23	Pass
29.986 MHz	25.28	50.00	24.72	Pass


**3.18.2 Data; Mains Line**

<b>Quasi-peak value (dB<math>\mu</math>V)</b>				
Frequency	Measured	Limit	Margin	Status
517.368 kHz	34.86	56.00	21.14	Pass
8.352 MHz	31.23	60.00	28.77	Pass
12.958 MHz	42.08	60.00	17.92	Pass
19.176 MHz	31.17	60.00	28.83	Pass
24.002 MHz	32.84	60.00	27.16	Pass
29.981 MHz	35.22	60.00	24.78	Pass


<b>Average value (dB<math>\mu</math>V)</b>				
Frequency	Measured	Limit	Margin	Status
183.582 kHz	38.46	54.32	15.87	Pass
8.342 MHz	23.28	50.00	26.72	Pass
12.500 MHz	25.68	50.00	24.32	Pass
16.625 MHz	23.52	50.00	26.48	Pass
24.002 MHz	27.61	50.00	22.39	Pass
29.981 MHz	25.12	50.00	24.88	Pass

### 3.18.3 Profiles; Middle Channel

Shown here is the mains-neutral plot.

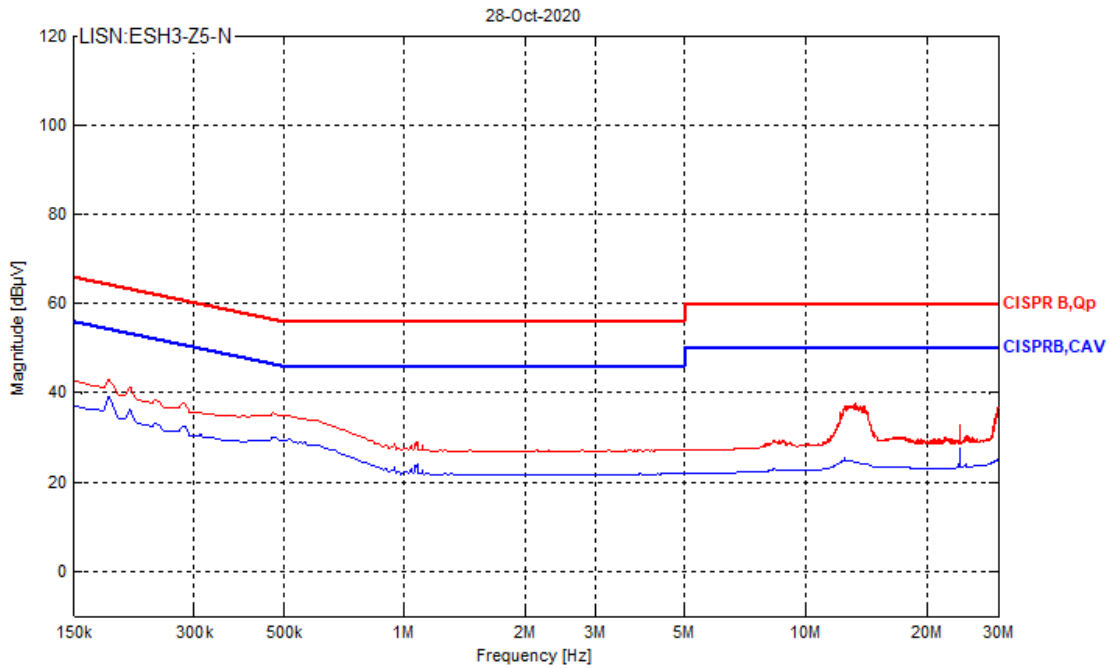

Shown here is the mains-line plot.

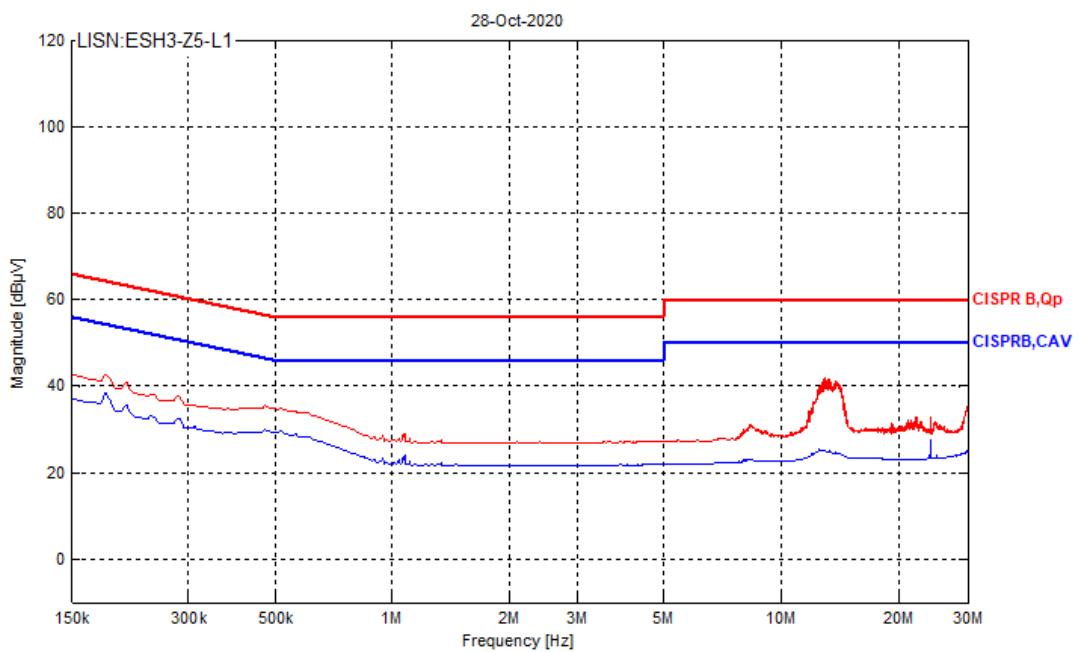

### 3.19 Conducted Emissions; Top Channel

#### 3.19.1 Data; Mains Neutral

Quasi-peak value (dB $\mu$ V)				
Frequency	Measured	Limit	Margin	Status
183.582 kHz	43.24	64.32	21.08	Pass
8.285 MHz	30.87	60.00	29.13	Pass
12.863 MHz	41.95	60.00	18.05	Pass
19.977 MHz	31.16	60.00	28.84	Pass
22.290 MHz	33.09	60.00	26.91	Pass
29.986 MHz	35.58	60.00	24.42	Pass

Average value (dB $\mu$ V)				
Frequency	Measured	Limit	Margin	Status
183.582 kHz	39.19	54.32	15.13	Pass
8.280 MHz	23.12	50.00	26.88	Pass
12.500 MHz	25.83	50.00	24.17	Pass
17.059 MHz	23.57	50.00	26.43	Pass
24.002 MHz	27.81	50.00	22.19	Pass
29.914 MHz	25.13	50.00	24.87	Pass

**3.19.2 Data; Mains Line**


<b>Quasi-peak value (dB<math>\mu</math>V)</b>				
Frequency	Measured	Limit	Margin	Status
517.368 kHz	34.87	56.00	21.13	Pass
8.366 MHz	30.50	60.00	29.50	Pass
13.111 MHz	38.28	60.00	21.72	Pass
18.146 MHz	30.05	60.00	29.95	Pass
24.002 MHz	32.92	60.00	27.08	Pass
25.647 MHz	30.34	60.00	29.66	Pass

<b>Average value (dB<math>\mu</math>V)</b>				
Frequency	Measured	Limit	Margin	Status
183.582 kHz	38.48	54.32	15.84	Pass
8.276 MHz	23.18	50.00	26.82	Pass
12.500 MHz	25.53	50.00	24.47	Pass
15.671 MHz	23.38	50.00	26.62	Pass
24.002 MHz	27.62	50.00	22.38	Pass
29.933 MHz	24.38	50.00	25.62	Pass




### 3.19.3 Profiles; Top Channel

Shown here is the mains-neutral plot.

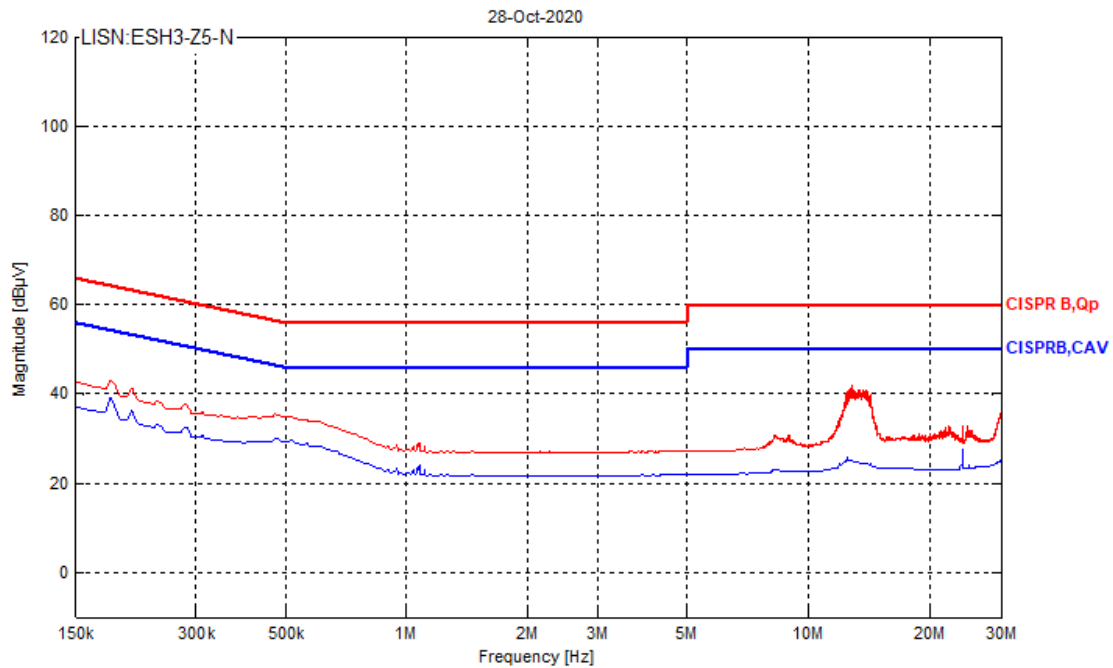


Shown here is the mains-line plot.

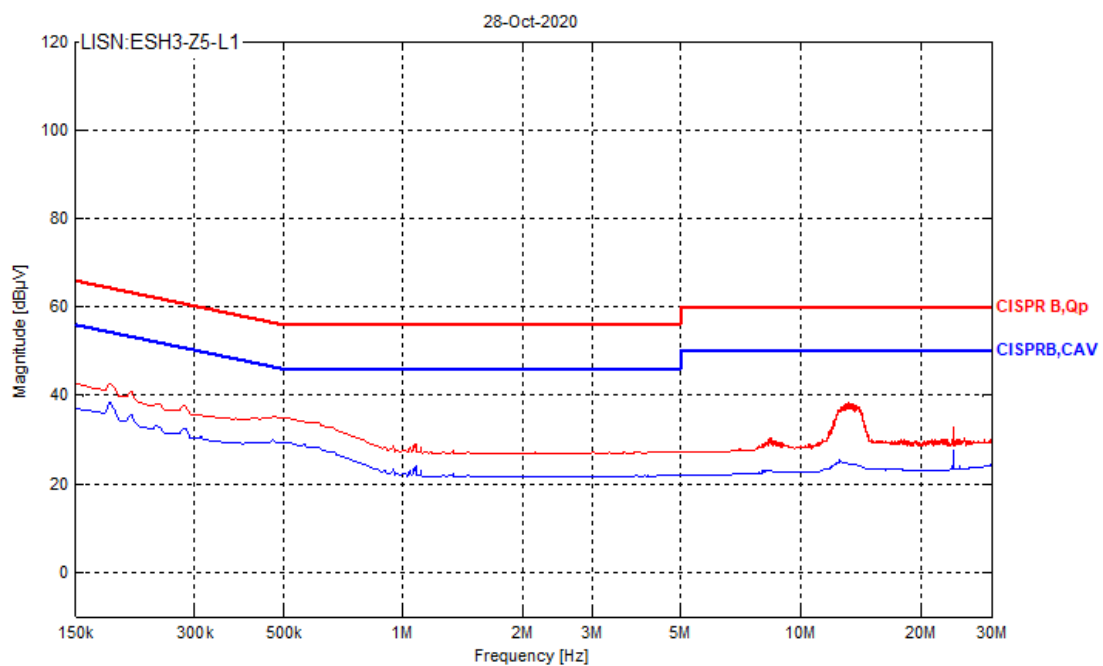

## 4.0 PHOTO LOG

### Emissions:



#### Radiated emissions

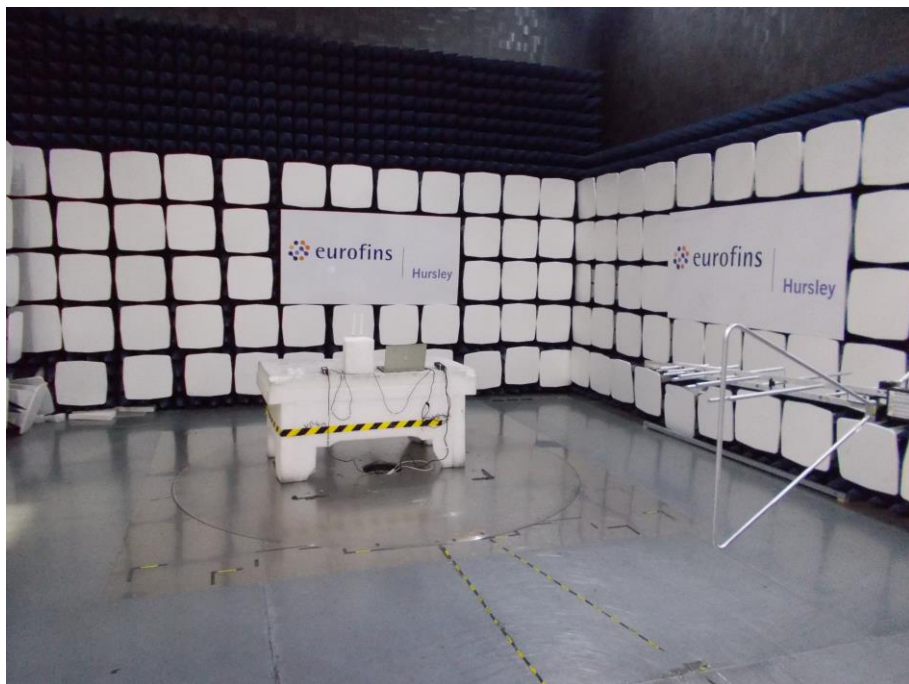

**Photo Log (continued)**

**Emissions:**

**Radiated emissions**

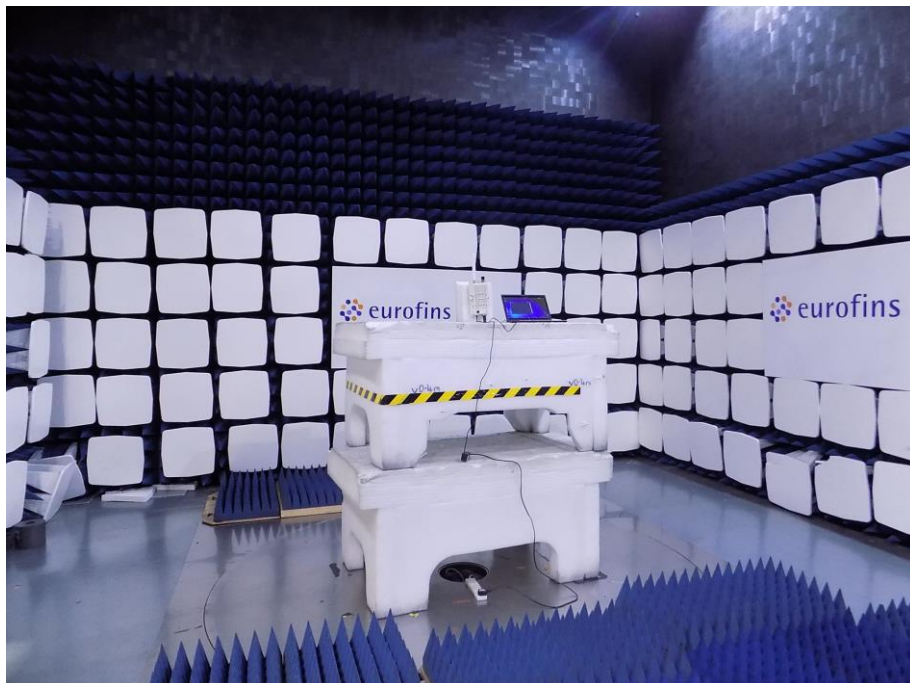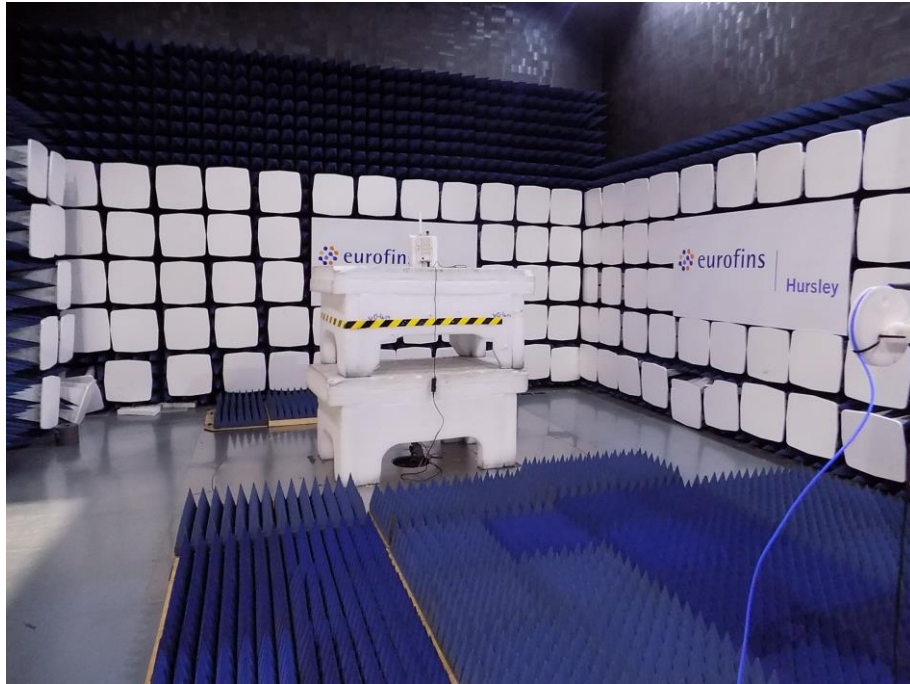

**Photo log continued**

**Emissions:**

**Conducted emissions**





## 5.0 MEASUREMENT UNCERTAINTIES

### Emissions tests

For all emissions tests, measurement uncertainties have been calculated in line with the requirements of CISPR 16-4-2 to give a confidence level of greater than 95%. In all cases the laboratories calculated uncertainty values (known as  $U_{lab}$ ) are equal to or are less than the expected uncertainty values contained in CISPR 16-4-2 (known as  $U_{Cispr}$ ). Below is a list of the laboratories calculated measurement uncertainties:

#### *Conducted emissions:*

Via AMN/LISN:	$\pm 3.27$ dB (9 kHz – 150 kHz), $\pm 3.28$ dB (150 kHz – 30 MHz)
Via AAN/ISN:	$\pm 4.99$ dB (150 kHz – 30 MHz)
Via CVP:	$\pm 3.47$ dB (150 kHz – 30 MHz)
Via CP:	$\pm 2.69$ dB (150 kHz – 30 MHz)
Via 100 $\Omega$ :	$\pm 2.69$ dB (150 kHz – 30 MHz)
Clicks:	$\pm 3.34$ dB (150 kHz – 30 MHz)
Harmonics:	$\pm 5.82$ % (100 Hz – 2 kHz)
Flicker:	$\pm 3.78$ % (worst case for all parameters)

#### *Radiated emissions:*

H-Field:	$\pm 2.73$ dB (9 kHz – 3 MHz), $\pm 2.88$ dB (3 MHz – 30 MHz)
D = 3.0 m (Horizontal):	$\pm 3.92$ dB (30 MHz – 200 MHz), $\pm 3.78$ dB (200 MHz – 1 GHz)
D = 3.0 m (Vertical):	$\pm 3.74$ dB (30 MHz – 200 MHz), $\pm 5.06$ dB (200 MHz – 1 GHz)
D = 3.0 m:	$\pm 4.50$ dB (1 GHz – 6 GHz), $\pm 4.04$ dB (6 GHz – 18 GHz), $\pm 4.27$ dB (18 GHz – 40 GHz)
D = 10.0 m (Horizontal):	$\pm 4.53$ dB (30 MHz – 200 MHz), $\pm 4.61$ dB (200 MHz – 1 GHz)
D = 10.0 m (Vertical):	$\pm 4.41$ dB (30 MHz – 200 MHz), $\pm 4.77$ dB (200 MHz – 1 GHz)

## 6.0 ANNEX – CONDUCTED EMISSIONS RESULTS

### 6.1 DTS Bandwidth

#### 6.1.1 Measurement method

Test was conducted in accordance with ANSI C63.10 Clause 11.8 Option 1:


- a) Set resolution bandwidth to 100 kHz
- b) Set the video bandwidth to  $\geq 3 \times \text{RBW}$
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

#### 6.1.2 Test results

Channel	6dB DTS Bandwidth (MHz)	Requirement	Result
Bottom	1.59	> 500 kHz	Pass
Middle	1.57	> 500 kHz	Pass
Top	1.54	> 500 kHz	Pass

Table 6: DTS Bandwidth

### 6.1.3 DTS Bandwidth plots

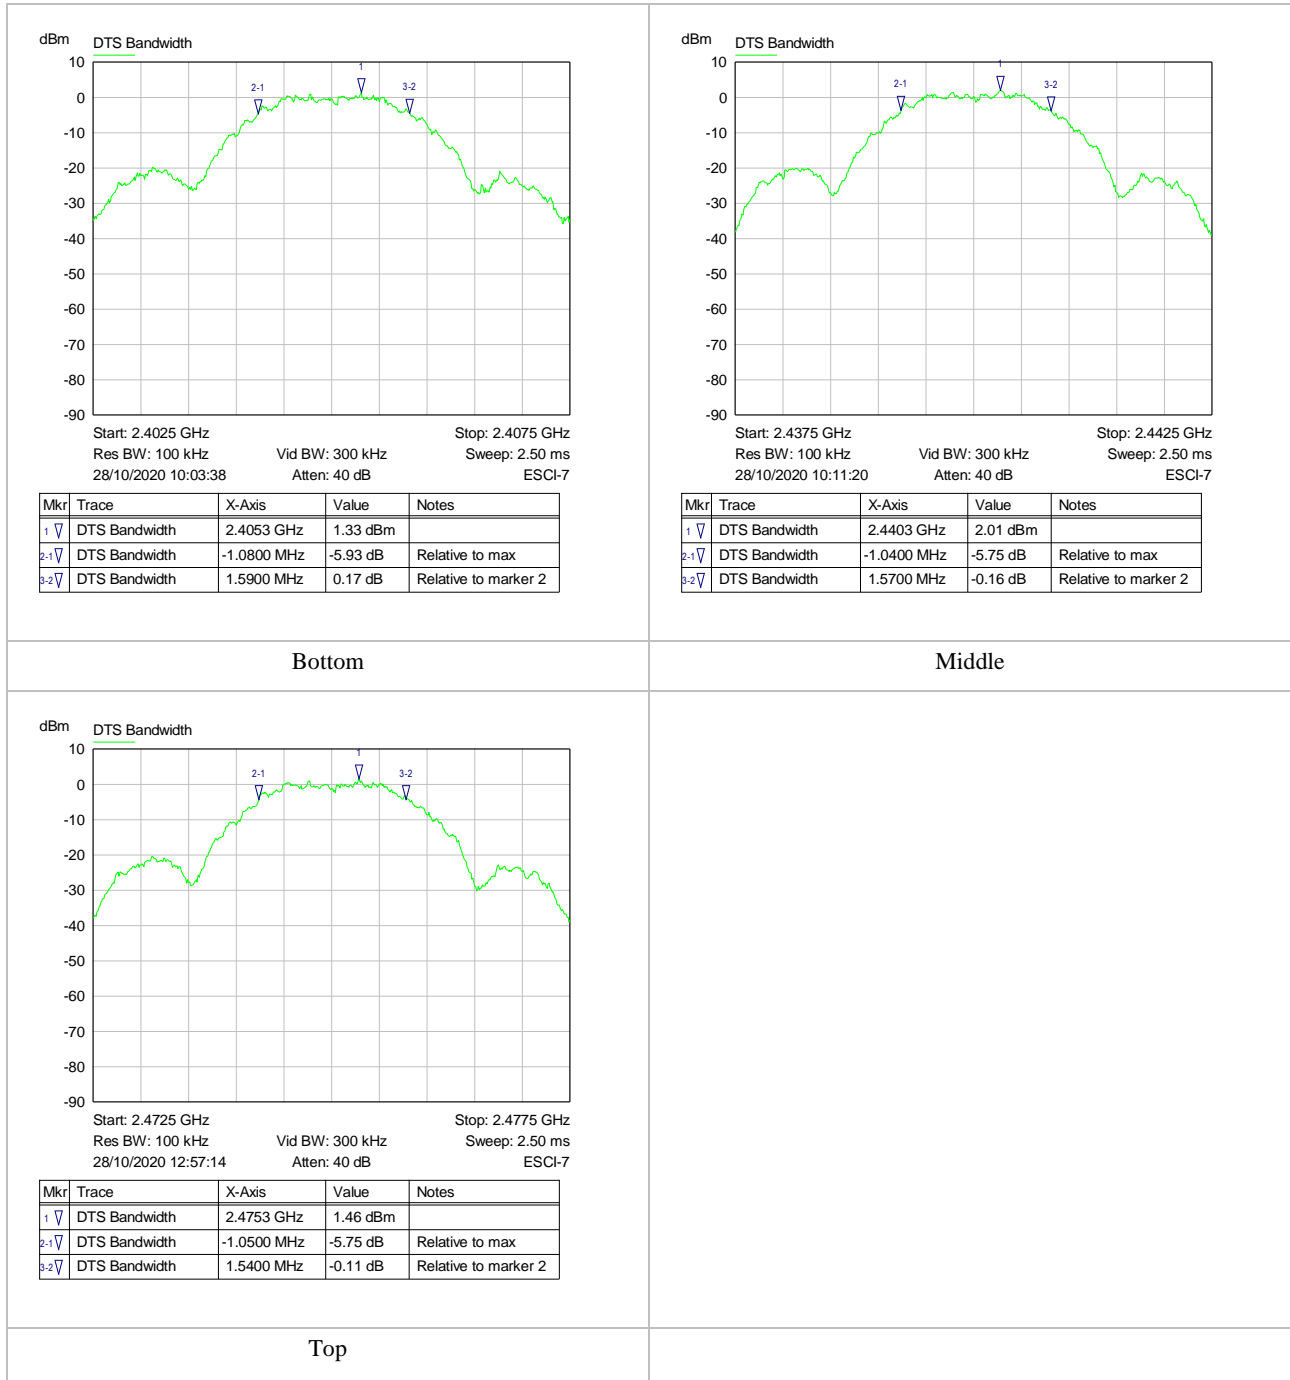

**Figure 1: DTS Bandwidth plots**

## 6.2 Maximum Peak Conducted Output Power

### 6.2.1 Measurement method

As the analyser could be set  $RBW \geq DTS$  bandwidth, the test was conducted in accordance with ANSI C63.10 Clause 11.9.1.1:

- a) Set the  $RBW \geq DTS$  bandwidth.
- b) Set  $VBW \geq 3 \times RBW$ .
- c) Set span  $\geq 3 \times RBW$
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.

### 6.2.2 Test results

Channel	Channel Power (dBm)	Limit (dBm)	Result
Bottom	4.75	30.0	Pass
Middle	5.30	30.0	Pass
Top	4.75	30.0	Pass

Table 7: Channel Power



### 6.2.3 Profile; Maximum Peak Conducted Power

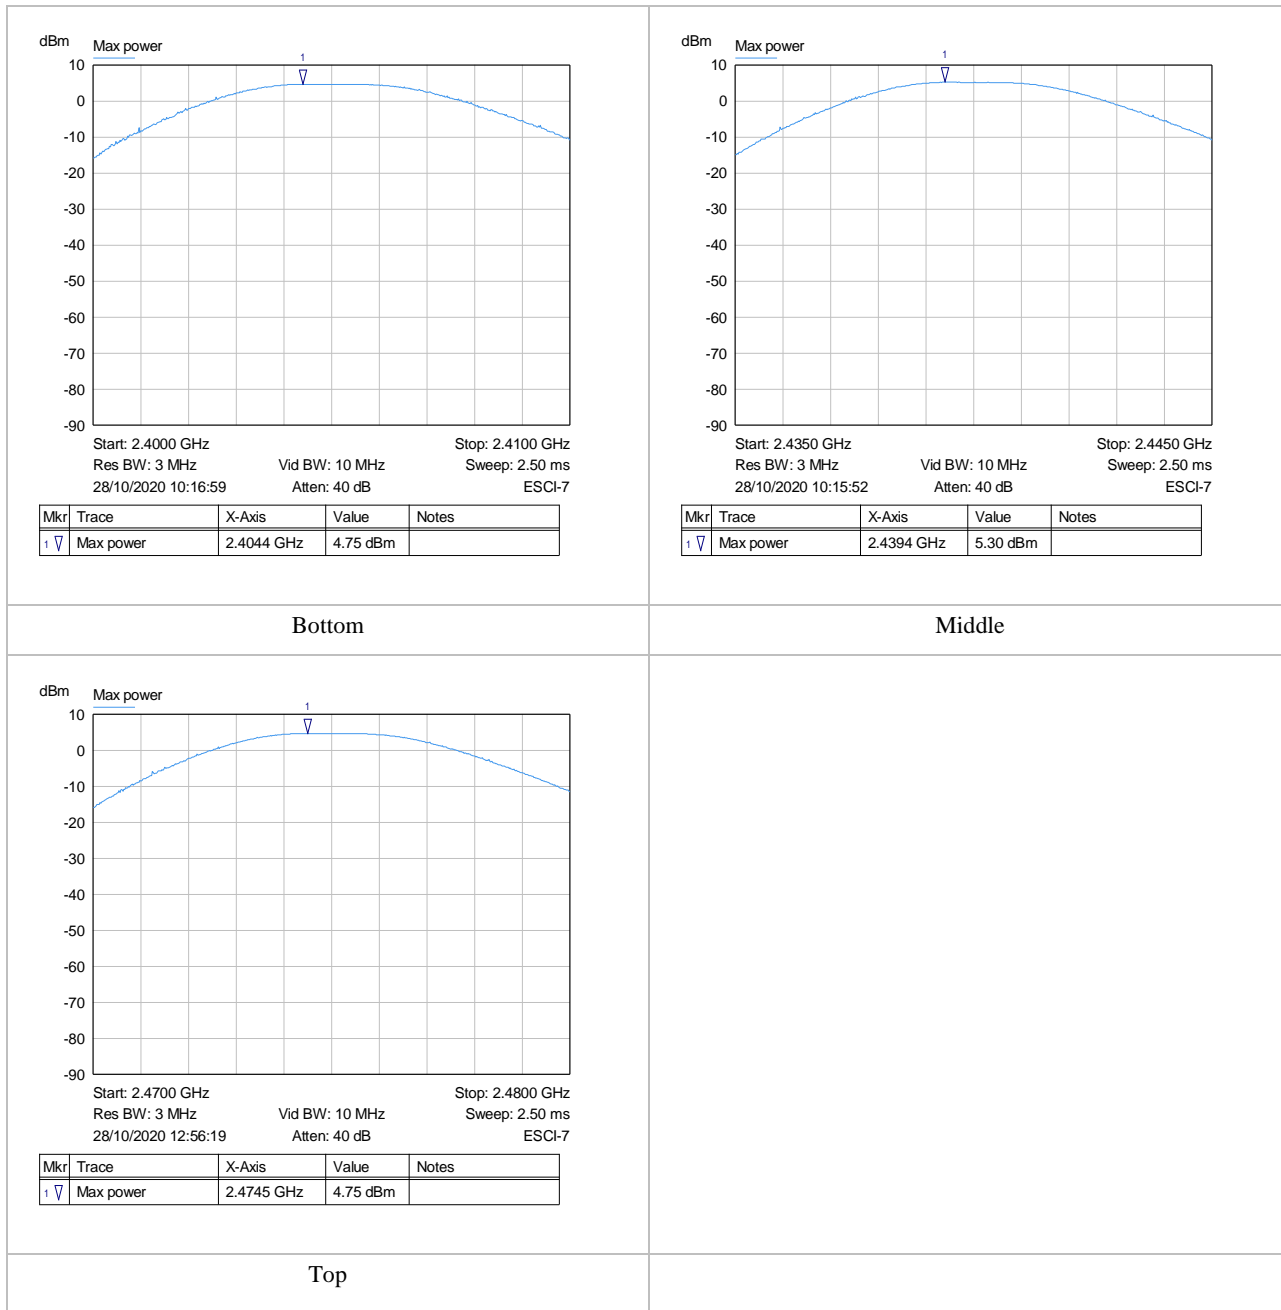


Figure 2: Peak Conducted Power plots

## 6.3 Maximum Power Spectral Density

### 6.3.1 Measurement method

As conducted power was measured as Maximum Peak Conducted Power, measurement was performed in accordance with ANSI C63.10 Clause 11.10.2:


- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 x DTS bandwidth.
- c) Set the RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
- d) Set the VBW  $\geq 3 \times \text{RBW}$ .
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

### 6.3.2 Test results

Channel	Peak Marker reading (dBm)	Limit (dBm/3kHz)	Result
Bottom	1.33	8.0	Pass
Middle	2.01	8.0	Pass
Top	1.46	8.0	Pass

Table 8: Spectral Density results

### 6.3.3 Profile; Power Spectral Density

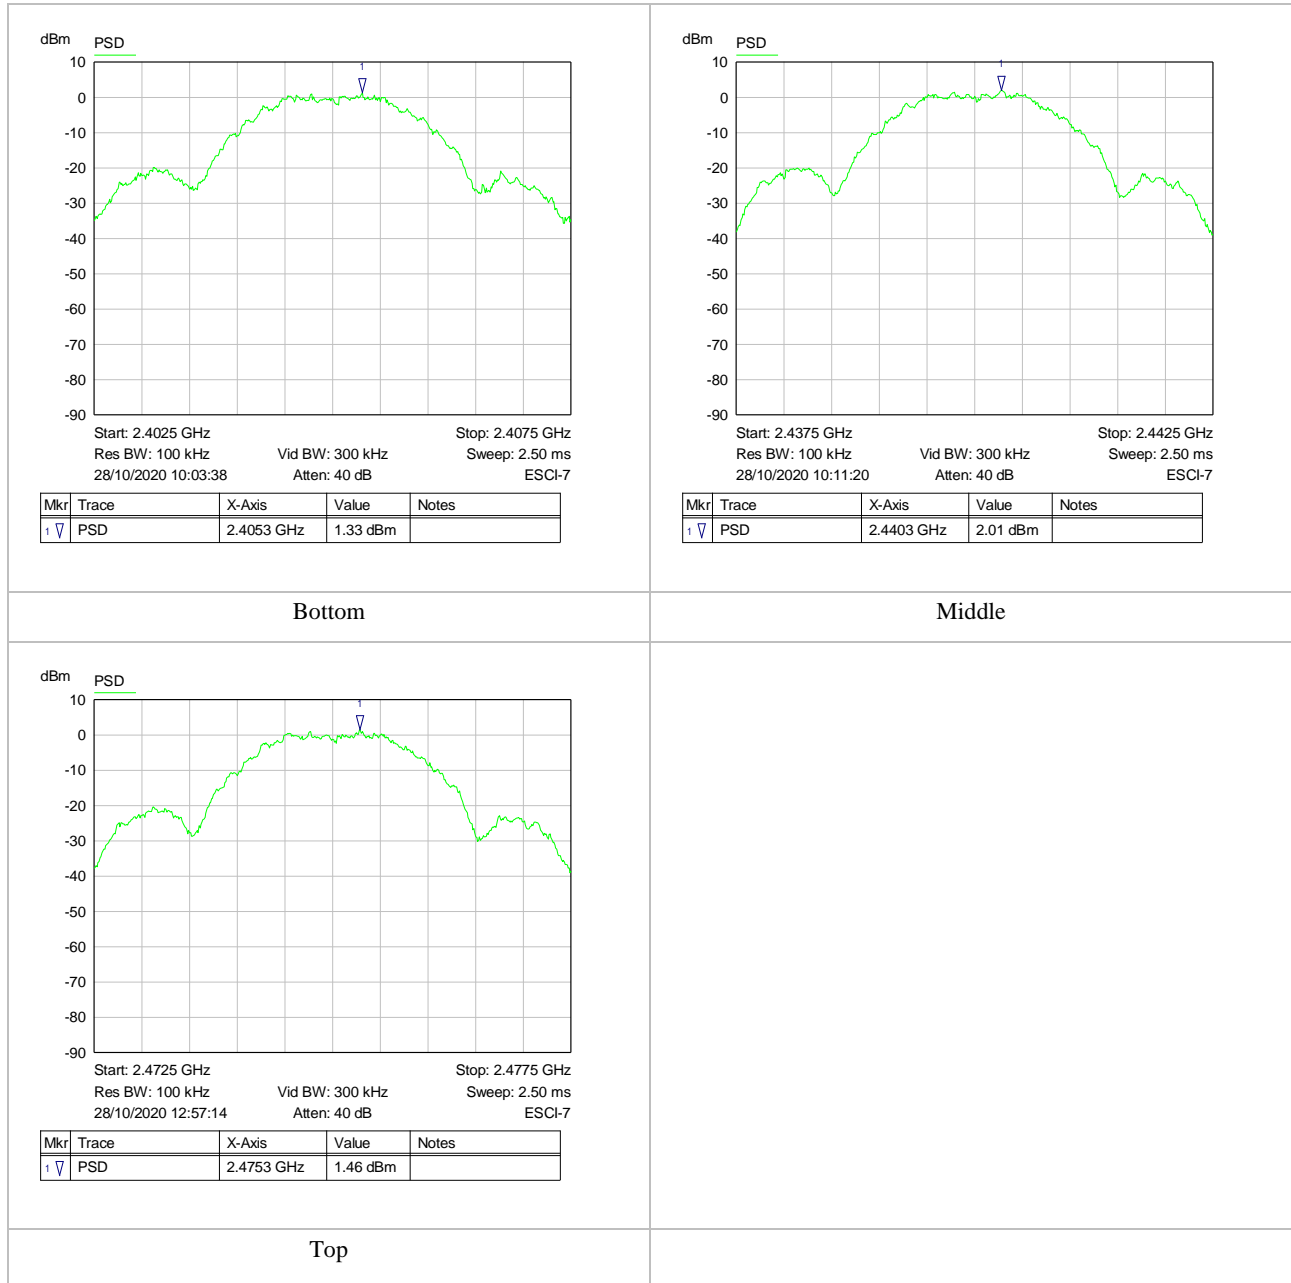

**Figure 3: Spectral Density plots**

## 6.4 Emissions in non-restricted frequency bands

### 6.4.1 Measurement method

Since peak power measurements were made using a peak detector, the same detector will be used for unwanted emissions. The unwanted emissions shall be at least 20dB lower than the wanted emission.

First, establish a reference level in accordance with ANSI C63.10 Clause 11.11.2:

- a) Set instrument center frequency to DTS channel center frequency.
- b) Set the span to  $\geq 1.5 \times$  DTS bandwidth.
- c) Set the RBW = 100 kHz.
- d) Set the VBW  $\geq 3 \times$  RBW.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum PSD level.

Then measure the emission levels in accordance with KDB 558074 section 11.3

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100 kHz.
- c) Set the VBW  $\geq 3 \times$  RBW.
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

### 6.4.2 Test results

The reference trace was taken from the Power Spectral Density Measurement which used the same settings.

For ease of measurement, maximum values are reported anywhere in the frequency band of investigation, whether or not it is outside a restricted band. Further measurements in restricted bands are in the next section.

Channel	Maximum Peak level in 100 kHz RBW (dBm)	-20 dBc (dBm)	Maximum emission (dBm)	Result
Bottom	1.33	-18.67		Pass
Middle	2.01	-17.99		Pass
Top	1.46	-18.54		Pass

**Table 9: Emissions in non-restricted bands**

### 6.4.3 Profile; Emissions in non-restricted frequency bands

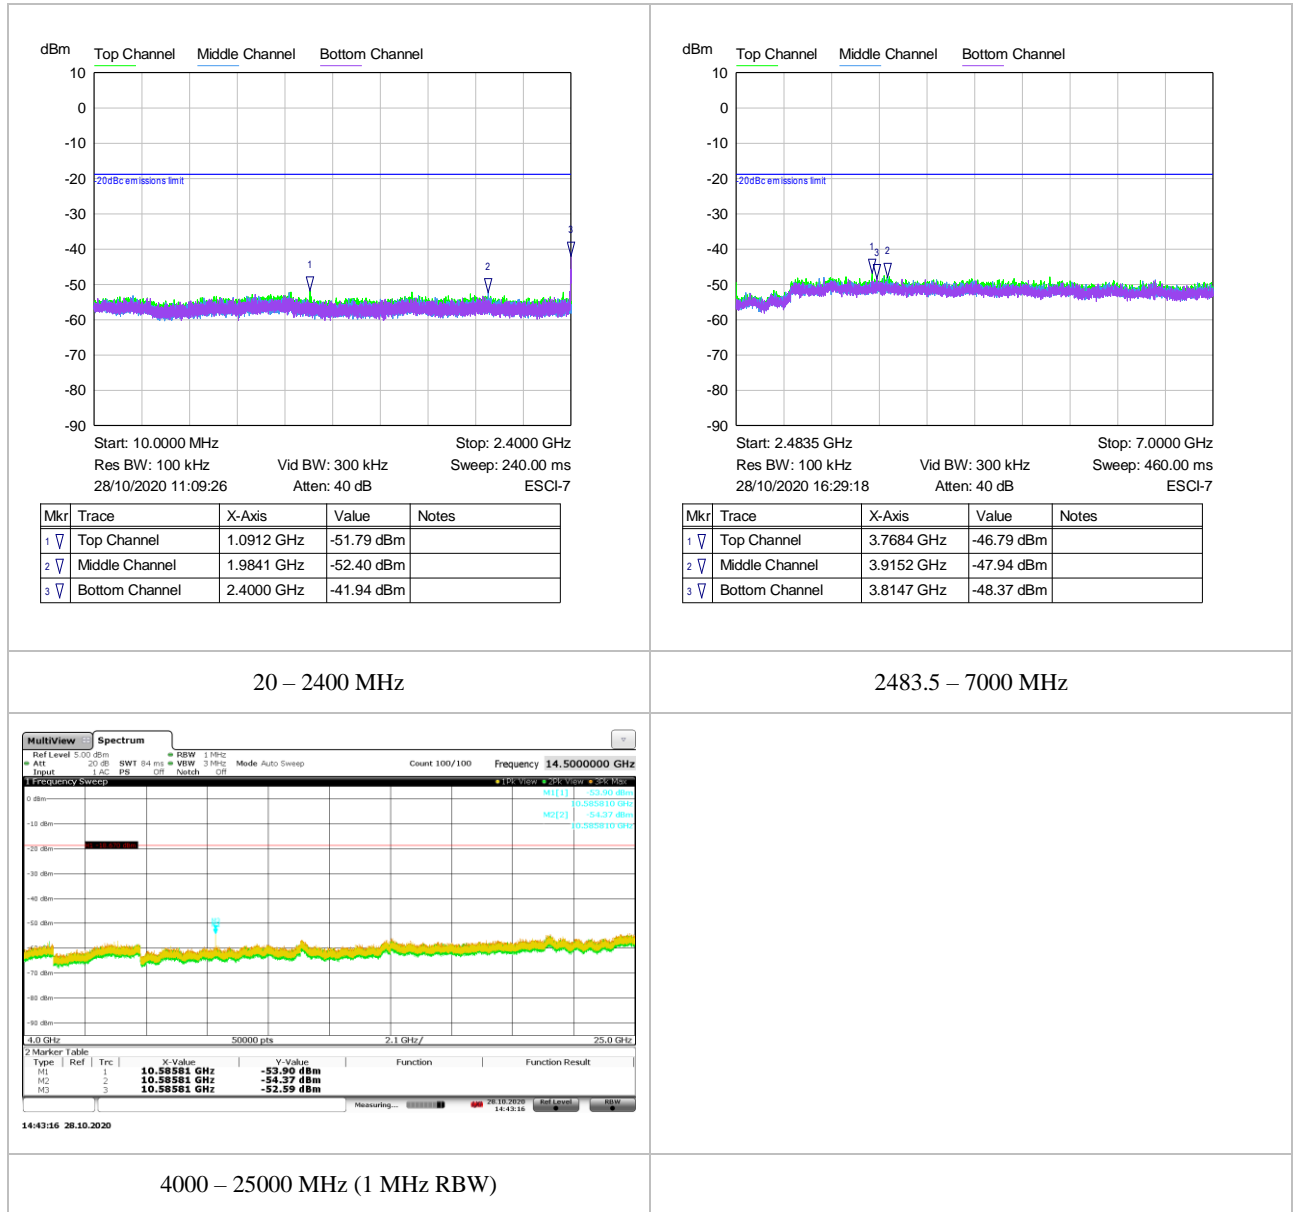


Figure 4: Emissions in non-restricted frequency bands

## 6.5 Maximum Emissions in Restricted Band

This testing is done in two parts:

- Antenna port conducted measurement
- Radiated measurement with antenna port terminated

## 6.6 Conducted Antenna port

### 6.6.1 Measurement method

The conducted antenna port power is converted to a radiated emissions field strength limit specified in 15.209(a) as per ANSI C63.10 Clause 11.12.2:

Electric field strength,  $E = \text{EIRP} - 20\log D + 104.8$

Which can be re-written as  $\text{EIRP} = E + 20\log D - 104.8$

Since  $\text{EIRP} = \text{conducted power} + \text{antenna gain} + \text{ground reflection}$

This can be re-written:

Max. conducted power =  $E + 20\log D - 104.8 - \text{antenna gain} - \text{ground reflection}$

If “E” is the limit, and the measurement distance taken as 3 m, the maximum conducted power can be determined as shown in the table:

Frequency range	Limit	Field strength ( $\mu\text{V/m}$ )	Field Strength ( $\text{dB}\mu\text{V/m}$ )	20logD	Antenna gain (dBi)	Ground reflection	Limit (dBm)
30 – 88 MHz	QP	100	40.0	9.54	4.0	4.7	-63.96
88 – 216 MHz	QP	150	43.5	9.54	4.0	4.7	-60.46
216 – 960 MHz	QP	200	46.0	9.54	4.0	4.7	-57.96
960 – 1000 MHz	QP	500	54.0	9.54	4.0	4.7	-49.96
> 1 GHz	Average	500	54.0	9.54	4.0	0	-45.26
> 1 GHz	Peak	Average + 20dB	74.0	9.54	4.0	0	-25.26

**Table 10: Restricted band limits at antenna port**

Initial measurement of antenna port emissions was performed with a peak detector as per ANSI C63.10 Clause 11.12.2.4:

- a) RBW = as specified in Table 1.
- b) VBW  $\geq 3 \times$  RBW.
- c) Detector = Peak.
- d) Sweep time = auto.
- e) Trace mode = max hold.
- f) Allow sweeps to continue until the trace stabilizes. (Note that the required measurement time may be longer for low duty cycle applications).

Where emissions above 1 GHz were close to the limit, these were re-measured using trace-averaging and RMS detector as per section 11.12.2.5.1:

- a) RBW = 1 MHz (unless otherwise specified).
- b) VBW  $\geq 3 \times$  RBW.
- c) Detector = RMS, if span/(# of points in sweep)  $\leq$  (RBW/2). Satisfying this condition may require increasing the number of points in the sweep or reducing the span. If this condition cannot be satisfied, then the detector mode shall be set to peak. (Note: 32001 measurement points used)
- d) Averaging type = power (i.e., RMS).
  - 1) As an alternative, the detector and averaging type may be set for linear voltage averaging.
  - 2) Some instruments require linear display mode in order to use linear voltage averaging. Log or dB averaging shall not be used.
- e) Sweep time = auto.
- f) Perform a trace average of at least 100 traces.


## 6.6.2 Test results

Maximum values for each frequency range are shown on the plots, and the worst case emissions for each channel where the emission is in a restricted band were re-measured using RMS detector and are detailed in the table below:

Channel	Frequency (MHz)	Detector	Level (dBm)	Peak limit (dBm)	Average limit (dBm)	Result
2405	2390	Peak	-54.47	-25.26	-45.26	Pass
2475	2483.5	Peak	-41.51	-25.26	N/A	Pass
		RMS	-49.67	N/A	-45.26	Pass


**Table 11: Emissions in restricted bands**

### 6.6.3 Emissions in restricted bands

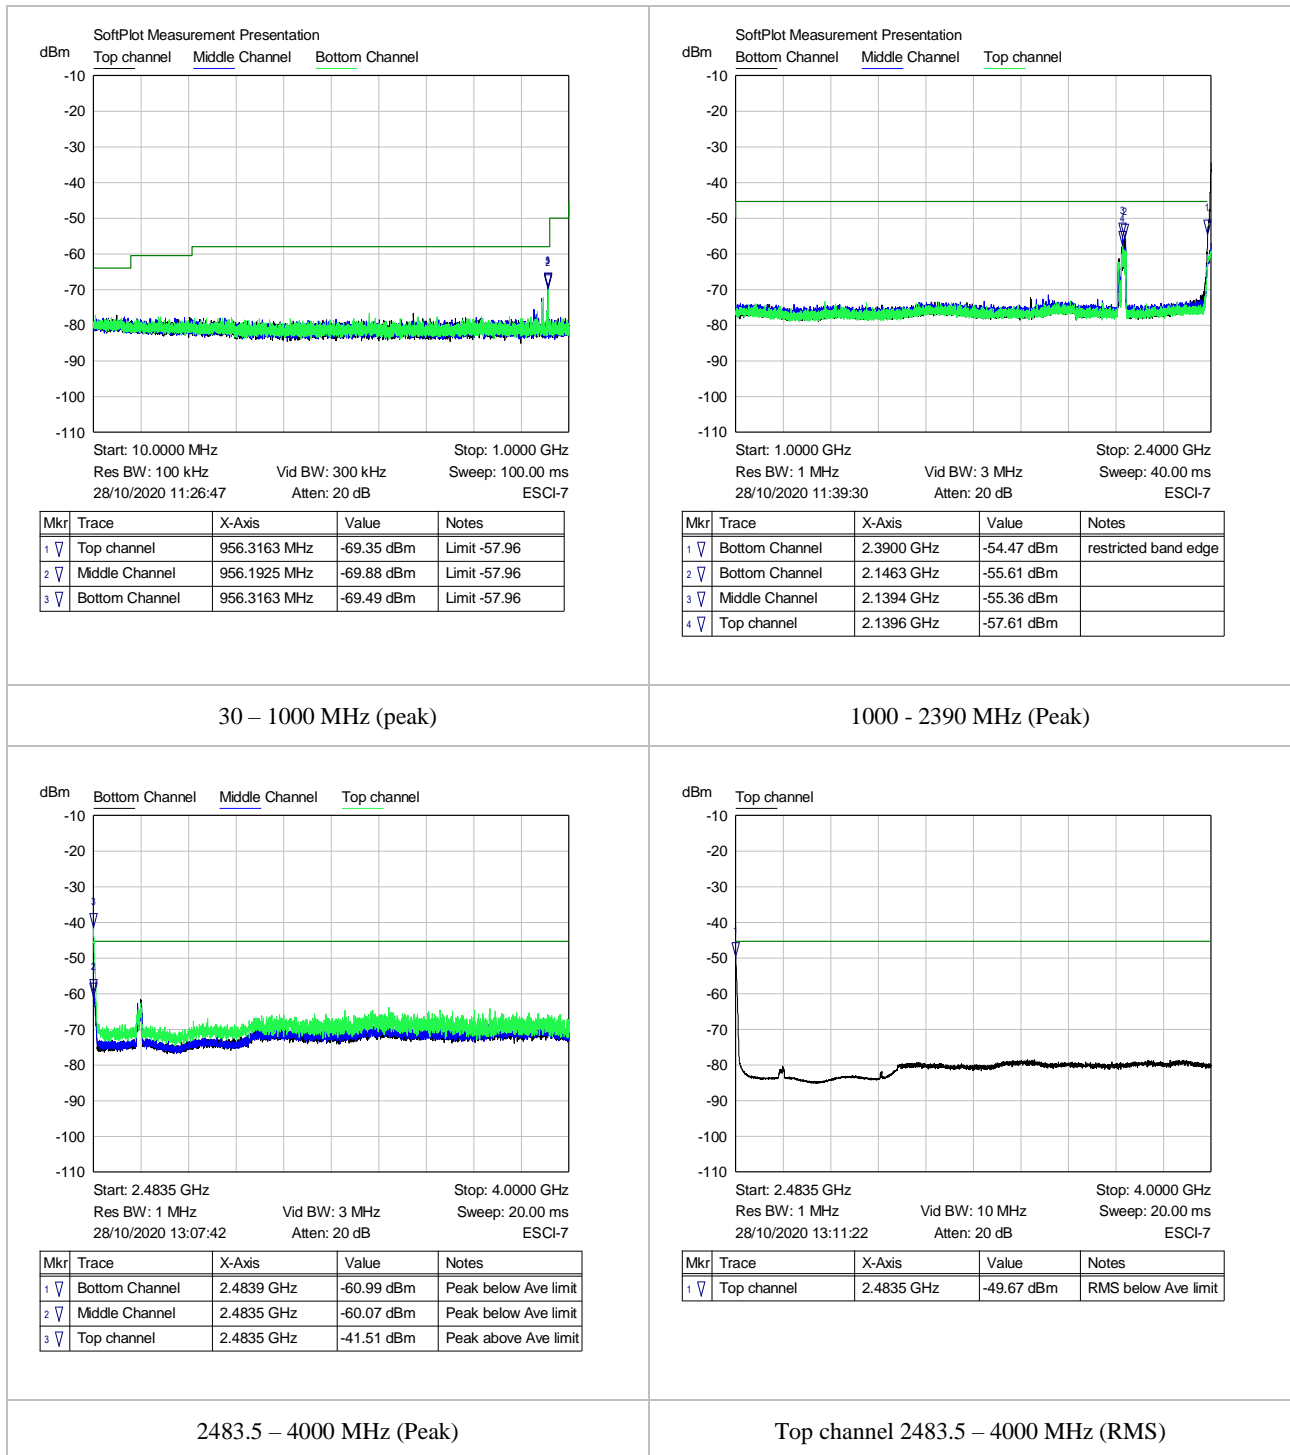



### 6.6.4 Emissions in restricted frequency bands (continued)

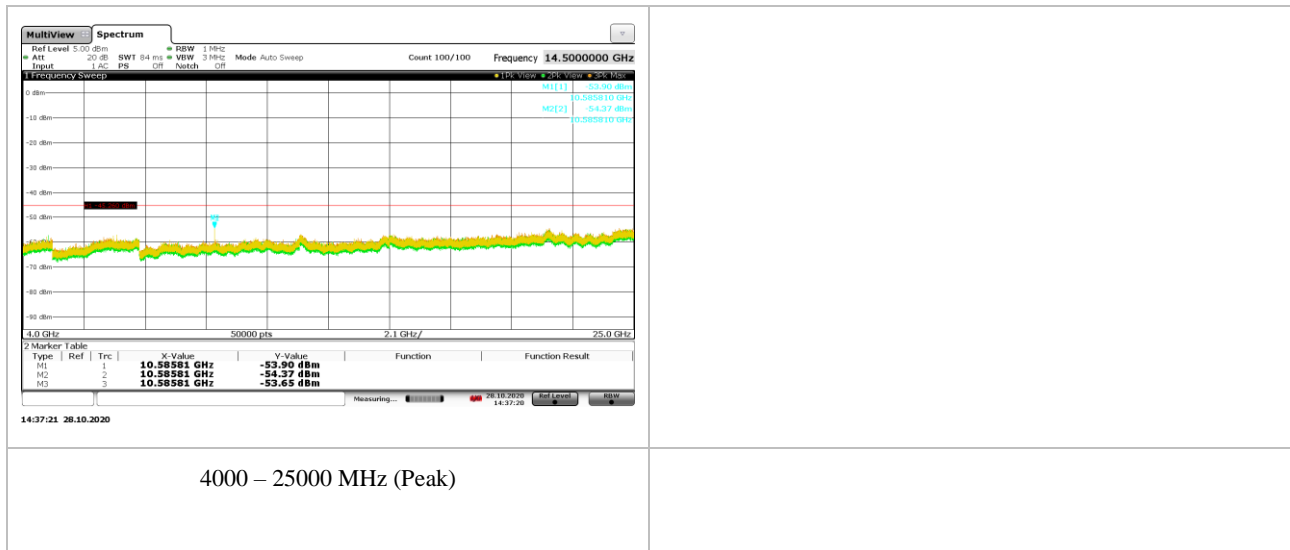

**Figure 6: Emissions in restricted frequency bands**

## 6.7 Occupied bandwidth

99% occupied bandwidth measured using the inbuilt function in the spectrum analyser

Channel	Occupied Bandwidth (MHz)	Requirement	Result
Bottom	2.500	None	For information
Middle	2.460	None	For information
Top	2.435	None	For information

Table 12: Occupied Bandwidth

### Occupied Bandwidth

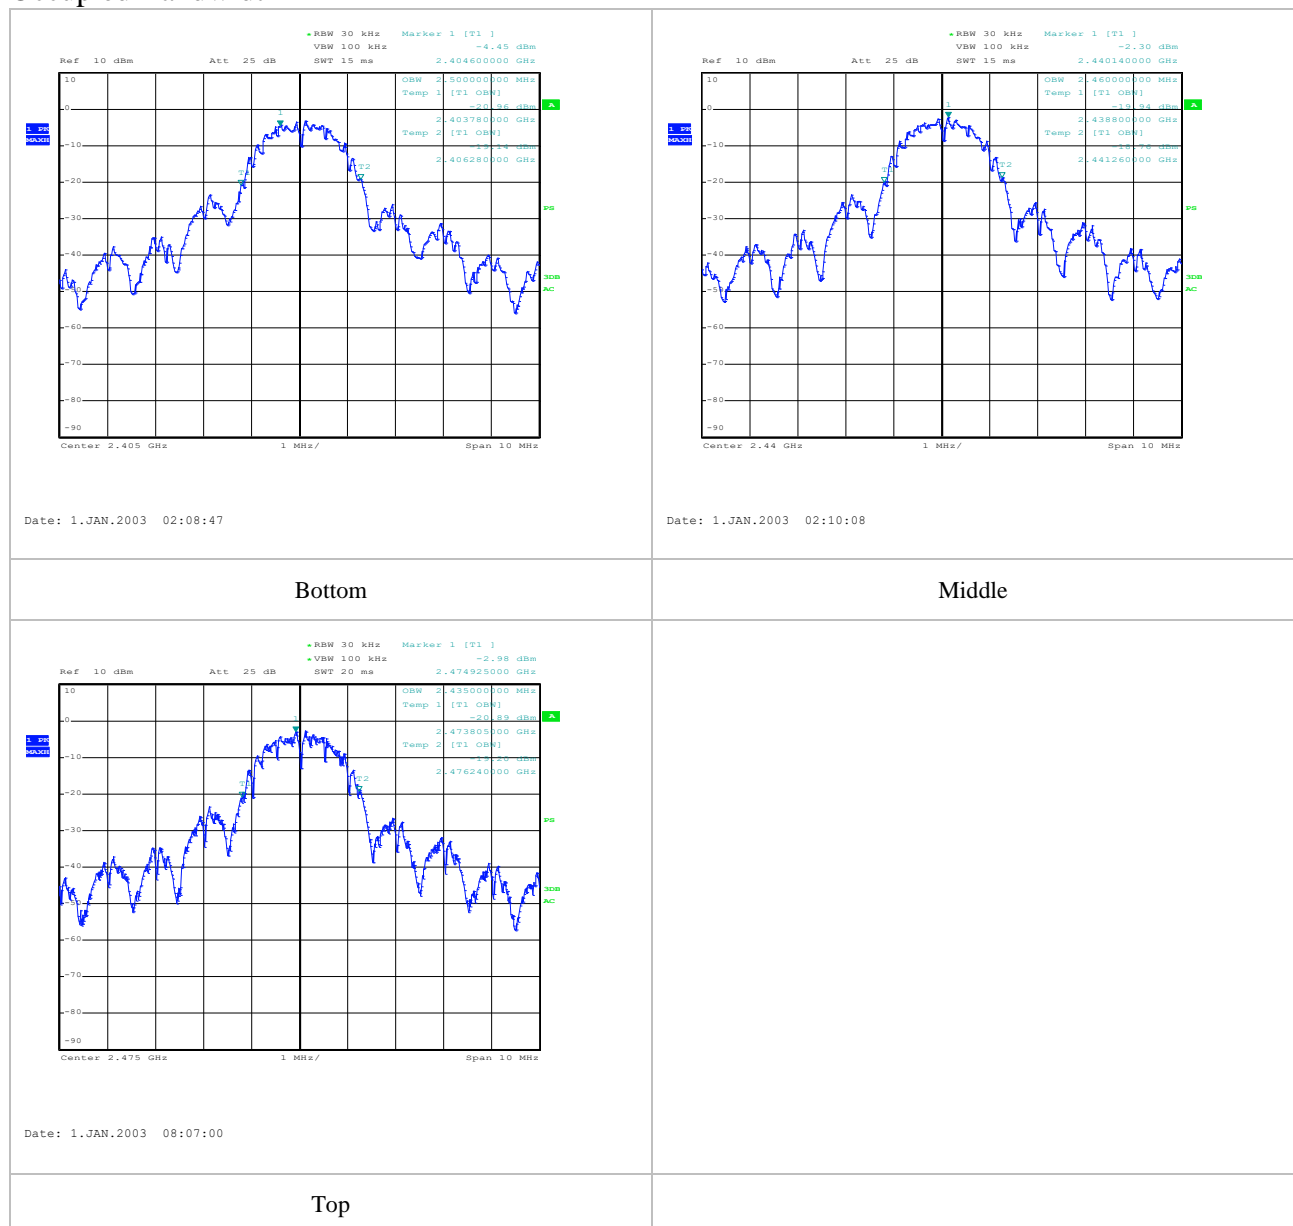


Figure 7: Occupied Bandwidth

## 6.8 Test equipment

Description	Manufacturer	Name	Serial Number	Calibration certificate Or Calibration due
Spectrum Analyser	Rohde & Schwarz	ESCI 7	HEMC #552	01/07/2021
Spectrum Analyser	Rohde & Schwarz	ESIB 40	HEMC #021	12/08/2021

**Table 1: Test Equipment**

*End of Document*