




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Vega Test Engineer: Felix Pang
Test Mode: AX20 5240MHz MIMO
Test Voltage: DC 3.7V
Note:

Radiated Emission Measurement

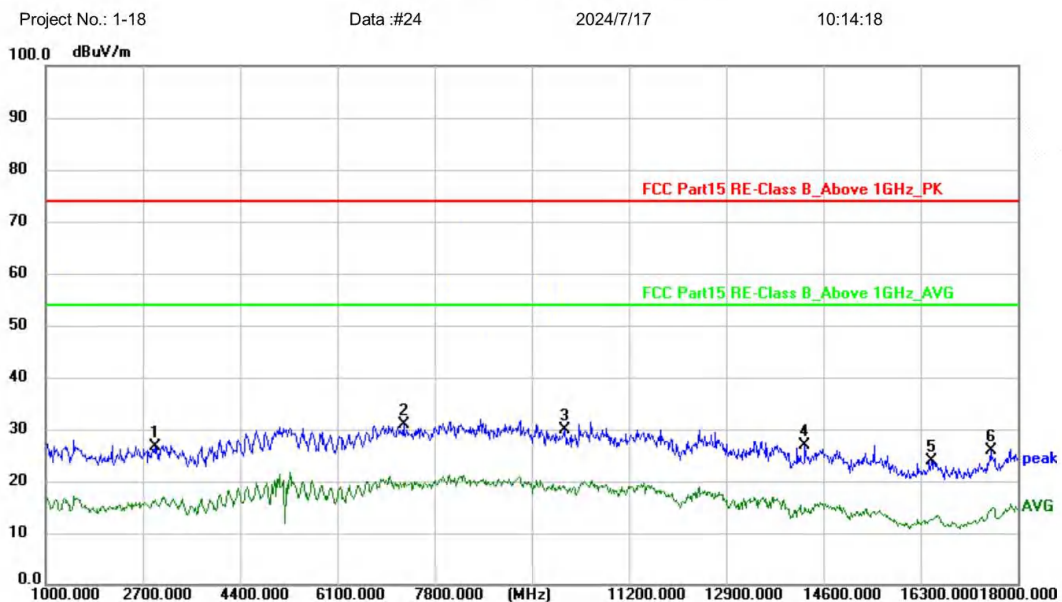

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2904.000	51.09	-24.55	26.54	74.00	-47.46	peak			P	
2 *	7256.000	44.73	-13.87	30.86	74.00	-43.14	peak			P	
3	10078.000	41.46	-11.64	29.82	74.00	-44.18	peak			P	
4	14277.000	35.21	-8.30	26.91	74.00	-47.09	peak			P	
5	16487.000	33.14	-9.25	23.89	74.00	-50.11	peak			P	
6	17524.000	33.33	-7.40	25.93	74.00	-48.07	peak			P	


Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Vertical** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Vega Test Engineer: Felix Pang
Test Mode: AX20 5240MHz MIMO
Test Voltage: DC 3.7V
Note:

Radiated Emission Measurement

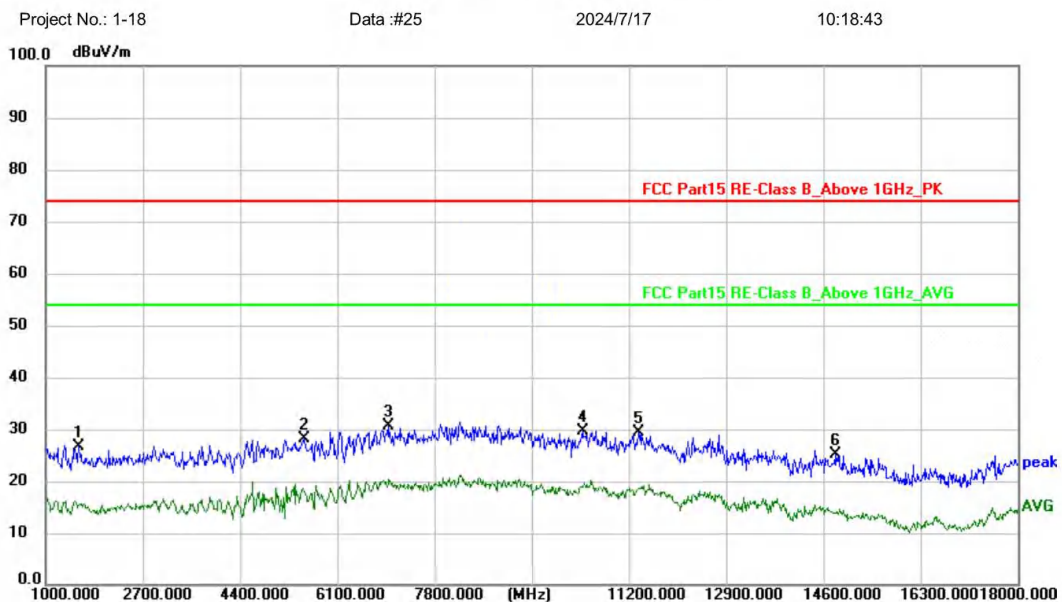

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	1578.000	54.16	-27.43	26.73	74.00	-47.27	peak			P	
2	5522.000	50.52	-22.47	28.05	74.00	-45.95	peak			P	
3 *	6984.000	44.74	-14.13	30.61	74.00	-43.39	peak			P	
4	10384.000	40.92	-11.22	29.70	74.00	-44.30	peak			P	
5	11370.000	39.75	-10.42	29.33	74.00	-44.67	peak			P	
6	14804.000	33.52	-8.39	25.13	74.00	-48.87	peak			P	


Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Vertical** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Vega Test Engineer: Felix Pang
Test Mode: N40 5190MHz MIMO
Test Voltage: DC 3.7V
Note:

Radiated Emission Measurement

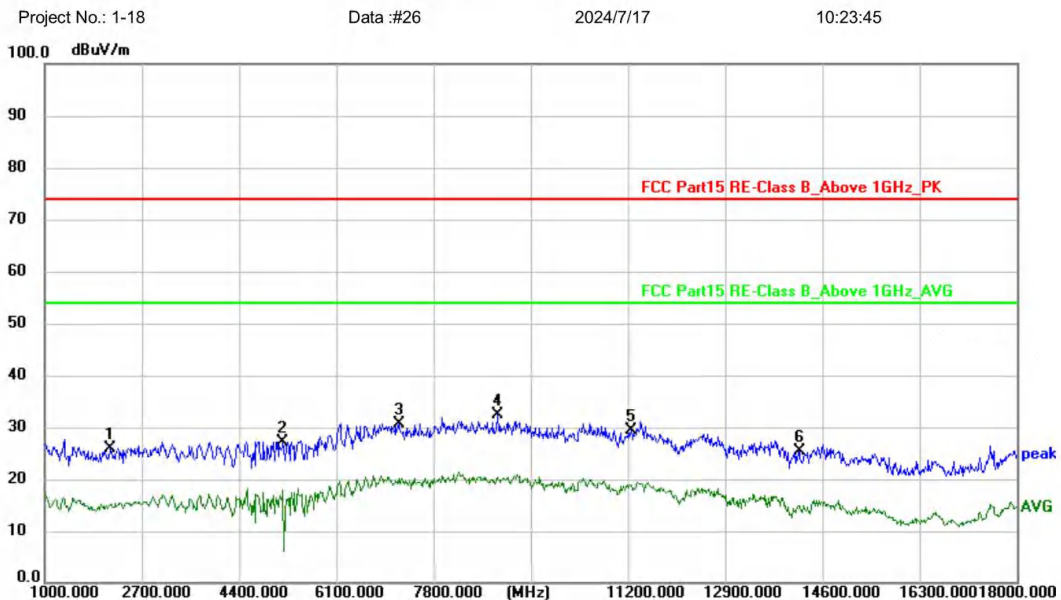

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2139.000	52.80	-26.88	25.92	74.00	-48.08	peak			P	
2	5165.000	53.86	-26.64	27.22	74.00	-46.78	peak			P	
3	7188.000	44.52	-13.93	30.59	74.00	-43.41	peak			P	
4 *	8922.000	44.75	-12.37	32.38	74.00	-41.62	peak			P	
5	11251.000	39.86	-10.43	29.43	74.00	-44.57	peak			P	
6	14192.000	33.72	-8.29	25.43	74.00	-48.57	peak			P	


Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Vega Test Engineer: Felix Pang
Test Mode: N40 5190MHz MIMO
Test Voltage: DC 3.7V
Note:

Radiated Emission Measurement

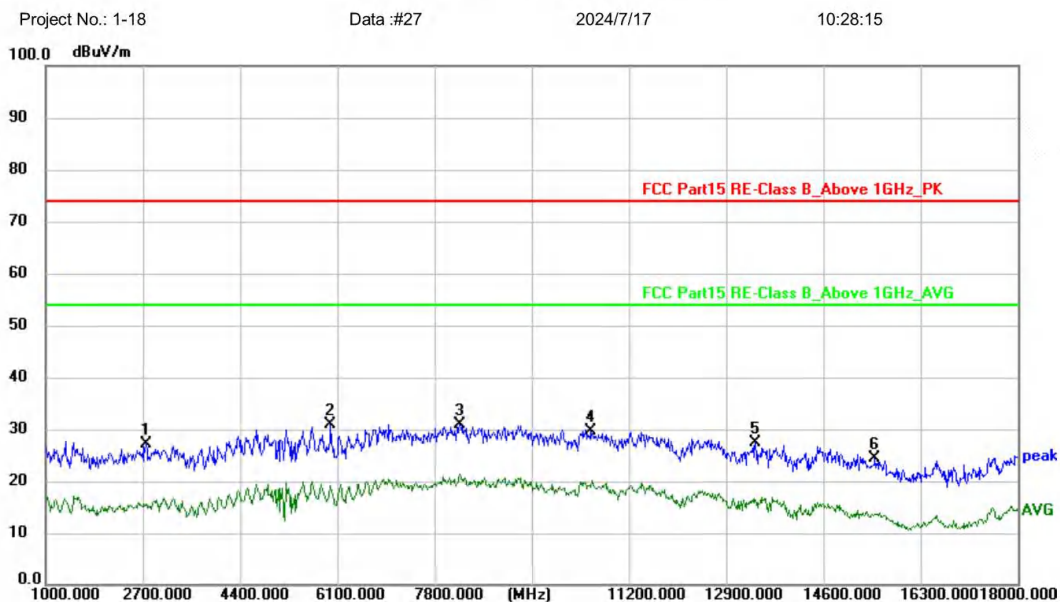

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2751.000	52.25	-25.02	27.23	74.00	-46.77	peak			P	
2 *	5981.000	47.83	-16.93	30.90	74.00	-43.10	peak			P	
3	8242.000	43.87	-13.00	30.87	74.00	-43.13	peak			P	
4	10537.000	40.77	-11.03	29.74	74.00	-44.26	peak			P	
5	13410.000	36.09	-8.75	27.34	74.00	-46.66	peak			P	
6	15501.000	33.24	-8.88	24.36	74.00	-49.64	peak			P	


Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Vega Test Engineer: Felix Pang
Test Mode: N40 5230MHz MIMO
Test Voltage: DC 3.7V
Note:

Radiated Emission Measurement

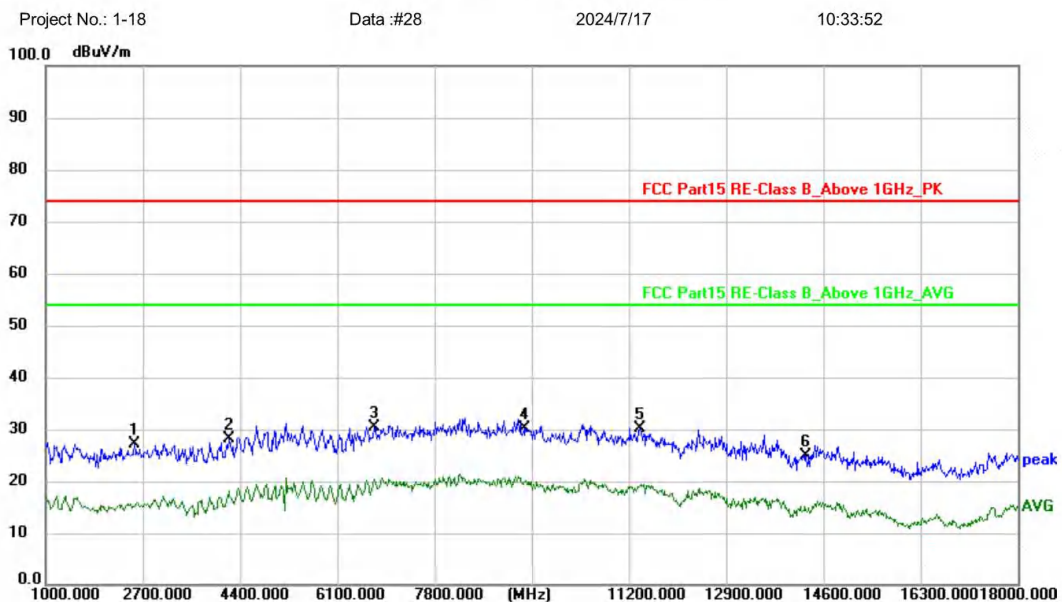

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2547.000	52.75	-25.63	27.12	74.00	-46.88	peak			P	
2	4213.000	49.44	-21.24	28.20	74.00	-45.80	peak			P	
3 *	6746.000	45.23	-14.80	30.43	74.00	-43.57	peak			P	
4	9364.000	42.22	-12.09	30.13	74.00	-43.87	peak			P	
5	11387.000	40.47	-10.41	30.06	74.00	-43.94	peak			P	
6	14294.000	33.21	-8.30	24.91	74.00	-49.09	peak			P	


Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Vertical** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Vega Test Engineer: Felix Pang
Test Mode: N40 5230MHz MIMO
Test Voltage: DC 3.7V
Note:

Radiated Emission Measurement

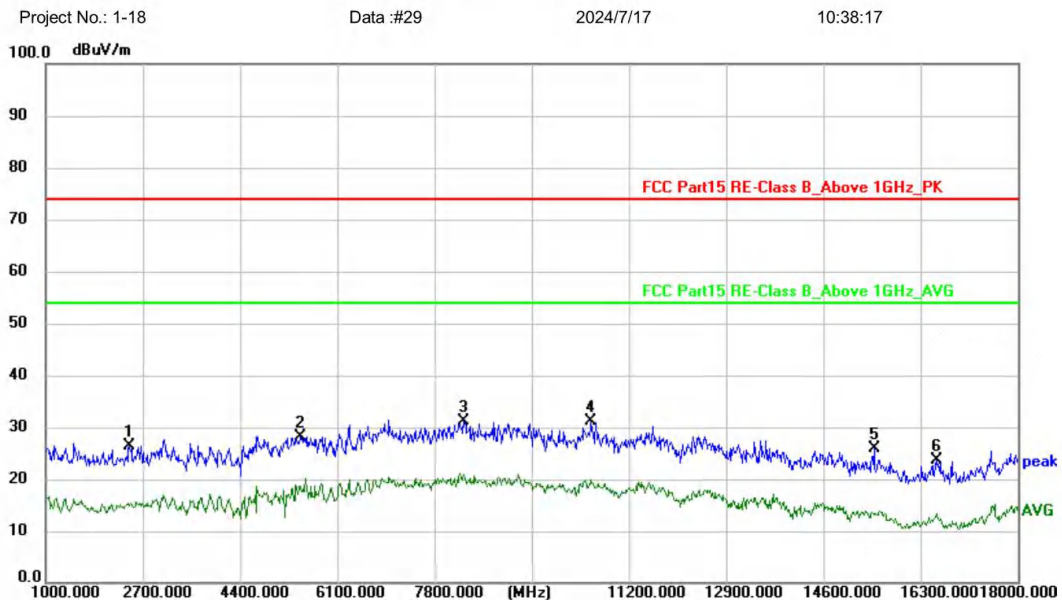

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2462.000	52.19	-25.90	26.29	74.00	-47.71	peak			P	
2	5454.000	51.49	-23.26	28.23	74.00	-45.77	peak			P	
3	8310.000	44.06	-12.95	31.11	74.00	-42.89	peak			P	
4 *	10537.000	42.21	-11.03	31.18	74.00	-42.82	peak			P	
5	15484.000	34.78	-8.86	25.92	74.00	-48.08	peak			P	
6	16572.000	32.93	-9.24	23.69	74.00	-50.31	peak			P	


Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Vertical** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Vega Test Engineer: Felix Pang
Test Mode: AC40 5190MHz MIMO
Test Voltage: DC 3.7V
Note:

Radiated Emission Measurement

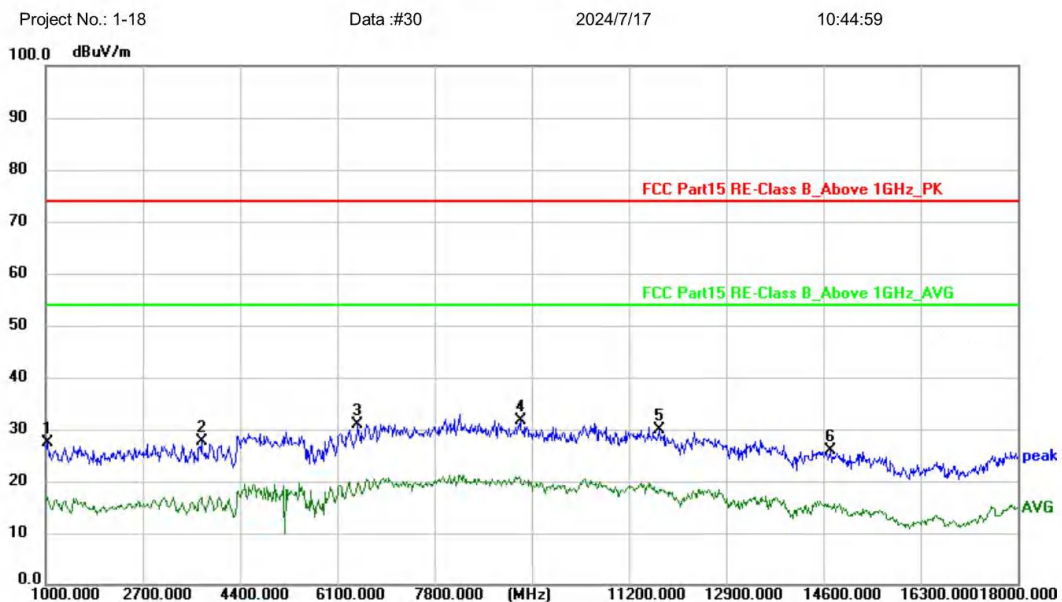

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	1034.000	55.00	-27.61	27.39	74.00	-46.61	peak			P	
2	3720.000	50.15	-22.61	27.54	74.00	-46.46	peak			P	
3	6457.000	46.54	-15.61	30.93	74.00	-43.07	peak			P	
4 *	9296.000	43.72	-12.13	31.59	74.00	-42.41	peak			P	
5	11727.000	40.28	-10.39	29.89	74.00	-44.11	peak			P	
6	14719.000	34.34	-8.38	25.96	74.00	-48.04	peak			P	


Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Vega Test Engineer: Felix Pang
Test Mode: AC40 5190MHz MIMO
Test Voltage: DC 3.7V
Note:

Radiated Emission Measurement

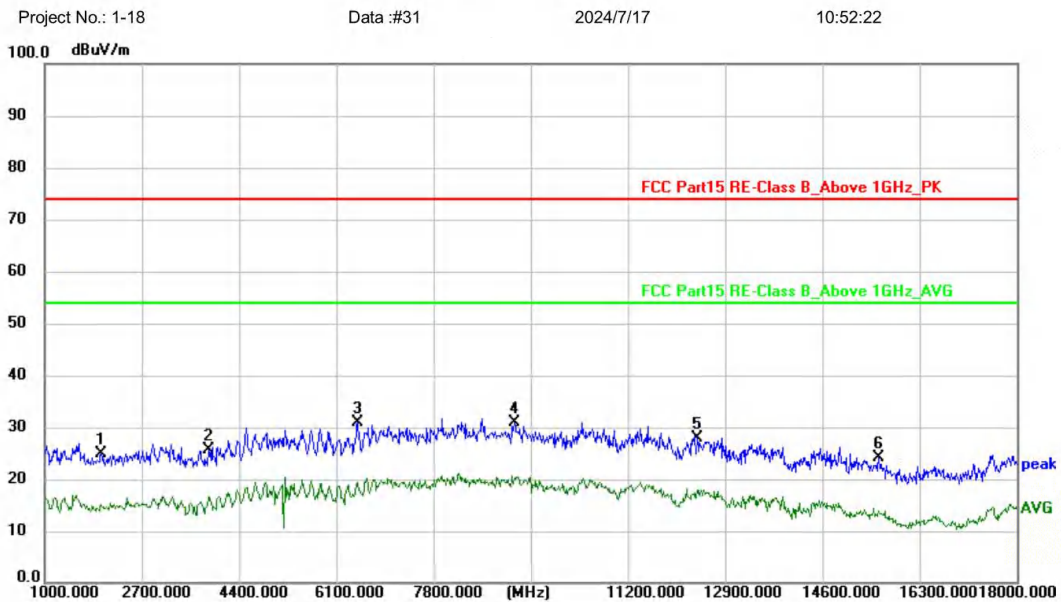

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	1986.000	52.17	-27.31	24.86	74.00	-49.14	peak			P	
2	3856.000	47.99	-22.31	25.68	74.00	-48.32	peak			P	
3	6474.000	46.37	-15.56	30.81	74.00	-43.19	peak			P	
4 *	9211.000	43.06	-12.19	30.87	74.00	-43.13	peak			P	
5	12407.000	37.71	-9.85	27.86	74.00	-46.14	peak			P	
6	15586.000	33.14	-8.96	24.18	74.00	-49.82	peak			P	


Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Vega Test Engineer: Felix Pang
Test Mode: AC40 5230MHz MIMO
Test Voltage: DC 3.7V
Note:

Radiated Emission Measurement

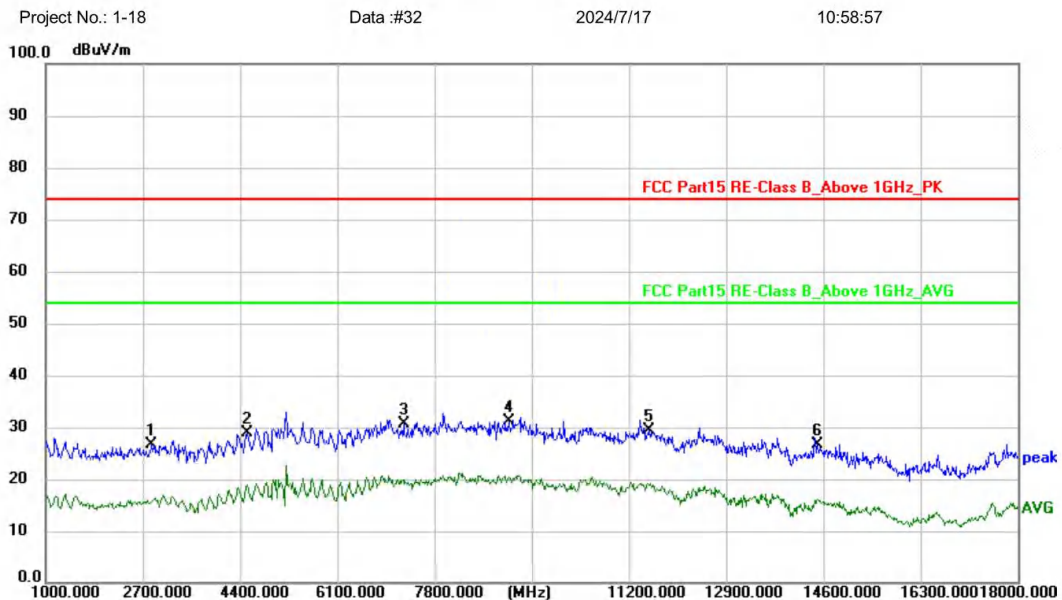

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2853.000	51.45	-24.71	26.74	74.00	-47.26	peak			P	
2	4519.000	49.11	-20.20	28.91	74.00	-45.09	peak			P	
3	7256.000	44.60	-13.87	30.73	74.00	-43.27	peak			P	
4 *	9109.000	43.45	-12.24	31.21	74.00	-42.79	peak			P	
5	11557.000	39.69	-10.41	29.28	74.00	-44.72	peak			P	
6	14498.000	34.99	-8.34	26.65	74.00	-47.35	peak			P	


Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Vertical** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Vega Test Engineer: Felix Pang
Test Mode: AC40 5230MHz MIMO
Test Voltage: DC 3.7V
Note:

Radiated Emission Measurement

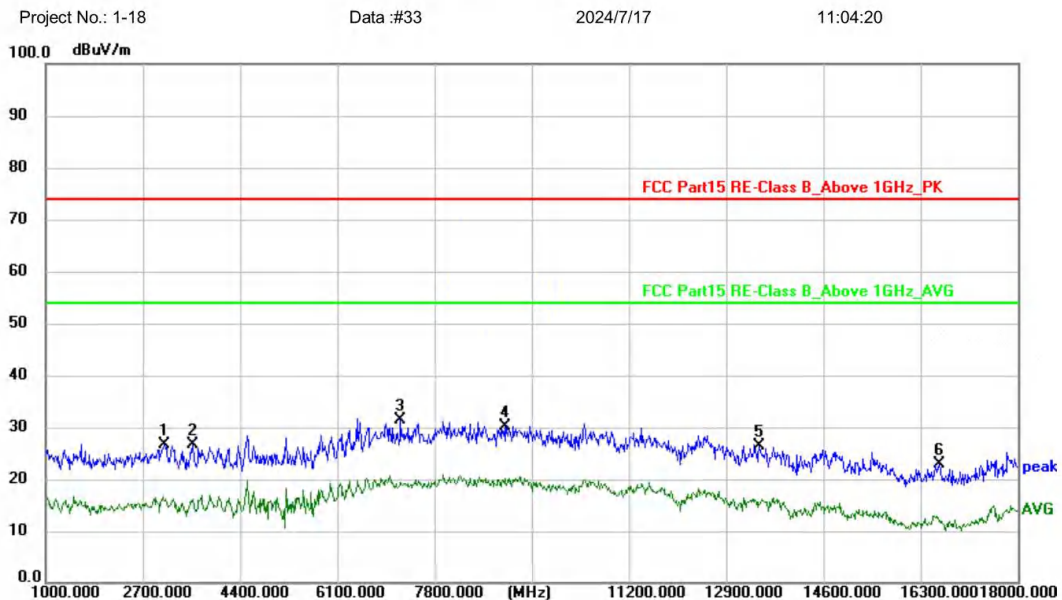

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	3074.000	50.66	-24.09	26.57	74.00	-47.43	peak			P	
2	3567.000	49.71	-22.96	26.75	74.00	-47.25	peak			P	
3 *	7205.000	45.31	-13.92	31.39	74.00	-42.61	peak			P	
4	9024.000	42.50	-12.29	30.21	74.00	-43.79	peak			P	
5	13478.000	35.01	-8.69	26.32	74.00	-47.68	peak			P	
6	16623.000	32.04	-9.23	22.81	74.00	-51.19	peak			P	


Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Vertical** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Vega Test Engineer: Felix Pang
Test Mode: AX40 5190MHz MIMO
Test Voltage: DC 3.7V
Note:

Radiated Emission Measurement

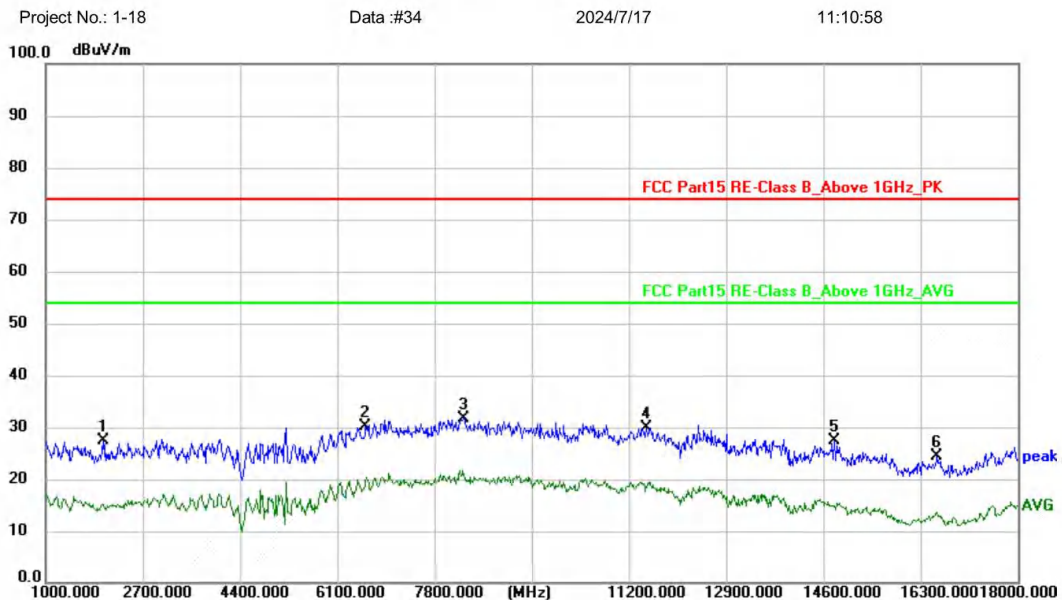

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2003.000	54.60	-27.29	27.31	74.00	-46.69	peak			P	
2	6593.000	45.38	-15.22	30.16	74.00	-43.84	peak			P	
3 *	8310.000	44.58	-12.95	31.63	74.00	-42.37	peak			P	
4	11506.000	40.38	-10.40	29.98	74.00	-44.02	peak			P	
5	14787.000	35.75	-8.39	27.36	74.00	-46.64	peak			P	
6	16589.000	33.62	-9.24	24.38	74.00	-49.62	peak			P	


Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Vega Test Engineer: Felix Pang
Test Mode: AX40 5190MHz MIMO
Test Voltage: DC 3.7V
Note:

Radiated Emission Measurement

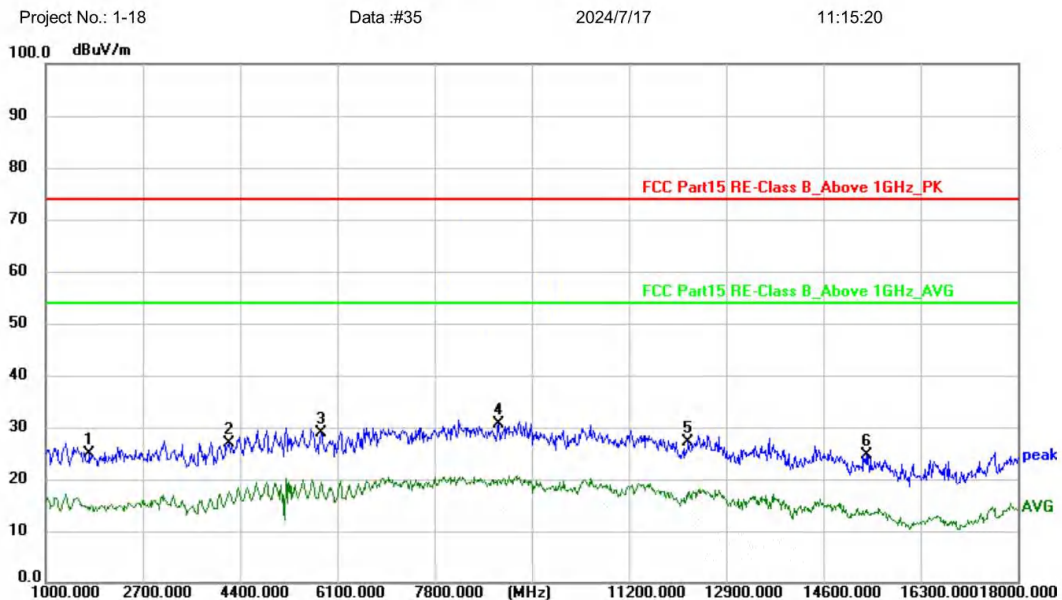

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	1765.000	52.18	-27.38	24.80	74.00	-49.20	peak			P	
2	4213.000	48.21	-21.24	26.97	74.00	-47.03	peak			P	
3	5811.000	46.09	-17.21	28.88	74.00	-45.12	peak			P	
4 *	8922.000	43.12	-12.37	30.75	74.00	-43.25	peak			P	
5	12237.000	37.16	-10.07	27.09	74.00	-46.91	peak			P	
6	15348.000	33.42	-8.75	24.67	74.00	-49.33	peak			P	


Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Vega Test Engineer: Felix Pang
Test Mode: AX40 5230MHz MIMO
Test Voltage: DC 3.7V
Note:

Radiated Emission Measurement

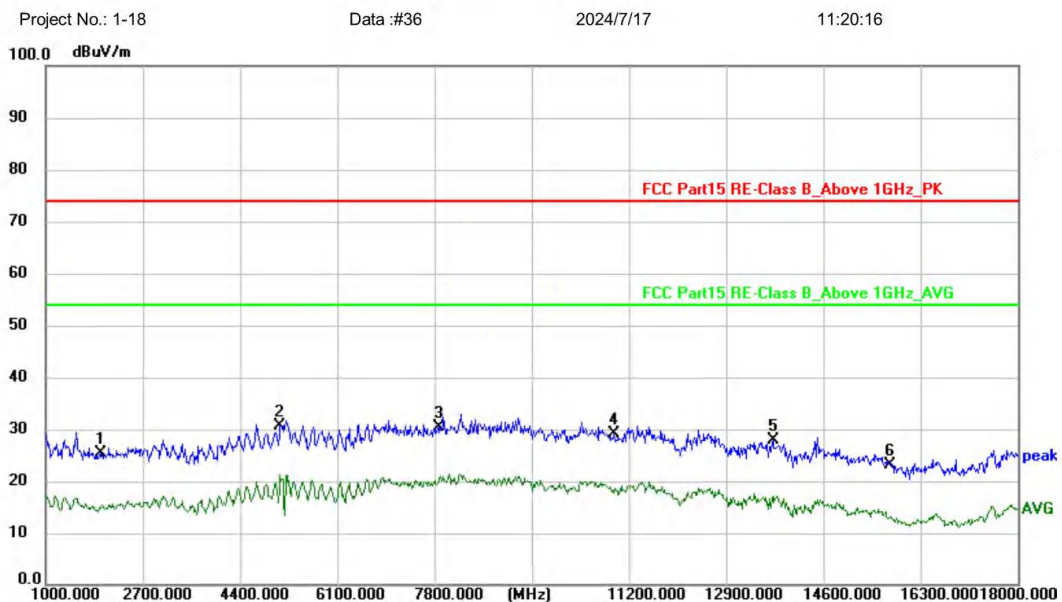

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	1952.000	52.77	-27.32	25.45	74.00	-48.55	peak			P	
2 *	5097.000	49.09	-18.39	30.70	74.00	-43.30	peak			P	
3	7868.000	43.72	-13.34	30.38	74.00	-43.62	peak			P	
4	10945.000	39.56	-10.51	29.05	74.00	-44.95	peak			P	
5	13716.000	36.32	-8.50	27.82	74.00	-46.18	peak			P	
6	15756.000	32.21	-9.11	23.10	74.00	-50.90	peak			P	


Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Vertical** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Vega Test Engineer: Felix Pang
Test Mode: AX40 5230MHz MIMO
Test Voltage: DC 3.7V
Note:

Radiated Emission Measurement

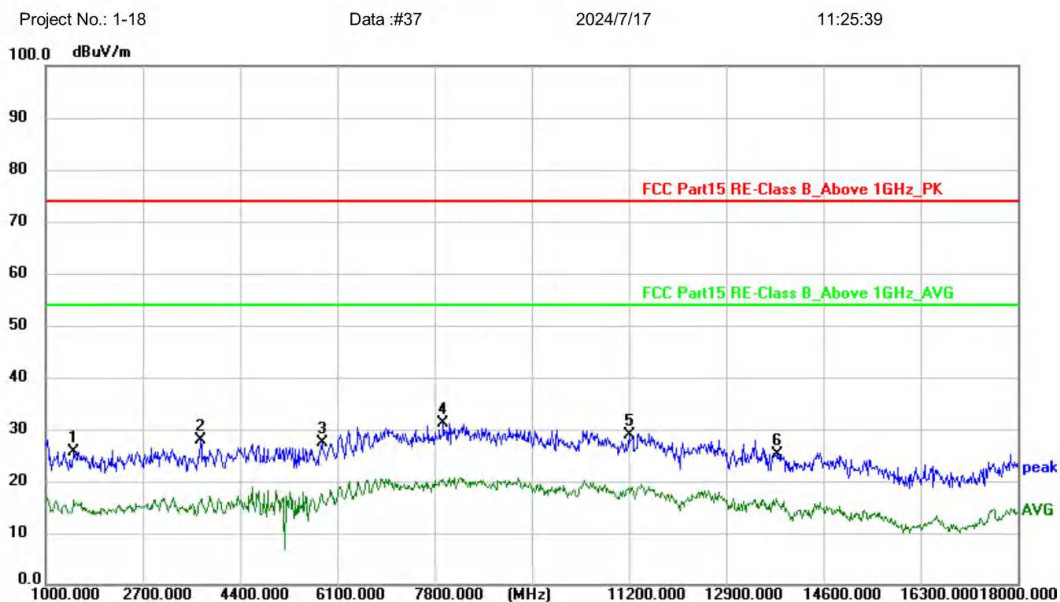

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	1493.000	53.20	-27.45	25.75	74.00	-48.25	peak			P	
2	3703.000	50.46	-22.66	27.80	74.00	-46.20	peak			P	
3	5828.000	46.38	-18.90	27.48	74.00	-46.52	peak			P	
4 *	7953.000	44.31	-13.27	31.04	74.00	-42.96	peak			P	
5	11200.000	39.24	-10.42	28.82	74.00	-45.18	peak			P	
6	13784.000	33.47	-8.42	25.05	74.00	-48.95	peak			P	


Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Vertical** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Vega Test Engineer: Felix Pang
Test Mode: AC80 5210MHz MIMO
Test Voltage: DC 3.7V
Note:

Radiated Emission Measurement

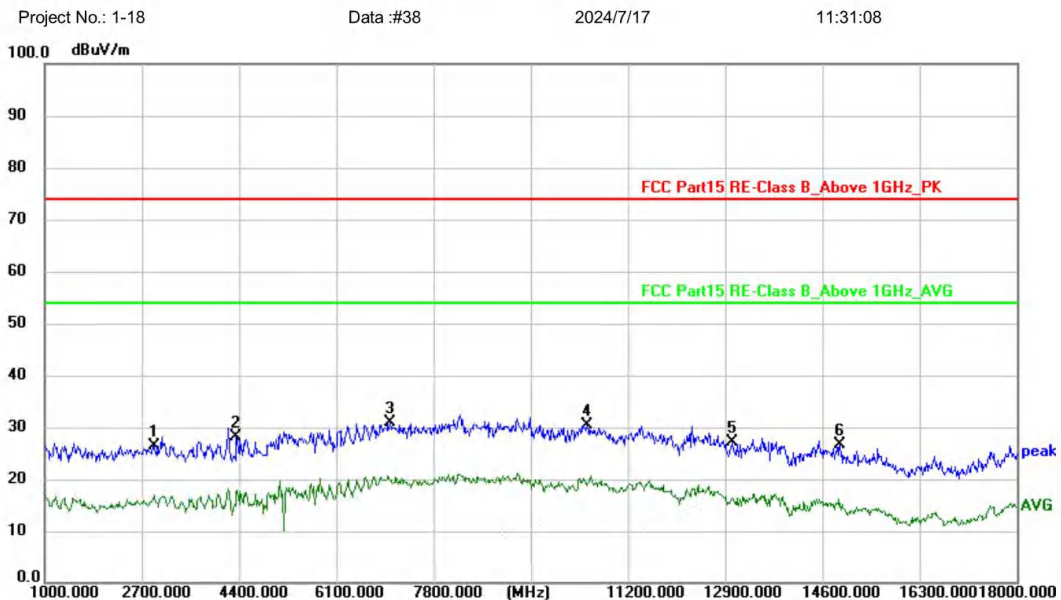

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2904.000	50.94	-24.55	26.39	74.00	-47.61	peak			P	
2	4349.000	52.32	-24.28	28.04	74.00	-45.96	peak			P	
3 *	7035.000	45.06	-14.06	31.00	74.00	-43.00	peak			P	
4	10486.000	41.40	-11.09	30.31	74.00	-43.69	peak			P	
5	13019.000	36.11	-9.06	27.05	74.00	-46.95	peak			P	
6	14906.000	34.92	-8.41	26.51	74.00	-47.49	peak			P	


Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Vega Test Engineer: Felix Pang
Test Mode: AC80 5210MHz MIMO
Test Voltage: DC 3.7V
Note:

Radiated Emission Measurement

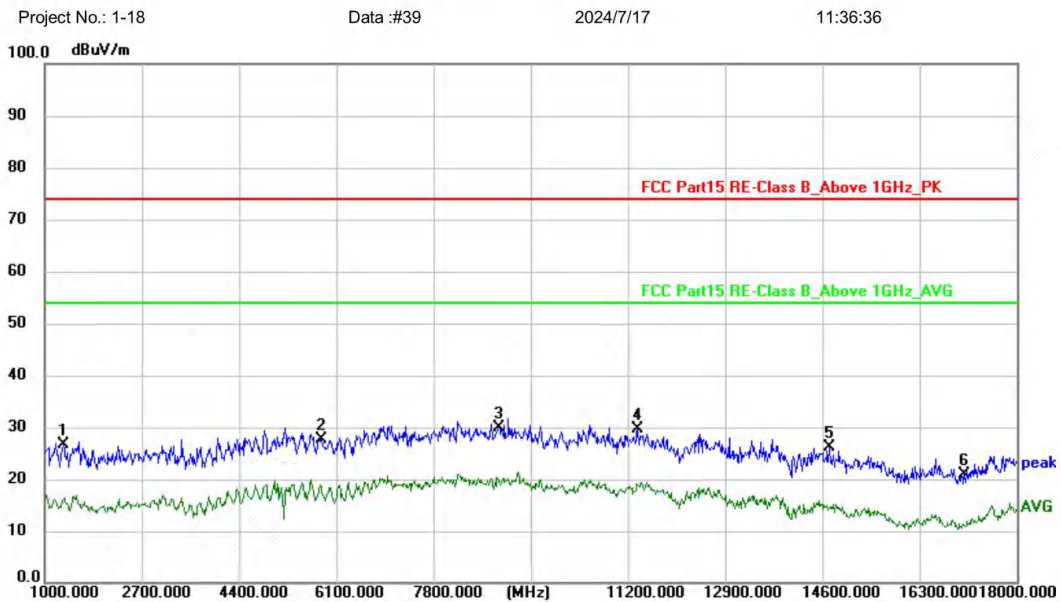

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	1323.000	54.03	-27.52	26.51	74.00	-47.49	peak			P	
2	5845.000	44.85	-17.15	27.70	74.00	-46.30	peak			P	
3 *	8939.000	42.30	-12.35	29.95	74.00	-44.05	peak			P	
4	11370.000	39.99	-10.42	29.57	74.00	-44.43	peak			P	
5	14719.000	34.62	-8.38	26.24	74.00	-47.76	peak			P	
6	17082.000	29.79	-8.90	20.89	74.00	-53.11	peak			P	


Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Vega Test Engineer: Felix Pang
Test Mode: AX80 5210MHz MIMO
Test Voltage: DC 3.7V
Note:

Radiated Emission Measurement

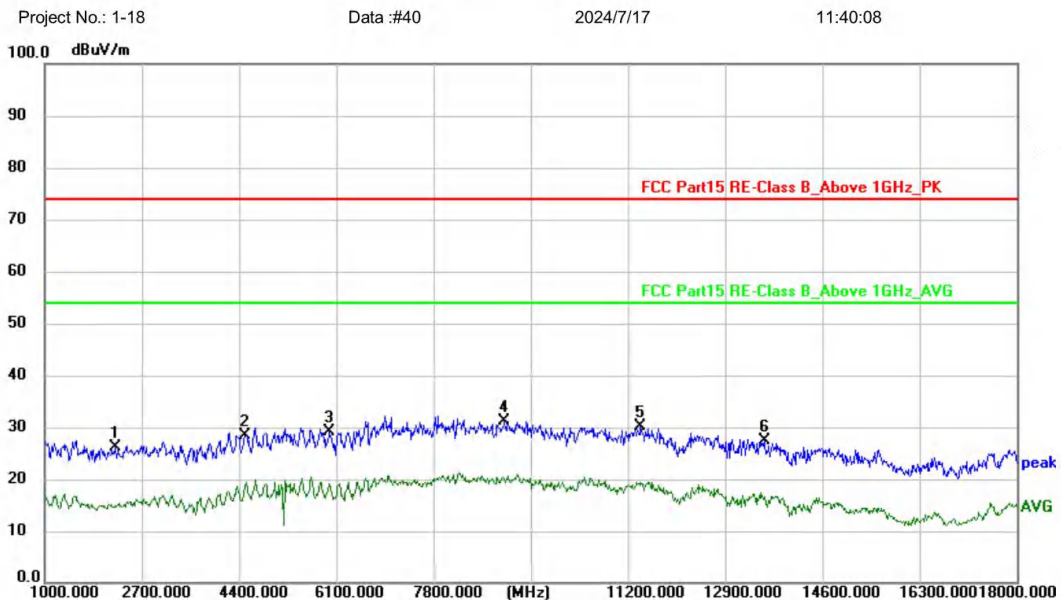

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2224.000	52.72	-26.62	26.10	74.00	-47.90	peak			P	
2	4502.000	48.67	-20.26	28.41	74.00	-45.59	peak			P	
3	5981.000	46.14	-16.93	29.21	74.00	-44.79	peak			P	
4 *	9041.000	43.52	-12.28	31.24	74.00	-42.76	peak			P	
5	11421.000	40.64	-10.40	30.24	74.00	-43.76	peak			P	
6	13580.000	36.05	-8.61	27.44	74.00	-46.56	peak			P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Vertical** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Vega Test Engineer: Felix Pang
Test Mode: AX80 5210MHz MIMO
Test Voltage: DC 3.7V
Note:

Radiated Emission Measurement


Project No.: 1-18

Data :#41

2024/7/17

11:46:34

100.0 dBuV/m

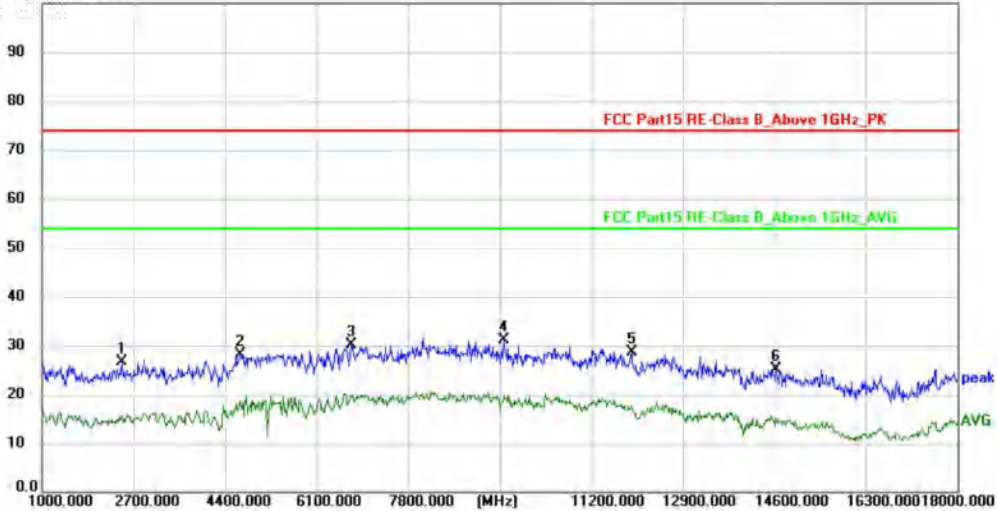

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2479.000	52.52	-25.84	26.68	74.00	-47.32	peak			P	
2	4689.000	54.65	-26.51	28.14	74.00	-45.86	peak			P	
3	6746.000	44.88	-14.80	30.08	74.00	-43.92	peak			P	
4 *	9568.000	43.05	-11.98	31.07	74.00	-42.93	peak			P	
5	11948.000	39.12	-10.37	28.75	74.00	-45.25	peak			P	
6	14634.000	33.39	-8.36	25.03	74.00	-48.97	peak			P	


Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Vega Test Engineer: Felix Pang
Test Mode: A 5180MHz
Test Voltage: DC 3.7V
Note:

Radiated Emission Measurement

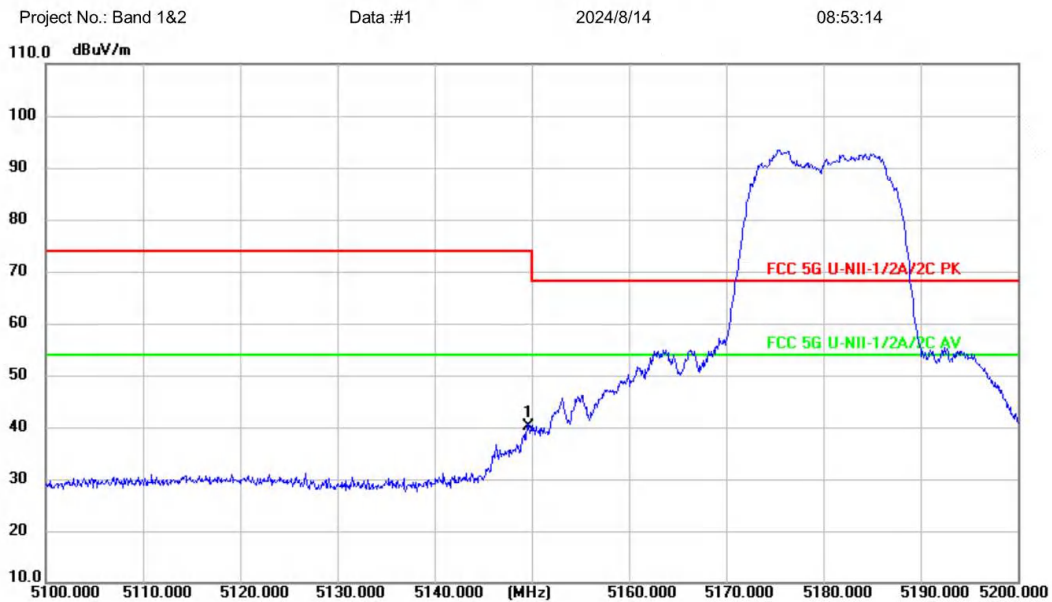

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	5149.775	58.46	-18.32	40.14	74.00	-33.86	peak			P	


Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Vertical** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Vega Test Engineer: Felix Pang
Test Mode: A 5180MHz
Test Voltage: DC 3.7V
Note:

Radiated Emission Measurement

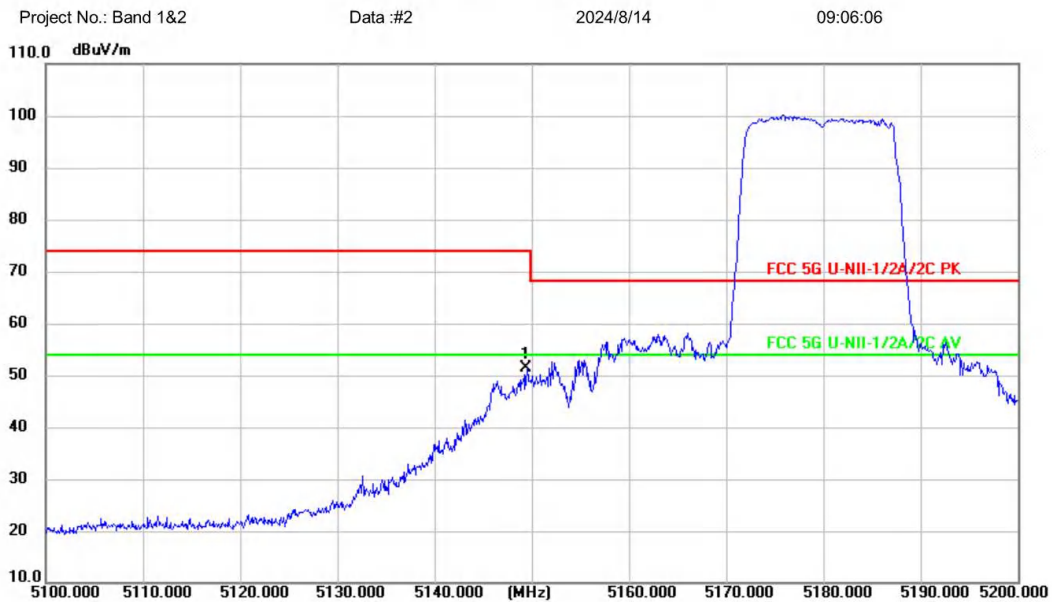

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	5149.587	78.12	-26.82	51.30	74.00	-22.70	peak			P	


Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Vega Test Engineer: Felix Pang
Test Mode: N40 5190MHz
Test Voltage: DC 3.7V
Note:

Radiated Emission Measurement

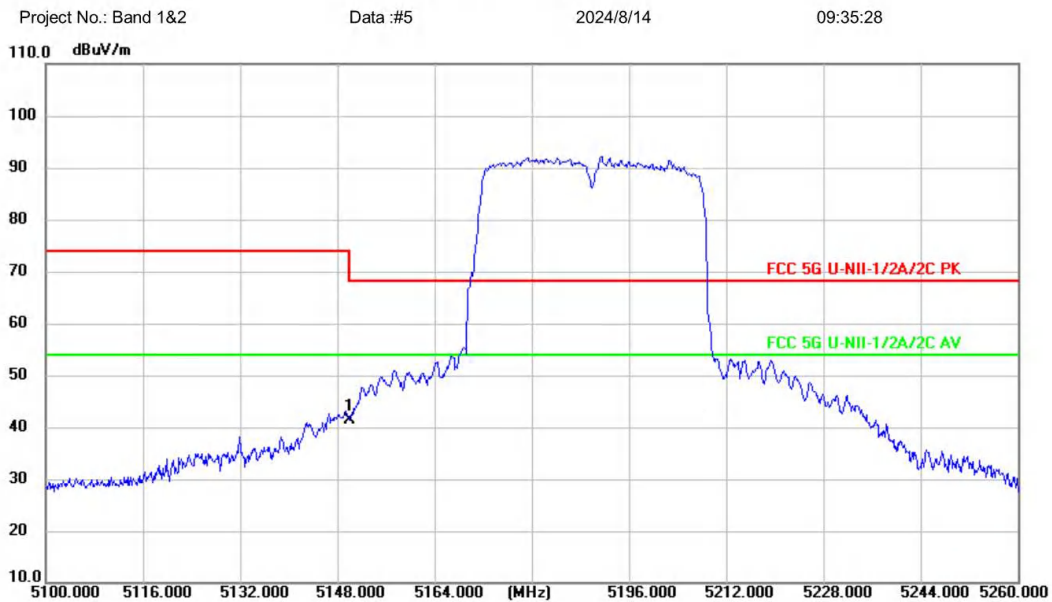

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	5150.000	59.63	-18.31	41.32	68.20	-26.88	peak			P	


Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Vertical** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Vega Test Engineer: Felix Pang
Test Mode: N40 5190MHz
Test Voltage: DC 3.7V
Note:

Radiated Emission Measurement

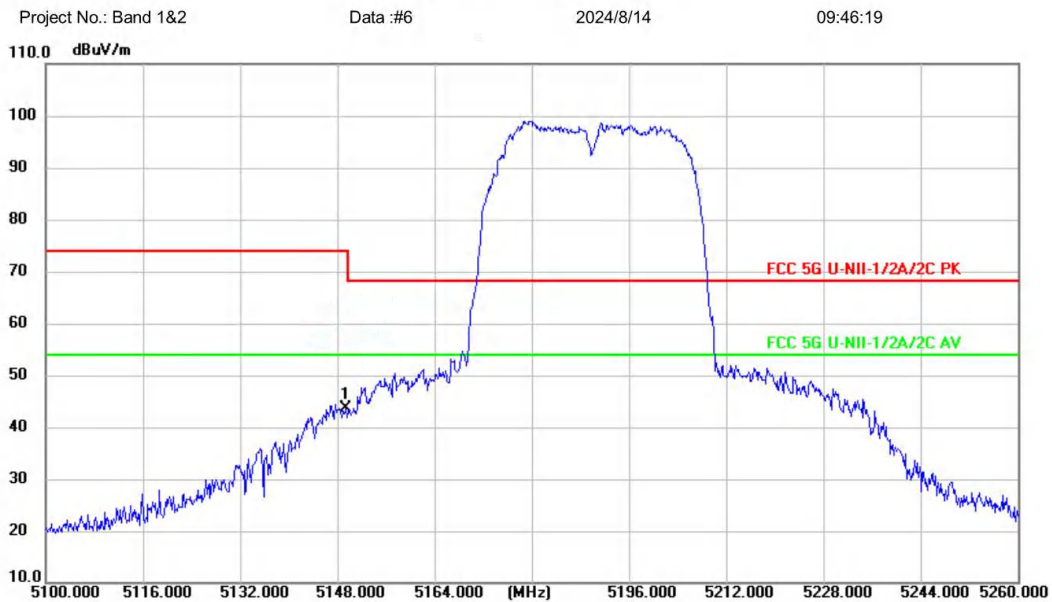

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	5149.460	70.56	-26.82	43.74	74.00	-30.26	peak			P	


Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Vega Test Engineer: Felix Pang
Test Mode: AX80 5210MHz
Test Voltage: DC 3.7V
Note:

Radiated Emission Measurement

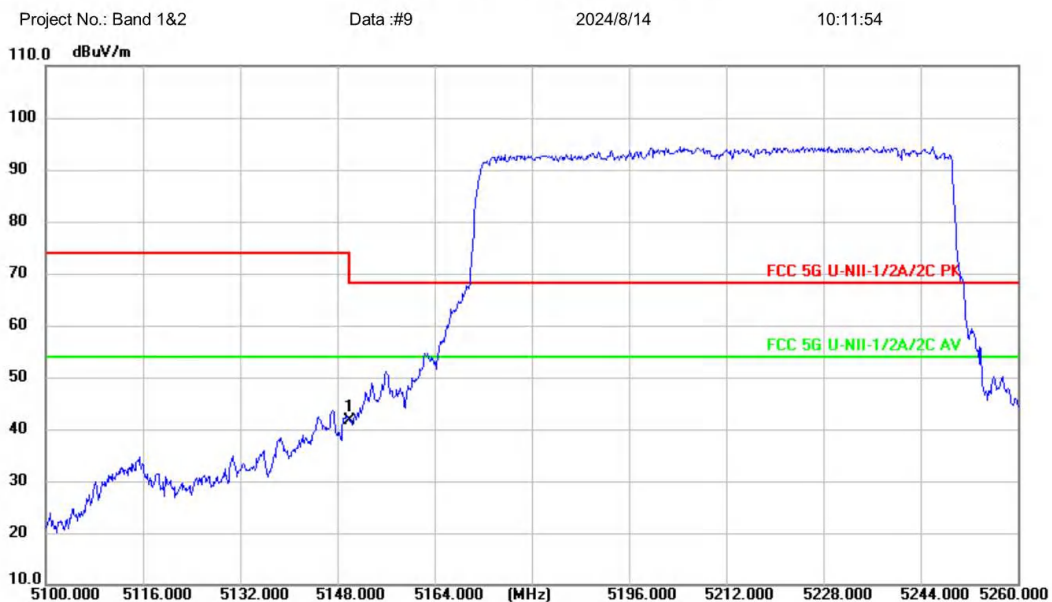

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	5150.180	68.54	-26.80	41.74	68.20	-26.46	peak			P	


Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Vertical** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Vega Test Engineer: Felix Pang
Test Mode: AX80 5210MHz
Test Voltage: DC 3.7V
Note:

Radiated Emission Measurement

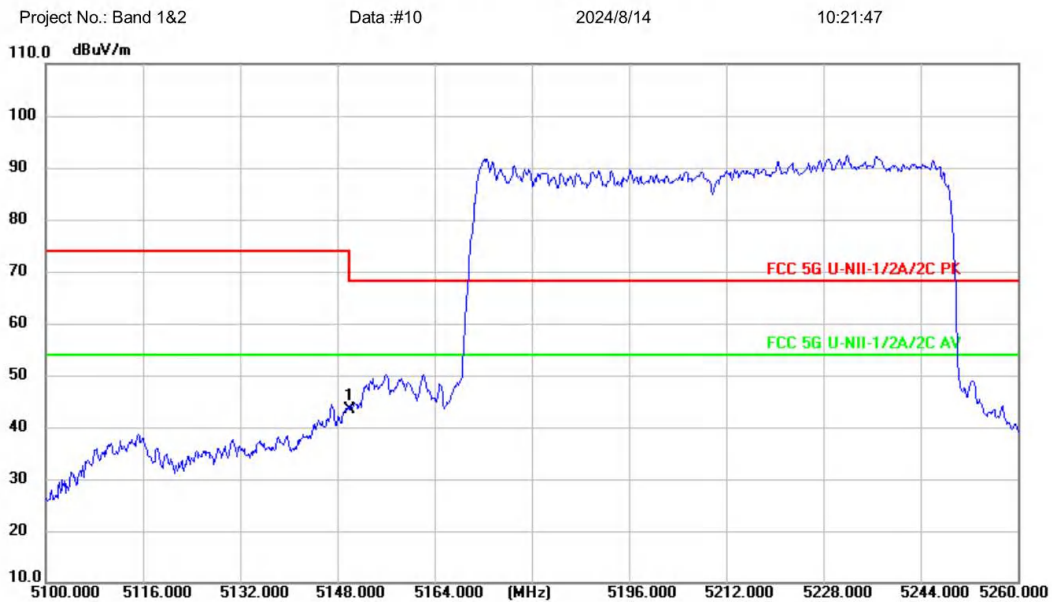

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	5150.140	70.10	-26.80	43.30	68.20	-24.90	peak			P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit

U-NII-3:




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Vega Test Engineer: Felix Pang
Test Mode: N20 5785MHz MIMO
Test Voltage: DC 3.7V
Note:

Radiated Emission Measurement

Project No.: 1-18 Data #1 2024/7/17 22:52:30

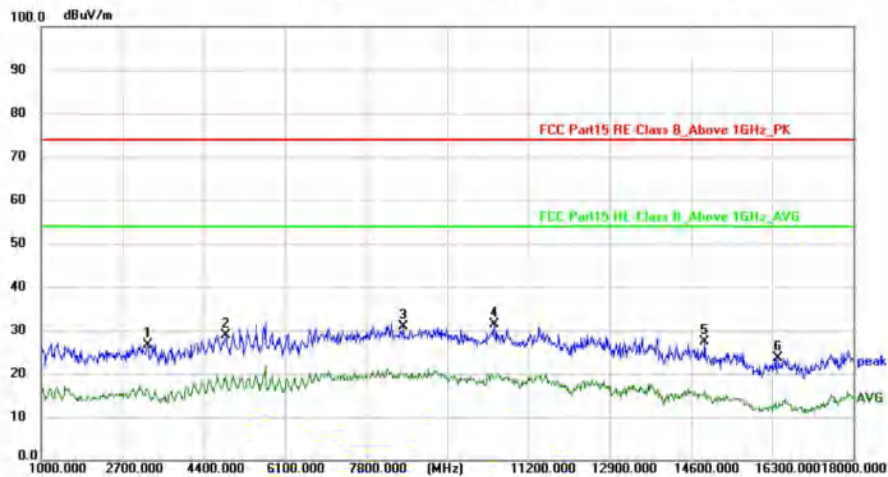

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	3227.000	50.37	-23.74	26.63	74.00	-47.37	peak			P	
2	4859.000	47.98	-19.05	28.93	74.00	-45.07	peak			P	
3	8582.000	43.56	-12.69	30.87	74.00	-43.13	peak			P	
4 *	10486.000	42.46	-11.09	31.37	74.00	-42.63	peak			P	
5	14889.000	35.77	-8.40	27.37	74.00	-46.63	peak			P	
6	16419.000	32.96	-9.26	23.70	74.00	-50.30	peak			P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit