




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Vertical** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Vega Test Engineer: Felix Pang
Test Mode: AX20 5785MHz MIMO
Test Voltage: DC 3.7V
Note:

Radiated Emission Measurement

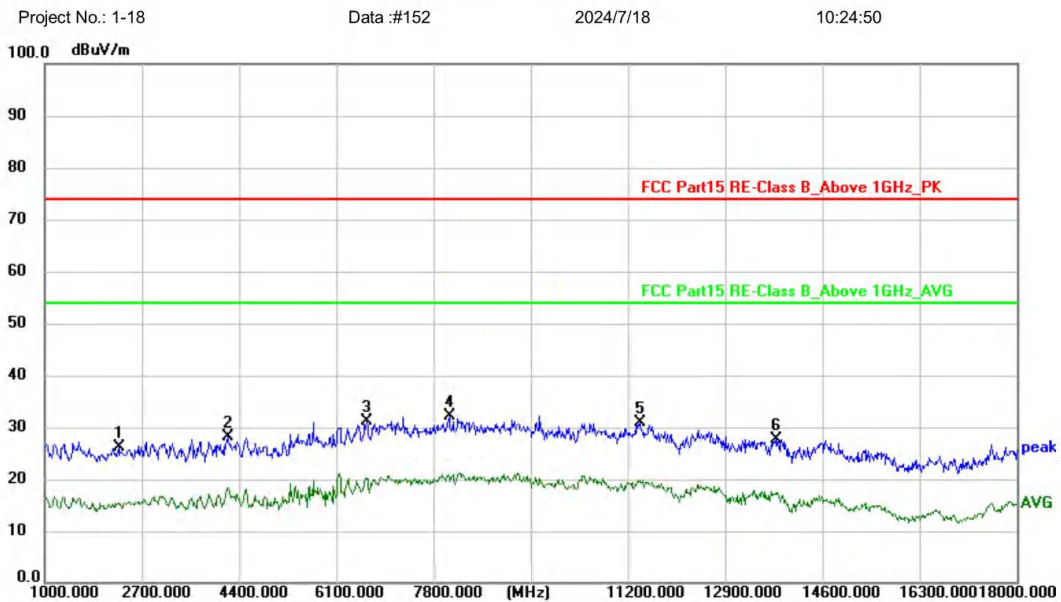

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2292.000	52.55	-26.41	26.14	74.00	-47.86	peak			P	
2	4196.000	51.28	-23.26	28.02	74.00	-45.98	peak			P	
3	6627.000	46.32	-15.13	31.19	74.00	-42.81	peak			P	
4 *	8072.000	45.24	-13.16	32.08	74.00	-41.92	peak			P	
5	11404.000	41.30	-10.41	30.89	74.00	-43.11	peak			P	
6	13784.000	35.96	-8.42	27.54	74.00	-46.46	peak			P	


Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Vega Test Engineer: Felix Pang
Test Mode: AX20 5785MHz MIMO
Test Voltage: DC 3.7V
Note:

Radiated Emission Measurement

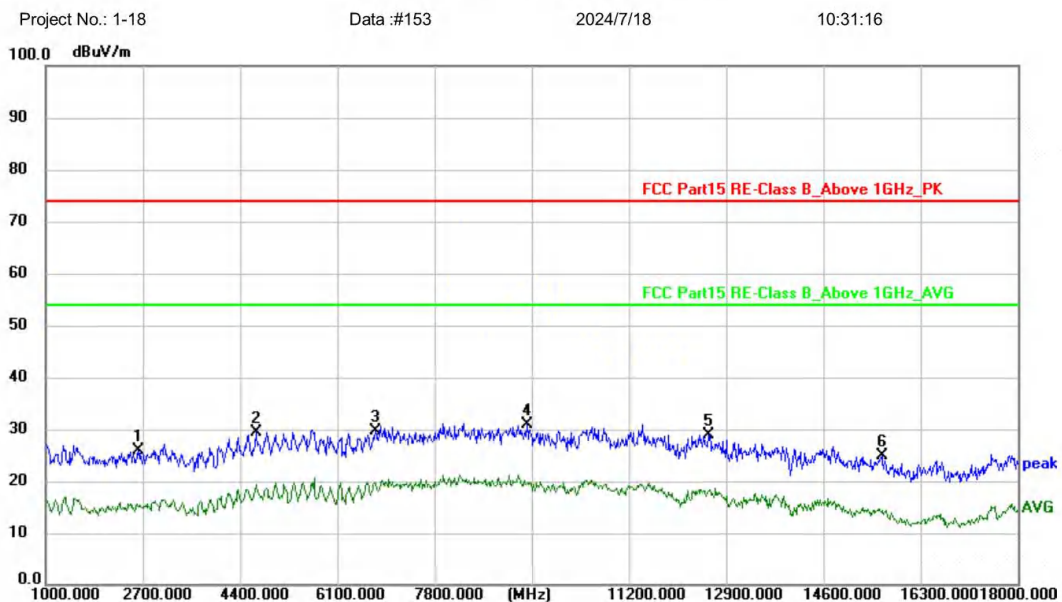

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2615.000	51.27	-25.43	25.84	74.00	-48.16	peak			P	
2	4672.000	49.13	-19.68	29.45	74.00	-44.55	peak			P	
3	6763.000	44.34	-14.75	29.59	74.00	-44.41	peak			P	
4 *	9415.000	42.85	-12.07	30.78	74.00	-43.22	peak			P	
5	12594.000	38.57	-9.61	28.96	74.00	-45.04	peak			P	
6	15620.000	33.78	-8.98	24.80	74.00	-49.20	peak			P	


Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Vega Test Engineer: Felix Pang
Test Mode: AX20 5825MHz MIMO
Test Voltage: DC 3.7V
Note:

Radiated Emission Measurement

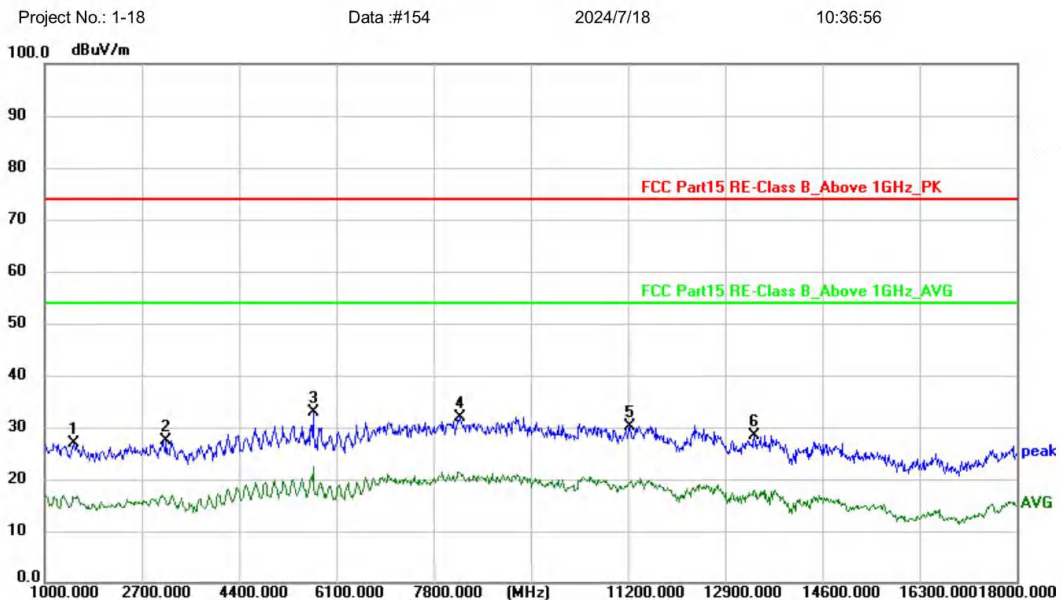

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	1510.000	54.40	-27.45	26.95	74.00	-47.05	peak			P	
2	3125.000	51.42	-23.97	27.45	74.00	-46.55	peak			P	
3 *	5692.000	50.16	-17.40	32.76	74.00	-41.24	peak			P	
4	8259.000	44.80	-12.99	31.81	74.00	-42.19	peak			P	
5	11234.000	40.54	-10.41	30.13	74.00	-43.87	peak			P	
6	13410.000	37.23	-8.75	28.48	74.00	-45.52	peak			P	


Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Vertical** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Vega Test Engineer: Felix Pang
Test Mode: AX20 5825MHz MIMO
Test Voltage: DC 3.7V
Note:

Radiated Emission Measurement

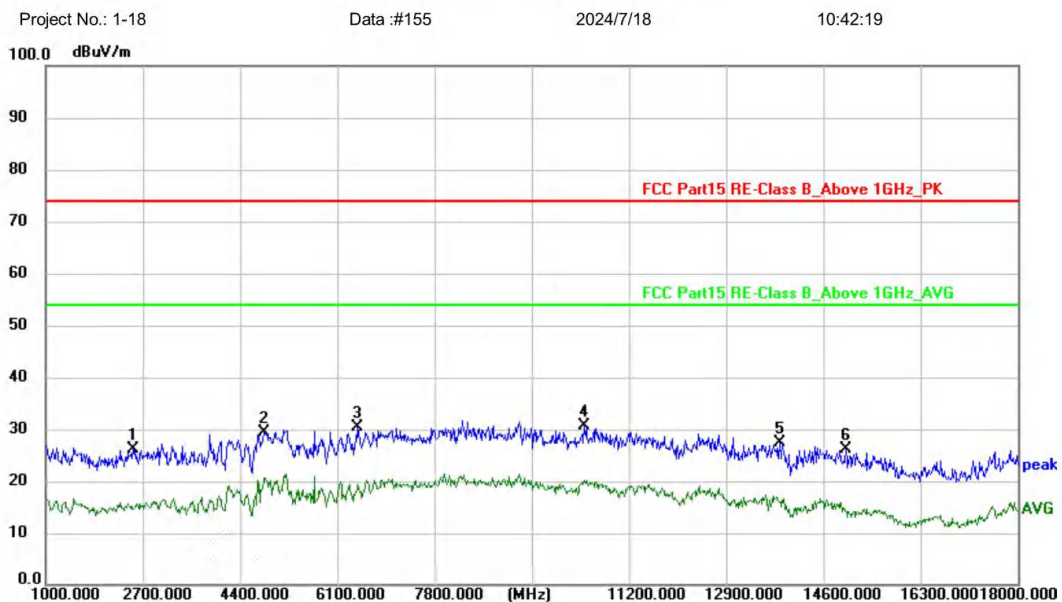

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2530.000	51.79	-25.69	26.10	74.00	-47.90	peak			P	
2	4808.000	56.70	-27.29	29.41	74.00	-44.59	peak			P	
3	6457.000	45.98	-15.61	30.37	74.00	-43.63	peak			P	
4 *	10418.000	41.85	-11.18	30.67	74.00	-43.33	peak			P	
5	13835.000	35.83	-8.39	27.44	74.00	-46.56	peak			P	
6	14991.000	34.44	-8.43	26.01	74.00	-47.99	peak			P	


Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Vertical** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Vega Test Engineer: Felix Pang
Test Mode: N40 5755MHz MIMO
Test Voltage: DC 3.7V
Note:

Radiated Emission Measurement

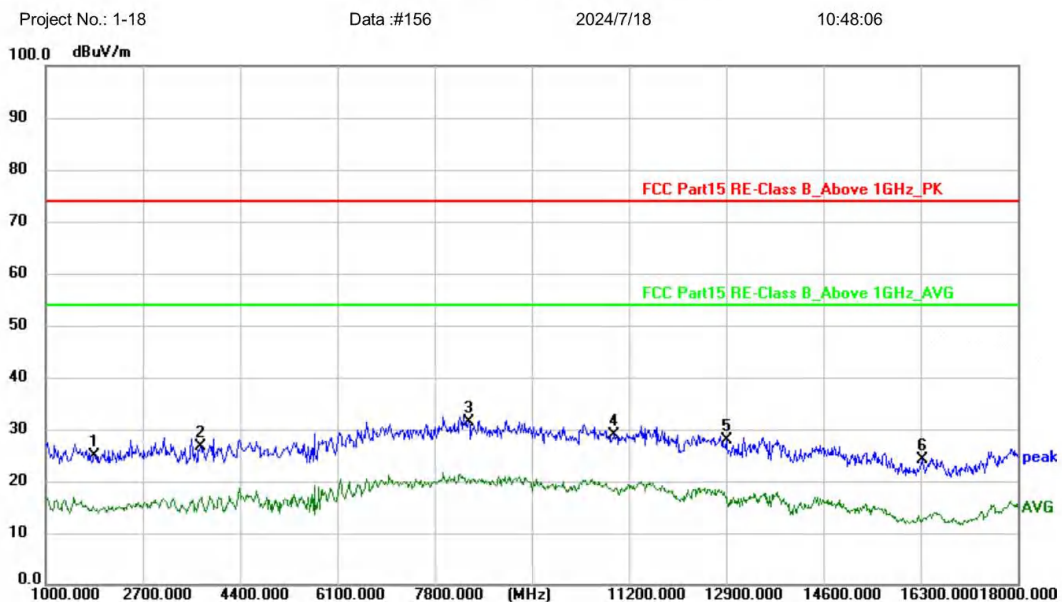

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	1850.000	52.27	-27.35	24.92	74.00	-49.08	peak			P	
2	3703.000	49.26	-22.66	26.60	74.00	-47.40	peak			P	
3 *	8395.000	44.36	-12.87	31.49	74.00	-42.51	peak			P	
4	10945.000	39.37	-10.51	28.86	74.00	-45.14	peak			P	
5	12900.000	37.05	-9.21	27.84	74.00	-46.16	peak			P	
6	16334.000	33.31	-9.27	24.04	74.00	-49.96	peak			P	


Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Vega Test Engineer: Felix Pang
Test Mode: N40 5755MHz MIMO
Test Voltage: DC 3.7V
Note:

Radiated Emission Measurement

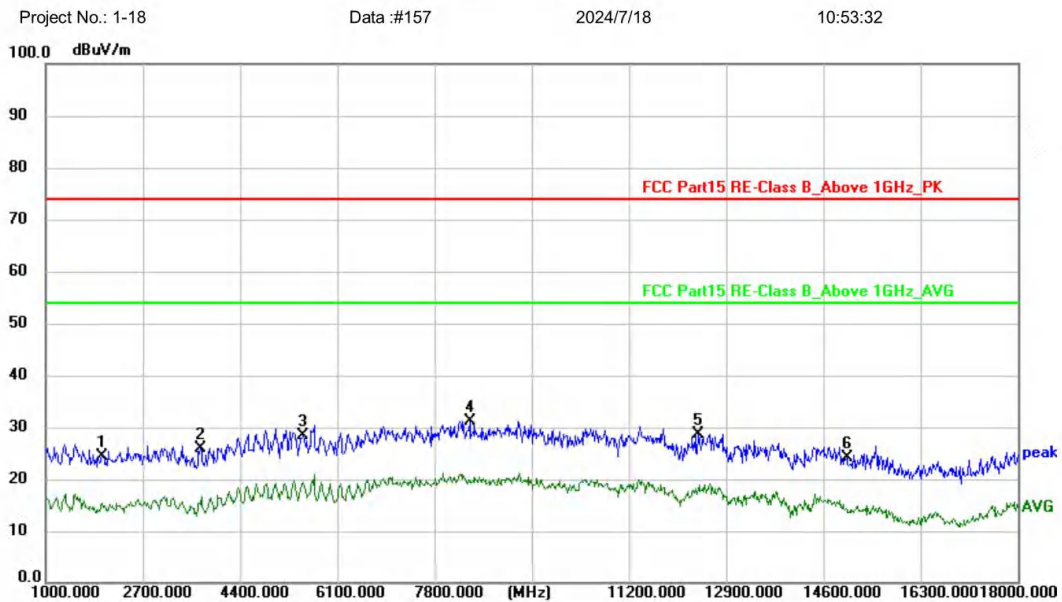

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	1986.000	51.58	-27.31	24.27	74.00	-49.73	peak			P	
2	3703.000	48.53	-22.66	25.87	74.00	-48.13	peak			P	
3	5505.000	46.11	-17.71	28.40	74.00	-45.60	peak			P	
4 *	8412.000	44.09	-12.86	31.23	74.00	-42.77	peak			P	
5	12407.000	38.54	-9.85	28.69	74.00	-45.31	peak			P	
6	15008.000	32.62	-8.44	24.18	74.00	-49.82	peak			P	


Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Vega Test Engineer: Felix Pang
Test Mode: N40 5795MHz MIMO
Test Voltage: DC 3.7V
Note:

Radiated Emission Measurement

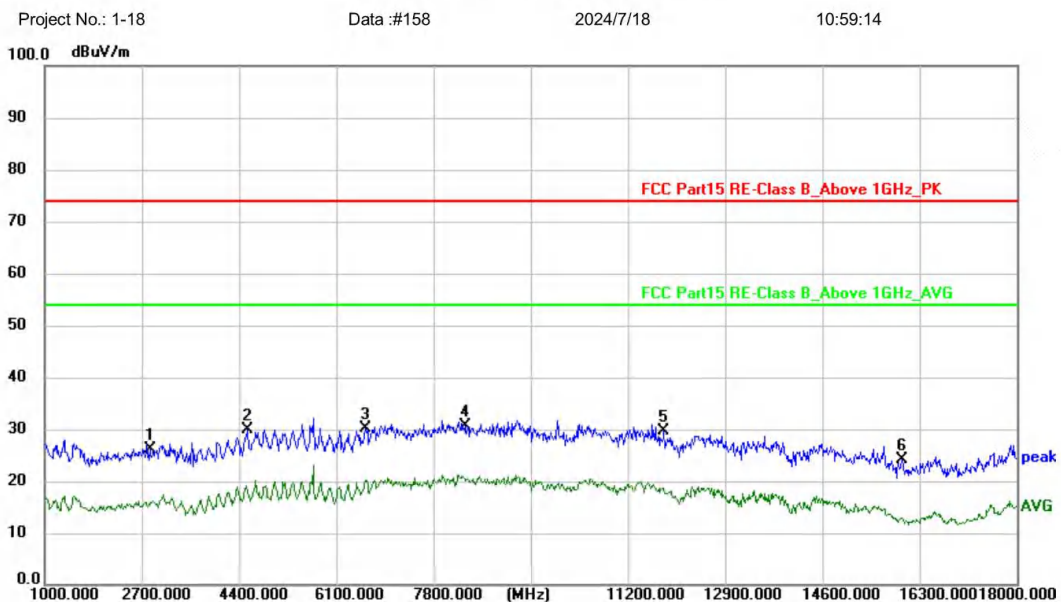

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2836.000	50.81	-24.76	26.05	74.00	-47.95	peak			P	
2	4553.000	49.89	-20.08	29.81	74.00	-44.19	peak			P	
3	6610.000	45.28	-15.19	30.09	74.00	-43.91	peak			P	
4 *	8344.000	43.59	-12.91	30.68	74.00	-43.32	peak			P	
5	11829.000	39.91	-10.38	29.53	74.00	-44.47	peak			P	
6	15994.000	33.33	-9.32	24.01	74.00	-49.99	peak			P	


Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Vertical** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Vega Test Engineer: Felix Pang
Test Mode: N40 5795MHz MIMO
Test Voltage: DC 3.7V
Note:

Radiated Emission Measurement

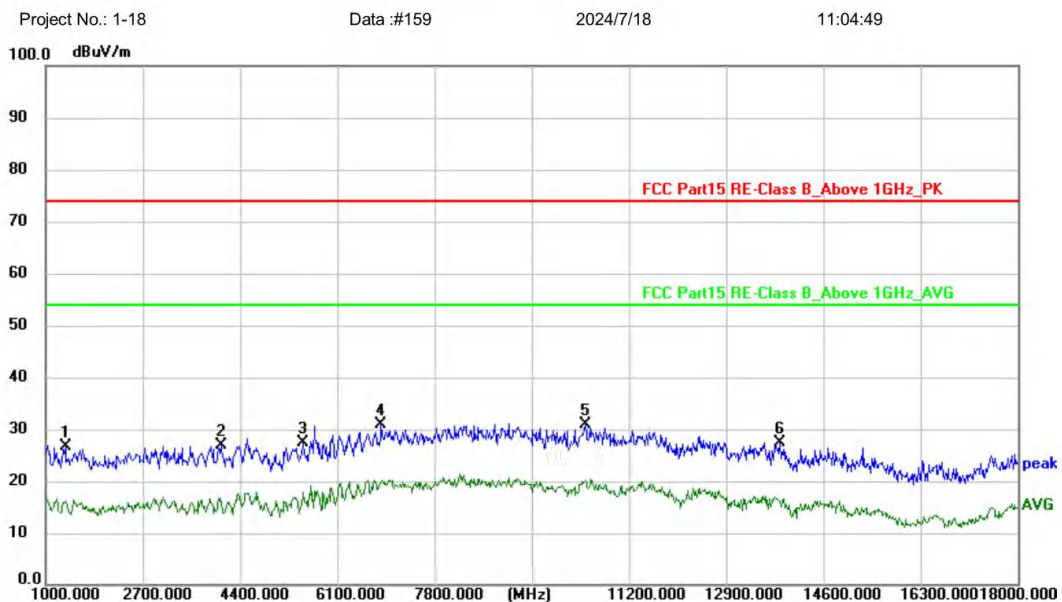

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	1340.000	54.20	-27.52	26.68	74.00	-47.32	peak			P	
2	4060.000	49.20	-22.37	26.83	74.00	-47.17	peak			P	
3	5505.000	50.00	-22.66	27.34	74.00	-46.66	peak			P	
4 *	6865.000	45.32	-14.46	30.86	74.00	-43.14	peak			P	
5	10435.000	41.95	-11.17	30.78	74.00	-43.22	peak			P	
6	13835.000	35.74	-8.39	27.35	74.00	-46.65	peak			P	


Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Vertical** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Vega Test Engineer: Felix Pang
Test Mode: AC40 5755MHz MIMO
Test Voltage: DC 3.7V
Note:

Radiated Emission Measurement

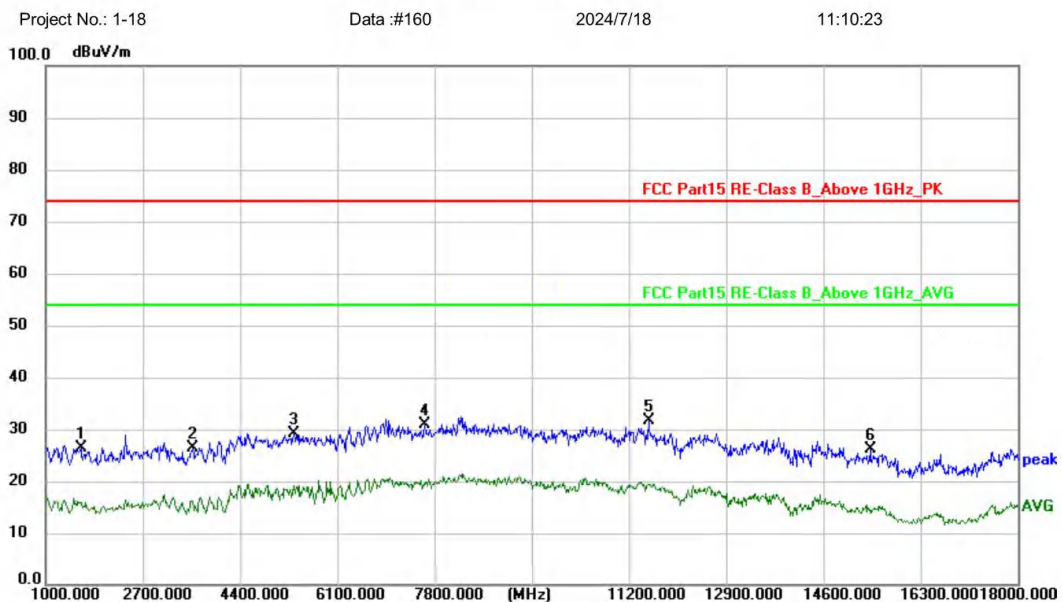

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	1612.000	53.91	-27.42	26.49	74.00	-47.51	peak			P	
2	3567.000	49.31	-22.96	26.35	74.00	-47.65	peak			P	
3	5335.000	53.73	-24.65	29.08	74.00	-44.92	peak			P	
4	7630.000	44.33	-13.56	30.77	74.00	-43.23	peak			P	
5 *	11540.000	42.04	-10.40	31.64	74.00	-42.36	peak			P	
6	15416.000	35.05	-8.81	26.24	74.00	-47.76	peak			P	


Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Vega Test Engineer: Felix Pang
Test Mode: AC40 5755MHz MIMO
Test Voltage: DC 3.7V
Note:

Radiated Emission Measurement

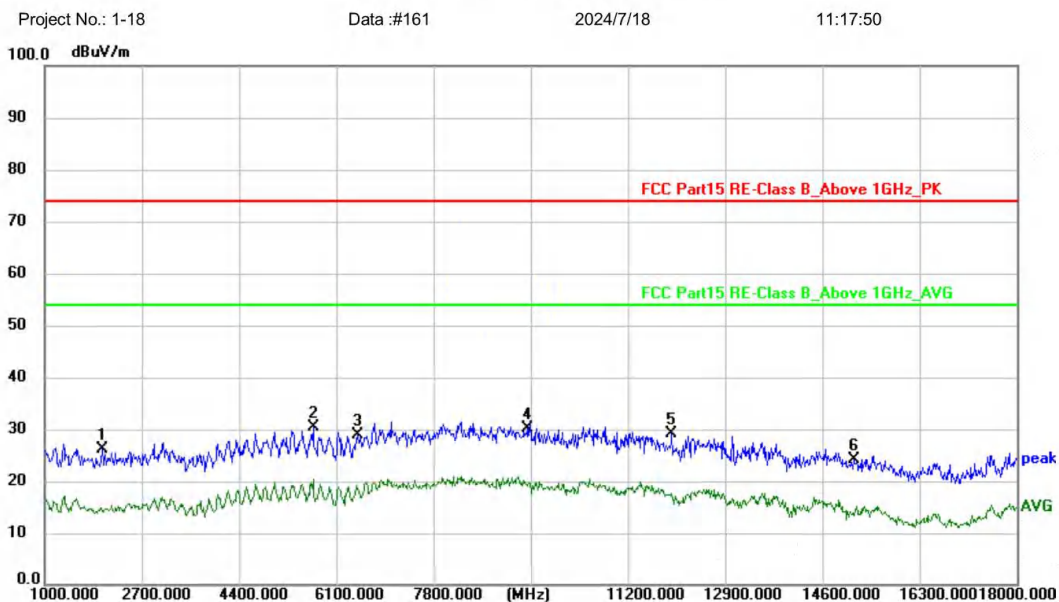

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2003.000	53.38	-27.29	26.09	74.00	-47.91	peak			P	
2 *	5692.000	47.80	-17.40	30.40	74.00	-43.60	peak			P	
3	6474.000	44.54	-15.56	28.98	74.00	-45.02	peak			P	
4	9449.000	42.28	-12.05	30.23	74.00	-43.77	peak			P	
5	11965.000	39.47	-10.39	29.08	74.00	-44.92	peak			P	
6	15144.000	32.58	-8.56	24.02	74.00	-49.98	peak			P	


Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Vega Test Engineer: Felix Pang
Test Mode: AC40 5795MHz MIMO
Test Voltage: DC 3.7V
Note:

Radiated Emission Measurement

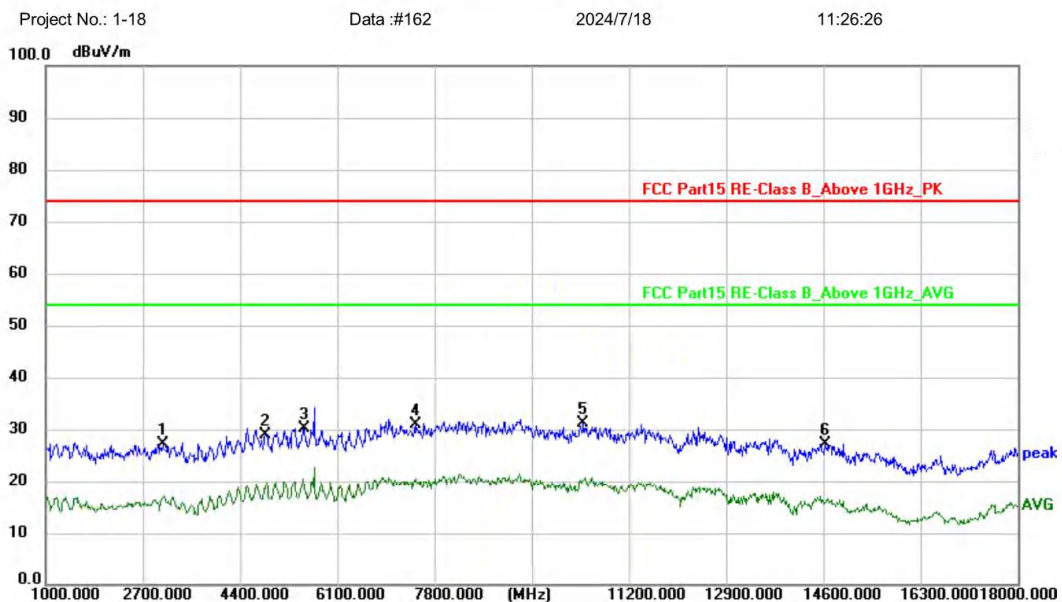

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	3040.000	51.27	-24.16	27.11	74.00	-46.89	peak			P	
2	4842.000	48.04	-19.09	28.95	74.00	-45.05	peak			P	
3	5522.000	47.93	-17.69	30.24	74.00	-43.76	peak			P	
4	7460.000	44.55	-13.69	30.86	74.00	-43.14	peak			P	
5 *	10401.000	42.26	-11.21	31.05	74.00	-42.95	peak			P	
6	14634.000	35.45	-8.36	27.09	74.00	-46.91	peak			P	


Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Vertical** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Vega Test Engineer: Felix Pang
Test Mode: AC40 5795MHz MIMO
Test Voltage: DC 3.7V
Note:

Radiated Emission Measurement

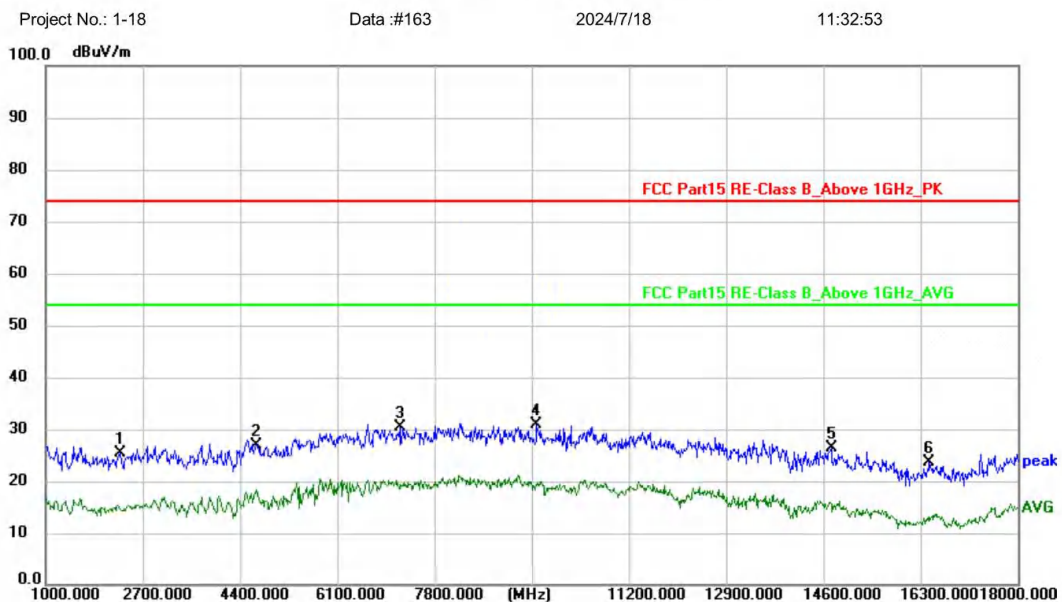

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2292.000	51.74	-26.41	25.33	74.00	-48.67	peak			P	
2	4689.000	53.44	-26.51	26.93	74.00	-47.07	peak			P	
3	7188.000	44.37	-13.93	30.44	74.00	-43.56	peak			P	
4 *	9585.000	42.82	-11.96	30.86	74.00	-43.14	peak			P	
5	14736.000	34.67	-8.38	26.29	74.00	-47.71	peak			P	
6	16453.000	32.91	-9.25	23.66	74.00	-50.34	peak			P	


Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Vertical** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Vega Test Engineer: Felix Pang
Test Mode: AX40 5755MHz MIMO
Test Voltage: DC 3.7V
Note:

Radiated Emission Measurement

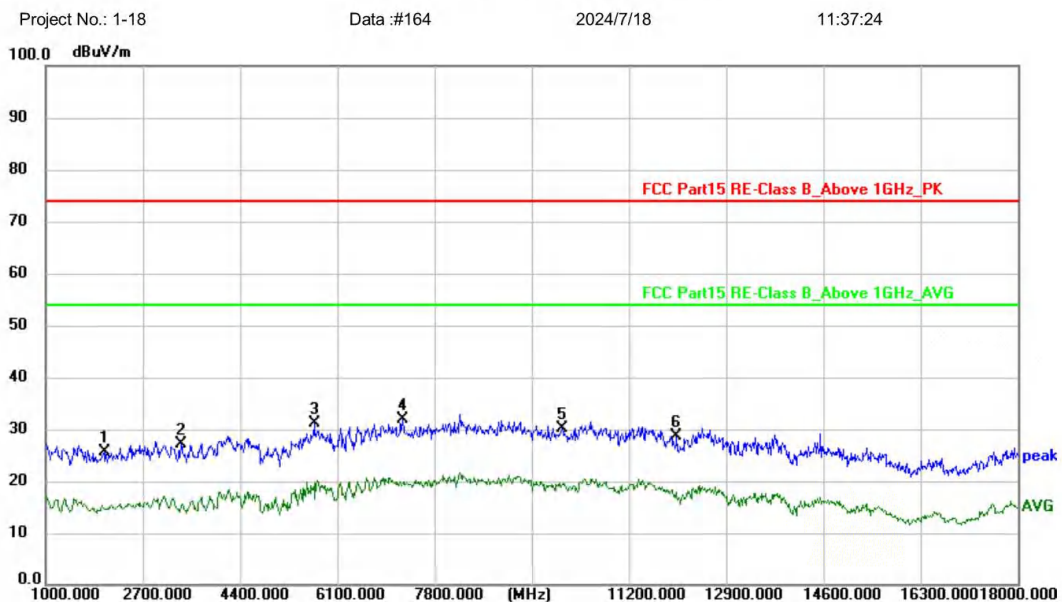

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2020.000	52.98	-27.24	25.74	74.00	-48.26	peak			P	
2	3363.000	50.52	-23.43	27.09	74.00	-46.91	peak			P	
3	5692.000	51.53	-20.48	31.05	74.00	-42.95	peak			P	
4 *	7239.000	45.75	-13.89	31.86	74.00	-42.14	peak			P	
5	10027.000	41.92	-11.69	30.23	74.00	-43.77	peak			P	
6	12033.000	39.02	-10.33	28.69	74.00	-45.31	peak			P	


Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Vega Test Engineer: Felix Pang
Test Mode: AX40 5755MHz MIMO
Test Voltage: DC 3.7V
Note:

Radiated Emission Measurement

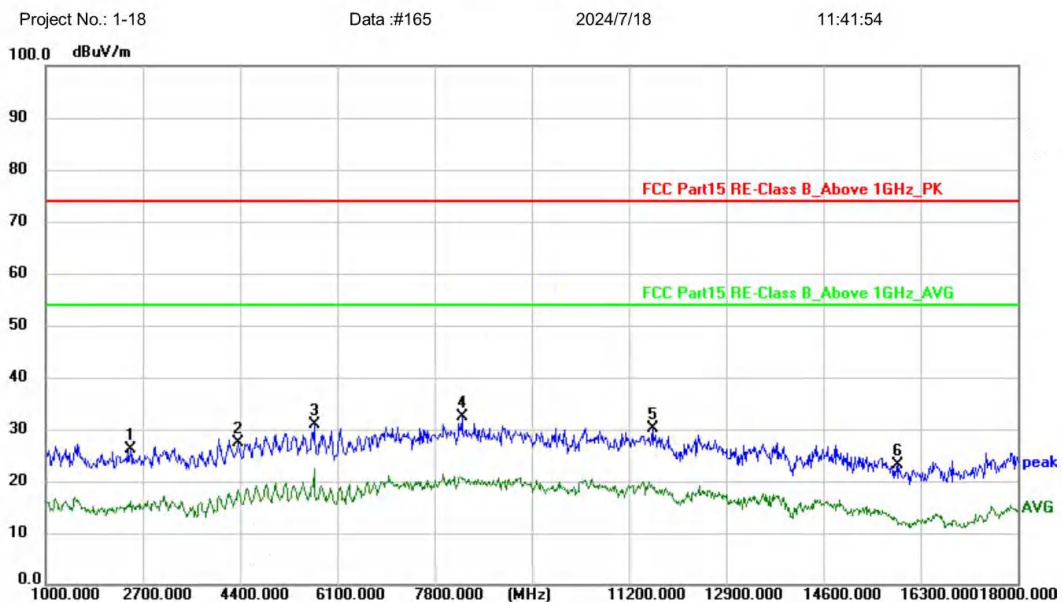

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2479.000	51.97	-25.84	26.13	74.00	-47.87	peak			P	
2	4366.000	48.18	-20.72	27.46	74.00	-46.54	peak			P	
3	5692.000	48.40	-17.40	31.00	74.00	-43.00	peak			P	
4 *	8276.000	45.25	-12.98	32.27	74.00	-41.73	peak			P	
5	11608.000	40.58	-10.40	30.18	74.00	-43.82	peak			P	
6	15909.000	32.32	-9.26	23.06	74.00	-50.94	peak			P	


Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Vega Test Engineer: Felix Pang
Test Mode: AX40 5795MHz MIMO
Test Voltage: DC 3.7V
Note:

Radiated Emission Measurement

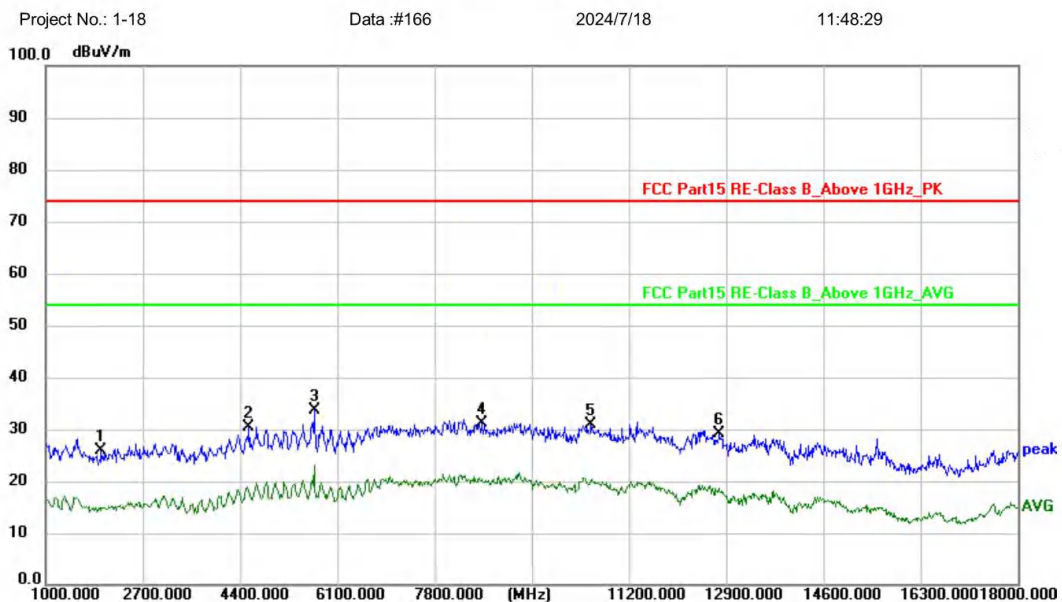

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	1969.000	53.31	-27.31	26.00	74.00	-48.00	peak			P	
2	4553.000	50.35	-20.08	30.27	74.00	-43.73	peak			P	
3 *	5692.000	50.92	-17.40	33.52	74.00	-40.48	peak			P	
4	8633.000	43.74	-12.64	31.10	74.00	-42.90	peak			P	
5	10537.000	41.84	-11.03	30.81	74.00	-43.19	peak			P	
6	12781.000	38.37	-9.36	29.01	74.00	-44.99	peak			P	


Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Vertical** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Vega Test Engineer: Felix Pang
Test Mode: AX40 5795MHz MIMO
Test Voltage: DC 3.7V
Note:

Radiated Emission Measurement

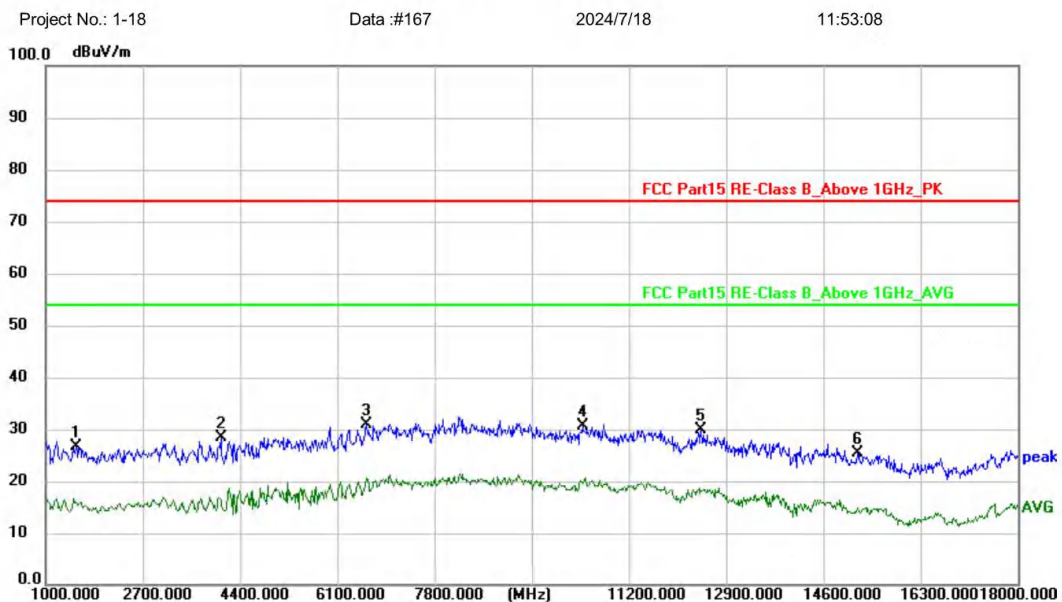

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	1527.000	53.95	-27.44	26.51	74.00	-47.49	peak			P	
2	4060.000	50.67	-22.37	28.30	74.00	-45.70	peak			P	
3 *	6610.000	46.18	-15.19	30.99	74.00	-43.01	peak			P	
4	10384.000	41.91	-11.22	30.69	74.00	-43.31	peak			P	
5	12458.000	39.63	-9.79	29.84	74.00	-44.16	peak			P	
6	15195.000	33.97	-8.60	25.37	74.00	-48.63	peak			P	


Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Vertical** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Vega Test Engineer: Felix Pang
Test Mode: AC80 5775MHz MIMO
Test Voltage: DC 3.7V
Note:

Radiated Emission Measurement

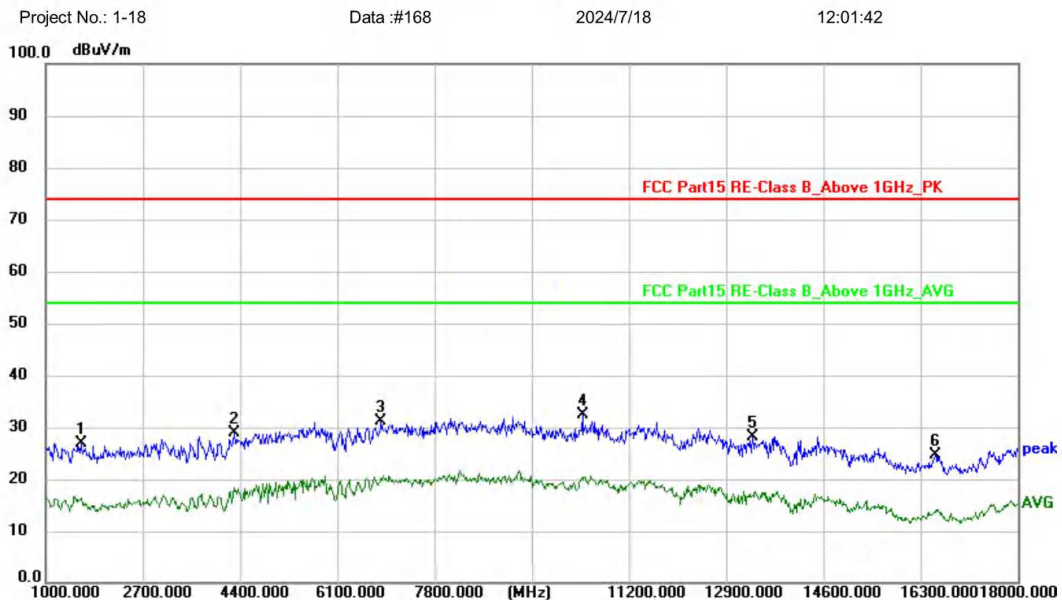

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	1612.000	54.37	-27.42	26.95	74.00	-47.05	peak			P	
2	4298.000	52.77	-23.93	28.84	74.00	-45.16	peak			P	
3	6865.000	45.53	-14.46	31.07	74.00	-42.93	peak			P	
4 *	10384.000	43.69	-11.22	32.47	74.00	-41.53	peak			P	
5	13359.000	37.03	-8.78	28.25	74.00	-45.75	peak			P	
6	16555.000	33.84	-9.24	24.60	74.00	-49.40	peak			P	


Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Vega Test Engineer: Felix Pang
Test Mode: AC80 5775MHz MIMO
Test Voltage: DC 3.7V
Note:

Radiated Emission Measurement

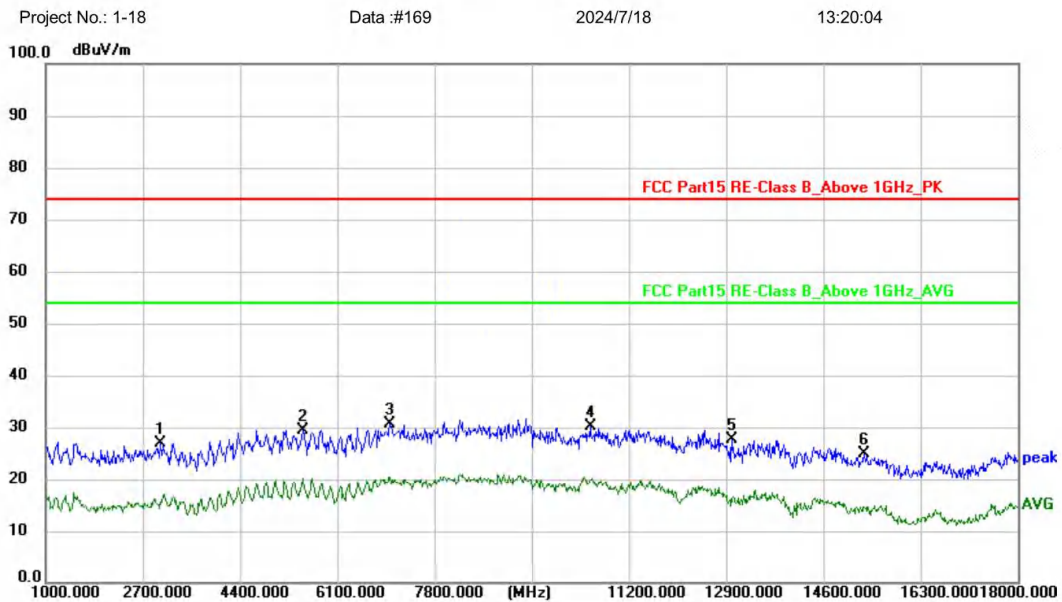

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	3006.000	51.22	-24.25	26.97	74.00	-47.03	peak			P	
2	5505.000	47.07	-17.71	29.36	74.00	-44.64	peak			P	
3 *	7018.000	44.63	-14.08	30.55	74.00	-43.45	peak			P	
4	10520.000	41.25	-11.05	30.20	74.00	-43.80	peak			P	
5	13002.000	36.61	-9.08	27.53	74.00	-46.47	peak			P	
6	15314.000	33.59	-8.71	24.88	74.00	-49.12	peak			P	


Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Vega Test Engineer: Felix Pang
Test Mode: AX80 5775MHz MIMO
Test Voltage: DC 3.7V
Note:

Radiated Emission Measurement

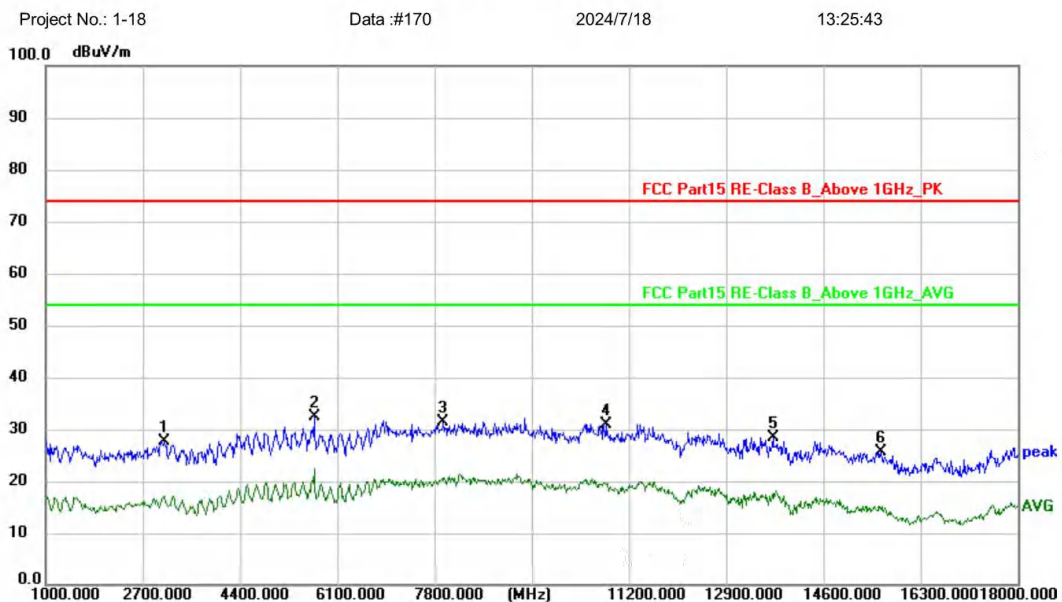

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	3074.000	51.84	-24.09	27.75	74.00	-46.25	peak			P	
2 *	5692.000	49.82	-17.40	32.42	74.00	-41.58	peak			P	
3	7953.000	44.60	-13.27	31.33	74.00	-42.67	peak			P	
4	10809.000	41.61	-10.68	30.93	74.00	-43.07	peak			P	
5	13716.000	36.87	-8.50	28.37	74.00	-45.63	peak			P	
6	15603.000	34.62	-8.98	25.64	74.00	-48.36	peak			P	


Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Vertical** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Vega Test Engineer: Felix Pang
Test Mode: AX80 5775MHz MIMO
Test Voltage: DC 3.7V
Note:

Radiated Emission Measurement

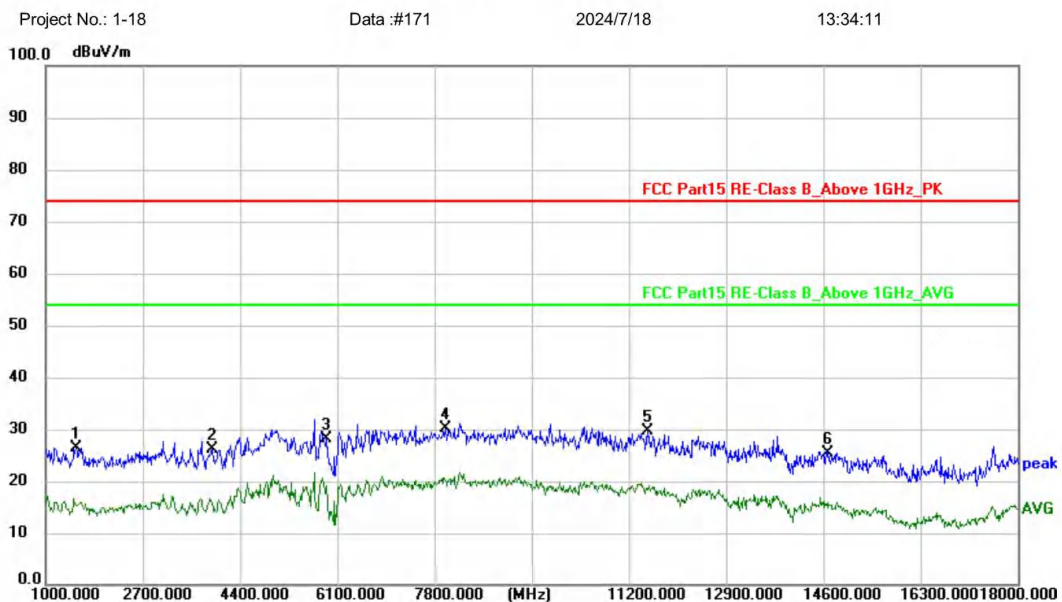

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	1527.000	53.74	-27.44	26.30	74.00	-47.70	peak			P	
2	3907.000	48.23	-22.19	26.04	74.00	-47.96	peak			P	
3	5913.000	46.14	-17.91	28.23	74.00	-45.77	peak			P	
4 *	7987.000	43.40	-13.24	30.16	74.00	-43.84	peak			P	
5	11523.000	40.07	-10.40	29.67	74.00	-44.33	peak			P	
6	14685.000	33.76	-8.37	25.39	74.00	-48.61	peak			P	


Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Vertical** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Vega Test Engineer: Felix Pang
Test Mode: AC20 5180MHz MIMO
Test Voltage: DC 3.7V
Note:

Radiated Emission Measurement

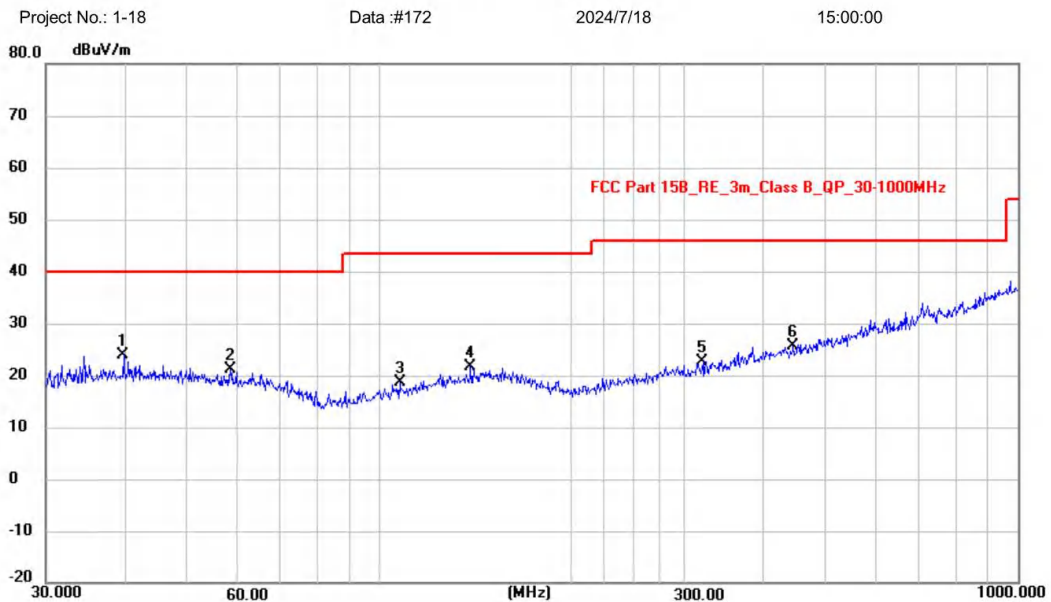

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	39.7146	9.27	14.53	23.80	40.00	-16.20	peak			P	
2	58.4074	7.87	13.28	21.15	40.00	-18.85	peak			P	
3	107.5100	7.19	11.33	18.52	43.50	-24.98	peak			P	
4	138.8734	7.81	13.83	21.64	43.50	-21.86	peak			P	
5	321.0605	7.14	15.50	22.64	46.00	-23.36	peak			P	
6	444.8514	6.81	18.82	25.63	46.00	-20.37	peak			P	


Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Vertical** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Vega Test Engineer: Felix Pang
Test Mode: A 5745MHz SISO
Test Voltage: DC 3.7V
Note:

Radiated Emission Measurement

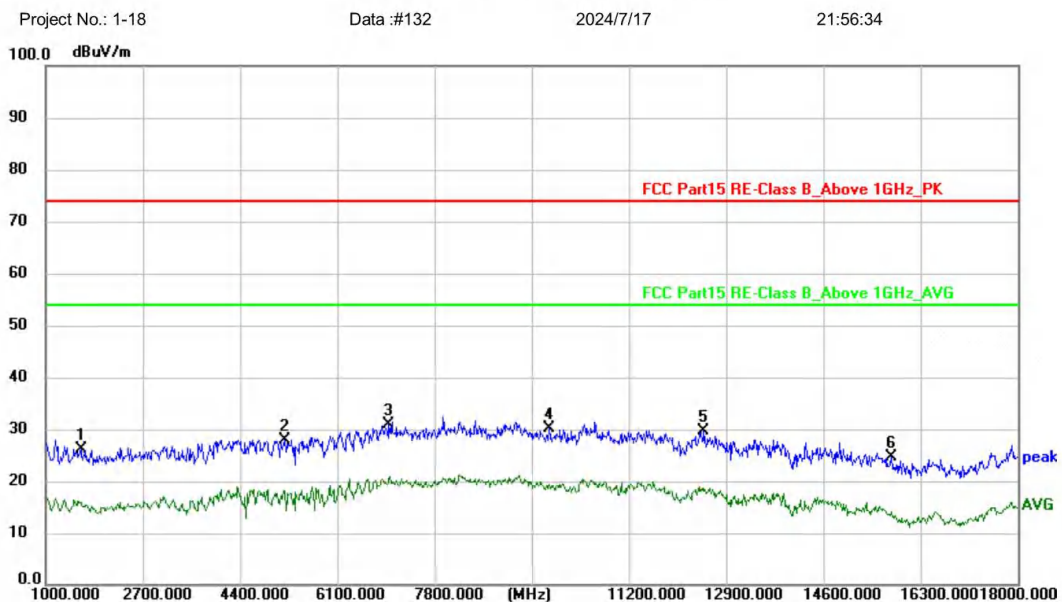

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	1612.000	53.65	-27.42	26.23	74.00	-47.77	peak			P	
2	5182.000	54.43	-26.44	27.99	74.00	-46.01	peak			P	
3 *	7001.000	44.99	-14.09	30.90	74.00	-43.10	peak			P	
4	9806.000	41.89	-11.84	30.05	74.00	-43.95	peak			P	
5	12509.000	39.25	-9.72	29.53	74.00	-44.47	peak			P	
6	15790.000	33.88	-9.13	24.75	74.00	-49.25	peak			P	


Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Vega Test Engineer: Felix Pang
Test Mode: A 5745MHz SISO
Test Voltage: DC 3.7V
Note:

Radiated Emission Measurement

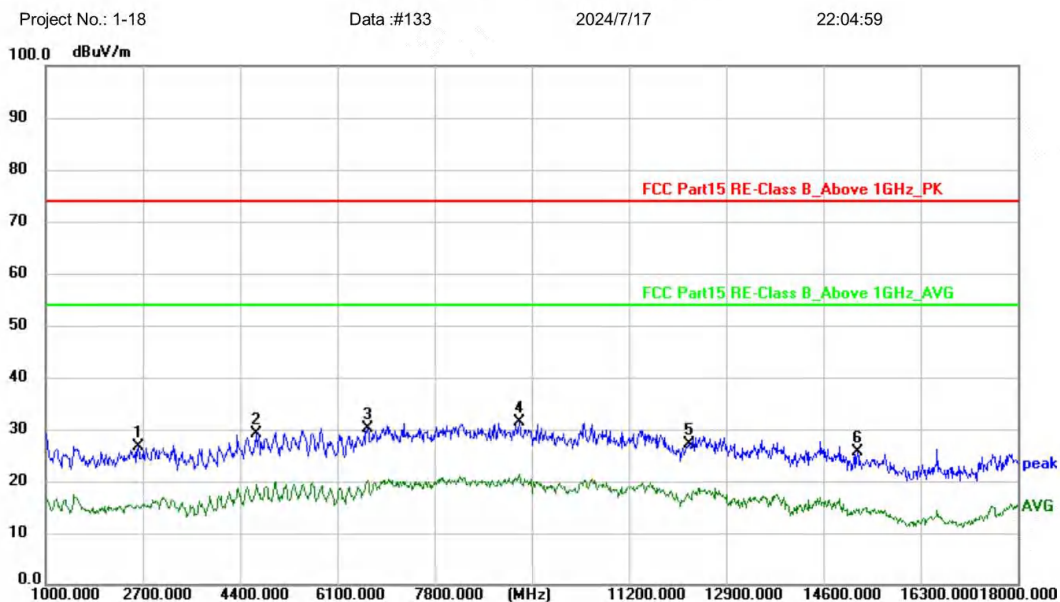

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2615.000	52.18	-25.43	26.75	74.00	-47.25	peak			P	
2	4672.000	48.77	-19.68	29.09	74.00	-44.91	peak			P	
3	6627.000	45.35	-15.13	30.22	74.00	-43.78	peak			P	
4 *	9279.000	43.62	-12.14	31.48	74.00	-42.52	peak			P	
5	12254.000	37.30	-10.05	27.25	74.00	-46.75	peak			P	
6	15195.000	34.15	-8.60	25.55	74.00	-48.45	peak			P	


Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Vega Test Engineer: Felix Pang
Test Mode: A 5785MHz SISO
Test Voltage: DC 3.7V
Note:

Radiated Emission Measurement

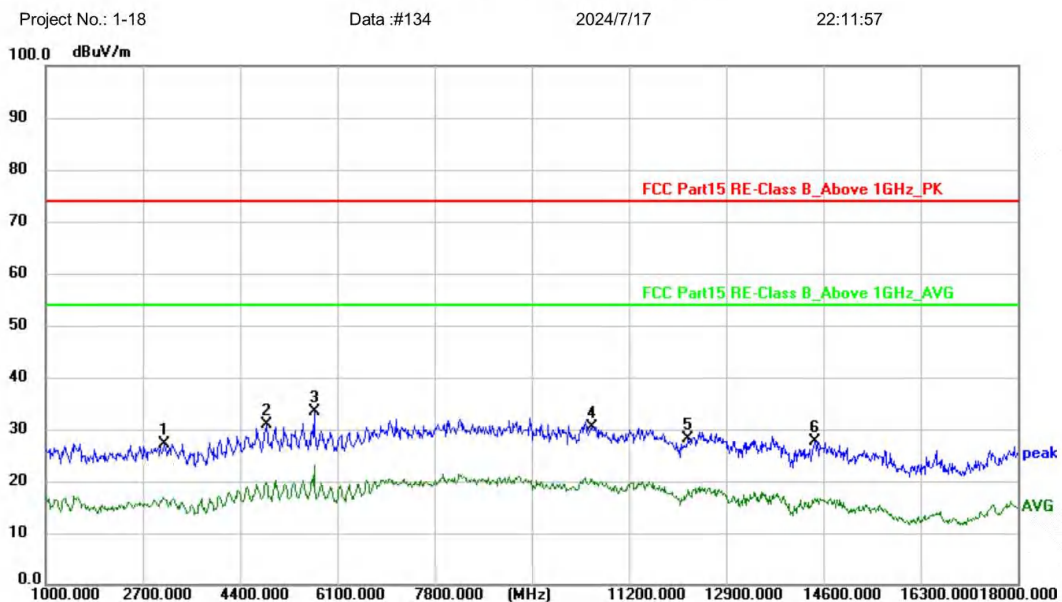

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	3074.000	51.30	-24.09	27.21	74.00	-46.79	peak			P	
2	4859.000	49.84	-19.05	30.79	74.00	-43.21	peak			P	
3 *	5692.000	50.81	-17.40	33.41	74.00	-40.59	peak			P	
4	10554.000	41.50	-11.00	30.50	74.00	-43.50	peak			P	
5	12237.000	38.24	-10.07	28.17	74.00	-45.83	peak			P	
6	14447.000	35.94	-8.33	27.61	74.00	-46.39	peak			P	


Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Vertical** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Vega Test Engineer: Felix Pang
Test Mode: A 5785MHz SISO
Test Voltage: DC 3.7V
Note:

Radiated Emission Measurement

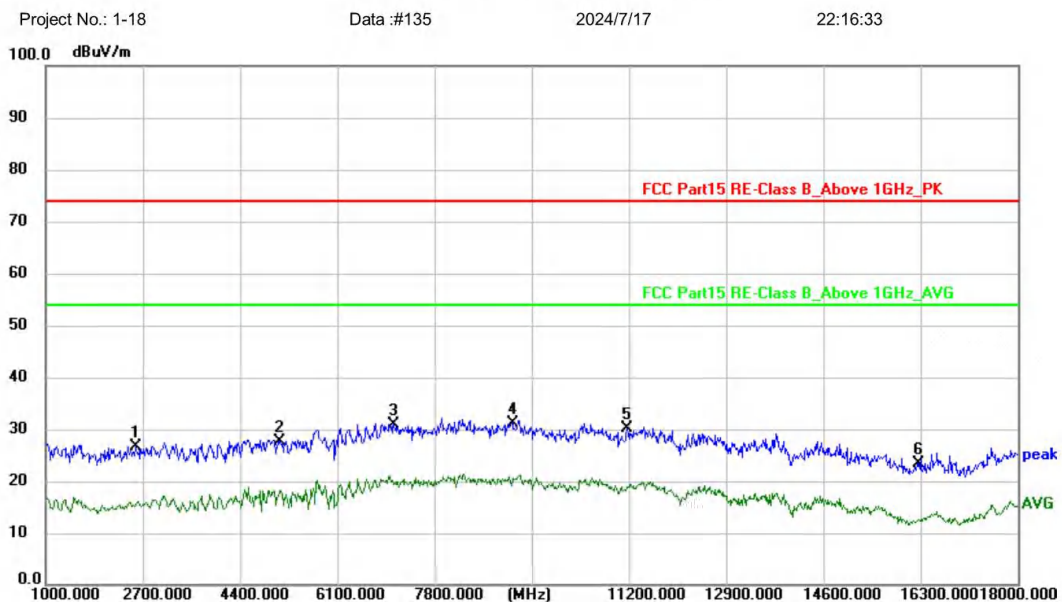

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2564.000	52.09	-25.58	26.51	74.00	-47.49	peak			P	
2	5097.000	55.10	-27.42	27.68	74.00	-46.32	peak			P	
3	7086.000	44.96	-14.02	30.94	74.00	-43.06	peak			P	
4 *	9160.000	43.28	-12.21	31.07	74.00	-42.93	peak			P	
5	11166.000	40.63	-10.43	30.20	74.00	-43.80	peak			P	
6	16266.000	32.78	-9.29	23.49	74.00	-50.51	peak			P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit