




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Vertical** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Vega Test Engineer: Felix Pang
Test Mode: A 5825MHz SISO
Test Voltage: DC 3.7V
Note:

Radiated Emission Measurement

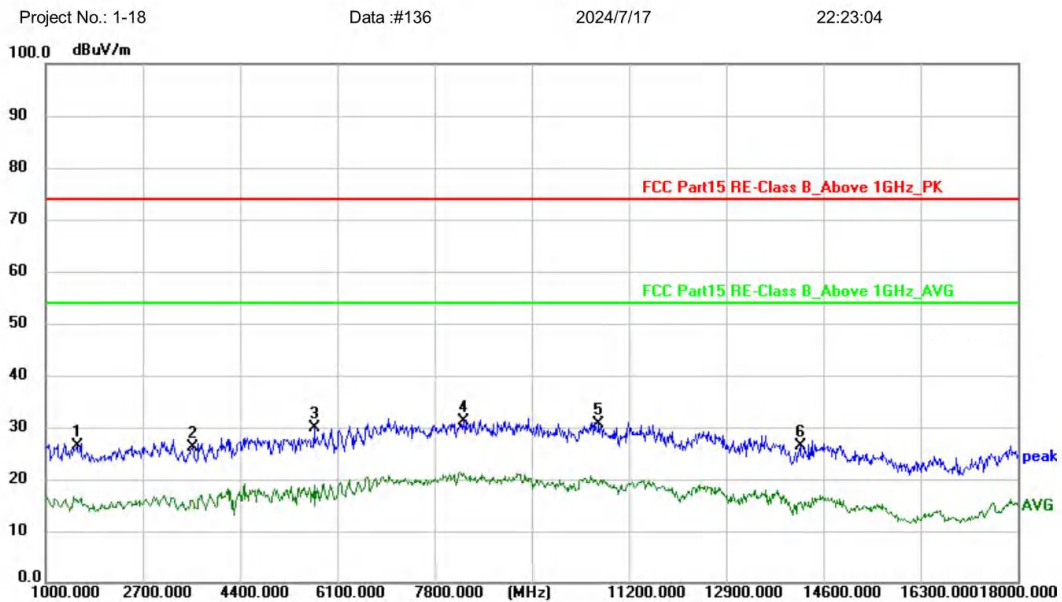

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	1544.000	53.85	-27.44	26.41	74.00	-47.59	peak			P	
2	3567.000	49.12	-22.96	26.16	74.00	-47.84	peak			P	
3	5692.000	50.32	-20.48	29.84	74.00	-44.16	peak			P	
4 *	8310.000	44.13	-12.95	31.18	74.00	-42.82	peak			P	
5	10673.000	41.57	-10.86	30.71	74.00	-43.29	peak			P	
6	14192.000	34.63	-8.29	26.34	74.00	-47.66	peak			P	


Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Vega Test Engineer: Felix Pang
Test Mode: A 5825MHz SISO
Test Voltage: DC 3.7V
Note:

Radiated Emission Measurement

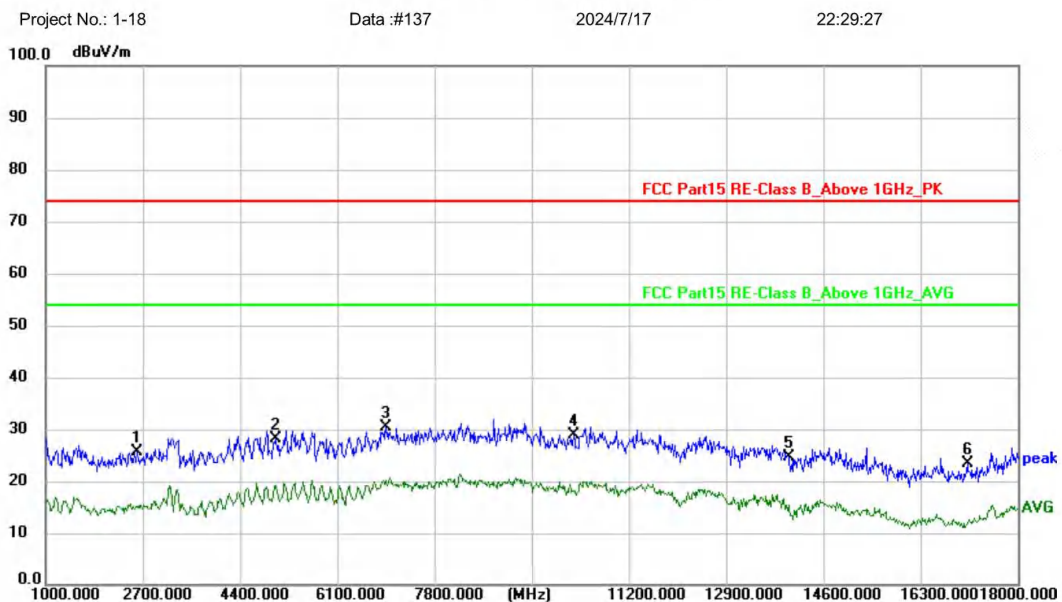

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2598.000	51.11	-25.49	25.62	74.00	-48.38	peak			P	
2	5029.000	46.53	-18.51	28.02	74.00	-45.98	peak			P	
3 *	6950.000	44.60	-14.24	30.36	74.00	-43.64	peak			P	
4	10231.000	40.24	-11.43	28.81	74.00	-45.19	peak			P	
5	13988.000	32.89	-8.25	24.64	74.00	-49.36	peak			P	
6	17116.000	32.20	-8.78	23.42	74.00	-50.58	peak			P	


Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Vega Test Engineer: Felix Pang
Test Mode: N20 5745MHz MIMO
Test Voltage: DC 3.7V
Note:

Radiated Emission Measurement

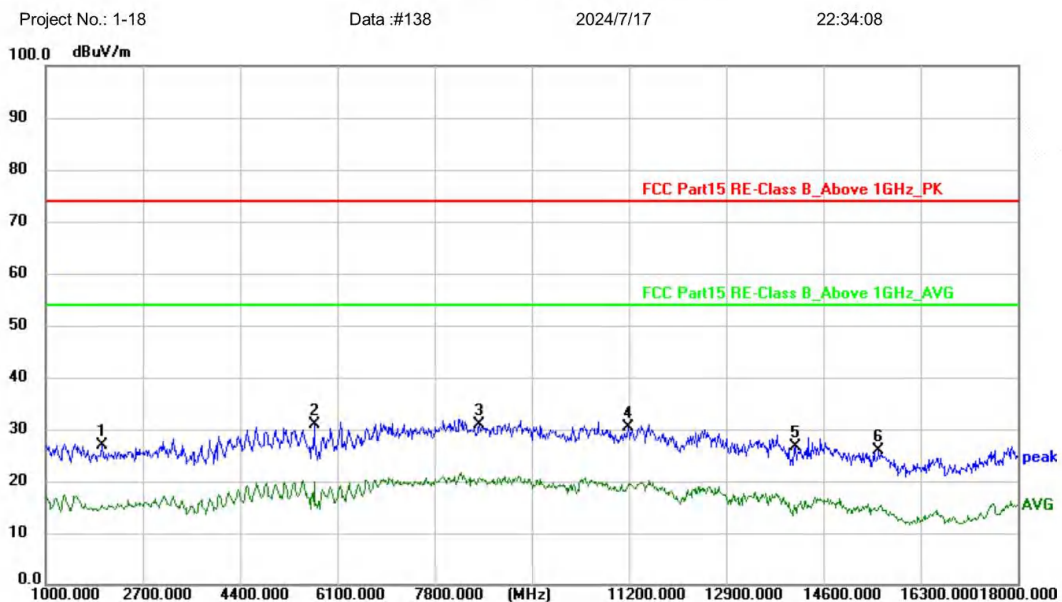

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	1986.000	54.23	-27.31	26.92	74.00	-47.08	peak			P	
2 *	5692.000	48.28	-17.40	30.88	74.00	-43.12	peak			P	
3	8582.000	43.46	-12.69	30.77	74.00	-43.23	peak			P	
4	11183.000	40.69	-10.42	30.27	74.00	-43.73	peak			P	
5	14107.000	34.92	-8.27	26.65	74.00	-47.35	peak			P	
6	15569.000	34.71	-8.95	25.76	74.00	-48.24	peak			P	


Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Vertical** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Vega Test Engineer: Felix Pang
Test Mode: N20 5745MHz MIMO
Test Voltage: DC 3.7V
Note:

Radiated Emission Measurement

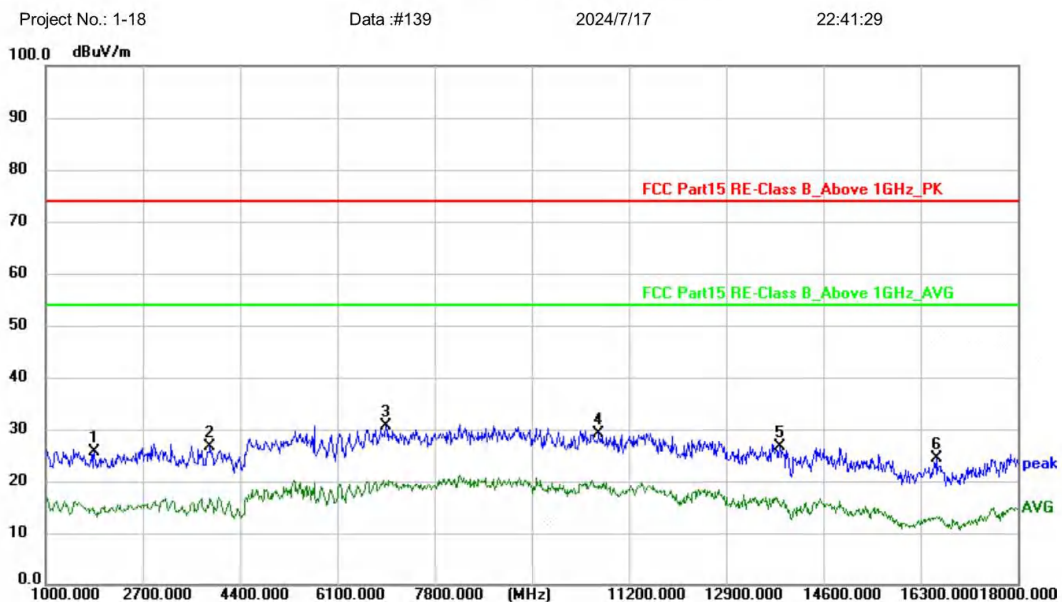

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	1850.000	52.90	-27.35	25.55	74.00	-48.45	peak			P	
2	3873.000	48.96	-22.26	26.70	74.00	-47.30	peak			P	
3 *	6950.000	44.85	-14.24	30.61	74.00	-43.39	peak			P	
4	10673.000	40.00	-10.86	29.14	74.00	-44.86	peak			P	
5	13835.000	35.02	-8.39	26.63	74.00	-47.37	peak			P	
6	16572.000	33.52	-9.24	24.28	74.00	-49.72	peak			P	


Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Vertical** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Vega Test Engineer: Felix Pang
Test Mode: N20 5785MHz MIMO
Test Voltage: DC 3.7V
Note:

Radiated Emission Measurement

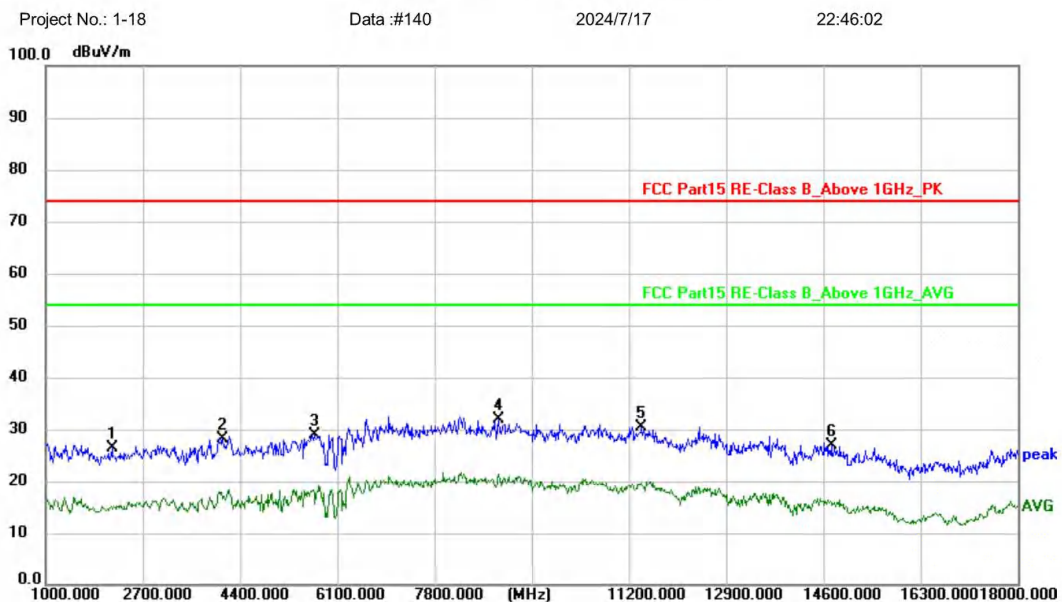

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2156.000	53.31	-26.83	26.48	74.00	-47.52	peak			P	
2	4094.000	50.78	-22.59	28.19	74.00	-45.81	peak			P	
3	5692.000	49.30	-20.48	28.82	74.00	-45.18	peak			P	
4 *	8922.000	44.36	-12.37	31.99	74.00	-42.01	peak			P	
5	11421.000	40.69	-10.40	30.29	74.00	-43.71	peak			P	
6	14736.000	35.29	-8.38	26.91	74.00	-47.09	peak			P	


Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Vega Test Engineer: Felix Pang
Test Mode: N20 5785MHz MIMO
Test Voltage: DC 3.7V
Note:

Radiated Emission Measurement

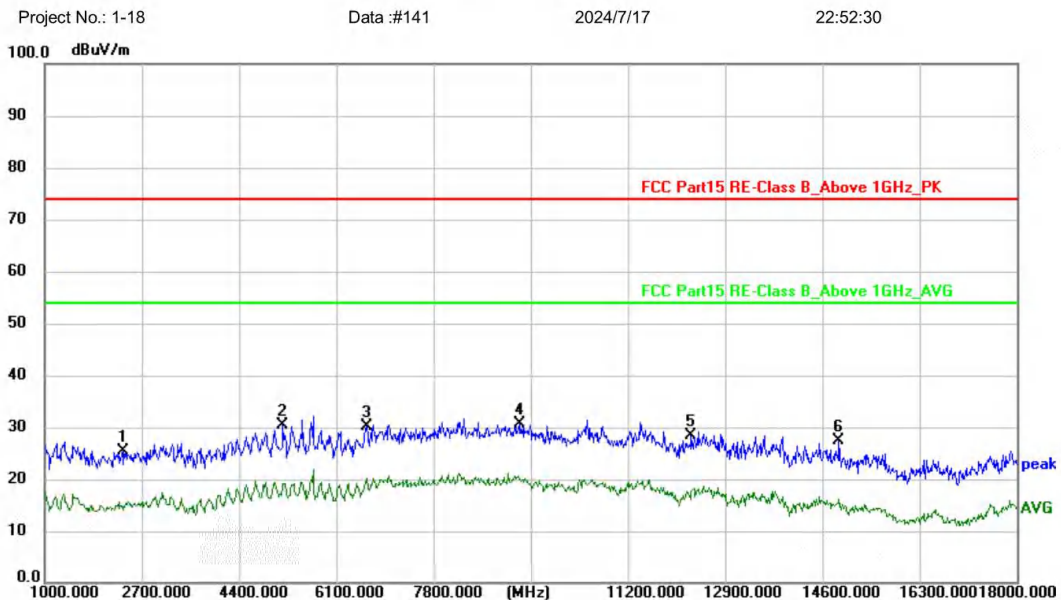

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2360.000	51.57	-26.21	25.36	74.00	-48.64	peak			P	
2	5165.000	48.58	-18.29	30.29	74.00	-43.71	peak			P	
3	6627.000	45.14	-15.13	30.01	74.00	-43.99	peak			P	
4 *	9313.000	42.74	-12.13	30.61	74.00	-43.39	peak			P	
5	12305.000	38.38	-9.99	28.39	74.00	-45.61	peak			P	
6	14889.000	35.77	-8.40	27.37	74.00	-46.63	peak			P	


Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Vega Test Engineer: Felix Pang
Test Mode: N20 5825MHz MIMO
Test Voltage: DC 3.7V
Note:

Radiated Emission Measurement

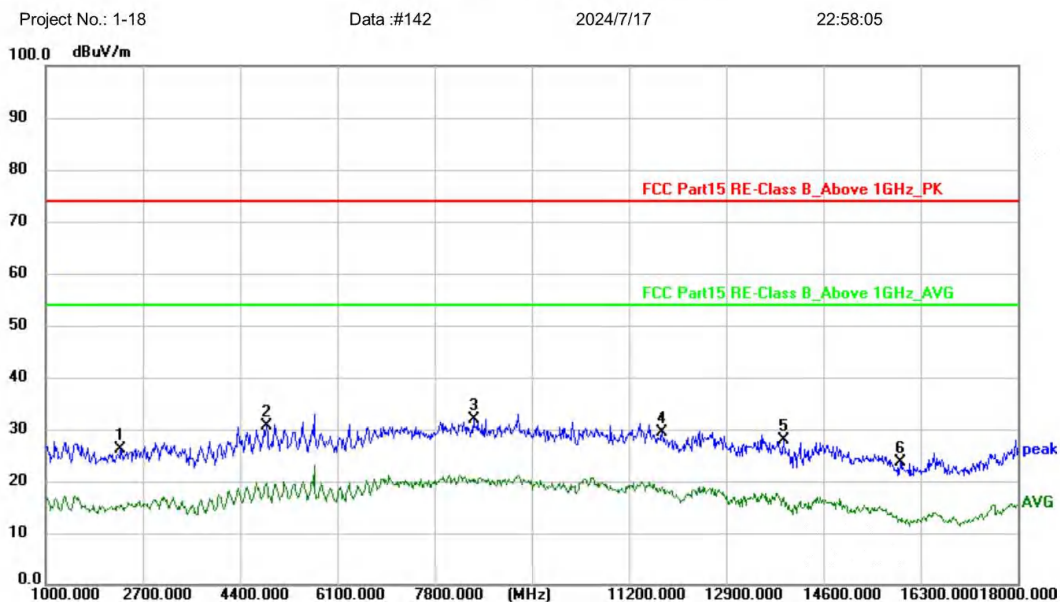

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2309.000	52.58	-26.35	26.23	74.00	-47.77	peak			P	
2	4859.000	49.56	-19.05	30.51	74.00	-43.49	peak			P	
3 *	8480.000	44.64	-12.78	31.86	74.00	-42.14	peak			P	
4	11778.000	39.79	-10.40	29.39	74.00	-44.61	peak			P	
5	13903.000	36.19	-8.33	27.86	74.00	-46.14	peak			P	
6	15943.000	32.83	-9.28	23.55	74.00	-50.45	peak			P	


Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Vertical** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Vega Test Engineer: Felix Pang
Test Mode: N20 5825MHz MIMO
Test Voltage: DC 3.7V
Note:

Radiated Emission Measurement

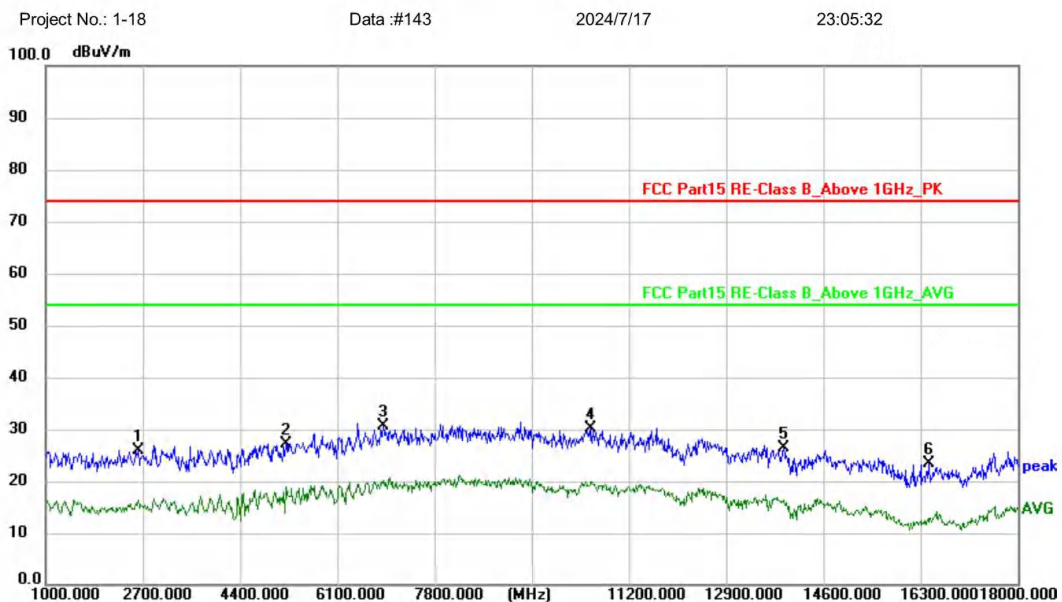

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2615.000	51.26	-25.43	25.83	74.00	-48.17	peak			P	
2	5199.000	53.45	-26.24	27.21	74.00	-46.79	peak			P	
3 *	6899.000	44.99	-14.37	30.62	74.00	-43.38	peak			P	
4	10537.000	41.23	-11.03	30.20	74.00	-43.80	peak			P	
5	13903.000	34.67	-8.33	26.34	74.00	-47.66	peak			P	
6	16436.000	32.54	-9.25	23.29	74.00	-50.71	peak			P	


Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Vertical** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Vega Test Engineer: Felix Pang
Test Mode: AC20 5745MHz MIMO
Test Voltage: DC 3.7V
Note:

Radiated Emission Measurement

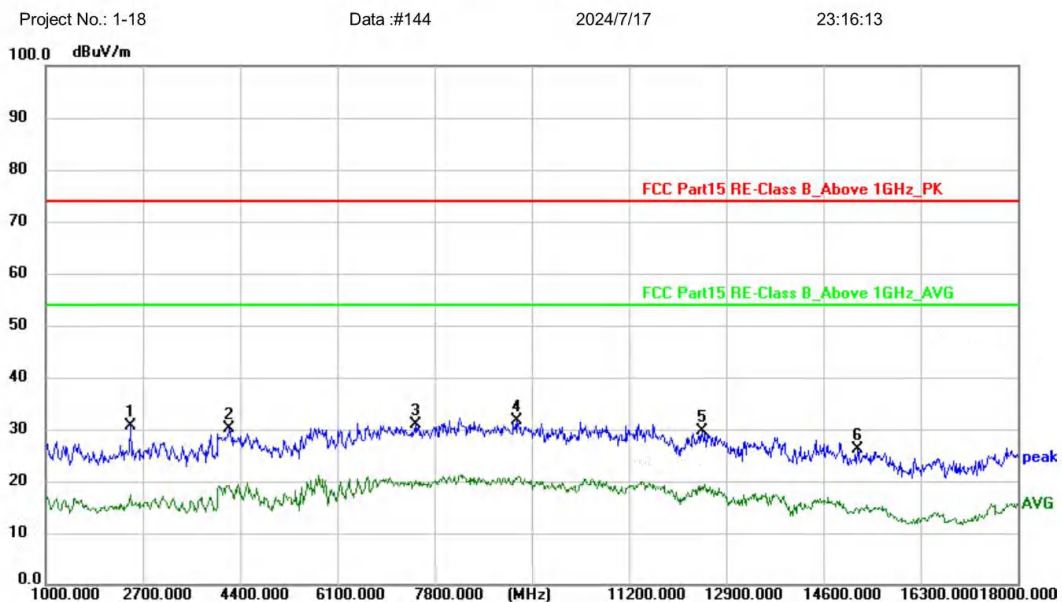

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2479.000	56.47	-25.84	30.63	74.00	-43.37	peak			P	
2	4213.000	53.40	-23.37	30.03	74.00	-43.97	peak			P	
3	7477.000	44.59	-13.69	30.90	74.00	-43.10	peak			P	
4 *	9245.000	43.89	-12.16	31.73	74.00	-42.27	peak			P	
5	12475.000	39.39	-9.76	29.63	74.00	-44.37	peak			P	
6	15195.000	34.76	-8.60	26.16	74.00	-47.84	peak			P	


Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Vega Test Engineer: Felix Pang
Test Mode: AC20 5745MHz MIMO
Test Voltage: DC 3.7V
Note:

Radiated Emission Measurement

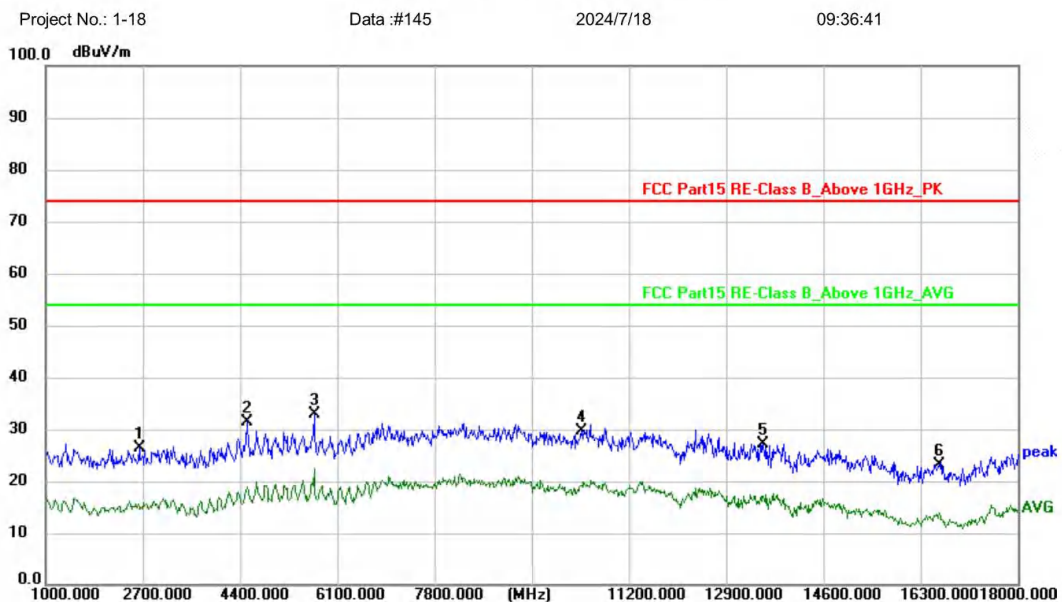

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2632.000	51.79	-25.38	26.41	74.00	-47.59	peak			P	
2	4519.000	51.59	-20.20	31.39	74.00	-42.61	peak			P	
3 *	5692.000	50.18	-17.40	32.78	74.00	-41.22	peak			P	
4	10367.000	40.76	-11.25	29.51	74.00	-44.49	peak			P	
5	13546.000	35.87	-8.63	27.24	74.00	-46.76	peak			P	
6	16623.000	32.36	-9.23	23.13	74.00	-50.87	peak			P	


Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Vega Test Engineer: Felix Pang
Test Mode: AC20 5785MHz MIMO
Test Voltage: DC 3.7V
Note:

Radiated Emission Measurement

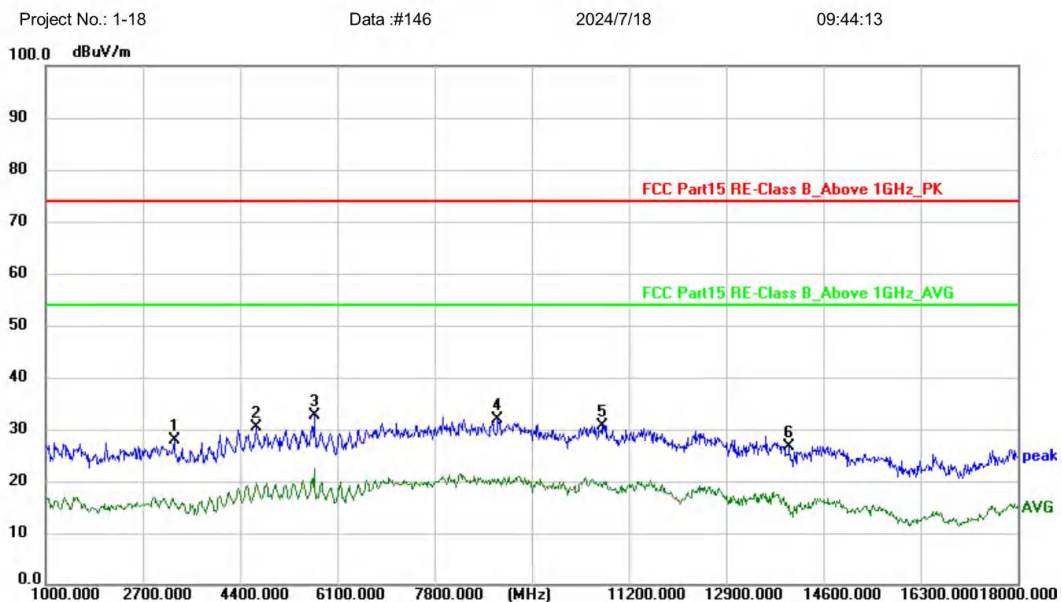

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	3244.000	51.61	-23.69	27.92	74.00	-46.08	peak			P	
2	4672.000	50.00	-19.68	30.32	74.00	-43.68	peak			P	
3 *	5692.000	50.05	-17.40	32.65	74.00	-41.35	peak			P	
4	8905.000	44.16	-12.38	31.78	74.00	-42.22	peak			P	
5	10724.000	41.46	-10.78	30.68	74.00	-43.32	peak			P	
6	14005.000	34.90	-8.25	26.65	74.00	-47.35	peak			P	


Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Vertical** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Vega Test Engineer: Felix Pang
Test Mode: AC20 5785MHz MIMO
Test Voltage: DC 3.7V
Note:

Radiated Emission Measurement

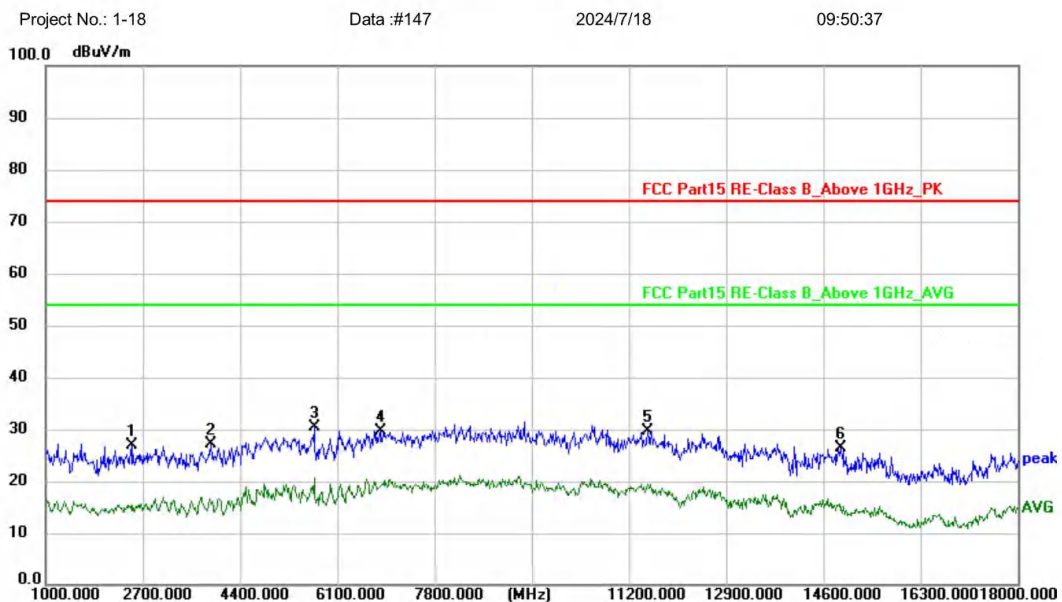

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2513.000	52.49	-25.73	26.76	74.00	-47.24	peak			P	
2	3890.000	49.43	-22.22	27.21	74.00	-46.79	peak			P	
3 *	5692.000	50.92	-20.48	30.44	74.00	-43.56	peak			P	
4	6865.000	44.19	-14.46	29.73	74.00	-44.27	peak			P	
5	11523.000	40.11	-10.40	29.71	74.00	-44.29	peak			P	
6	14906.000	34.90	-8.41	26.49	74.00	-47.51	peak			P	


Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Vertical** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Vega Test Engineer: Felix Pang
Test Mode: AC20 5825MHz MIMO
Test Voltage: DC 3.7V
Note:

Radiated Emission Measurement

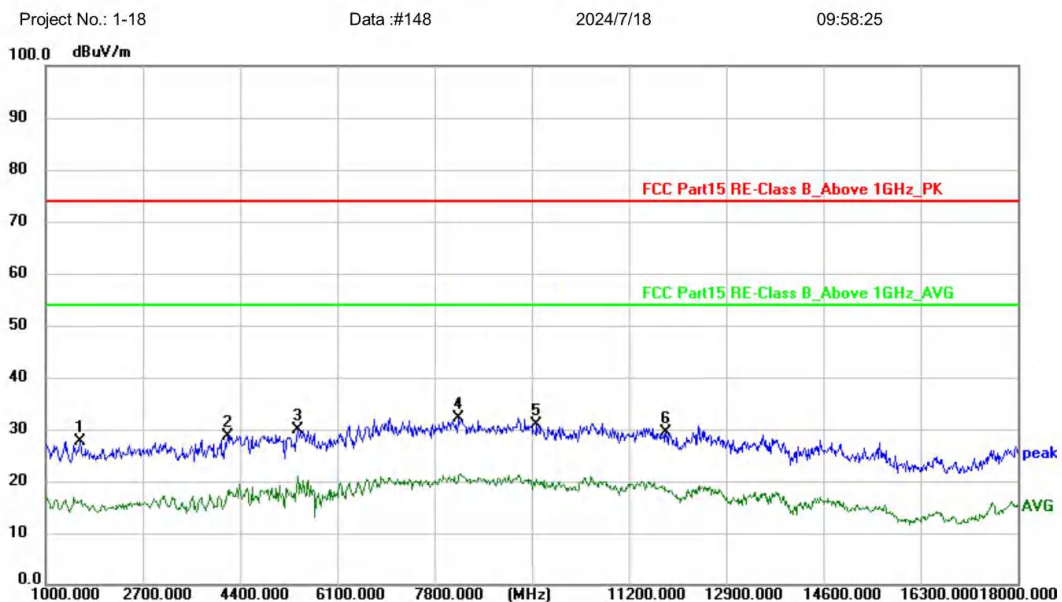

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	1595.000	55.06	-27.43	27.63	74.00	-46.37	peak			P	
2	4179.000	51.68	-23.15	28.53	74.00	-45.47	peak			P	
3	5403.000	53.68	-23.86	29.82	74.00	-44.18	peak			P	
4 *	8225.000	45.22	-13.02	32.20	74.00	-41.80	peak			P	
5	9585.000	42.92	-11.96	30.96	74.00	-43.04	peak			P	
6	11846.000	39.88	-10.38	29.50	74.00	-44.50	peak			P	


Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Vega Test Engineer: Felix Pang
Test Mode: AC20 5825MHz MIMO
Test Voltage: DC 3.7V
Note:

Radiated Emission Measurement

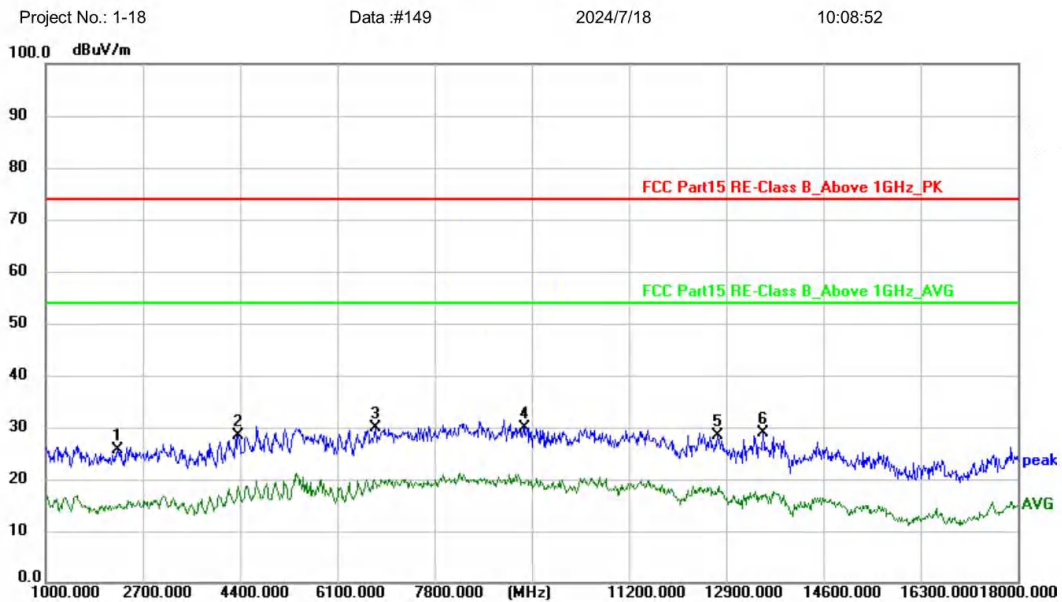

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2258.000	52.04	-26.52	25.52	74.00	-48.48	peak			P	
2	4366.000	49.10	-20.72	28.38	74.00	-45.62	peak			P	
3	6763.000	44.57	-14.75	29.82	74.00	-44.18	peak			P	
4 *	9364.000	42.06	-12.09	29.97	74.00	-44.03	peak			P	
5	12747.000	37.87	-9.41	28.46	74.00	-45.54	peak			P	
6	13546.000	37.49	-8.63	28.86	74.00	-45.14	peak			P	


Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Vega Test Engineer: Felix Pang
Test Mode: AX20 5745MHz MIMO
Test Voltage: DC 3.7V
Note:

Radiated Emission Measurement

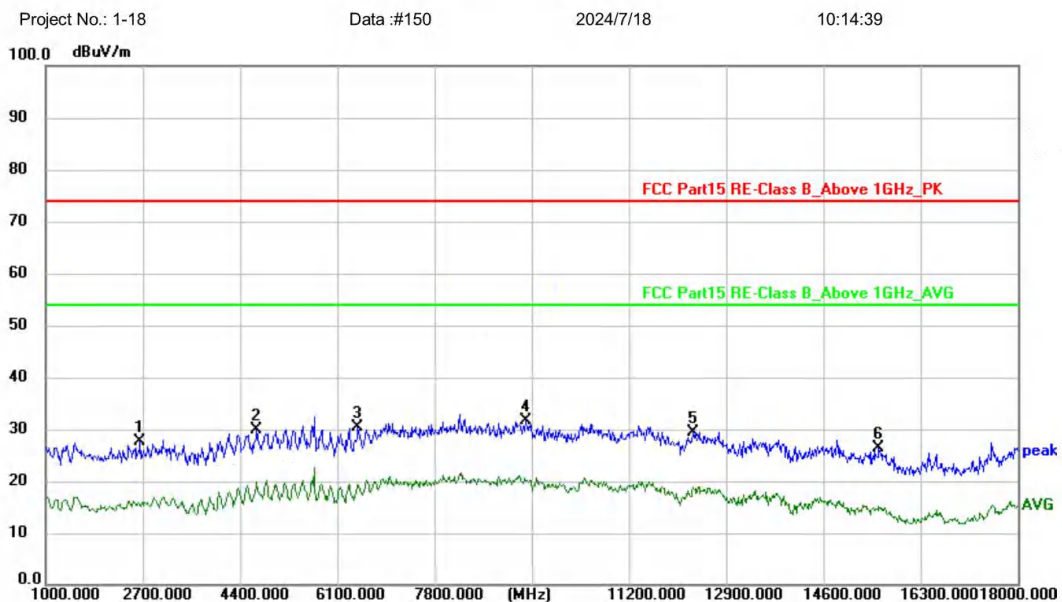

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2649.000	53.03	-25.32	27.71	74.00	-46.29	peak			P	
2	4689.000	49.50	-19.62	29.88	74.00	-44.12	peak			P	
3	6457.000	45.97	-15.61	30.36	74.00	-43.64	peak			P	
4 *	9398.000	43.64	-12.07	31.57	74.00	-42.43	peak			P	
5	12322.000	39.47	-9.97	29.50	74.00	-44.50	peak			P	
6	15569.000	35.23	-8.95	26.28	74.00	-47.72	peak			P	


Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Vertical** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Vega Test Engineer: Felix Pang
Test Mode: AX20 5745MHz MIMO
Test Voltage: DC 3.7V
Note:

Radiated Emission Measurement

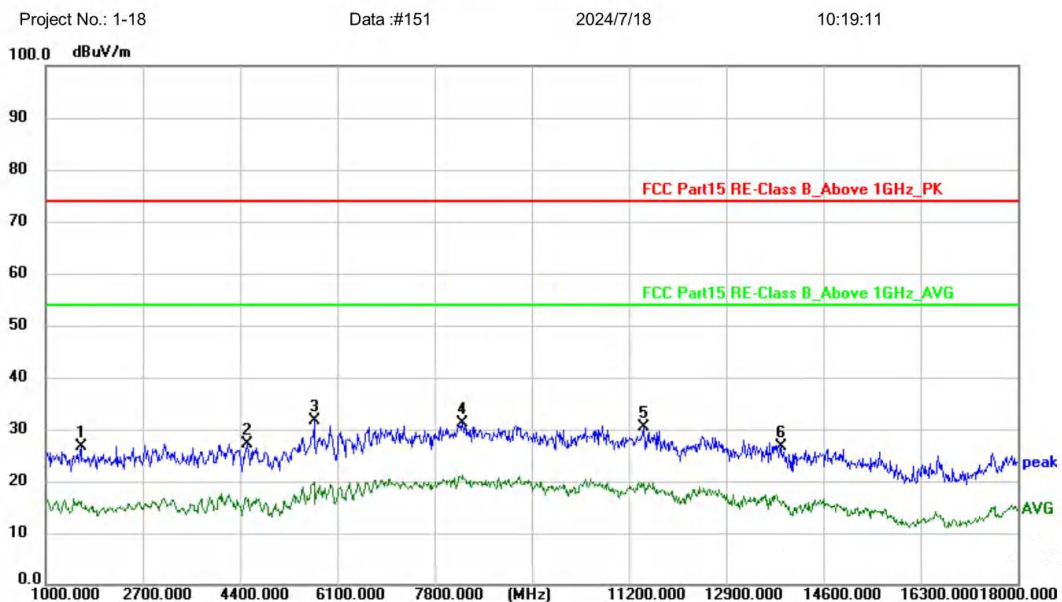

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	1612.000	53.99	-27.42	26.57	74.00	-47.43	peak			P	
2	4519.000	52.63	-25.39	27.24	74.00	-46.76	peak			P	
3 *	5692.000	51.99	-20.48	31.51	74.00	-42.49	peak			P	
4	8293.000	44.05	-12.96	31.09	74.00	-42.91	peak			P	
5	11455.000	40.88	-10.42	30.46	74.00	-43.54	peak			P	
6	13852.000	35.06	-8.36	26.70	74.00	-47.30	peak			P	


Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Vega Test Engineer: Felix Pang
Test Mode: A 5745MHz
Test Voltage: DC 3.7V
Note:

Radiated Emission Measurement

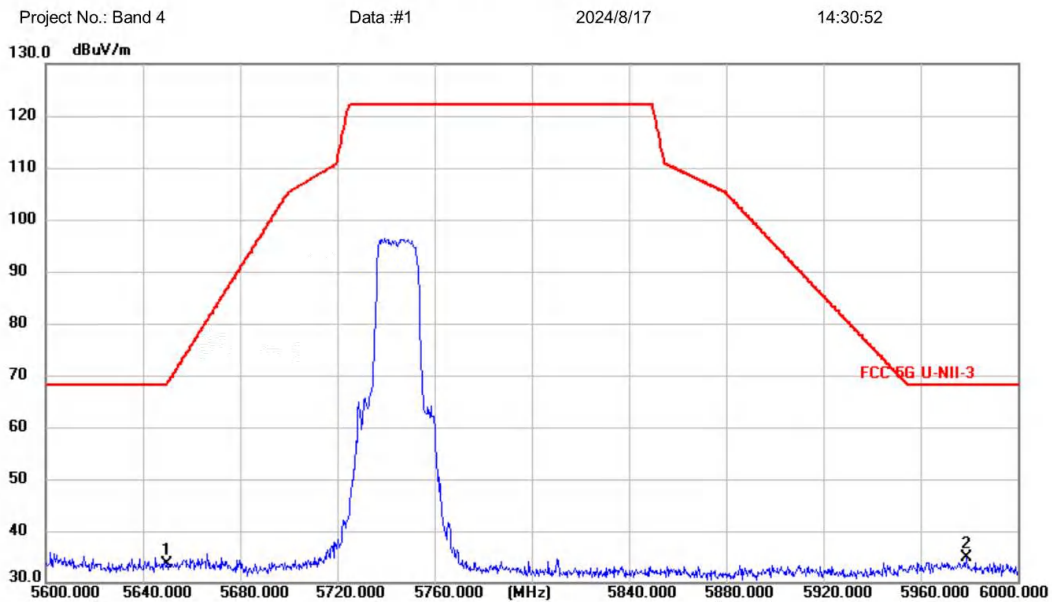

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	5650.250	51.21	-17.46	33.75	68.39	-34.64	peak			P	
2 *	5979.150	51.81	-16.93	34.88	68.20	-33.32	peak			P	


Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Vertical** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Vega Test Engineer: Felix Pang
Test Mode: A 5745MHz
Test Voltage: DC 3.7V
Note:

Radiated Emission Measurement

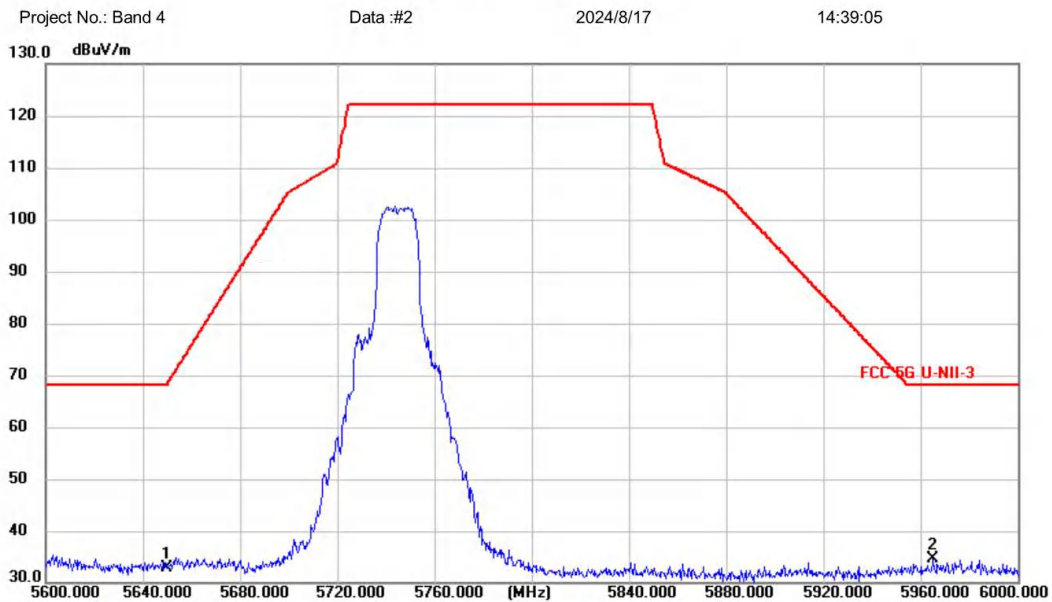

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	5650.200	50.31	-17.46	32.85	68.35	-35.50	peak			P	
2 *	5965.250	51.60	-16.95	34.65	68.20	-33.55	peak			P	


Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Vertical** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Vega Test Engineer: Felix Pang
Test Mode: A 5825MHz
Test Voltage: DC 3.7V
Note:

Radiated Emission Measurement

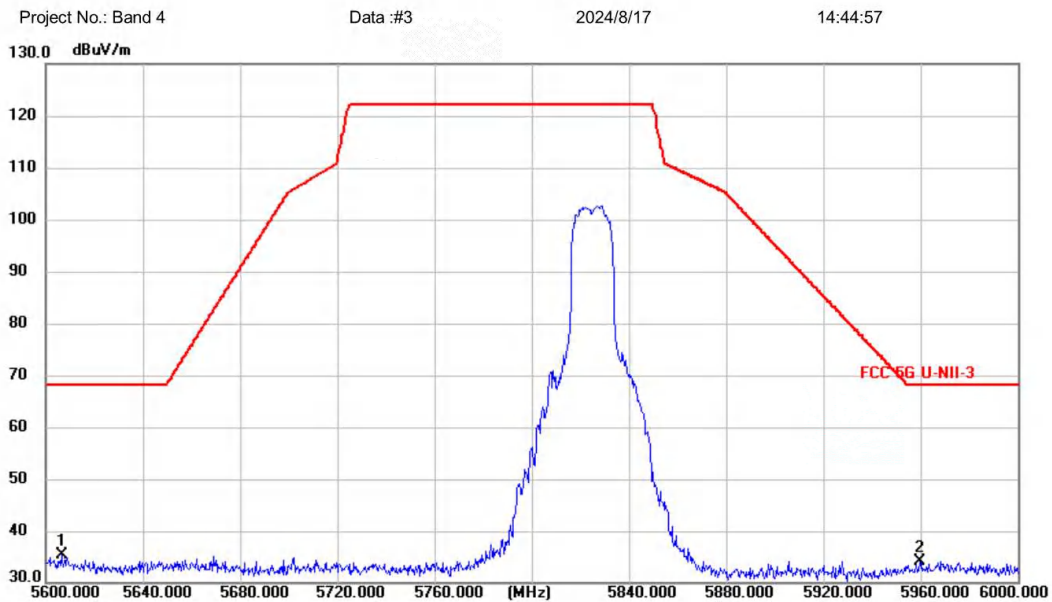

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	5606.550	56.94	-21.49	35.45	68.20	-32.75	peak			P	
2	5959.700	51.43	-17.36	34.07	68.20	-34.13	peak			P	


Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Vega Test Engineer: Felix Pang
Test Mode: A 5825MHz
Test Voltage: DC 3.7V
Note:

Radiated Emission Measurement

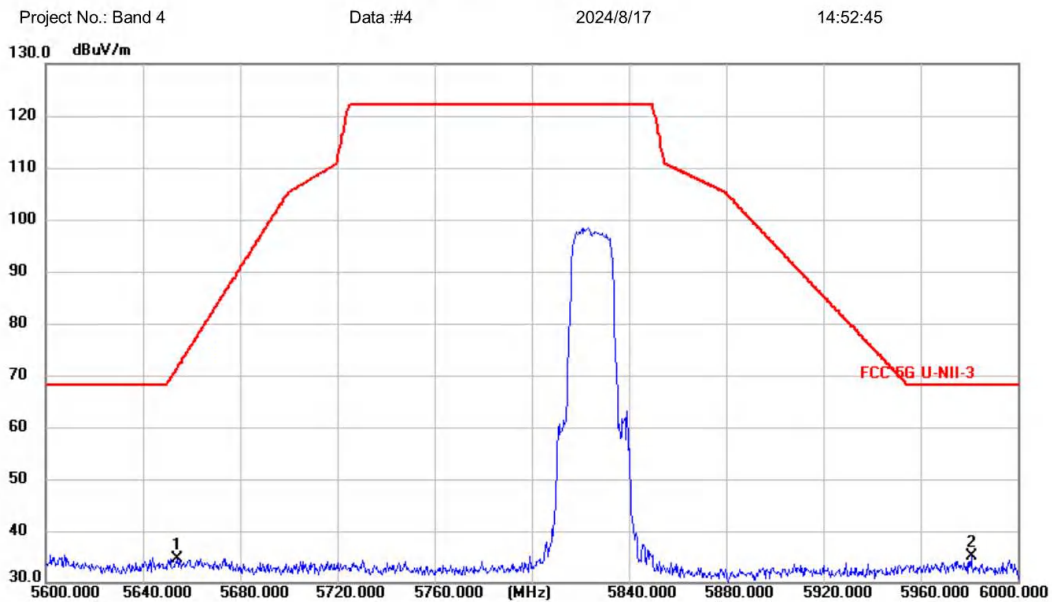


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	5654.350	55.64	-20.92	34.72	71.43	-36.71	peak			P	
2 *	5980.950	52.22	-17.12	35.10	68.20	-33.10	peak			P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Vega Test Engineer: Felix Pang
Test Mode: N40 5755MHz
Test Voltage: DC 3.7V
Note:

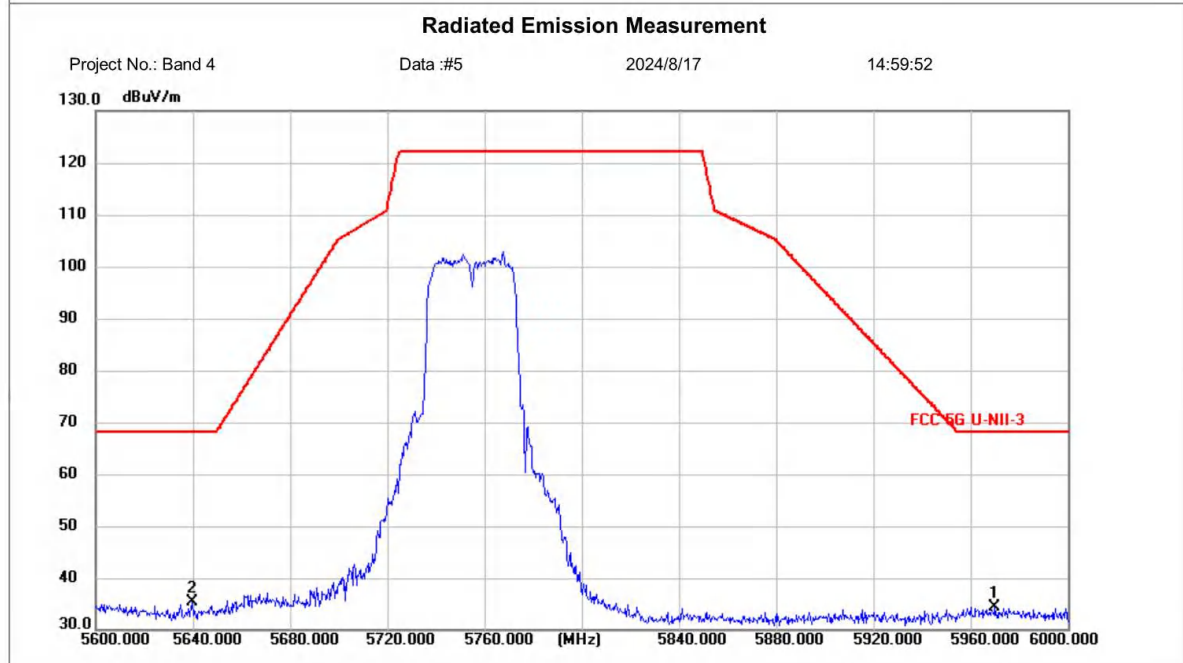

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	5970.100	51.26	-16.94	34.32	68.20	-33.88	peak			P	
2 *	5639.600	52.81	-17.50	35.31	68.20	-32.89	peak			P	


Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Vertical** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Vega Test Engineer: Felix Pang
Test Mode: N40 5755MHz
Test Voltage: DC 3.7V
Note:

Radiated Emission Measurement

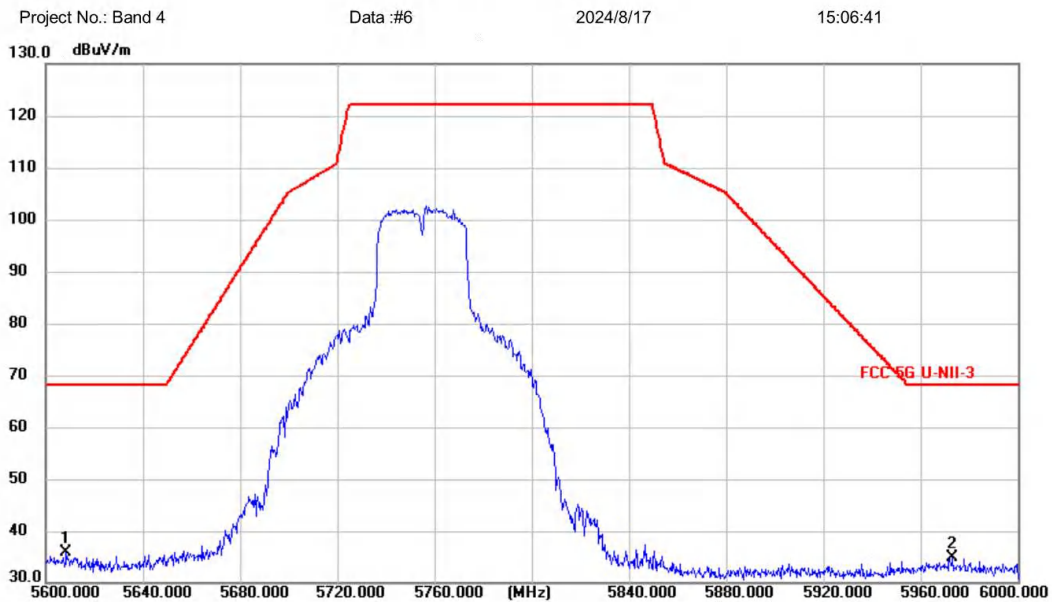

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	5608.650	53.35	-17.55	35.80	68.20	-32.40	peak			P	
2	5973.400	51.70	-16.94	34.76	68.20	-33.44	peak			P	


Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Vertical** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Vega Test Engineer: Felix Pang
Test Mode: N40 5795MHz
Test Voltage: DC 3.7V
Note:

Radiated Emission Measurement

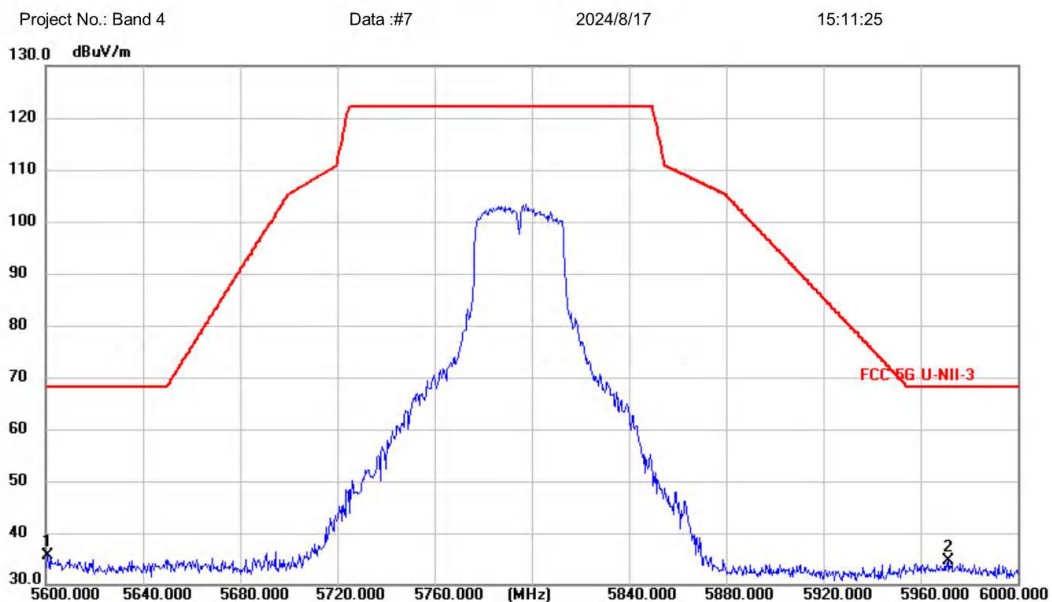

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	5601.100	57.18	-21.55	35.63	68.20	-32.57	peak			P	
2	5971.700	51.74	-17.22	34.52	68.20	-33.68	peak			P	


Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Vega Test Engineer: Felix Pang
Test Mode: N40 5795MHz
Test Voltage: DC 3.7V
Note:

Radiated Emission Measurement

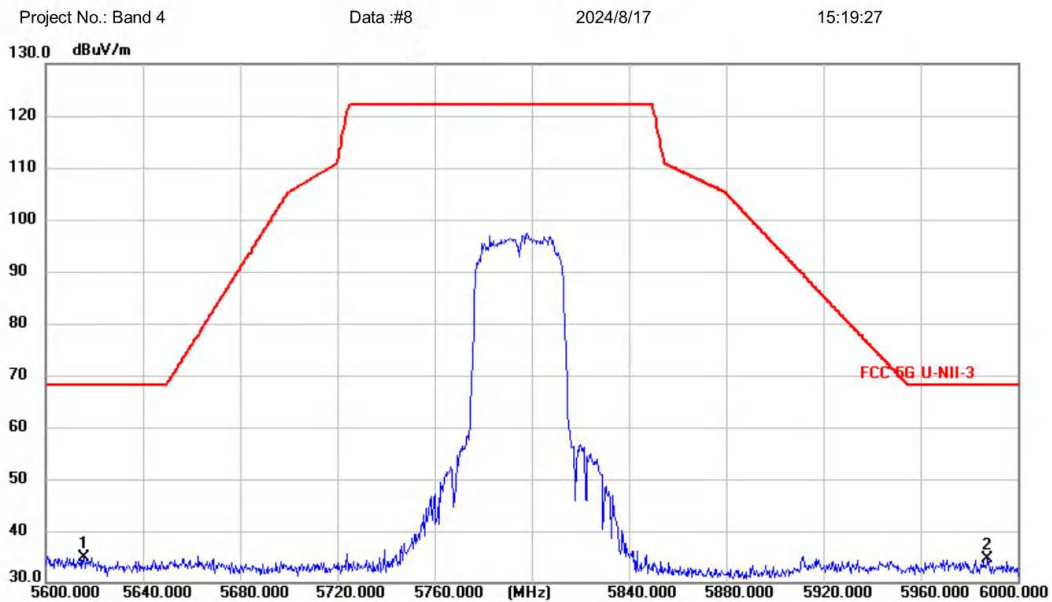

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	5615.900	56.33	-21.37	34.96	68.20	-33.24	peak			P	
2	5987.800	51.56	-17.03	34.53	68.20	-33.67	peak			P	


Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: Einstar Vega Test Engineer: Felix Pang
Test Mode: AX80 5775MHz
Test Voltage: DC 3.7V
Note:

Radiated Emission Measurement

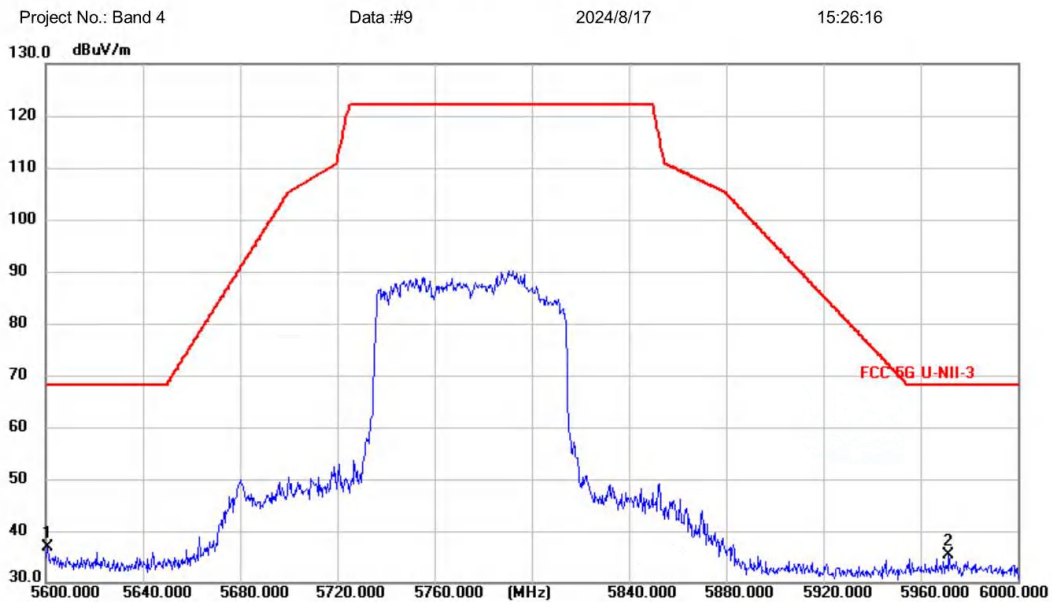

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	5601.100	54.44	-17.56	36.88	68.20	-31.32	peak			P	
2	5971.900	52.22	-16.94	35.28	68.20	-32.92	peak			P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber
EUT: 3D Scanner
M/N: Einstar Vega
Test Mode: AX80 5775MHz
Test Voltage: DC 3.7V
Note:

Polarization: **Vertical**
Distance: 3m
Test Engineer: Felix Pang

Temperature: 26 °C
Humidity: 54 %RH


Radiated Emission Measurement

Project No.: Band 4

Data :#10

2024/8/17

15:36:18

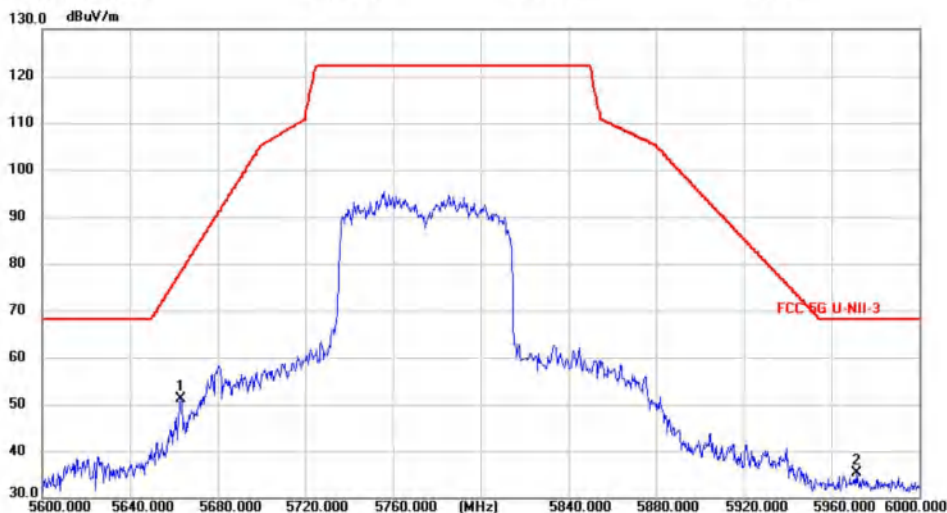

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	5663.450	71.95	-20.82	51.13	78.19	-27.06	peak			P	
2	5971.550	52.61	-17.23	35.38	68.20	-32.82	peak			P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit

File: Band 4\Data :#10

Page: 1

Engineer Signature:

1.3 Co-location mode

There is no evident emissions occurred in simultaneous modes, thus no records listed.

2. Test Results of AC Conducted Emissions




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-Shielded Room Phase: **L1** Temperature: 26 °C
EUT: 3D Scanner Humidity: 54 %RH
M/N: Einstar Vega Test Engineer: Felix Pang
Test Mode: Fast Mode+5G Wi-Fi +BT Link+Charging
Test Voltage: AC 120V/60Hz
Note:

Conducted Emission Measurement

Test Date: 2024/7/11 14:49:47

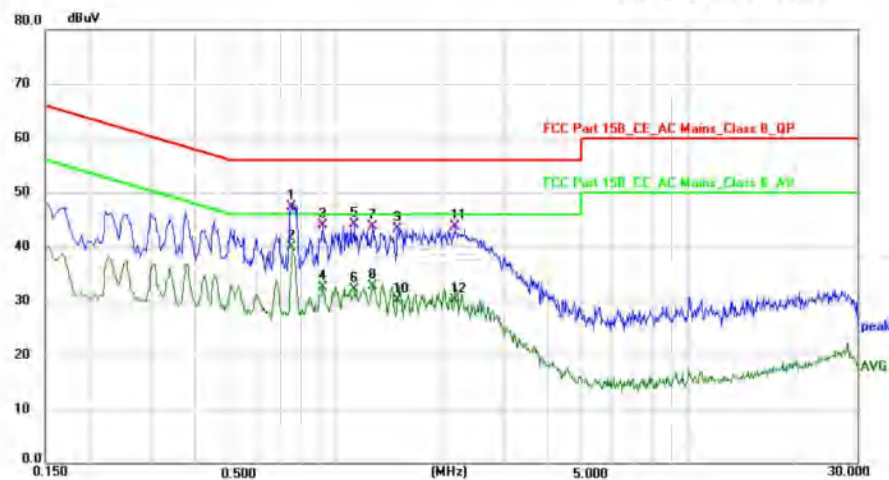

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.7539	37.81	9.43	47.24	56.00	-8.76	QP	P	
2 *	0.7539	30.56	9.43	39.99	46.00	-6.01	AVG	P	
3	0.9220	34.56	9.42	43.98	56.00	-12.02	QP	P	
4	0.9220	23.10	9.42	32.52	46.00	-13.48	AVG	P	
5	1.1300	34.79	9.41	44.20	56.00	-11.80	QP	P	
6	1.1300	22.76	9.41	32.17	46.00	-13.83	AVG	P	
7	1.2700	34.25	9.40	43.65	56.00	-12.35	QP	P	
8	1.2700	23.22	9.40	32.62	46.00	-13.38	AVG	P	
9	1.4980	33.85	9.40	43.25	56.00	-12.75	QP	P	
10	1.4980	20.70	9.40	30.10	46.00	-15.90	AVG	P	
11	2.1780	34.26	9.39	43.65	56.00	-12.35	QP	P	
12	2.1780	20.77	9.39	30.16	46.00	-15.84	AVG	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-Shielded Room Phase: **N** Temperature: 26 °C
EUT: 3D Scanner Humidity: 54 %RH
M/N: Einstar Vega Test Engineer: Felix Pang
Test Mode: Fast Mode+5G Wi-Fi +BT Link+Charging
Test Voltage: AC 120V/60Hz
Note:

Conducted Emission Measurement

Test Date: 2024/7/11 14:47:23

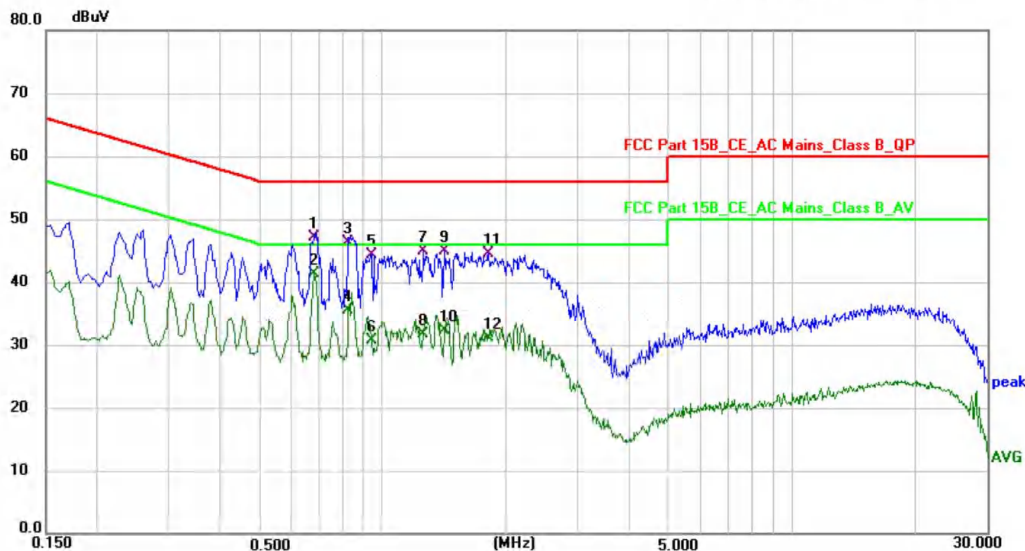

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.6780	37.42	9.78	47.20	56.00	-8.80	QP	P	
2 *	0.6780	31.45	9.78	41.23	46.00	-4.77	AVG	P	
3	0.8260	36.61	9.67	46.28	56.00	-9.72	QP	P	
4	0.8260	25.92	9.67	35.59	46.00	-10.41	AVG	P	
5	0.9420	34.74	9.56	44.30	56.00	-11.70	QP	P	
6	0.9420	21.23	9.56	30.79	46.00	-15.21	AVG	P	
7	1.2620	35.40	9.44	44.84	56.00	-11.16	QP	P	
8	1.2620	22.25	9.44	31.69	46.00	-14.31	AVG	P	
9	1.4180	35.46	9.41	44.87	56.00	-11.13	QP	P	
10	1.4180	22.92	9.41	32.33	46.00	-13.67	AVG	P	
11	1.8100	35.11	9.31	44.42	56.00	-11.58	QP	P	
12	1.8100	21.88	9.31	31.19	46.00	-14.81	AVG	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit