




Shenzhen PSI Testing Co., Ltd.  
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,  
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

|                                   |                                 |                    |
|-----------------------------------|---------------------------------|--------------------|
| Test Site: PSI EMC Lab-3m Chamber | Polarization: <b>Horizontal</b> | Temperature: 26 °C |
| EUT: 3D Scanner                   | Distance: 3m                    | Humidity: 54 %RH   |
| M/N: EinScan Libre                | Test Engineer: Felix Pang       |                    |
| Test Mode: ax40 2452              |                                 |                    |
| Test Voltage: DC 14.4V            |                                 |                    |
| Note:                             |                                 |                    |

#### Radiated Emission Measurement

Test Date: 2024/9/15 10:25:28

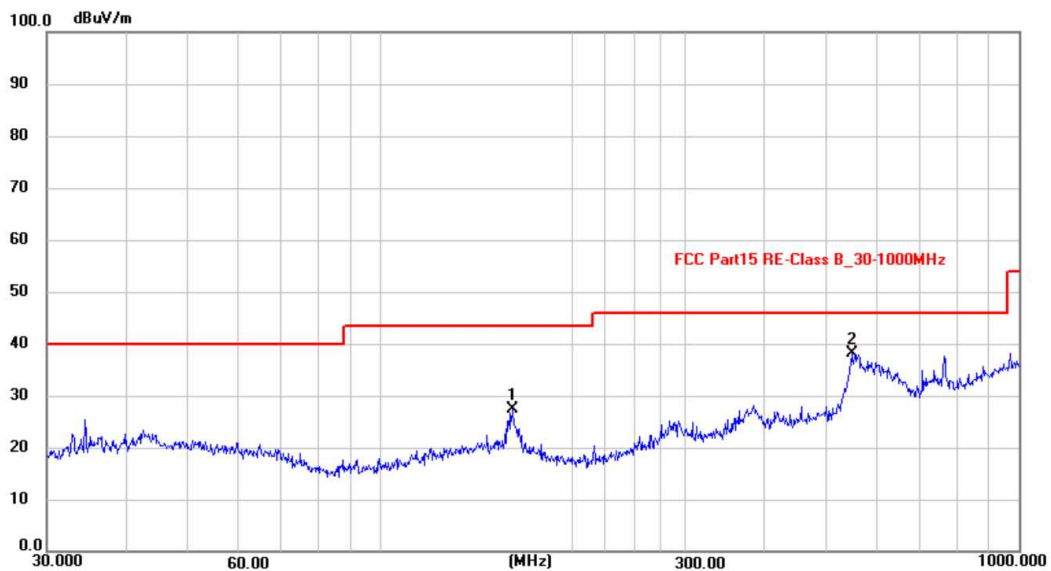

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg.) | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-------------|----------------|-----|--------|
| 1   | 160.9090        | 14.19          | 13.17         | 27.36          | 43.50          | -16.14      | peak     | 200         | 297            | P   |        |
| 2 * | 549.0193        | 18.65          | 19.47         | 38.12          | 46.00          | -7.88       | peak     | 200         | 346            | P   |        |

Note: \*:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.  
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,  
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

|                                   |                                 |                    |
|-----------------------------------|---------------------------------|--------------------|
| Test Site: PSI EMC Lab-3m Chamber | Polarization: <b>Horizontal</b> | Temperature: 26 °C |
| EUT: 3D Scanner                   | Distance: 3m                    | Humidity: 54 %RH   |
| M/N: EinScan Libre                | Test Engineer: Felix Pang       |                    |
| Test Mode: b 2412MHz              |                                 |                    |
| Test Voltage: DC 14.4V            |                                 |                    |
| Note:                             |                                 |                    |

#### Radiated Emission Measurement

Test Date: 2024/9/15 8:30:26

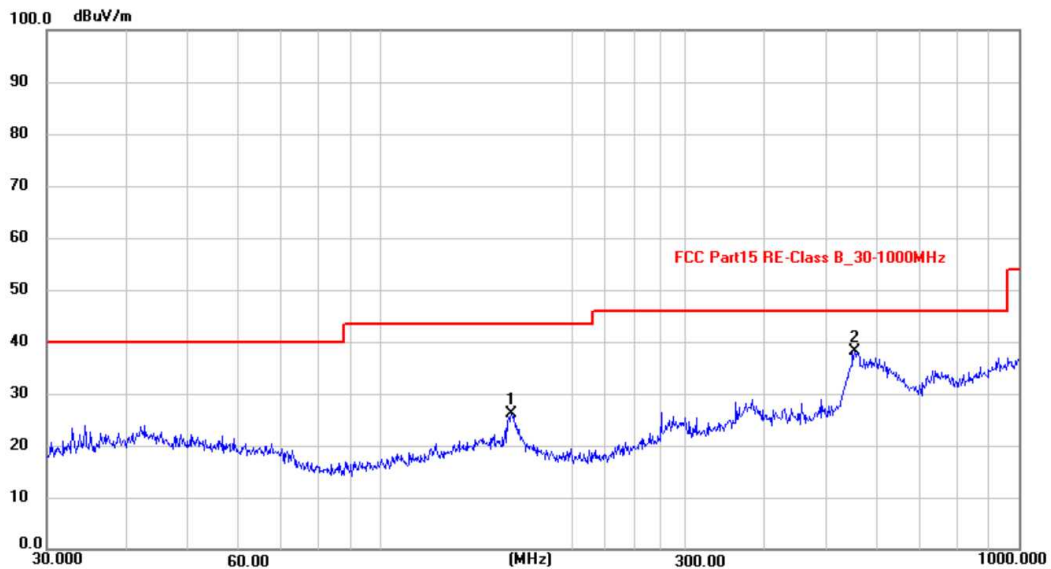

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg.) | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-------------|----------------|-----|--------|
| 1   | 160.3456        | 13.02          | 13.23         | 26.25          | 43.50          | -17.25      | peak     | 200         | 85             | P   |        |
| 2 * | 552.8832        | 18.48          | 19.56         | 38.04          | 46.00          | -7.96       | peak     | 200         | 166            | P   |        |

Note: \*:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.  
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,  
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

|                                   |                               |                    |
|-----------------------------------|-------------------------------|--------------------|
| Test Site: PSI EMC Lab-3m Chamber | Polarization: <b>Vertical</b> | Temperature: 26 °C |
| EUT: 3D Scanner                   | Distance: 3m                  | Humidity: 54 %RH   |
| M/N: EinScan Libre                | Test Engineer: Felix Pang     |                    |
| Test Mode: b 2412MHz              |                               |                    |
| Test Voltage: DC 14.4V            |                               |                    |
| Note:                             |                               |                    |

#### Radiated Emission Measurement

Test Date: 2024/9/15 8:35:07

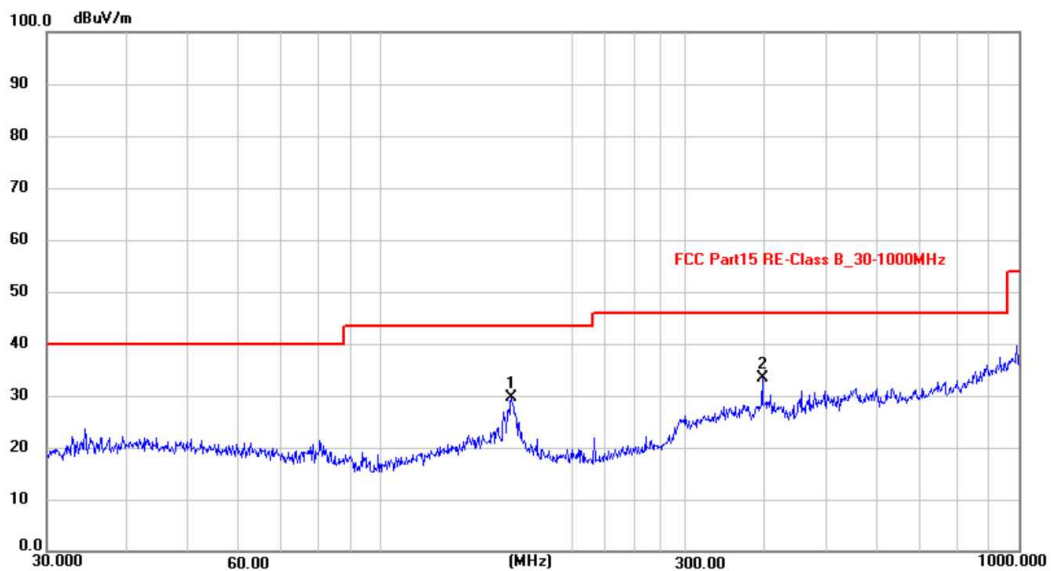

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg.) | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-------------|----------------|-----|--------|
| 1   | 160.3456        | 16.28          | 13.23         | 29.51          | 43.50          | -13.99      | peak     | 100         | 75             | P   |        |
| 2 * | 396.2415        | 17.26          | 16.10         | 33.36          | 46.00          | -12.64      | peak     | 100         | 354            | P   |        |

Note: \*:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit

### Above 1GHz

Note: there is a appropriate filter installed at the input of the measurement system power amplifier to attenuate the fundamental emission of the EUT.




Shenzhen PSI Testing Co., Ltd.  
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,  
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

|                                   |                               |                    |
|-----------------------------------|-------------------------------|--------------------|
| Test Site: PSI EMC Lab-3m Chamber | Polarization: <b>Vertical</b> | Temperature: 26 °C |
| EUT: 3D Scanner                   | Distance: 3m                  | Humidity: 54 %RH   |
| M/N: EinScan Libre                | Test Engineer: Felix Pang     |                    |
| Test Mode: b 2437MHz              |                               |                    |
| Test Voltage: DC 14.4V            |                               |                    |
| Note:                             |                               |                    |

#### Radiated Emission Measurement

Test Date: 2024/9/16 9:52:32

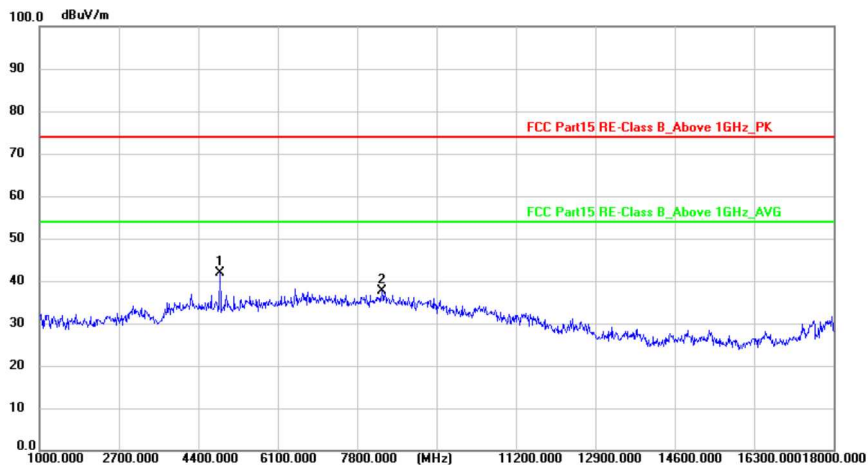

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg.) | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-------------|----------------|-----|--------|
| 1 * | 4873.875        | 55.86          | -13.88        | 41.98          | 74.00          | -32.02      | peak     | 150         | 94             | P   |        |
| 2   | 8335.500        | 44.49          | -6.84         | 37.65          | 74.00          | -36.35      | peak     | 150         | 210            | P   |        |

Note: \*:Maximum data    x:Over limit    !:over margin    Level = Reading + Factor    Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.  
 1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,  
 Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber      Polarization: **Horizontal**      Temperature: 26 °C  
 EUT: 3D Scanner      Distance: 3m      Humidity: 54 %RH  
 M/N: EinScan Libre      Test Engineer: Felix Pang  
 Test Mode: b 2437MHz  
 Test Voltage: DC 14.4V  
 Note:

**Radiated Emission Measurement**

Test Date: 2024/9/16    9:57:19

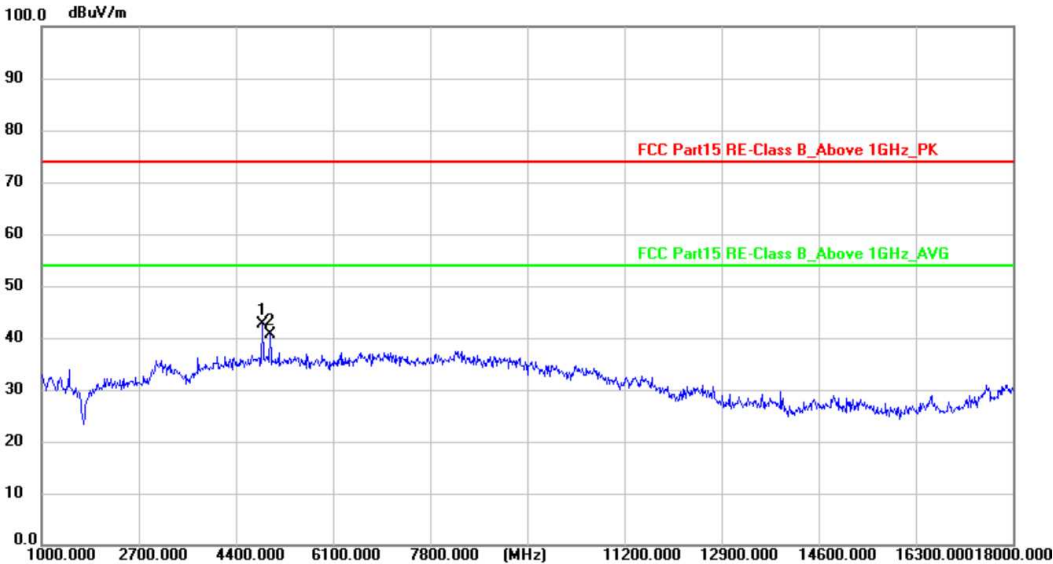

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg.) | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-------------|----------------|-----|--------|
| 1 * | 4873.875        | 55.54          | -13.00        | 42.54          | 74.00          | -31.46      | peak     | 150         | 102            | P   |        |
| 2   | 4999.250        | 53.23          | -12.56        | 40.67          | 74.00          | -33.33      | peak     | 150         | 37             | P   |        |

Note: \*:Maximum data    x:Over limit    !:over margin    Level = Reading + Factor    Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.  
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,  
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

|                                   |                                 |                    |
|-----------------------------------|---------------------------------|--------------------|
| Test Site: PSI EMC Lab-3m Chamber | Polarization: <b>Horizontal</b> | Temperature: 26 °C |
| EUT: 3D Scanner                   | Distance: 3m                    | Humidity: 54 %RH   |
| M/N: EinScan Libre                | Test Engineer: Felix Pang       |                    |
| Test Mode: b 2462MHz              |                                 |                    |
| Test Voltage: DC 14.4V            |                                 |                    |
| Note:                             |                                 |                    |

#### Radiated Emission Measurement

Test Date: 2024/9/16 9:03:24

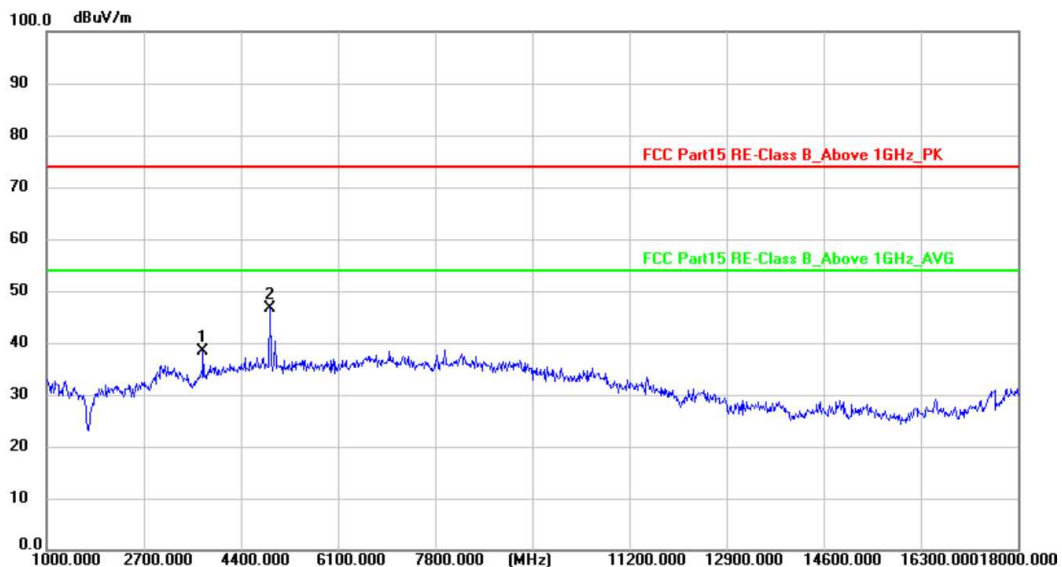

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg.) | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-------------|----------------|-----|--------|
| 1   | 3749.750        | 55.12          | -16.71        | 38.41          | 74.00          | -35.59      | peak     | 150         | 146            | P   |        |
| 2 * | 4922.750        | 59.49          | -12.83        | 46.66          | 74.00          | -27.34      | peak     | 150         | 245            | P   |        |

Note: \*:Maximum data    x:Over limit    !:over margin    Level = Reading + Factor    Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.  
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,  
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

|                                   |                               |                    |
|-----------------------------------|-------------------------------|--------------------|
| Test Site: PSI EMC Lab-3m Chamber | Polarization: <b>Vertical</b> | Temperature: 26 °C |
| EUT: 3D Scanner                   | Distance: 3m                  | Humidity: 54 %RH   |
| M/N: EinScan Libre                | Test Engineer: Felix Pang     |                    |
| Test Mode: b 2462MHz              |                               |                    |
| Test Voltage: DC 14.4V            |                               |                    |
| Note:                             |                               |                    |

#### Radiated Emission Measurement

Test Date: 2024/9/16 9:07:46

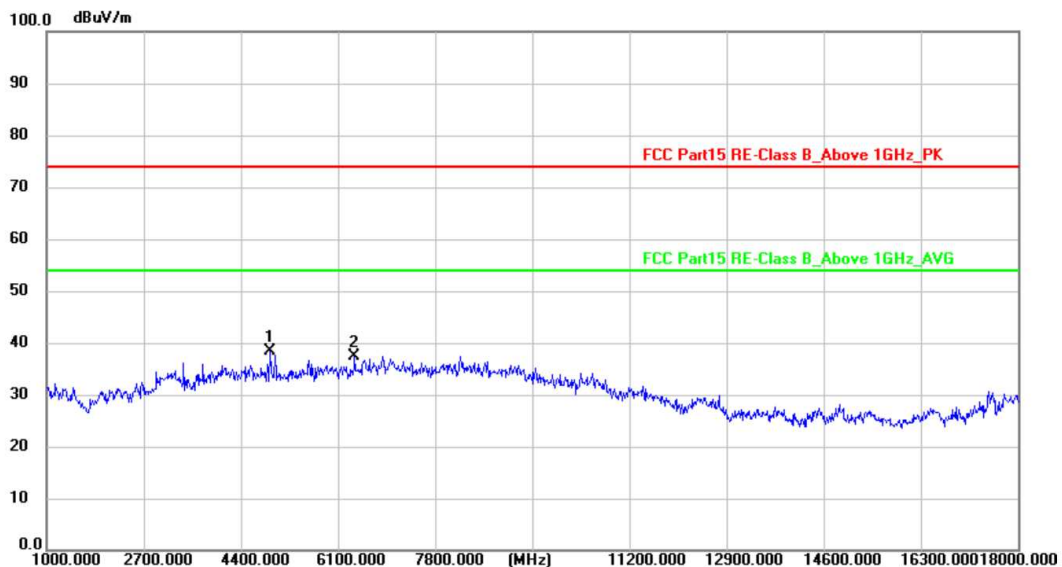

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg.) | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-------------|----------------|-----|--------|
| 1 * | 4924.875        | 52.15          | -13.75        | 38.40          | 74.00          | -35.60      | peak     | 150         | 106            | P   |        |
| 2   | 6389.000        | 47.23          | -9.76         | 37.47          | 74.00          | -36.53      | peak     | 150         | 304            | P   |        |

Note: \*:Maximum data    x:Over limit    !:over margin    Level = Reading + Factor    Margin = Level - Limit






Shenzhen PSI Testing Co., Ltd.  
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,  
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

|                                   |                               |                    |
|-----------------------------------|-------------------------------|--------------------|
| Test Site: PSI EMC Lab-3m Chamber | Polarization: <b>Vertical</b> | Temperature: 26 °C |
| EUT: 3D Scanner                   | Distance: 3m                  | Humidity: 54 %RH   |
| M/N: EinScan Libre                | Test Engineer: Felix Pang     |                    |
| Test Mode: g 2412MHz              |                               |                    |
| Test Voltage: DC 14.4V            |                               |                    |
| Note:                             |                               |                    |

#### Radiated Emission Measurement

Test Date: 2024/9/16 9:14:43

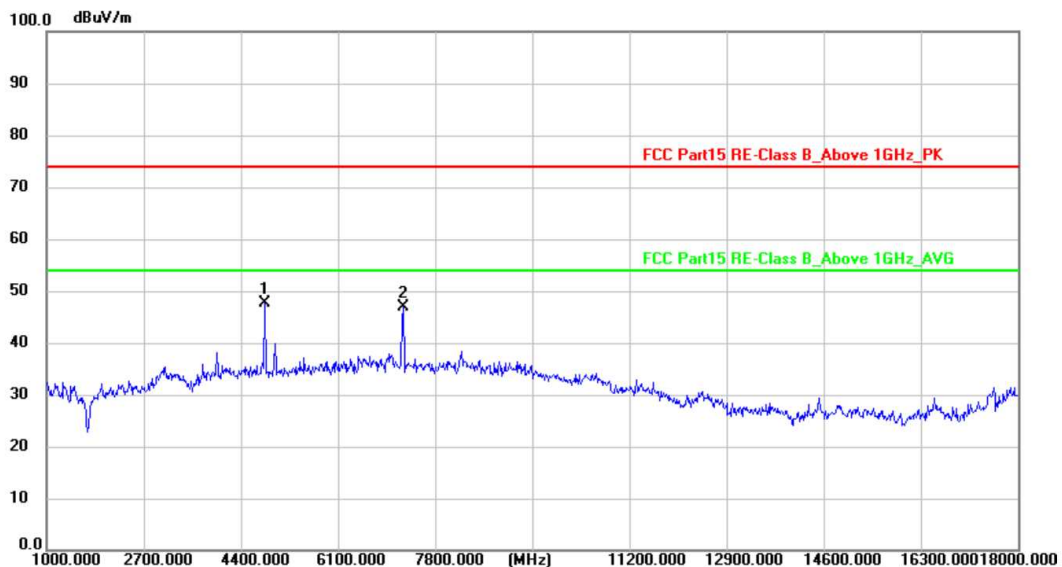

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg.) | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-------------|----------------|-----|--------|
| 1 * | 4829.250        | 61.64          | -13.99        | 47.65          | 74.00          | -26.35      | peak     | 150         | 102            | P   |        |
| 2   | 7241.125        | 54.82          | -7.84         | 46.98          | 74.00          | -27.02      | peak     | 150         | 34             | P   |        |

Note: \*:Maximum data    x:Over limit    !:over margin    Level = Reading + Factor    Margin = Level - Limit






Shenzhen PSI Testing Co., Ltd.  
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,  
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

|                                   |                                 |                    |
|-----------------------------------|---------------------------------|--------------------|
| Test Site: PSI EMC Lab-3m Chamber | Polarization: <b>Horizontal</b> | Temperature: 26 °C |
| EUT: 3D Scanner                   | Distance: 3m                    | Humidity: 54 %RH   |
| M/N: EinScan Libre                | Test Engineer: Felix Pang       |                    |
| Test Mode: g 2412MHz              |                                 |                    |
| Test Voltage: DC 14.4V            |                                 |                    |
| Note:                             |                                 |                    |

#### Radiated Emission Measurement

Test Date: 2024/9/16 9:20:21

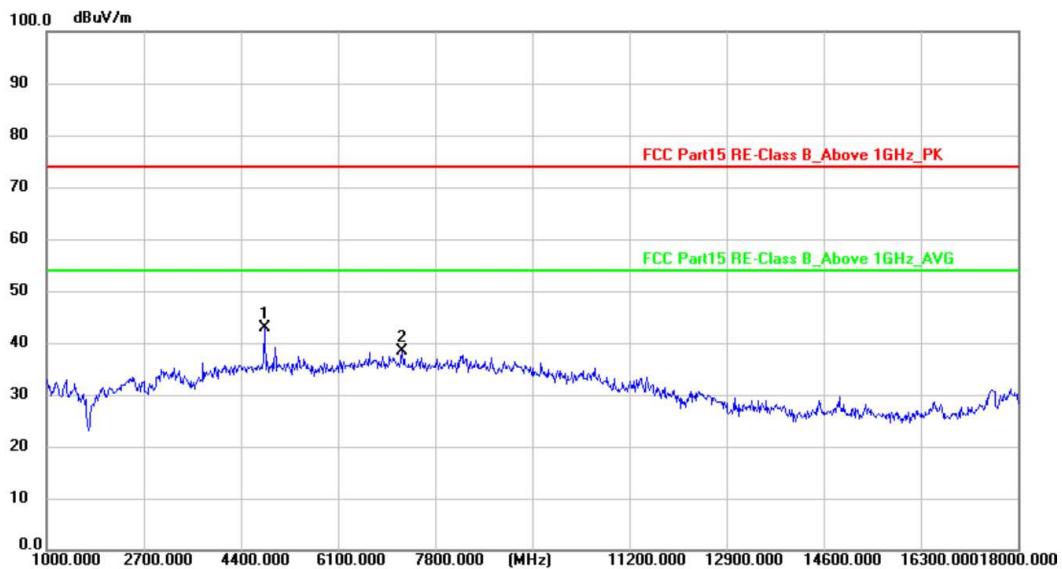

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg.) | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-------------|----------------|-----|--------|
| 1 * | 4818.625        | 56.08          | -13.19        | 42.89          | 74.00          | -31.11      | peak     | 150         | 89             | P   |        |
| 2   | 7230.500        | 46.33          | -7.85         | 38.48          | 74.00          | -35.52      | peak     | 150         | 47             | P   |        |

Note: \*:Maximum data    x:Over limit    !:over margin    Level = Reading + Factor    Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.  
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,  
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

|                                   |                                 |                    |
|-----------------------------------|---------------------------------|--------------------|
| Test Site: PSI EMC Lab-3m Chamber | Polarization: <b>Horizontal</b> | Temperature: 26 °C |
| EUT: 3D Scanner                   | Distance: 3m                    | Humidity: 54 %RH   |
| M/N: EinScan Libre                | Test Engineer: Felix Pang       |                    |
| Test Mode: g 2437MHz              |                                 |                    |
| Test Voltage: DC 14.4V            |                                 |                    |
| Note:                             |                                 |                    |

#### Radiated Emission Measurement

Test Date: 2024/9/16 9:26:16

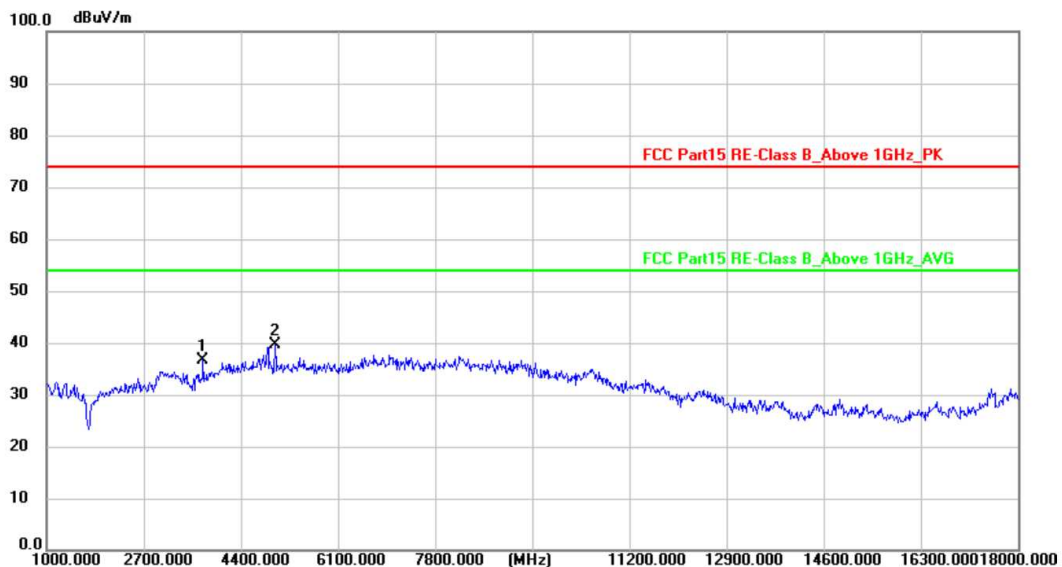

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg.) | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-------------|----------------|-----|--------|
| 1   | 3749.750        | 53.45          | -16.71        | 36.74          | 74.00          | -37.26      | peak     | 150         | 105            | P   |        |
| 2 * | 4999.250        | 52.17          | -12.56        | 39.61          | 74.00          | -34.39      | peak     | 150         | 240            | P   |        |

Note: \*:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.  
 1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,  
 Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber      Polarization: **Vertical**      Temperature: 26 °C  
 EUT: 3D Scanner      Distance: 3m      Humidity: 54 %RH  
 M/N: EinScan Libre      Test Engineer: Felix Pang  
 Test Mode: g 2437MHz  
 Test Voltage: DC 14.4V  
 Note:

**Radiated Emission Measurement**

Test Date: 2024/9/16    9:31:39

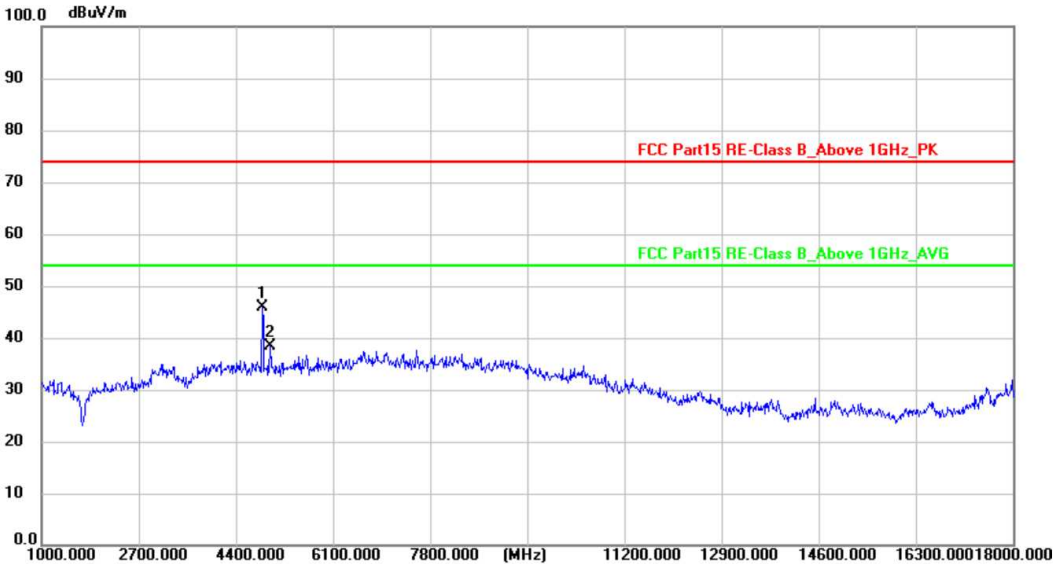

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg.) | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-------------|----------------|-----|--------|
| 1 * | 4871.750        | 59.71          | -13.89        | 45.82          | 74.00          | -28.18      | peak     | 150         | 112            | P   |        |
| 2   | 4999.250        | 51.85          | -13.56        | 38.29          | 74.00          | -35.71      | peak     | 150         | 231            | P   |        |

Note: \*:Maximum data    x:Over limit    !:over margin    Level = Reading + Factor    Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.  
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,  
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

|                                   |                               |                    |
|-----------------------------------|-------------------------------|--------------------|
| Test Site: PSI EMC Lab-3m Chamber | Polarization: <b>Vertical</b> | Temperature: 26 °C |
| EUT: 3D Scanner                   | Distance: 3m                  | Humidity: 54 %RH   |
| M/N: EinScan Libre                | Test Engineer: Felix Pang     |                    |
| Test Mode: g 2462MHz              |                               |                    |
| Test Voltage: DC 14.4V            |                               |                    |
| Note:                             |                               |                    |

#### Radiated Emission Measurement

Test Date: 2024/9/16 9:37:20

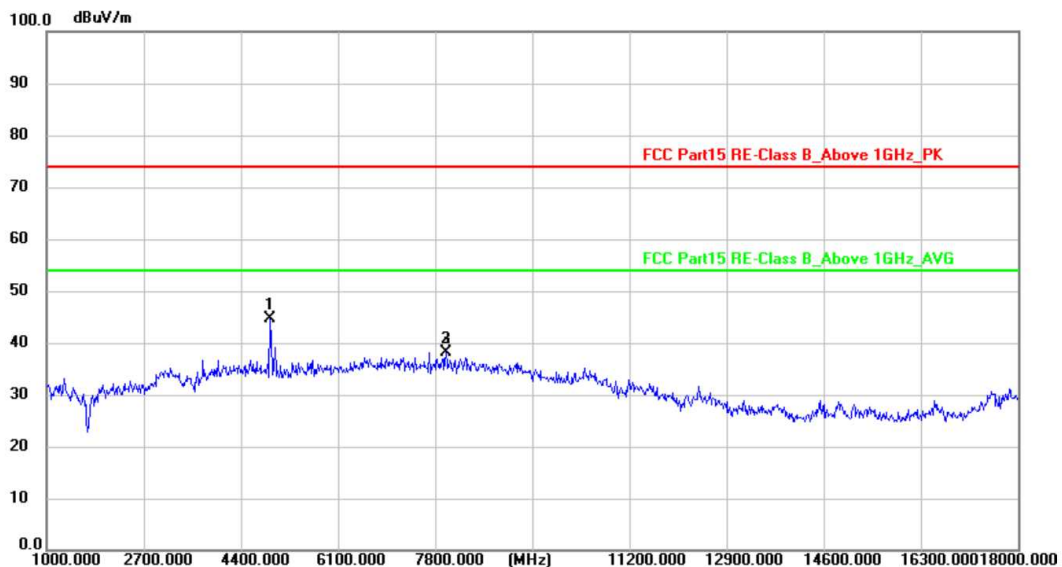

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg.) | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-------------|----------------|-----|--------|
| 1 * | 4922.750        | 58.36          | -13.76        | 44.60          | 74.00          | -29.40      | peak     | 150         | 103            | P   |        |
| 2   | 7999.750        | 45.22          | -7.16         | 38.06          | 74.00          | -35.94      | peak     | 150         | 245            | P   |        |
| 3   | 7999.750        | 45.22          | -7.16         | 38.06          | 74.00          | -35.94      | peak     |             |                | P   |        |

Note: \*:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.  
 1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,  
 Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

|                                   |                                 |                    |
|-----------------------------------|---------------------------------|--------------------|
| Test Site: PSI EMC Lab-3m Chamber | Polarization: <b>Horizontal</b> | Temperature: 26 °C |
| EUT: 3D Scanner                   | Distance: 3m                    | Humidity: 54 %RH   |
| M/N: EinScan Libre                | Test Engineer: Felix Pang       |                    |
| Test Mode: g 2462MHz              |                                 |                    |
| Test Voltage: DC 14.4V            |                                 |                    |
| Note:                             |                                 |                    |

Radiated Emission Measurement

Test Date: 2024/9/16 9:43:50

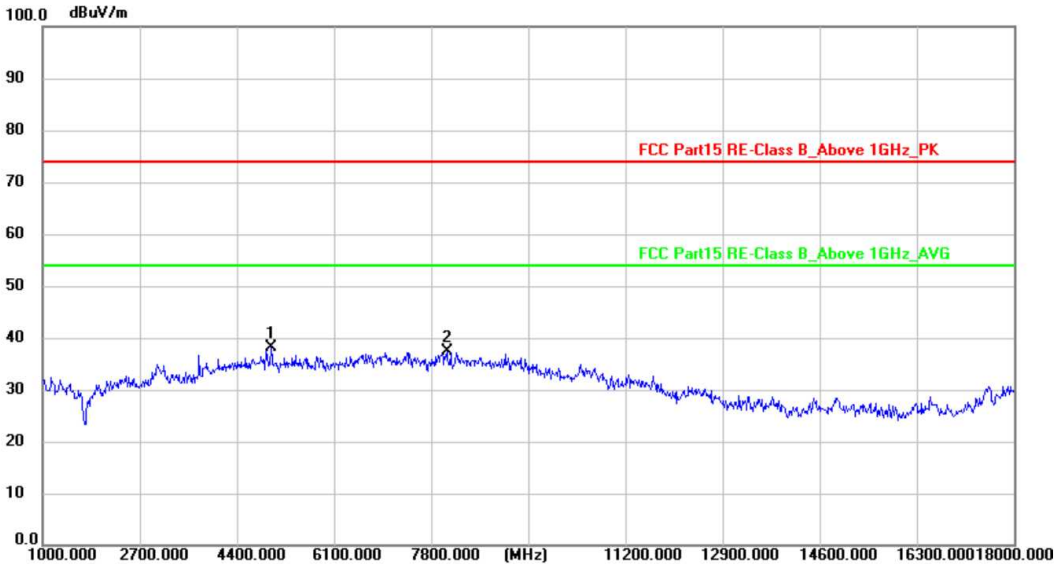

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg.) | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-------------|----------------|-----|--------|
| 1 * | 4999.250        | 50.65          | -12.56        | 38.09          | 74.00          | -35.91      | peak     | 150         | 114            | P   |        |
| 2   | 8082.625        | 44.55          | -7.08         | 37.47          | 74.00          | -36.53      | peak     | 150         | 231            | P   |        |

Note: \*:Maximum data    x:Over limit    !:over margin    Level = Reading + Factor    Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.  
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,  
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

|                                   |                                 |                    |
|-----------------------------------|---------------------------------|--------------------|
| Test Site: PSI EMC Lab-3m Chamber | Polarization: <b>Horizontal</b> | Temperature: 26 °C |
| EUT: 3D Scanner                   | Distance: 3m                    | Humidity: 54 %RH   |
| M/N: EinScan Libre                | Test Engineer: Felix Pang       |                    |
| Test Mode: n20 2412MHz            |                                 |                    |
| Test Voltage: DC 14.4V            |                                 |                    |
| Note:                             |                                 |                    |

#### Radiated Emission Measurement

Test Date: 2024/9/16 9:50:55

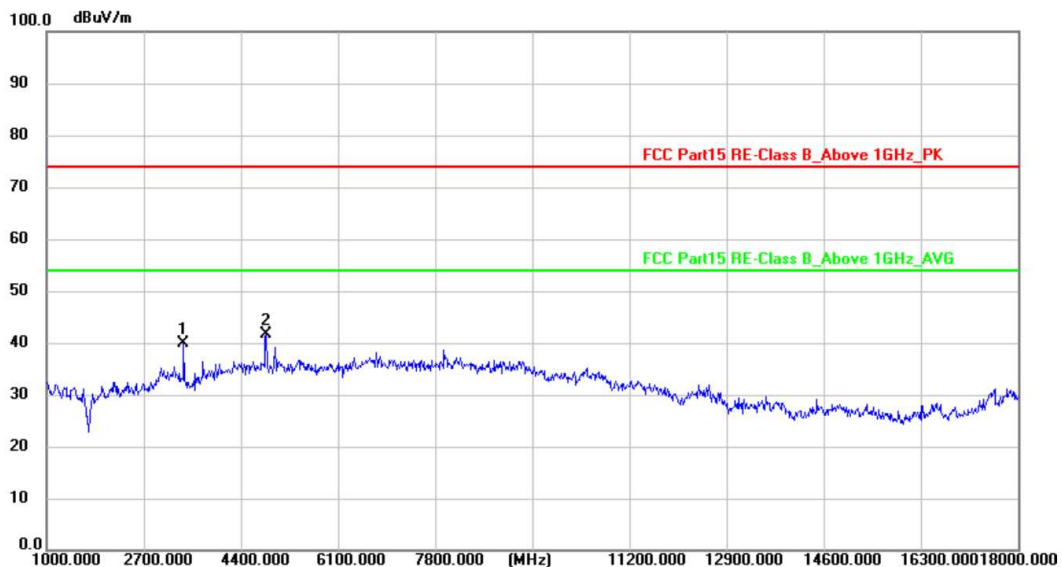

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg.) | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-------------|----------------|-----|--------|
| 1   | 3401.250        | 57.34          | -17.54        | 39.80          | 74.00          | -34.20      | peak     | 150         | 301            | P   |        |
| 2 * | 4842.000        | 54.65          | -13.11        | 41.54          | 74.00          | -32.46      | peak     | 150         | 89             | P   |        |

Note: \*:Maximum data    x:Over limit    !:over margin    Level = Reading + Factor    Margin = Level - Limit






Shenzhen PSI Testing Co., Ltd.  
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,  
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

|                                   |                               |                    |
|-----------------------------------|-------------------------------|--------------------|
| Test Site: PSI EMC Lab-3m Chamber | Polarization: <b>Vertical</b> | Temperature: 26 °C |
| EUT: 3D Scanner                   | Distance: 3m                  | Humidity: 54 %RH   |
| M/N: EinScan Libre                | Test Engineer: Felix Pang     |                    |
| Test Mode: n20 2412MHz            |                               |                    |
| Test Voltage: DC 14.4V            |                               |                    |
| Note:                             |                               |                    |

#### Radiated Emission Measurement

Test Date: 2024/9/16 9:55:19

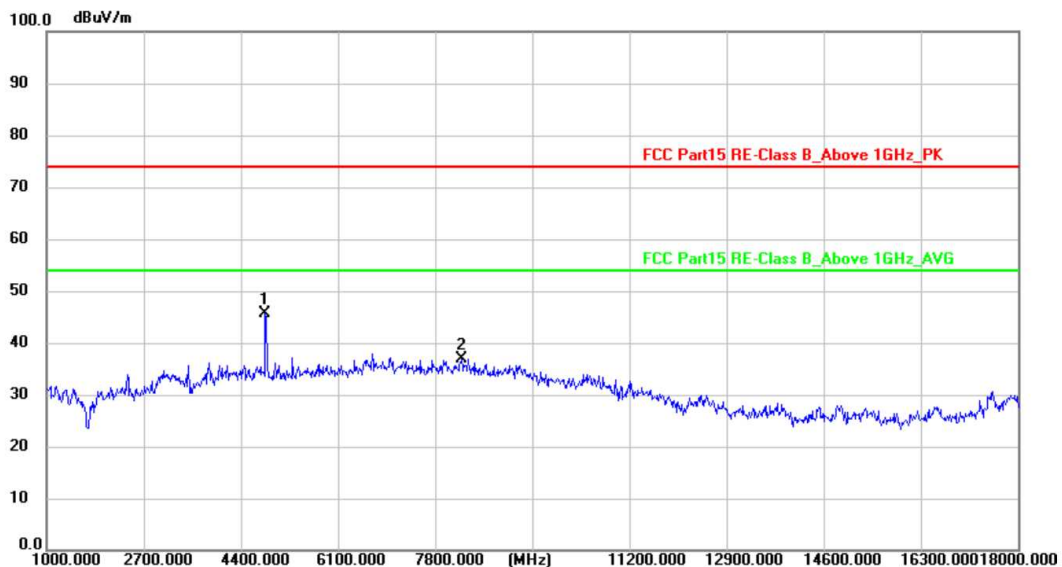

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg.) | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-------------|----------------|-----|--------|
| 1 * | 4837.750        | 59.64          | -13.98        | 45.66          | 74.00          | -28.34      | peak     | 150         | 214            | P   |        |
| 2   | 8273.875        | 43.89          | -6.90         | 36.99          | 74.00          | -37.01      | peak     | 150         | 301            | P   |        |

Note: \*:Maximum data    x:Over limit    !:over margin    Level = Reading + Factor    Margin = Level - Limit






Shenzhen PSI Testing Co., Ltd.  
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,  
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

|                                   |                               |                    |
|-----------------------------------|-------------------------------|--------------------|
| Test Site: PSI EMC Lab-3m Chamber | Polarization: <b>Vertical</b> | Temperature: 26 °C |
| EUT: 3D Scanner                   | Distance: 3m                  | Humidity: 54 %RH   |
| M/N: EinScan Libre                | Test Engineer: Felix Pang     |                    |
| Test Mode: n20 2437MHz            |                               |                    |
| Test Voltage: DC 14.4V            |                               |                    |
| Note:                             |                               |                    |

#### Radiated Emission Measurement

Test Date: 2024/9/16 10:04:08

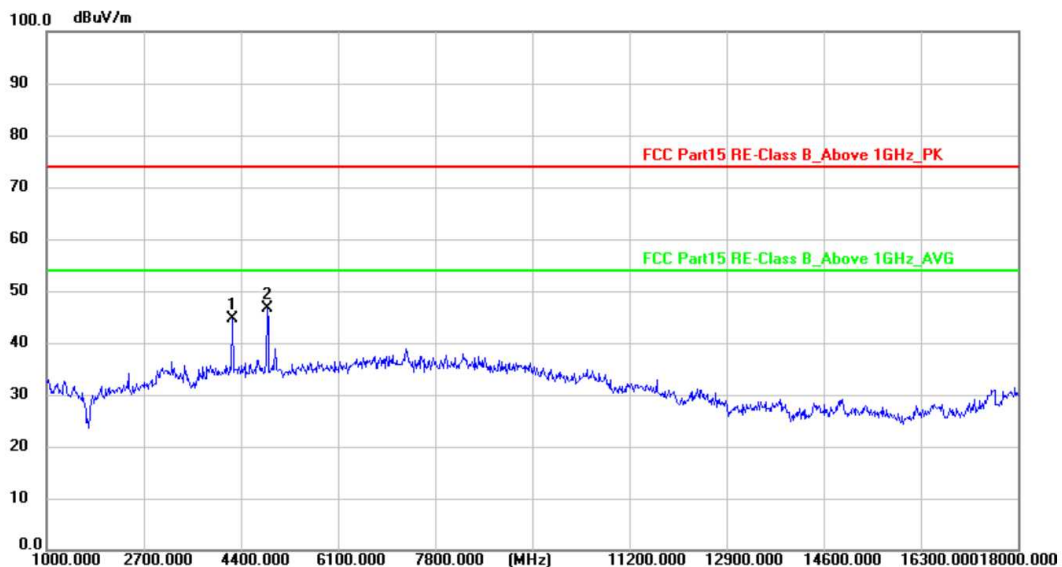

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg.) | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-------------|----------------|-----|--------|
| 1   | 4261.875        | 59.97          | -15.42        | 44.55          | 74.00          | -29.45      | peak     | 150         | 210            | P   |        |
| 2 * | 4871.750        | 60.58          | -13.89        | 46.69          | 74.00          | -27.31      | peak     | 150         | 102            | P   |        |

Note: \*:Maximum data    x:Over limit    !:over margin    Level = Reading + Factor    Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.  
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,  
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

|                                   |                                 |                    |
|-----------------------------------|---------------------------------|--------------------|
| Test Site: PSI EMC Lab-3m Chamber | Polarization: <b>Horizontal</b> | Temperature: 26 °C |
| EUT: 3D Scanner                   | Distance: 3m                    | Humidity: 54 %RH   |
| M/N: EinScan Libre                | Test Engineer: Felix Pang       |                    |
| Test Mode: n20 2437MHz            |                                 |                    |
| Test Voltage: DC 14.4V            |                                 |                    |
| Note:                             |                                 |                    |

#### Radiated Emission Measurement

Test Date: 2024/9/16 10:09:27

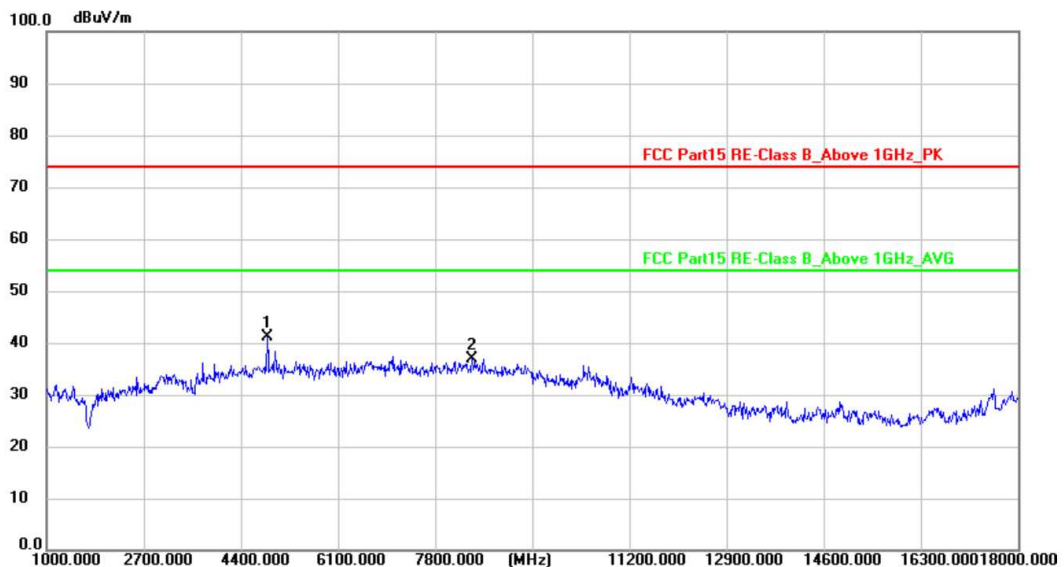

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg.) | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-------------|----------------|-----|--------|
| 1 * | 4873.875        | 54.13          | -13.00        | 41.13          | 74.00          | -32.87      | peak     | 150         | 245            | P   |        |
| 2   | 8450.250        | 43.56          | -6.74         | 36.82          | 74.00          | -37.18      | peak     | 150         | 305            | P   |        |

Note: \*:Maximum data    x:Over limit    !:over margin    Level = Reading + Factor    Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.  
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,  
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

|                                   |                                 |                    |
|-----------------------------------|---------------------------------|--------------------|
| Test Site: PSI EMC Lab-3m Chamber | Polarization: <b>Horizontal</b> | Temperature: 26 °C |
| EUT: 3D Scanner                   | Distance: 3m                    | Humidity: 54 %RH   |
| M/N: EinScan Libre                | Test Engineer: Felix Pang       |                    |
| Test Mode: n20 2462MHz            |                                 |                    |
| Test Voltage: DC 14.4V            |                                 |                    |
| Note:                             |                                 |                    |

#### Radiated Emission Measurement

Test Date: 2024/9/16 10:14:55

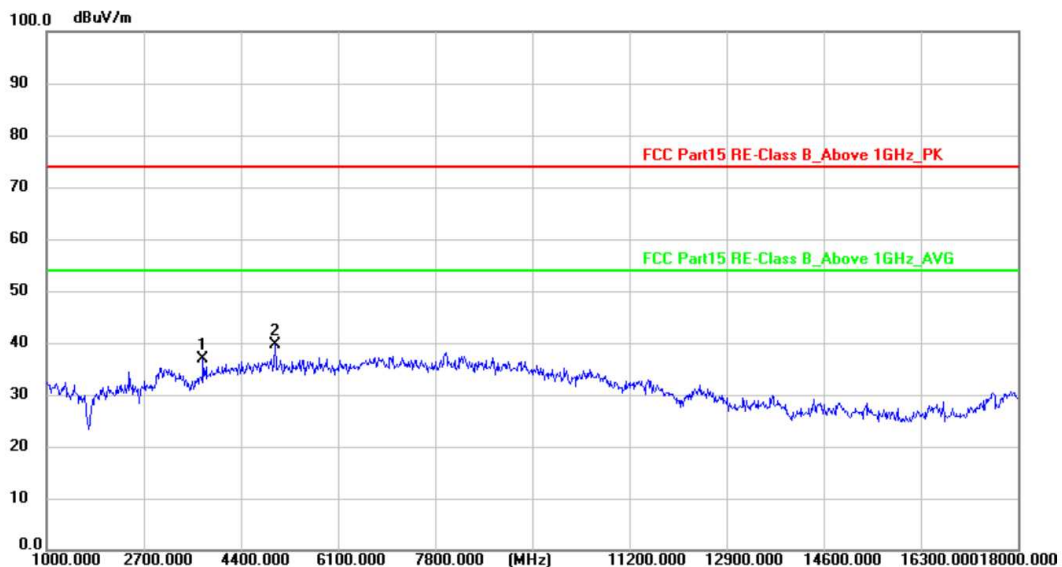

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg.) | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-------------|----------------|-----|--------|
| 1   | 3749.750        | 53.58          | -16.71        | 36.87          | 74.00          | -37.13      | peak     | 150         | 215            | P   |        |
| 2 * | 4999.250        | 52.12          | -12.56        | 39.56          | 74.00          | -34.44      | peak     | 150         | 310            | P   |        |

Note: \*:Maximum data    x:Over limit    !:over margin    Level = Reading + Factor    Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.  
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,  
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

|                                   |                               |                    |
|-----------------------------------|-------------------------------|--------------------|
| Test Site: PSI EMC Lab-3m Chamber | Polarization: <b>Vertical</b> | Temperature: 26 °C |
| EUT: 3D Scanner                   | Distance: 3m                  | Humidity: 54 %RH   |
| M/N: EinScan Libre                | Test Engineer: Felix Pang     |                    |
| Test Mode: n20 2462MHz            |                               |                    |
| Test Voltage: DC 14.4V            |                               |                    |
| Note:                             |                               |                    |

#### Radiated Emission Measurement

Test Date: 2024/9/16 10:19:44

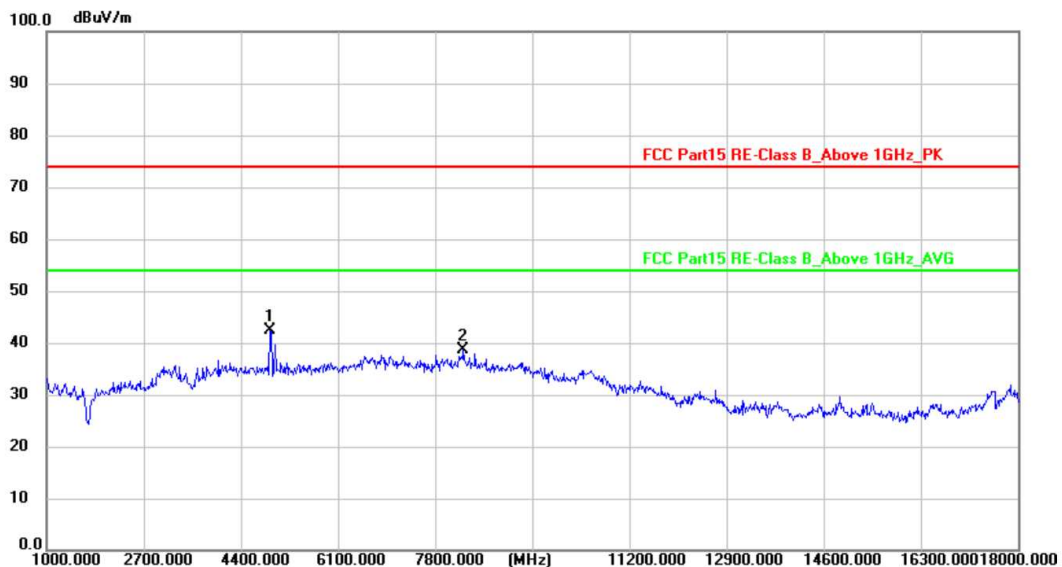

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg.) | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-------------|----------------|-----|--------|
| 1 * | 4922.750        | 56.09          | -13.75        | 42.34          | 74.00          | -31.66      | peak     | 150         | 321            | P   |        |
| 2   | 8305.750        | 45.61          | -6.86         | 38.75          | 74.00          | -35.25      | peak     | 150         | 125            | P   |        |

Note: \*:Maximum data    x:Over limit    !:over margin    Level = Reading + Factor    Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.  
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,  
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

|                                   |                               |                    |
|-----------------------------------|-------------------------------|--------------------|
| Test Site: PSI EMC Lab-3m Chamber | Polarization: <b>Vertical</b> | Temperature: 26 °C |
| EUT: 3D Scanner                   | Distance: 3m                  | Humidity: 54 %RH   |
| M/N: EinScan Libre                | Test Engineer: Felix Pang     |                    |
| Test Mode: ax40 2422MHz           |                               |                    |
| Test Voltage: DC 14.4V            |                               |                    |
| Note:                             |                               |                    |

#### Radiated Emission Measurement

Test Date: 2024/9/16 10:24:22

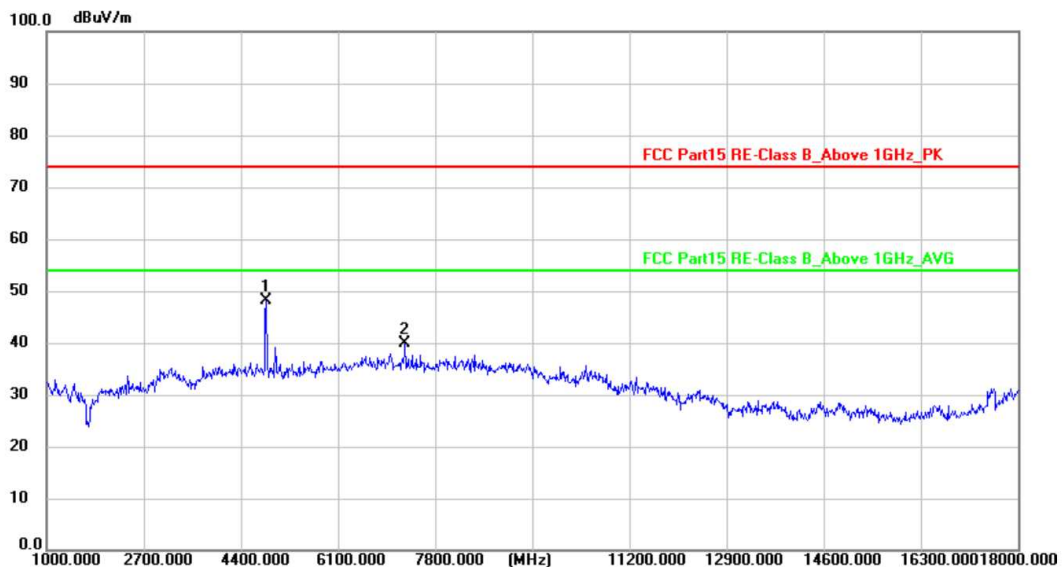

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg.) | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-------------|----------------|-----|--------|
| 1 * | 4846.250        | 62.00          | -13.95        | 48.05          | 74.00          | -25.95      | peak     | 150         | 215            | P   |        |
| 2   | 7275.125        | 47.62          | -7.80         | 39.82          | 74.00          | -34.18      | peak     | 150         | 315            | P   |        |

Note: \*:Maximum data    x:Over limit    !:over margin    Level = Reading + Factor    Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.  
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,  
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

|                                   |                                 |                    |
|-----------------------------------|---------------------------------|--------------------|
| Test Site: PSI EMC Lab-3m Chamber | Polarization: <b>Horizontal</b> | Temperature: 26 °C |
| EUT: 3D Scanner                   | Distance: 3m                    | Humidity: 54 %RH   |
| M/N: EinScan Libre                | Test Engineer: Felix Pang       |                    |
| Test Mode: ax40 2422MHz           |                                 |                    |
| Test Voltage: DC 14.4V            |                                 |                    |
| Note:                             |                                 |                    |

#### Radiated Emission Measurement

Test Date: 2024/9/16 10:31:56

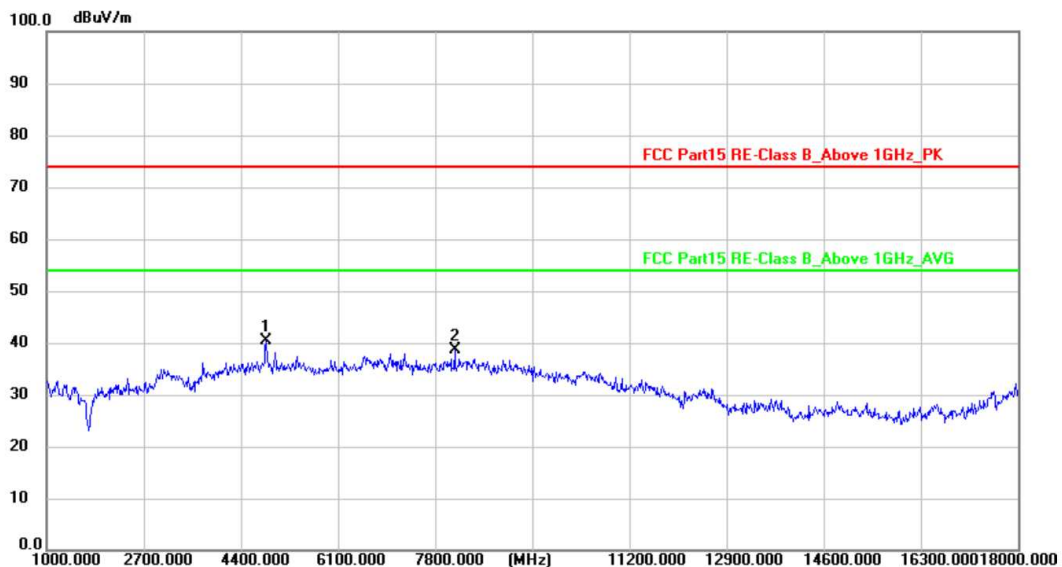

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg.) | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-------------|----------------|-----|--------|
| 1 * | 4844.125        | 53.50          | -13.11        | 40.39          | 74.00          | -33.61      | peak     | 150         | 314            | P   |        |
| 2   | 8154.875        | 45.58          | -7.01         | 38.57          | 74.00          | -35.43      | peak     | 150         | 124            | P   |        |

Note: \*:Maximum data    x:Over limit    !:over margin    Level = Reading + Factor    Margin = Level - Limit






Shenzhen PSI Testing Co., Ltd.  
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,  
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

|                                   |                                 |                    |
|-----------------------------------|---------------------------------|--------------------|
| Test Site: PSI EMC Lab-3m Chamber | Polarization: <b>Horizontal</b> | Temperature: 26 °C |
| EUT: 3D Scanner                   | Distance: 3m                    | Humidity: 54 %RH   |
| M/N: EinScan Libre                | Test Engineer: Felix Pang       |                    |
| Test Mode: ax40 2437MHz           |                                 |                    |
| Test Voltage: DC 14.4V            |                                 |                    |
| Note:                             |                                 |                    |

#### Radiated Emission Measurement

Test Date: 2024/9/16 10:37:27

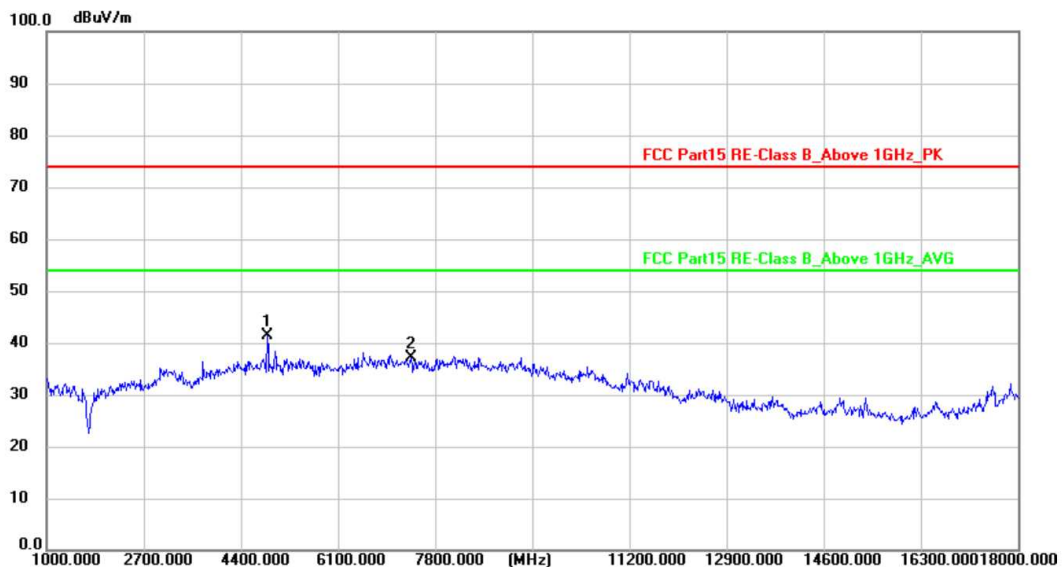

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg.) | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-------------|----------------|-----|--------|
| 1 * | 4873.875        | 54.29          | -13.00        | 41.29          | 74.00          | -32.71      | peak     | 150         | 45             | P   |        |
| 2   | 7387.750        | 44.75          | -7.70         | 37.05          | 74.00          | -36.95      | peak     | 150         | 145            | P   |        |

Note: \*:Maximum data    x:Over limit    !:over margin    Level = Reading + Factor    Margin = Level - Limit