

## FCC PART 15C


## TEST REPORT

For

### MPOW TECHNOLOGY CO., LIMITED

FLAT/RM 605 6/F FA YUEN COMMERCIAL BUILDING 75-77 FA YUEN STREET  
MONGKOK KL HONG KONG

**FCC ID: 2AMH2-CA169A**

<b>Report Type:</b> Original Report	<b>Product Name:</b> MAGNETIC WIRELESS CAR CHARGER MOUNT
<b>Report Number:</b>	RDG210205001-00
<b>Report Date:</b>	2021-05-27
<b>Reviewed By:</b>	Ivan Cao Assistant Manager 
<b>Test Laboratory:</b>	Bay Area Compliance Laboratories Corp. (Dongguan) No.12, Pulong East 1 <sup>st</sup> Road, Tangxia Town, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 <a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a>

## TABLE OF CONTENTS

<b>GENERAL INFORMATION.....</b>	<b>3</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....	3
OBJECTIVE .....	3
RELATED SUBMITTAL(S)/GRANT(S).....	3
TEST METHODOLOGY .....	3
MEASUREMENT UNCERTAINTY .....	4
TEST FACILITY .....	4
DECLARATIONS.....	4
<b>SYSTEM TEST CONFIGURATION.....</b>	<b>5</b>
JUSTIFICATION .....	5
EUT EXERCISE SOFTWARE .....	5
SUPPORT EQUIPMENT LIST AND DETAILS .....	5
SUPPORT CABLE LIST AND DETAILS .....	5
BLOCK DIAGRAM OF TEST SETUP .....	5
<b>SUMMARY OF TEST RESULTS.....</b>	<b>6</b>
<b>FCC §1.1310, §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE) .....</b>	<b>7</b>
APPLICABLE STANDARD .....	7
BLOCK DIAGRAM OF TEST SETUP .....	8
TEST EQUIPMENT LIST AND DETAILS.....	8
TEST DATA .....	8
<b>FCC§15.203 - ANTENNA REQUIREMENT.....</b>	<b>10</b>
APPLICABLE STANDARD .....	10
ANTENNA CONNECTED CONSTRUCTION .....	10
<b>FCC §15.205 &amp; §15.209 - RADIATED EMISSIONS TEST .....</b>	<b>11</b>
APPLICABLE STANDARD .....	11
EUT SETUP .....	11
EMI TEST RECEIVER SETUP.....	12
CORRECTED AMPLITUDE & MARGIN CALCULATION .....	12
TEST EQUIPMENT LIST AND DETAILS.....	12
TEST RESULTS SUMMARY .....	13
TEST DATA .....	13

---

## GENERAL INFORMATION

---

### Product Description for Equipment Under Test (EUT)

<b>EUT Name:</b>	MAGNETIC WIRELESS CAR CHARGER MOUNT
<b>EUT Model:</b>	CA169A
<b>Operation Frequency:</b>	110.5-215kHz
<b>Maximum Charger Output:</b>	15W
<b>Rated Input Voltage:</b>	DC 5V/9V/12V from USB port
<b>Serial Number:</b>	RDG210205001-RF-S1
<b>EUT Received Date:</b>	2021.02.07
<b>EUT Received Status:</b>	Good

### Objective

This Type approval report is prepared on behalf of **MPOW TECHNOLOGY CO., LIMITED** in accordance with Part 2, Subpart J, and Part 15, Subparts A and C of the Federal Communications Commission's rules.

The objective is to determine the compliance of the EUT with FCC rules, 15.203, 15.205, 15.209.

### Related Submittal(s)/Grant(s)

No related submittal(s)/grant(s).

### Test Methodology

All measurements detailed in this Test Report were performed in accordance with ANSI C63.10-2013 "American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices".

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

## Measurement Uncertainty

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
radiated Emissions	9kHz~30MHz: 4.12dB 30M~200MHz: 4.58 dB for Horizontal, 4.59 dB for Vertical 200M~1GHz: 4.83 dB for Horizontal, 5.85 dB for Vertical
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	3.12 dB (150 kHz to 30 MHz)

*Note: Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.*

## Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.12, Pulong East 1<sup>st</sup> Road, Tangxia Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 897218, the FCC Designation No. : CN1220.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0022.

## Declarations

BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “▲”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

## SYSTEM TEST CONFIGURATION

### Justification

The system was configured for testing in a test mode

The device is a wireless charger operation on frequency 110.5 kHz - 215 kHz.

### EUT Exercise Software

No software used in test.


### Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
HUIER	Wireless Charging Load	WXC15WL	HEWX15W001
Have	Adapter	QC24-CN	QC24-CN-1
Pro instrument	DC Power Supply	pps3300	3300012

### Support Cable List and Details

Cable Description	Shielding Type	Ferrite Core	Length (m)	From	To
USB Cable	No	No	1.2	Adapter	EUT

### Block Diagram of Test Setup

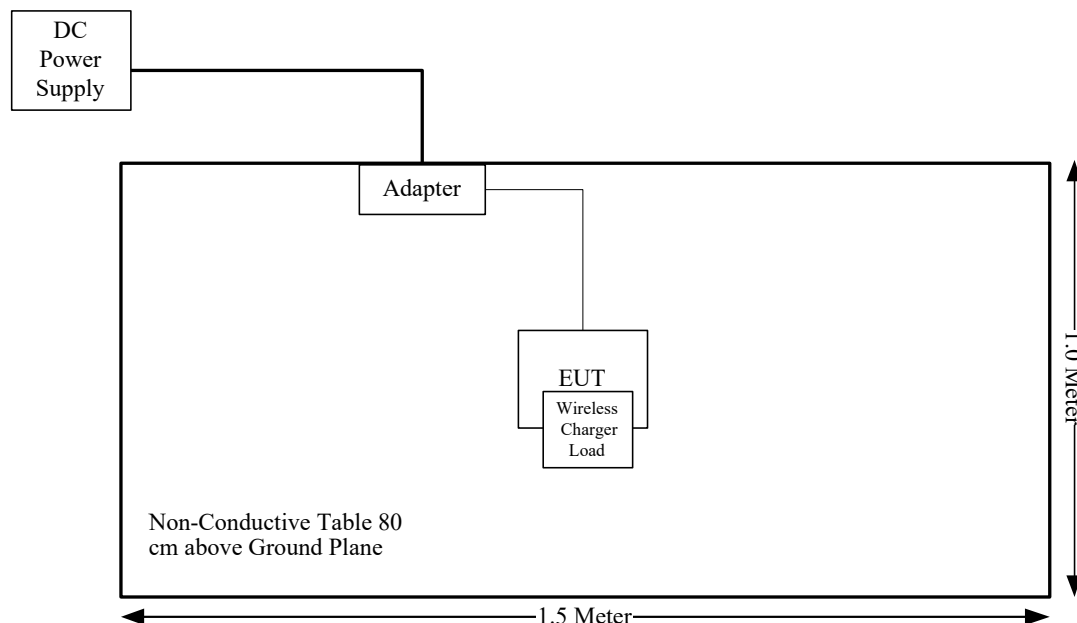

**SUMMARY OF TEST RESULTS**

<b>FCC Rules</b>	<b>Description of Test</b>	<b>Result</b>
FCC §1.1310, §2.1091	MAXIMUM PERMISSIBLE EXPOSURE (MPE)	Compliance
FCC§15.203	Antenna Requirement	Compliance
FCC§15.207	AC Line Conducted Emission	Not applicable
§15.209 §15.205	Radiated Emission Test	Compliance

Not applicable: the device was powered by Battery when operating.

## **FCC §1.1310, §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)**

### **Applicable Standard**

According to subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

<b>(B) Limits for General Population/Uncontrolled Exposure</b>				
<b>Frequency Range (MHz)</b>	<b>Electric Field Strength (V/m)</b>	<b>Magnetic Field Strength (A/m)</b>	<b>Power Density (mW/cm<sup>2</sup>)</b>	<b>Averaging Time (minutes)</b>
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f <sup>2</sup> )	30
30–300	27.5	0.073	0.2	30
300–1500	/	/	f/1500	30
1500–100,000	/	/	1.0	30

f = frequency in MHz; \* = Plane-wave equivalent power density;


According with KDB 680106 D01 RF Exposure Wireless Charging Apps v03r01 clause 3 c)

- c) For devices designed for typical desktop applications, such as wireless charging pads, RF exposure evaluation should be conducted assuming a user separation distance of 15 cm. E and H field strength measurements or numerical modeling may be used to demonstrate compliance. Measurements should be made from all sides and the top of the primary/client pair, with the 15 cm measured from the center of the probe(s) to the edge of the device. Emissions between 100 kHz to 300 kHz should be assessed versus the limits at 300 kHz in Table 1 of Section 1.1310: 614 V/m and 1.63 A/m. A KDB inquiry is required to determine the applicable exposure limits below 100 kHz.

According to 680106 D01 RF Exposure Wireless Charging App v03r01 clause 5 b)

- b) Inductive wireless power transfer applications with supporting field strength results and meeting all of the following requirements are not required to submit a KDB inquiry for devices approved using SDoC or a PAG for equipment approved using certification to address RF exposure compliance. However, the responsible party is required to keep a copy of the test report in accordance with KDB 865664 D02. A copy of the test report is to be submitted with the application if the device is approved using certification.
- (1) Power transfer frequency is less than 1 MHz.
  - (2) Output power from each primary coil is less than or equal to 15 watts.
  - (3) The transfer system includes only single primary and secondary coils. This includes charging systems that may have multiple primary coils and clients that are able to detect and allow coupling only between individual pairs of coils.
  - (4) Client device is placed directly in contact with the transmitter.
  - (5) Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion).
  - (6) The aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.

**Block Diagram of Test Setup**

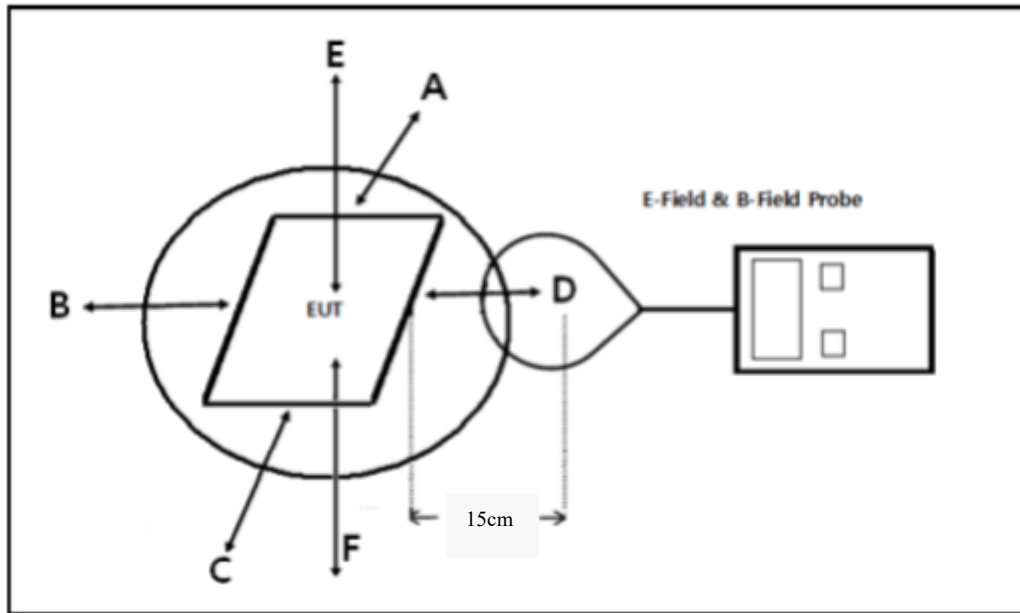

Note: 20 cm for Top test.

**Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Narda	Exposure Level Tester	ELT-400	N-0229	2019-11-19	2021-11-18
Narda	B Field Probe	ELT Probe 100cm <sup>2</sup>	M-0666	2019-11-19	2021-11-18
Amplifier Research	Isotropic Field Probe	FP5000	301825	2018-11-12	2021-11-12

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

**Test Data**

**Environmental Conditions**

<b>Temperature:</b>	22.9 °C
<b>Relative Humidity:</b>	52 %
<b>ATM Pressure:</b>	101.2 kPa
<b>Test Engineer:</b>	Bond Qin
<b>Test Date</b>	2021-03-08



**H-field Strength:**

Frequency Range (kHz)	Position A (A/m)	Position B (A/m)	Position C (A/m)	Position D (A/m)	Position E (A/m)	50% Limit (A/m)	Limit (A/m)
110.5-215	0.060	0.014	0.070	0.064	0.044	0.815	1.63

Note: Test with 15cm distance from the center of the probe(s) to the edge of the device, 20 cm for top(Position E) test.

**E-field Strength:**

Frequency Range (kHz)	Position A (V/m)	Position B (V/m)	Position C (V/m)	Position D (V/m)	Position E (V/m)	50% Limit (V/m)	Limit (V/m)
110.5-215	2.234	2.107	2.239	2.228	2.224	307	614

Note: Test with 15cm distance from the center of the probe(s) to the edge of the device, 20 cm for top(Position E) test.

**Result: Compliance****Considerations of compliance 680106 D01 RF Exposure Wireless Charging App v03r01 clause 5 b:**

(1) Power transfer frequency is less than 1 MHz.

Yes, the operation frequency is 110.5-215 kHz.

(2) Output power from each primary coil is less than or equal to 15 watts.

Yes, the maximum output power of primary coil is **15 Watts**.

(3) The transfer system includes only single primary and secondary coils. This includes charging systems that may have multiple primary coils and clients that are able to detect and allow coupling only between individual pairs of coils.

The transfer system includes only single primary coil, and system detect and allow coupling only between individual pairs of coils.

(4) Client device is placed directly in contact with the transmitter.

Yes, client device is placed directly in contact with the transmitter

(5) Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion).

Yes, mobile exposure conditions only

(6) The aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.

Yes, the test result for H and E-field strength less than 50% of the MPE limit.

---

## **FCC§15.203 - ANTENNA REQUIREMENT**

---

### **Applicable Standard**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

### **Antenna Connected Construction**

The EUT has one integral antenna arrangement, which was permanently attached and fulfill the requirement of this section. Please refer to the EUT photos.

**Result:** Compliance.

## FCC §15.205 & §15.209 - RADIATED EMISSIONS TEST

### Applicable Standard


As per FCC Part 15.209

(a) Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

\*\*Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§15.231 and 15.241.

### EUT Setup

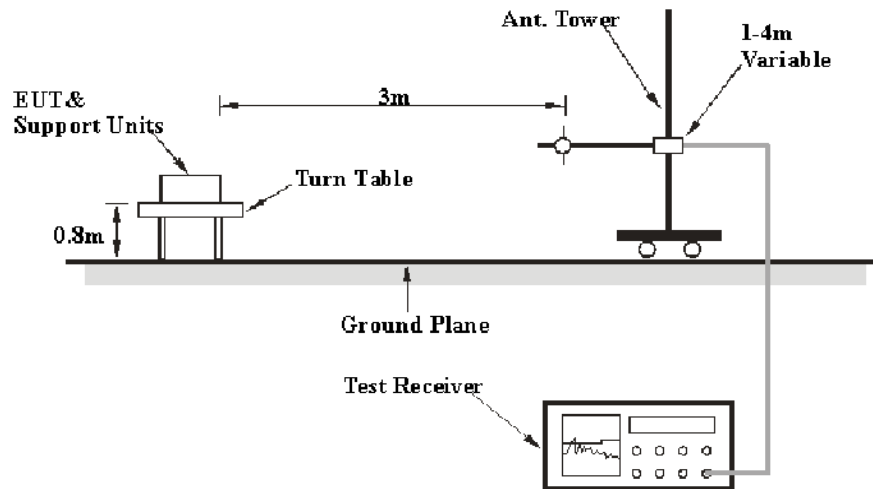

The radiated emission tests were performed in the 3-meter chamber test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC Part Subpart C limits.

The spacing between the peripherals was 10 cm.

## EMI Test Receiver Setup

The system was investigated from 9 kHz to 1 GHz.

During the radiated emission test, the EMI test Receiver was set with the following configurations:

Frequency Range	RBW	Video B/W	Measurement
9 kHz – 150 kHz	200 Hz	1 kHz	QP/Average
150 kHz – 30 MHz	9 kHz	30 kHz	QP/Average
30 MHz – 1000 MHz	120 kHz	300 kHz	QP

The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

If the maximized peak measured value complies with the limit, then it is unnecessary to perform an QP/Average measurement

## Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corr. Ampl.}$$

## Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Sunol Sciences	Antenna	JB3	A060611-2	2020-08-25	2023-08-25
R&S	EMI Test Receiver	ESCI	100224	2020-09-12	2021-09-12
Unknown	Coaxial Cable	C-NJNJ-50	C-1000-01	2020-09-05	2021-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-02	2020-09-05	2021-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0530-01	2020-09-24	2021-09-24
Sonoma	Amplifier	310N	185914	2020-10-13	2021-10-13
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

## Test Results Summary


According to the data in the following table, the EUT complied with the FCC Part 15.209&15.205.

## Test Data

### Environmental Conditions

<b>Temperature:</b>	24.6°C
<b>Relative Humidity:</b>	54.1 %
<b>ATM Pressure:</b>	100.4 kPa
<b>Test Engineer:</b>	King Wang
<b>Test date:</b>	2021-05-18


1) 9 kHz~150kHz:

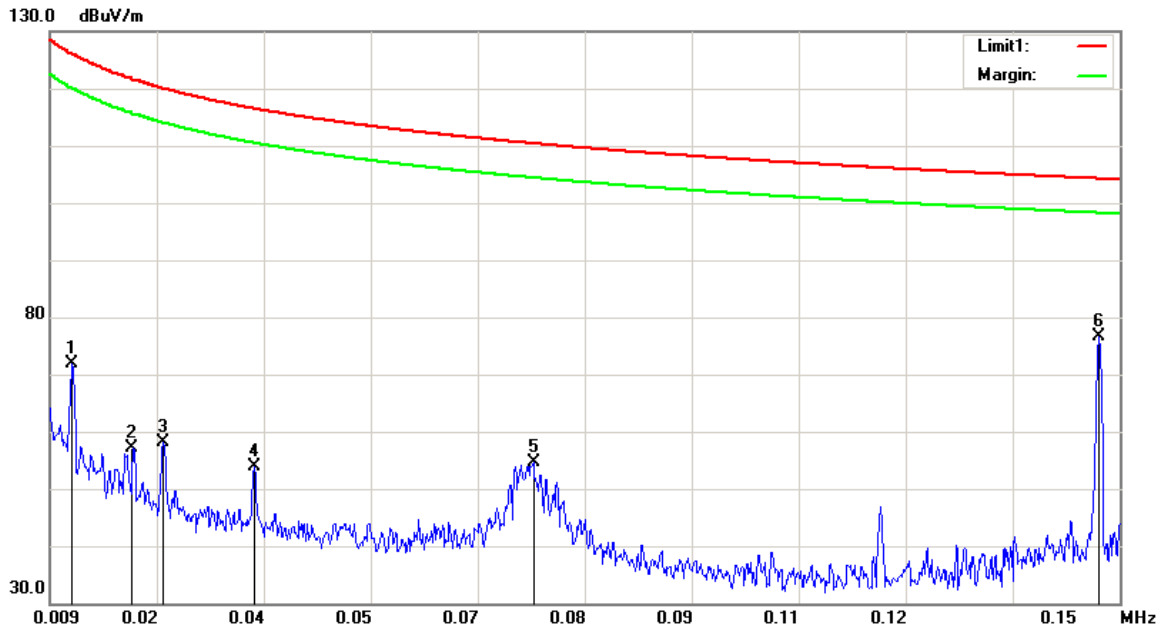

Frequency (MHz)	Receiver Reading (dBμV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
0.0120	15.53	peak	56.25	71.78	126.02	54.24
0.0200	7.48	peak	49.58	57.06	121.58	64.52
0.0240	9.93	peak	48.21	58.14	120.00	61.86
0.0360	8.78	peak	45.02	53.80	116.48	62.68
0.0727	15.90	peak	38.69	54.59	110.37	55.78
0.1472*	43.28	peak	33.29	76.57	104.24	27.67

\*Fundamental.

2)150kHz-30 MHz

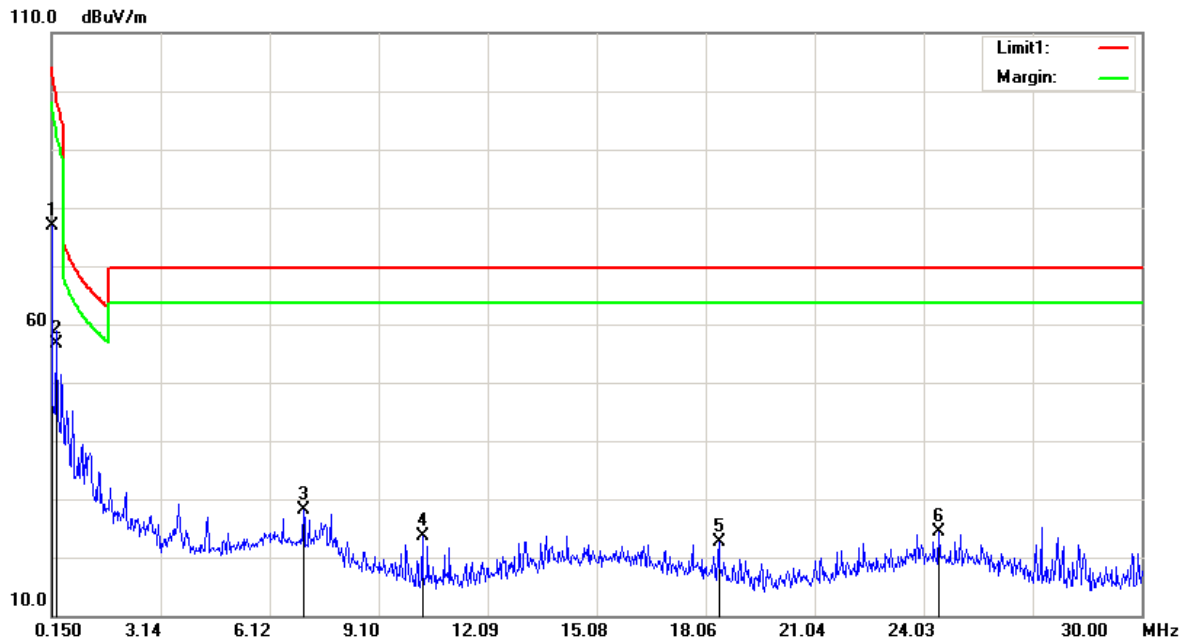


Frequency (MHz)	Receiver Reading (dBμV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
0.1500*	43.65	peak	33.13	76.78	104.08	27.30
0.2993	29.81	peak	26.74	56.55	98.08	41.53
7.0454	22.36	peak	5.84	28.20	69.54	41.34
10.2990	18.42	peak	5.13	23.55	69.54	45.99
18.4182	17.98	peak	4.68	22.66	69.54	46.88
24.4480	19.88	peak	4.44	24.32	69.54	45.22

\*Fundamental.

3) 30 MHz-1GHz


**Horizontal:**

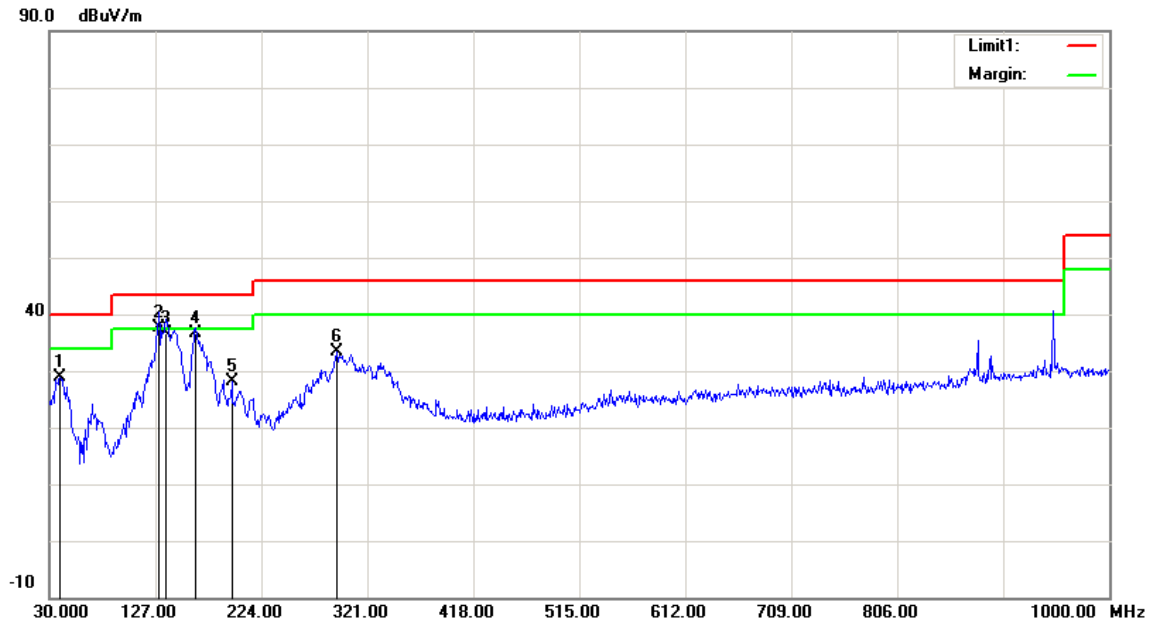

Frequency (MHz)	Receiver Reading (dBμV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
39.7000	37.83	peak	-9.05	28.78	40.00	11.22
129.9100	47.22	QP	-9.68	37.54	43.50	5.96
136.7000	45.80	QP	-9.25	36.55	43.50	6.95
163.8600	45.82	QP	-9.28	36.54	43.50	6.96
196.8400	37.72	peak	-9.65	28.07	43.50	15.43
292.8700	41.00	peak	-7.74	33.26	46.00	12.74



**Vertical:**

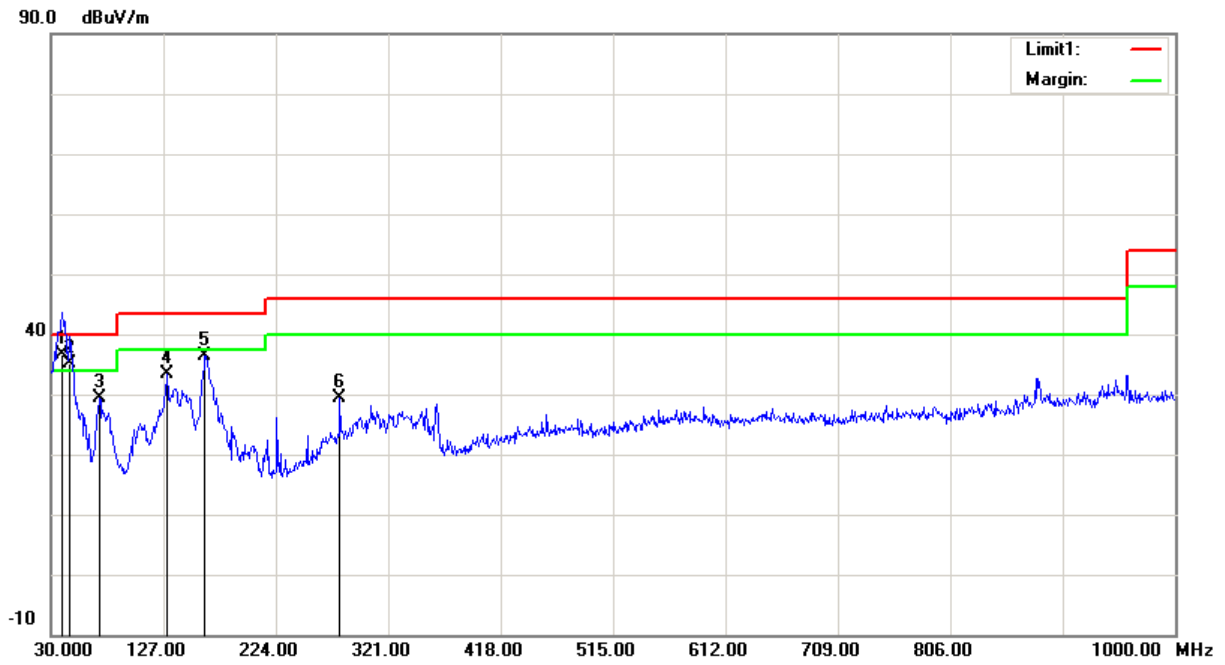

Frequency (MHz)	Receiver Reading (dBμV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
39.7000	45.65	QP	-9.05	36.60	40.00	3.40
46.4900	48.96	QP	-13.81	35.15	40.00	4.85
71.7100	45.55	peak	-16.26	29.29	40.00	10.71
129.9100	42.95	peak	-9.68	33.27	43.50	10.23
162.8900	45.68	peak	-9.39	36.29	43.50	7.21
279.2900	37.96	peak	-8.57	29.39	46.00	16.61

\*\*\*\*\* END OF REPORT \*\*\*\*\*