

EUT Specification

FCC ID: 2AMI2-33658

Characteristics	Description
Product Name	Swiss Tech 40000mAh Ultimate Plus Power Bank
Model number	33658
Power Supply	AC120V/60Hz for adapter
Operating Frequency Range	110-205KHz
Modulation Technique	FSK
Antenna Type	Induction coil
Device category	<input type="checkbox"/> Portable (<20cm separation) <input checked="" type="checkbox"/> Mobile (>20cm separation) <input type="checkbox"/> Others ____
Exposure classification	<input type="checkbox"/> Occupational/Controlled exposure (S = 5mW/cm ²) <input checked="" type="checkbox"/> General Population/Uncontrolled exposure (S=1mW/cm ²)
Antenna diversity	<input type="checkbox"/> Single antenna <input checked="" type="checkbox"/> Multiple antennas <input type="checkbox"/> Tx diversity <input type="checkbox"/> Rx diversity <input type="checkbox"/> Tx/Rx diversity
Evaluation applied	<input checked="" type="checkbox"/> MPE Evaluation <input type="checkbox"/> SAR Evaluation

Applicable Standard:

FCC Part 1(1.1310) ,Part 2(2.1091) and KDB 680106 D01 RF Exposure Wireless Charging Apps v03

Applicable Requirement:

Three different categories of transmitters are defined by the FCC in OET Bulletin 65.

These categories are fixed installation, mobile, and portable and are

defined as follows:

Fixed Installations: fixed location means that the device, including its antenna, is physically secured at a permanent location and is not able to be easily moved to another location. Additionally, distance to humans from the antenna is maintained to at least 2 meters.

Mobile Devices: a mobile device is defined as a transmitting device designed to be used in other than fixed locations and to be generally used in such a way that a separation distance of at least 20 centimeters is normally maintained between the transmitter's radiating structures and the body of the user or nearby persons. Transmitters designed to be used by consumers or workers that can be easily re-located, such as a wireless modem operating in a laptop computer, are considered mobile devices if they meet the 20 centimeter separation requirement. The FCC rules for evaluating mobile devices for RF compliance are found in 47 CFR §2.1091.

Portable Devices: a portable device is defined as a transmitting device designed to be used so that the radiating structure(s) of the device is/are within 20 centimeters of the body of the user. Portable device requirements are found in Section 2.1093 of the FCC's Rules (47 CFR§2.1093).

The FCC also categorizes the use of the device as based upon the user's awareness and ability to exercise control over his or her exposure. The two categories defined are Occupational/ Controlled Exposure and General Population/Uncontrolled Exposure.

These two categories are defined as follows:


Occupational/controlled exposure limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when a person is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure. The phrase fully aware in the context of applying these exposure limits means that an exposed person has received written and/or verbal information fully explaining the potential for RF exposure resulting from his or her employment. With the exception of transient persons, this phrase also means that an exposed person has received appropriate training regarding work practices relating to controlling or mitigating his or her exposure. Such training is not required for transient persons, but they must receive written and/or verbal information and notification (for example, using signs) concerning their exposure potential and appropriate means available to mitigate their exposure. The phrase exercise control means that an exposed person is allowed to and knows how to reduce or avoid exposure by administrative or engineering controls and work practices, such as use of personal protective equipment or time averaging of exposure.


General population/uncontrolled exposure limits apply in situations in which the general public may be exposed, or in which persons who are

exposed as a consequence of their employment may not be fully aware of the potential for exposure or cannot exercise control over their exposure. Licensees and applicants are responsible for compliance with both the occupational/controlled exposure limits and the general population/uncontrolled exposure limits as they apply to transmitters under their jurisdiction. Licensees and applicants should be aware that the occupational/controlled exposure limits apply especially in situations where workers may have access to areas in very close proximity to antennas and access to the general public may be restricted.

In lieu of evaluation with the general population/uncontrolled exposure limits, amateur licensees authorized under part 97 of this chapter and members of his or her immediate household may be evaluated with respect to the occupational/controlled exposure limits in this section, provided appropriate training and information has been provided to the amateur licensee and members of his/her household. Other nearby persons who are not members of the amateur licensee's household must be evaluated with respect to the general population/uncontrolled exposure limits.

Test Setup Block

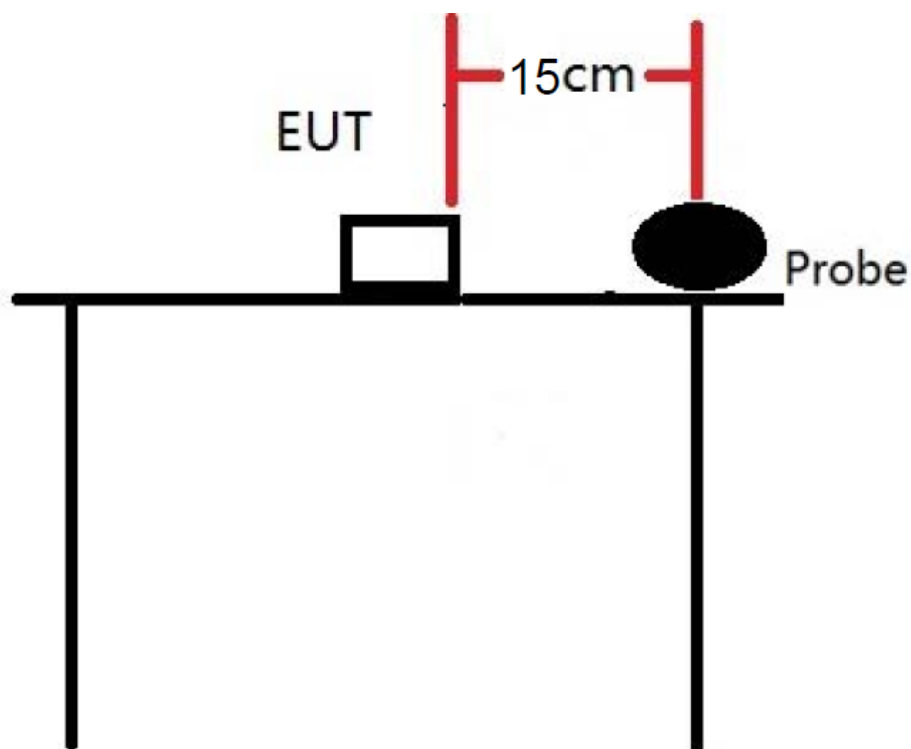

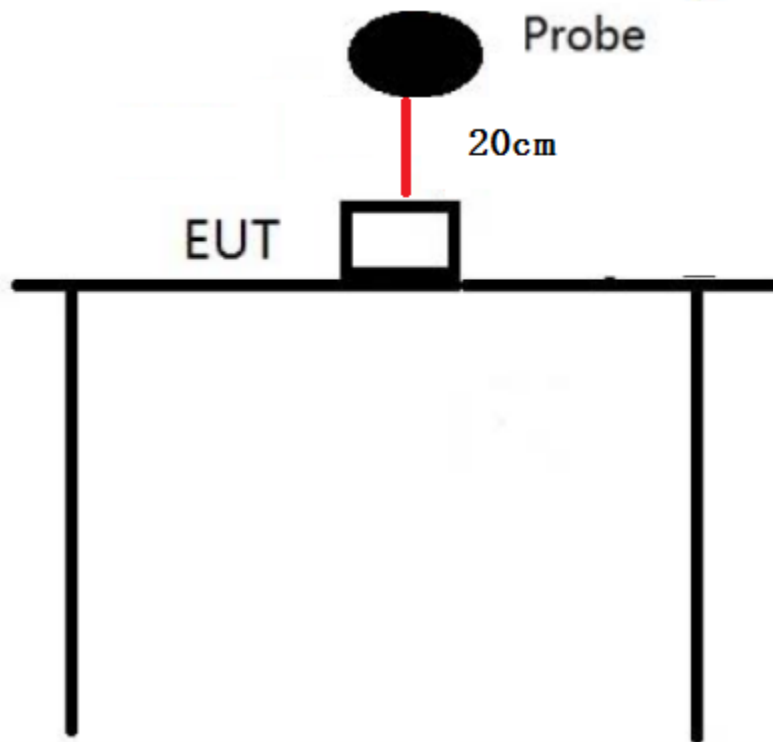

Test Procedure

1. Connect the EUT and equipment as above diagram of test configuration.
2. EUT was placed on a table, and the measure probe was placed at a measurement distance of 15cm from the EUT to the center of the probe.
3. Power on the measuring probe, the EUT was set at the maximum field strength emission state.
4. The EUT was put in different directions (Left, Right, Front, Rear, Top and Bottom) toward to the measure probe. The distance from the top of the EUT to the probe is 20CM, and the distance from other directions is 15cm. Measure the value of field strength.
5. Record the worst data of the different directions.

Measuring Device And Test Equipment

Used	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
<input checked="" type="checkbox"/>	Electric and magnetic field analyzer	Narda	EHP-200A	180ZX11012	2024-03-03
<input checked="" type="checkbox"/>	Test Software	Narda	EHP-200-TS 2.07	N/A	N/A

Description of Support Device

iPhone : Manufacturer: Apple Inc.
M/N: A2404
S/N: N/A

Adapter : Model number: HW-200325CPO
Input: 100-240V~, 50/60Hz, 1.8A
Manufacturer: Apple Inc.

Airpods : M/N:A2190
S/N: N/A

Limits for Maximum Permissible Exposure(MPE)

Frequency Range(MHz)	Electric Field Strength(V/m)	Magnetic Field Strength(A/m)	Power Density(mW/cm ²)	Average Time
(A) Limits for Occupational/Control Exposures				
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842/f	4.89/f	(900/f)*	6
30-300	61.4	0.163	1.0	6
300-1500	--	--	F/300	6
1500-100000	--	--	5	6
(B) Limits for General Population/Uncontrol Exposures				
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f)*	30
30-300	27.5	0.073	0.2	30
300-1500	--	--	F/1500	30
1500-100000	--	--	1	30

Note: f denotes for frequency in MHz.

* denotes for plane-wave equivalent power density.

Measurement Result

We pretested four modes (max load, mid load, min load, Standby) for EUT. The worst mode (max load) and worst test frequency(frequency: 127.495KHz)test data see the following.

Magnetic Field (H-Field) strength at 15cm from the boundaries of EUT, and 20cm from the top.

Test Mode: Wireless Charging 10w for 1% battery						
		Measuring Distance(cm)	H-Field(A/m)	50% H-Field(A/m)	Limit(A/m)	50% Limit(A/m)
Measurement Point 1	Front	15	0.174	0.086	1.63	0.815
Measurement Point 2	Back	15	0.171	0.085		
Measurement Point 3	Left	15	0.180	0.090		
Measurement Point 4	Right	15	0.154	0.077		
Measurement Point 5	Bottom	15	0.142	0.071		
Measurement Point 6	Top	20	0.230	0.115		

Test Mode: Wireless Charging 10w for 1% battery						
		Measuring Distance(cm)	E-Field(V/m)	50% E-Field(V/m)	Limit(V/m)	50% Limit(V/m)
Measurement Point 1	Front	15	117.125	58.562	614	307
Measurement Point 2	Back	15	116.986	58.493		
Measurement Point 3	Left	15	117.023	58.511		
Measurement Point 4	Right	15	114.025	57.012		
Measurement Point 5	Bottom	15	111.114	55.557		
Measurement Point 6	Top	20	124.269	62.134		

Test Mode: Wireless Charging 10w for 50% battery						
		Measuring Distance(cm)	H-Field(A/m)	50% H-Field(A/m)	Limit(A/m)	50% Limit(A/m)
Measurement Point 1	Front	15	0.169	0.084	1.63	0.815
Measurement Point 2	Back	15	0.168	0.084		
Measurement Point 3	Left	15	0.178	0.089		
Measurement Point 4	Right	15	0.151	0.075		
Measurement Point 5	Bottom	15	0.140	0.070		
Measurement Point 6	Top	20	0.228	0.104		

Test Mode: Wireless Charging 10w for 50% battery						
		Measuring Distance(cm)	E-Field(V/m)	50% E-Field(V/m)	Limit(V/m)	50% Limit(V/m)
Measurement Point 1	Front	15	116.854	58.427	614	307
Measurement Point 2	Back	15	115.369	57.684		
Measurement Point 3	Left	15	116.941	58.470		
Measurement Point 4	Right	15	113.568	56.784		
Measurement Point 5	Bottom	15	110.694	55.347		
Measurement Point 6	Top	20	124.125	62.062		

Test Mode: Wireless Charging 10w for 100% battery						
		Measuring Distance(cm)	H-Field(A/m)	50% H-Field(A/m)	Limit(A/m)	50% Limit(A/m)
Measurement Point 1	Front	15	0.156	0.078	1.63	0.815
Measurement Point 2	Back	15	0.158	0.079		
Measurement Point 3	Left	15	0.165	0.082		
Measurement Point 4	Right	15	0.135	0.067		
Measurement Point 5	Bottom	15	0.120	0.061		
Measurement Point 6	Top	20	0.204	0.102		

Test Mode: Wireless Charging 10w for 100% battery						
		Measuring Distance(cm)	E-Field(V/m)	50% E-Field(V/m)	Limit(V/m)	50% Limit(V/m)
Measurement Point 1	Front	15	105.324	52.662	614	307
Measurement Point 2	Back	15	107.365	53.682		
Measurement Point 3	Left	15	108.547	54.273		
Measurement Point 4	Right	15	109.654	54.827		
Measurement Point 5	Bottom	15	92.587	46.293		
Measurement Point 6	Top	20	110.650	55.325		

Test Mode: Wireless Charging 7.5w for 1% battery						
		Measuring Distance(cm)	H-Field(A/m)	50% H-Field(A/m)	Limit(A/m)	50% Limit(A/m)
Measurement Point 1	Front	15	0.153	0.076	1.63	0.815
Measurement Point 2	Back	15	0.156	0.078		
Measurement Point 3	Left	15	0.154	0.077		
Measurement Point 4	Right	15	0.148	0.074		
Measurement Point 5	Bottom	15	0.126	0.063		
Measurement Point 6	Top	20	0.201	0.100		

Test Mode: Wireless Charging 7.5w for 1% battery						
		Measuring Distance(cm)	E-Field(V/m)	50% E-Field(V/m)	Limit(V/m)	50% Limit(V/m)
Measurement Point 1	Front	15	104.254	52.127	614	307
Measurement Point 2	Back	15	106.582	53.291		
Measurement Point 3	Left	15	107.140	53.572		
Measurement Point 4	Right	15	108.256	54.128		
Measurement Point 5	Bottom	15	93.741	46.870		
Measurement Point 6	Top	20	112.364	56.1821		

Test Mode: Wireless Charging 7.5w for 50% battery						
		Measuring Distance(cm)	H-Field(A/m)	50% H-Field(A/m)	Limit(A/m)	50% Limit(A/m)
Measurement Point 1	Front	15	0.148	0.074	1.63	0.815
Measurement Point 2	Back	15	0.144	0.072		
Measurement Point 3	Left	15	0.146	0.073		
Measurement Point 4	Right	15	0.149	0.074		
Measurement Point 5	Bottom	15	0.120	0.060		
Measurement Point 6	Top	20	0.191	0.095		

Test Mode: Wireless Charging 7.5w for 50% battery						
		Measuring Distance(cm)	E-Field(V/m)	50% E-Field(V/m)	Limit(V/m)	50% Limit(V/m)
Measurement Point 1	Front	15	103.540	51.770	614	307
Measurement Point 2	Back	15	105.148	52.574		
Measurement Point 3	Left	15	105.690	52.845		
Measurement Point 4	Right	15	106.203	53.101		
Measurement Point 5	Bottom	15	93.034	46.517		
Measurement Point 6	Top	20	109.634	54.817		

Test Mode: Wireless Charging 7.5w for 100% battery						
		Measuring Distance(cm)	H-Field(A/m)	50% H-Field(A/m)	Limit(A/m)	50% Limit(A/m)
Measurement Point 1	Front	15	0.148	0.074	1.63	0.815
Measurement Point 2	Back	15	0.144	0.072		
Measurement Point 3	Left	15	0.142	0.071		
Measurement Point 4	Right	15	0.131	0.065		
Measurement Point 5	Bottom	15	0.115	0.057		
Measurement Point 6	Top	20	0.196	0.098		

Test Mode: Wireless Charging 7.5w for 100% battery						
		Measuring Distance(cm)	E-Field(V/m)	50% E-Field(V/m)	Limit(V/m)	50% Limit(V/m)
Measurement Point 1	Front	15	103.204	51.602	614	307
Measurement Point 2	Back	15	102.145	51.072		
Measurement Point 3	Left	15	102.527	51.263		
Measurement Point 4	Right	15	104.126	52.063		
Measurement Point 5	Bottom	15	91.050	45.525		
Measurement Point 6	Top	20	108.442	54.221		

Test Mode: Wireless Charging 5w for 1% battery						
		Measuring Distance(cm)	H-Field(A/m)	50% H-Field(A/m)	Limit(A/m)	50% Limit(A/m)
Measurement Point 1	Front	15	0.154	0.077	1.63	0.815
Measurement Point 2	Back	15	0.157	0.079		
Measurement Point 3	Left	15	0.155	0.078		
Measurement Point 4	Right	15	0.150	0.075		
Measurement Point 5	Bottom	15	0.127	0.064		
Measurement Point 6	Top	20	0.203	0.102		

Test Mode: Wireless Charging 5w for 1% battery						
		Measuring Distance(cm)	E-Field(V/m)	50% E-Field(V/m)	Limit(V/m)	50% Limit(V/m)
Measurement Point 1	Front	15	104.252	52.126	614	307
Measurement Point 2	Back	15	106.564	53.282		
Measurement Point 3	Left	15	107.138	53.569		
Measurement Point 4	Right	15	108.252	54.126		
Measurement Point 5	Bottom	15	93.738	46.869		
Measurement Point 6	Top	20	112.357	56.179		

Test Mode: Wireless Charging 5w for 50% battery						
		Measuring Distance(cm)	H-Field(A/m)	50% H-Field(A/m)	Limit(A/m)	50% Limit(A/m)
Measurement Point 1	Front	15	0.146	0.073	1.63	0.815
Measurement Point 2	Back	15	0.142	0.071		
Measurement Point 3	Left	15	0.144	0.072		
Measurement Point 4	Right	15	0.147	0.074		
Measurement Point 5	Bottom	15	0.122	0.061		
Measurement Point 6	Top	20	0.187	0.094		

Test Mode: Wireless Charging 5w for 50% battery						
		Measuring Distance(cm)	E-Field(V/m)	50% E-Field(V/m)	Limit(V/m)	50% Limit(V/m)
Measurement Point 1	Front	15	103.538	51.769	614	307
Measurement Point 2	Back	15	105.146	52.573		
Measurement Point 3	Left	15	105.677	52.839		
Measurement Point 4	Right	15	106.204	53.102		
Measurement Point 5	Bottom	15	94.031	46.516		
Measurement Point 6	Top	20	109.632	54.816		

Test Mode: Wireless Charging 5w for 100% battery						
		Measuring Distance(cm)	H-Field(A/m)	50% H-Field(A/m)	Limit(A/m)	50% Limit(A/m)
Measurement Point 1	Front	15	0.146	0.073	1.63	0.815
Measurement Point 2	Back	15	0.143	0.072		
Measurement Point 3	Left	15	0.140	0.070		
Measurement Point 4	Right	15	0.132	0.066		
Measurement Point 5	Bottom	15	0.112	0.056		
Measurement Point 6	Top	20	0.197	0.099		

Test Mode: Wireless Charging 5w for 100% battery						
		Measuring Distance(cm)	E-Field(V/m)	50% E-Field(V/m)	Limit(V/m)	50% Limit(V/m)
Measurement Point 1	Front	15	103.201	51.601	614	307
Measurement Point 2	Back	15	102.142	51.071		
Measurement Point 3	Left	15	102.525	51.263		
Measurement Point 4	Right	15	104.125	52.063		
Measurement Point 5	Bottom	15	91.048	45.524		
Measurement Point 6	Top	20	108.443	54.222		

PHOTOGRAPHS OF TEST SETUP



Signature

A handwritten signature in black ink, appearing to read 'Tiger Xu', written on a white rectangular background.

Tiger Xu
EMC Director
Date: 2023-02-09