



Shenzhen Huaxia Testing Technology Co., Ltd

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua District, Shenzhen, China

Telephone: +86-755-26648640
Fax: +86-755-26648637
Website: www.cqa-cert.com

Report Template Version: V03
Report Template Revision Date: Mar.1st, 2017

FCC/IC Test Report

Report No. : CQSZ20180500203EW-06

Applicant: Hangzhou Great Star Industrial Co., Ltd.

Address of Applicant: No.35, Jiuahuan Road, Jiubao Town, Jianggan District, Hangzhou 310019, China


Manufacturer: Hangzhou Great Star Industrial Co., Ltd.

Address of Manufacturer: No.35, Jiuahuan Road, Jiubao Town, Jianggan District, Hangzhou 310019, China

Equipment Under Test (EUT):

Product: Iris Wi-Fi smart Hub

Model No.: IH300

Brand Name: 

FCC ID: 2AMI2IH300

IC: 22853-IH300

Standards: 47 CFR Part 15, Subpart C
RSS-210 Issue 9 August 2016
RSS-247 Issue 2 February 2017
RSS-Gen Issue 5 Nov 2018

Date of Test: 2018-07-15 to 2018-07-24

Date of Issue: 2018-07-24

Test Result : PASS*

Tested By:

(Aaron Ma)

Reviewed By:

(Owen Zhou)

Approved By:

(Jack Ai)



* In the configuration tested, the EUT complied with the standards specified above.

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of CQA, this report can't be reproduced except in full.

2 Version

Revision History Of Report

Report No.	Version	Description	Issue Date
CQSZ20180500203EW-06	Rev.01	Initial report	2018-07-24

3 Test Summary

Test Item	Test Requirement	Test method	Result
Radiated Spurious Emissions	47 CFR Part 15, Subpart C Section 15.205/15.209, RSS-Gen Issue 5	ANSI C63.10 2013	PASS

Note: Iris Wi-Fi smart Hub for simultaneous transmission

4 Contents


	Page
1 COVER PAGE.....	1
2 VERSION	2
3 TEST SUMMARY	3
4 CONTENTS	4
5 GENERAL INFORMATION.....	5
5.1 CLIENT INFORMATION	5
5.2 GENERAL DESCRIPTION OF EUT	5
5.3 TEST ENVIRONMENT AND MODE	6
5.4 DESCRIPTION OF SUPPORT UNITS	6
5.5 TEST LOCATION	7
5.6 TEST FACILITY	7
5.7 STATEMENT OF THE MEASUREMENT UNCERTAINTY	8
5.8 DEVIATION FROM STANDARDS	8
5.9 ABNORMALITIES FROM STANDARD CONDITIONS	8
5.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER	8
5.11 EQUIPMENT LIST	9
6 TEST RESULTS AND MEASUREMENT DATA.....	10
6.1 RADIATED SPURIOUS EMISSIONS.....	10
6.1.1 Radiated emission below 1GHz.....	13
6.1.2 Transmitter emission above 1GHz.....	15
7 PHOTOGRAPHS - EUT TEST SETUP	23
7.1 RADIATED SPURIOUS EMISSION.....	23

5 General Information

5.1 Client Information

Applicant:	Hangzhou Great Star Industrial Co., Ltd.
Address of Applicant:	No.35, Jiujuan Road, Jiubao Town, Jianggan District, Hangzhou 310019, China
Manufacturer:	Hangzhou Great Star Industrial Co., Ltd.
Address of Manufacturer:	No.35, Jiujuan Road, Jiubao Town, Jianggan District, Hangzhou 310019, China

5.2 General Description of EUT

Product Name:	Iris Wi-Fi Smart Hub
Model No.:	IH300
Trade Mark:	
Hardware Version:	IH300-003V-IMX-D-iMagic
Software Version:	Linux iMagic 4.1.15-HW
Operation Frequency:	IEEE 802.11b/g/n(HT20): 2412MHz to 2462MHz Zigbee: 2405~2480MHz Z-wave: 908.4MHz ~ 916MHz BLE: 2402~2480MHz
Modulation Type:	IEEE for 802.11b: DSSS(CCK,DQPSK,DBPSK) IEEE for 802.11g : OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE for 802.11n(HT20) : OFDM (64QAM, 16QAM, QPSK,BPSK) Zigbee: O-QPSK Z-wave : FSK (908.4MHz and 908.42MHz), GFSK (916MHz) BLE: GFSK
Number of Channel:	IEEE 802.11b/g, IEEE 802.11n HT20: 11 Channels Zigbee: 16 Channels Z-wave : 3 Channels BLE: 40 Channels
Sample Type:	Mobile production
Test Software of EUT:	Secure CRT (manufacturer declare)
Antenna Type:	Integral antenna for WIFI, Z-wave PCB antenna for Zigbee, BLE
Antenna Gain:	WIFI: 1.6dBi Zigbee: 0.3dBi Z-wave: 2.0dBi BLE: 3.5 dBi
Power Supply:	Adapter: Model:RD1201500-C55-81MG Input:100-240V~50/60Hz 0.6A Output:DC12V 1.5A Battery: ICR18650 2600mAh, 3.7V

5.3 Test Environment and Mode

Operating Environment:	
Temperature:	24.0 °C
Humidity:	52 % RH
Atmospheric Pressure:	1008 mbar
The following test modes were adjusted during the tests:	
Operation mode	Description of the operation mode
1	Transmission at Wifi Ch.6 (2437MHz)
	Transmission at Zigbee Ch.18 (2440MHz)
	Transmission at Z-wave Ch.2 (908.42MHz)
2	Transmission at Wifi Ch.6 (2437MHz)
	BLE link
	Transmission at Z-wave Ch.2 (908.42MHz)
3	Transmission at Zigbee Ch.18 (2440MHz)
	Transmission at Z-wave Ch.2 (908.42MHz)
4	BLE link
	Transmission at Z-wave Ch.2 (908.42MHz)

5.4 Description of Support Units

The EUT has been tested with associated equipment below.

Description	Manufacturer	Model No.	Remark	FCC certification
PC	Lenovo	ThinkPad E450c	Provide by lab	ID
AC/DC Adapter	Lenovo	PA-1450-55LN	Provide by lab	DOC

5.5 Test Location

All tests were performed at:

Shenzhen Huaxia Testing Technology Co., Ltd.,

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua New District, Shenzhen, Guangdong, China

5.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **CNAS (No. CNAS L5785)**

CNAS has accredited Shenzhen Huaxia Testing Technology Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

- **ISED Registration No.: 22984-1**

The 3m Semi-anechoic chamber of Shenzhen Huaxia Testing Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing

- **A2LA (Certificate No. 4742.01)**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 4742.01.

- **FCC Registration No.: 522263**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.:522263

5.7 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate.

The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities.

The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the **Shenzhen Huaxia Testing Technology Co., Ltd.** quality system acc. to DIN EN ISO/IEC 17025.

Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CQA laboratory is reported:

Test	Range	Uncertainty	Notes
Radiated Emission	Below 1GHz	±5.12dB	(1)
Radiated Emission	Above 1GHz	±4.60dB	(1)
Conducted Disturbance	0.15~30MHz	±3.34dB	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

5.8 Deviation from Standards

None.

5.9 Abnormalities from Standard Conditions

None.

5.10 Other Information Requested by the Customer

None.



5.11 Equipment List

Item	Test Equipment	Manufacturer	Model No.	Instrument No.	Calibration Due Date
1	EMI Test Receiver	R&S	ESR7	CQA-005	2018/9/24
2	Spectrum analyzer	R&S	FSU26	CQA-038	2018/9/24
3	Preamplifier	MITEQ	AFS4-00010300-18-10P-4	CQA-035	2018/9/24
4	Preamplifier	MITEQ	AMF-6D-02001800-29-20P	CQA-036	2018/9/24
5	Loop antenna	ZHINAN	ZN30900A	CQA-087	2019/3/21
6	Bilog Antenna	R&S	HL562	CQA-011	2018/9/24
7	Horn Antenna	R&S	HF906	CQA-012	2018/9/24
8	Horn Antenna	R&S	BBHA 9170	CQA-088	2018/9/24
9	Coax cable (9KHz~40GHz)	CQA	RE-low-01	CQA-077	2018/9/24
10	Coax cable (9KHz~40GHz)	CQA	RE-high-02	CQA-078	2018/9/24

6 Test results and Measurement Data

6.1 Radiated Spurious Emissions

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205, RSS-Gen Issue 5				
Test Method:	ANSI C63.10 2013				
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100 kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
Peak		1MHz	10Hz	Average	
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.					

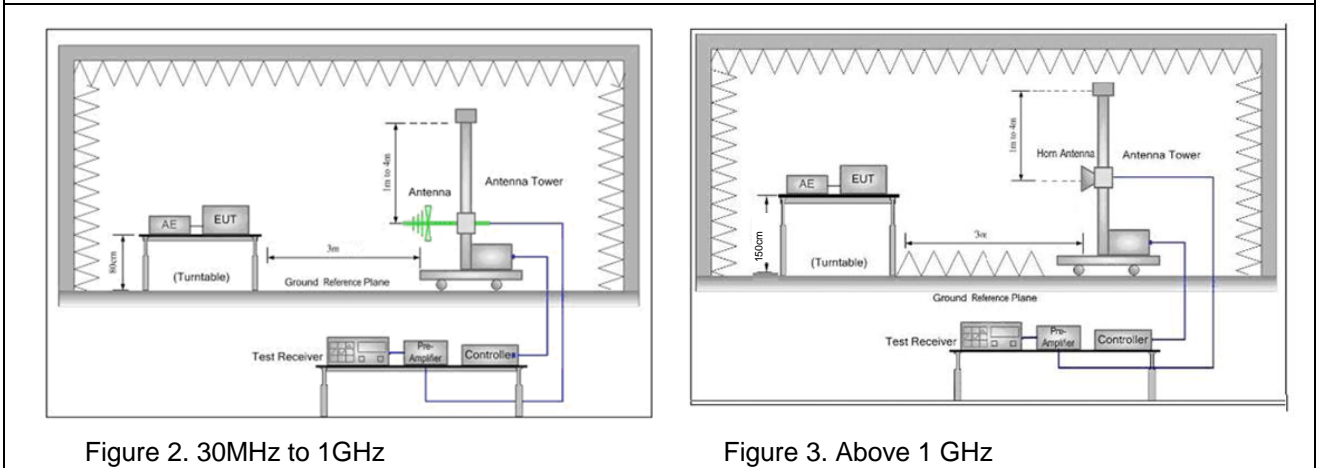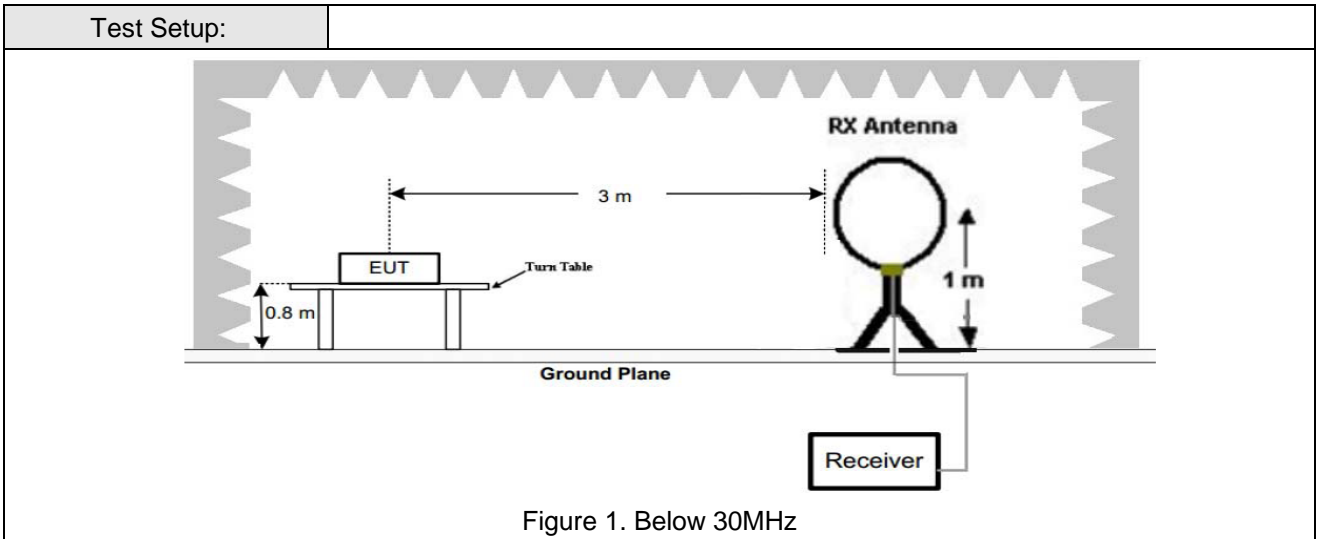

Test Procedure:

- a. 1) Below 1G: The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- 2) Above 1G: The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.


Note: For the radiated emission test above 1GHz:
 Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

	<p>d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters(for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</p> <p>e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</p> <p>f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</p> <p>g. Test the EUT in the lowest channel ,the middle channel ,the Highest channel</p> <p>h. Repeat above procedures until all frequencies measured was complete.</p>
<p>Test Mode:</p>	<p>Pretest the EUT at Mode 1, Mode 2, Mode 3 & Mode 4, For below 1GHz, through Pre-scan, find Mode 1 is the worst case. Only the worst case is recorded in the report.</p>
<p>Test Results:</p>	<p>Pass</p>


6.1.1 Radiated emission below 1GHz

30MHz~1GHz_mode 1 is the worst case		
Test mode:	mode 1	Vertical

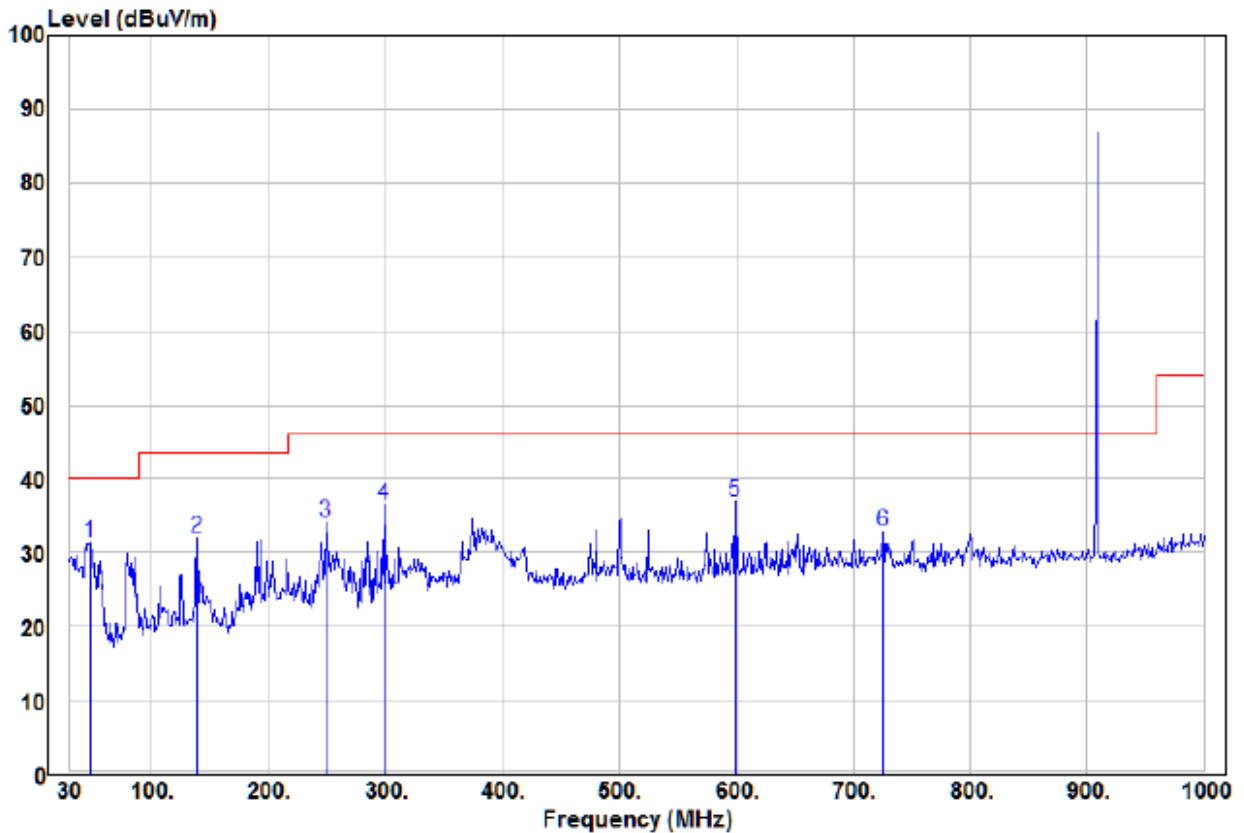

	Read Freq	Read Level	Factor	Limit Level	Limit Line	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1 pp	47.46	20.69	10.66	31.35	40.00	-8.65	Peak	VERTICAL
2	138.64	23.44	8.58	32.02	43.50	-11.48	Peak	VERTICAL
3	249.22	24.97	9.12	34.09	46.00	-11.91	Peak	VERTICAL
4	298.69	24.85	11.57	36.42	46.00	-9.58	Peak	VERTICAL
5	599.39	18.62	18.19	36.81	46.00	-9.19	Peak	VERTICAL
6	725.49	12.90	19.96	32.86	46.00	-13.14	Peak	VERTICAL


Test mode:	mode 1	Horizontal
------------	--------	------------

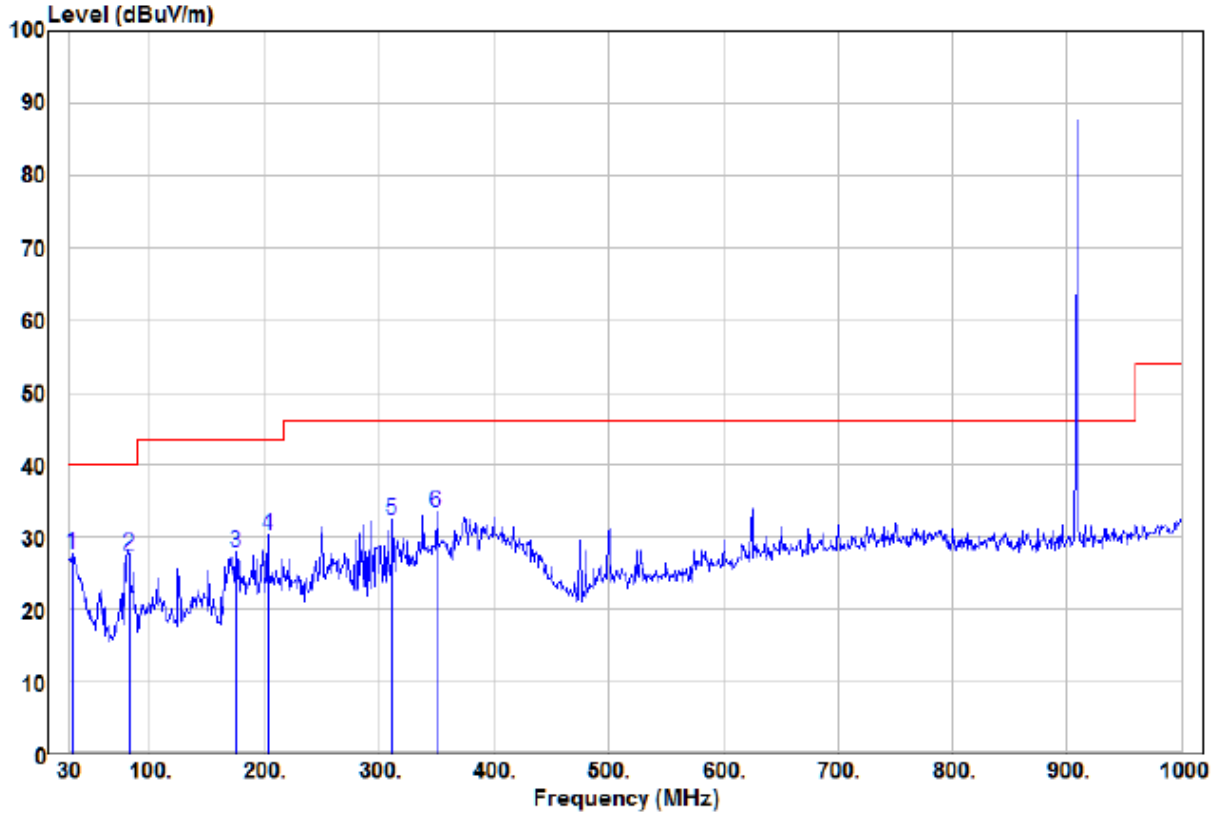

	Read			Limit	Over		
Freq	Level	Factor	Level	Line	Limit	Remark	Pol/Phase
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1 pp	31.94	8.96	18.75	27.71	40.00	-12.29 Peak	HORIZONTAL
2	81.41	17.52	9.92	27.44	40.00	-12.56 Peak	HORIZONTAL
3	175.50	19.87	8.07	27.94	43.50	-15.56 Peak	HORIZONTAL
4	202.66	21.46	8.84	30.30	43.50	-13.20 Peak	HORIZONTAL
5	311.30	20.76	11.69	32.45	46.00	-13.55 Peak	HORIZONTAL
6	350.10	19.81	13.60	33.41	46.00	-12.59 Peak	HORIZONTAL


6.1.2 Transmitter emission above 1GHz

Test mode:	mode 1	Vertical
------------	--------	----------

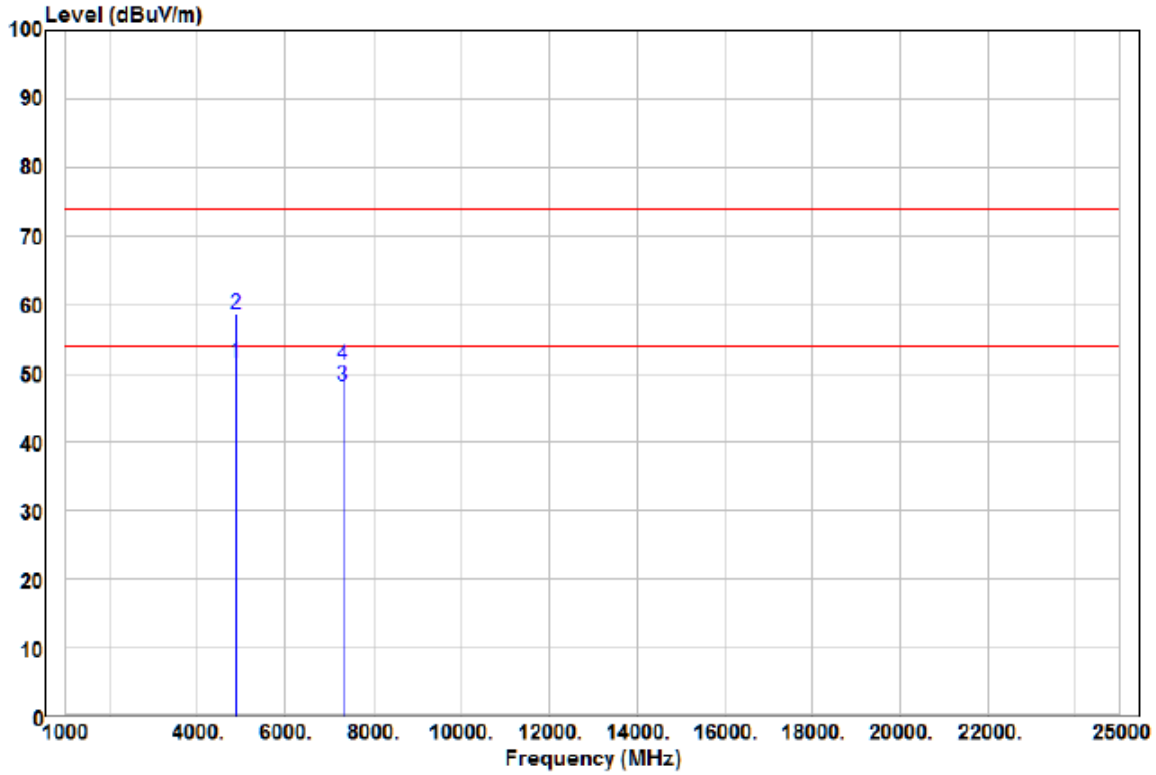


	Read			Limit	Over		
Freq	Level	Factor	Level	Line	Limit	Remark	Pol/Phase
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1 pp	4880.00	55.55	-4.01	51.54	54.00	-2.46 Average	VERTICAL
2 pk	4880.00	62.58	-4.01	58.57	74.00	-15.43 Peak	VERTICAL
3	7320.00	47.23	1.01	48.24	54.00	-5.76 Average	VERTICAL
4	7320.00	50.10	1.01	51.11	74.00	-22.89 Peak	VERTICAL

Test mode:	mode 1	Horizontal
------------	--------	------------

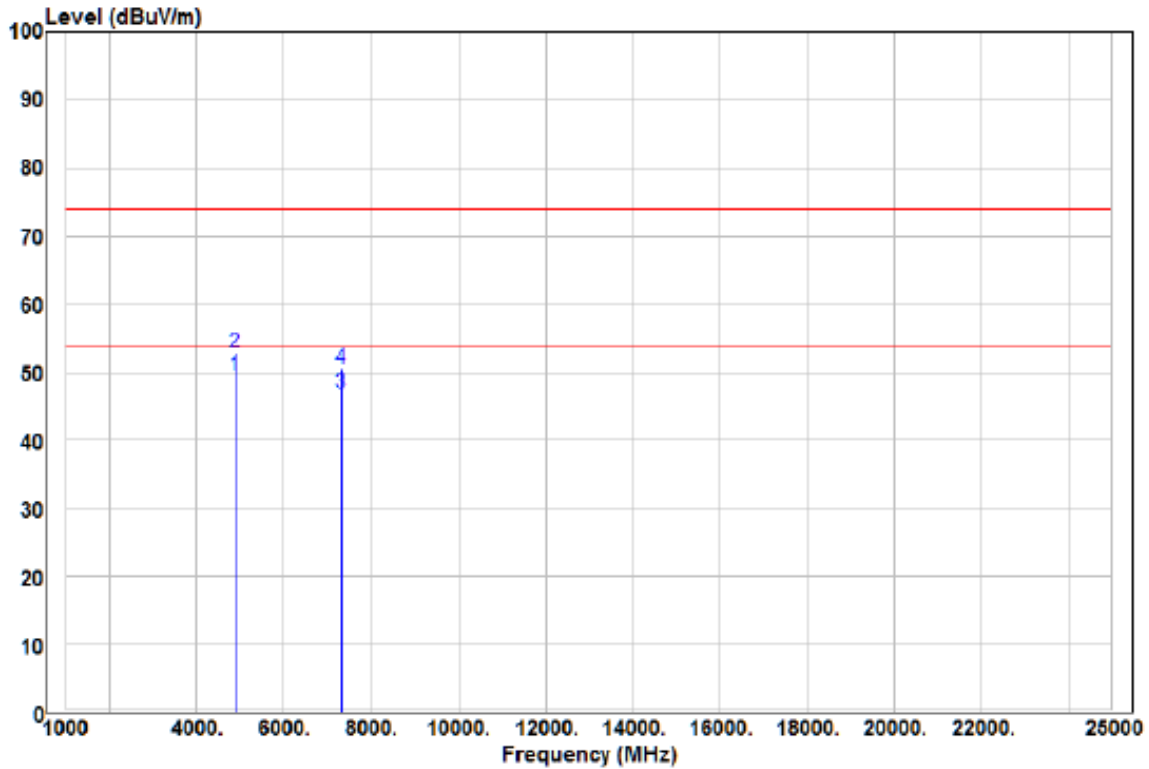


	Read		Limit	Over				
Freq	Level	Factor	Level	Line	Limit	Remark	Pol/Phase	
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB			
1 pp	4880.00	53.41	-4.01	49.40	54.00	-4.60	Average	HORIZONTAL
2 pk	4880.00	57.00	-4.01	52.99	74.00	-21.01	Peak	HORIZONTAL
3	7320.00	46.00	1.01	47.01	54.00	-6.99	Average	HORIZONTAL
4	7320.00	49.58	1.01	50.59	74.00	-23.41	Peak	HORIZONTAL

Test mode:	mode 2	Vertical
------------	--------	----------

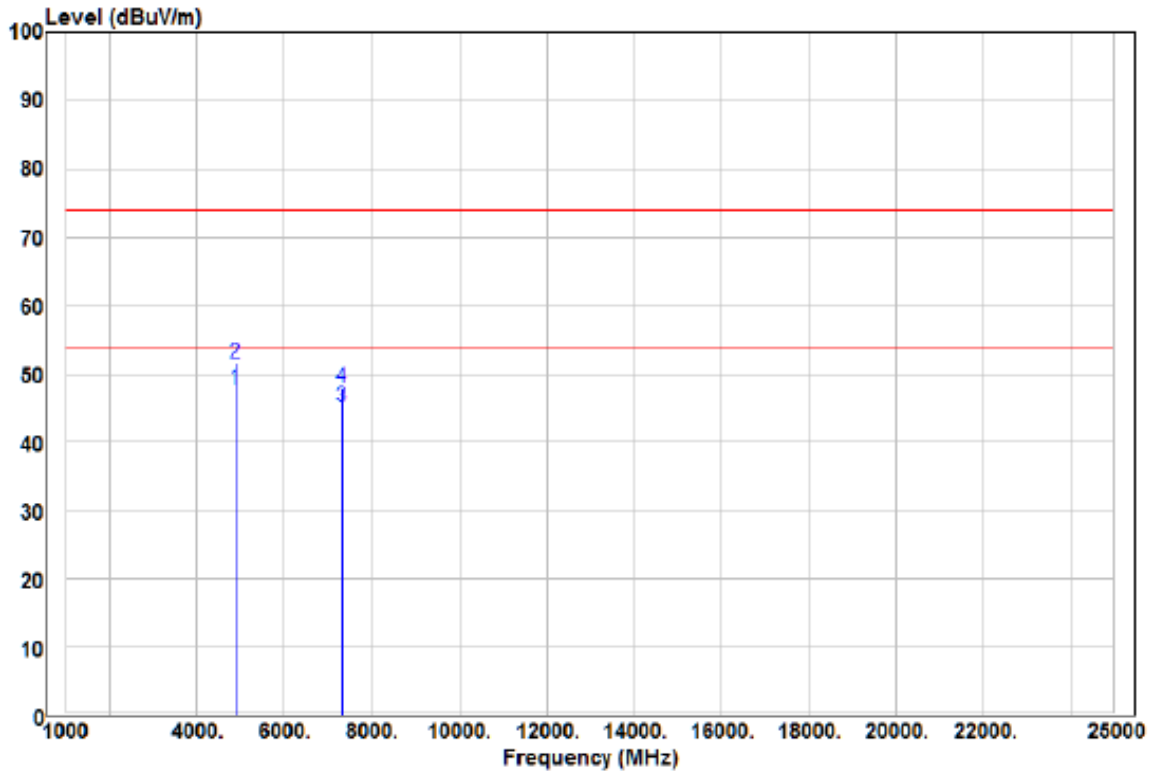


	Read		Limit	Over				
Freq	Level	Factor	Level	Line	Limit	Remark	Pol/Phase	
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB			
1 pp	4874.00	51.84	-4.01	47.83	54.00	-6.17	Average	HORIZONTAL
2 pk	4874.00	55.54	-4.01	51.53	74.00	-22.47	Peak	HORIZONTAL
3	7311.00	44.28	0.96	45.24	54.00	-8.76	Average	HORIZONTAL
4	7311.00	47.07	0.96	48.03	74.00	-25.97	Peak	HORIZONTAL

Test mode:	mode 2	Horizontal
------------	--------	------------

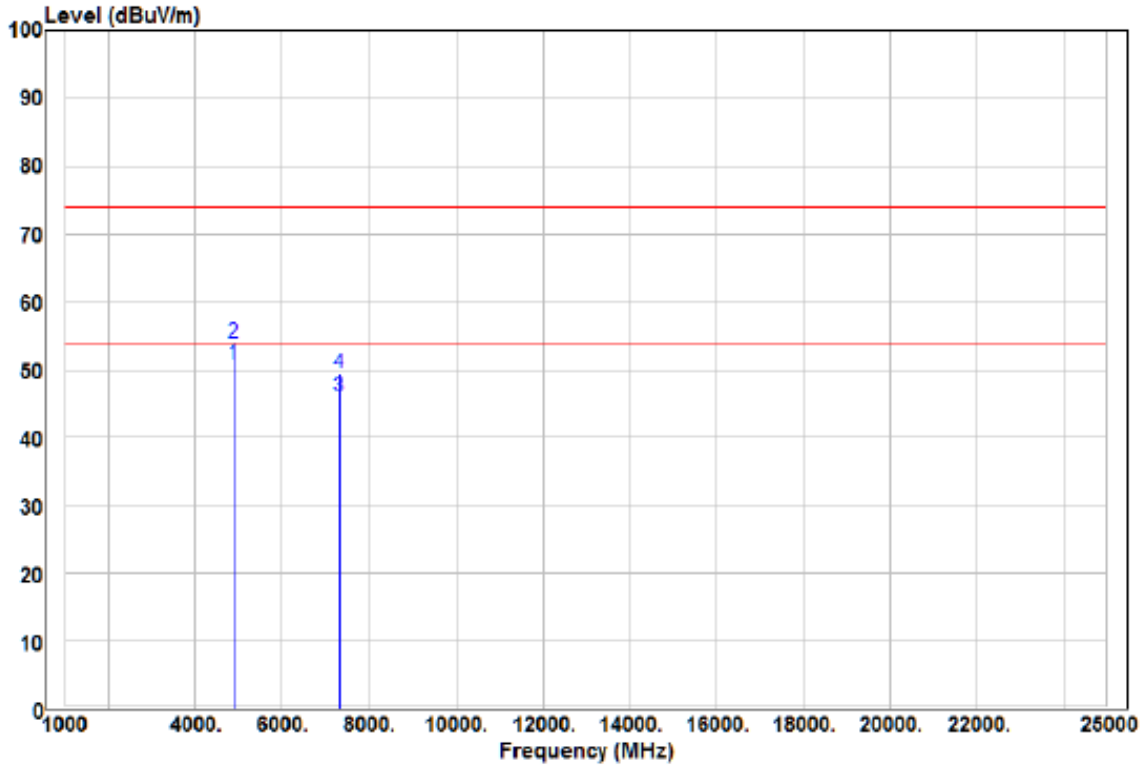


	Read	Limit	Over					
Freq	Level	Factor	Level	Line	Limit	Remark	Pol/Phase	
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB			
1 pp	4874.00	54.67	-4.01	50.66	54.00	-3.34	Average	VERTICAL
2 pk	4874.00	57.90	-4.01	53.89	74.00	-20.11	Peak	VERTICAL
3	7311.00	45.03	0.96	45.99	54.00	-8.01	Average	VERTICAL
4	7311.00	48.60	0.96	49.56	74.00	-24.44	Peak	VERTICAL

Test mode:	mode 3	Vertical
------------	--------	----------

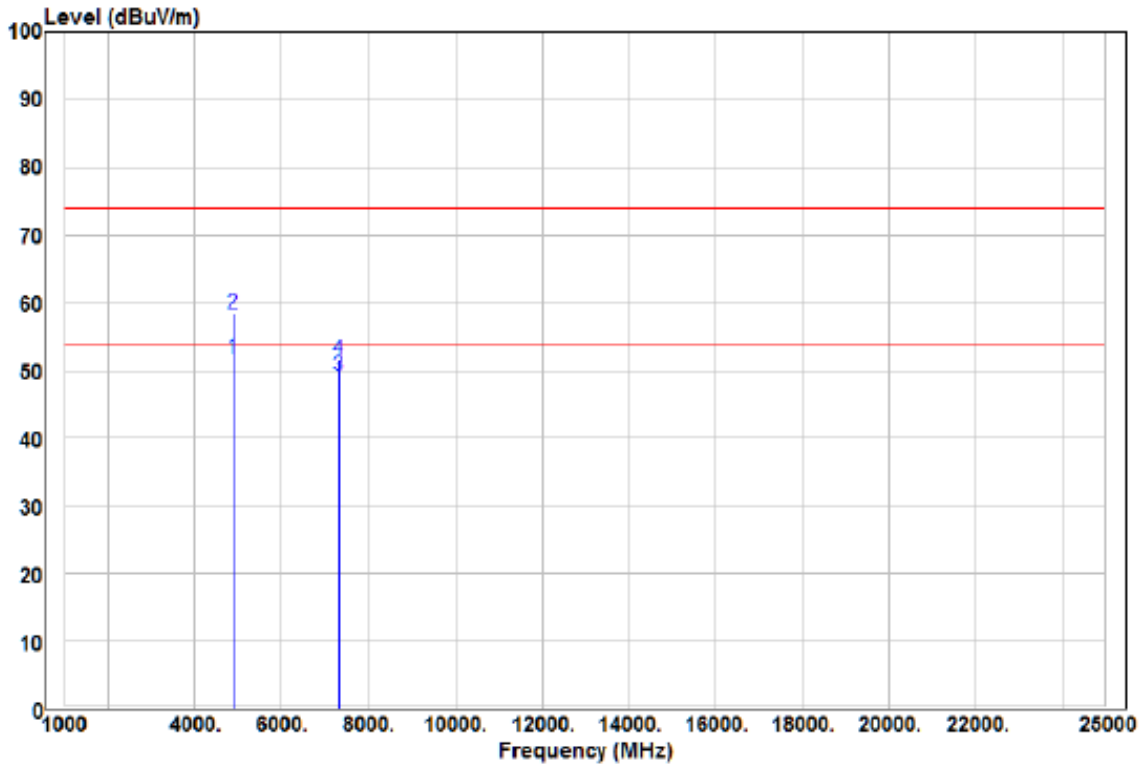


	Read		Limit	Over				
Freq	Level	Factor	Level	Line	Limit	Remark	Pol/Phase	
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB			
1 pp	4880.00	55.78	-4.01	51.77	54.00	-2.23	Average	VERTICAL
2 pk	4880.00	62.37	-4.01	58.36	74.00	-15.64	Peak	VERTICAL
3	7320.00	48.17	1.01	49.18	54.00	-4.82	Average	VERTICAL
4	7320.00	50.49	1.01	51.50	74.00	-22.50	Peak	VERTICAL

Test mode:	mode 3	Horizontal
------------	--------	------------

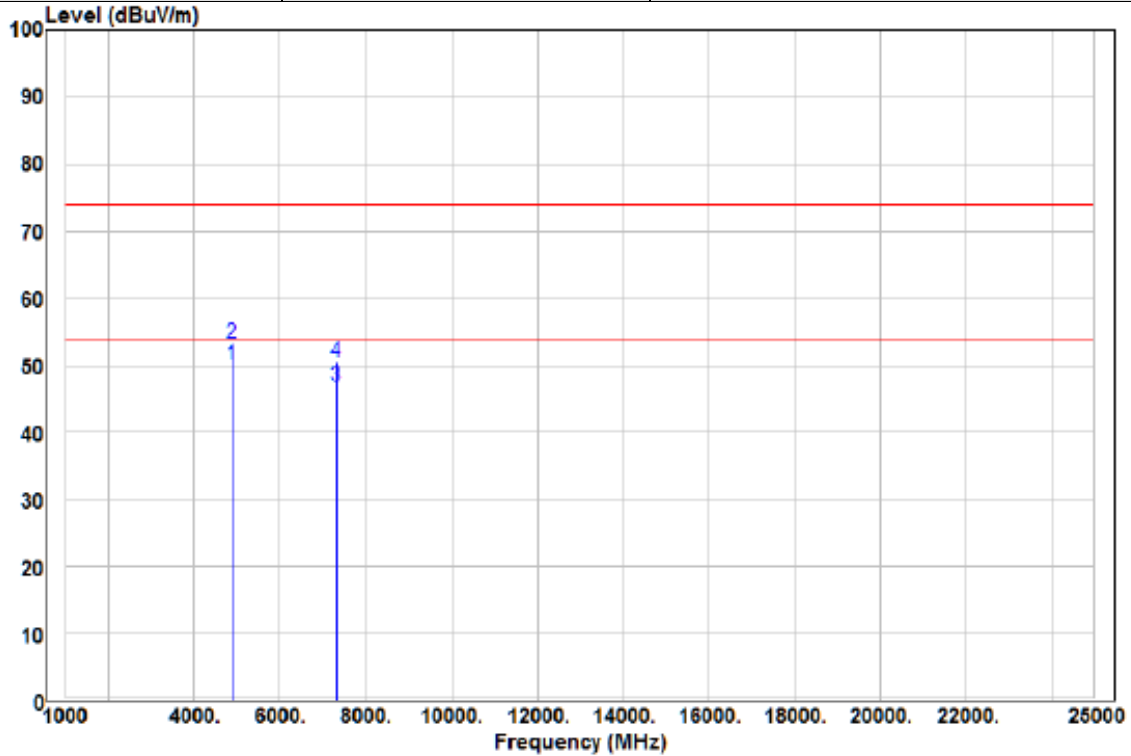


	Read		Limit	Over					
	Freq	Level	Factor	Level	Line	Limit	Remark	Pol/Phase	
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB			
1	pp	4880.00	54.11	-4.01	50.10	54.00	-3.90	Average	HORIZONTAL
2	pk	4880.00	57.33	-4.01	53.32	74.00	-20.68	Peak	HORIZONTAL
3		7320.00	46.00	1.01	47.01	54.00	-6.99	Average	HORIZONTAL
4		7320.00	49.55	1.01	50.56	74.00	-23.44	Peak	HORIZONTAL

Test mode:	mode 4	Vertical
------------	--------	----------

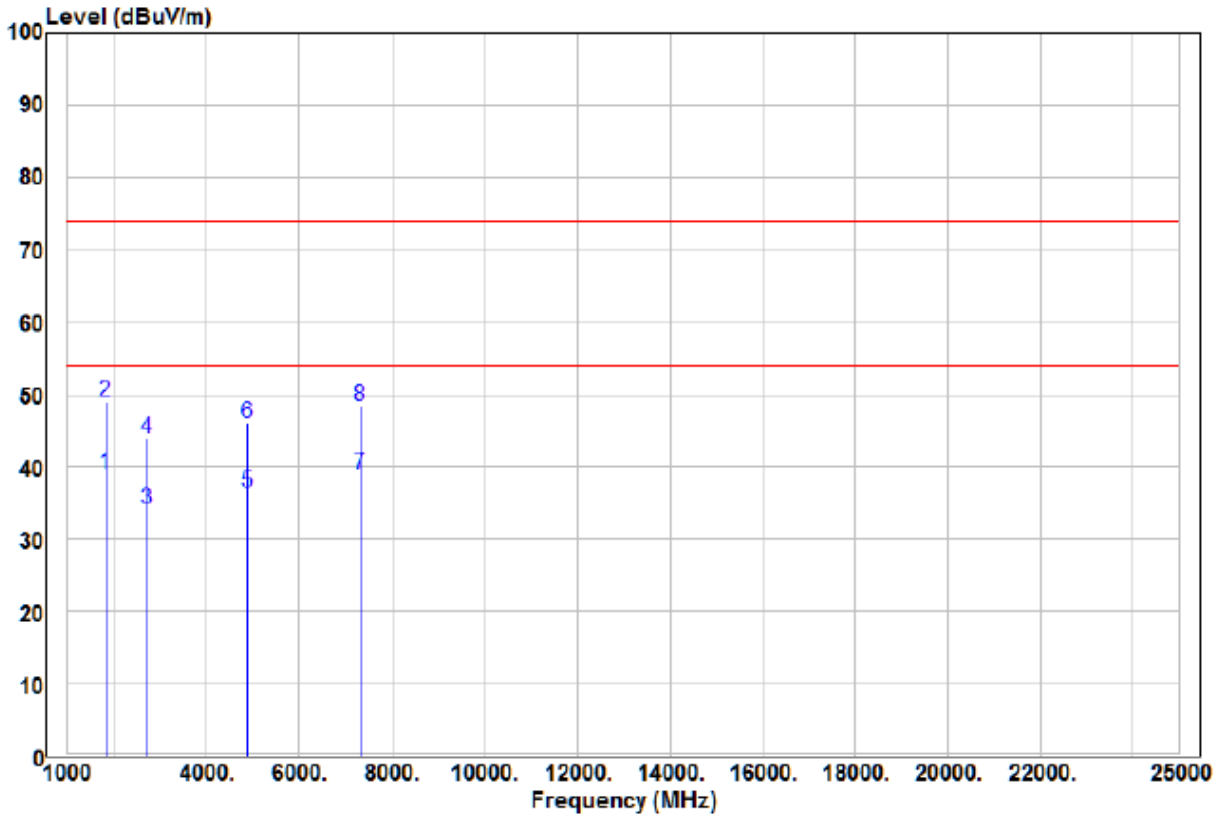

		Read		Limit	Over			
	Freq	Level	Factor	Level	Line	Limit	Remark	
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Pol/Phase	
1	pp	1816.84	52.66	-13.54	39.12	54.00	-14.88 Average	VERTICAL
2	pk	1816.84	62.67	-13.54	49.13	74.00	-24.87 Peak	VERTICAL
3		2725.26	46.00	-11.87	34.13	54.00	-19.87 Average	VERTICAL
4		2725.26	55.88	-11.87	44.01	74.00	-29.99 Peak	VERTICAL
5		4880.00	40.56	-4.01	36.55	54.00	-17.45 Average	VERTICAL
6		4880.00	50.00	-4.01	45.99	74.00	-28.01 Peak	VERTICAL
7		7320.00	38.02	1.01	39.03	54.00	-14.97 Average	VERTICAL
8		7320.00	47.47	1.01	48.48	74.00	-25.52 Peak	VERTICAL

Test mode:	mode 4	Horizontal
------------	--------	------------

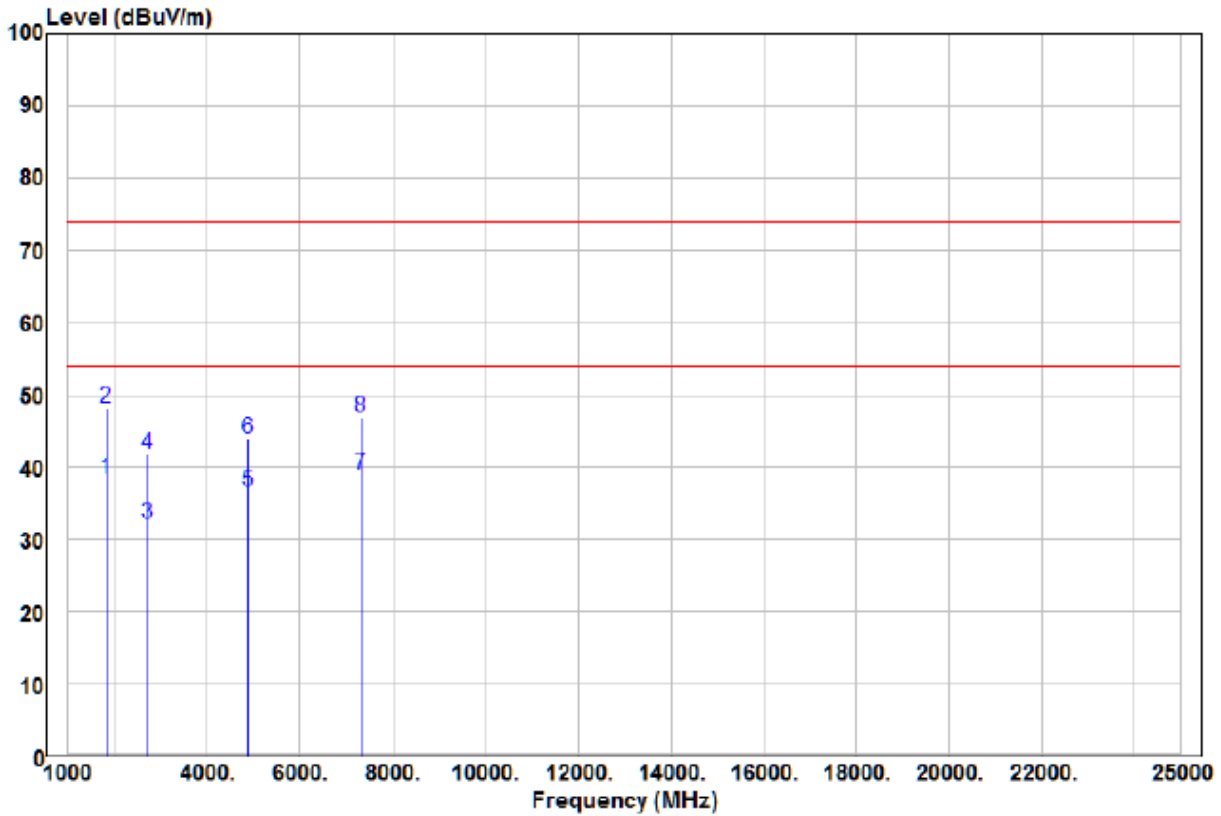

	Read Freq	Read Level	Factor	Limit Level	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	1816.84	52.00	-13.54	38.46	54.00	-15.54	Average HORIZONTAL
2 pk	1816.84	61.84	-13.54	48.30	74.00	-25.70	Peak HORIZONTAL
3	2725.26	44.00	-11.87	32.13	54.00	-21.87	Average HORIZONTAL
4	2725.26	53.66	-11.87	41.79	74.00	-32.21	Peak HORIZONTAL
5	4880.00	40.69	-4.01	36.68	54.00	-17.32	Average HORIZONTAL
6	4880.00	48.00	-4.01	43.99	74.00	-30.01	Peak HORIZONTAL
7 pp	7320.00	38.10	1.01	39.11	54.00	-14.89	Average HORIZONTAL
8	7320.00	46.00	1.01	47.01	74.00	-26.99	Peak HORIZONTAL

Remark:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

$$\text{Final Test Level} = \text{Receiver Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Preamplifier Factor}$$

2) Scan from 9kHz to 25GHz, The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.