

Report No.: KSCR220800148703 Page: 1 of 9

1 Cover Page

RF Exposure Evaluation Report

| Test Result: | Pass* |
|--------------------------|--|
| Date of Issue: | 2023-04-25 |
| Date of Test: | 2022-09-15 to 2022-09-30 and 2023-03-31 |
| Date of Receipt: | 2022-08-19 |
| Standard(s) : | FCC Rules 47 CFR §2.1093 KDB 447498 D01 General RF Exposure Guidance DR05-44791 |
| Trade mark: | Xiaomi |
| Model No.: | WCJ05ZM |
| EUT Name: | Xiaomi 50W Wireless Car Charger |
| Equipment Under Test (EU | Т): |
| Address of Manufacturer: | Room A913, No.159 Chengjiang Road, Jiangyin City, Jiangsu Province, 214431, P.R.C |
| Manufacturer: | ZIMI CORPORATION |
| Address of Applicant: | Room A913, No.159 Chengjiang Road, Jiangyin City, Jiangsu Province, 214431, P.R.C |
| Applicant: | ZIMI CORPORATION |
| FCC ID: | 2AMIN-WCJ05ZM |
| Application No.: | KSCR2208001487AT |

In the configuration tested, the EUT complied with the standards specified above.

Eni fri

Eric Lin Laboratory Manager



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at https://www.ags.com/en/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction documents. This document annot be reproduced except in full, without prior written approval of the Company. any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com"

or enter the Doctine Reside Set 2015 (186-512) 5735 5888 f(86-512) 57370818 www.sgsgroup.com.cn 中国・江苏・昆山开发区伟业路10号 邮编: 215300 f(86-512) 57355888 f(86-512) 57370818 sgs.china@sgs.com



Report No.: KSCR220800148703 Page: 2 of 9

| Revision Record | | | | | | | | |
|-----------------|-------------|------------|--------|--|--|--|--|--|
| Version | Description | Date | Remark | | | | | |
| 00 | Original | 2023-04-25 | / | | | | | |
| | | | | | | | | |
| | | | | | | | | |

| Authorized for issue by: | | |
|--------------------------|---------------------------|--|
| | Ceril Lin | |
| | Eric Liu/Project Engineer | |
| | Eni fri | |
| | Eric Lin /Reviewer | |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at https://www.sgs.com/en/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction form exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com"

No.10 Weiye Road, Development Zone, Kunshan, Jiangsu, China 215300 t(86-512) 5735 5888 f(86-512) 57370818 www.sgsgroup.com.cn 中国・江苏・昆山开发区伟业路10号 邮编: 215300 t(86-512) 57355888 f(86-512) 57370818 sgs.china@sgs.com



Report No.: KSCR220800148703 Page: 3 of 9

2 Contents

| | | | Page |
|---|-----|--|------|
| 1 | COV | /ER PAGE | 1 |
| 2 | CON | NTENTS | 3 |
| 3 | GEN | NERAL INFORMATION | 4 |
| | 3.1 | GENERAL DESCRIPTION OF E.U.T. | 4 |
| | 3.2 | SEPARATION DISTANCE | 4 |
| | 3.3 | Test Location | 5 |
| | 3.4 | Test Facility | 5 |
| 4 | FCC | RADIOFREQUENCY RADIATION EXPOSURE LIMITS | 6 |
| | 4.1 | BLANKET 1 MW BLANKET EXEMPTION | 6 |
| | 4.2 | MPE-BASED EXEMPTION | 6 |
| | 4.3 | SAR-BASED EXEMPTION | 7 |
| 5 | MEA | ASUREMENT AND CALCULATION | 9 |
| | 5.1 | MAXIMUM TRANSMIT POWER | 9 |
| | 5.2 | RF EXPOSURE CALCULATION | 9 |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>https://www.sgs.com/en/Terms-and-Conditions</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Clear's instructions, if any. The Company's sole responsibility is to its Client and this document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of **testing inspection report & certificate**, **please contact us at telephone:** (86-575) 8307 1443, or email: Ch.Boccheck@sgs.com.

Member of the SGS Group (SGS SA)



Integral Antenna

Report No.: KSCR220800148703 Page: 4 of 9

3 General Information

3.1 General Description of E.U.T.


| • | |
|----------------------|----------------------|
| Power supply: | DC 12V-20V,3.25A Max |
| Device Type: | Portable device |
| 5.8GHz | |
| Operation Frequency: | 5835MHz |
| Modulation Type: | FMCW |
| Number of Channels: | 1 |

WPT

| Operation frequency: | 115kHz to 148kHz |
|---------------------------|-----------------------------|
| Modulation type: | Load modulation |
| Antenna type: | Inductive Loop Coil Antenna |
| Wireless Output Power: | 50W(Max) |

3.2 Separation Distance

Antenna type:

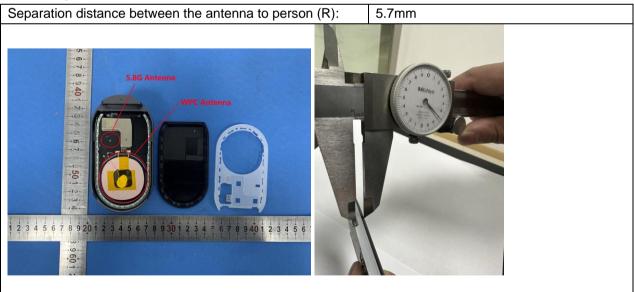

Remark: This minimum test separation distance is determined by the smallest distance from the antenna and radiating structures or outer surface of the device, according to the host form factor, exposure conditions and platform requirements, to any part of the body or extremity of a user or bystander.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>https://www.sgs.com/en/Terms-and-Conditions</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction for written approval of the Company. Any unauthorized alteration, forgery or faisification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-512) 5730'0818 www.sgsgroup.com.cn PN.0.10 Weipve Road, Development Zone, Kunshan, Jiangsu, China 215300 (166-512) 57355888 file6-512) 57370818 sgs.china@sgs.com



Report No.: KSCR220800148703 Page: 5 of 9

3.3 Test Location

All tests were performed at:

Compliance Certification Services (Kunshan) Inc.

No.10 Weiye Rd, Innovation park, Eco&Tec, Development Zone, Kunshan City, Jiangsu, China.

Tel: +86 512 5735 5888 Fax: +86 512 5737 0818

No tests were sub-contracted.

Note:

1. SGS is not responsible for wrong test results due to incorrect information (e.g., max. internal working frequency, antenna gain, cable loss, etc) is provided by the applicant. (If applicable).

2. SGS is not responsible for the authenticity, integrity and the validity of the conclusion based on results of the data provided by applicant. (If applicable).

3.4 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• A2LA

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. is accredited by the American Association for Laboratory Accreditation(A2LA).

• FCC

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been recognized as an accredited testing laboratory.

• ISED

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. EMC Laboratory has been recognized by Innovation, Science and Economic Development Canada (ISED) as an accredited testing laboratory. Company Number: 8617A

• VCCI

The 3m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-13868, C-14336, T-12221, G-10830 respectively.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>https://www.sgs.com/en/Terms-and-Conditions</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction for written approval of the Company. Any unauthorized alteration, forgery or faisification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-512) 5730'0818 www.sgsgroup.com.cn PN.0.10 Weipve Road, Development Zone, Kunshan, Jiangsu, China 215300 (166-512) 57355888 file6-512) 57370818 sgs.china@sgs.com



Report No.: KSCR220800148703 Page: 6 of 9

4 FCC Radiofrequency radiation exposure limits

Test exemptions apply for devices used in general population/uncontrolled exposure environments, according to the SAR-based, or MPE-based exemption thresholds.

4.1 Blanket 1 mW Blanket Exemption

The 1 mW Blanket Exemption of §1.1307(b)(3)(i)(A) applies for single fixed, mobile, and portable RF sources with available maximum time-averaged power of no more than 1 mW, regardless of separation distance.

The 1-mW blanket exemption applies at separation distances less than 0.5 cm, including where there is no separation. This exemption shall not be used in conjunction with other exemption criteria other than those for multiple RF sources in paragraph §1.1307(b)(3)(ii)(A).

The 1-mW exemption is independent of service type and covers the full range of 100 kHz to 100 GHz, but it shall not be used in conjunction with other exemption criteria or in devices with higher-power transmitters operating in the same time-averaging period. Exposure from such higher-power transmitters would invalidate the underlying assumption that exposure from the lower-power transmitter is the only contributor to SAR in the relevant volume of tissue.

4.2 MPE-based Exemption

General frequency and separation-distance dependent MPE-based effective radiated power (ERP) thresholds are in Table B.1 [Table 1 of §1.1307(b)(1)(i)(C)] to support an exemption from further evaluation from 300 kHz through 100 GHz.

| RF Source Frequency | | | Minim | Threshold ERP | | | | | |
|---|---|-------------------|---------------------|---|------------|-------------------------|--|--|--|
| <i>f</i> ∟ MHz | | <i>f</i> ⊢ MHz | λ _L / 2π | λ _L / 2π λ _H / 2 [·] | | W | | | |
| 0.3 | 0.3 – 1.34 | | 159 m | _ | 35.6 m | 1,920 R ² | | | |
| 1.34 | - | 30 | 35.6 m – | | 1.6 m | 3,450 R²/f ² | | | |
| 30 | - | 300 | 1.6 m | _ | 159 mm | 3.83 R ² | | | |
| 300 | - | 1,500 | 159 mm | _ | 31.8 mm | 0.0128 R ² f | | | |
| 1,500 | 1,500 – 100,000 31.8 mm – 0.5 mm 19.2R ² | | | | | | | | |
| Subscripts L and H are low and high; λ is wavelength. | | | | | | | | | |
| From §1.1307 | (b)(3)(i)(| C), modified by a | dding Minimum D | Distance | e columns. | | | | |

| Table B.1—Thresholds For Single RF Sources | Subject to Routine Environmental Evaluation |
|--|---|
|--|---|

The table applies to any RF source (i.e. single fixed, mobile, and portable transmitters) and specifies power and distance criteria for each of the five frequency ranges used for the MPE limits. These criteria apply at separation distances from any part of the radiating structure of at least $\lambda/2\pi$. The thresholds are





Report No.: KSCR220800148703 Page: 7 of 9

based on the general population MPE limits with a single perfect reflection, outside of the reactive nearfield, and in the main beam of the radiator.

For mobile devices that are not exempt per Table B.1 [Table 1 of \$1.1307(b)(1)(i)(C)] at distances from 20 cm to 40 cm and in 0.3 GHz to 6 GHz, evaluation of compliance with the exposure limits in \$1.1310 is necessary if the ERP of the device is greater than *ERP*_{20cm} in Formula (B.1) [repeated from \$2.1091(c)(1); also in \$1.1307(b)(1)(i)(B)].

$$P_{\rm th} (\rm mW) = ERP_{20 \,\rm cm} (\rm mW) = \begin{cases} 2040f & 0.3 \,\rm GHz \le f < 1.5 \,\rm GHz \\ 3060 & 1.5 \,\rm GHz \le f \le 6 \,\rm GHz \end{cases}$$
(B.1)

If the ERP is not easily obtained, then the available maximum time-averaged power may be used (i.e., without consideration of ERP only if the physical dimensions of the radiating structure(s) do not exceed the electrical length of $\lambda/4$ or if the antenna gain is less than that of a half-wave dipole.

SAR-based exemptions are constant at separation distances between 20 cm and 40 cm to avoid discontinuities in the threshold when transitioning between SAR-based and MPE-based exemption criteria at 40 cm, considering the importance of reflections.

| Limit calculation | | | | | | | | | |
|-------------------|----------------|------------|------------------|--|--|--|--|--|--|
| Frequency range | Frequency(MHz) | R(λ/2π)(m) | Threshold ERP(W) | | | | | | |
| 300~1500MHz | 915 | 0.0522 | 0.032 | | | | | | |
| 1500~100000MHz | 5835 | 0.0082 | 0.001 | | | | | | |

4.3 SAR-based Exemption

SAR-based thresholds are derived based on frequency, power, and separation distance of the RF source. The formula defines the thresholds in general for either available maximum time-averaged power or maximum time-averaged ERP, whichever is greater.

If the ERP of a device is not easily determined, such as for a portable device with a small form factor, the applicant may use the available maximum time-averaged power exclusively if the device antenna or radiating structure does not exceed an electrical length of $\lambda/4$.

As for devices with antennas of length greater than $\lambda/4$ where the gain is not well defined, but always less than that of a half-wave dipole (length $\lambda/2$), the available maximum time-averaged power generated by the device may be used in place of the maximum time-averaged ERP, where that value is not known. The separation distance is the smallest distance from any part of the antenna or radiating structure for all persons, during operation at the applicable ERP. In the case of mobile or portable devices, the

separation distance is from the outer housing of the device where it is closest to the antenna.



| Jnless otherwise agreed in writing, this document is issued b varilable on request or accessible at <u>https://www.sgs.com</u> ndemnification and jurisdiction issues defined therein. Any h he Company's findings at the time of its intervention only esponsibility is to its Cient and this document does not exor under the transaction documents. This document cannot be r nauthorized alteration, forgery or faisification of the content o the fullest extent of the law. Unless otherwise stated the r sample(s) are retained for 30 days only. | en/Terr older of and wi nerate p eprodu or appe | ms-and-Co f this docu thin the line arties to a ced except arance of t | prditions. Attention ment is advised tha mits of Client's ins transaction from ex t in full, without prio this document is unli- | is drawn to the t information conta tructions, if any. T kercising all their ri r written approval awful and offender | limitation of liability, ined hereon reflects The Company's sole ghts and obligations of the Company. Any s may be prosecuted |
|--|--|---|---|--|--|
| | - | | | | |
| Attention: To check the authenticity of testing /inspectio | n repor | t & certifi | cate, please conta | ct us at telephone | 8: (86-755) 8307 1443, |
| or email: CN.Doccheck@sgs.com | | | | | |
| No.10 Weiye Road, Development Zone, Kunshan, Jiangsu, | China | 215300 | t(86-512) 5735 5888 | f(86-512) 57370818 | www.sgsgroup.com.cn |
| 中国・江苏・昆山开发区伟业路10号 | 邮编: | 215300 | t(86-512) 57355888 | f(86-512) 57370818 | sgs.china@sgs.com |



Report No.: KSCR220800148703 Page: 8 of 9

The SAR-based exemption formula of \$1.1307(b)(3)(i)(B), repeated here as Formula (B.2), applies for single fixed, mobile, and portable RF sources with available maximum time-averaged power or effective radiated power (ERP), whichever is greater, of less than or equal to the threshold P_{th} (mW).

This method shall only be used at separation distances from 0.5 cm to 40 cm and at frequencies from 0.3 GHz to 6 GHz (inclusive). P_{th} is given by Formula (B.2).

$$P_{\rm th} (\rm mW) = \begin{cases} ERP_{20 \,\rm cm} (d/20 \,\rm cm)^x & d \le 20 \,\rm cm \\ \\ ERP_{20 \,\rm cm} & 20 \,\rm cm < d \le 40 \,\rm cm \end{cases}$$
(B.2)

where

$$x = -\log_{10}\left(\frac{60}{ERP_{20}\operatorname{cm}\sqrt{f}}\right)$$

and f is in GHz, d is the separation distance (cm), and ERP_{20cm} is per Formula (B.1).

Example values shown in Table B.2 are for illustration only.

| | Table B.2—Example Power Thresholds (mW) | | | | | | | | | |
|-----------|---|--------------|----|-----|-----|-----|-----|-----|-----|-----|
| Frequency | | Distance(mm) | | | | | | | | |
| (MHz) | 5 | 10 | 15 | 20 | 25 | 30 | 35 | 40 | 45 | 50 |
| 300 | 39 | 65 | 88 | 110 | 129 | 148 | 166 | 184 | 201 | 217 |
| 450 | 22 | 44 | 67 | 89 | 112 | 135 | 158 | 180 | 203 | 226 |
| 835 | 9 | 25 | 44 | 66 | 90 | 116 | 145 | 175 | 207 | 240 |
| 1900 | 3 | 12 | 26 | 44 | 66 | 92 | 122 | 157 | 195 | 236 |
| 2450 | 3 | 10 | 22 | 38 | 59 | 83 | 111 | 143 | 179 | 219 |
| 3600 | 2 | 8 | 18 | 32 | 49 | 71 | 96 | 125 | 158 | 195 |
| 5800 | 1 | 6 | 14 | 25 | 40 | 58 | 80 | 106 | 136 | 169 |

| Limit calculation | | | | | | | | |
|---|-------|-------|-----|-------|--|--|--|--|
| Frequency range(GHz) Frequency(GHz) X Distance(cm) Pth (mW) | | | | | | | | |
| 1.5~6 | 5.835 | 2.091 | 0.5 | 1.369 | | | | |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at https://www.sgs.com/en/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Cilent's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction form exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN_Doccheck@sgs.com"

No.10 Weiye Road, Development Zone, Kunshan, Jiangsu, China 215300 ((86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn 中国・江苏・昆山开发区伟业路10号 邮编: 215300 t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com



Report No.: KSCR220800148703 Page: 9 of 9

5 Measurement and Calculation

5.1 Maximum transmit power

The Power Data is based on the RF Test Report: KSCR220800148701. Power=85.58dBuV/m=-9.62dBm; So Max power=-9.0dBm=0.13mW The SAR Data is based on the Report: B23Z60388-SEM01 Max SAR=4.91E-03 W/kg

5.2 RF Exposure Calculation

The provisions in § 1.1307(b)(3)(ii)(B) address the case of multiple source exemptions (in general for both SAR and MPE Environmental Assessment requirements) that may be considered in fixed, mobile, or portable device exposure conditions.

In a similar fashion, a device with multiple RF sources can be exempted from the requirements of RF exposure testing for the purpose of equipment authorization if the following condition is met:

$$TER = \sum_{i=0}^{N_{exe}} \frac{P_i}{P_{th,i}} + \sum_{i=0}^{N_S} \frac{SAR_i}{SAR_{lim,i}} + \sum_{j=0}^{N_f} \left(\frac{MPE_j}{MPE_{lim,j}}\right)^2 + \sum_{k=0}^{N_{PD}} \frac{MPE_{ik}}{MPE_{lim,k}} \le 1$$

TER=0.13/1.369+4.91E-03/1.6=0.095+0.003=0.098<=1

Remark: we used the maximum power between the conducted power and ERP/EIRP to perform RF exposure exemption evaluation.

| Evaluation method | Separation distance between the antenna to person (R) | Exempt Limit(mW) | Verdict |
|--------------------------------------|---|------------------|---------|
| Blanket 1 mW Blanket Exemption | No distance requirement | 1mW | N/A |
| MPE-based Exemption(ERP) | (λ / 2π) < R | 1mW(ERP) | N/A |
| SAR-based Exemption(<i>P</i> th) | 0.5cm < R < 40cm | 1.369mW | Yes |

So, the 5835MHz is to qualify for SAR test exemption, the exemption report is in lieu of the SAR report.

--End of the Report--

