

# FCC Radio Test Report

## FCC ID: 2AMIU-5B

### Original Grant

**Report No.** : TB-FCC154401  
**Applicant** : Shenzhen Benjun Technology Co., LTD  
**Equipment Under Test (EUT)**  
**EUT Name** : Bone-conduction headphone and sunglasses  
**Model No.** : Vision 5B  
**Serial Model No.** : N/A  
**Brand Name** : BJVISION/ACTEK  
**Receipt Date** : 2017-06-24  
**Test Date** : 2017-06-25 to 2017-07-05  
**Issue Date** : 2017-07-06  
**Standards** : FCC Part 15: 2016, Subpart C(15.247)  
**Test Method** : ANSI C63.10: 2013  
**Conclusions** : **PASS**

In the configuration tested, the EUT complied with the standards specified above,

**Test/Witness  
Engineer**

: *Ivan Su*

**Approved &  
Authorized**

: *Ray Lai*



This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in the report.



## Contents

|                                                                   |           |
|-------------------------------------------------------------------|-----------|
| <b>CONTENTS.....</b>                                              | <b>2</b>  |
| <b>1. GENERAL INFORMATION ABOUT EUT .....</b>                     | <b>4</b>  |
| 1.1 Client Information.....                                       | 4         |
| 1.2 General Description of EUT (Equipment Under Test) .....       | 4         |
| 1.3 Block Diagram Showing the Configuration of System Tested..... | 5         |
| 1.4 Description of Support Units .....                            | 6         |
| 1.5 Description of Test Mode.....                                 | 6         |
| 1.6 Description of Test Software Setting .....                    | 7         |
| 1.7 Measurement Uncertainty .....                                 | 7         |
| 1.8 Test Facility.....                                            | 8         |
| <b>2. TEST SUMMARY.....</b>                                       | <b>9</b>  |
| <b>3. TEST EQUIPMENT.....</b>                                     | <b>10</b> |
| <b>4. CONDUCTED EMISSION TEST .....</b>                           | <b>11</b> |
| 4.1 Test Standard and Limit.....                                  | 11        |
| 4.2 Test Setup.....                                               | 11        |
| 4.3 Test Procedure.....                                           | 11        |
| 4.4 EUT Operating Mode .....                                      | 12        |
| 4.5 Test Da5ta.....                                               | 12        |
| <b>5. RADIATED EMISSION TEST .....</b>                            | <b>17</b> |
| 5.1 Test Standard and Limit.....                                  | 17        |
| 5.2 Test Setup.....                                               | 18        |
| 5.3 Test Procedure.....                                           | 19        |
| 5.4 EUT Operating Condition .....                                 | 20        |
| 5.5 Test Data.....                                                | 20        |
| <b>6. RESTRICTED BANDS REQUIREMENT .....</b>                      | <b>29</b> |
| 6.1 Test Standard and Limit.....                                  | 29        |
| 6.2 Test Setup.....                                               | 29        |
| 6.3 Test Procedure.....                                           | 29        |
| 6.4 EUT Operating Condition .....                                 | 30        |
| 6.5 Test Data.....                                                | 30        |
| <b>7. BANDWIDTH TEST .....</b>                                    | <b>36</b> |
| 7.1 Test Standard and Limit.....                                  | 36        |
| 7.2 Test Setup.....                                               | 36        |
| 7.3 Test Procedure.....                                           | 36        |
| 7.4 EUT Operating Condition .....                                 | 36        |
| 7.5 Test Data.....                                                | 37        |
| <b>8. PEAK OUTPUT POWER TEST.....</b>                             | <b>39</b> |
| 8.1 Test Standard and Limit.....                                  | 39        |
| 8.2 Test Setup.....                                               | 39        |



|                                             |           |
|---------------------------------------------|-----------|
| 8.3 Test Procedure.....                     | 39        |
| 8.4 EUT Operating Condition .....           | 39        |
| 8.5 Test Data.....                          | 40        |
| <b>9. POWER SPECTRAL DENSITY TEST .....</b> | <b>42</b> |
| 9.1 Test Standard and Limit.....            | 42        |
| 9.2 Test Setup.....                         | 42        |
| 9.3 Test Procedure.....                     | 42        |
| 9.4 EUT Operating Condition .....           | 42        |
| 9.5 Test Data.....                          | 43        |
| <b>10. ANTENNA REQUIREMENT.....</b>         | <b>45</b> |
| 10.1 Standard Requirement.....              | 45        |
| 10.2 Antenna Connected Construction.....    | 45        |
| 10.3 Result.....                            | 45        |

## 1. General Information about EUT

### 1.1 Client Information

**Applicant** : Shenzhen Benjun Technology Co., LTD  
**Address** : 8-709 Runcheng garden xili Nanshan Shenzhen China  
**Manufacturer** : Shenzhen Tianjiu Electronics Co., Ltd.  
**Address** : Building 3, No. 21, Makan Road, Xili Town, Nanshan District, Shenzhen, Guangdong, China

### 1.2 General Description of EUT (Equipment Under Test)

|                               |   |                                                            |                                                    |
|-------------------------------|---|------------------------------------------------------------|----------------------------------------------------|
| <b>EUT Name</b>               | : | Bone-conduction headphone and sunglasses                   |                                                    |
| <b>Models No.</b>             | : | Vision 5B                                                  |                                                    |
| <b>Product Description</b>    | : | Operation Frequency:                                       | Bluetooth 4.0(BLE): 2402MHz~2480MHz                |
|                               | : | Number of Channel:                                         | Bluetooth 4.0(BLE): 40 channels <b>see note(3)</b> |
|                               | : | RF Output Power:                                           | 6.029dBm Conducted Power                           |
|                               | : | Antenna Gain:                                              | 0dBi PCB Antenna                                   |
|                               | : | Modulation Type:                                           | GFSK                                               |
|                               | : | Bit Rate of Transmitter:                                   | 1Mbps(GFSK)                                        |
| <b>Power Supply</b>           | : | DC power by USB cable.<br>DC power by Li-ion battery.      |                                                    |
| <b>Power Rating</b>           | : | DC 5V by Host System.<br>DC 3.7V by 250mAh Li-ion Battery. |                                                    |
| <b>Connecting I/O Port(S)</b> | : | Please refer to the User's Manual                          |                                                    |

#### Note:

This Test Report is FCC Part 15.247 for Bluetooth BLE, the test procedure follows the FCC KDB 558074 D01 DTS Means Guidance v04.

- (1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
- (2) Antenna information provided by the applicant.




(3) Channel List:

| Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
|---------|-----------------|---------|-----------------|---------|-----------------|
| 00      | <b>2402</b>     | 14      | 2430            | 28      | 2458            |
| 01      | 2404            | 15      | 2432            | 29      | 2460            |
| 02      | 2406            | 16      | 2434            | 30      | 2462            |
| 03      | 2408            | 17      | 2436            | 31      | 2464            |
| 04      | 2410            | 18      | 2438            | 32      | 2466            |
| 05      | 2412            | 19      | 2440            | 33      | 2468            |
| 06      | 2414            | 20      | <b>2442</b>     | 34      | 2470            |
| 07      | 2416            | 21      | 2444            | 35      | 2472            |
| 08      | 2418            | 22      | 2446            | 36      | 2474            |
| 09      | 2420            | 23      | 2448            | 37      | 2476            |
| 10      | 2422            | 24      | 2450            | 38      | 2478            |
| 11      | 2424            | 25      | 2452            | 39      | <b>2480</b>     |
| 12      | 2426            | 26      | 2454            |         |                 |
| 13      | 2428            | 27      | 2456            |         |                 |

1.3 Block Diagram Showing the Configuration of System Tested

**Charging + TX Mode**

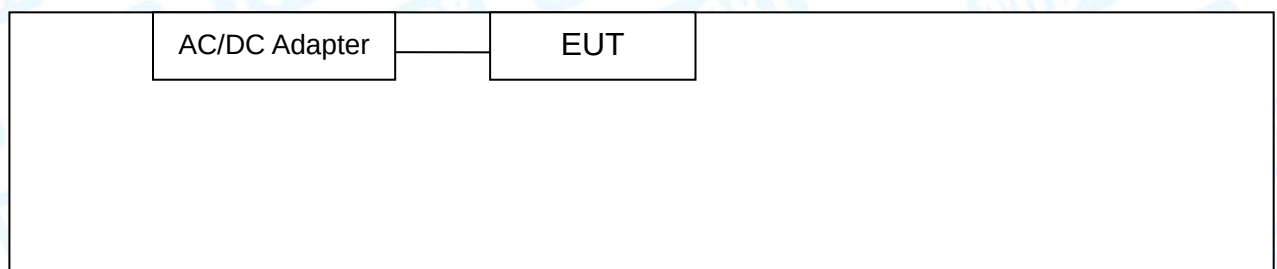

**TX Mode**



## 1.4 Description of Support Units

| Equipment Information                                            |               |              |              |          |
|------------------------------------------------------------------|---------------|--------------|--------------|----------|
| Name                                                             | Model         | FCC ID/VOC   | Manufacturer | Used “√” |
| AC/DC Adapter                                                    | A16-502000    | ----         | AOHAI        | √        |
| AC/DC Adapter Input: AC 100~240V, 50/60Hz, 0.5A    Output: 5V/2A |               |              |              |          |
| Cable Information                                                |               |              |              |          |
| Number                                                           | Shielded Type | Ferrite Core | Length       | Note     |
| Cable 1                                                          | YES           | NO           | 1M           |          |

## 1.5 Description of Test Mode

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned follow was evaluated respectively.

| For Conducted Test |                        |
|--------------------|------------------------|
| Final Test Mode    | Description            |
| Mode 1             | USB Charging + TX Mode |

| For Radiated Test |                            |
|-------------------|----------------------------|
| Final Test Mode   | Description                |
| Mode 2            | TX Mode                    |
| Mode 3            | TX Mode (Channel 00/20/39) |

### Note:

- (1) For all test, we have verified the construction and function in typical operation. And all the test modes were carried out with the EUT in transmitting operation in maximum power with all kinds of data rate.

According to ANSI C63.10 standards, the measurements are performed at the highest, middle, lowest available channels, and the worst case data rate as follows:

BLE Mode: GFSK Modulation Transmitting mode.

- (2) During the testing procedure, the continuously transmitting with the maximum power mode was programmed by the customer.
- (3) The EUT is considered a portable unit; in normal use it was positioned on X-plane. The worst case was found positioned on X-plane. Therefore only the test data of this X-plane was used for radiated emission measurement test.



## 1.6 Description of Test Software Setting

During testing channel& Power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of RF setting.

| Test Software Version | Blue Test 3.exe |         |          |
|-----------------------|-----------------|---------|----------|
| Frequency             | 2402 MHz        | 2442MHz | 2480 MHz |
| BLE GFSK              | DEF             | DEF     | DEF      |

## 1.7 Measurement Uncertainty

The reported uncertainty of measurement  $y \pm U$ , where expended uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %.

| Test Item          | Parameters                                        | Expanded Uncertainty ( $U_{Lab}$ ) |
|--------------------|---------------------------------------------------|------------------------------------|
| Conducted Emission | Level Accuracy:<br>9kHz~150kHz<br>150kHz to 30MHz | $\pm 3.42$ dB<br>$\pm 3.42$ dB     |
| Radiated Emission  | Level Accuracy:<br>9kHz to 30 MHz                 | $\pm 4.60$ dB                      |
| Radiated Emission  | Level Accuracy:<br>30MHz to 1000 MHz              | $\pm 4.40$ dB                      |
| Radiated Emission  | Level Accuracy:<br>Above 1000MHz                  | $\pm 4.20$ dB                      |

## 1.8 Test Facility

The testing was performed by the Shenzhen Toby Technology Co., Ltd., in their facilities located at:1A/F., Bldg.6, Yusheng Industrial Zone, The National Road No.107 Xixiang Section 467, Xixiang, Bao'an, Shenzhen, Guangdong, China.

At the time of testing, the following bodies accredited the Laboratory:

### **CNAS (L5813)**

The Laboratory has been accredited by CNAS to ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories for the competence in the field of testing. And the Registration No.: CNAS L5813.

### **FCC List No.: (811562)**

The Laboratory is listed in the United States of American Federal Communications Commission (FCC), and the registration number is 811562.

### **IC Registration No.: (11950A-1)**

The Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing. The site registration: Site# 11950A-1.



## 2. Test Summary

| FCC Part 15 Subpart C(15.247)/ RSS 247 Issue 2          |                    |                                                                             |          |        |
|---------------------------------------------------------|--------------------|-----------------------------------------------------------------------------|----------|--------|
| Standard Section                                        |                    | Test Item                                                                   | Judgment | Remark |
| FCC                                                     | IC                 |                                                                             |          |        |
| 15.203                                                  |                    | Antenna Requirement                                                         | PASS     | N/A    |
| 15.207(a)                                               | RSS-GEN<br>7.2.4   | Conducted Emission                                                          | PASS     | N/A    |
| 15.205&15.247(d)                                        | RSS-GEN<br>7.2.2   | Band-Edge & Unwanted Emissions into Restricted Frequency                    | PASS     | N/A    |
| 15.247(a)(2)                                            | RSS 247<br>5.2 (1) | 6dB Bandwidth                                                               | PASS     | N/A    |
| 15.247(b)(3)                                            | RSS 247<br>5.4 (4) | Conducted Max Output Power                                                  | PASS     | N/A    |
| 15.247(e)                                               | RSS 247<br>5.2 (2) | Power Spectral Density                                                      | PASS     | N/A    |
| 15.205,<br>15.209&15.247(d)                             | RSS 247<br>5.5     | Transmitter Radiated Spurious &Unwanted Emissions into Restricted Frequency | PASS     | N/A    |
| <b>Note:</b> N/A is an abbreviation for Not Applicable. |                    |                                                                             |          |        |

### 3. Test Equipment

| Conducted Emission Test    |                                  |             |            |               |               |
|----------------------------|----------------------------------|-------------|------------|---------------|---------------|
| Equipment                  | Manufacturer                     | Model No.   | Serial No. | Last Cal.     | Cal. Due Date |
| EMI Test Receiver          | Rohde & Schwarz                  | ESCI        | 100321     | Jul. 22, 2016 | Jul. 21, 2017 |
| RF Switching Unit          | Compliance Direction Systems Inc | RSU-A4      | 34403      | Jul. 22, 2016 | Jul. 21, 2017 |
| AMN                        | SCHWARZBECK                      | NNBL 8226-2 | 8226-2/164 | Jul. 22, 2016 | Jul. 21, 2017 |
| LISN                       | Rohde & Schwarz                  | ENV216      | 101131     | Jul. 22, 2016 | Jul. 21, 2017 |
| Radiation Emission Test    |                                  |             |            |               |               |
| Equipment                  | Manufacturer                     | Model No.   | Serial No. | Last Cal.     | Cal. Due Date |
| Spectrum Analyzer          | Agilent                          | E4407B      | MY45106456 | Jul. 22, 2016 | Jul. 21, 2017 |
| EMI Test Receiver          | Rohde & Schwarz                  | ESPI        | 100010/007 | Jul. 22, 2016 | Jul. 21, 2017 |
| Bilog Antenna              | ETS-LINDGREN                     | 3142E       | 00117537   | Mar.25, 2017  | Mar. 24, 2018 |
| Bilog Antenna              | ETS-LINDGREN                     | 3142E       | 00117542   | Mar.25, 2017  | Mar. 24, 2018 |
| Horn Antenna               | ETS-LINDGREN                     | 3117        | 00143207   | Mar.24, 2017  | Mar. 23, 2018 |
| Horn Antenna               | ETS-LINDGREN                     | 3117        | 00143209   | Mar.24, 2017  | Mar. 23, 2018 |
| Loop Antenna               | Laplace instrument               | RF300       | 0701       | Mar.24, 2017  | Mar. 23, 2018 |
| Pre-amplifier              | Sonoma                           | 310N        | 185903     | Mar.24, 2017  | Mar. 23, 2018 |
| Pre-amplifier              | HP                               | 8449B       | 3008A00849 | Mar.25, 2017  | Mar. 24, 2018 |
| Cable                      | HUBER+SUHNER                     | 100         | SUCOFLEX   | Mar.24, 2017  | Mar. 23, 2018 |
| Positioning Controller     | ETS-LINDGREN                     | 2090        | N/A        | N/A           | N/A           |
| Antenna Conducted Emission |                                  |             |            |               |               |
| Equipment                  | Manufacturer                     | Model No.   | Serial No. | Last Cal.     | Cal. Due Date |
| Spectrum Analyzer          | Agilent                          | E4407B      | MY45106456 | Jul. 22, 2016 | Jul. 21, 2017 |
| Spectrum Analyzer          | Rohde & Schwarz                  | ESCI        | 100010/007 | Jul. 22, 2016 | Jul. 21, 2017 |
| Power Meter                | Anritsu                          | ML2495A     | 25406005   | Jul. 22, 2016 | Jul. 21, 2017 |
| Power Sensor               | Anritsu                          | ML2411B     | 25406005   | Jul. 22, 2016 | Jul. 21, 2017 |



## 4. Conducted Emission Test

### 4.1 Test Standard and Limit

#### 4.1.1 Test Standard

FCC Part 15.207

#### 4.1.2 Test Limit

**Conducted Emission Test Limit**

| Frequency     | Maximum RF Line Voltage (dB $\mu$ V) |               |
|---------------|--------------------------------------|---------------|
|               | Quasi-peak Level                     | Average Level |
| 150kHz~500kHz | 66 ~ 56 *                            | 56 ~ 46 *     |
| 500kHz~5MHz   | 56                                   | 46            |
| 5MHz~30MHz    | 60                                   | 50            |


Notes:

(1) \*Decreasing linearly with logarithm of the frequency.

(2) The lower limit shall apply at the transition frequencies.

(3) The limit decrease in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

### 4.2 Test Setup

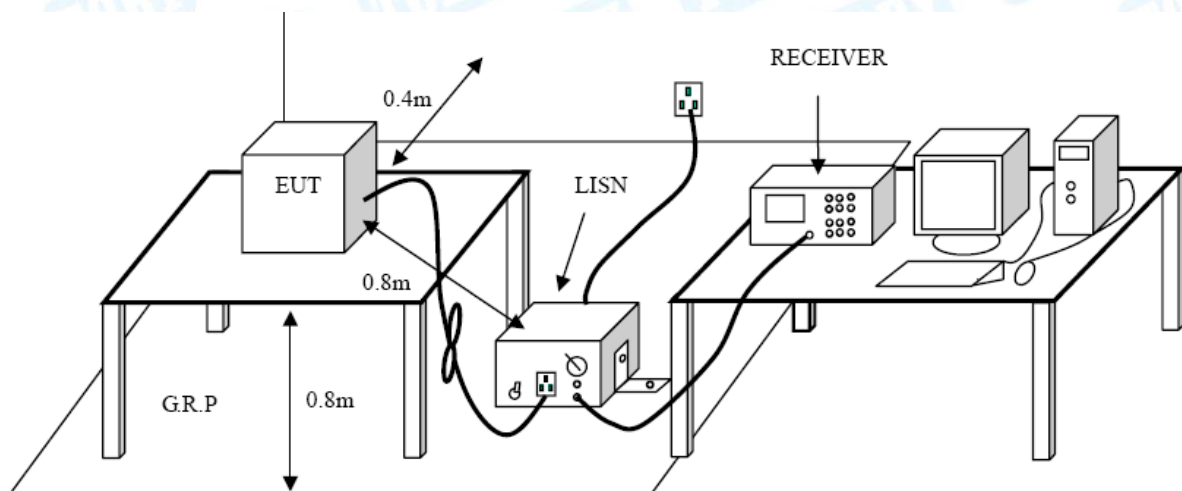

### 4.3 Test Procedure

The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.

Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.

I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.

LISN at least 80 cm from nearest part of EUT chassis.

The bandwidth of EMI test receiver is set at 9 kHz, and the test frequency band is from 0.15MHz to 30MHz.

#### 4.4 EUT Operating Mode


Please refer to the description of test mode.

#### 4.5 Test Da5ta

Test data please refer the following pages.




|                      |                                          |                           |           |
|----------------------|------------------------------------------|---------------------------|-----------|
| <b>EUT:</b>          | Bone-conduction headphone and sunglasses | <b>Model:</b>             | Vision 5B |
| <b>Temperature:</b>  | 25°C                                     | <b>Relative Humidity:</b> | 55%       |
| <b>Test Voltage:</b> | AC 120V/60 Hz                            |                           |           |
| <b>Terminal:</b>     | Line                                     |                           |           |
| <b>Test Mode:</b>    | USB Charging Mode                        |                           |           |
| <b>Remark:</b>       | Only worse case is reported              |                           |           |

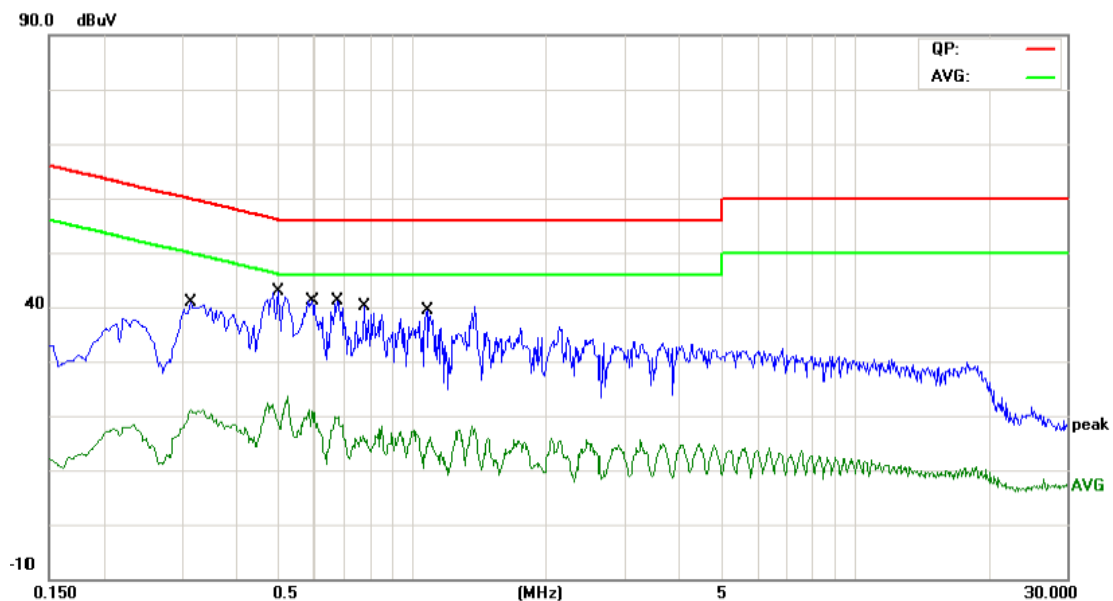

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV | Limit<br>dBuV | Over<br>dB | Detector |
|-----|-----|--------------|--------------------------|-------------------------|--------------------------|---------------|------------|----------|
| 1   |     | 0.3140       | 24.38                    | 9.59                    | 33.97                    | 59.86         | -25.89     | QP       |
| 2   |     | 0.3140       | 10.06                    | 9.59                    | 19.65                    | 49.86         | -30.21     | AVG      |
| 3   |     | 0.4980       | 24.02                    | 9.60                    | 33.62                    | 56.03         | -22.41     | QP       |
| 4   |     | 0.4980       | 7.15                     | 9.60                    | 16.75                    | 46.03         | -29.28     | AVG      |
| 5   | *   | 0.5940       | 25.20                    | 9.60                    | 34.80                    | 56.00         | -21.20     | QP       |
| 6   |     | 0.5940       | 10.50                    | 9.60                    | 20.10                    | 46.00         | -25.90     | AVG      |
| 7   |     | 0.6740       | 24.64                    | 9.61                    | 34.25                    | 56.00         | -21.75     | QP       |
| 8   |     | 0.6740       | 9.85                     | 9.61                    | 19.46                    | 46.00         | -26.54     | AVG      |
| 9   |     | 0.7780       | 21.18                    | 9.61                    | 30.79                    | 56.00         | -25.21     | QP       |
| 10  |     | 0.7780       | 6.36                     | 9.61                    | 15.97                    | 46.00         | -30.03     | AVG      |
| 11  |     | 1.0780       | 19.15                    | 9.60                    | 28.75                    | 56.00         | -27.25     | QP       |
| 12  |     | 1.0780       | 3.92                     | 9.60                    | 13.52                    | 46.00         | -32.48     | AVG      |

Emission Level= Read Level+ Correct Factor

|                      |                                          |                           |           |
|----------------------|------------------------------------------|---------------------------|-----------|
| <b>EUT:</b>          | Bone-conduction headphone and sunglasses | <b>Model:</b>             | Vision 5B |
| <b>Temperature:</b>  | 25°C                                     | <b>Relative Humidity:</b> | 55%       |
| <b>Test Voltage:</b> | AC 120V/60 Hz                            |                           |           |
| <b>Terminal:</b>     | Neutral                                  |                           |           |
| <b>Test Mode:</b>    | USB Charging Mode                        |                           |           |
| <b>Remark:</b>       | Only worse case is reported              |                           |           |

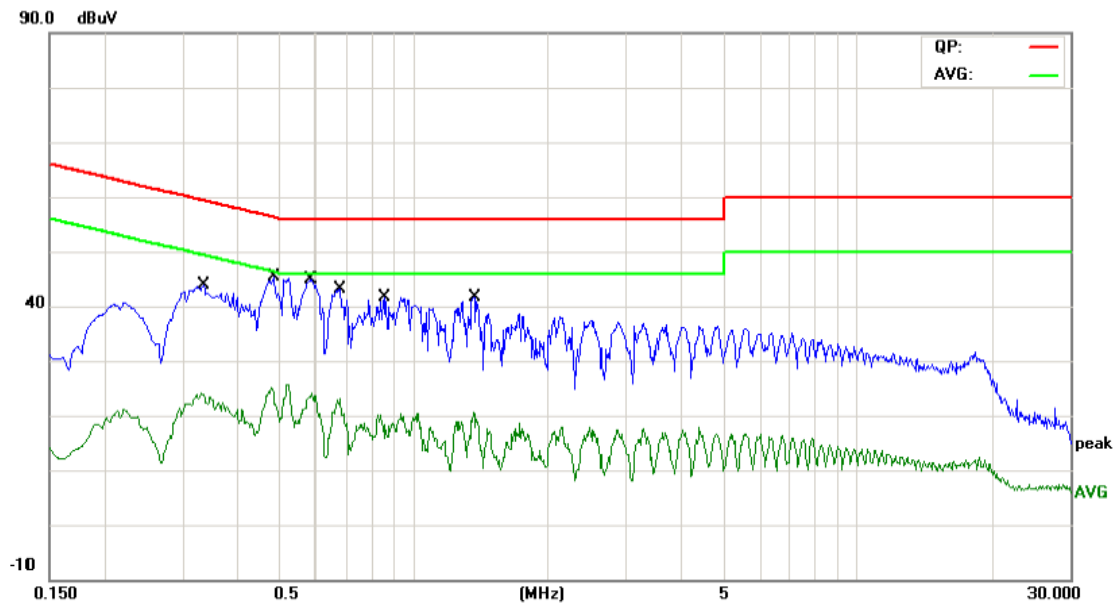


| No. | Mk. | Freq.  | Reading Level | Correct Factor | Measurement | Limit | Over   |          |
|-----|-----|--------|---------------|----------------|-------------|-------|--------|----------|
|     |     | MHz    | dBuV          | dB             | dBuV        | dBuV  | dB     | Detector |
| 1   |     | 0.3339 | 28.26         | 9.57           | 37.83       | 59.35 | -21.52 | QP       |
| 2   |     | 0.3339 | 13.01         | 9.57           | 22.58       | 49.35 | -26.77 | AVG      |
| 3   | *   | 0.4820 | 29.94         | 9.58           | 39.52       | 56.30 | -16.78 | QP       |
| 4   |     | 0.4820 | 14.23         | 9.58           | 23.81       | 46.30 | -22.49 | AVG      |
| 5   |     | 0.5860 | 29.12         | 9.58           | 38.70       | 56.00 | -17.30 | QP       |
| 6   |     | 0.5860 | 13.05         | 9.58           | 22.63       | 46.00 | -23.37 | AVG      |
| 7   |     | 0.6820 | 27.03         | 9.59           | 36.62       | 56.00 | -19.38 | QP       |
| 8   |     | 0.6820 | 11.43         | 9.59           | 21.02       | 46.00 | -24.98 | AVG      |
| 9   |     | 0.8580 | 24.31         | 9.59           | 33.90       | 56.00 | -22.10 | QP       |
| 10  |     | 0.8580 | 6.47          | 9.59           | 16.06       | 46.00 | -29.94 | AVG      |
| 11  |     | 1.3619 | 25.86         | 9.60           | 35.46       | 56.00 | -20.54 | QP       |
| 12  |     | 1.3619 | 9.22          | 9.60           | 18.82       | 46.00 | -27.18 | AVG      |

Emission Level= Read Level+ Correct Factor




|                      |                                          |                           |           |
|----------------------|------------------------------------------|---------------------------|-----------|
| <b>EUT:</b>          | Bone-conduction headphone and sunglasses | <b>Model:</b>             | Vision 5B |
| <b>Temperature:</b>  | 25°C                                     | <b>Relative Humidity:</b> | 55%       |
| <b>Test Voltage:</b> | AC 240V/60 Hz                            |                           |           |
| <b>Terminal:</b>     | Line                                     |                           |           |
| <b>Test Mode:</b>    | USB Charging Mode                        |                           |           |
| <b>Remark:</b>       | Only worse case is reported              |                           |           |

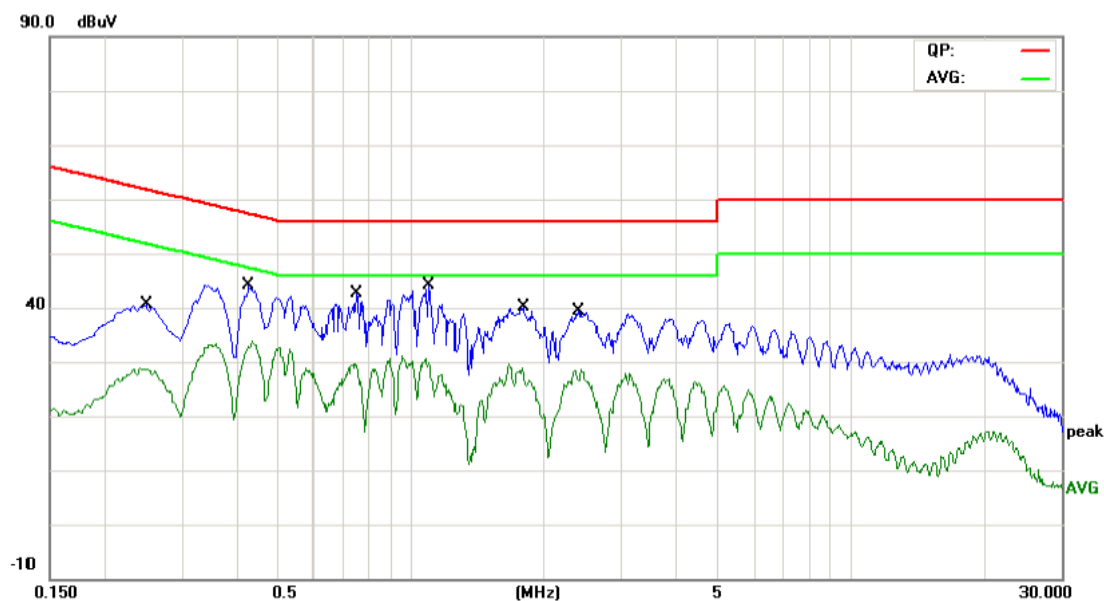

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV | Limit<br>dBuV | Over<br>dB | Detector |
|-----|-----|--------------|--------------------------|-------------------------|--------------------------|---------------|------------|----------|
| 1   |     | 0.2500       | 24.77                    | 9.58                    | 34.35                    | 61.75         | -27.40     | QP       |
| 2   |     | 0.2500       | 17.75                    | 9.58                    | 27.33                    | 51.75         | -24.42     | AVG      |
| 3   |     | 0.4260       | 28.62                    | 9.60                    | 38.22                    | 57.33         | -19.11     | QP       |
| 4   | *   | 0.4260       | 22.61                    | 9.60                    | 32.21                    | 47.33         | -15.12     | AVG      |
| 5   |     | 1.0940       | 25.47                    | 9.60                    | 35.07                    | 56.00         | -20.93     | QP       |
| 6   |     | 1.0940       | 17.78                    | 9.60                    | 27.38                    | 46.00         | -18.62     | AVG      |
| 7   |     | 0.7500       | 25.30                    | 9.61                    | 34.91                    | 56.00         | -21.09     | QP       |
| 8   |     | 0.7500       | 17.13                    | 9.61                    | 26.74                    | 46.00         | -19.26     | AVG      |
| 9   |     | 1.7940       | 22.66                    | 9.61                    | 32.27                    | 56.00         | -23.73     | QP       |
| 10  |     | 1.7940       | 15.74                    | 9.61                    | 25.35                    | 46.00         | -20.65     | AVG      |
| 11  |     | 2.4020       | 22.23                    | 9.62                    | 31.85                    | 56.00         | -24.15     | QP       |
| 12  |     | 2.4020       | 15.89                    | 9.62                    | 25.51                    | 46.00         | -20.49     | AVG      |

Emission Level= Read Level+ Correct Factor

|                      |                                          |                           |           |
|----------------------|------------------------------------------|---------------------------|-----------|
| <b>EUT:</b>          | Bone-conduction headphone and sunglasses | <b>Model:</b>             | Vision 5B |
| <b>Temperature:</b>  | 25°C                                     | <b>Relative Humidity:</b> | 55%       |
| <b>Test Voltage:</b> | AC 240V/60 Hz                            |                           |           |
| <b>Terminal:</b>     | Neutral                                  |                           |           |
| <b>Test Mode:</b>    | USB Charging Mode                        |                           |           |
| <b>Remark:</b>       | Only worse case is reported              |                           |           |

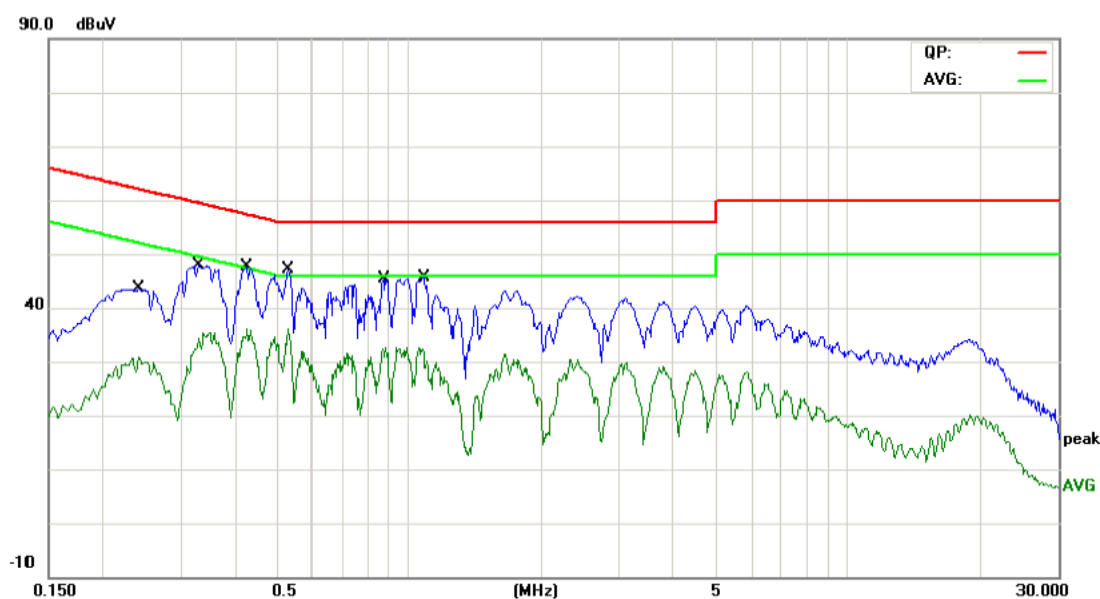

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV | Limit<br>dBuV | Over<br>dB | Detector |
|-----|-----|--------------|--------------------------|-------------------------|--------------------------|---------------|------------|----------|
| 1   | *   | 0.3300       | 31.66                    | 9.57                    | 41.23                    | 59.45         | -18.22     | QP       |
| 2   |     | 0.3300       | 14.11                    | 9.57                    | 23.68                    | 49.45         | -25.77     | AVG      |
| 3   |     | 0.2420       | 26.21                    | 9.62                    | 35.83                    | 62.02         | -26.19     | QP       |
| 4   |     | 0.2420       | 8.97                     | 9.62                    | 18.59                    | 52.02         | -33.43     | AVG      |
| 5   |     | 0.4260       | 28.14                    | 9.58                    | 37.72                    | 57.33         | -19.61     | QP       |
| 6   |     | 0.4260       | 10.77                    | 9.58                    | 20.35                    | 47.33         | -26.98     | AVG      |
| 7   |     | 0.5299       | 27.05                    | 9.58                    | 36.63                    | 56.00         | -19.37     | QP       |
| 8   |     | 0.5299       | 9.20                     | 9.58                    | 18.78                    | 46.00         | -27.22     | AVG      |
| 9   |     | 0.8740       | 25.32                    | 9.59                    | 34.91                    | 56.00         | -21.09     | QP       |
| 10  |     | 0.8740       | 8.11                     | 9.59                    | 17.70                    | 46.00         | -28.30     | AVG      |
| 11  |     | 1.0820       | 27.63                    | 9.59                    | 37.22                    | 56.00         | -18.78     | QP       |
| 12  |     | 1.0820       | 9.85                     | 9.59                    | 19.44                    | 46.00         | -26.56     | AVG      |

Emission Level= Read Level+ Correct Factor



## 5. Radiated Emission Test

### 5.1 Test Standard and Limit

#### 5.1.1 Test Standard

FCC Part 15.247(d)

#### 5.1.2 Test Limit

**Radiated Emission Limits (9kHz~1000MHz)**

| Frequency (MHz) | Field Strength (microvolt/meter) | Measurement Distance (meters) |
|-----------------|----------------------------------|-------------------------------|
| 0.009~0.490     | 2400/F(KHz)                      | 300                           |
| 0.490~1.705     | 24000/F(KHz)                     | 30                            |
| 1.705~30.0      | 30                               | 30                            |
| 30~88           | 100                              | 3                             |
| 88~216          | 150                              | 3                             |
| 216~960         | 200                              | 3                             |
| Above 960       | 500                              | 3                             |

**Radiated Emission Limit (Above 1000MHz)**


| Frequency (MHz) | Distance Meters(at 3m) |                  |
|-----------------|------------------------|------------------|
|                 | Peak (dBuV/m)          | Average (dBuV/m) |
| Above 1000      | 74                     | 54               |

**Note:**


(1) The tighter limit applies at the band edges.

(2) Emission Level (dBuV/m)=20log Emission Level (uV/m)

## 5.2 Test Setup

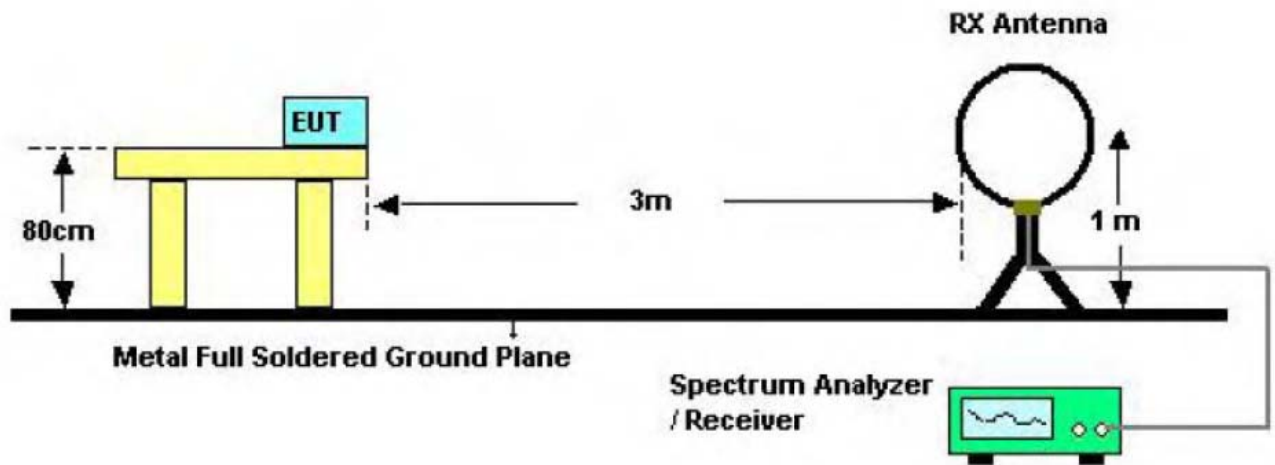


Below 30MHz Test Setup

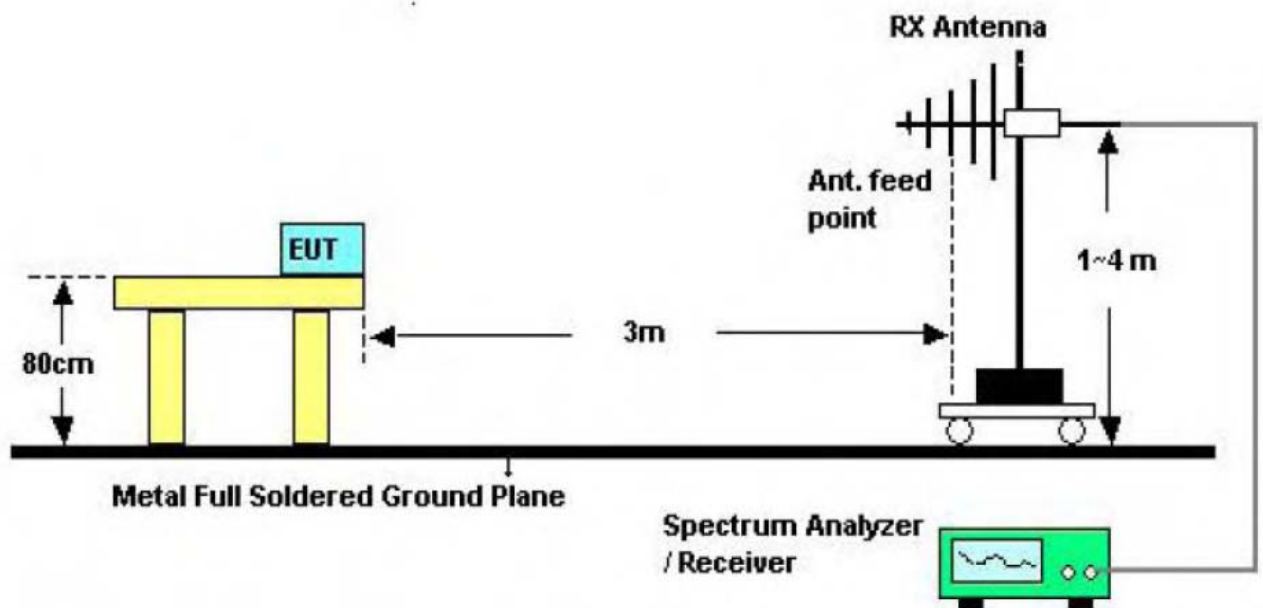

Below 1000MHz Test Setup



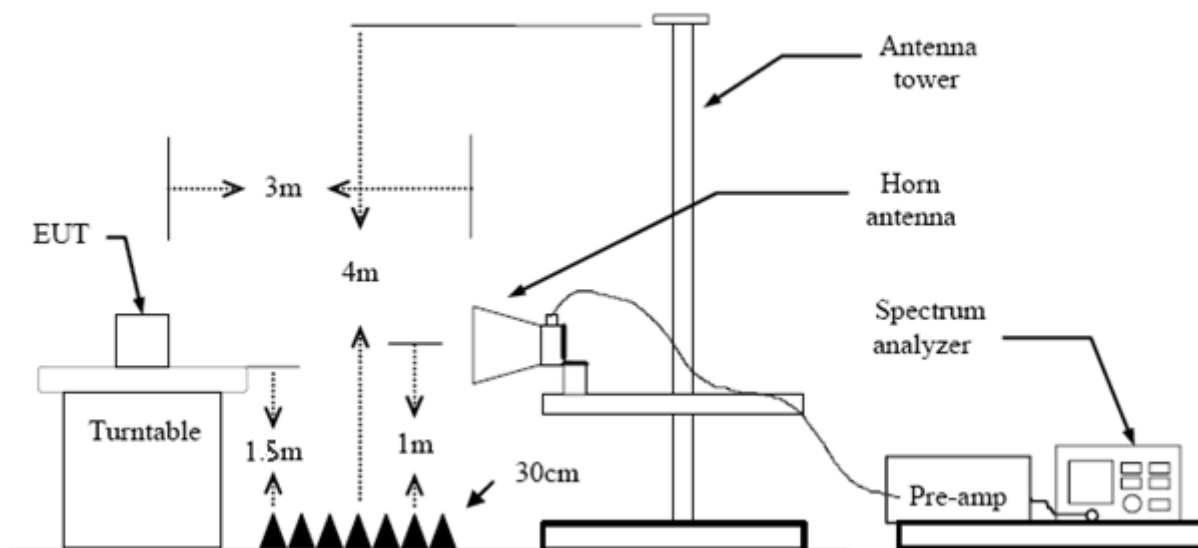

Above 1GHz Test Setup

### 5.3 Test Procedure

- (1) The measuring distance of 3m shall be used for measurements at frequency up to 1GHz and above 1 GHz. The EUT was placed on a rotating 0.8m high above ground, the table was rotated 360 degrees to determine the position of the highest radiation.
- (2) Measurements at frequency above 1GHz. The EUT was placed on a rotating 1.5m high above the ground. RF absorbers covered the ground plane with a minimum area of 3.0m by 3.0m between the EUT and measurement receiver antenna. The RF absorber shall not exceed 30cm in high above the conducting floor. The table was rotated 360 degrees to determine the position of the highest radiation.
- (3) The Test antenna shall vary between 1m and 4m, Both Horizontal and Vertical antenna are set to make measurement.
- (4) The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- (5) If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit Bellow 1 GHz, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed. But the Peak Value and average value both need to comply with applicable limit above 1 GHz.
- (6) Testing frequency range below 1GHz the measuring instrument use VBW=120 kHz with Quasi-peak detection.
- (7) Testing frequency range above 1GHz the measuring instrument use RBW=1 MHz and VBW=3 MHz with Peak Detector for Peak Values, and use RBW=1 MHz and VBW=10 Hz with Peak Detector for Average Values.
- (8) For the actual test configuration, please see the test setup photo.

## 5.4 EUT Operating Condition

The Equipment Under Test was set to Continual Transmitting in maximum power.

## 5.5 Test Data

Remark: During testing above 1GHz the measuring instrument use RBW=1 MHz and VBW=3 MHz with Peak Detector for Peak Values, and use RBW=1 MHz and VBW=10 Hz with Peak Detector for Average Values.

Test data please refer the following pages.




### 9 KHz~30 MHz

From 9 KHz to 30 MHz: Conclusion: PASS

Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

### 30MHz~1GHz

|                      |                                          |                           |           |
|----------------------|------------------------------------------|---------------------------|-----------|
| <b>EUT:</b>          | Bone-conduction headphone and sunglasses | <b>Model:</b>             | Vision 5B |
| <b>Temperature:</b>  | 25℃                                      | <b>Relative Humidity:</b> | 55%       |
| <b>Test Voltage:</b> | DC 3.7V                                  |                           |           |
| <b>Ant. Pol.</b>     | Horizontal                               |                           |           |
| <b>Test Mode:</b>    | BLE TX 2402 Mode                         |                           |           |
| <b>Remark:</b>       | Only worse case is reported              |                           |           |

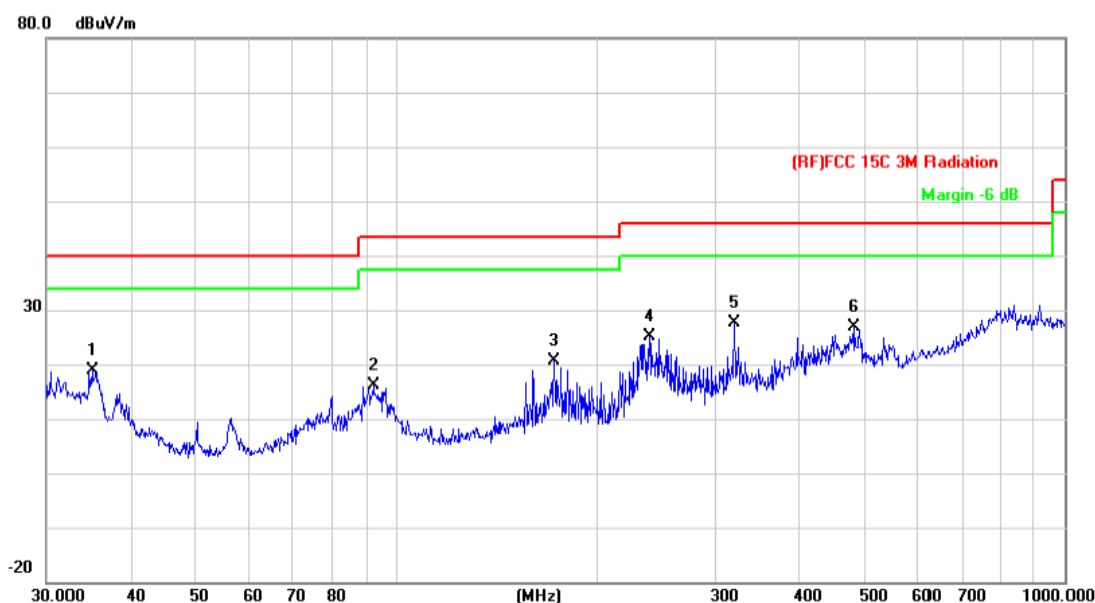


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB/m | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Over<br>dB | Detector |
|-----|-----|--------------|--------------------------|---------------------------|----------------------------|-----------------|------------|----------|
| 1   |     | 35.0048      | 36.13                    | -17.22                    | 18.91                      | 40.00           | -21.09     | QP       |
| 2   |     | 92.1388      | 38.78                    | -22.54                    | 16.24                      | 43.50           | -27.26     | QP       |
| 3   |     | 171.9946     | 41.39                    | -20.78                    | 20.61                      | 43.50           | -22.89     | QP       |
| 4   |     | 238.3102     | 43.29                    | -18.27                    | 25.02                      | 46.00           | -20.98     | QP       |
| 5   | *   | 319.9370     | 43.52                    | -15.89                    | 27.63                      | 46.00           | -18.37     | QP       |
| 6   |     | 483.9094     | 37.99                    | -11.14                    | 26.85                      | 46.00           | -19.15     | QP       |

\*:Maximum data    x:Over limit    !:over margin

**Emission Level= Read Level+ Correct Factor**

|                      |                                          |                           |           |
|----------------------|------------------------------------------|---------------------------|-----------|
| <b>EUT:</b>          | Bone-conduction headphone and sunglasses | <b>Model:</b>             | Vision 5B |
| <b>Temperature:</b>  | 25°C                                     | <b>Relative Humidity:</b> | 55%       |
| <b>Test Voltage:</b> | DC 3.7V                                  |                           |           |
| <b>Ant. Pol.</b>     | Vertical                                 |                           |           |
| <b>Test Mode:</b>    | BLE TX 2402 Mode                         |                           |           |
| <b>Remark:</b>       | Only worse case is reported              |                           |           |

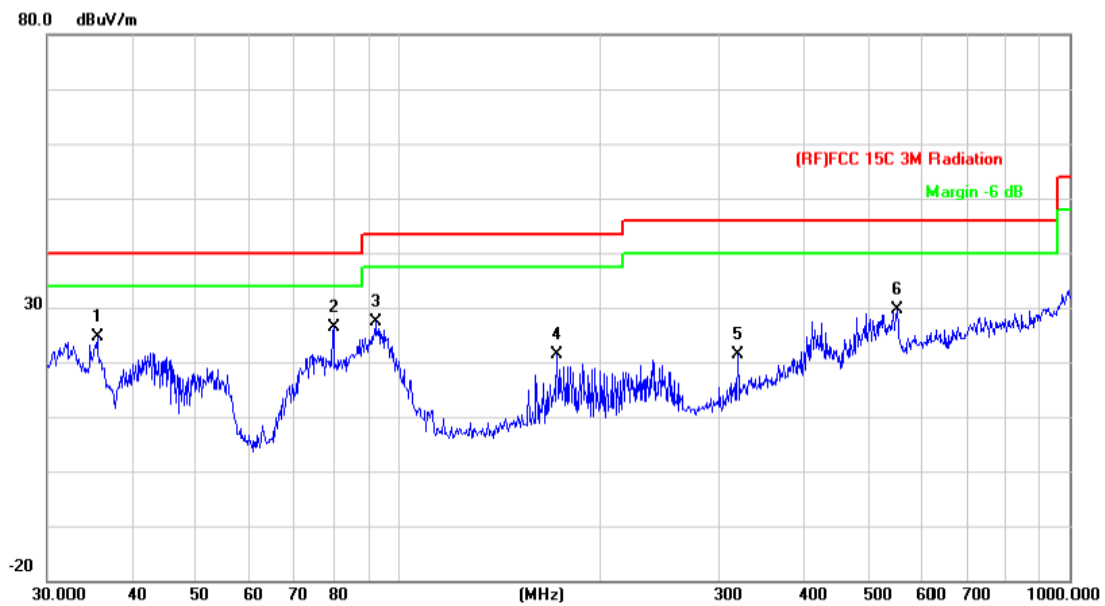

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Over   |          |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|
|     |     | MHz      | dBuV          | dB/m           | dBuV/m      | dBuV/m | dB     | Detector |
| 1   |     | 35.4993  | 42.05         | -17.53         | 24.52       | 40.00  | -15.48 | QP       |
| 2   | *   | 80.0806  | 49.69         | -23.34         | 26.35       | 40.00  | -13.65 | QP       |
| 3   |     | 92.1388  | 49.93         | -22.54         | 27.39       | 43.50  | -16.11 | QP       |
| 4   |     | 171.9946 | 42.13         | -20.78         | 21.35       | 43.50  | -22.15 | QP       |
| 5   |     | 319.9370 | 37.17         | -15.89         | 21.28       | 46.00  | -24.72 | QP       |
| 6   |     | 552.8832 | 39.23         | -9.50          | 29.73       | 46.00  | -16.27 | QP       |


\*:Maximum data x:Over limit !:over margin

**Emission Level= Read Level+ Correct Factor**



**Above 1GHz**


|                      |                                                                              |                           |           |
|----------------------|------------------------------------------------------------------------------|---------------------------|-----------|
| <b>EUT:</b>          | Bone-conduction headphone and sunglasses                                     | <b>Model:</b>             | Vision 5B |
| <b>Temperature:</b>  | 25°C                                                                         | <b>Relative Humidity:</b> | 55%       |
| <b>Test Voltage:</b> | DC 3.7V                                                                      |                           |           |
| <b>Ant. Pol.</b>     | Horizontal                                                                   |                           |           |
| <b>Test Mode:</b>    | BLE Mode TX 2402 MHz                                                         |                           |           |
| <b>Remark:</b>       | No report for the emission which more than 10 dB below the prescribed limit. |                           |           |

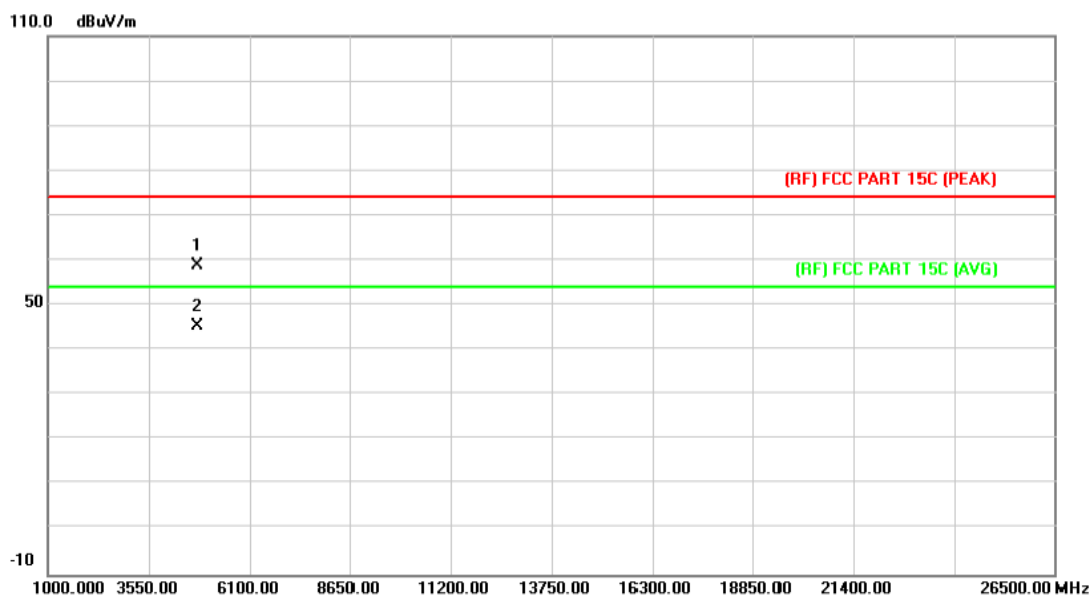

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB/m | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Over<br>dB | Detector |
|-----|-----|--------------|--------------------------|---------------------------|----------------------------|-----------------|------------|----------|
| 1   |     | 4803.014     | 47.74                    | 11.15                     | 58.89                      | 74.00           | -15.11     | peak     |
| 2   | *   | 4803.632     | 34.22                    | 11.16                     | 45.38                      | 54.00           | -8.62      | AVG      |

**Emission Level= Read Level+ Correct Factor**

|                      |                                                                              |                           |           |
|----------------------|------------------------------------------------------------------------------|---------------------------|-----------|
| <b>EUT:</b>          | Bone-conduction headphone and sunglasses                                     | <b>Model:</b>             | Vision 5B |
| <b>Temperature:</b>  | 25℃                                                                          | <b>Relative Humidity:</b> | 55%       |
| <b>Test Voltage:</b> | DC 3.7V                                                                      |                           |           |
| <b>Ant. Pol.</b>     | Vertical                                                                     |                           |           |
| <b>Test Mode:</b>    | BLE Mode TX 2402 MHz                                                         |                           |           |
| <b>Remark:</b>       | No report for the emission which more than 10 dB below the prescribed limit. |                           |           |

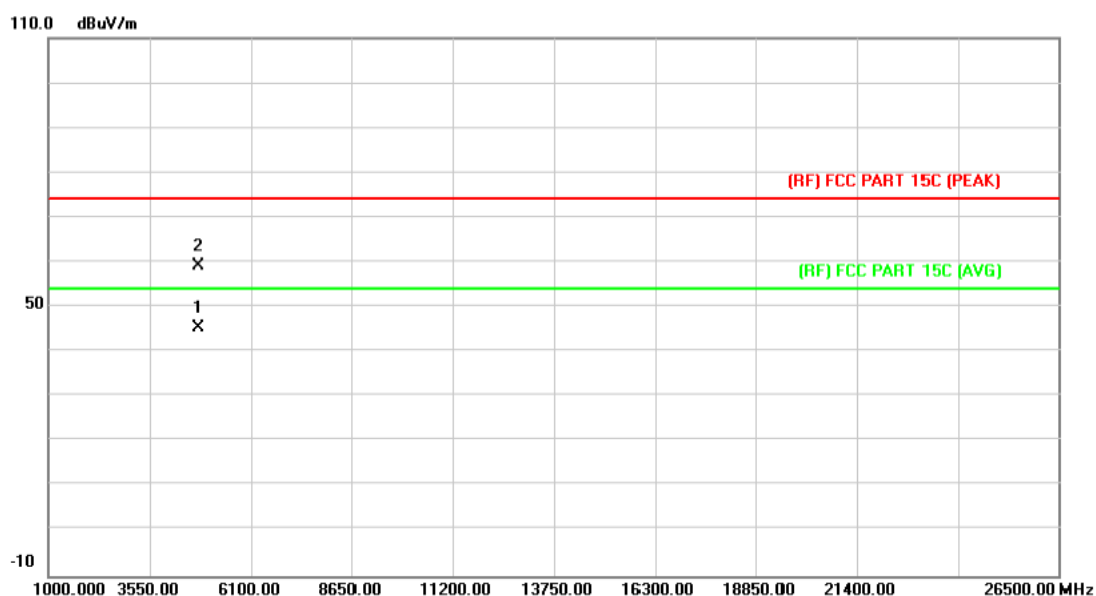


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Over   | Detector |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|
|     |     | MHz      | dBuV          | dB/m           | dBuV/m      | dBuV/m | dB     |          |
| 1   | *   | 4803.106 | 34.26         | 11.15          | 45.41       | 54.00  | -8.59  | AVG      |
| 2   |     | 4803.800 | 47.87         | 11.16          | 59.03       | 74.00  | -14.97 | peak     |

Emission Level= Read Level+ Correct Factor




|                      |                                                                              |                           |           |
|----------------------|------------------------------------------------------------------------------|---------------------------|-----------|
| <b>EUT:</b>          | Bone-conduction headphone and sunglasses                                     | <b>Model:</b>             | Vision 5B |
| <b>Temperature:</b>  | 25°C                                                                         | <b>Relative Humidity:</b> | 55%       |
| <b>Test Voltage:</b> | DC 3.7V                                                                      |                           |           |
| <b>Ant. Pol.</b>     | Horizontal                                                                   |                           |           |
| <b>Test Mode:</b>    | BLE Mode TX 2442 MHz                                                         |                           |           |
| <b>Remark:</b>       | No report for the emission which more than 10 dB below the prescribed limit. |                           |           |

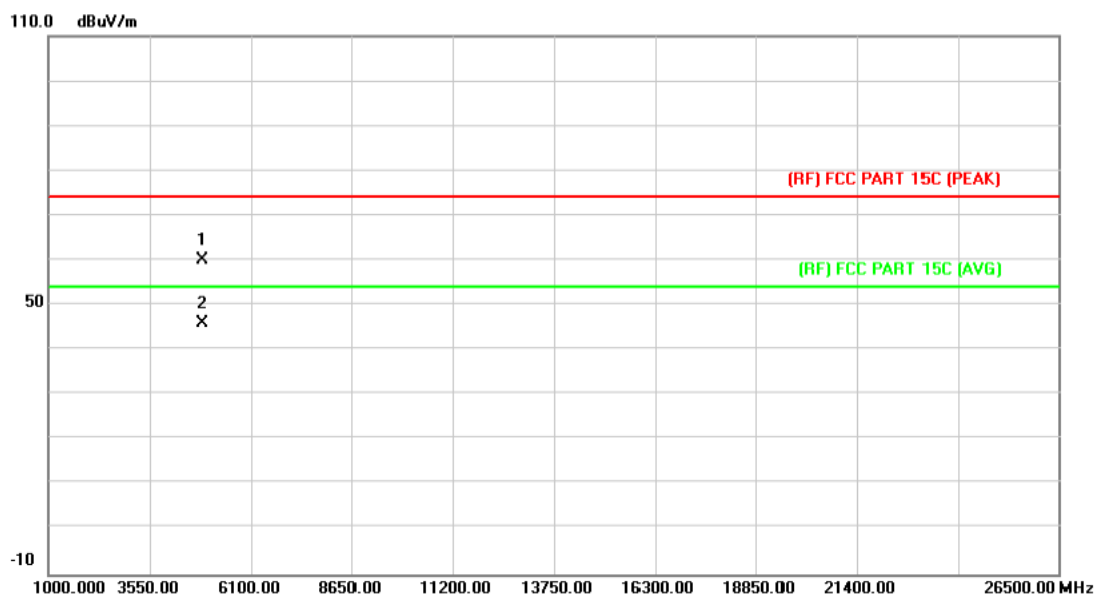

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measure-ment | Limit  | Over   |          |
|-----|-----|----------|---------------|----------------|--------------|--------|--------|----------|
|     |     | MHz      | dBuV          | dB/m           | dBuV/m       | dBuV/m | dB     | Detector |
| 1   |     | 4883.096 | 48.60         | 11.35          | 59.95        | 74.00  | -14.05 | peak     |
| 2   | *   | 4884.684 | 34.65         | 11.37          | 46.02        | 54.00  | -7.98  | AVG      |

Emission Level= Read Level+ Correct Factor

|                      |                                                                              |                           |           |
|----------------------|------------------------------------------------------------------------------|---------------------------|-----------|
| <b>EUT:</b>          | Bone-conduction headphone and sunglasses                                     | <b>Model:</b>             | Vision 5B |
| <b>Temperature:</b>  | 25°C                                                                         | <b>Relative Humidity:</b> | 55%       |
| <b>Test Voltage:</b> | DC 3.7V                                                                      |                           |           |
| <b>Ant. Pol.</b>     | Vertical                                                                     |                           |           |
| <b>Test Mode:</b>    | BLE Mode TX 2442 MHz                                                         |                           |           |
| <b>Remark:</b>       | No report for the emission which more than 10 dB below the prescribed limit. |                           |           |

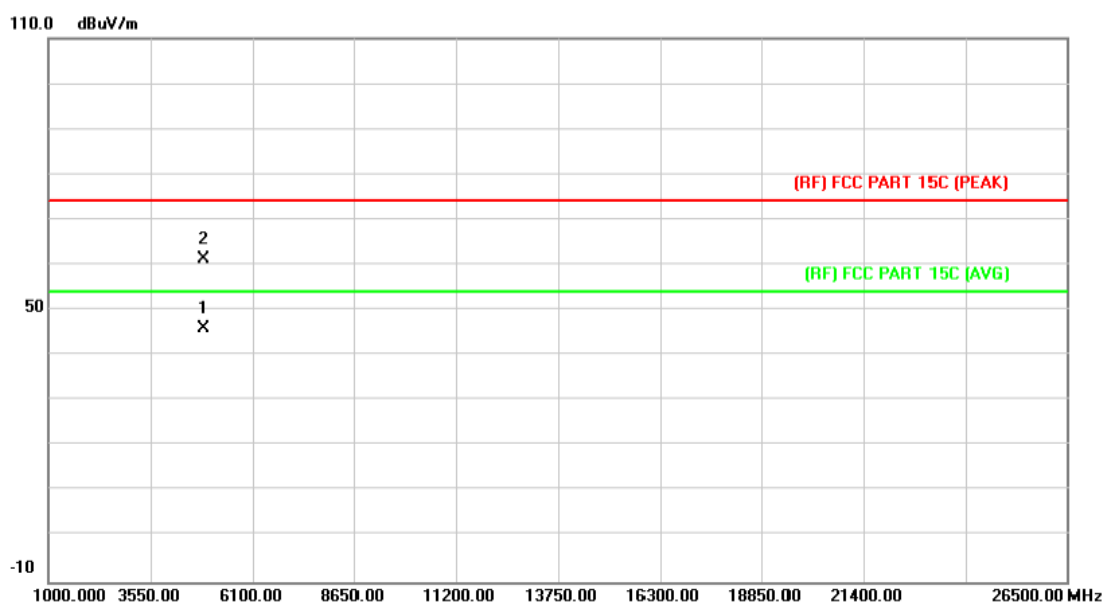


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB/m | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Over<br>dB | Detector |
|-----|-----|--------------|--------------------------|---------------------------|----------------------------|-----------------|------------|----------|
| 1   | *   | 4884.368     | 34.66                    | 11.36                     | 46.02                      | 54.00           | -7.98      | AVG      |
| 2   |     | 4884.658     | 49.79                    | 11.37                     | 61.16                      | 74.00           | -12.84     | peak     |

Emission Level= Read Level+ Correct Factor




|                      |                                                                              |                           |           |
|----------------------|------------------------------------------------------------------------------|---------------------------|-----------|
| <b>EUT:</b>          | Bone-conduction headphone and sunglasses                                     | <b>Model:</b>             | Vision 5B |
| <b>Temperature:</b>  | 25°C                                                                         | <b>Relative Humidity:</b> | 55%       |
| <b>Test Voltage:</b> | DC 3.7V                                                                      |                           |           |
| <b>Ant. Pol.</b>     | Horizontal                                                                   |                           |           |
| <b>Test Mode:</b>    | BLE Mode TX 2480 MHz                                                         |                           |           |
| <b>Remark:</b>       | No report for the emission which more than 10 dB below the prescribed limit. |                           |           |

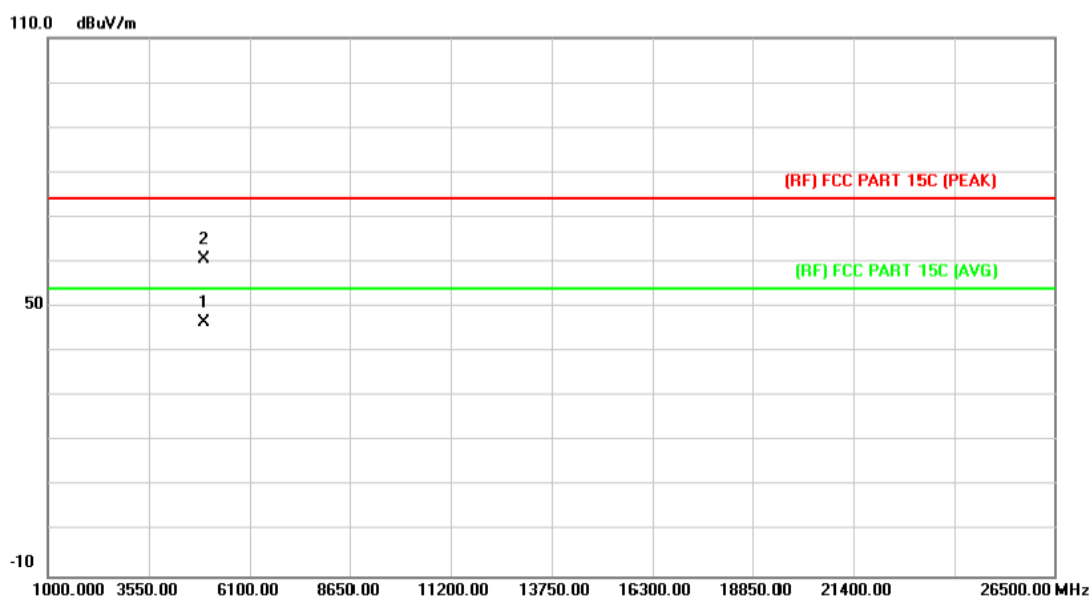

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Over   |          |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|
|     |     | MHz      | dBuV          | dB/m           | dBuV/m      | dBuV/m | dB     | Detector |
| 1   | *   | 4960.264 | 34.94         | 11.55          | 46.49       | 54.00  | -7.51  | AVG      |
| 2   |     | 4960.276 | 49.02         | 11.55          | 60.57       | 74.00  | -13.43 | peak     |

Emission Level= Read Level+ Correct Factor

|                      |                                                                              |                           |           |
|----------------------|------------------------------------------------------------------------------|---------------------------|-----------|
| <b>EUT:</b>          | Bone-conduction headphone and sunglasses                                     | <b>Model:</b>             | Vision 5B |
| <b>Temperature:</b>  | 25℃                                                                          | <b>Relative Humidity:</b> | 55%       |
| <b>Test Voltage:</b> | DC 3.7V                                                                      |                           |           |
| <b>Ant. Pol.</b>     | Vertical                                                                     |                           |           |
| <b>Test Mode:</b>    | BLE Mode TX 2480 MHz                                                         |                           |           |
| <b>Remark:</b>       | No report for the emission which more than 10 dB below the prescribed limit. |                           |           |

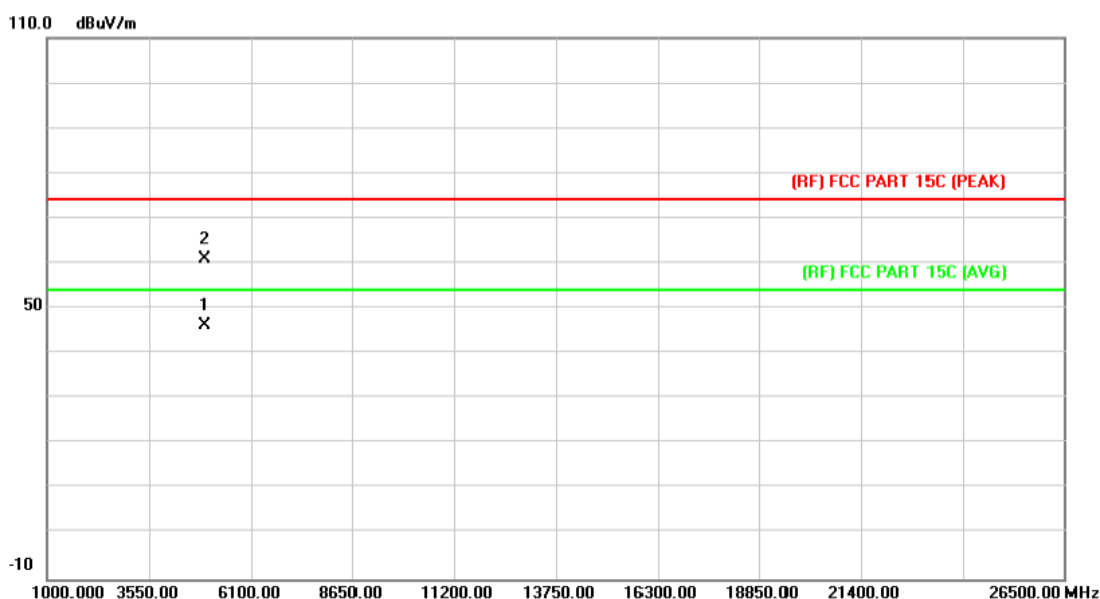

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB/m | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Over<br>dB | Detector |
|-----|-----|--------------|--------------------------|---------------------------|----------------------------|-----------------|------------|----------|
| 1   | *   | 4960.368     | 34.81                    | 11.55                     | 46.36                      | 54.00           | -7.64      | AVG      |
| 2   |     | 4960.982     | 49.54                    | 11.55                     | 61.09                      | 74.00           | -12.91     | peak     |

Emission Level= Read Level+ Correct Factor



## 6. Restricted Bands Requirement

### 6.1 Test Standard and Limit


#### 6.1.1 Test Standard

FCC Part 15.247(d) FCC Part 15.205

#### 6.1.2 Test Limit

| Restricted Frequency<br>Band<br>(MHz) | Distance Meters(at 3m) |                     |
|---------------------------------------|------------------------|---------------------|
|                                       | Peak<br>(dBuV/m)       | Average<br>(dBuV/m) |
| 2310 ~2390                            | 74                     | 54                  |
| 2483.5 ~2500                          | 74                     | 54                  |

### 6.2 Test Setup

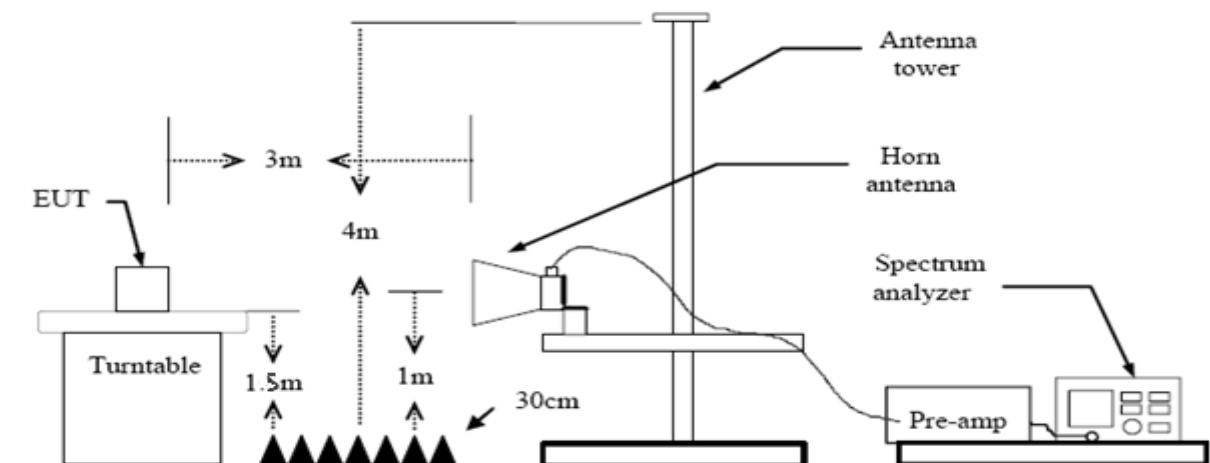

### 6.3 Test Procedure

- (1) The measuring distance of 3m shall be used for measurements at frequency up to 1GHz and above 1 GHz. The EUT was placed on a rotating 0.8m high above ground, the table was rotated 360 degrees to determine the position of the highest radiation.
- (2) Measurements at frequency above 1GHz. The EUT was placed on a rotating 1.5m high above the ground. RF absorbers covered the ground plane with a minimum area of 3.0m by 3.0m between the EUT and measurement receiver antenna. The RF absorber shall not exceed 30cm in high above the conducting floor. The table was rotated 360 degrees to determine the position of the highest radiation.
- (3) The Test antenna shall vary between 1m and 4m, Both Horizontal and Vertical antenna are set to make measurement.
- (4) The initial step in collecting conducted emission data is a spectrum analyzer peak detector

mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.

- (5) If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit Bellow 1 GHz, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed. But the Peak Value and average value both need to comply with applicable limit above 1 GHz.
- (6) Testing frequency range below 1GHz the measuring instrument use VBW=120 kHz with Quasi-peak detection.
- (7) Testing frequency range above 1GHz the measuring instrument use RBW=1 MHz and VBW=3 MHz with Peak Detector for Peak Values, and use RBW=1 MHz and VBW=10 Hz with Peak Detector for Average Values.
- (8) For the actual test configuration, please see the test setup photo.

#### 6.4 EUT Operating Condition

The Equipment Under Test was set to Continual Transmitting in maximum power.

#### 6.5 Test Data


Remark: During testing above 1GHz the measuring instrument use RBW=1 MHz and VBW=3 MHz with Peak Detector for Peak Values, and use RBW=1 MHz and VBW=10 Hz with Peak Detector for Average Values.

Test data please refer the following pages.



**(1) Radiation Test**


|                      |                                          |                           |           |
|----------------------|------------------------------------------|---------------------------|-----------|
| <b>EUT:</b>          | Bone-conduction headphone and sunglasses | <b>Model:</b>             | Vision 5B |
| <b>Temperature:</b>  | 25°C                                     | <b>Relative Humidity:</b> | 55%       |
| <b>Test Voltage:</b> | DC 3.7V                                  |                           |           |
| <b>Ant. Pol.</b>     | Horizontal                               |                           |           |
| <b>Test Mode:</b>    | BLE Mode TX 2402 MHz                     |                           |           |
| <b>Remark:</b>       | N/A                                      |                           |           |

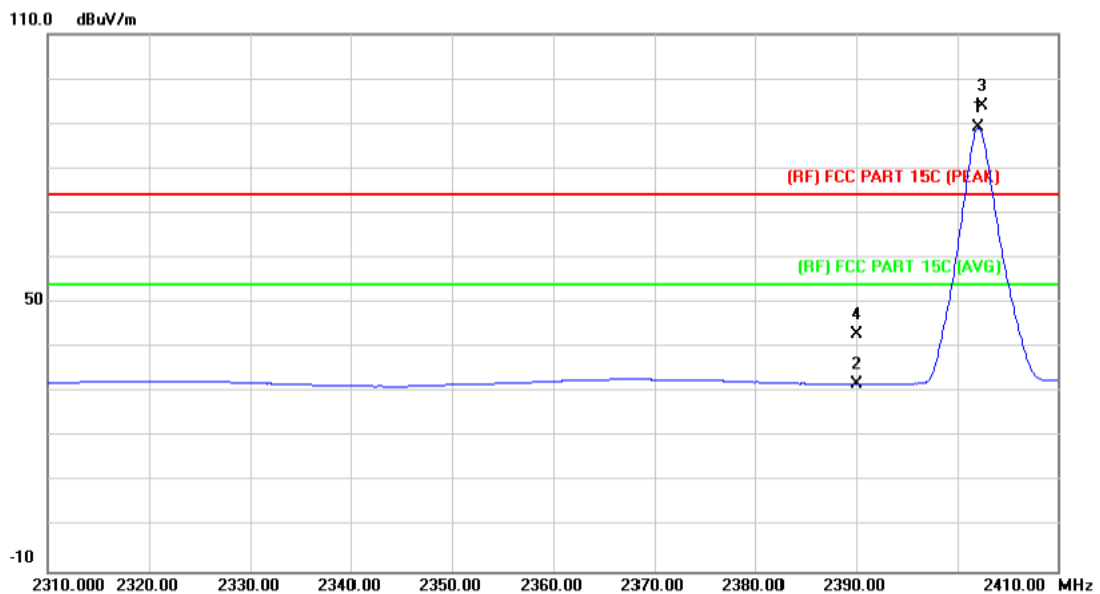

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit                 | Over   |          |
|-----|-----|----------|---------------|----------------|-------------|-----------------------|--------|----------|
|     |     | MHz      | dBuV          | dB/m           | dBuV/m      | dBuV/m                | dB     | Detector |
| 1   | *   | 2402.100 | 89.30         | -0.21          | 89.09       | Fundamental Frequency |        | AVG      |
| 2   |     | 2390.000 | 32.11         | -0.27          | 31.84       | 54.00                 | -22.16 | AVG      |
| 3   | X   | 2402.400 | 94.04         | -0.21          | 93.83       | Fundamental Frequency |        | peak     |
| 4   |     | 2390.000 | 43.27         | -0.27          | 43.00       | 74.00                 | -31.00 | peak     |

**Emission Level= Read Level+ Correct Factor**

|                      |                                          |                           |           |
|----------------------|------------------------------------------|---------------------------|-----------|
| <b>EUT:</b>          | Bone-conduction headphone and sunglasses | <b>Model:</b>             | Vision 5B |
| <b>Temperature:</b>  | 25°C                                     | <b>Relative Humidity:</b> | 55%       |
| <b>Test Voltage:</b> | DC 3.7V                                  |                           |           |
| <b>Ant. Pol.</b>     | Vertical                                 |                           |           |
| <b>Test Mode:</b>    | BLE Mode TX 2402 MHz                     |                           |           |
| <b>Remark:</b>       | N/A                                      |                           |           |

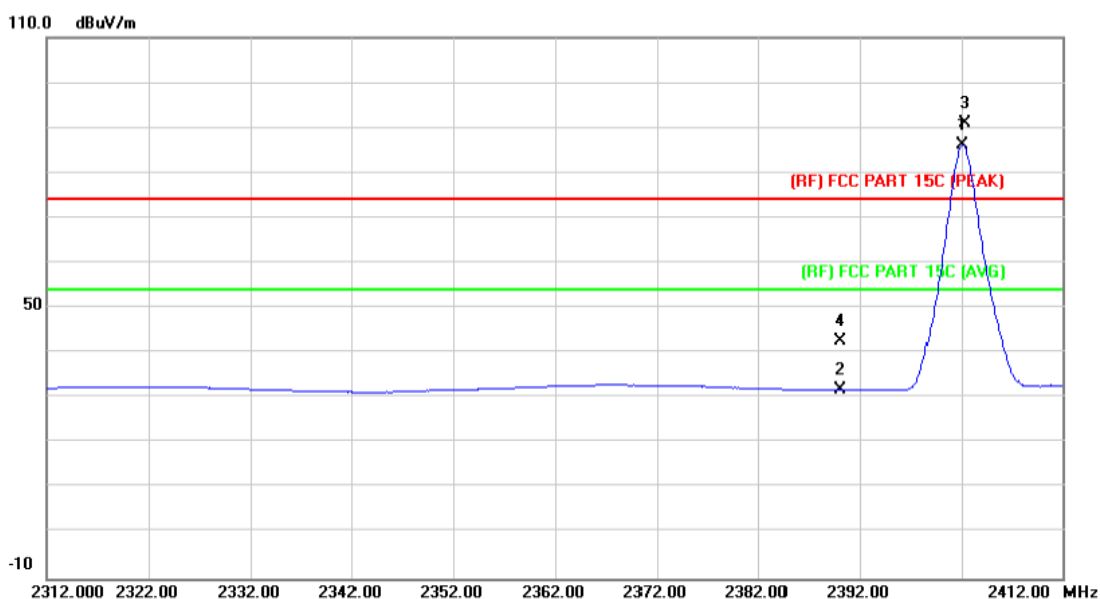


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB/m | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m       | Over<br>dB | Detector |
|-----|-----|--------------|--------------------------|---------------------------|----------------------------|-----------------------|------------|----------|
| 1   | *   | 2402.100     | 86.41                    | -0.21                     | 86.20                      | Fundamental Frequency |            | AVG      |
| 2   |     | 2390.000     | 32.01                    | -0.27                     | 31.74                      | 54.00                 | -22.26     | AVG      |
| 3   | X   | 2402.300     | 91.22                    | -0.21                     | 91.01                      | Fundamental Frequency |            | peak     |
| 4   |     | 2390.000     | 42.83                    | -0.27                     | 42.56                      | 74.00                 | -31.44     | peak     |

Emission Level= Read Level+ Correct Factor




|                      |                                          |                           |           |
|----------------------|------------------------------------------|---------------------------|-----------|
| <b>EUT:</b>          | Bone-conduction headphone and sunglasses | <b>Model:</b>             | Vision 5B |
| <b>Temperature:</b>  | 25°C                                     | <b>Relative Humidity:</b> | 55%       |
| <b>Test Voltage:</b> | DC 3.7V                                  |                           |           |
| <b>Ant. Pol.</b>     | Horizontal                               |                           |           |
| <b>Test Mode:</b>    | BLE Mode TX 2480 MHz                     |                           |           |
| <b>Remark:</b>       | N/A                                      |                           |           |

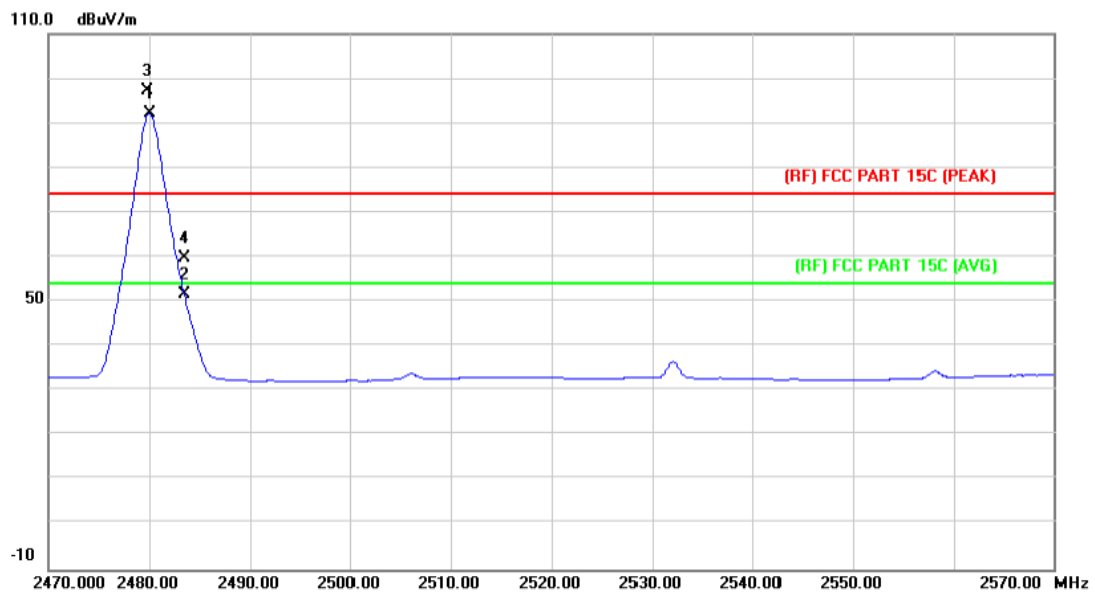

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB/m | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m       | Over<br>dB | Detector |
|-----|-----|--------------|--------------------------|---------------------------|----------------------------|-----------------------|------------|----------|
| 1   | *   | 2480.000     | 92.11                    | 0.17                      | 92.28                      | Fundamental Frequency |            | AVG      |
| 2   |     | 2483.500     | 51.38                    | 0.19                      | 51.57                      | 54.00                 | -2.43      | AVG      |
| 3   | X   | 2479.800     | 96.96                    | 0.17                      | 97.13                      | Fundamental Frequency |            | peak     |
| 4   |     | 2483.500     | 59.62                    | 0.19                      | 59.81                      | 74.00                 | -14.19     | peak     |

Emission Level= Read Level+ Correct Factor

|                      |                                          |                           |           |
|----------------------|------------------------------------------|---------------------------|-----------|
| <b>EUT:</b>          | Bone-conduction headphone and sunglasses | <b>Model:</b>             | Vision 5B |
| <b>Temperature:</b>  | 25°C                                     | <b>Relative Humidity:</b> | 55%       |
| <b>Test Voltage:</b> | DC 3.7V                                  |                           |           |
| <b>Ant. Pol.</b>     | Vertical                                 |                           |           |
| <b>Test Mode:</b>    | BLE Mode TX 2480 MHz                     |                           |           |
| <b>Remark:</b>       | N/A                                      |                           |           |

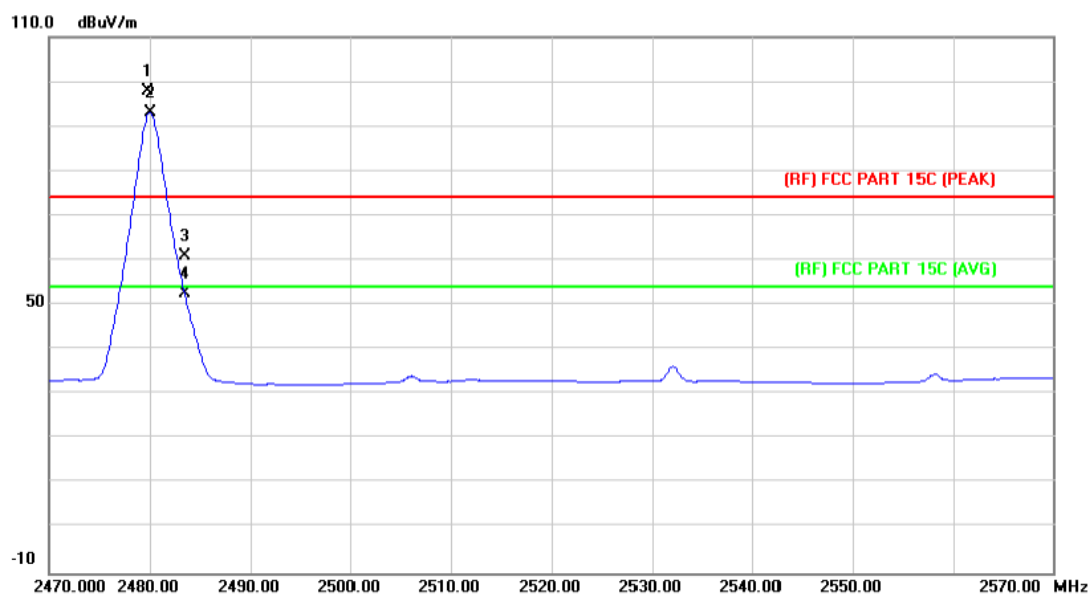



| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB/m | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m       | Over<br>dB | Detector |
|-----|-----|--------------|--------------------------|---------------------------|----------------------------|-----------------------|------------|----------|
| 1   | X   | 2479.800     | 97.79                    | 0.17                      | 97.96                      | Fundamental Frequency |            | peak     |
| 2   | *   | 2480.000     | 92.96                    | 0.17                      | 93.13                      | Fundamental Frequency |            | AVG      |
| 3   |     | 2483.500     | 60.72                    | 0.19                      | 60.91                      | 74.00                 | -13.09     | peak     |
| 4   |     | 2483.500     | 52.23                    | 0.19                      | 52.42                      | 54.00                 | -1.58      | AVG      |

Emission Level= Read Level+ Correct Factor



## (2) Conducted Test

|                      |                                                        |                           |           |
|----------------------|--------------------------------------------------------|---------------------------|-----------|
| <b>EUT:</b>          | Bone-conduction headphone and sunglasses               | <b>Model:</b>             | Vision 5B |
| <b>Temperature:</b>  | 25°C                                                   | <b>Relative Humidity:</b> | 55%       |
| <b>Test Voltage:</b> | DC 3.7V                                                |                           |           |
| <b>Test Mode:</b>    | BLE Mode TX 2402MHz / BLE Mode TX 2480MHz              |                           |           |
| <b>Remark:</b>       | The EUT is programed in continuously transmitting mode |                           |           |

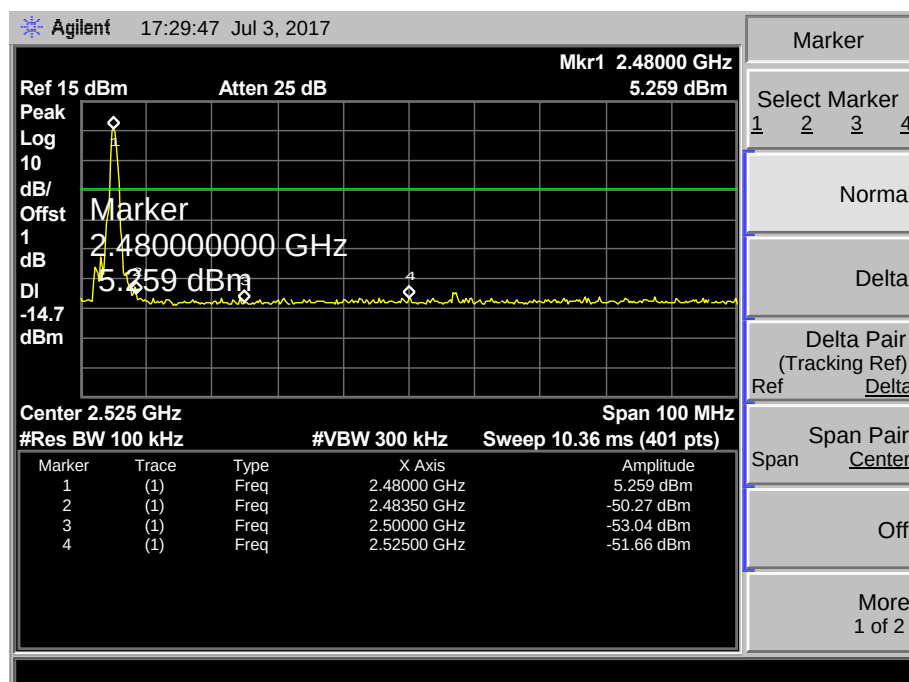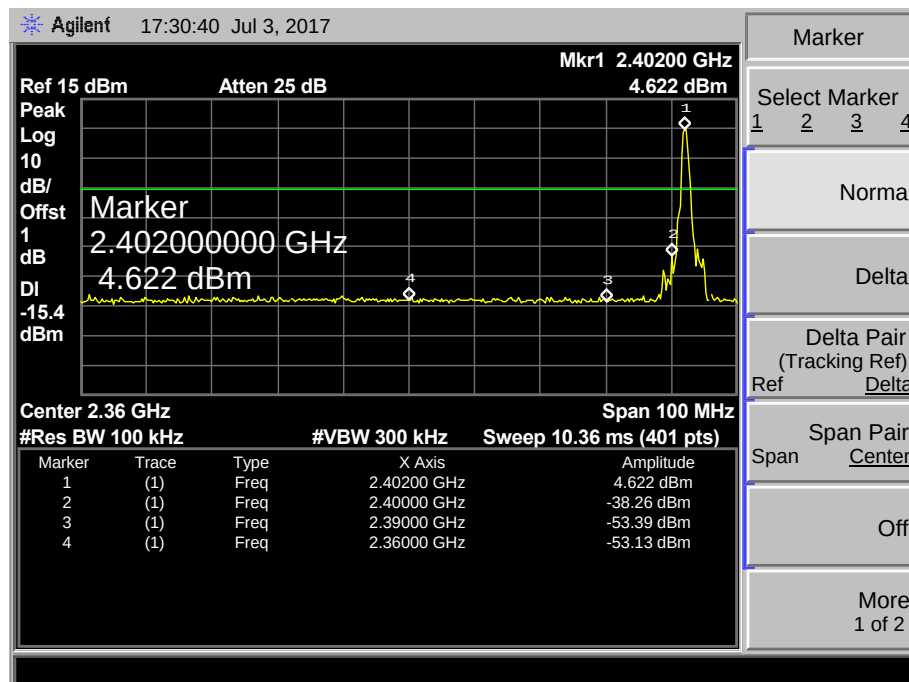

## 7. Bandwidth Test

### 7.1 Test Standard and Limit


#### 7.1.1 Test Standard

FCC Part 15.247 (a)(2)

#### 7.1.2 Test Limit

| FCC Part 15 Subpart C(15.247)/RSS-247 |                                   |                      |
|---------------------------------------|-----------------------------------|----------------------|
| Test Item                             | Limit                             | Frequency Range(MHz) |
| Bandwidth                             | $\geq 500$ KHz<br>(6dB bandwidth) | 2400~2483.5          |

### 7.2 Test Setup



### 7.3 Test Procedure

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) The bandwidth is measured at an amplitude level reduced 6dB from the reference level. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst –case (i.e the widest) bandwidth.
- (3) Measure the channel separation the spectrum analyzer was set to Resolution Bandwidth:100 kHz, and Video Bandwidth:300 kHz, Detector: Peak, Sweep Time set auto.

### 7.4 EUT Operating Condition

The EUT was set to continuously transmitting in each mode and low, middle and high channel for the test.



## 7.5 Test Data

|                         |                                          |                     |             |
|-------------------------|------------------------------------------|---------------------|-------------|
| EUT:                    | Bone-conduction headphone and sunglasses | Model:              | Vision 5B   |
| Temperature:            | 25℃                                      | Relative Humidity:  | 55%         |
| Test Voltage:           | DC 3.7V                                  |                     |             |
| Test Mode:              | BLE TX Mode                              |                     |             |
| Channel frequency (MHz) | 6dB Bandwidth (kHz)                      | 99% Bandwidth (kHz) | Limit (kHz) |
| 2402                    | 718.035                                  | 1050.6              | >=500       |
| 2442                    | 718.615                                  | 1050.5              |             |
| 2480                    | 715.607                                  | 1047.7              |             |
| BLE Mode                |                                          |                     |             |
| 2402 MHz                |                                          |                     |             |

Agilent

17:27:07 Jul 3, 2017

Ch Freq

2.402 GHz

Trig

Line

Occupied Bandwidth

Center 2.40200000 GHz

Ref 15 dBm

Atten 25 dB

#Peak

Log

10

dB/

Offst

1

dB

Center 2.402 GHz

Span 3 MHz

#Res BW 100 kHz

#VBW 300 kHz

Sweep 5 ms (401 pts)

Occupied Bandwidth

1.0506 MHz

Occ BW % Pwr

99.00 %

x dB

-6.00 dB

Transmit Freq Error

47.534 kHz

x dB Bandwidth

718.035 kHz

Freq/Channel

Center Freq

2.40200000 GHz

Start Freq

2.40050000 GHz

Stop Freq

2.40350000 GHz

CF Step

300.000000 kHz

Auto

Man

Freq Offset

0.00000000 Hz

Signal Track

On

Off


Scale Type

Log

Lin


BLE Mode

2442 MHz

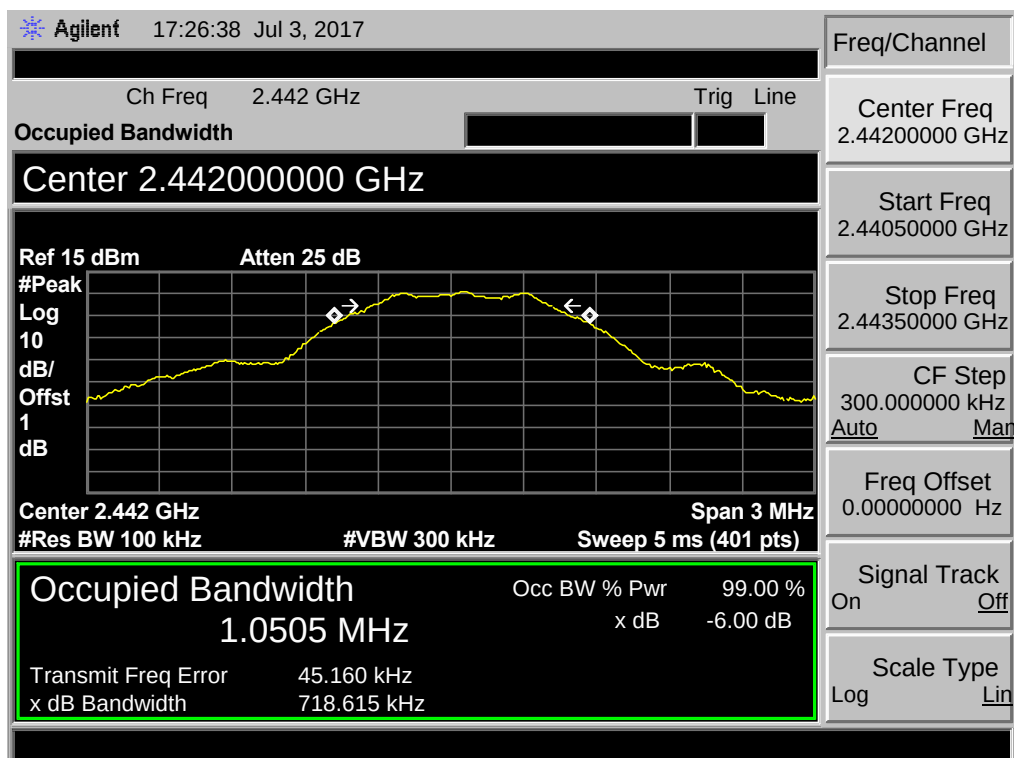

BLE Mode

2480 MHz

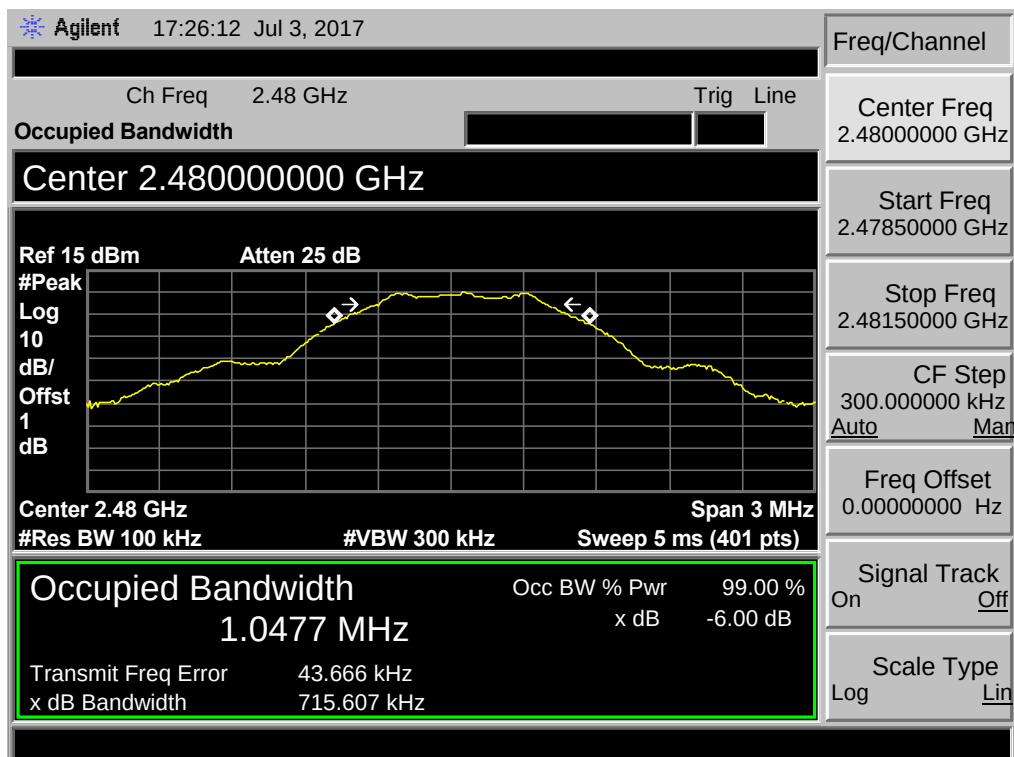



## 8. Peak Output Power Test

### 8.1 Test Standard and Limit


#### 8.1.1 Test Standard

FCC Part 15.247 (b)(3)

#### 8.1.2 Test Limit

| FCC Part 15 Subpart C(15.247)/RSS-247 |                  |                      |
|---------------------------------------|------------------|----------------------|
| Test Item                             | Limit            | Frequency Range(MHz) |
| Peak Output Power                     | 1 Watt or 30 dBm | 2400~2483.5          |

### 8.2 Test Setup



### 8.3 Test Procedure


The EUT was directly connected to the Spectrum Analyzer and antenna output port as show in the block diagram above. The measurement is according to section 9.1.1 of KDB 558074 D01 DTS Meas Guidance v04.

- (1) Set the  $RBW \geq DTS$  Bandwidth
- (2) Set  $VBW \geq 3 * RBW$
- (3) Set  $Span \geq 3 * RBW$
- (4) Sweep time=auto
- (5) Detector= peak
- (6) Trace mode= maxhold.
- (7) Allow trace to fully stabilize, and then use peak marker function to determine the peak amplitude level.

### 8.4 EUT Operating Condition

The EUT was set to continuously transmitting in the max power during the test.


## 8.5 Test Data

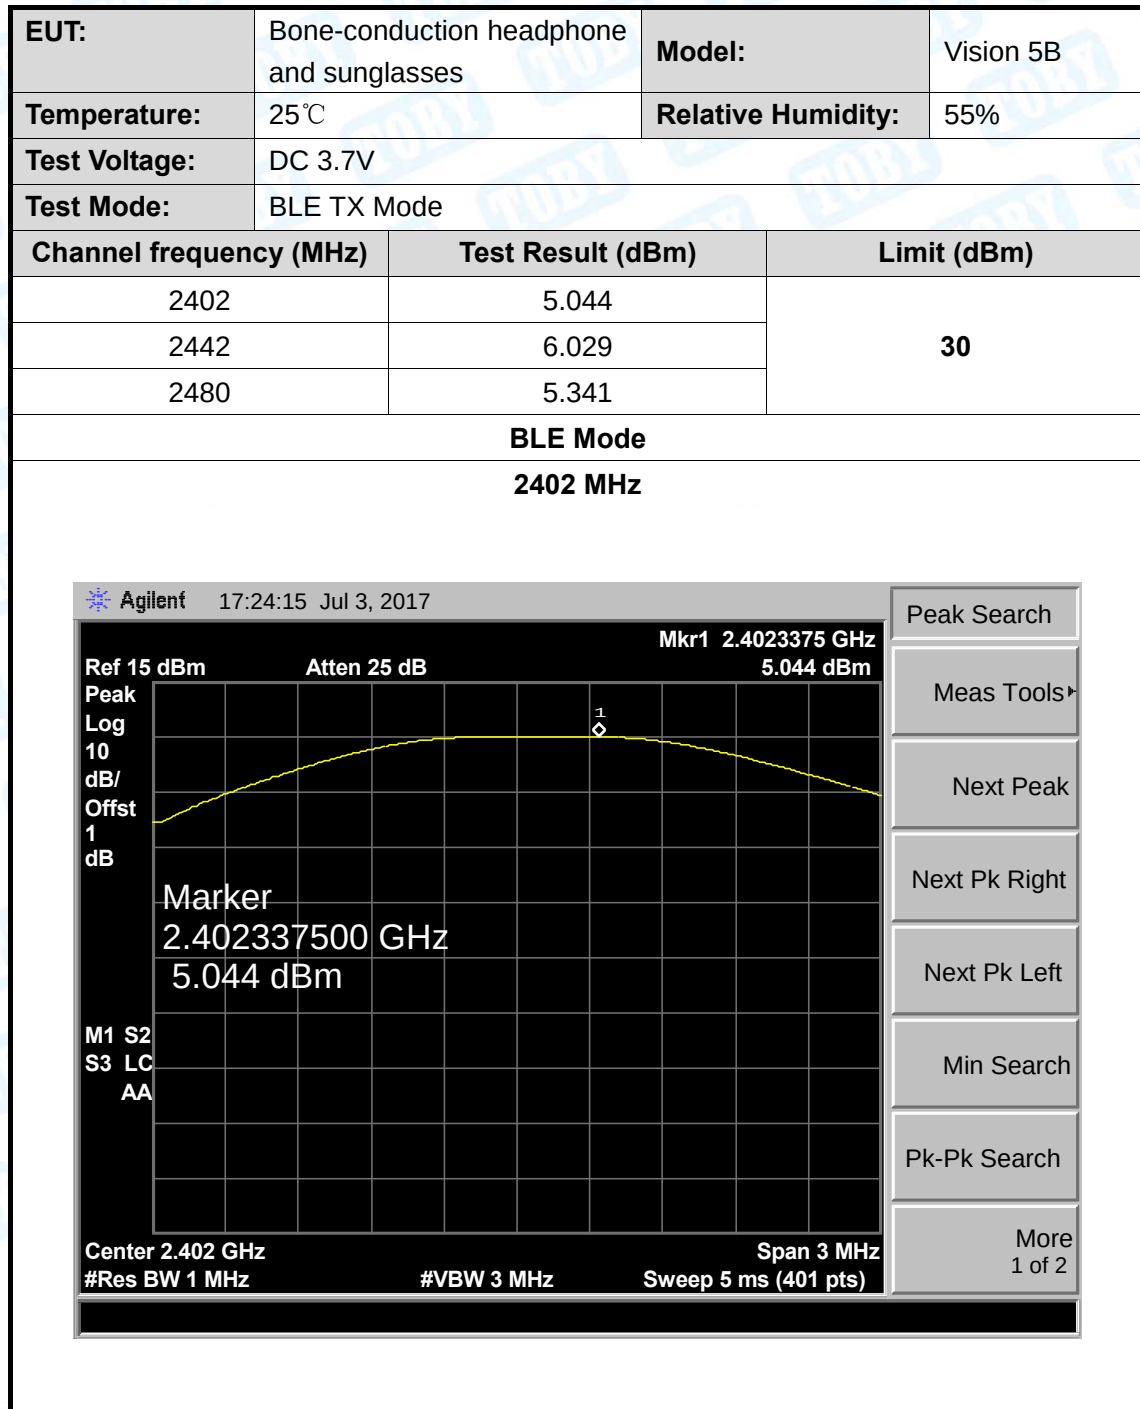




BLE Mode

2442 MHz

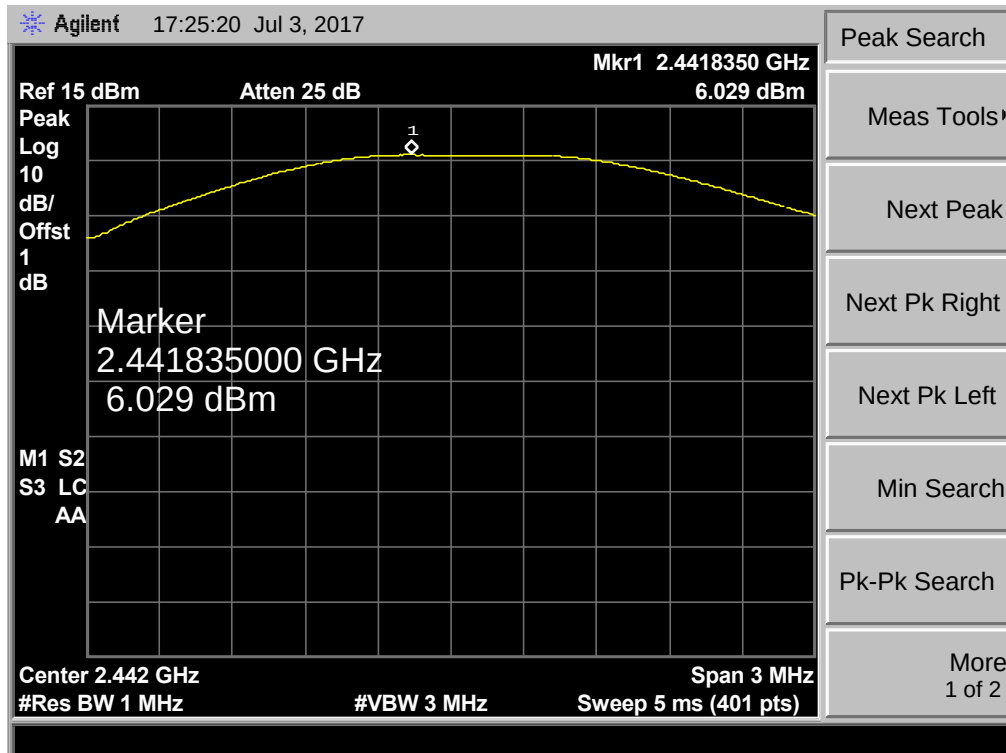

BLE Mode

2480 MHz

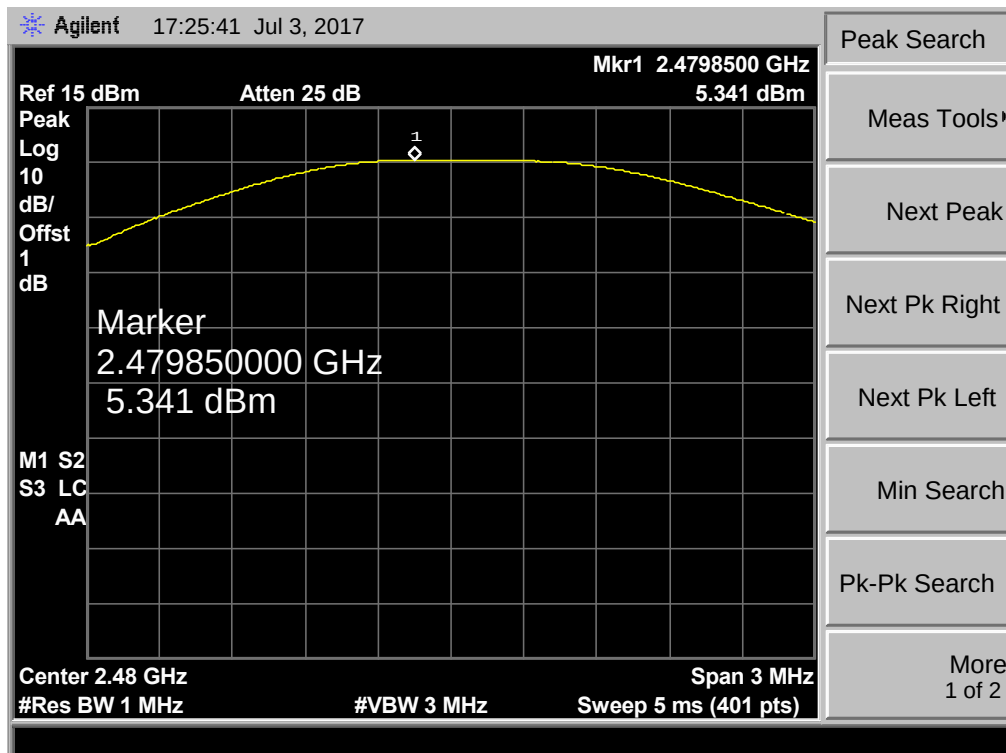

## 9. Power Spectral Density Test

### 9.1 Test Standard and Limit


#### 9.1.1 Test Standard

FCC Part 15.247 (e)

#### 9.1.2 Test Limit

| FCC Part 15 Subpart C(15.247) |                    |                      |
|-------------------------------|--------------------|----------------------|
| Test Item                     | Limit              | Frequency Range(MHz) |
| Power Spectral Density        | 8dBm(in any 3 kHz) | 2400~2483.5          |

### 9.2 Test Setup



### 9.3 Test Procedure

The EUT was directly connected to the Spectrum Analyzer and antenna output port as show in the block diagram above. The measurement according to section 10.2 of KDB 558074 D01 DTS Meas Guidance v04.

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) Set analyser center frequency to DTS channel center frequencyc.
- (3) Set the span to 1.5 times the DTS bandwidth.
- (4) Set the RBW to: 3 kHz
- (5) Set the VBW to: 10 kHz
- (6) Detector: peak
- (7) Sweep time: auto
- (8) Allow trace to fully stabilize. Then use the peak marker function to determine the maximum amplitude level.

### 9.4 EUT Operating Condition

The EUT was set to continuously transmitting in each mode and low, Midle and high channel for the test.




## 9.5 Test Data

| <b>EUT:</b>             | Bone-conduction headphone and sunglasses | <b>Model:</b>             | Vision 5B |
|-------------------------|------------------------------------------|---------------------------|-----------|
| <b>Temperature:</b>     | 25°C                                     | <b>Relative Humidity:</b> | 55%       |
| <b>Test Voltage:</b>    | DC 3.7V                                  |                           |           |
| <b>Test Mode:</b>       | BLE TX Mode                              |                           |           |
| Channel Frequency (MHz) | Power Density (dBm)                      | Limit (dBm)               | Result    |
| 2402                    | -10.41                                   | 8                         | PASS      |
| 2442                    | -9.193                                   |                           |           |
| 2480                    | -9.834                                   |                           |           |


## BLE Mode

2402 MHz

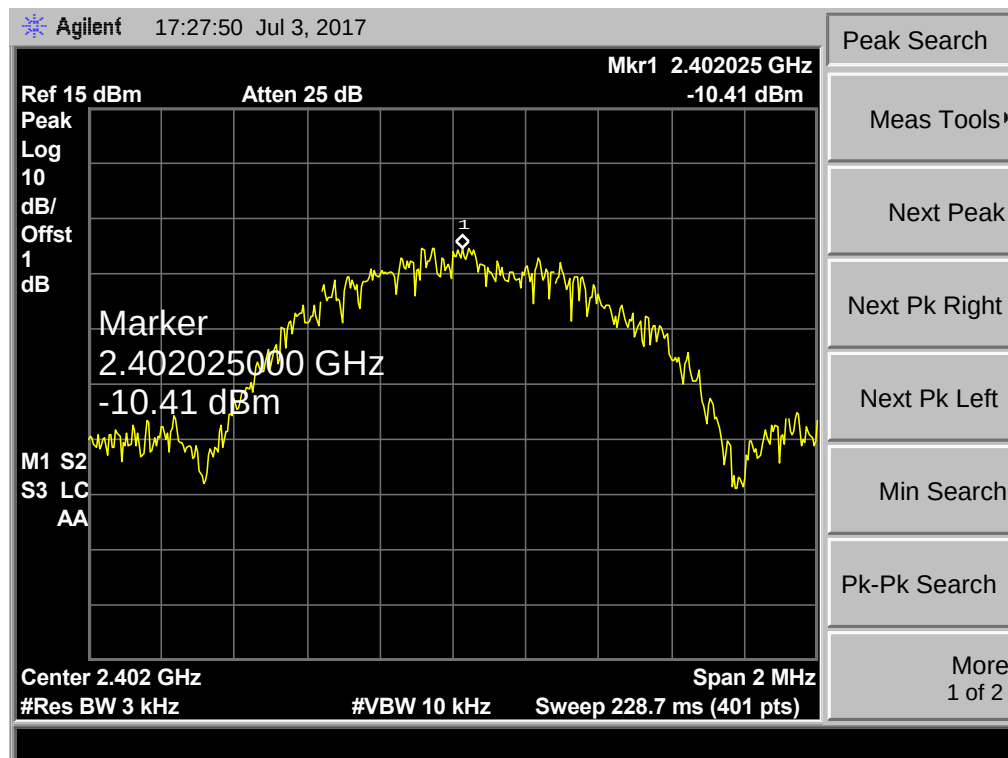


BLE Mode

2442 MHz

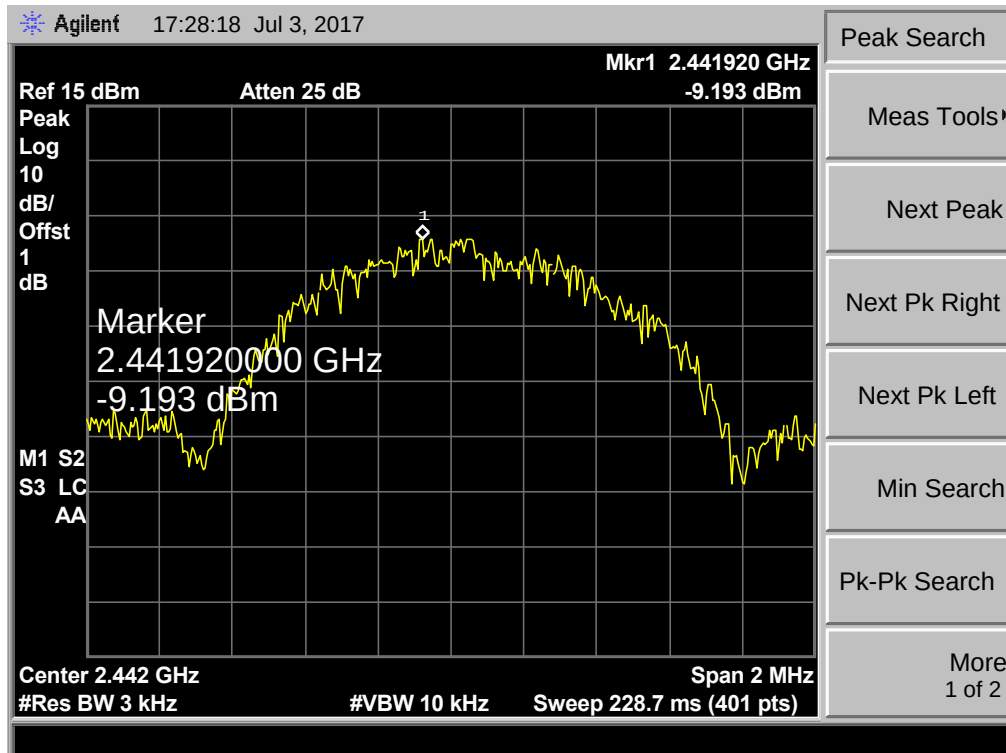

BLE Mode

2480 MHz

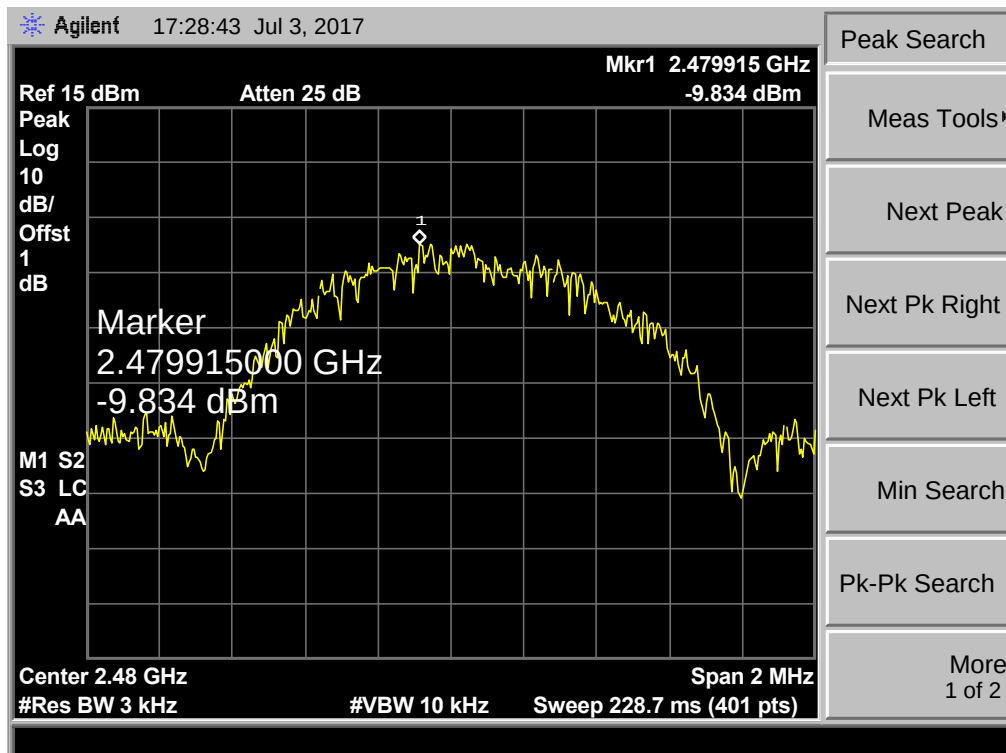



## 10. Antenna Requirement

### 10.1 Standard Requirement

#### 10.1.1 Standard

FCC Part 15.203

#### 10.1.2 Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### 10.2 Antenna Connected Construction

The directional gains of the antenna used for transmitting is 0dBi, and the antenna de-signed with permanent attachment and no consideration of replacement. Please see the EUT photo for details.

### 10.3 Result

The EUT antenna is a PCB Antenna. It complies with the standard requirement.

| Antenna Type                                                   |
|----------------------------------------------------------------|
| <input checked="" type="checkbox"/> Permanent attached antenna |
| <input type="checkbox"/> Unique connector antenna              |
| <input type="checkbox"/> Professional installation antenna     |

-----END OF REPORT-----