

FCC 47 CFR PART 15 SUBPART C

TEST REPORT

For

Product Name: 4G LTE Mobile Router

Brand Name: macaroon

Model No.: macaroon M1

Series Model.: N/A

FCC ID: 2AMIWM1

Test Report Number:
C170614R01-RPW

Issued for

Beijing ULINK Technology Co., Ltd.

East Area of 5F, No.16 Wangjing North Rd., Chaoyang District, Beijing, China

Issued by

Compliance Certification Services Inc.

Kun shan Laboratory

**No.10 Weiye Rd., Innovation park, Eco&Tec,
Development Zone, Kunshan City, Jiangsu, China**

TEL: 86-512-57355888

FAX: 86-512-57370818



Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by A2LA or any government agencies. The test results in the report only apply to the tested sample.

TABLE OF CONTENTS

1. TEST RESULT CERTIFICATION.....	4
2. EUT DESCRIPTION.....	5
3. TEST METHODOLOGY	6
3.1. EUT CONFIGURATION	6
3.2. EUT EXERCISE	6
3.3. GENERAL TEST PROCEDURES.....	6
3.4. FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS.....	7
3.5. DESCRIPTION OF TEST MODES.....	8
3.6. ANTENNA DESCRIPTION	8
4. INSTRUMENT CALIBRATION.....	9
4.1. MEASURING INSTRUMENT CALIBRATION	9
5. FACILITIES AND ACCREDITATIONS	11
5.1. FACILITIES	11
5.2. EQUIPMENT	11
5.3. LABORATORY ACCREDITATIONS AND LISTING	11
5.4. TABLE OF ACCREDITATIONS AND LISTINGS	12
6. SETUP OF EQUIPMENT UNDER TEST	13
6.1. SETUP CONFIGURATION OF EUT	13
6.2. SUPPORT EQUIPMENT.....	13
7. FCC PART 15.247 REQUIREMENTS.....	14
7.1. 6DB BANDWIDTH	14
7.2. PEAK POWER	21
7.3. PEAK POWER SPECTRAL DENSITY	23
7.4. SPURIOUS EMISSIONS	31
7.5. RADIATED EMISSIONS	54
7.6. POWERLINE CONDUCTED EMISSIONS	72

Revision History

Rev.	Issue Date	Report NO.	Effect Page	Contents
00	July 26, 2017	C170614R01-RPW	ALL	N/A

1. TEST RESULT CERTIFICATION

Product Name:	4G LTE Mobile Router
Trade Name:	macaroon
Model Name.:	macaroon M1
Series Model:	N/A
Applicant Discrepancy:	Initial
Device Category:	portable unit
Date of Test:	June 23, 2017~July 24, 2017
Applicant:	Beijing ULINK Technology Co., Ltd. East Area of 5F, No.16 Wangjing North Rd., Chaoyang District, Beijing, China
Manufacturer:	Beijing ULINK Technology Co., Ltd. East Area of 5F, No.16 Wangjing North Rd., Chaoyang District, Beijing, China
Application Type:	Certification

APPLICABLE STANDARDS

STANDARD	TEST RESULT
FCC 47 CFR Part 15 Subpart C	No non-compliance noted

We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10: 2013 and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247.


The test results of this report relate only to the tested sample EUT identified in this report.

Approved by:



Jeff.Fang
RF Manager
Compliance Certification Service Inc.

Tested by:



Lily.Wang
Test Engineer
Compliance Certification Service Inc.

2. EUT DESCRIPTION

Product Name:	4G LTE Mobile Router
Brand Name:	macaroon
Model Name:	macaroon M1
Series Model:	N/A
Model Discrepancy:	N/A
Power Adapter:	Power Adapter: Model :TUUS050100-K00 Input: 100-240V~50/60Hz, 0.2A Output: 5V—1A Battery (rating): capacity: 11.4WH 3.8V
Frequency Range:	IEEE 802.11b/g: 2412MHz to 2462 MHz IEEE 802.11n HT20: 2412MHz to 2462 MHz IEEE 802.11n HT40: 2422MHz to 2452 MHz
Average Transmit Power:	IEEE 802.11b mode: 13.81dBm IEEE 802.11g mode: 12.08dBm IEEE 802.11n HT20 mode: 11.30dBm IEEE 802.11n HT40 mode: 10.95dBm
Modulation Technique:	IEEE802.11b mode: DSSS (1,2,5.5 and 11 Mbps) IEEE802.11g mode: DSSS /OFDM (6,9,12,18,24,36,48 and 54 Mbps) IEEE802.11n HT20 mode: OFDM (MCS0~MCS7) IEEE802.11n HT40 mode: OFDM (MCS0~MCS7)
Number of Channels:	IEEE 802.11b/g mode: 11 Channels IEEE 802.11n HT20 : 11 Channels IEEE 802.11n HT40 : 7 Channels
Antenna Specification:	Internal Antenna Gain: 2.62 dBi

Remark:

- 1.The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.
- 2.This submittal(s) (test report) is intended for FCC ID: 2AM1WM1 filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.

3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10 2013 and FCC CFR 47 15.207, 15.209 and 15.247.

3.1. EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2. EUT EXERCISE

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

3.3. GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.10 2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

Under 1GHz

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.10:2013.

Above 1GHz

The EUT is placed on a turn table, which is 1.5 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.10:2013.

3.4.FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

3.5.DESCRIPTION OF TEST MODES

The worst-case data rates:

IEEE802.11b mode:

Channel Low (2412MHz)

Channel Mid (2437MHz)

Channel High (2462MHz) with 11Mbps data rate was chosen for full testing.

IEEE802.11g mode:

Channel Low (2412MHz)

Channel Mid (2437MHz)

Channel High (2462MHz) with 54Mbps data rate was chosen for full testing.

IEEE 802.11n HT20 MHz Channel mode:

Channel Low (2412MHz)

Channel Mid (2437MHz)

Channel High (2462MHz) with MCS7 data rate was chosen for full testing.

IEEE 802.11n HT40 MHz Channel mode:

Channel Low (2422MHz)

Channel Mid (2437MHz)

Channel High (2452MHz) with MCS7 data rate was chosen for full testing.


Note : After the preliminary san the EUT with Adapter 1 was the worst mode, which mode data was recorded.

3.6.ANTENNA DESCRIPTION

According to FCC 47 CFR 15.203

"an intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached or an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section"

As the photo below, the EUT use a unique coupling to the intentional radiator attached antenna, so the EUT complies with the requirement of 15.203.

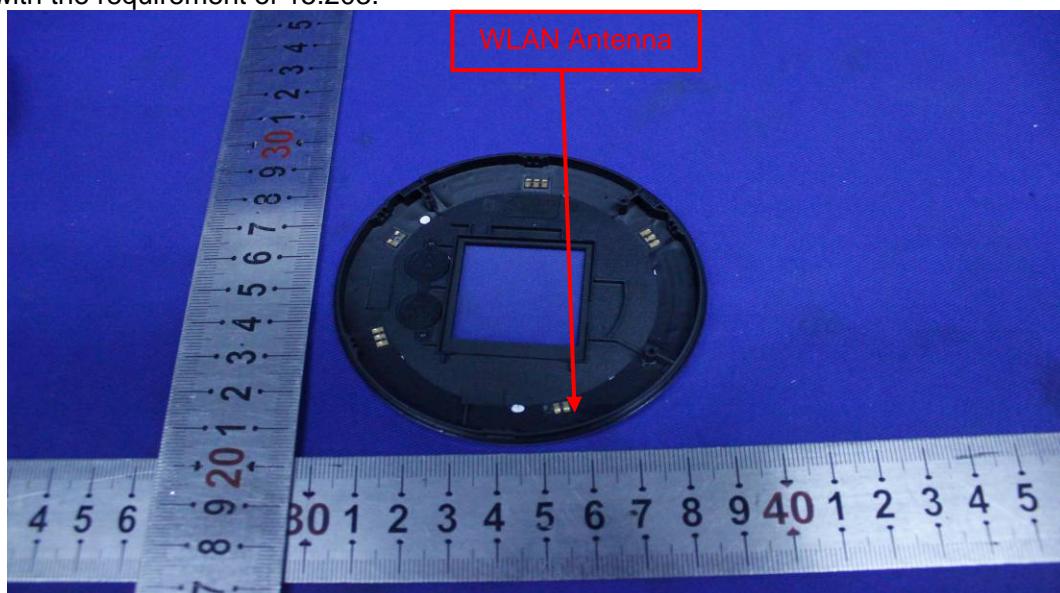

4. INSTRUMENT CALIBRATION

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

Equipment Used for Emissions Measurement

Conducted Emissions Test Site					
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Data	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY44020154	2016-9-10	2017-9-9
Spectrum Analyzer	RS	FSU26	200789	2016-7-21	2017-7-20
Spectrum Analyzer	RS	FSU26	200789	2017-7-20	2018-7-19
Power meter	Anritsu	ML2495A	1445010	2017-4-26	2018-4-25
Power sensor	Anritsu	MA2411B	1339220	2017-4-26	2018-4-25
Power SPLITTER	Mini-Circuits	ZN2PD-9G	SF078500430	N.C.R	N.C.R
DC Power Supply	AGILENT	E3632A	MY50340053	N.C.R	N.C.R
Temp. / Humidity Gauge	Anymetre	TH603	CCS007	2016-11-1	2017-10-31
Test Software			EZ-EMC		

977 Chamber					
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Data	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY44020154	2016-9-10	2017-9-9
Spectrum Analyzer	RS	FSU26	200789	2016-7-21	2017-7-20
Spectrum Analyzer	RS	FSU26	200789	2017-7-20	2018-7-19
EMI Test Receiver	R&S	ESCI	101378	2017-1-5	2018-1-4
Pre-Amplifier	MITEQ	AMF-6F-260400-40-8P	1037496	2016-11-15	2017-11-14
Amplifier	MITEQ	JS41-00101800-32-10P	1675713	2017-7-20	2018-7-19
Broad-Band Horn Antenna	SCHWARZBECK	BBHA 9170	9170-515	2017-3-6	2018-3-5
Bilog Antenna	Sunol	JB1	A062604	2017-5-27	2018-5-26
Bilog Antenna	Sunol	JB1	A110204-1	2017-5-27	2018-5-26
Loop Antenna	Hengweiyi	39501C	2014012	2017-1-5	2018-1-4
Horn-antenna	SCHWARZBECK	9120D	D:266	2017-2-28	2018-2-27
Horn-antenna	SCHWARZBECK	9120D	D:267	2016-11-10	2017-11-9
Turn Table	CT	CT123	4165	N.C.R	N.C.R
Antenna Tower	CT	CTERG23	3256	N.C.R	N.C.R
Controller	CT	CT1OO	95637	N.C.R	N.C.R
Test Software			EZ-EMC		

Conducted Emission					
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Data	Calibration Due
EMI TEST RECEIVER	R&S	ESCI	100781	2017-2-28	2018-2-27
V (V-LISN)	SCHWARZBECK	NNLK 8129	8129-143	2016-11-1	2017-10-31
TWO-LINE V-NETWORK	R&S	ENV216	101604	2016-11-1	2017-10-31
Pulse LIMITER	R&S	ESH3-Z2	100524	2017-1-5	2018-1-4
Test Software			EZ-EMC		

Remark: The measurement uncertainty is less than +/- 2.81dB, which is evaluated as per the NAMAS NIS 81 and CISPR/A/291/CDV.

Expanded Uncertainty (95% CONFIDENCE INTERVAL): K=2

5. FACILITIES AND ACCREDITATIONS

5.1. FACILITIES

All measurement facilities used to collect the measurement data are located at CCS China Kunshan Lab at 10#Weiye Rd, Innovation Park Eco. & Tec. Development Zone Kunshan city JiangSu, (215300), CHINA.

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 2013 and CISPR Publication 22.

5.2. EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5.3. LABORATORY ACCREDITATIONS AND LISTING

FCC –Designation Number: CN1172.

Compliance Certification Services Inc. Kun shan Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files and the Designation Number: CN1172.

5.4. TABLE OF ACCREDITATIONS AND LISTINGS

Country	Agency	Scope of Accreditation	Logo
USA	A2LA	47 CFR FCC Part 15/18 (using ANSI C63.10 :2013); VCCI V3; CNS 13438; CNS 13439; CNS 13803; CISPR 11; EN 55011; CISPR 13; EN 55013; CISPR 22:2005; CISPR 22:1997 +A1 :2000+A2 :2002; EN 55022:2006; EN55022 :1998 +A1 :2001+A2 :2003; EN 61000-6-3 (excluding discontinuous interference); EN 61000-6-4; AS/NZS CISPR 22; CAN/CSA-CEI/IEC CISPR 22; EN 61000-3-2; EN 61000-3-3; EN550024; EN 61000-4-2; EN 61000-4-3; EN61000-4-4; EN 61000-4-5; EN 61000-4-6; IEC 61000-4-8; EN 61000-4-11; IEC61000-3-2; IEC61000-3-3; IEC 61000-4-2; IEC 61000-4-3; IEC 61000-4-4; IEC 61000-4-5; IEC 61000-4-6; IEC 61000-4-8; IEC 61000-4-11; EN 300 220-3; EN 300 328; EN 300 330-2; EN 300 440-1; EN 300-440-2; EN 300 893; EN 301 489-01; EN 301 489-3; EN 301 489-07; EN 301 489-17; 47 CFR FCC Part 15, 22, 24	
USA	FCC	3/10 meter Sites to perform FCC Part 15/18 measurements	
Japan	VCCI	3/10 meter Sites and conducted test sites to perform radiated/conducted measurements	VCCI R-1600 C-1707 G-216

** No part of this report may be used to claim or imply product endorsement by A2LA or any agency of the US Government.*

6. SETUP OF EQUIPMENT UNDER TEST

6.1. SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

6.2. SUPPORT EQUIPMENT

No.	Device Type	Brand	Model	Series No.	FCC ID
1.	N/A	N/A	N/A	N/A	N/A

Remark:

2. *All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.*
3. *Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.*


7. FCC PART 15.247 REQUIREMENTS

7.1.6DB BANDWIDTH

LIMIT

According to §15.247(a)(2), systems using digital modulation techniques may operate in the 902 - 928 MHz, and 2400 - 2483.5 MHz bands, and 5725 - 5850 MHz bands. The minimum 6dB bandwidth shall be at least 500kHz.

Test Configuration



TEST PROCEDURE

Set the spectrum analyzer as RBW = 100 kHz, VBW = 300 kHz, Sweep = auto couple.

TEST RESULTS

No non-compliance noted

Test Data

IEEE 802.11b mode

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Result
Low	2412	9.054	>500	PASS
Mid	2437	8.990		PASS
High	2462	8.990		PASS

IEEE 802.11g mode



Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Result
Low	2412	16.587	>500	PASS
Mid	2437	16.538		PASS
High	2462	16.538		PASS

IEEE 802.11n HT20 mode


Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Result
Low	2412	17.788	>500	PASS
Mid	2437	17.788		PASS
High	2462	17.740		PASS

IEEE 802.11n HT40 mode

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Result
Low	2422	36.538	>500	PASS
Mid	2437	36.442		PASS
High	2452	36.538		PASS

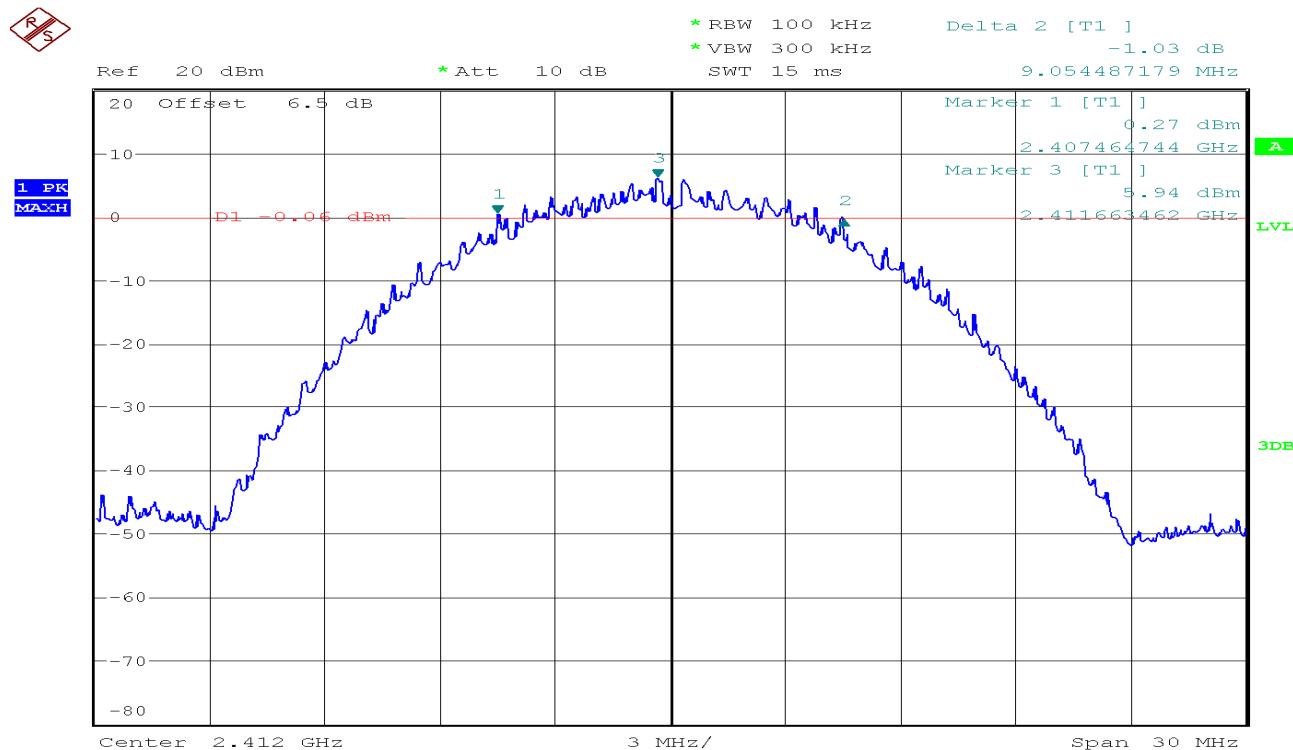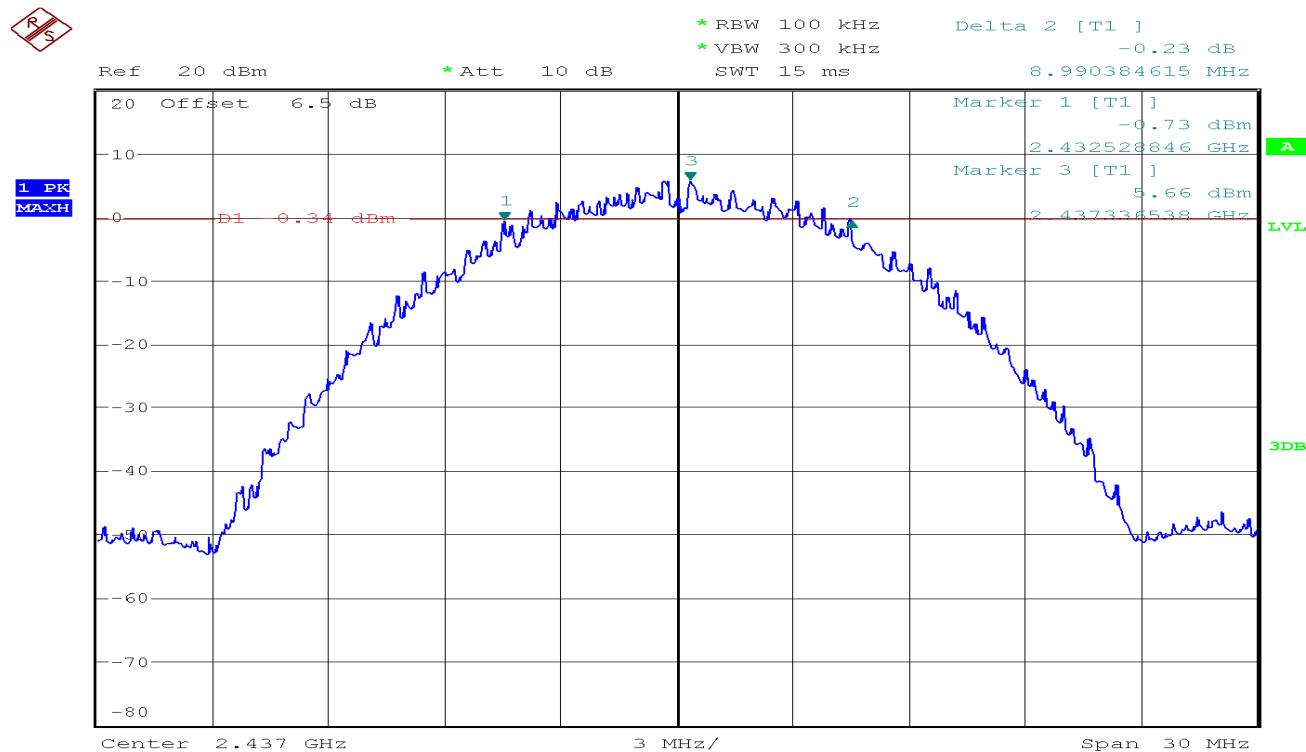
Test Plot**IEEE 802.11b MODE****6dB Bandwidth (CH Low)****6dB Bandwidth (CH Mid)**

6dB Bandwidth (CH High)

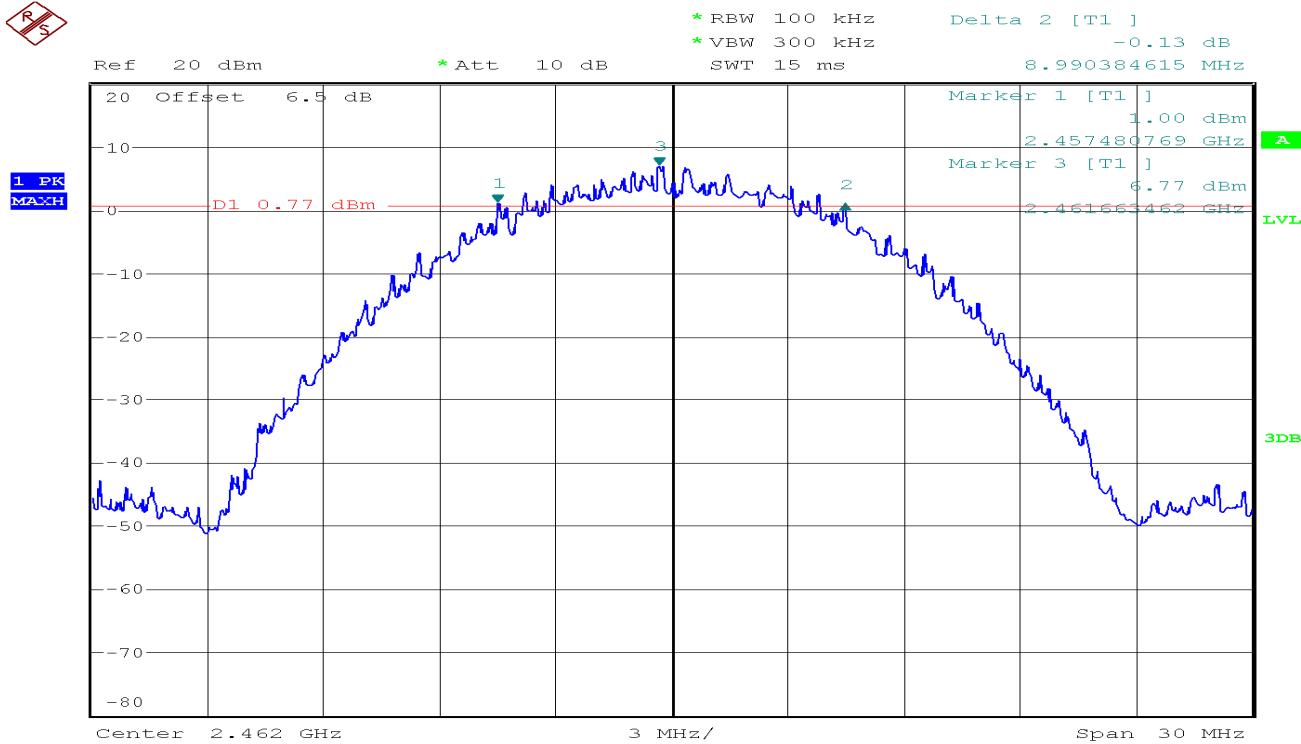


IEEE 802.11g MODE


6dB Bandwidth (CH Low)


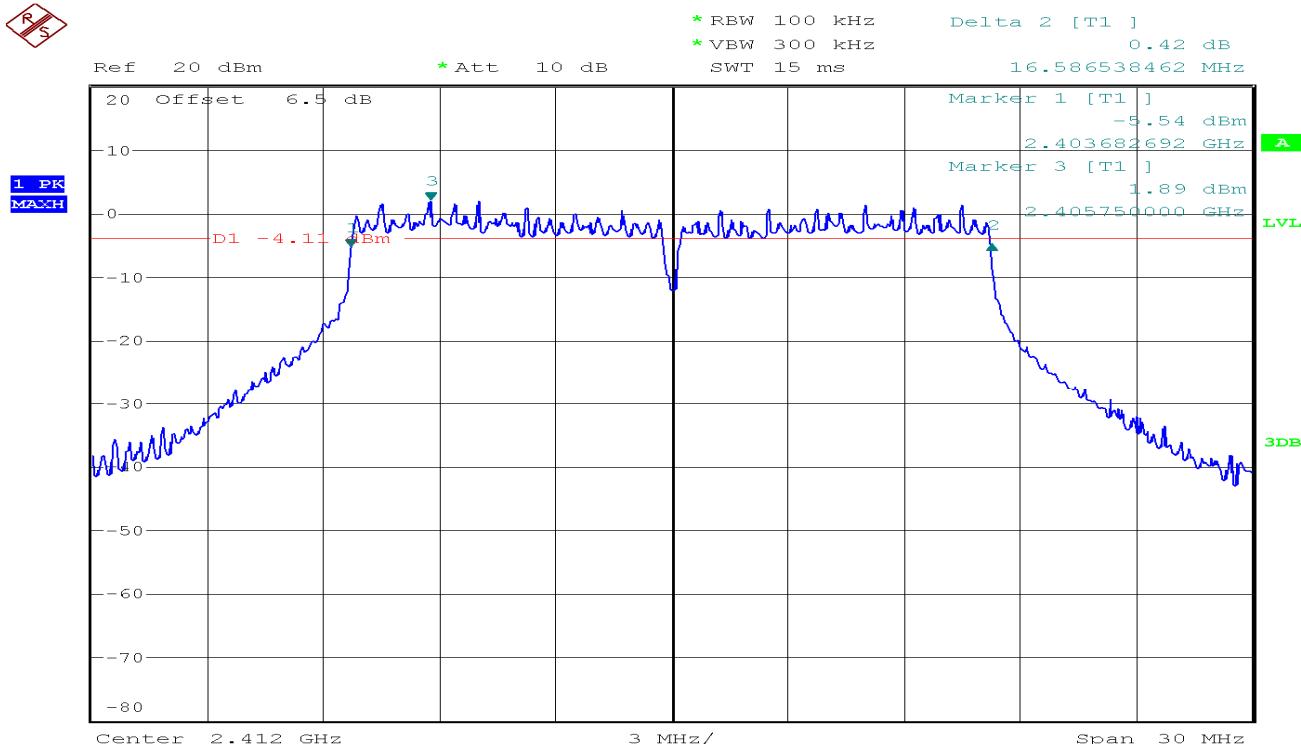


6dB Bandwidth (CH Mid)

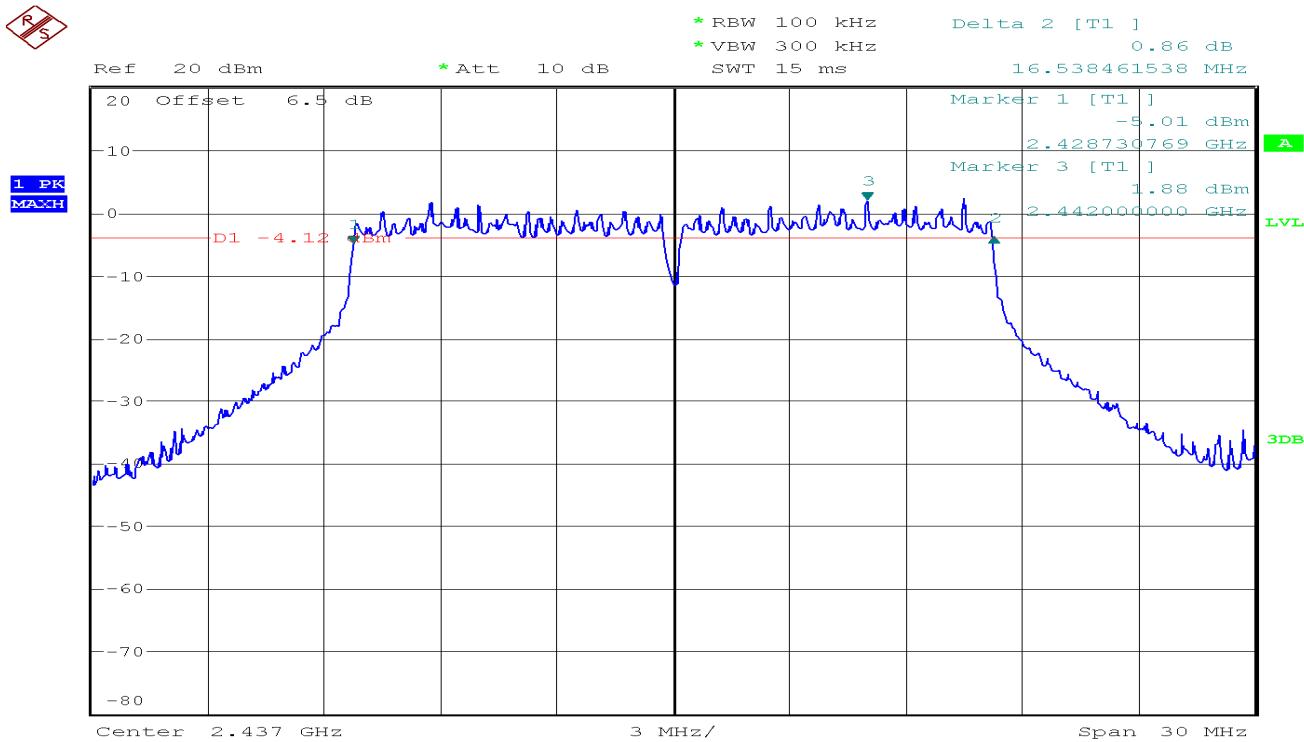


6dB Bandwidth (CH High)

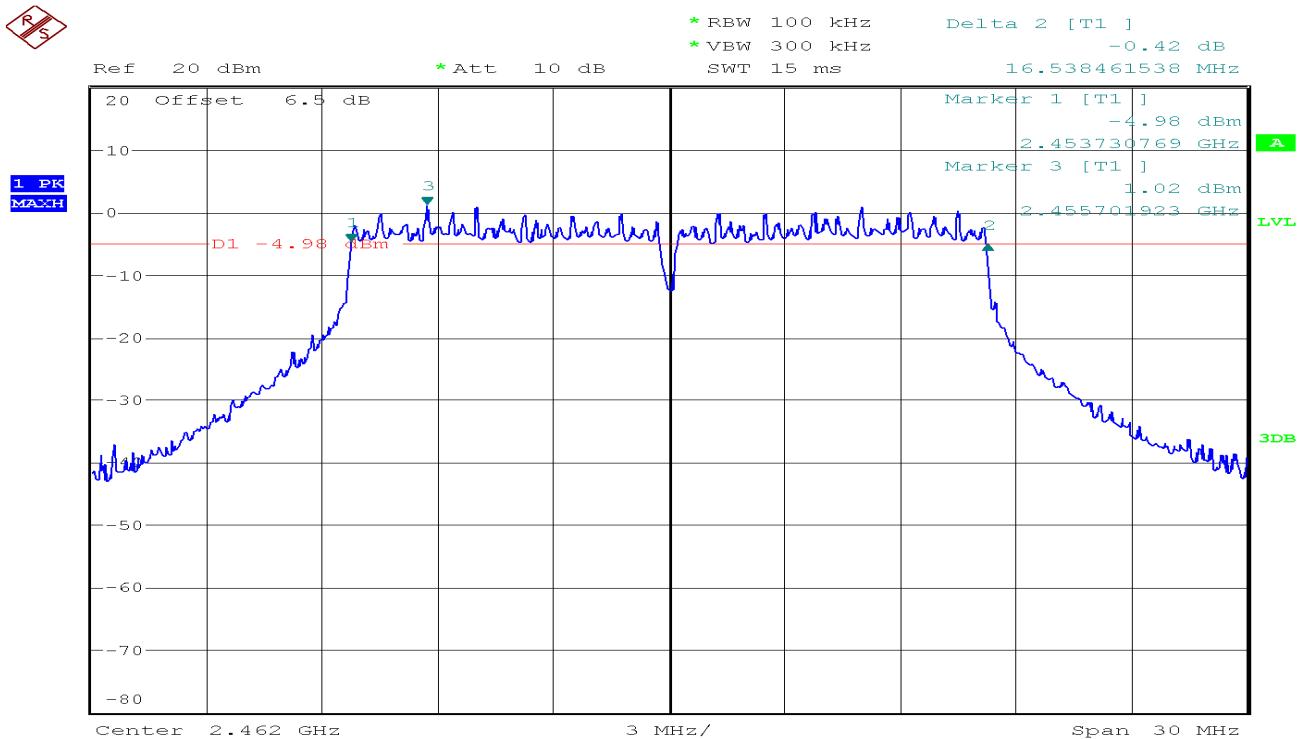

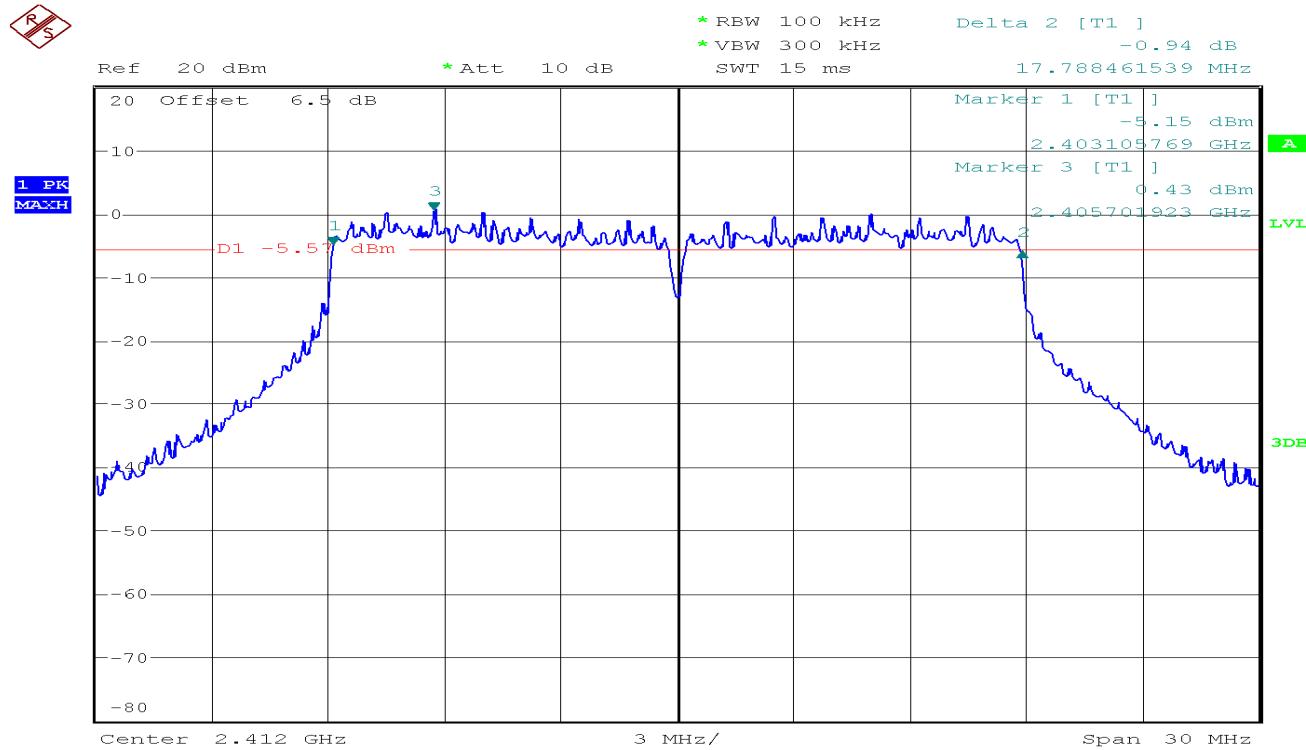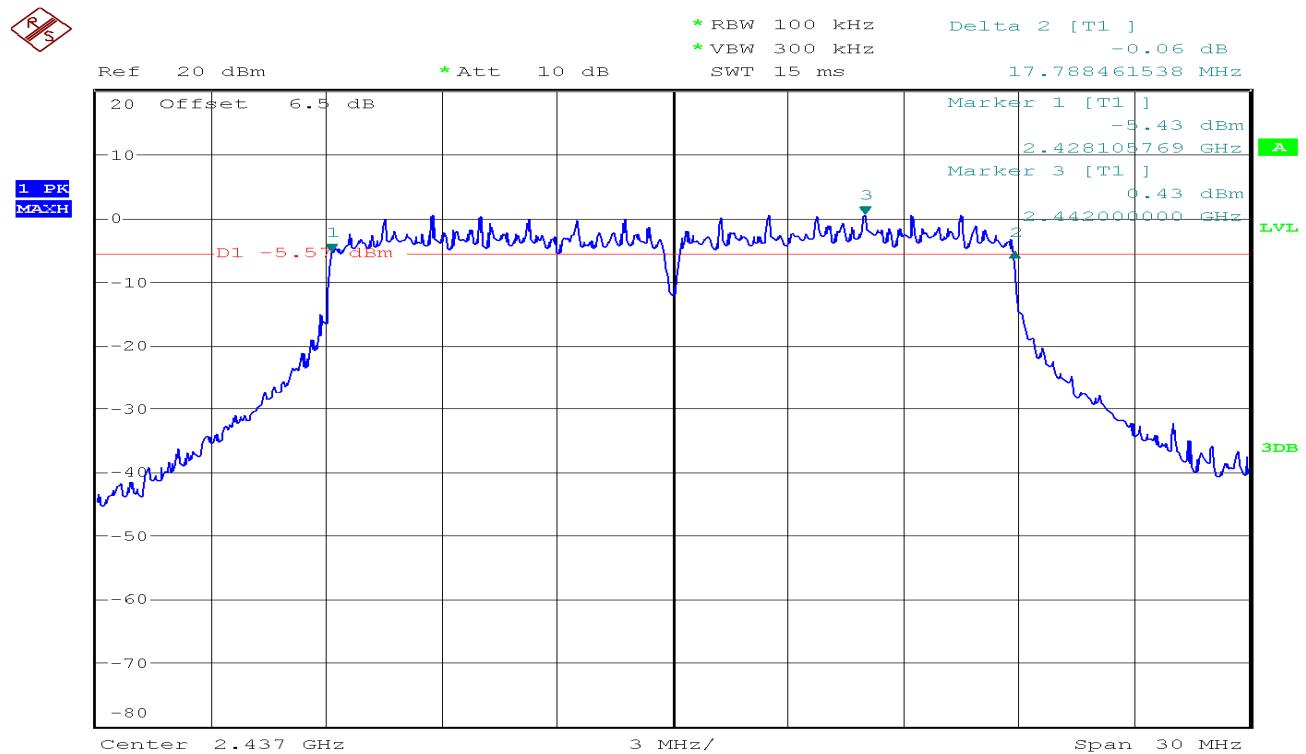
IEEE 802.11n HT20 mode**6dB Bandwidth (CH Low)****6dB Bandwidth (CH Mid)**

6dB Bandwidth (CH High)

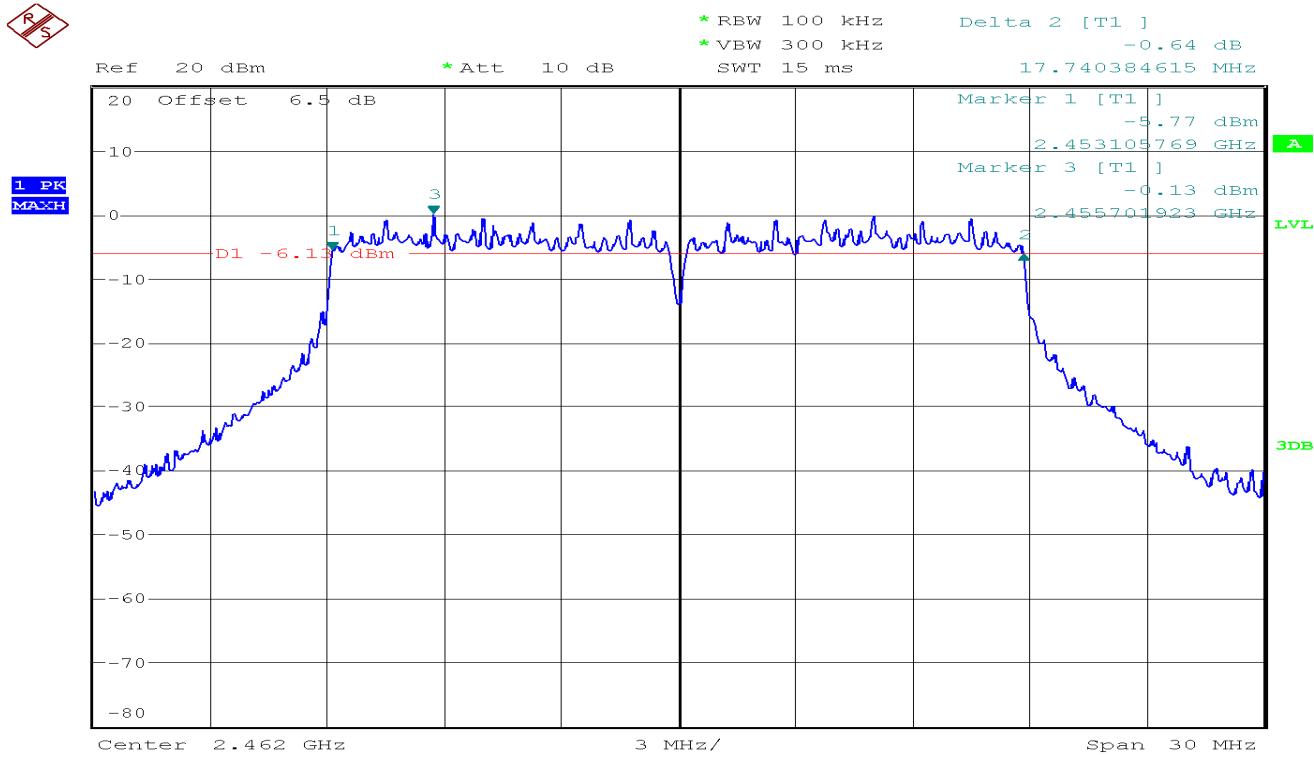


IEEE 802.11n HT40 mode


6dB Bandwidth (CH Low)

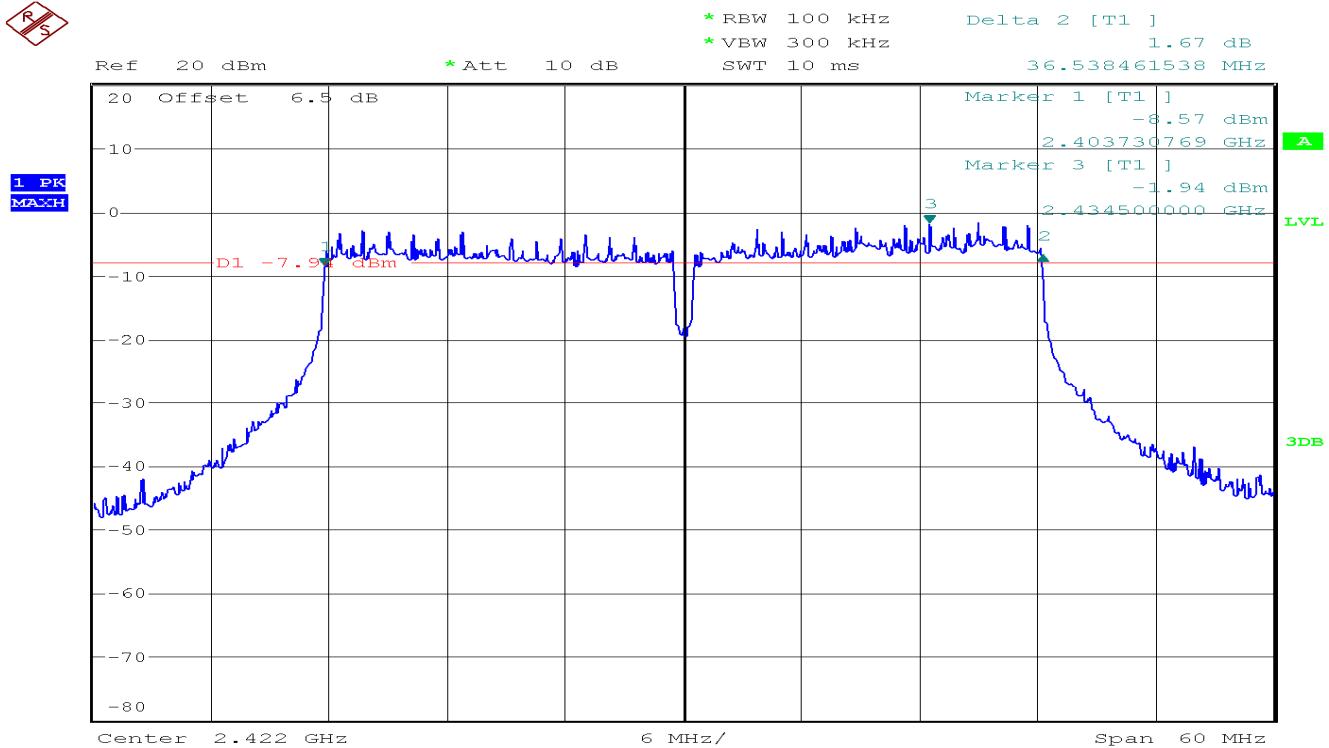

6dB Bandwidth (CH Mid)

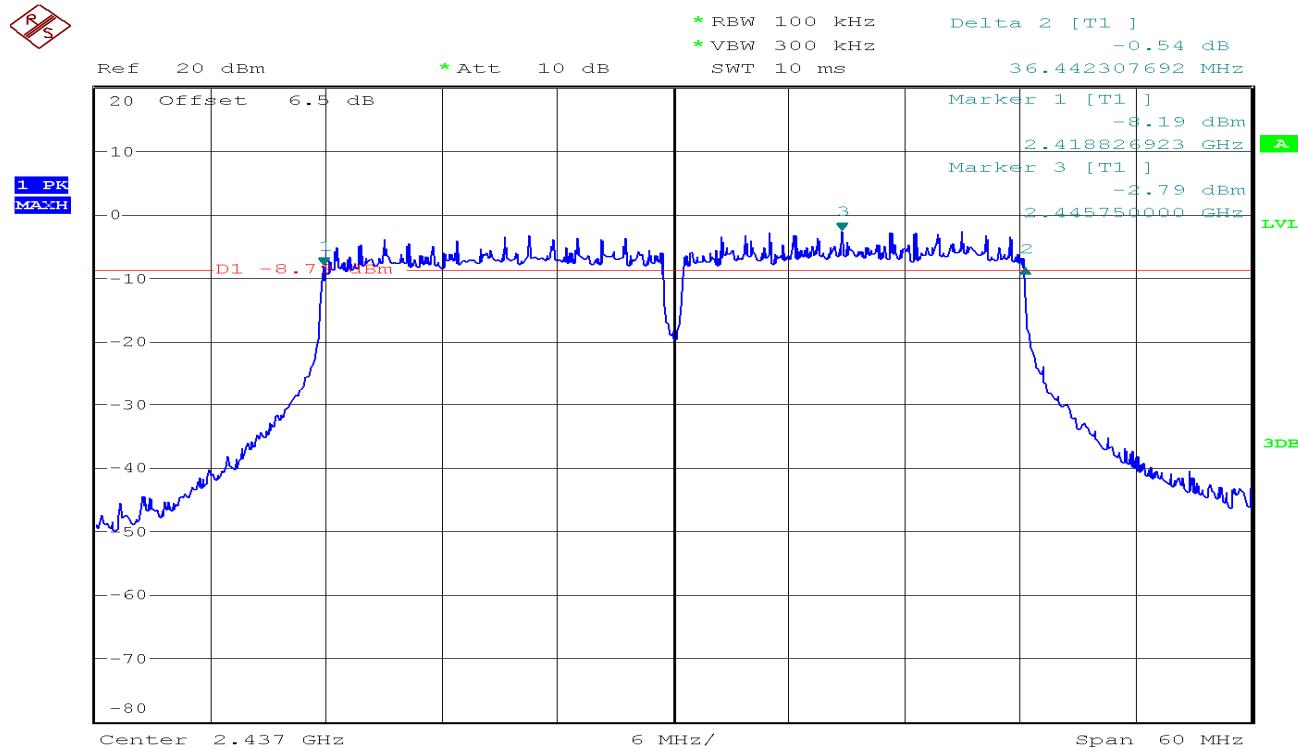

6dB Bandwidth (CH High)

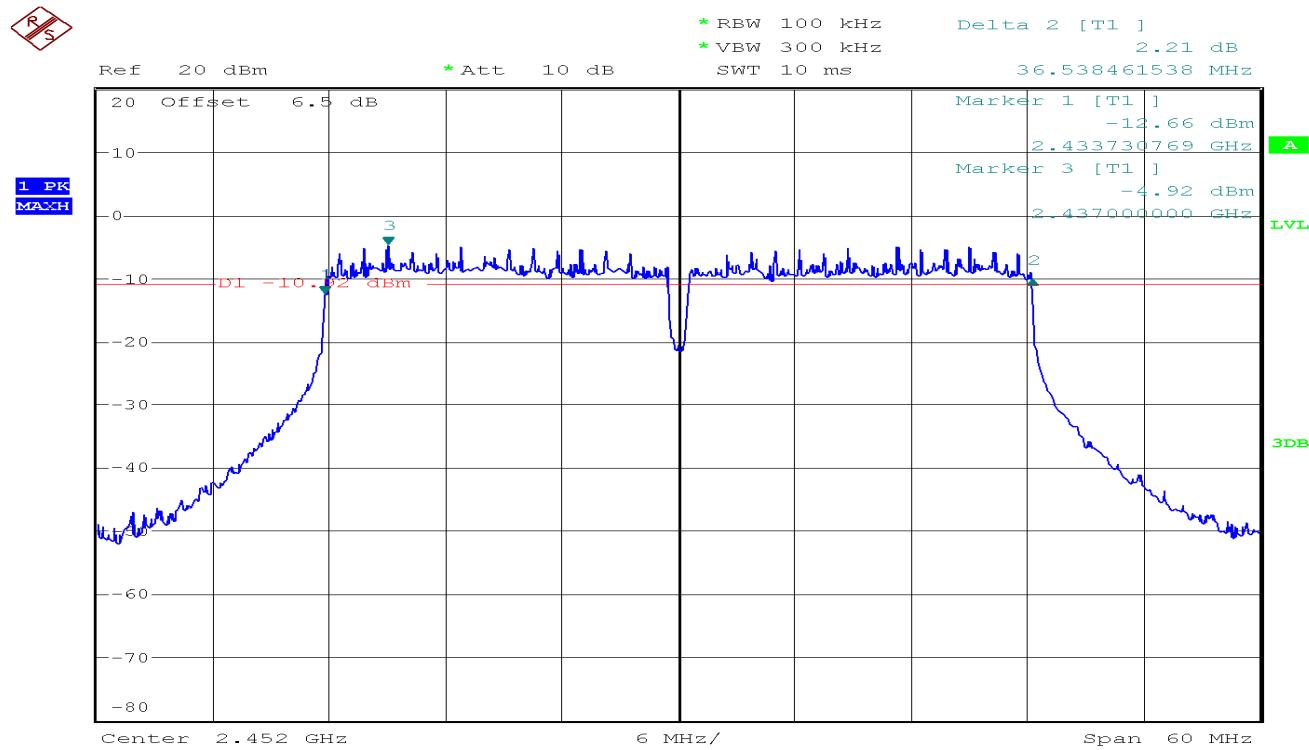


7.2. PEAK POWER

LIMIT

The maximum peak output power of the intentional radiator shall not exceed the following:

1. According to §15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, and 2400-2483.5 MHz: 1 Watt.
2. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6dBi.

Test Configuration

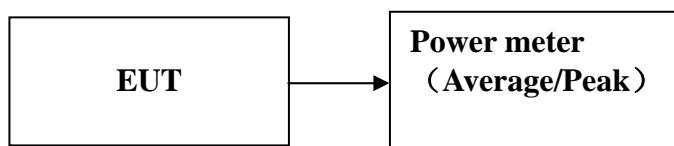

TEST PROCEDURE

1. The EUT transmitter output is connected to the Power meter.
The Power meter is set to the peak power detection.
2. The testing follows the Measurement Procedure FCC KDB No. 558074 D01 DTS Meas.
Guidance v04. 9.1.3 PKPM1 Peak-reading power meter method.

TEST RESULTS

No non-compliance noted

Test Data**Test mode: IEEE 802.11b mode**

Channel	Frequency (MHz)	PK Output Power (dBm)	AV Output Power (dBm)	Limit (dBm)
Low	2412	16.19	13.72	30.00
Mid	2437	15.98	13.52	30.00
High	2462	16.18	13.81	30.00

Test mode: IEEE 802.11g mode

Channel	Frequency (MHz)	PK Output Power (dBm)	AV Output Power (dBm)	Limit (dBm)
Low	2412	22.00	11.84	30.00
Mid	2437	22.08	12.08	30.00
High	2462	20.68	11.06	30.00

Test mode: IEEE 802.11n HT20 mode

Channel	Frequency (MHz)	PK Output Power (dBm)	AV Output Power (dBm)	Limit (dBm)
Low	2412	20.76	11.30	30.00
Mid	2437	20.63	11.29	30.00
High	2462	19.67	10.10	30.00

Test mode: IEEE 802.11n HT40 mode

Channel	Frequency (MHz)	PK Output Power (dBm)	AV Output Power (dBm)	Limit (dBm)
Low	2422	20.41	10.95	30.00
Mid	2437	20.25	10.79	30.00
High	2452	18.06	8.50	30.00


Note:Duty factor has been offseted with cableloss

7.3. PEAK POWER SPECTRAL DENSITY

LIMIT

1. According to §15.247(e), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.
2. According to §15.247(f), the digital modulation operation of the hybrid system, with the frequency hopping turned off, shall comply with the power density requirements of paragraph (d) of this section.

Test Configuration



TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set the spectrum analyzer as RBW = 3 kHz, VBW = 10 kHz, Span = 1.5 times the DTS bandwidth, Sweep = auto
3. Record the max reading.
4. Repeat the above procedure until the measurements for all frequencies are completed.

TEST RESULTS

No non-compliance noted

Test Data**Test mode: IEEE 802.11b mode**

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-8.47	8.00	PASS
Mid	2437	-8.78	8.00	PASS
High	2462	-7.44	8.00	PASS

Test mode: IEEE 802.11g mode



Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-13.29	8.00	PASS
Mid	2437	-14.06	8.00	PASS
High	2462	-14.54	8.00	PASS

Test mode: IEEE 802.11n HT20 mode


Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-15.17	8.00	PASS
Mid	2437	-14.60	8.00	PASS
High	2462	-13.87	8.00	PASS

Test mode: IEEE 802.11n HT40 mode


Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2422	-16.35	8.00	PASS
Mid	2437	-17.47	8.00	PASS
High	2452	-19.68	8.00	PASS

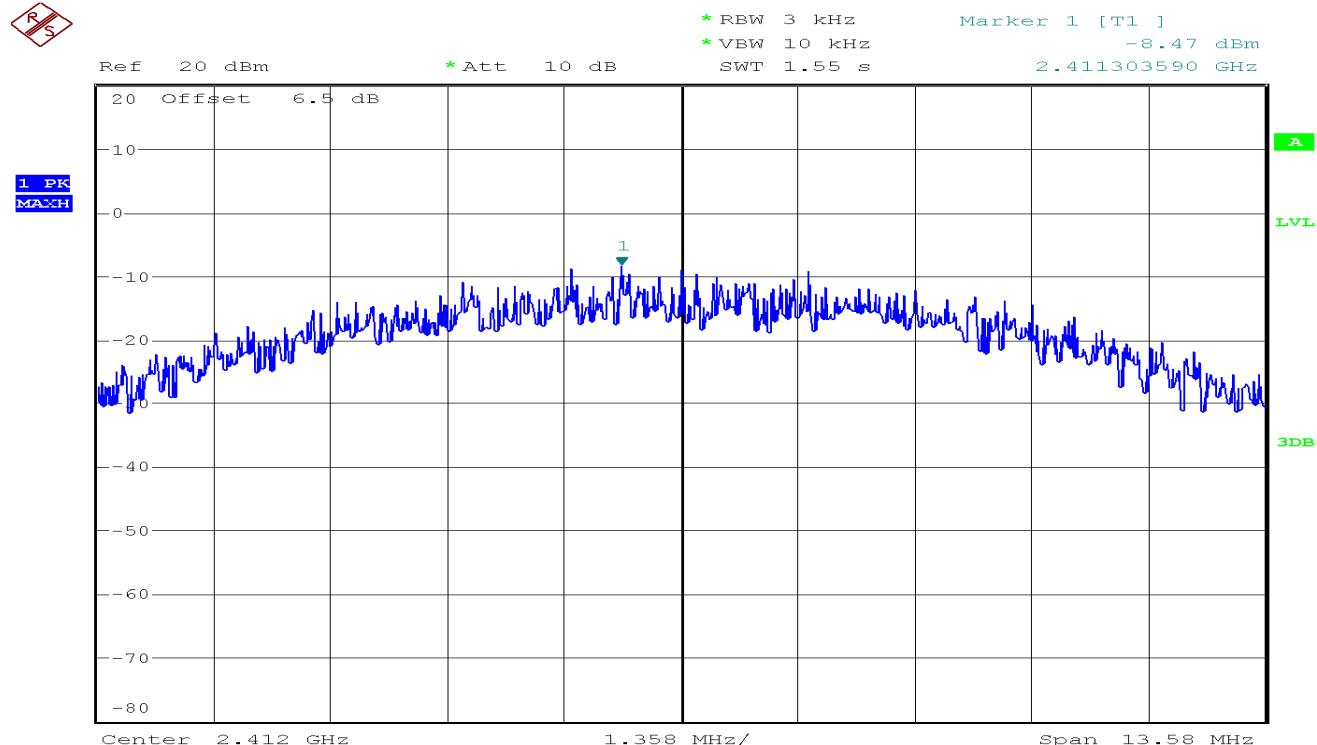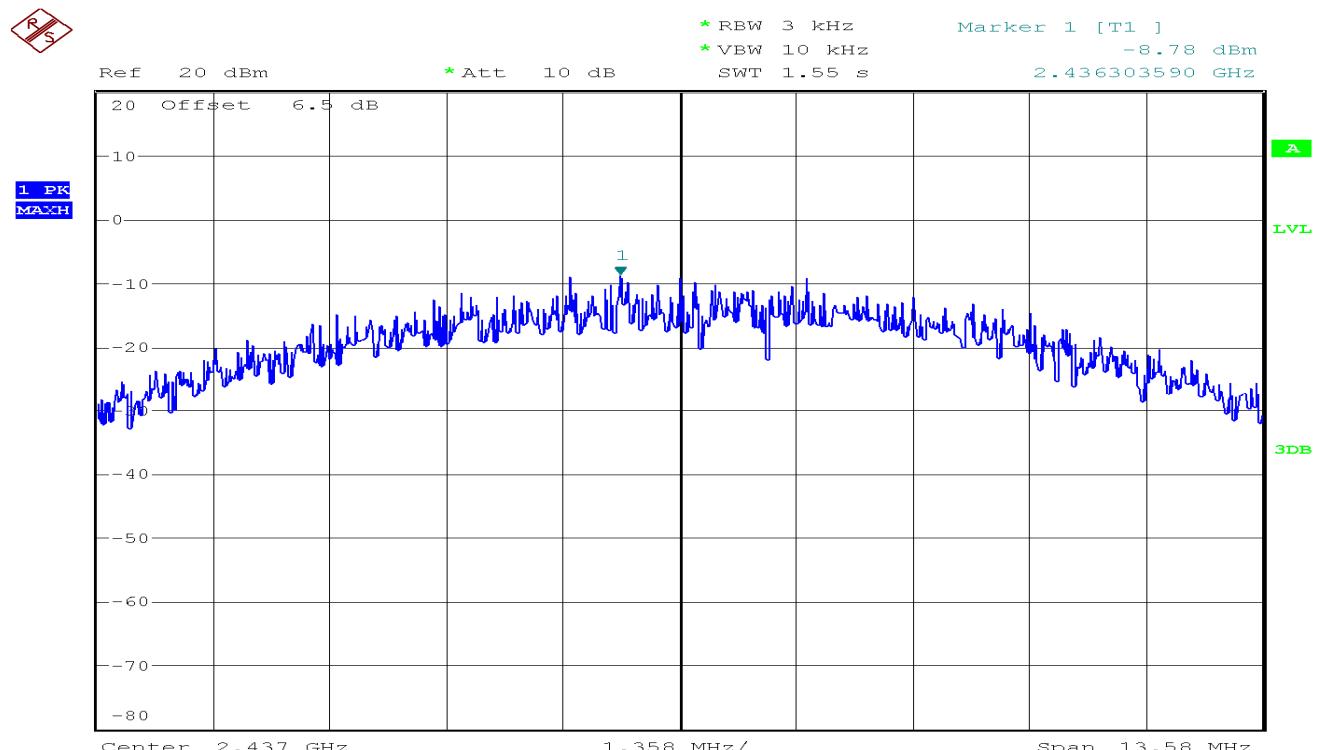Test Plot**IEEE 802.11b mode****PPSD (CH Low)****PPSD(CH Mid)**


PPSD (CH High)

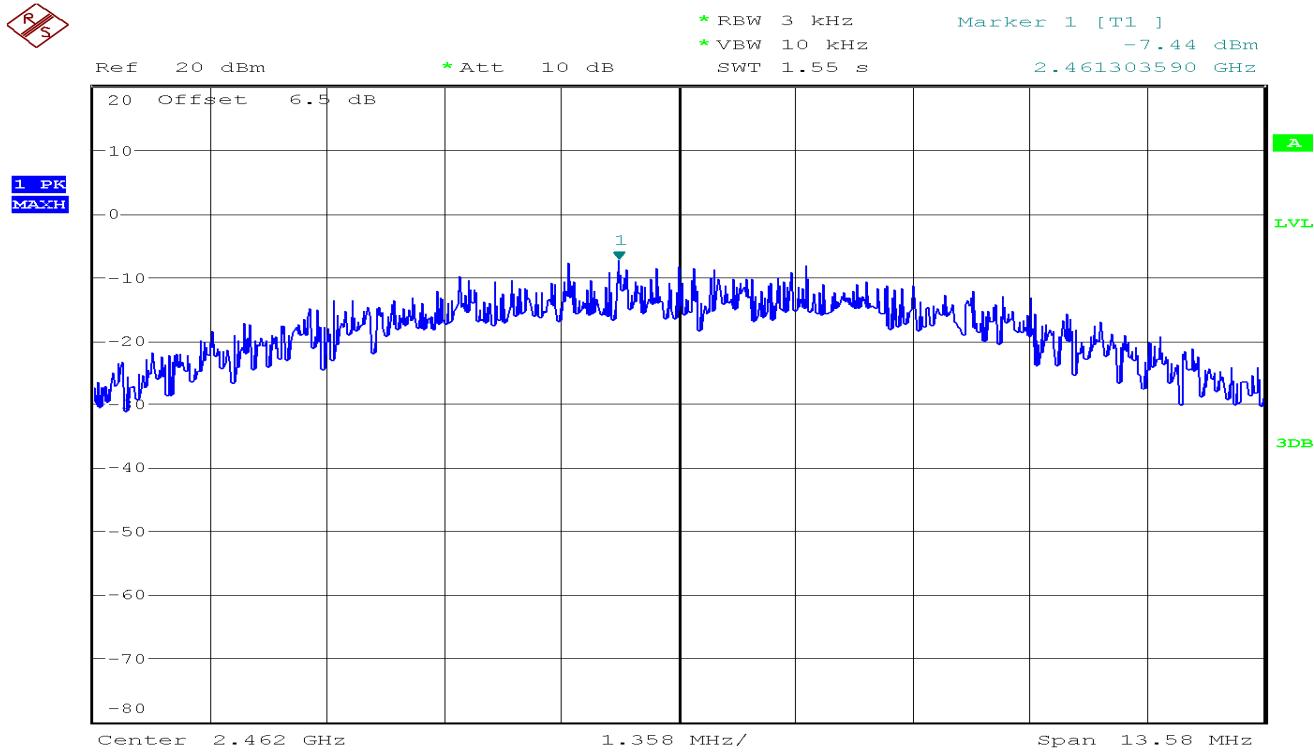IEEE 802.11g mode


PPSD (CH Low)

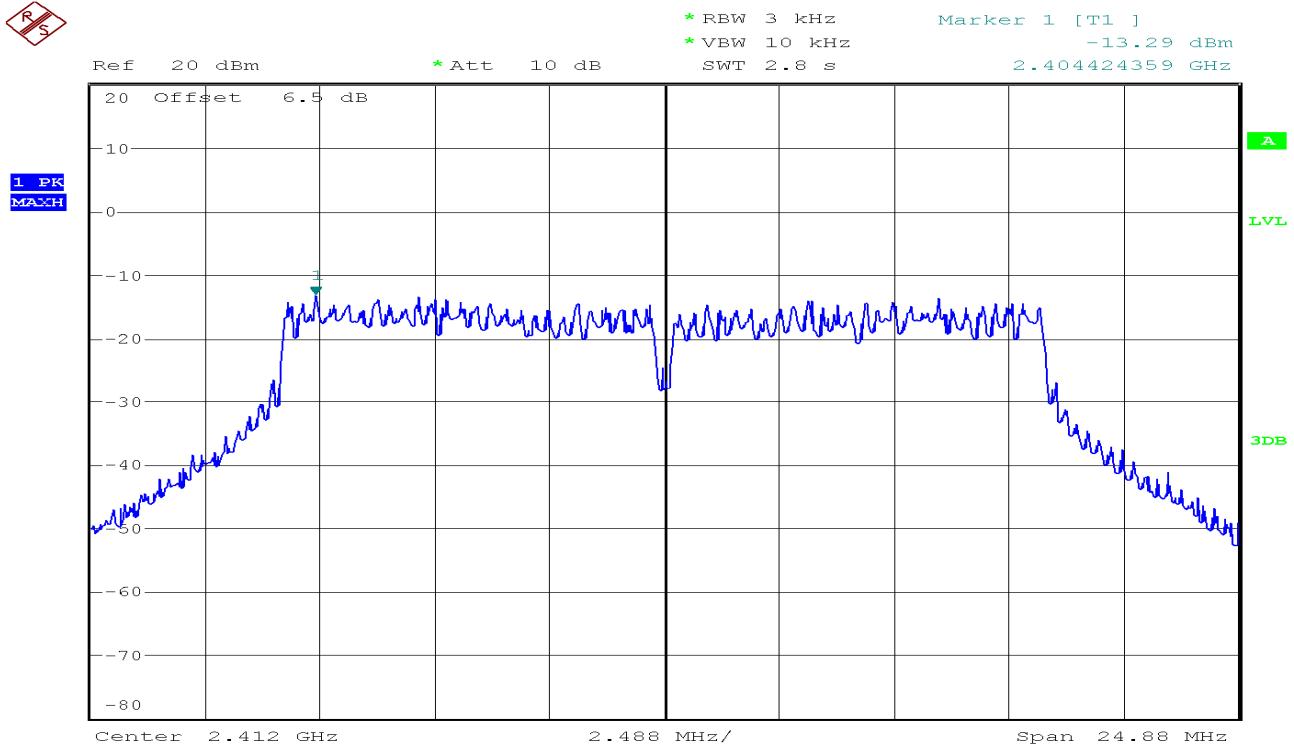

PPSD (CH Mid)

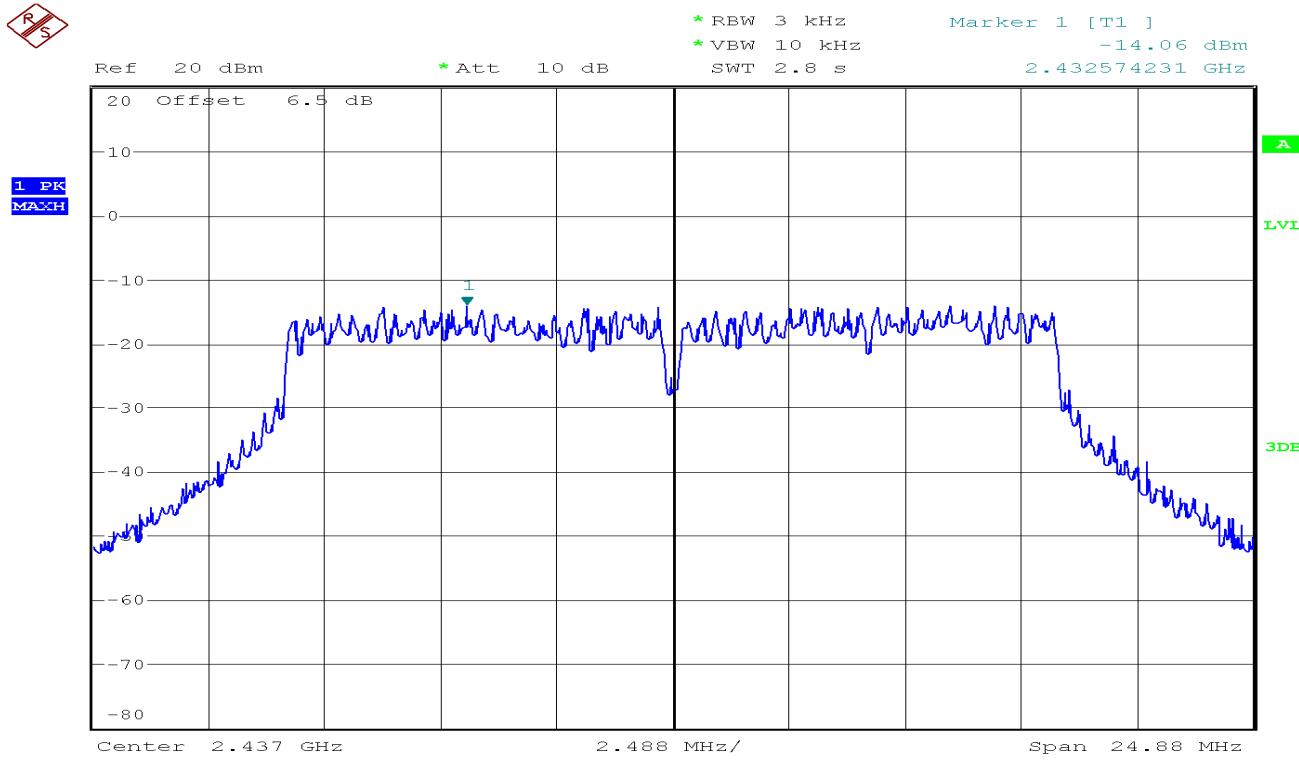


PPSD (CH High)

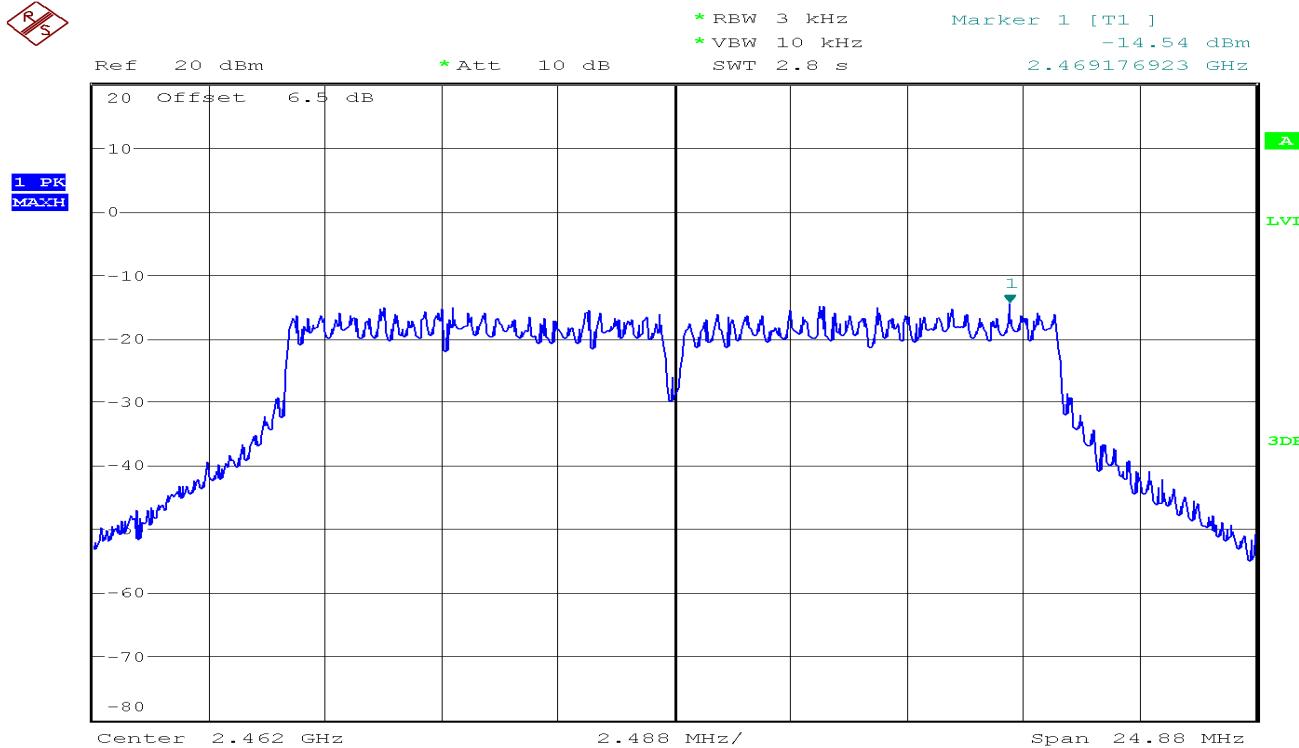


IEEE 802.11n HT20 mode


PPSD (CH Low)

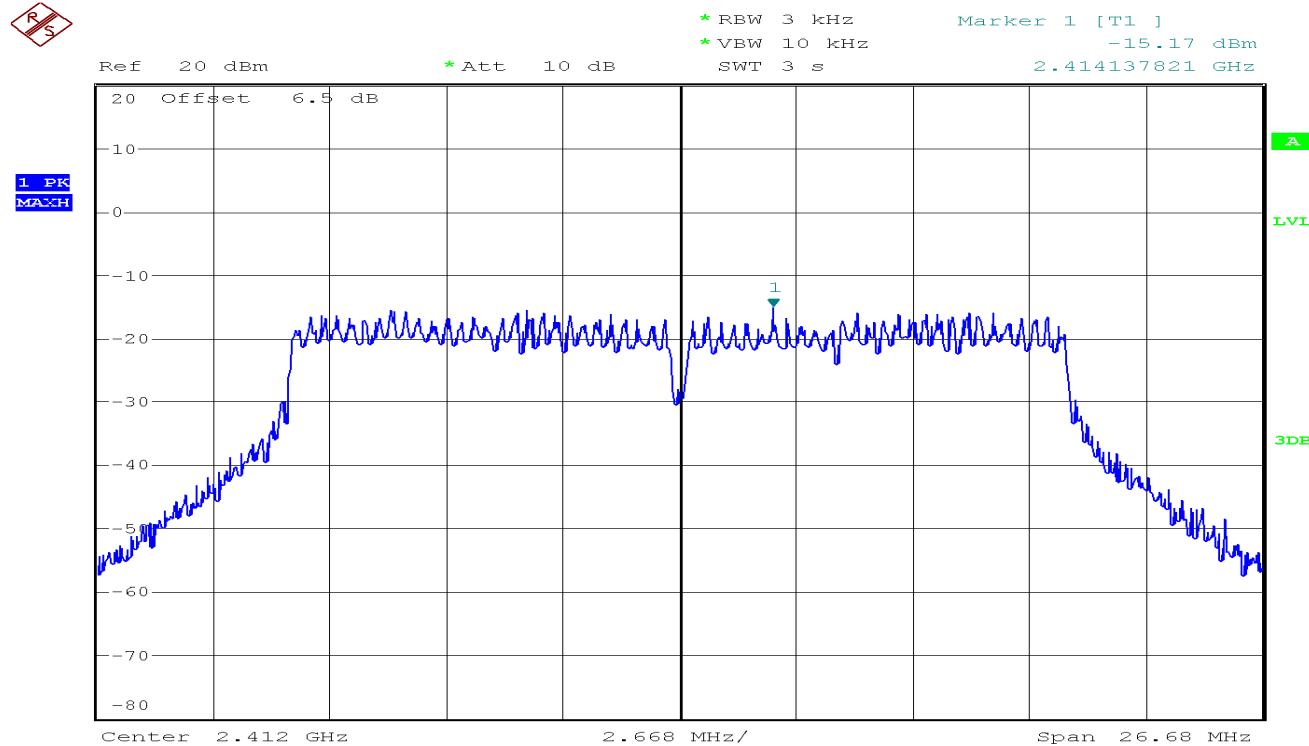


PPSD (CH Mid)

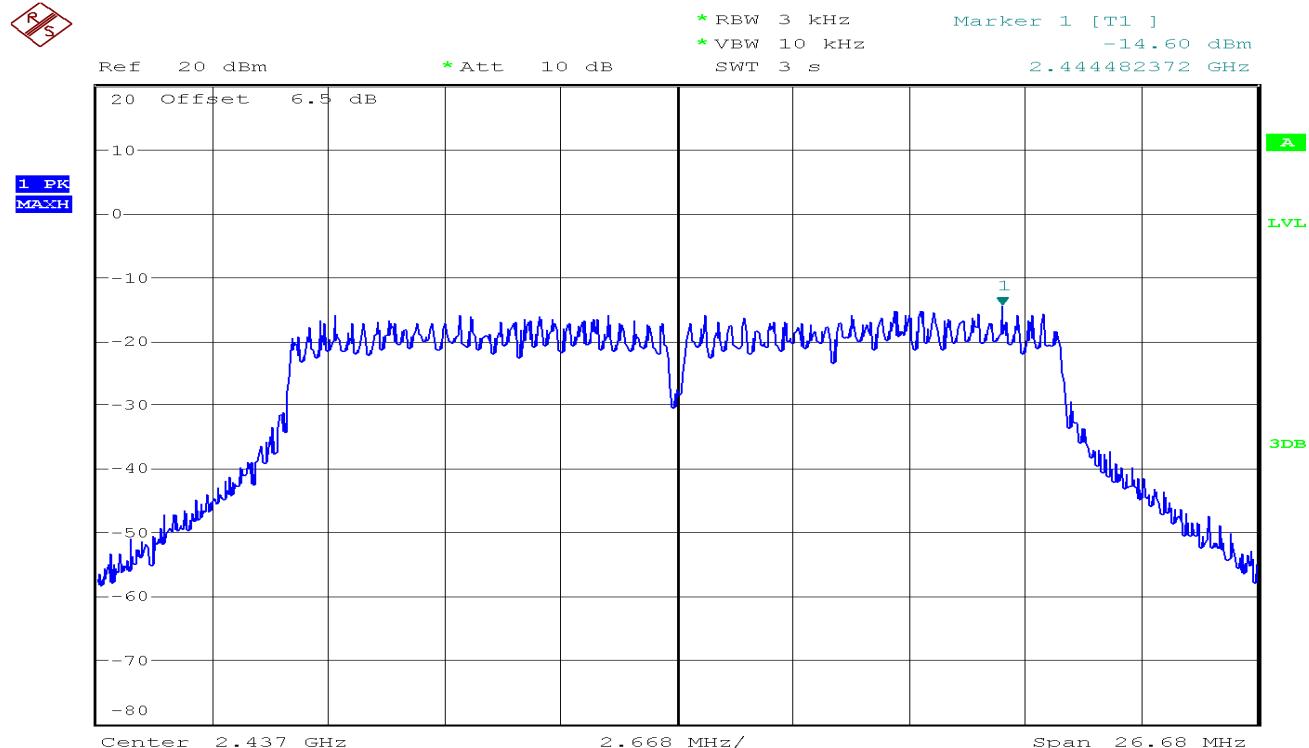


PPSD (CH High)

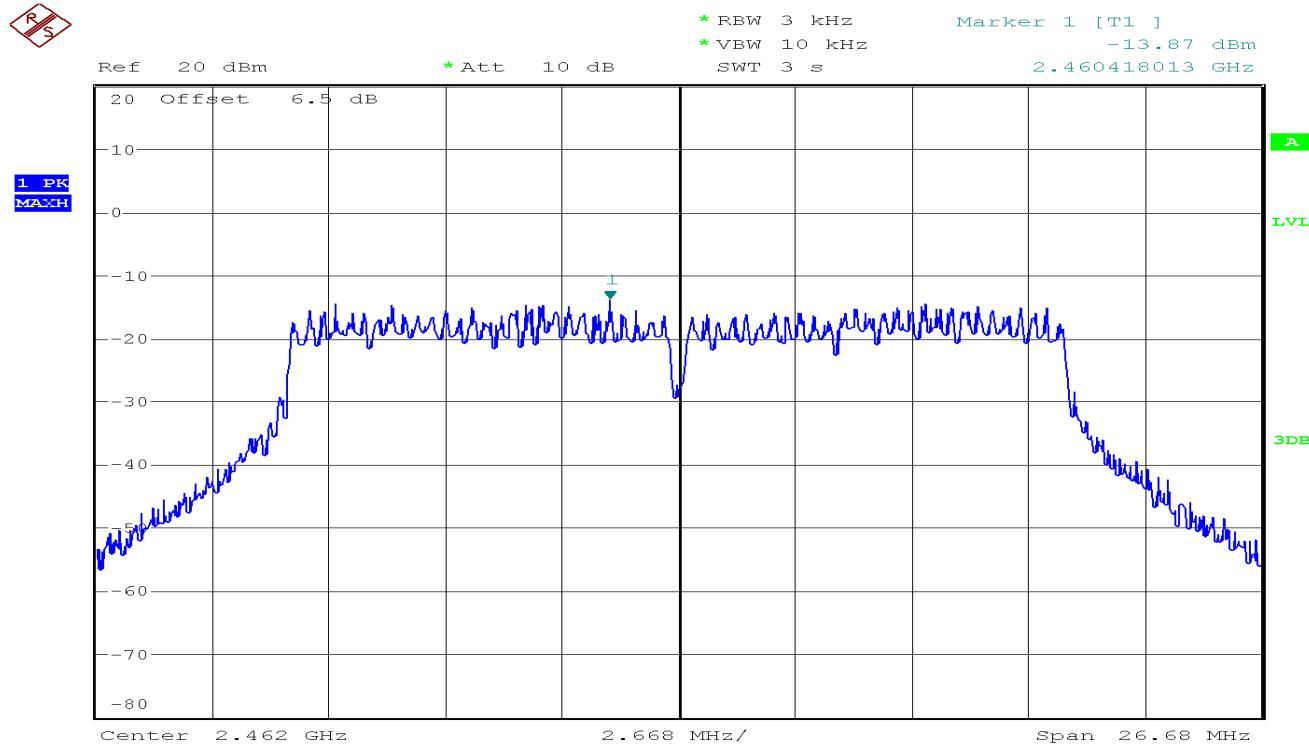IEEE 802.11n HT40 mode


PPSD (CH Low)

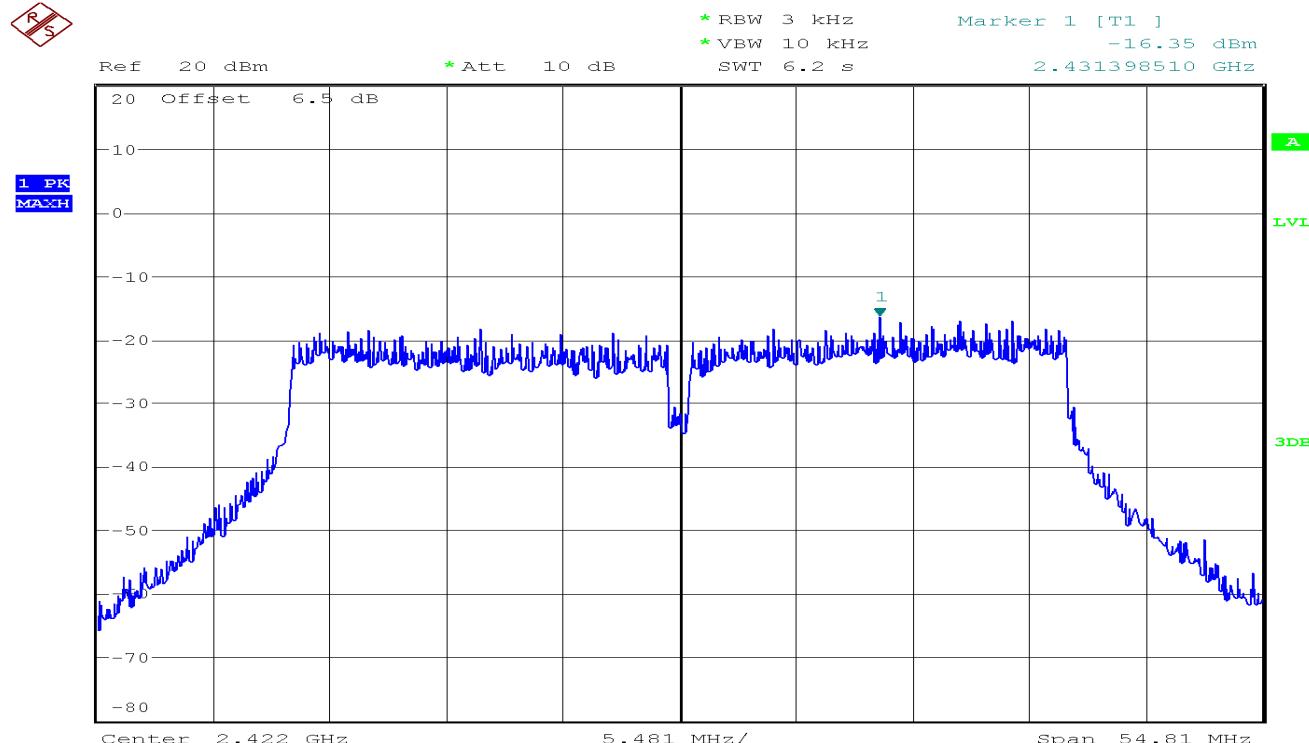

PPSD (CH Mid)

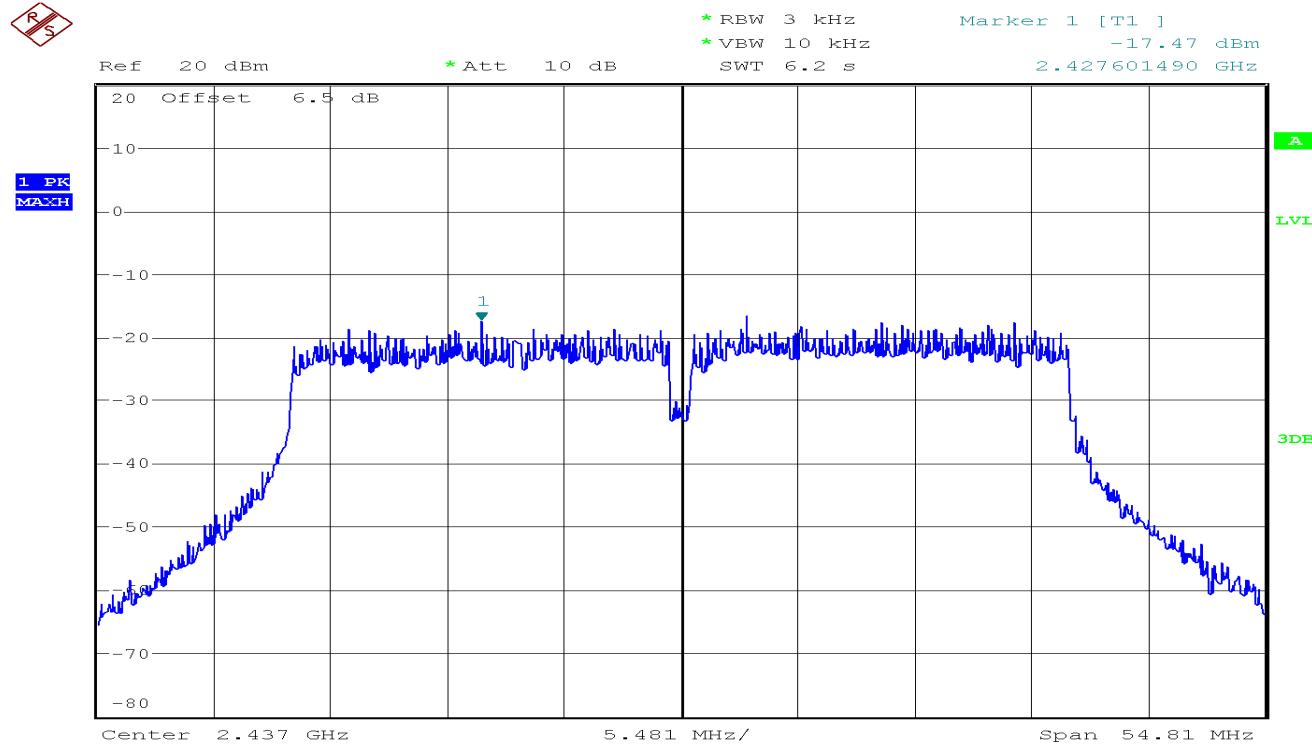

PPSD (CH High)

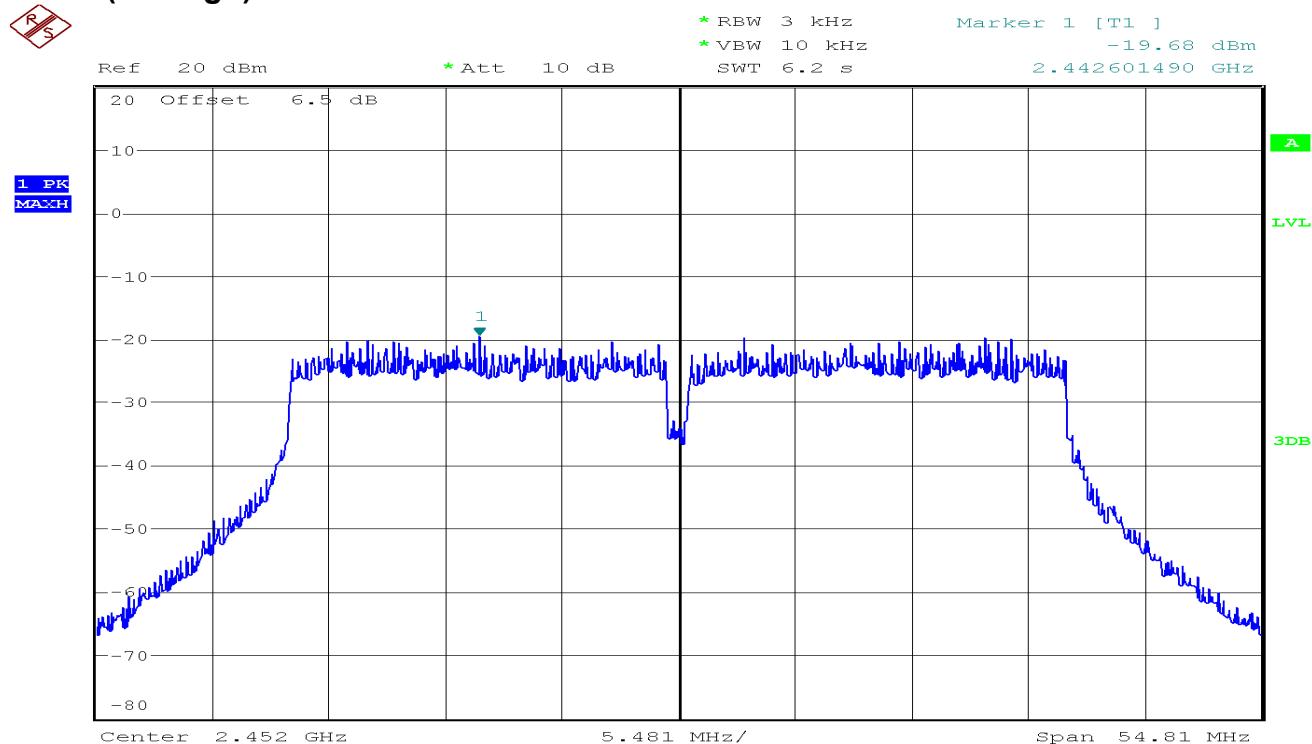


7.4.SPURIOUS EMISSIONS

Conducted Measurement

LIMIT

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

Test Configuration



TEST PROCEDURE



Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.


Measurements are made over the 30MHz to 40GHz range with the transmitter set to the lowest, middle, and highest channels.

TEST RESULTS


No non-compliance noted

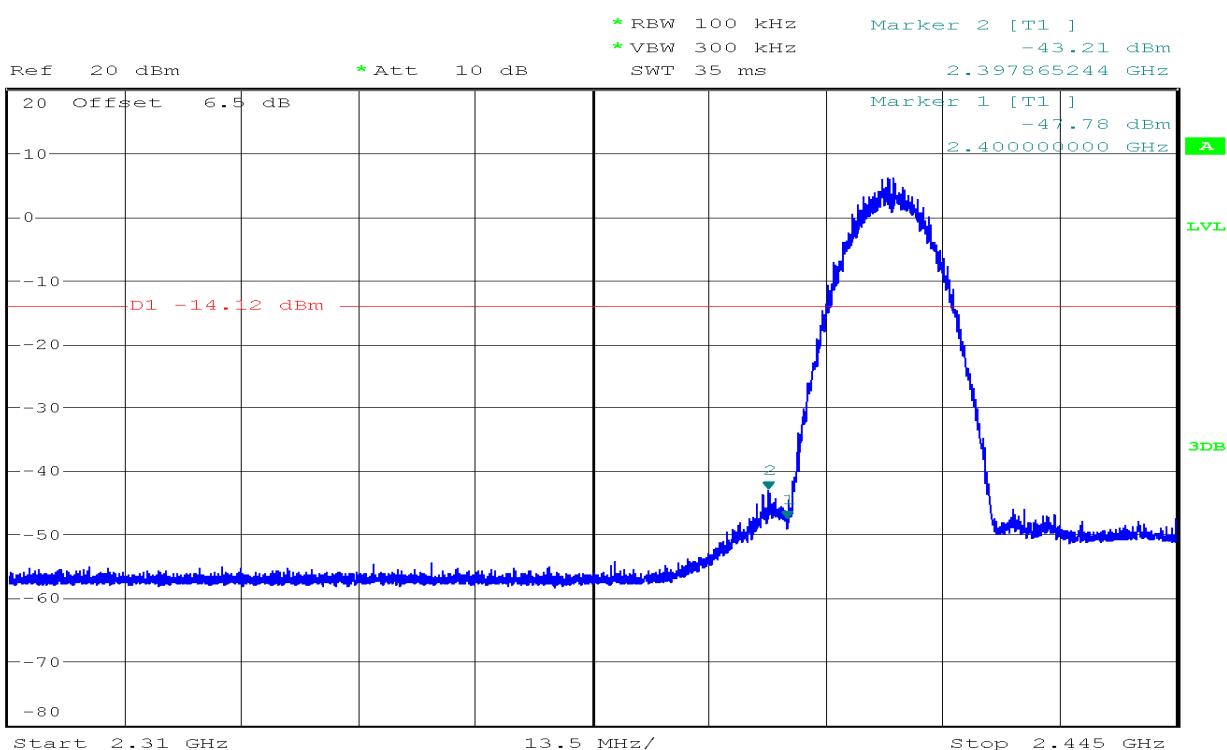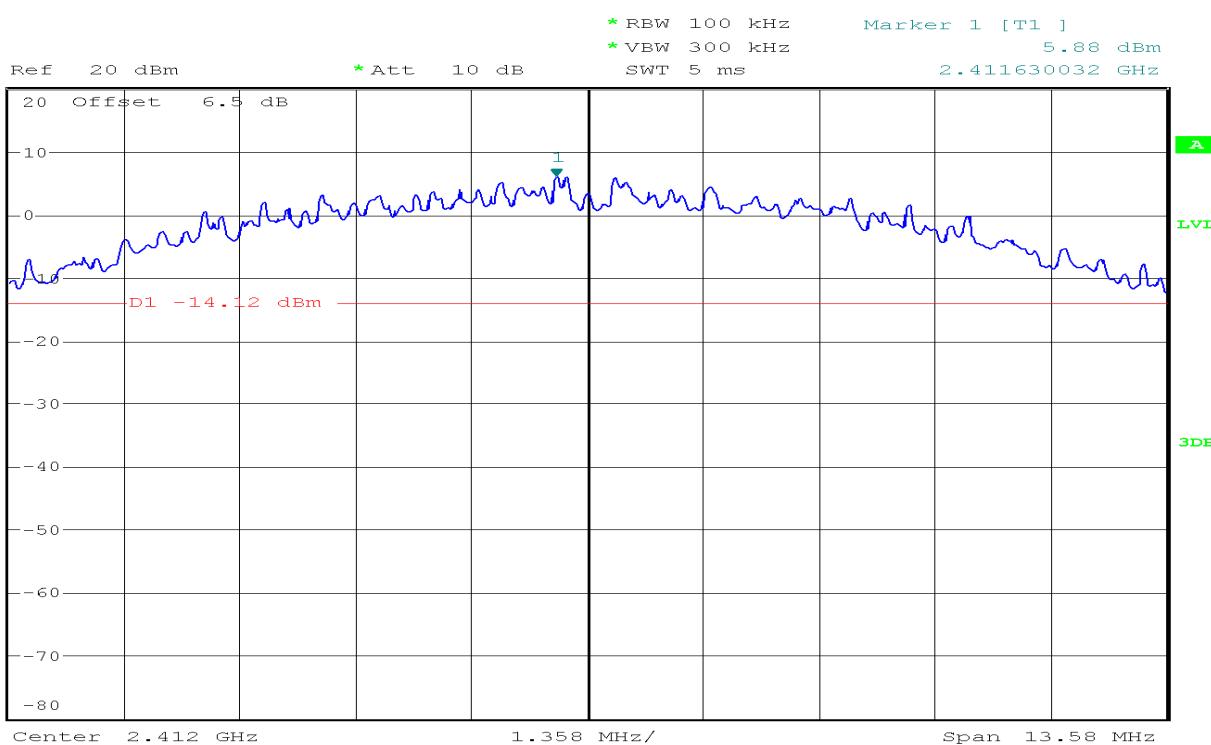Test Plot**OUT-OF-BAND SPURIOUS EMISSIONS-CONDUCTED MEASUREMENT****IEEE 802.11b mode****CH Low**



RS

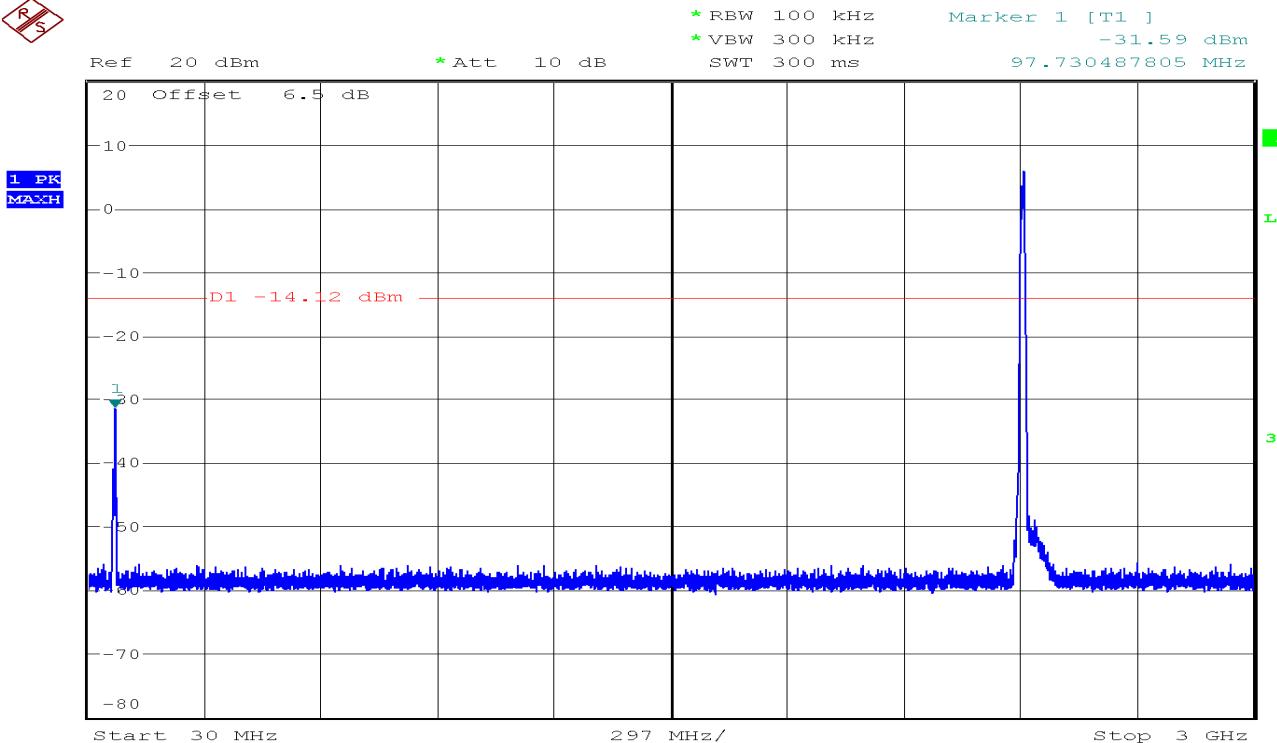


RS

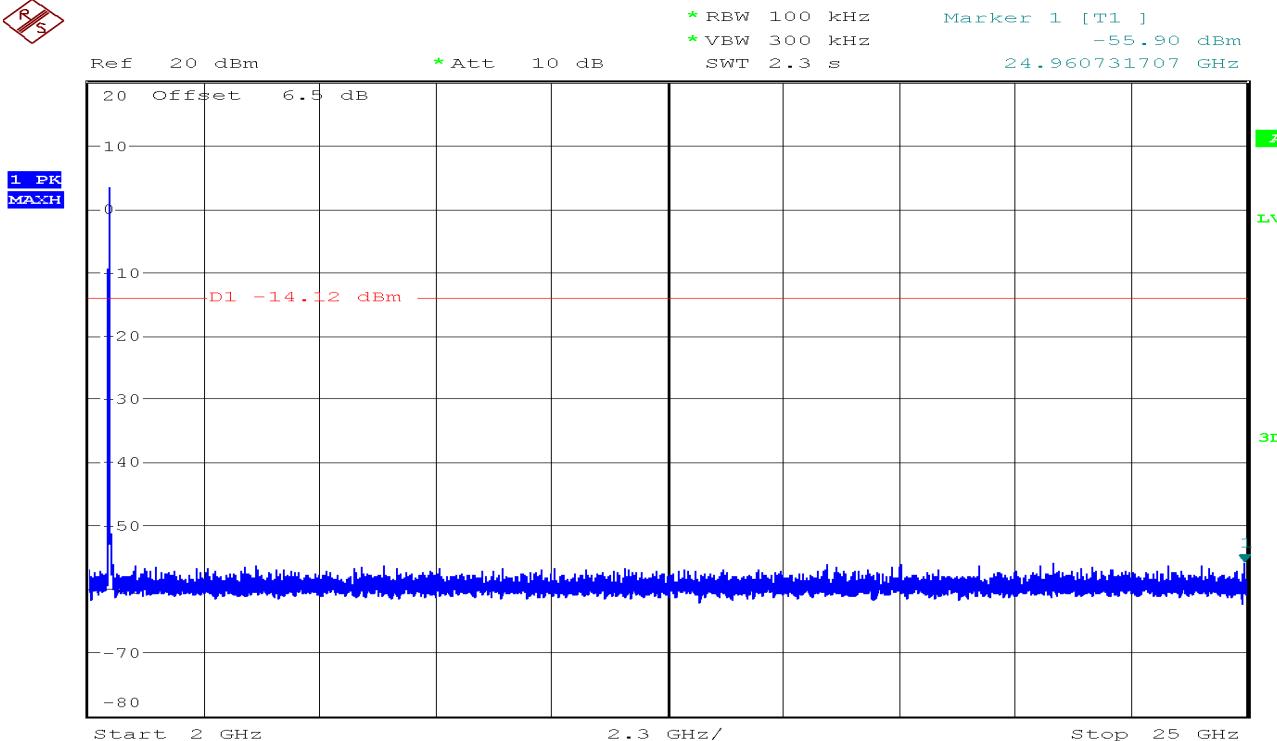


CH Mid

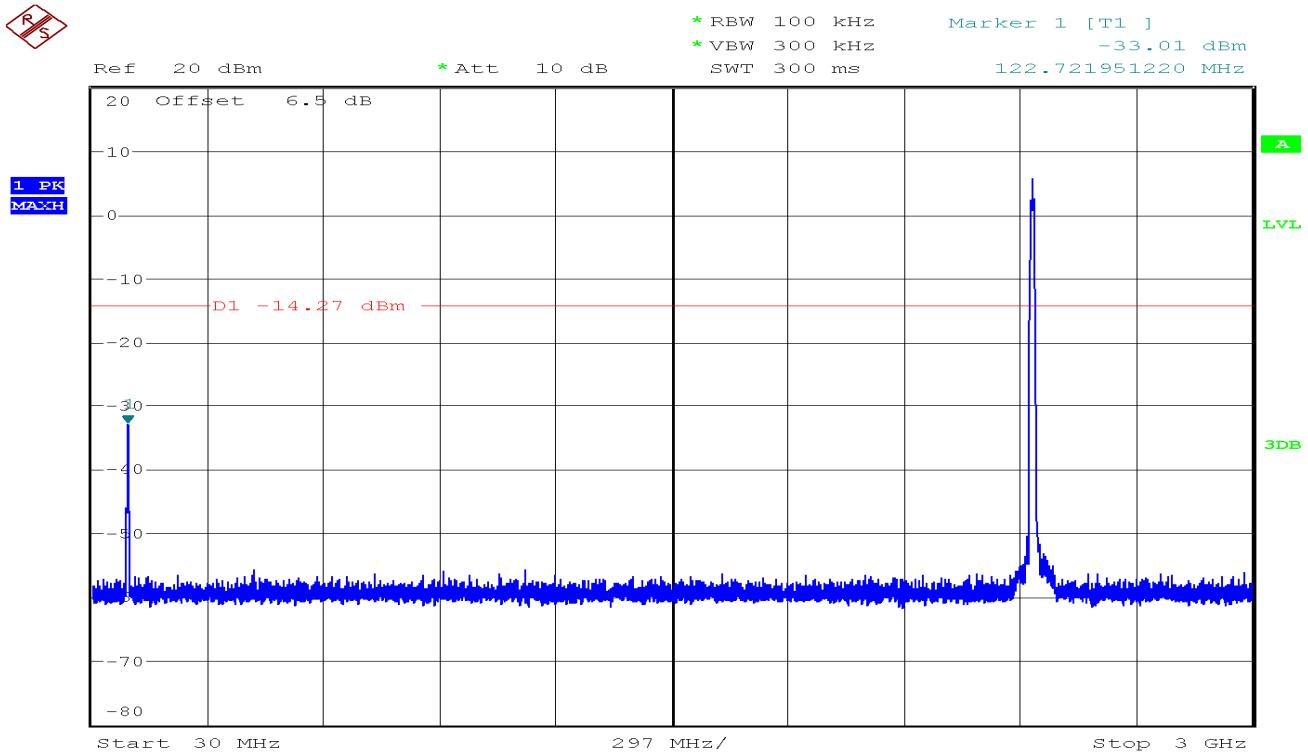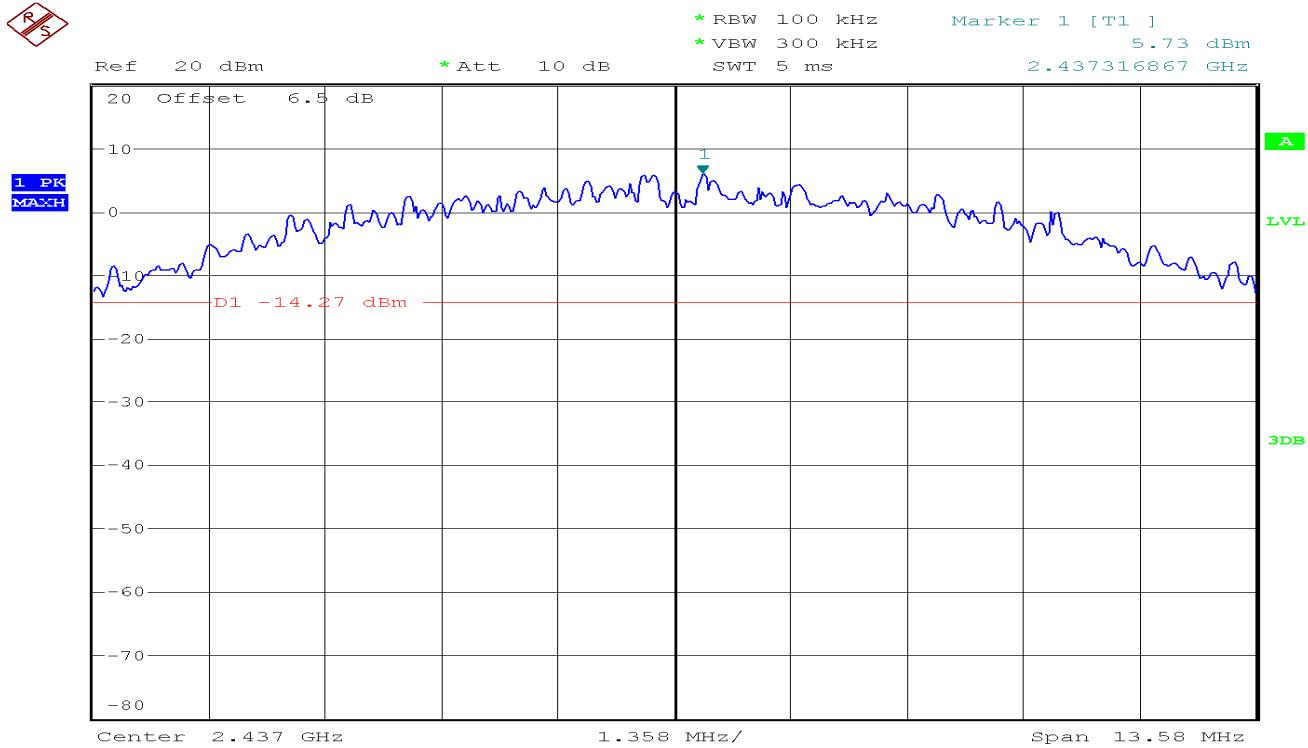


RS

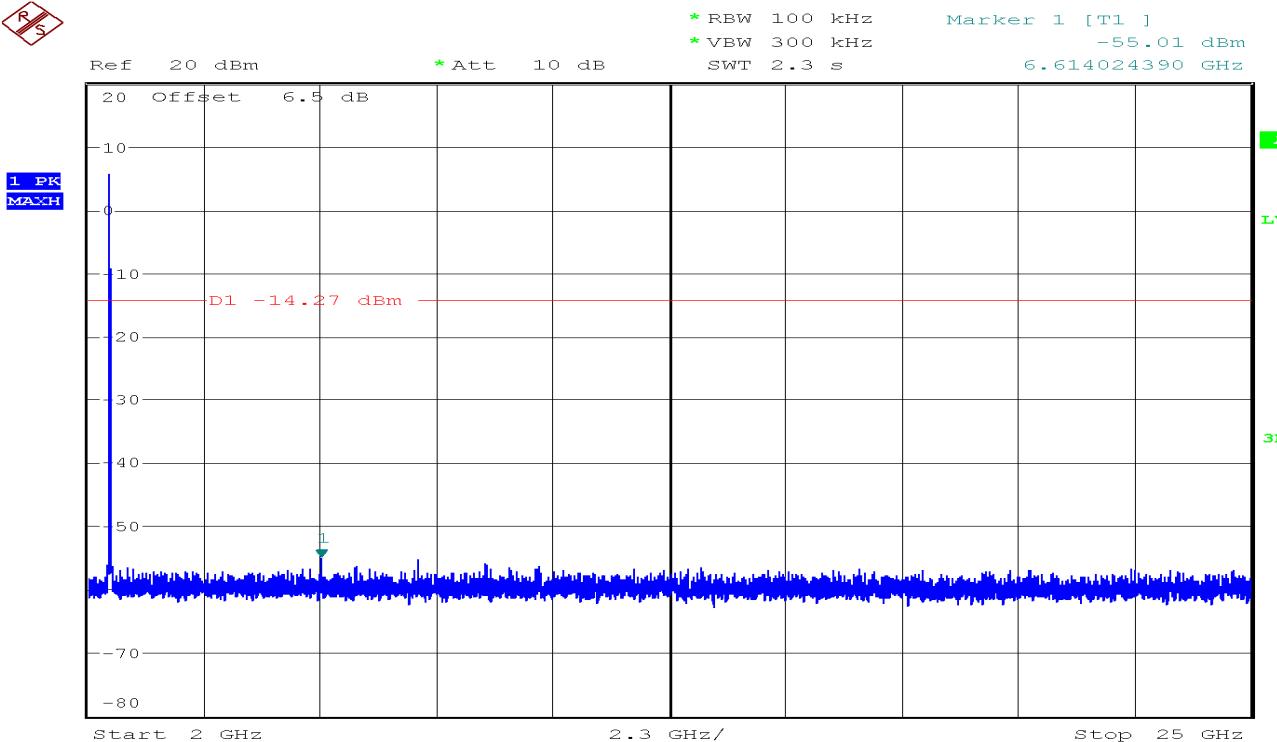**CH High**


RS

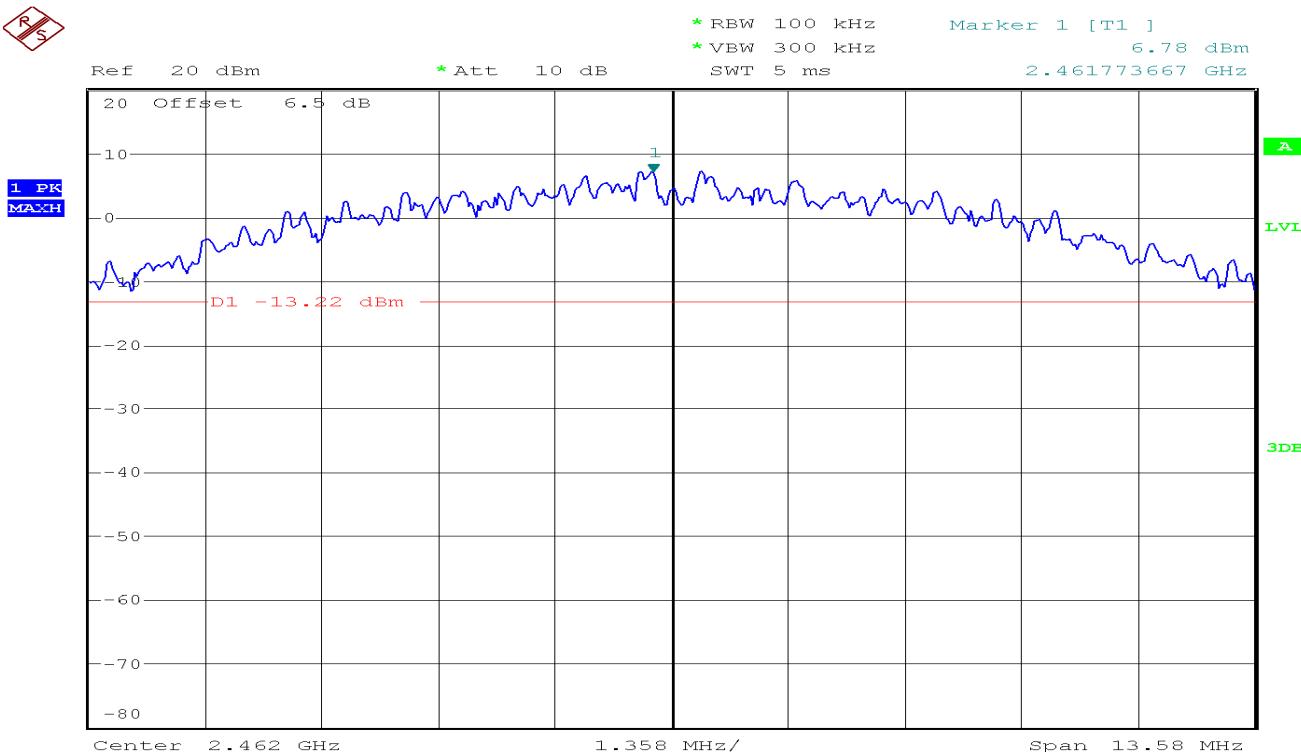


RS

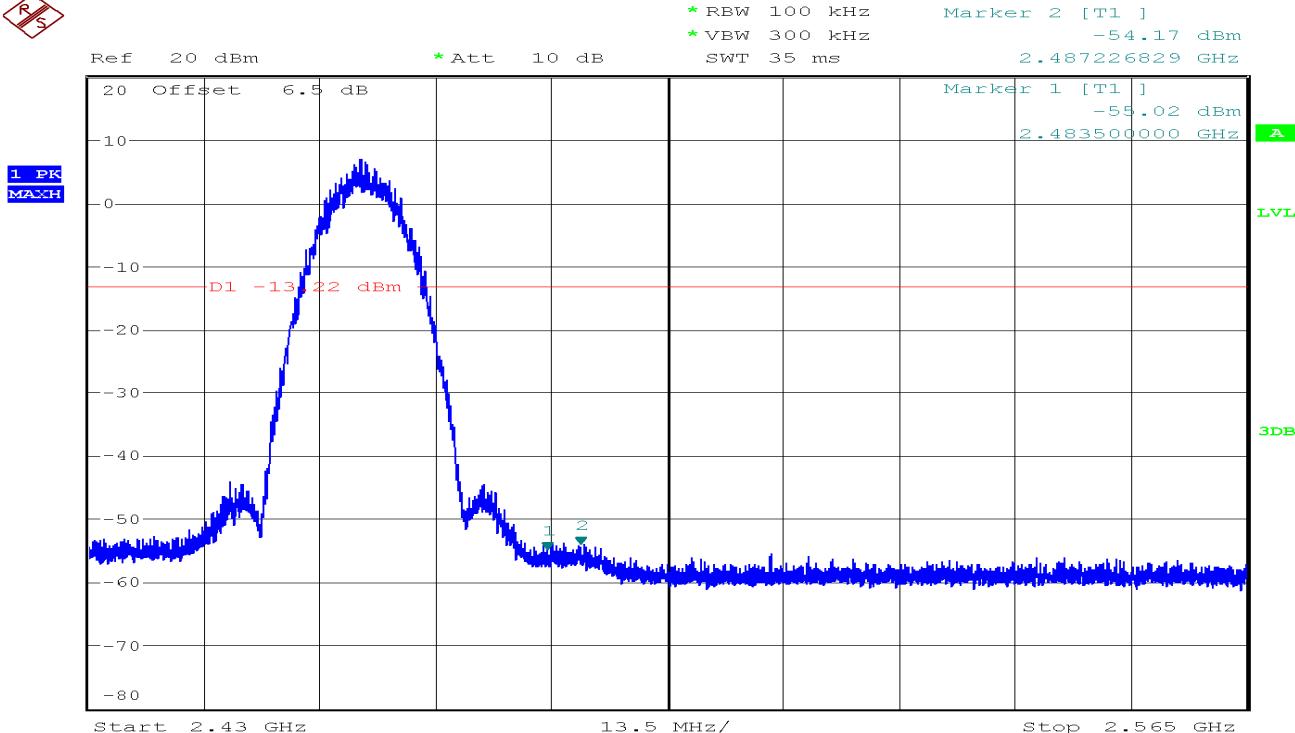


RS

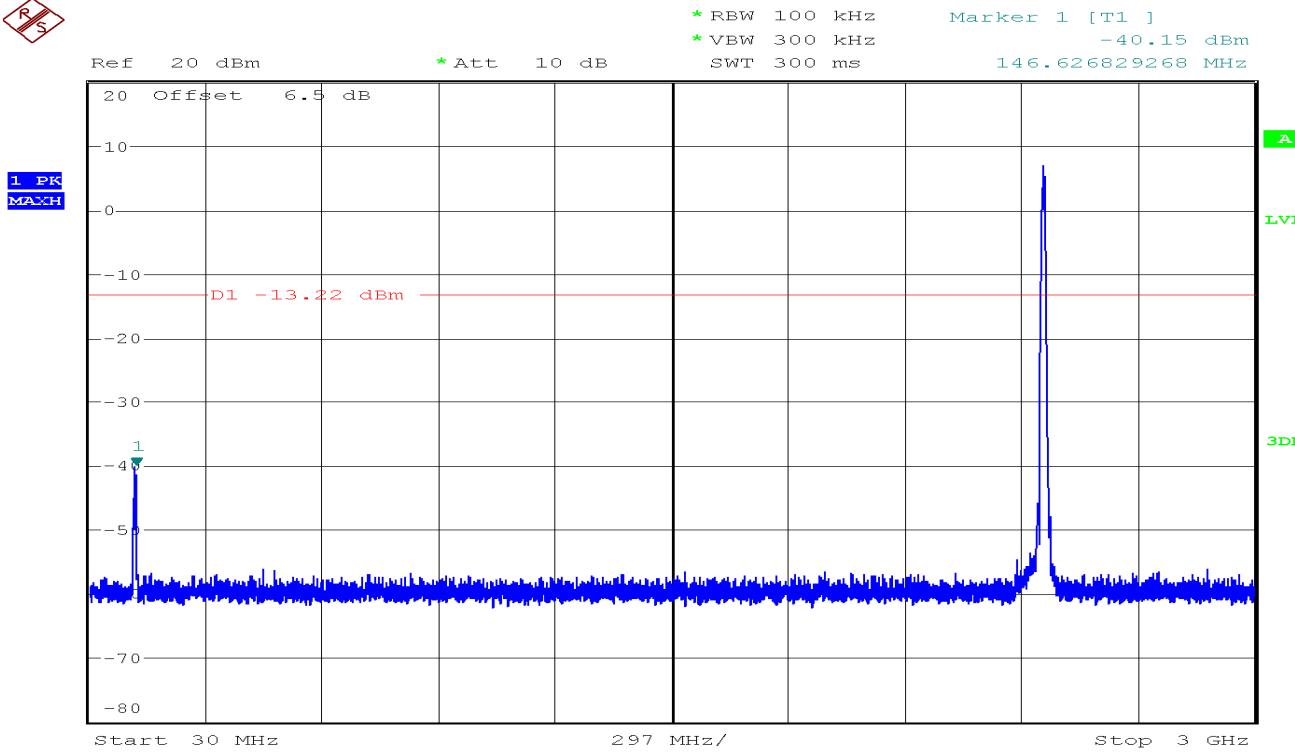

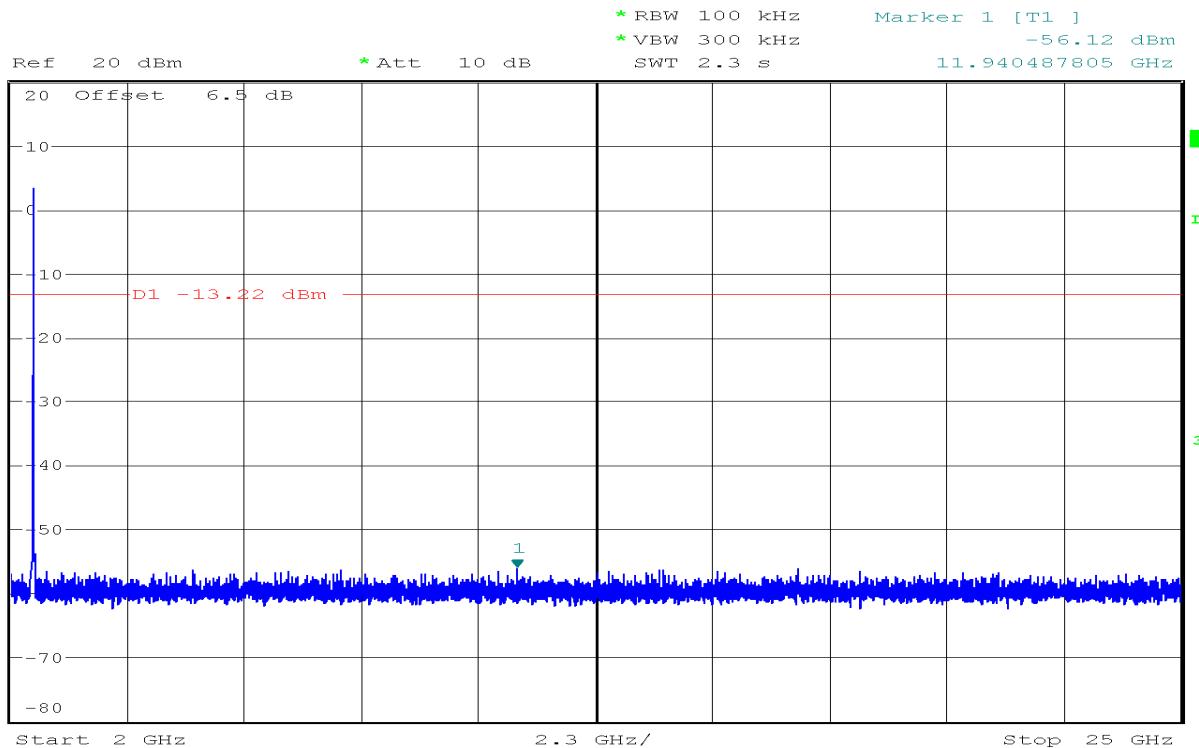


IEEE 802.11g mode


CH Low

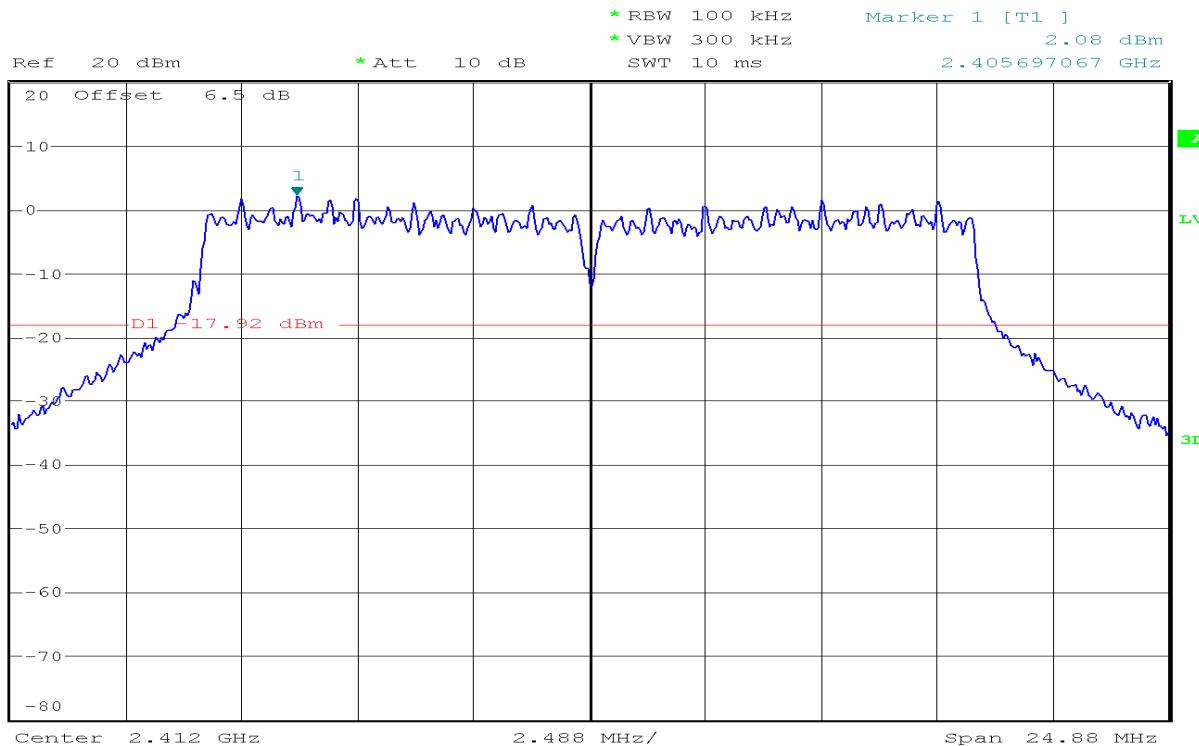


RS

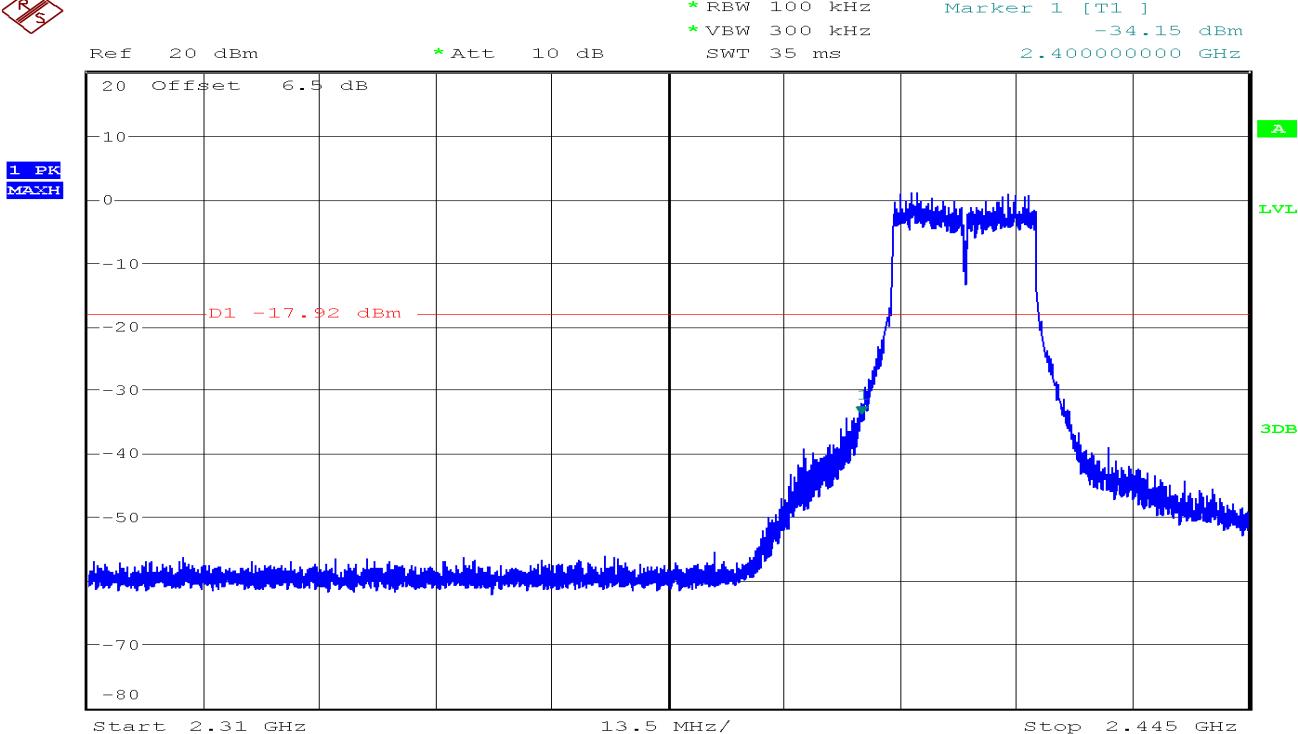

RS

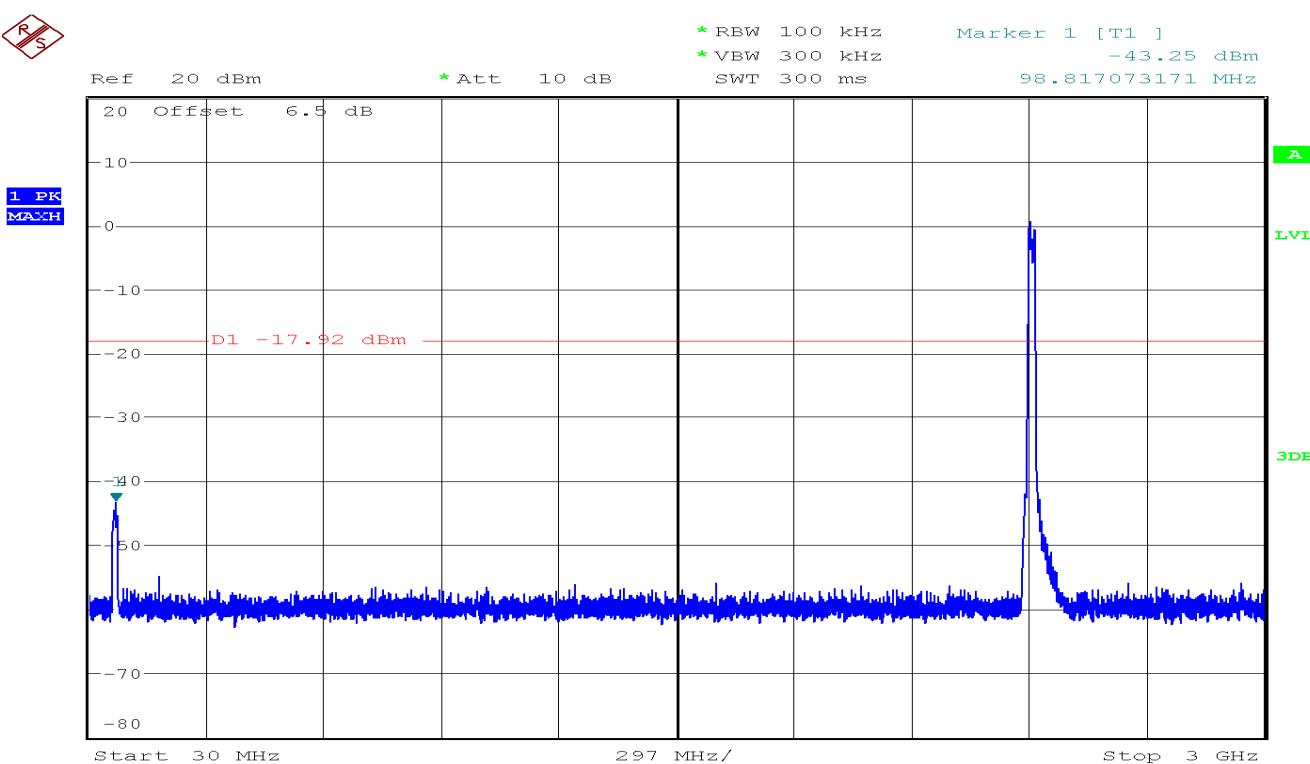


RS

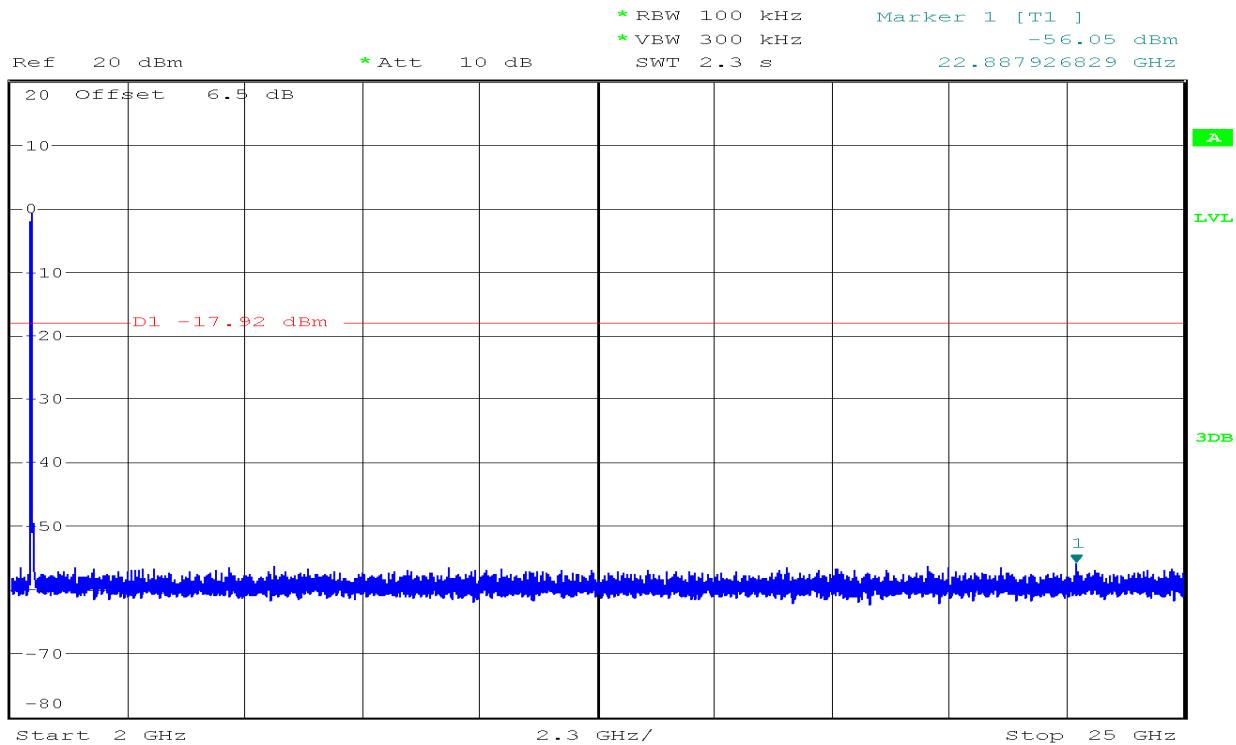


CH Mid


RS

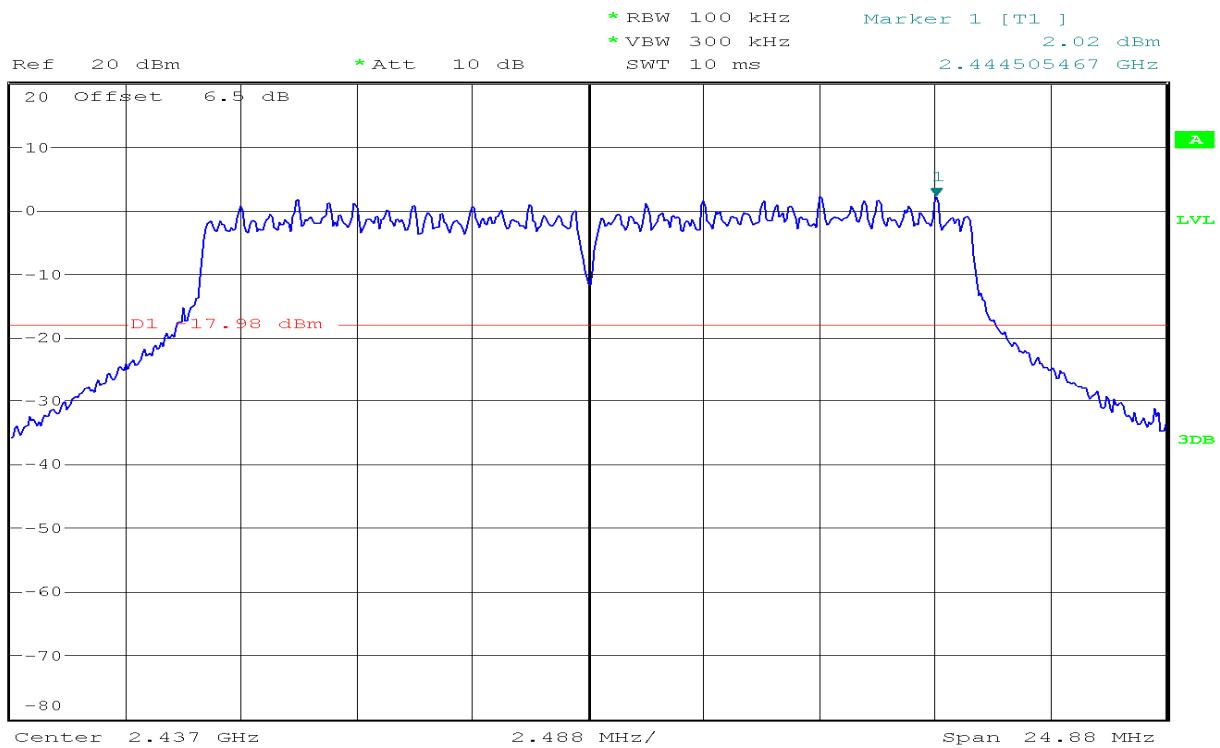



RS

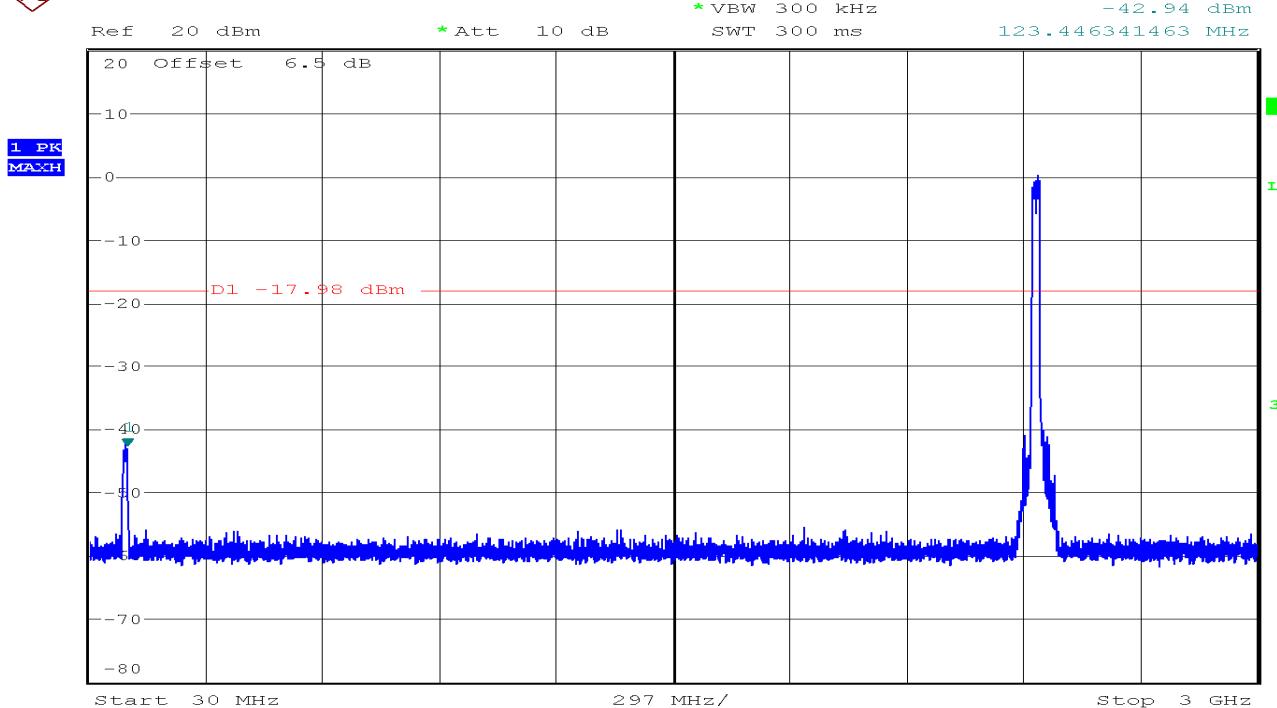


RS

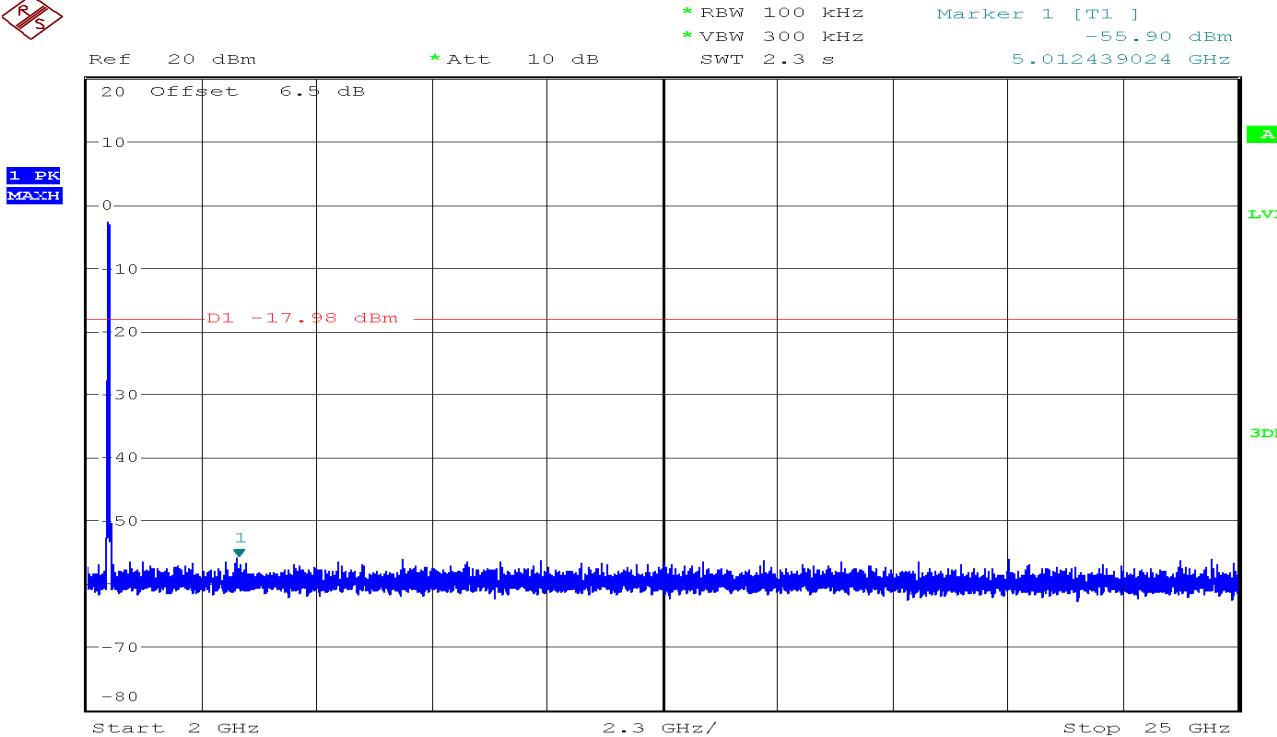


CH High

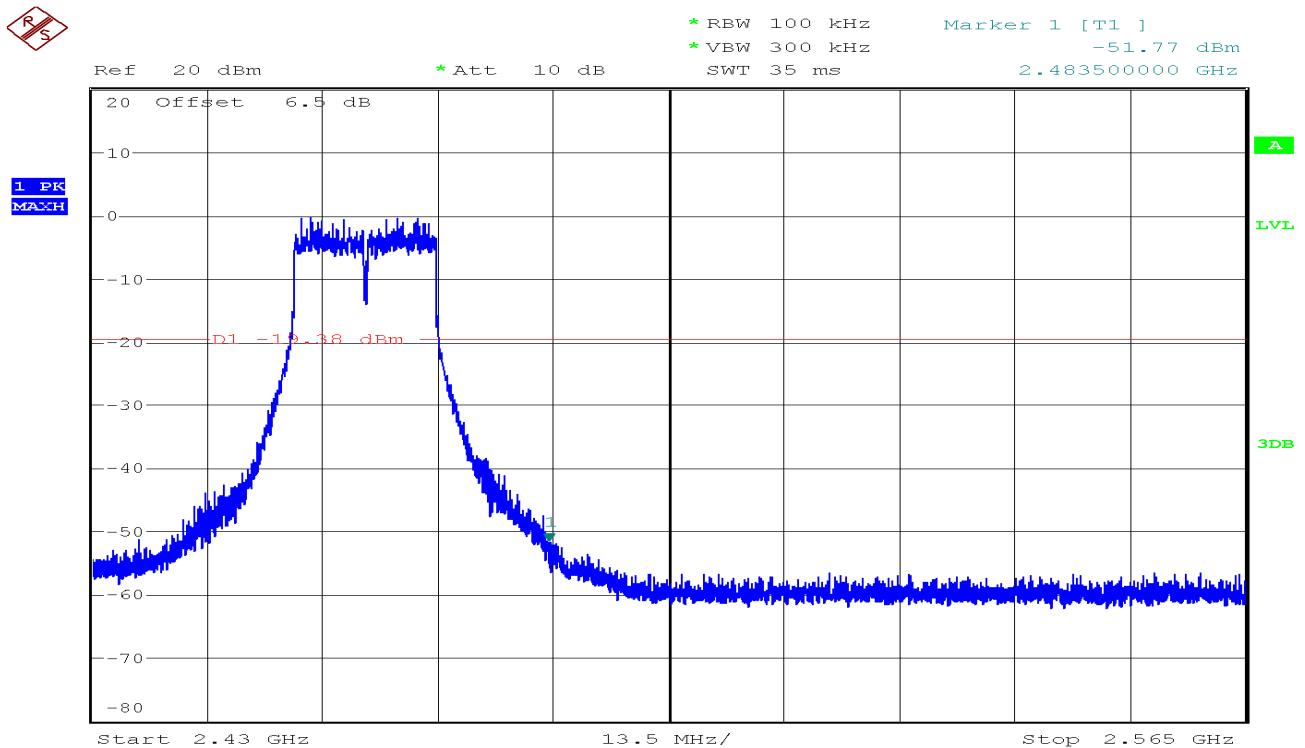
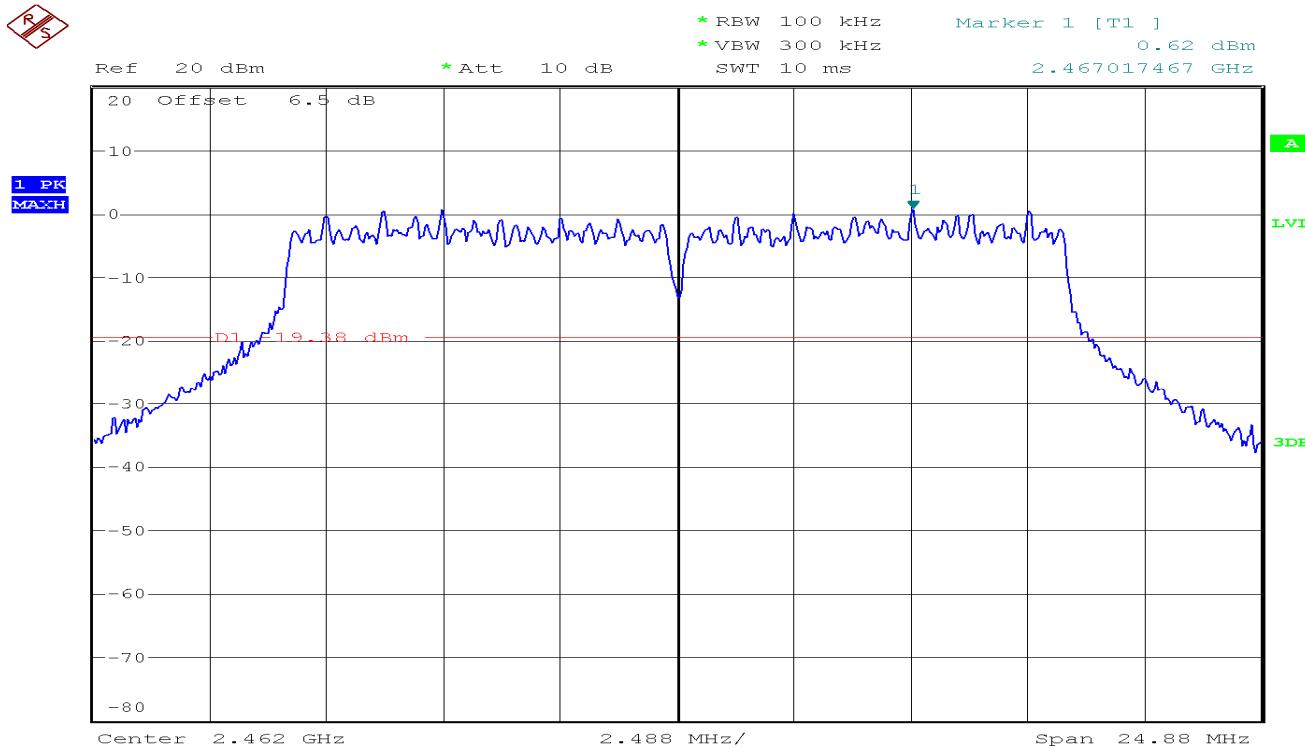


RS

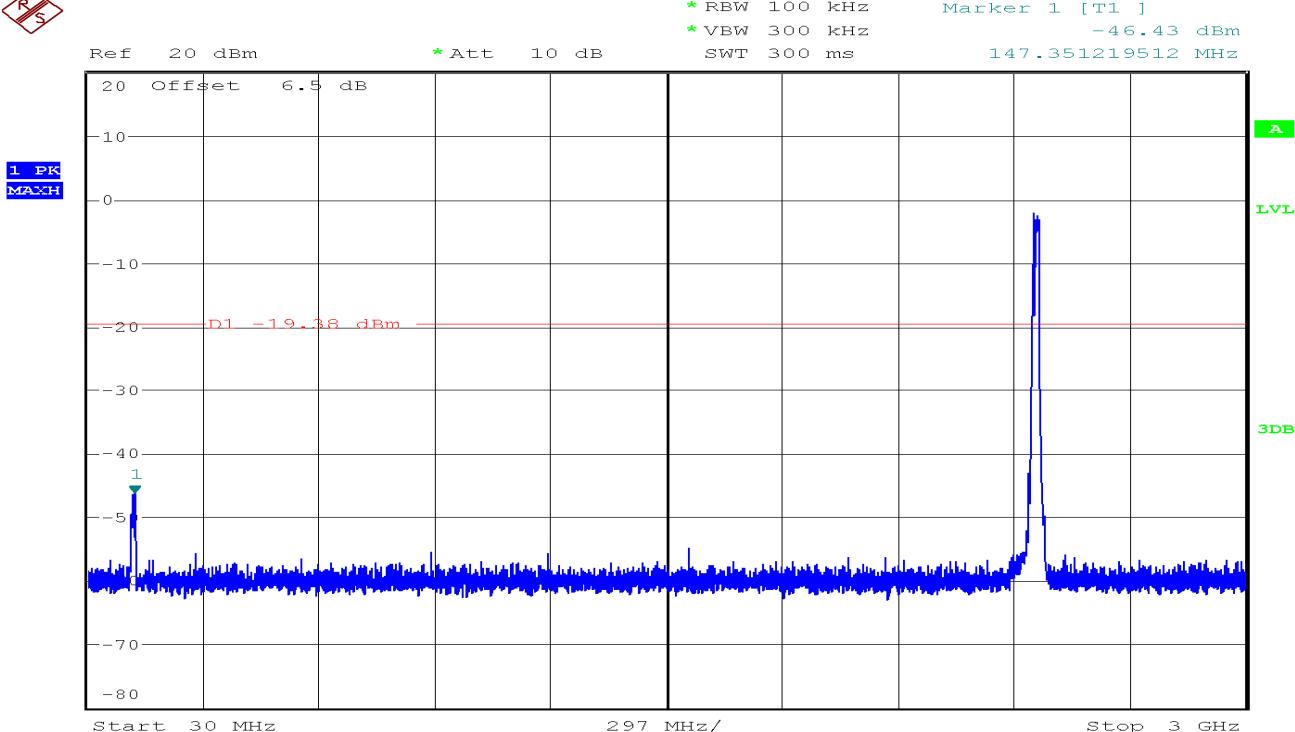


RS

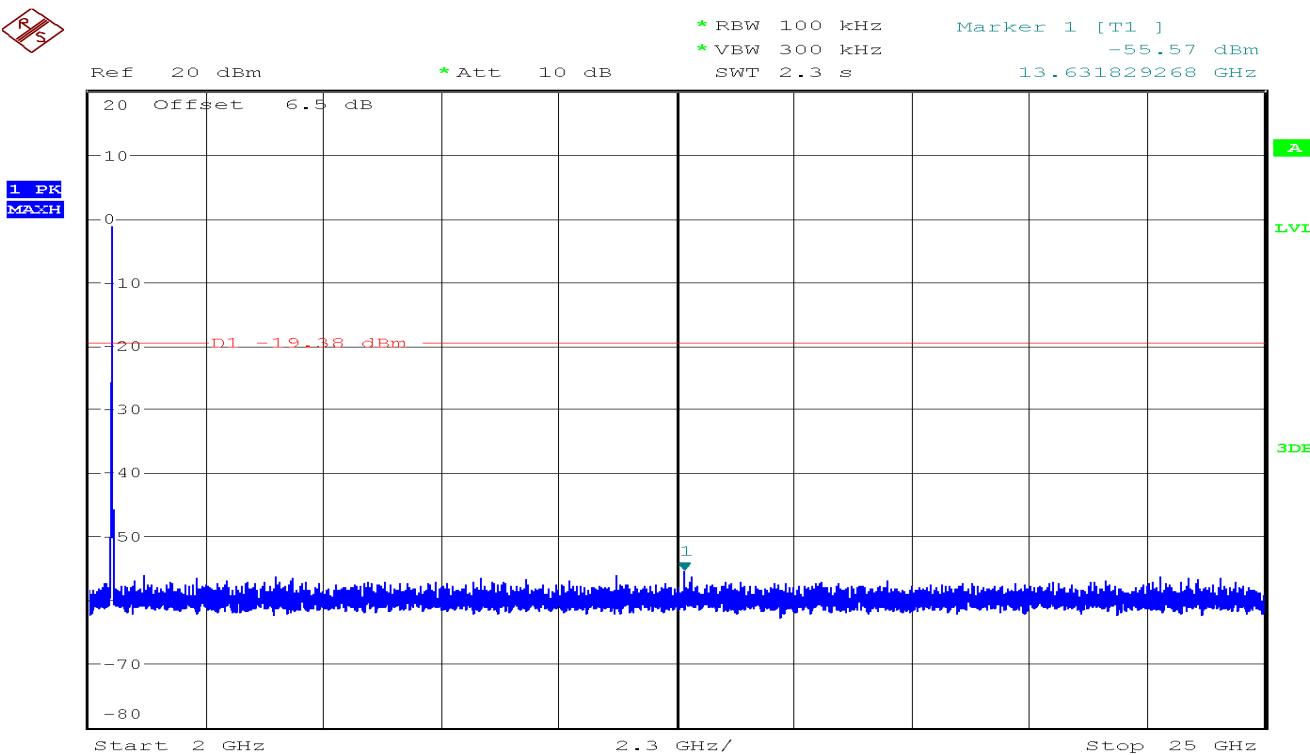


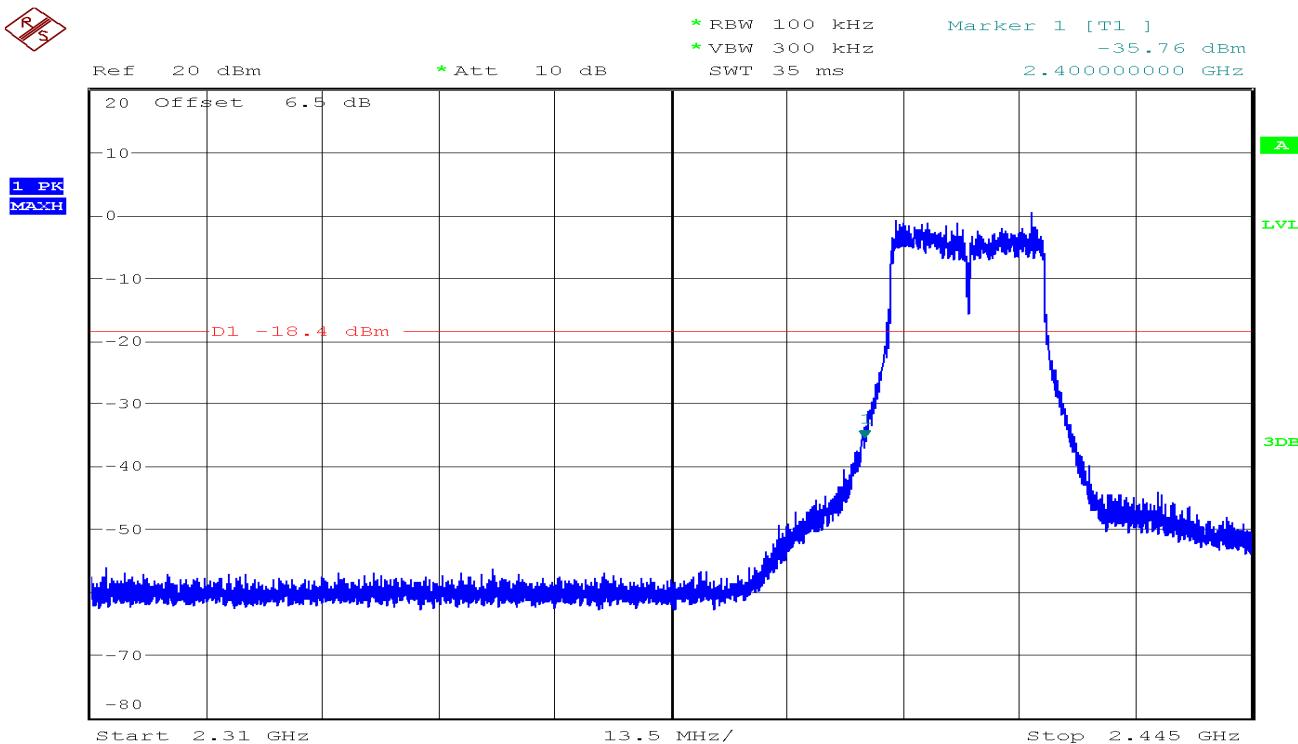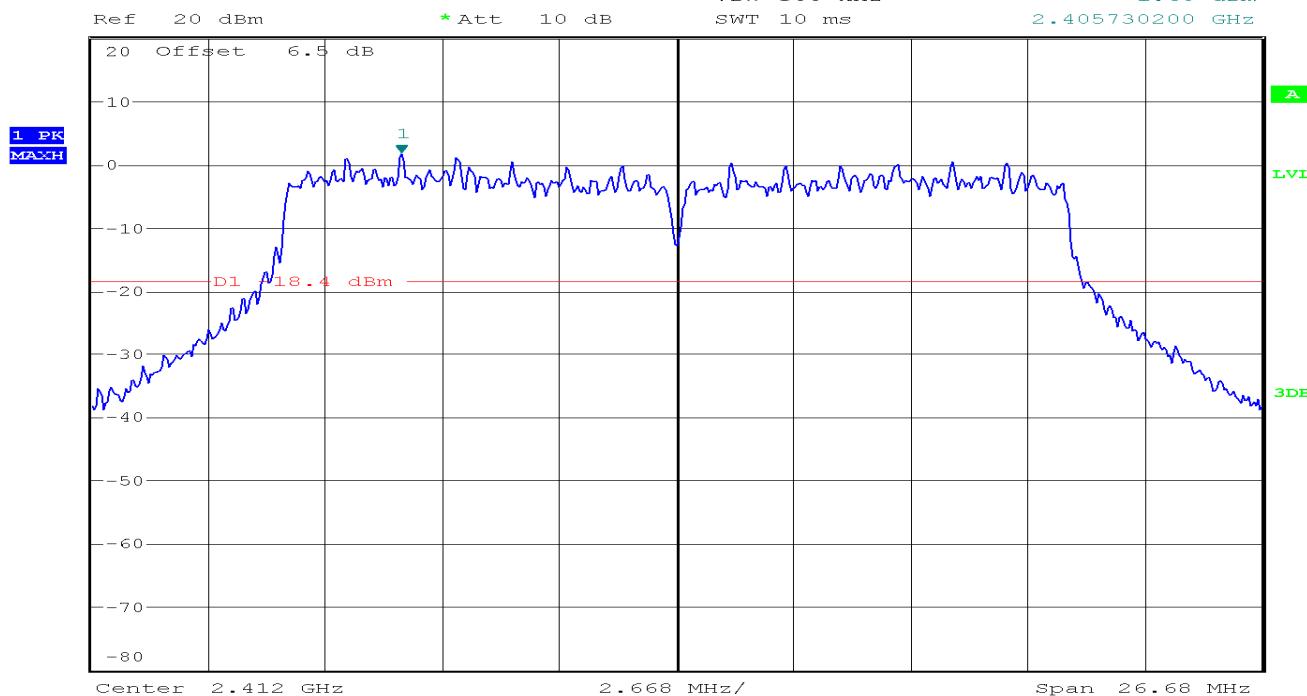IEEE 802.11n HT20 mode**CH Low**



RS

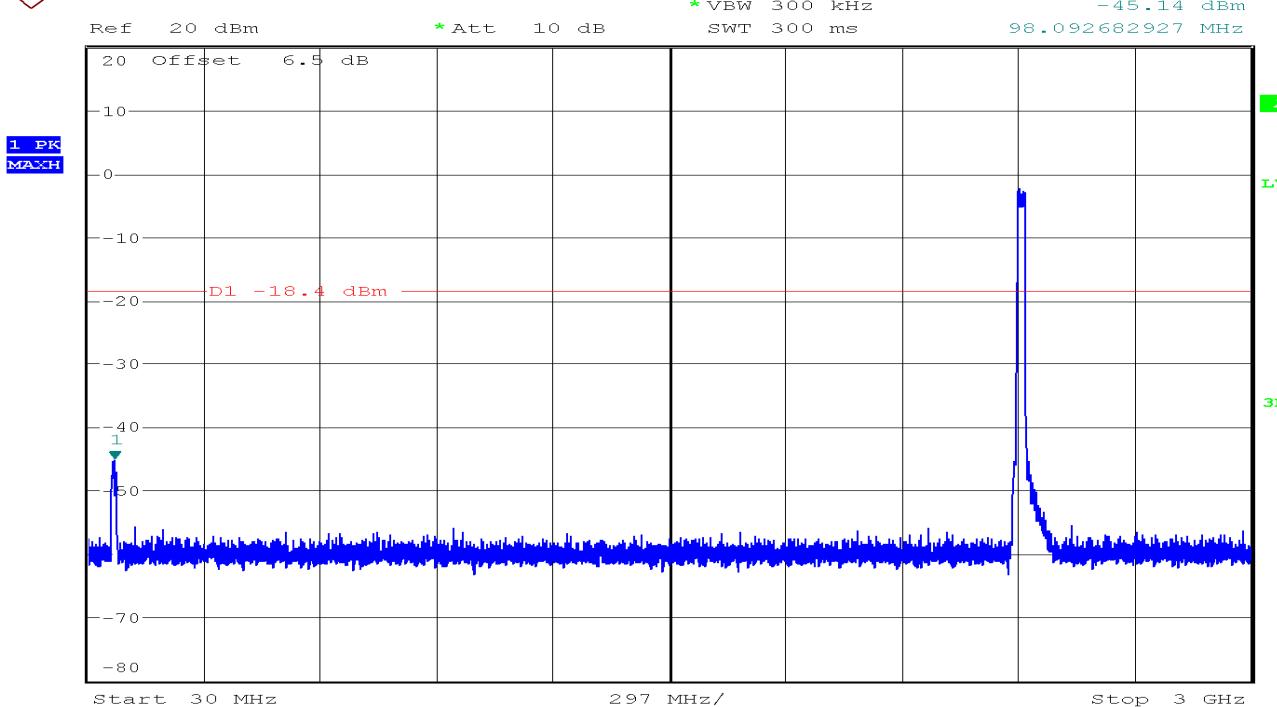


RS

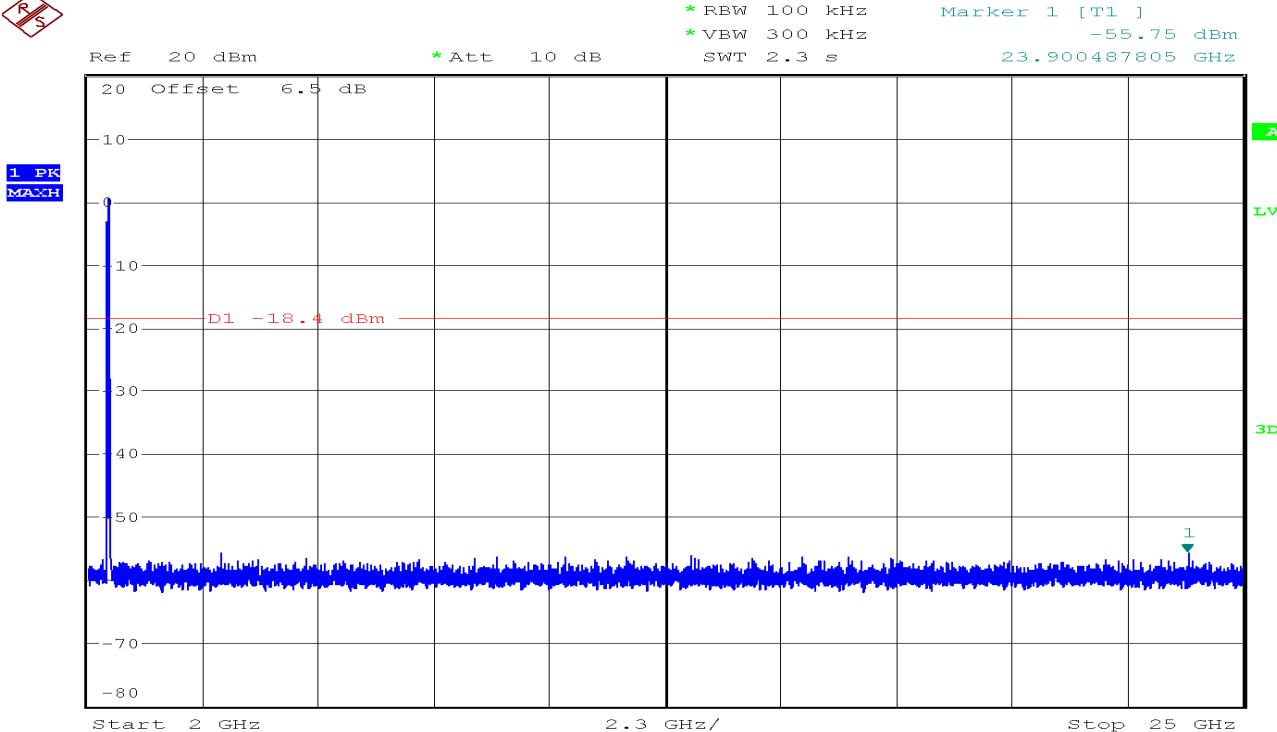

CH Mid

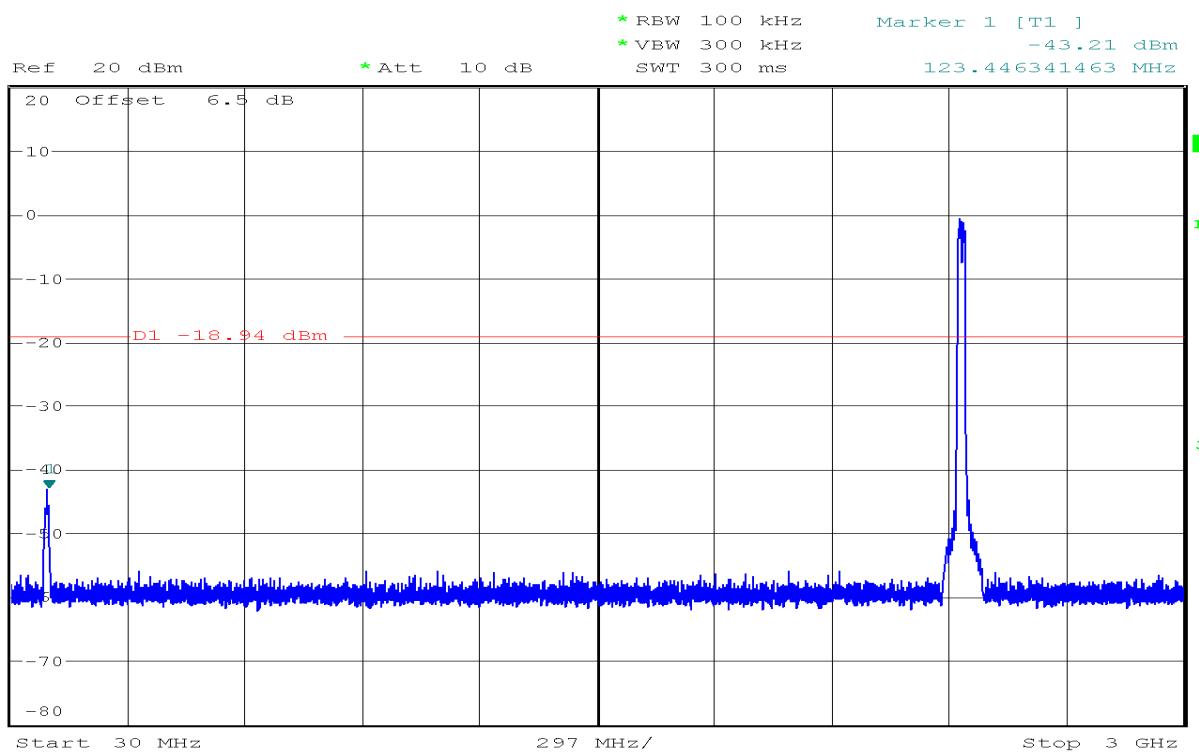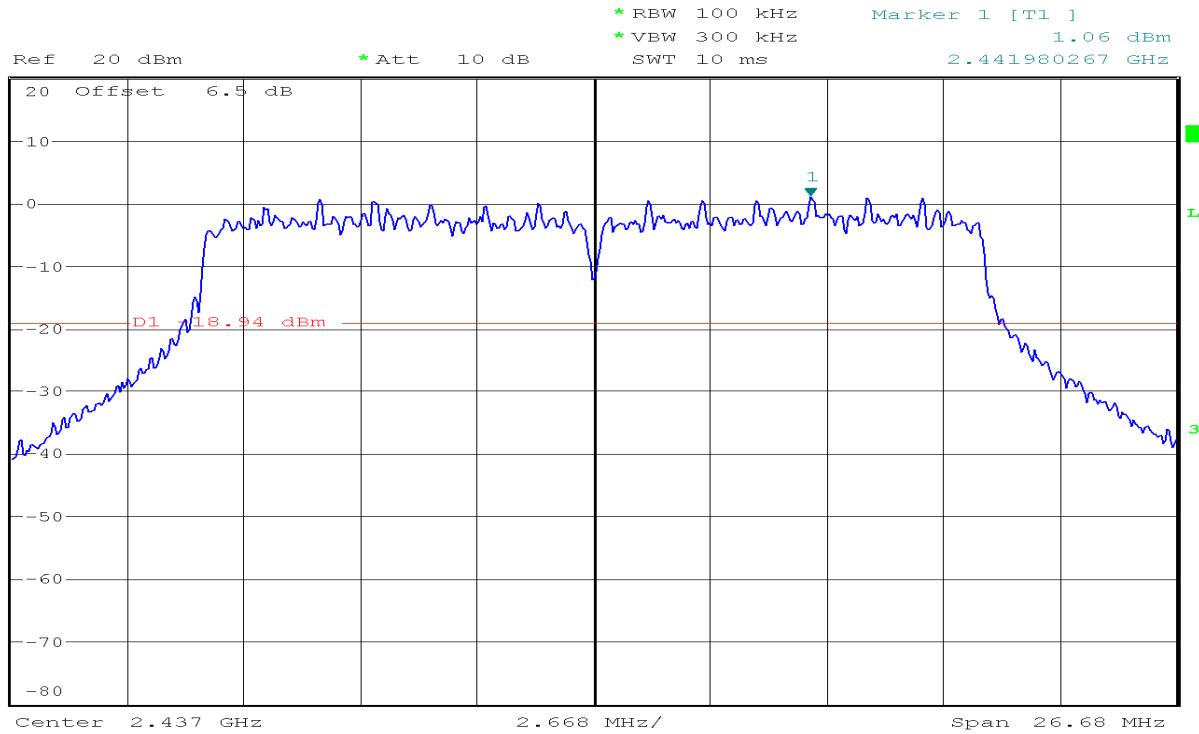


RS

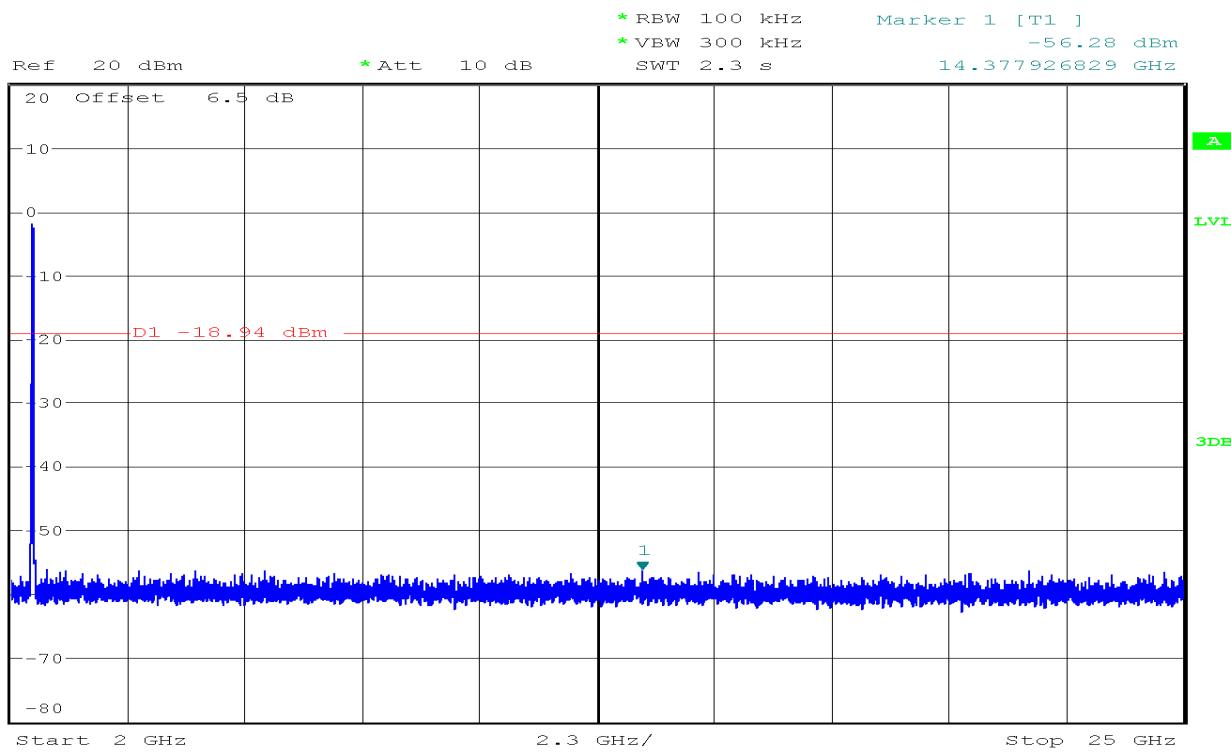


CH High


RS

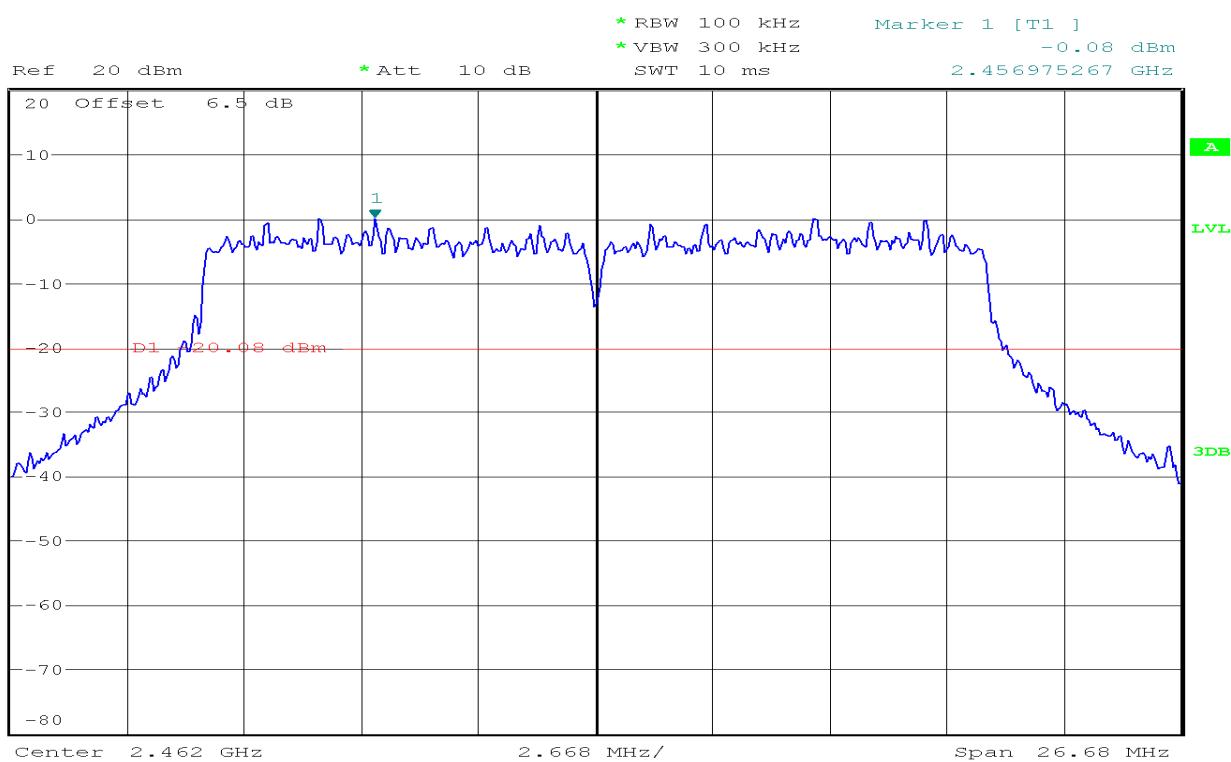


RS

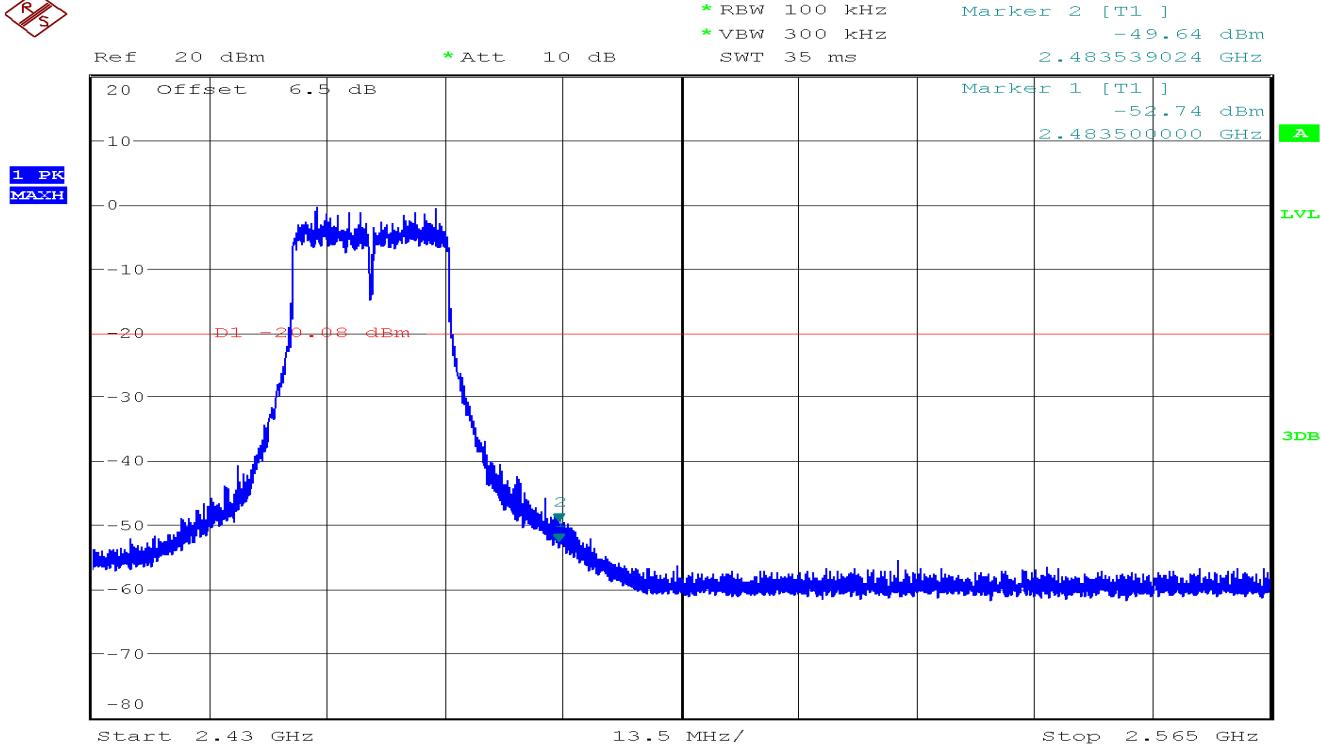


RS

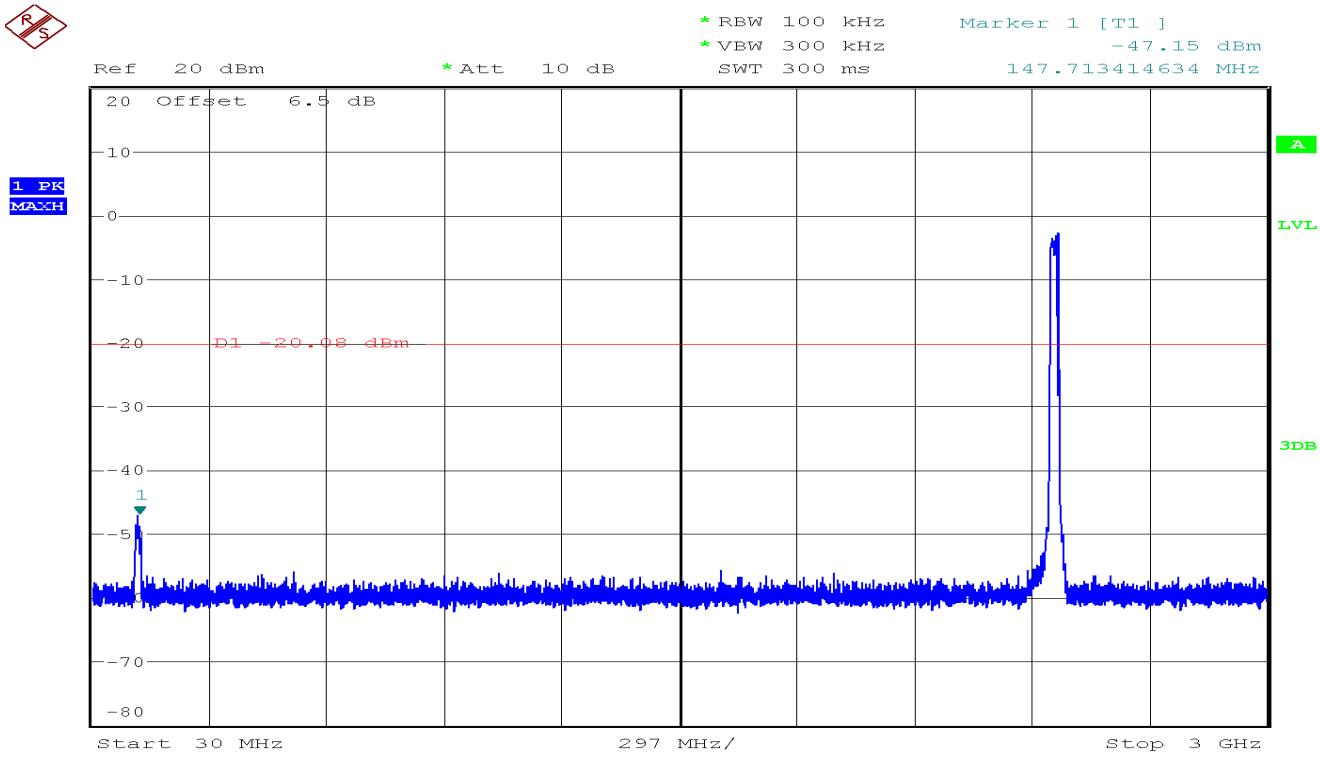


RS

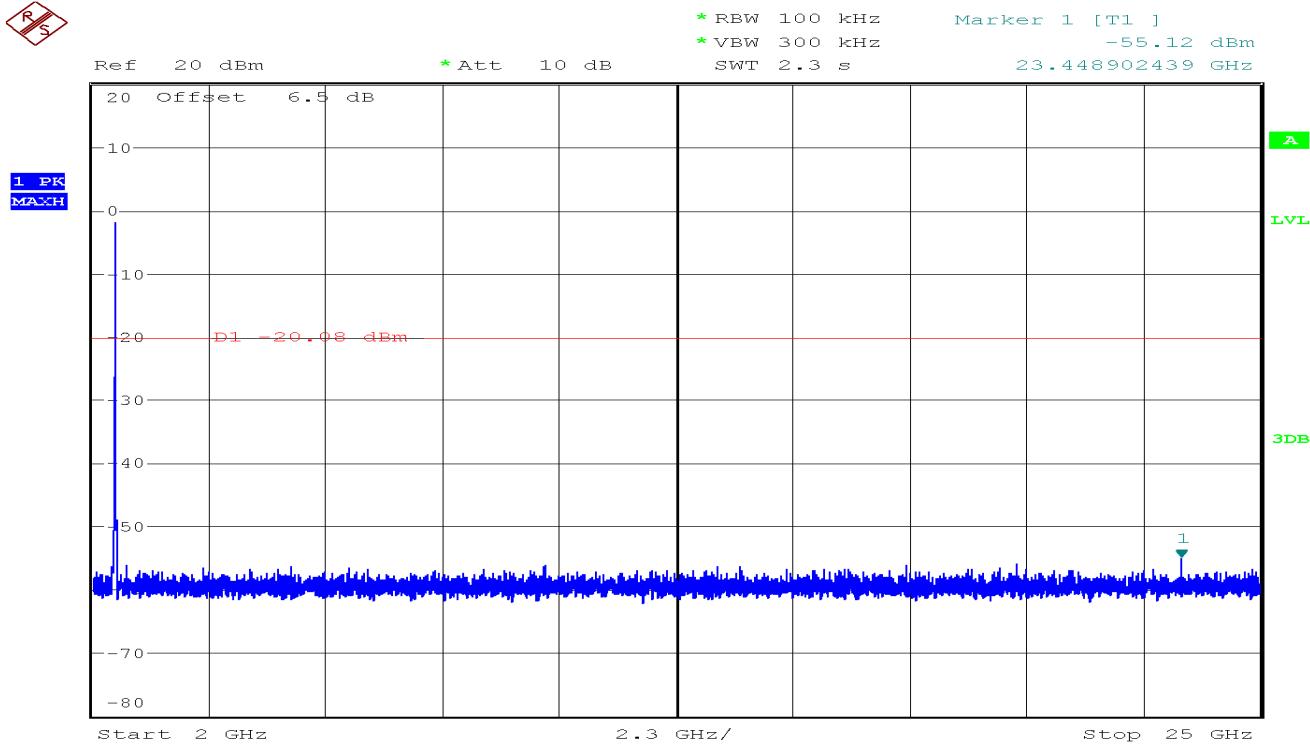**IEEE 802.11n HT40 mode****CH Low**


RS

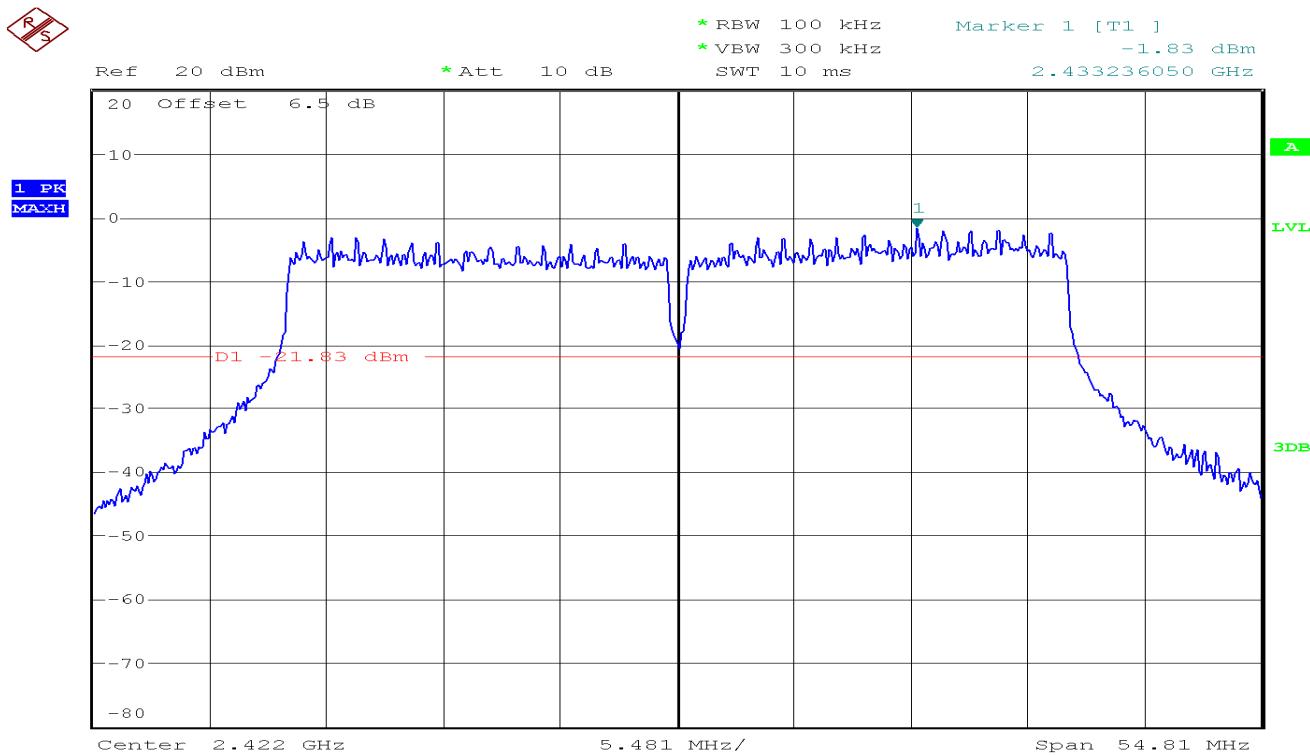


RS

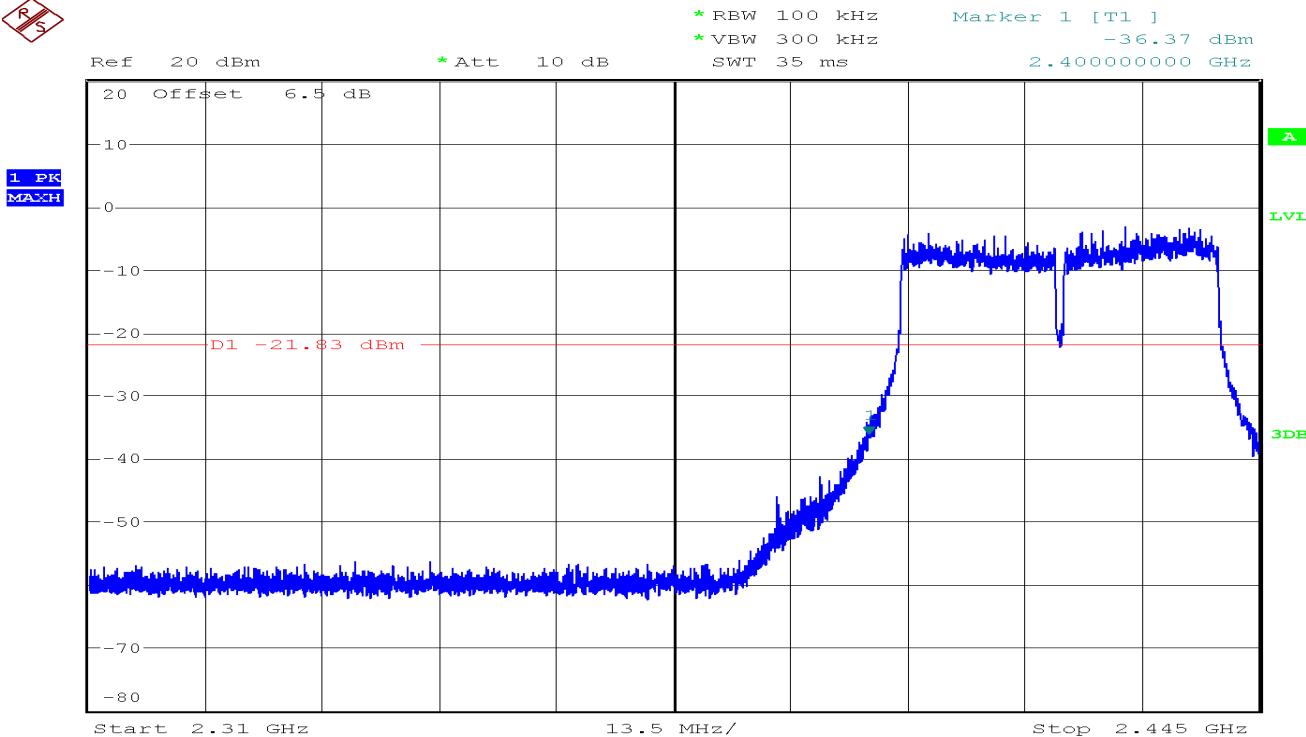

RS

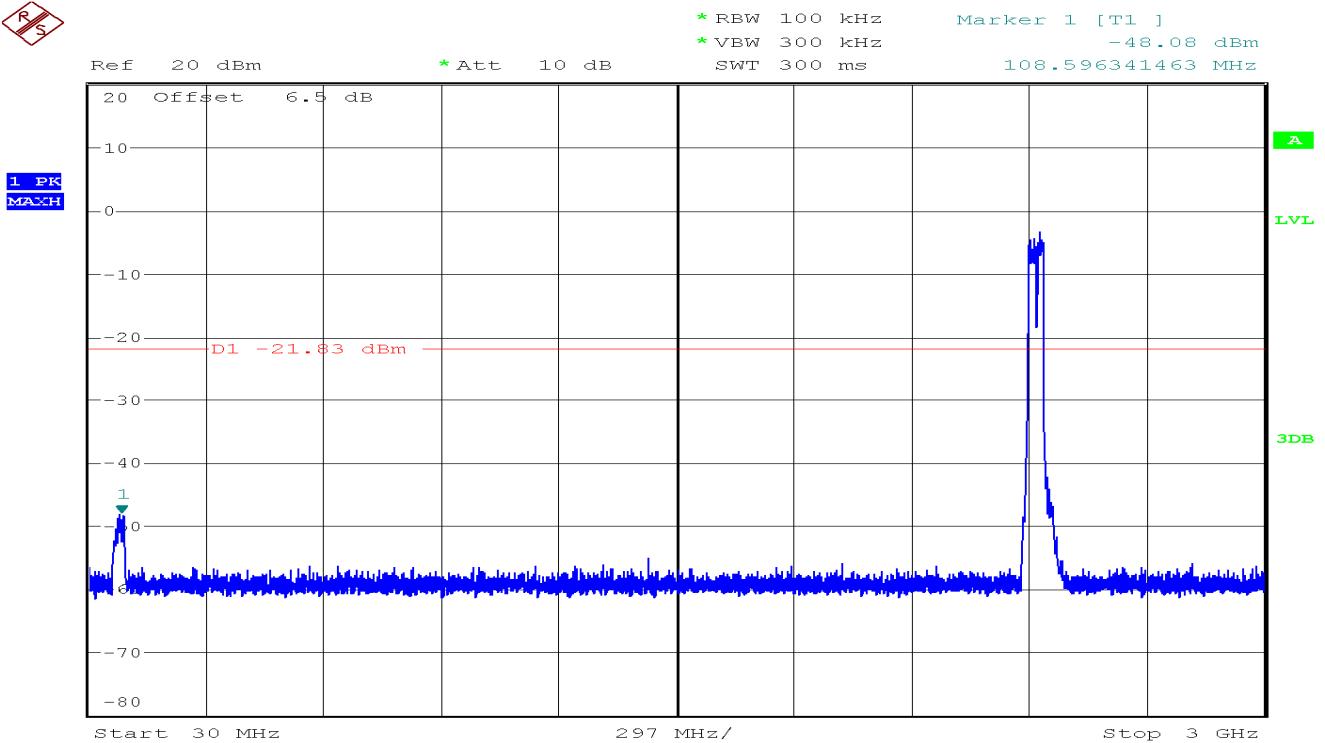


RS

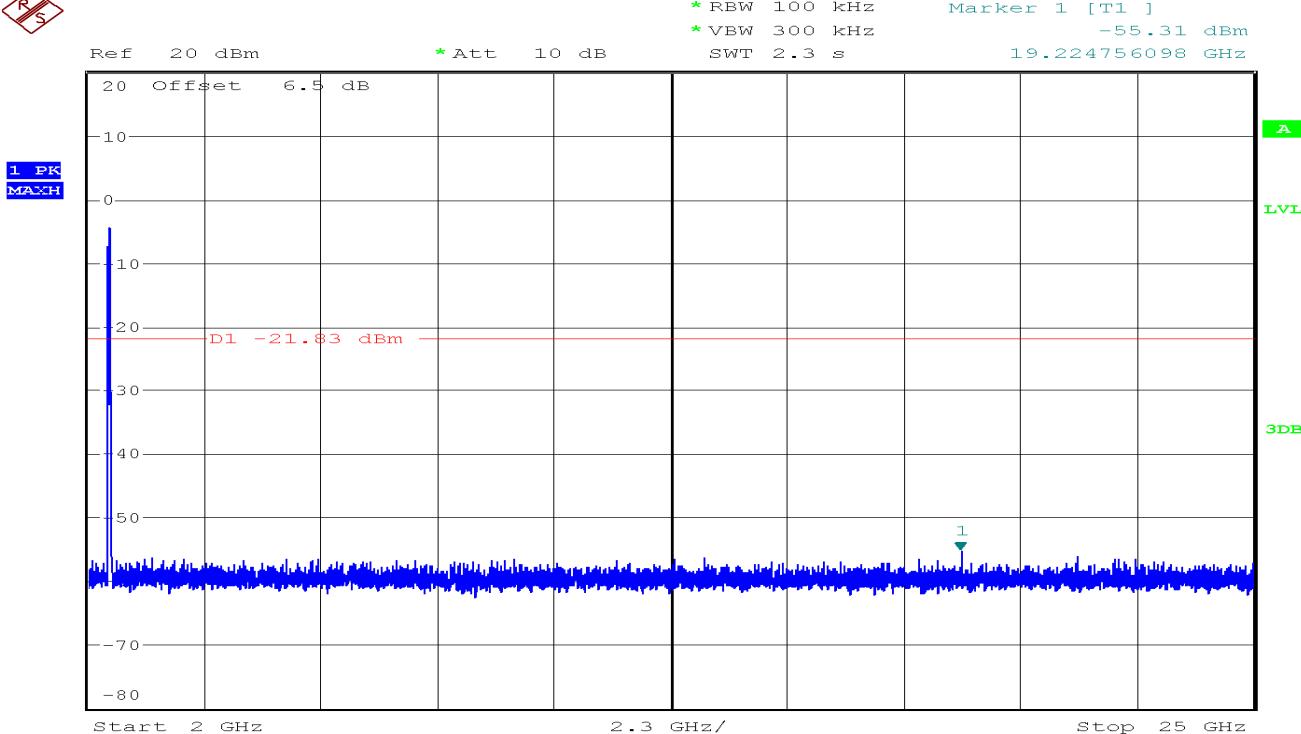


CH Mid


RS

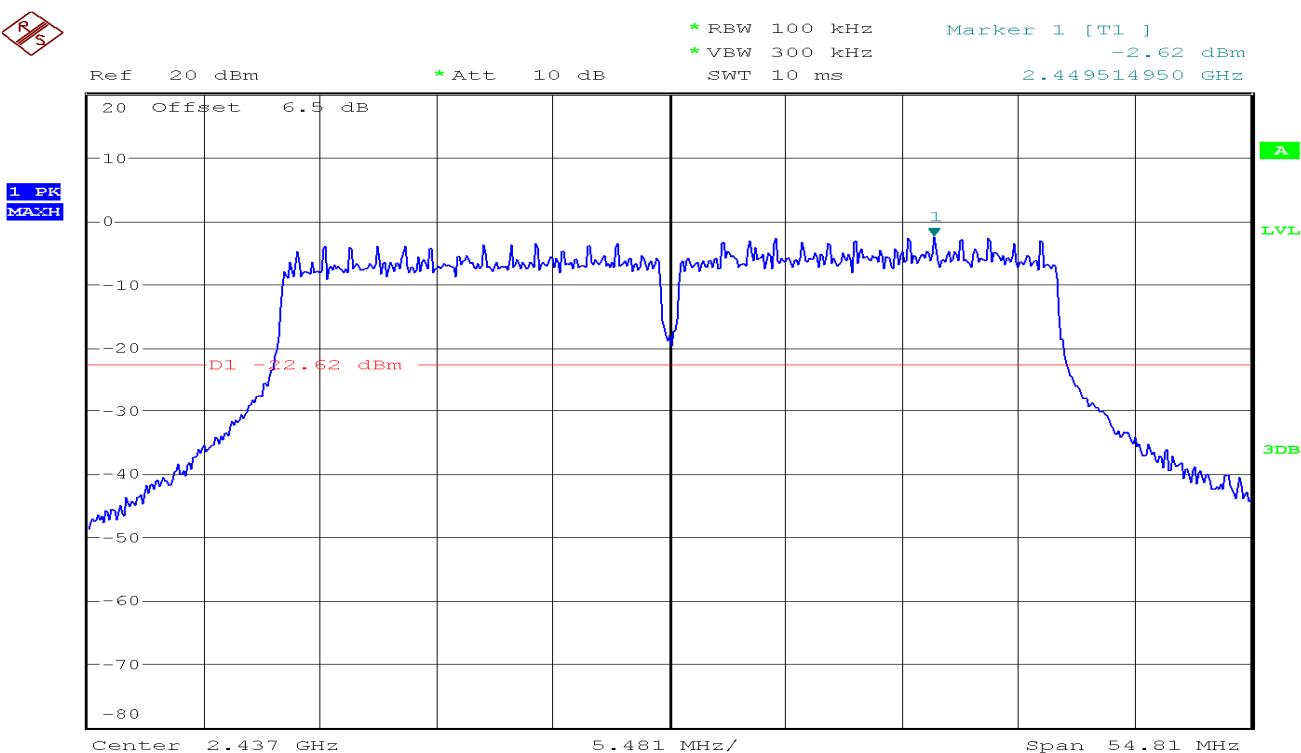



RS

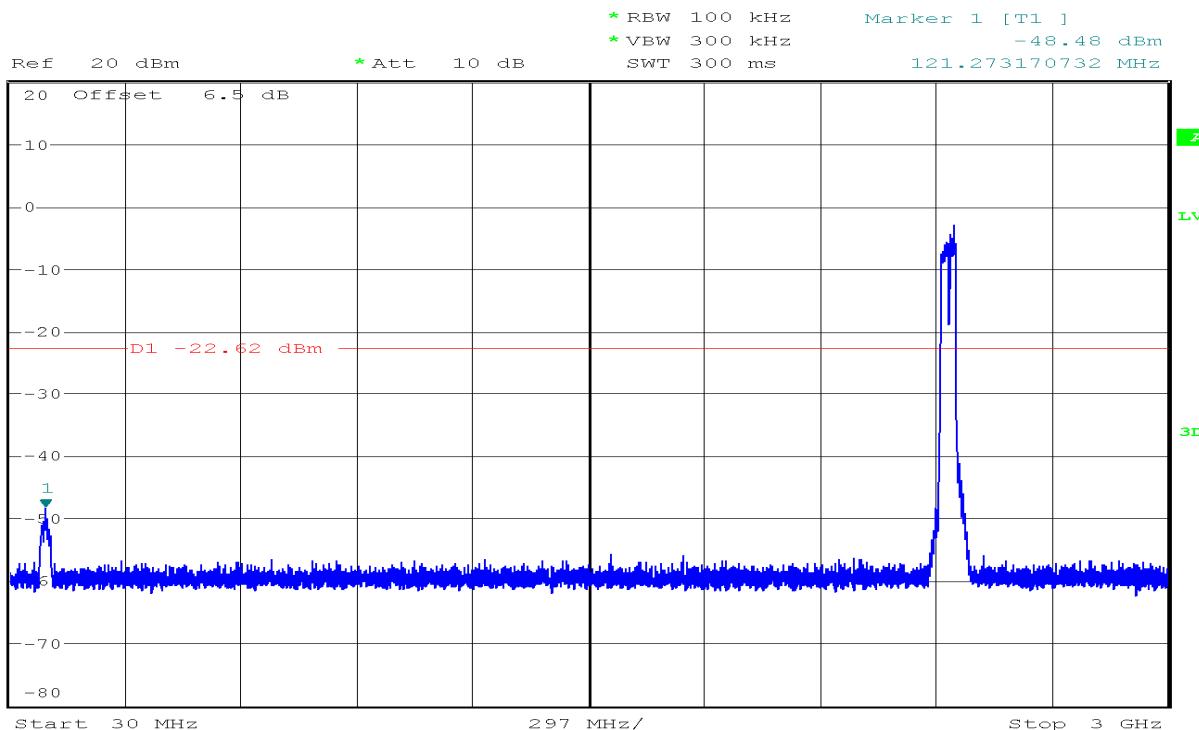1 PK
MAXH


RS

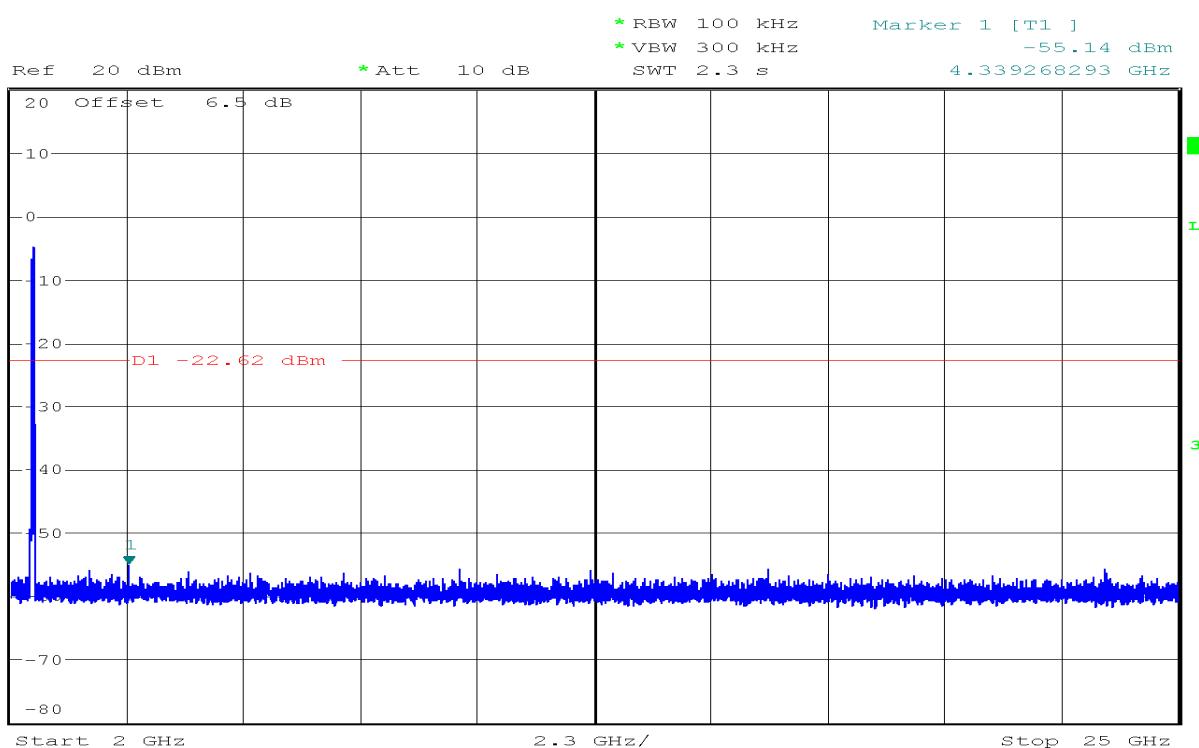1 PK
MAXH


CH High

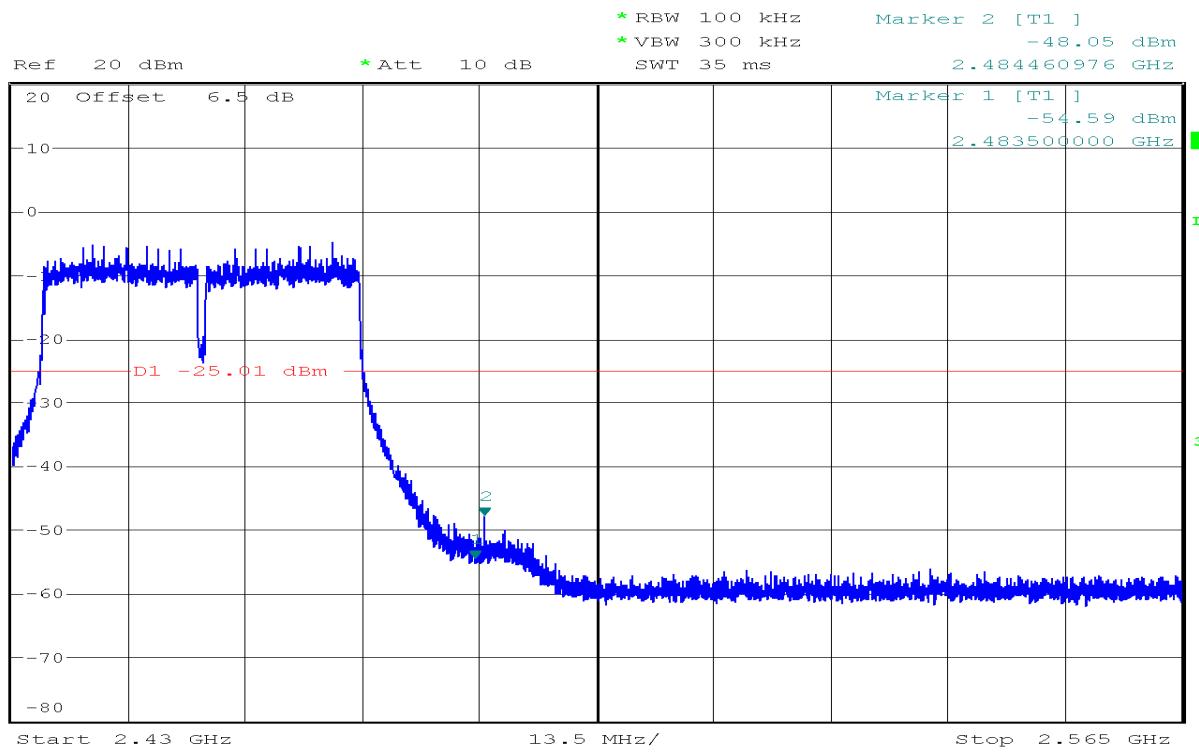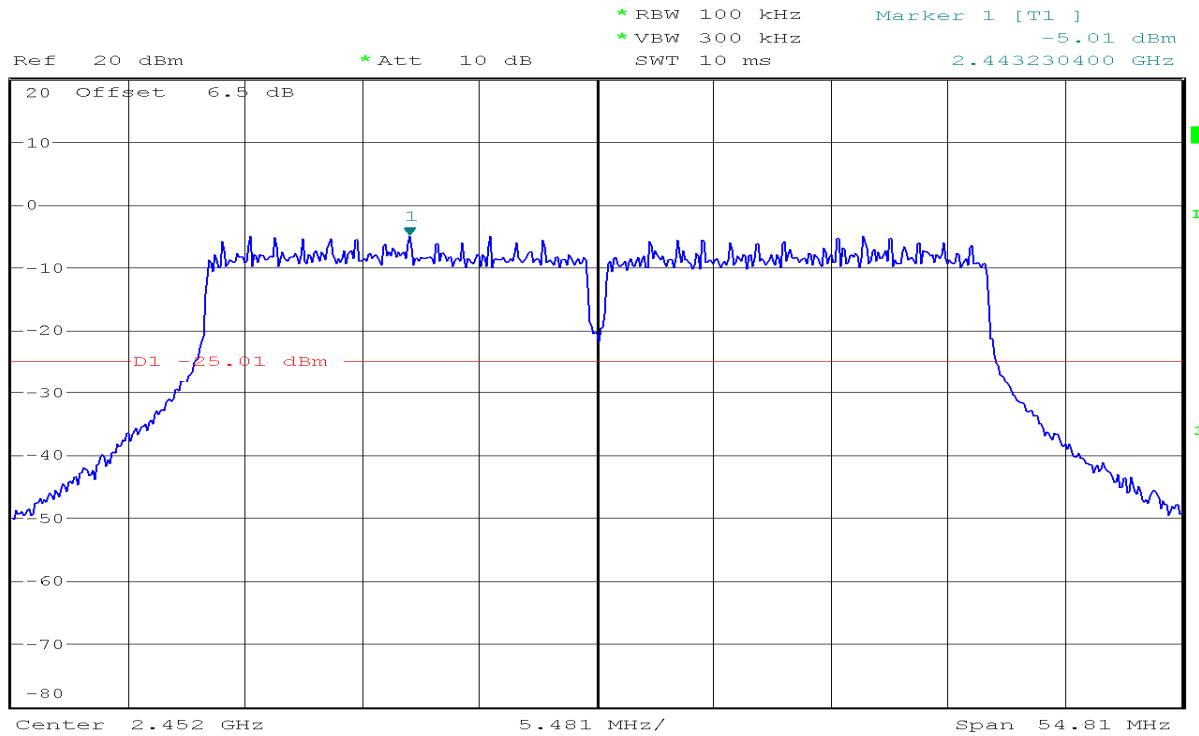

RS

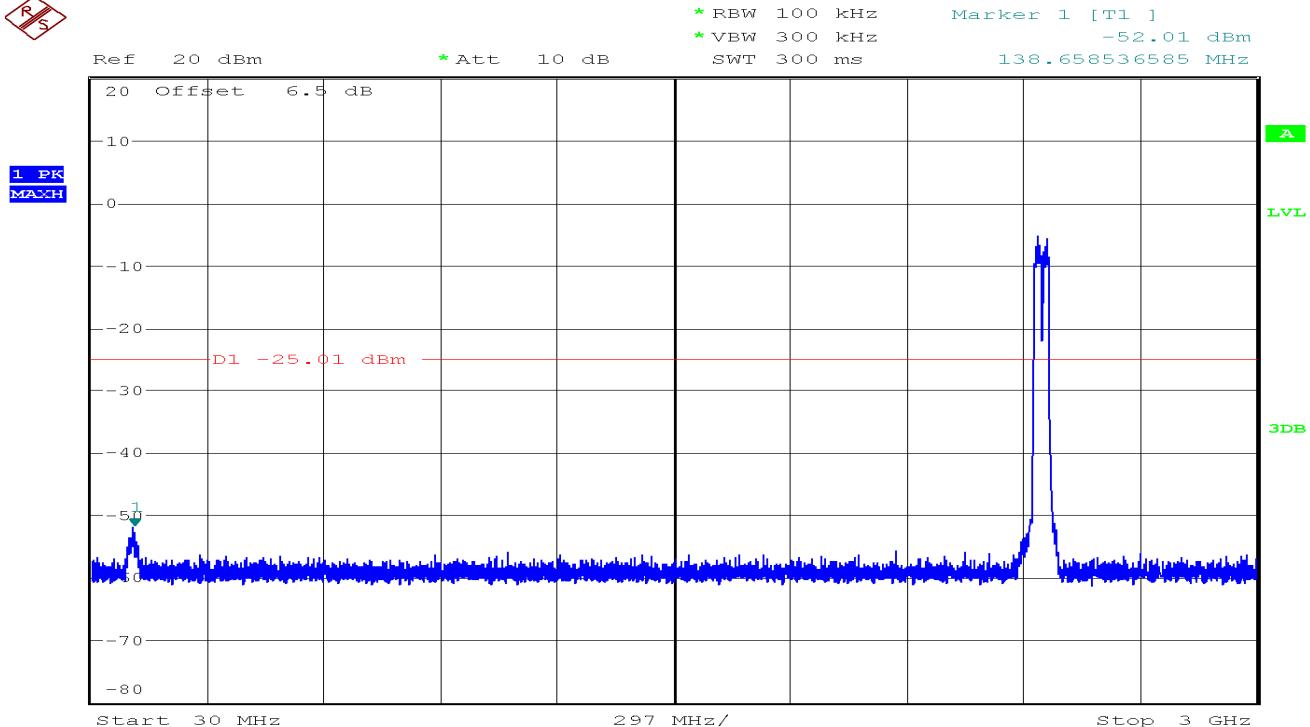

RS

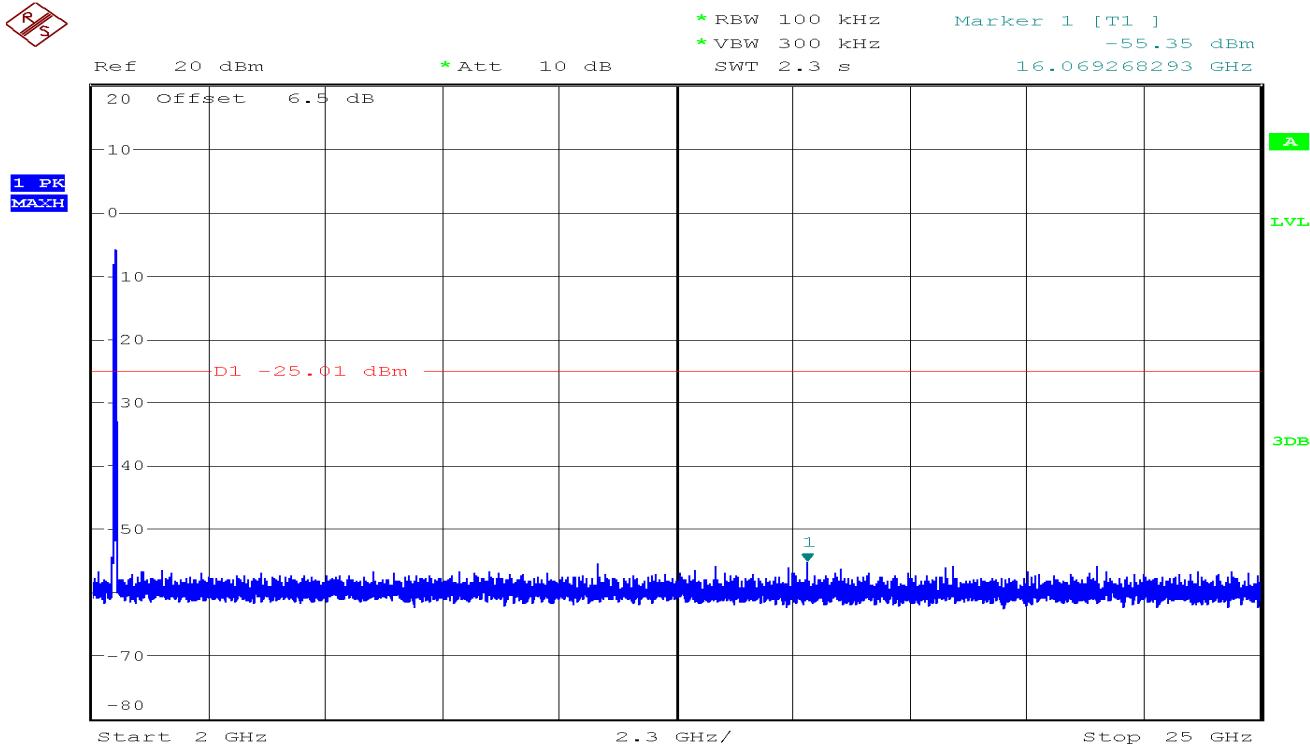

7.5. RADIATED EMISSIONS

LIMIT

Radiated emissions from 9 kHz to 25 GHz were measured according to the methods defines in ANSI C63.10-2013. The EUT was placed above the ground plane, 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz. The interface cables and equipment positions were varied within limits of reasonable applications to determine the positions producing maximum radiated emissions

1. According to §15.209(a), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:



FREQUENCIES(MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE(meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3


Remark: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

2. In the emission table above, the tighter limit applies at the band edges.

Frequency (MHz)	Field Strength (μ V/m at 3-meter)	Field Strength (dB μ V/m at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Test Configuration

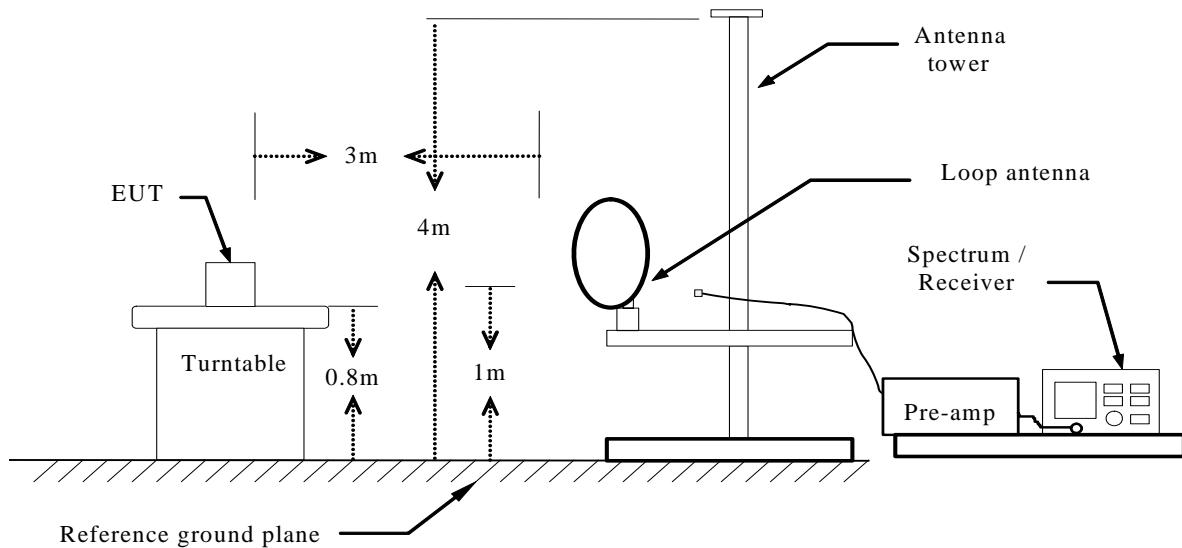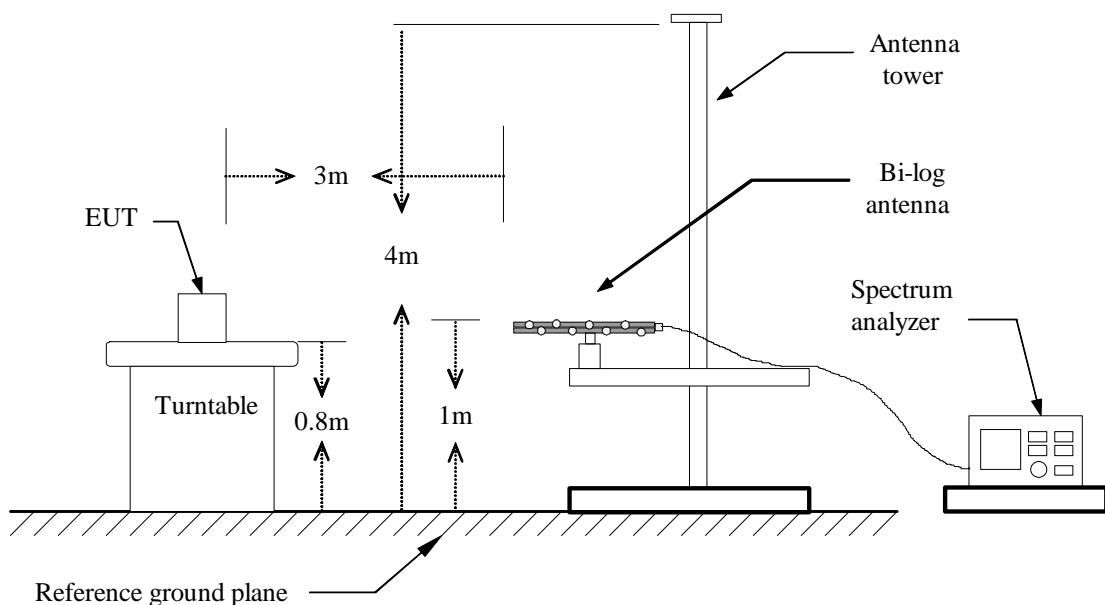Below 30MHz**Below 1 GHz**

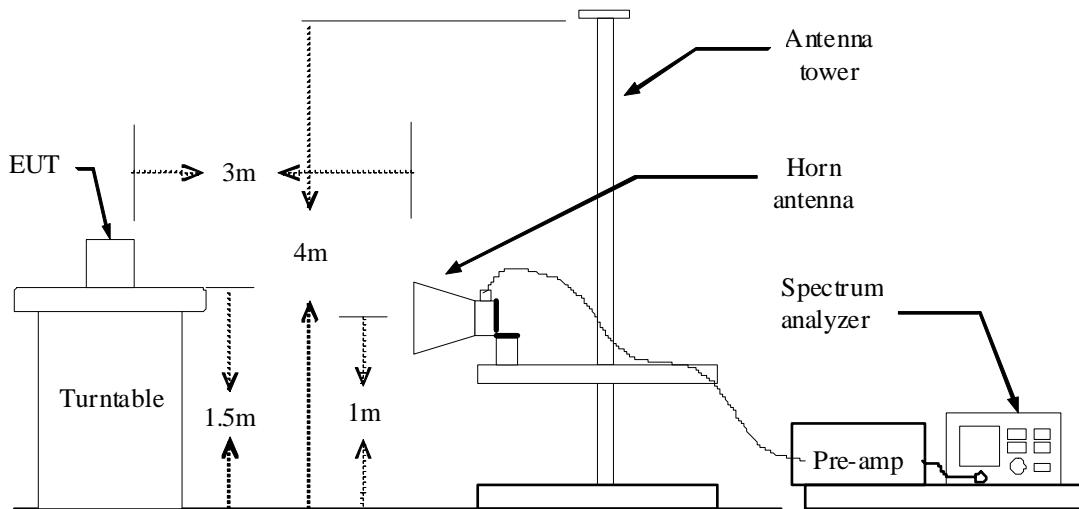Above 1 GHz**TEST PROCEDURE**

1. The EUT is placed on a turntable above ground plane, which is 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:

Below 1GHz:

RBW=100kHz / VBW=300kHz / Sweep=AUTO

Above 1GHz:

PEAK: RBW=VBW=1MHz / Sweep=AUTO


AVERAGE: RBW=1MHz / Sweep=AUTO

VBW=10Hz, when duty cycle is no less than 98 percent.


$VBW \geq 1/T$, when duty cycle is less than 98 percent, where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
IEEE 802.11 b	98.8	--	--	10Hz
IEEE 802.11 g	95	2.283	0.44	0.5KHz
IEEE 802.11n HT20	97	3.750	0.27	0.3KHz
IEEE 802.11n HT40	94.4	9.000	0.11	0.3KHz

7. Repeat above procedures until the measurements for all frequencies are complete.

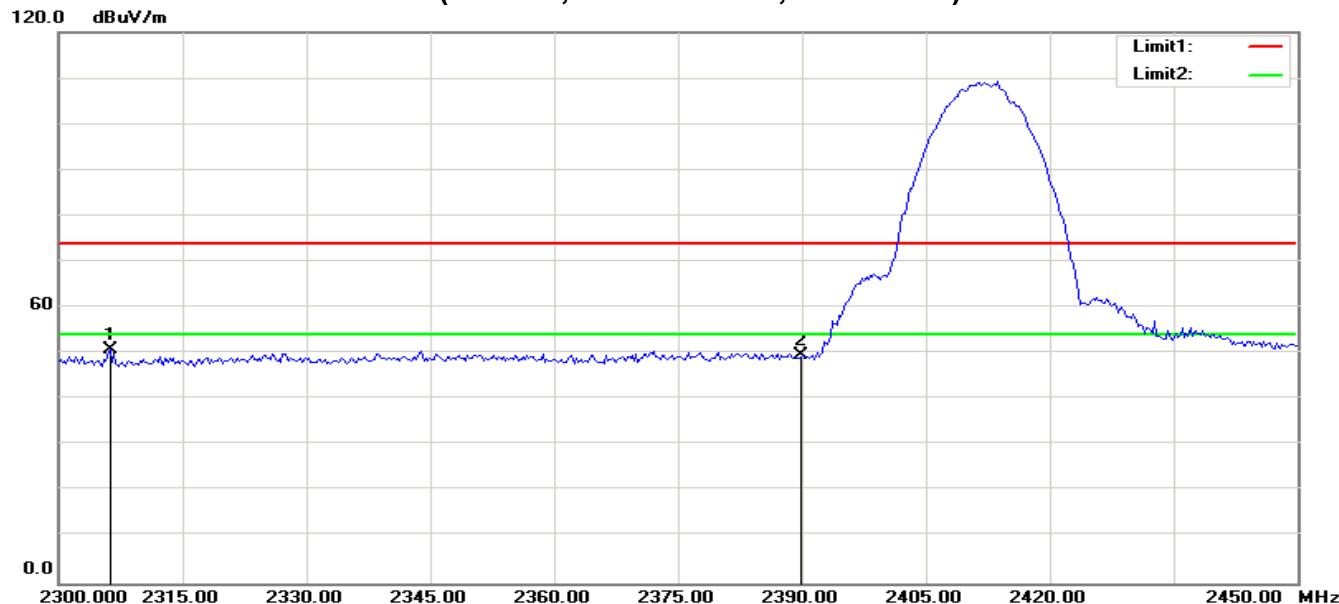
TEST RESULTS**RESTRICTED BANDEDGE (b Mode, Low Channel, Horizontal)**

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	2306.250	58.79	-8.09	50.70	74.00	-23.30	100	179	peak
2	2390.000	56.95	-7.31	49.64	74.00	-24.36	100	357	peak

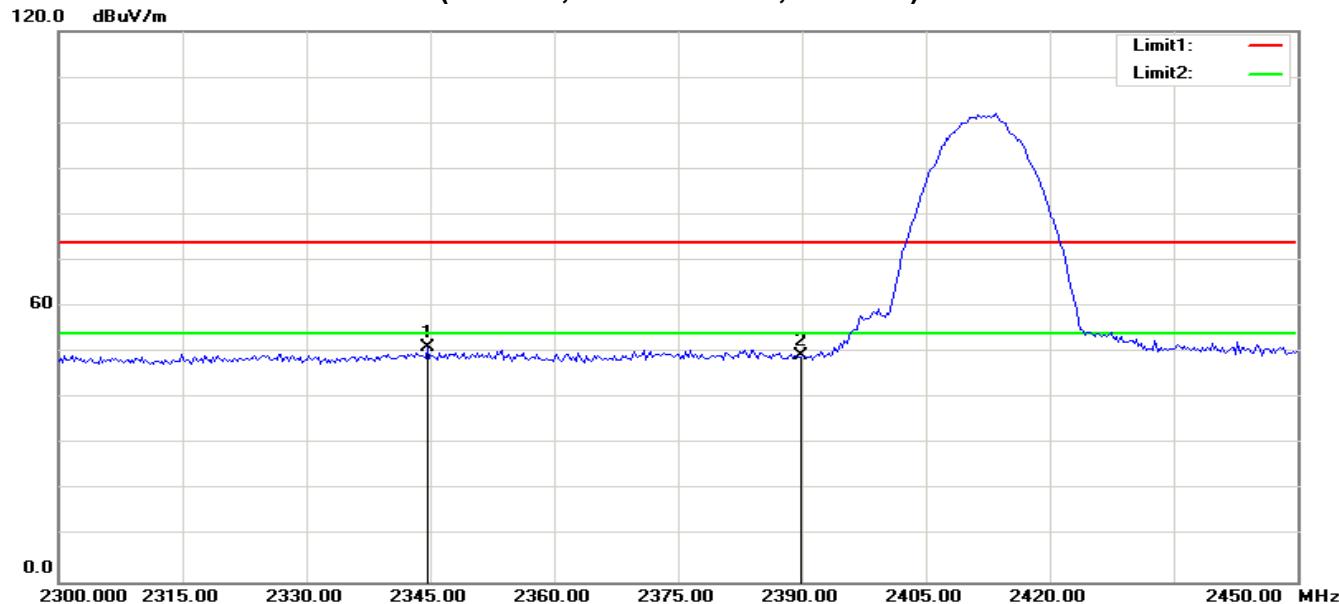RESTRICTED BANDEDGE (b Mode, Low Channel, Vertical)


No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	2344.711	58.81	-7.73	51.08	74.00	-22.92	200	288	peak
2	2390.000	56.55	-7.31	49.24	74.00	-24.76	200	34	peak

RESTRICTED BANDEDGE (b Mode, High Channel, Horizontal)

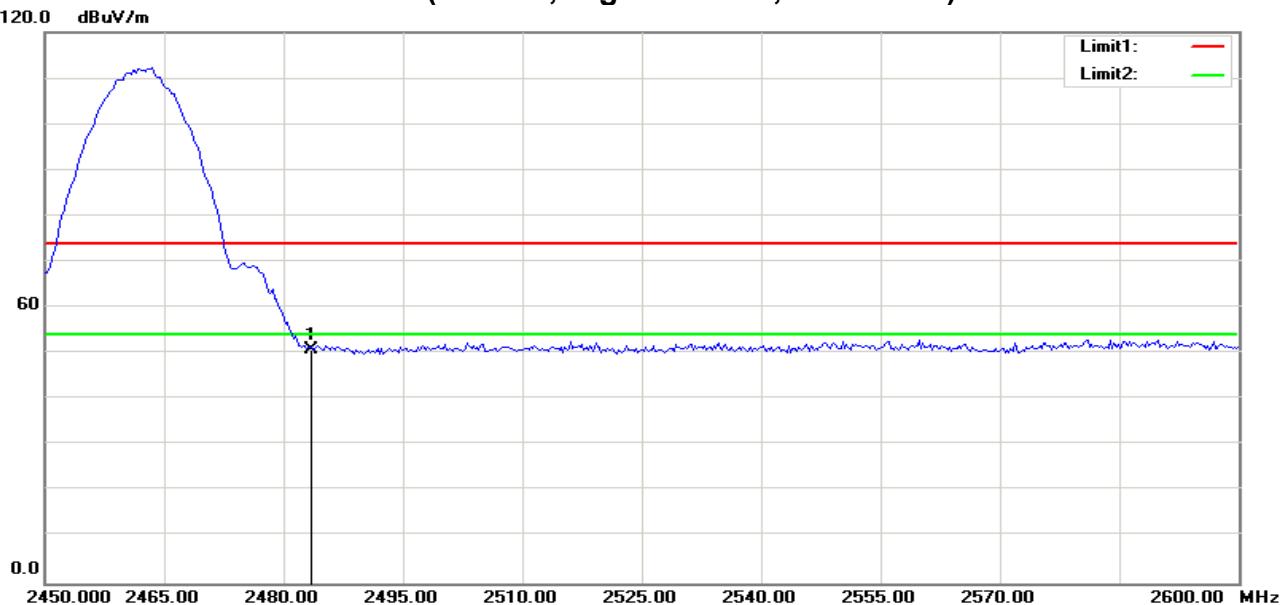


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2483.500	57.36	-6.44	50.92	74.00	-23.08	100	360	peak

RESTRICTED BANDEDGE (b Mode, High Channel, Vertical)

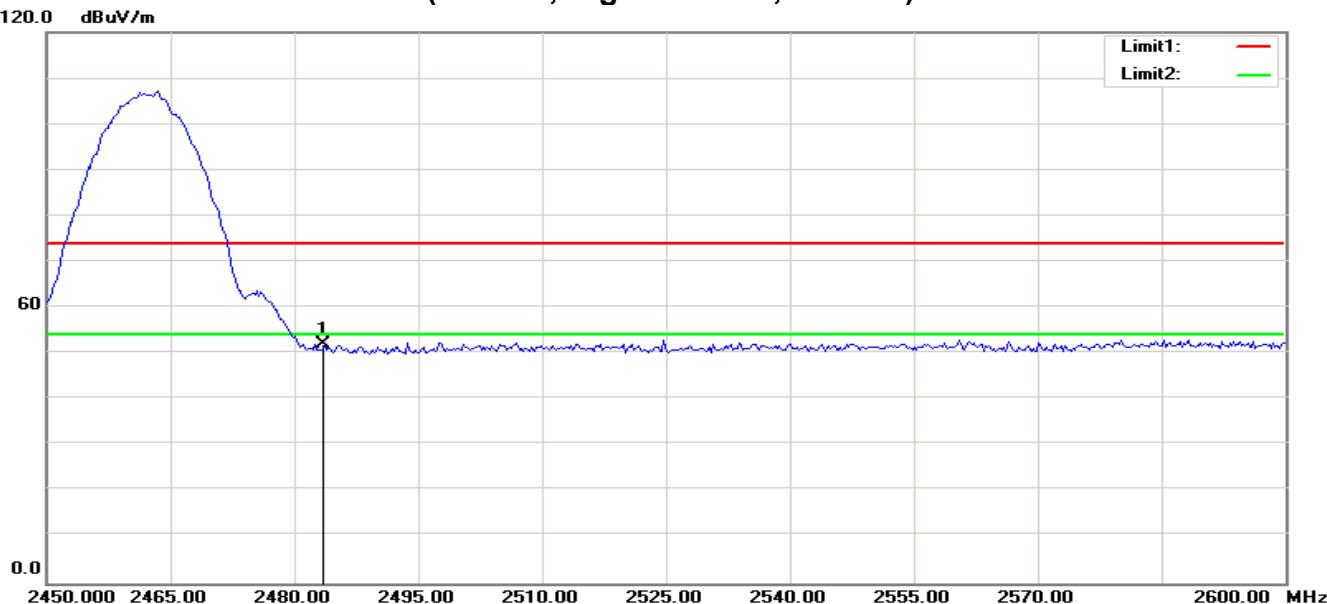


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2483.500	58.44	-6.44	52.00	74.00	-22.00	100	308	peak

RESTRICTED BANDEDGE (g Mode, Low Channel, Horizontal)

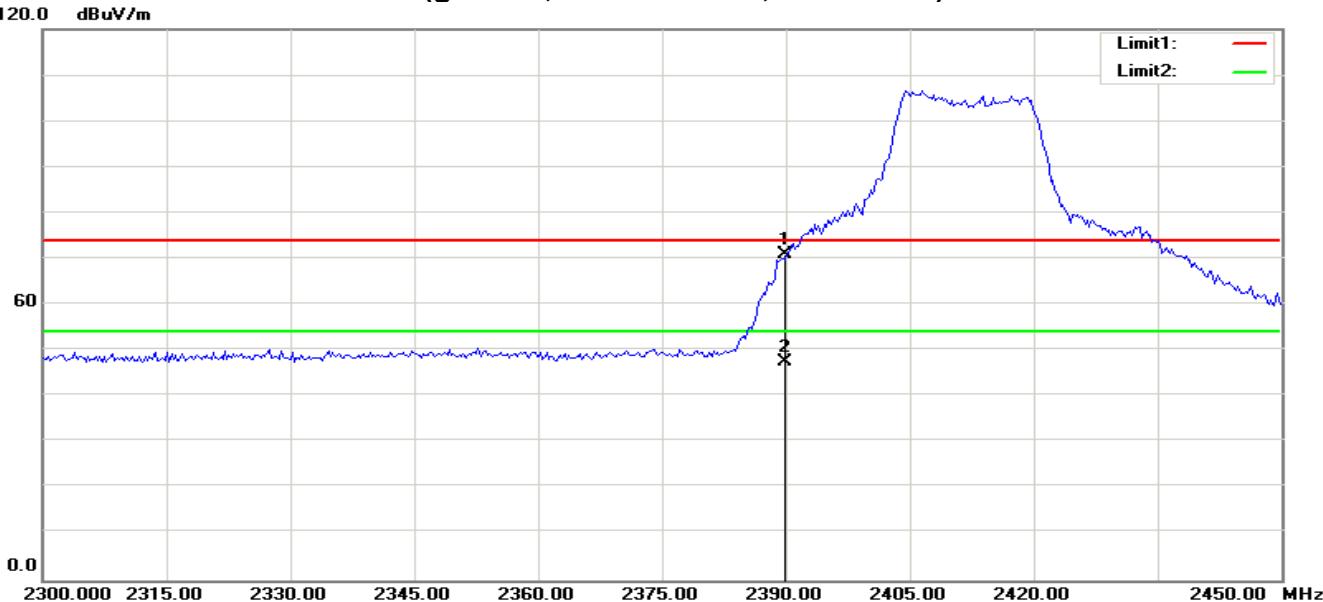


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2390.000	78.40	-7.31	71.09	74.00	-2.91	200	121	peak
2	2390.000	55.00	-7.31	47.69	54.00	-6.31	100	131	AVG

RESTRICTED BANDEDGE (g Mode, Low Channel, Vertical)

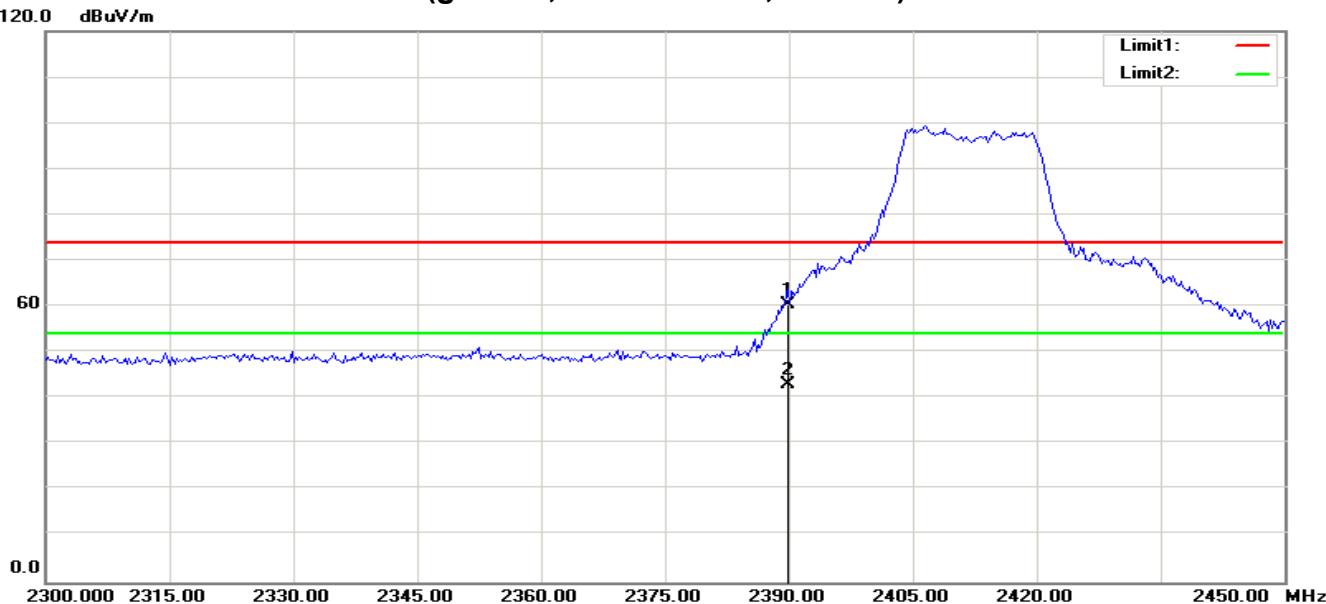


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2390.000	67.65	-7.31	60.34	74.00	-13.66	200	50	peak
2	2390.000	50.29	-7.31	42.98	54.00	-11.02	200	39	AVG

RESTRICTED BANDEDGE (g Mode, High Channel, Horizontal)

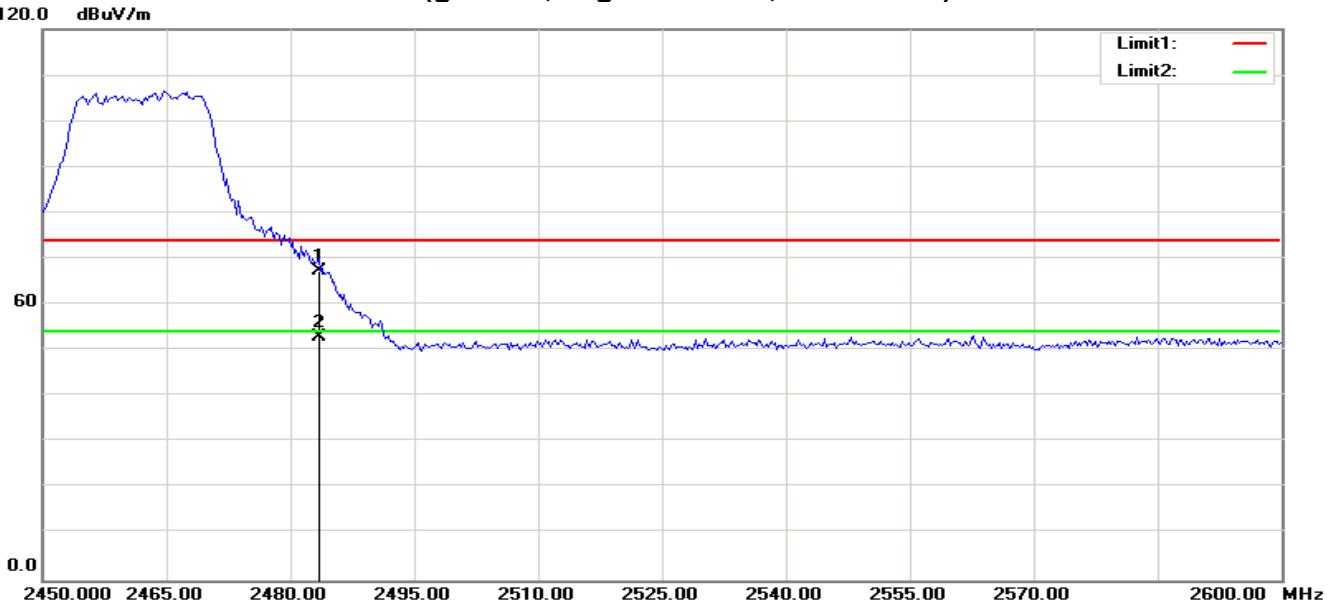


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2483.500	73.64	-6.44	67.20	74.00	-6.80	100	130	peak
2	2483.500	59.37	-6.44	52.93	54.00	-1.07	100	135	AVG

RESTRICTED BANDEDGE (g Mode, High Channel, Vertical)

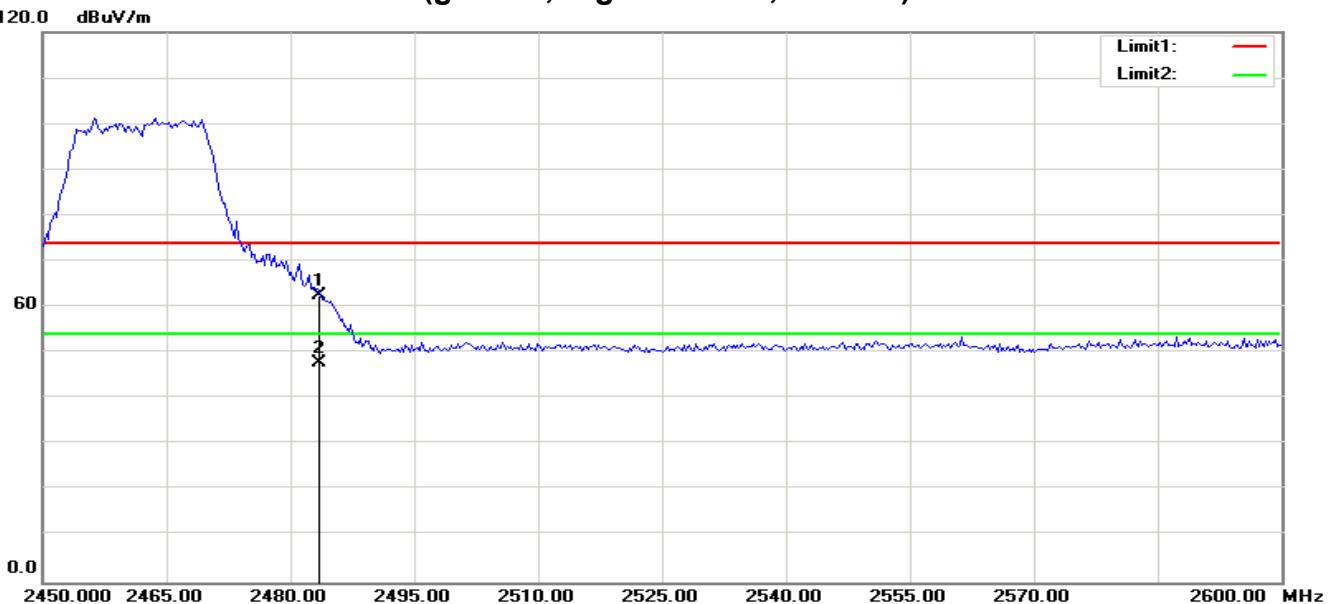


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2483.500	69.07	-6.44	62.63	74.00	-11.37	100	80	peak
2	2483.500	54.24	-6.44	47.80	54.00	-6.20	100	97	AVG

RESTRICTED BANDEDGE (IEEE 802.11n HT20 mode, Low Channel, Horizontal)

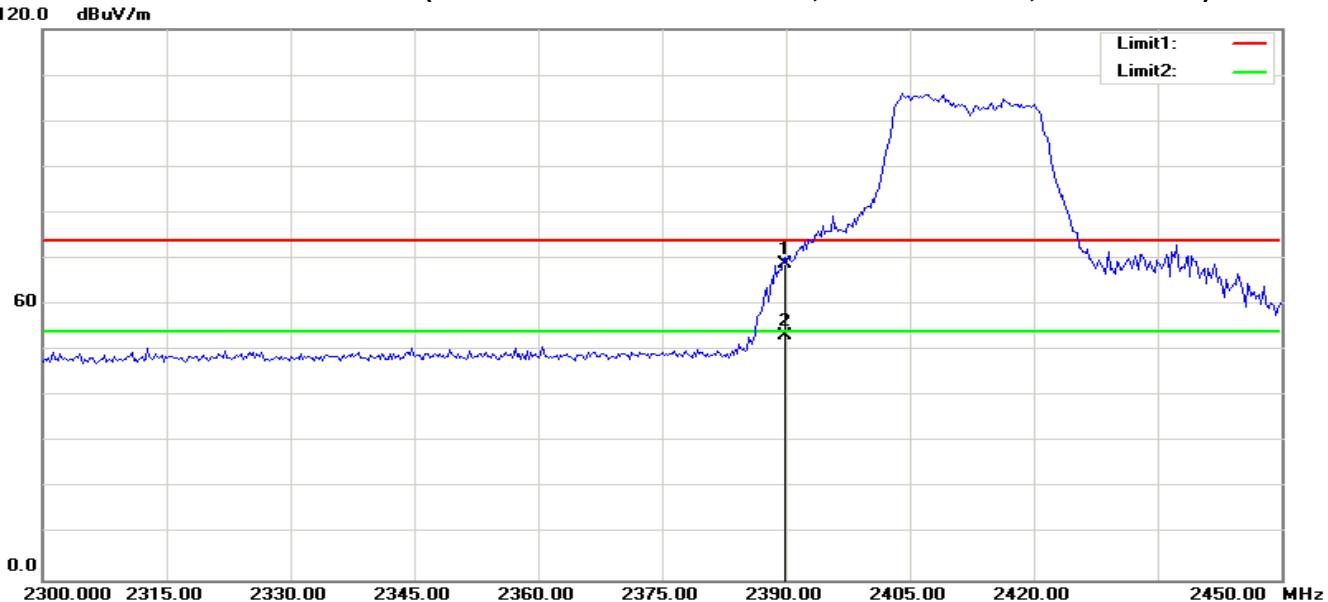


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2390.000	76.24	-7.31	68.93	74.00	-5.07	100	148	peak
2	2390.000	60.56	-7.31	53.25	54.00	-0.75	100	125	AVG

RESTRICTED BANDEDGE (IEEE 802.11n HT20 mode, Low Channel, Vertical)

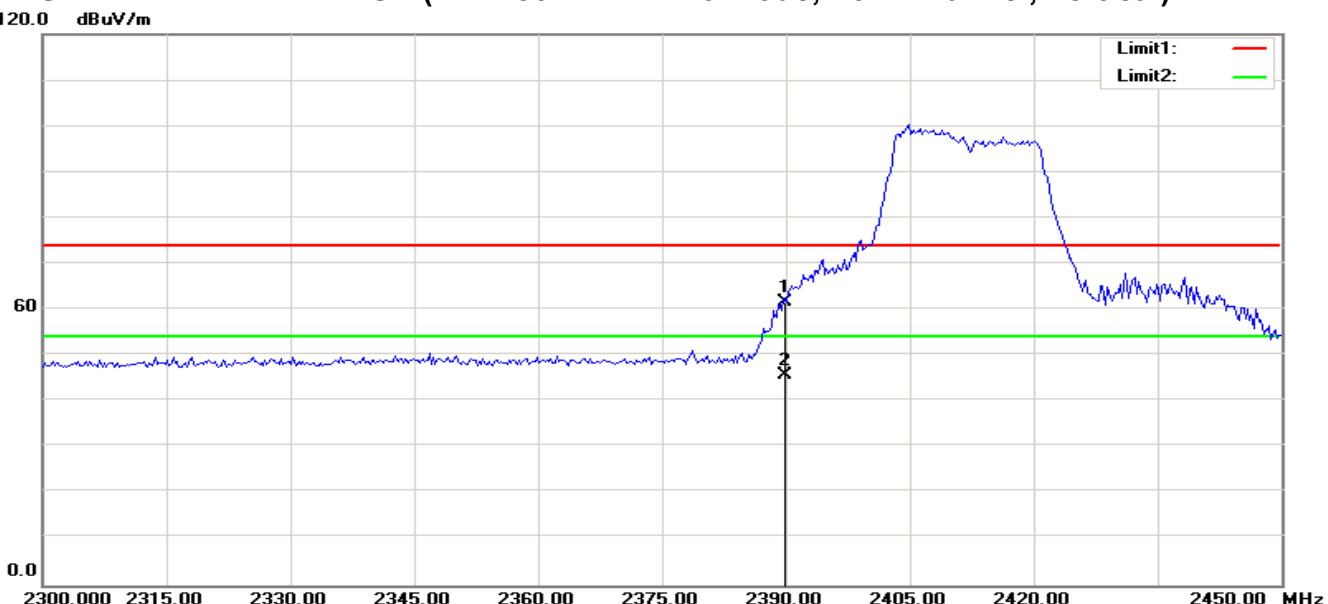


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2390.000	69.09	-7.31	61.78	74.00	-12.22	100	220	peak
2	2390.000	53.21	-7.31	45.90	54.00	-8.10	100	205	AVG

RESTRICTED BANDEDGE (IEEE 802.11n HT20 mode, High Channel, Horizontal)

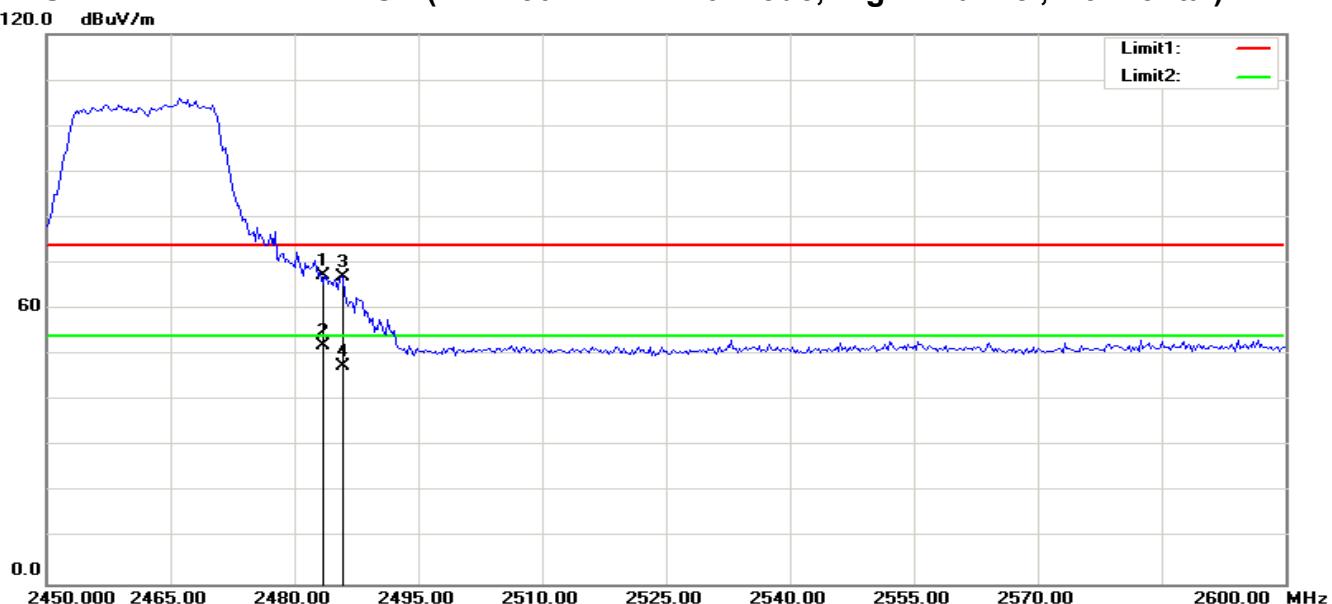


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2483.500	73.77	-6.44	67.33	74.00	-6.67	100	199	peak
2	2483.500	58.48	-6.44	52.04	54.00	-1.96	100	209	AVG
3	2485.817	73.42	-6.42	67.00	74.00	-7.00	100	136	peak
4	2485.817	53.91	-6.42	47.49	54.00	-6.51	100	141	AVG

RESTRICTED BANDEDGE (IEEE 802.11n HT20 mode, High Channel, Vertical)

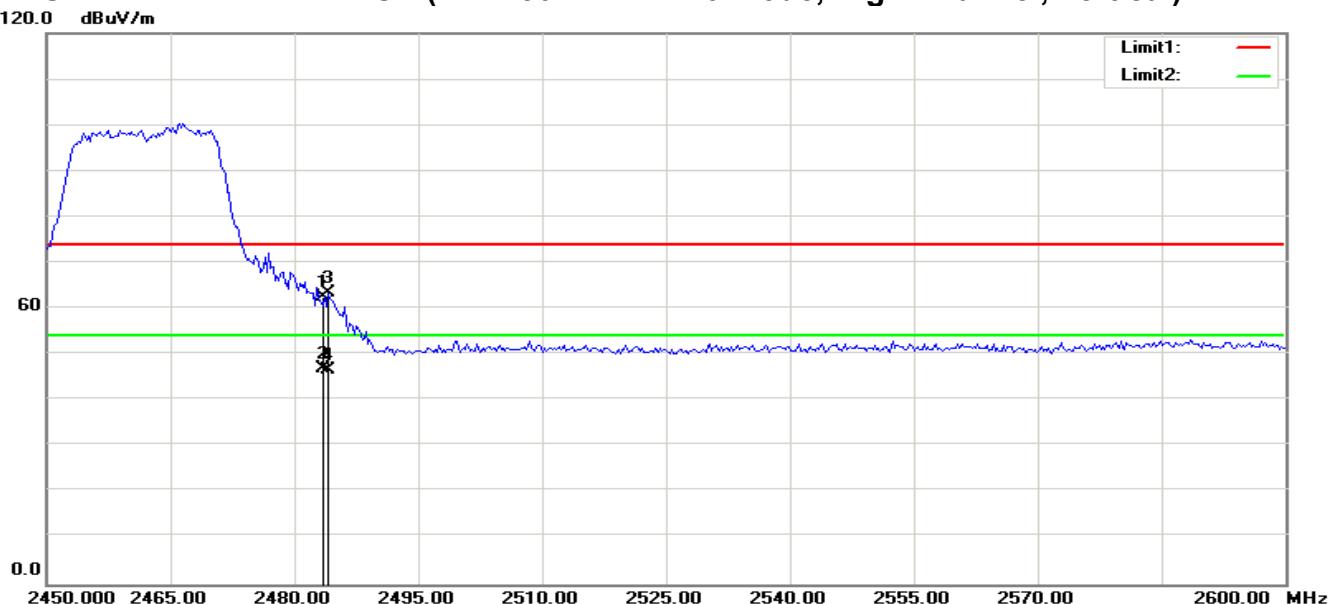


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2483.500	68.95	-6.44	62.51	74.00	-11.49	100	126	peak
2	2483.500	53.49	-6.44	47.05	54.00	-6.95	100	78	AVG
3	2484.135	69.97	-6.44	63.53	74.00	-10.47	100	83	peak
4	2484.135	53.22	-6.44	46.78	54.00	-7.22	100	52	AVG

RESTRICTED BANDEDGE (IEEE 802.11n HT40 mode, Low Channel, Horizontal)

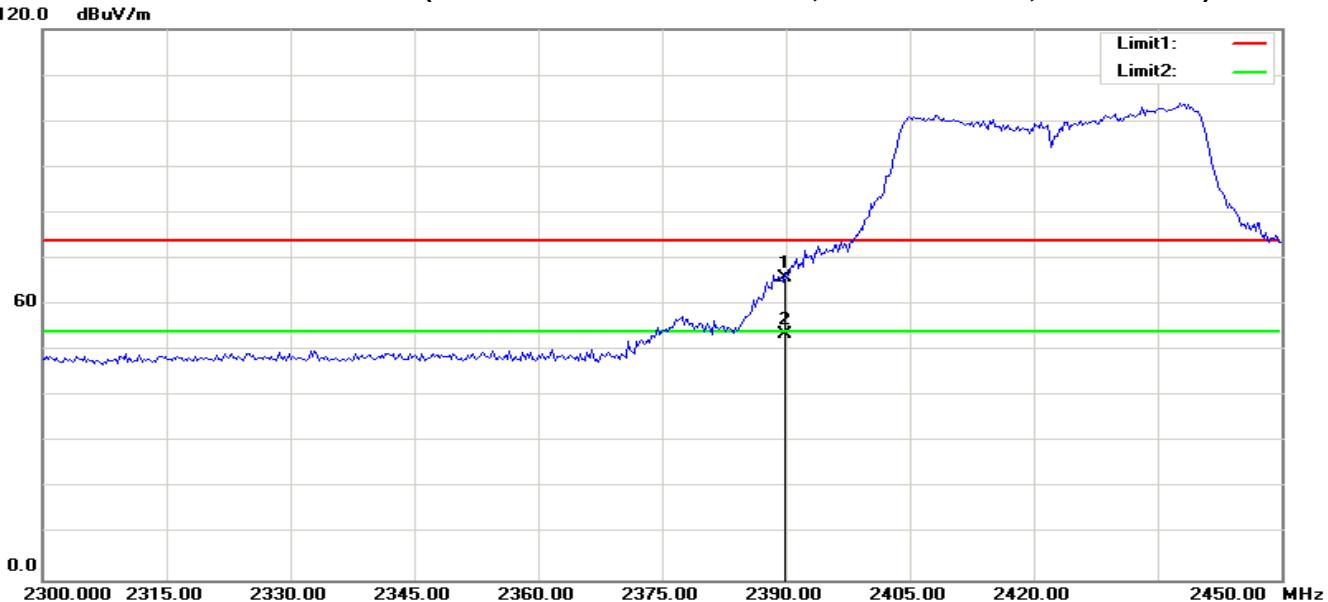


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2390.000	73.17	-7.31	65.86	74.00	-8.14	100	150	peak
2	2390.000	60.93	-7.31	53.62	54.00	-0.38	100	164	AVG

RESTRICTED BANDEDGE (IEEE 802.11n HT40 mode, Low Channel, Vertical)

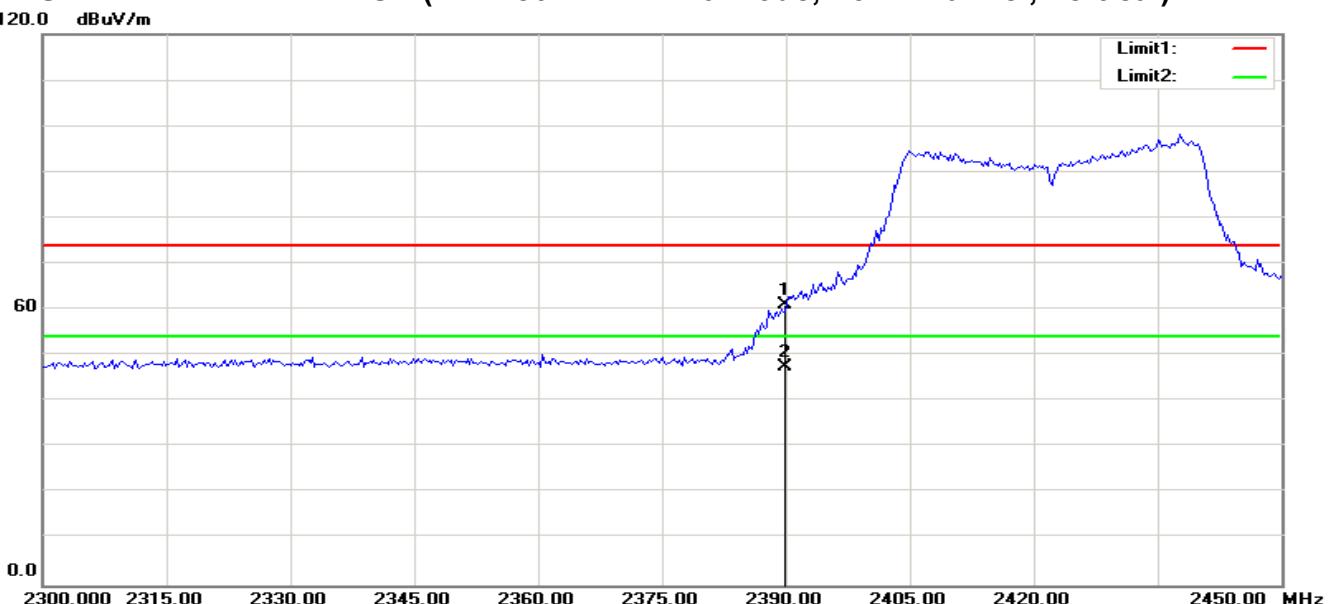


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2390.000	68.36	-7.31	61.05	74.00	-12.95	100	213	peak
2	2390.000	54.98	-7.31	47.67	54.00	-6.33	100	212	AVG

RESTRICTED BANDEDGE (IEEE 802.11n HT40 mode, High Channel, Horizontal)

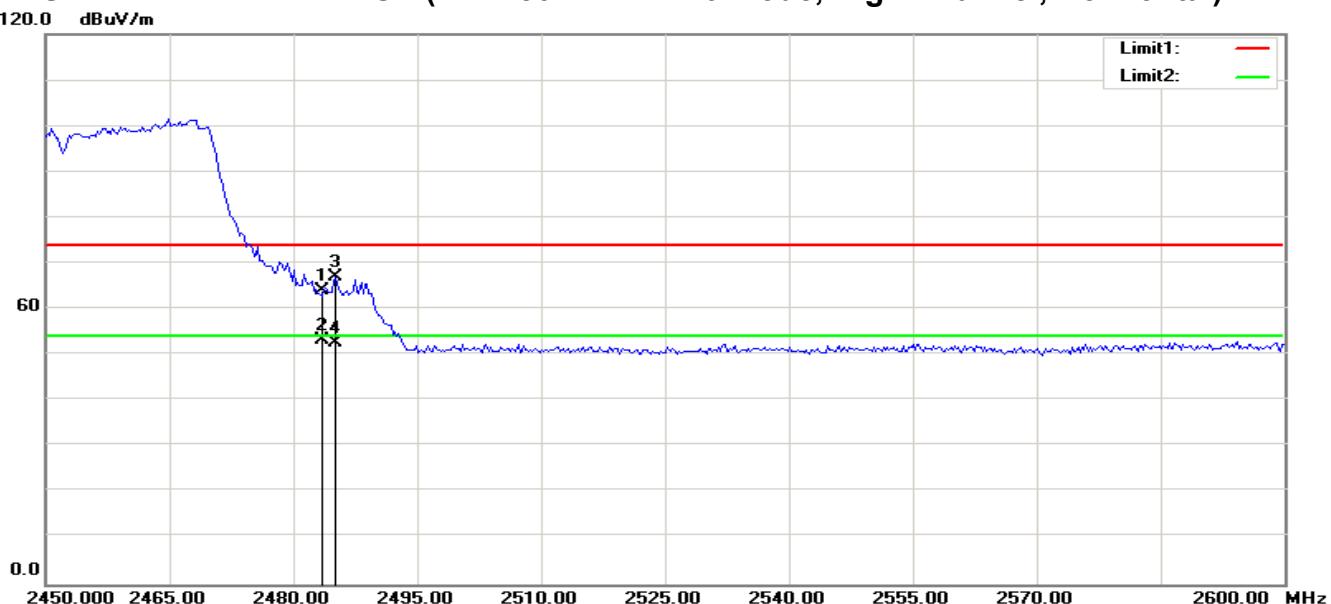

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	2483.500	70.52	-6.44	64.08	74.00	-9.92	200	198	peak
2	2483.500	59.81	-6.44	53.37	54.00	-0.63	100	24	AVG
3	2485.096	73.38	-6.43	66.95	74.00	-7.05	100	194	peak
4	2485.096	58.95	-6.43	52.52	54.00	-1.48	100	180	AVG

RESTRICTED BANDEDGE (IEEE 802.11n HT40 mode, High Channel, Vertical)

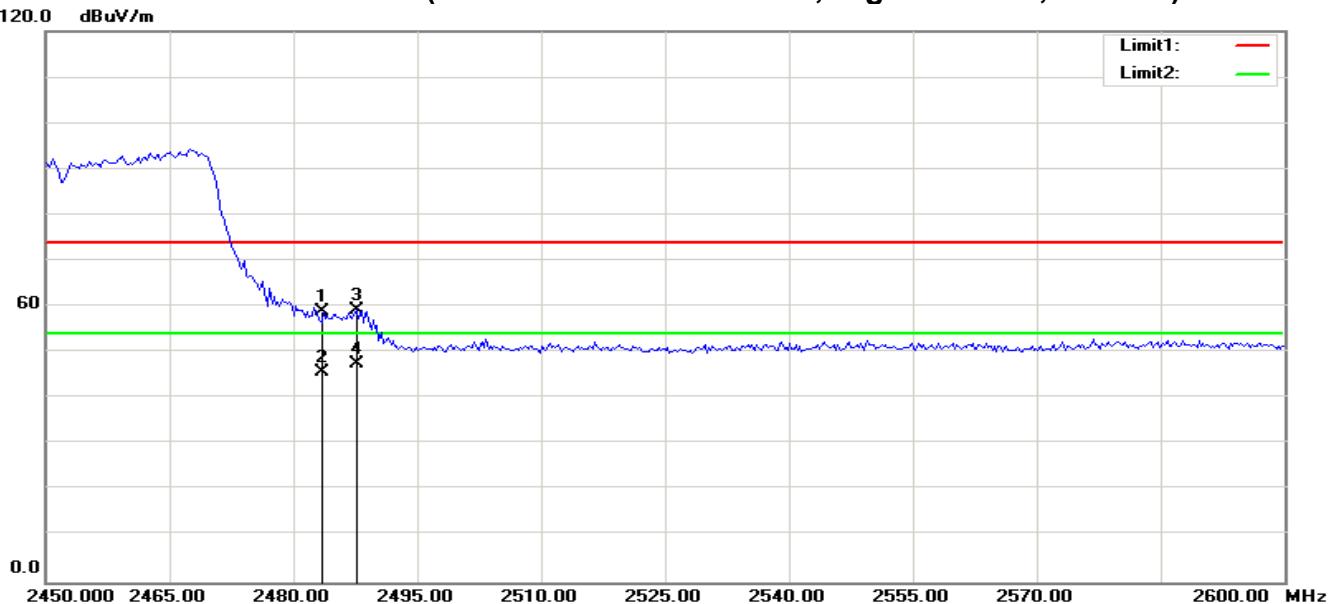

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	2483.500	65.41	-6.44	58.97	74.00	-15.03	100	152	peak
2	2483.500	52.30	-6.44	45.86	54.00	-8.14	200	70	AVG
3	2487.740	65.76	-6.40	59.36	74.00	-14.64	100	82	peak
4	2487.740	54.09	-6.40	47.69	54.00	-6.31	100	65	AVG

Test Result of Radiated Emission**Below 30MHz**

The interference of the frequency value is lower than the limit below 20 db, measured as the background noise values and will not be recorded.

30MHz-1GHz

Operation Mode:	Normal Link	Test Date:	2017-7-22
Temperature:	25°C	Tested by:	Lily.Wang
Humidity:	48% RH	Polarity:	Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
45.3300	V	16.46	13.37	29.83	40.00	-10.17	QP
171.6200	V	8.70	15.12	23.82	43.50	-19.68	peak
650.8000	V	6.19	24.45	30.64	46.00	-15.36	peak
763.3200	V	6.40	25.96	32.36	46.00	-13.64	peak
851.5900	V	5.42	26.14	31.56	46.00	-14.44	peak
993.2100	V	4.76	27.47	32.23	54.00	-21.77	peak
<hr/>							
168.7100	H	9.54	15.05	24.59	43.50	-18.91	peak
673.1100	H	5.47	24.62	30.09	46.00	-15.91	peak
748.7700	H	5.31	26.42	31.73	46.00	-14.27	peak
870.9900	H	5.27	26.06	31.33	46.00	-14.67	peak
929.1900	H	5.53	26.43	31.96	46.00	-14.04	peak
998.0600	H	5.30	27.55	32.85	54.00	-21.15	peak

Remark:

1. Measuring frequencies from 30 MHz to the 1GHz (No emission found between lowest internal used/generated frequency to 30 MHz).
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Margin (dB) = Result (dBuV/m) – Limit (dBuV/m).

Above 1 GHz**Operation Mode:** TX / IEEE 802.11b / CH Low**Test Date:** 2017-7-22**Temperature:** 24°C**Tested by:** Lily.Wang**Humidity:** 48 % RH**Polarity:** Ver. / Hor.**Horizontal**

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	4814.103	45.29	-5.26	40.03	74.00	-33.97	100	170	peak
2	7402.244	44.35	6.47	50.82	74.00	-23.18	100	305	peak
N/A									

Vertical

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	4814.103	50.51	-5.26	45.25	74.00	-28.75	100	136	peak
2	7157.051	45.63	6.25	51.88	74.00	-22.12	100	190	peak
N/A									

Operation Mode: TX / IEEE 802.11b / CH Mid**Test Date:** 2017-7-22**Temperature:** 24°C**Tested by:** Lily.Wang**Humidity:** 48 % RH**Polarity:** Ver. / Hor.**Horizontal**

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	4977.564	44.15	-5.13	39.02	74.00	-34.98	100	211	peak
2	7429.487	43.53	6.50	50.03	74.00	-23.97	100	41	peak
N/A									

Vertical

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	4868.590	47.08	-5.22	41.86	74.00	-32.14	100	118	peak
2	7157.051	44.91	6.25	51.16	74.00	-22.84	100	337	peak
N/A									

Operation Mode: TX / IEEE 802.11b / CH High**Test Date:** 2017-7-22**Temperature:** 24°C**Tested by:** Lily.Wang**Humidity:** 48 % RH**Polarity:** Ver. / Hor.**Horizontal**

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	5250.000	43.49	-3.92	39.57	74.00	-34.43	100	258	peak
2	7293.269	43.86	6.37	50.23	74.00	-23.77	100	340	peak
N/A									

Vertical

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4923.077	47.57	-5.17	42.40	74.00	-31.60	100	360	peak
2	7020.833	44.41	6.13	50.54	74.00	-23.46	100	317	peak
N/A									

Operation Mode: TX / IEEE 802.11g / CH Low**Test Date:** 2017-7-22**Temperature:** 24°C**Tested by:** Lily.Wang**Humidity:** 48 % RH**Polarity:** Ver. / Hor.**Horizontal**

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4814.103	45.82	-5.26	40.56	74.00	-33.44	100	7	peak
2	7048.077	45.49	6.15	51.64	74.00	-22.36	100	113	peak
N/A									

Vertical

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4814.103	49.70	-5.26	44.44	74.00	-29.56	100	128	peak
2	7483.974	43.77	6.55	50.32	74.00	-23.68	100	277	peak
N/A									

Operation Mode: TX / IEEE 802.11g / CH Mid**Test Date:** 2017-7-22**Temperature:** 24°C**Tested by:** Lily.Wang**Humidity:** 48 % RH**Polarity:** Ver. / Hor.**Horizontal**

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4868.590	44.14	-5.22	38.92	74.00	-35.08	100	87	peak
2	7020.833	44.75	6.13	50.88	74.00	-23.12	100	6	peak
N/A									

Vertical

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4868.590	47.41	-5.22	42.19	74.00	-31.81	100	137	peak
2	7266.026	43.39	6.35	49.74	74.00	-24.26	100	224	peak
N/A									

Operation Mode: TX / IEEE 802.11g / CH High**Test Date:** 2017-7-22**Temperature:** 24°C**Tested by:** Lily.Wang**Humidity:** 48 % RH**Polarity:** Ver. / Hor.**Horizontal**

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4950.320	44.62	-5.15	39.47	74.00	-34.53	100	171	peak
2	7157.051	44.50	6.25	50.75	74.00	-23.25	100	271	peak
N/A									

Vertical

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4923.077	47.90	-5.17	42.73	74.00	-31.27	100	145	peak
2	7129.808	44.27	6.23	50.50	74.00	-23.50	100	30	peak
N/A									

Operation Mode: TX / IEEE 802.11n HT20 mode / CH Low**Test Date:** 2017-7-22**Temperature:** 24°C**Tested by:** Lily.Wang**Humidity:** 48 % RH**Polarity:** Ver. / Hor.**Horizontal**

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4814.103	46.08	-5.26	40.82	74.00	-33.18	100	154	peak
2	7483.974	44.55	6.55	51.10	74.00	-22.90	100	251	peak
N/A									

Vertical

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4814.103	50.98	-5.26	45.72	74.00	-28.28	100	127	peak
2	7429.487	44.07	6.50	50.57	74.00	-23.43	100	4	peak
N/A									

Operation Mode: TX / IEEE 802.11n HT20 mode / CH Mid**Test Date:** 2017-7-22**Temperature:** 24°C**Tested by:** Lily.Wang**Humidity:** 48 % RH**Polarity:** Ver. / Hor.**Horizontal**

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	5032.051	44.45	-4.96	39.49	74.00	-34.51	100	351	peak
2	7347.756	43.46	6.42	49.88	74.00	-24.12	100	31	peak
N/A									

Vertical

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4868.590	46.65	-5.22	41.43	74.00	-32.57	100	339	peak
2	7347.756	42.80	6.42	49.22	74.00	-24.78	100	163	peak
N/A									

Operation Mode: TX / IEEE 802.11n HT20 mode / CH High **Test Date:** 2017-7-22**Temperature:** 24°C**Tested by:** Lily.Wang**Humidity:** 48 % RH**Polarity:** Ver. / Hor.**Horizontal**

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	4923.077	45.92	-5.17	40.75	74.00	-33.25	100	87	peak
2	7129.808	44.39	6.23	50.62	74.00	-23.38	100	215	peak
N/A									

Vertical

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	4923.077	47.44	-5.17	42.27	74.00	-31.73	100	351	peak
2	7701.923	44.50	6.74	51.24	74.00	-22.76	100	244	peak
N/A									

Operation Mode: TX / IEEE 802.11n HT40 mode / CH Low**Test Date:** 2017-7-22**Temperature:** 24°C**Tested by:** Lily.Wang**Humidity:** 48 % RH**Polarity:** Ver. / Hor.**Horizontal**

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	5195.513	43.63	-4.18	39.45	74.00	-34.55	100	98	peak
2	7293.269	44.35	6.37	50.72	74.00	-23.28	100	259	peak
N/A									

Vertical

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	5032.051	44.26	-4.96	39.30	74.00	-34.70	100	336	peak
2	7266.026	43.94	6.35	50.29	74.00	-23.71	100	246	peak
N/A									

Operation Mode: TX / IEEE 802.11n HT40 mode / CH Mid**Test Date:** 2017-7-22**Temperature:** 24°C**Tested by:** Lily.Wang**Humidity:** 48 % RH**Polarity:** Ver. / Hor.**Horizontal**

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4923.077	45.17	-5.17	40.00	74.00	-34.00	100	204	peak
2	7429.487	43.13	6.50	49.63	74.00	-24.37	100	106	peak
N/A									

Vertical

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4868.590	47.34	-5.22	42.12	74.00	-31.88	100	338	peak
2	7102.564	44.59	6.20	50.79	74.00	-23.21	100	360	peak
N/A									

Operation Mode: TX / IEEE 802.11n HT40 mode / CH High **Test Date:** 2017-7-22**Temperature:** 24°C**Tested by:** Lily.Wang**Humidity:** 48 % RH**Polarity:** Ver. / Hor.**Horizontal**

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	5086.538	44.71	-4.70	40.01	74.00	-33.99	100	39	peak
2	7429.487	43.39	6.50	49.89	74.00	-24.11	100	270	peak
N/A									

Vertical

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	5004.808	43.73	-5.09	38.64	74.00	-35.36	100	214	peak
2	7266.026	44.30	6.35	50.65	74.00	-23.35	100	187	peak
N/A									

7.6. POWERLINE CONDUCTED EMISSIONS

LIMIT

According to §15.207(a), except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

* Decreases with the logarithm of the frequency.

Test Configuration

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

TEST PROCEDURE


1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.

TEST RESULTS

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

TEST DATA


Job No.:	C170614R01	Date:	2017/7/1
Model No.:	macaroon M1	Time:	AM 10:12:25
Standard:	FCC Class B	Temp.(C)/Hum.(%):	22(C)/48%
Test item:	Conduction test	Test By:	Lily.Wang
Line:	L1	Test Voltage:	AC 120V/60Hz
Model:		Description:	

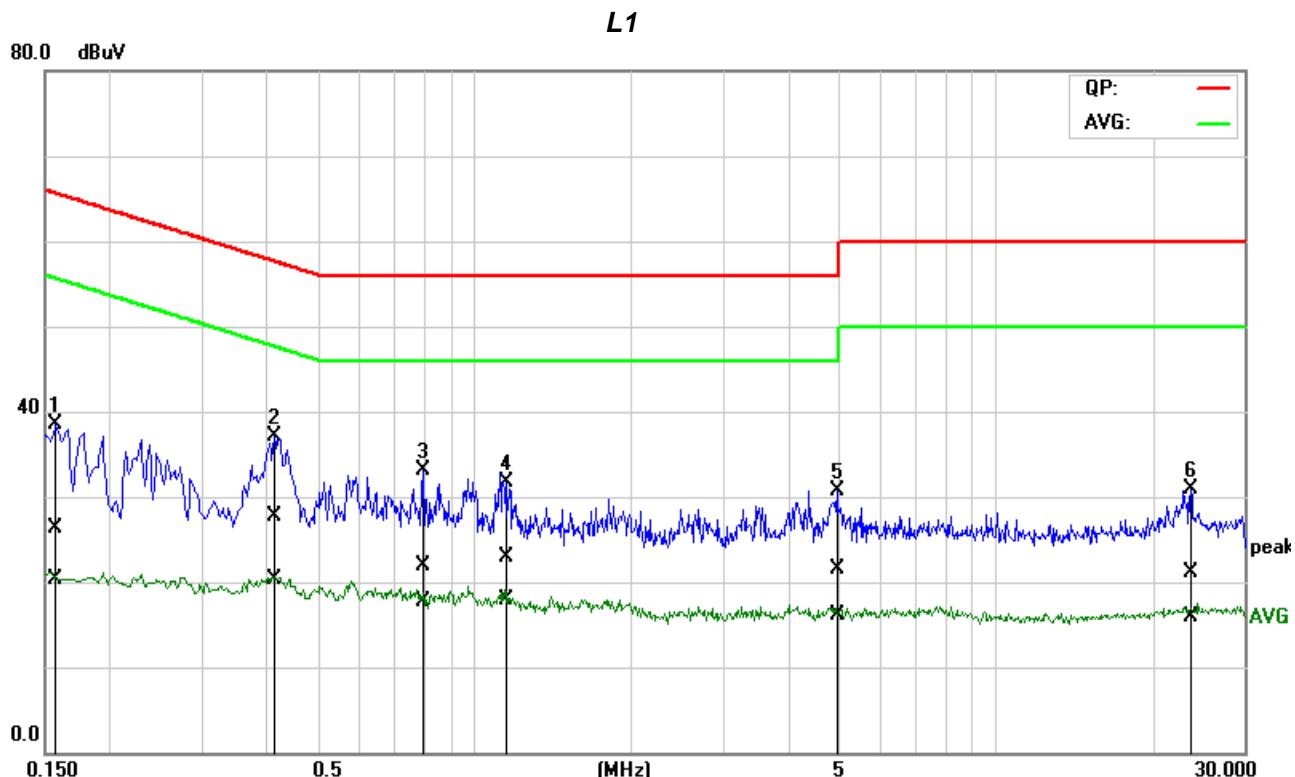

No.	Frequency	QuasiPeak reading	Average reading	Correction factor	QuasiPeak result	Average result	QuasiPeak limit	Average limit	QuasiPeak margin	Average margin	Remark
	(MHz)	(dBuV)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dBuV)	(dB)	(dB)	
1	0.1581	5.68	-0.33	20.58	26.26	20.25	65.56	55.56	-39.30	-35.31	Pass
2*	0.4145	7.14	-0.26	20.53	27.67	20.27	57.56	47.56	-29.89	-27.29	Pass
3	0.7927	1.34	-2.74	20.50	21.84	17.76	56.00	46.00	-34.16	-28.24	Pass
4	1.1601	2.52	-2.49	20.44	22.96	17.95	56.00	46.00	-33.04	-28.05	Pass
5	4.9717	0.93	-4.57	20.61	21.54	16.04	56.00	46.00	-34.46	-29.96	Pass
6	23.6432	0.33	-4.88	20.86	21.19	15.98	60.00	50.00	-38.81	-34.02	Pass

Note: 1. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line).


Job No.:	C170614R01	Date:	2017/7/1
Model No.:	macaroon M1	Time:	AM 10:17:44
Standard:	FCC Class B	Temp.(C)/Hum.(%):	22(C)/48%
Test item:	Conduction test	Test By:	Lily.Wang
Line:	L2	Test Voltage:	AC 120V/60Hz
Model:		Description:	

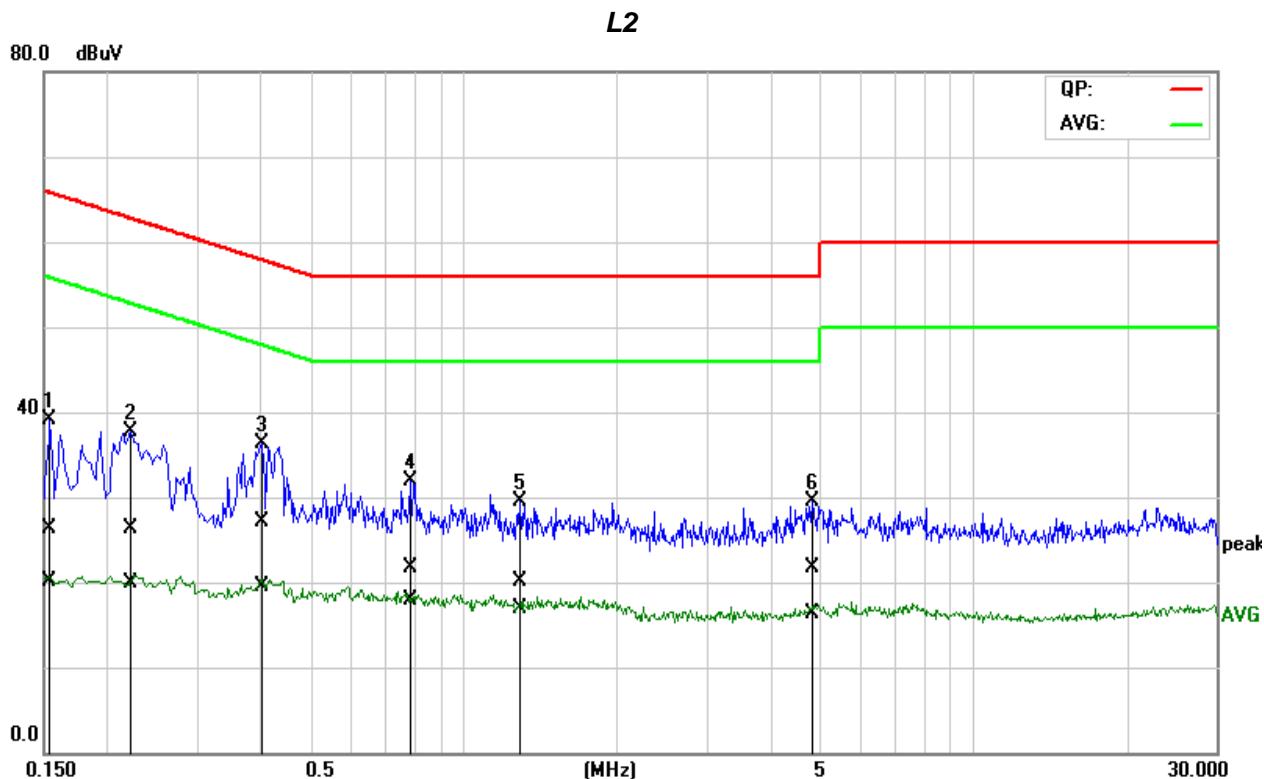

No.	Frequency	QuasiPeak reading	Average reading	Correction factor	QuasiPeak result	Average result	QuasiPeak limit	Average limit	QuasiPeak margin	Average margin	Remark
	(MHz)	(dBuV)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dBuV)	(dB)	(dB)	
1	0.1547	5.86	-0.26	20.36	26.22	20.10	65.74	55.74	-39.52	-35.64	Pass
2	0.2236	5.83	-0.49	20.42	26.25	19.93	62.68	52.68	-36.43	-32.75	Pass
3	0.4052	6.61	-1.05	20.46	27.07	19.41	57.75	47.75	-30.68	-28.34	Pass
4*	0.7867	1.30	-2.53	20.46	21.76	17.93	56.00	46.00	-34.24	-28.07	Pass
5	1.2947	-0.31	-3.50	20.47	20.16	16.97	56.00	46.00	-35.84	-29.03	Pass
6	4.8494	0.99	-4.36	20.74	21.73	16.38	56.00	46.00	-34.27	-29.62	Pass

Note: 1. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line).


Job No.:	C170614R01	Date:	2017/7/1
Model No.:	macaroon M1	Time:	AM 10:02:30
Standard:	FCC Class B	Temp.(C)/Hum.(%):	22(C)/48%
Test item:	Conduction test	Test By:	Lily.Wang
Line:	L1	Test Voltage:	AC 240V/60Hz
Model:		Description:	

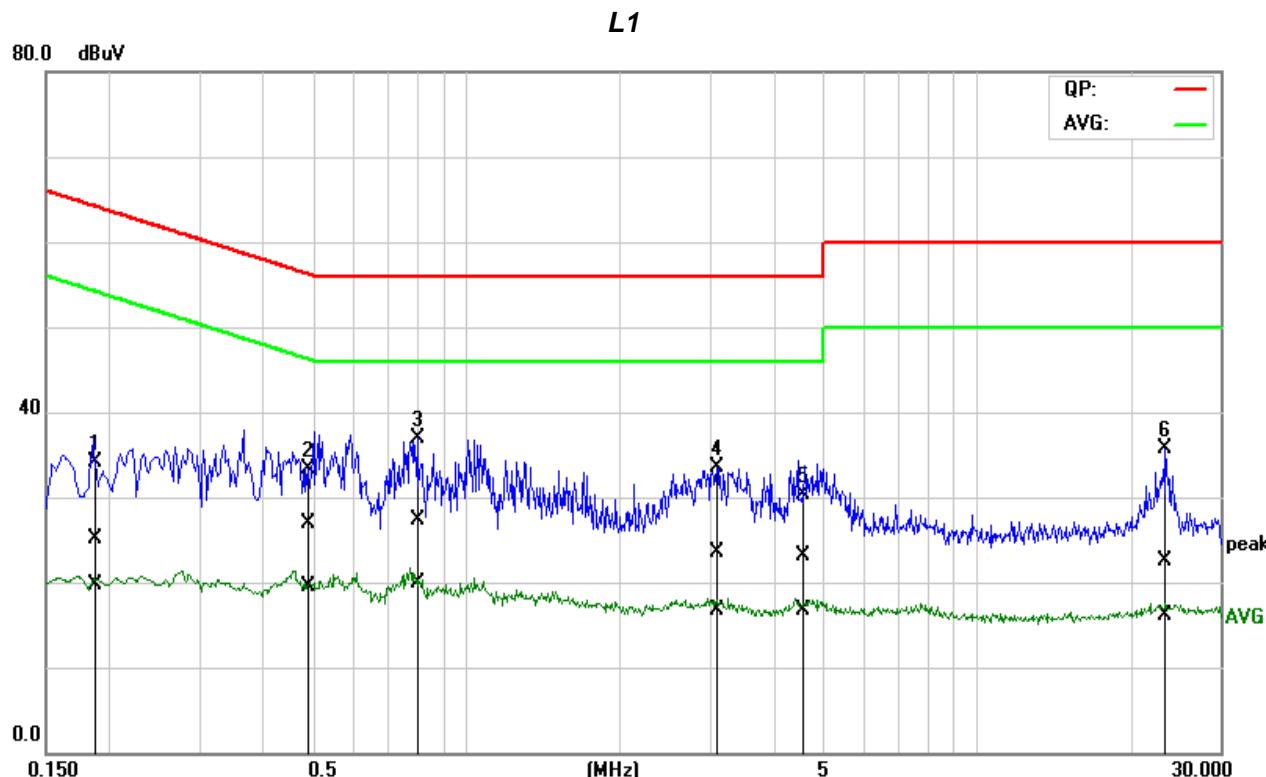

No.	Frequency	QuasiPeak reading	Average reading	Correction factor	QuasiPeak result	Average result	QuasiPeak limit	Average limit	QuasiPeak margin	Average margin	Remark
	(MHz)	(dBuV)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dBuV)	(dB)	(dB)	
1	0.1882	4.58	-0.76	20.53	25.11	19.77	64.12	54.12	-39.01	-34.35	Pass
2	0.4904	6.41	-1.07	20.49	26.90	19.42	56.16	46.16	-29.26	-26.74	Pass
3*	0.7947	6.74	-0.52	20.50	27.24	19.98	56.00	46.00	-28.76	-26.02	Pass
4	3.0876	2.93	-3.89	20.52	23.45	16.63	56.00	46.00	-32.55	-29.37	Pass
5	4.5040	2.44	-3.95	20.59	23.03	16.64	56.00	46.00	-32.97	-29.36	Pass
6	23.4295	1.72	-4.83	20.86	22.58	16.03	60.00	50.00	-37.42	-33.97	Pass

Note: 1. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line).

Job No.:	C170614R01	Date:	2017/7/1
Model No.:	macaroon M1	Time:	AM 10:07:28
Standard:	FCC Class B	Temp.(C)/Hum.(%):	22(C)/48%
Test item:	Conduction test	Test By:	Lily.Wang
Line:	L2	Test Voltage:	AC 240V/60Hz
Model:		Description:	

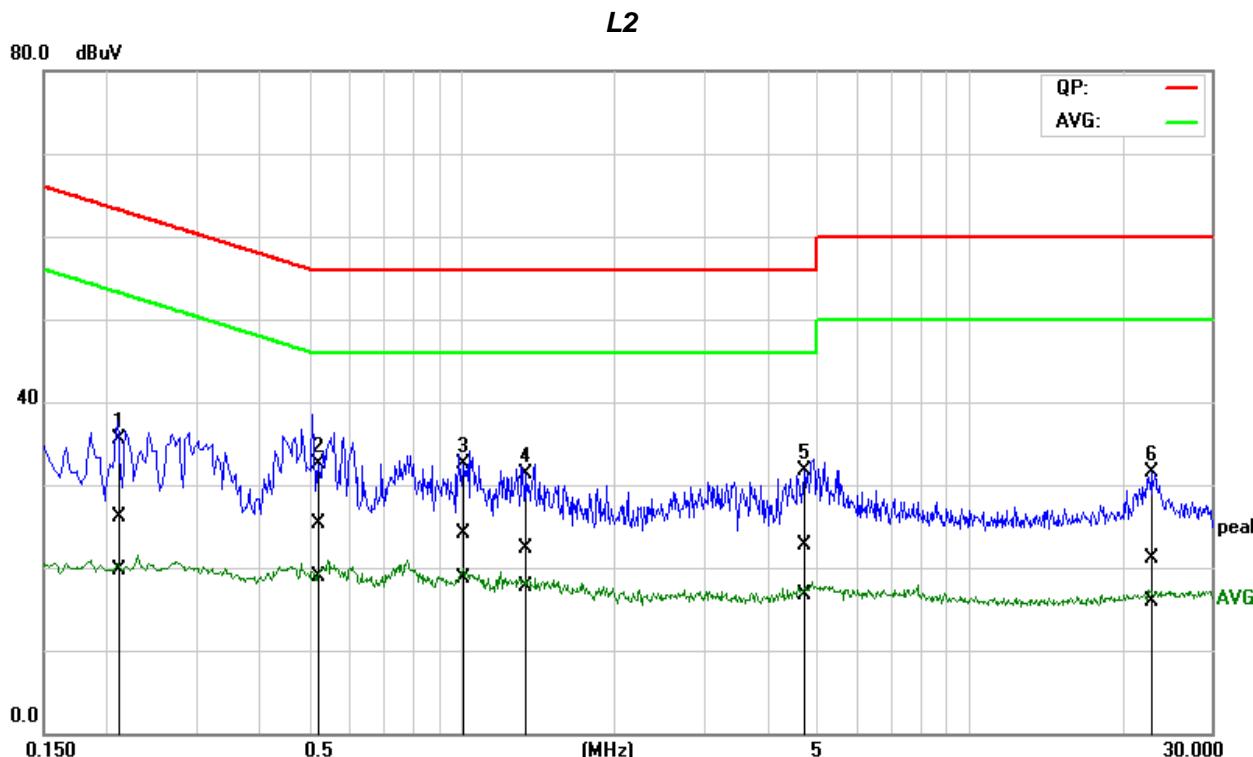

No.	Frequency (MHz)	QuasiPeak reading (dBuV)	Average reading (dBuV)	Correction factor (dB)	QuasiPeak result (dBuV)	Average result (dBuV)	QuasiPeak limit (dBuV)	Average limit (dBuV)	QuasiPeak margin (dB)	Average margin (dB)	Remark
1	0.2121	5.79	-0.76	20.41	26.20	19.65	63.12	53.12	-36.92	-33.47	Pass
2*	0.5159	4.91	-1.63	20.45	25.36	18.82	56.00	46.00	-30.64	-27.18	Pass
3	1.0129	3.56	-1.80	20.45	24.01	18.65	56.00	46.00	-31.99	-27.35	Pass
4	1.3487	1.84	-2.81	20.48	22.32	17.67	56.00	46.00	-33.68	-28.33	Pass
5	4.7531	1.92	-3.99	20.73	22.65	16.74	56.00	46.00	-33.35	-29.26	Pass
6	22.9604	0.30	-5.06	20.87	21.17	15.81	60.00	50.00	-38.83	-34.19	Pass

Note: 1. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line).

Remark:

1. The measuring frequencies range between 0.15 MHz and 30 MHz.
2. The emissions measured in the frequency range between 0.15 MHz and 30MHz were made with an instrument using Quasi-peak detector and Average detector.
3. “--” denotes the emission level was or more than 2dB below the Average limit, and no re-check was made.
4. The IF bandwidth of SPA between 0.15MHz and 30MHz was 10KHz. The IF bandwidth of Test Receiver between 0.15MHz and 30MHz was 9kHz.

END OF REPORT